
FCC Test Report

Report No.: AGC00850141002FE04

FCC ID : UOSAM208
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : mobile phone
BRAND NAME : AMGOO
MODEL NAME : AM208
CLIENT : Amgoo Telecom (Shenzhen) Co., Ltd.
DATE OF ISSUE : Nov.17, 2014
STANDARD(S) : FCC Part 22H & 24E Rules
TEST PROCEDURE(S)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov.17, 2014	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION.....	6
2.1 PRODUCT DESCRIPTION.....	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	7
2.3 TEST METHODOLOGY.....	7
2.4 TEST FACILITY	7
2.5 MEASUREMENT INSTRUMENTS.....	8
2.6 SPECIAL ACCESSORIES	8
2.7 EQUIPMENT MODIFICATIONS.....	8
3. SYSTEM TEST CONFIGURATION	9
3.1 EUT CONFIGURATION	9
3.2 EUT EXERCISE.....	9
3.3 GENERAL TECHNICAL REQUIREMENTS.....	9
3.4 CONFIGURATION OF EUT SYSTEM	10
4. SUMMARY OF TEST RESULTS	11
5. DESCRIPTION OF TEST MODES.....	11
6. OUTPUT POWER	12
6.1 CONDUCTED OUTPUT POWER.....	12
6.2 RADIATED OUTPUT POWER	15
7. PEAK-TO-AVERAGE RATIO AND MODULATION CHARACTERISTICS	19
7.1 MEASUREMENT METHOD	19
7.2 PROVISIONS APPLICABLE	19
7.3 MEASUREMENT RESULT.....	20
APPENDIX A: MODULATION CHARACTERISTICS.....	21
8. OCCUPIED BANDWIDTH.....	25

8.1 MEASUREMENT METHOD	25
8.2 PROVISIONS APPLICABLE	25
8.3 MEASUREMENT RESULT	25
Appendix B: BandWidth	25
9. BAND EDGE	39
9.1 MEASUREMENT METHOD	39
9.2 PROVISIONS APPLICABLE	39
9.3 MEASUREMENT RESULT	39
APPENDIX C: BAND EDGES COMPLIANCE	39
10. SPURIOUS EMISSION	48
10.1 CONDUCTED SPURIOUS EMISSION	48
APPENDIX D: SPURIOUS EMISSION AT ANTENNA TERMINAL	50
10.2 RADIATED SPURIOUS EMISSION	86
11. MAINS CONDUCTED EMISSION	90
11.1 MEASUREMENT METHOD	90
11.2 PROVISIONS APPLICABLE	90
11.3 MEASUREMENT RESULT	91
12. FREQUENCY STABILITY	93
12.1 MEASUREMENT METHOD	93
12.2 PROVISIONS APPLICABLE	93
12.3 MEASUREMENT RESULT	94
Appendix E: Frequency Stability	94
PHOTOGRAPHS OF TEST SETUP	101
PHOTOGRAPHS OF EUT	103

1. VERIFICATION OF COMPLIANCE


Applicant	Amgoo Telecom (Shenzhen) Co., Ltd.
Address	3/F, Block R2-A(North), Gaoxin S. Ave. 4th, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China
Manufacturer	Amgoo Telecom (Shenzhen) Co., Ltd.
Address	3/F, Block R2-A(North), Gaoxin S. Ave. 4th, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China
Product Designation	mobile phone
Brand name	AMGOO
Test Model	AM208
Date of Test	Nov.08,2014 to Nov.14,2014
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-2.5G/RF

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By :



Bart Xie

Nov.17, 2014

Reviewed By :



Kidd Yang

Nov.17, 2014

Approved By:



Solger Zhang

Nov.17, 2014

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	mobile phone
Hardware Version:	S7011B_MB_V1_1
Software Version:	N/A
Frequency Bands:	☒ GSM 850 ☒ PCS 1900 (U.S. Bands) ☒ GSM 900 ☒ DCS 1800 (Non-U.S. Bands)
Antenna:	PIFA Antenna
Antenna gain:	-1.0dBi
Battery parameter:	DC3.7V/1200mAh
Adapter Input:	AC100-240V, 50-60Hz, 0.15A
Adapter Output:	DC5.0V, 500mA
Output Power:	30.79dBm Maximum ERP measured for GSM 850 31.84dBm Maximum Average Burst Power for GSM 850 27.52dBm Maximum EIRP measured for PCS 1900 28.67dBm Maximum Average Burst Power for PCS 1900
Dual SIM Card:	The result for SIM1 is the worst case which was only recorded
GPRS Class:	12
Extreme Vol. Limits:	DC 3.4 V to DC4.2 V (Nominal DC 3.7 V)
Extreme Temp. Tolerance:	-10°C to +50°C
** Note: The High Voltage DC 4.2V and Low Voltage DC 3.4V were declared by manufacturer, The EUT could not operate normally with higher or lower voltage. Other functions have been performed according to verification procedure except for MS function.	

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: UOSAM208** filing to comply with the FCC Part 22H and 24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r01

2.4 TEST FACILITY

The test site used to collect the radiated data is located at:

Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

2.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	Calibration Date	Calibration Due.
SPECTRUM ANALYZER	AGILENT	E4440A	Feb.17,2014	Feb.16,2015
TEST RECEIVER	R&S	ESCI	July 25, 2014	July 24, 2015
COMMUNICATION TESTER	AGILENT	8960	July 25, 2014	July 24, 2015
COMMUNICATION TESTER	R&S	CMU200	July 25, 2014	July 24, 2015
SIGNAL GENERATOR	AGILENT	E4438C	Feb.23,2014	Feb. 22,2015
LISN	R&S	ESH3-Z5	July 25, 2014	July 24, 2015
CLIMATE CHAMBER	ALBATROSS	--	July 25, 2014	July 24, 2015
Loop Antenna	A.H.	SAS-562B	May 10, 2014	May 09, 2015
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	Aug.16, 2014	Aug.15, 2015
Substitution Antenna	EMCO	3142C	Aug.16, 2014	Aug.15, 2015
Substitution Antenna	EM	EM-AH-10180	Apr.19, 2014	Apr.18, 2015
Horn Antenna	EM	EM-AH-10180	Feb.17,2014	Feb.16,2015
Horn Antenna	A.H. Systems Inc.	SAS-574	June 6, 2014	June 5, 2015
Radiation Cable 1	Sat	RE1	June 4, 2014	June 3, 2015
Radiation Cable 2	Sat	RE2	June 4, 2014	June 3, 2015
Conduction Cable	Sat	CE1	June 4, 2014	June 3, 2015

2.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted	22.913(a) / 24.232 (b)
		Radiated	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238
		Radiated Spurious Emission	
4	Mains Conducted Emission		15.107 / 15.207
5	Frequency Stability		2.1055 /24.235
6	Occupied Bandwidth		2.1049 (h)(i)
7	Emission Bandwidth		22.917(b) / 24.238 (b)
8	Band Edge		22.917(b) / 24.238 (b)

3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile phone	AM208	FCC ID:	EUT
2	Adapter	CH4	DC5V / 500mA	Accessory
3	Battery	AM-4U	DC3.7V/ 1200mAh	Accessory
4	Earphone	AM208	N/A	Accessory
5	USB Cable	AM208	N/A	Accessory

Note: All the accessories have been used during the test. The following “EUT” in setup diagram means EUT system.

4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917/ 24.238	Pass
		Radiated Spurious Emission		
4	Mains Conducted Emission		15.107 / 15.207	Pass
5	Frequency Stability		2.1055 /24.235	Pass
6	Occupied Bandwidth		2.1049 (h)(i)	Pass
7	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
8	Band Edge		22.917(b) / 24.238 (b)	Pass

5. DESCRIPTION OF TEST MODES

During the testing, the EUT (Quad-band GSM / GPRS Mobile Phone) was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

Note: GSM and GPRS modes have been tested during the test. The worst condition (GSM) be recorded in the test report if no other modes test data.

6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM, GPRS,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

6.1.2 PROVISIONS APPLICABLE

Conducted Output Power Limits for GSM 850 MHz			
Mode	Power Step	Nominal Peak Power	Tolerance(dB)
GSM	5	33 dBm (2W)	-2
GPRS	3	33 dBm (2W)	-2

Conducted Output Power Limits for PCS 1900 MHz			
Mode	Power Step	Nominal Peak Power	Tolerance(dB)
GSM	0	30 dBm (1W)	-2
GPRS	3	30 dBm (1W)	-2

6.1.3 MEASUREMENT RESULT

Test Result of Conducted Output Power for GSM 850 MHZ (SIM1)

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM	824.2	33	32.49	-0.51	31.84	-9	22.84
	836.6	33	32.44	-0.56	31.75	-9	22.75
	848.8	33	32.38	-0.62	31.73	-9	22.73
GPRS850 (1 Slot)	824.2	33	32.34	-0.66	31.58	-9	22.58
	836.6	33	32.31	-0.69	31.52	-9	22.52
	848.8	33	32.28	-0.72	31.44	-9	22.44
GPRS850 (2 Slot)	824.2	30	29.61	-0.39	28.87	-6	22.87
	836.6	30	29.57	-0.43	28.78	-6	22.78
	848.8	30	29.53	-0.47	28.73	-6	22.73
GPRS850 (3 Slot)	824.2	28.23	27.59	-0.64	26.76	-4.26	22.5
	836.6	28.23	27.55	-0.68	26.69	-4.26	22.43
	848.8	28.23	27.52	-0.71	26.74	-4.26	22.48
GPRS850 (4 Slot)	824.2	27	26.66	-0.34	25.88	-3	22.88
	836.6	27	26.72	-0.28	25.94	-3	22.94
	848.8	27	26.56	-0.44	25.76	-3	22.76

Test Result of Conducted Output Power for PCS 1900 MHZ (SIM1)

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM	1850.2	30	29.29	-0.71	28.67	-9	19.67
	1880	30	29.26	-0.74	28.65	-9	19.65
	1909.8	30	29.21	-0.79	28.57	-9	19.57
GPRS1900 (1 Slot)	1850.2	30	29.18	-0.82	28.34	-9	19.34
	1880	30	29.15	-0.85	28.31	-9	19.31
	1909.8	30	29.13	-0.87	28.28	-9	19.28
GPRS1900 (2 Slot)	1850.2	27	26.69	-0.31	25.88	-6	19.88
	1880	27	26.65	-0.35	25.85	-6	19.85
	1909.8	27	26.54	-0.46	25.79	-6	19.79
GPRS1900 (3 Slot)	1850.2	25.23	24.66	-0.57	23.89	-4.26	19.63
	1880	25.23	24.55	-0.68	23.75	-4.26	19.49
	1909.8	25.23	24.53	-0.7	23.71	-4.26	19.45
GPRS1900 (4 Slot)	1850.2	24	23.68	-0.32	22.89	-3	19.89
	1880	24	23.59	-0.41	22.83	-3	19.83
	1909.8	24	23.52	-0.48	22.68	-3	19.68

6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.

6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Radiated Power Limits for GSM 850 MHZ (ERP)		
Mode	Power Step	Nominal Peak Power
GSM	5	≤ 38.45 dBm (7W)
GPRS	3	≤ 38.45 dBm (7W)

Radiated Power Limits for PCS 1900 MHZ (E.I.R.P.)		
Mode	Power Step	Nominal Peak Power
GSM	0	≤ 33 dBm (2W)
GPRS	3	≤ 33 dBm (2W)

6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	5	30.79	Horizontal	Pass
	836.6	5	30.62	Horizontal	Pass
	848.8	5	30.57	Horizontal	Pass
GPRS 1 slot	824.2	3	30.53	Horizontal	Pass
	836.6	3	30.51	Horizontal	Pass
	848.8	3	30.44	Horizontal	Pass
GPRS 2 slots	824.2	3	Less than 27 dBm	Horizontal	Pass
	836.6	3		Horizontal	Pass
	848.8	3		Horizontal	Pass
GPRS 3 slots	824.2	2		Horizontal	Pass
	836.6	2		Horizontal	Pass
	848.8	2		Horizontal	Pass
GPRS 4 slots	824.2	2		Horizontal	Pass
	836.6	2		Horizontal	Pass
	848.8	2		Horizontal	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	0	27.52	Horizontal	Pass
	1880.0	0	27.48	Horizontal	Pass
	1909.8	0	27.42	Horizontal	Pass
GPRS 1slot	1850.2	3	27.43	Horizontal	Pass
	1880.0	3	27.35	Horizontal	Pass
	1909.8	3	27.31	Horizontal	Pass
GPRS 2 slots	1850.2	3	Less than 27 dBm	Horizontal	Pass
	1880.0	3		Horizontal	Pass
	1909.8	3		Horizontal	Pass
GPRS 3 slots	1850.2	2		Horizontal	Pass
	1880.0	2		Horizontal	Pass
	1909.8	2		Horizontal	Pass
GPRS 4 slots	1850.2	2		Horizontal	Pass
	1880.0	2		Horizontal	Pass
	1909.8	2		Horizontal	Pass

7. PEAK-TO-AVERAGE RATIO AND MODULATION CHARACTERISTICS

7.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

7.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

7.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	0.65	0.69	0.65

Modes	PCS 1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	0.62	0.61	0.64

APPENDIX A: MODULATION CHARACTERISTICS

Test Mode	Test Modes description
GSM/TM1	GSM system,GSM,GMSK modulation
GSM/TM2	GSM system,GPRS,GMSK modulation


Test Results

For GSM


Test Band=GSM850

Test Mode=GSM/TM1

Test Channel=MCH

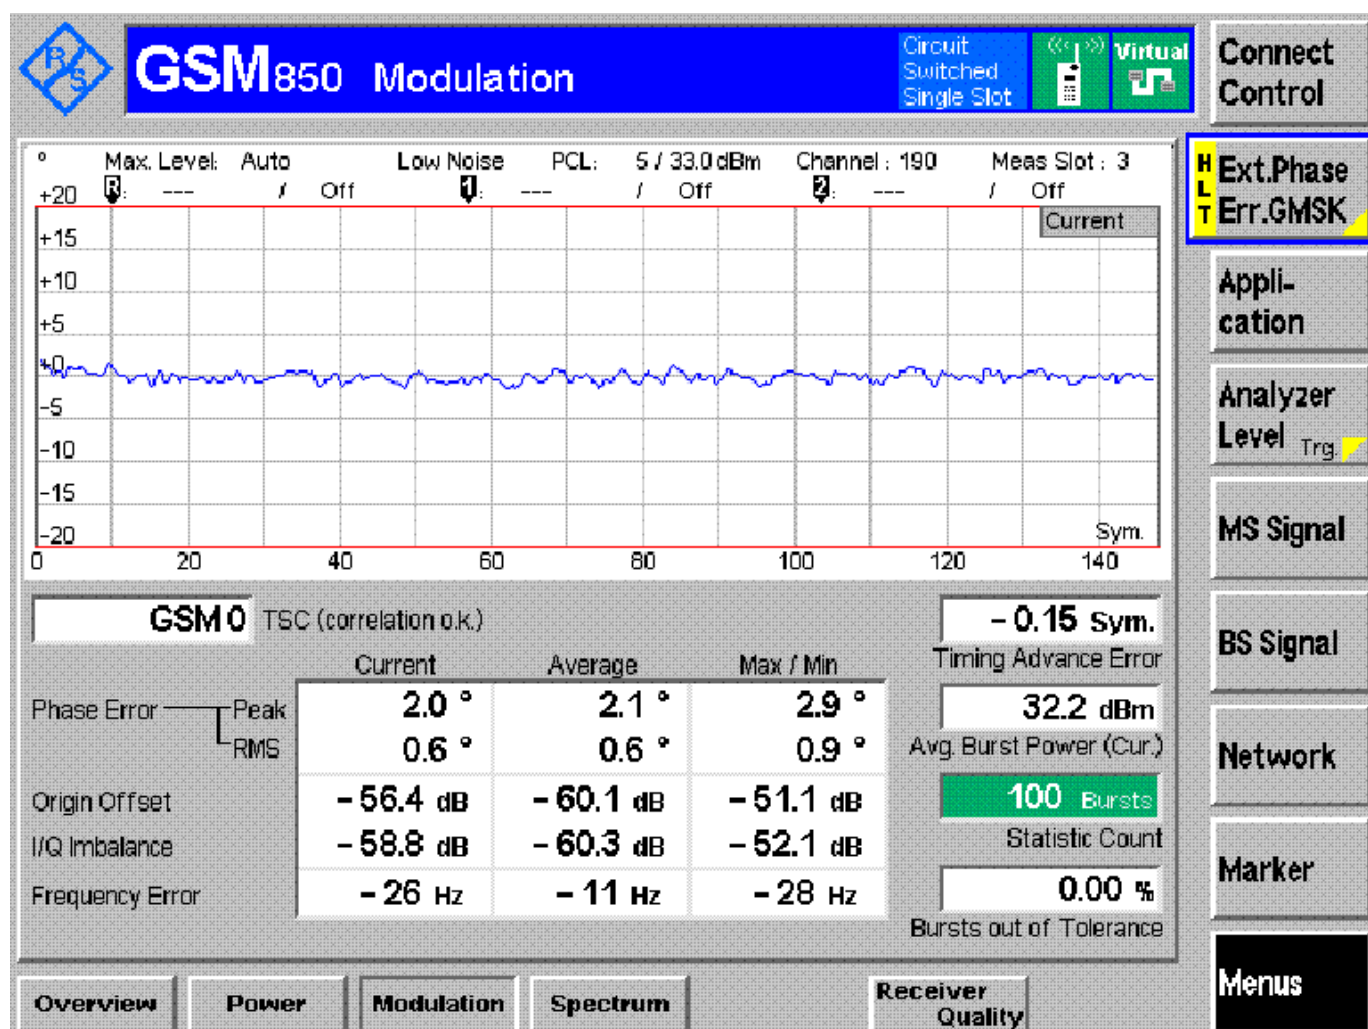


Test Mode=GSM/TM2
Test Channel=MCH

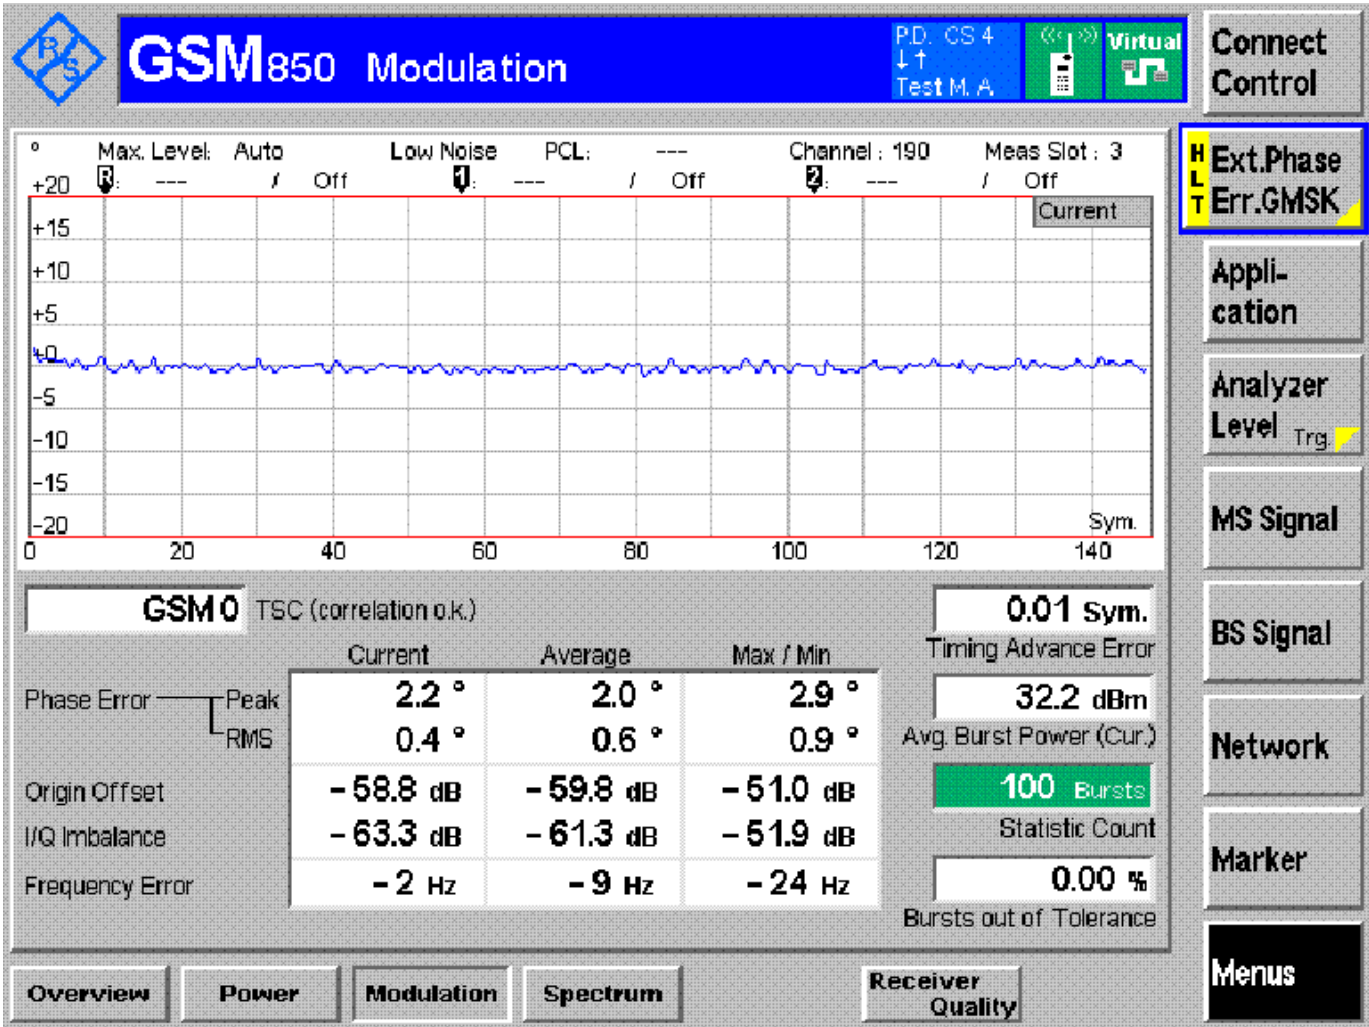


Test Band=GSM1900

Test Mode=GSM/TM1

Test Channel=MCH

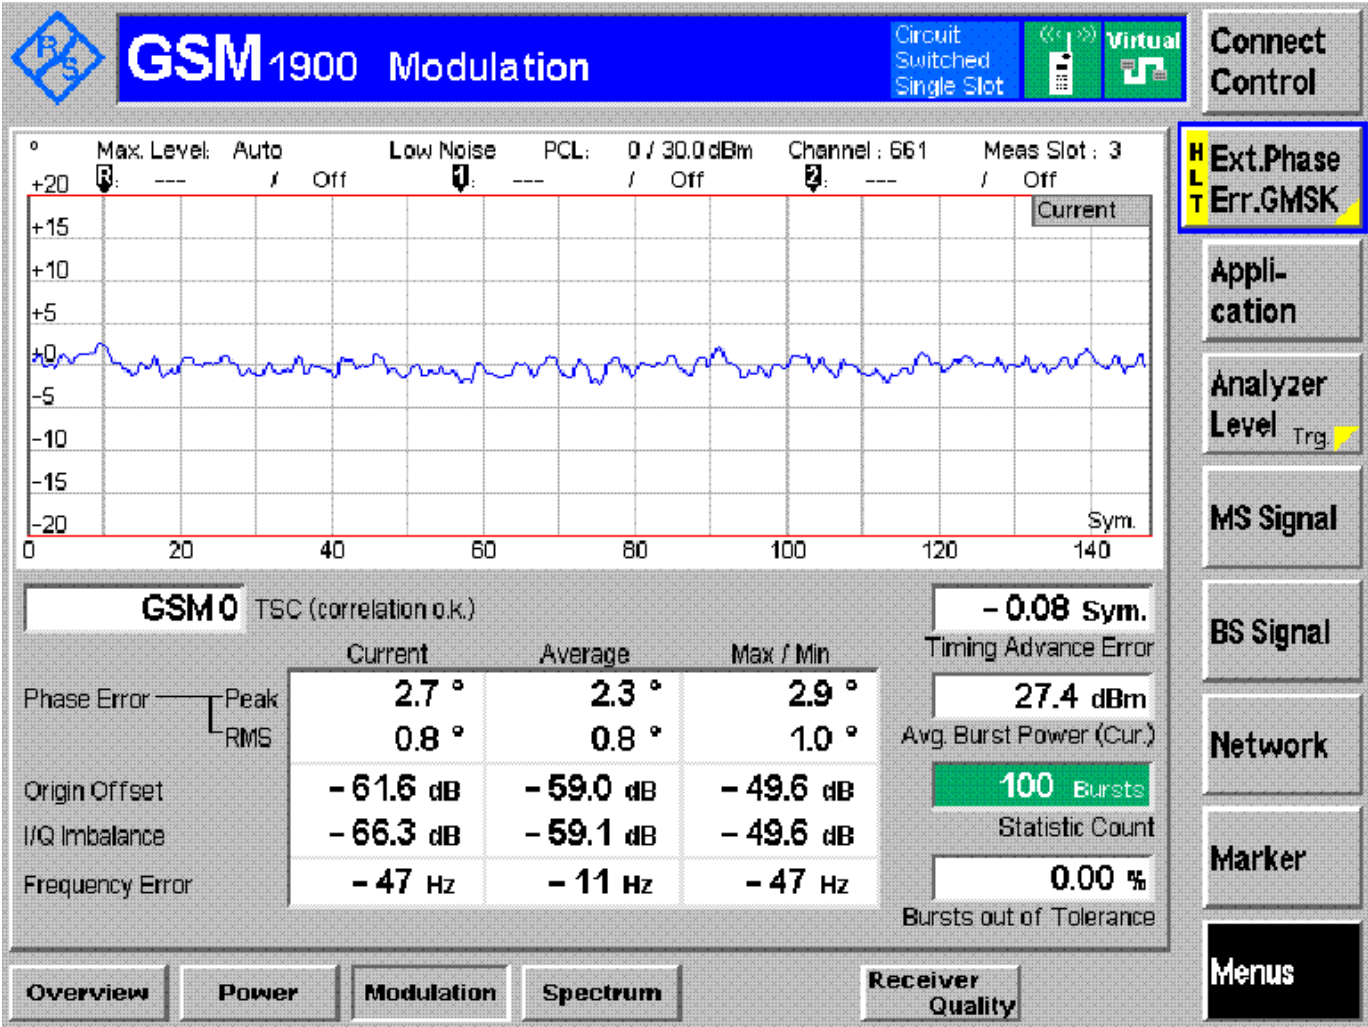

Test Mode=GSM/TM2
Test Channel=MCH

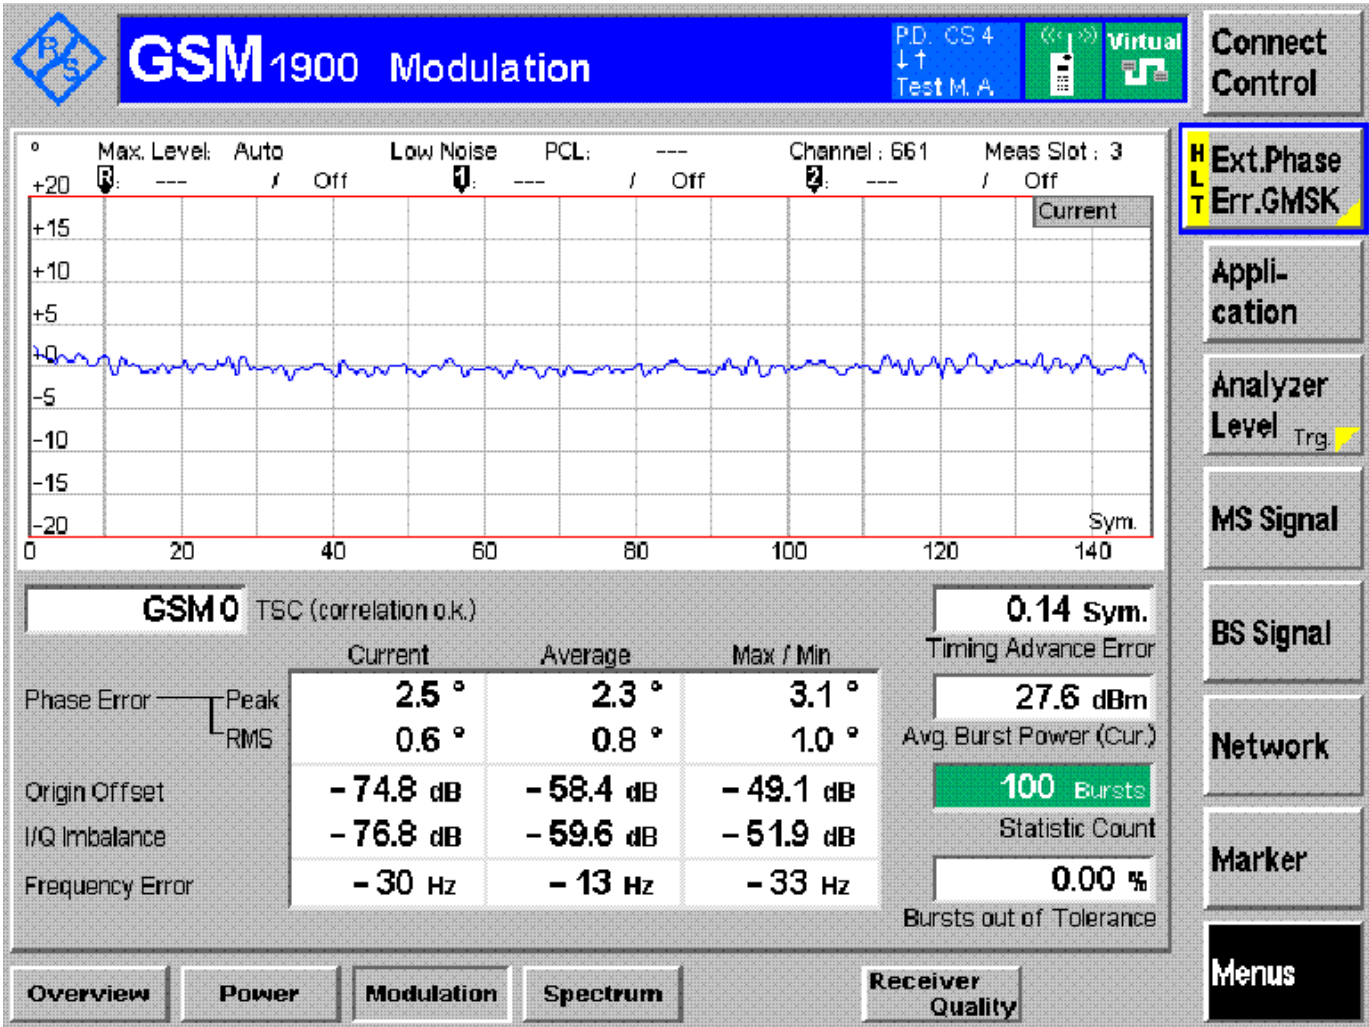

8. OCCUPIED BANDWIDTH

8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

8.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

8.3 MEASUREMENT RESULT

Appendix B: BandWidth

Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GSM/TM 1	LCH	245.94	315.84	PASS
		MCH	244.58	316.71	PASS
		HCH	245.80	323.33	PASS
	GSM/TM 2	LCH	241.68	312.61	PASS
		MCH	244.55	318.45	PASS
		HCH	246.87	324.03	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GSM/TM 1	LCH	245.23	320.79	PASS
		MCH	245.51	317.48	PASS
		HCH	245.65	313.73	PASS
	GSM/TM 2	LCH	242.30	317.03	PASS
		MCH	242.21	310.38	PASS
		HCH	245.74	319.57	PASS

For GSM


Test Band=GSM850

Test Mode=GSM/TM1


Test Channel=LCH

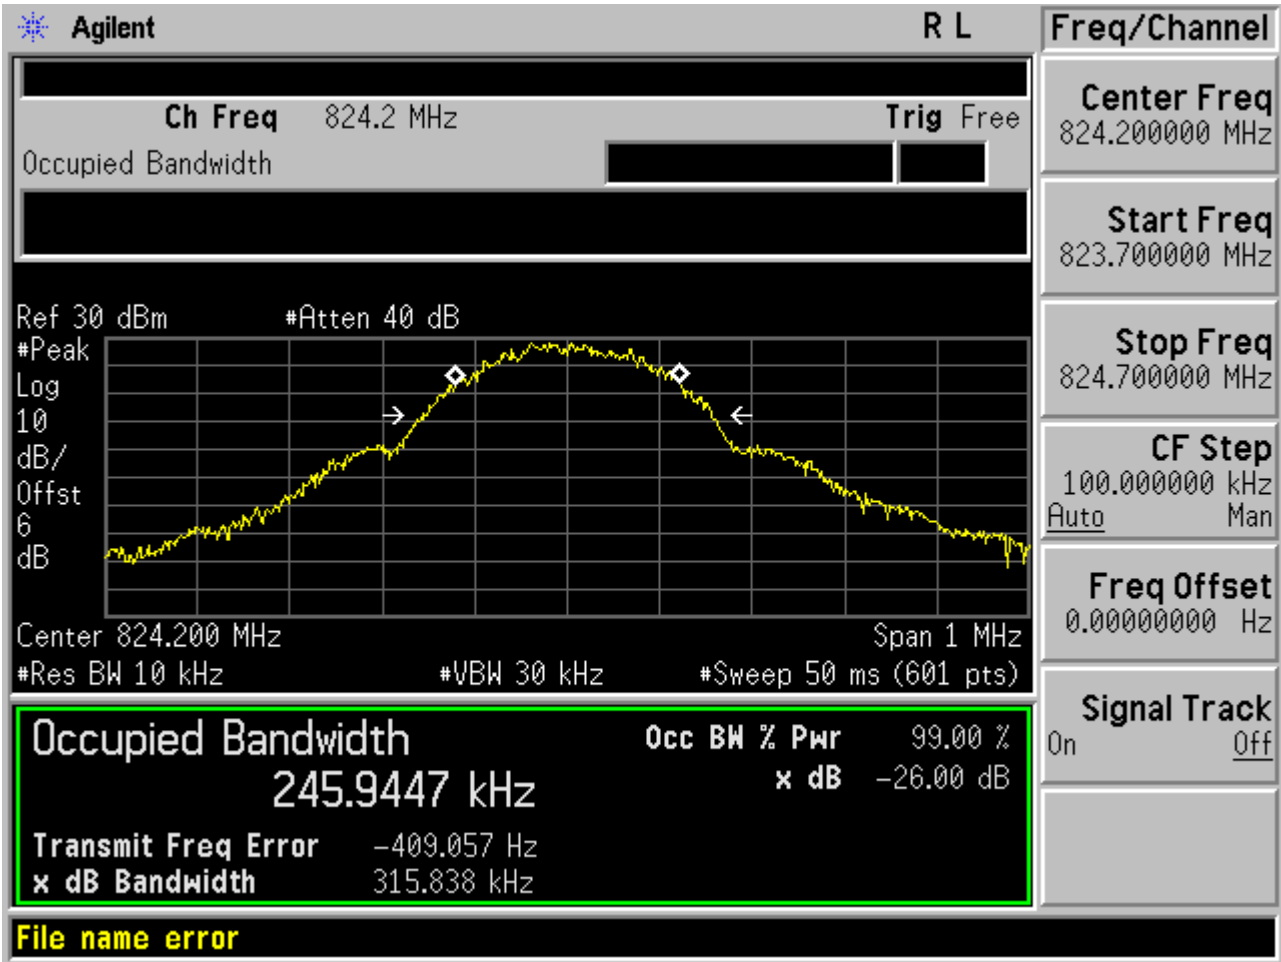

Test Channel=MCH

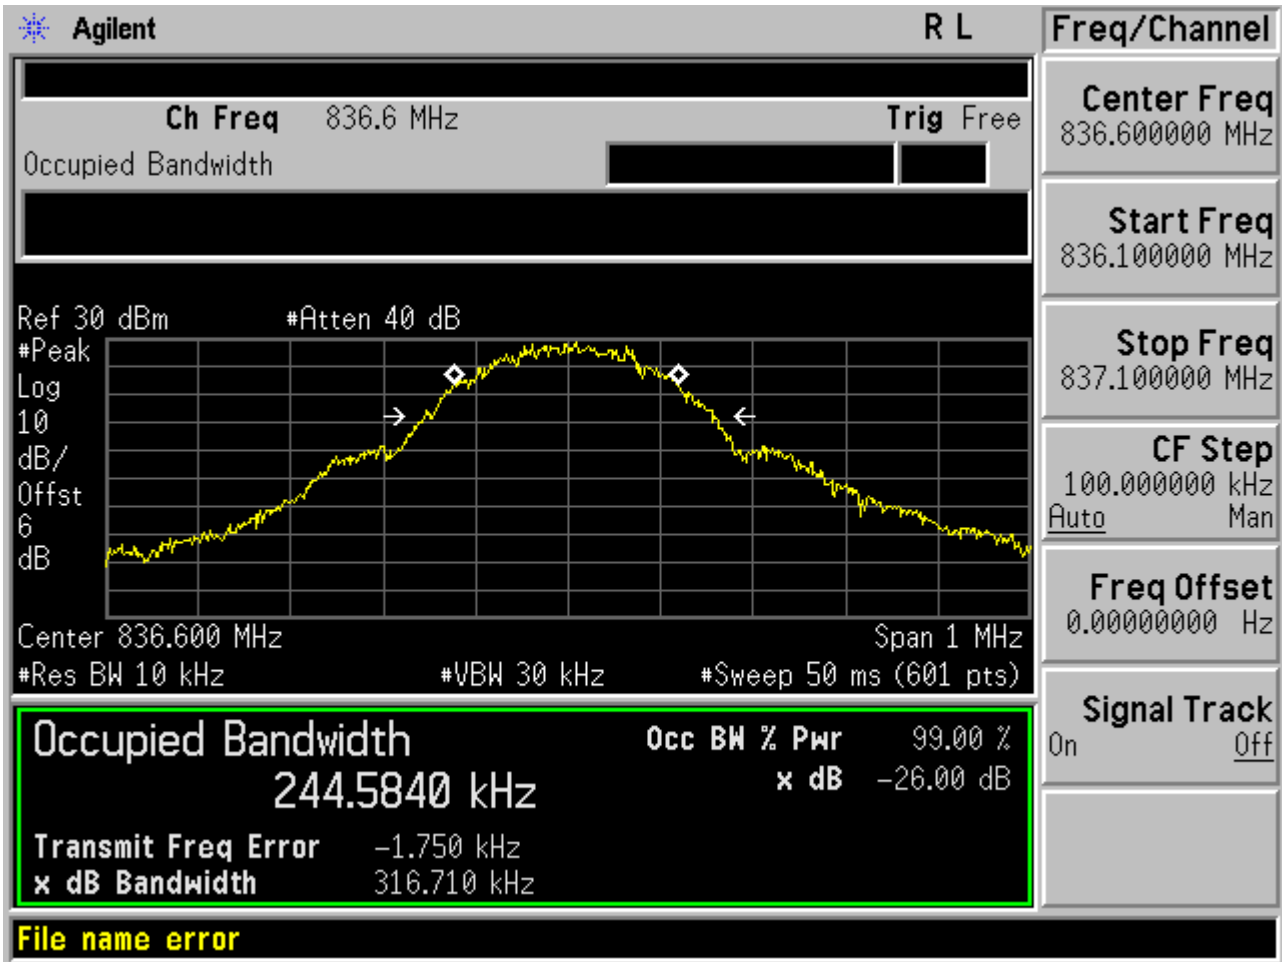


Test Channel=HCH

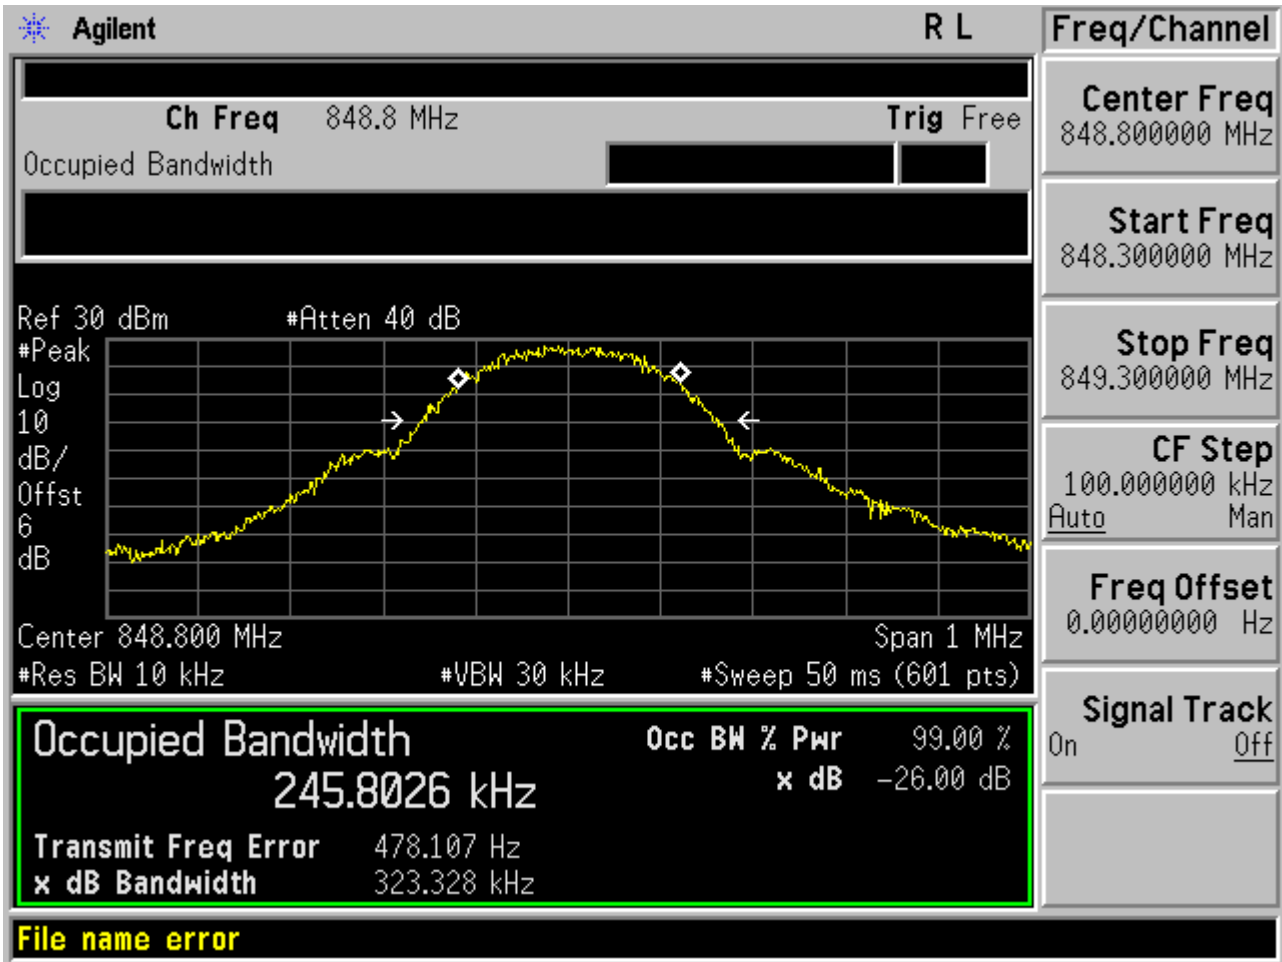


Test Band=GSM850

Test Mode=GSM/TM2


Test Channel=LCH

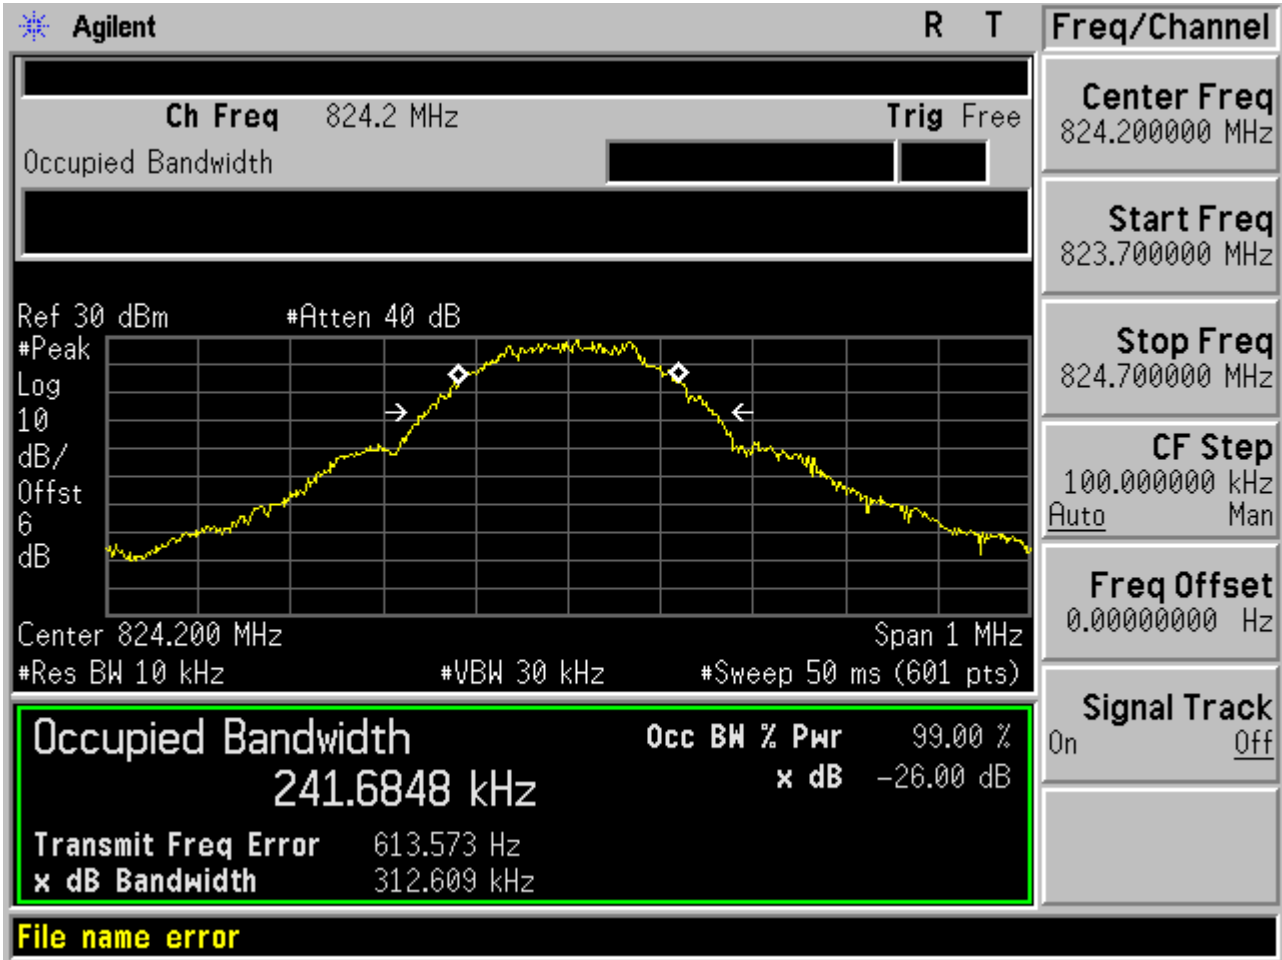

Test Channel=MCH

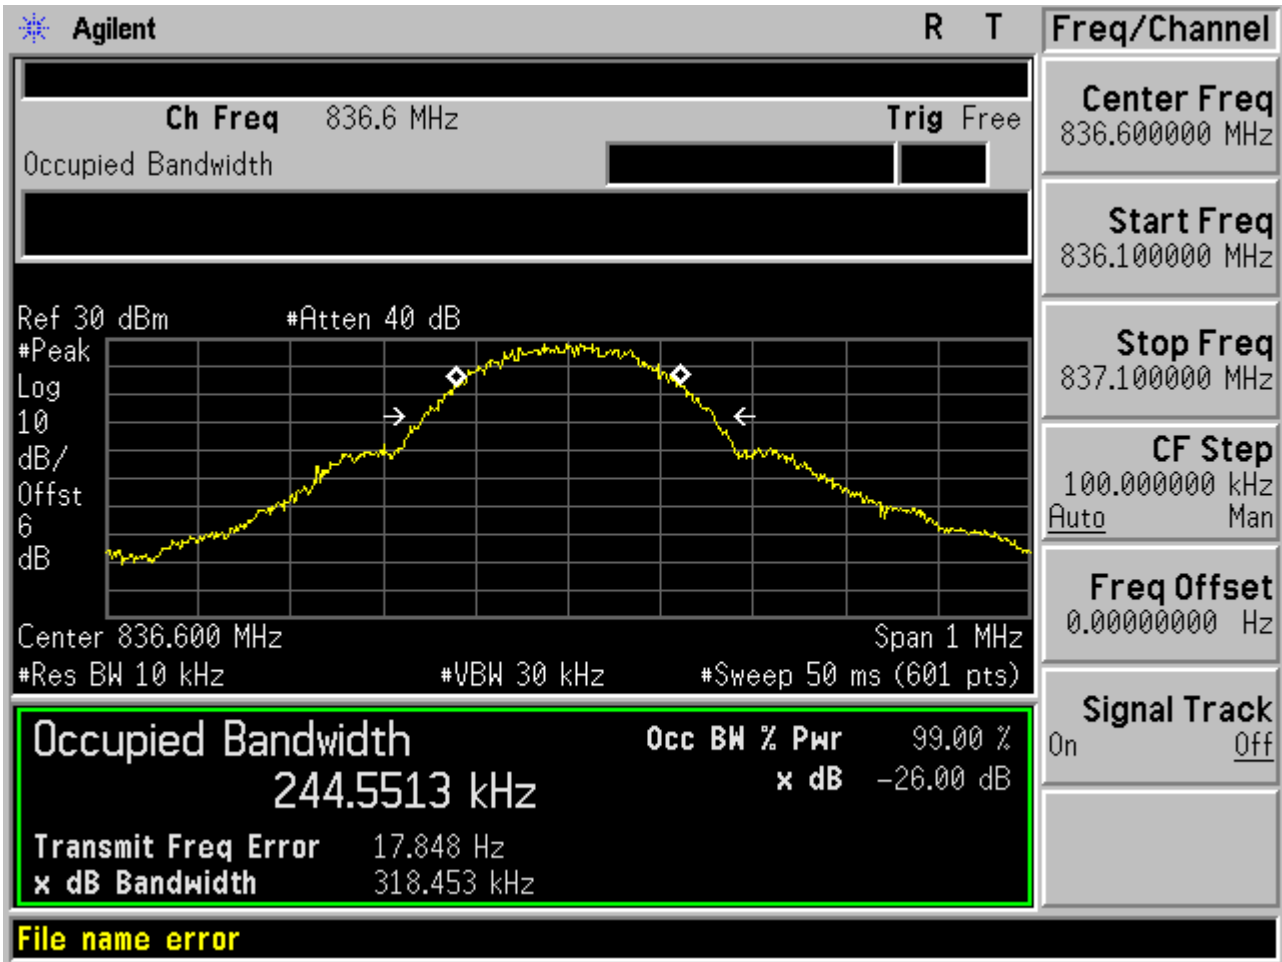


Test Channel=HCH

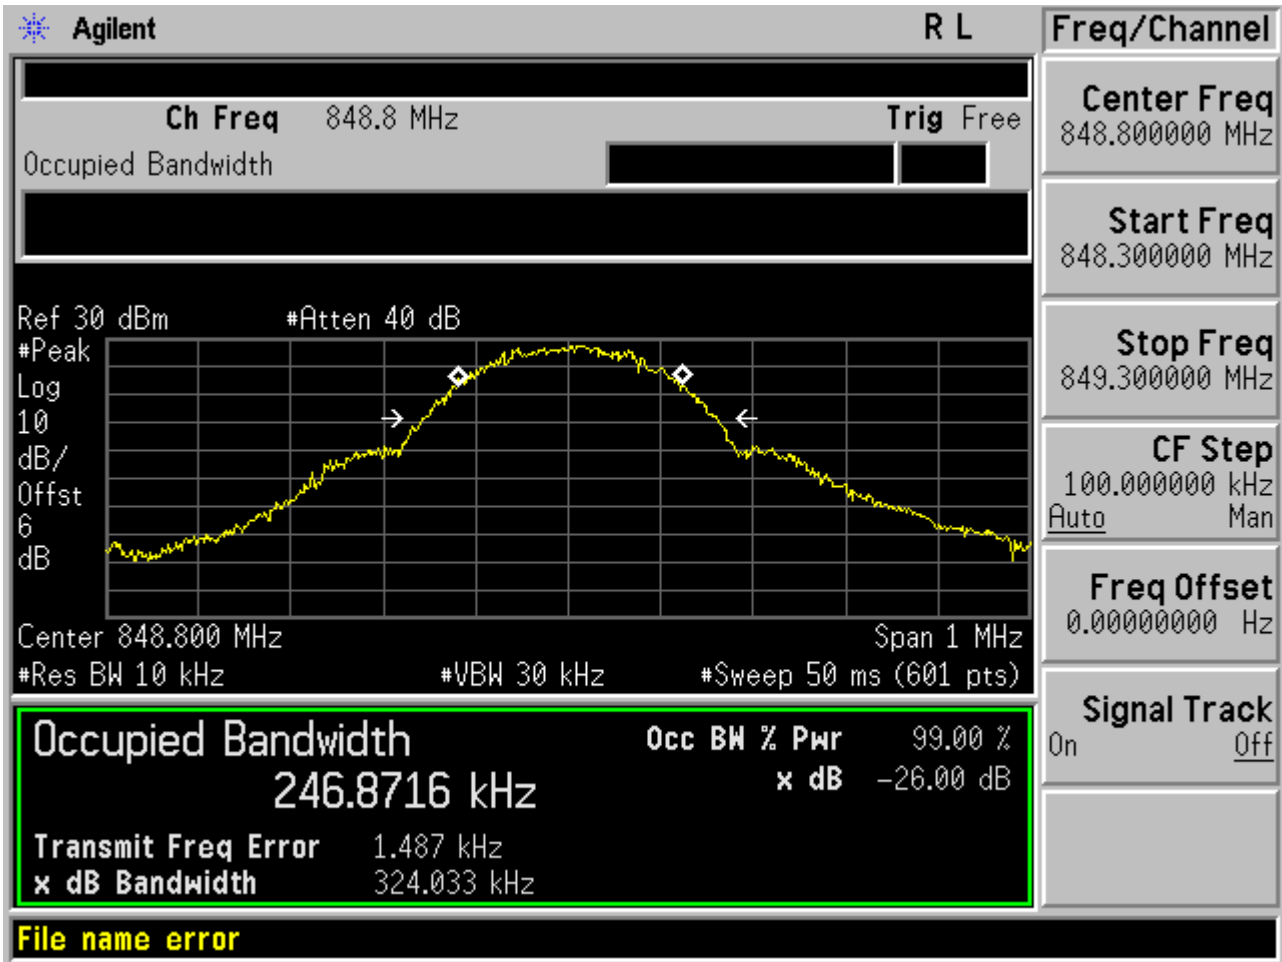


Test Band=GSM1900

Test Mode=GSM/TM1


Test Channel=LCH

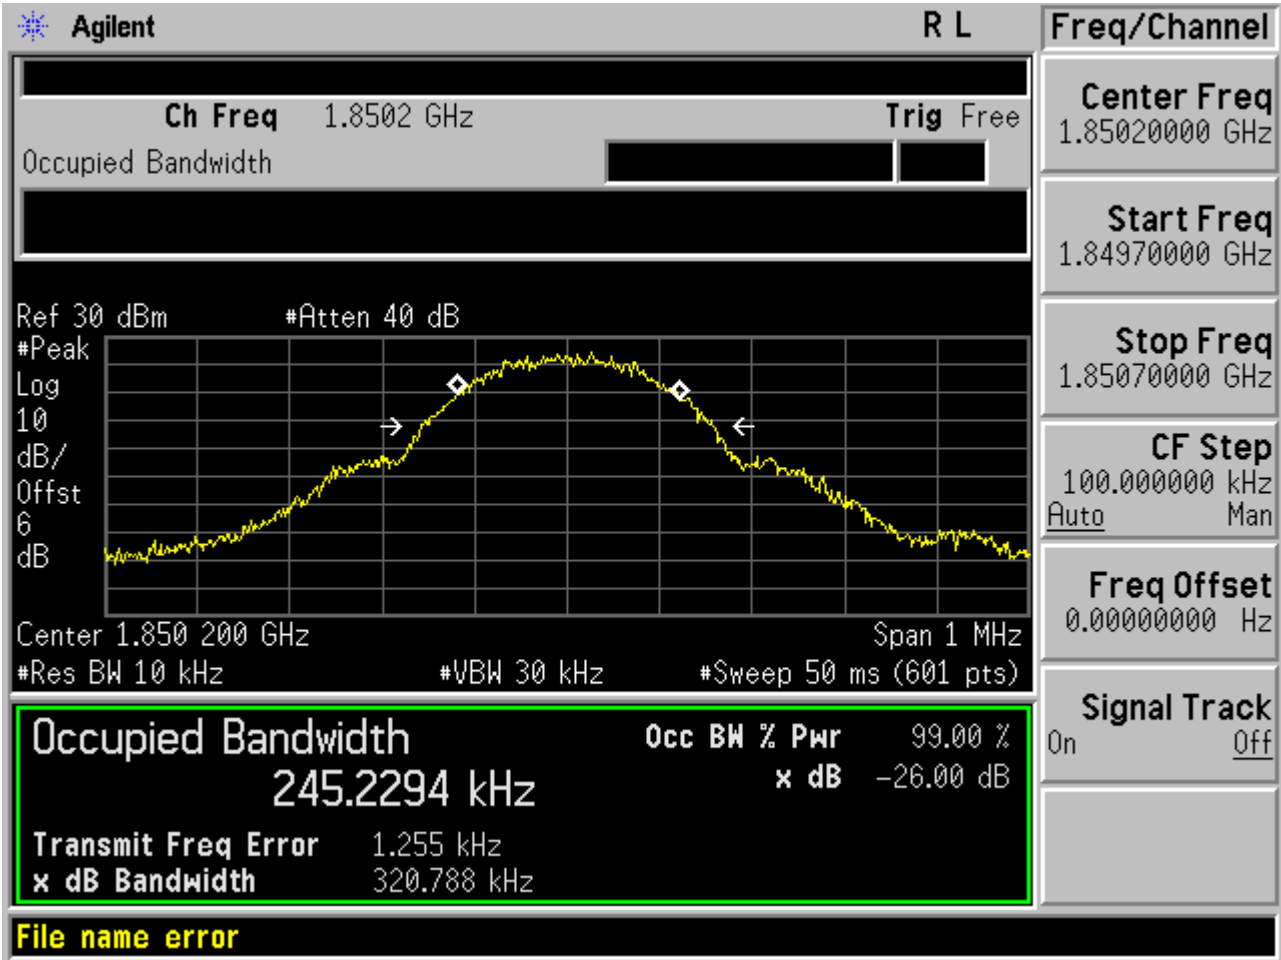

Test Channel=MCH

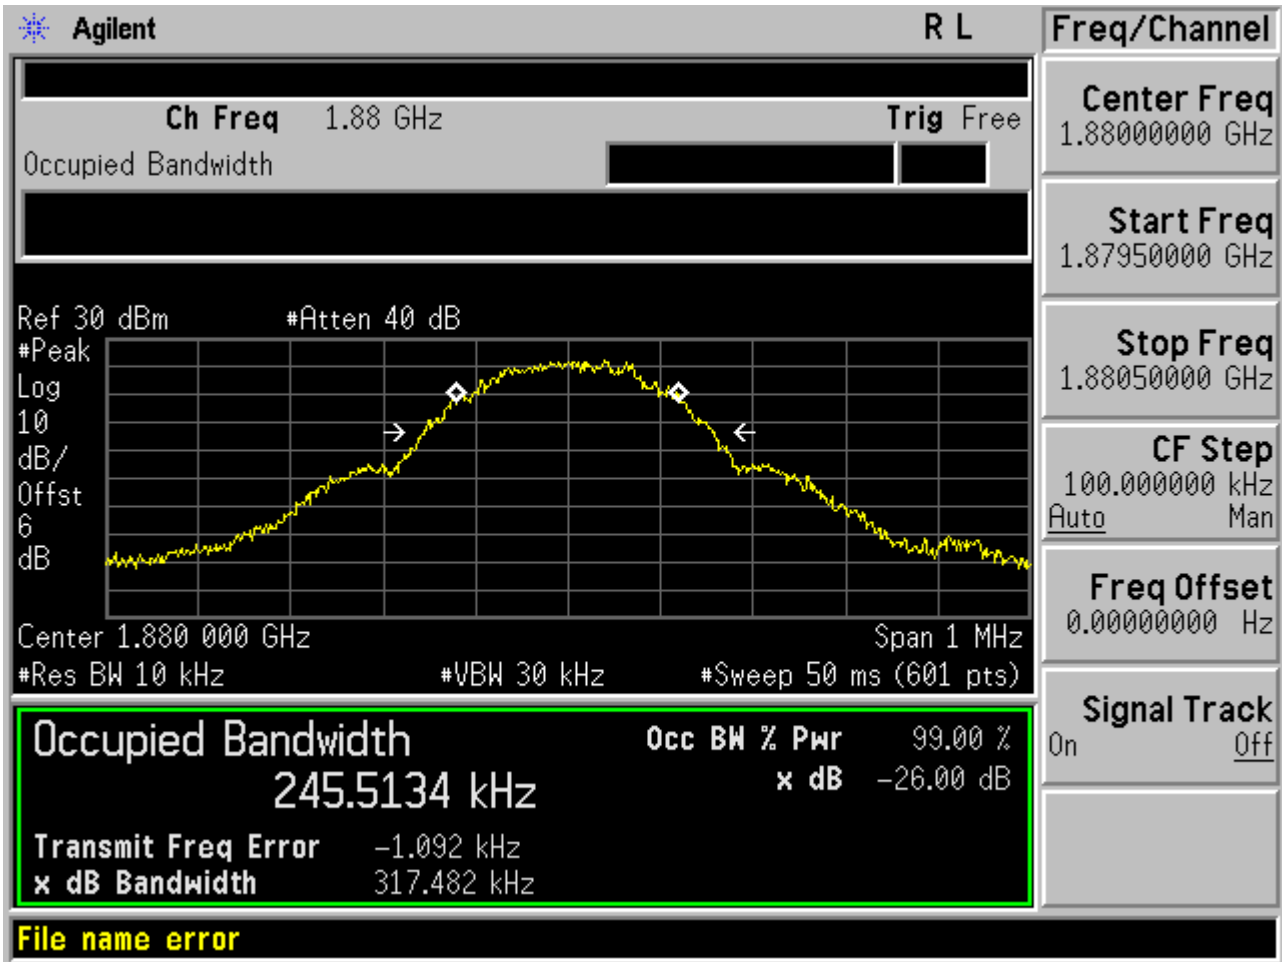


Test Channel=HCH

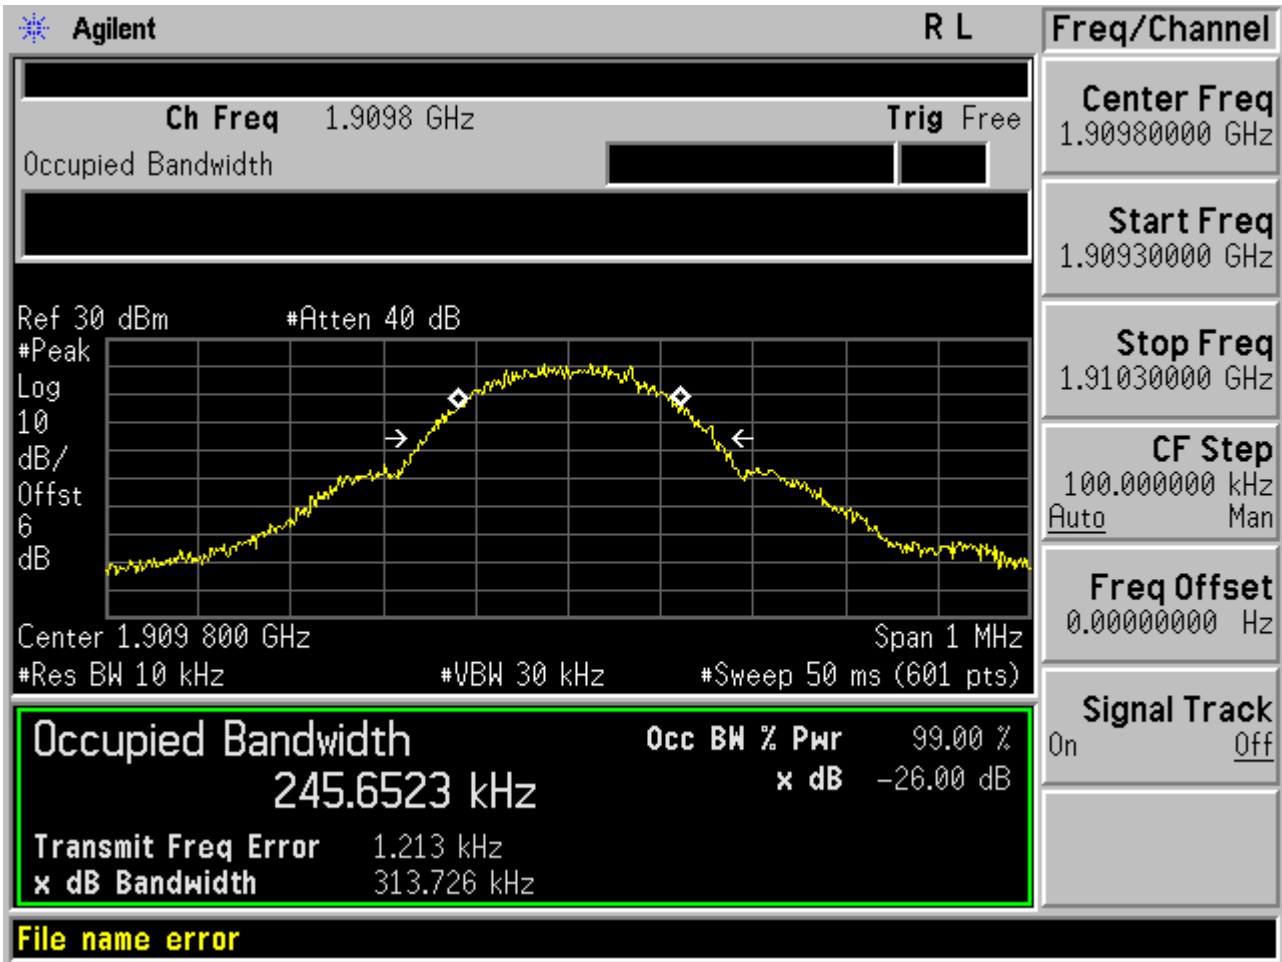


Test Mode=GSM/TM2

Test Channel=LCH

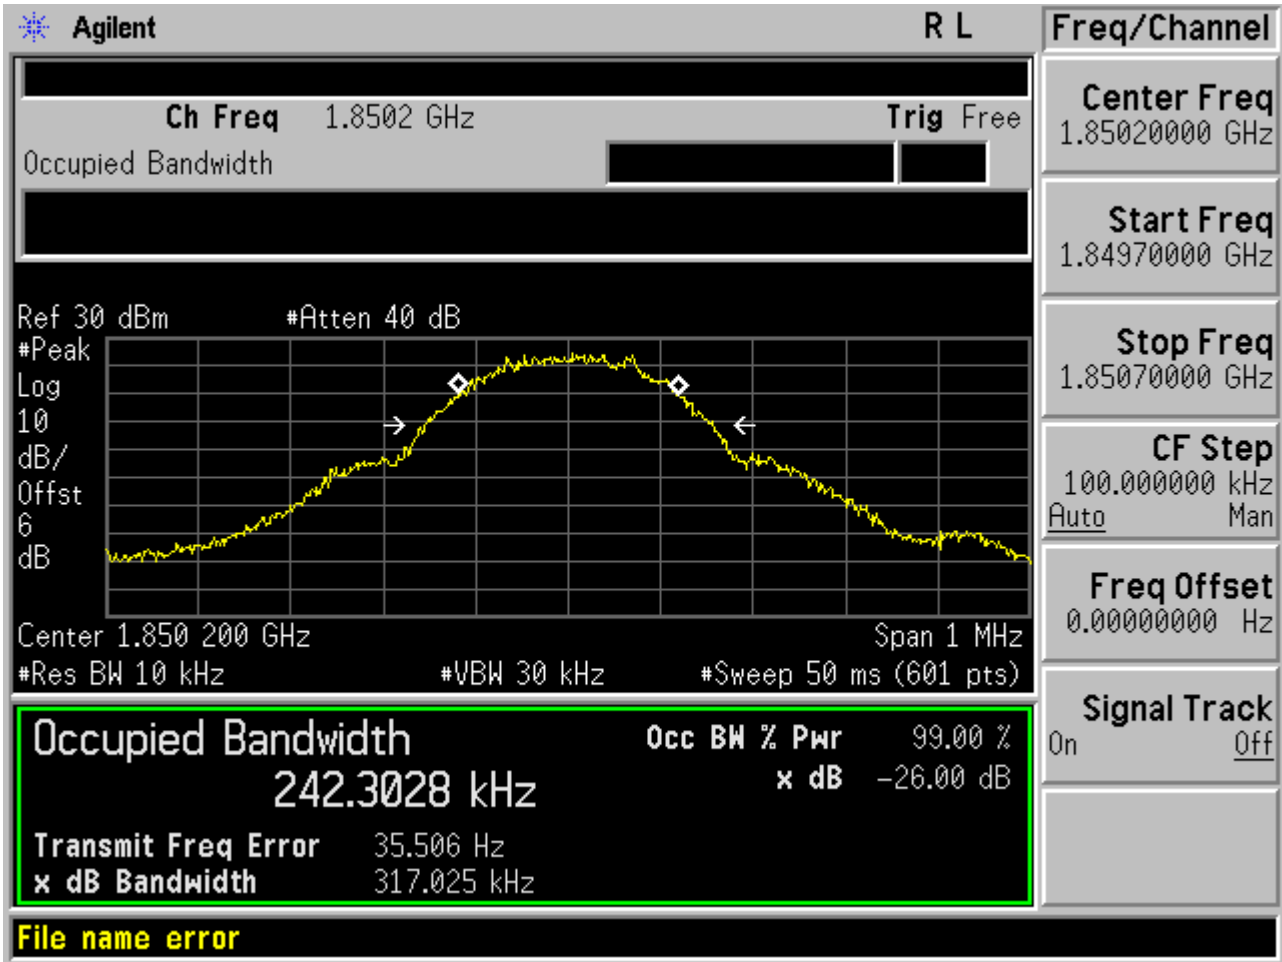

Test Channel=MCH

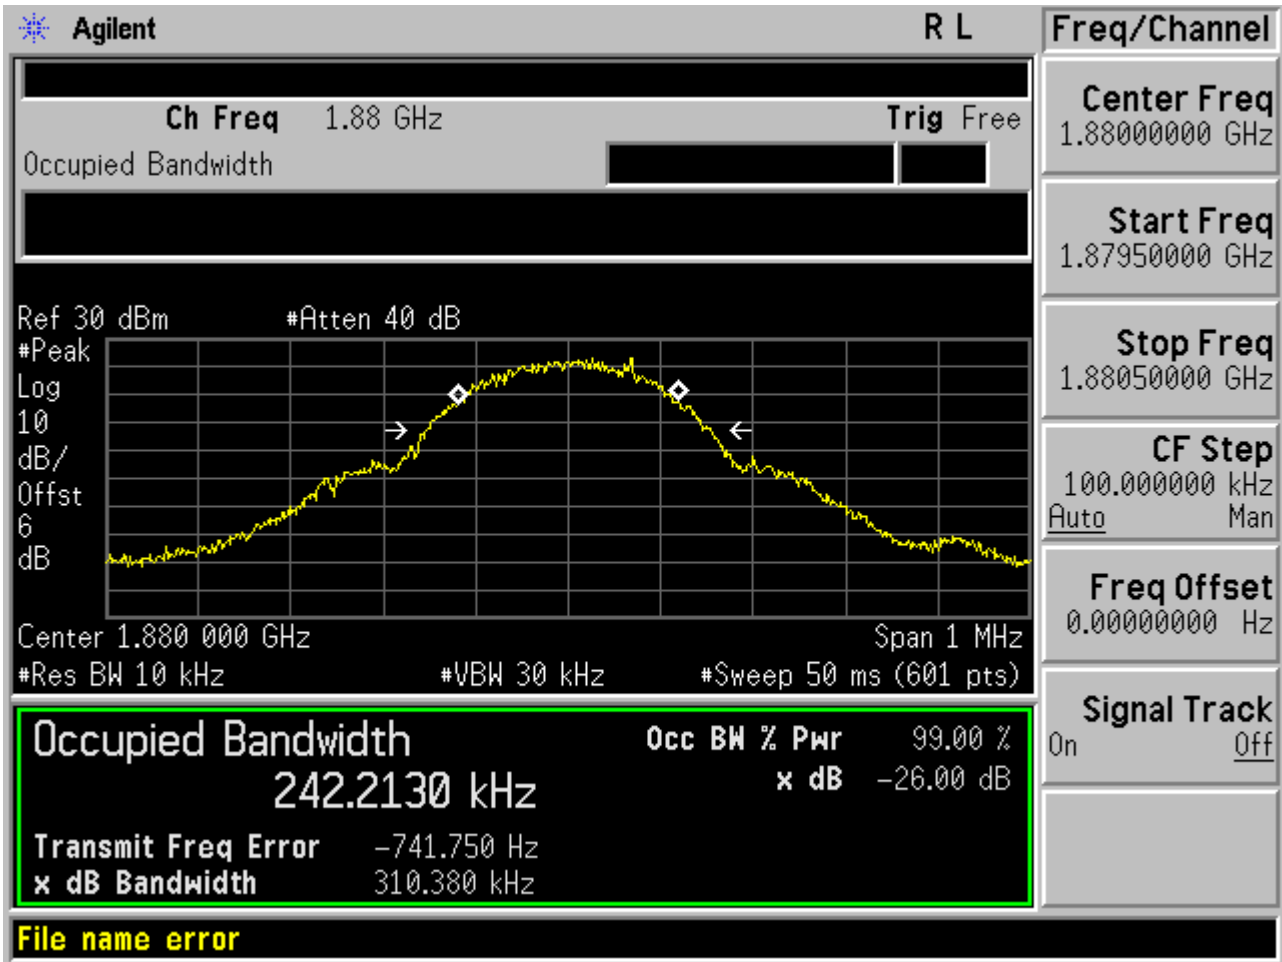

Freq/Channel

Center Freq 1.88000000 GHz

Start Freq 1.87950000 GHz

Stop Freq 1.88050000 GHz

CF Step 100.000000 kHz


Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

File name error

Test Channel=HCH

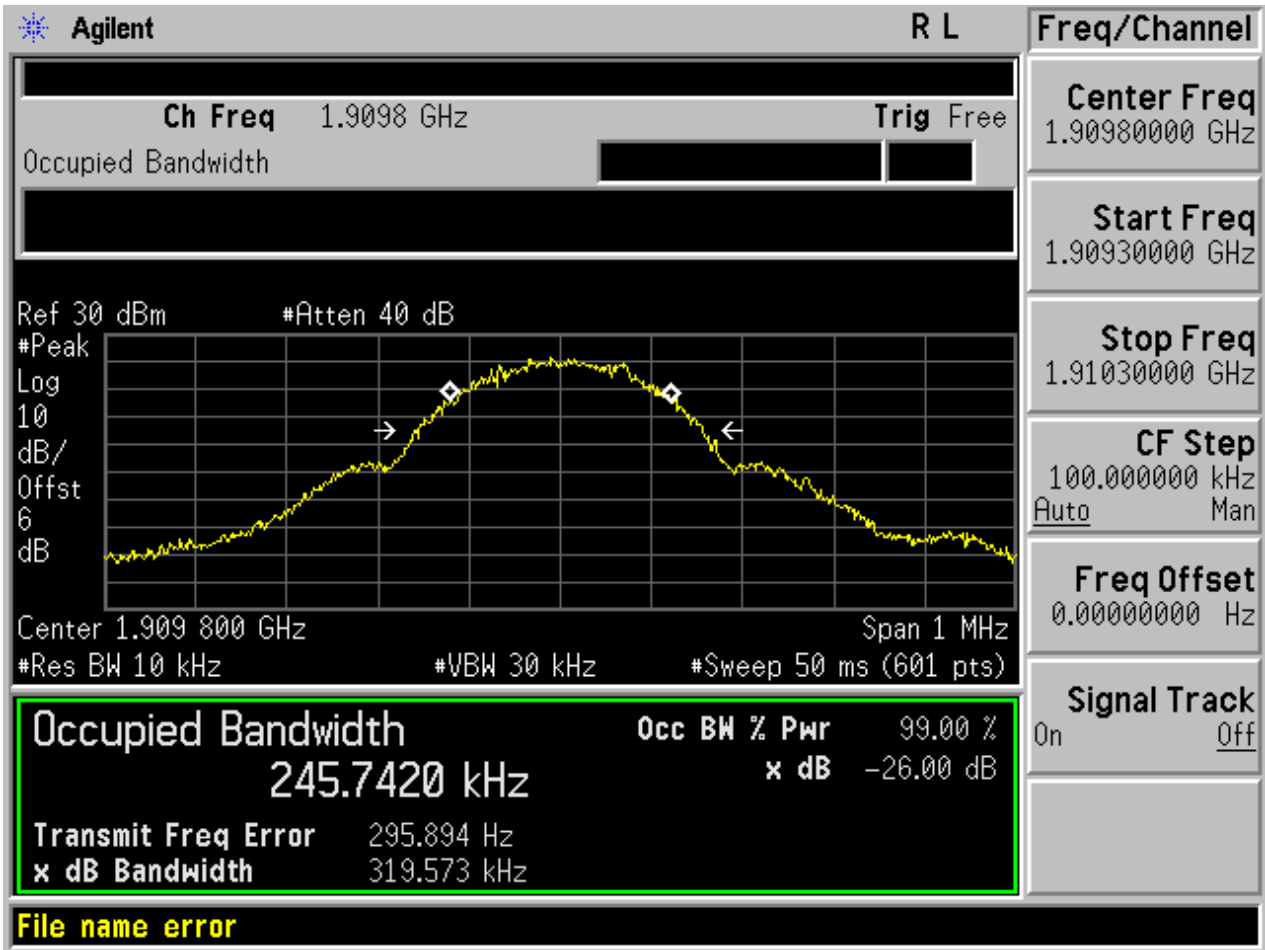

9. BAND EDGE

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)

9.3 MEASUREMENT RESULT

APPENDIX C: BAND EDGES COMPLIANCE


Test Results

For GSM


Test Band=GSM850

Test Mode=GSM/TM1


Test Channel=LCH

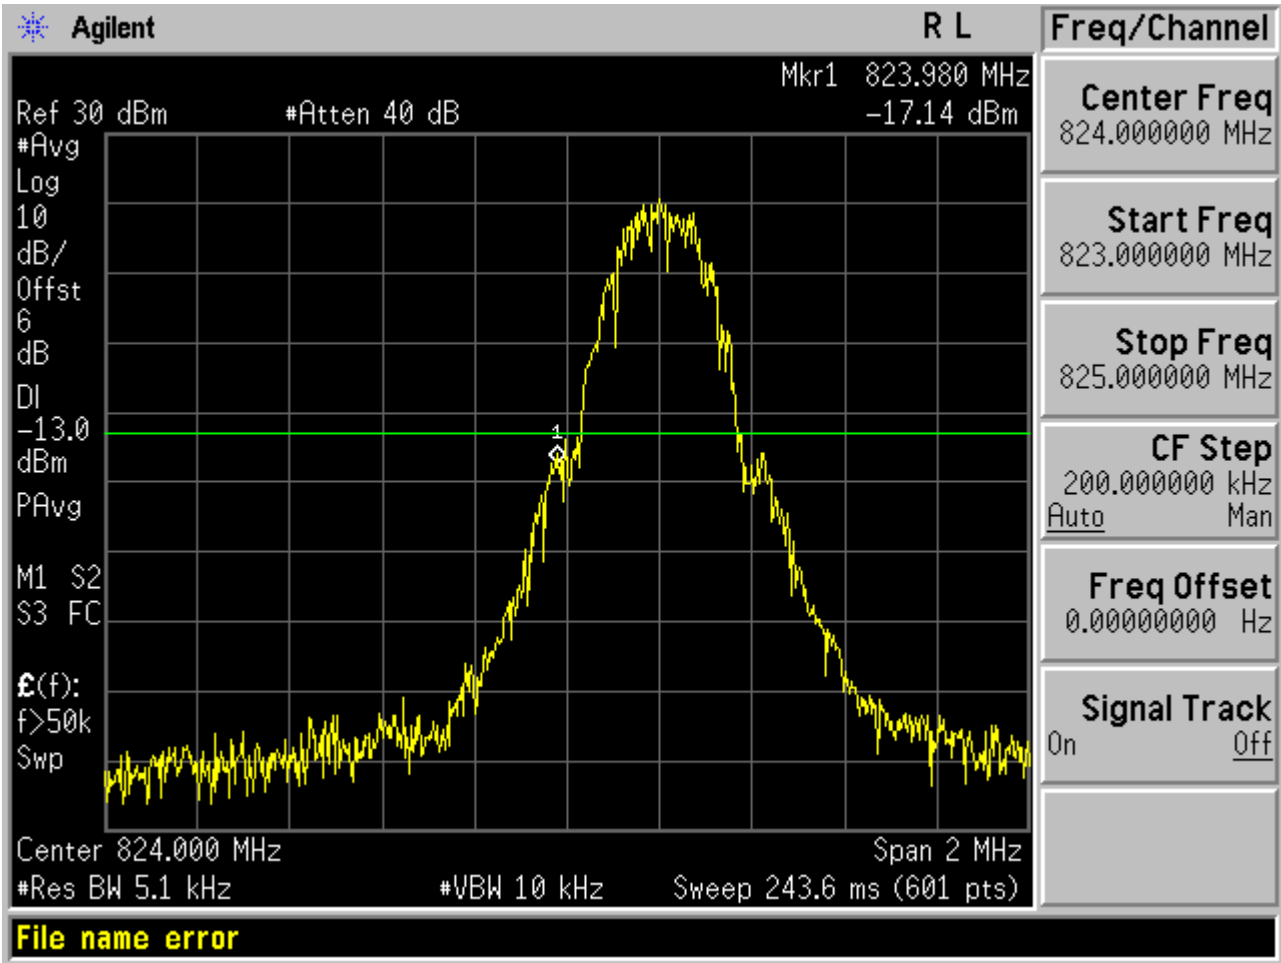


Test Channel=HCH

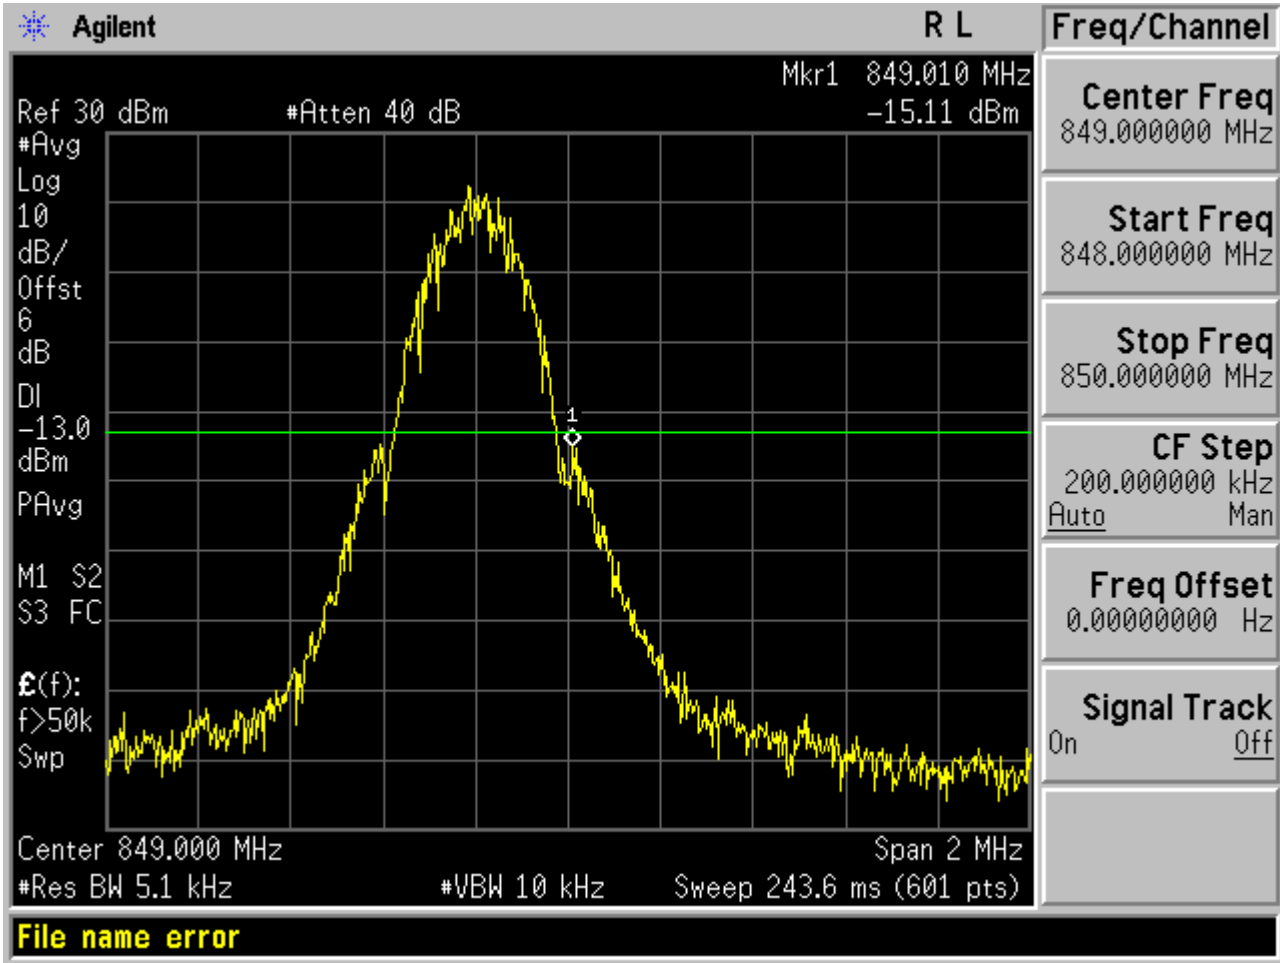

Test Mode=GSM/TM2
Test Channel=LCH

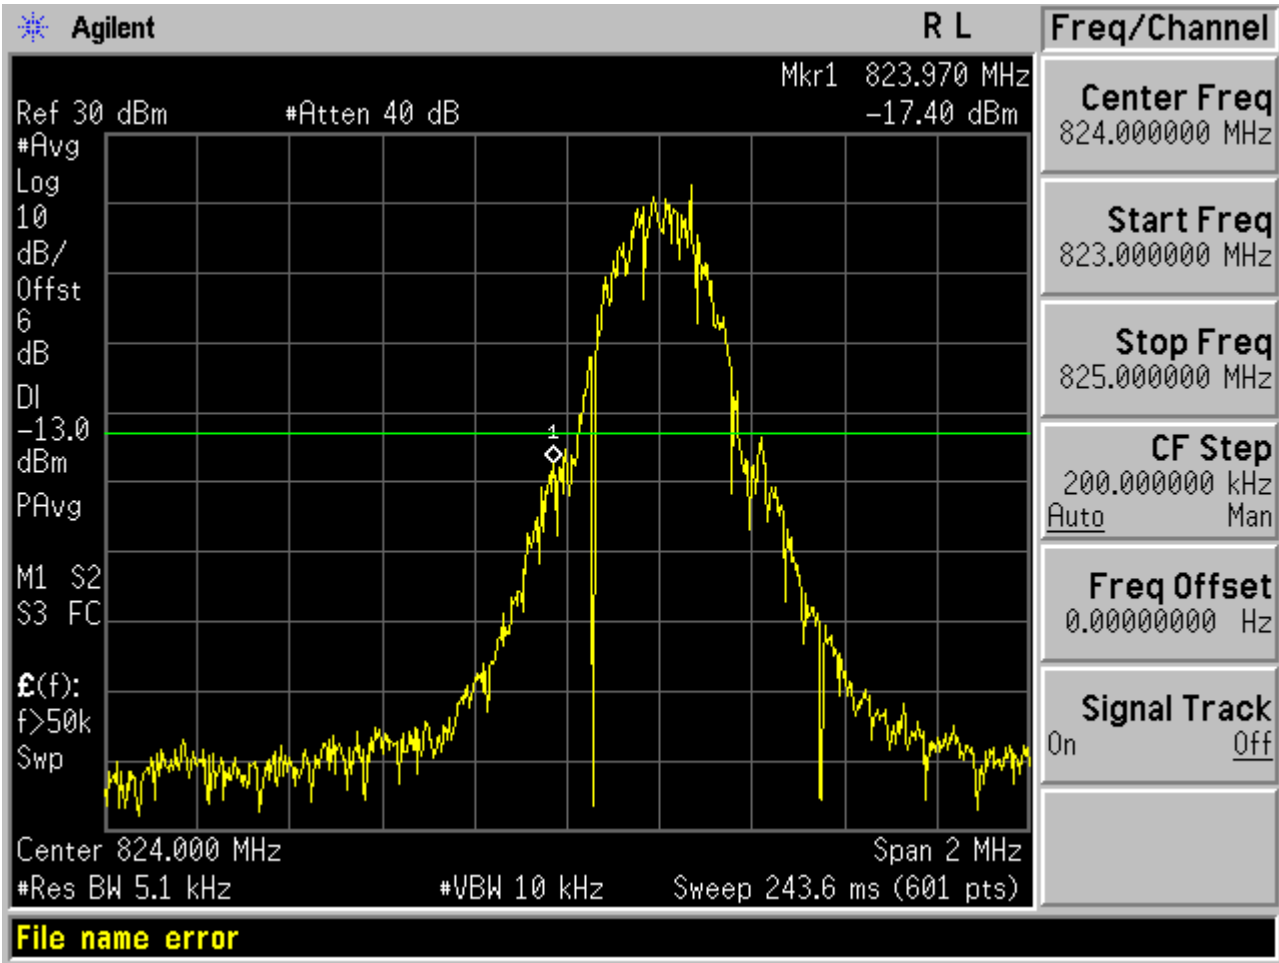


Test Channel=HCH

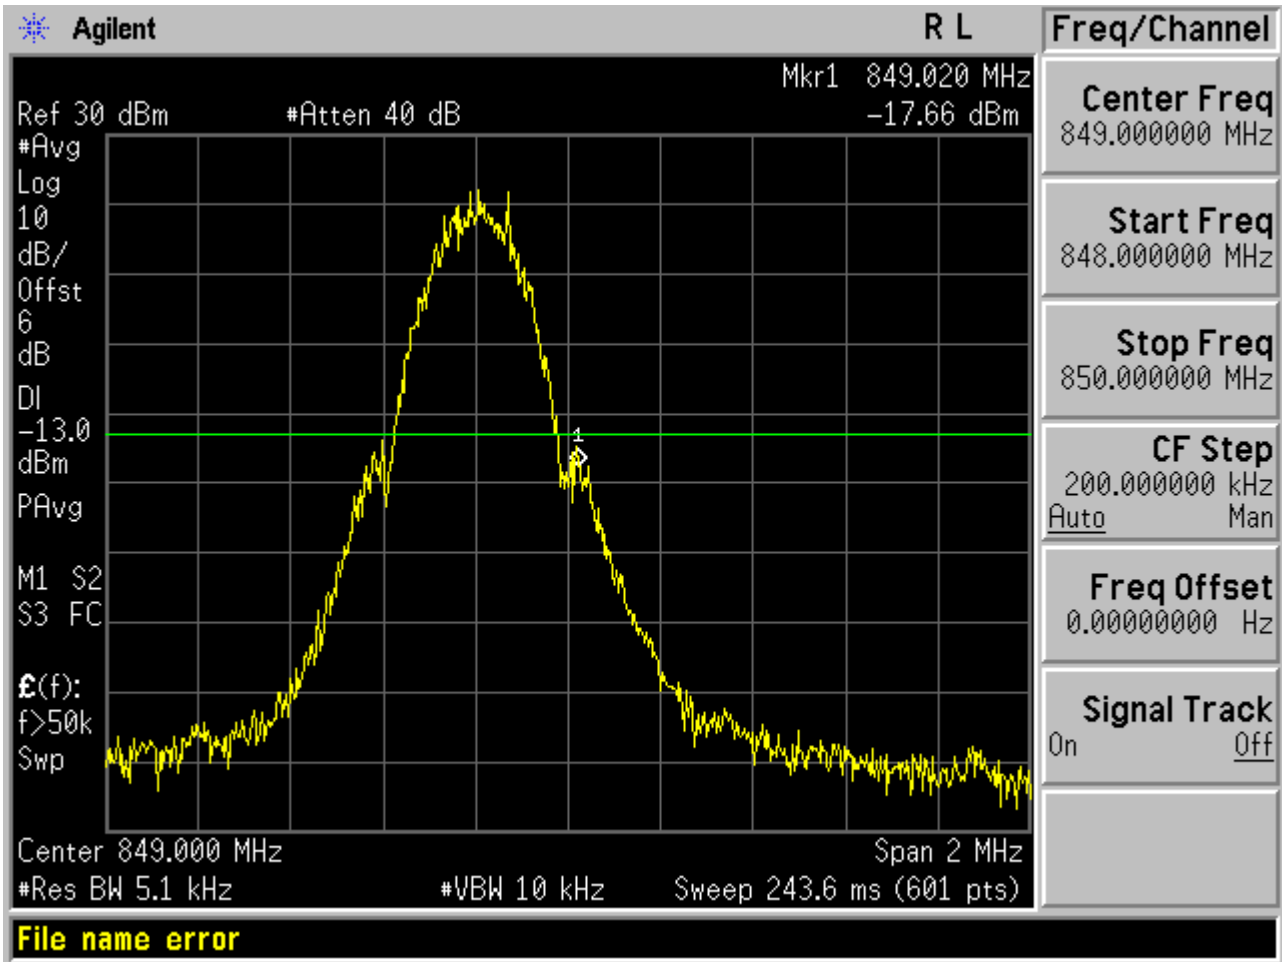


Test Band=GSM1900

Test Mode=GSM/TM1


Test Channel=LCH

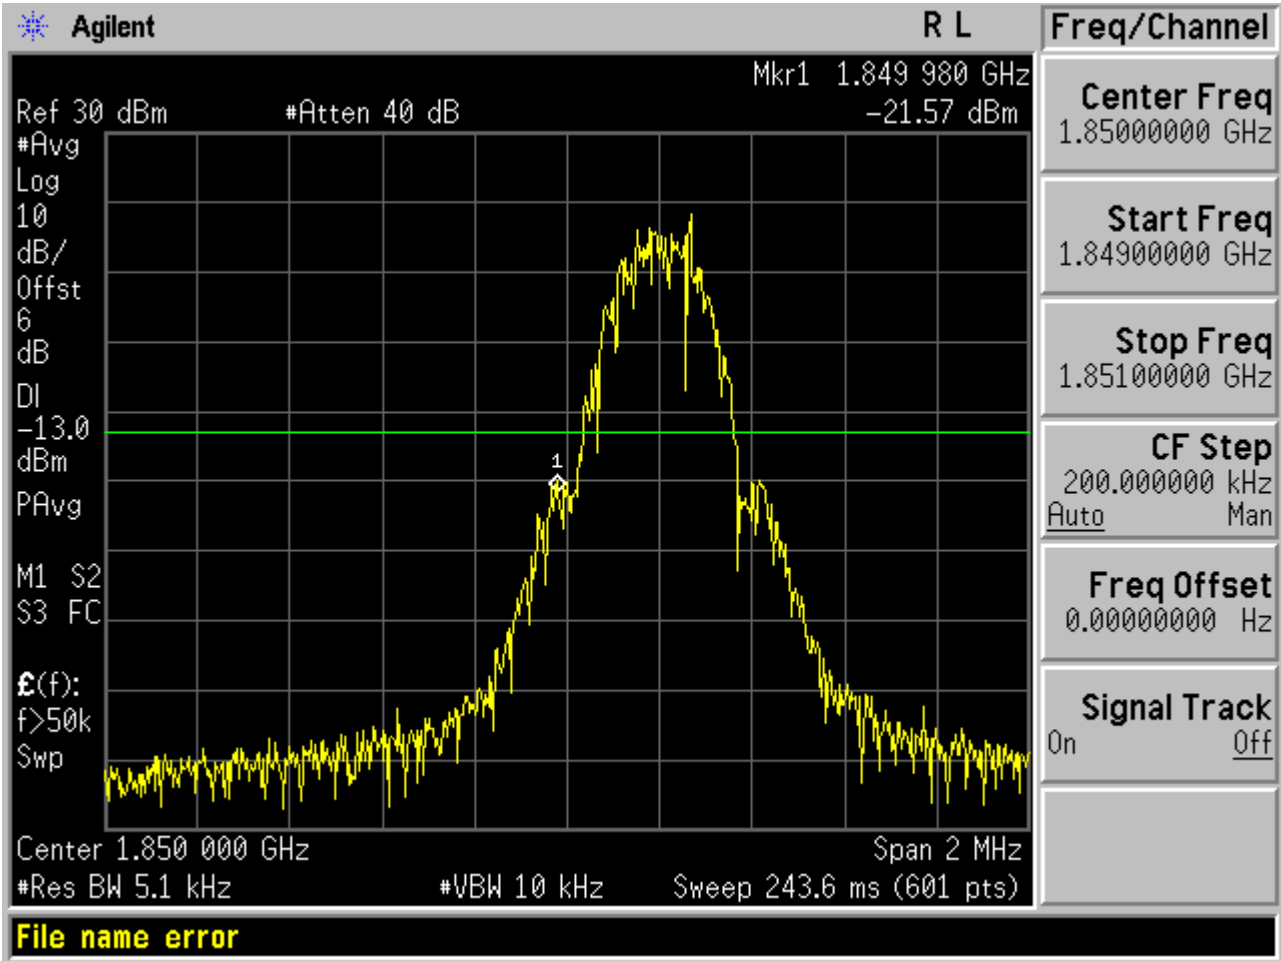


Test Channel=HCH

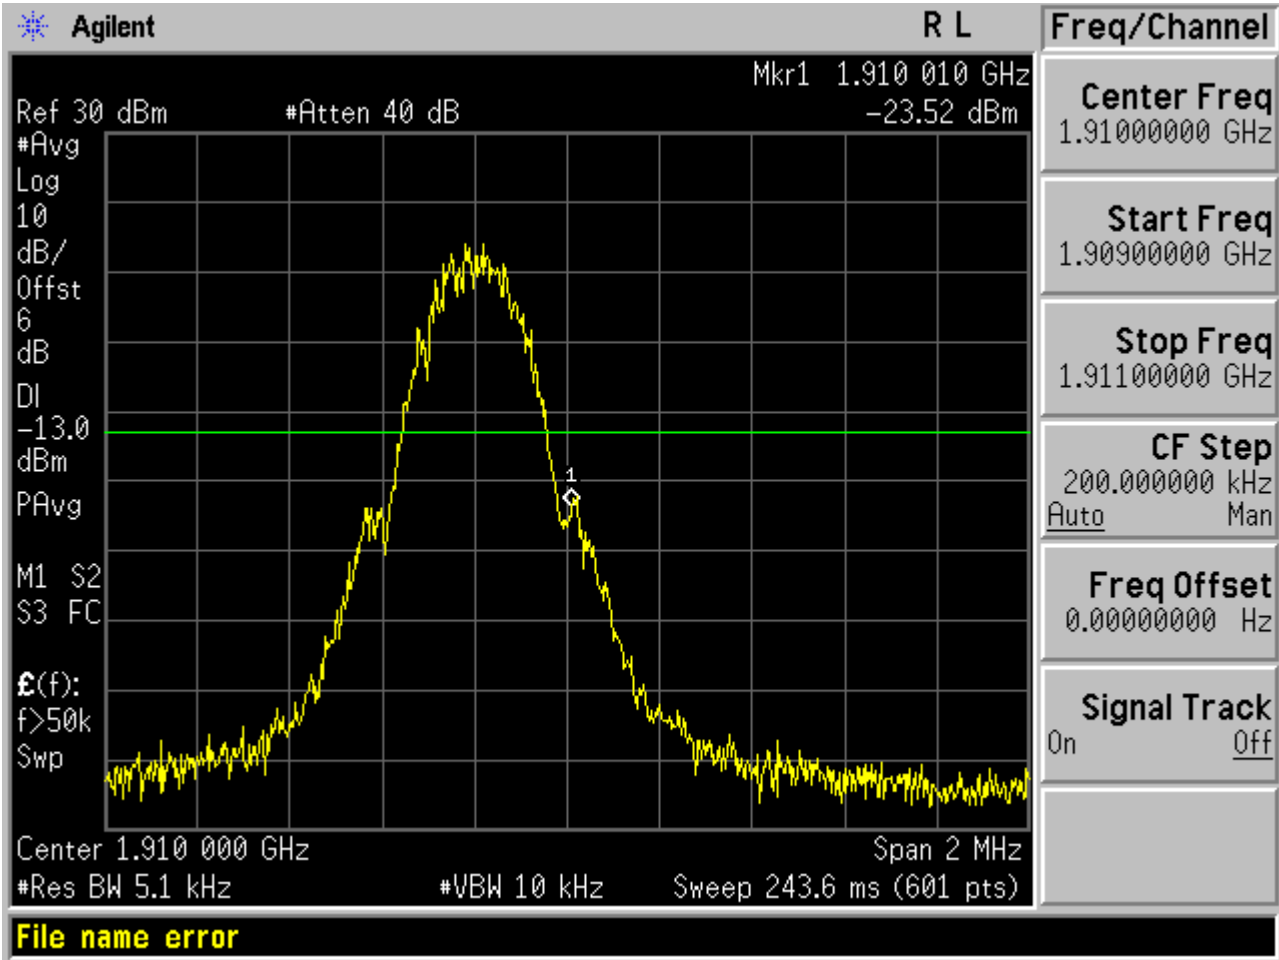

Test Mode=GSM/TM2
Test Channel=LCH

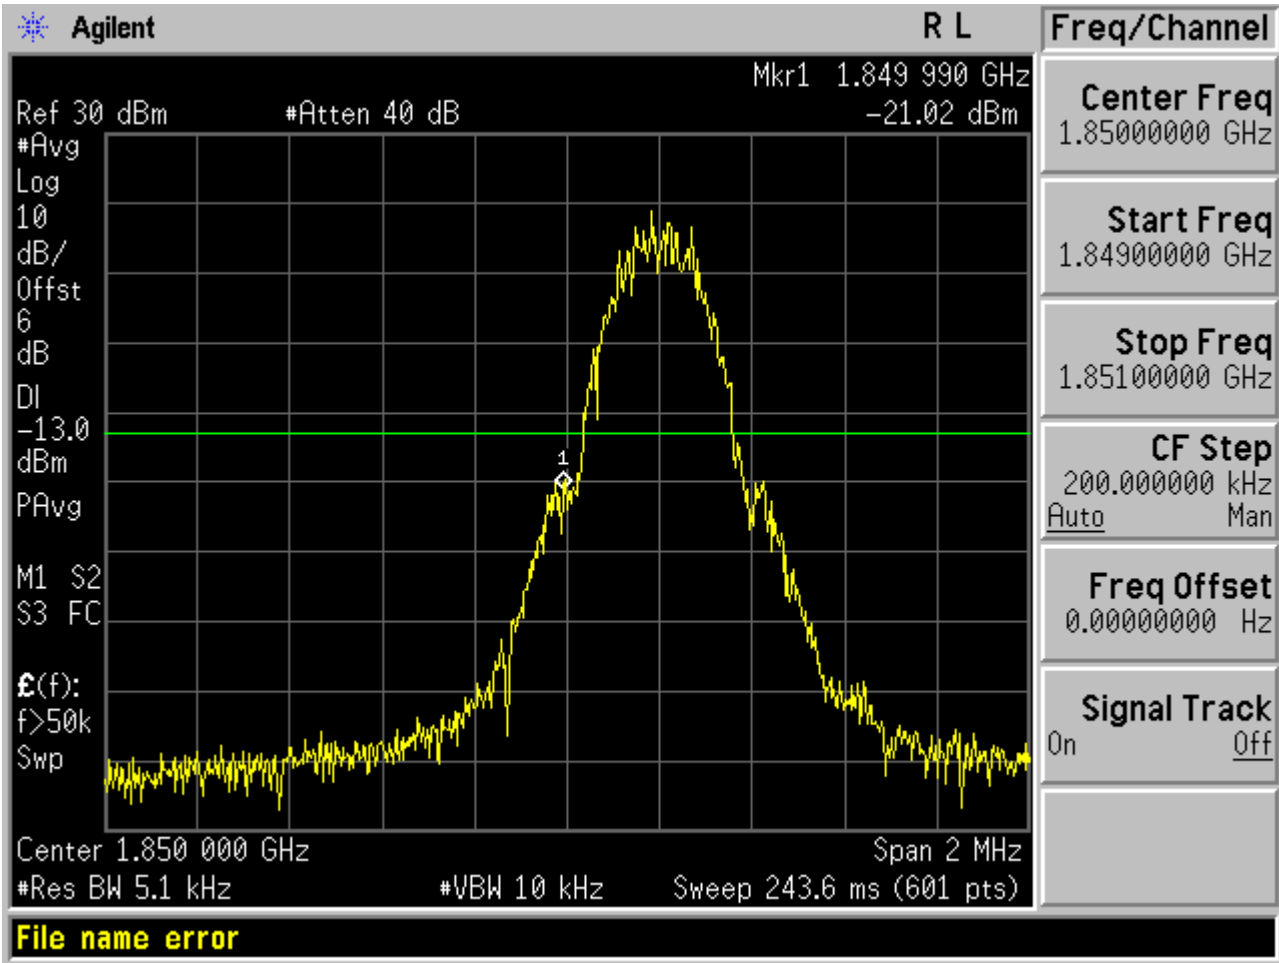

Test Channel=HCH

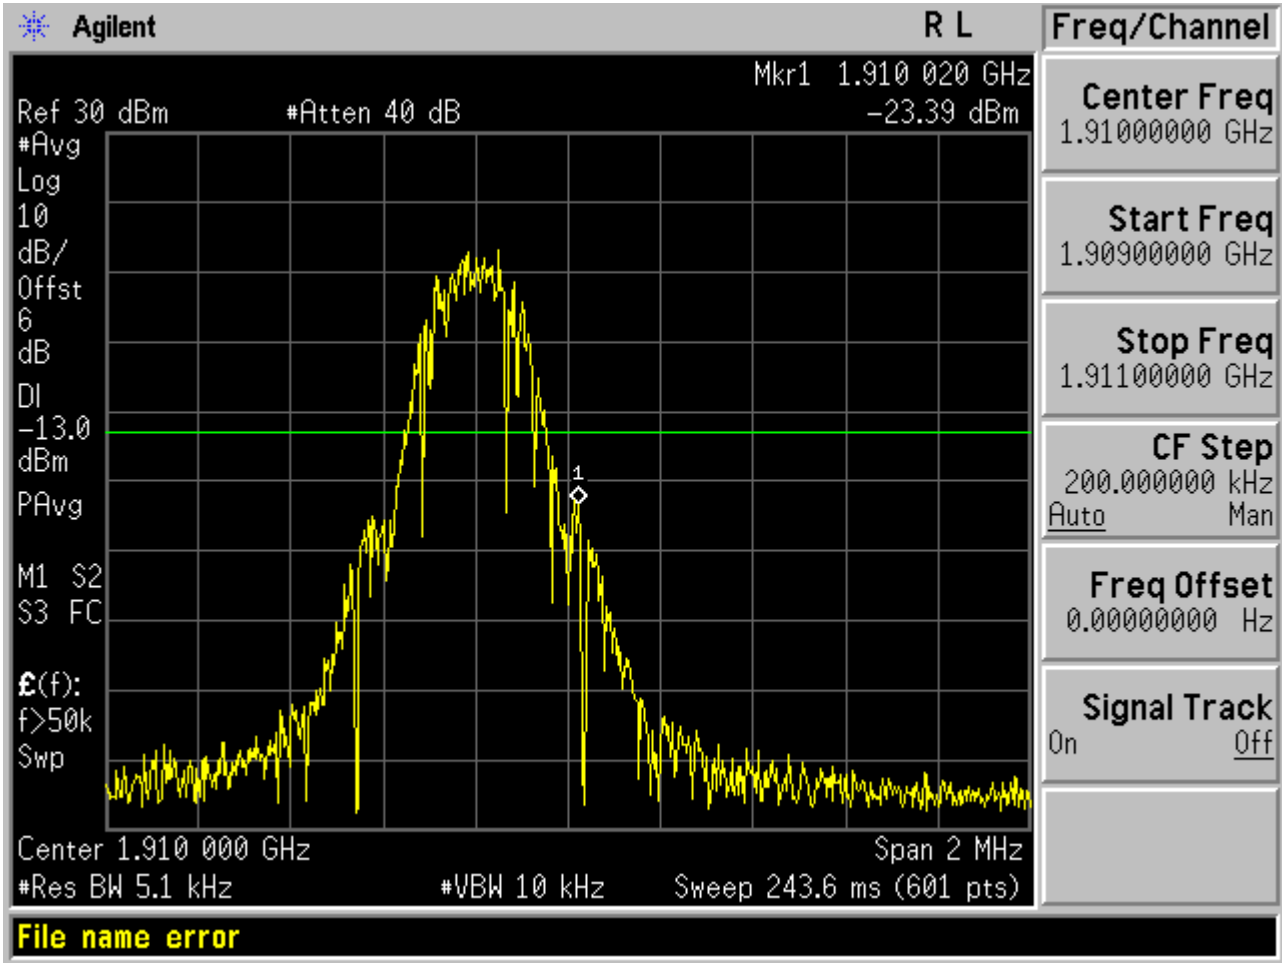

10. SPURIOUS EMISSION

10.1 CONDUCTED SPURIOUS EMISSION

10.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

10.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

10.1.3 MEASUREMENT RESULT

Conducted Spurious Emission for GSM 850 MHz						
Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)
2	1648.4	B.I.N.F	1673.2	B.I.N.F	1697.6	B.I.N.F
3	2472.6	B.I.N.F	2509.8	B.I.N.F	2546.4	B.I.N.F
4	3296.8	B.I.N.F	3346.4	B.I.N.F	3395.2	B.I.N.F
5	4121	B.I.N.F	4183	B.I.N.F	4244	B.I.N.F
6	4945.2	B.I.N.F	5019.6	B.I.N.F	5092.8	B.I.N.F
7	5769.4	B.I.N.F	5856.2	B.I.N.F	5941.6	B.I.N.F
8	6593.6	B.I.N.F	6692.8	B.I.N.F	6790.4	B.I.N.F
9	7417.8	B.I.N.F	7529.4	B.I.N.F	7639.2	B.I.N.F
10	8242	B.I.N.F	8366	B.I.N.F	8488	B.I.N.F
● B.I.N.F: Below Instruments Noise floor						

Conducted Spurious Emission for PCS 1900 MHz						
Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	B.I.N.F	3760	B.I.N.F	3819.6	B.I.N.F
3	5550.6	B.I.N.F	5640	B.I.N.F	5729.4	B.I.N.F
4	7400.8	B.I.N.F	7520	B.I.N.F	7639.2	B.I.N.F
5	9251.0	B.I.N.F	9400	B.I.N.F	9549.0	B.I.N.F
6	11101.2	B.I.N.F	11280	B.I.N.F	11458.8	B.I.N.F
7	12951.4	B.I.N.F	13160	B.I.N.F	13368.6	B.I.N.F
8	14801.6	B.I.N.F	15040	B.I.N.F	15278.4	B.I.N.F
9	16651.8	B.I.N.F	16920	B.I.N.F	17188.2	B.I.N.F
10	18502.0	B.I.N.F	18800	B.I.N.F	19098.0	B.I.N.F
● B.I.N.F: Below Instruments Noise floor						

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.


APPENDIX D: SPURIOUS EMISSION AT ANTENNA TERMINAL


Test Results

Test Band=GSM850


Test Mode=GSM/TM1


Test Channel=LCH

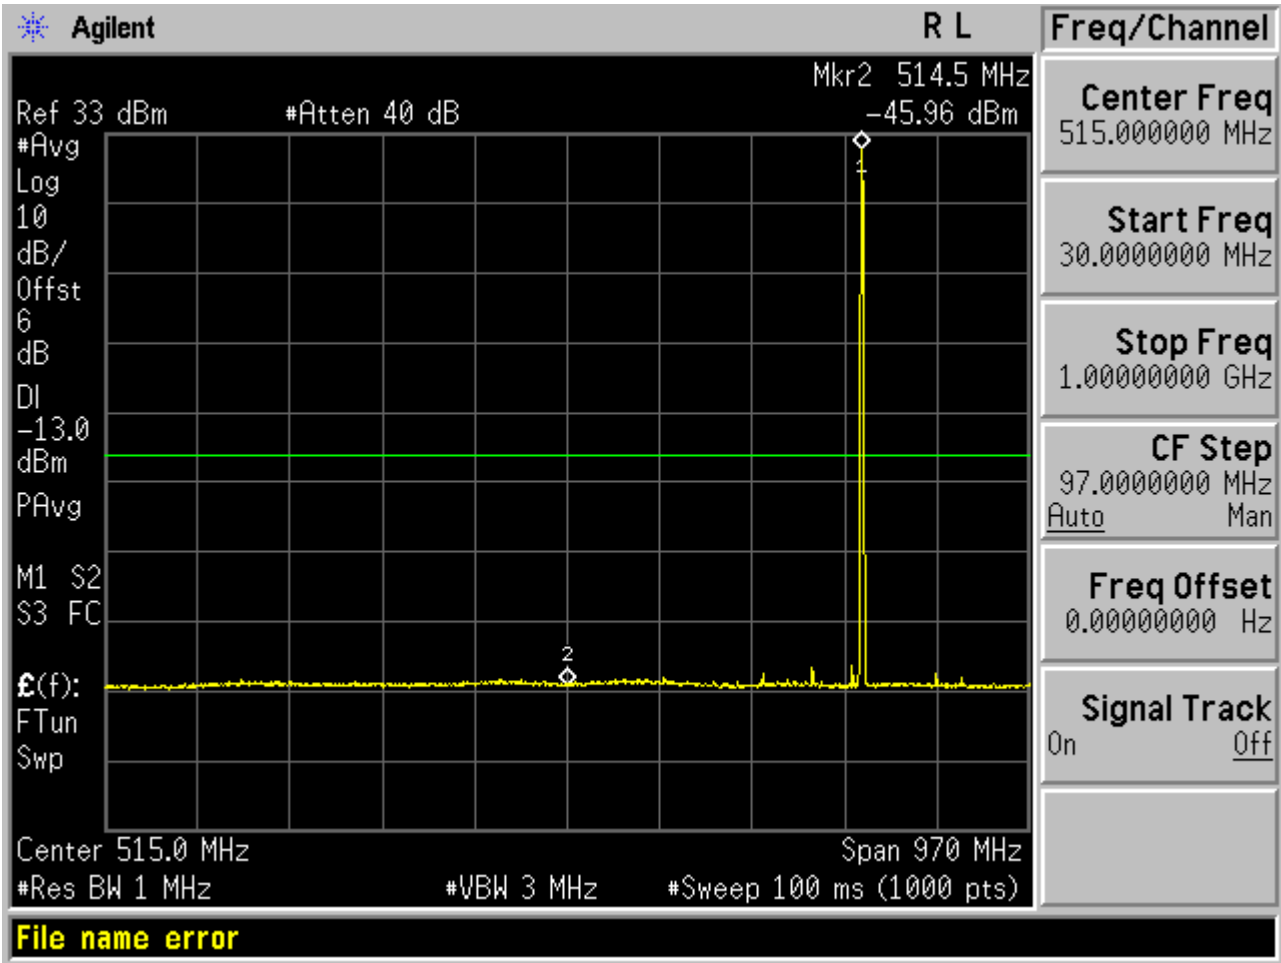

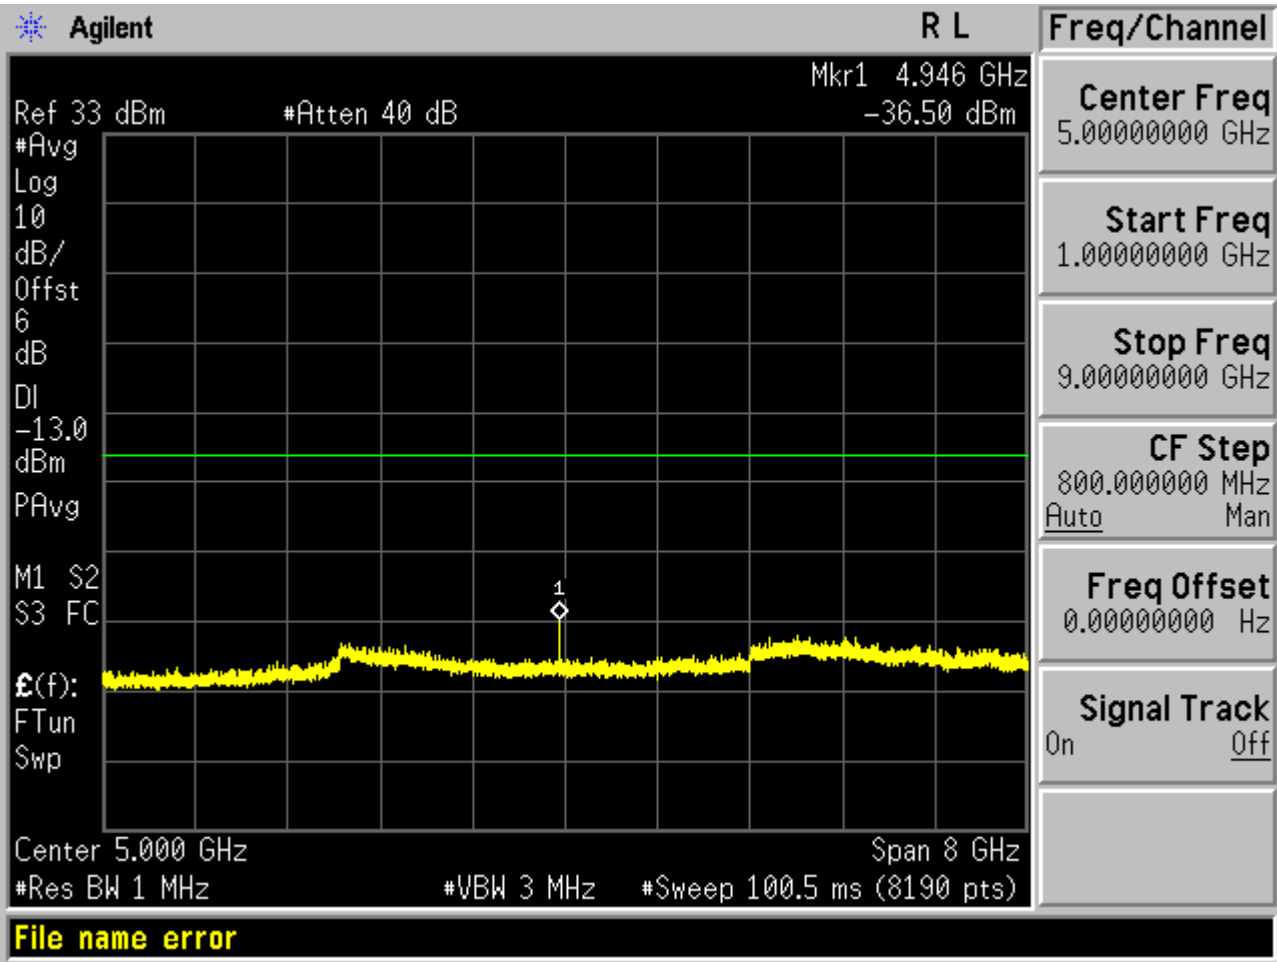



Test Channel=MCH

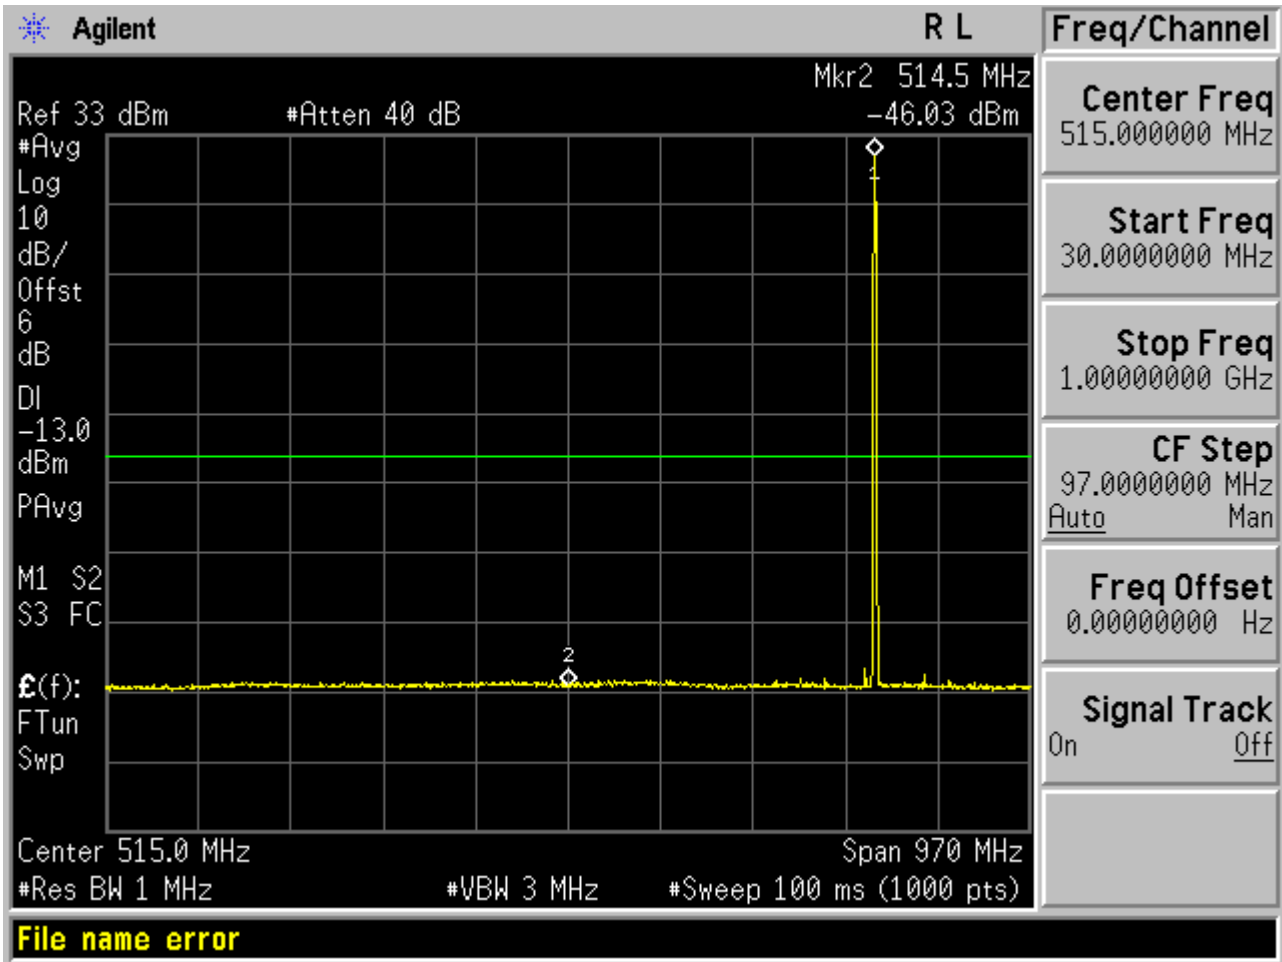

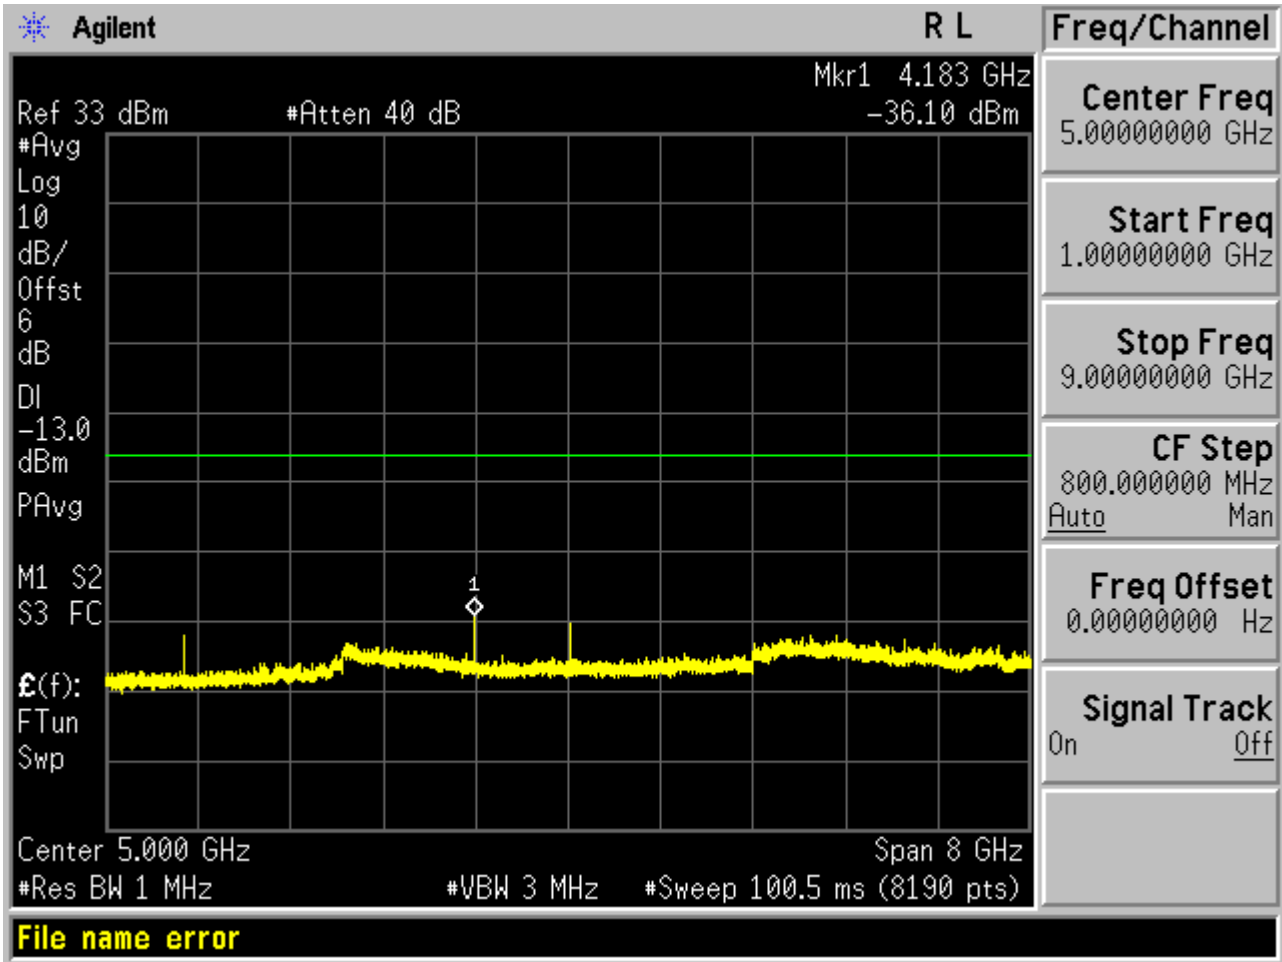



Test Channel=HCH

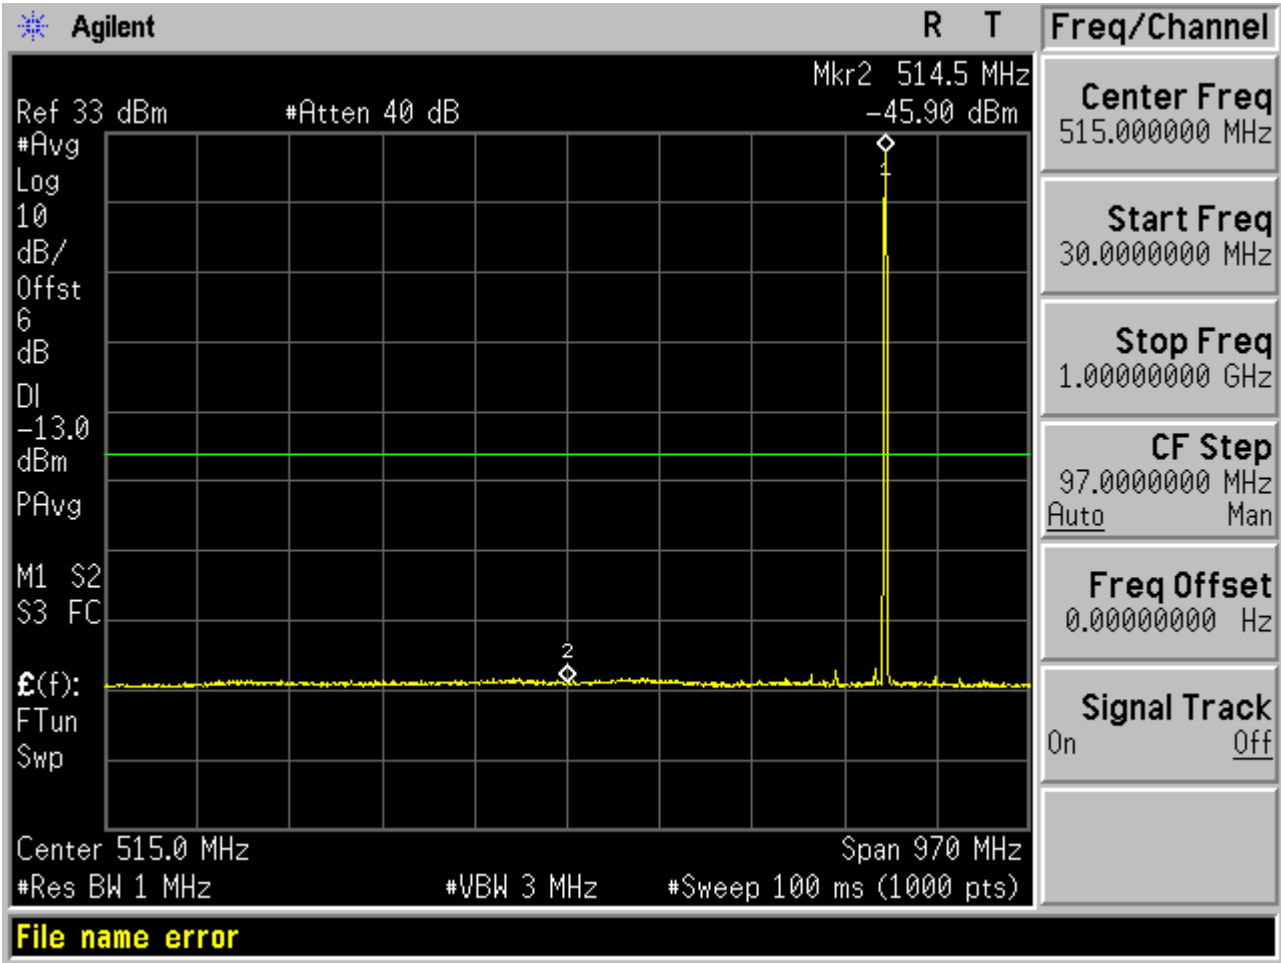

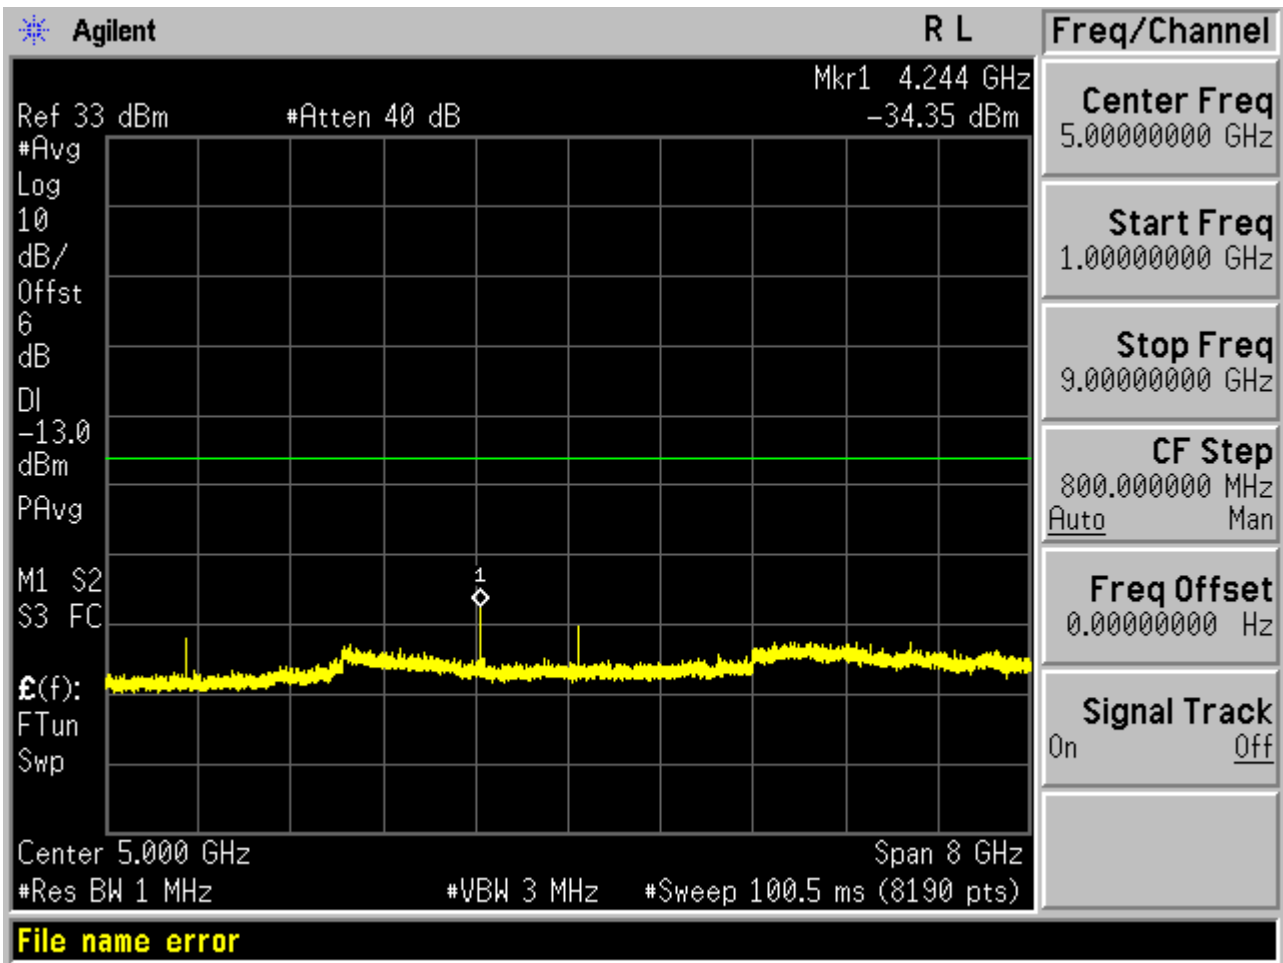



Test Mode=GSM/TM2
Test Channel=LCH

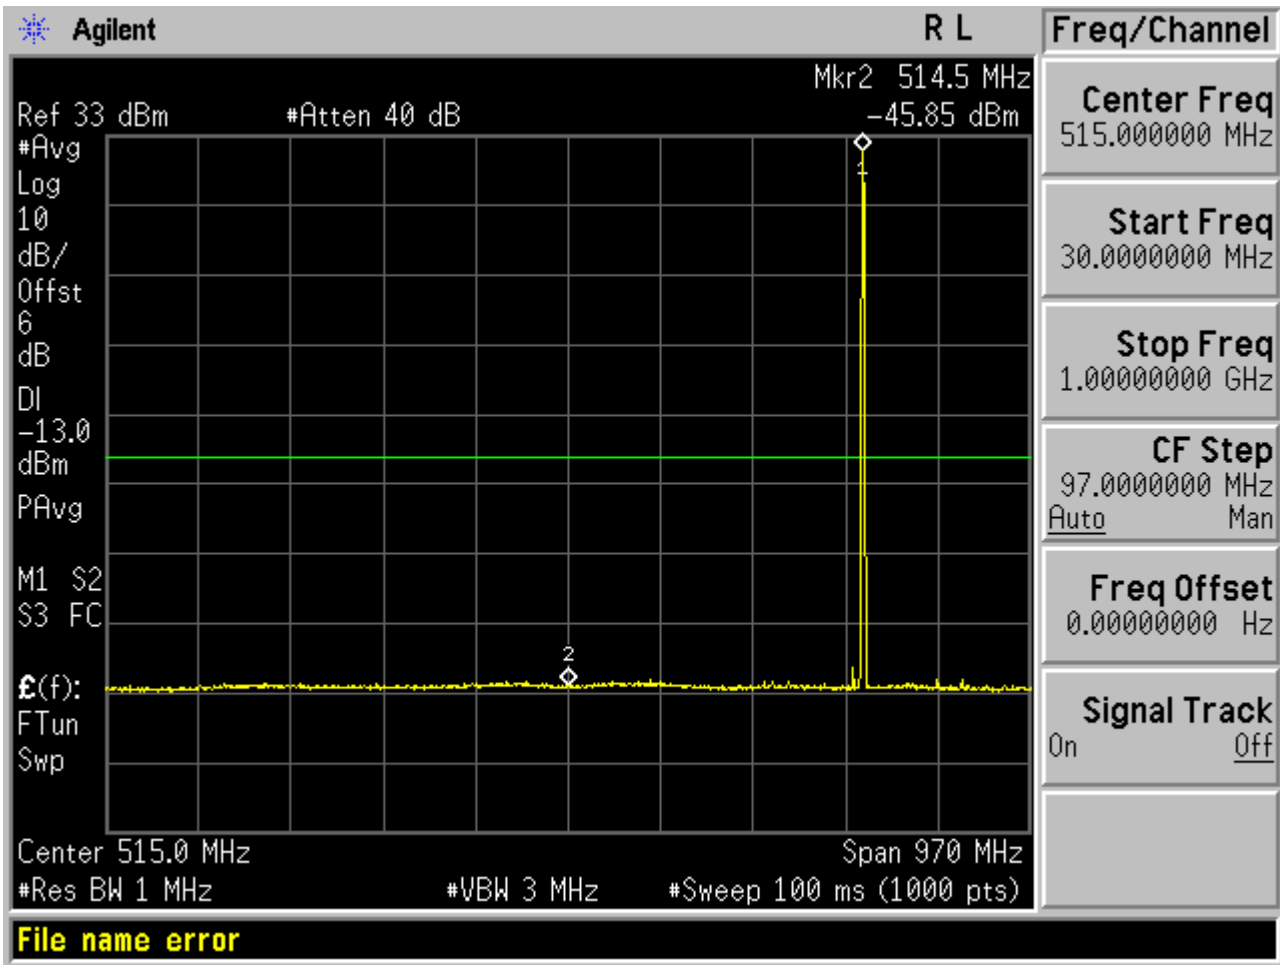

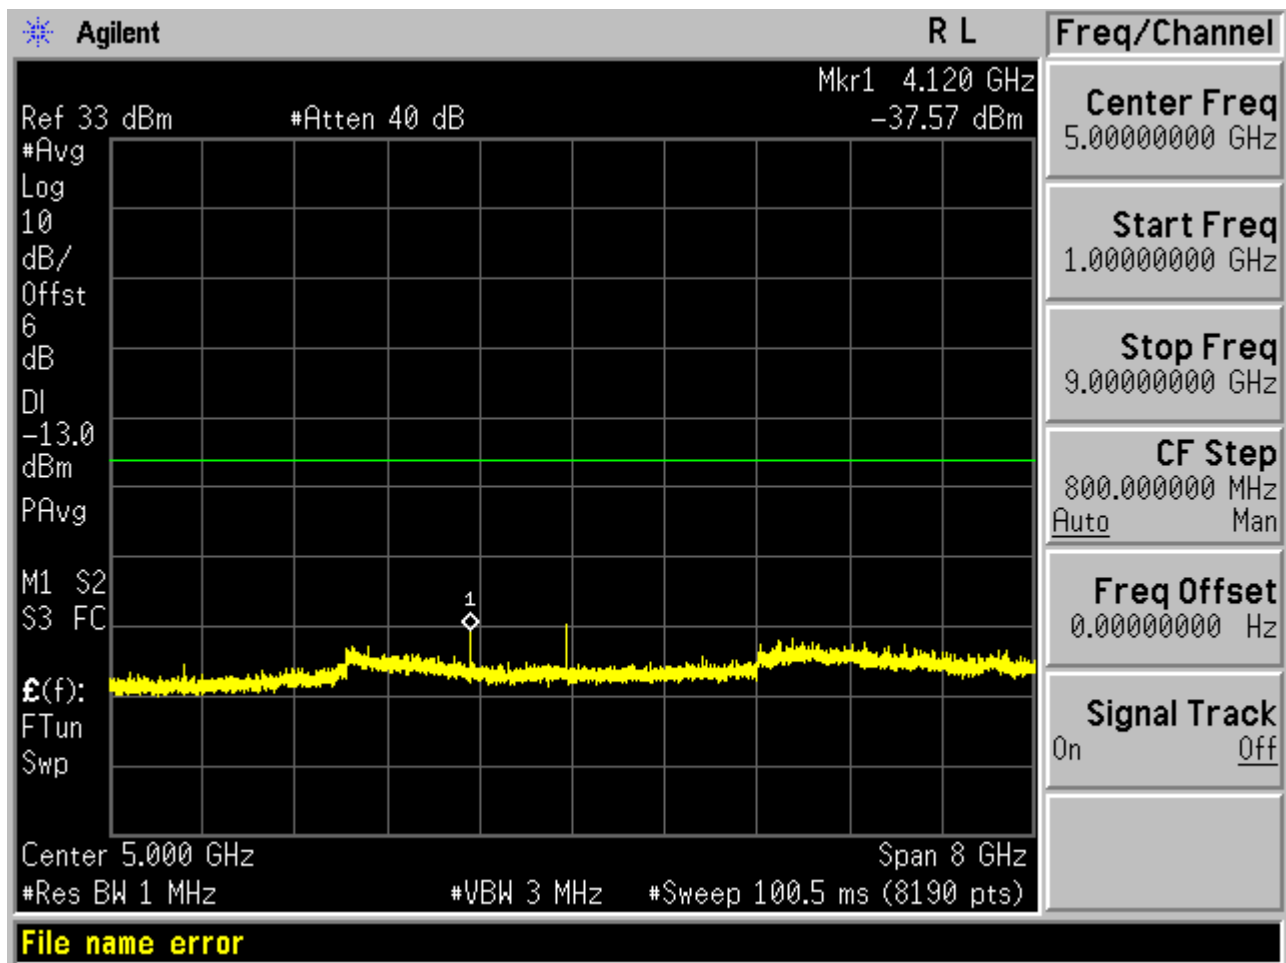



Test Channel=MCH

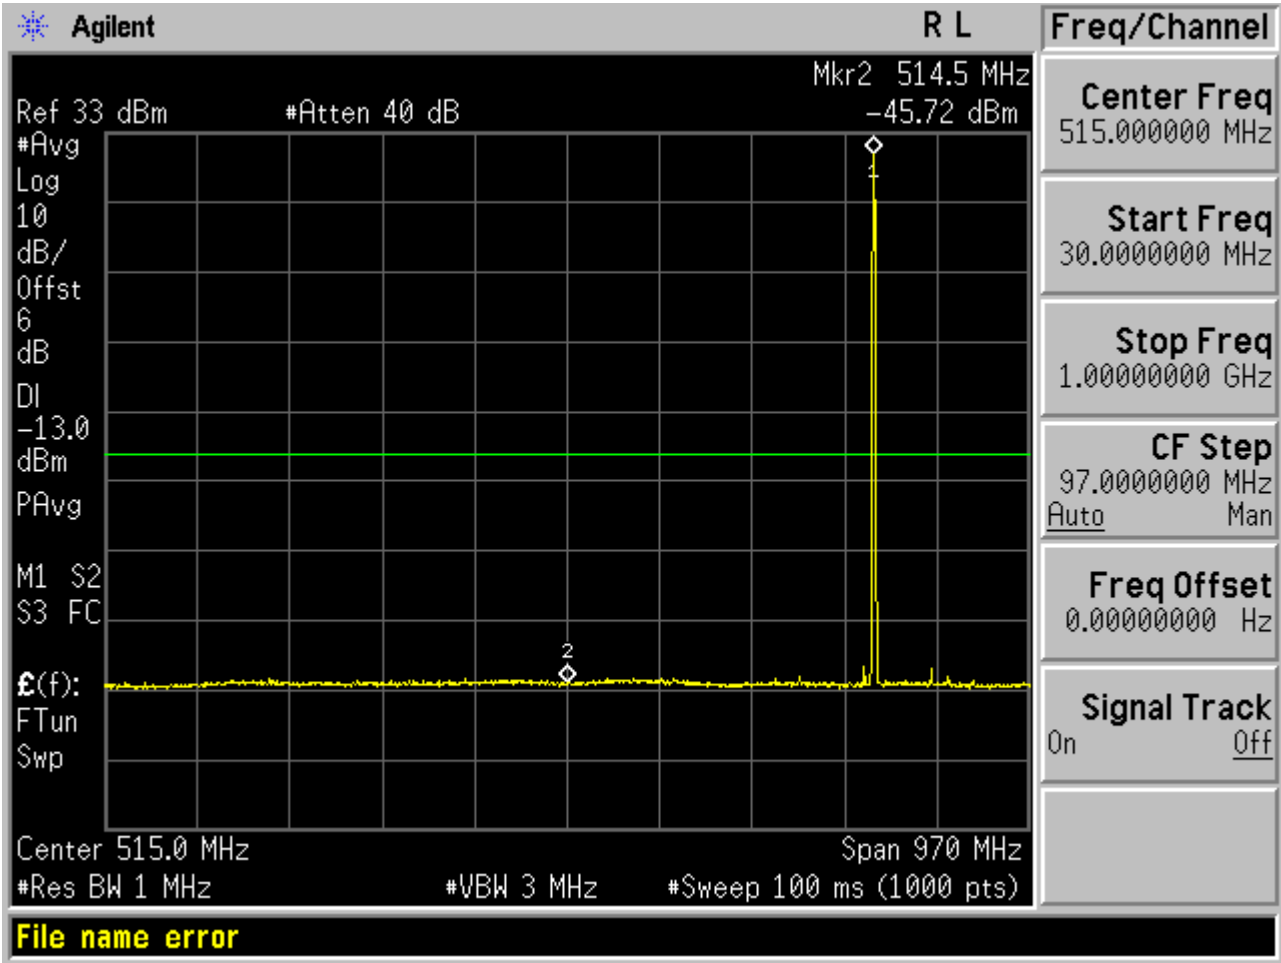

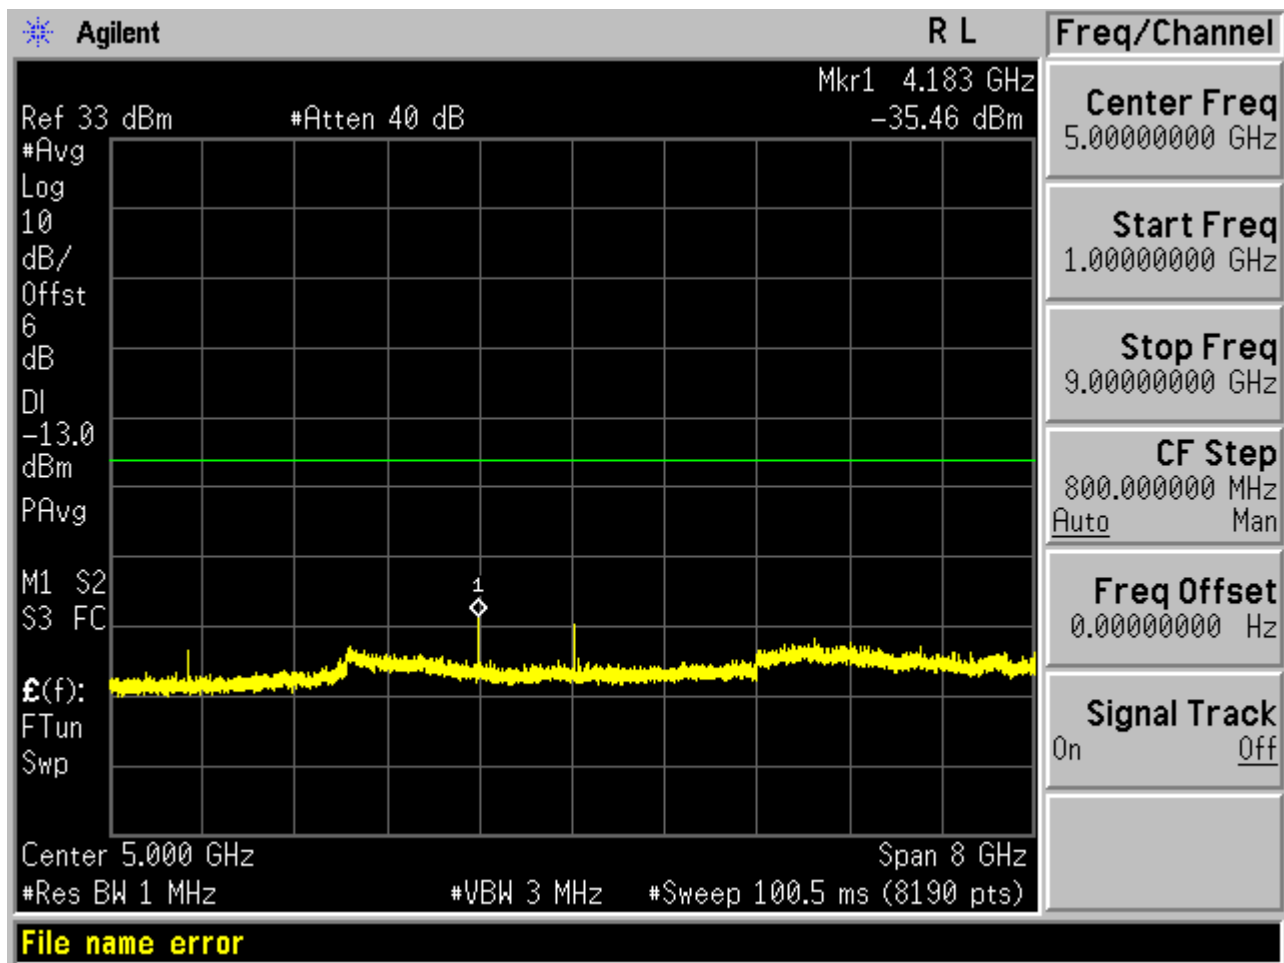

Test Channel=HCH

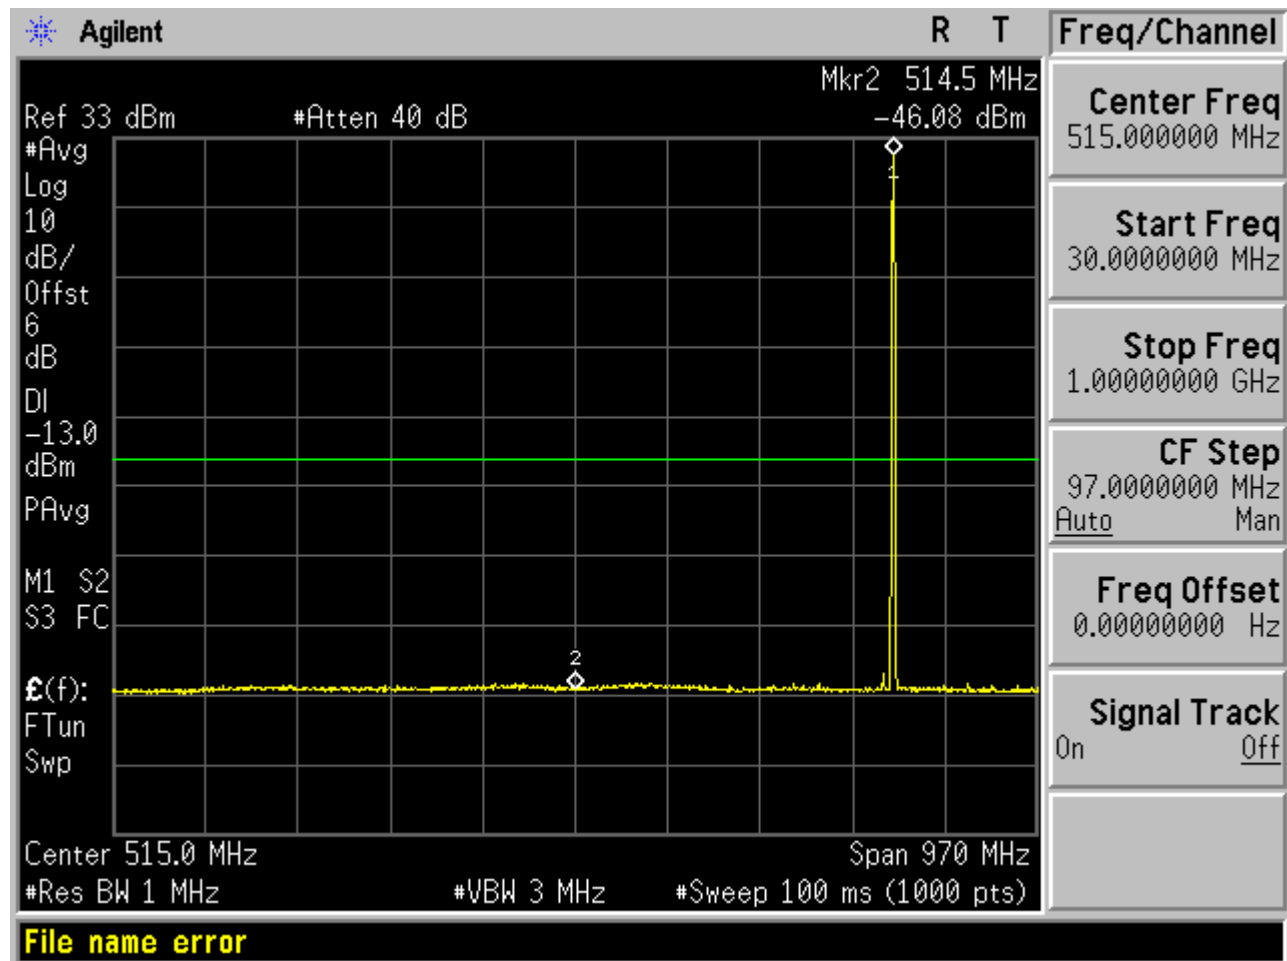


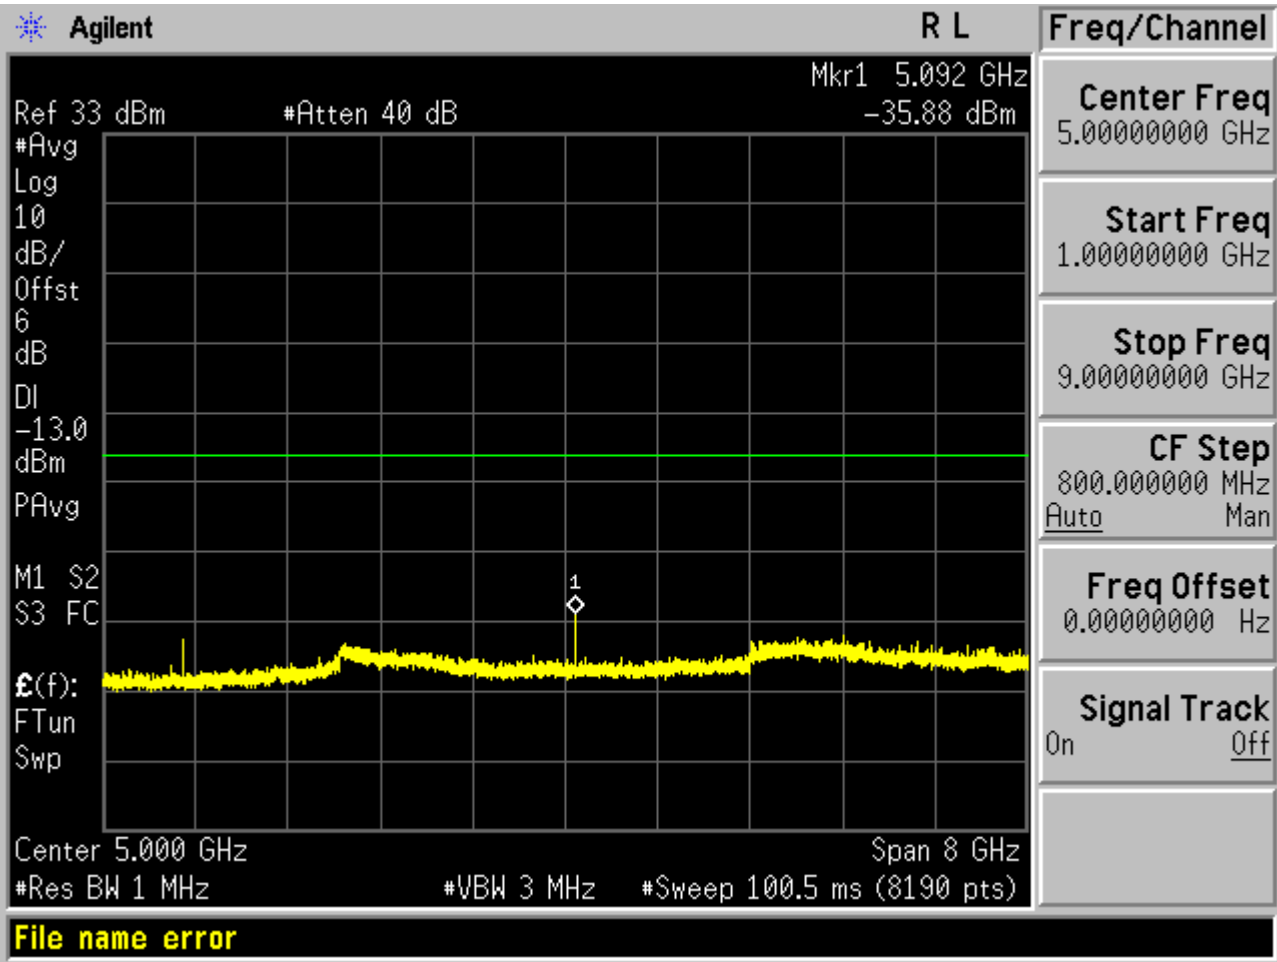


Test Band=GSM1900

Test Mode=GSM/TM1

Test Channel=LCH

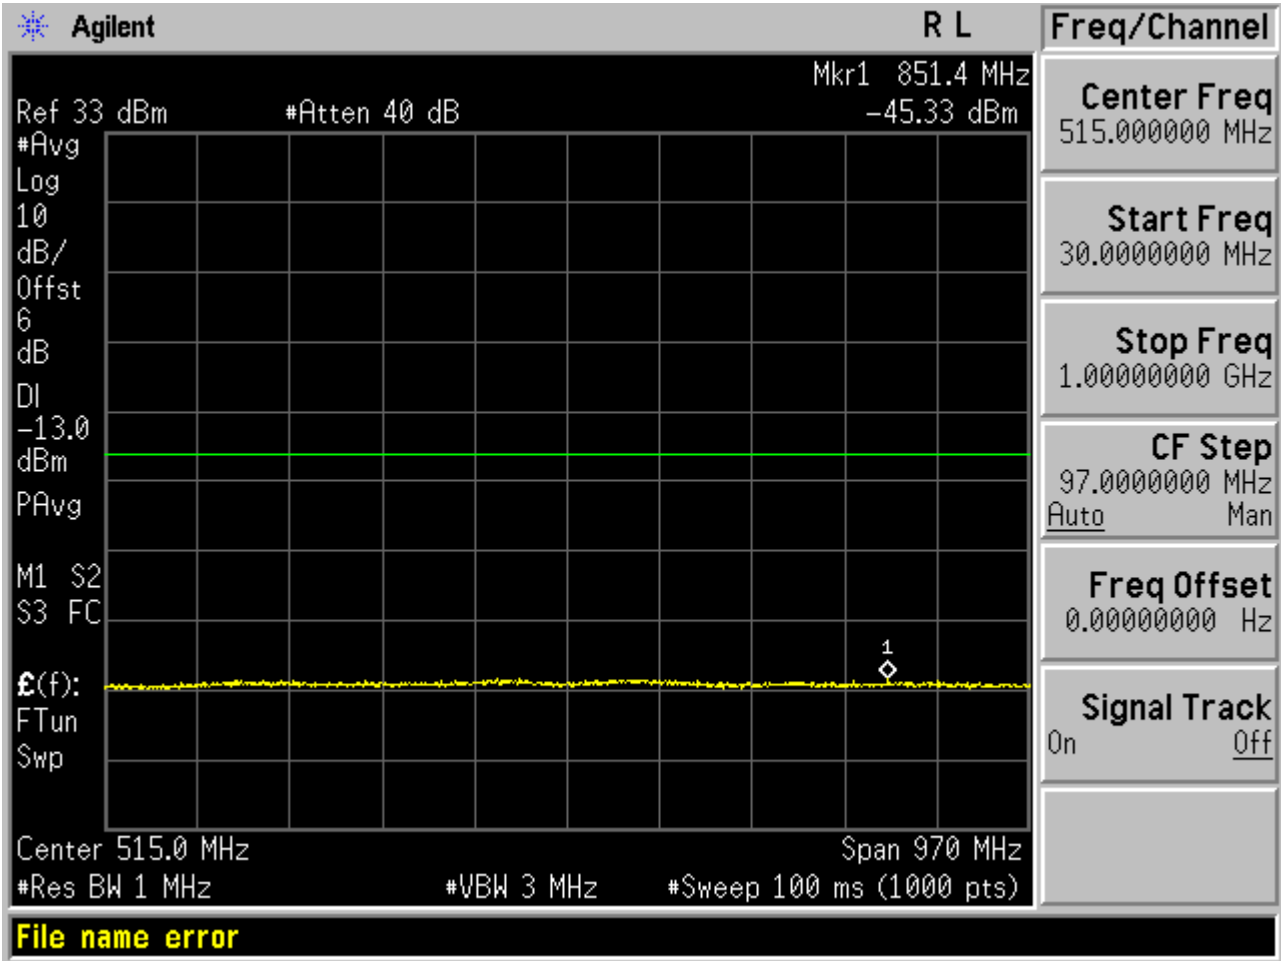


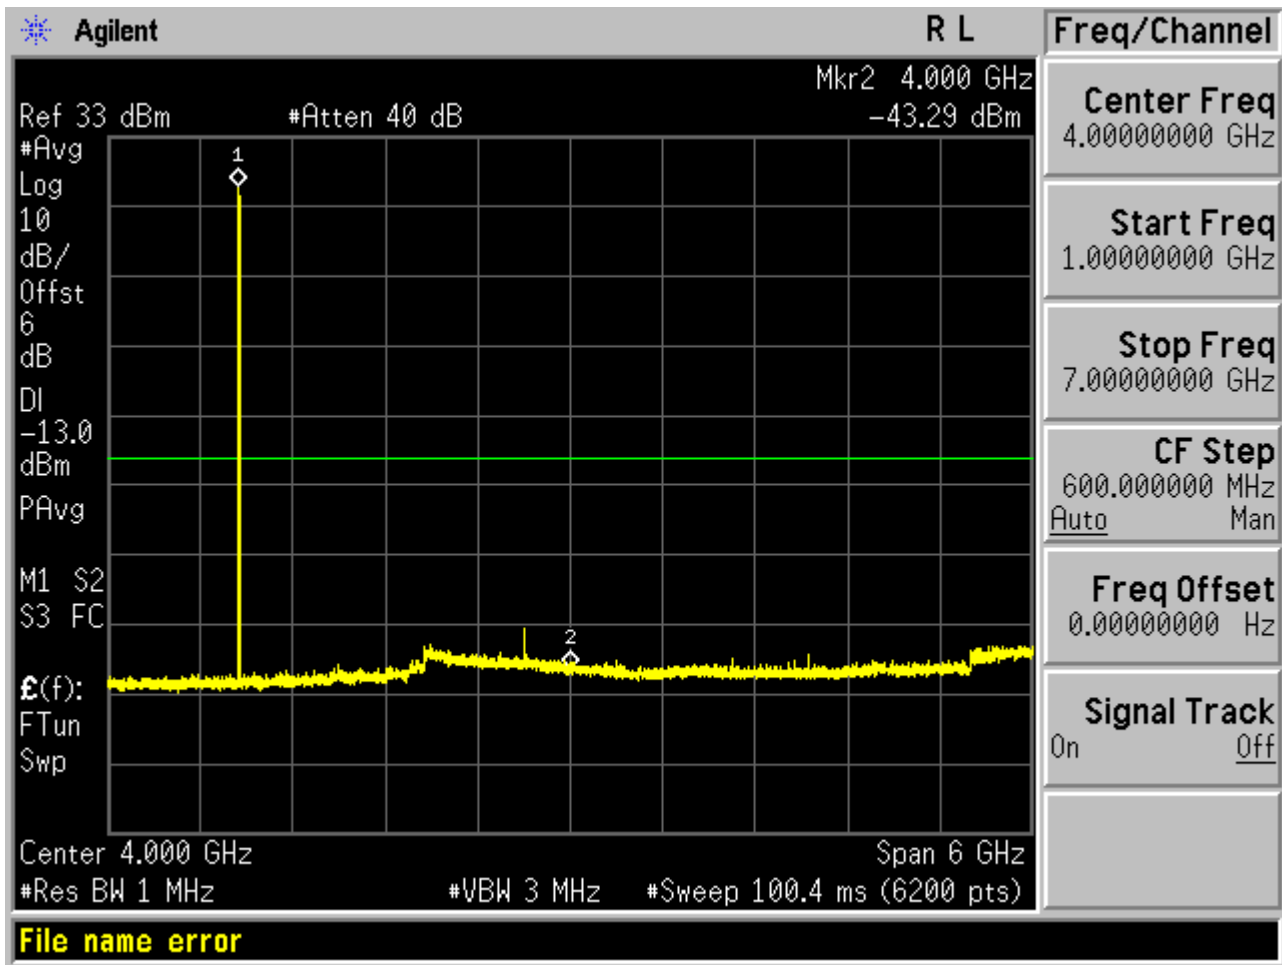








Test Channel=MCH

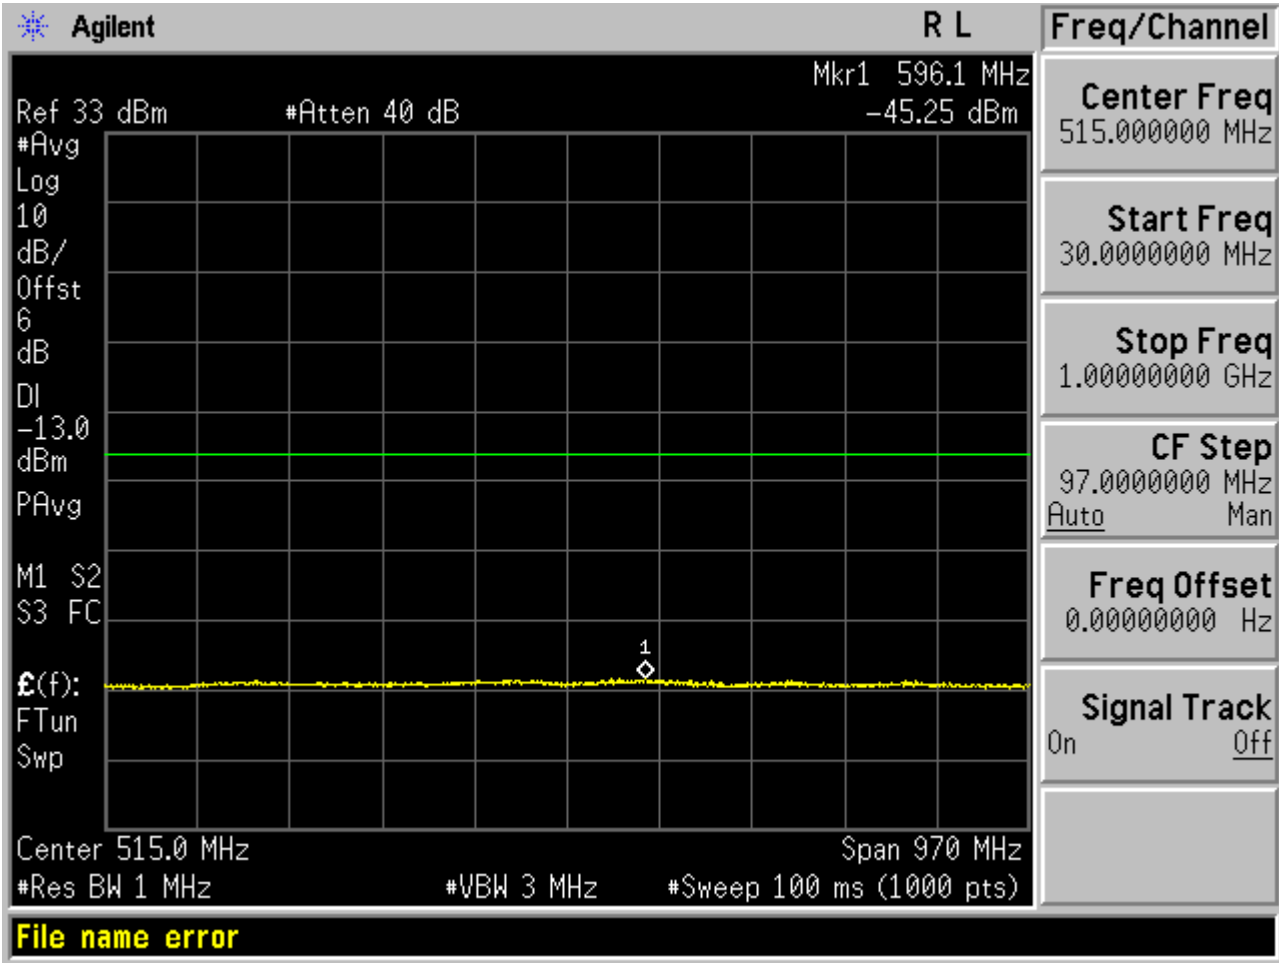


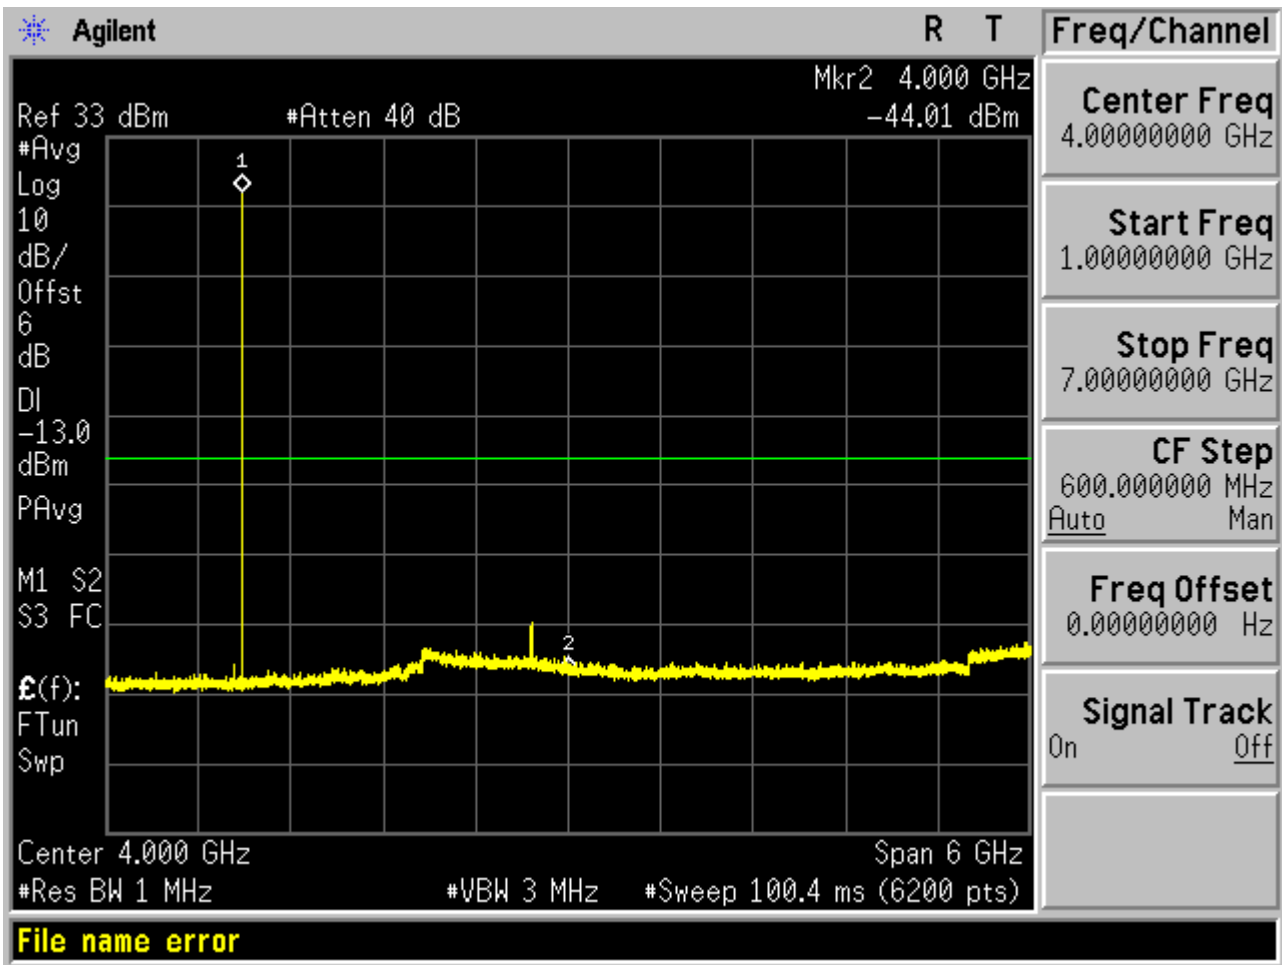


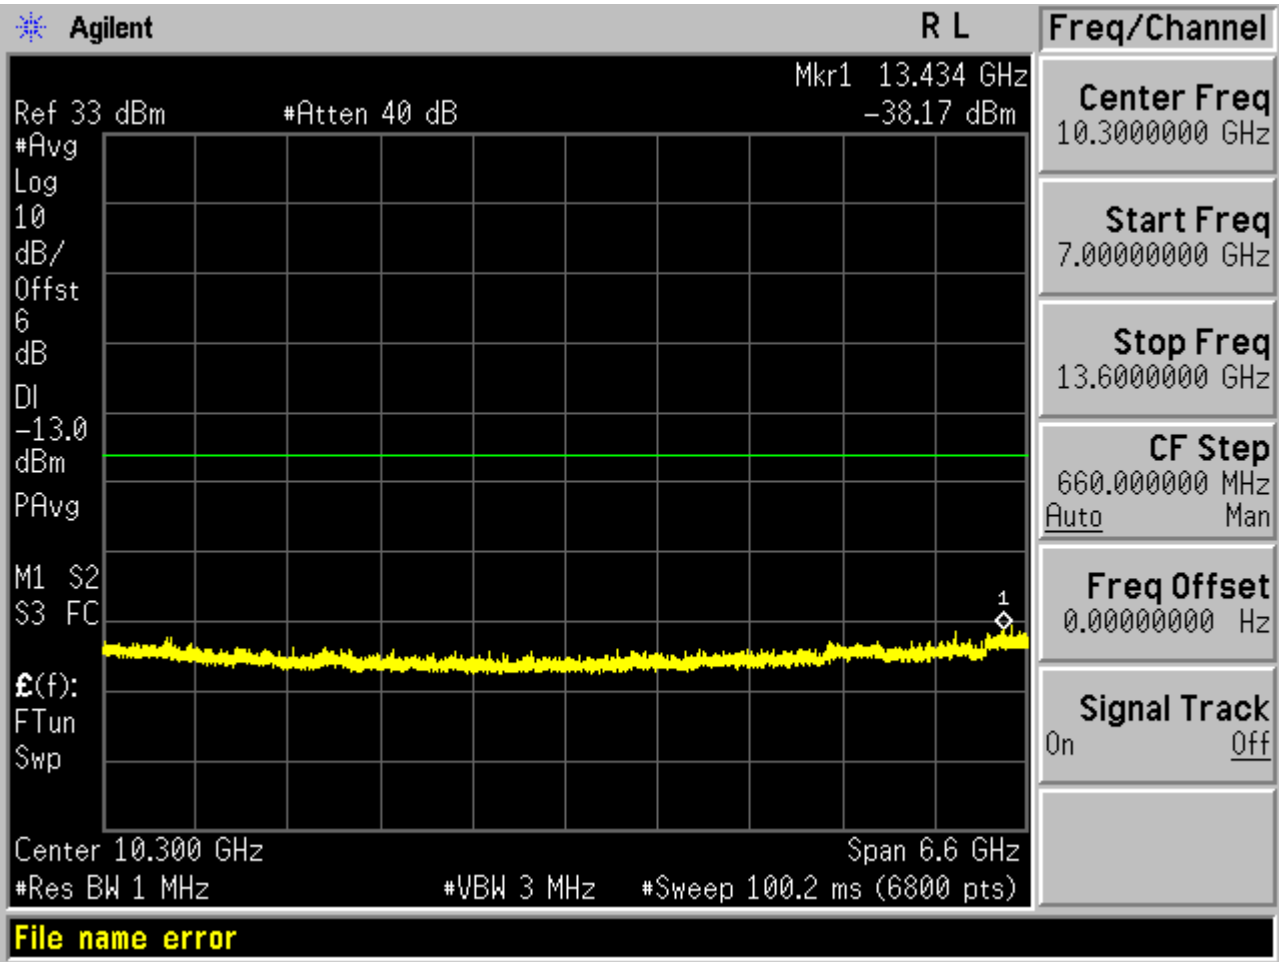


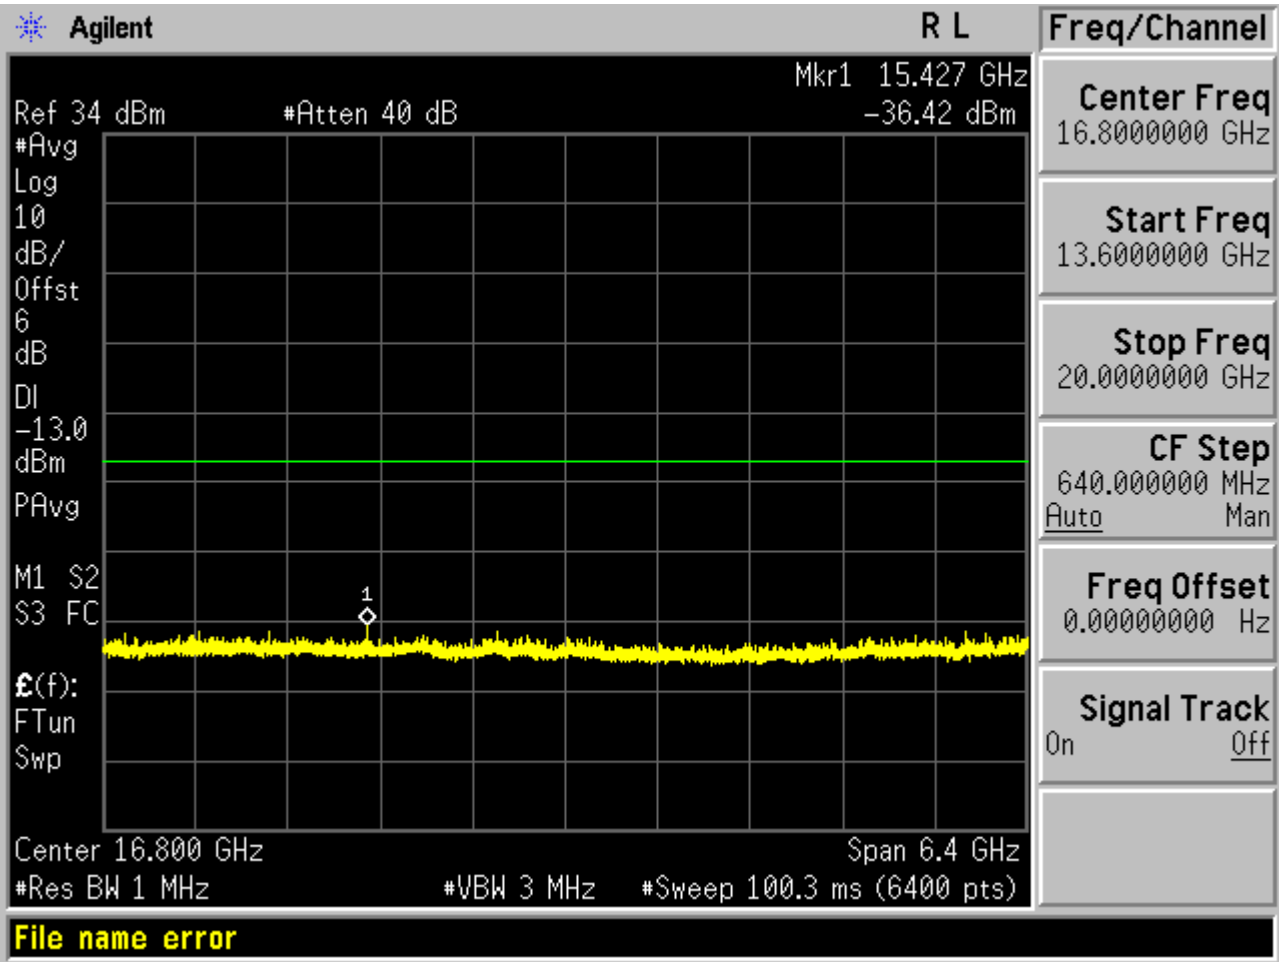


Test Channel=HCH

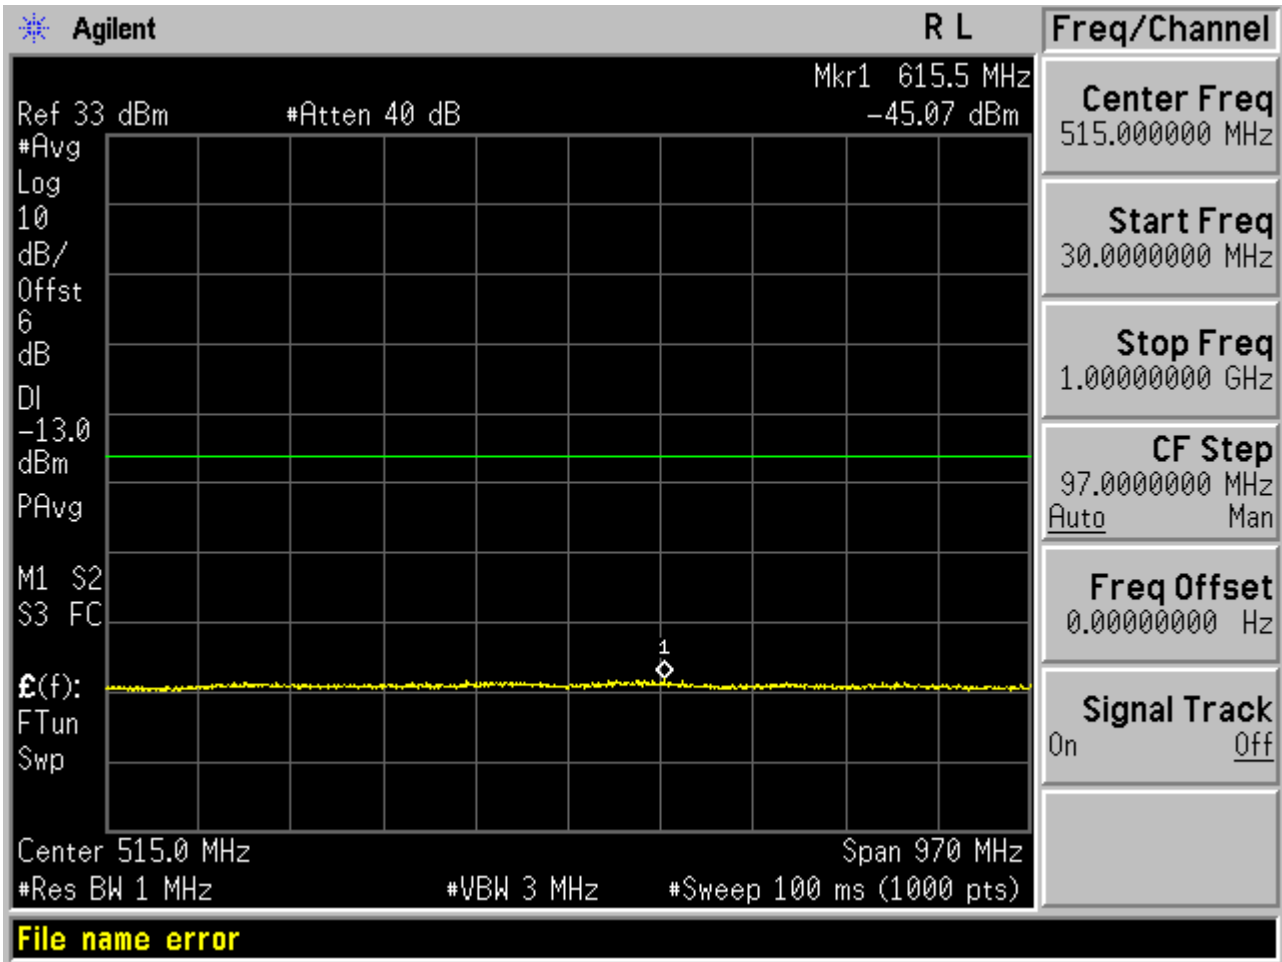


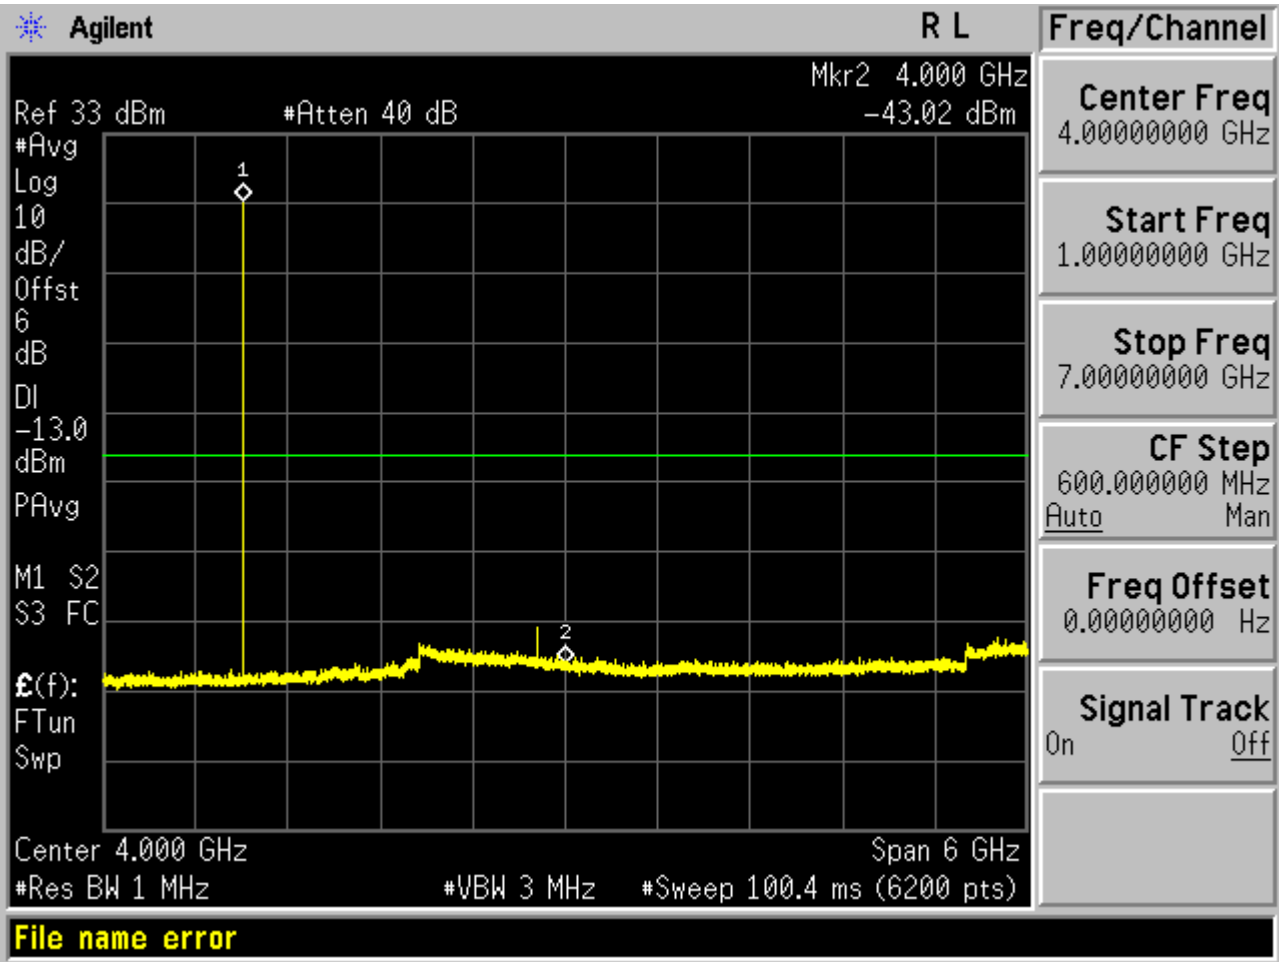


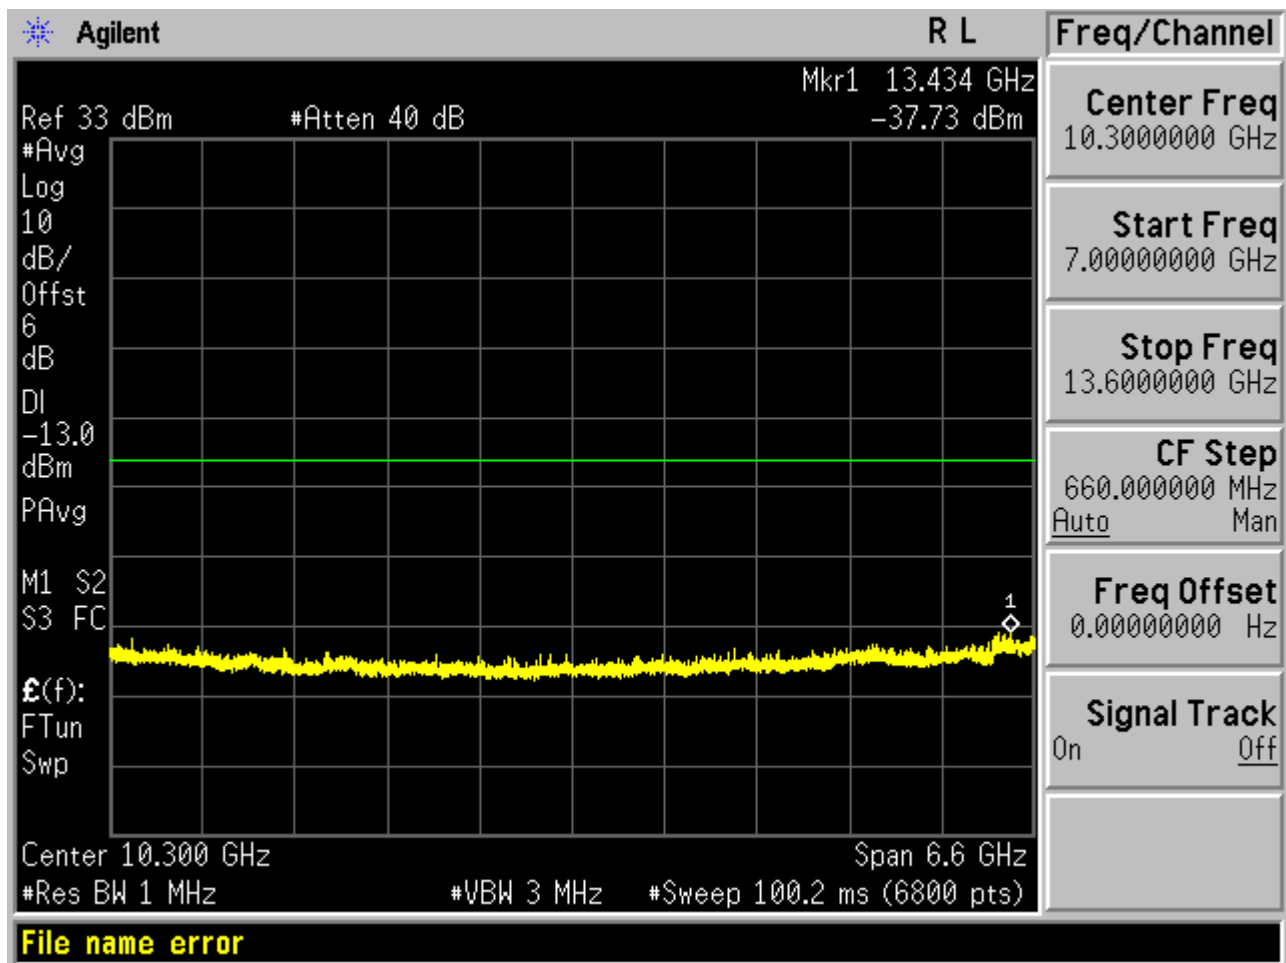


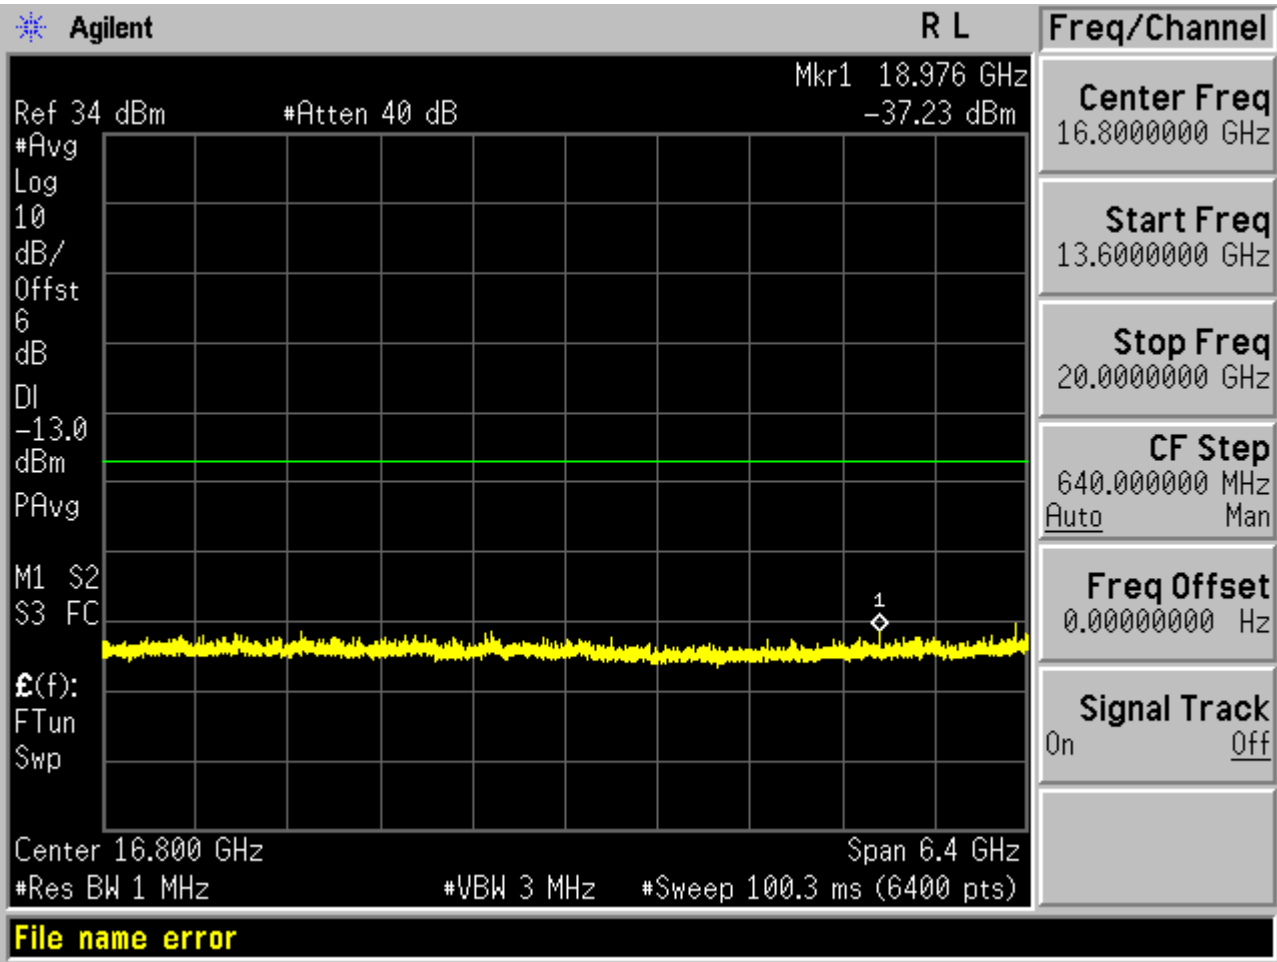


Test Mode=GSM/TM2
Test Channel=LCH

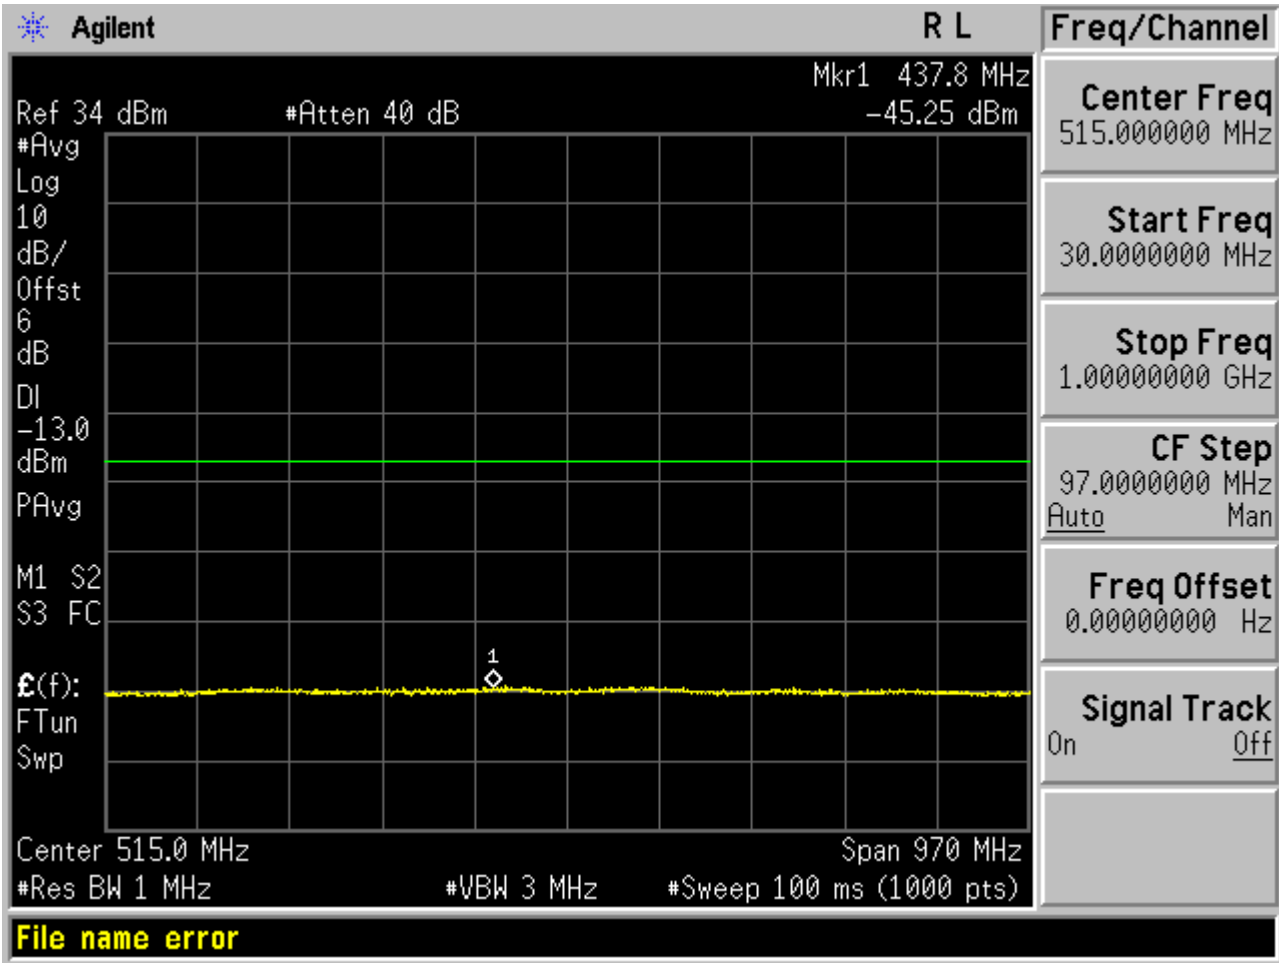


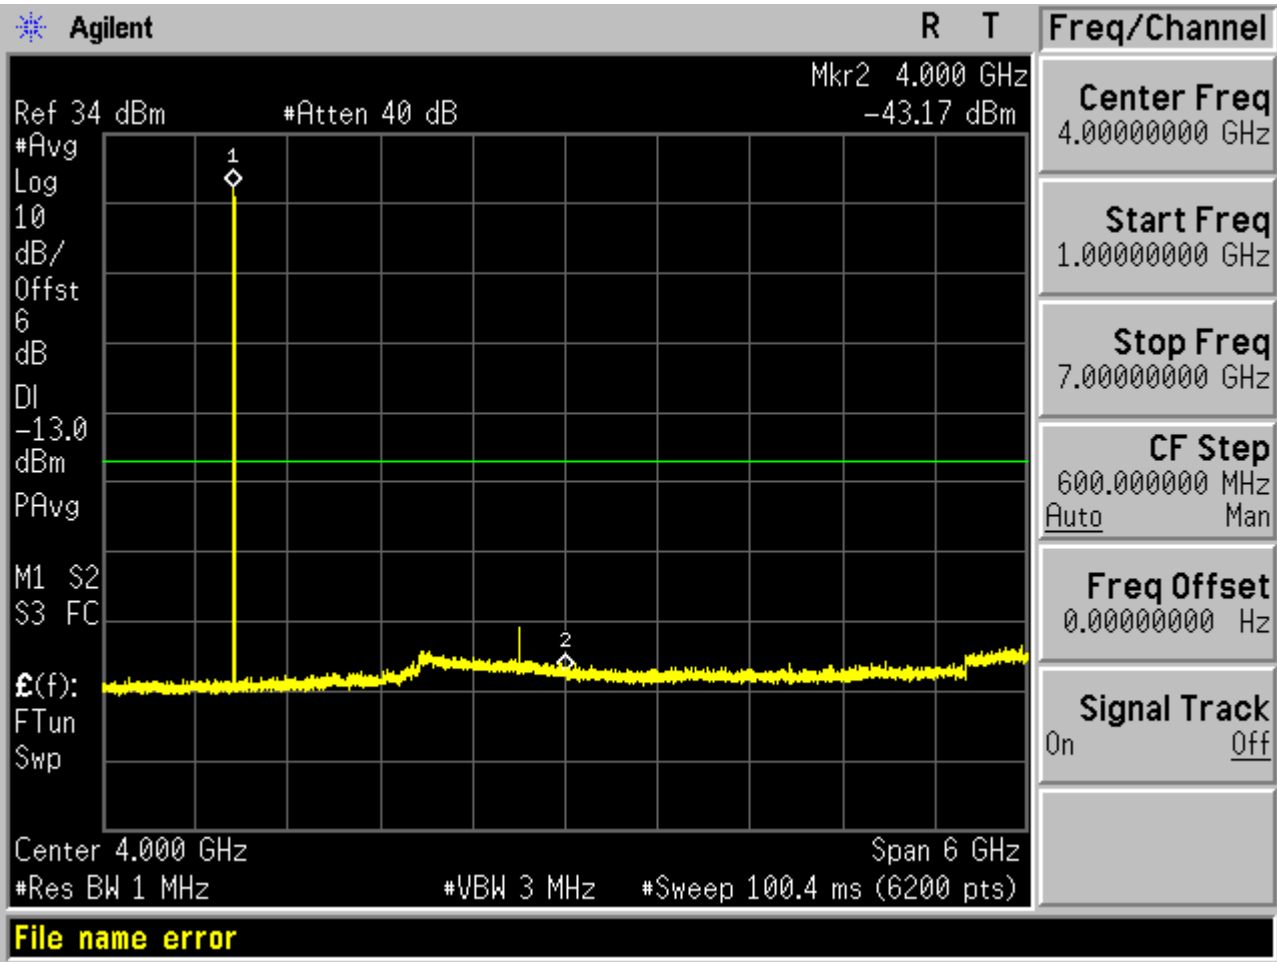


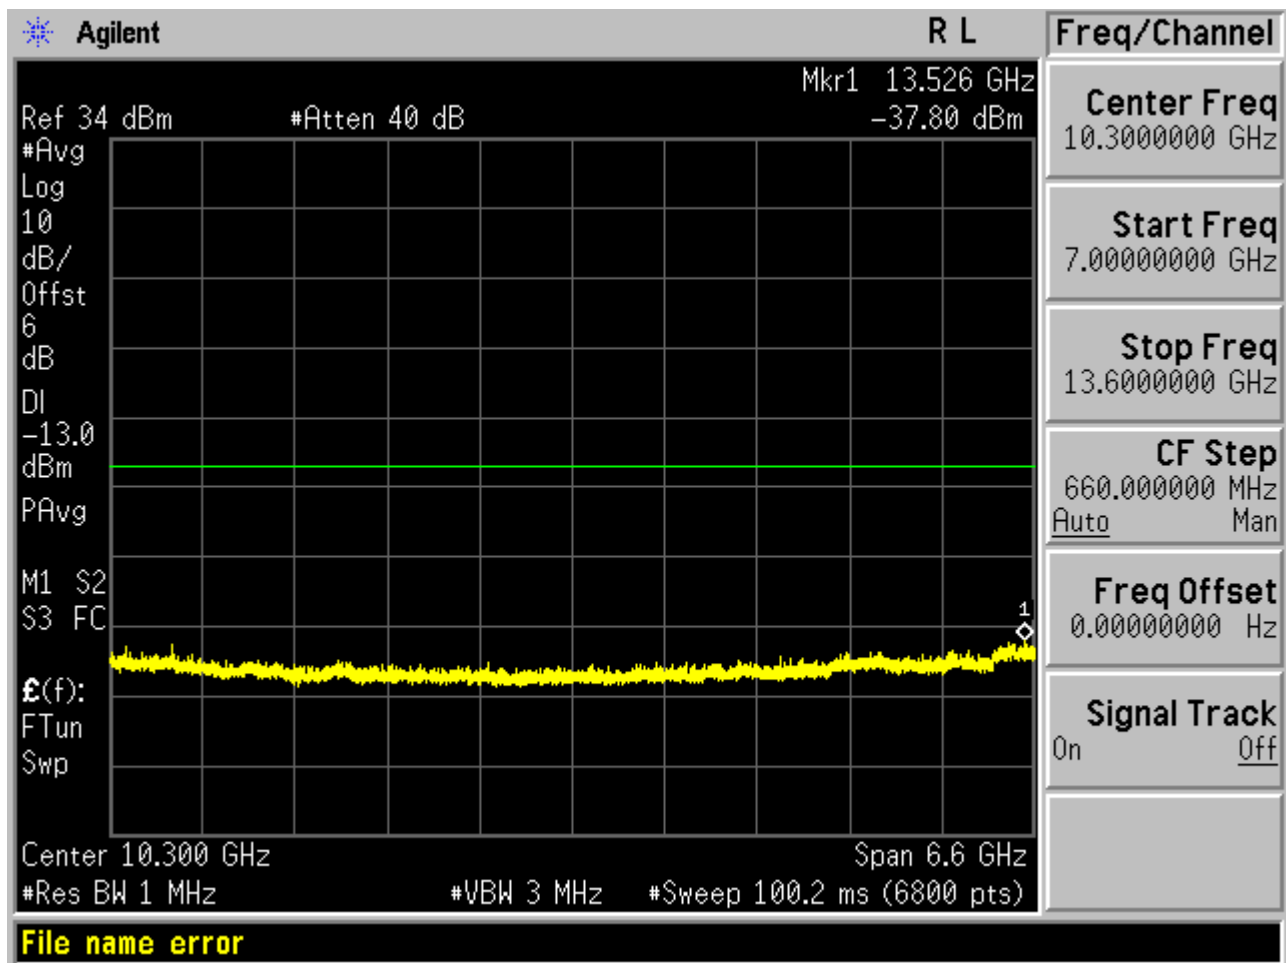


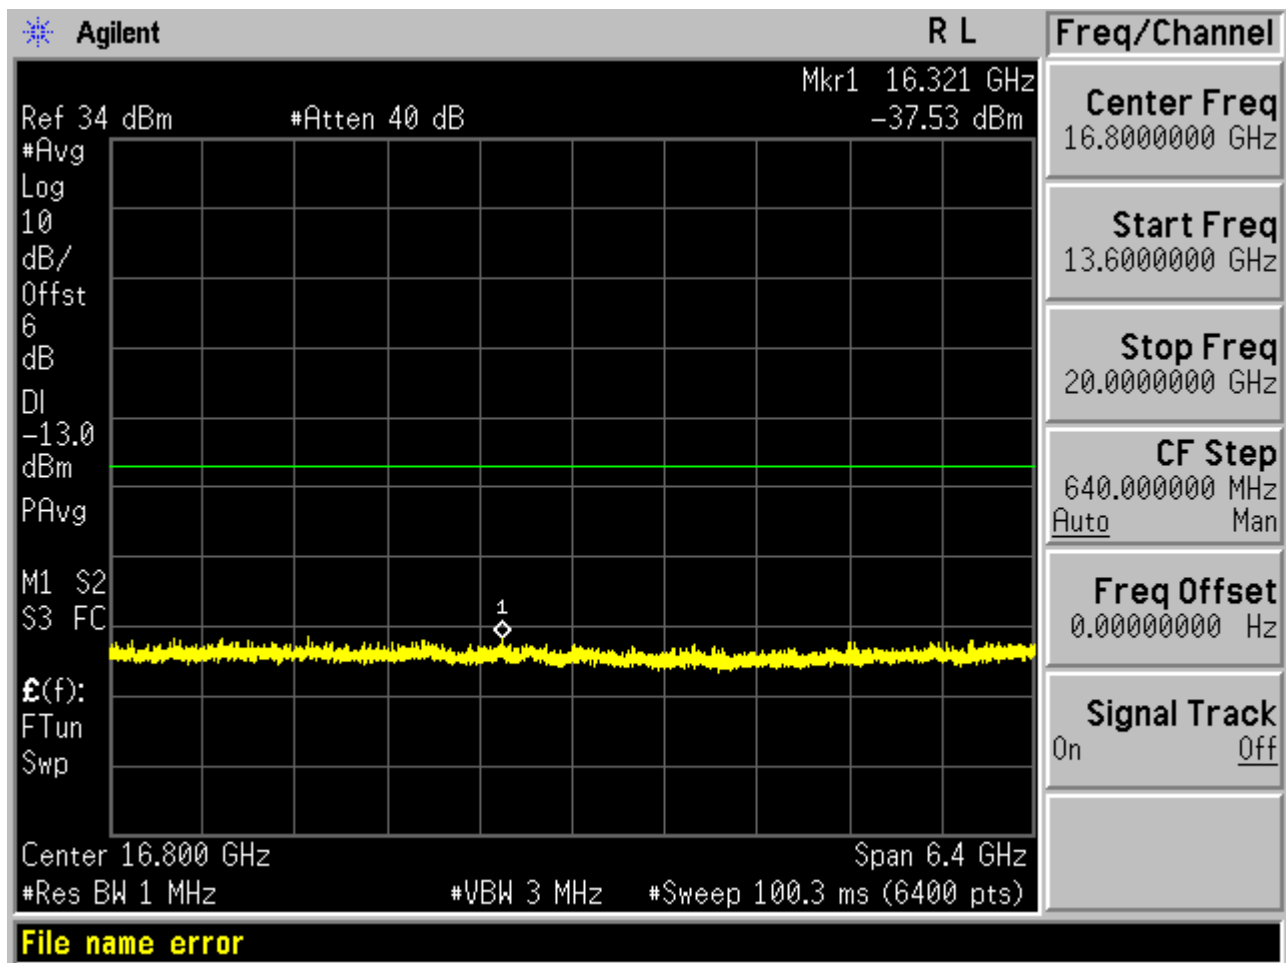


Test Channel=MCH

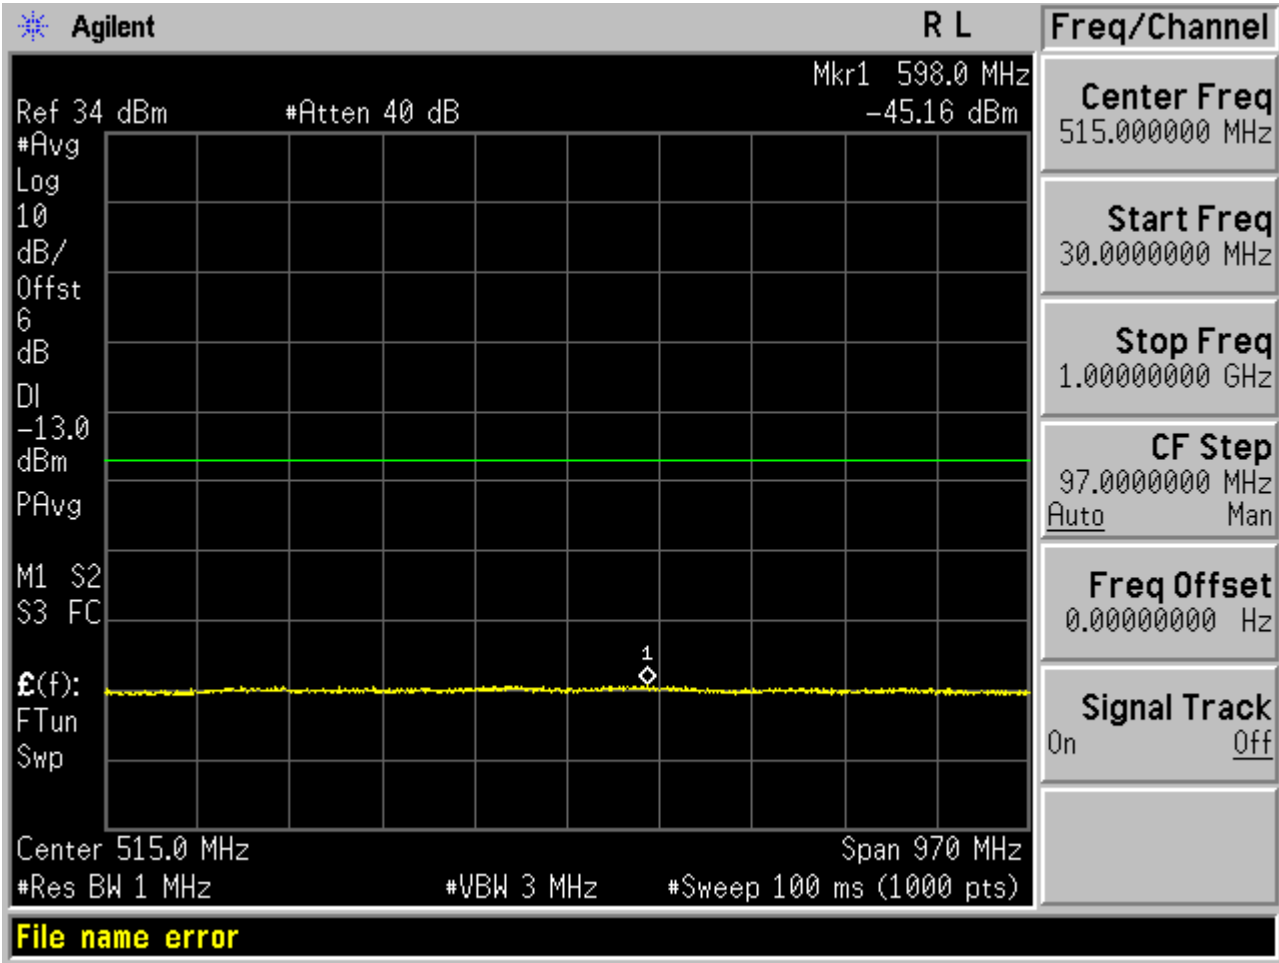


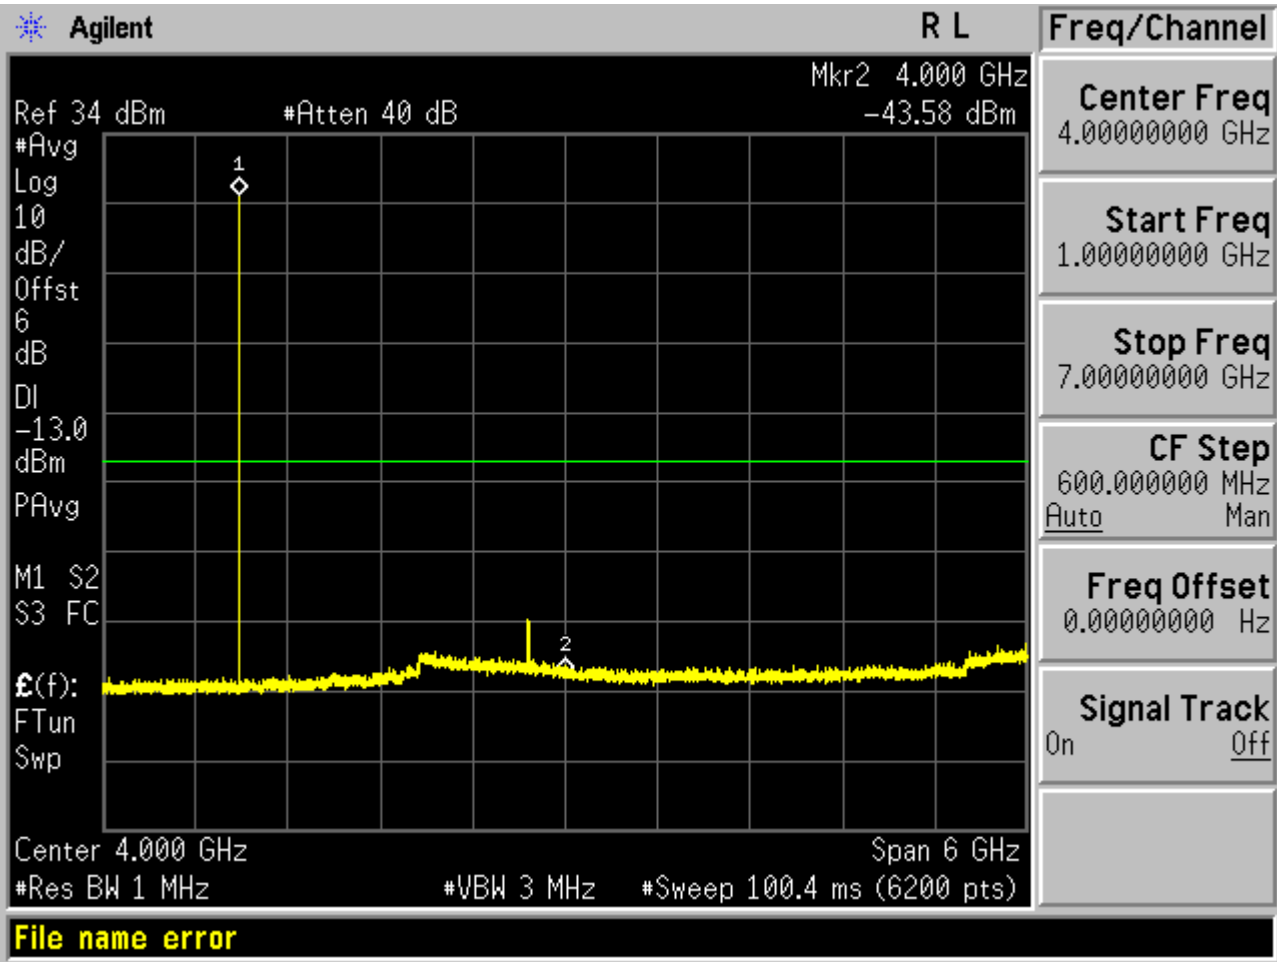


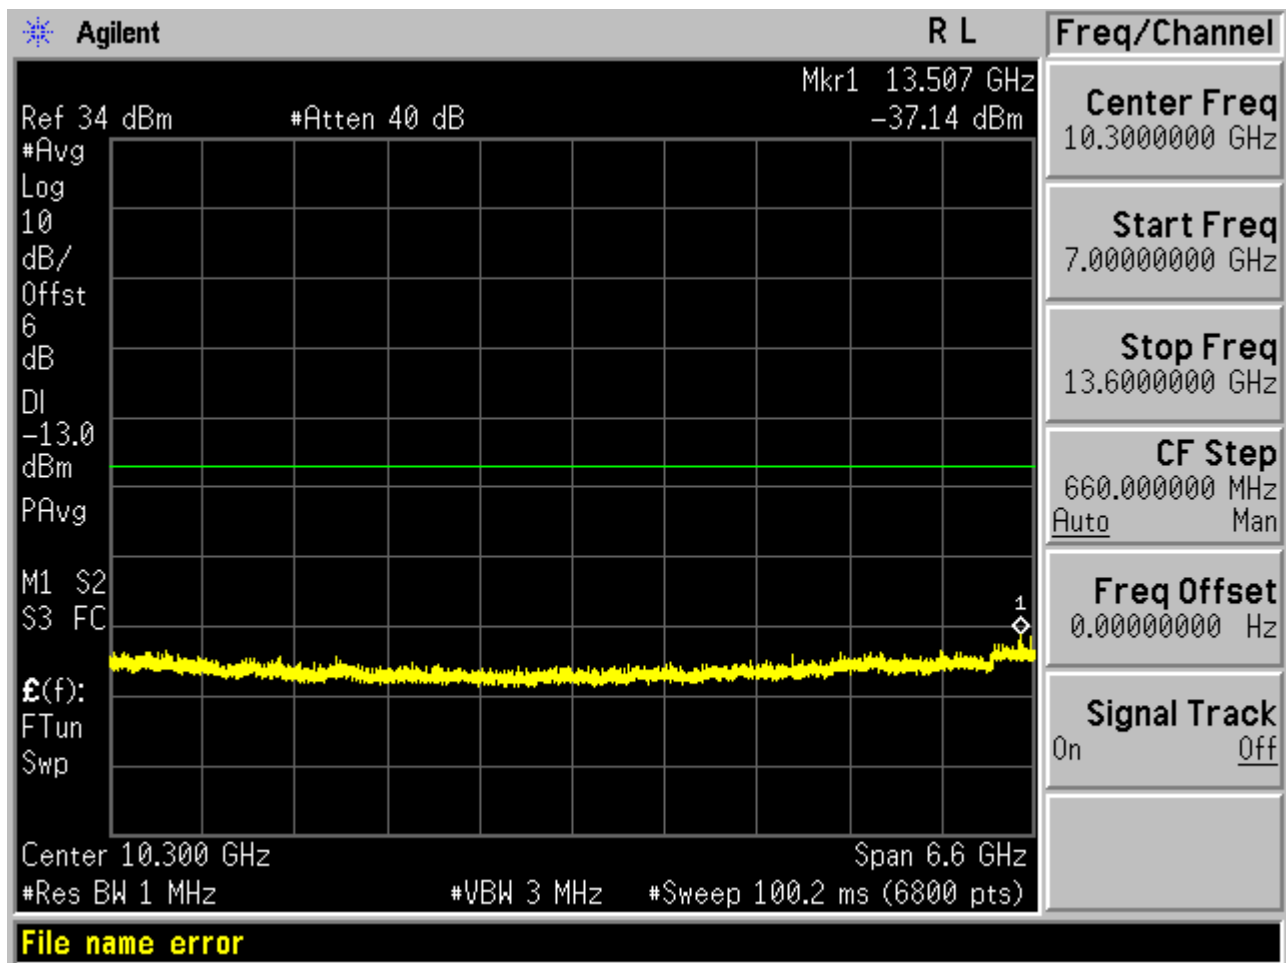


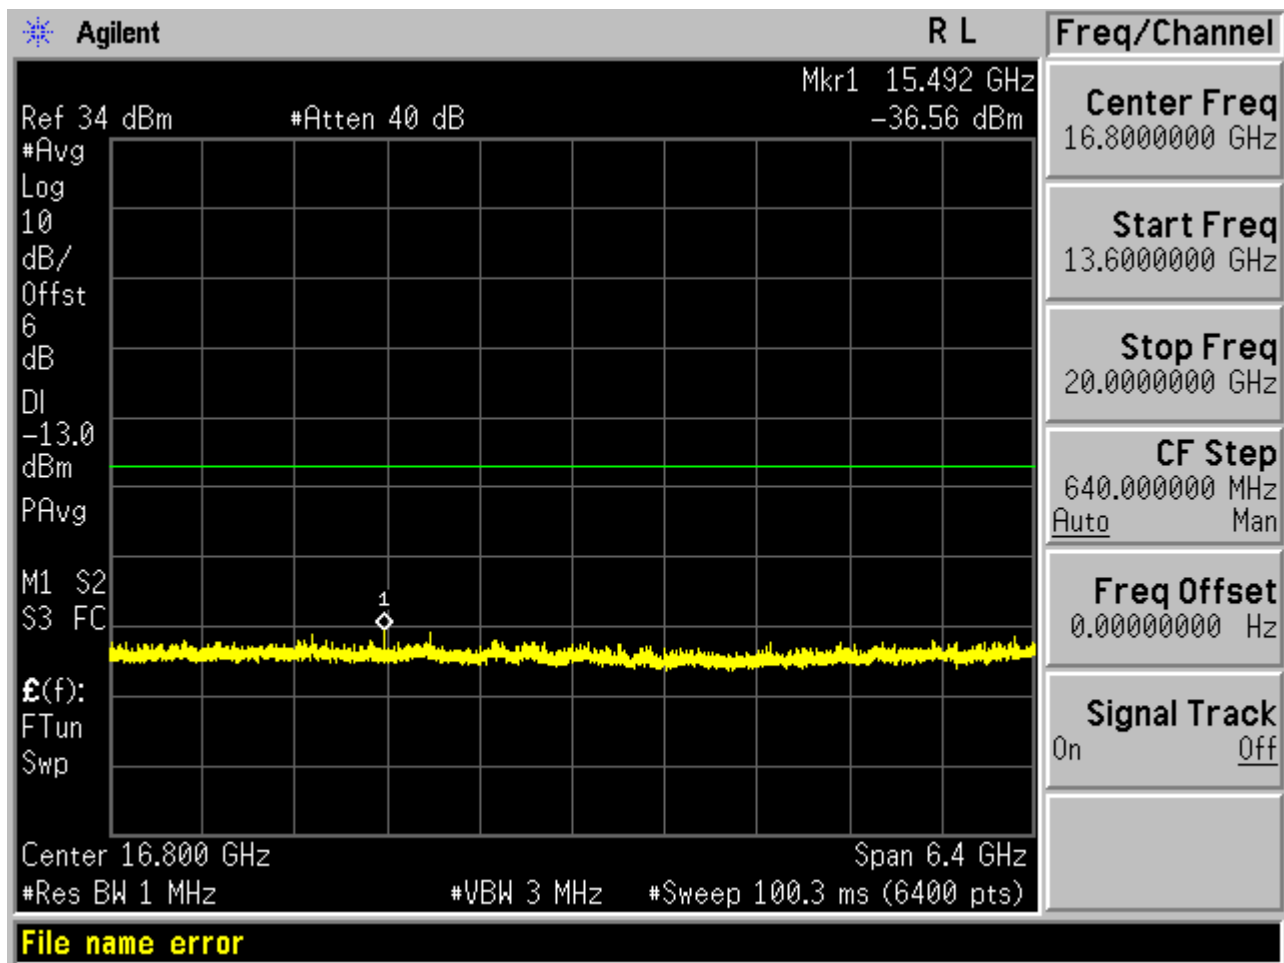


Test Channel=HCH

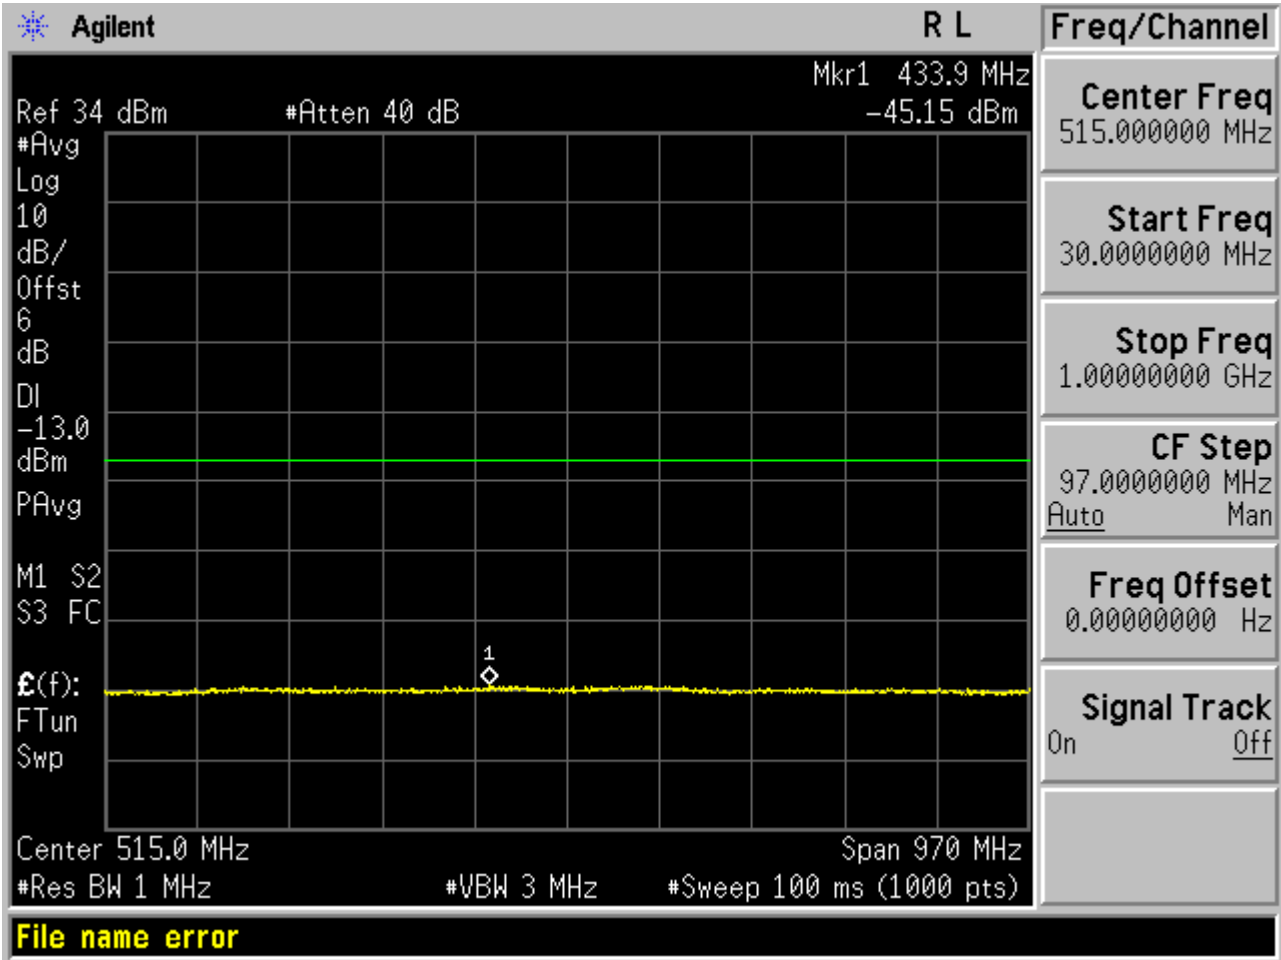


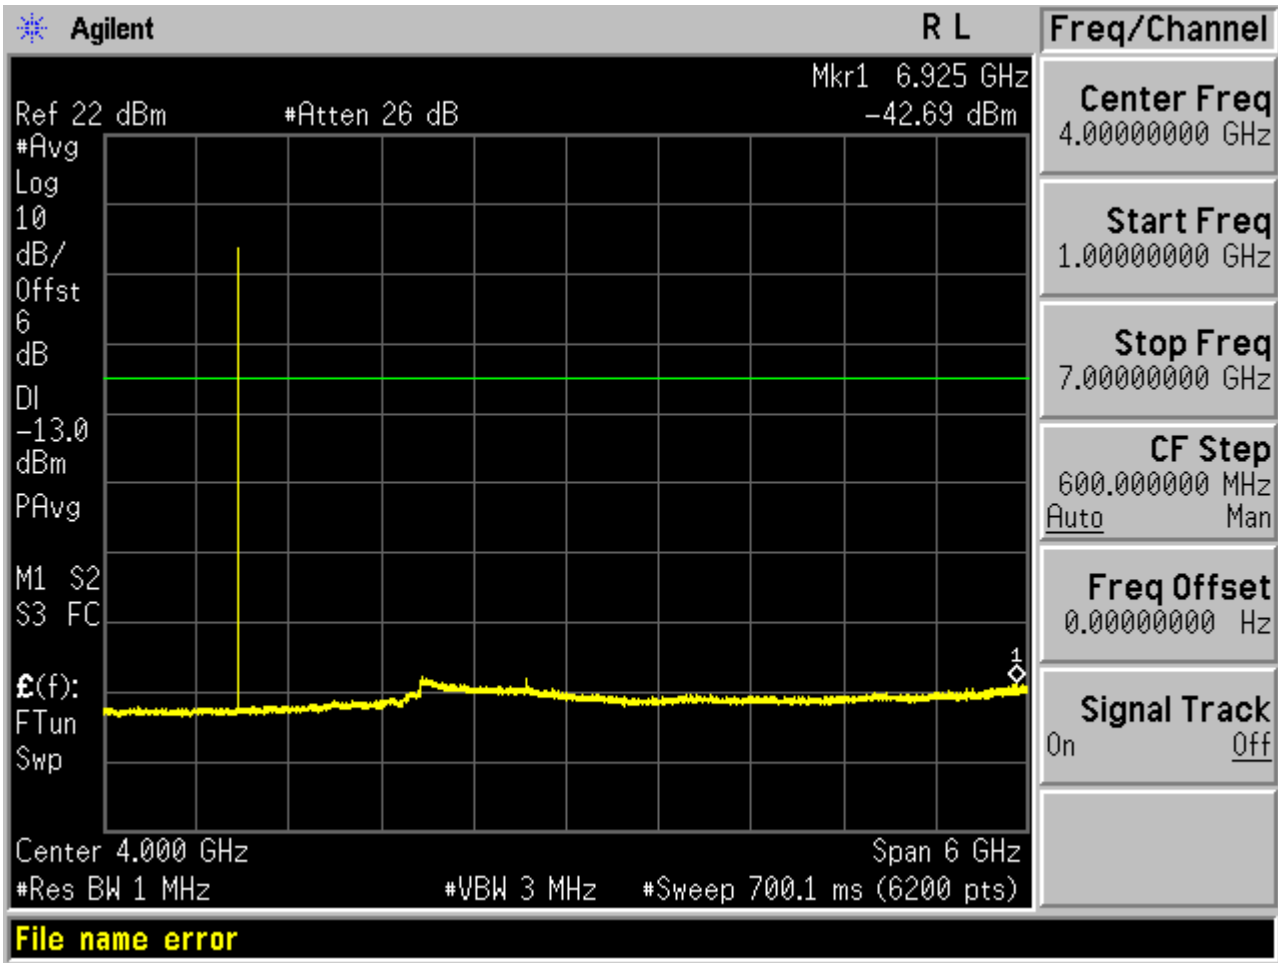

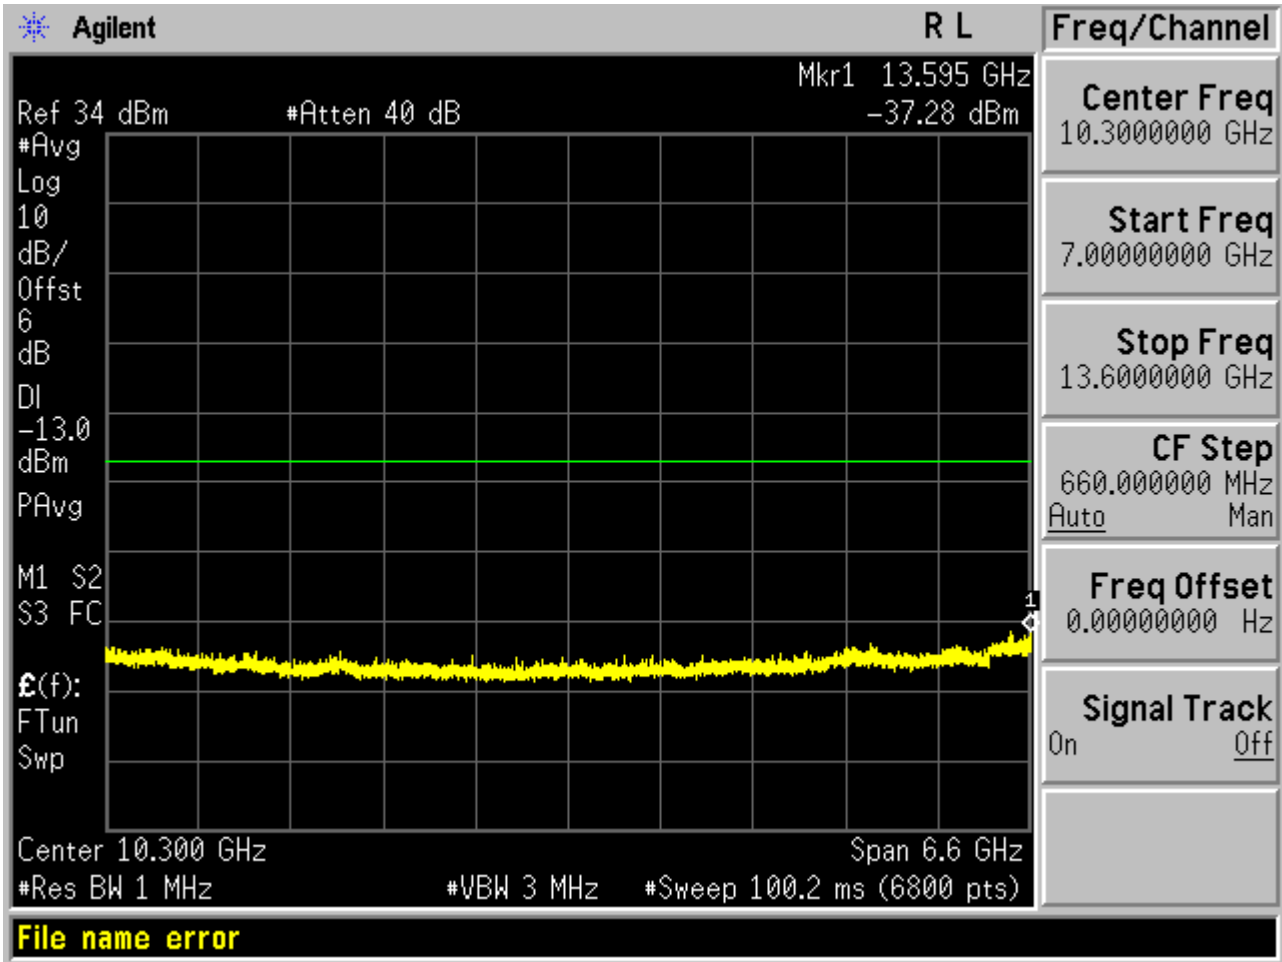

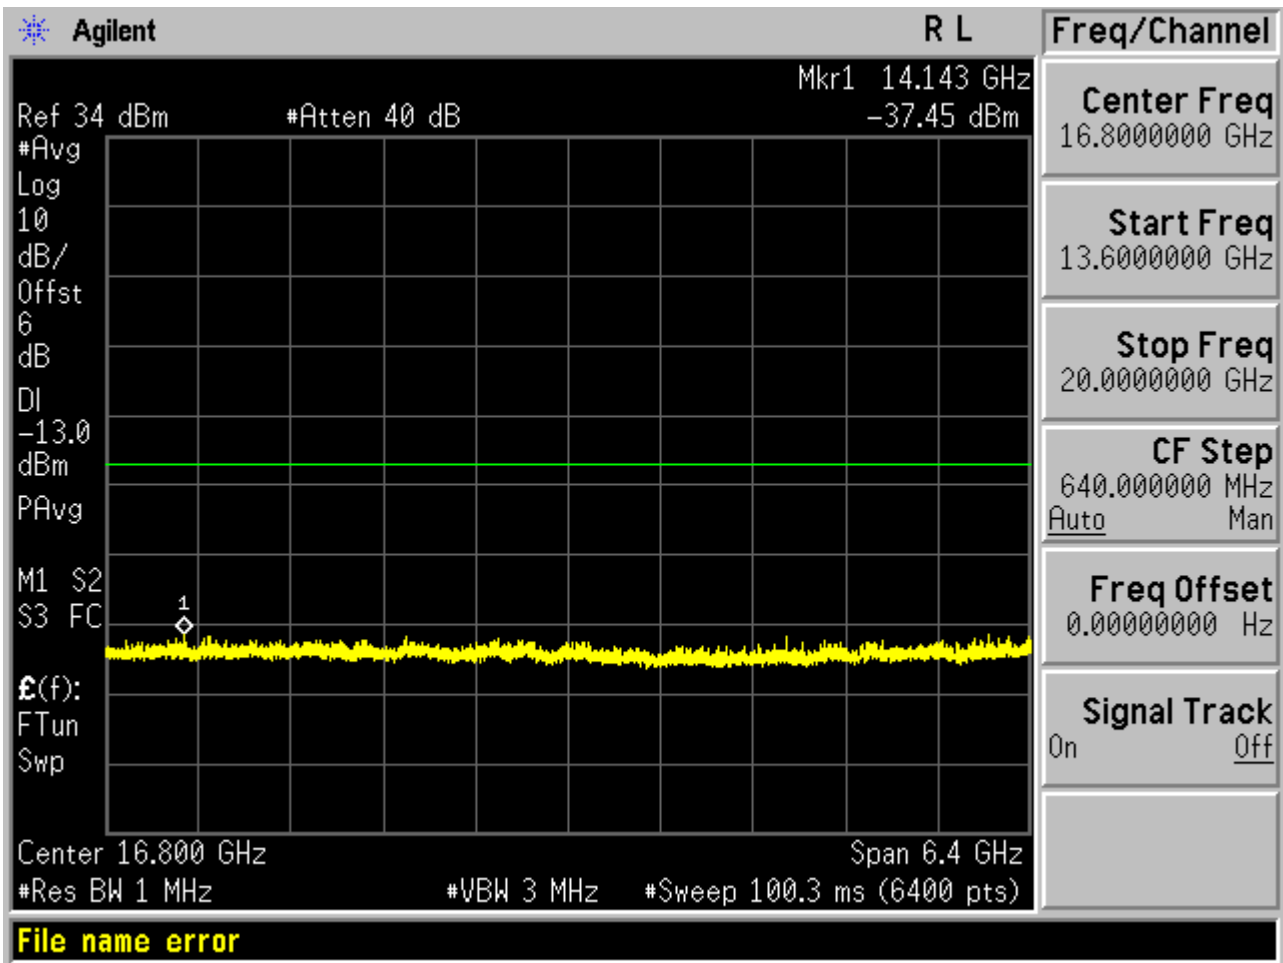

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

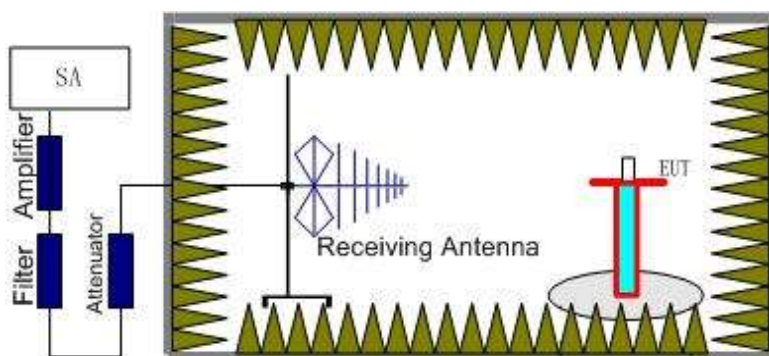

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + A_{Rpl}$

10.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a IMOBOnsee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

10.2.3 MEASUREMENT RESULT

The Worst Test Results for Channel 128 / 824.2 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1648.00	-43.55	-5.01	-48.56	-13.00	Horizontal
1752.00	-43.41	-2.18	-45.59	-13.00	Vertical
2472.00	-46.83	3.46	-43.37	-13.00	Horizontal
9086.00	-45.49	2.79	-42.70	-13.00	Horizontal

The Worst Test Results for Channel 190/836.6 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1673.00	-44.25	-3.22	-47.47	-13.00	Horizontal
1903.00	-46.29	-0.24	-46.53	-13.00	Vertical
9089.00	-45.42	3.98	-41.44	-13.00	Vertical

The Worst Test Results for Channel 251/848.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1698.00	-46.53	-2.26	-48.79	-13.00	Horizontal
1888.50	-47.78	-3.12	-50.90	-13.00	Vertical
2131.00	-48.83	-1.74	-50.57	-13.00	Vertical
9089.00	-45.61	8.46	-37.15	-13.00	Horizontal

The Worst Test Results for Channel 512/1850.2 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1999.00	-53.87	-1.5	-55.37	-13.00	Horizontal
3700.00	-57.61	8.74	-48.87	-13.00	Horizontal
12950.40	-55.23	11.56	-43.67	-13.00	Vertical
17919.60	-52.67	17.89	-34.78	-13.00	Vertical

The Worst Test Results for Channel 661/1880.0 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.50	-53.26	2.7	-50.56	-13.00	Vertical
9399.00	-53.29	11.6	-41.69	-13.00	Vertical
13160.40	-54.64	14.89	-39.75	-13.00	Horizontal
15039.60	-54.61	13.87	-40.74	-13.00	Vertical
17941.20	-55.38	19.76	-35.62	-13.00	Horizontal
The Worst Test Results for Channel 810/1909.8 MHz					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.00	-56.65	2.32	-54.33	-13.00	Vertical
9548.50	-55.89	11.3	-44.59	-13.00	Horizontal
13367.40	-54.94	12.4	-42.54	-13.00	Horizontal
15277.80	-56.72	15.03	-41.69	-13.00	Vertical
17931.60	-54.35	19	-35.35	-13.00	Horizontal

Note: ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The “Factor” value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.

11. MAINS CONDUCTED EMISSION

11.1 MEASUREMENT METHOD


The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

11.2 PROVISIONS APPLICABLE

Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50
*Decreases with the logarithm of the frequency.		
*The lower limit shall apply at the transition frequency.		

11.3 MEASUREMENT RESULT


LINE CONDUCTED EMISSION – L1

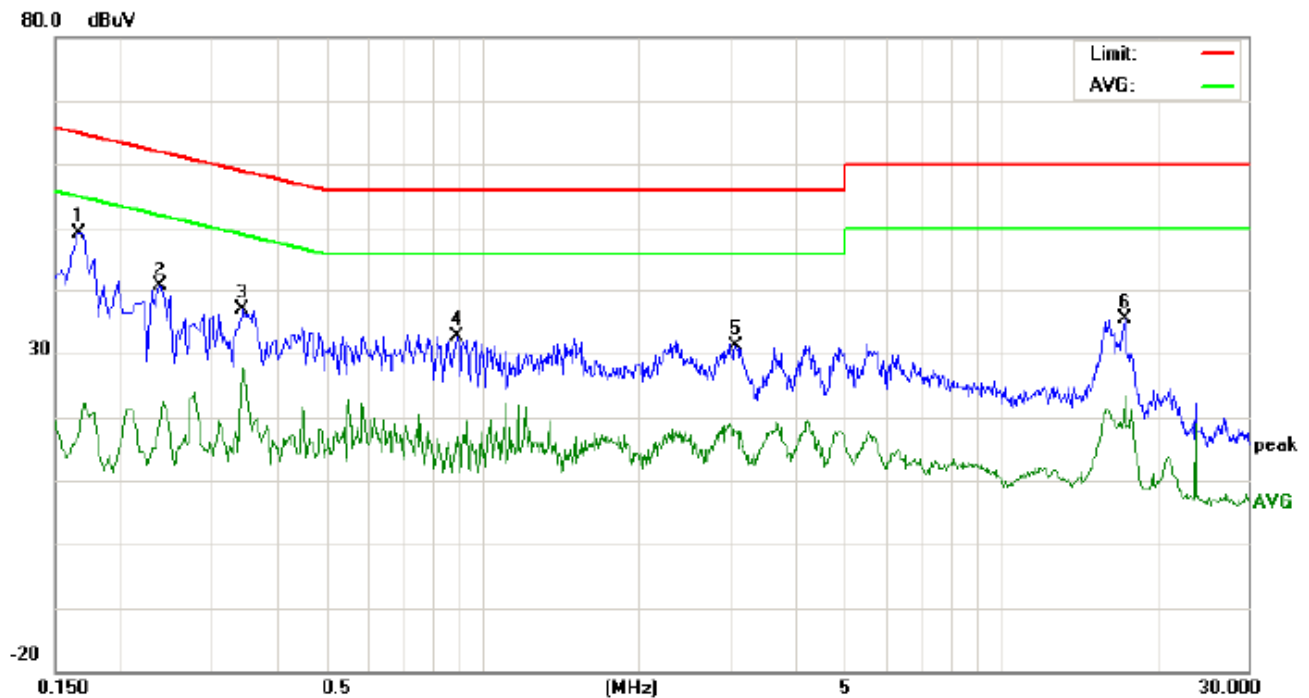

Site: Conduction Phase: **L1** Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
EUT: mobile phone
M/N: AM208
Mode: Call
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	38.94		6.78	10.18	49.12		16.96	65.15	55.15	-16.03	-38.19	P	
2	0.2380	30.38		8.95	10.26	40.64		19.21	62.16	52.16	-21.52	-32.95	P	
3	0.3460	26.57		17.39	10.31	36.88		27.70	59.06	49.06	-22.18	-21.36	P	
4	0.8980	22.22		4.99	10.41	32.63		15.40	56.00	46.00	-23.37	-30.60	P	
5	3.0780	20.63		7.13	10.54	31.17		17.67	56.00	46.00	-24.83	-28.33	P	
6	17.2979	25.26		13.32	10.13	35.39		23.45	60.00	50.00	-24.61	-26.55	P	

LINE CONDUCTED EMISSION - N

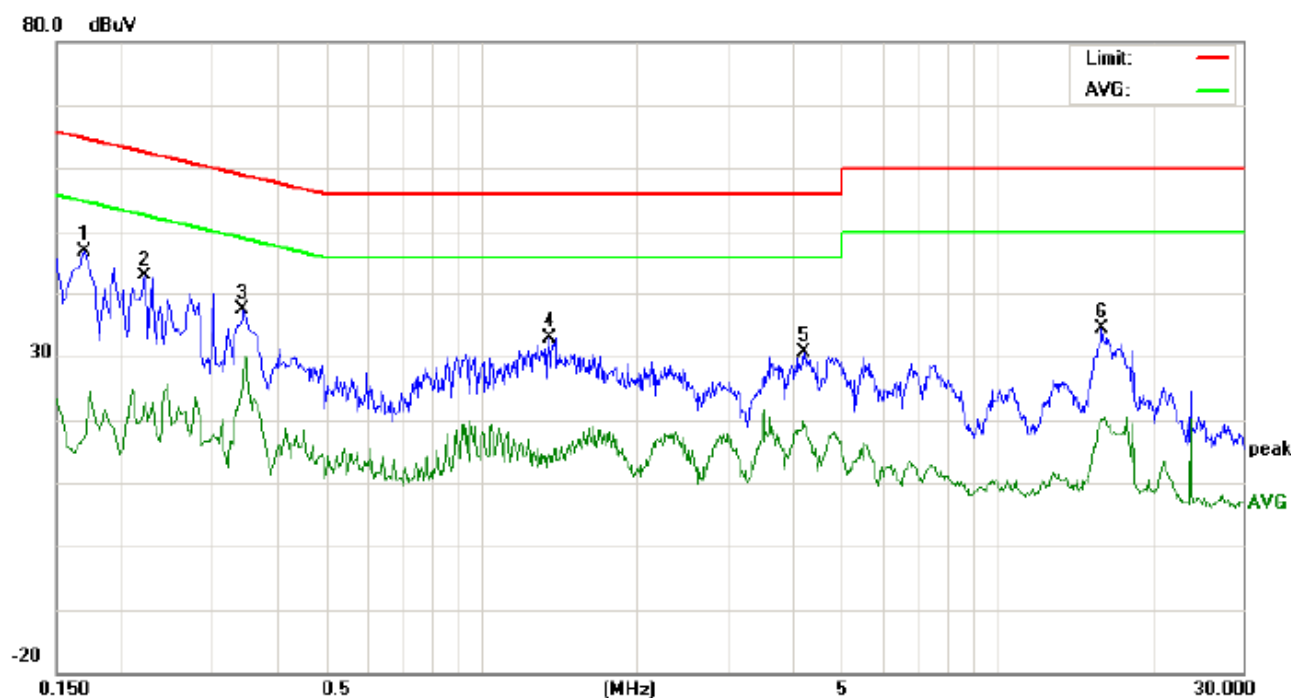

Site: Conduction
Limit: FCC Class B Conduction(QP)
EUT: mobile phone
M/N: AM208
Mode: Call
Note:

Phase: **N**
Power: AC 120V/60Hz
Temperature: 26
Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	36.81		6.91	10.18	46.99		17.09	64.96	54.96	-17.97	-37.87	P	
2	0.2220	32.74		12.39	10.24	42.98		22.63	62.74	52.74	-19.76	-30.11	P	
3	0.3460	27.02		17.43	10.31	37.33		27.74	59.06	49.06	-21.73	-21.32	P	
4	1.3540	22.40		3.96	10.38	32.78		14.34	56.00	46.00	-23.22	-31.66	P	
5	4.2380	20.37		8.63	10.33	30.70		18.96	56.00	46.00	-25.30	-27.04	P	
6	16.0540	24.36		10.08	10.11	34.47		20.19	60.00	50.00	-25.53	-29.81	P	

Note: The GSM850 mode is the worst condition.

12. FREQUENCY STABILITY

12.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 , channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

12.2 PROVISIONS APPLICABLE

12.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

12.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

12.3 MEASUREMENT RESULT

Appendix E: Frequency Stability

Test Results

Frequency Error vs. Voltage:

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 850	TM1	LCH	TN	VL	18.98	0.02	±2.5	PASS
			TN	VN	-22.08	-0.03	±2.5	PASS
			TN	VH	-20.73	-0.03	±2.5	PASS
		MCH	TN	VL	-33.90	-0.04	±2.5	PASS
			TN	VN	-30.93	-0.04	±2.5	PASS
			TN	VH	-24.15	-0.03	±2.5	PASS
		HCH	TN	VL	-21.89	-0.03	±2.5	PASS
			TN	VN	-32.03	-0.04	±2.5	PASS
			TN	VH	-25.05	-0.03	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 850	TM2	LCH	TN	VL	-18.08	-0.02	±2.5	PASS
			TN	VN	-20.02	-0.02	±2.5	PASS
			TN	VH	-21.05	-0.03	±2.5	PASS
		MCH	TN	VL	-34.55	-0.04	±2.5	PASS
			TN	VN	-31.19	-0.04	±2.5	PASS
			TN	VH	-30.80	-0.04	±2.5	PASS
		HCH	TN	VL	-20.08	-0.02	±2.5	PASS
			TN	VN	-21.05	-0.02	±2.5	PASS
			TN	VH	-20.53	-0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	TM1	LCH	TN	VL	-36.61	-0.02	±2.5	PASS
			TN	VN	-43.65	-0.02	±2.5	PASS
			TN	VH	-40.87	-0.02	±2.5	PASS
		MCH	TN	VL	-42.49	-0.02	±2.5	PASS
			TN	VN	-53.47	-0.03	±2.5	PASS

			TN	VH	-46.94	-0.02	±2.5	PASS
		HCH	TN	VL	-85.56	-0.04	±2.5	PASS
			TN	VN	-69.93	-0.04	±2.5	PASS
			TN	VH	-66.51	-0.03	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	TM2	LCH	TN	VL	-24.92	-0.01	±2.5	PASS
			TN	VN	-42.23	-0.02	±2.5	PASS
			TN	VH	-35.97	-0.02	±2.5	PASS
		MCH	TN	VL	-51.46	-0.03	±2.5	PASS
			TN	VN	-44.17	-0.02	±2.5	PASS
			TN	VH	-36.03	-0.02	±2.5	PASS
		HCH	TN	VL	-56.82	-0.03	±2.5	PASS
			TN	VN	-63.86	-0.03	±2.5	PASS
			TN	VH	-67.28	-0.04	±2.5	PASS

Frequency Error vs. Temperature:

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	TM1	LCH	VN	-30	-15.63	-0.02	±2.5	PASS
			VN	-20	-22.34	-0.03	±2.5	PASS
			VN	-10	-18.85	-0.02	±2.5	PASS
			VN	0	-20.34	-0.02	±2.5	PASS
			VN	10	-21.44	-0.03	±2.5	PASS
			VN	20	-17.18	-0.02	±2.5	PASS
			VN	30	-26.73	-0.03	±2.5	PASS
			VN	40	-24.67	-0.03	±2.5	PASS
			VN	50	-29.06	-0.04	±2.5	PASS
GSM850	TM1	MCH	VN	-30	-37.71	-0.05	±2.5	PASS
			VN	-20	-23.12	-0.03	±2.5	PASS
			VN	-10	-32.03	-0.04	±2.5	PASS
			VN	0	-37.58	-0.04	±2.5	PASS
			VN	10	-24.28	-0.03	±2.5	PASS
			VN	20	-27.25	-0.03	±2.5	PASS
			VN	30	-24.15	-0.03	±2.5	PASS
			VN	40	-28.41	-0.03	±2.5	PASS
			VN	50	-24.99	-0.03	±2.5	PASS
GSM850	TM1	HCH	VN	-30	-27.83	-0.03	±2.5	PASS
			VN	-20	-27.89	-0.03	±2.5	PASS
			VN	-10	-20.21	-0.02	±2.5	PASS
			VN	0	-24.67	-0.03	±2.5	PASS
			VN	10	-28.73	-0.03	±2.5	PASS
			VN	20	-28.99	-0.03	±2.5	PASS
			VN	30	-24.34	-0.03	±2.5	PASS
			VN	40	-25.12	-0.03	±2.5	PASS
			VN	50	-22.47	-0.03	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	TM2	LCH	VN	-30	-26.73	-0.03	±2.5	PASS
			VN	-20	-14.01	-0.02	±2.5	PASS
			VN	-10	-31.51	-0.04	±2.5	PASS
			VN	0	-16.53	-0.02	±2.5	PASS
			VN	10	-22.21	-0.03	±2.5	PASS
			VN	20	-28.80	-0.03	±2.5	PASS
			VN	30	-22.02	-0.03	±2.5	PASS
			VN	40	-22.60	-0.03	±2.5	PASS
			VN	50	-18.79	-0.02	±2.5	PASS
GSM850	TM2	MCH	VN	-30	-31.70	-0.04	±2.5	PASS
			VN	-20	-36.55	-0.04	±2.5	PASS
			VN	-10	-32.93	-0.04	±2.5	PASS
			VN	0	-28.41	-0.03	±2.5	PASS
			VN	10	-18.92	-0.02	±2.5	PASS
			VN	20	-18.02	-0.02	±2.5	PASS
			VN	30	-29.83	-0.04	±2.5	PASS
			VN	40	-31.70	-0.04	±2.5	PASS
			VN	50	-33.13	-0.04	±2.5	PASS
GSM850	TM2	HCH	VN	-30	-26.41	-0.03	±2.5	PASS
			VN	-20	-27.57	-0.03	±2.5	PASS
			VN	-10	-25.89	-0.03	±2.5	PASS
			VN	0	-25.96	-0.03	±2.5	PASS
			VN	10	-25.63	-0.03	±2.5	PASS
			VN	20	-22.34	-0.03	±2.5	PASS
			VN	30	-20.92	-0.02	±2.5	PASS
			VN	40	-18.98	-0.02	±2.5	PASS
			VN	50	-16.53	-0.02	±2.5	PASS


Test Band	Test Mode	Test Channel	Test Volt.	Test Temp	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	TM1	LCH	VN	-30	-38.61	-0.02	±2.5	PASS
			VN	-20	-50.17	-0.03	±2.5	PASS
			VN	-10	-37.39	-0.02	±2.5	PASS
			VN	0	-49.40	-0.03	±2.5	PASS
			VN	10	-36.87	-0.02	±2.5	PASS
			VN	20	-41.20	-0.02	±2.5	PASS
			VN	30	-36.48	-0.02	±2.5	PASS
			VN	40	-42.10	-0.02	±2.5	PASS
			VN	50	-46.30	-0.03	±2.5	PASS
GSM 1900	TM1	MCH	VN	-30	-50.50	-0.03	±2.5	PASS
			VN	-20	-45.85	-0.02	±2.5	PASS
			VN	-10	-51.40	-0.03	±2.5	PASS
			VN	0	-51.92	-0.03	±2.5	PASS
			VN	10	-41.46	-0.02	±2.5	PASS
			VN	20	-56.11	-0.03	±2.5	PASS
			VN	30	-39.00	-0.02	±2.5	PASS
			VN	40	-51.66	-0.03	±2.5	PASS
			VN	50	-61.73	-0.03	±2.5	PASS
GSM 1900	TM1	HCH	VN	-30	-77.10	-0.04	±2.5	PASS
			VN	-20	-74.06	-0.04	±2.5	PASS
			VN	-10	-83.81	-0.04	±2.5	PASS
			VN	0	-87.95	-0.05	±2.5	PASS
			VN	10	-84.85	-0.04	±2.5	PASS
			VN	20	-61.99	-0.03	±2.5	PASS
			VN	30	-68.90	-0.04	±2.5	PASS
			VN	40	-65.22	-0.03	±2.5	PASS
			VN	50	-67.09	-0.04	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	TM2	LCH	VN	-30	-27.83	-0.02	±2.5	PASS
			VN	-20	-41.26	-0.02	±2.5	PASS
			VN	-10	-45.07	-0.02	±2.5	PASS
			VN	0	-47.72	-0.03	±2.5	PASS
			VN	10	-32.22	-0.02	±2.5	PASS
			VN	20	-35.77	-0.02	±2.5	PASS
			VN	30	-32.93	-0.02	±2.5	PASS
			VN	40	-37.13	-0.02	±2.5	PASS
			VN	50	-37.00	-0.02	±2.5	PASS
GSM 1900	TM2	MCH	VN	-30	-40.55	-0.02	±2.5	PASS
			VN	-20	-47.52	-0.03	±2.5	PASS
			VN	-10	-42.68	-0.02	±2.5	PASS
			VN	0	-45.72	-0.02	±2.5	PASS
			VN	10	-39.00	-0.02	±2.5	PASS
			VN	20	-33.84	-0.02	±2.5	PASS
			VN	30	-41.71	-0.02	±2.5	PASS
			VN	40	-42.94	-0.02	±2.5	PASS
			VN	50	-41.78	-0.02	±2.5	PASS
GSM 1900	TM2	HCH	VN	-30	-40.59	-0.02	±2.5	PASS
			VN	-20	-47.46	-0.03	±2.5	PASS
			VN	-10	-42.52	-0.02	±2.5	PASS
			VN	0	-45.63	-0.02	±2.5	PASS
			VN	10	-39.18	-0.02	±2.5	PASS
			VN	20	-33.73	-0.02	±2.5	PASS
			VN	30	-41.76	-0.02	±2.5	PASS
			VN	40	-42.84	-0.02	±2.5	PASS
			VN	50	-41.65	-0.02	±2.5	PASS

PHOTOGRAPHS OF TEST SETUP CONDUCTED EMISSION



RADIATED SPURIOUS EMISSION

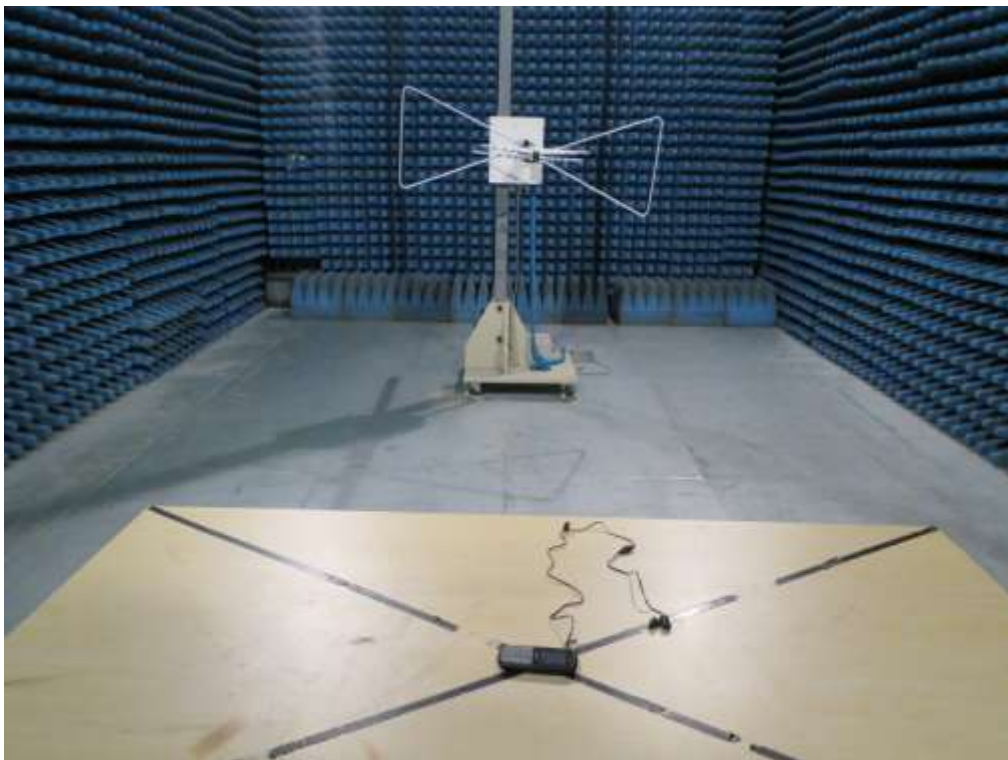



PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3



INTERNAL VIEW OF EUT-1

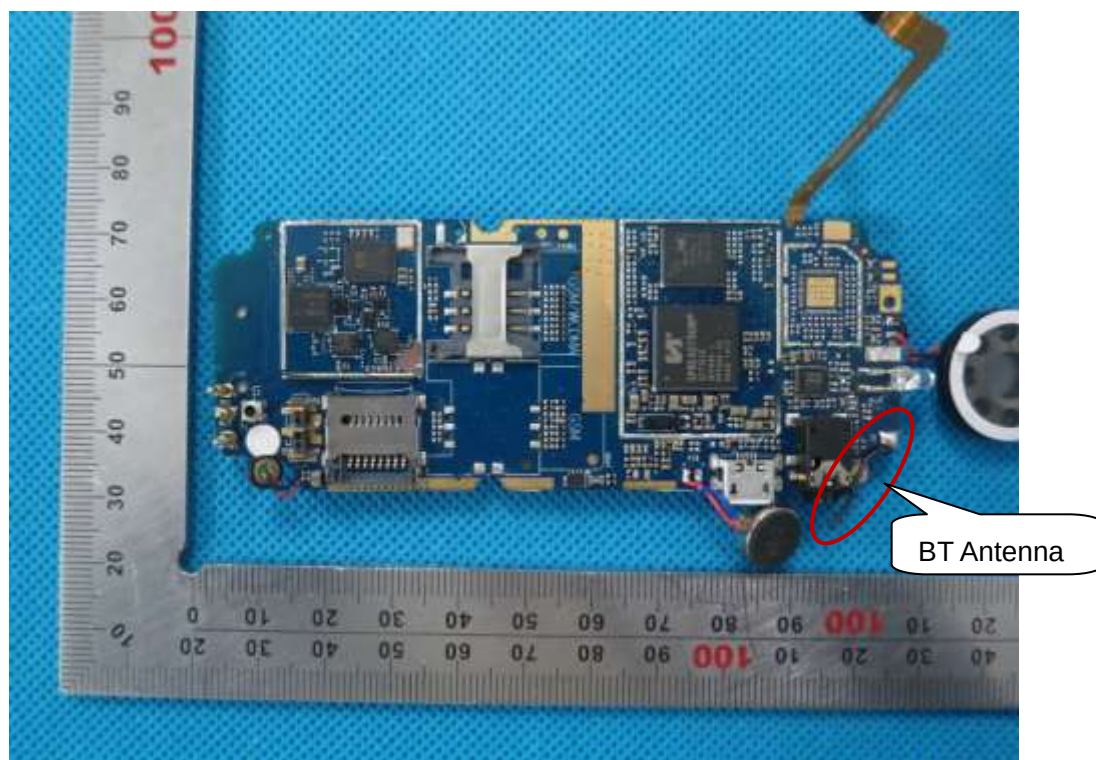

INTERNAL VIEW OF EUT-2

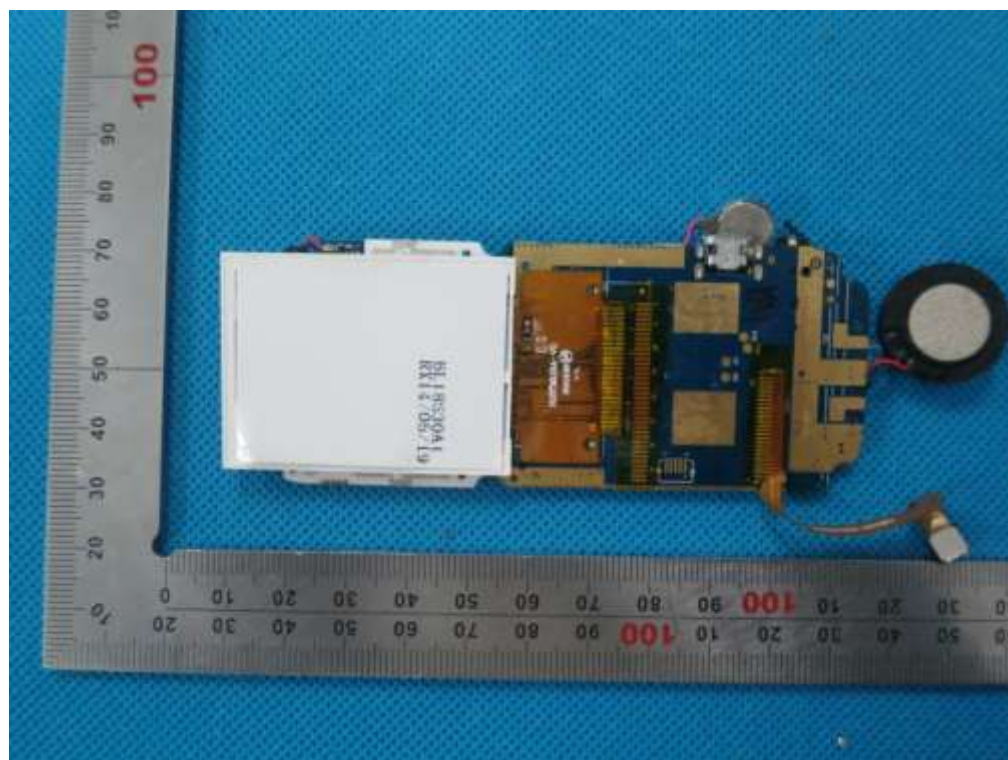

----END OF REPORT----