

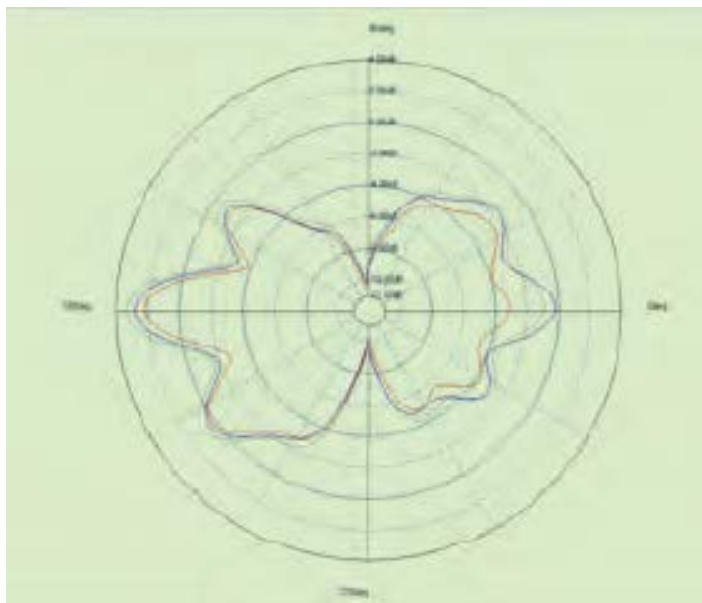


| Item                        | Specification    |
|-----------------------------|------------------|
| Frequency                   | 915MHz           |
| Bandwidth                   | 15MHz typ        |
| VSWR                        | $\leq 2.0$       |
| Impedance                   | 50 $\Omega$      |
| Gain                        | 3.42dBi          |
| Azimuth                     | Omni-directional |
| Polarization                | Linear           |
| Operating Temperature range | -40°C ~+ 85°C    |

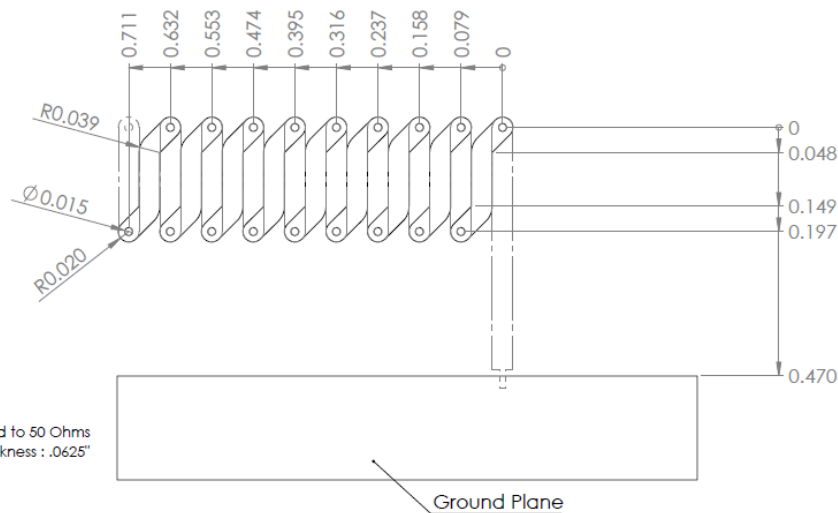

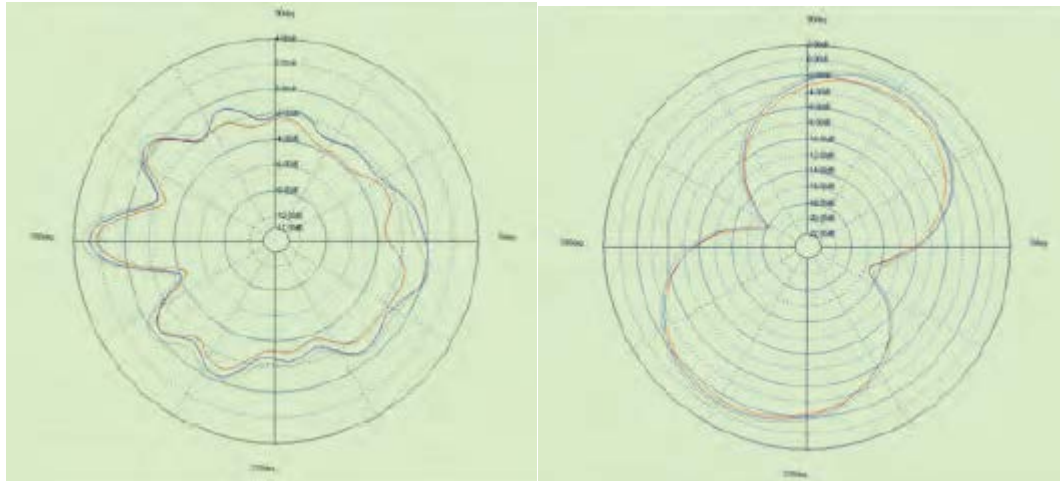

| Frequency (MHz) | 910   | 915   | 925   |
|-----------------|-------|-------|-------|
| Avg. Gain (dBi) | -2.56 | -2.12 | -2.25 |
| Peak Gain (dBi) | 3.15  | 3.42  | 3.08  |
| Efficiency (%)  | 54    | 59    | 53    |