

# Avnera

## RF-WHTIB (Receiver)

March 07, 2007

Report No. AVNE0008

Report Prepared By



[www.nwemc.com](http://www.nwemc.com)  
1-888-EMI-CERT

© 2007 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway  
Suite 400  
Hillsboro, Oregon 97124

**Certificate of Test**  
**Issue Date: March 7, 2007**  
**Avnera**  
**Model: RF-WHTIB (Receiver)**

Emissions				
Test Description	Specification	Test Method	Pass	Fail
AC Powerline Conducted Emissions	FCC 15.207:2006	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Occupied Bandwidth	FCC 15.247:2006 DTS	ANSI C63.4:2003, KDB No. 558074	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Output Power	FCC 15.247:2006 DTS	ANSI C63.4:2003, KDB No. 558074	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band Edge Compliance	FCC 15.247:2006 DTS	ANSI C63.4:2003, KDB No. 558074	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Radiated Emissions	FCC 15.247:2006 DTS	ANSI C63.4:2003, KDB No. 558074	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Spectral Density	FCC 15.247:2006 DTS	ANSI C63.4:2003, KDB No. 558074	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Conducted Emissions	FCC 15.247:2006 DTS	ANSI C63.4:2003, KDB No. 558074	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**Modifications made to the product**

See the Modifications section of this report

**Test Facility**

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.  
22975 NW Evergreen Parkway, Suite 400, Hillsboro, OR 97124  
Phone: (503) 844-4066  
Fax: (503) 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

**Approved By:**

Donald Facteau, IS Manager

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*


*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

Revision Number	Description	Date	Page Number
00	None		

**FCC:** Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



**NVLAP:** Northwest EMC, Inc. is accredited under the United States Department of Commerce, National Institute of Standards and Technology, and National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



**Industry Canada:** Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



**CAB:** Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.



**TÜV Product Service:** Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories, available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0604C.



**TÜV Rheinland:** Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



**NEMKO:** Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



**Australia/New Zealand:** The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



**VCCI:** Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Numbers. - Hillsboro: C-1071, R-1025, C-2687, T-289, and R-2318, Irvine: R-1943, C-2766, and T-298, Sultan: R-871, C-1784, and T-294.*)



**BSMI:** Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.




**GOST:** Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



## SCOPE


For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

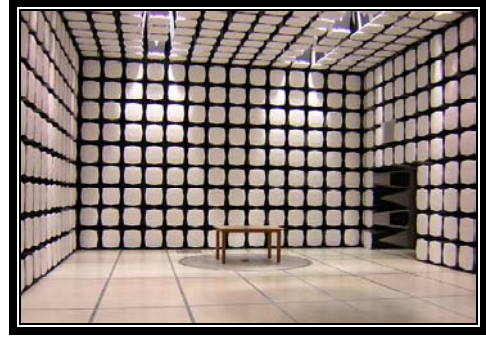

**California – Orange County Facility  
Labs OC01 – OC13**

41 Tesla Ave. Irvine, CA 92618  
(888) 364-2378 Fax: (503) 844-3826

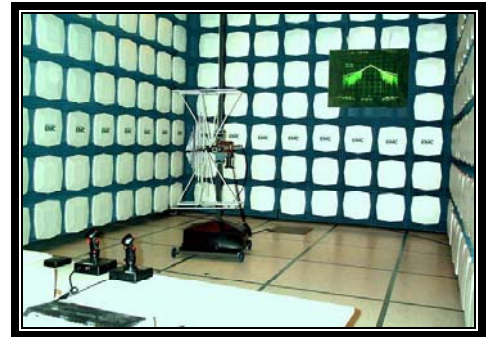

**Oregon – Evergreen Facility  
Labs EV01 – EV11**

22975 NW Evergreen Pkwy. Suite 400 Hillsboro, OR 97124  
(503) 844-4066 Fax: (503) 844-3826



**Washington – Sultan Facility  
Labs SU01 – SU07**

14128 339<sup>th</sup> Ave. SE Sultan, WA 98294  
(888) 364-2378



## Party Requesting the Test

<b>Company Name:</b>	Avnera
<b>Address:</b>	16505 NW Bethany Ct, Suite 100
<b>City, State, Zip:</b>	Beaverton, OR 97006
<b>Test Requested By:</b>	Ward Ramsdell
<b>Model:</b>	RF-WHTIB (Receiver)
<b>First Date of Test:</b>	March 3, 2007
<b>Last Date of Test:</b>	March 6, 2007
<b>Receipt Date of Samples:</b>	March 3, 2007
<b>Equipment Design Stage:</b>	Prototype
<b>Equipment Condition:</b>	No Damage

## Information Provided by the Party Requesting the Test

**Functional Description of the EUT (Equipment Under Test):**

A consumer audio transmission device comprised of two separate units using a nearly identical radio.

**Testing Objective:**

These tests were selected to satisfy the requirements for TCB certification under 15.247.

## EUT Photo



**CONFIGURATION 2 AVNE0008****Software/Firmware Running during test**

Description	Version
AWAconfig	v1.24

**EUT**

Description	Manufacturer	Model/Part Number	Serial Number
EUT – RF-WHTIB (Receiver)	Avnera	RF-WHTIB(Receiver)	None

**Peripherals in test setup boundary**

Description	Manufacturer	Model/Part Number	Serial Number
USB - SPI Adapter	Total Phase	Aardvark	2237-061748

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Test PC	Dell	D600	6XGDX41

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	1.85m	PA	AC Mains	EUT - Rocketfish Receiver RF-WHTIB (Receiver)
USB Cable	Yes	1.85m	No	USB - SPI Adapter	Test PC
SPI Adapter Cable	No	0.2m	No	EUT - RF-WHTIB (Sender)	USB - SPI Adapter
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					



**CONFIGURATION 4 AVNE0008****Software/Firmware Running during test**

Description	Version
AWAconfig	v1.24

**EUT**

Description	Manufacturer	Model/Part Number	Serial Number
EUT - RF-WHTIB (Receiver)	Avnera	RF-WHTIB(Receiver)	None

**Peripherals in test setup boundary**

Description	Manufacturer	Model/Part Number	Serial Number
USB - SPI Adapter	Total Phase	Aardvark	2237-061748

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Test PC	Dell	D600	6XGDX41

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	1.85m	PA	AC Mains	EUT - RF-WHTIB (Receiver)
USB Cable	Yes	1.85m	No	USB - SPI Adapter	Test PC
SPI Adapter Cable	No	0.2m	No	EUT - RF-WHTIB (Sender)	USB - SPI Adapter
Speaker wire (x4)	No	1.0m	No	EUT - RF-WHTIB (Receiver)	unterminated

**PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.**

<b>Equipment modifications</b>					
Item	Date	Test	Modification	Note	Disposition of EUT
1	3/2/2007	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	3/3/2007	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	3/3/2007	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	3/3/2007	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	3/3/2007	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	3/5/2007	Spurious Radiated Emissions-	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	3/6/2007	AC Powerline Conducted Emissions	Modified from delivered configuration. Initial or No Modification	Sender power supply was switched to CUI Stack M/N: DV-51AAT. Modification done by Holly Ashkannejhad.	Scheduled testing was completed.

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

**MODES OF OPERATION**

Transmitting antenna 1  
Transmitting antenna 2

**CHANNELS INVESTIGATED**

low channel  
mid channel  
high channel

**POWER SETTINGS INVESTIGATED**

120VAC/60Hz

**FREQUENCY RANGE INVESTIGATED**

Start Frequency 30 MHz Stop Frequency 26 GHz

**SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

**TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Interval
High Pass Filter	Micro-Tronics	HPM50111	HFO	12/29/2006	13
EV01 cables g,h,j			EVB	12/29/2006	13
EV01 cables c,g, h			EVA	12/29/2006	13
Pre-Amplifier	Miteq	AMF-4D-010100-24-10P	APW	12/29/2006	13
Pre-Amplifier	Miteq	AM-1616-1000	AOL	12/29/2006	13
Antenna, Horn	EMCO	3115	AHC	8/24/2006	12
Antenna, Biconilog	EMCO	3141	AXE	12/28/2005	24

**MEASUREMENT BANDWIDTHS**

	Frequency Range	Peak Data	Quasi-Peak Data	Average Data
	(MHz)	(kHz)	(kHz)	(kHz)
	0.01 - 0.15	1.0	0.2	0.2
	0.15 - 30.0	10.0	9.0	9.0
	30.0 - 1000	100.0	120.0	120.0
	Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

**MEASUREMENT UNCERTAINTY**

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

**TEST DESCRIPTION**

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

<b>EUT:</b> RF-WHTIB (Receiver)	<b>Work Order:</b> AVNE0008
<b>Serial Number:</b> None	<b>Date:</b> 03/05/07
<b>Customer:</b> Avnera	<b>Temperature:</b> 23
<b>Attendees:</b> None	<b>Humidity:</b> 33%
<b>Project:</b> None	<b>Barometric Pres.:</b> 30.1
<b>Tested by:</b> Holly Ashkannejhad	<b>Power:</b> 120VAC/60Hz
	<b>Job Site:</b> EV01

<b>TEST SPECIFICATIONS</b>	<b>Test Method</b>
FCC 15.247 (DTS):2006	ANSI C63.4:2003 KDB No. 558074


<b>TEST PARAMETERS</b>	
<b>Antenna Height(s) (m)</b> 1 - 4	<b>Test Distance (m)</b> 3

**COMMENTS**

**EUT OPERATING MODES**  
Transmitting, Antenna 2, see comments for channel

**DEVIATIONS FROM TEST STANDARD**  
No deviations.

<b>Run #</b>	6	NVLAP Lab Code 200630-0	<i>Holly Ashkannejhad</i> Signature
<b>Configuration #</b>	4		
<b>Results</b>	Pass		

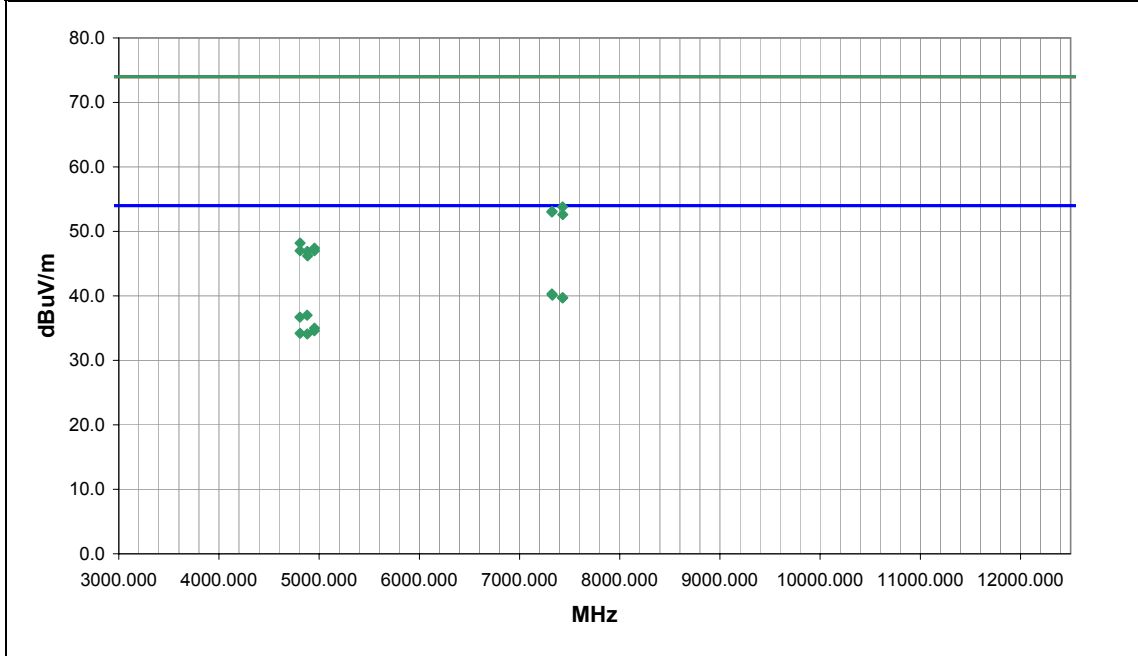

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7323.167	25.1	15.2	123.0	1.9	3.0	0.0	V-Horn	AV	0.0	40.3	54.0	-13.7	Mid channel
7326.858	24.9	15.2	273.0	1.0	3.0	0.0	H-Horn	AV	0.0	40.1	54.0	-13.9	Mid channel
7427.608	24.2	15.5	276.0	1.0	3.0	0.0	H-Horn	AV	0.0	39.7	54.0	-14.3	High channel
7431.133	24.2	15.5	201.0	1.0	3.0	0.0	V-Horn	AV	0.0	39.7	54.0	-14.3	High channel
4880.067	27.5	9.5	53.0	1.0	3.0	0.0	V-Horn	AV	0.0	37.0	54.0	-17.0	Mid channel
4808.142	27.4	9.3	128.0	1.0	3.0	0.0	V-Horn	AV	0.0	36.7	54.0	-17.3	Low channel
4952.925	25.0	10.0	196.0	1.0	3.0	0.0	V-Horn	AV	0.0	35.0	54.0	-19.0	High channel
4951.992	24.6	10.0	357.0	2.4	3.0	0.0	H-Horn	AV	0.0	34.6	54.0	-19.4	High channel
4809.950	24.9	9.3	360.0	1.0	3.0	0.0	H-Horn	AV	0.0	34.2	54.0	-19.8	Low channel
4881.850	24.6	9.5	90.0	1.0	3.0	0.0	H-Horn	AV	0.0	34.1	54.0	-19.9	Mid channel
7430.067	38.3	15.5	276.0	1.0	3.0	0.0	H-Horn	PK	0.0	53.8	74.0	-20.2	High channel
7323.783	37.9	15.2	123.0	1.9	3.0	0.0	V-Horn	PK	0.0	53.1	74.0	-20.9	Mid channel
7322.733	37.8	15.2	273.0	1.0	3.0	0.0	H-Horn	PK	0.0	53.0	74.0	-21.0	Mid channel
7431.050	37.1	15.5	201.0	1.0	3.0	0.0	V-Horn	PK	0.0	52.6	74.0	-21.4	High channel
4809.883	38.9	9.3	128.0	1.0	3.0	0.0	V-Horn	PK	0.0	48.2	74.0	-25.8	Low channel
4952.275	37.4	10.0	196.0	1.0	3.0	0.0	V-Horn	PK	0.0	47.4	74.0	-26.6	High channel
4808.633	37.7	9.3	360.0	1.0	3.0	0.0	H-Horn	PK	0.0	47.0	74.0	-27.0	Low channel
4952.792	37.0	10.0	357.0	2.4	3.0	0.0	H-Horn	PK	0.0	47.0	74.0	-27.0	High channel
4880.625	37.4	9.5	53.0	1.0	3.0	0.0	V-Horn	PK	0.0	46.9	74.0	-27.1	Mid channel
4883.683	36.7	9.5	90.0	1.0	3.0	0.0	H-Horn	PK	0.0	46.2	74.0	-27.8	Mid channel

EUT: RF-WHTIB (Receiver)		Work Order: AVNE0008
Serial Number: None	Date: 03/05/07	
Customer: Avnera	Temperature: 23	
Attendees: None	Humidity: 33%	
Project: None	Barometric Pres.: 30.1	
Tested by: Holly Ashkannejhad	Power: 120VAC/60Hz	Job Site: EV01

**TEST SPECIFICATIONS** Test Method

FCC 15.247 (DTS):2006	ANSI C63.4:2003 KDB No. 558074
-----------------------	--------------------------------

**TEST PARAMETERS**

Antenna Height(s) (m)	1 - 4	Test Distance (m)	3
-----------------------	-------	-------------------	---

**COMMENTS**


**EUT OPERATING MODES**

Transmitting, Antenna 2, high channel

**DEVIATIONS FROM TEST STANDARD**

No deviations.

Run #	7	NVLAP Lab Code 200630-0	Signature <i>Holly Ashkannejhad</i>
Configuration #	4		
Results	Pass		

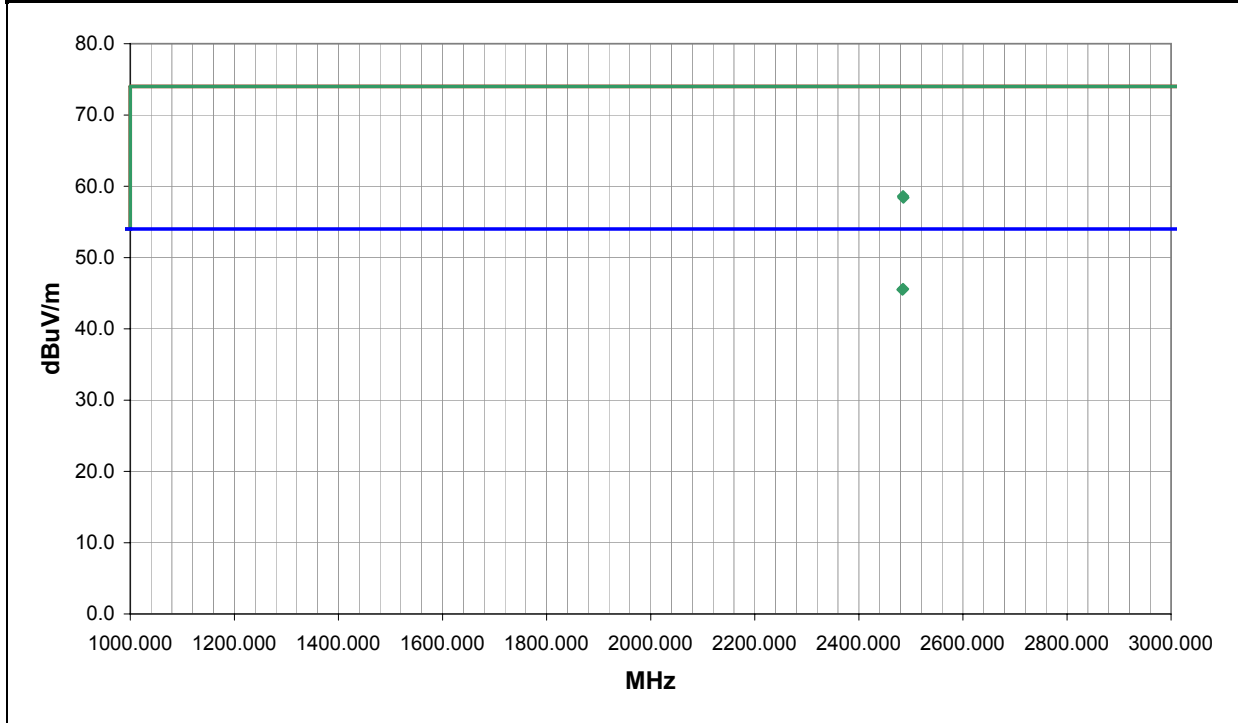

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2484.987	23.5	2.1	314.0	1.0	3.0	20.0	H-Horn	AV	0.0	45.6	54.0	-8.4
2483.683	23.4	2.1	311.0	3.2	3.0	20.0	V-Horn	AV	0.0	45.5	54.0	-8.5
2484.977	36.5	2.1	314.0	1.0	3.0	20.0	H-Horn	PK	0.0	58.6	74.0	-15.4
2485.490	36.3	2.1	311.0	3.2	3.0	20.0	V-Horn	PK	0.0	58.4	74.0	-15.6

EUT: RF-WHTIB (Receiver)		Work Order: AVNE0008
Serial Number: None	Date: 03/05/07	
Customer: Avnera	Temperature: 23	
Attendees: None	Humidity: 33%	
Project: None	Barometric Pres.: 30.1	
Tested by: Holly Ashkannejhad	Power: 120VAC/60Hz	Job Site: EV01

**TEST SPECIFICATIONS** Test Method

FCC 15.247 (DTS):2006	ANSI C63.4:2003 KDB No. 558074
-----------------------	--------------------------------

**TEST PARAMETERS**

Antenna Height(s) (m)	1 - 4	Test Distance (m)	3
-----------------------	-------	-------------------	---

**COMMENTS**


**EUT OPERATING MODES**

Transmitting, Antenna 1, High Channel

**DEVIATIONS FROM TEST STANDARD**

No deviations.

Run #	8	NVLAP Lab Code 200630-0 <i>Holly Ashkannejhad</i> Signature
Configuration #	4	
Results	Pass	

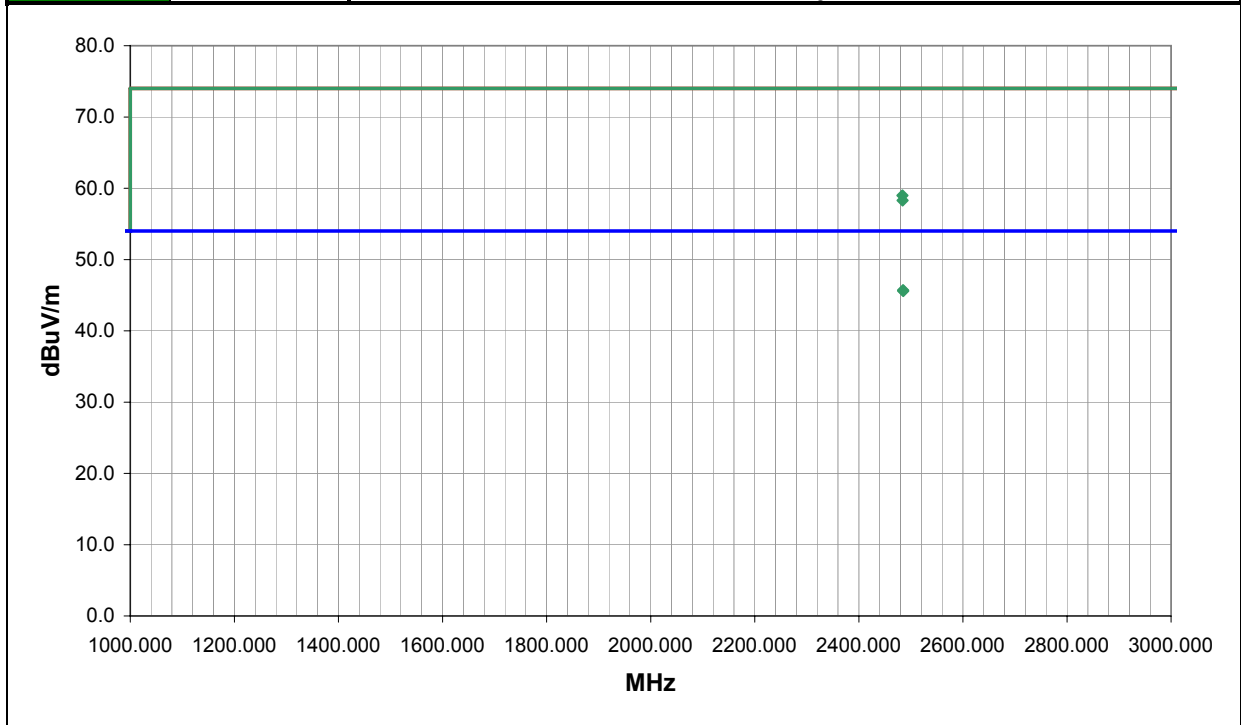

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
2484.984	23.6	2.1	2.0	1.0	3.0	20.0	H-Horn	AV	0.0	45.7	54.0	-8.3
2485.178	23.5	2.1	327.0	1.0	3.0	20.0	V-Horn	AV	0.0	45.6	54.0	-8.4
2483.642	36.9	2.1	327.0	1.0	3.0	20.0	V-Horn	PK	0.0	59.0	74.0	-15.0
2484.072	36.2	2.1	2.0	1.0	3.0	20.0	H-Horn	PK	0.0	58.3	74.0	-15.7

EUT: RF-WHTIB (Receiver)	Work Order: AVNE0008
Serial Number: None	Date: 03/05/07
Customer: Avnera	Temperature: 23
Attendees: None	Humidity: 33%
Project: None	Barometric Pres.: 30.1
Tested by: Holly Ashkannejhad	Power: 120VAC/60Hz
	Job Site: EV01

<b>TEST SPECIFICATIONS</b>	Test Method
FCC 15.247 (DTS):2006	ANSI C63.4:2003 KDB No. 558074


<b>TEST PARAMETERS</b>	
Antenna Height(s) (m) 1 - 4	Test Distance (m) 3

<b>COMMENTS</b>

<b>EUT OPERATING MODES</b>
Transmitting, Antenna 1, see comments for channel

<b>DEVIATIONS FROM TEST STANDARD</b>
No deviations.


Run #	9	NVLAP Lab Code 200630-0	Signature <i>Holly Ashkannejhad</i>
Configuration #	4		
Results	Pass		

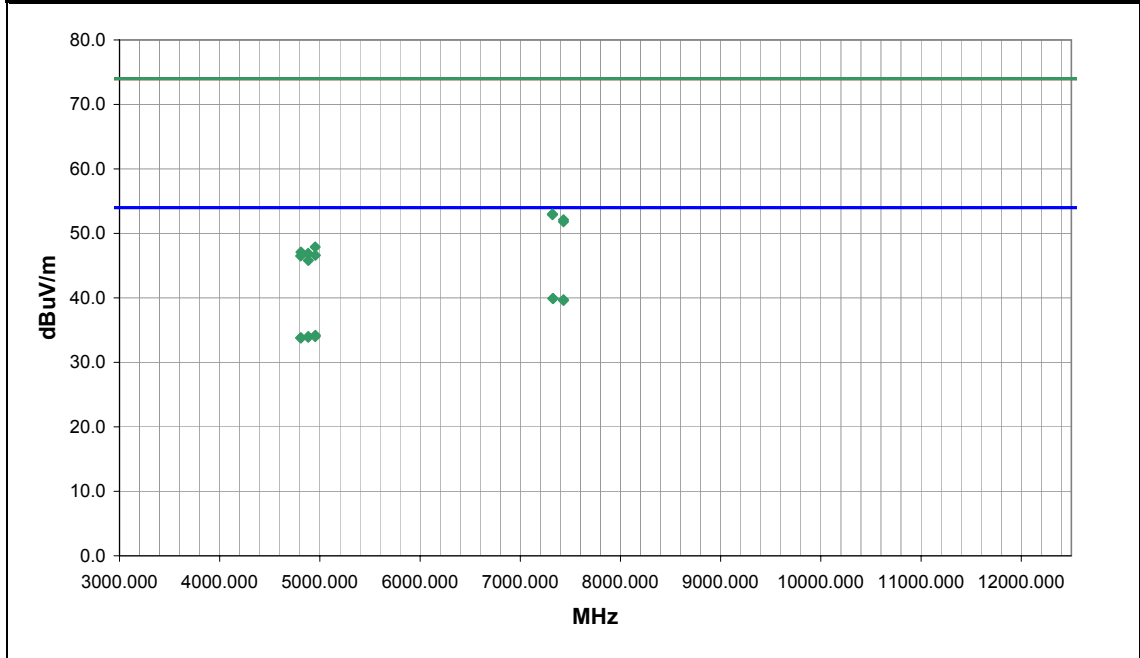

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
7323.692	24.7	15.2	360.0	1.6	3.0	0.0	H-Horn	AV	0.0	39.9	54.0	-14.1	Mid channel
7327.283	24.7	15.2	220.0	1.4	3.0	0.0	V-Horn	AV	0.0	39.9	54.0	-14.1	Mid channel
7430.683	24.2	15.5	105.0	1.0	3.0	0.0	V-Horn	AV	0.0	39.7	54.0	-14.3	High Channel
7431.392	24.1	15.5	62.0	1.0	3.0	0.0	H-Horn	AV	0.0	39.6	54.0	-14.4	High Channel
4953.958	24.2	10.0	310.0	1.0	3.0	0.0	V-Horn	AV	0.0	34.2	54.0	-19.8	High Channel
4885.000	24.5	9.5	-1.0	1.3	3.0	0.0	H-Horn	AV	0.0	34.0	54.0	-20.0	Mid channel
4952.600	24.0	10.0	206.0	3.2	3.0	0.0	H-Horn	AV	0.0	34.0	54.0	-20.0	High Channel
4882.742	24.4	9.5	266.0	1.0	3.0	0.0	V-Horn	AV	0.0	33.9	54.0	-20.1	Mid channel
4807.950	24.5	9.3	63.0	1.0	3.0	0.0	H-Horn	AV	0.0	33.8	54.0	-20.2	Low channel
4810.167	24.5	9.3	92.0	1.0	3.0	0.0	V-Horn	AV	0.0	33.8	54.0	-20.2	Low channel
7321.442	37.8	15.2	220.0	1.4	3.0	0.0	V-Horn	PK	0.0	53.0	74.0	-21.0	Mid channel
7321.300	37.7	15.2	360.0	1.6	3.0	0.0	H-Horn	PK	0.0	52.9	74.0	-21.1	Mid channel
7431.475	36.6	15.5	62.0	1.0	3.0	0.0	H-Horn	PK	0.0	52.1	74.0	-21.9	High Channel
7430.842	36.3	15.5	105.0	1.0	3.0	0.0	V-Horn	PK	0.0	51.8	74.0	-22.2	High Channel
4952.658	37.9	10.0	310.0	1.0	3.0	0.0	V-Horn	PK	0.0	47.9	74.0	-26.1	High Channel
4810.633	37.8	9.3	92.0	1.0	3.0	0.0	V-Horn	PK	0.0	47.1	74.0	-26.9	Low channel
4882.300	37.4	9.5	266.0	1.0	3.0	0.0	V-Horn	PK	0.0	46.9	74.0	-27.1	Mid channel
4953.983	36.6	10.0	206.0	3.2	3.0	0.0	H-Horn	PK	0.0	46.6	74.0	-27.4	High Channel
4808.142	37.2	9.3	63.0	1.0	3.0	0.0	H-Horn	PK	0.0	46.5	74.0	-27.5	Low channel
4883.992	36.3	9.5	-1.0	1.3	3.0	0.0	H-Horn	PK	0.0	45.8	74.0	-28.2	Mid channel





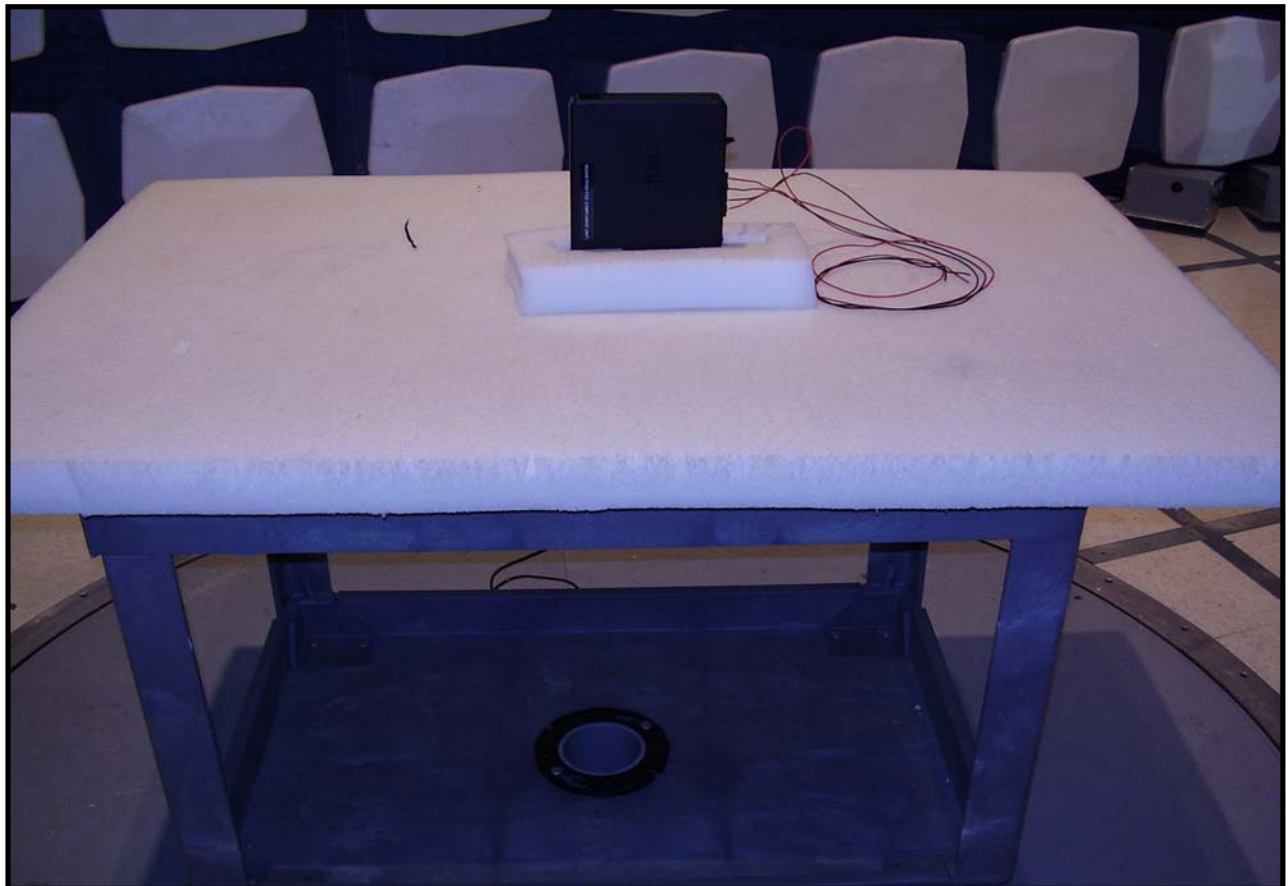

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4407B	AAU	12/8/2006	13
Attenuator	Pasternack	PE7005-20	AUN	2/6/2007	13
Power Sensor	Gigatronics	80701A	SPL	9/19/2006	12
Power Meter	Gigatronics	8651A	SPM	9/19/2006	12
Attenuator	Pasternack	PE7005-20	AUN	2/6/2007	13
Signal Generator	Hewlett-Packard	8648D	TGC	12/7/2006	13

#### MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

#### TEST DESCRIPTION

The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.

**EMC**

**OCCUPIED BANDWIDTH**

<b>EUT:</b> RF-WHTIB (Receiver)		<b>Work Order:</b> AVNE0008	
<b>Serial Number:</b> None		<b>Date:</b> 03/03/07	
<b>Customer:</b> Avnera		<b>Temperature:</b> 22°C	
<b>Attendees:</b> None		<b>Humidity:</b> 36%	
<b>Project:</b> None		<b>Barometric Pres.:</b> 30.47	
<b>Tested by:</b> Rod Peloquin		<b>Power:</b> 120VAC/60Hz	
		<b>Job Site:</b> EV06	

<b>TEST SPECIFICATIONS</b>		<b>Test Method</b>	
FCC 15.247:2006 DTS		ANSI C63.4:2003, KDB No. 558074	


**COMMENTS**

**DEVIATIONS FROM TEST STANDARD**


<b>Configuration #</b>	2	<i>Rod Peloquin</i> Signature
------------------------	---	----------------------------------

	Value	Limit	Results
Low Channel	1.0880 MHz	> 500 kHz	Pass
Mid Channel	1.1136 MHz	> 500 kHz	Pass
High Channel	1.1106 MHz	> 500 kHz	Pass

Low Channel		
<b>Result:</b> Pass	<b>Value:</b> 1.0880 MHz	<b>Limit:</b> > 500 kHz

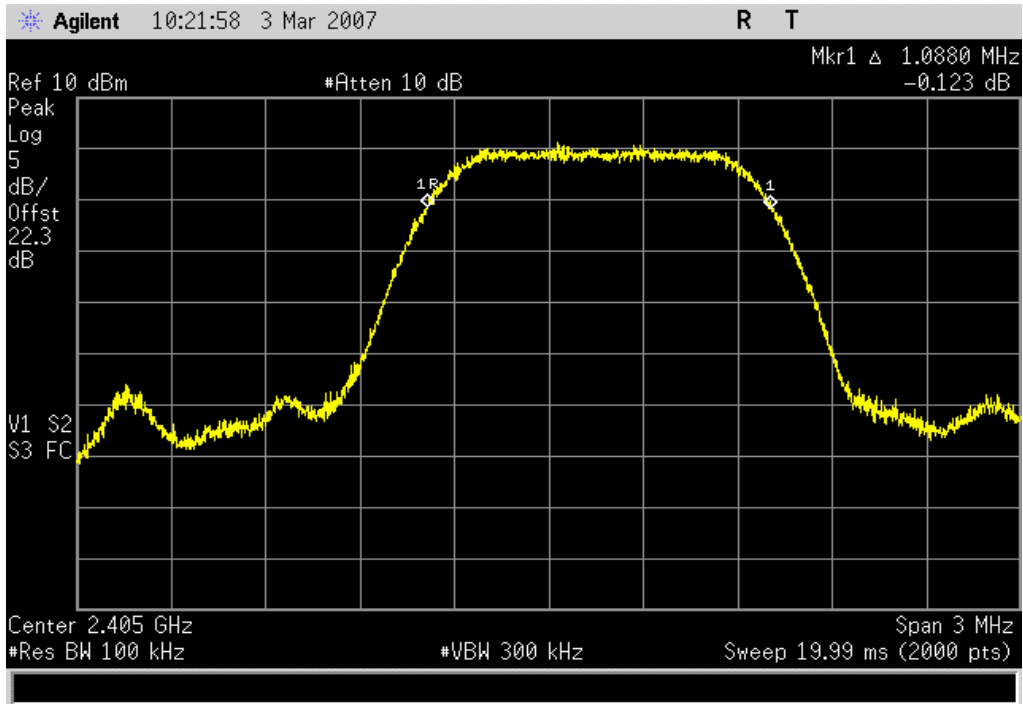

Mid Channel		
<b>Result:</b> Pass	<b>Value:</b> 1.1136 MHz	<b>Limit:</b> > 500 kHz

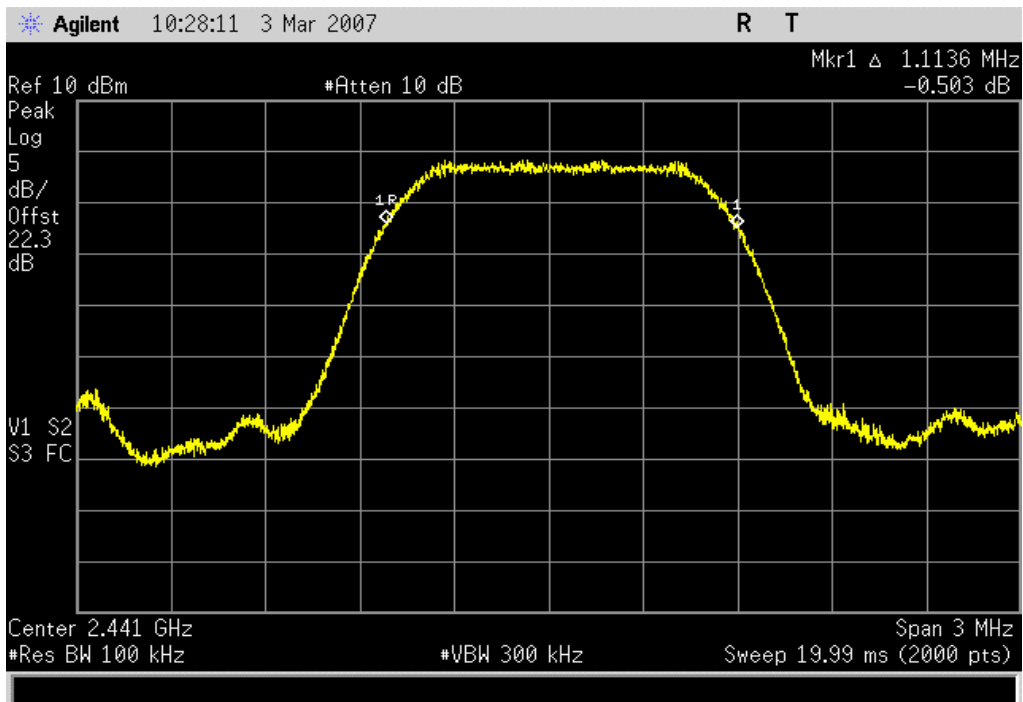


## High Channel


**Result:** Pass

**Value:** 1.1106 MHz

**Limit:** > 500 kHz

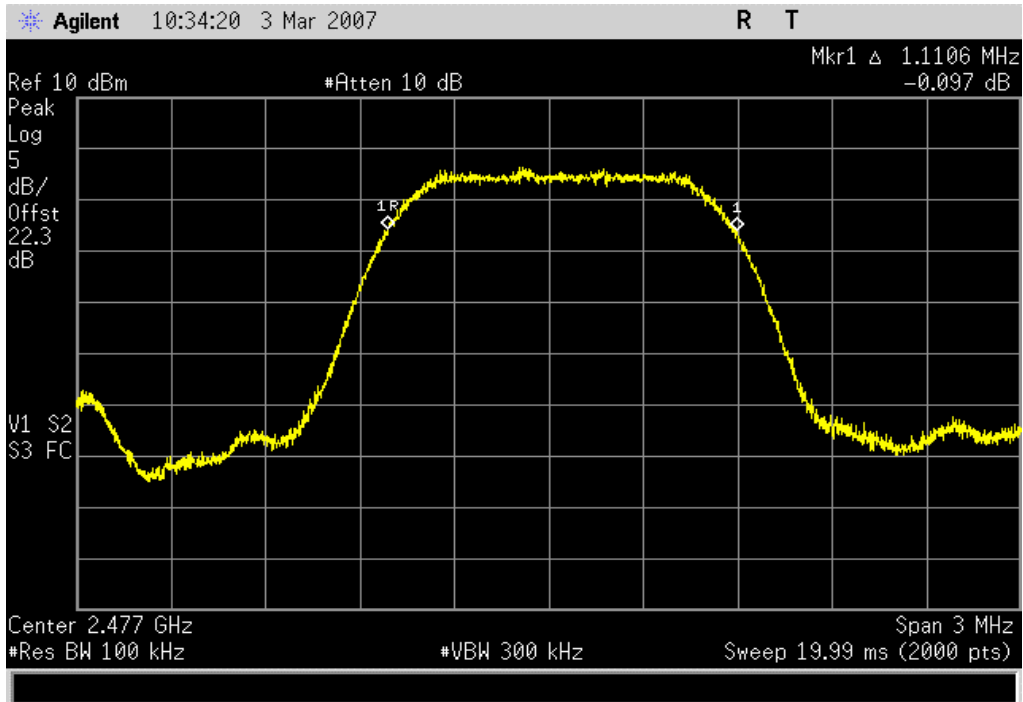



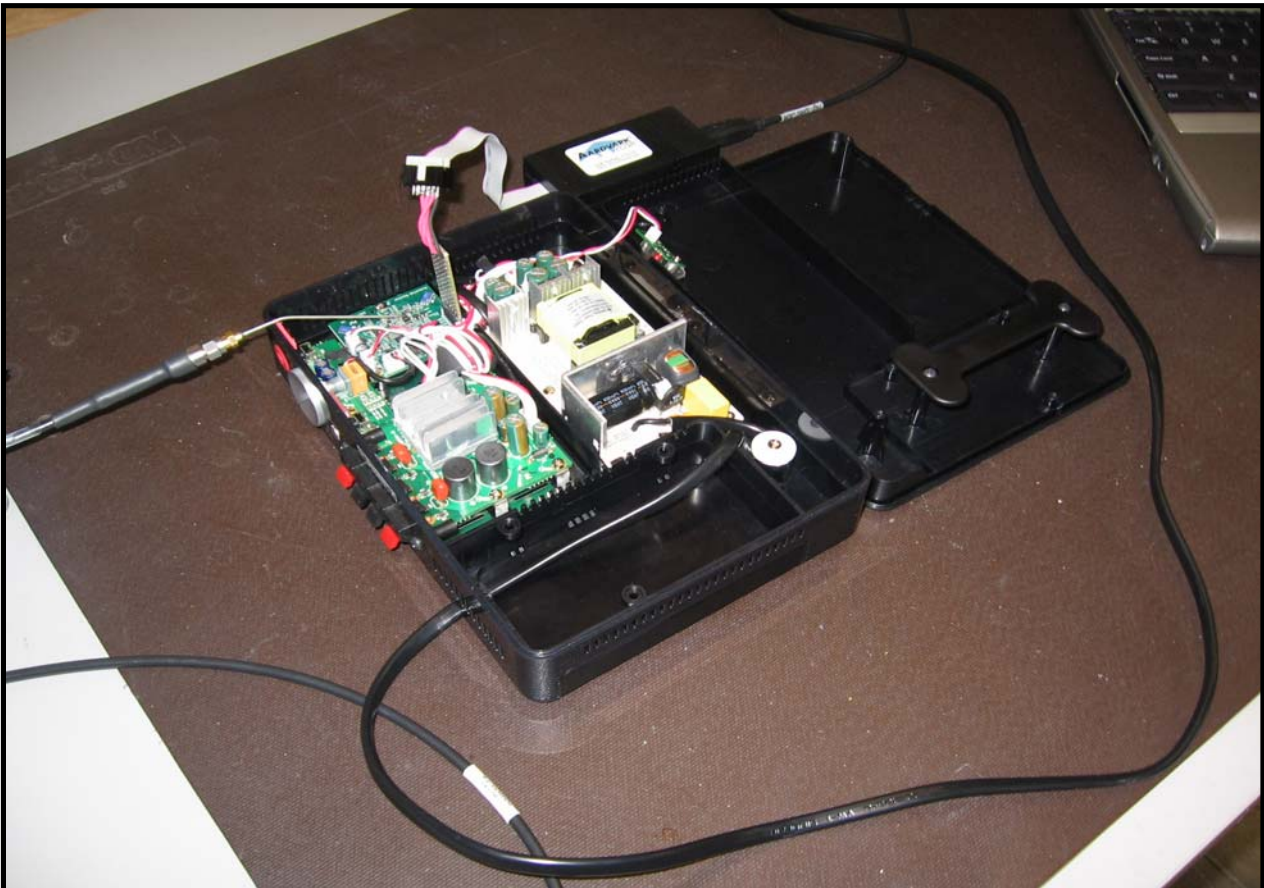



Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4407B	AAU	12/8/2006	13
Attenuator	Pasternack	PE7005-20	AUN	2/6/2007	13
Power Meter	Gigatronics	8651A	SPM	9/19/2006	12
Power Sensor	Gigatronics	80701A	SPL	9/19/2006	12
Signal Generator	Hewlett-Packard	8648D	TGC	12/7/2006	13

#### MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

#### TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.

**De Facto EIRP Limit:** Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

**EMC**

**OUTPUT POWER**

<b>EUT:</b> RF-WHTIB (Receiver)		<b>Work Order:</b> AVNE0008	
<b>Serial Number:</b> None		<b>Date:</b> 03/03/07	
<b>Customer:</b> Avnera		<b>Temperature:</b> 19°C	
<b>Attendees:</b> None		<b>Humidity:</b> 36%	
<b>Project:</b> None		<b>Barometric Pres.:</b> 30.47	
<b>Tested by:</b> Rod Peloquin		<b>Power:</b> 120VAC/60Hz	
		<b>Job Site:</b> EV06	

<b>TEST SPECIFICATIONS</b>		<b>Test Method</b>	
FCC 15.247:2006 DTS		ANSI C63.4:2003, KDB No. 558074	


**COMMENTS**

**DEVIATIONS FROM TEST STANDARD**


<b>Configuration #</b>	2	<i>Rod Peloquin</i> Signature
------------------------	---	----------------------------------

	Value	Limit	Results
Low Channel	7.9 mW	1 W	Pass
Mid Channel	6.3 mW	1 W	Pass
High Channel	4.5 mW	1 W	Pass


Low Channel		
<b>Result:</b> Pass	<b>Value:</b> 7.9 mW	<b>Limit:</b> 1 W

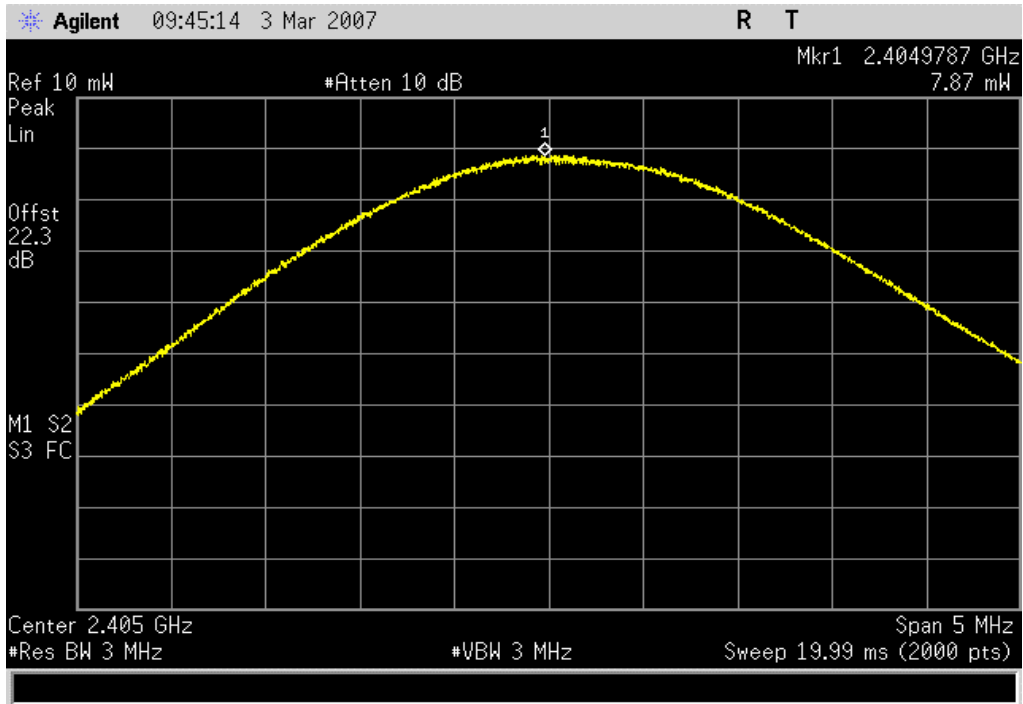


Mid Channel		
<b>Result:</b> Pass	<b>Value:</b> 6.3 mW	<b>Limit:</b> 1 W

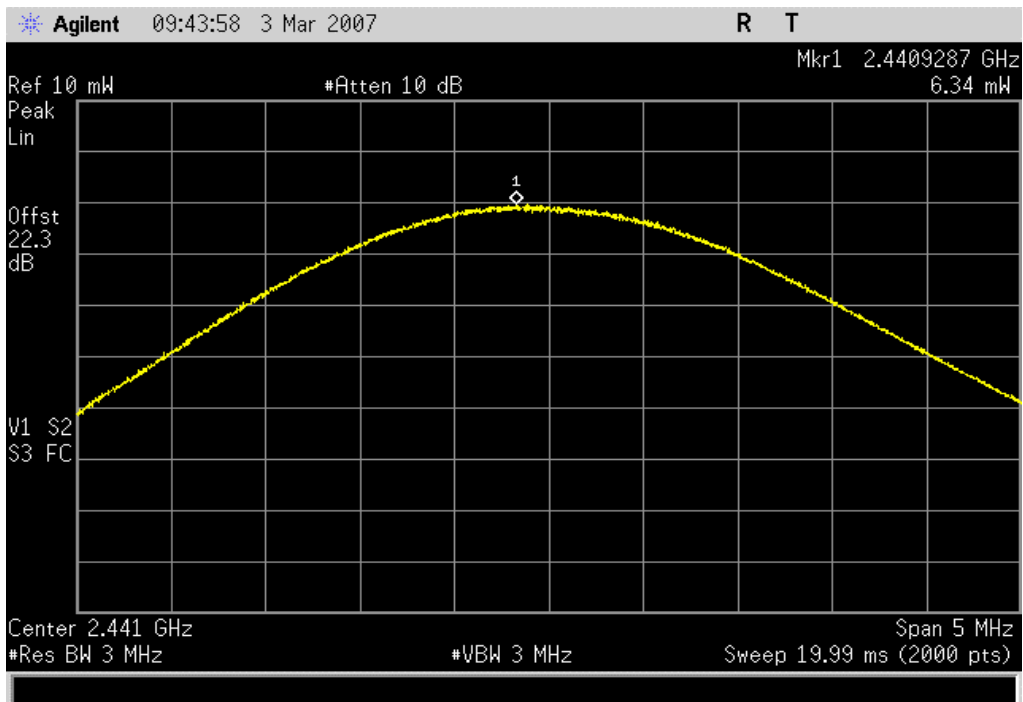

High Channel  
**Result:** Pass      **Value:** 4.5 mW      **Limit:** 1 W

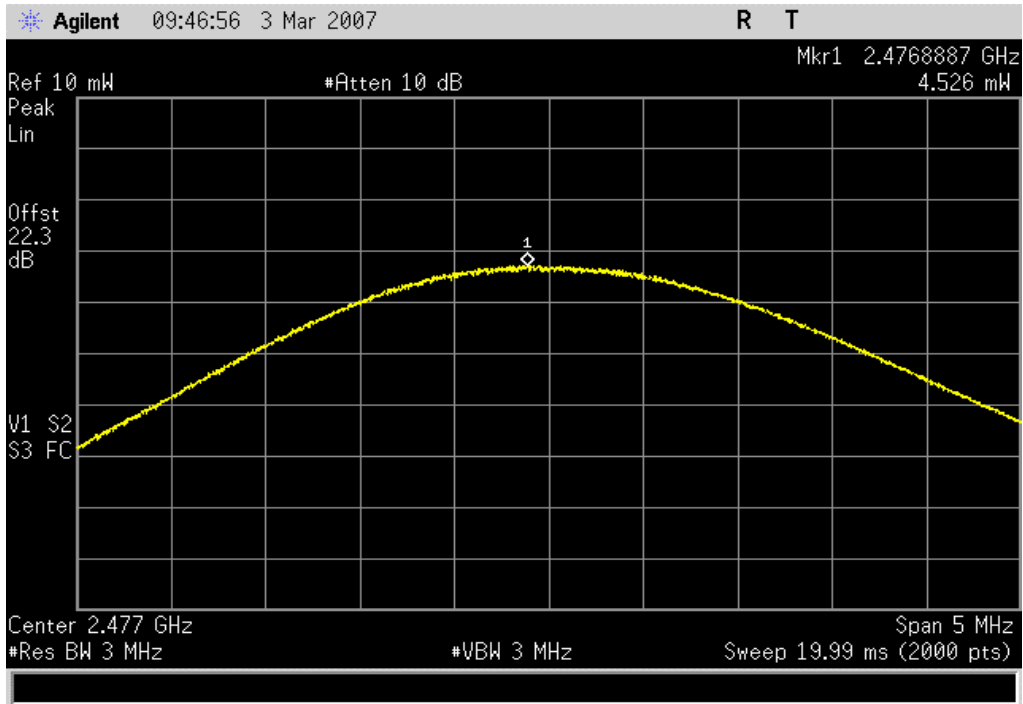

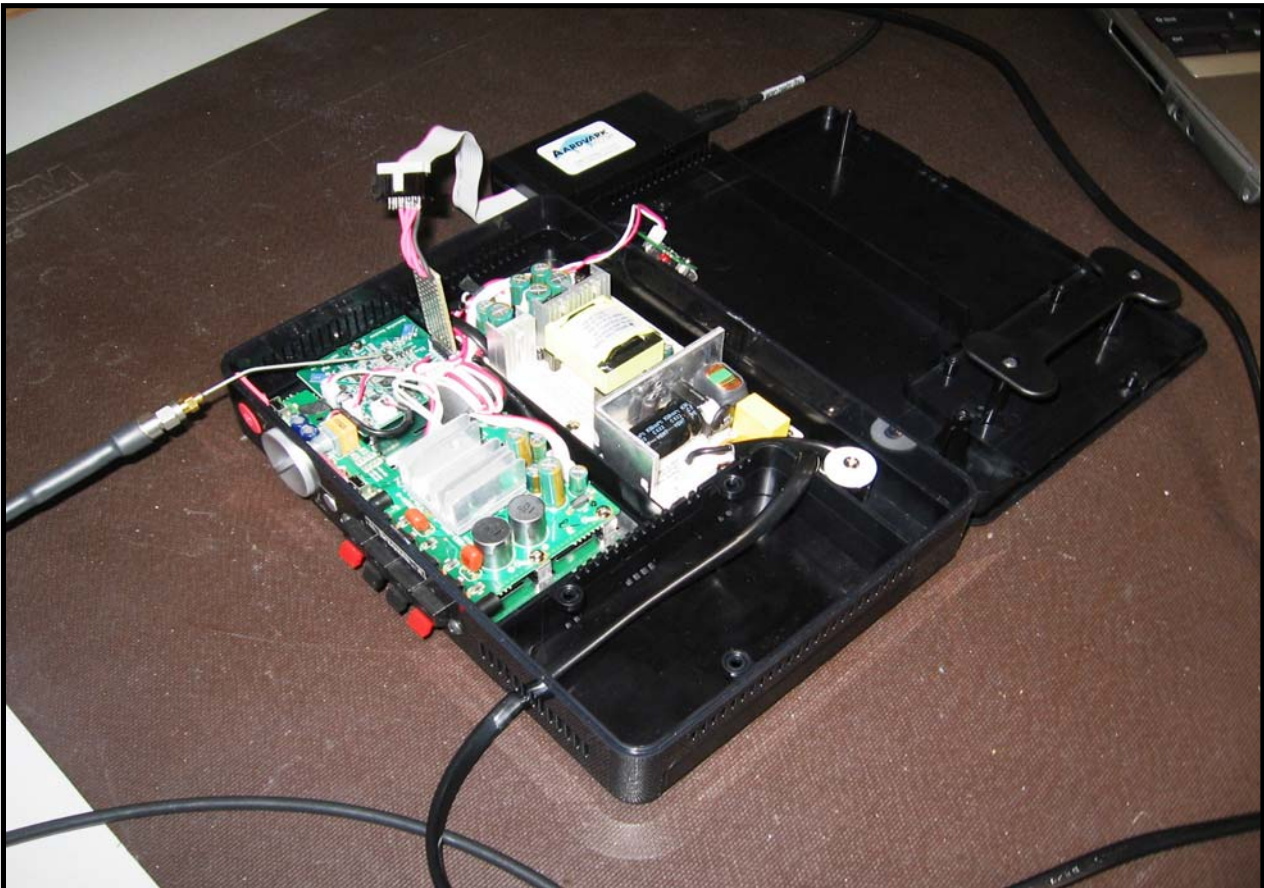

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4407B	AAU	12/8/2006	13
Attenuator	Pasternack	PE7005-20	AUN	2/6/2007	13
Power Sensor	Gigatronics	80701A	SPL	9/19/2006	12
Power Meter	Gigatronics	8651A	SPM	9/19/2006	12
Signal Generator	Hewlett-Packard	8648D	TGC	12/7/2006	13

#### MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

#### TEST DESCRIPTION

The requirements of FCC 15.247(d) for emissions at least 20dB below the carrier in any 100kHz bandwidth outside the allowable band was measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 10 MHz below the band edge to 10 MHz above the band edge.

**EMC**

**BAND EDGE COMPLIANCE**

<b>EUT:</b> RF-WHTIB (Receiver)		<b>Work Order:</b> AVNE0008	
<b>Serial Number:</b> None		<b>Date:</b> 03/03/07	
<b>Customer:</b> Avnera		<b>Temperature:</b> 19°C	
<b>Attendees:</b> None		<b>Humidity:</b> 36%	
<b>Project:</b> None		<b>Barometric Pres.:</b> 30.47	
<b>Tested by:</b> Rod Peloquin		<b>Power:</b> 120VAC/60Hz	
		<b>Job Site:</b> EV06	

<b>TEST SPECIFICATIONS</b>		<b>Test Method</b>	
FCC 15.247:2006 DTS		ANSI C63.4:2003, KDB No. 558074	

**COMMENTS**

**DEVIATIONS FROM TEST STANDARD**

<b>Configuration #</b>	2	<i>Rod Peloquin</i> Signature
------------------------	---	----------------------------------


	<b>Value</b>	<b>Limit</b>	<b>Results</b>
Low Channel	-48.7 dBc	≤ 20 dBc	Pass
High Channel	-46.9 dBc	≤ 20 dBc	Pass



**BAND EDGE COMPLIANCE**


**Low Channel**



**Result:** Pass                      **Value:** -48.7 dBc                      **Limit:** ≤ 20 dBc

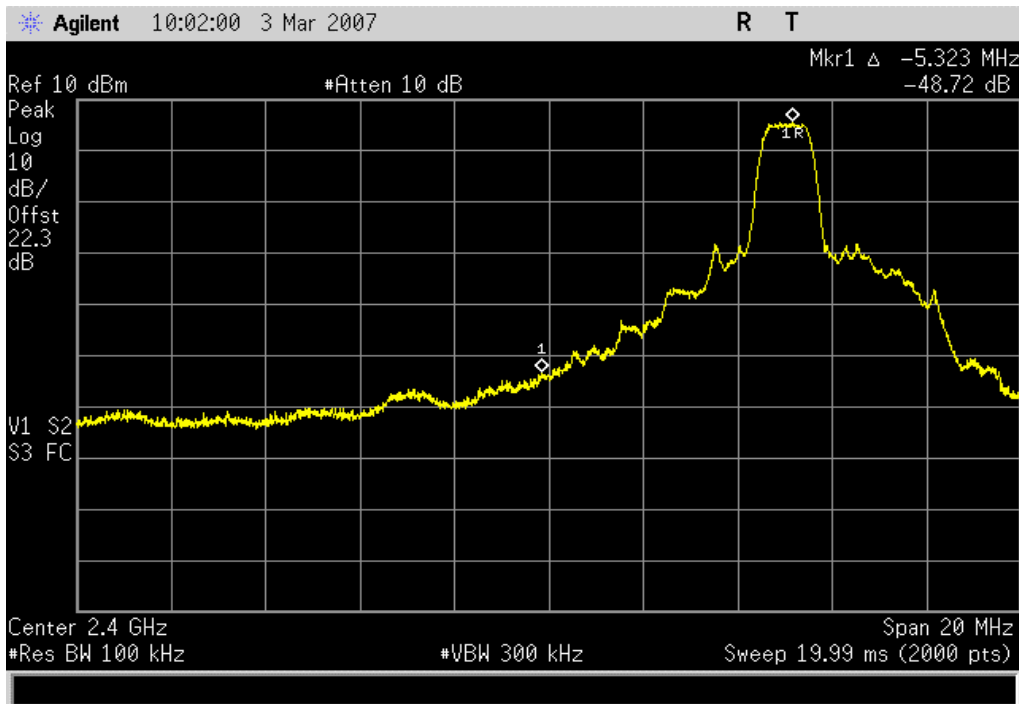

**High Channel**

**Result:** Pass                      **Value:** -46.9 dBc                      **Limit:** ≤ 20 dBc

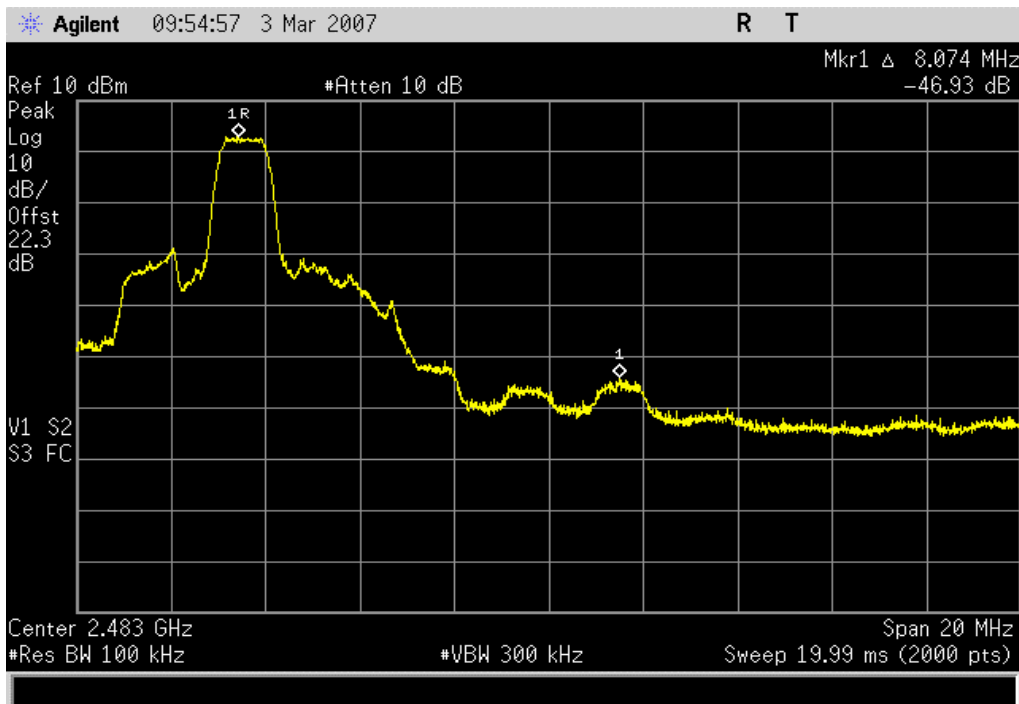

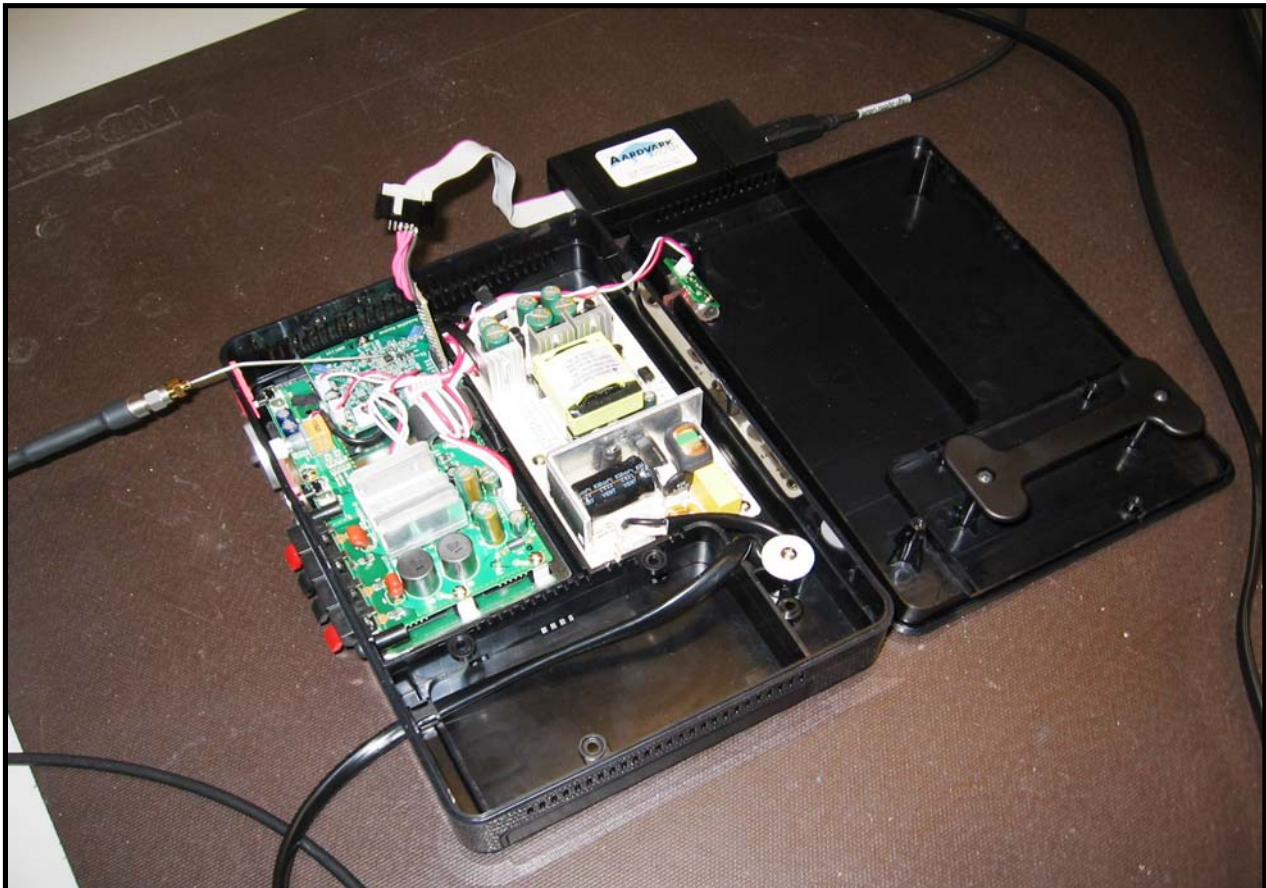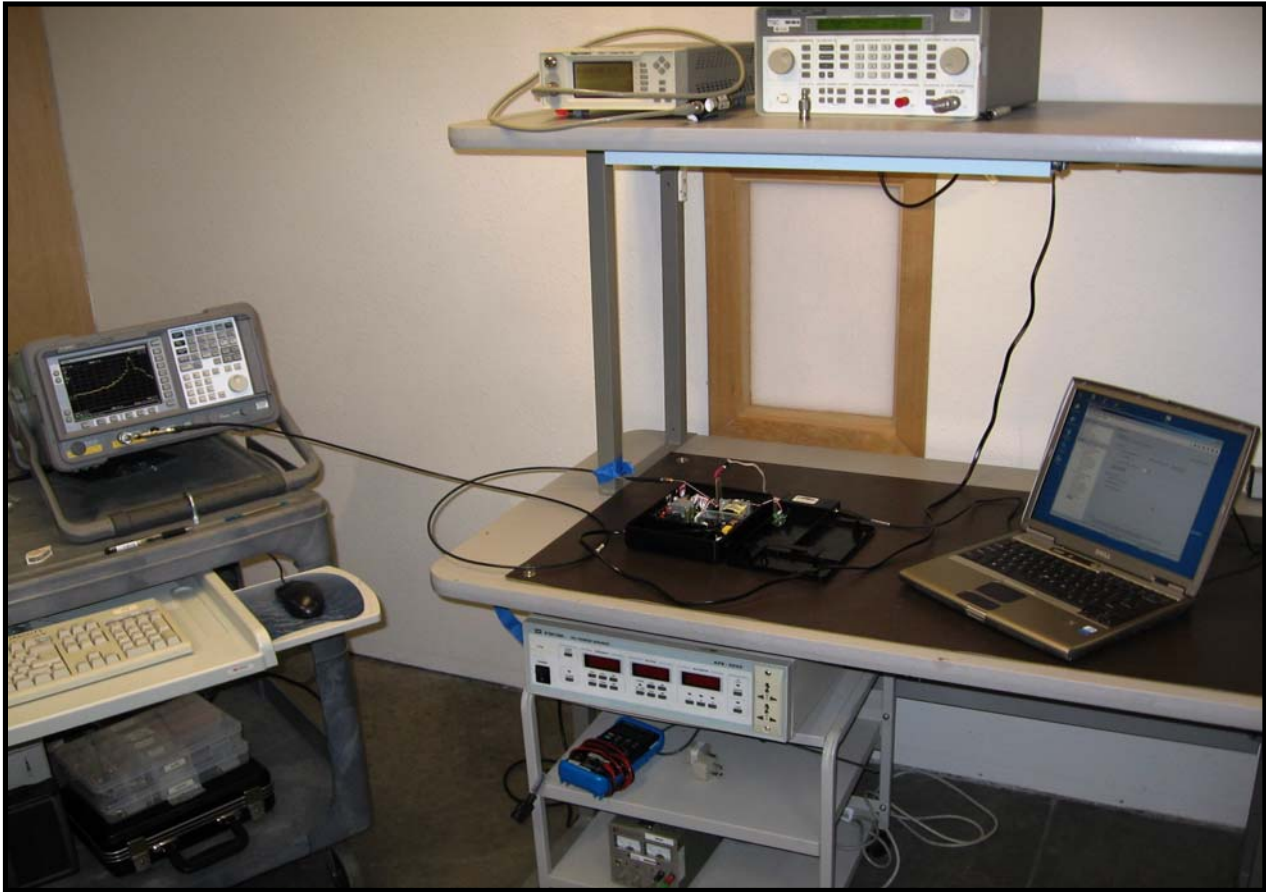

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4407B	AAU	12/8/2006	13
Attenuator	Pasternack	PE7005-20	AUN	2/6/2007	13
Power Meter	Gigatronics	8651A	SPM	9/19/2006	12
Power Sensor	Gigatronics	80701A	SPL	9/19/2006	12
Signal Generator	Hewlett-Packard	8648D	TGC	12/7/2006	13

#### MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

#### TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium, and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

## EMC

## SPURIOUS CONDUCTED EMISSIONS

EUT: RF-WHTIB (Receiver)	Work Order: AVNE0008
Serial Number: None	Date: 03/03/07
Customer: Avnera	Temperature: 22°C
Attendees: None	Humidity: 34%
Project: None	Barometric Pres.: 30.47
Tested by: Rod Peloquin	Power: 120VAC/60Hz
	Job Site: EV06

TEST SPECIFICATIONS	Test Method
FCC 15.247:2006 DTS	ANSI C63.4:2003, KDB No. 558074

## COMMENTS


## DEVIATIONS FROM TEST STANDARD

Configuration #	2	<i>Rod Peloquin</i> Signature
-----------------	---	----------------------------------


		Value	Limit	Results
Low Channel	0 - 3 GHz	< -40 dBc	≤ -20 dBc	Pass
	3 - 12.5 GHz	< -40 dBc	≤ -20 dBc	Pass
	12.5 - 25 GHz	< -40 dBc	≤ -20 dBc	Pass
Mid Channel	0 - 3 GHz	< -40 dBc	≤ -20 dBc	Pass
	3 - 12.5 GHz	< -40 dBc	≤ -20 dBc	Pass
	12.5 - 25 GHz	< -40 dBc	≤ -20 dBc	Pass
High Channel	0 - 3 GHz	< -40 dBc	≤ -20 dBc	Pass
	3 - 12.5 GHz	< -40 dBc	≤ -20 dBc	Pass
	12.5 - 25 GHz	< -40 dBc	≤ -20 dBc	Pass

**SPURIOUS CONDUCTED EMISSIONS**


Low Channel, 0 - 3 GHz  
**Result:** Pass      **Value:** < -40 dBc      **Limit:** ≤ -20 dBc

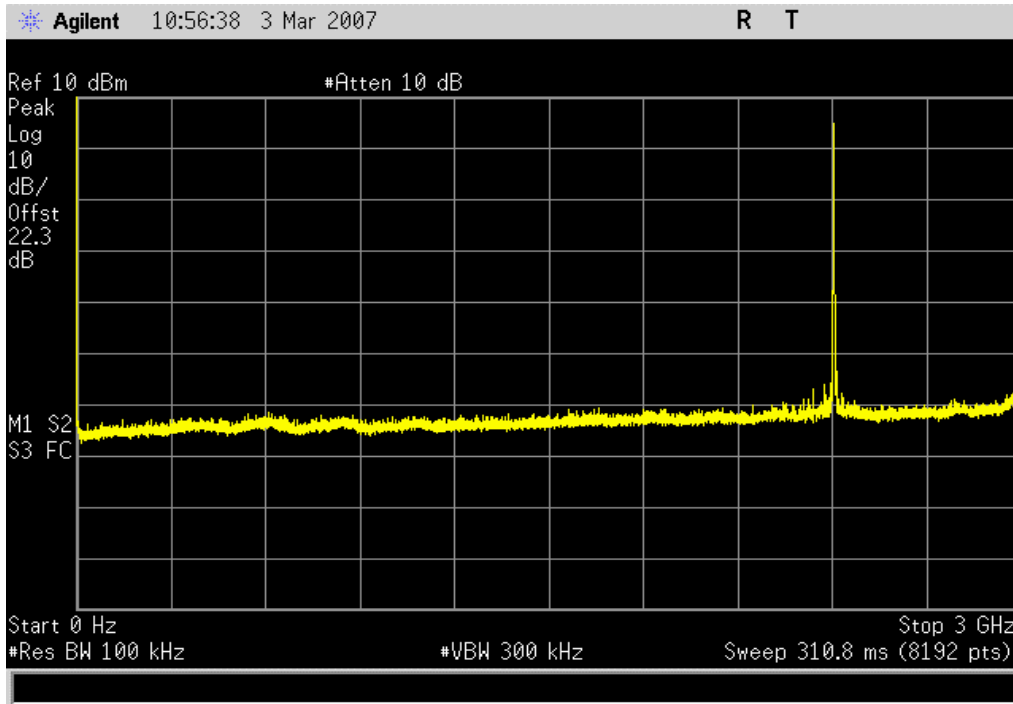


Low Channel, 3 - 12.5 GHz  
**Result:** Pass      **Value:** < -40 dBc      **Limit:** ≤ -20 dBc

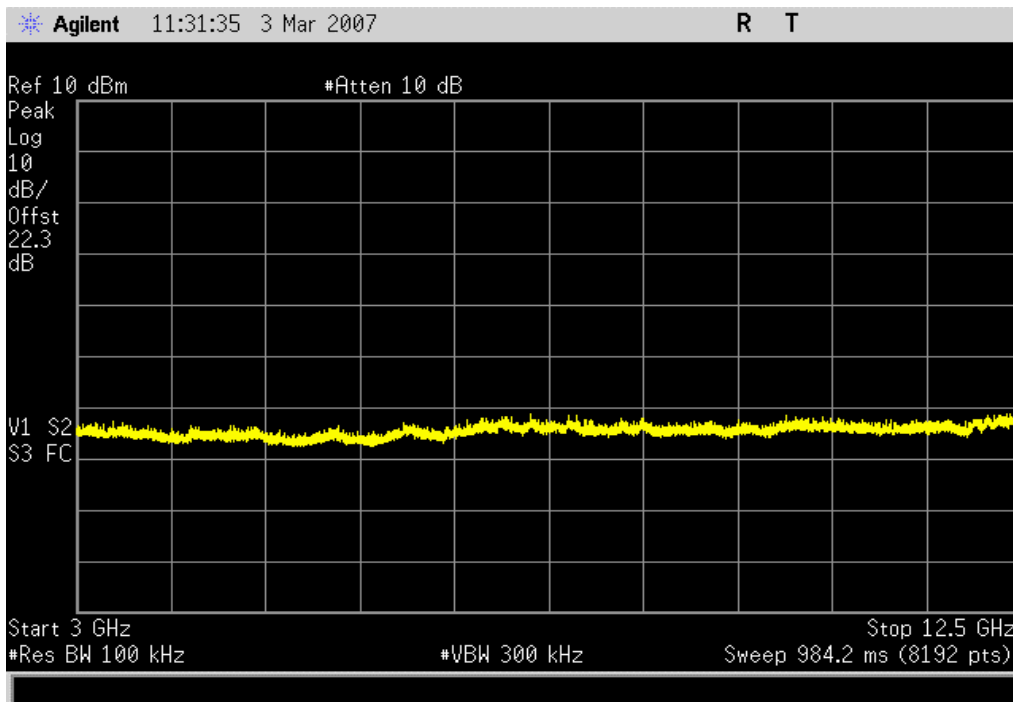


Low Channel, 12.5 - 25 GHz  
**Result:** Pass      **Value:** < -40 dBc      **Limit:** ≤ -20 dBc

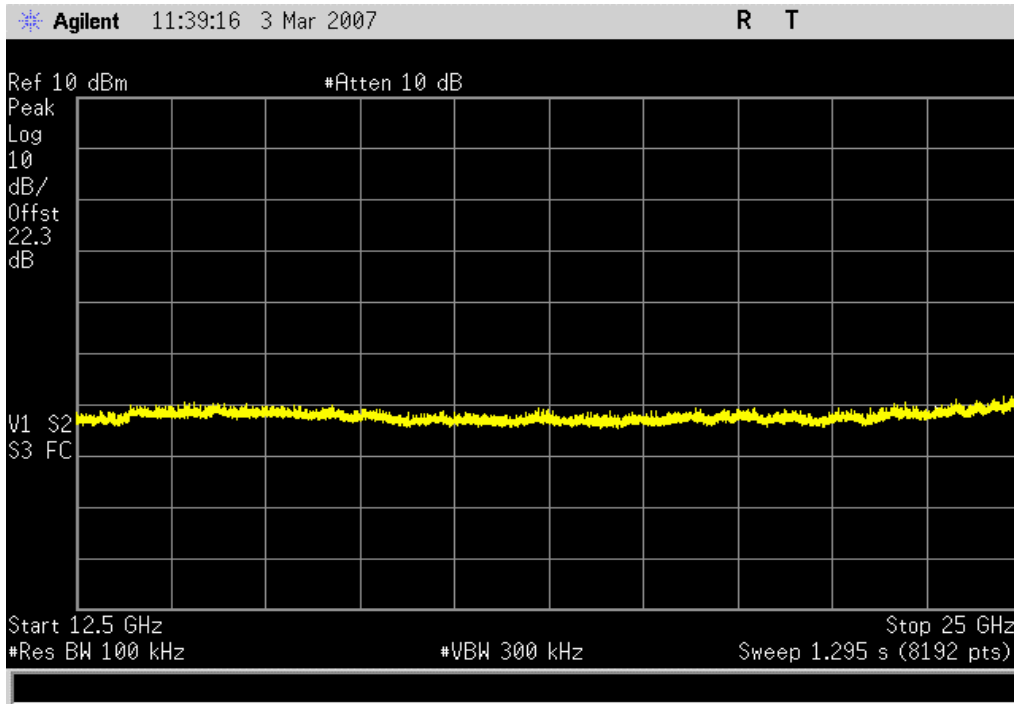


Mid Channel, 0 - 3 GHz  
**Result:** Pass      **Value:** < -40 dBc      **Limit:** ≤ -20 dBc

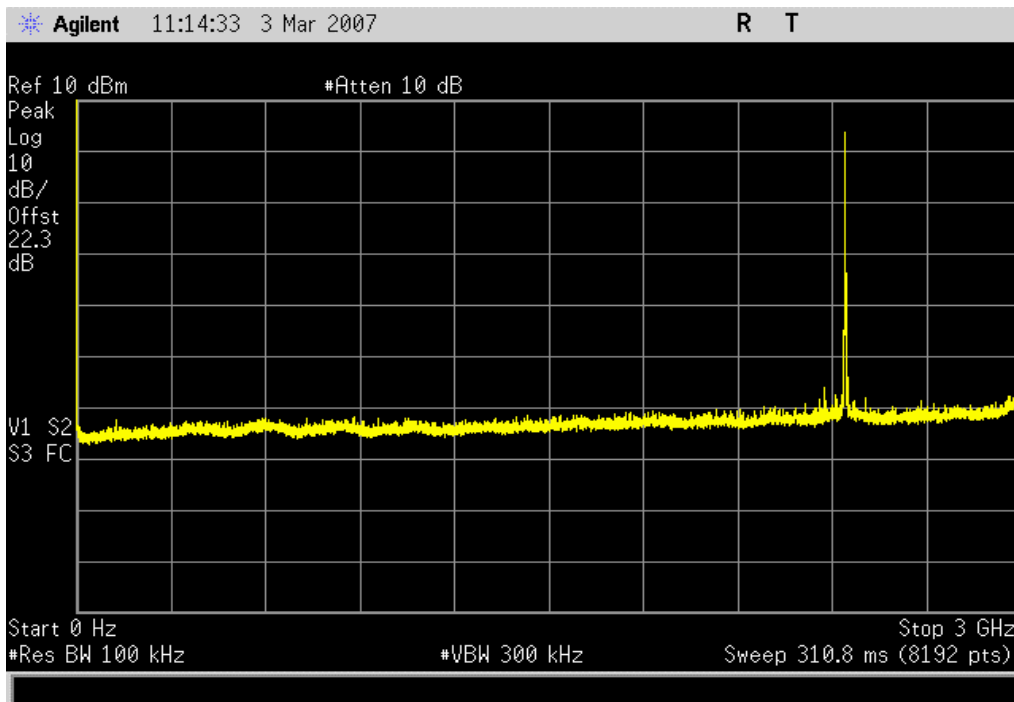

Mid Channel, 3 - 12.5 GHz  
**Result:** Pass      **Value:** < -40 dBc      **Limit:** ≤ -20 dBc

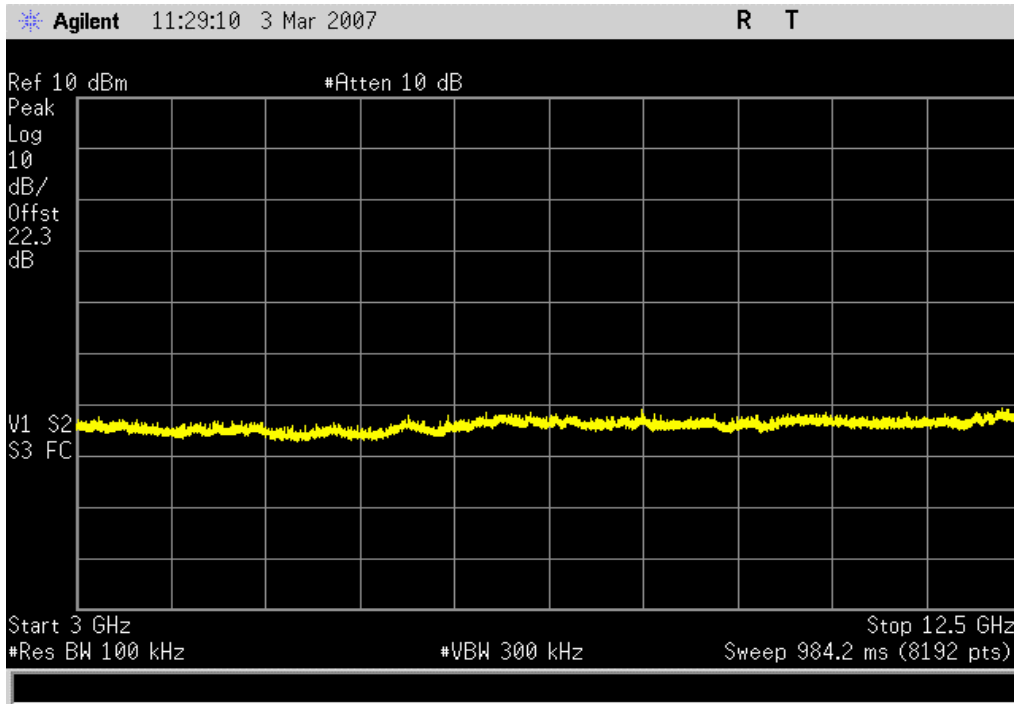


Mid Channel, 12.5 - 25 GHz  
**Result:** Pass      **Value:** < -40 dBc      **Limit:** ≤ -20 dBc

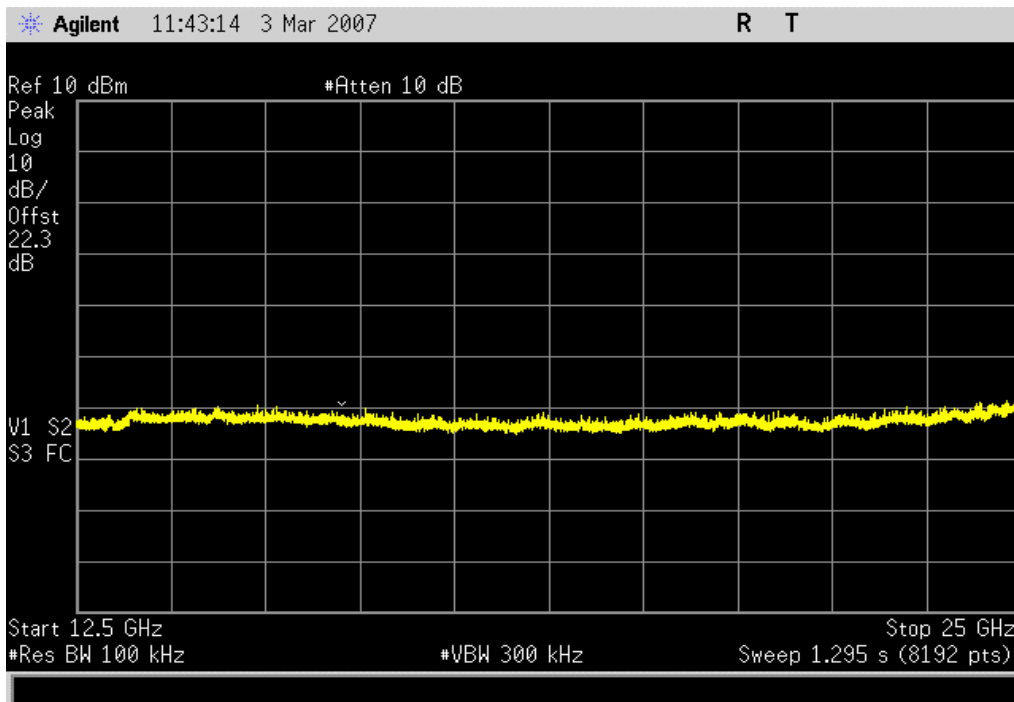




High Channel, 0 - 3 GHz  
**Result:** Pass      **Value:** < -40 dBc      **Limit:** ≤ -20 dBc

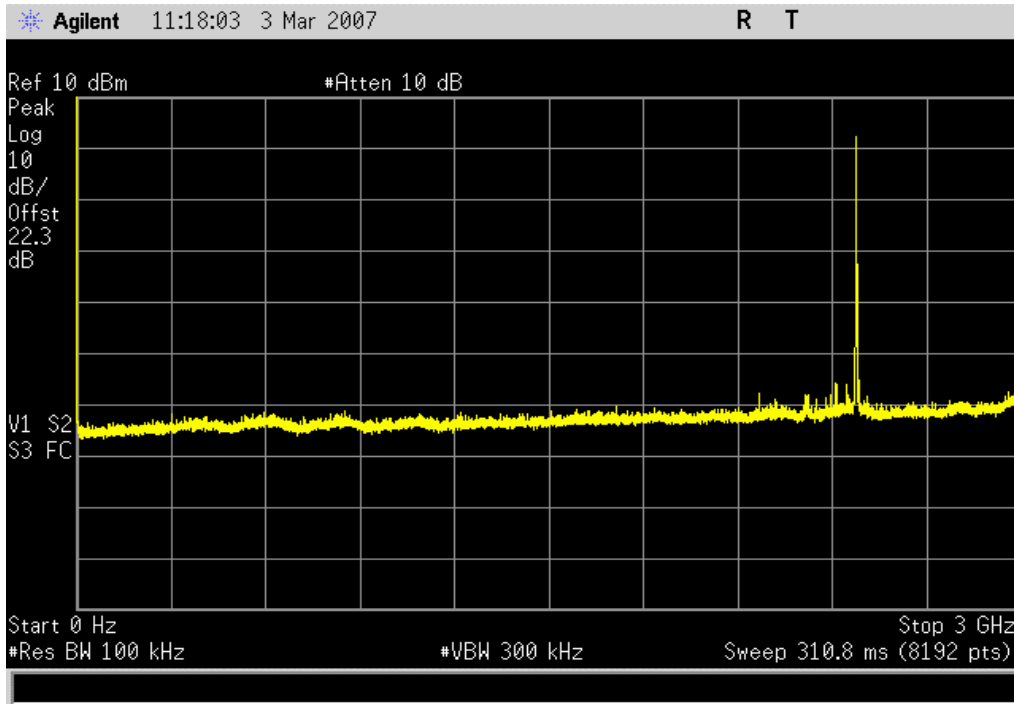



High Channel, 3 - 12.5 GHz  
**Result:** Pass      **Value:** < -40 dBc      **Limit:** ≤ -20 dBc

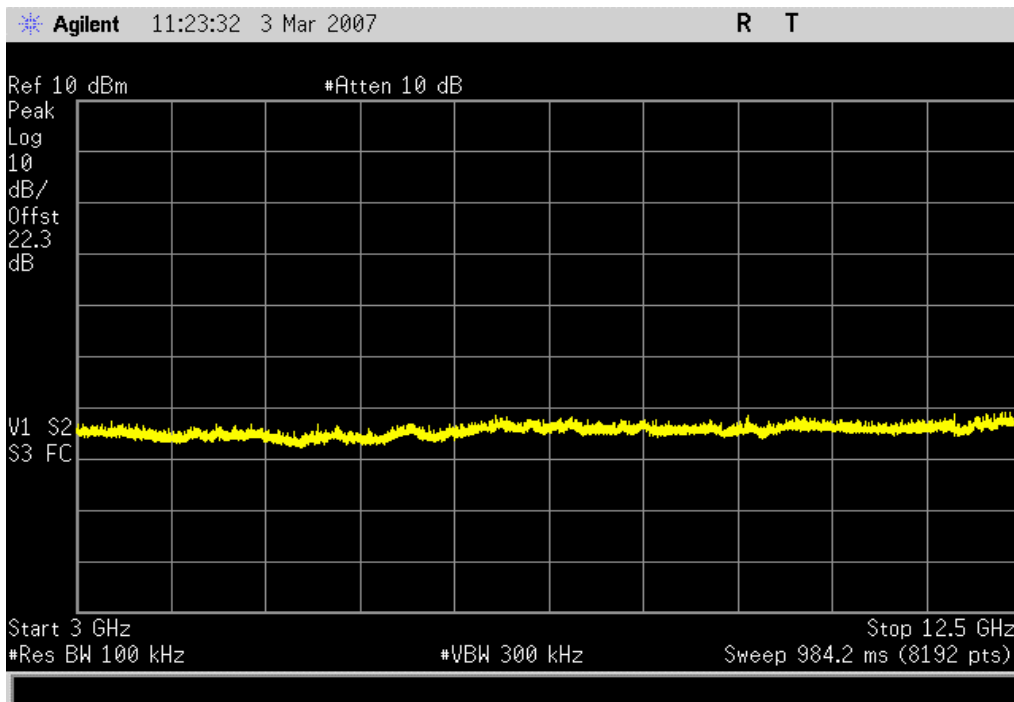

# SPURIOUS CONDUCTED EMISSIONS

High Channel, 12.5 - 25 GHz		
<b>Result:</b> Pass	<b>Value:</b> < -40 dBc	<b>Limit:</b> ≤ -20 dBc

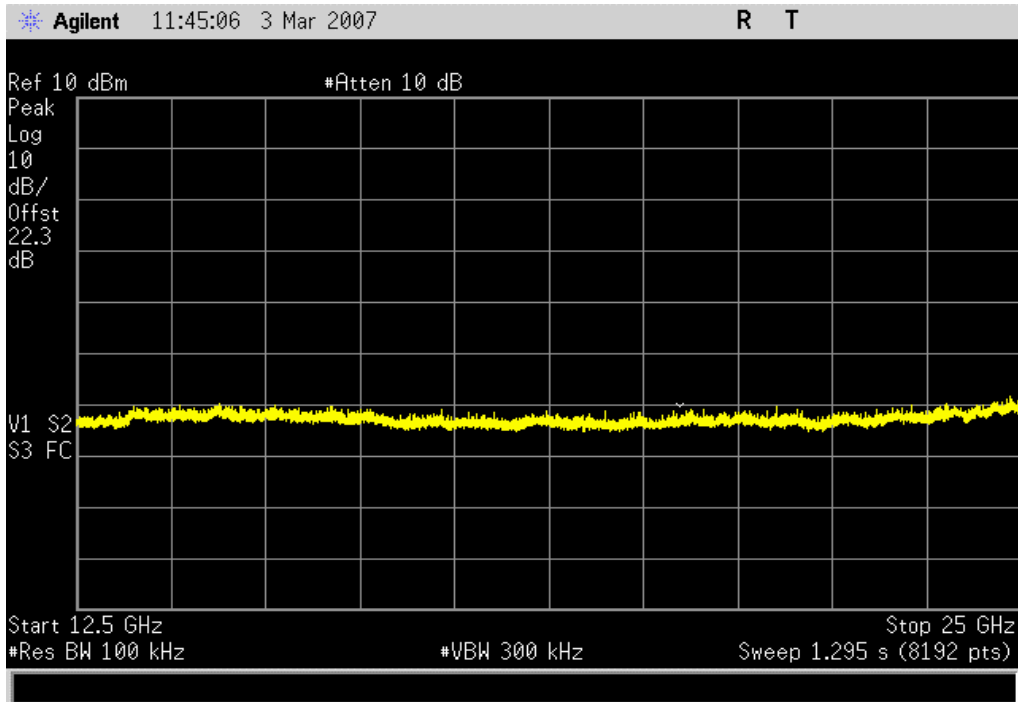

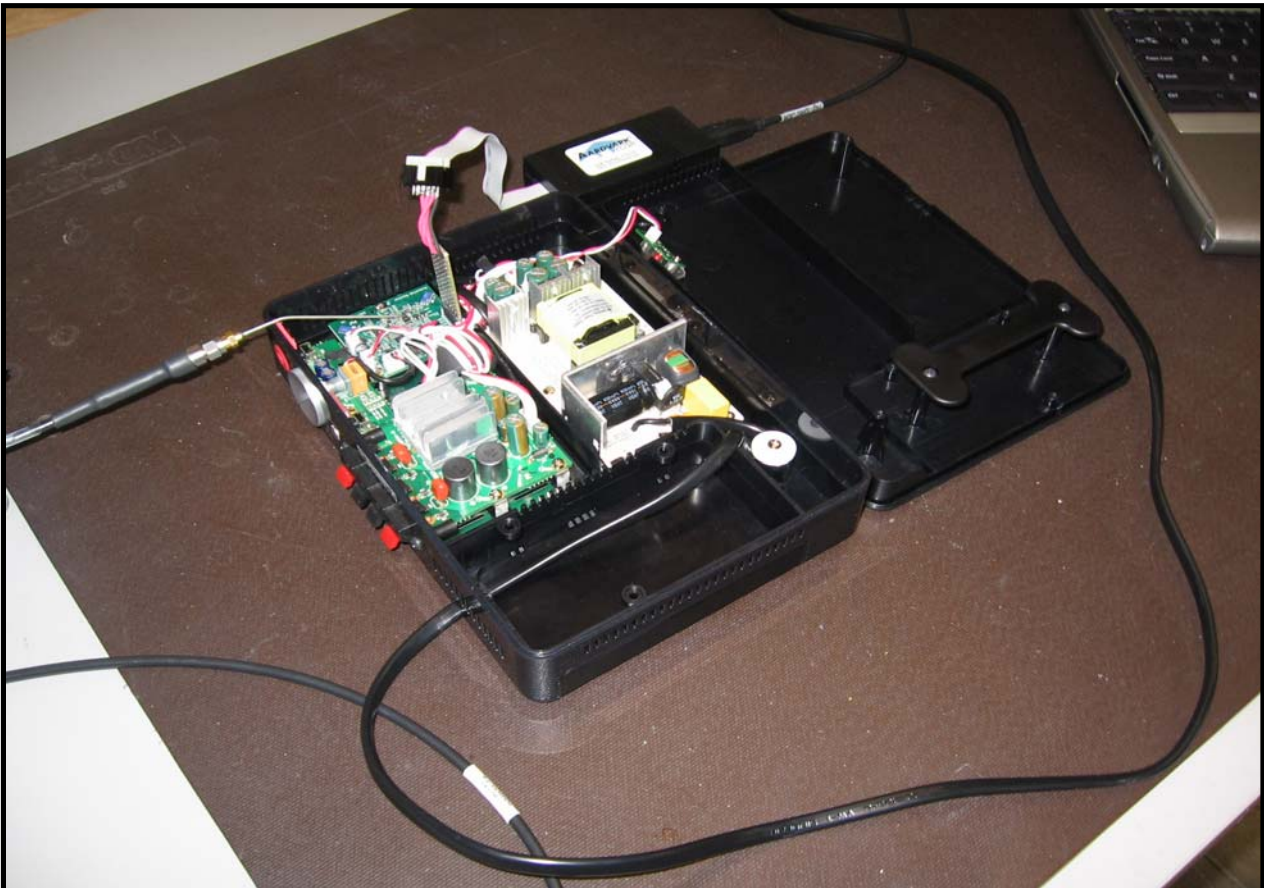

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4407B	AAU	12/8/2006	13
Attenuator	Pasternack	PE7005-20	AUN	2/6/2007	13
Power Meter	Gigatronics	8651A	SPM	9/19/2006	12
Power Sensor	Gigatronics	80701A	SPL	9/19/2006	12
Signal Generator	Hewlett-Packard	8648D	TGC	12/7/2006	13

#### MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

#### TEST DESCRIPTION

The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. Per the procedure outlined in FCC 97-114, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep = (SPAN/3 kHz)). For example, given a span of 1.5 MHz, the sweep should be  $1.5 \times 10^6 \div 3 \times 10^3 = 500$  seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

*"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3 kHz."*

## EMC

## POWER SPECTRAL DENSITY

EUT:	RF-WHTIB (Receiver)	Work Order:	AVNE0008
Serial Number:	None	Date:	03/03/07
Customer:	Avnera	Temperature:	21°C
Attendees:	None	Humidity:	35%
Project:	None	Barometric Pres.:	30.47
Tested by:	Rod Peloquin	Power:	120VAC/60Hz
		Job Site:	EV06

TEST SPECIFICATIONS		Test Method	
FCC 15.247:2006 DTS		ANSI C63.4:2003, KDB No. 558074	


**COMMENTS**  
34.8 dB correction added to results to normalized analyzer marker noise function to 3 kHz

**DEVIATIONS FROM TEST STANDARD**


Configuration #	2	<i>Rod Peloquin</i> Signature
-----------------	---	----------------------------------

	Value	Limit	Results
Low Channel	-9.86 dBm / 3 kHz	8 dBm / 3 kHz	Pass
Mid Channel	-8.05 dBm / 3 kHz	8 dBm / 3 kHz	Pass
High Channel	-10.08 dBm / 3 kHz	8 dBm / 3 kHz	Pass

Low Channel  
**Result:** Pass      **Value:** -9.86 dBm / 3 kHz      **Limit:** 8 dBm / 3 kHz

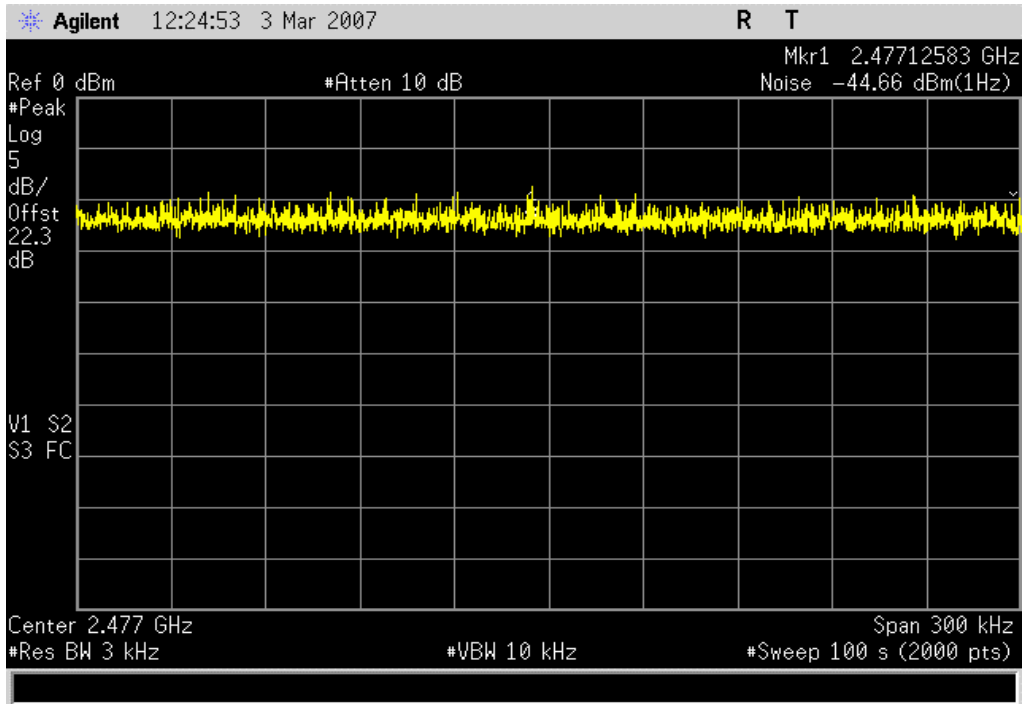

Mid Channel  
**Result:** Pass      **Value:** -8.05 dBm / 3 kHz      **Limit:** 8 dBm / 3 kHz

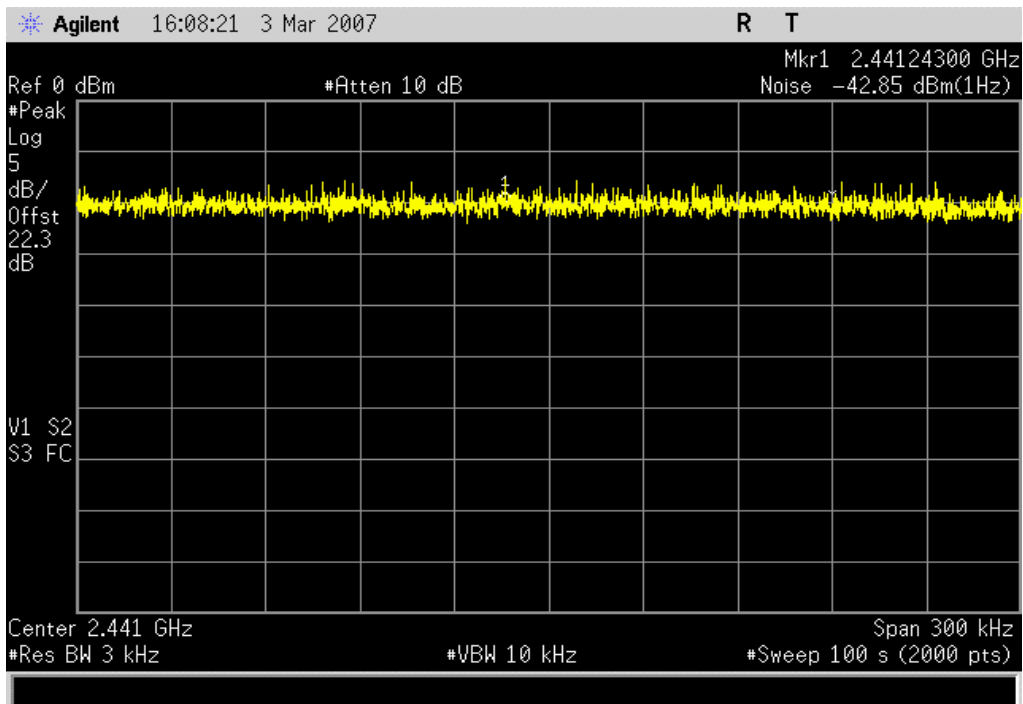


## High Channel

**Result:** Pass

**Value:** -10.08 dBm / 3 kHz

**Limit:** 8 dBm / 3 kHz

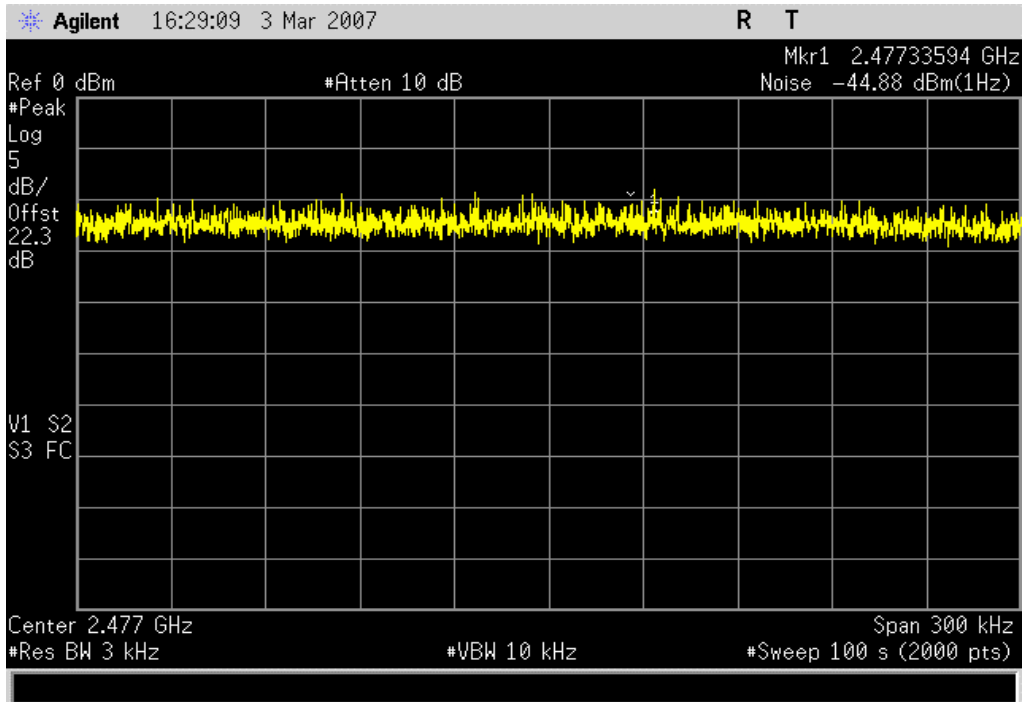







Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

#### MODES OF OPERATION

EUT in Tx mode, high channel, antenna 2.  
 EUT in Tx mode, mid channel, antenna 2.  
 EUT in Tx mode, low channel, antenna 2.  
 EUT in Tx mode, low channel, antenna 1.  
 EUT in Tx mode, mid channel, antenna 1.  
 EUT in Tx mode, high channel, antenna 1.

#### POWER SETTINGS INVESTIGATED

120VAC/60Hz

#### SAMPLE CALCULATIONS

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

#### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Tektronix	011-0059-02	ATC	12/27/2006	13
High Pass Filter	TTE	H97-100K-50-720B	HFX	8/22/2006	13
Receiver	Rohde & Schwartz	ESCI	ARG	12/7/2006	13
EV07 cable d			EVG	3/30/2006	13
LISN	Solar	9252-50-R-24-BNC	LIQ	12/20/2006	13

#### MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Measurements were made using the bandwidths and detectors specified. No video filter was used.

#### MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

#### TEST DESCRIPTION


Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50  $\Omega$  measuring port is terminated by a 50  $\Omega$  EMI meter or a 50  $\Omega$  resistive load. All 50  $\Omega$  measuring ports of the LISN are terminated by 50 $\Omega$ .

<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, high channel, antenna 1.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	33	<b>Line:</b>	Neutral	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	---------	--------------------------	----	----------------	------

Quasi Peak Data - vs - Quasi Peak Limit

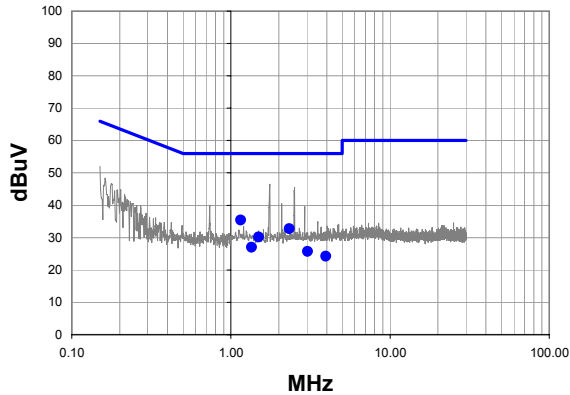

Average Data - vs - Average Limit

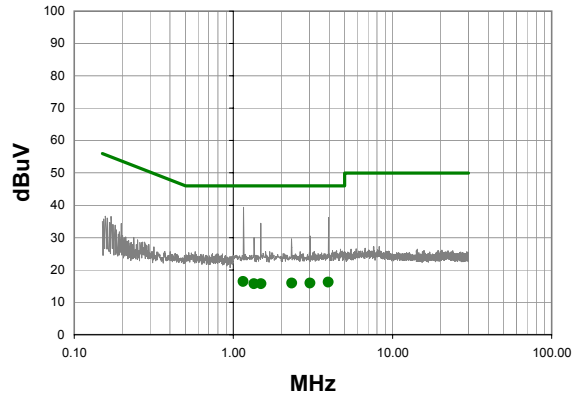

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
1.152	14.9	0.5	35.4	56.0	-20.6
2.328	12.2	0.5	32.7	56.0	-23.3
1.496	9.7	0.5	30.2	56.0	-25.8
1.352	6.5	0.5	27.0	56.0	-29.0
3.028	5.2	0.5	25.7	56.0	-30.3
3.948	3.7	0.5	24.2	56.0	-31.8

Average Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
1.152	-4.1	0.5	16.4	46.0	-29.6
3.948	-4.3	0.5	16.2	46.0	-29.8
2.328	-4.6	0.5	15.9	46.0	-30.1
3.028	-4.6	0.5	15.9	46.0	-30.1
1.352	-4.8	0.5	15.7	46.0	-30.3
1.496	-4.8	0.5	15.7	46.0	-30.3

<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, high channel, antenna 1.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	34	<b>Line:</b>	High Line	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	-----------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

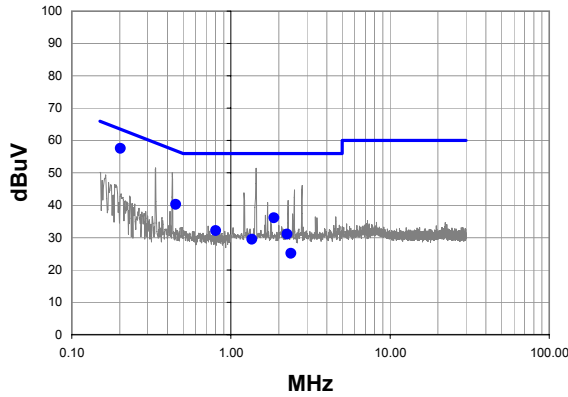

**Average Data - vs - Average Limit**

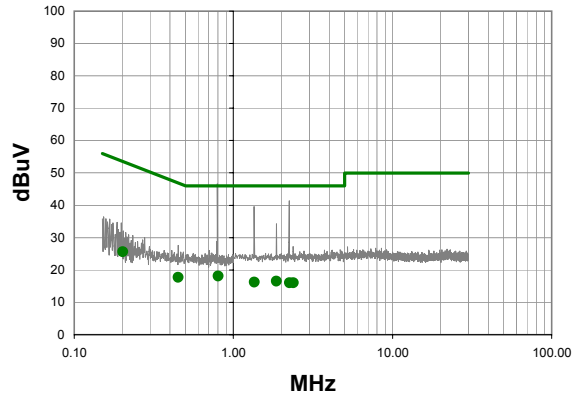

**Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.202	36.6	1.0	57.6	63.5	-5.9
0.451	19.4	0.8	40.2	56.9	-16.6
1.868	15.6	0.5	36.1	56.0	-19.9
0.805	11.5	0.6	32.1	56.0	-23.9
2.252	10.6	0.5	31.1	56.0	-24.9
1.356	9.0	0.5	29.5	56.0	-26.5
2.380	4.6	0.5	25.1	56.0	-30.9

**Average Data - vs - Average Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.805	-2.5	0.6	18.1	46.0	-27.9
0.202	4.6	1.0	25.6	53.5	-27.9
0.451	-3.1	0.8	17.7	46.9	-29.1
1.868	-4.0	0.5	16.5	46.0	-29.5
1.356	-4.3	0.5	16.2	46.0	-29.8
2.252	-4.5	0.5	16.0	46.0	-30.0
2.380	-4.5	0.5	16.0	46.0	-30.0


<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	

<b>EUT:</b>	RF-WHTIB (Receiver)
<b>Configuration:</b>	4 - Receiver - Radiated
<b>Customer:</b>	Avnera
<b>Attendees:</b>	None
<b>EUT Power:</b>	120VAC/60Hz
<b>Operating Mode:</b>	EUT in Tx mode, mid channel, antenna 1.
<b>Deviations:</b>	No deviations.
<b>Comments:</b>	


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	35	<b>Line:</b>	High Line	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	-----------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

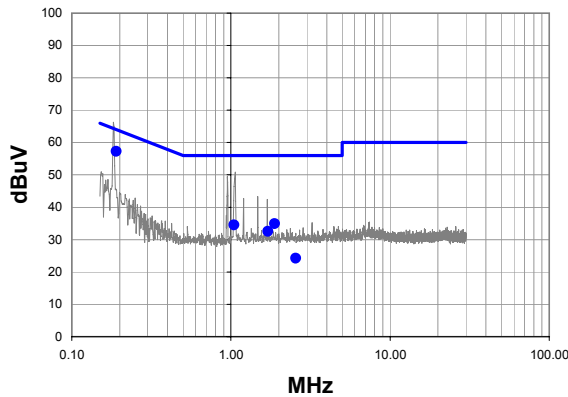

**Average Data - vs - Average Limit**

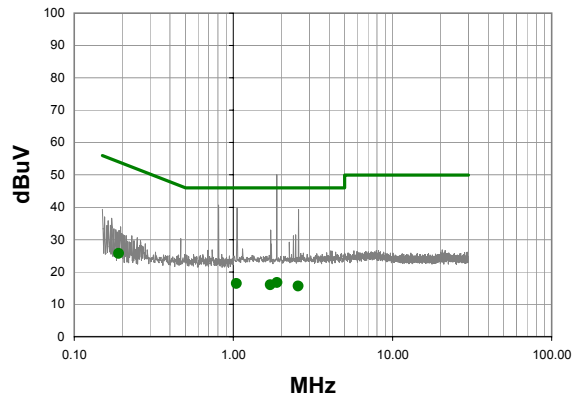

**Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.190	36.1	1.2	57.3	64.0	-6.7
1.880	14.4	0.5	34.9	56.0	-21.1
1.048	14.0	0.5	34.5	56.0	-21.5
1.708	12.0	0.5	32.5	56.0	-23.5
2.556	3.7	0.5	24.2	56.0	-31.8

**Average Data - vs - Average Limit**


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.190	4.5	1.2	25.7	54.0	-28.3
1.880	-3.8	0.5	16.7	46.0	-29.3
1.048	-4.1	0.5	16.4	46.0	-29.6
1.708	-4.5	0.5	16.0	46.0	-30.0
2.556	-4.9	0.5	15.6	46.0	-30.4

<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, mid channel, antenna 1.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	36	<b>Line:</b>	Neutral	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	---------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

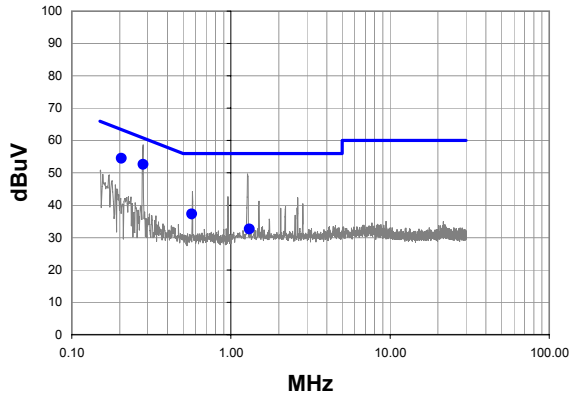

**Average Data - vs - Average Limit**

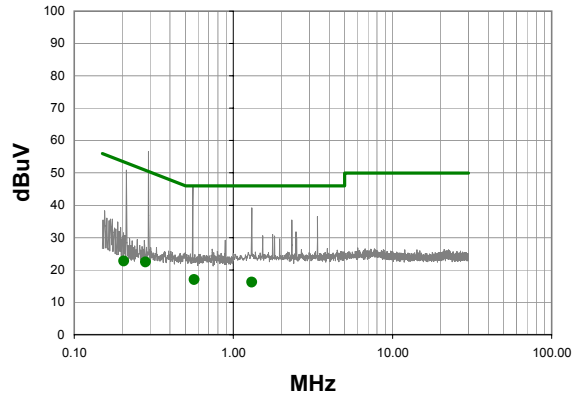

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.281	31.7	0.9	52.6	60.8	-8.1
0.205	33.5	1.0	54.5	63.4	-8.9
0.568	16.5	0.8	37.3	56.0	-18.7
1.304	12.1	0.5	32.6	56.0	-23.4

Average Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.281	1.5	0.9	22.4	50.8	-28.3
0.568	-3.8	0.8	17.0	46.0	-29.0
1.304	-4.3	0.5	16.2	46.0	-29.8
0.205	1.8	1.0	22.8	53.4	-30.6

<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, low channel, antenna 1.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	37	<b>Line:</b>	Neutral	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	---------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

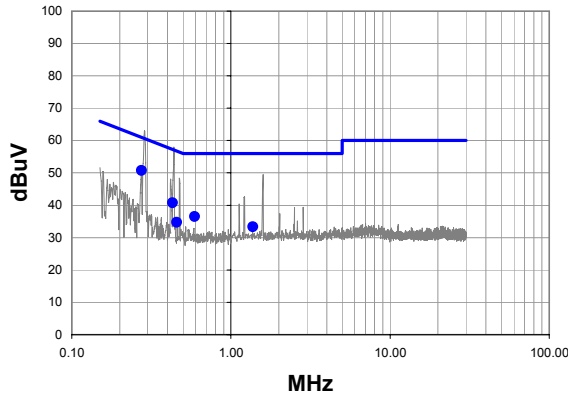

**Average Data - vs - Average Limit**

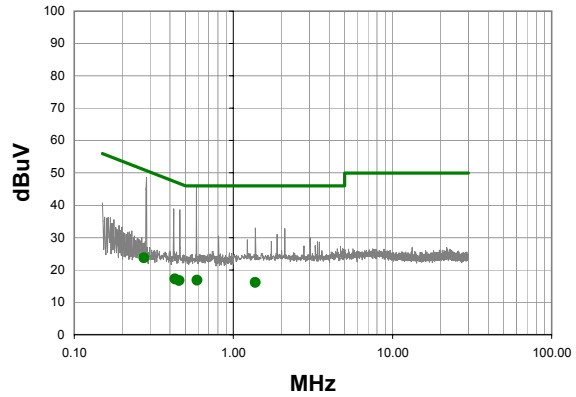

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.274	29.8	1.0	50.8	61.0	-10.2
0.429	19.9	0.9	40.8	57.3	-16.5
0.593	15.7	0.8	36.5	56.0	-19.5
0.457	13.9	0.8	34.7	56.7	-22.0
1.376	12.8	0.5	33.3	56.0	-22.7

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.274	2.8	1.0	23.8	51.0	-27.2
0.593	-3.9	0.8	16.9	46.0	-29.1
1.376	-4.4	0.5	16.1	46.0	-29.9
0.457	-4.1	0.8	16.7	46.7	-30.0
0.429	-3.6	0.9	17.3	47.3	-30.0


<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	

<b>EUT:</b>	RF-WHTIB (Receiver)
<b>Configuration:</b>	4 - Receiver - Radiated
<b>Customer:</b>	Avnera
<b>Attendees:</b>	None
<b>EUT Power:</b>	120VAC/60Hz
<b>Operating Mode:</b>	EUT in Tx mode, low channel, antenna 1.
<b>Deviations:</b>	No deviations.
<b>Comments:</b>	


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	38	<b>Line:</b>	High Line	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	-----------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

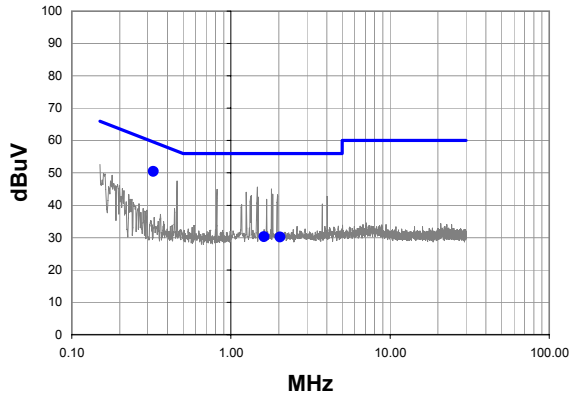

**Average Data - vs - Average Limit**

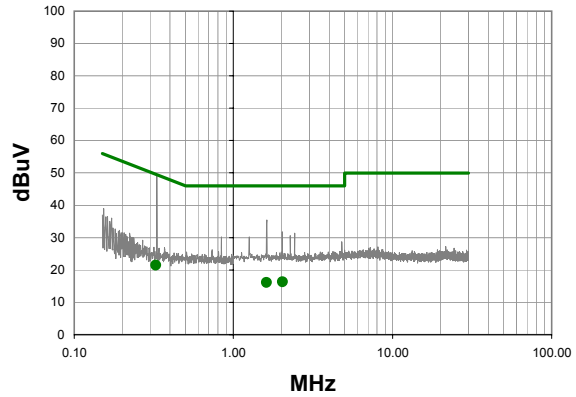

**Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.326	29.5	0.9	50.4	59.6	-9.1
1.616	9.8	0.5	30.3	56.0	-25.7
2.040	9.7	0.5	30.2	56.0	-25.8

**Average Data - vs - Average Limit**


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.326	0.5	0.9	21.4	49.6	-28.1
2.040	-4.2	0.5	16.3	46.0	-29.7
1.616	-4.4	0.5	16.1	46.0	-29.9

<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, low channel, antenna 2.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	39	<b>Line:</b>	High Line	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	-----------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

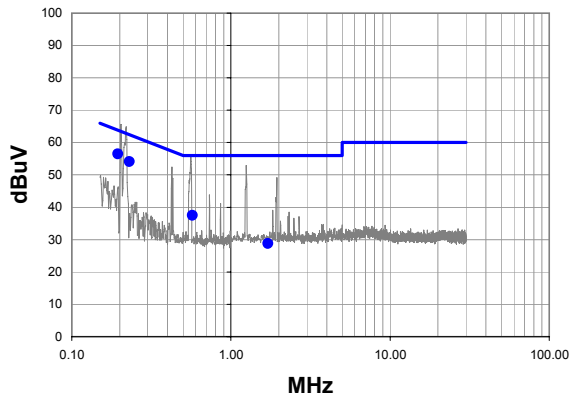

**Average Data - vs - Average Limit**

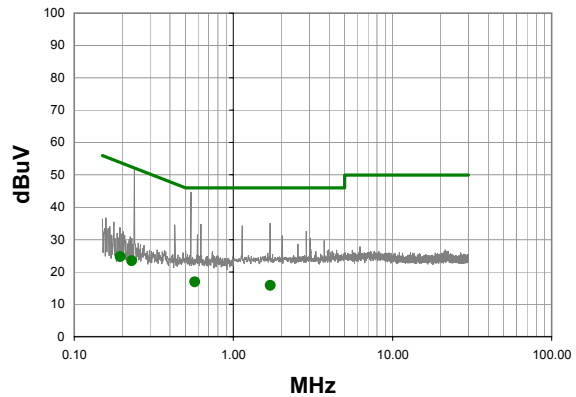

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.195	35.4	1.1	56.5	63.8	-7.3
0.230	33.1	1.0	54.1	62.4	-8.4
0.572	16.7	0.8	37.5	56.0	-18.5
1.708	8.3	0.5	28.8	56.0	-27.2

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.230	2.5	1.0	23.5	52.4	-29.0
0.195	3.6	1.1	24.7	53.8	-29.1
0.572	-3.9	0.8	16.9	46.0	-29.1
1.708	-4.7	0.5	15.8	46.0	-30.2




<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, low channel, antenna 2.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	40	<b>Line:</b>	Neutral	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	---------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

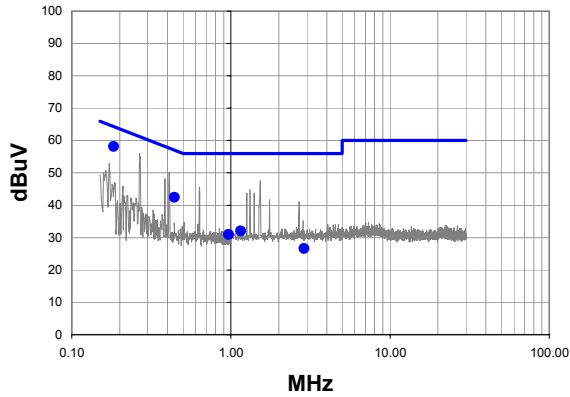

**Average Data - vs - Average Limit**

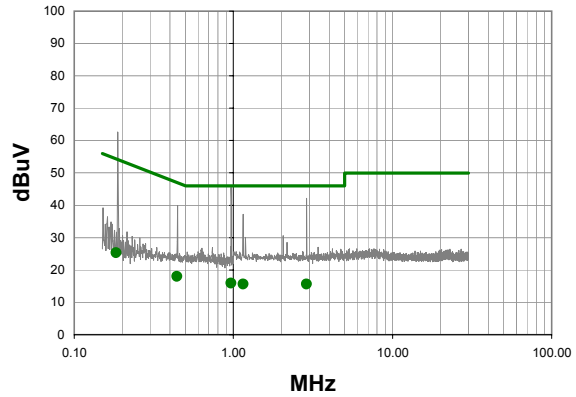

**Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.183	36.8	1.3	58.1	64.3	-6.2
0.442	21.6	0.8	42.4	57.0	-14.6
1.152	11.5	0.5	32.0	56.0	-24.0
0.968	10.4	0.5	30.9	56.0	-25.1
2.880	6.1	0.5	26.6	56.0	-29.4

**Average Data - vs - Average Limit**


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.442	-2.8	0.8	18.0	47.0	-29.0
0.183	4.0	1.3	25.3	54.3	-29.0
0.968	-4.6	0.5	15.9	46.0	-30.1
1.152	-4.9	0.5	15.6	46.0	-30.4
2.880	-4.9	0.5	15.6	46.0	-30.4

<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, mid channel, antenna 2.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	41	<b>Line:</b>	Neutral	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	---------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

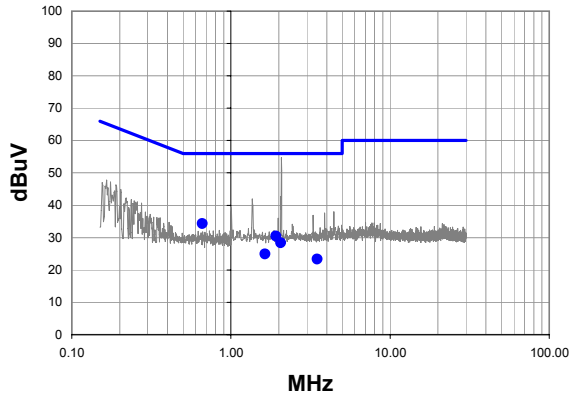

**Average Data - vs - Average Limit**

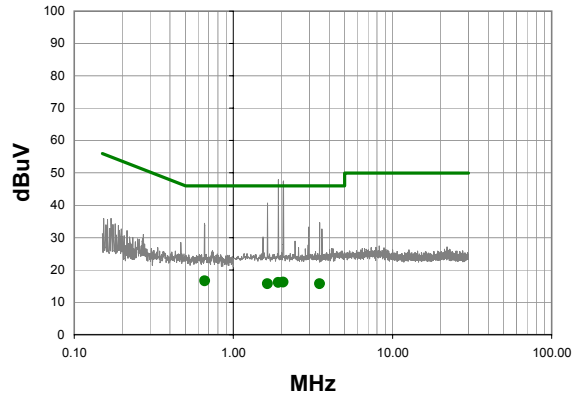

**Quasi Peak Data - vs - Quasi Peak Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.662	13.6	0.7	34.3	56.0	-21.7
1.916	10.0	0.5	30.5	56.0	-25.5
2.052	7.9	0.5	28.4	56.0	-27.6
1.636	4.4	0.5	24.9	56.0	-31.1
3.488	2.8	0.5	23.3	56.0	-32.7

**Average Data - vs - Average Limit**

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.662	-4.1	0.7	16.6	46.0	-29.4
2.052	-4.3	0.5	16.2	46.0	-29.8
1.916	-4.4	0.5	16.1	46.0	-29.9
1.636	-4.8	0.5	15.7	46.0	-30.3
3.488	-4.8	0.5	15.7	46.0	-30.3


<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	

<b>EUT:</b>	RF-WHTIB (Receiver)
<b>Configuration:</b>	4 - Receiver - Radiated
<b>Customer:</b>	Avnera
<b>Attendees:</b>	None
<b>EUT Power:</b>	120VAC/60Hz
<b>Operating Mode:</b>	EUT in Tx mode, mid channel, antenna 2.
<b>Deviations:</b>	No deviations.
<b>Comments:</b>	


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	42	<b>Line:</b>	High Line	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	-----------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

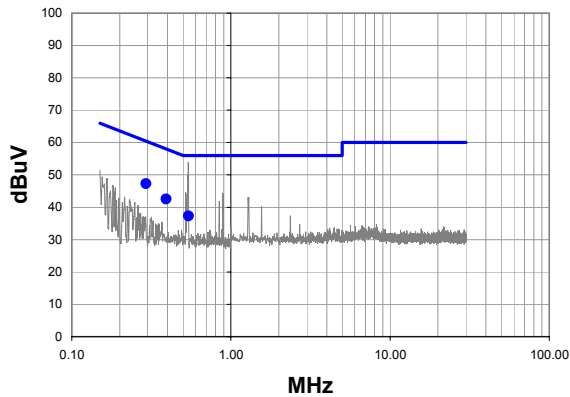

**Average Data - vs - Average Limit**

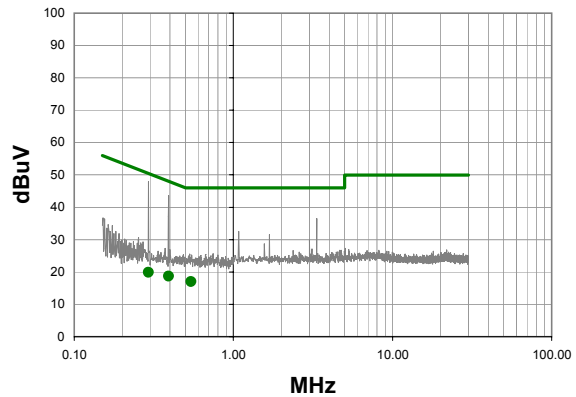

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.293	26.3	0.9	47.2	60.4	-13.2
0.391	21.7	0.9	42.6	58.0	-15.5
0.543	16.5	0.8	37.3	56.0	-18.7

Average Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.543	-3.8	0.8	17.0	46.0	-29.0
0.391	-2.2	0.9	18.7	48.0	-29.4
0.293	-1.1	0.9	19.8	50.4	-30.6

<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, high channel, antenna 2.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	43	<b>Line:</b>	High Line	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	-----------	--------------------------	----	----------------	------

Quasi Peak Data - vs - Quasi Peak Limit

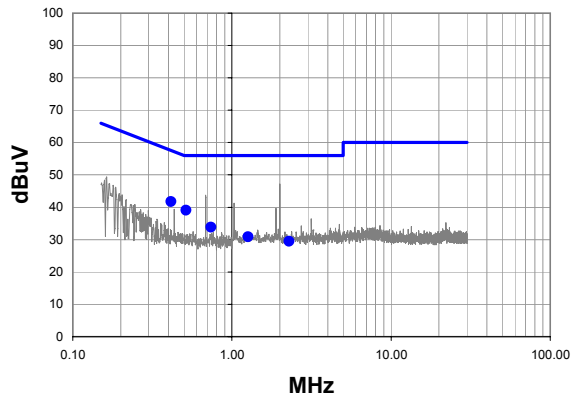

Average Data - vs - Average Limit

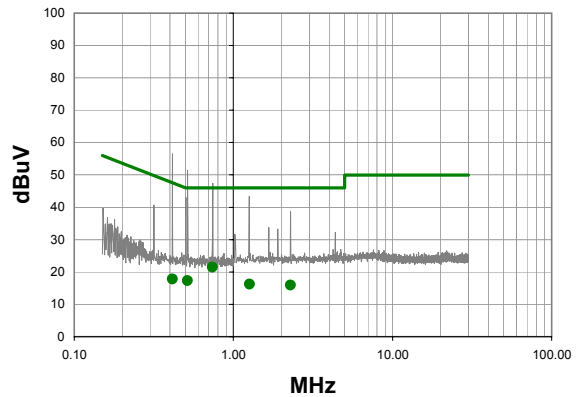

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.414	20.9	0.9	41.8	57.6	-15.8
0.516	18.3	0.8	39.1	56.0	-16.9
0.738	13.2	0.7	33.9	56.0	-22.1
1.264	10.4	0.5	30.9	56.0	-25.1
2.288	9.0	0.5	29.5	56.0	-26.5

Average Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.738	0.8	0.7	21.5	46.0	-24.5
0.516	-3.5	0.8	17.3	46.0	-28.7
1.264	-4.3	0.5	16.2	46.0	-29.8
0.414	-3.1	0.9	17.8	47.6	-29.8
2.288	-4.6	0.5	15.9	46.0	-30.1

<b>Work Order:</b>	AVNE0008	<b>Date:</b>	03/06/07	<i>Holly Ashkannejhad</i> <b>Tested by:</b> Holly Ashkannejhad
<b>Project:</b>	None	<b>Temperature:</b>	23	
<b>Job Site:</b>	EV07	<b>Humidity:</b>	33	
<b>Serial Number:</b>	None	<b>Barometric Pres.:</b>	30.1	
<b>EUT:</b>	RF-WHTIB (Receiver)			
<b>Configuration:</b>	4 - Receiver - Radiated			
<b>Customer:</b>	Avnera			
<b>Attendees:</b>	None			
<b>EUT Power:</b>	120VAC/60Hz			
<b>Operating Mode:</b>	EUT in Tx mode, high channel, antenna 2.			
<b>Deviations:</b>	No deviations.			
<b>Comments:</b>				


<b>Test Specifications</b> FCC 15.207:2006	<b>Class B</b>	<b>Test Method</b> ANSI C63.4:2003
---	----------------	---------------------------------------

<b>Run #</b>	44	<b>Line:</b>	Neutral	<b>Ext. Attenuation:</b>	20	<b>Results</b>	Pass
--------------	----	--------------	---------	--------------------------	----	----------------	------

**Quasi Peak Data - vs - Quasi Peak Limit**

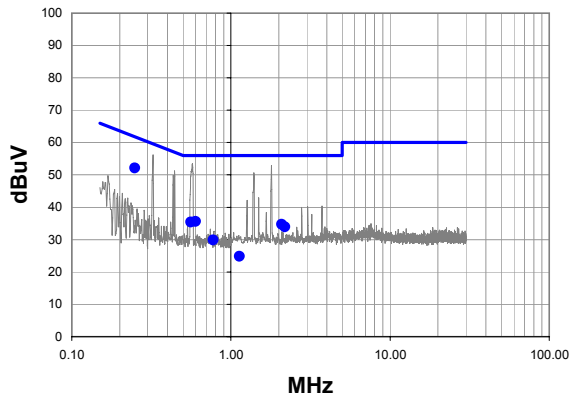

**Average Data - vs - Average Limit**

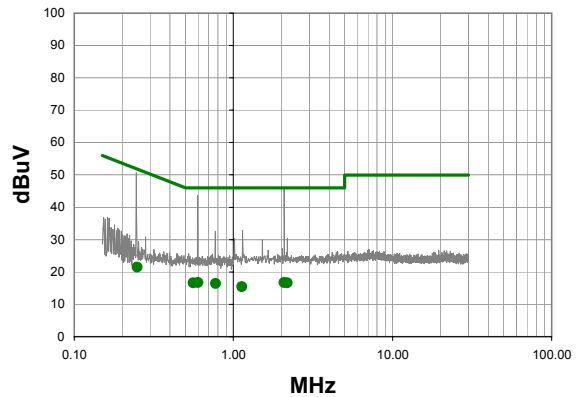

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.249	31.2	1.0	52.2	61.8	-9.6
0.599	14.9	0.8	35.7	56.0	-20.3
0.561	14.6	0.8	35.4	56.0	-20.6
2.080	14.2	0.5	34.7	56.0	-21.3
2.184	13.4	0.5	33.9	56.0	-22.1
0.773	9.2	0.6	29.8	56.0	-26.2
1.132	4.3	0.5	24.8	56.0	-31.2

Average Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.599	-4.0	0.8	16.8	46.0	-29.2
2.080	-3.8	0.5	16.7	46.0	-29.3
2.184	-3.9	0.5	16.6	46.0	-29.4
0.561	-4.2	0.8	16.6	46.0	-29.4
0.773	-4.2	0.6	16.4	46.0	-29.6
0.249	0.5	1.0	21.5	51.8	-30.3
1.132	-5.1	0.5	15.4	46.0	-30.6

