


				G.S.D. S.r.l. Certified in accordance with UNI EN ISO 9001:2008 by TÜV Rheinland Italia S.r.l. Certificate N. 39 00 1850509	
G.S.D. Srl PISA - Italy		Test Report n. FCC-16513		Rev. 00	
Manufacturer		CAEN RFID S.r.l.			
Address		Via Vetràia, 11 55049 Viareggio (LU) Italy			
Product		RA0005 – qDock – qIDmini docking station			
Testing Laboratory Name		G.S.D. S.r.l.			
Address		Via Marmiceto, 8 56121 Ospedaletto Pisa (PI) Italy			
Tel/Fax		+39 050 984254 / +39 050 984262			
P.IVA/VAT		01343950505			
http – e-mail		www.gsd.it - info@gsd.it			
FCC Listed		Registration Number: 424037			
Location and Date of Issue		Pisa, 2016 August 25			
G.S.D. s.r.l. Via Marmiceto, 8 56121 OSPEDALETTO - PISA Tel. 050.984254 - Fax 050.984262 P. IVA 01343950505 SENIOR EMC TEST MANAGER <i>Dr. Gian Luca Genovesi</i>  QUALITY MANAGER <i>Dr. David Pelliccia</i> 					

INDEX	
1. MANUFACTURER AND EUT IDENTIFICATION	3
2. REFERENCE STANDARDS.....	6
3. TEST GENERALITY, RESULT, CONDITION, MEASUREMENT UNCERTAINTY.....	7
4. RADIATED EMISSIONS.....	9
5. POWERLINE CONDUCTED EMISSIONS.....	12
6. PHOTO.....	15

1. MANUFACTURER AND EUT IDENTIFICATION¹	
Manufacturer	CAEN RFID S.r.l..
Address	Via Vetraia, 11 55049 Viareggio (LU) Italy
Product	RA0005 – qDock – qIDmini docking station
Date of reception	2016 January 18
Sampling	Laboratory sample for certification
Test Item Description	Multiple Charging Docking Station
Nominal Input Voltage	100-240Vac 50/60Hz External Power Supply
FCC ID	UVECAENRFID018

¹A detailed documentation is preserved in the internal fascicle.



*Fig. 1.1
Equipment Photo: Docking Station*



Fig. 1.2
Equipment Photo: Power Supply

2. REFERENCE STANDARDS

Tests and measurements are performed accordingly to the reference standards given in the table below:

<i>TEST</i>	<i>STANDARD</i>
Emissions: Radiated – Section 15.109	FCC Rules and Regulations, Title 47 Part 15 – Sub part C ANSI C63.4 2014 – American National Standard for Methods of Measuring of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
Emissions: Conducted – Section 15.107	FCC Rules and Regulations, Title 47 Part 15 – Sub part C ANSI C63.4 2014 – American National Standard for Methods of Measuring of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz

3. TEST GENERALITY, RESULT, CONDITION, MEASUREMENT UNCERTAINTY**Sub-part 2.1033(b)****Test And Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2 and the following individual Parts: 15.109; Unintentional Radiators

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing: In accordance with ANSI C63.4-2009, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures.

All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

Summary of Test Results

<i>TEST</i>	<i>RESULT</i>
<i>Emissions: conducted Section 15.107</i>	<i>Pass</i>
<i>Emissions: radiated Section 15.109</i>	<i>Pass</i>

Measurement uncertainty


<i>TEST</i>	<i>EXPANDED UNCERTAINTY</i>
Conducted Emission – 50Ω/50μH (150 kHz - 30 MHz)	± 3.5 dB
Radiated Emission – (Semianechoic Room) (30 MHz - 18 GHz)	± 4.7 dB

Climatic Conditions

<i>PARAMETER</i>	<i>VALUE</i>
Temperature	(293 ± 3) K
Relative humidity	(50 ± 5) %

Extensions

The results refer only to the sampled EUT and under the specified conditions.

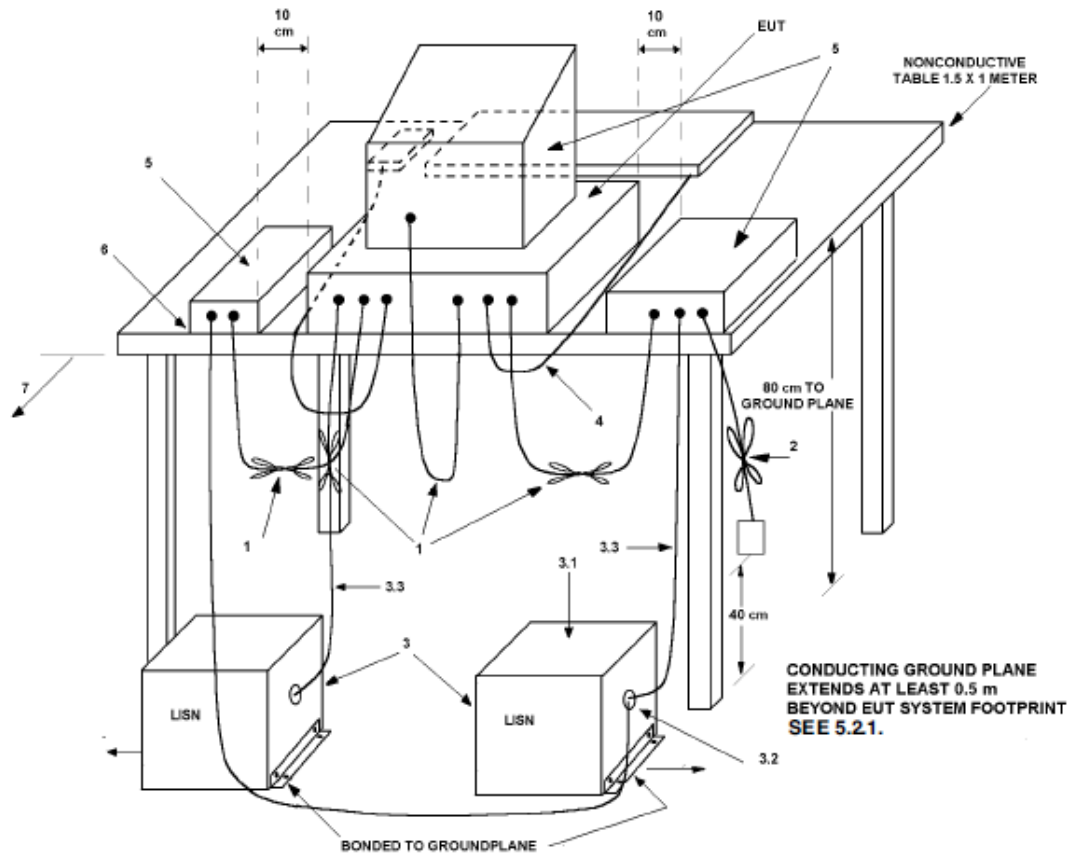

Conducted and Radiated EUT Test Set-up example (ANSI C63.4 2014)

Test Mode: the EUT was used with a personal computer and it was tested with standard SW CAEN RFID Easy Controller by USB.

4. RADIATED EMISSIONS

In the following table you can find the limits established by the reference standard:

FREQUENCY RANGE (MHz)	<i>Field Strenght</i> <i>QUASI-PEAK LIMITS</i> [dB (μV/m)]
30 ÷ 88	40
88 ÷ 216	43,5
216 ÷ 960	46
Above 960	54

Test Equipment

EQUIPMENT	MANUFACTURER	MODEL	CAL. DUE
EMI Receiver	HP	HP8546A	01/2017
EMI Receiver Filter Section	HP	HP85460A	01/2017
Anechoic Chamber	Comtest	CSA01	01/2017
Bilog Antenna	Schaffner	CBL6112B	01/2017
Horn Antenna	EMCO	3115	01/2017
Controllor	Deisel	HD100	01/2017
Turn Table	Deisel	MA240	01/2017
LISN	GSD	NTW06	01/2017

Test procedure: RE22R02Notes

Azimuth position EUT-Antenna corresponding to 0° identifies the rotating table orientation (TT) in which the instrument to be tested shows the front part turned towards the antenna. Positive grades individuate clockwise rotations of TT when this one is observed from the top. For negative degrees, TT rotation is anticlockwise.

Antenna height respect to the mass plane is conventionally individuated with: MA=XXX where XXX indicates the height (always positive for e>100) expressed in cm.

Antenna horizontal polarisation is indicated by POL=H.

Antenna vertical polarisation is indicated by POL=V.

EUT was tested in the three ortogonal planes.


Results and conclusions


In all the operative conditions, equipment complied with the standard limits. Graphics in following figures show the most significant registrations of the performed measurements.

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. FCC-16513 Rev. 00, page 9 / 16

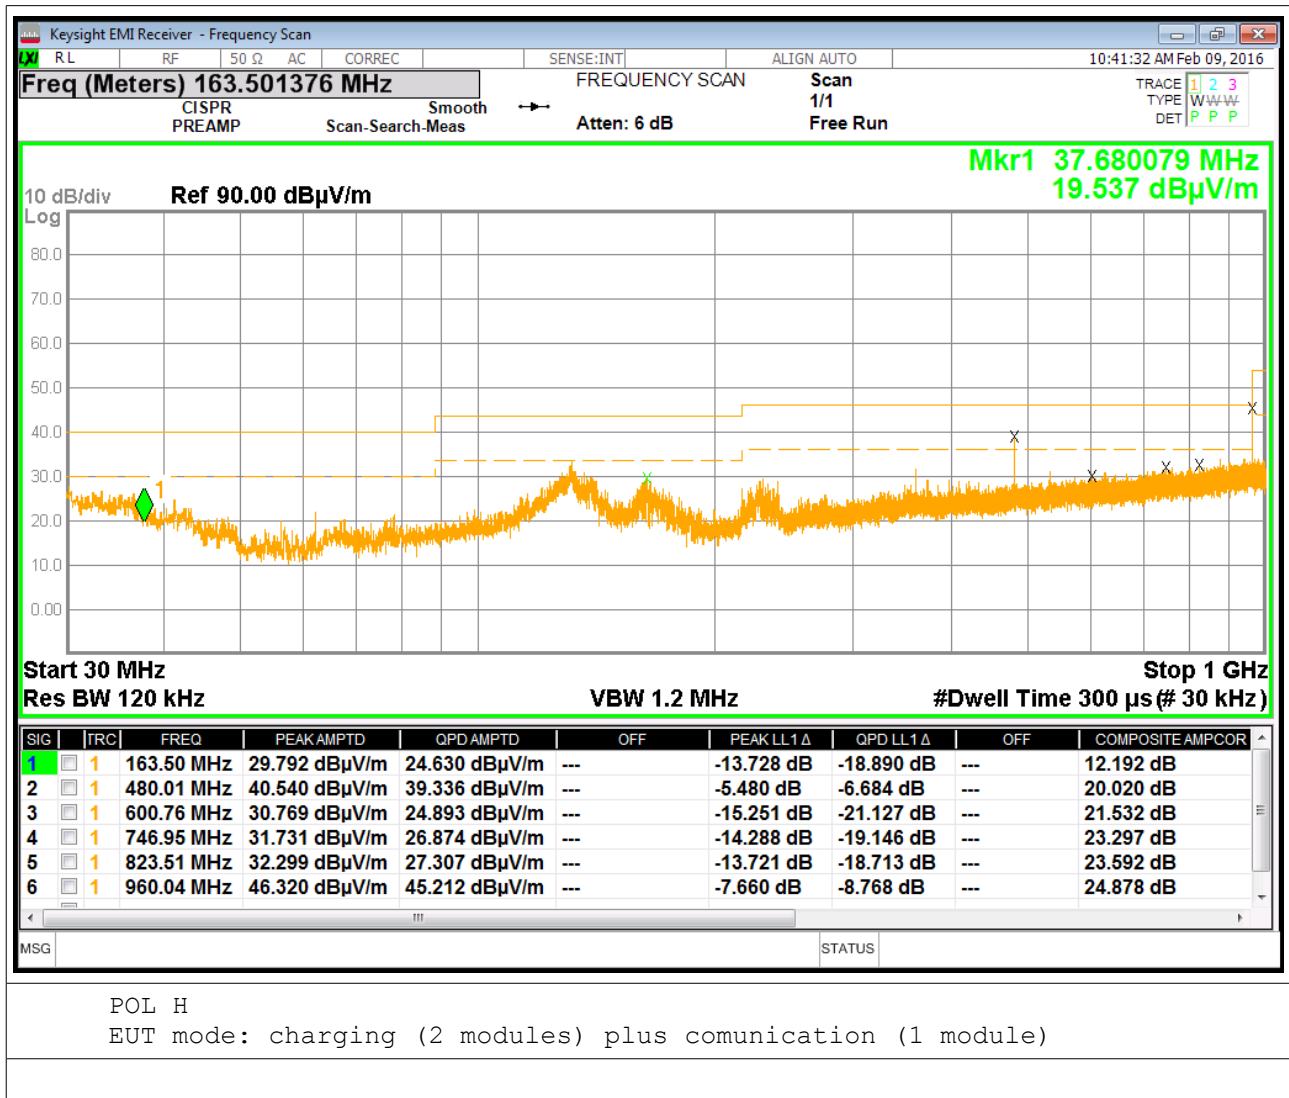

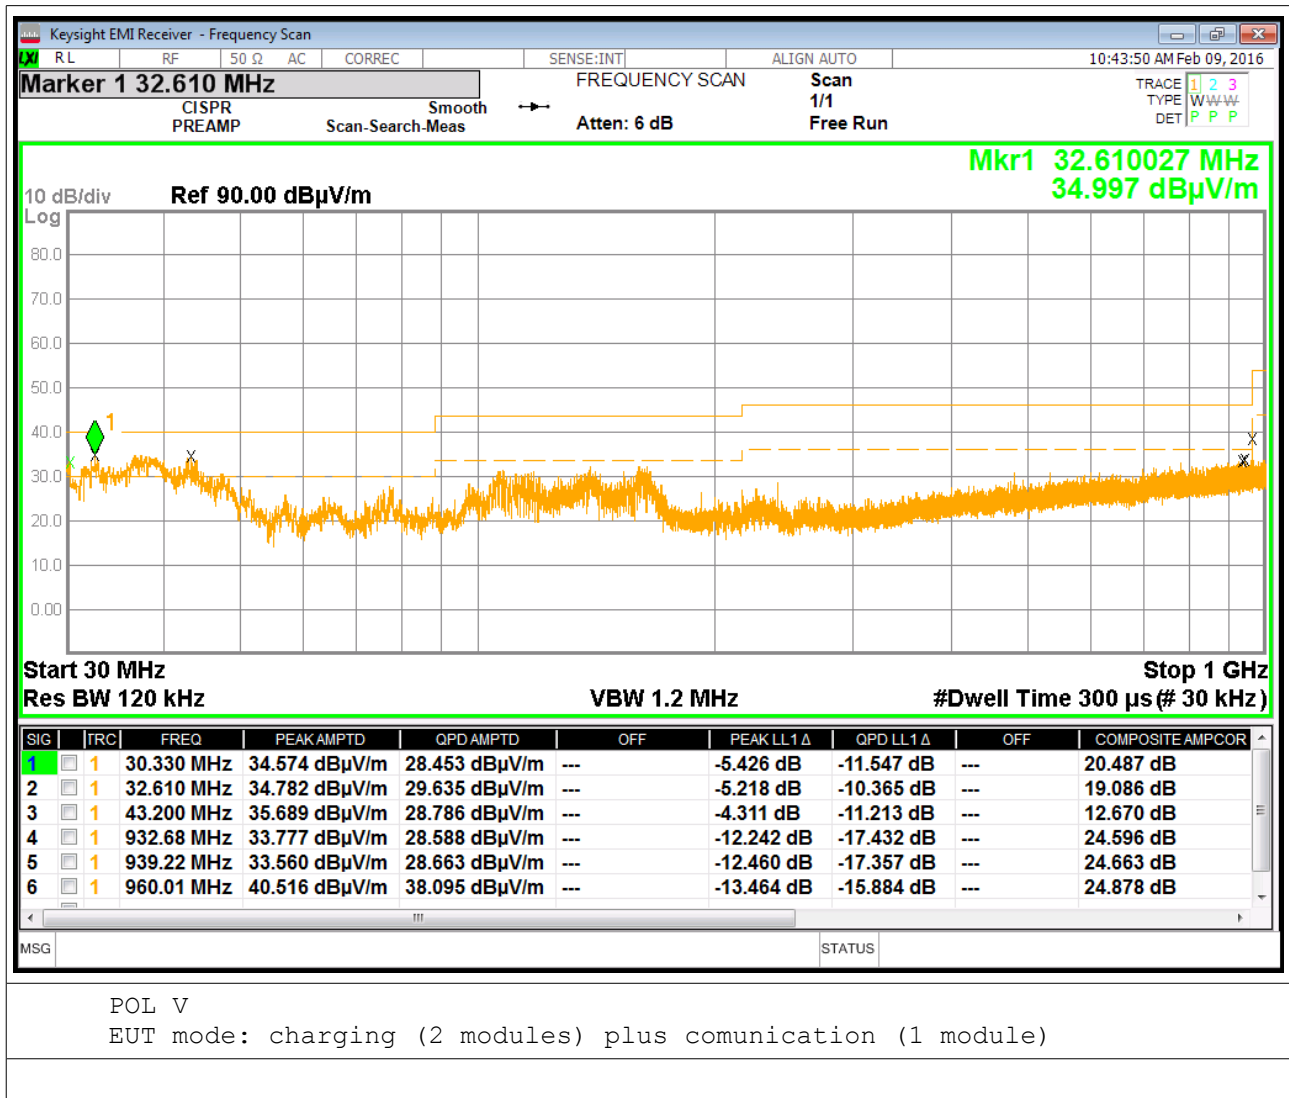

5. POWERLINE CONDUCTED EMISSIONS

Equipment shall meet the limits below when using a CISPR16 quasi-peak and average detector receivers.

FCC, 15.107

FREQUENCY RANGE (MHz)	QUASI-PEAK LIMIT [dB (μV)]	AVERAGE LIMIT [dB (μV)]
0.15 ÷ 0.50	66 ÷ 56 ^(*)	56 ÷ 46 ^(*)
0.50 ÷ 5	56	46
5 ÷ 30	60	50

^(*) Limit decreasing linearly with logarithm of frequency

Test Equipment

EQUIPMENT	MANUFACTURER	MODEL	CAL. DUE
EMI Receiver	HP	HP8546A	01/2017
EMI Receiver Filter Section	HP	HP85460A	01/2017
Screened Room	GSD	CSC01	01/2017
Transient Limiter	HP	11947A	01/2017
LISN	GSD	GSDA01	01/2017

Test procedure: CE22R01

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a spectrum analyzer by a transient limiter. The conducted emissions from 150 kHz to 30 MHz were monitored and compared to the specification limits

Test method

Test method was in accordance with the reference standard.

EUT modes of operations were tested in order to achieve the maximum level of emission.

Results

Equipment complied with the test specification limits.

Graphics in following figures show some registrations of the frequency spectrum of the conducted emissions.




FREQ 687.5 kHz
PEAK 50.3 dBμV
QP 46.7 dBμV
AVG 37.2 dBμV

LOC REF 85.0 dBμV

AUTORANGE ON

10
dB/
#ATN
20 dB

WA SB
SC FS
ACORR

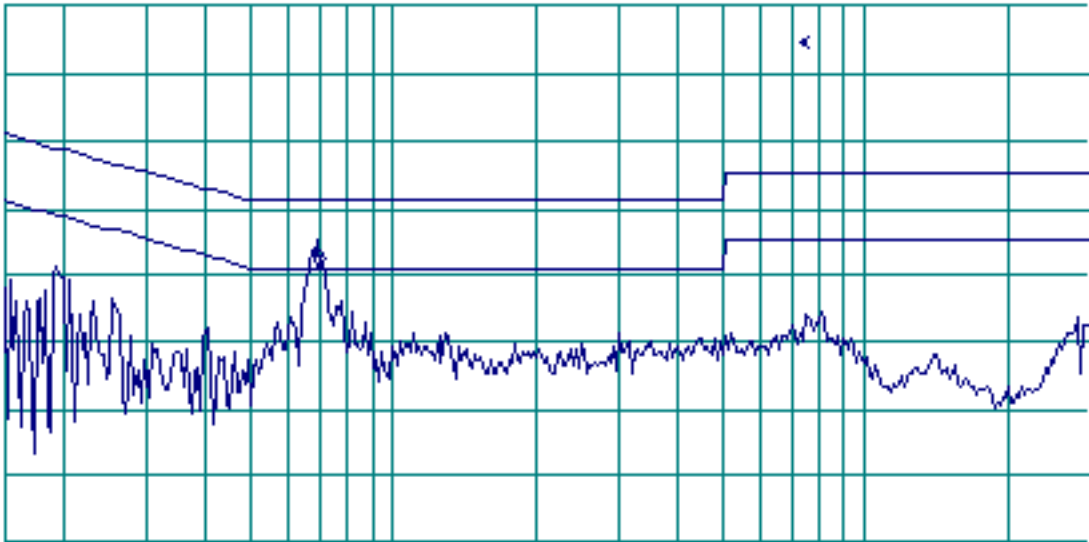

START 150 kHz

RL IF BW 9.0 kHz

AVG BW 30 kHz

STOP 30.00 MHz

#SWP 10.0 sec

#	Frequency (MHz)	Peak Amp (dBμV)	QP Amp (dBμV)	Avg Amp (dBμV)
1	0.685413	50.08	47.43	37.07
2	0.183015	48.28	42.34	24.84
3	0.254658	43.40	40.65	29.12
4	0.415534	37.69	34.60	21.39
5	7.711667	39.35	34.52	23.37
6	28.674414	37.66	33.48	27.50
7	13.994278	33.40	29.85	24.69

PHASE 1




FREQ 700.3 kHz
PEAK 50.3 dBμV
QP 47.8 dBμV
AVG 38.1 dBμV

LOG REF 85.0 dBμV

AUTORANGE ON

10
dB/
#ATTN
20 dB

WA SB
SC FS
ACORR

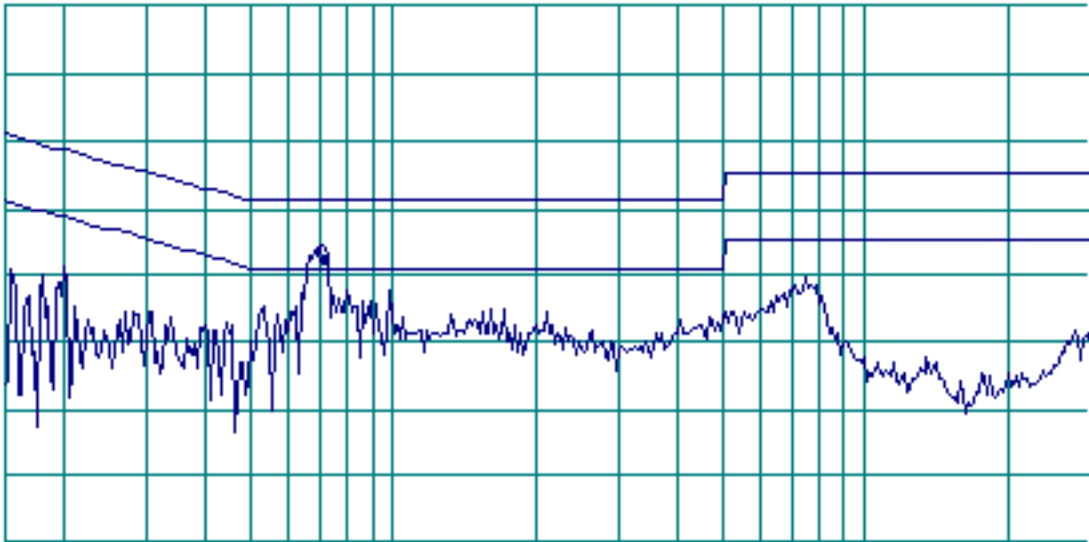

START 150 kHz

STOP 30.00 MHz

L IF BW 9.0 kHz

AVG BW 30 kHz

#SWP 10.0 sec

#	Frequency (MHz)	Peak Amp (dBμV)	QP Amp (dBμV)	Avg Amp (dBμV)
1	0.700274	50.29	47.83	38.10
2	7.579628	44.72	40.08	27.08
3	13.592321	33.38	28.46	22.86
4	27.257442	36.03	30.86	24.05
5	0.706660	49.95	45.86	38.27
6	0.677806	49.94	48.77	40.59
7	1.027737	42.06	39.51	26.91
8	0.189109	49.84	47.76	32.94

PHASE 2

6. PHOTO



Fig. 6.1
Conducted Emissions Test Set-up

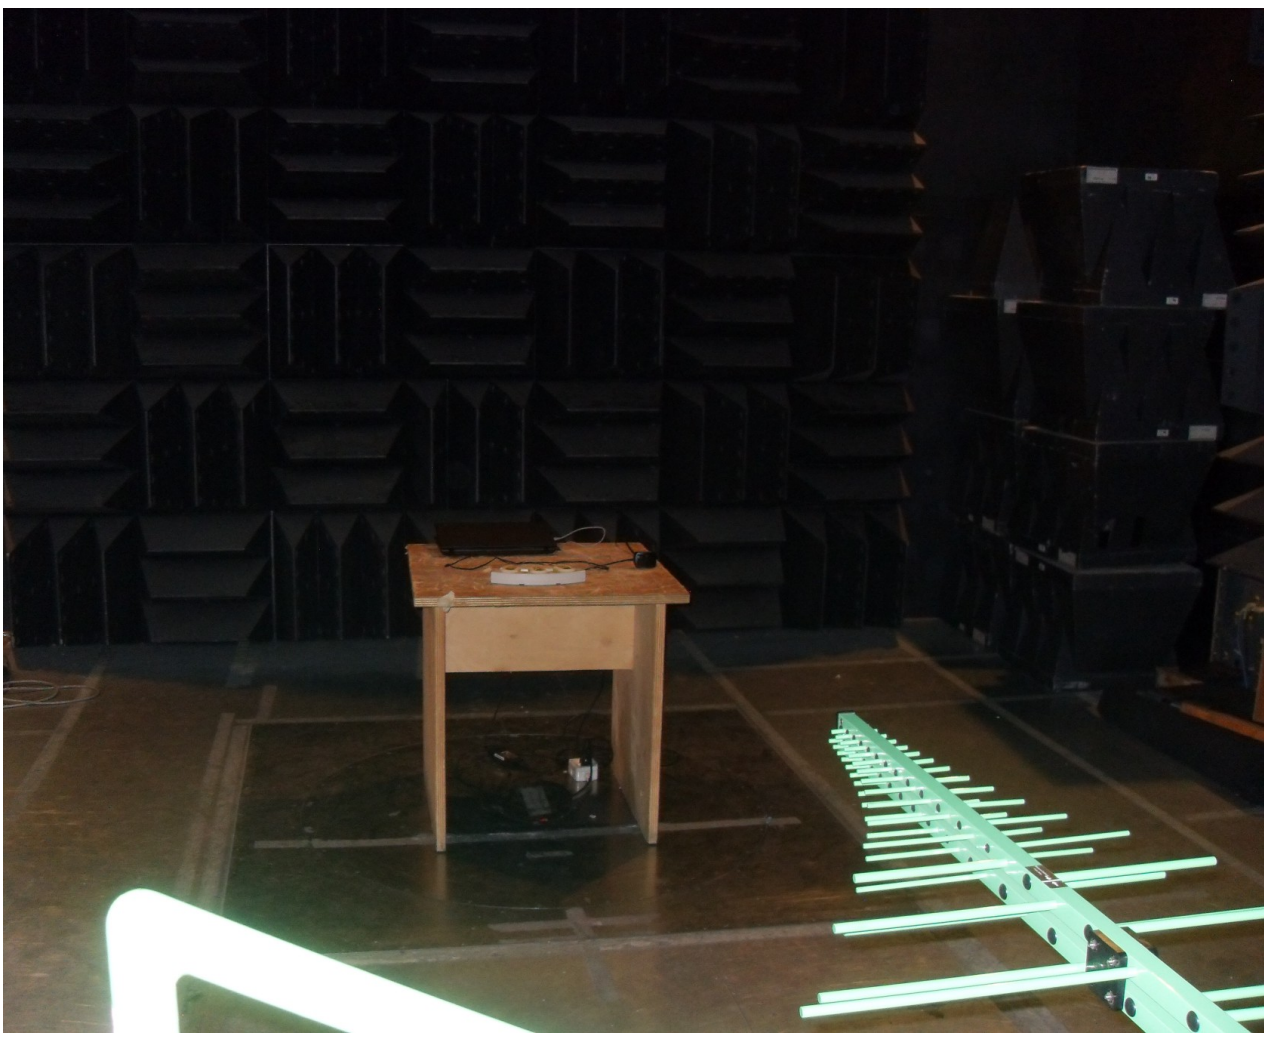


Fig. 6.2

Radiated Emissions Test Set-up