

FCC/ISED Test Report

Prepared for: Hunter Douglas

Address: 2550 Midway Boulevard
Broomfield, CO 80020

Product: Shutter Wireless Module

Test Report No: R20171116-20-01

Approved By: 
Nic S. Johnson, NCE
Technical Manager
iNARTE Certified EMC Engineer #EMC-003337-NE

DATE: 15 December 2017

Total Pages: 50

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

	Report Number:	R20171020-21-01	Rev	0
	Prepared for:	Hunter Douglas		

REVISION PAGE

Rev. No.	Date	Description
0	15 December 2017	Original – NJohnson Prepared by KVepuri

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

CONTENTS

Revision Page.....	2
Tables of Figures	4
Table of Tables.....	5
1.0 Summary of test results.....	6
2.0 EUT Description	7
2.1 Equipment under test.....	7
2.2 Description of test modes.....	8
2.3 Description of support units	8
3.0 Laboratory description	9
3.1 Laboratory description	9
3.2 Test Personnel	9
3.3 Test equipment	10
4.0 Detailed results	11
4.1 Duty Cycle	11
4.2 Radiated emissions	12
4.3 Peak Output Power	23
4.4 Bandwidth	27
4.5 Bandedges	35
4.6 Power Spectral Density	41
4.7 Conducted AC Mains Emissions.....	45
Appendix A: Sample Calculation	47
Appendix B – Measurement Uncertainty	49
REPORT END.....	50

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

TABLES OF FIGURES

Figure Number	Page
Figure 1 - Radiated Emissions Test Setup.....	Error! Bookmark not defined.
Figure 2 - Radiated Emissions Test Setup.....	14
Figure 3 - Radiated Emissions Plot, Receive.....	15
Figure 4 - Radiated Emissions Plot, Low Channel.....	17
Figure 5 - Radiated Emissions Plot, Mid Channel.....	19
Figure 6 - Radiated Emissions Plot, High Channel.....	21
Figure 7 – Peak Output Power Measurements Test Setup	23
Figure 8 – Output Power, Low Channel. -1.09 dBm	24
Figure 9 - Output Power, Mid Channel, -0.85 dBm	25
Figure 10 - Output Power, High Channel, -0.72 dBm	26
Figure 11 - Bandwidth Measurements Test Setup.....	28
Figure 12 - 99% Occupied Bandwidth, Low Channel	29
Figure 13 - 99% Occupied Bandwidth, Mid Channel	30
Figure 14 - 99% Occupied Bandwidth, High Channel	31
Figure 15 – 6dB Bandwidth, Low Channel.....	32
Figure 16 - 6dB Bandwidth, Mid Channel.....	33
Figure 17 - 6dB Bandwidth, High Channel.....	34
Figure 18 - Band-edge Measurement, Low Channel, Restricted Frequency.....	37
Figure 19 - Band-edge Measurement, Low Channel, Fundamental	38
Figure 20 - Band-edge Measurement, High Channel, Restricted Frequency	39
Figure 21 - Band-edge Measurement, High Channel, Fundamental.....	40
Figure 22 – Power Spectral Density, Low Channel	42
Figure 23 – Power Spectral Density, Mid Channel	43

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

Figure 24 – Power Spectral Density, High Channel.....	44
Figure 25 - Conducted Emissions Plot.....	46

TABLE OF TABLES

Table Number	Page
Table 1 - Radiated Emissions Quasi-peak Measurements, Receive	15
Table 2 - Radiated Emissions Peak Measurements vs. Average Limit, Receive	16
Table 3 - Radiated Emissions Quasi-peak Measurements, Low Channel	18
Table 4 - Radiated Emissions Peak Measurements, Low Channel.....	18
Table 5 - Radiated Emissions Quasi-peak Measurements, Mid Channel	20
Table 6 - Radiated Emissions Peak Measurements, Mid Channel	20
Table 7 - Radiated Emissions Quasi-peak Measurements, High Channel	21
Table 8 - Radiated Emissions Peak Measurements, High Channel.....	22

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

1.0 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 4, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 2 Section 5.24	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 4, Section 7.1	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247(d) (unrestricted) RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 4, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 2 Section 5.2	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 2 Section 11.13	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 4, Section 7.1	Conducted Emissions	Pass

See Section 4 for details on the test methods used for each test.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

The Equipment Under Test (EUT) was a wireless module used to control window blinds. It has transmit and receive capabilities. It is intended to be paired with a remote.

EUT	Shutter Module
EUT Received	11/20/2017
EUT Tested	11/20/2017 - 12/14/2017
Serial No.	PCB: 2008000005
Operating Band	2400.0 - 2483.5 GHz
Device Type	DTS
Power Supply	18 VDC Power Supply Model: ADS0366-W180200 Input: 100-240VAC, 1A Output: 18V, 2A Note: the power supply was used as a representative “off-the-shelf” sample and the EUT will not be sold with a specific power supply. It contains the required power regulation to meet the modular approval requirements.

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

2.2 DESCRIPTION OF TEST MODES

The EUT operates on, and was tested at the frequencies below:

Channel	Frequency
Low	2407
Middle	2440
High	2480

These are the only three representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

The EUT was tested as module. This EUT was set to transmit in a worse-case scenario with modulation on. The manufacturer modified the unit to transmit continuously on the lowest, highest and one channel in the middle.

2.3 DESCRIPTION OF SUPPORT UNITS

None

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

3.0 LABORATORY DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^{\circ}$ Celsius

3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Karthik Vepuri	EMC Test Engineer	Testing
3	Nic Johnson	Technical Manager	Review of Results

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Rohde & Schwarz Test Receiver	ES126	100037	24 Jan 2017	24 Jan 2018
EMCO Biconilog Antenna	3142B	1647	02 Aug 2017	02 Aug 2018
EMCO Horn Antenna	3115	6416	25 Jan 2016	25 Jan 2018
EMCO Horn Antenna	3116	2576	26 Jan 2016	26 Jan 2018
Rohde & Schwarz Preamplifier	TS-PR18	3545700803	9 Feb 2017*	9 Feb 2018*
Trilithic High Pass Filter	6HC330	23042	9 Feb 2017*	9 Feb 2018*
Rohde & Schwarz LISN	ESH3-Z5	100023	23 Jan 2017	23 Jan 2018
RF Cable (preamplifier to antenna)	MFR-57500	01-07-002	09 Feb 2017*	09 Feb 2018*
RF Cable (antenna to 10m chamber bulkhead)	FSCM 64639	01E3872	09 Feb 2017*	09 Feb 2018*
RF Cable (10m chamber bulkhead to control room bulkhead)	FSCM 64639	01E3874	09 Feb 2017*	09 Feb 2018*
RF Cable (Control room bulkhead to RF switch)	FSCM 64639	01E3871	09 Feb 2017*	09 Feb 2018*
RF Cable (RF switch to test receiver)	FSCM 64639	01F1206	09 Feb 2017*	09 Feb 2018*
RF switch – Rohde and Schwarz	TS-RSP	1113.5503.14	09 Feb 2017*	09 Feb 2018*
N connector bulkhead (10m chamber)	PE9128	NCEEBH1	09 Feb 2017*	09 Feb 2018*
N connector bulkhead (control room)	PE9128	NCEEBH2	09 Feb 2017*	09 Feb 2018*

*Internal Characterization

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

4.0 DETAILED RESULTS

4.1 DUTY CYCLE

Duty cycle measurements were not performed. Peak detector measurements were compliant with average limits so it was not necessary.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

4.2 RADIATED EMISSIONS

Test Method: ANSI C63.10:2013, Section 6.5, 6.6, 11.11, 11.12

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB $\mu\text{V/m}$) = 20 * log * Emission level ($\mu\text{V/m}$).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

Test setup:

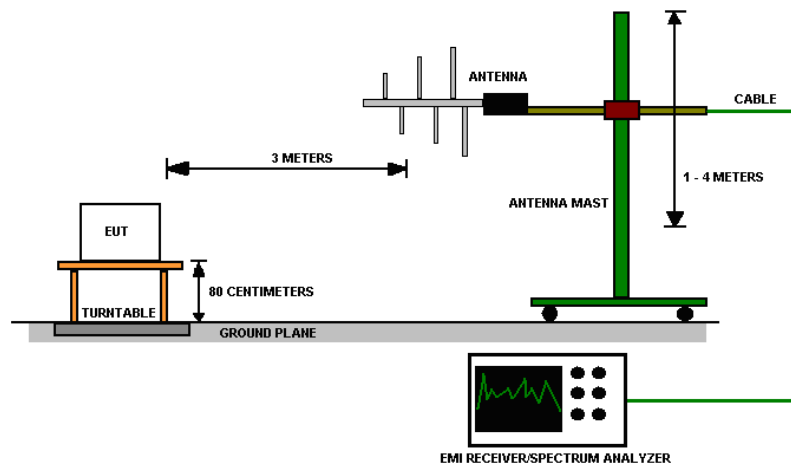


Figure 1 - Radiated Emissions Test Setup

EUT operating conditions

The EUT was powered by 18 VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

Test results:

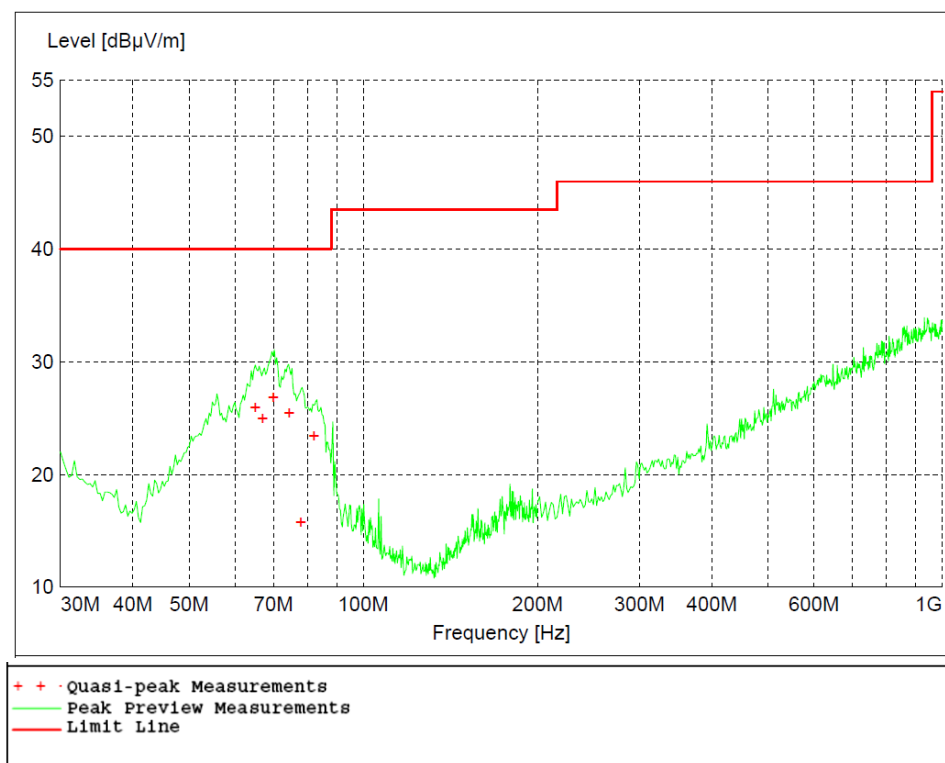


Figure 2 - Radiated Emissions Plot, Receive

Table 1 - Radiated Emissions Quasi-peak Measurements, Receive

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBμV/m	dBμV/m	dB	cm.	deg.		
65.100000	25.88	40.00	14.10	99	109	VERT	Y
67.020000	24.97	40.00	15.00	100	106	VERT	Y
69.900000	26.79	40.00	13.20	101	89	VERT	Y
74.520000	25.40	40.00	14.60	99	94	VERT	Y
78.000000	15.76	40.00	24.20	98	0	VERT	Y
82.200000	23.37	40.00	16.60	141	61	VERT	Y

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

Table 2 - Radiated Emissions Peak Measurements vs. Average Limit, Receive

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBμV/m	dBμV/m	dB	cm.	deg.		
2414.600000	35.37	54.00	18.60	100	263	HORI	Y
4810.000000	48.50	54.00	5.50	197	0	VERT	Y
7200.000000	42.81	54.00	11.20	370	296	VERT	Y
9622.800000	45.24	54.00	8.80	288	88	HORI	Y

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

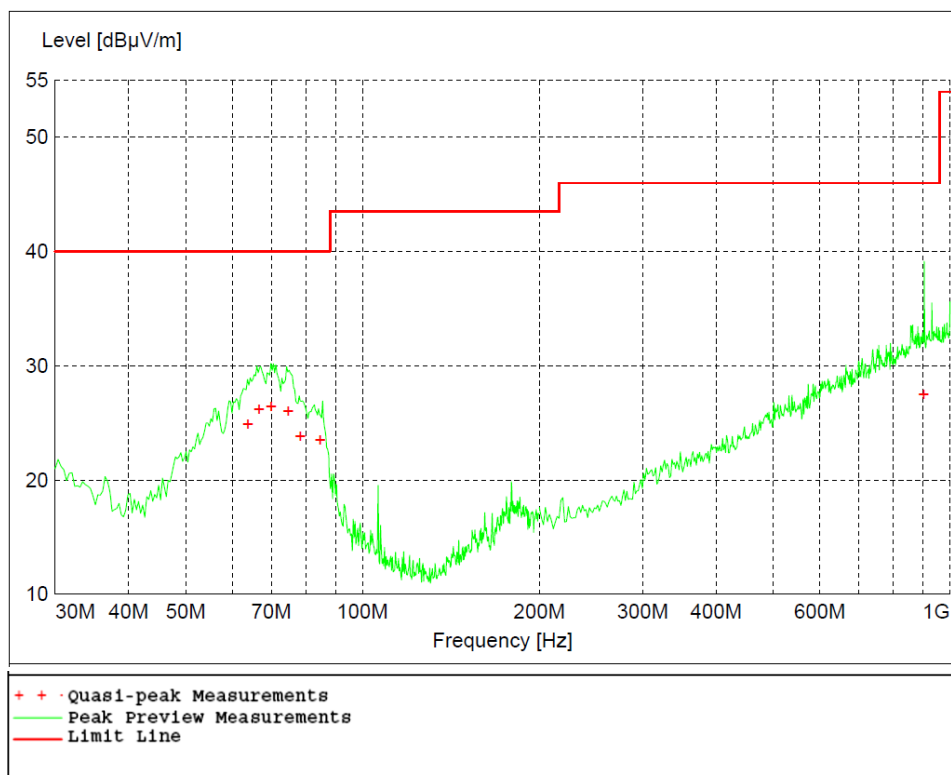


Figure 3 - Radiated Emissions Plot, Low Channel

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

Table 3 - Radiated Emissions Quasi-peak Measurements, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBµV/m	dBµV/m	dB	cm.	deg.		
63.900000	24.83	40.00	15.20	99	168	VERT	Y
66.660000	26.16	40.00	13.80	136	153	VERT	Y
69.960000	26.39	40.00	13.60	144	153	VERT	Y
74.760000	26.04	40.00	14.00	143	158	VERT	Y
78.360000	23.80	40.00	16.20	163	84	VERT	Y
84.780000	23.51	40.00	16.50	142	43	VERT	Y
902.700000	27.47	46.00	18.50	399	139	VERT	Y

Table 4 - Radiated Emissions Peak Measurements vs. Average Limit, Low Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBµV/m	dBµV/m	dB	cm.	deg.		
2407.000000	97.30	NA	NA	153	159	HORI	Y
4814.000000	53.09	54.00	0.90	166	12	VERT	Y
7240.800000	44.22	54.00	9.80	99	211	VERT	Y
9613.600000	46.17	54.00	7.80	101	184	VERT	Y

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

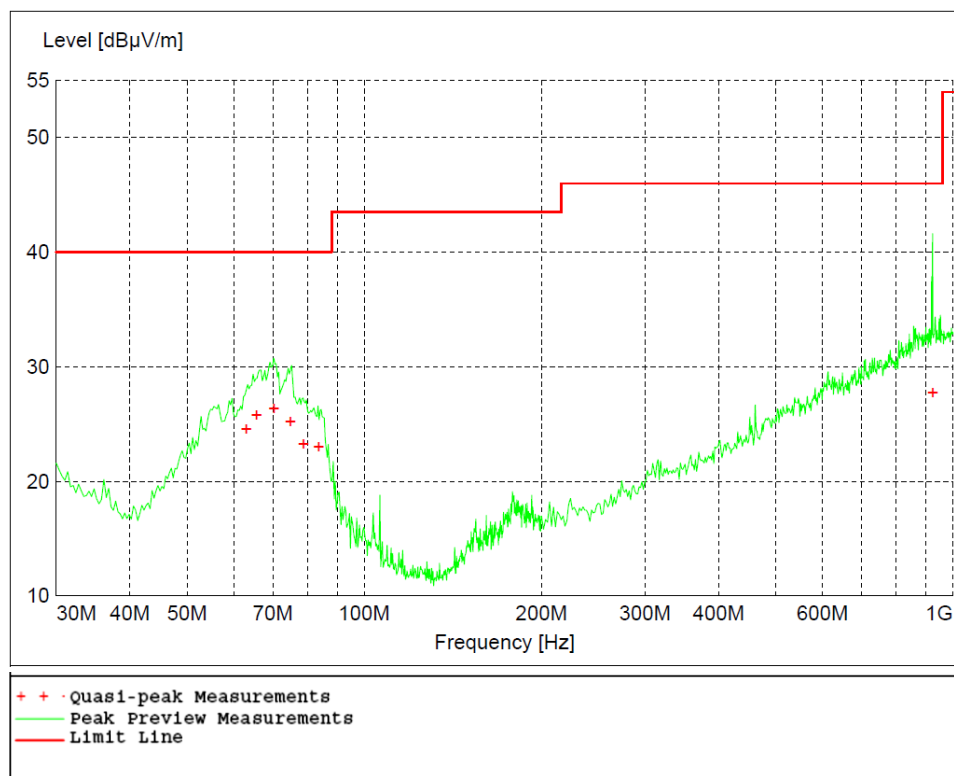


Figure 4 - Radiated Emissions Plot, Mid Channel

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

Table 5 - Radiated Emissions Quasi-peak Measurements, Mid Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.		
63.060000	24.51	40.00	15.50	99	138	VERT	Y
65.700000	25.75	40.00	14.20	99	143	VERT	Y
70.320000	26.29	40.00	13.70	104	152	VERT	Y
75.000000	25.15	40.00	14.80	149	157	VERT	Y
78.900000	23.23	40.00	16.80	144	26	VERT	Y
83.700000	22.95	40.00	17.00	163	84	VERT	Y
924.240000	27.74	46.00	18.30	384	231	HORI	Y

Table 6 - Radiated Emissions Peak Measurements vs. Average Limit, Mid Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dB μ V/m	dB μ V/m	dB	cm.	deg.		
2440.000000	96.54	NA	NA	153	164	HORI	Y
4880.000000	52.36	54.00	1.60	167	15	VERT	Y
7320.000000	46.47	54.00	7.50	99	190	VERT	Y
9776.200000	46.87	54.00	7.10	237	154	VERT	Y

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

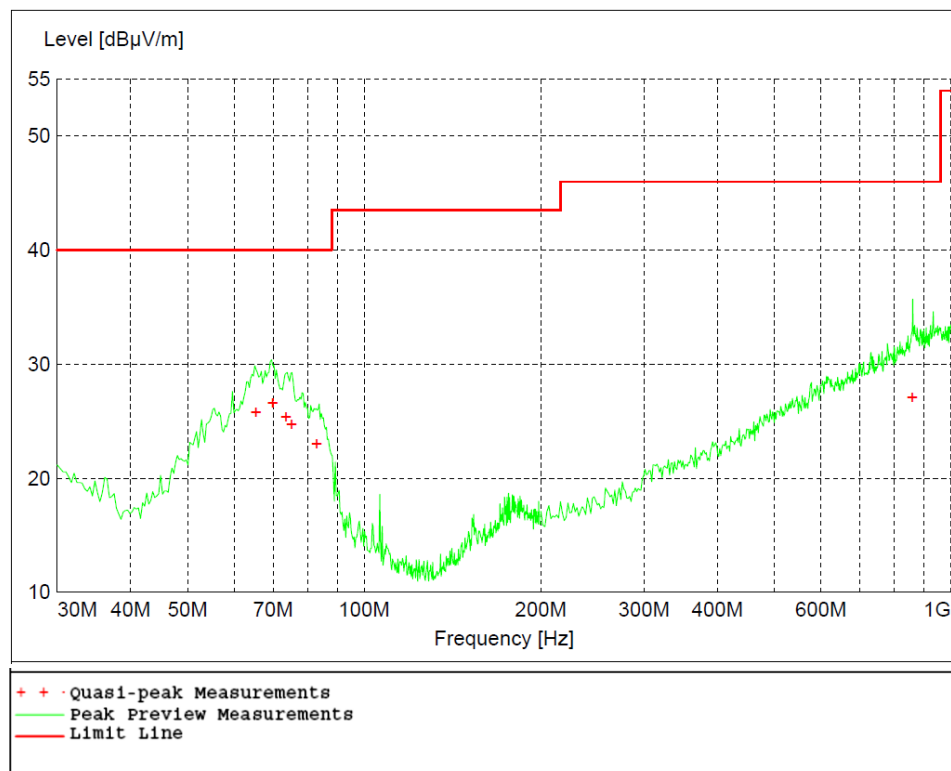


Figure 5 - Radiated Emissions Plot, High Channel

Table 7 - Radiated Emissions Quasi-peak Measurements, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBμV/m	dBμV/m	dB	cm.	deg.		
65.460000	25.78	40.00	14.20	102	114	VERT	Y
69.840000	26.57	40.00	13.40	100	128	VERT	Y
73.560000	25.39	40.00	14.60	100	79	VERT	Y
75.240000	24.74	40.00	15.30	143	88	VERT	Y
83.040000	22.95	40.00	17.10	170	0	VERT	Y
859.200000	27.04	46.00	19.00	117	344	VERT	Y

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

Table 8 - Radiated Emissions Peak Measurements vs. Average Limit, High Channel

Frequency	Level	Limit	Margin	Height	Angle	Pol	Axis
MHz	dBμV/m	dBμV/m	dB	cm.	deg.		
2480.000000	95.99	NA	NA	153	124	HORI	Y
4960.000000	50.64	54.00	3.40	154	216	VERT	Y
7440.000000	47.92	54.00	6.10	180	360	VERT	Y
9938.200000	46.58	54.00	7.40	165	184	VERT	Y

Peak measurements were compared to average limit and found to be compliant so average measurements were not performed

REMARKS:

1. Emission level (dBμV/m) = Raw Value (dBμV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The EUT was measured in all 3 orthogonal axis. It was found that the Y-axis produced the highest emissions, and this orientation was used for all testing. See the test setup photo exhibit for details on the orientations.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

4.3 PEAK OUTPUT POWER

Test Method: ANSI C63.10, Section(s) 11.9.1.1

Limits of bandwidth measurements:

The maximum allowed peak output power is 30 dBm.

Test procedures:

The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable with 3 MHz RBW and 10 MHz VBW. The RBW was set to a value larger than the DTS bandwidth.

Deviations from test standard:

No deviation.

Test setup:



Figure 6 – Peak Output Power Measurements Test Setup

*0.6 dB of cable loss was used and it was accounted for in the plots

EUT operating conditions:

The EUT was powered by 18 VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

Test results:

Peak Output Power

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm)	Method	RESULT
Low	2407	-1.09	Conducted	PASS
Middle	2440	-0.85	Conducted	PASS
High	2480	-0.72	Conducted	PASS

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

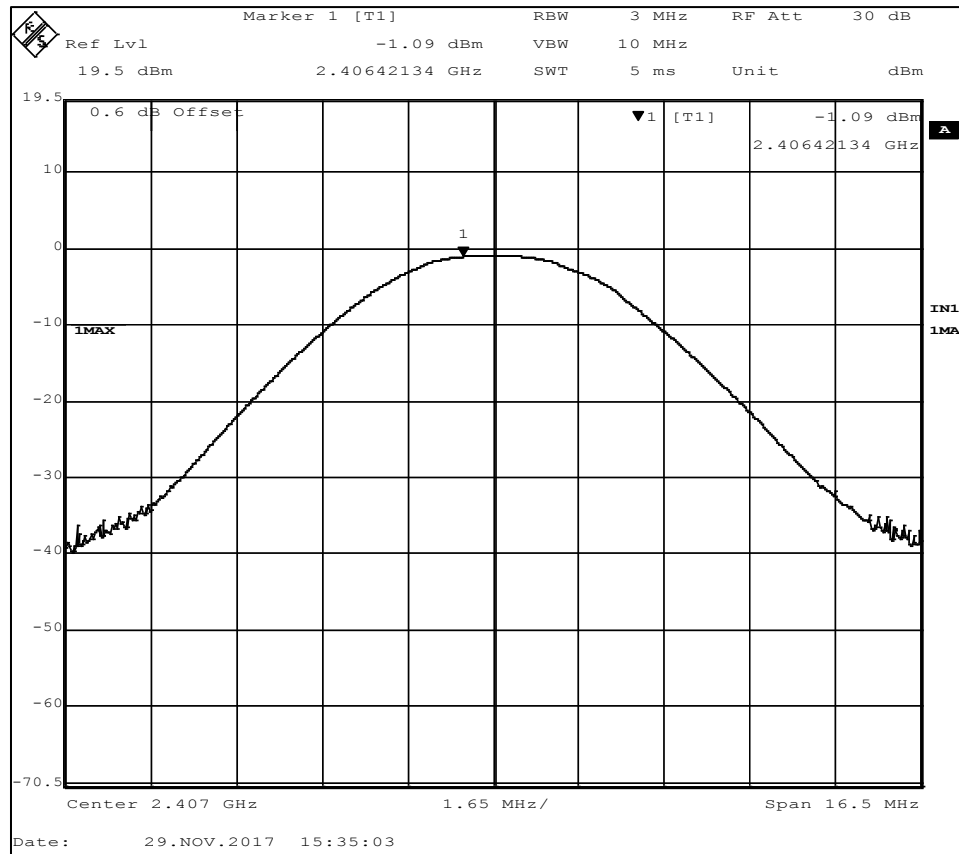


Figure 7 – Output Power, Low Channel. -1.09 dBm

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

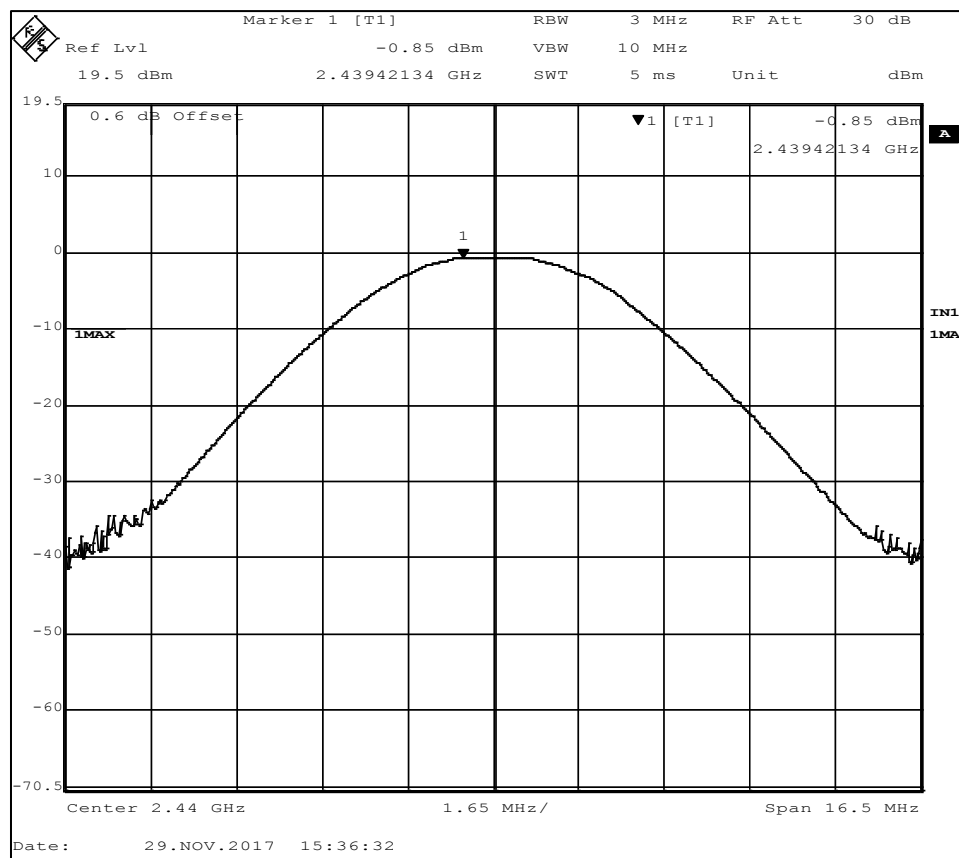


Figure 8 - Output Power, Mid Channel, -0.85 dBm

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

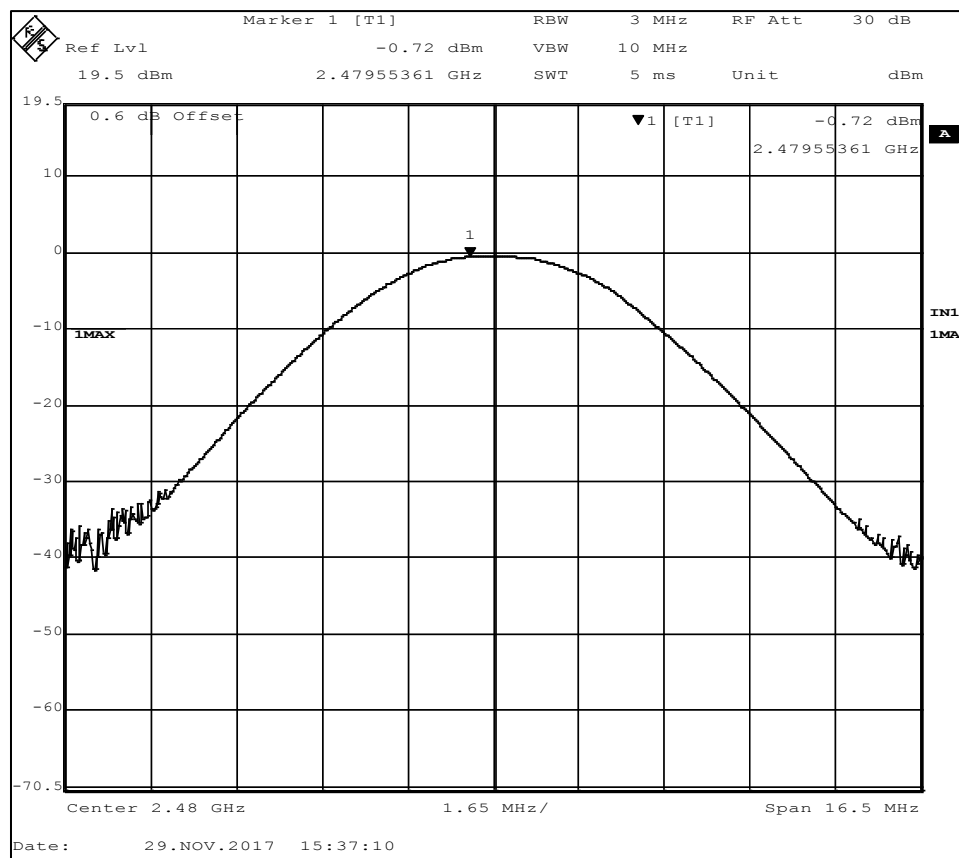


Figure 9 - Output Power, High Channel, -0.72 dBm

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

4.4 BANDWIDTH

Test Method: ANSI C63.10, Section(s) 11.8.1

Limits of bandwidth measurements:

The 99% occupied bandwidth and peak output powers are displayed. The maximum allowed peak output power is 30 dBm.

The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Bandwidth measurement was taken at a distance of 3m from the EUT. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

The 99% occupied is defined as the bandwidth at which 99% of the signal power is found. This corresponds to 20dB down from the maximum power level. The maximum power was measured with the largest resolution bandwidth possible (10MHz) and this value was recorded. The signal was then captured with a 1 MHz resolution bandwidth and the frequencies where the measurements were 20dB below the maximum power were marked. The bandwidth between these frequencies was recorded as the 99% occupied bandwidth.

The 6 dB bandwidth is defined as the bandwidth of which is higher than peak power minus 6dB.

For peak output power measurements, the EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable with 3 MHz RBW and 10 MHz VBW.

Deviations from test standard:

No deviation.

Test setup:

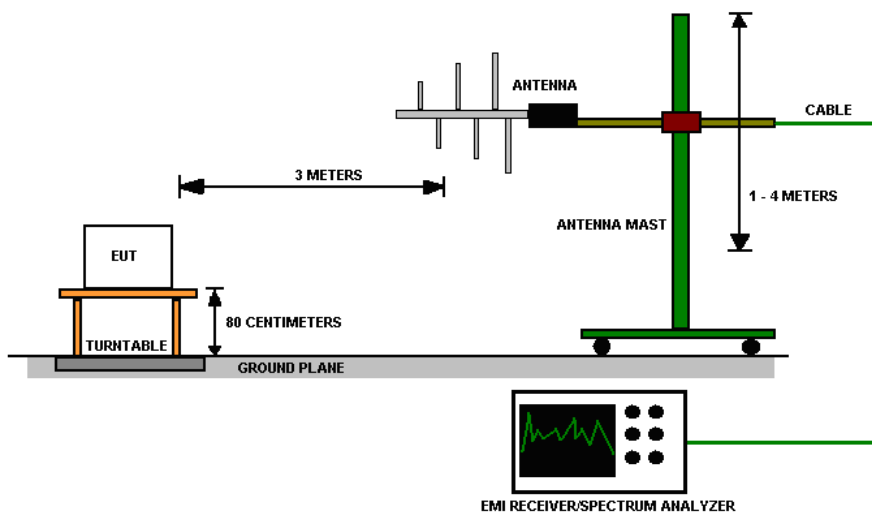


Figure 10 - Bandwidth Measurements Test Setup

EUT operating conditions:

The EUT was powered by 18 VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

Test results:

99% Occupied Bandwidth

CHANNEL	CHANNEL FREQUENCY (MHz)	99% Occupied BW (MHz)
1	2407	2.09
2	2440	2.06
3	2480	2.05

6dB Bandwidth

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BW (kHz)
1	2407	875.75
2	2440	865.73
3	2480	857.72

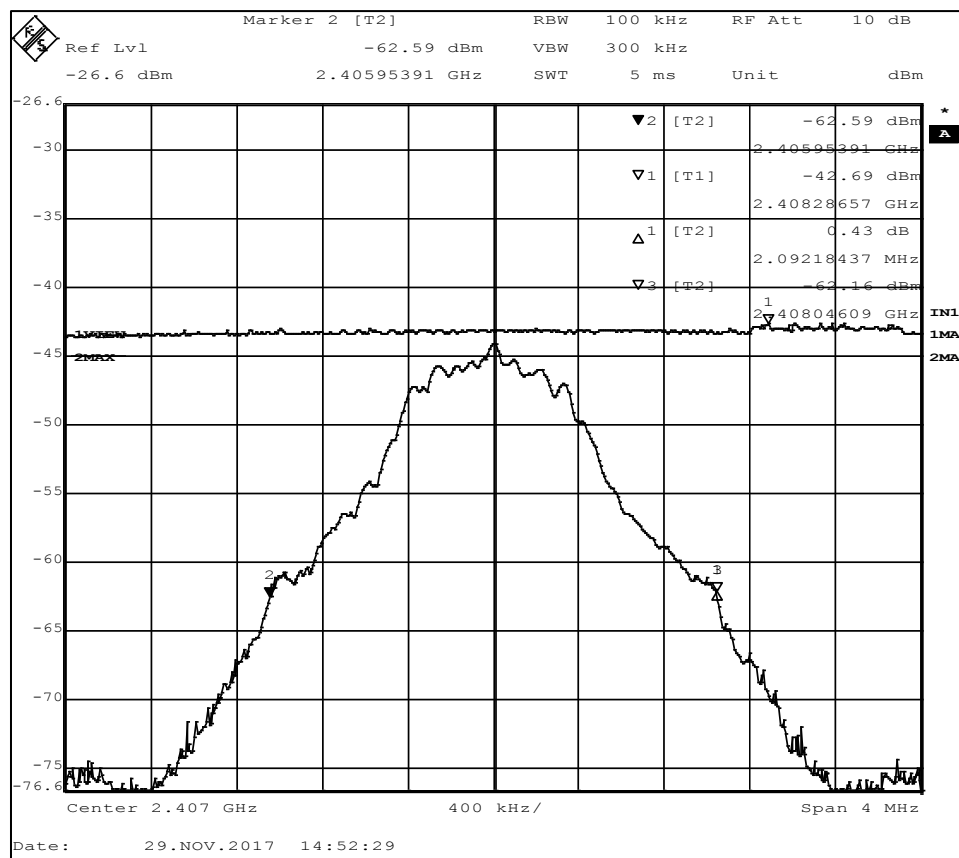


Figure 11 - 99% Occupied Bandwidth, Low Channel

Note: the trace at the top where Marker 1 is located was made with a 10MHz resolution bandwidth and saved on the screen. The trace on the bottom was made with a 100 kHz RBW.

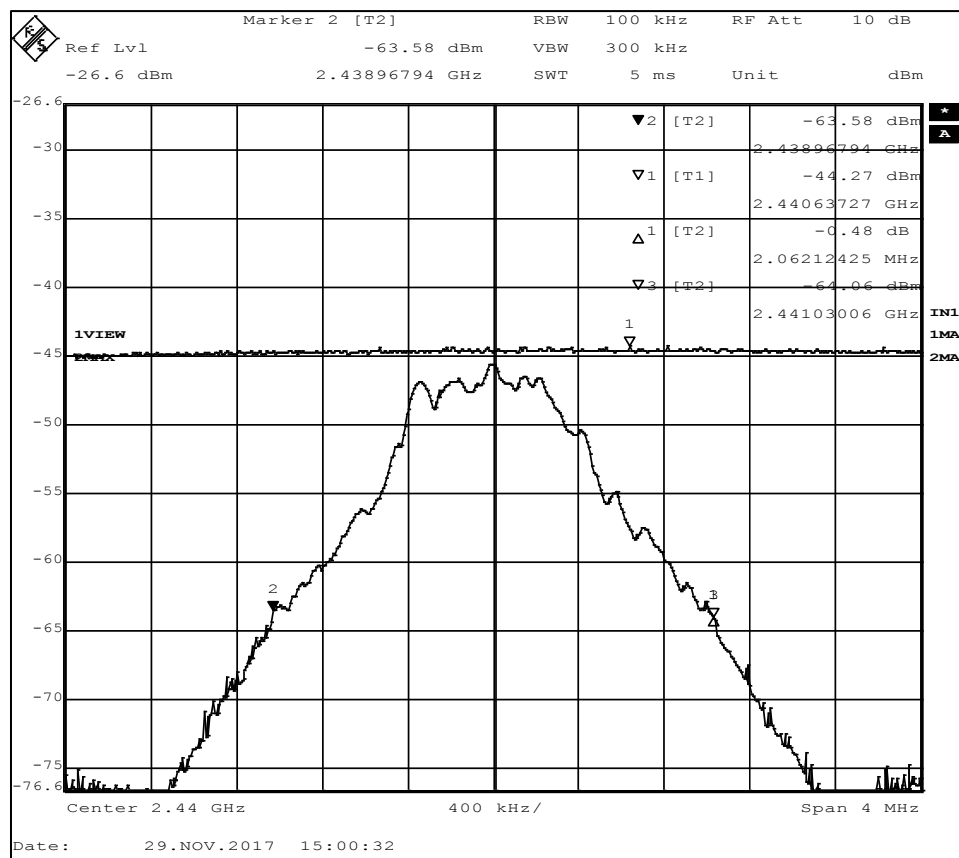


Figure 12 - 99% Occupied Bandwidth, Mid Channel

Note: the trace at the top where Marker 1 is located was made with a 10MHz resolution bandwidth and saved on the screen. The trace on the bottom was made with a 100 kHz RBW.

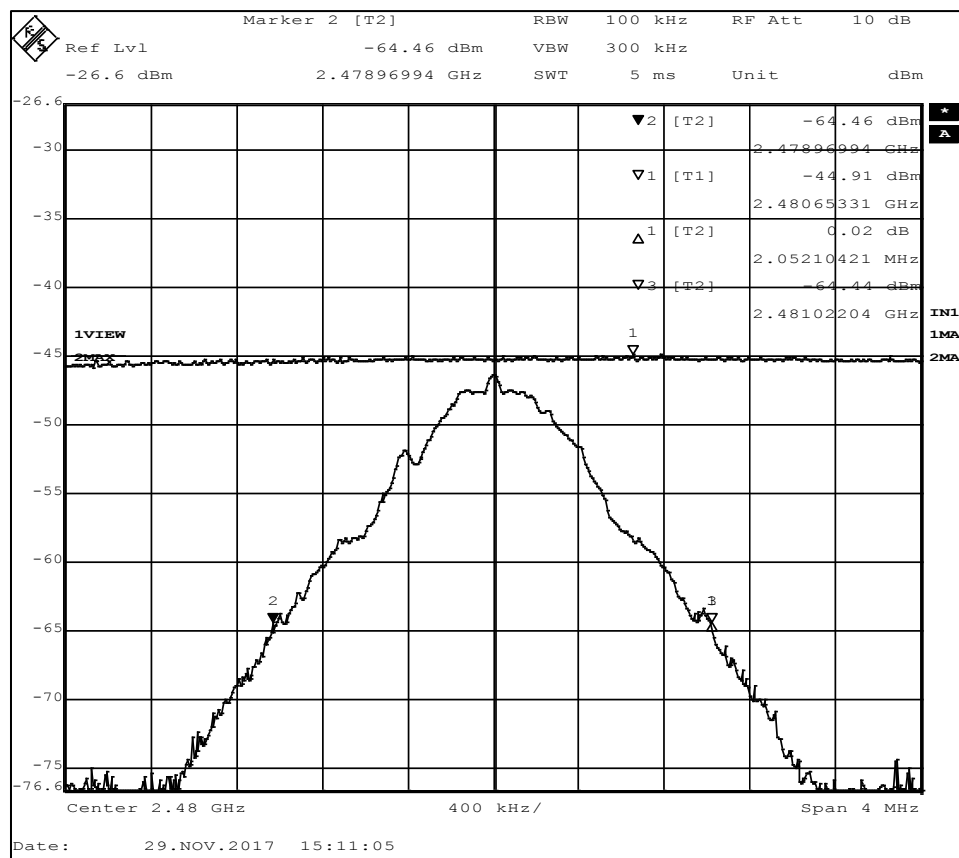


Figure 13 - 99% Occupied Bandwidth, High Channel

Note: the trace at the top where Marker 1 is located was made with a 10MHz resolution bandwidth and saved on the screen. The trace on the bottom was made with a 100 kHz RBW.

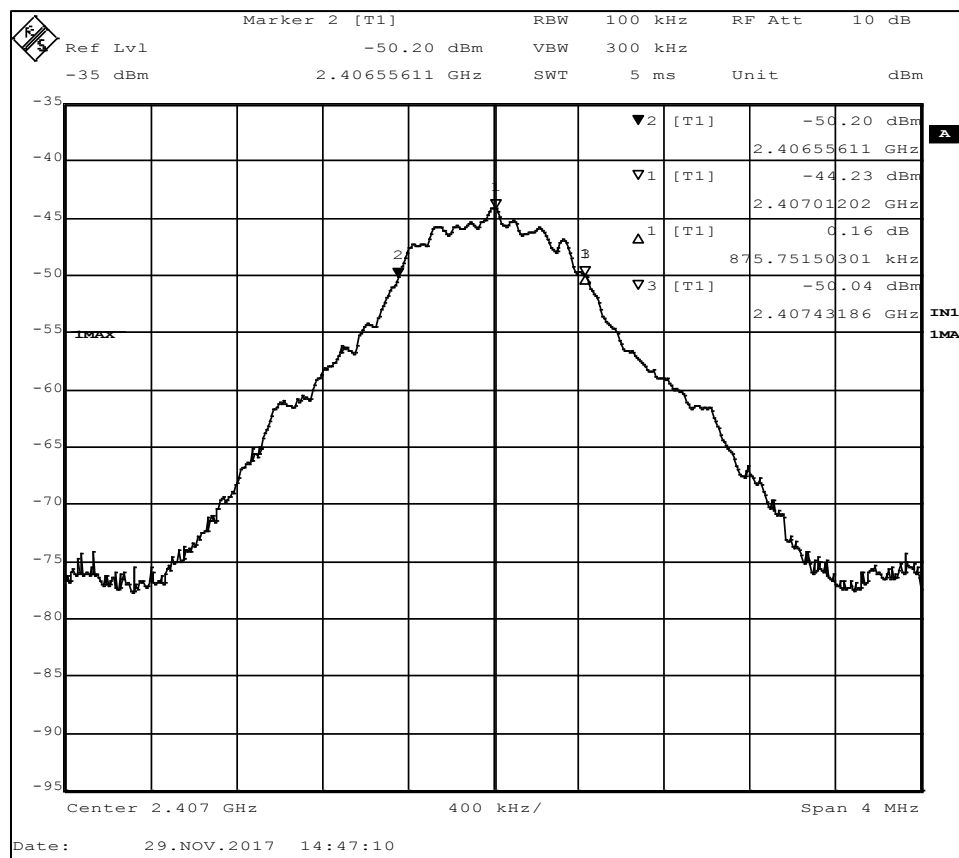


Figure 14 – 6dB Bandwidth, Low Channel

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

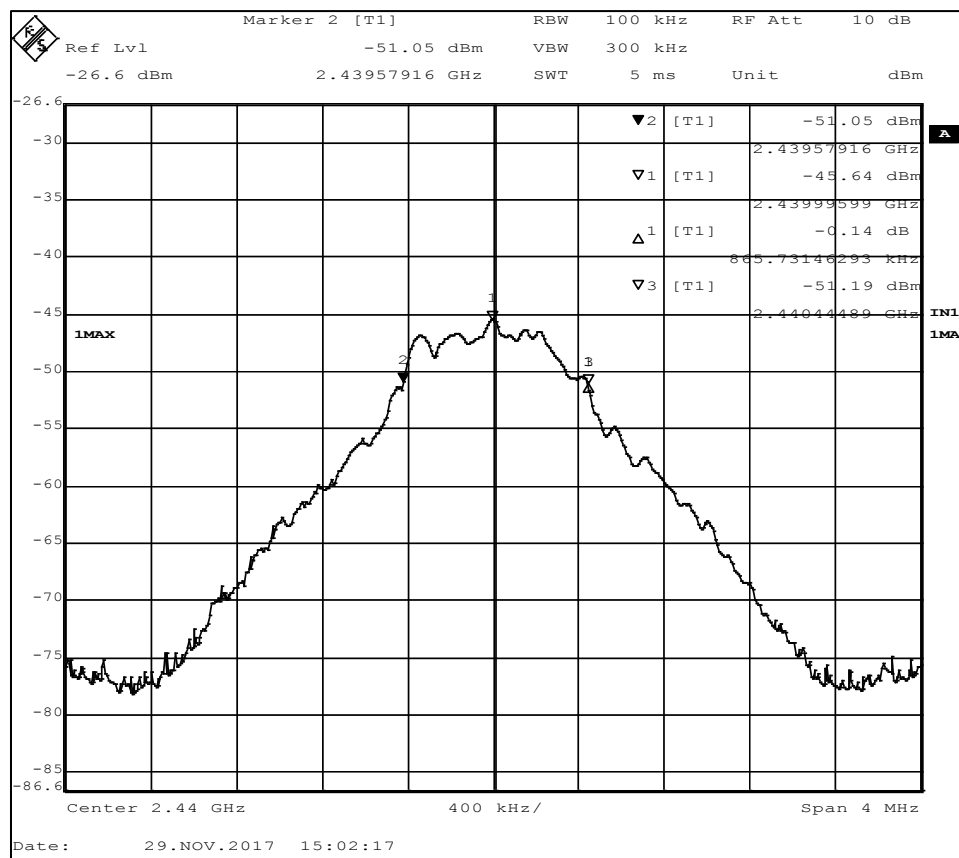


Figure 15 - 6dB Bandwidth, Mid Channel

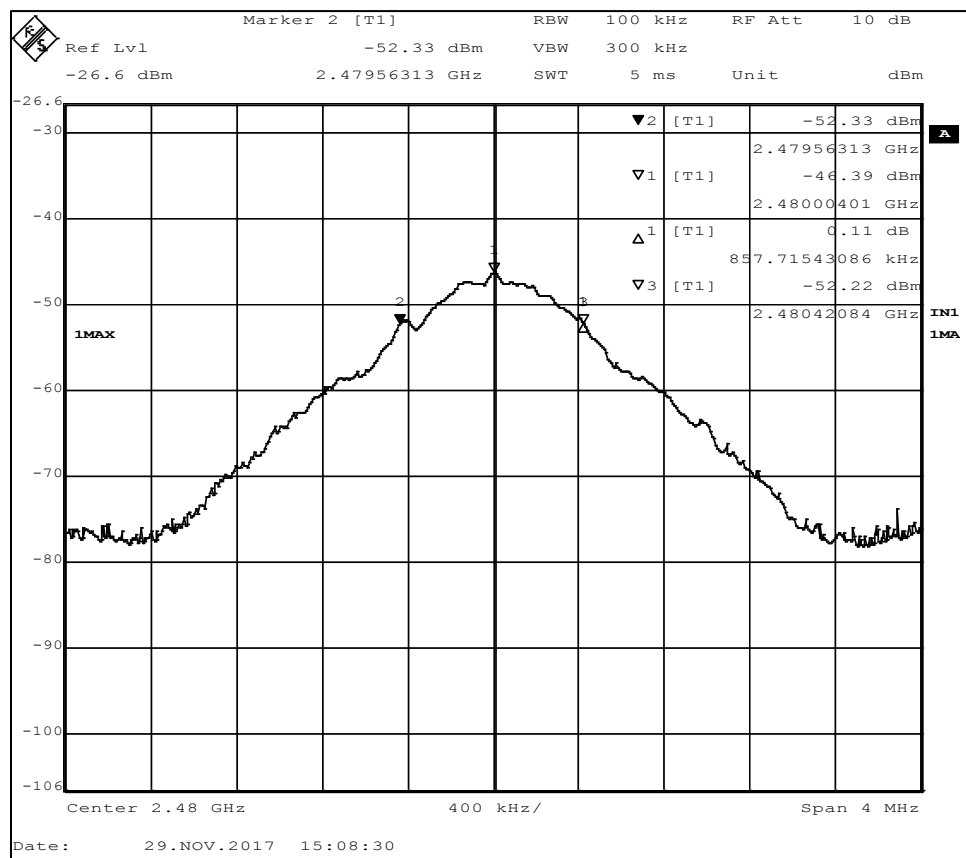


Figure 16 - 6dB Bandwidth, High Channel

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

4.5 BANDEGES

Test Method: ANSI C63.10, Section(s) 6.10.6, 11.13.2

Limits of bandedge measurements:

For emissions outside of the allowed band of operation (2400.0MHz – 2480.0MHz), the emission level needs to be 20dB under the maximum fundamental field strength. However, if the emissions fall within one of the restricted bands from 15.205 the field strength levels need to be under that of the limits in 15.209.

Test procedures:

The EUT was tested in the same method as described in section 4.3 - *Bandwidth*. The EUT was oriented as to produce the maximum emission levels. The resolution bandwidth was set to 30kHz and the EMI receiver was used to scan from the bandedge to the fundamental frequency with a quasi-peak detector. The highest emissions level beyond the bandedge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209.

Deviations from test standard:

No deviation.

Test setup:

See Section 4.3

EUT operating conditions:

The EUT was powered by 18 VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

Test results:

Highest Out of Band Emissions

CHANNEL	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level dBm	Relative Fundamental Level (dBm)	Delta	Min (dBc)	Result
Low (restricted)	2390.0	-104.04	-46.10	57.94	43.30	PASS
Low (unrestricted)	2340.0	-84.37	-46.10	41.27	20.00	PASS
High	2483.5	-104.54	-49.18	55.36	41.99	PASS

*Minimum delta = [highest fundamental peak field strength from Section 4.2] – [Part 15.209 radiated emissions limit.]

From Section 4.2

Fundamental average field strength at 2407MHz for low channel = 97.30 dBμV/m

Fundamental average field strength at 2480MHz for high channel = 95.99 dBμV/m

Channel 1 minimum delta = 97.30 – 54.0 dBμV/m = 43.30 dBc

Channel 3 minimum delta = 95.99 – 54.0 dBμV/m = 41.99 dBc

Measurements do not include correction factors and are intended to be relative measurements only.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

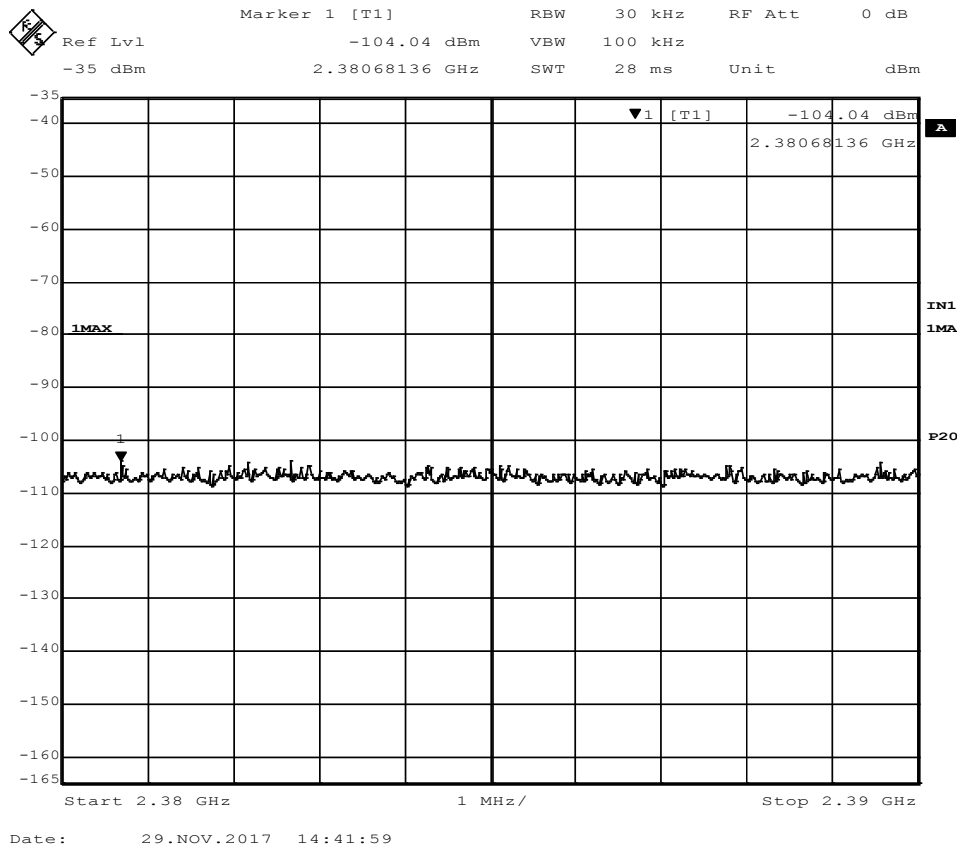


Figure 17 - Band-edge Measurement, Low Channel, Restricted Frequency

The plot shows an uncorrected measurement, used for relative measurements only.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

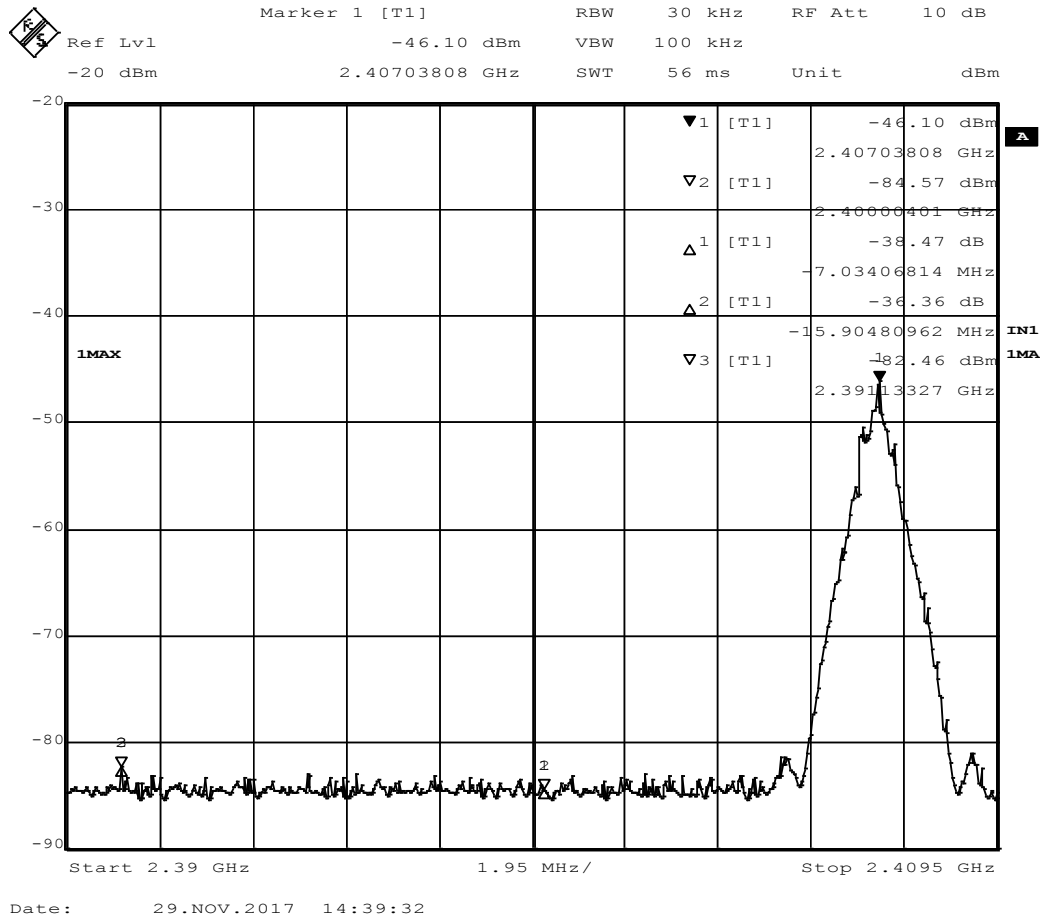


Figure 18 - Band-edge Measurement, Low Channel, Fundamental

The plot shows an uncorrected measurement, used for relative measurements only.

Worst Delta = 36.36 dB > 20 dB minimum

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

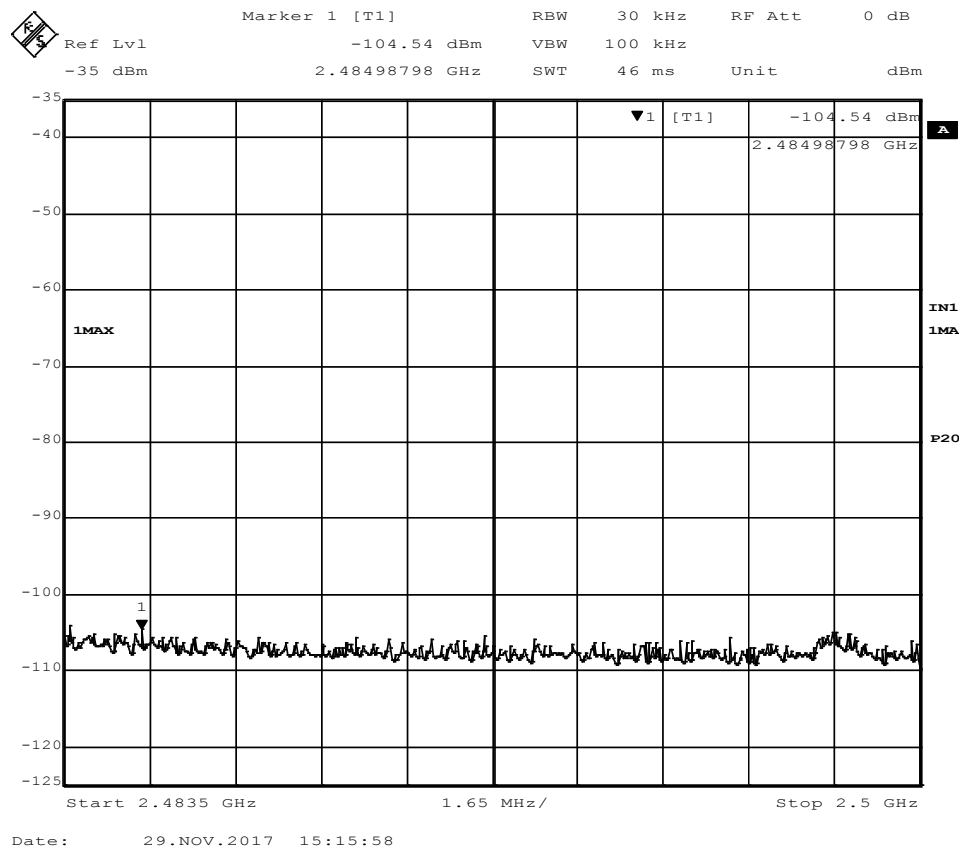


Figure 19 - Band-edge Measurement, High Channel, Restricted Frequency

The plot shows an uncorrected measurement, used for relative measurements only.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

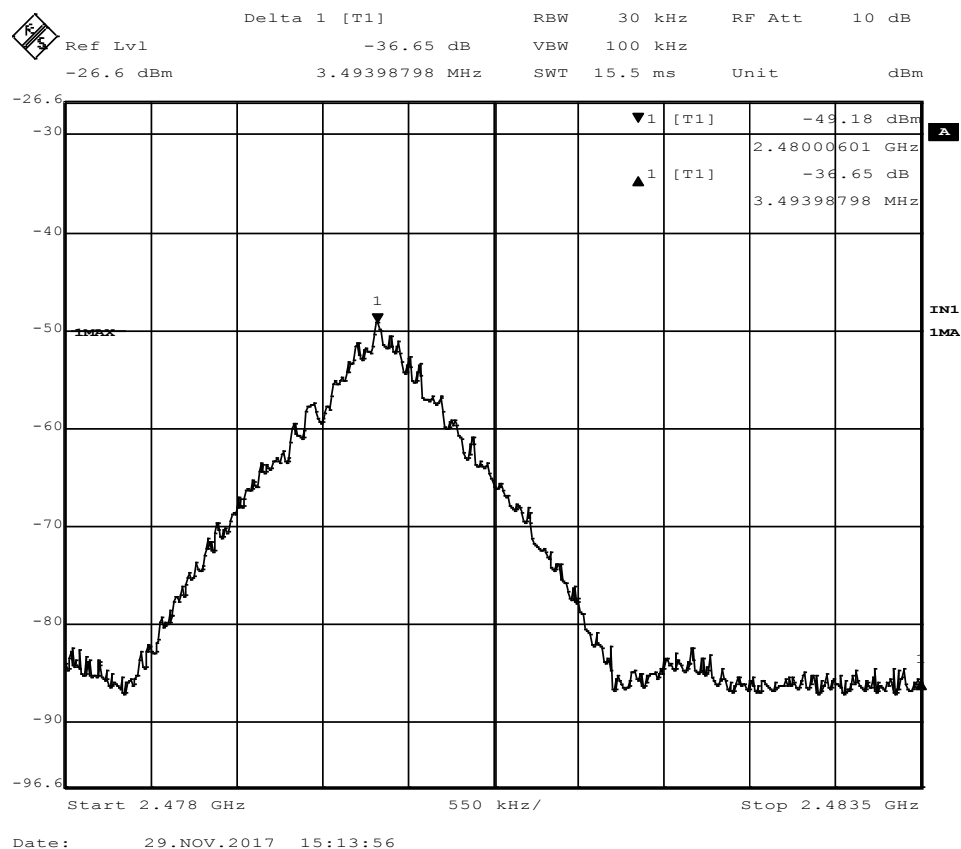


Figure 20 - Band-edge Measurement, High Channel, Fundamental

The plot shows an uncorrected measurement, used for relative measurements only.

Delta = 36.65 dB > 20 dB minimum

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

4.6 POWER SPECTRAL DENSITY

Test Method: ANSI C63.10, Section 11.10.2

Limits of power measurements:

The maximum PSD allowed is 8 dBm.

Test procedures:

1. All measurements were taken at a distance of 3m from the EUT.
2. The resolution bandwidth was set to 3 kHz and the video bandwidth was set to 10 kHz to capture the signal. The analyzer used a peak detector in max hold mode.

Test setup:

The field strength was measured at a distance of 3m and the EIRP was calculated using field strength equation below each plot.

EUT operating conditions:

The EUT was powered by 18VDC unless specified and set to transmit continuously on the lowest frequency channel, highest frequency channel and one in the middle of its operating range.

Test results:

Power Spectral Density

CHANNEL	CHANNEL FREQUENCY (MHz)	EIRP RF POWER LEVEL IN # KHz BW (dBm)	MAXIMUM POWER LIMIT (dBm)	RESULT
1	2407	-10.60	8.00	PASS
2	2440	-12.11	8.00	PASS
3	2480	-11.59	8.00	PASS

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

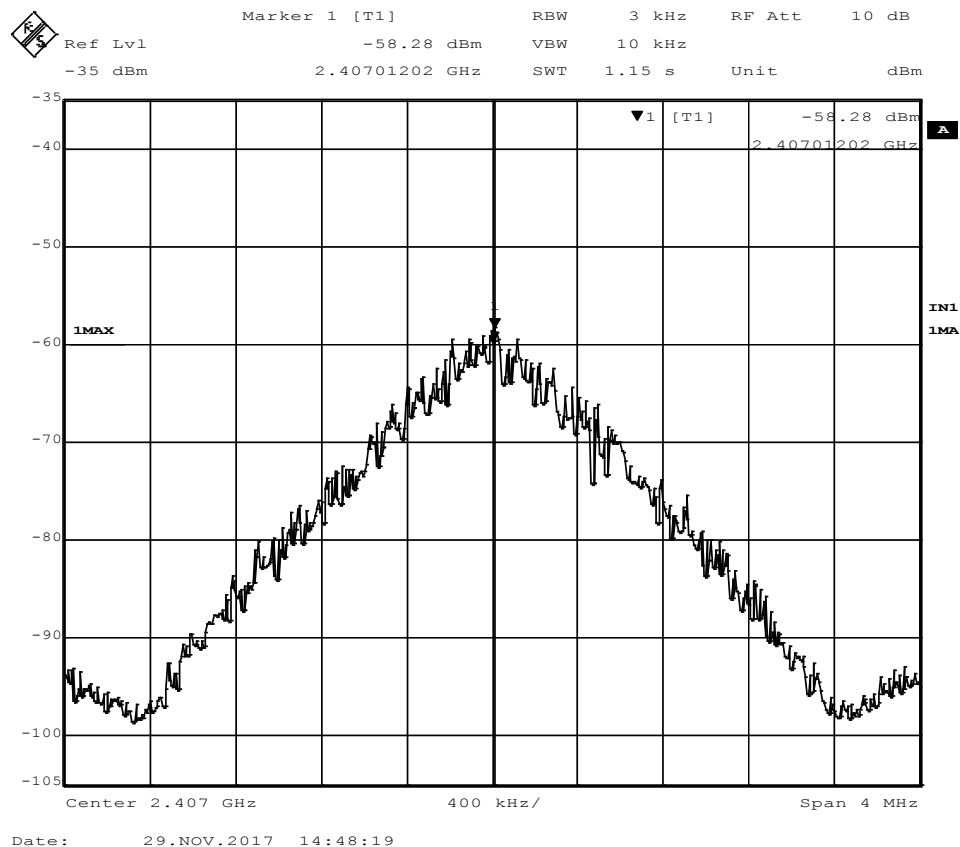


Figure 21 – Power Spectral Density, Low Channel

Power Spectral Density = $-58.28 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = -10.60 \text{ dBm}$

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

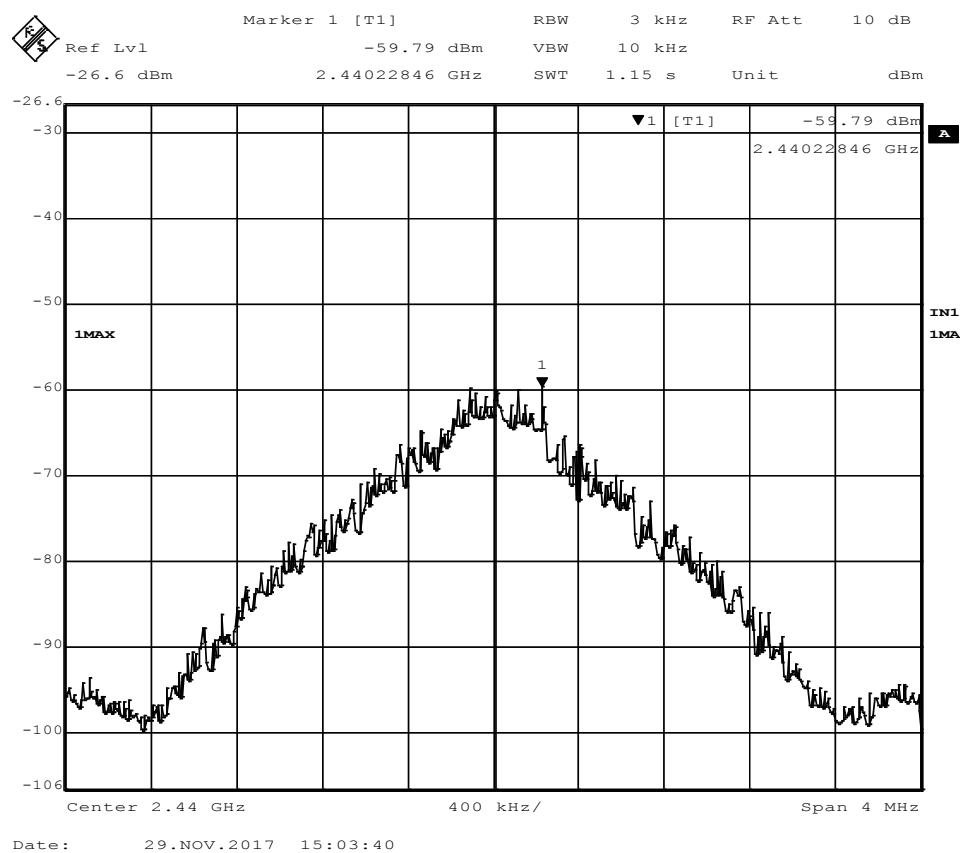


Figure 22 – Power Spectral Density, Mid Channel

Power Spectral Density = $-59.79 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = -12.11 \text{ dBm}$

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

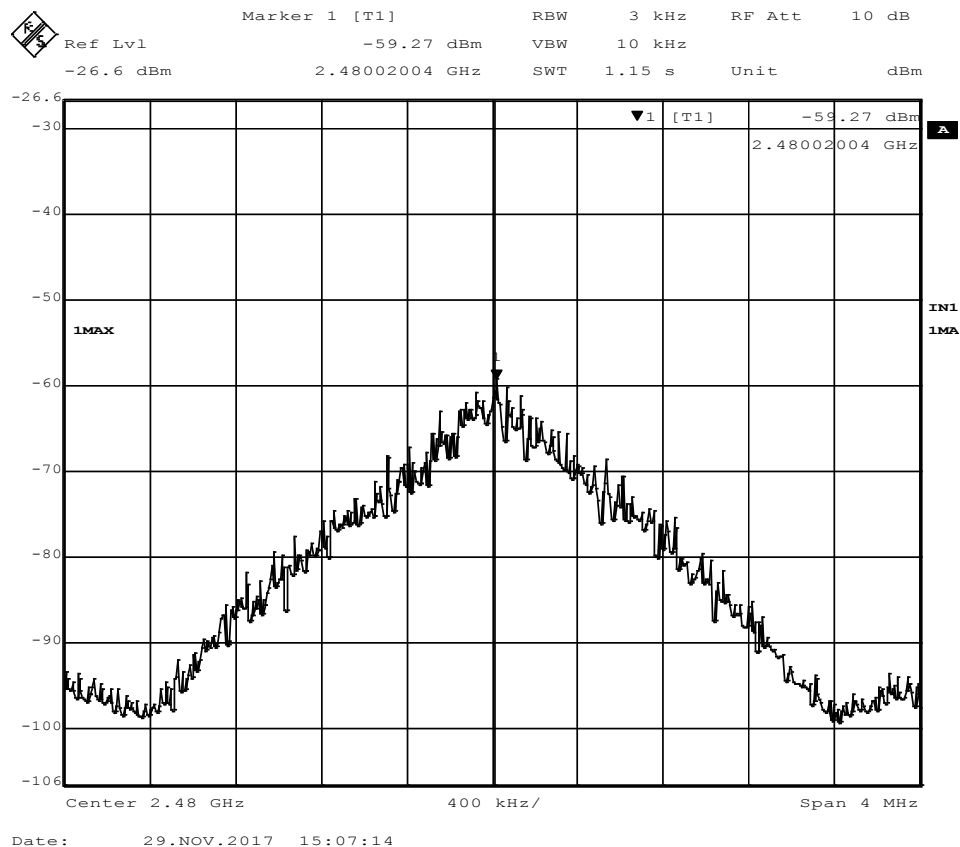


Figure 23 – Power Spectral Density, High Channel

Power Spectral Density = $-59.27 \text{ dBm} + 107 + \text{CL} + \text{AF} - 95.23 = -11.59 \text{ dBm}$

CL = cable loss = 7.60 dB

AF = antenna factor = 28.31 dB

107 = conversion from dBm to dBμV on a 50Ω measurement system

-95.23 = Conversion from field strength (dBμV/m) to EIRP (dBm) at a 3m measurement distance.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

4.7 CONDUCTED AC MAINS EMISSIONS

Test Method: ANSI C63.10, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

Test setup:

The EUT was tested as module

EUT operating conditions:

The EUT was powered by 18 VDC unless specified and set to transmit continuously on the Middle channel of its operating range.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

Test Results:

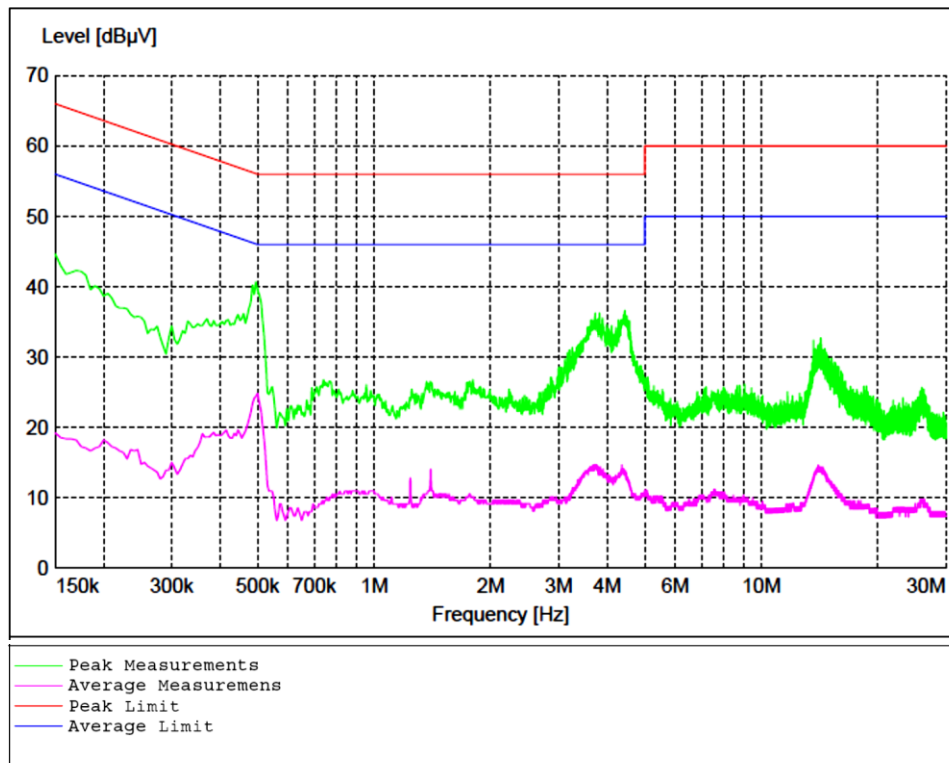


Figure 24 - Conducted Emissions Plot

All measurements were found to be at least 10dB below the applicable limit.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [Field \text{ Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$Power \text{ (watts)} = 10^{[Power \text{ (dBm)}/10]} / 1000$$

$$Voltage \text{ (dB}\mu\text{V)} = Power \text{ (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field \text{ Strength (V/m)} = 10^{[Field \text{ Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

10log(10^9) is the conversion from micro to milli

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	3.82
Radiated Emissions, 3m	1GHz - 18GHz	4.44
Emissions limits, conducted	30MHz – 18GHz	±3.30 dB

Expanded uncertainty values are calculated to a confidence level of 95%.

	Report Number:	R20171116-20-01	Rev	0
	Prepared for:	Hunter Douglas		

REPORT END