

7.8 Unwanted Emissions above 1 GHz

Mode A_Dipole Ant.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.00 H	324	55.9	2.6
2	5150.00	45.5 AV	54.0	-8.5	1.00 H	324	42.9	2.6
3	*5260.00	107.9 PK			1.00 H	324	67.8	40.1
4	*5260.00	97.4 AV			1.00 H	324	57.3	40.1
5	#10520.00	56.9 PK	68.2	-11.3	1.55 H	131	47.8	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	2.17 V	70	57.2	2.6
2	5150.00	46.9 AV	54.0	-7.1	2.17 V	70	44.3	2.6
3	*5260.00	121.3 PK			2.17 V	70	81.2	40.1
4	*5260.00	111.0 AV			2.17 V	70	70.9	40.1
5	#10520.00	57.3 PK	68.2	-10.9	1.42 V	238	48.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	107.7 PK			1.00 H	324	67.6	40.1
2	*5300.00	97.2 AV			1.00 H	324	57.1	40.1
3	5350.00	59.3 PK	74.0	-14.7	1.00 H	324	57.0	2.3
4	5350.00	45.4 AV	54.0	-8.6	1.00 H	324	43.1	2.3
5	10600.00	56.5 PK	74.0	-17.5	1.51 H	129	47.4	9.1
6	10600.00	43.1 AV	54.0	-10.9	1.51 H	129	34.0	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	2.23 V	65	57.8	2.6
2	5150.00	49.6 AV	54.0	-4.4	2.23 V	65	47.0	2.6
3	*5300.00	121.9 PK			2.23 V	65	81.8	40.1
4	*5300.00	111.4 AV			2.23 V	65	71.3	40.1
5	5350.00	67.3 PK	74.0	-6.7	2.23 V	65	65.0	2.3
6	5350.00	51.3 AV	54.0	-2.7	2.23 V	65	49.0	2.3
7	10600.00	57.3 PK	74.0	-16.7	1.89 V	94	48.2	9.1
8	10600.00	44.2 AV	54.0	-9.8	1.89 V	94	35.1	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	106.6 PK			1.00 H	324	66.5	40.1
2	*5320.00	95.9 AV			1.00 H	324	55.8	40.1
3	5350.00	59.3 PK	74.0	-14.7	1.00 H	324	57.0	2.3
4	5350.00	46.5 AV	54.0	-7.5	1.00 H	324	44.2	2.3
5	10640.00	56.1 PK	74.0	-17.9	1.52 H	136	47.2	8.9
6	10640.00	42.7 AV	54.0	-11.3	1.52 H	136	33.8	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.7 PK			2.26 V	72	79.6	40.1
2	*5320.00	109.3 AV			2.26 V	72	69.2	40.1
3	5350.00	68.3 PK	74.0	-5.7	2.26 V	72	66.0	2.3
4	5350.00	53.3 AV	54.0	-0.7	2.26 V	72	51.0	2.3
5	10640.00	56.6 PK	74.0	-17.4	1.48 V	245	47.7	8.9
6	10640.00	43.2 AV	54.0	-10.8	1.48 V	245	34.3	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.6 PK	74.0	-16.4	1.06 H	333	55.1	2.5
2	5460.00	45.1 AV	54.0	-8.9	1.06 H	333	42.6	2.5
3	#5470.00	56.6 PK	68.2	-11.6	1.06 H	333	54.1	2.5
4	*5500.00	108.1 PK			1.06 H	333	67.7	40.4
5	*5500.00	97.6 AV			1.06 H	333	57.2	40.4
6	11000.00	56.8 PK	74.0	-17.2	1.58 H	132	47.6	9.2
7	11000.00	43.4 AV	54.0	-10.6	1.58 H	132	34.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5500.00	120.4 PK			2.13 V	64	80.0	40.4
2	*5500.00	110.1 AV			2.13 V	64	69.7	40.4
3	11000.00	57.1 PK	74.0	-16.9	1.46 V	242	47.9	9.2
4	11000.00	43.7 AV	54.0	-10.3	1.46 V	242	34.5	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	108.4 PK			1.08 H	329	67.4	41.0
2	*5600.00	107.7 AV			1.08 H	329	66.7	41.0
3	11200.00	57.6 PK	74.0	-16.4	1.61 H	129	47.7	9.9
4	11200.00	44.2 AV	54.0	-9.8	1.61 H	129	34.3	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	120.9 PK			1.95 V	66	79.9	41.0
2	*5600.00	110.1 AV			1.95 V	66	69.1	41.0
3	11200.00	58.0 PK	74.0	-16.0	1.45 V	239	48.1	9.9
4	11200.00	44.6 AV	54.0	-9.4	1.45 V	239	34.7	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.3 PK			1.00 H	333	66.8	41.5
2	*5700.00	97.2 AV			1.00 H	333	55.7	41.5
3	#5725.00	59.1 PK	68.2	-9.1	1.00 H	333	55.2	3.9
4	11400.00	58.0 PK	74.0	-16.0	1.62 H	135	47.9	10.1
5	11400.00	44.6 AV	54.0	-9.4	1.62 H	135	34.5	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	119.9 PK			1.95 V	18	78.4	41.5
2	*5700.00	109.6 AV			1.95 V	18	68.1	41.5
3	#5725.00	64.4 PK	68.2	-3.8	1.95 V	18	60.5	3.9
4	11400.00	57.8 PK	74.0	-16.2	1.37 V	239	47.7	10.1
5	11400.00	44.4 AV	54.0	-9.6	1.37 V	239	34.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.1 PK	74.0	-15.9	1.00 H	289	55.6	2.5
2	5460.00	45.2 AV	54.0	-8.8	1.00 H	289	42.7	2.5
3	#5470.00	58.4 PK	68.2	-9.8	1.00 H	289	55.9	2.5
4	*5720.00	107.3 PK			1.00 H	289	65.8	41.5
5	*5720.00	96.9 AV			1.00 H	289	55.4	41.5
6	11420.00	57.7 PK	74.0	-16.3	1.57 H	126	47.6	10.1
7	11420.00	44.3 AV	54.0	-9.7	1.57 H	126	34.2	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.9 PK	74.0	-16.1	1.77 V	15	55.4	2.5
2	5460.00	45.7 AV	54.0	-8.3	1.77 V	15	43.2	2.5
3	#5470.00	57.1 PK	68.2	-11.1	1.77 V	15	54.6	2.5
4	*5720.00	120.1 PK			1.77 V	15	78.6	41.5
5	*5720.00	109.6 AV			1.77 V	15	68.1	41.5
6	11420.00	58.0 PK	74.0	-16.0	1.48 V	231	47.9	10.1
7	11420.00	44.9 AV	54.0	-9.1	1.48 V	231	34.8	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.00 H	324	56.0	2.6
2	5150.00	45.7 AV	54.0	-8.3	1.00 H	324	43.1	2.6
3	*5260.00	111.0 PK			1.00 H	324	70.9	40.1
4	*5260.00	96.7 AV			1.00 H	324	56.6	40.1
5	#10520.00	56.8 PK	68.2	-11.4	1.55 H	131	47.7	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	2.17 V	70	56.2	2.6
2	5150.00	46.5 AV	54.0	-7.5	2.17 V	70	43.9	2.6
3	*5260.00	123.8 PK			2.17 V	70	83.7	40.1
4	*5260.00	110.2 AV			2.17 V	70	70.1	40.1
5	#10520.00	57.0 PK	68.2	-11.2	1.42 V	238	47.9	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	110.4 PK			1.00 H	324	70.3	40.1
2	*5300.00	96.2 AV			1.00 H	324	56.1	40.1
3	5350.00	59.1 PK	74.0	-14.9	1.00 H	324	56.8	2.3
4	5350.00	46.9 AV	54.0	-7.1	1.00 H	324	44.6	2.3
5	10600.00	56.4 PK	74.0	-17.6	1.51 H	129	47.3	9.1
6	10600.00	43.0 AV	54.0	-11.0	1.51 H	129	33.9	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.4 PK			2.17 V	71	82.3	40.1
2	*5300.00	108.8 AV			2.17 V	71	68.7	40.1
3	5350.00	72.5 PK	74.0	-1.5	2.17 V	71	70.2	2.3
4	5350.00	52.9 AV	54.0	-1.1	2.17 V	71	50.6	2.3
5	10600.00	56.2 PK	74.0	-17.8	1.45 V	246	47.1	9.1
6	10600.00	42.8 AV	54.0	-11.2	1.45 V	246	33.7	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	107.5 PK			1.00 H	324	67.4	40.1
2	*5320.00	94.9 AV			1.00 H	324	54.8	40.1
3	5350.00	58.2 PK	74.0	-15.8	1.00 H	324	55.9	2.3
4	5350.00	45.3 AV	54.0	-8.7	1.00 H	324	43.0	2.3
5	10640.00	56.4 PK	74.0	-17.6	1.52 H	136	47.5	8.9
6	10640.00	43.0 AV	54.0	-11.0	1.52 H	136	34.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	122.2 PK			2.26 V	72	82.1	40.1
2	*5320.00	108.1 AV			2.26 V	72	68.0	40.1
3	5350.00	66.3 PK	74.0	-7.7	2.26 V	72	64.0	2.3
4	5350.00	52.3 AV	54.0	-1.7	2.26 V	72	50.0	2.3
5	10640.00	56.3 PK	74.0	-17.7	1.48 V	245	47.4	8.9
6	10640.00	42.9 AV	54.0	-11.1	1.48 V	245	34.0	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.1 PK	74.0	-15.9	1.06 H	333	55.6	2.5
2	5460.00	45.2 AV	54.0	-8.8	1.06 H	333	42.7	2.5
3	#5470.00	57.9 PK	68.2	-10.3	1.06 H	333	55.4	2.5
4	*5500.00	110.8 PK			1.06 H	333	70.4	40.4
5	*5500.00	97.0 AV			1.06 H	333	56.6	40.4
6	11000.00	56.8 PK	74.0	-17.2	1.58 H	132	47.6	9.2
7	11000.00	43.4 AV	54.0	-10.6	1.58 H	132	34.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.6 PK	74.0	-11.4	2.13 V	64	60.1	2.5
2	5460.00	49.0 AV	54.0	-5.0	2.13 V	64	46.5	2.5
3	#5470.00	62.6 PK	68.2	-5.6	2.13 V	64	60.1	2.5
4	*5500.00	122.4 PK			2.13 V	64	82.0	40.4
5	*5500.00	109.0 AV			2.13 V	64	68.6	40.4
6	11000.00	56.9 PK	74.0	-17.1	1.46 V	242	47.7	9.2
7	11000.00	43.2 AV	54.0	-10.8	1.46 V	242	34.0	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	110.8 PK			1.08 H	329	69.8	41.0
2	*5600.00	96.8 AV			1.08 H	329	55.8	41.0
3	11200.00	57.6 PK	74.0	-16.4	1.61 H	129	47.7	9.9
4	11200.00	44.1 AV	54.0	-9.9	1.61 H	129	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	123.2 PK			1.95 V	66	82.2	41.0
2	*5600.00	109.3 AV			1.95 V	66	68.3	41.0
3	11200.00	57.9 PK	74.0	-16.1	1.45 V	239	48.0	9.9
4	11200.00	44.4 AV	54.0	-9.6	1.45 V	239	34.5	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.8 PK			1.00 H	329	69.3	41.5
2	*5700.00	106.4 AV			1.00 H	329	64.9	41.5
3	#5725.00	59.1 PK	68.2	-9.1	1.00 H	329	55.2	3.9
4	11400.00	57.7 PK	74.0	-16.3	1.62 H	135	47.6	10.1
5	11400.00	44.2 AV	54.0	-9.8	1.62 H	135	34.1	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	122.3 PK			1.95 V	18	80.8	41.5
2	*5700.00	108.4 AV			1.95 V	18	66.9	41.5
3	#5725.00	65.2 PK	68.2	-3.0	1.95 V	18	61.3	3.9
4	11400.00	57.7 PK	74.0	-16.3	1.37 V	239	47.6	10.1
5	11400.00	44.2 AV	54.0	-9.8	1.37 V	239	34.1	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.6 PK	74.0	-16.4	1.00 H	289	55.1	2.5
2	5460.00	45.0 AV	54.0	-9.0	1.00 H	289	42.5	2.5
3	#5470.00	56.7 PK	68.2	-11.5	1.00 H	289	54.2	2.5
4	*5720.00	110.2 PK			1.00 H	289	68.7	41.5
5	*5720.00	96.2 AV			1.00 H	289	54.7	41.5
6	11440.00	58.4 PK	74.0	-15.6	1.57 H	126	48.2	10.2
7	11440.00	44.9 AV	54.0	-9.1	1.57 H	126	34.7	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.1 PK	74.0	-15.9	1.77 V	15	55.6	2.5
2	5460.00	45.9 AV	54.0	-8.1	1.77 V	15	43.4	2.5
3	#5470.00	57.6 PK	68.2	-10.6	1.77 V	15	55.1	2.5
4	*5720.00	122.6 PK			1.77 V	15	81.1	41.5
5	*5720.00	108.8 AV			1.77 V	15	67.3	41.5
6	11440.00	58.4 PK	74.0	-15.6	1.48 V	231	48.2	10.2
7	11440.00	45.0 AV	54.0	-9.0	1.48 V	231	34.8	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.00 H	324	56.4	2.6
2	5150.00	46.0 AV	54.0	-8.0	1.00 H	324	43.4	2.6
3	*5270.00	107.1 PK			1.00 H	324	67.0	40.1
4	*5270.00	94.0 AV			1.00 H	324	53.9	40.1
5	5350.00	60.9 PK	74.0	-13.1	1.00 H	324	58.6	2.3
6	5350.00	47.0 AV	54.0	-7.0	1.00 H	324	44.7	2.3
7	#10540.00	56.2 PK	68.2	-12.0	1.55 H	131	47.1	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.1 PK	74.0	-11.9	2.19 V	70	59.5	2.6
2	5150.00	48.5 AV	54.0	-5.5	2.19 V	70	45.9	2.6
3	*5270.00	120.7 PK			2.19 V	70	80.6	40.1
4	*5270.00	107.4 AV			2.19 V	70	67.3	40.1
5	5350.00	69.1 PK	74.0	-4.9	2.19 V	70	66.8	2.3
6	5350.00	53.6 AV	54.0	-0.4	2.19 V	70	51.3	2.3
7	#10540.00	56.7 PK	68.2	-11.5	1.42 V	238	47.6	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	105.0 PK			1.00 H	324	64.9	40.1
2	*5310.00	92.3 AV			1.00 H	324	52.2	40.1
3	5350.00	65.7 PK	74.0	-8.3	1.00 H	324	63.4	2.3
4	5350.00	45.7 AV	54.0	-8.3	1.00 H	324	43.4	2.3
5	10620.00	56.2 PK	74.0	-17.8	1.52 H	136	47.2	9.0
6	10620.00	42.8 AV	54.0	-11.2	1.52 H	136	33.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	118.2 PK			2.26 V	72	78.1	40.1
2	*5310.00	105.9 AV			2.26 V	72	65.8	40.1
3	5350.00	66.3 PK	74.0	-7.7	2.26 V	72	64.0	2.3
4	5350.00	50.2 AV	54.0	-3.8	2.26 V	72	47.9	2.3
5	10620.00	56.4 PK	74.0	-17.6	1.48 V	245	47.4	9.0
6	10620.00	43.0 AV	54.0	-11.0	1.48 V	245	34.0	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	1.06 H	333	55.8	2.5
2	5460.00	45.3 AV	54.0	-8.7	1.06 H	333	42.8	2.5
3	#5470.00	57.7 PK	68.2	-10.5	1.06 H	333	55.2	2.5
4	*5510.00	107.5 PK			1.06 H	333	67.1	40.4
5	*5510.00	95.1 AV			1.06 H	333	54.7	40.4
6	11020.00	56.6 PK	74.0	-17.4	1.61 H	129	47.3	9.3
7	11020.00	43.2 AV	54.0	-10.8	1.61 H	129	33.9	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.9 PK	74.0	-10.1	2.13 V	64	61.4	2.5
2	5460.00	48.7 AV	54.0	-5.3	2.13 V	64	46.2	2.5
3	#5470.00	65.0 PK	68.2	-3.2	2.13 V	64	62.5	2.5
4	*5510.00	119.7 PK			2.13 V	64	79.3	40.4
5	*5510.00	106.8 AV			2.13 V	64	66.4	40.4
6	11020.00	57.1 PK	74.0	-16.9	1.46 V	242	47.8	9.3
7	11020.00	43.7 AV	54.0	-10.3	1.46 V	242	34.4	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	107.3 PK			1.08 H	329	66.6	40.7
2	*5550.00	94.4 AV			1.08 H	329	53.7	40.7
3	11100.00	57.1 PK	74.0	-16.9	1.61 H	129	47.5	9.6
4	11100.00	43.6 AV	54.0	-10.4	1.61 H	129	34.0	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	119.8 PK			1.95 V	60	79.1	40.7
2	*5550.00	107.0 AV			1.95 V	60	66.3	40.7
3	11100.00	57.3 PK	74.0	-16.7	1.45 V	239	47.7	9.6
4	11100.00	43.8 AV	54.0	-10.2	1.45 V	239	34.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	107.9 PK			1.00 H	332	66.7	41.2
2	*5630.00	95.8 AV			1.00 H	332	54.6	41.2
3	#5725.00	59.6 PK	68.2	-8.6	1.00 H	332	55.7	3.9
4	11260.00	57.2 PK	74.0	-16.8	1.62 H	135	47.2	10.0
5	11260.00	43.7 AV	54.0	-10.3	1.62 H	135	33.7	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	120.2 PK			1.95 V	17	79.0	41.2
2	*5630.00	107.9 AV			1.95 V	17	66.7	41.2
3	#5725.00	66.5 PK	68.2	-1.7	1.95 V	17	62.6	3.9
4	11260.00	57.4 PK	74.0	-16.6	1.37 V	239	47.4	10.0
5	11260.00	43.8 AV	54.0	-10.2	1.37 V	239	33.8	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	1.00 H	289	55.8	2.5
2	5460.00	45.1 AV	54.0	-8.9	1.00 H	289	42.6	2.5
3	#5470.00	57.9 PK	68.2	-10.3	1.00 H	289	55.4	2.5
4	*5710.00	107.1 PK			1.00 H	289	65.5	41.6
5	*5710.00	93.3 AV			1.00 H	289	51.7	41.6
6	11420.00	57.5 PK	74.0	-16.5	1.57 H	126	47.4	10.1
7	11420.00	44.1 AV	54.0	-9.9	1.57 H	126	34.0	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.1 PK	74.0	-15.9	1.77 V	15	55.6	2.5
2	5460.00	46.1 AV	54.0	-7.9	1.77 V	15	43.6	2.5
3	#5470.00	57.7 PK	68.2	-10.5	1.77 V	15	55.2	2.5
4	*5710.00	120.5 PK			1.77 V	15	78.9	41.6
5	*5710.00	107.5 AV			1.77 V	15	65.9	41.6
6	11420.00	57.9 PK	74.0	-16.1	1.48 V	231	47.8	10.1
7	11420.00	44.5 AV	54.0	-9.5	1.48 V	231	34.4	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	1.00 H	324	55.6	2.6
2	5150.00	45.8 AV	54.0	-8.2	1.00 H	324	43.2	2.6
3	*5290.00	102.0 PK			1.00 H	324	61.9	40.1
4	*5290.00	89.4 AV			1.00 H	324	49.3	40.1
5	5350.00	58.1 PK	74.0	-15.9	1.00 H	324	55.8	2.3
6	5350.00	45.0 AV	54.0	-9.0	1.00 H	324	42.7	2.3
7	#10580.00	56.3 PK	68.2	-11.9	1.52 H	136	47.3	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.9 PK	74.0	-14.1	2.17 V	70	57.3	2.6
2	5150.00	47.6 AV	54.0	-6.4	2.17 V	70	45.0	2.6
3	*5290.00	114.9 PK			2.17 V	70	74.8	40.1
4	*5290.00	102.3 AV			2.17 V	70	62.2	40.1
5	5350.00	64.2 PK	74.0	-9.8	2.17 V	70	61.9	2.3
6	5350.00	51.5 AV	54.0	-2.5	2.17 V	70	49.2	2.3
7	#10580.00	56.5 PK	68.2	-11.7	1.46 V	239	47.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.5 PK	74.0	-13.5	1.00 H	333	58.0	2.5
2	5460.00	46.6 AV	54.0	-7.4	1.00 H	333	44.1	2.5
3	#5470.00	57.4 PK	68.2	-10.8	1.00 H	333	54.9	2.5
4	*5530.00	105.8 PK			1.00 H	333	65.2	40.6
5	*5530.00	97.0 AV			1.00 H	333	56.4	40.6
6	11060.00	56.8 PK	74.0	-17.2	1.58 H	136	47.3	9.5
7	11060.00	43.3 AV	54.0	-10.7	1.58 H	136	33.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	69.3 PK	74.0	-4.7	2.21 V	64	66.8	2.5
2	5460.00	52.7 AV	54.0	-1.3	2.21 V	64	50.2	2.5
3	#5470.00	66.7 PK	68.2	-1.5	2.21 V	64	64.2	2.5
4	*5530.00	117.4 PK			2.21 V	64	76.8	40.6
5	*5530.00	104.6 AV			2.21 V	64	64.0	40.6
6	11060.00	57.0 PK	74.0	-17.0	1.46 V	242	47.5	9.5
7	11060.00	43.4 AV	54.0	-10.6	1.46 V	242	33.9	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	1.08 H	329	55.8	2.5
2	5460.00	45.5 AV	54.0	-8.5	1.08 H	329	43.0	2.5
3	#5470.00	58.2 PK	68.2	-10.0	1.08 H	329	55.7	2.5
4	*5610.00	106.1 PK			1.08 H	329	65.1	41.0
5	*5610.00	92.3 AV			1.08 H	329	51.3	41.0
6	#5725.00	59.7 PK	68.2	-8.5	1.08 H	329	55.8	3.9
7	11220.00	57.5 PK	74.0	-16.5	1.61 H	129	47.6	9.9
8	11220.00	44.0 AV	54.0	-10.0	1.61 H	129	34.1	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.5 PK	74.0	-9.5	1.95 V	63	62.0	2.5
2	5460.00	50.0 AV	54.0	-4.0	1.95 V	63	47.5	2.5
3	#5470.00	66.2 PK	68.2	-2.0	1.95 V	63	63.7	2.5
4	*5610.00	117.8 PK			1.95 V	63	76.8	41.0
5	*5610.00	104.4 AV			1.95 V	63	63.4	41.0
6	#5725.00	67.0 PK	68.2	-1.2	1.95 V	63	63.1	3.9
7	11220.00	57.3 PK	74.0	-16.7	1.45 V	239	47.4	9.9
8	11220.00	43.8 AV	54.0	-10.2	1.45 V	239	33.9	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.5 PK	74.0	-15.5	1.00 H	289	56.0	2.5
2	5460.00	45.5 AV	54.0	-8.5	1.00 H	289	43.0	2.5
3	#5470.00	57.8 PK	68.2	-10.4	1.00 H	289	55.3	2.5
4	*5690.00	103.4 PK			1.00 H	289	62.0	41.4
5	*5690.00	91.2 AV			1.00 H	289	49.8	41.4
6	11380.00	57.5 PK	74.0	-16.5	1.57 H	126	47.4	10.1
7	11380.00	44.2 AV	54.0	-9.8	1.57 H	126	34.1	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.1 PK	74.0	-9.9	1.86 V	15	61.6	2.5
2	5460.00	49.6 AV	54.0	-4.4	1.86 V	15	47.1	2.5
3	#5470.00	62.2 PK	68.2	-6.0	1.86 V	15	59.7	2.5
4	*5690.00	117.5 PK			1.86 V	15	76.1	41.4
5	*5690.00	104.9 AV			1.86 V	15	63.5	41.4
6	11380.00	57.7 PK	74.0	-16.3	1.48 V	231	47.6	10.1
7	11380.00	44.3 AV	54.0	-9.7	1.48 V	231	34.2	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.1 PK	74.0	-14.9	1.00 H	323	56.5	2.6
2	5150.00	46.5 AV	54.0	-7.5	1.00 H	323	43.9	2.6
3	*5250.00	101.2 PK			1.00 H	323	61.1	40.1
4	*5250.00	89.0 AV			1.00 H	323	48.9	40.1
5	5350.00	61.2 PK	74.0	-12.8	1.00 H	323	58.9	2.3
6	5350.00	48.5 AV	54.0	-5.5	1.00 H	323	46.2	2.3
7	#10500.00	56.6 PK	68.2	-11.6	1.52 H	125	47.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	2.17 V	108	63.1	2.6
2	5150.00	53.8 AV	54.0	-0.2	2.17 V	108	51.2	2.6
3	*5250.00	112.8 PK			2.17 V	108	72.7	40.1
4	*5250.00	100.0 AV			2.17 V	108	59.9	40.1
5	5350.00	64.2 PK	74.0	-9.8	2.17 V	108	61.9	2.3
6	5350.00	51.9 AV	54.0	-2.1	2.17 V	108	49.6	2.3
7	#10500.00	56.4 PK	68.2	-11.8	1.37 V	241	47.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	1.06 H	333	56.2	2.5
2	5460.00	46.3 AV	54.0	-7.7	1.06 H	333	43.8	2.5
3	#5470.00	57.6 PK	68.2	-10.6	1.06 H	333	55.1	2.5
4	*5570.00	99.9 PK			1.06 H	333	59.1	40.8
5	*5570.00	87.8 AV			1.06 H	333	47.0	40.8
6	#5725.00	59.3 PK	68.2	-8.9	1.06 H	333	55.4	3.9
7	11140.00	57.0 PK	74.0	-17.0	1.58 H	132	47.2	9.8
8	11140.00	43.5 AV	54.0	-10.5	1.58 H	132	33.7	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.3 PK	74.0	-8.7	2.20 V	65	62.8	2.5
2	5460.00	53.2 AV	54.0	-0.8	2.20 V	65	50.7	2.5
3	#5470.00	63.7 PK	68.2	-4.5	2.20 V	65	61.2	2.5
4	*5570.00	112.3 PK			2.20 V	65	71.5	40.8
5	*5570.00	99.7 AV			2.20 V	65	58.9	40.8
6	#5725.00	62.3 PK	68.2	-5.9	2.20 V	65	58.4	3.9
7	11140.00	57.5 PK	74.0	-16.5	1.47 V	242	47.7	9.8
8	11140.00	44.1 AV	54.0	-9.9	1.47 V	242	34.3	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode A_PIFA Ant.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.2 PK	74.0	-14.8	1.34 H	13	56.6	2.6
2	5150.00	47.8 AV	54.0	-6.2	1.34 H	13	45.2	2.6
3	*5260.00	123.3 PK			1.34 H	13	83.2	40.1
4	*5260.00	112.6 AV			1.34 H	13	72.5	40.1
5	5350.00	60.6 PK	74.0	-13.4	1.34 H	13	58.3	2.3
6	5350.00	47.9 AV	54.0	-6.1	1.34 H	13	45.6	2.3
7	#10520.00	55.5 PK	68.2	-12.7	1.08 H	184	46.4	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	2.34 V	65	56.1	2.6
2	5150.00	45.8 AV	54.0	-8.2	2.34 V	65	43.2	2.6
3	*5260.00	112.0 PK			2.34 V	65	71.9	40.1
4	*5260.00	101.7 AV			2.34 V	65	61.6	40.1
5	5350.00	58.2 PK	74.0	-15.8	2.34 V	65	55.9	2.3
6	5350.00	45.4 AV	54.0	-8.6	2.34 V	65	43.1	2.3
7	#10520.00	55.3 PK	68.2	-12.9	1.24 V	131	46.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.2 PK			1.34 H	12	83.1	40.1
2	*5300.00	112.5 AV			1.34 H	12	72.4	40.1
3	5350.00	68.3 PK	74.0	-5.7	1.34 H	12	66.0	2.3
4	5350.00	53.6 AV	54.0	-0.4	1.34 H	12	51.3	2.3
5	10600.00	56.7 PK	74.0	-17.3	1.12 H	183	47.6	9.1
6	10600.00	43.6 AV	54.0	-10.4	1.12 H	183	34.5	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.6 PK			2.37 V	68	72.5	40.1
2	*5300.00	101.7 AV			2.37 V	68	61.6	40.1
3	5350.00	61.4 PK	74.0	-12.6	2.37 V	68	59.1	2.3
4	5350.00	48.8 AV	54.0	-5.2	2.37 V	68	46.5	2.3
5	10600.00	56.5 PK	74.0	-17.5	1.27 V	135	47.4	9.1
6	10600.00	43.5 AV	54.0	-10.5	1.27 V	135	34.4	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	122.2 PK			1.18 H	13	82.1	40.1
2	*5320.00	111.6 AV			1.18 H	13	71.5	40.1
3	5350.00	65.9 PK	74.0	-8.1	1.18 H	13	63.6	2.3
4	5350.00	53.4 AV	54.0	-0.6	1.18 H	13	51.1	2.3
5	10640.00	56.4 PK	74.0	-17.6	1.25 H	174	47.5	8.9
6	10640.00	43.2 AV	54.0	-10.8	1.25 H	174	34.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.7 PK			2.41 V	53	70.6	40.1
2	*5320.00	101.0 AV			2.41 V	53	60.9	40.1
3	5350.00	61.8 PK	74.0	-12.2	2.41 V	53	59.5	2.3
4	5350.00	48.0 AV	54.0	-6.0	2.41 V	53	45.7	2.3
5	10640.00	55.7 PK	74.0	-18.3	1.20 V	152	46.8	8.9
6	10640.00	42.6 AV	54.0	-11.4	1.20 V	152	33.7	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.2 PK	74.0	-10.8	1.00 H	16	60.7	2.5
2	5460.00	50.8 AV	54.0	-3.2	1.00 H	16	48.3	2.5
3	#5470.00	64.7 PK	68.2	-3.5	1.00 H	16	62.2	2.5
4	*5500.00	123.5 PK			1.00 H	16	83.1	40.4
5	*5500.00	112.8 AV			1.00 H	16	72.4	40.4
6	11000.00	56.9 PK	74.0	-17.1	1.17 H	182	47.7	9.2
7	11000.00	43.7 AV	54.0	-10.3	1.17 H	182	34.5	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.4 PK	74.0	-15.6	2.38 V	67	55.9	2.5
2	5460.00	46.7 AV	54.0	-7.3	2.38 V	67	44.2	2.5
3	#5470.00	60.4 PK	68.2	-7.8	2.38 V	67	57.9	2.5
4	*5500.00	111.7 PK			2.38 V	67	71.3	40.4
5	*5500.00	101.9 AV			2.38 V	67	61.5	40.4
6	11000.00	56.1 PK	74.0	-17.9	1.26 V	137	46.9	9.2
7	11000.00	43.4 AV	54.0	-10.6	1.26 V	137	34.2	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.3 PK			1.00 H	19	83.3	41.0
2	*5600.00	113.7 AV			1.00 H	19	72.7	41.0
3	11200.00	57.3 PK	74.0	-16.7	1.16 H	185	47.4	9.9
4	11200.00	44.1 AV	54.0	-9.9	1.16 H	185	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	112.5 PK			2.39 V	67	71.5	41.0
2	*5600.00	102.7 AV			2.39 V	67	61.7	41.0
3	11200.00	57.0 PK	74.0	-17.0	1.28 V	137	47.1	9.9
4	11200.00	44.3 AV	54.0	-9.7	1.28 V	137	34.4	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	122.3 PK			1.00 H	15	80.8	41.5
2	*5700.00	112.0 AV			1.00 H	15	70.5	41.5
3	#5725.00	67.0 PK	68.2	-1.2	1.00 H	15	63.1	3.9
4	11400.00	58.5 PK	74.0	-15.5	1.14 H	182	48.4	10.1
5	11400.00	44.9 AV	54.0	-9.1	1.14 H	182	34.8	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.3 PK			2.42 V	69	69.8	41.5
2	*5700.00	100.9 AV			2.42 V	69	59.4	41.5
3	#5725.00	61.1 PK	68.2	-7.1	2.42 V	69	57.2	3.9
4	11400.00	58.2 PK	74.0	-15.8	1.22 V	140	48.1	10.1
5	11400.00	44.6 AV	54.0	-9.4	1.22 V	140	34.5	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	1.00 H	17	56.2	2.5
2	5460.00	47.1 AV	54.0	-6.9	1.00 H	17	44.6	2.5
3	#5470.00	57.5 PK	68.2	-10.7	1.00 H	17	55.0	2.5
4	*5720.00	122.0 PK			1.00 H	17	80.5	41.5
5	*5720.00	111.5 AV			1.00 H	17	70.0	41.5
6	11440.00	57.8 PK	74.0	-16.2	1.18 H	192	47.6	10.2
7	11440.00	44.6 AV	54.0	-9.4	1.18 H	192	34.4	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.1 PK	74.0	-15.9	2.41 V	62	55.6	2.5
2	5460.00	46.8 AV	54.0	-7.2	2.41 V	62	44.3	2.5
3	#5470.00	57.5 PK	68.2	-10.7	2.41 V	62	55.0	2.5
4	*5720.00	112.1 PK			2.41 V	62	70.6	41.5
5	*5720.00	101.0 AV			2.41 V	62	59.5	41.5
6	11440.00	57.6 PK	74.0	-16.4	1.22 V	145	47.4	10.2
7	11440.00	44.4 AV	54.0	-9.6	1.22 V	145	34.2	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.34 H	13	57.0	2.6
2	5150.00	47.4 AV	54.0	-6.6	1.34 H	13	44.8	2.6
3	*5260.00	125.9 PK			1.34 H	13	85.8	40.1
4	*5260.00	111.8 AV			1.34 H	13	71.7	40.1
5	5350.00	61.7 PK	74.0	-12.3	1.34 H	13	59.4	2.3
6	5350.00	49.5 AV	54.0	-4.5	1.34 H	13	47.2	2.3
7	#10520.00	56.4 PK	68.2	-11.8	1.08 H	184	47.3	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	2.34 V	65	56.0	2.6
2	5150.00	45.8 AV	54.0	-8.2	2.34 V	65	43.2	2.6
3	*5260.00	114.3 PK			2.34 V	65	74.2	40.1
4	*5260.00	101.1 AV			2.34 V	65	61.0	40.1
5	5350.00	58.3 PK	74.0	-15.7	2.34 V	65	56.0	2.3
6	5350.00	45.6 AV	54.0	-8.4	2.34 V	65	43.3	2.3
7	#10520.00	56.0 PK	68.2	-12.2	1.24 V	131	46.9	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.1 PK	74.0	-12.9	1.34 H	13	58.5	2.6
2	5150.00	47.8 AV	54.0	-6.2	1.34 H	13	45.2	2.6
3	*5300.00	125.4 PK			1.34 H	13	85.3	40.1
4	*5300.00	111.4 AV			1.34 H	13	71.3	40.1
5	5350.00	70.7 PK	74.0	-3.3	1.34 H	13	68.4	2.3
6	5350.00	53.2 AV	54.0	-0.8	1.34 H	13	50.9	2.3
7	10600.00	56.3 PK	74.0	-17.7	1.12 H	183	47.2	9.1
8	10600.00	43.2 AV	54.0	-10.8	1.12 H	183	34.1	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	2.37 V	68	56.1	2.6
2	5150.00	45.7 AV	54.0	-8.3	2.37 V	68	43.1	2.6
3	*5300.00	114.9 PK			2.37 V	68	74.8	40.1
4	*5300.00	100.5 AV			2.37 V	68	60.4	40.1
5	5350.00	61.7 PK	74.0	-12.3	2.37 V	68	59.4	2.3
6	5350.00	47.7 AV	54.0	-6.3	2.37 V	68	45.4	2.3
7	10600.00	55.9 PK	74.0	-18.1	1.27 V	135	46.8	9.1
8	10600.00	42.8 AV	54.0	-11.2	1.27 V	135	33.7	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.3 PK			1.18 H	13	83.2	40.1
2	*5320.00	110.1 AV			1.18 H	13	70.0	40.1
3	5350.00	69.1 PK	74.0	-4.9	1.18 H	13	66.8	2.3
4	5350.00	52.7 AV	54.0	-1.3	1.18 H	13	50.4	2.3
5	10640.00	55.9 PK	74.0	-18.1	1.25 H	174	47.0	8.9
6	10640.00	42.7 AV	54.0	-11.3	1.25 H	174	33.8	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.6 PK			2.41 V	53	72.5	40.1
2	*5320.00	99.0 AV			2.41 V	53	58.9	40.1
3	5350.00	59.0 PK	74.0	-15.0	2.41 V	53	56.7	2.3
4	5350.00	46.2 AV	54.0	-7.8	2.41 V	53	43.9	2.3
5	10640.00	55.7 PK	74.0	-18.3	1.20 V	152	46.8	8.9
6	10640.00	43.5 AV	54.0	-10.5	1.20 V	152	34.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.0 PK	74.0	-11.0	1.00 H	16	60.5	2.5
2	5460.00	50.3 AV	54.0	-3.7	1.00 H	16	47.8	2.5
3	#5470.00	65.6 PK	68.2	-2.6	1.00 H	16	63.1	2.5
4	*5500.00	126.3 PK			1.00 H	16	85.9	40.4
5	*5500.00	112.6 AV			1.00 H	16	72.2	40.4
6	11000.00	57.4 PK	74.0	-16.6	1.17 H	182	48.2	9.2
7	11000.00	43.9 AV	54.0	-10.1	1.17 H	182	34.7	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	2.38 V	67	56.6	2.5
2	5460.00	45.9 AV	54.0	-8.1	2.38 V	67	43.4	2.5
3	#5470.00	58.6 PK	68.2	-9.6	2.38 V	67	56.1	2.5
4	*5500.00	115.1 PK			2.38 V	67	74.7	40.4
5	*5500.00	101.4 AV			2.38 V	67	61.0	40.4
6	11000.00	57.1 PK	74.0	-16.9	1.26 V	137	47.9	9.2
7	11000.00	43.8 AV	54.0	-10.2	1.26 V	137	34.6	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	127.1 PK			1.00 H	19	86.1	41.0
2	*5600.00	113.4 AV			1.00 H	19	72.4	41.0
3	11200.00	57.6 PK	74.0	-16.4	1.16 H	185	47.7	9.9
4	11200.00	44.1 AV	54.0	-9.9	1.16 H	185	34.2	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	115.9 PK			2.39 V	67	74.9	41.0
2	*5600.00	102.2 AV			2.39 V	67	61.2	41.0
3	11200.00	57.5 PK	74.0	-16.5	1.28 V	137	47.6	9.9
4	11200.00	44.2 AV	54.0	-9.8	1.28 V	137	34.3	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	124.7 PK			1.00 H	15	83.2	41.5
2	*5700.00	110.6 AV			1.00 H	15	69.1	41.5
3	#5725.00	67.4 PK	68.2	-0.8	1.00 H	15	63.5	3.9
4	11400.00	58.2 PK	74.0	-15.8	1.14 H	182	48.1	10.1
5	11400.00	44.5 AV	54.0	-9.5	1.14 H	182	34.4	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.6 PK			2.42 V	69	72.1	41.5
2	*5700.00	100.2 AV			2.42 V	69	58.7	41.5
3	#5725.00	62.2 PK	68.2	-6.0	2.42 V	69	58.3	3.9
4	11400.00	58.2 PK	74.0	-15.8	1.22 V	140	48.1	10.1
5	11400.00	44.7 AV	54.0	-9.3	1.22 V	140	34.6	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	1.00 H	17	56.2	2.5
2	5460.00	46.7 AV	54.0	-7.3	1.00 H	17	44.2	2.5
3	#5470.00	58.0 PK	68.2	-10.2	1.00 H	17	55.5	2.5
4	*5720.00	123.3 PK			1.00 H	17	81.8	41.5
5	*5720.00	110.4 AV			1.00 H	17	68.9	41.5
6	11440.00	57.5 PK	74.0	-16.5	1.18 H	192	47.3	10.2
7	11440.00	44.4 AV	54.0	-9.6	1.18 H	192	34.2	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	2.41 V	62	55.8	2.5
2	5460.00	45.5 AV	54.0	-8.5	2.41 V	62	43.0	2.5
3	#5470.00	56.6 PK	68.2	-11.6	2.41 V	62	54.1	2.5
4	*5720.00	113.5 PK			2.41 V	62	72.0	41.5
5	*5720.00	100.4 AV			2.41 V	62	58.9	41.5
6	11440.00	57.8 PK	74.0	-16.2	1.22 V	145	47.6	10.2
7	11440.00	44.6 AV	54.0	-9.4	1.22 V	145	34.4	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.34 H	13	56.9	2.6
2	5150.00	47.9 AV	54.0	-6.1	1.34 H	13	45.3	2.6
3	*5270.00	121.7 PK			1.34 H	13	81.6	40.1
4	*5270.00	108.5 AV			1.34 H	13	68.4	40.1
5	5350.00	66.8 PK	74.0	-7.2	1.34 H	13	64.5	2.3
6	5350.00	52.1 AV	54.0	-1.9	1.34 H	13	49.8	2.3
7	#10540.00	56.1 PK	68.2	-12.1	1.08 H	184	47.0	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	2.34 V	65	55.9	2.6
2	5150.00	46.1 AV	54.0	-7.9	2.34 V	65	43.5	2.6
3	*5270.00	110.3 PK			2.34 V	65	70.2	40.1
4	*5270.00	97.6 AV			2.34 V	65	57.5	40.1
5	5350.00	58.5 PK	74.0	-15.5	2.34 V	65	56.2	2.3
6	5350.00	46.3 AV	54.0	-7.7	2.34 V	65	44.0	2.3
7	#10540.00	56.4 PK	68.2	-11.8	1.24 V	131	47.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	122.1 PK			1.18 H	13	82.0	40.1
2	*5310.00	108.7 AV			1.18 H	13	68.6	40.1
3	5350.00	70.4 PK	74.0	-3.6	1.18 H	13	68.1	2.3
4	5350.00	53.7 AV	54.0	-0.3	1.18 H	13	51.4	2.3
5	10620.00	55.7 PK	74.0	-18.3	1.25 H	174	46.7	9.0
6	10620.00	43.0 AV	54.0	-11.0	1.25 H	174	34.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	110.3 PK			2.41 V	53	70.2	40.1
2	*5310.00	97.7 AV			2.41 V	53	57.6	40.1
3	5350.00	62.9 PK	74.0	-11.1	2.41 V	53	60.6	2.3
4	5350.00	47.4 AV	54.0	-6.6	2.41 V	53	45.1	2.3
5	10620.00	55.4 PK	74.0	-18.6	1.20 V	152	46.4	9.0
6	10620.00	42.3 AV	54.0	-11.7	1.20 V	152	33.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.4 PK	74.0	-9.6	1.00 H	16	61.9	2.5
2	5460.00	51.4 AV	54.0	-2.6	1.00 H	16	48.9	2.5
3	#5470.00	65.9 PK	68.2	-2.3	1.00 H	16	63.4	2.5
4	*5510.00	123.7 PK			1.00 H	16	83.3	40.4
5	*5510.00	111.1 AV			1.00 H	16	70.7	40.4
6	11020.00	57.3 PK	74.0	-16.7	1.17 H	182	48.0	9.3
7	11020.00	43.8 AV	54.0	-10.2	1.17 H	182	34.5	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.0 PK	74.0	-15.0	2.38 V	67	56.5	2.5
2	5460.00	49.8 AV	54.0	-4.2	2.38 V	67	47.3	2.5
3	#5470.00	60.0 PK	68.2	-8.2	2.38 V	67	57.5	2.5
4	*5510.00	113.4 PK			2.38 V	67	73.0	40.4
5	*5510.00	100.0 AV			2.38 V	67	59.6	40.4
6	11020.00	57.1 PK	74.0	-16.9	1.26 V	137	47.8	9.3
7	11020.00	43.6 AV	54.0	-10.4	1.26 V	137	34.3	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.3 PK	74.0	-10.7	1.00 H	15	60.8	2.5
2	5460.00	49.5 AV	54.0	-4.5	1.00 H	15	47.0	2.5
3	#5470.00	63.7 PK	68.2	-4.5	1.00 H	15	61.2	2.5
4	*5550.00	123.8 PK			1.00 H	15	83.1	40.7
5	*5550.00	110.7 AV			1.00 H	15	70.0	40.7
6	11100.00	57.4 PK	74.0	-16.6	1.16 H	182	47.8	9.6
7	11100.00	43.8 AV	54.0	-10.2	1.16 H	182	34.2	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.0 PK	74.0	-15.0	2.39 V	61	56.5	2.5
2	5460.00	45.7 AV	54.0	-8.3	2.39 V	61	43.2	2.5
3	#5470.00	58.6 PK	68.2	-9.6	2.39 V	61	56.1	2.5
4	*5550.00	113.2 PK			2.39 V	61	72.5	40.7
5	*5550.00	100.0 AV			2.39 V	61	59.3	40.7
6	11100.00	57.6 PK	74.0	-16.4	1.22 V	136	48.0	9.6
7	11100.00	44.0 AV	54.0	-10.0	1.22 V	136	34.4	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	123.9 PK			1.00 H	14	82.7	41.2
2	*5630.00	110.2 AV			1.00 H	14	69.0	41.2
3	#5725.00	64.5 PK	68.2	-3.7	1.00 H	14	60.6	3.9
4	11260.00	57.7 PK	74.0	-16.3	1.14 H	182	47.7	10.0
5	11260.00	44.1 AV	54.0	-9.9	1.14 H	182	34.1	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	112.4 PK			2.42 V	69	71.2	41.2
2	*5630.00	99.5 AV			2.42 V	69	58.3	41.2
3	#5725.00	59.5 PK	68.2	-8.7	2.42 V	69	55.6	3.9
4	11260.00	58.0 PK	74.0	-16.0	1.22 V	140	48.0	10.0
5	11260.00	44.3 AV	54.0	-9.7	1.22 V	140	34.3	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.8 PK	74.0	-15.2	1.00 H	5	56.3	2.5
2	5460.00	45.5 AV	54.0	-8.5	1.00 H	5	43.0	2.5
3	#5470.00	57.8 PK	68.2	-10.4	1.00 H	5	55.3	2.5
4	*5710.00	119.5 PK			1.00 H	5	77.9	41.6
5	*5710.00	107.3 AV			1.00 H	5	65.7	41.6
6	11420.00	57.1 PK	74.0	-16.9	1.18 H	192	47.0	10.1
7	11420.00	43.9 AV	54.0	-10.1	1.18 H	192	33.8	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	2.39 V	62	56.4	2.5
2	5460.00	45.2 AV	54.0	-8.8	2.39 V	62	42.7	2.5
3	#5470.00	57.9 PK	68.2	-10.3	2.39 V	62	55.4	2.5
4	*5710.00	109.0 PK			2.39 V	62	67.4	41.6
5	*5710.00	96.4 AV			2.39 V	62	54.8	41.6
6	11420.00	57.2 PK	74.0	-16.8	1.22 V	145	47.1	10.1
7	11420.00	44.2 AV	54.0	-9.8	1.22 V	145	34.1	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.29 H	13	57.5	2.6
2	5150.00	48.5 AV	54.0	-5.5	1.29 H	13	45.9	2.6
3	*5290.00	118.2 PK			1.29 H	13	78.1	40.1
4	*5290.00	105.0 AV			1.29 H	13	64.9	40.1
5	5350.00	65.7 PK	74.0	-8.3	1.29 H	13	63.4	2.3
6	5350.00	53.4 AV	54.0	-0.6	1.29 H	13	51.1	2.3
7	#10580.00	56.2 PK	68.2	-12.0	1.08 H	182	47.2	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	2.34 V	65	56.3	2.6
2	5150.00	45.9 AV	54.0	-8.1	2.34 V	65	43.3	2.6
3	*5290.00	107.1 PK			2.34 V	65	67.0	40.1
4	*5290.00	93.9 AV			2.34 V	65	53.8	40.1
5	5350.00	59.3 PK	74.0	-14.7	1.00 V	65	57.0	2.3
6	5350.00	46.8 AV	54.0	-7.2	1.00 V	65	44.5	2.3
7	#10580.00	55.9 PK	68.2	-12.3	1.24 V	129	46.9	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.3 PK	74.0	-6.7	1.00 H	16	64.8	2.5
2	5460.00	53.4 AV	54.0	-0.6	1.00 H	16	50.9	2.5
3	#5470.00	67.1 PK	68.2	-1.1	1.00 H	16	64.6	2.5
4	*5530.00	120.7 PK			1.00 H	16	80.1	40.6
5	*5530.00	108.1 AV			1.00 H	16	67.5	40.6
6	11060.00	57.0 PK	74.0	-17.0	1.12 H	179	47.5	9.5
7	11060.00	43.3 AV	54.0	-10.7	1.12 H	179	33.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.5 PK	74.0	-14.5	2.41 V	72	57.0	2.5
2	5460.00	46.9 AV	54.0	-7.1	2.41 V	72	44.4	2.5
3	#5470.00	58.1 PK	68.2	-10.1	2.41 V	72	55.6	2.5
4	*5530.00	109.2 PK			2.41 V	72	68.6	40.6
5	*5530.00	96.0 AV			2.41 V	72	55.4	40.6
6	11060.00	56.9 PK	74.0	-17.1	1.26 V	137	47.4	9.5
7	11060.00	43.3 AV	54.0	-10.7	1.26 V	137	33.8	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.0 PK	74.0	-10.0	1.00 H	17	61.5	2.5
2	5460.00	50.6 AV	54.0	-3.4	1.00 H	17	48.1	2.5
3	#5470.00	64.6 PK	68.2	-3.6	1.00 H	17	62.1	2.5
4	*5610.00	121.2 PK			1.00 H	17	80.2	41.0
5	*5610.00	108.0 AV			1.00 H	17	67.0	41.0
6	#5725.00	65.8 PK	68.2	-2.4	1.00 H	17	61.9	3.9
7	11220.00	57.6 PK	74.0	-16.4	1.14 H	178	47.7	9.9
8	11220.00	43.9 AV	54.0	-10.1	1.14 H	178	34.0	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	2.40 V	68	56.6	2.5
2	5460.00	46.6 AV	54.0	-7.4	2.40 V	68	44.1	2.5
3	#5470.00	58.9 PK	68.2	-9.3	2.40 V	68	56.4	2.5
4	*5610.00	109.5 PK			2.40 V	68	68.5	41.0
5	*5610.00	96.8 AV			2.40 V	68	55.8	41.0
6	#5725.00	59.7 PK	68.2	-8.5	2.40 V	68	55.8	3.9
7	11220.00	57.5 PK	74.0	-16.5	1.28 V	134	47.6	9.9
8	11220.00	43.8 AV	54.0	-10.2	1.28 V	134	33.9	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.8 PK	74.0	-8.2	1.00 H	4	63.3	2.5
2	5460.00	51.3 AV	54.0	-2.7	1.00 H	4	48.8	2.5
3	#5470.00	65.3 PK	68.2	-2.9	1.00 H	4	62.8	2.5
4	*5690.00	117.8 PK			1.00 H	4	76.4	41.4
5	*5690.00	104.8 AV			1.00 H	4	63.4	41.4
6	11380.00	57.5 PK	74.0	-16.5	1.18 H	183	47.4	10.1
7	11380.00	44.3 AV	54.0	-9.7	1.18 H	183	34.2	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.6 PK	74.0	-13.4	2.39 V	67	58.1	2.5
2	5460.00	47.6 AV	54.0	-6.4	2.39 V	67	45.1	2.5
3	#5470.00	59.8 PK	68.2	-8.4	2.39 V	67	57.3	2.5
4	*5690.00	106.6 PK			2.39 V	67	65.2	41.4
5	*5690.00	93.9 AV			2.39 V	67	52.5	41.4
6	11380.00	57.0 PK	74.0	-17.0	1.20 V	142	46.9	10.1
7	11380.00	43.8 AV	54.0	-10.2	1.20 V	142	33.7	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.8 PK	74.0	-9.2	1.26 H	26	62.2	2.6
2	5150.00	52.7 AV	54.0	-1.3	1.26 H	26	50.1	2.6
3	*5250.00	114.6 PK			1.26 H	26	74.5	40.1
4	*5250.00	102.0 AV			1.26 H	26	61.9	40.1
5	5350.00	66.5 PK	74.0	-7.5	1.26 H	26	64.2	2.3
6	5350.00	53.5 AV	54.0	-0.5	1.26 H	26	51.2	2.3
7	#10500.00	55.5 PK	68.2	-12.7	1.02 H	188	46.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	2.42 V	65	56.8	2.6
2	5150.00	47.1 AV	54.0	-6.9	2.42 V	65	44.5	2.6
3	*5250.00	103.8 PK			2.42 V	65	63.7	40.1
4	*5250.00	91.6 AV			2.42 V	65	51.5	40.1
5	5350.00	59.4 PK	74.0	-14.6	2.42 V	65	57.1	2.3
6	5350.00	47.5 AV	54.0	-6.5	2.42 V	65	45.2	2.3
7	#10500.00	55.7 PK	68.2	-12.5	1.08 V	131	46.7	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	68.1 PK	74.0	-5.9	1.00 H	17	65.6	2.5
2	5460.00	53.8 AV	54.0	-0.2	1.00 H	17	51.3	2.5
3	#5470.00	66.3 PK	68.2	-1.9	1.00 H	17	63.8	2.5
4	*5570.00	114.8 PK			1.00 H	17	74.0	40.8
5	*5570.00	102.0 AV			1.00 H	17	61.2	40.8
6	#5725.00	65.7 PK	68.2	-2.5	1.00 H	17	61.8	3.9
7	11140.00	57.5 PK	74.0	-16.5	1.14 H	185	47.7	9.8
8	11140.00	43.6 AV	54.0	-10.4	1.14 H	185	33.8	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.2 PK	74.0	-13.8	2.38 V	72	57.7	2.5
2	5460.00	48.2 AV	54.0	-5.8	2.38 V	72	45.7	2.5
3	#5470.00	57.4 PK	68.2	-10.8	2.38 V	72	54.9	2.5
4	*5570.00	104.3 PK			2.38 V	72	63.5	40.8
5	*5570.00	91.0 AV			2.38 V	72	50.2	40.8
6	#5725.00	58.9 PK	68.2	-9.3	2.38 V	72	55.0	3.9
7	11140.00	57.3 PK	74.0	-16.7	1.28 V	144	47.5	9.8
8	11140.00	43.4 AV	54.0	-10.6	1.28 V	144	33.6	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B_Dipole Ant.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.08 H	150	56.0	2.6
2	5150.00	45.8 AV	54.0	-8.2	1.08 H	150	43.2	2.6
3	*5260.00	111.2 PK			1.08 H	150	71.1	40.1
4	*5260.00	100.1 AV			1.08 H	150	60.0	40.1
5	5350.00	58.2 PK	74.0	-15.8	1.08 H	150	55.9	2.3
6	5350.00	45.0 AV	54.0	-9.0	1.08 H	150	42.7	2.3
7	#10520.00	57.0 PK	68.2	-11.2	2.07 H	152	47.9	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	2.12 V	65	59.6	2.6
2	5150.00	49.0 AV	54.0	-5.0	2.12 V	65	46.4	2.6
3	*5260.00	121.7 PK			2.12 V	65	81.6	40.1
4	*5260.00	111.6 AV			2.12 V	65	71.5	40.1
5	5350.00	62.4 PK	74.0	-11.6	2.12 V	65	60.1	2.3
6	5350.00	49.3 AV	54.0	-4.7	2.12 V	65	47.0	2.3
7	#10520.00	57.6 PK	68.2	-10.6	1.89 V	97	48.5	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	1.08 H	151	55.6	2.6
2	5150.00	45.7 AV	54.0	-8.3	1.08 H	151	43.1	2.6
3	*5300.00	109.6 PK			1.08 H	151	69.5	40.1
4	*5300.00	99.2 AV			1.08 H	151	59.1	40.1
5	5350.00	57.8 PK	74.0	-16.2	1.08 H	151	55.5	2.3
6	5350.00	45.7 AV	54.0	-8.3	1.08 H	151	43.4	2.3
7	10600.00	57.3 PK	74.0	-16.7	2.01 H	152	48.2	9.1
8	10600.00	43.7 AV	54.0	-10.3	2.01 H	152	34.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	2.23 V	65	57.8	2.6
2	5150.00	49.6 AV	54.0	-4.4	2.23 V	65	47.0	2.6
3	*5300.00	121.9 PK			2.23 V	65	81.8	40.1
4	*5300.00	111.4 AV			2.23 V	65	71.3	40.1
5	5350.00	67.3 PK	74.0	-6.7	2.23 V	65	65.0	2.3
6	5350.00	51.3 AV	54.0	-2.7	2.23 V	65	49.0	2.3
7	10600.00	57.3 PK	74.0	-16.7	1.89 V	94	48.2	9.1
8	10600.00	44.2 AV	54.0	-9.8	1.89 V	94	35.1	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.6 PK			1.04 H	151	69.5	40.1
2	*5320.00	99.0 AV			1.04 H	151	58.9	40.1
3	5350.00	58.4 PK	74.0	-15.6	1.04 H	151	56.1	2.3
4	5350.00	46.1 AV	54.0	-7.9	1.04 H	151	43.8	2.3
5	10640.00	57.1 PK	74.0	-16.9	2.09 H	144	48.2	8.9
6	10640.00	43.7 AV	54.0	-10.3	2.09 H	144	34.8	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.9 PK			2.26 V	65	80.8	40.1
2	*5320.00	110.7 AV			2.26 V	65	70.6	40.1
3	5350.00	65.9 PK	74.0	-8.1	2.26 V	65	63.6	2.3
4	5350.00	52.0 AV	54.0	-2.0	2.26 V	65	49.7	2.3
5	10640.00	56.5 PK	74.0	-17.5	1.92 V	87	47.6	8.9
6	10640.00	43.1 AV	54.0	-10.9	1.92 V	87	34.2	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	1.11 H	153	56.4	2.5
2	5460.00	45.9 AV	54.0	-8.1	1.11 H	153	43.4	2.5
3	#5470.00	58.6 PK	68.2	-9.6	1.11 H	153	56.1	2.5
4	*5500.00	109.2 PK			1.11 H	153	68.8	40.4
5	*5500.00	98.8 AV			1.11 H	153	58.4	40.4
6	11000.00	57.3 PK	74.0	-16.7	2.14 H	151	48.1	9.2
7	11000.00	43.7 AV	54.0	-10.3	2.14 H	151	34.5	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.1 PK	74.0	-10.9	2.11 V	61	60.6	2.5
2	5460.00	52.4 AV	54.0	-1.6	2.11 V	61	49.9	2.5
3	#5470.00	64.9 PK	68.2	-3.3	2.11 V	61	62.4	2.5
4	*5500.00	119.6 PK			2.11 V	61	79.2	40.4
5	*5500.00	109.3 AV			2.11 V	61	68.9	40.4
6	11000.00	57.6 PK	74.0	-16.4	1.74 V	95	48.4	9.2
7	11000.00	44.0 AV	54.0	-10.0	1.74 V	95	34.8	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	111.3 PK			1.14 H	158	70.3	41.0
2	*5600.00	100.8 AV			1.14 H	158	59.8	41.0
3	11200.00	57.9 PK	74.0	-16.1	2.09 H	147	48.0	9.9
4	11200.00	44.3 AV	54.0	-9.7	2.09 H	147	34.4	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	120.0 PK			2.07 V	62	79.0	41.0
2	*5600.00	110.8 AV			2.07 V	62	69.8	41.0
3	11200.00	58.2 PK	74.0	-15.8	1.80 V	94	48.3	9.9
4	11200.00	44.5 AV	54.0	-9.5	1.80 V	94	34.6	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.5 PK			1.00 H	138	67.0	41.5
2	*5700.00	98.1 AV			1.00 H	138	56.6	41.5
3	#5725.00	60.0 PK	68.2	-8.2	1.00 H	138	56.1	3.9
4	11400.00	58.0 PK	74.0	-16.0	2.29 H	157	47.9	10.1
5	11400.00	44.3 AV	54.0	-9.7	2.29 H	157	34.2	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.4 PK			2.15 V	194	76.9	41.5
2	*5700.00	108.4 AV			2.15 V	194	66.9	41.5
3	#5725.00	65.8 PK	68.2	-2.4	2.15 V	194	61.9	3.9
4	11400.00	58.1 PK	74.0	-15.9	1.81 V	104	48.0	10.1
5	11400.00	44.4 AV	54.0	-9.6	1.81 V	104	34.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.7 PK	74.0	-16.3	1.05 H	138	55.2	2.5
2	5460.00	45.4 AV	54.0	-8.6	1.05 H	138	42.9	2.5
3	#5470.00	56.8 PK	68.2	-11.4	1.05 H	138	54.3	2.5
4	*5720.00	109.4 PK			1.05 H	138	67.9	41.5
5	*5720.00	98.4 AV			1.05 H	138	56.9	41.5
6	11440.00	58.4 PK	74.0	-15.6	2.32 H	158	48.2	10.2
7	11440.00	44.7 AV	54.0	-9.3	2.32 H	158	34.5	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	2.09 V	189	56.6	2.5
2	5460.00	47.1 AV	54.0	-6.9	2.09 V	189	44.6	2.5
3	*5720.00	119.3 PK			2.09 V	189	77.8	41.5
4	*5720.00	108.9 AV			2.09 V	189	67.4	41.5
5	#5725.00	59.4 PK	68.2	-8.8	2.09 V	189	55.5	3.9
6	11440.00	58.6 PK	74.0	-15.4	1.83 V	107	48.4	10.2
7	11440.00	44.9 AV	54.0	-9.1	1.83 V	107	34.7	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.08 H	150	55.7	2.6
2	5150.00	45.8 AV	54.0	-8.2	1.08 H	150	43.2	2.6
3	*5260.00	112.3 PK			1.08 H	150	72.2	40.1
4	*5260.00	99.0 AV			1.08 H	150	58.9	40.1
5	5350.00	57.5 PK	74.0	-16.5	1.08 H	150	55.2	2.3
6	5350.00	45.1 AV	54.0	-8.9	1.08 H	150	42.8	2.3
7	#10520.00	56.7 PK	68.2	-11.5	2.07 H	152	47.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.8 PK	74.0	-13.2	2.12 V	65	58.2	2.6
2	5150.00	48.6 AV	54.0	-5.4	2.12 V	65	46.0	2.6
3	*5260.00	125.0 PK			2.12 V	65	84.9	40.1
4	*5260.00	110.8 AV			2.12 V	65	70.7	40.1
5	5350.00	64.6 PK	74.0	-9.4	2.12 V	65	62.3	2.3
6	5350.00	49.9 AV	54.0	-4.1	2.12 V	65	47.6	2.3
7	#10520.00	57.2 PK	68.2	-11.0	1.89 V	97	48.1	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.08 H	150	56.9	2.6
2	5150.00	45.9 AV	54.0	-8.1	1.08 H	150	43.3	2.6
3	*5300.00	112.1 PK			1.08 H	150	72.0	40.1
4	*5300.00	99.0 AV			1.08 H	150	58.9	40.1
5	5350.00	60.3 PK	74.0	-13.7	1.08 H	150	58.0	2.3
6	5350.00	46.6 AV	54.0	-7.4	1.08 H	150	44.3	2.3
7	10600.00	57.1 PK	74.0	-16.9	2.01 H	152	48.0	9.1
8	10600.00	43.5 AV	54.0	-10.5	2.01 H	152	34.4	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	2.23 V	65	59.6	2.6
2	5150.00	49.1 AV	54.0	-4.9	2.23 V	65	46.5	2.6
3	*5300.00	123.9 PK			2.23 V	65	83.8	40.1
4	*5300.00	110.4 AV			2.23 V	65	70.3	40.1
5	5350.00	71.8 PK	74.0	-2.2	2.23 V	65	69.5	2.3
6	5350.00	53.3 AV	54.0	-0.7	2.23 V	65	51.0	2.3
7	10600.00	56.8 PK	74.0	-17.2	1.89 V	94	47.7	9.1
8	10600.00	43.2 AV	54.0	-10.8	1.89 V	94	34.1	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.0 PK			1.04 H	151	69.9	40.1
2	*5320.00	96.3 AV			1.04 H	151	56.2	40.1
3	5350.00	58.6 PK	74.0	-15.4	1.04 H	151	56.3	2.3
4	5350.00	45.3 AV	54.0	-8.7	1.04 H	151	43.0	2.3
5	10640.00	56.2 PK	74.0	-17.8	2.09 H	144	47.3	8.9
6	10640.00	42.7 AV	54.0	-11.3	2.09 H	144	33.8	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.4 PK			2.26 V	65	83.3	40.1
2	*5320.00	108.7 AV			2.26 V	65	68.6	40.1
3	5350.00	69.4 PK	74.0	-4.6	2.26 V	65	67.1	2.3
4	5350.00	51.9 AV	54.0	-2.1	2.26 V	65	49.6	2.3
5	10640.00	56.6 PK	74.0	-17.4	1.92 V	87	47.7	8.9
6	10640.00	43.1 AV	54.0	-10.9	1.92 V	87	34.2	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.9 PK	74.0	-14.1	1.11 H	153	57.4	2.5
2	5460.00	46.9 AV	54.0	-7.1	1.11 H	153	44.4	2.5
3	#5470.00	59.3 PK	68.2	-8.9	1.11 H	153	56.8	2.5
4	*5500.00	112.9 PK			1.11 H	153	72.5	40.4
5	*5500.00	99.2 AV			1.11 H	153	58.8	40.4
6	11000.00	57.3 PK	74.0	-16.7	2.14 H	151	48.1	9.2
7	11000.00	43.8 AV	54.0	-10.2	2.14 H	151	34.6	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	69.0 PK	74.0	-5.0	2.11 V	61	66.5	2.5
2	5460.00	53.8 AV	54.0	-0.2	2.11 V	61	51.3	2.5
3	#5470.00	67.5 PK	68.2	-0.7	2.11 V	61	65.0	2.5
4	*5500.00	123.5 PK			2.11 V	61	83.1	40.4
5	*5500.00	109.3 AV			2.11 V	61	68.9	40.4
6	11000.00	57.1 PK	74.0	-16.9	1.74 V	95	47.9	9.2
7	11000.00	43.6 AV	54.0	-10.4	1.74 V	95	34.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	113.7 PK			1.14 H	158	72.7	41.0
2	*5600.00	100.4 AV			1.14 H	158	59.4	41.0
3	11200.00	57.5 PK	74.0	-16.5	2.09 H	147	47.6	9.9
4	11200.00	44.0 AV	54.0	-10.0	2.09 H	147	34.1	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.4 PK			2.07 V	62	83.4	41.0
2	*5600.00	110.2 AV			2.07 V	62	69.2	41.0
3	11200.00	57.8 PK	74.0	-16.2	1.80 V	94	47.9	9.9
4	11200.00	44.4 AV	54.0	-9.6	1.80 V	94	34.5	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.1 PK			1.00 H	138	70.6	41.5
2	*5700.00	98.1 AV			1.00 H	138	56.6	41.5
3	#5725.00	60.0 PK	68.2	-8.2	1.00 H	138	56.1	3.9
4	11400.00	58.2 PK	74.0	-15.8	2.29 H	157	48.1	10.1
5	11400.00	44.6 AV	54.0	-9.4	2.29 H	157	34.5	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	121.5 PK			2.15 V	194	80.0	41.5
2	*5700.00	107.9 AV			2.15 V	194	66.4	41.5
3	#5725.00	67.5 PK	68.2	-0.7	2.15 V	194	63.6	3.9
4	11400.00	58.3 PK	74.0	-15.7	1.81 V	104	48.2	10.1
5	11400.00	44.7 AV	54.0	-9.3	1.81 V	104	34.6	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	1.05 H	138	55.7	2.5
2	5460.00	45.3 AV	54.0	-8.7	1.05 H	138	42.8	2.5
3	#5470.00	57.5 PK	68.2	-10.7	1.05 H	138	55.0	2.5
4	*5720.00	111.8 PK			1.05 H	138	70.3	41.5
5	*5720.00	98.0 AV			1.05 H	138	56.5	41.5
6	11440.00	58.4 PK	74.0	-15.6	2.32 H	158	48.2	10.2
7	11440.00	44.8 AV	54.0	-9.2	2.32 H	158	34.6	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	2.09 V	189	56.2	2.5
2	5460.00	46.7 AV	54.0	-7.3	2.09 V	189	44.2	2.5
3	#5470.00	57.8 PK	68.2	-10.4	2.09 V	189	55.3	2.5
4	*5720.00	122.1 PK			2.09 V	189	80.6	41.5
5	*5720.00	108.2 AV			2.09 V	189	66.7	41.5
6	11440.00	58.3 PK	74.0	-15.7	1.83 V	107	48.1	10.2
7	11440.00	44.7 AV	54.0	-9.3	1.83 V	107	34.5	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	1.08 H	151	56.7	2.6
2	5150.00	46.0 AV	54.0	-8.0	1.08 H	151	43.4	2.6
3	*5270.00	110.3 PK			1.08 H	151	70.2	40.1
4	*5270.00	97.2 AV			1.08 H	151	57.1	40.1
5	5350.00	58.7 PK	74.0	-15.3	1.08 H	151	56.4	2.3
6	5350.00	45.8 AV	54.0	-8.2	1.08 H	151	43.5	2.3
7	#10540.00	56.8 PK	68.2	-11.4	2.04 H	152	47.7	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.7 PK	74.0	-11.3	2.12 V	65	60.1	2.6
2	5150.00	48.3 AV	54.0	-5.7	2.12 V	65	45.7	2.6
3	*5270.00	121.4 PK			2.12 V	65	81.3	40.1
4	*5270.00	108.3 AV			2.12 V	65	68.2	40.1
5	5350.00	69.1 PK	74.0	-4.9	2.12 V	65	66.8	2.3
6	5350.00	53.4 AV	54.0	-0.6	2.12 V	65	51.1	2.3
7	#10540.00	56.6 PK	68.2	-11.6	1.87 V	96	47.5	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	108.2 PK			1.04 H	151	68.1	40.1
2	*5310.00	95.6 AV			1.04 H	151	55.5	40.1
3	5350.00	57.4 PK	74.0	-16.6	1.04 H	151	55.1	2.3
4	5350.00	45.2 AV	54.0	-8.8	1.04 H	151	42.9	2.3
5	10620.00	57.0 PK	74.0	-17.0	2.09 H	153	48.0	9.0
6	10620.00	44.4 AV	54.0	-9.6	2.09 H	153	35.4	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	120.2 PK			2.28 V	65	80.1	40.1
2	*5310.00	107.9 AV			2.28 V	65	67.8	40.1
3	5350.00	65.9 PK	74.0	-8.1	2.28 V	65	63.6	2.3
4	5350.00	51.9 AV	54.0	-2.1	2.28 V	65	49.6	2.3
5	10620.00	57.2 PK	74.0	-16.8	1.88 V	92	48.2	9.0
6	10620.00	44.5 AV	54.0	-9.5	1.88 V	92	35.5	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.0 PK	74.0	-15.0	1.11 H	153	56.5	2.5
2	5460.00	46.3 AV	54.0	-7.7	1.11 H	153	43.8	2.5
3	#5470.00	57.9 PK	68.2	-10.3	1.11 H	153	55.4	2.5
4	*5510.00	108.6 PK			1.11 H	153	68.2	40.4
5	*5510.00	94.4 AV			1.11 H	153	54.0	40.4
6	11020.00	57.3 PK	74.0	-16.7	2.12 H	158	48.0	9.3
7	11020.00	44.6 AV	54.0	-9.4	2.12 H	158	35.3	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.6 PK	74.0	-12.4	2.11 V	61	59.1	2.5
2	5460.00	49.8 AV	54.0	-4.2	2.11 V	61	47.3	2.5
3	#5470.00	62.5 PK	68.2	-5.7	2.11 V	61	60.0	2.5
4	*5510.00	118.5 PK			2.11 V	61	78.1	40.4
5	*5510.00	105.8 AV			2.11 V	61	65.4	40.4
6	11020.00	57.1 PK	74.0	-16.9	1.74 V	94	47.8	9.3
7	11020.00	44.5 AV	54.0	-9.5	1.74 V	94	35.2	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	111.1 PK			1.14 H	158	70.4	40.7
2	*5550.00	97.0 AV			1.14 H	158	56.3	40.7
3	11100.00	57.2 PK	74.0	-16.8	2.11 H	147	47.6	9.6
4	11100.00	44.5 AV	54.0	-9.5	2.11 H	147	34.9	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	120.9 PK			2.07 V	64	80.2	40.7
2	*5550.00	108.3 AV			2.07 V	64	67.6	40.7
3	11100.00	57.1 PK	74.0	-16.9	1.80 V	94	47.5	9.6
4	11100.00	44.6 AV	54.0	-9.4	1.80 V	94	35.0	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	108.5 PK			1.00 H	139	67.3	41.2
2	*5630.00	95.7 AV			1.00 H	139	54.5	41.2
3	#5725.00	61.1 PK	68.2	-7.1	1.00 H	139	57.2	3.9
4	11260.00	57.7 PK	74.0	-16.3	2.08 H	150	47.7	10.0
5	11260.00	44.5 AV	54.0	-9.5	2.08 H	150	34.5	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	116.6 PK			2.26 V	174	75.4	41.2
2	*5630.00	105.4 AV			2.26 V	174	64.2	41.2
3	#5725.00	67.2 PK	68.2	-1.0	2.26 V	174	63.3	3.9
4	11260.00	57.9 PK	74.0	-16.1	1.82 V	96	47.9	10.0
5	11260.00	44.7 AV	54.0	-9.3	1.82 V	96	34.7	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.8 PK	74.0	-16.2	1.05 H	138	55.3	2.5
2	5460.00	45.3 AV	54.0	-8.7	1.05 H	138	42.8	2.5
3	#5470.00	56.9 PK	68.2	-11.3	1.05 H	138	54.4	2.5
4	*5710.00	109.4 PK			1.05 H	138	67.8	41.6
5	*5710.00	96.6 AV			1.05 H	138	55.0	41.6
6	11420.00	58.3 PK	74.0	-15.7	2.32 H	158	48.2	10.1
7	11420.00	44.7 AV	54.0	-9.3	2.32 H	158	34.6	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.1 PK	74.0	-13.9	2.09 V	189	57.6	2.5
2	5460.00	47.1 AV	54.0	-6.9	2.09 V	189	44.6	2.5
3	#5470.00	57.2 PK	68.2	-11.0	2.09 V	189	54.7	2.5
4	*5710.00	119.7 PK			2.09 V	189	78.1	41.6
5	*5710.00	105.9 AV			2.09 V	189	64.3	41.6
6	11420.00	58.0 PK	74.0	-16.0	1.83 V	107	47.9	10.1
7	11420.00	45.4 AV	54.0	-8.6	1.83 V	107	35.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.04 H	151	55.9	2.6
2	5150.00	45.5 AV	54.0	-8.5	1.04 H	151	42.9	2.6
3	*5290.00	105.7 PK			1.04 H	151	65.6	40.1
4	*5290.00	92.6 AV			1.04 H	151	52.5	40.1
5	5350.00	59.1 PK	74.0	-14.9	1.04 H	151	56.8	2.3
6	5350.00	46.2 AV	54.0	-7.8	1.04 H	151	43.9	2.3
7	#10580.00	56.5 PK	68.2	-11.7	2.07 H	151	47.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	2.28 V	65	57.6	2.6
2	5150.00	47.2 AV	54.0	-6.8	2.28 V	65	44.6	2.6
3	*5290.00	117.0 PK			2.28 V	65	76.9	40.1
4	*5290.00	105.9 AV			2.28 V	65	65.8	40.1
5	5350.00	66.1 PK	74.0	-7.9	2.28 V	65	63.8	2.3
6	5350.00	53.3 AV	54.0	-0.7	2.28 V	65	51.0	2.3
7	#10580.00	56.8 PK	68.2	-11.4	1.88 V	92	47.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.0 PK	74.0	-15.0	1.02 H	137	56.5	2.5
2	5460.00	46.2 AV	54.0	-7.8	1.02 H	137	43.7	2.5
3	#5470.00	59.2 PK	68.2	-9.0	1.02 H	137	56.7	2.5
4	*5530.00	104.9 PK			1.02 H	137	64.3	40.6
5	*5530.00	91.6 AV			1.02 H	137	51.0	40.6
6	11060.00	57.2 PK	74.0	-16.8	2.14 H	158	47.7	9.5
7	11060.00	44.6 AV	54.0	-9.4	2.14 H	158	35.1	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.0 PK	74.0	-7.0	2.11 V	65	64.5	2.5
2	5460.00	52.0 AV	54.0	-2.0	2.11 V	65	49.5	2.5
3	#5470.00	65.1 PK	68.2	-3.1	2.11 V	65	62.6	2.5
4	*5530.00	115.3 PK			2.11 V	65	74.7	40.6
5	*5530.00	101.6 AV			2.11 V	65	61.0	40.6
6	11060.00	57.4 PK	74.0	-16.6	1.74 V	94	47.9	9.5
7	11060.00	44.7 AV	54.0	-9.3	1.74 V	94	35.2	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	1.01 H	137	56.4	2.5
2	5460.00	45.7 AV	54.0	-8.3	1.01 H	137	43.2	2.5
3	#5470.00	58.2 PK	68.2	-10.0	1.01 H	137	55.7	2.5
4	*5610.00	105.8 PK			1.01 H	137	64.8	41.0
5	*5610.00	93.0 AV			1.01 H	137	52.0	41.0
6	#5725.00	61.4 PK	68.2	-6.8	1.01 H	137	57.5	3.9
7	11220.00	57.8 PK	74.0	-16.2	2.20 H	158	47.9	9.9
8	11220.00	45.2 AV	54.0	-8.8	2.20 H	158	35.3	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.8 PK	74.0	-8.2	2.11 V	297	63.3	2.5
2	5460.00	50.8 AV	54.0	-3.2	2.11 V	297	48.3	2.5
3	#5470.00	65.3 PK	68.2	-2.9	2.11 V	297	62.8	2.5
4	*5610.00	116.2 PK			2.11 V	297	75.2	41.0
5	*5610.00	103.0 AV			2.11 V	297	62.0	41.0
6	#5725.00	66.5 PK	68.2	-1.7	2.11 V	297	62.6	3.9
7	11220.00	57.7 PK	74.0	-16.3	1.77 V	98	47.8	9.9
8	11220.00	45.1 AV	54.0	-8.9	1.77 V	98	35.2	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.0 PK	74.0	-16.0	1.05 H	138	55.4	2.6
2	5460.00	46.1 AV	54.0	-7.9	1.05 H	138	43.5	2.6
3	#5470.00	56.0 PK	68.2	-12.2	1.05 H	138	53.4	2.6
4	*5690.00	105.4 PK			1.05 H	138	64.2	41.2
5	*5690.00	93.0 AV			1.05 H	138	51.8	41.2
6	11380.00	58.1 PK	74.0	-15.9	2.32 H	158	48.2	9.9
7	11380.00	45.4 AV	54.0	-8.6	2.32 H	158	35.5	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.3 PK	74.0	-8.7	2.09 V	189	62.8	2.5
2	5460.00	51.6 AV	54.0	-2.4	2.09 V	189	49.1	2.5
3	#5470.00	67.0 PK	68.2	-1.2	2.09 V	189	64.5	2.5
4	*5690.00	115.1 PK			2.09 V	189	73.7	41.4
5	*5690.00	102.4 AV			2.09 V	189	61.0	41.4
6	11380.00	58.2 PK	74.0	-15.8	1.83 V	107	48.1	10.1
7	11380.00	45.6 AV	54.0	-8.4	1.83 V	107	35.5	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.04 H	151	56.0	2.6
2	5150.00	46.4 AV	54.0	-7.6	1.04 H	151	43.8	2.6
3	*5250.00	100.3 PK			1.04 H	151	60.1	40.2
4	*5250.00	87.6 AV			1.04 H	151	47.4	40.2
5	5350.00	58.8 PK	74.0	-15.2	1.04 H	151	56.4	2.4
6	5350.00	46.7 AV	54.0	-7.3	1.04 H	151	44.3	2.4
7	#10500.00	56.5 PK	68.2	-11.7	2.15 H	148	47.8	8.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.8 PK	74.0	-10.2	2.30 V	65	61.2	2.6
2	5150.00	51.6 AV	54.0	-2.4	2.30 V	65	49.0	2.6
3	*5250.00	112.8 PK			2.30 V	65	72.7	40.1
4	*5250.00	99.4 AV			2.30 V	65	59.3	40.1
5	5350.00	66.5 PK	74.0	-7.5	2.30 V	65	64.2	2.3
6	5350.00	53.6 AV	54.0	-0.4	2.30 V	65	51.3	2.3
7	#10500.00	57.2 PK	68.2	-11.0	1.87 V	88	48.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.5 PK	74.0	-14.5	1.00 H	24	57.0	2.5
2	5460.00	47.1 AV	54.0	-6.9	1.00 H	24	44.6	2.5
3	#5470.00	58.1 PK	68.2	-10.1	1.00 H	24	55.6	2.5
4	*5570.00	101.9 PK			1.00 H	24	61.1	40.8
5	*5570.00	89.2 AV			1.00 H	24	48.4	40.8
6	#5725.00	60.3 PK	68.2	-7.9	1.00 H	24	56.4	3.9
7	11140.00	57.2 PK	74.0	-16.8	2.23 H	158	47.4	9.8
8	11140.00	44.5 AV	54.0	-9.5	2.23 H	158	34.7	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.4 PK	74.0	-7.6	2.11 V	220	63.9	2.5
2	5460.00	53.7 AV	54.0	-0.3	2.11 V	220	51.2	2.5
3	#5470.00	65.2 PK	68.2	-3.0	2.11 V	220	62.7	2.5
4	*5570.00	112.5 PK			2.11 V	220	71.7	40.8
5	*5570.00	99.3 AV			2.11 V	220	58.5	40.8
6	#5725.00	65.5 PK	68.2	-2.7	2.11 V	220	61.6	3.9
7	11140.00	57.1 PK	74.0	-16.9	1.79 V	102	47.3	9.8
8	11140.00	44.4 AV	54.0	-9.6	1.79 V	102	34.6	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B_PIFA Ant.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.12 H	32	56.4	2.6
2	5150.00	47.7 AV	54.0	-6.3	1.12 H	32	45.1	2.6
3	*5260.00	122.8 PK			1.12 H	32	82.7	40.1
4	*5260.00	111.6 AV			1.12 H	32	71.5	40.1
5	#10520.00	56.5 PK	68.2	-11.7	1.57 H	242	47.4	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.9 PK	74.0	-16.1	2.41 V	62	55.3	2.6
2	5150.00	45.8 AV	54.0	-8.2	2.41 V	62	43.2	2.6
3	*5260.00	112.6 PK			2.41 V	62	72.5	40.1
4	*5260.00	101.9 AV			2.41 V	62	61.8	40.1
5	#10520.00	56.7 PK	68.2	-11.5	1.22 V	145	47.6	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.9 PK	74.0	-13.1	1.02 H	32	58.3	2.6
2	5150.00	49.6 AV	54.0	-4.4	1.02 H	32	47.0	2.6
3	*5300.00	121.1 PK			1.02 H	32	81.0	40.1
4	*5300.00	110.7 AV			1.02 H	32	70.6	40.1
5	5350.00	62.6 PK	74.0	-11.4	1.02 H	32	60.3	2.3
6	5350.00	50.9 AV	54.0	-3.1	1.02 H	32	48.6	2.3
7	10600.00	56.9 PK	74.0	-17.1	1.51 H	242	47.8	9.1
8	10600.00	43.5 AV	54.0	-10.5	1.51 H	242	34.4	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	2.39 V	64	56.8	2.6
2	5150.00	49.6 AV	54.0	-4.4	2.39 V	64	47.0	2.6
3	*5300.00	111.2 PK			2.39 V	64	70.9	40.3
4	*5300.00	100.5 AV			2.39 V	64	60.2	40.3
5	5350.00	63.2 PK	74.0	-10.8	2.39 V	64	60.8	2.4
6	5350.00	47.9 AV	54.0	-6.1	2.39 V	64	45.5	2.4
7	10600.00	56.8 PK	74.0	-17.2	1.75 V	230	48.2	8.6
8	10600.00	43.6 AV	54.0	-10.4	1.75 V	230	35.0	8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	121.9 PK			1.02 H	32	81.8	40.1
2	*5320.00	110.5 AV			1.02 H	32	70.4	40.1
3	5350.00	64.9 PK	74.0	-9.1	1.02 H	32	62.6	2.3
4	5350.00	52.0 AV	54.0	-2.0	1.02 H	32	49.7	2.3
5	10640.00	56.4 PK	74.0	-17.6	1.52 H	242	47.4	9.0
6	10640.00	43.0 AV	54.0	-11.0	1.52 H	242	34.0	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.8 PK			2.40 V	68	71.7	40.1
2	*5320.00	100.9 AV			2.40 V	68	60.8	40.1
3	5350.00	58.7 PK	74.0	-15.3	2.40 V	68	56.4	2.3
4	5350.00	47.2 AV	54.0	-6.8	2.40 V	68	44.9	2.3
5	10640.00	56.3 PK	74.0	-17.7	1.72 V	229	47.4	8.9
6	10640.00	43.0 AV	54.0	-11.0	1.72 V	229	34.1	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.7 PK	74.0	-10.3	1.02 H	22	61.2	2.5
2	5460.00	52.8 AV	54.0	-1.2	1.02 H	22	50.3	2.5
3	#5470.00	63.6 PK	68.2	-4.6	1.02 H	22	61.1	2.5
4	*5500.00	120.6 PK			1.02 H	22	80.2	40.4
5	*5500.00	110.4 AV			1.02 H	22	70.0	40.4
6	11000.00	57.0 PK	74.0	-17.0	1.55 H	247	47.8	9.2
7	11000.00	43.7 AV	54.0	-10.3	1.55 H	247	34.5	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.2 PK	74.0	-14.8	2.28 V	68	56.7	2.5
2	5460.00	45.5 AV	54.0	-8.5	2.28 V	68	43.0	2.5
3	#5470.00	58.6 PK	68.2	-9.6	2.28 V	68	56.1	2.5
4	*5500.00	111.0 PK			2.28 V	68	70.6	40.4
5	*5500.00	100.7 AV			2.28 V	68	60.3	40.4
6	11000.00	56.9 PK	74.0	-17.1	1.74 V	231	47.7	9.2
7	11000.00	43.6 AV	54.0	-10.4	1.74 V	231	34.4	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	121.8 PK			1.22 H	22	80.8	41.0
2	*5600.00	111.5 AV			1.22 H	22	70.5	41.0
3	11200.00	57.5 PK	74.0	-16.5	1.58 H	251	47.6	9.9
4	11200.00	44.2 AV	54.0	-9.8	1.58 H	251	34.3	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	111.9 PK			2.32 V	68	70.9	41.0
2	*5600.00	101.7 AV			2.32 V	68	60.7	41.0
3	11200.00	57.4 PK	74.0	-16.6	1.74 V	233	47.5	9.9
4	11200.00	44.1 AV	54.0	-9.9	1.74 V	233	34.2	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	120.5 PK			1.20 H	7	79.0	41.5
2	*5700.00	110.3 AV			1.20 H	7	68.8	41.5
3	#5725.00	66.0 PK	68.2	-2.2	1.20 H	7	62.1	3.9
4	11400.00	58.4 PK	74.0	-15.6	1.64 H	251	48.3	10.1
5	11400.00	45.1 AV	54.0	-8.9	1.64 H	251	35.0	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.8 PK			2.32 V	72	69.3	41.5
2	*5700.00	100.5 AV			2.32 V	72	59.0	41.5
3	#5725.00	59.7 PK	68.2	-8.5	2.32 V	72	55.8	3.9
4	11400.00	57.7 PK	74.0	-16.3	1.76 V	237	47.6	10.1
5	11400.00	44.4 AV	54.0	-9.6	1.76 V	237	34.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.7 PK	74.0	-14.3	1.02 H	8	57.2	2.5
2	5460.00	47.7 AV	54.0	-6.3	1.02 H	8	45.2	2.5
3	#5470.00	57.7 PK	68.2	-10.5	1.02 H	8	55.2	2.5
4	*5720.00	121.7 PK			1.02 H	8	80.2	41.5
5	*5720.00	111.2 AV			1.02 H	8	69.7	41.5
6	11440.00	57.5 PK	74.0	-16.5	1.53 H	242	47.3	10.2
7	11440.00	44.2 AV	54.0	-9.8	1.53 H	242	34.0	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	2.37 V	68	56.4	2.5
2	5460.00	46.1 AV	54.0	-7.9	2.37 V	68	43.6	2.5
3	#5470.00	57.6 PK	68.2	-10.6	2.37 V	68	55.1	2.5
4	*5720.00	110.9 PK			2.37 V	68	69.4	41.5
5	*5720.00	101.2 AV			2.37 V	68	59.7	41.5
6	11440.00	57.7 PK	74.0	-16.3	1.74 V	230	47.5	10.2
7	11440.00	44.4 AV	54.0	-9.6	1.74 V	230	34.2	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.02 H	32	56.0	2.6
2	5150.00	47.5 AV	54.0	-6.5	1.02 H	32	44.9	2.6
3	*5260.00	124.9 PK			1.02 H	32	84.8	40.1
4	*5260.00	111.6 AV			1.02 H	32	71.5	40.1
5	#10520.00	56.9 PK	68.2	-11.3	1.57 H	242	47.8	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	2.37 V	68	55.9	2.6
2	5150.00	45.8 AV	54.0	-8.2	2.37 V	68	43.2	2.6
3	*5260.00	114.9 PK			2.37 V	68	74.8	40.1
4	*5260.00	101.7 AV			2.37 V	68	61.6	40.1
5	#10520.00	57.0 PK	68.2	-11.2	1.73 V	229	47.9	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.2 PK			1.02 H	32	83.1	40.1
2	*5300.00	109.5 AV			1.02 H	32	69.4	40.1
3	5350.00	69.9 PK	74.0	-4.1	1.02 H	32	67.6	2.3
4	5350.00	53.9 AV	54.0	-0.1	1.02 H	32	51.6	2.3
5	10600.00	56.2 PK	74.0	-17.8	1.51 H	242	47.1	9.1
6	10600.00	42.9 AV	54.0	-11.1	1.51 H	242	33.8	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	113.2 PK			2.39 V	64	73.1	40.1
2	*5300.00	99.7 AV			2.39 V	64	59.6	40.1
3	5350.00	64.0 PK	74.0	-10.0	2.39 V	64	61.7	2.3
4	5350.00	47.7 AV	54.0	-6.3	2.39 V	64	45.4	2.3
5	10600.00	56.6 PK	74.0	-17.4	1.75 V	230	47.5	9.1
6	10600.00	43.4 AV	54.0	-10.6	1.75 V	230	34.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.4 PK			1.02 H	32	83.3	40.1
2	*5320.00	109.6 AV			1.02 H	32	69.5	40.1
3	5350.00	66.1 PK	74.0	-7.9	1.02 H	32	63.8	2.3
4	5350.00	51.1 AV	54.0	-2.9	1.02 H	32	48.8	2.3
5	10640.00	56.3 PK	74.0	-17.7	1.52 H	242	47.4	8.9
6	10640.00	43.0 AV	54.0	-11.0	1.52 H	242	34.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.4 PK			2.40 V	68	73.3	40.1
2	*5320.00	99.9 AV			2.40 V	68	59.8	40.1
3	5350.00	58.9 PK	74.0	-15.1	2.40 V	68	56.6	2.3
4	5350.00	46.0 AV	54.0	-8.0	2.40 V	68	43.7	2.3
5	10640.00	56.7 PK	74.0	-17.3	1.72 V	229	47.8	8.9
6	10640.00	43.4 AV	54.0	-10.6	1.72 V	229	34.5	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.2 PK	74.0	-9.8	1.02 H	18	61.7	2.5
2	5460.00	51.7 AV	54.0	-2.3	1.02 H	18	49.2	2.5
3	#5470.00	65.3 PK	68.2	-2.9	1.02 H	18	62.8	2.5
4	*5500.00	123.1 PK			1.02 H	18	82.7	40.4
5	*5500.00	109.2 AV			1.02 H	18	68.8	40.4
6	11000.00	56.7 PK	74.0	-17.3	1.55 H	247	47.5	9.2
7	11000.00	43.4 AV	54.0	-10.6	1.55 H	247	34.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	2.28 V	68	56.4	2.5
2	5460.00	46.1 AV	54.0	-7.9	2.28 V	68	43.6	2.5
3	#5470.00	59.2 PK	68.2	-9.0	2.28 V	68	56.7	2.5
4	*5500.00	113.3 PK			2.28 V	68	72.9	40.4
5	*5500.00	99.4 AV			2.28 V	68	59.0	40.4
6	11000.00	57.3 PK	74.0	-16.7	1.74 V	231	48.1	9.2
7	11000.00	44.0 AV	54.0	-10.0	1.74 V	231	34.8	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	123.8 PK			1.22 H	22	82.8	41.0
2	*5600.00	110.3 AV			1.22 H	22	69.3	41.0
3	11200.00	57.3 PK	74.0	-16.7	1.58 H	251	47.4	9.9
4	11200.00	44.0 AV	54.0	-10.0	1.58 H	251	34.1	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	114.0 PK			2.32 V	68	73.0	41.0
2	*5600.00	100.5 AV			2.32 V	68	59.5	41.0
3	11200.00	57.0 PK	74.0	-17.0	1.58 V	251	47.1	9.9
4	11200.00	43.8 AV	54.0	-10.2	1.58 V	251	33.9	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	122.2 PK			1.19 H	7	80.7	41.5
2	*5700.00	108.8 AV			1.19 H	7	67.3	41.5
3	#5725.00	67.7 PK	68.2	-0.5	1.20 H	7	63.8	3.9
4	11400.00	57.3 PK	74.0	-16.7	1.64 H	251	47.2	10.1
5	11400.00	43.9 AV	54.0	-10.1	1.64 H	251	33.8	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.0 PK			2.32 V	72	71.5	41.5
2	*5700.00	99.1 AV			2.32 V	72	57.6	41.5
3	#5725.00	60.3 PK	68.2	-7.9	2.32 V	72	56.4	3.9
4	11400.00	57.7 PK	74.0	-16.3	1.76 V	237	47.6	10.1
5	11400.00	44.4 AV	54.0	-9.6	1.76 V	237	34.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	1.02 H	8	56.6	2.5
2	5460.00	47.4 AV	54.0	-6.6	1.02 H	8	44.9	2.5
3	#5470.00	58.7 PK	68.2	-9.5	1.02 H	8	56.2	2.5
4	*5720.00	124.7 PK			1.02 H	8	83.2	41.5
5	*5720.00	110.6 AV			1.02 H	8	69.1	41.5
6	11440.00	58.0 PK	74.0	-16.0	1.53 H	242	47.8	10.2
7	11440.00	44.6 AV	54.0	-9.4	1.53 H	242	34.4	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.9 PK	74.0	-16.1	2.37 V	68	55.4	2.5
2	5460.00	45.8 AV	54.0	-8.2	2.37 V	68	43.3	2.5
3	#5470.00	57.9 PK	68.2	-10.3	2.37 V	68	55.4	2.5
4	*5720.00	114.6 PK			2.37 V	68	73.1	41.5
5	*5720.00	100.6 AV			2.37 V	68	59.1	41.5
6	11440.00	58.0 PK	74.0	-16.0	1.74 V	230	47.8	10.2
7	11440.00	44.7 AV	54.0	-9.3	1.74 V	230	34.5	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.3 PK	74.0	-13.7	1.02 H	17	57.7	2.6
2	5150.00	47.6 AV	54.0	-6.4	1.02 H	17	45.0	2.6
3	*5270.00	121.8 PK			1.02 H	17	81.7	40.1
4	*5270.00	109.1 AV			1.02 H	17	69.0	40.1
5	5350.00	68.6 PK	74.0	-5.4	1.02 H	17	66.3	2.3
6	5350.00	53.7 AV	54.0	-0.3	1.02 H	17	51.4	2.3
7	#10540.00	56.9 PK	68.2	-11.3	1.57 H	242	47.8	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	2.32 V	65	55.7	2.6
2	5150.00	45.8 AV	54.0	-8.2	2.32 V	65	43.2	2.6
3	*5270.00	110.7 PK			2.32 V	65	70.6	40.1
4	*5270.00	97.4 AV			2.32 V	65	57.3	40.1
5	5350.00	60.4 PK	74.0	-13.6	2.32 V	65	58.1	2.3
6	5350.00	47.9 AV	54.0	-6.1	2.32 V	65	45.6	2.3
7	#10540.00	56.6 PK	68.2	-11.6	1.78 V	229	47.5	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	117.6 PK			1.02 H	32	77.5	40.1
2	*5310.00	105.1 AV			1.02 H	32	65.0	40.1
3	5350.00	65.2 PK	74.0	-8.8	1.02 H	32	62.9	2.3
4	5350.00	52.6 AV	54.0	-1.4	1.02 H	32	50.3	2.3
5	10620.00	56.4 PK	74.0	-17.6	1.54 H	242	47.4	9.0
6	10620.00	43.1 AV	54.0	-10.9	1.54 H	242	34.1	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	108.1 PK			2.40 V	68	68.0	40.1
2	*5310.00	95.3 AV			2.40 V	68	55.2	40.1
3	5350.00	58.1 PK	74.0	-15.9	2.40 V	68	55.8	2.3
4	5350.00	46.7 AV	54.0	-7.3	2.40 V	68	44.4	2.3
5	10620.00	56.6 PK	74.0	-17.4	1.82 V	229	47.6	9.0
6	10620.00	43.3 AV	54.0	-10.7	1.82 V	229	34.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.8 PK	74.0	-10.2	1.02 H	18	61.3	2.5
2	5460.00	49.1 AV	54.0	-4.9	1.02 H	18	46.6	2.5
3	#5470.00	67.8 PK	68.2	-0.4	1.02 H	18	65.3	2.5
4	*5510.00	120.1 PK			1.02 H	18	79.7	40.4
5	*5510.00	106.7 AV			1.02 H	18	66.3	40.4
6	11020.00	56.8 PK	74.0	-17.2	1.55 H	247	47.5	9.3
7	11020.00	43.5 AV	54.0	-10.5	1.55 H	247	34.2	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.0 PK	74.0	-16.0	2.28 V	68	55.5	2.5
2	5460.00	45.8 AV	54.0	-8.2	2.28 V	68	43.3	2.5
3	#5470.00	59.1 PK	68.2	-9.1	2.28 V	68	56.6	2.5
4	*5510.00	109.9 PK			2.28 V	68	69.5	40.4
5	*5510.00	96.9 AV			2.28 V	68	56.5	40.4
6	11020.00	57.4 PK	74.0	-16.6	1.74 V	231	48.1	9.3
7	11020.00	44.0 AV	54.0	-10.0	1.74 V	231	34.7	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.5 PK	74.0	-8.5	1.02 H	18	63.0	2.5
2	5460.00	50.2 AV	54.0	-3.8	1.02 H	18	47.7	2.5
3	#5470.00	63.5 PK	68.2	-4.7	1.02 H	18	61.0	2.5
4	*5550.00	121.6 PK			1.02 H	18	80.9	40.7
5	*5550.00	108.7 AV			1.02 H	18	68.0	40.7
6	11100.00	56.9 PK	74.0	-17.1	1.58 H	251	47.3	9.6
7	11100.00	43.6 AV	54.0	-10.4	1.58 H	251	34.0	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	2.32 V	68	55.7	2.5
2	5460.00	45.2 AV	54.0	-8.8	2.32 V	68	42.7	2.5
3	#5470.00	59.5 PK	68.2	-8.7	2.32 V	68	57.0	2.5
4	*5550.00	111.3 PK			2.32 V	68	70.6	40.7
5	*5550.00	98.7 AV			2.32 V	68	58.0	40.7
6	11100.00	57.1 PK	74.0	-16.9	1.74 V	233	47.5	9.6
7	11100.00	43.8 AV	54.0	-10.2	1.74 V	233	34.2	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	120.8 PK			1.20 H	15	79.6	41.2
2	*5630.00	107.9 AV			1.20 H	15	66.7	41.2
3	#5725.00	64.5 PK	68.2	-3.7	1.20 H	15	60.6	3.9
4	11260.00	57.7 PK	74.0	-16.3	1.64 H	251	47.7	10.0
5	11260.00	44.4 AV	54.0	-9.6	1.64 H	251	34.4	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	110.8 PK			2.32 V	72	69.6	41.2
2	*5630.00	97.8 AV			2.32 V	72	56.6	41.2
3	#5725.00	59.6 PK	68.2	-8.6	2.32 V	72	55.7	3.9
4	11260.00	57.7 PK	74.0	-16.3	1.76 V	237	47.7	10.0
5	11260.00	44.4 AV	54.0	-9.6	1.76 V	237	34.4	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.0 PK	74.0	-12.0	1.02 H	15	59.5	2.5
2	5460.00	48.5 AV	54.0	-5.5	1.02 H	15	46.0	2.5
3	#5470.00	59.5 PK	68.2	-8.7	1.02 H	15	57.0	2.5
4	*5710.00	123.1 PK			1.02 H	15	81.5	41.6
5	*5710.00	109.3 AV			1.02 H	15	67.7	41.6
6	11420.00	57.9 PK	74.0	-16.1	1.53 H	242	47.8	10.1
7	11420.00	44.6 AV	54.0	-9.4	1.53 H	242	34.5	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.7 PK	74.0	-16.3	2.37 V	68	55.2	2.5
2	5460.00	46.3 AV	54.0	-7.7	2.37 V	68	43.8	2.5
3	#5470.00	58.4 PK	68.2	-9.8	2.37 V	68	55.9	2.5
4	*5710.00	112.5 PK			2.37 V	68	71.0	41.5
5	*5710.00	99.0 AV			2.37 V	68	57.5	41.5
6	11420.00	57.4 PK	74.0	-16.6	1.74 V	230	47.3	10.1
7	11420.00	44.1 AV	54.0	-9.9	1.74 V	230	34.0	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.02 H	19	56.9	2.6
2	5150.00	46.1 AV	54.0	-7.9	1.02 H	19	43.5	2.6
3	*5290.00	113.8 PK			1.02 H	19	73.7	40.1
4	*5290.00	101.2 AV			1.02 H	19	61.1	40.1
5	5350.00	65.9 PK	74.0	-8.1	1.02 H	19	63.6	2.3
6	5350.00	52.7 AV	54.0	-1.3	1.02 H	19	50.4	2.3
7	#10580.00	56.5 PK	68.2	-11.7	1.61 H	239	47.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	2.37 V	61	56.3	2.6
2	5150.00	46.1 AV	54.0	-7.9	2.37 V	61	43.5	2.6
3	*5290.00	104.5 PK			2.37 V	61	64.4	40.1
4	*5290.00	91.2 AV			2.37 V	61	51.1	40.1
5	5350.00	65.9 PK	74.0	-8.1	2.37 V	61	63.6	2.3
6	5350.00	47.2 AV	54.0	-6.8	2.37 V	61	44.9	2.3
7	#10580.00	56.2 PK	68.2	-12.0	1.74 V	223	47.2	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.0 PK	74.0	-8.0	1.02 H	18	63.5	2.5
2	5460.00	52.9 AV	54.0	-1.1	1.02 H	18	50.4	2.5
3	#5470.00	63.8 PK	68.2	-4.4	1.02 H	18	61.3	2.5
4	*5530.00	116.4 PK			1.02 H	18	75.8	40.6
5	*5530.00	100.9 AV			1.02 H	18	60.3	40.6
6	11060.00	56.5 PK	74.0	-17.5	1.55 H	247	47.0	9.5
7	11060.00	43.3 AV	54.0	-10.7	1.55 H	247	33.8	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.4 PK	74.0	-13.6	2.28 V	68	57.9	2.5
2	5460.00	47.0 AV	54.0	-7.0	2.28 V	68	44.5	2.5
3	#5470.00	58.6 PK	68.2	-9.6	2.28 V	68	56.1	2.5
4	*5530.00	106.9 PK			2.28 V	68	66.3	40.6
5	*5530.00	93.4 AV			2.28 V	68	52.8	40.6
6	11060.00	56.8 PK	74.0	-17.2	1.74 V	231	47.3	9.5
7	11060.00	43.5 AV	54.0	-10.5	1.74 V	231	34.0	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.9 PK	74.0	-7.1	1.02 H	18	64.4	2.5
2	5460.00	52.0 AV	54.0	-2.0	1.02 H	18	49.5	2.5
3	#5470.00	67.3 PK	68.2	-0.9	1.02 H	18	64.8	2.5
4	*5610.00	119.0 PK			1.02 H	18	78.0	41.0
5	*5610.00	105.7 AV			1.02 H	18	64.7	41.0
6	#5725.00	65.2 PK	68.2	-3.0	1.02 H	18	61.3	3.9
7	11220.00	57.5 PK	74.0	-16.5	1.58 H	251	47.6	9.9
8	11220.00	44.2 AV	54.0	-9.8	1.58 H	251	34.3	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.5 PK	74.0	-14.5	2.32 V	68	57.0	2.5
2	5460.00	47.0 AV	54.0	-7.0	2.32 V	68	44.5	2.5
3	#5470.00	61.2 PK	68.2	-7.0	2.32 V	68	58.7	2.5
4	*5610.00	109.4 PK			2.32 V	68	68.4	41.0
5	*5610.00	96.0 AV			2.32 V	68	55.0	41.0
6	#5725.00	59.8 PK	68.2	-8.4	2.32 V	68	55.9	3.9
7	11220.00	56.9 PK	74.0	-17.1	1.74 V	233	47.0	9.9
8	11220.00	43.6 AV	54.0	-10.4	1.74 V	233	33.7	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.7 PK	74.0	-11.3	1.02 H	20	60.2	2.5
2	5460.00	50.3 AV	54.0	-3.7	1.02 H	20	47.8	2.5
3	#5470.00	62.2 PK	68.2	-6.0	1.02 H	20	59.7	2.5
4	*5690.00	119.3 PK			1.02 H	20	77.9	41.4
5	*5690.00	106.3 AV			1.02 H	20	64.9	41.4
6	#5850.00	62.8 PK	68.2	-5.4	1.02 H	20	58.7	4.1
7	11380.00	56.9 PK	74.0	-17.1	1.53 H	242	46.8	10.1
8	11380.00	43.6 AV	54.0	-10.4	1.53 H	242	33.5	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.5 PK	74.0	-14.5	2.37 V	68	57.0	2.5
2	5460.00	46.6 AV	54.0	-7.4	2.37 V	68	44.1	2.5
3	#5470.00	58.9 PK	68.2	-9.3	2.37 V	68	56.4	2.5
4	*5690.00	107.6 PK			2.37 V	68	66.2	41.4
5	*5690.00	95.2 AV			2.37 V	68	53.8	41.4
6	#5850.00	59.6 PK	68.2	-8.6	2.37 V	68	55.5	4.1
7	11380.00	56.7 PK	74.0	-17.3	1.74 V	230	46.6	10.1
8	11380.00	44.6 AV	54.0	-9.4	1.74 V	230	34.5	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.7 PK	74.0	-9.3	1.02 H	30	62.1	2.6
2	5150.00	52.7 AV	54.0	-1.3	1.02 H	30	50.1	2.6
3	*5250.00	110.7 PK			1.02 H	30	70.6	40.1
4	*5250.00	98.8 AV			1.02 H	30	58.7	40.1
5	5350.00	64.9 PK	74.0	-9.1	1.02 H	30	62.6	2.3
6	5350.00	53.2 AV	54.0	-0.8	1.02 H	30	50.9	2.3
7	#10500.00	56.5 PK	68.2	-11.7	1.61 H	237	47.5	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	2.37 V	61	57.6	2.6
2	5150.00	47.3 AV	54.0	-6.7	2.37 V	61	44.7	2.6
3	*5250.00	101.9 PK			2.37 V	61	61.8	40.1
4	*5250.00	88.8 AV			2.37 V	61	48.7	40.1
5	5350.00	59.3 PK	74.0	-14.7	2.37 V	61	57.0	2.3
6	5350.00	47.0 AV	54.0	-7.0	2.37 V	61	44.7	2.3
7	#10500.00	56.1 PK	68.2	-12.1	1.74 V	223	47.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.9 PK	74.0	-7.1	1.02 H	18	64.4	2.5
2	5460.00	53.5 AV	54.0	-0.5	1.02 H	18	51.0	2.5
3	#5470.00	65.2 PK	68.2	-3.0	1.02 H	18	62.7	2.5
4	*5570.00	112.5 PK			1.02 H	18	71.7	40.8
5	*5570.00	99.2 AV			1.02 H	18	58.4	40.8
6	#5725.00	61.8 PK	68.2	-6.4	1.02 H	18	57.9	3.9
7	11140.00	56.6 PK	74.0	-17.4	1.55 H	247	46.8	9.8
8	11140.00	43.3 AV	54.0	-10.7	1.55 H	247	33.5	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.9 PK	74.0	-14.1	2.28 V	68	57.4	2.5
2	5460.00	47.4 AV	54.0	-6.6	2.28 V	68	44.9	2.5
3	#5470.00	60.1 PK	68.2	-8.1	2.28 V	68	57.6	2.5
4	*5570.00	101.5 PK			2.28 V	68	60.7	40.8
5	*5570.00	89.2 AV			2.28 V	68	48.4	40.8
6	#5725.00	59.0 PK	68.2	-9.2	2.28 V	68	55.1	3.9
7	11140.00	56.5 PK	74.0	-17.5	1.74 V	231	46.7	9.8
8	11140.00	43.2 AV	54.0	-10.8	1.74 V	231	33.4	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode C_Dipole Ant.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.19 H	158	56.0	2.6
2	5150.00	46.0 AV	54.0	-8.0	1.19 H	158	43.4	2.6
3	*5260.00	111.4 PK			1.19 H	158	71.3	40.1
4	*5260.00	100.2 AV			1.19 H	158	60.1	40.1
5	5350.00	58.4 PK	74.0	-15.6	1.19 H	158	56.1	2.3
6	5350.00	45.4 AV	54.0	-8.6	1.19 H	158	43.1	2.3
7	#10520.00	56.7 PK	68.2	-11.5	3.55 H	122	47.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.6 PK	74.0	-13.4	2.23 V	287	58.0	2.6
2	5150.00	49.0 AV	54.0	-5.0	2.23 V	287	46.4	2.6
3	*5260.00	121.9 PK			2.23 V	287	81.8	40.1
4	*5260.00	111.9 AV			2.23 V	287	71.8	40.1
5	5350.00	60.9 PK	74.0	-13.1	2.23 V	287	58.6	2.3
6	5350.00	49.2 AV	54.0	-4.8	2.23 V	287	46.9	2.3
7	#10520.00	57.5 PK	68.2	-10.7	1.92 V	84	48.4	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	1.23 H	155	55.6	2.6
2	5150.00	45.7 AV	54.0	-8.3	1.23 H	155	43.1	2.6
3	*5300.00	109.8 PK			1.23 H	155	69.7	40.1
4	*5300.00	99.0 AV			1.23 H	155	58.9	40.1
5	5350.00	57.5 PK	74.0	-16.5	1.23 H	155	55.2	2.3
6	5350.00	45.2 AV	54.0	-8.8	1.23 H	155	42.9	2.3
7	10600.00	57.0 PK	74.0	-17.0	3.52 H	119	47.9	9.1
8	10600.00	43.4 AV	54.0	-10.6	3.52 H	119	34.3	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.3 PK	74.0	-13.7	2.19 V	292	57.7	2.6
2	5150.00	49.5 AV	54.0	-4.5	2.19 V	292	46.9	2.6
3	*5300.00	121.6 PK			2.19 V	292	81.5	40.1
4	*5300.00	111.1 AV			2.19 V	292	71.0	40.1
5	5350.00	64.5 PK	74.0	-9.5	2.19 V	292	62.2	2.3
6	5350.00	50.2 AV	54.0	-3.8	2.19 V	292	47.9	2.3
7	10600.00	57.6 PK	74.0	-16.4	1.92 V	84	48.5	9.1
8	10600.00	44.4 AV	54.0	-9.6	1.92 V	84	35.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.8 PK			1.20 H	159	69.7	40.1
2	*5320.00	99.3 AV			1.20 H	159	59.2	40.1
3	5350.00	58.9 PK	74.0	-15.1	1.20 H	159	56.6	2.3
4	5350.00	46.2 AV	54.0	-7.8	1.20 H	159	43.9	2.3
5	10640.00	56.7 PK	74.0	-17.3	3.49 H	124	47.8	8.9
6	10640.00	43.2 AV	54.0	-10.8	3.49 H	124	34.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	121.1 PK			2.27 V	290	81.0	40.1
2	*5320.00	110.9 AV			2.27 V	290	70.8	40.1
3	5350.00	66.6 PK	74.0	-7.4	2.27 V	290	64.3	2.3
4	5350.00	53.0 AV	54.0	-1.0	2.27 V	290	50.7	2.3
5	10640.00	56.8 PK	74.0	-17.2	1.87 V	85	47.9	8.9
6	10640.00	43.3 AV	54.0	-10.7	1.87 V	85	34.4	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.0 PK	74.0	-16.0	1.25 H	59	55.5	2.5
2	5460.00	45.5 AV	54.0	-8.5	1.25 H	59	43.0	2.5
3	#5470.00	57.8 PK	68.2	-10.4	1.25 H	59	55.3	2.5
4	*5500.00	108.4 PK			1.25 H	59	68.0	40.4
5	*5500.00	98.1 AV			1.25 H	59	57.7	40.4
6	11000.00	57.4 PK	74.0	-16.6	3.49 H	121	48.2	9.2
7	11000.00	43.7 AV	54.0	-10.3	3.49 H	121	34.5	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.7 PK	74.0	-11.3	2.31 V	284	60.2	2.5
2	5460.00	49.6 AV	54.0	-4.4	2.31 V	284	47.1	2.5
3	#5470.00	62.7 PK	68.2	-5.5	2.31 V	284	60.2	2.5
4	*5500.00	118.9 PK			2.31 V	284	78.5	40.4
5	*5500.00	108.5 AV			2.31 V	284	68.1	40.4
6	11000.00	57.8 PK	74.0	-16.2	1.94 V	74	48.6	9.2
7	11000.00	44.2 AV	54.0	-9.8	1.94 V	74	35.0	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	110.5 PK			1.22 H	57	69.5	41.0
2	*5600.00	99.8 AV			1.22 H	57	58.8	41.0
3	11200.00	58.0 PK	74.0	-16.0	3.46 H	116	48.1	9.9
4	11200.00	44.5 AV	54.0	-9.5	3.46 H	116	34.6	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	119.6 PK			2.29 V	291	78.6	41.0
2	*5600.00	110.1 AV			2.29 V	291	69.1	41.0
3	11200.00	58.1 PK	74.0	-15.9	1.87 V	73	48.2	9.9
4	11200.00	44.3 AV	54.0	-9.7	1.87 V	73	34.4	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.2 PK			1.32 H	74	66.7	41.5
2	*5700.00	97.9 AV			1.32 H	74	56.4	41.5
3	#5725.00	59.4 PK	68.2	-8.8	1.32 H	74	55.5	3.9
4	11400.00	58.2 PK	74.0	-15.8	3.52 H	123	48.1	10.1
5	11400.00	44.5 AV	54.0	-9.5	3.52 H	123	34.4	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.2 PK			2.36 V	274	76.7	41.5
2	*5700.00	108.1 AV			2.36 V	274	66.6	41.5
3	#5725.00	64.3 PK	68.2	-3.9	2.36 V	274	60.4	3.9
4	11400.00	57.9 PK	74.0	-16.1	1.98 V	74	47.8	10.1
5	11400.00	44.2 AV	54.0	-9.8	1.98 V	74	34.1	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.5 PK	74.0	-15.5	1.37 H	75	56.0	2.5
2	5460.00	45.2 AV	54.0	-8.8	1.37 H	75	42.7	2.5
3	#5470.00	57.1 PK	68.2	-11.1	1.37 H	75	54.6	2.5
4	*5720.00	109.6 PK			1.37 H	75	68.1	41.5
5	*5720.00	98.6 AV			1.37 H	75	57.1	41.5
6	11440.00	58.7 PK	74.0	-15.3	3.43 H	112	48.5	10.2
7	11440.00	44.9 AV	54.0	-9.1	3.43 H	112	34.7	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.3 PK	74.0	-14.7	2.37 V	279	56.8	2.5
2	5460.00	47.0 AV	54.0	-7.0	2.37 V	279	44.5	2.5
3	#5470.00	57.0 PK	68.2	-11.2	2.37 V	279	54.5	2.5
4	*5720.00	119.5 PK			2.37 V	279	78.0	41.5
5	*5720.00	109.0 AV			2.37 V	279	67.5	41.5
6	11440.00	58.8 PK	74.0	-15.2	1.92 V	71	48.6	10.2
7	11440.00	45.1 AV	54.0	-8.9	1.92 V	71	34.9	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	1.19 H	158	56.1	2.6
2	5150.00	45.9 AV	54.0	-8.1	1.19 H	158	43.3	2.6
3	*5260.00	112.4 PK			1.19 H	158	72.3	40.1
4	*5260.00	96.2 AV			1.19 H	158	56.1	40.1
5	5350.00	57.5 PK	74.0	-16.5	1.19 H	158	55.2	2.3
6	5350.00	44.9 AV	54.0	-9.1	1.19 H	158	42.6	2.3
7	#10520.00	56.9 PK	68.2	-11.3	3.55 H	122	47.8	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.6 PK	74.0	-13.4	2.23 V	287	58.0	2.6
2	5150.00	48.6 AV	54.0	-5.4	2.23 V	287	46.0	2.6
3	*5260.00	125.2 PK			2.23 V	287	85.1	40.1
4	*5260.00	111.0 AV			2.23 V	287	70.9	40.1
5	5350.00	63.5 PK	74.0	-10.5	2.23 V	287	61.2	2.3
6	5350.00	49.6 AV	54.0	-4.4	2.23 V	287	47.3	2.3
7	#10520.00	57.4 PK	68.2	-10.8	1.92 V	84	48.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.23 H	155	56.2	2.6
2	5150.00	45.8 AV	54.0	-8.2	1.23 H	155	43.2	2.6
3	*5300.00	111.3 PK			1.23 H	155	71.2	40.1
4	*5300.00	98.2 AV			1.23 H	155	58.1	40.1
5	5350.00	58.2 PK	74.0	-15.8	1.23 H	155	55.9	2.3
6	5350.00	45.9 AV	54.0	-8.1	1.23 H	155	43.6	2.3
7	10600.00	57.4 PK	74.0	-16.6	3.52 H	119	48.3	9.1
8	10600.00	43.8 AV	54.0	-10.2	3.52 H	119	34.7	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	2.19 V	292	57.9	2.6
2	5150.00	49.2 AV	54.0	-4.8	2.19 V	292	46.6	2.6
3	*5300.00	123.6 PK			2.19 V	292	83.5	40.1
4	*5300.00	110.0 AV			2.19 V	292	69.9	40.1
5	5350.00	71.4 PK	74.0	-2.6	2.19 V	292	69.1	2.3
6	5350.00	52.5 AV	54.0	-1.5	2.19 V	292	50.2	2.3
7	10600.00	56.9 PK	74.0	-17.1	1.88 V	84	47.8	9.1
8	10600.00	43.3 AV	54.0	-10.7	1.88 V	84	34.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.2 PK			1.20 H	159	72.1	40.1
2	*5320.00	98.5 AV			1.20 H	159	58.4	40.1
3	5350.00	56.8 PK	74.0	-17.2	1.20 H	159	54.5	2.3
4	5350.00	45.4 AV	54.0	-8.6	1.20 H	159	43.1	2.3
5	10640.00	56.4 PK	74.0	-17.6	3.49 H	124	47.5	8.9
6	10640.00	43.0 AV	54.0	-11.0	3.49 H	124	34.1	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.6 PK			2.27 V	290	83.5	40.1
2	*5320.00	109.0 AV			2.27 V	290	68.9	40.1
3	5350.00	67.5 PK	74.0	-6.5	2.27 V	290	65.2	2.3
4	5350.00	51.5 AV	54.0	-2.5	2.27 V	290	49.2	2.3
5	10640.00	56.4 PK	74.0	-17.6	1.87 V	85	47.5	8.9
6	10640.00	42.9 AV	54.0	-11.1	1.87 V	85	34.0	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.4 PK	74.0	-13.6	1.25 H	59	57.9	2.5
2	5460.00	46.8 AV	54.0	-7.2	1.25 H	59	44.3	2.5
3	#5470.00	59.6 PK	68.2	-8.6	1.25 H	59	57.1	2.5
4	*5500.00	113.1 PK			1.25 H	59	72.7	40.4
5	*5500.00	99.4 AV			1.25 H	59	59.0	40.4
6	11000.00	57.1 PK	74.0	-16.9	3.49 H	121	47.9	9.2
7	11000.00	43.7 AV	54.0	-10.3	3.49 H	121	34.5	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.4 PK	74.0	-7.6	2.31 V	284	63.9	2.5
2	5460.00	53.8 AV	54.0	-0.2	2.31 V	284	51.3	2.5
3	#5470.00	67.4 PK	68.2	-0.8	2.31 V	284	64.9	2.5
4	*5500.00	123.7 PK			2.31 V	284	83.3	40.4
5	*5500.00	109.5 AV			2.31 V	284	69.1	40.4
6	11000.00	57.8 PK	74.0	-16.2	1.94 V	74	48.6	9.2
7	11000.00	44.0 AV	54.0	-10.0	1.94 V	74	34.8	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	110.8 PK			1.22 H	57	69.8	41.0
2	*5600.00	100.3 AV			1.22 H	57	59.3	41.0
3	11200.00	58.1 PK	74.0	-15.9	3.46 H	116	48.2	9.9
4	11200.00	44.4 AV	54.0	-9.6	3.46 H	116	34.5	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	123.5 PK			2.29 V	291	82.5	41.0
2	*5600.00	109.2 AV			2.29 V	291	68.2	41.0
3	11200.00	57.2 PK	74.0	-16.8	1.87 V	73	47.3	9.9
4	11200.00	43.9 AV	54.0	-10.1	1.87 V	73	34.0	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.3 PK			1.32 H	74	70.8	41.5
2	*5700.00	98.4 AV			1.32 H	74	56.9	41.5
3	#5725.00	62.2 PK	68.2	-6.0	1.32 H	74	58.3	3.9
4	11400.00	58.4 PK	74.0	-15.6	3.52 H	123	48.3	10.1
5	11400.00	44.7 AV	54.0	-9.3	3.52 H	123	34.6	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	121.7 PK			2.36 V	274	80.2	41.5
2	*5700.00	108.1 AV			2.36 V	274	66.6	41.5
3	#5725.00	65.8 PK	68.2	-2.4	2.36 V	274	61.9	3.9
4	11400.00	58.5 PK	74.0	-15.5	1.98 V	74	48.4	10.1
5	11400.00	44.9 AV	54.0	-9.1	1.98 V	74	34.8	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	1.37 H	75	56.1	2.6
2	5460.00	45.1 AV	54.0	-8.9	1.37 H	75	42.5	2.6
3	#5470.00	57.2 PK	68.2	-11.0	1.37 H	75	54.6	2.6
4	*5720.00	112.0 PK			1.37 H	75	70.7	41.3
5	*5720.00	98.2 AV			1.37 H	75	56.9	41.3
6	11440.00	58.0 PK	74.0	-16.0	3.43 H	112	48.1	9.9
7	11440.00	44.4 AV	54.0	-9.6	3.43 H	112	34.5	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.6 PK	74.0	-15.4	2.37 V	279	56.1	2.5
2	5460.00	46.7 AV	54.0	-7.3	2.37 V	279	44.2	2.5
3	#5470.00	57.8 PK	68.2	-10.4	2.37 V	279	55.3	2.5
4	*5720.00	122.3 PK			2.37 V	279	80.8	41.5
5	*5720.00	108.3 AV			2.37 V	279	66.8	41.5
6	11440.00	57.9 PK	74.0	-16.1	1.92 V	71	47.7	10.2
7	11440.00	44.3 AV	54.0	-9.7	1.92 V	71	34.1	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.21 H	157	56.2	2.6
2	5150.00	45.7 AV	54.0	-8.3	1.21 H	157	43.1	2.6
3	*5270.00	110.4 PK			1.21 H	157	70.3	40.1
4	*5270.00	97.3 AV			1.21 H	157	57.2	40.1
5	5350.00	58.4 PK	74.0	-15.6	1.21 H	157	56.1	2.3
6	5350.00	45.9 AV	54.0	-8.1	1.21 H	157	43.6	2.3
7	#10540.00	57.0 PK	68.2	-11.2	3.49 H	120	47.9	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.4 PK	74.0	-12.6	2.23 V	289	58.8	2.6
2	5150.00	48.7 AV	54.0	-5.3	2.23 V	289	46.1	2.6
3	*5270.00	121.9 PK			2.23 V	289	81.8	40.1
4	*5270.00	108.5 AV			2.23 V	289	68.4	40.1
5	5350.00	69.0 PK	74.0	-5.0	2.23 V	289	66.7	2.3
6	5350.00	53.8 AV	54.0	-0.2	2.23 V	289	51.5	2.3
7	#10540.00	56.7 PK	68.2	-11.5	1.89 V	81	47.6	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	108.3 PK			1.21 H	160	68.2	40.1
2	*5310.00	95.7 AV			1.21 H	160	55.6	40.1
3	5350.00	58.0 PK	74.0	-16.0	1.21 H	160	55.7	2.3
4	5350.00	45.0 AV	54.0	-9.0	1.21 H	160	42.7	2.3
5	10620.00	56.8 PK	74.0	-17.2	3.52 H	121	47.8	9.0
6	10620.00	44.2 AV	54.0	-9.8	3.52 H	121	35.2	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	118.4 PK			2.25 V	289	78.3	40.1
2	*5310.00	106.2 AV			2.25 V	289	66.1	40.1
3	5350.00	66.1 PK	74.0	-7.9	2.28 V	65	63.8	2.3
4	5350.00	51.7 AV	54.0	-2.3	2.28 V	65	49.4	2.3
5	10620.00	56.5 PK	74.0	-17.5	1.92 V	83	47.5	9.0
6	10620.00	44.0 AV	54.0	-10.0	1.92 V	83	35.0	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.7 PK	74.0	-14.3	1.28 H	59	57.2	2.5
2	5460.00	46.4 AV	54.0	-7.6	1.28 H	59	43.9	2.5
3	#5470.00	59.4 PK	68.2	-8.8	1.28 H	59	56.9	2.5
4	*5510.00	108.8 PK			1.28 H	59	68.4	40.4
5	*5510.00	94.6 AV			1.28 H	59	54.2	40.4
6	11020.00	57.4 PK	74.0	-16.6	3.47 H	119	48.1	9.3
7	11020.00	44.8 AV	54.0	-9.2	3.47 H	119	35.5	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.9 PK	74.0	-12.1	2.31 V	284	59.4	2.5
2	5460.00	49.1 AV	54.0	-4.9	2.31 V	284	46.6	2.5
3	#5470.00	63.9 PK	68.2	-4.3	2.31 V	284	61.4	2.5
4	*5510.00	118.7 PK			2.31 V	284	78.3	40.4
5	*5510.00	106.0 AV			2.31 V	284	65.6	40.4
6	11020.00	56.8 PK	74.0	-17.2	1.93 V	72	47.5	9.3
7	11020.00	44.2 AV	54.0	-9.8	1.93 V	72	34.9	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	110.3 PK			1.22 H	57	69.6	40.7
2	*5550.00	96.2 AV			1.22 H	57	55.5	40.7
3	11100.00	57.0 PK	74.0	-17.0	3.46 H	116	47.4	9.6
4	11100.00	44.4 AV	54.0	-9.6	3.46 H	116	34.8	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	120.2 PK			2.28 V	291	79.5	40.7
2	*5550.00	107.5 AV			2.28 V	291	66.8	40.7
3	11100.00	56.8 PK	74.0	-17.2	1.85 V	77	47.2	9.6
4	11100.00	44.2 AV	54.0	-9.8	1.85 V	77	34.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	108.3 PK			1.29 H	62	67.1	41.2
2	*5630.00	95.4 AV			1.29 H	62	54.2	41.2
3	#5725.00	61.2 PK	68.2	-7.0	1.29 H	62	57.3	3.9
4	11260.00	57.5 PK	74.0	-16.5	3.41 H	122	47.5	10.0
5	11260.00	44.9 AV	54.0	-9.1	3.41 H	122	34.9	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	116.9 PK			2.41 V	293	75.7	41.2
2	*5630.00	105.8 AV			2.41 V	293	64.6	41.2
3	#5725.00	67.0 PK	68.2	-1.2	2.41 V	293	63.1	3.9
4	11260.00	57.9 PK	74.0	-16.1	1.85 V	71	47.9	10.0
5	11260.00	45.4 AV	54.0	-8.6	1.85 V	71	35.4	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	1.37 H	75	55.7	2.5
2	5460.00	45.2 AV	54.0	-8.8	1.37 H	75	42.7	2.5
3	#5470.00	57.1 PK	68.2	-11.1	1.37 H	75	54.6	2.5
4	*5710.00	109.6 PK			1.37 H	75	68.0	41.6
5	*5710.00	96.8 AV			1.37 H	75	55.2	41.6
6	11420.00	58.5 PK	74.0	-15.5	3.43 H	112	48.4	10.1
7	11420.00	44.9 AV	54.0	-9.1	3.43 H	112	34.8	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.0 PK	74.0	-14.0	2.37 V	279	57.5	2.5
2	5460.00	48.5 AV	54.0	-5.5	2.37 V	279	46.0	2.5
3	#5470.00	58.5 PK	68.2	-9.7	2.37 V	279	56.0	2.5
4	*5710.00	119.9 PK			2.37 V	279	78.3	41.6
5	*5710.00	106.1 AV			2.37 V	279	64.5	41.6
6	11420.00	57.7 PK	74.0	-16.3	1.92 V	71	47.6	10.1
7	11420.00	45.1 AV	54.0	-8.9	1.92 V	71	35.0	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.1 PK	74.0	-14.9	1.24 H	163	56.5	2.6
2	5150.00	45.7 AV	54.0	-8.3	1.24 H	163	43.1	2.6
3	*5290.00	105.8 PK			1.24 H	163	65.7	40.1
4	*5290.00	92.9 AV			1.24 H	163	52.8	40.1
5	5350.00	58.0 PK	74.0	-16.0	1.24 H	163	55.7	2.3
6	5350.00	46.0 AV	54.0	-8.0	1.24 H	163	43.7	2.3
7	#10580.00	56.6 PK	68.2	-11.6	3.52 H	124	47.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	2.27 V	289	57.0	2.6
2	5150.00	47.2 AV	54.0	-6.8	2.27 V	289	44.6	2.6
3	*5290.00	117.2 PK			2.27 V	289	77.1	40.1
4	*5290.00	106.1 AV			2.27 V	289	66.0	40.1
5	5350.00	64.7 PK	74.0	-9.3	2.27 V	289	62.4	2.3
6	5350.00	53.7 AV	54.0	-0.3	2.27 V	289	51.4	2.3
7	#10580.00	57.0 PK	68.2	-11.2	1.92 V	81	48.0	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.7 PK	74.0	-14.3	1.27 H	59	57.2	2.5
2	5460.00	46.2 AV	54.0	-7.8	1.27 H	59	43.7	2.5
3	#5470.00	58.9 PK	68.2	-9.3	1.27 H	59	56.4	2.5
4	*5530.00	105.1 PK			1.27 H	59	64.5	40.6
5	*5530.00	91.8 AV			1.27 H	59	51.2	40.6
6	11060.00	57.4 PK	74.0	-16.6	3.47 H	119	47.9	9.5
7	11060.00	44.7 AV	54.0	-9.3	3.47 H	119	35.2	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.0 PK	74.0	-7.0	2.31 V	284	64.5	2.5
2	5460.00	53.8 AV	54.0	-0.2	2.31 V	284	51.3	2.5
3	#5470.00	64.7 PK	68.2	-3.5	2.31 V	284	62.2	2.5
4	*5530.00	115.5 PK			2.31 V	284	74.9	40.6
5	*5530.00	101.8 AV			2.31 V	284	61.2	40.6
6	11060.00	57.6 PK	74.0	-16.4	1.93 V	75	48.1	9.5
7	11060.00	45.0 AV	54.0	-9.0	1.93 V	75	35.5	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.2 PK	74.0	-14.8	1.24 H	58	56.7	2.5
2	5460.00	45.6 AV	54.0	-8.4	1.24 H	58	43.1	2.5
3	#5470.00	58.1 PK	68.2	-10.1	1.24 H	58	55.6	2.5
4	*5610.00	106.1 PK			1.24 H	58	65.1	41.0
5	*5610.00	93.2 AV			1.24 H	58	52.2	41.0
6	#5725.00	61.5 PK	68.2	-6.7	1.24 H	58	57.6	3.9
7	11220.00	58.0 PK	74.0	-16.0	3.52 H	122	48.1	9.9
8	11220.00	45.5 AV	54.0	-8.5	3.52 H	122	35.6	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.7 PK	74.0	-9.3	2.32 V	269	62.2	2.5
2	5460.00	51.3 AV	54.0	-2.7	2.32 V	269	48.8	2.5
3	#5470.00	64.4 PK	68.2	-3.8	2.32 V	269	61.9	2.5
4	*5610.00	116.4 PK			2.32 V	269	75.4	41.0
5	*5610.00	103.2 AV			2.32 V	269	62.2	41.0
6	#5725.00	66.6 PK	68.2	-1.6	2.32 V	269	62.7	3.9
7	11220.00	58.1 PK	74.0	-15.9	1.94 V	76	48.2	9.9
8	11220.00	45.5 AV	54.0	-8.5	1.94 V	76	35.6	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	1.37 H	75	56.4	2.5
2	5460.00	46.0 AV	54.0	-8.0	1.37 H	75	43.5	2.5
3	#5470.00	58.7 PK	68.2	-9.5	1.37 H	75	56.2	2.5
4	*5690.00	105.7 PK			1.37 H	75	64.3	41.4
5	*5690.00	93.3 AV			1.37 H	75	51.9	41.4
6	11380.00	57.6 PK	74.0	-16.4	3.43 H	112	47.5	10.1
7	11380.00	45.1 AV	54.0	-8.9	3.43 H	112	35.0	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.3 PK	74.0	-7.7	2.37 V	279	63.8	2.5
2	5460.00	51.7 AV	54.0	-2.3	2.37 V	279	49.2	2.5
3	#5470.00	63.7 PK	68.2	-4.5	2.37 V	279	61.2	2.5
4	*5690.00	115.3 PK			2.37 V	279	73.9	41.4
5	*5690.00	102.5 AV			2.37 V	279	61.1	41.4
6	11380.00	57.9 PK	74.0	-16.1	1.92 V	71	47.8	10.1
7	11380.00	45.4 AV	54.0	-8.6	1.92 V	71	35.3	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.22 H	158	55.7	2.6
2	5150.00	46.3 AV	54.0	-7.7	1.22 H	158	43.7	2.6
3	*5250.00	100.5 PK			1.22 H	158	60.4	40.1
4	*5250.00	87.8 AV			1.22 H	158	47.7	40.1
5	5350.00	57.6 PK	74.0	-16.4	1.22 H	158	55.3	2.3
6	5350.00	45.8 AV	54.0	-8.2	1.22 H	158	43.5	2.3
7	#10500.00	56.6 PK	68.2	-11.6	3.47 H	129	47.6	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.0 PK	74.0	-8.0	2.24 V	276	63.4	2.6
2	5150.00	51.9 AV	54.0	-2.1	2.24 V	276	49.3	2.6
3	*5250.00	113.0 PK			2.24 V	276	72.9	40.1
4	*5250.00	99.6 AV			2.24 V	276	59.5	40.1
5	5350.00	66.1 PK	74.0	-7.9	2.24 V	276	63.8	2.3
6	5350.00	53.5 AV	54.0	-0.5	2.24 V	276	51.2	2.3
7	#10500.00	57.4 PK	68.2	-10.8	1.85 V	73	48.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.7 PK	74.0	-14.3	1.29 H	54	57.2	2.5
2	5460.00	47.0 AV	54.0	-7.0	1.29 H	54	44.5	2.5
3	#5470.00	59.2 PK	68.2	-9.0	1.29 H	54	56.7	2.5
4	*5570.00	102.0 PK			1.29 H	54	61.2	40.8
5	*5570.00	89.4 AV			1.29 H	54	48.6	40.8
6	#5725.00	60.9 PK	68.2	-7.3	1.29 H	54	57.0	3.9
7	11140.00	57.0 PK	74.0	-17.0	3.57 H	122	47.2	9.8
8	11140.00	44.7 AV	54.0	-9.3	3.57 H	122	34.9	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.8 PK	74.0	-7.2	2.32 V	273	64.3	2.5
2	5460.00	53.7 AV	54.0	-0.3	2.32 V	273	51.2	2.5
3	#5470.00	64.6 PK	68.2	-3.6	2.32 V	273	62.1	2.5
4	*5570.00	112.8 PK			2.32 V	273	72.0	40.8
5	*5570.00	99.5 AV			2.32 V	273	58.7	40.8
6	#5725.00	66.8 PK	68.2	-1.4	2.32 V	273	62.9	3.9
7	11140.00	57.2 PK	74.0	-16.8	1.94 V	76	47.4	9.8
8	11140.00	44.6 AV	54.0	-9.4	1.94 V	76	34.8	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode C_PIFA Ant.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.7 PK	74.0	-14.3	1.10 H	44	57.1	2.6
2	5150.00	47.2 AV	54.0	-6.8	1.10 H	44	44.6	2.6
3	*5260.00	122.4 PK			1.10 H	44	82.3	40.1
4	*5260.00	111.2 AV			1.10 H	44	71.1	40.1
5	#10520.00	56.7 PK	68.2	-11.5	1.87 H	253	47.6	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	2.09 V	71	56.3	2.6
2	5150.00	45.9 AV	54.0	-8.1	2.09 V	71	43.3	2.6
3	*5260.00	112.2 PK			2.09 V	71	72.1	40.1
4	*5260.00	101.4 AV			2.09 V	71	61.3	40.1
5	#10520.00	56.3 PK	68.2	-11.9	2.12 V	145	47.2	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.8 PK			1.15 H	41	80.7	40.1
2	*5300.00	110.3 AV			1.15 H	41	70.2	40.1
3	5350.00	63.6 PK	74.0	-10.4	1.15 H	41	61.3	2.3
4	5350.00	51.3 AV	54.0	-2.7	1.15 H	41	49.0	2.3
5	10600.00	56.7 PK	74.0	-17.3	1.87 H	253	47.6	9.1
6	10600.00	43.3 AV	54.0	-10.7	1.87 H	253	34.2	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	110.8 PK			2.08 V	67	70.7	40.1
2	*5300.00	100.2 AV			2.08 V	67	60.1	40.1
3	5350.00	62.8 PK	74.0	-11.2	2.08 V	67	60.5	2.3
4	5350.00	48.1 AV	54.0	-5.9	2.08 V	67	45.8	2.3
5	10600.00	56.6 PK	74.0	-17.4	2.11 V	138	47.5	9.1
6	10600.00	43.4 AV	54.0	-10.6	2.11 V	138	34.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.7 PK			1.17 H	41	80.6	40.1
2	*5320.00	110.1 AV			1.17 H	41	70.0	40.1
3	5350.00	64.3 PK	74.0	-9.7	1.17 H	41	62.0	2.3
4	5350.00	52.7 AV	54.0	-1.3	1.17 H	41	50.4	2.3
5	10640.00	56.5 PK	74.0	-17.5	1.95 H	256	47.6	8.9
6	10640.00	43.2 AV	54.0	-10.8	1.95 H	256	34.3	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.4 PK			2.10 V	67	71.3	40.1
2	*5320.00	100.6 AV			2.10 V	67	60.5	40.1
3	5350.00	59.5 PK	74.0	-14.5	2.10 V	67	57.2	2.3
4	5350.00	47.4 AV	54.0	-6.6	2.10 V	67	45.1	2.3
5	10640.00	56.0 PK	74.0	-18.0	2.20 V	137	47.1	8.9
6	10640.00	42.7 AV	54.0	-11.3	2.20 V	137	33.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.8 PK	74.0	-10.2	1.10 H	48	61.3	2.5
2	5460.00	52.8 AV	54.0	-1.2	1.10 H	48	50.3	2.5
3	#5470.00	64.5 PK	68.2	-3.7	1.10 H	48	62.0	2.5
4	*5500.00	120.2 PK			1.10 H	48	79.8	40.4
5	*5500.00	110.0 AV			1.10 H	48	69.6	40.4
6	11000.00	57.3 PK	74.0	-16.7	1.92 H	251	48.1	9.2
7	11000.00	43.9 AV	54.0	-10.1	1.92 H	251	34.7	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	2.08 V	85	55.8	2.5
2	5460.00	46.8 AV	54.0	-7.2	2.08 V	85	44.3	2.5
3	#5470.00	58.2 PK	68.2	-10.0	2.08 V	85	55.7	2.5
4	*5500.00	110.6 PK			2.08 V	85	70.2	40.4
5	*5500.00	100.3 AV			2.08 V	85	59.9	40.4
6	11000.00	56.8 PK	74.0	-17.2	2.07 V	139	47.6	9.2
7	11000.00	42.5 AV	54.0	-11.5	2.07 V	139	33.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	121.4 PK			1.18 H	47	80.4	41.0
2	*5600.00	111.2 AV			1.18 H	47	70.2	41.0
3	11200.00	57.6 PK	74.0	-16.4	1.95 H	248	47.7	9.9
4	11200.00	44.3 AV	54.0	-9.7	1.95 H	248	34.4	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	111.6 PK			2.09 V	82	70.6	41.0
2	*5600.00	101.3 AV			2.09 V	82	60.3	41.0
3	11200.00	57.0 PK	74.0	-17.0	2.07 V	144	47.1	9.9
4	11200.00	43.8 AV	54.0	-10.2	2.07 V	144	33.9	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	120.1 PK			1.24 H	47	78.6	41.5
2	*5700.00	109.5 AV			1.24 H	47	68.0	41.5
3	#5725.00	65.7 PK	68.2	-2.5	1.24 H	47	61.8	3.9
4	11400.00	58.3 PK	74.0	-15.7	1.96 H	252	48.2	10.1
5	11400.00	45.0 AV	54.0	-9.0	1.96 H	252	34.9	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.5 PK			2.23 V	81	69.0	41.5
2	*5700.00	100.1 AV			2.23 V	81	58.6	41.5
3	#5725.00	60.1 PK	68.2	-8.1	2.23 V	81	56.2	3.9
4	11400.00	57.3 PK	74.0	-16.7	2.09 V	147	47.2	10.1
5	11400.00	43.9 AV	54.0	-10.1	2.09 V	147	33.8	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.1 PK	74.0	-13.9	1.24 H	49	57.6	2.5
2	5460.00	48.0 AV	54.0	-6.0	1.24 H	49	45.5	2.5
3	#5470.00	58.3 PK	68.2	-9.9	1.24 H	49	55.8	2.5
4	*5720.00	121.3 PK			1.24 H	49	79.8	41.5
5	*5720.00	110.8 AV			1.24 H	49	69.3	41.5
6	11440.00	57.5 PK	74.0	-16.5	2.01 H	249	47.3	10.2
7	11440.00	44.2 AV	54.0	-9.8	2.01 H	249	34.0	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	2.25 V	84	55.8	2.5
2	5460.00	46.0 AV	54.0	-8.0	2.25 V	84	43.5	2.5
3	#5470.00	57.3 PK	68.2	-10.9	2.25 V	84	54.8	2.5
4	*5720.00	110.6 PK			2.25 V	84	69.1	41.5
5	*5720.00	100.8 AV			2.25 V	84	59.3	41.5
6	11440.00	57.8 PK	74.0	-16.2	2.11 V	143	47.6	10.2
7	11440.00	44.6 AV	54.0	-9.4	2.11 V	143	34.4	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.10 H	44	57.0	2.6
2	5150.00	47.4 AV	54.0	-6.6	1.10 H	44	44.8	2.6
3	*5260.00	124.5 PK			1.10 H	44	84.4	40.1
4	*5260.00	111.2 AV			1.10 H	44	71.1	40.1
5	#10520.00	56.5 PK	68.2	-11.7	1.87 H	253	47.4	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	2.09 V	71	55.6	2.6
2	5150.00	45.7 AV	54.0	-8.3	2.09 V	71	43.1	2.6
3	*5260.00	114.4 PK			2.09 V	71	74.3	40.1
4	*5260.00	101.3 AV			2.09 V	71	61.2	40.1
5	#10520.00	56.7 PK	68.2	-11.5	2.12 V	145	47.6	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.8 PK			1.15 H	41	82.7	40.1
2	*5300.00	109.1 AV			1.15 H	41	69.0	40.1
3	5350.00	68.0 PK	74.0	-6.0	1.15 H	41	65.7	2.3
4	5350.00	53.3 AV	54.0	-0.7	1.15 H	41	51.0	2.3
5	10600.00	56.8 PK	74.0	-17.2	1.92 H	256	47.7	9.1
6	10600.00	43.6 AV	54.0	-10.4	1.92 H	256	34.5	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.8 PK			2.08 V	67	72.7	40.1
2	*5300.00	99.3 AV			2.08 V	67	59.2	40.1
3	5350.00	63.6 PK	74.0	-10.4	2.08 V	67	61.3	2.3
4	5350.00	47.6 AV	54.0	-6.4	2.08 V	67	45.3	2.3
5	10600.00	57.1 PK	74.0	-16.9	2.11 V	138	48.0	9.1
6	10600.00	43.8 AV	54.0	-10.2	2.11 V	138	34.7	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.5 PK			1.17 H	41	83.4	40.1
2	*5320.00	109.2 AV			1.17 H	41	69.1	40.1
3	5350.00	64.6 PK	74.0	-9.4	1.17 H	41	62.3	2.3
4	5350.00	50.7 AV	54.0	-3.3	1.17 H	41	48.4	2.3
5	10640.00	56.4 PK	74.0	-17.6	1.95 H	256	47.5	8.9
6	10640.00	43.1 AV	54.0	-10.9	1.95 H	256	34.2	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.0 PK			2.10 V	67	72.9	40.1
2	*5320.00	99.4 AV			2.10 V	67	59.3	40.1
3	5350.00	58.1 PK	74.0	-15.9	2.10 V	67	55.8	2.3
4	5350.00	46.1 AV	54.0	-7.9	2.10 V	67	43.8	2.3
5	10640.00	56.8 PK	74.0	-17.2	2.20 V	137	47.9	8.9
6	10640.00	43.5 AV	54.0	-10.5	2.20 V	137	34.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.2 PK	74.0	-10.8	1.10 H	48	60.7	2.5
2	5460.00	52.2 AV	54.0	-1.8	1.10 H	48	49.7	2.5
3	#5470.00	64.5 PK	68.2	-3.7	1.10 H	48	62.0	2.5
4	*5500.00	122.8 PK			1.10 H	48	82.4	40.4
5	*5500.00	108.8 AV			1.10 H	48	68.4	40.4
6	11000.00	56.7 PK	74.0	-17.3	1.92 H	251	47.5	9.2
7	11000.00	43.4 AV	54.0	-10.6	1.92 H	251	34.2	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	2.08 V	85	56.1	2.6
2	5460.00	46.3 AV	54.0	-7.7	2.08 V	85	43.7	2.6
3	#5470.00	58.8 PK	68.2	-9.4	2.08 V	85	56.2	2.6
4	*5500.00	112.9 PK			2.08 V	85	72.4	40.5
5	*5500.00	99.0 AV			2.08 V	85	58.5	40.5
6	11000.00	56.3 PK	74.0	-17.7	2.07 V	139	47.6	8.7
7	11000.00	43.0 AV	54.0	-11.0	2.07 V	139	34.3	8.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	123.5 PK			1.18 H	47	82.5	41.0
2	*5600.00	110.0 AV			1.18 H	47	69.0	41.0
3	11200.00	57.2 PK	74.0	-16.8	1.95 H	248	47.3	9.9
4	11200.00	43.9 AV	54.0	-10.1	1.95 H	248	34.0	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	113.6 PK			2.09 V	82	72.6	41.0
2	*5600.00	100.1 AV			2.09 V	82	59.1	41.0
3	11200.00	57.5 PK	74.0	-16.5	2.07 V	144	47.6	9.9
4	11200.00	44.2 AV	54.0	-9.8	2.07 V	144	34.3	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	121.8 PK			1.24 H	47	80.3	41.5
2	*5700.00	108.4 AV			1.24 H	47	66.9	41.5
3	#5725.00	67.8 PK	68.2	-0.4	1.24 H	47	63.9	3.9
4	11400.00	57.6 PK	74.0	-16.4	1.96 H	252	47.5	10.1
5	11400.00	44.3 AV	54.0	-9.7	1.96 H	252	34.2	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.6 PK			2.23 V	81	71.1	41.5
2	*5700.00	92.7 AV			2.23 V	81	51.2	41.5
3	#5725.00	60.1 PK	68.2	-8.1	2.23 V	81	56.2	3.9
4	11400.00	58.3 PK	74.0	-15.7	2.09 V	147	48.2	10.1
5	11400.00	45.0 AV	54.0	-9.0	2.09 V	147	34.9	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.5 PK	74.0	-14.5	1.24 H	49	57.0	2.5
2	5460.00	47.6 AV	54.0	-6.4	1.24 H	49	45.1	2.5
3	#5470.00	57.8 PK	68.2	-10.4	1.24 H	49	55.3	2.5
4	*5720.00	124.3 PK			1.24 H	49	82.8	41.5
5	*5720.00	110.2 AV			1.24 H	49	68.7	41.5
6	11440.00	57.5 PK	74.0	-16.5	2.01 H	249	47.3	10.2
7	11440.00	44.2 AV	54.0	-9.8	2.01 H	249	34.0	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	2.25 V	84	55.8	2.5
2	5460.00	45.9 AV	54.0	-8.1	2.25 V	84	43.4	2.5
3	#5470.00	57.5 PK	68.2	-10.7	2.25 V	84	55.0	2.5
4	*5720.00	114.2 PK			2.25 V	84	72.7	41.5
5	*5720.00	100.2 AV			2.25 V	84	58.7	41.5
6	11440.00	57.3 PK	74.0	-16.7	2.11 V	143	47.1	10.2
7	11440.00	44.0 AV	54.0	-10.0	2.11 V	143	33.8	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.5 PK	74.0	-14.5	1.08 H	42	56.9	2.6
2	5150.00	47.6 AV	54.0	-6.4	1.08 H	42	45.0	2.6
3	*5270.00	121.4 PK			1.08 H	42	81.3	40.1
4	*5270.00	108.8 AV			1.08 H	42	68.7	40.1
5	5350.00	68.0 PK	74.0	-6.0	1.08 H	42	65.7	2.3
6	5350.00	53.7 AV	54.0	-0.3	1.08 H	42	51.4	2.3
7	#10540.00	56.3 PK	68.2	-11.9	1.92 H	253	47.2	9.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	2.11 V	82	56.1	2.6
2	5150.00	45.8 AV	54.0	-8.2	2.11 V	82	43.2	2.6
3	*5270.00	110.3 PK			2.11 V	82	70.2	40.1
4	*5270.00	97.0 AV			2.11 V	82	56.9	40.1
5	5350.00	60.9 PK	74.0	-13.1	2.11 V	82	58.6	2.3
6	5350.00	48.2 AV	54.0	-5.8	2.11 V	82	45.9	2.3
7	#10540.00	56.4 PK	68.2	-11.8	2.09 V	143	47.3	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	117.2 PK			1.17 H	46	77.1	40.1
2	*5310.00	104.7 AV			1.17 H	46	64.6	40.1
3	5350.00	64.9 PK	74.0	-9.1	1.17 H	46	62.6	2.3
4	5350.00	52.8 AV	54.0	-1.2	1.17 H	46	50.5	2.3
5	10620.00	55.9 PK	74.0	-18.1	1.95 H	256	46.9	9.0
6	10620.00	42.8 AV	54.0	-11.2	1.95 H	256	33.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	107.7 PK			2.11 V	82	67.6	40.1
2	*5310.00	94.8 AV			2.11 V	82	54.7	40.1
3	5350.00	58.8 PK	74.0	-15.2	2.11 V	82	56.5	2.3
4	5350.00	46.5 AV	54.0	-7.5	2.11 V	82	44.2	2.3
5	10620.00	56.4 PK	74.0	-17.6	2.09 V	143	47.4	9.0
6	10620.00	43.0 AV	54.0	-11.0	2.09 V	143	34.0	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.2 PK	74.0	-9.8	1.10 H	48	61.7	2.5
2	5460.00	49.4 AV	54.0	-4.6	1.10 H	48	46.9	2.5
3	#5470.00	65.1 PK	68.2	-3.1	1.10 H	48	62.6	2.5
4	*5510.00	119.8 PK			1.10 H	48	79.4	40.4
5	*5510.00	106.3 AV			1.10 H	48	65.9	40.4
6	11020.00	56.8 PK	74.0	-17.2	1.92 H	251	47.5	9.3
7	11020.00	43.5 AV	54.0	-10.5	1.92 H	251	34.2	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	2.08 V	85	55.7	2.5
2	5460.00	45.7 AV	54.0	-8.3	2.08 V	85	43.2	2.5
3	#5470.00	59.0 PK	68.2	-9.2	2.08 V	85	56.5	2.5
4	*5510.00	109.5 PK			2.08 V	85	69.1	40.4
5	*5510.00	96.6 AV			2.08 V	85	56.2	40.4
6	11020.00	57.5 PK	74.0	-16.5	2.07 V	139	48.2	9.3
7	11020.00	44.2 AV	54.0	-9.8	2.07 V	139	34.9	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.6 PK	74.0	-10.4	1.18 H	47	61.1	2.5
2	5460.00	50.1 AV	54.0	-3.9	1.18 H	47	47.6	2.5
3	#5470.00	63.6 PK	68.2	-4.6	1.18 H	47	61.1	2.5
4	*5550.00	121.2 PK			1.18 H	47	80.5	40.7
5	*5550.00	108.3 AV			1.18 H	47	67.6	40.7
6	11100.00	57.1 PK	74.0	-16.9	1.95 H	248	47.5	9.6
7	11100.00	43.7 AV	54.0	-10.3	1.95 H	248	34.1	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.4 PK	74.0	-15.6	2.09 V	82	55.9	2.5
2	5460.00	45.9 AV	54.0	-8.1	2.09 V	82	43.4	2.5
3	#5470.00	58.4 PK	68.2	-9.8	2.09 V	82	55.9	2.5
4	*5550.00	110.9 PK			2.09 V	82	70.2	40.7
5	*5550.00	98.3 AV			2.09 V	82	57.6	40.7
6	11100.00	57.7 PK	74.0	-16.3	2.07 V	144	48.1	9.6
7	11100.00	44.1 AV	54.0	-9.9	2.07 V	144	34.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	119.8 PK			1.24 H	47	78.6	41.2
2	*5630.00	106.9 AV			1.24 H	47	65.7	41.2
3	#5725.00	64.4 PK	68.2	-3.8	1.24 H	47	60.5	3.9
4	11260.00	57.2 PK	74.0	-16.8	1.96 H	252	47.2	10.0
5	11260.00	43.9 AV	54.0	-10.1	1.96 H	252	33.9	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	110.4 PK			2.23 V	81	69.2	41.2
2	*5630.00	97.3 AV			2.23 V	81	56.1	41.2
3	#5725.00	60.4 PK	68.2	-7.8	2.23 V	81	56.5	3.9
4	11260.00	57.5 PK	74.0	-16.5	2.09 V	147	47.5	10.0
5	11260.00	44.2 AV	54.0	-9.8	2.09 V	147	34.2	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.4 PK	74.0	-11.6	1.24 H	49	59.9	2.5
2	5460.00	49.0 AV	54.0	-5.0	1.24 H	49	46.5	2.5
3	#5470.00	59.6 PK	68.2	-8.6	1.24 H	49	57.1	2.5
4	*5710.00	122.7 PK			1.24 H	49	81.1	41.6
5	*5710.00	108.9 AV			1.24 H	49	67.3	41.6
6	11420.00	57.4 PK	74.0	-16.6	2.01 H	249	47.3	10.1
7	11420.00	44.1 AV	54.0	-9.9	2.01 H	249	34.0	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	2.25 V	84	56.6	2.5
2	5460.00	46.2 AV	54.0	-7.8	2.25 V	84	43.7	2.5
3	#5470.00	58.1 PK	68.2	-10.1	2.25 V	84	55.6	2.5
4	*5710.00	112.2 PK			2.25 V	84	70.6	41.6
5	*5710.00	98.7 AV			2.25 V	84	57.1	41.6
6	11420.00	57.3 PK	74.0	-16.7	2.11 V	143	47.2	10.1
7	11420.00	44.0 AV	54.0	-10.0	2.11 V	143	33.9	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	1.09 H	37	56.3	2.6
2	5150.00	46.1 AV	54.0	-7.9	1.09 H	37	43.5	2.6
3	*5290.00	113.5 PK			1.09 H	37	73.4	40.1
4	*5290.00	100.8 AV			1.09 H	37	60.7	40.1
5	5350.00	65.9 PK	74.0	-8.1	1.09 H	37	63.6	2.3
6	5350.00	53.2 AV	54.0	-0.8	1.09 H	37	50.9	2.3
7	#10580.00	56.4 PK	68.2	-11.8	1.87 H	249	47.4	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.2 PK	74.0	-14.8	2.11 V	85	56.6	2.6
2	5150.00	45.0 AV	54.0	-9.0	2.11 V	85	42.4	2.6
3	*5290.00	104.1 PK			2.11 V	85	64.0	40.1
4	*5290.00	90.8 AV			2.11 V	85	50.7	40.1
5	5350.00	61.1 PK	74.0	-12.9	2.11 V	85	58.8	2.3
6	5350.00	47.3 AV	54.0	-6.7	2.11 V	85	45.0	2.3
7	#10580.00	56.1 PK	68.2	-12.1	2.07 V	143	47.1	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.5 PK	74.0	-7.5	1.10 H	48	64.0	2.5
2	5460.00	52.7 AV	54.0	-1.3	1.10 H	48	50.2	2.5
3	#5470.00	63.4 PK	68.2	-4.8	1.10 H	48	60.9	2.5
4	*5530.00	116.0 PK			1.10 H	48	75.4	40.6
5	*5530.00	100.5 AV			1.10 H	48	59.9	40.6
6	11060.00	56.9 PK	74.0	-17.1	1.92 H	251	47.4	9.5
7	11060.00	43.6 AV	54.0	-10.4	1.92 H	251	34.1	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.0 PK	74.0	-14.0	2.08 V	85	57.5	2.5
2	5460.00	47.3 AV	54.0	-6.7	2.08 V	85	44.8	2.5
3	#5470.00	58.2 PK	68.2	-10.0	2.08 V	85	55.7	2.5
4	*5530.00	106.6 PK			2.08 V	85	66.0	40.6
5	*5530.00	93.1 AV			2.08 V	85	52.5	40.6
6	11060.00	57.1 PK	74.0	-16.9	2.07 V	139	47.6	9.5
7	11060.00	43.7 AV	54.0	-10.3	2.07 V	139	34.2	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.9 PK	74.0	-8.1	1.18 H	47	63.4	2.5
2	5460.00	52.0 AV	54.0	-2.0	1.18 H	47	49.5	2.5
3	#5470.00	66.7 PK	68.2	-1.5	1.18 H	47	64.2	2.5
4	*5610.00	118.5 PK			1.18 H	47	77.5	41.0
5	*5610.00	105.3 AV			1.18 H	47	64.3	41.0
6	#5725.00	66.0 PK	68.2	-2.2	1.18 H	47	62.1	3.9
7	11220.00	57.3 PK	74.0	-16.7	1.95 H	248	47.4	9.9
8	11220.00	44.0 AV	54.0	-10.0	1.95 H	248	34.1	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.5 PK	74.0	-13.5	2.09 V	82	58.0	2.5
2	5460.00	47.5 AV	54.0	-6.5	2.09 V	82	45.0	2.5
3	#5470.00	61.1 PK	68.2	-7.1	2.09 V	86	58.6	2.5
4	*5610.00	109.0 PK			2.09 V	82	68.0	41.0
5	*5610.00	95.6 AV			2.09 V	82	54.6	41.0
6	#5725.00	60.6 PK	68.2	-7.6	2.09 V	86	56.7	3.9
7	11220.00	57.1 PK	74.0	-16.9	2.07 V	144	47.2	9.9
8	11220.00	43.8 AV	54.0	-10.2	2.07 V	144	33.9	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.0 PK	74.0	-10.0	1.24 H	49	61.5	2.5
2	5460.00	50.4 AV	54.0	-3.6	1.24 H	49	47.9	2.5
3	#5470.00	62.8 PK	68.2	-5.4	1.24 H	49	60.3	2.5
4	*5690.00	118.9 PK			1.24 H	49	77.5	41.4
5	*5690.00	106.0 AV			1.24 H	49	64.6	41.4
6	#5850.00	63.0 PK	68.2	-5.2	1.24 H	49	58.9	4.1
7	11380.00	56.6 PK	74.0	-17.4	2.01 H	249	46.5	10.1
8	11380.00	43.5 AV	54.0	-10.5	2.01 H	249	33.4	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.6 PK	74.0	-14.4	2.25 V	84	57.1	2.5
2	5460.00	46.9 AV	54.0	-7.1	2.25 V	84	44.4	2.5
3	#5470.00	58.2 PK	68.2	-10.0	2.25 V	84	55.7	2.5
4	*5690.00	107.2 PK			2.25 V	84	65.8	41.4
5	*5690.00	94.8 AV			2.25 V	84	53.4	41.4
6	#5850.00	59.2 PK	68.2	-9.0	2.25 V	84	55.1	4.1
7	11380.00	57.1 PK	74.0	-16.9	2.11 V	143	47.0	10.1
8	11380.00	43.9 AV	54.0	-10.1	2.11 V	143	33.8	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.2 PK	74.0	-9.8	1.09 H	37	61.6	2.6
2	5150.00	52.9 AV	54.0	-1.1	1.09 H	37	50.3	2.6
3	*5250.00	110.4 PK			1.09 H	37	70.3	40.1
4	*5250.00	98.4 AV			1.09 H	37	58.3	40.1
5	5350.00	65.3 PK	74.0	-8.7	1.09 H	37	63.0	2.3
6	5350.00	53.0 AV	54.0	-1.0	1.09 H	37	50.7	2.3
7	#10500.00	56.2 PK	68.2	-12.0	1.87 H	249	47.2	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	2.11 V	85	56.7	2.6
2	5150.00	47.4 AV	54.0	-6.6	2.11 V	85	44.8	2.6
3	*5250.00	101.5 PK			2.11 V	85	61.4	40.1
4	*5250.00	88.4 AV			2.11 V	85	48.3	40.1
5	5350.00	59.1 PK	74.0	-14.9	2.11 V	85	56.8	2.3
6	5350.00	47.0 AV	54.0	-7.0	2.11 V	85	44.7	2.3
7	#10500.00	55.8 PK	68.2	-12.4	2.07 V	143	46.8	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.2 PK	74.0	-7.8	1.10 H	48	63.7	2.5
2	5460.00	53.4 AV	54.0	-0.6	1.10 H	48	50.9	2.5
3	#5470.00	65.0 PK	68.2	-3.2	1.10 H	48	62.5	2.5
4	*5570.00	112.2 PK			1.10 H	48	71.4	40.8
5	*5570.00	98.9 AV			1.10 H	48	58.1	40.8
6	#5725.00	61.8 PK	68.2	-6.4	1.10 H	48	57.9	3.9
7	11140.00	56.9 PK	74.0	-17.1	1.92 H	251	47.1	9.8
8	11140.00	43.5 AV	54.0	-10.5	1.92 H	251	33.7	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.6 PK	74.0	-13.4	2.08 V	85	58.1	2.5
2	5460.00	47.5 AV	54.0	-6.5	2.08 V	85	45.0	2.5
3	#5470.00	60.7 PK	68.2	-7.5	2.08 V	85	58.2	2.5
4	*5570.00	101.1 PK			2.08 V	85	60.3	40.8
5	*5570.00	88.9 AV			2.08 V	85	48.1	40.8
6	#5725.00	60.1 PK	68.2	-8.1	2.08 V	85	56.2	3.9
7	11140.00	56.4 PK	74.0	-17.6	2.07 V	139	46.6	9.8
8	11140.00	43.1 AV	54.0	-10.9	2.07 V	139	33.3	9.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge Mode A_Dipole Ant.

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 52

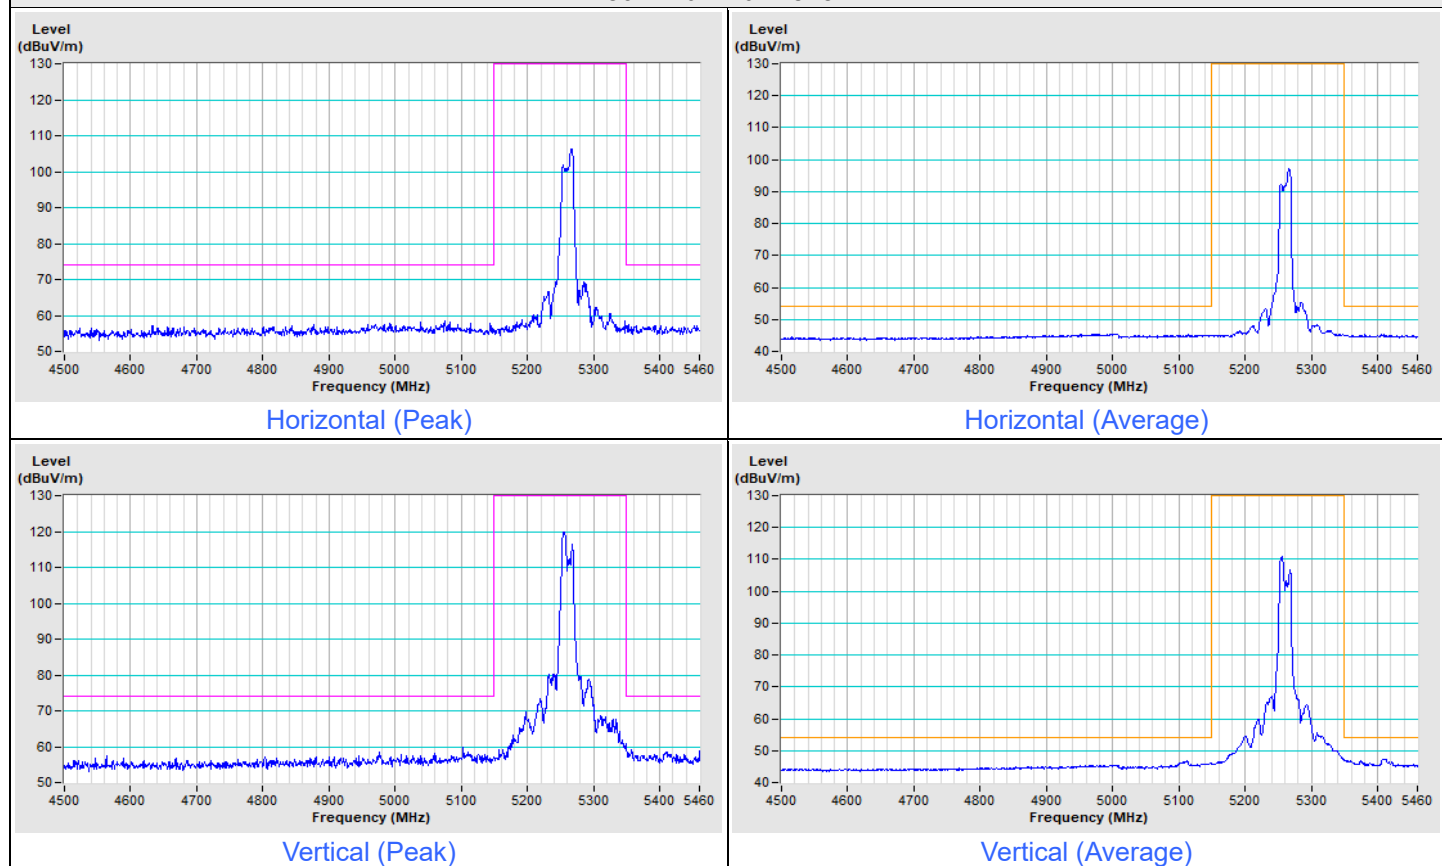


802.11a Channel 60

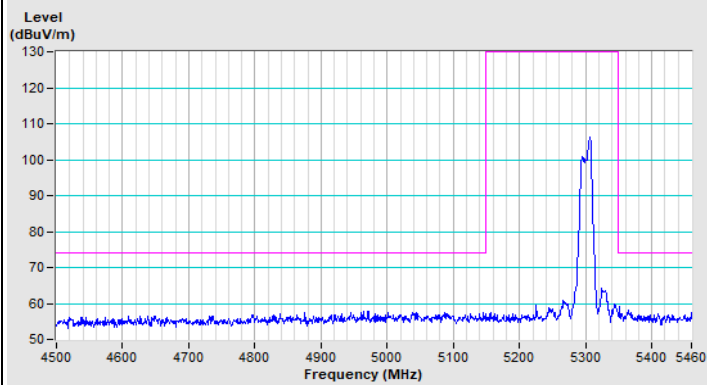


Horizontal (Peak)

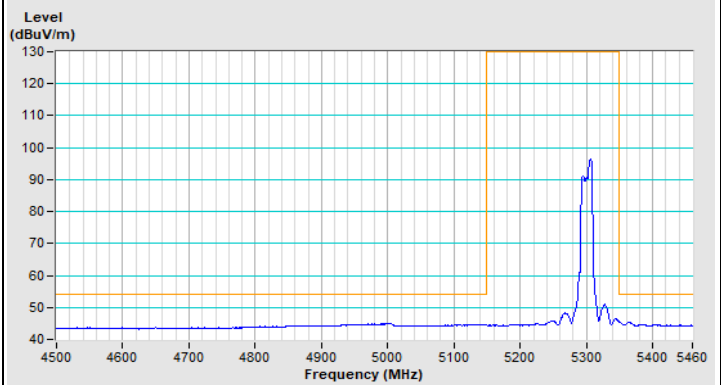

Horizontal (Average)

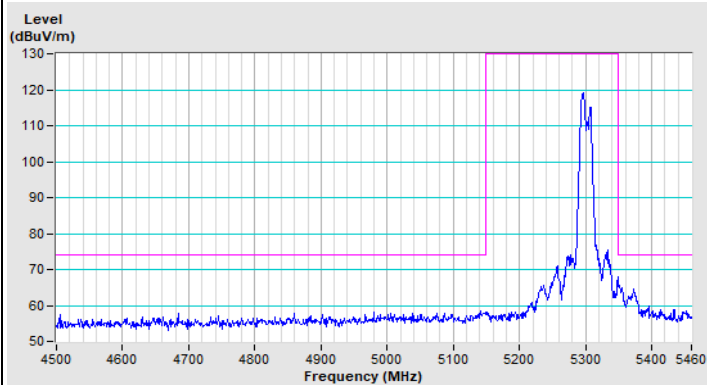


Vertical (Peak)

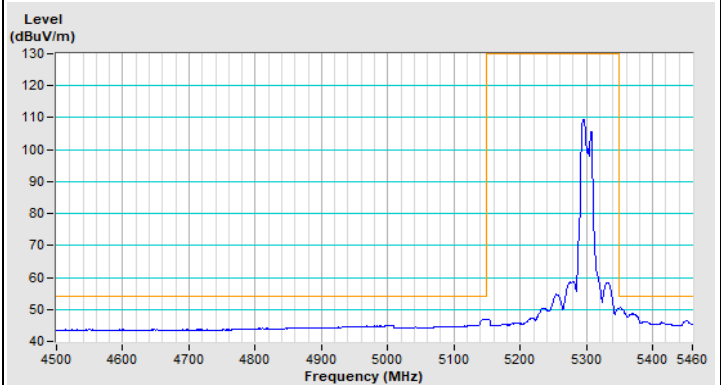


Vertical (Average)


802.11a Channel 64

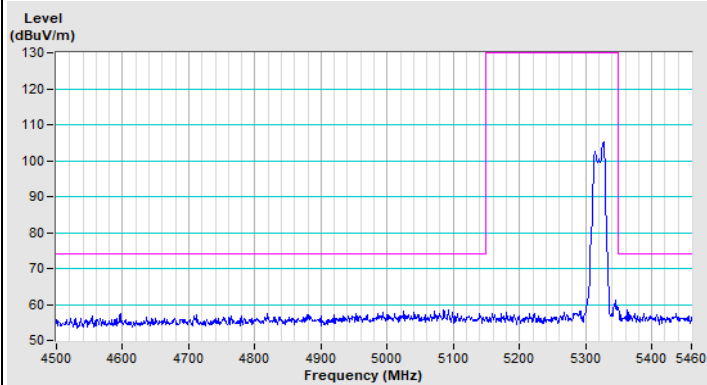


Horizontal (Peak)

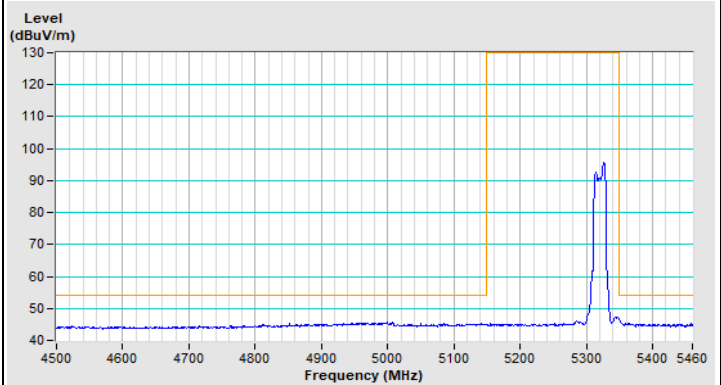

Horizontal (Average)

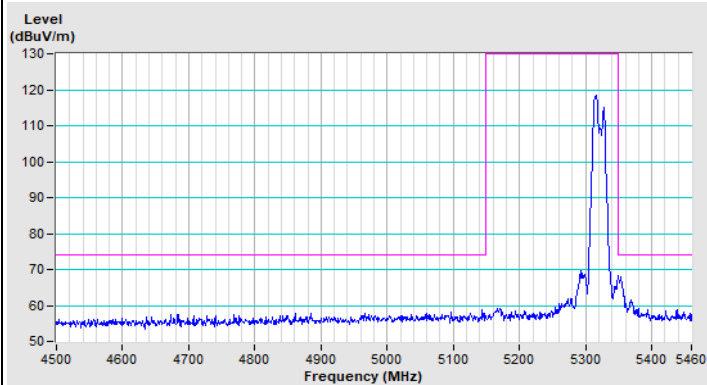


Vertical (Peak)

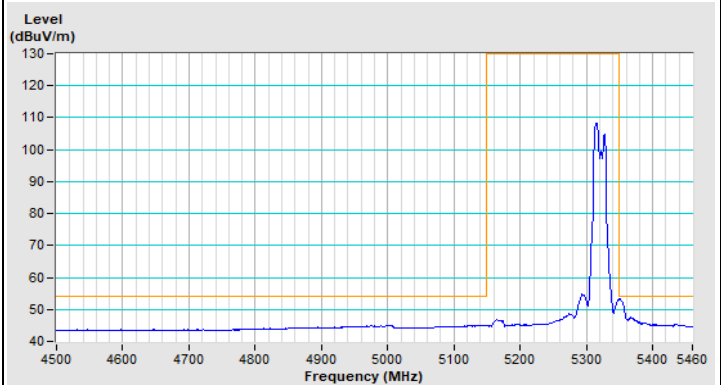


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

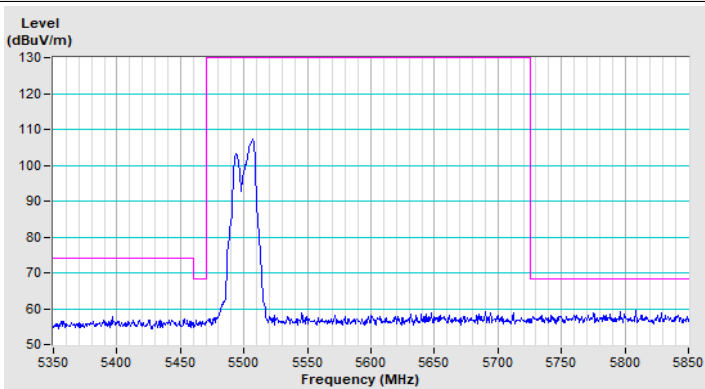


Horizontal (Peak)

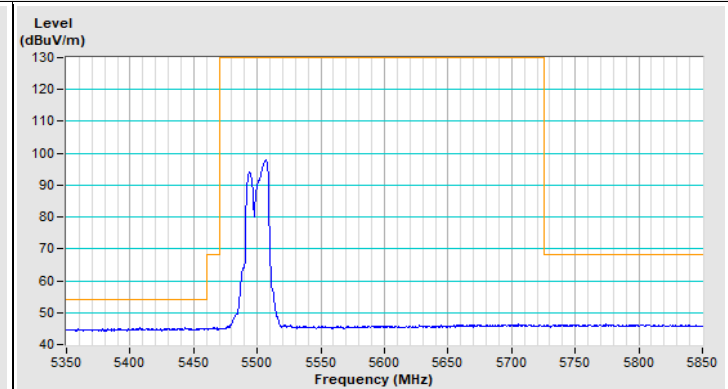

Horizontal (Average)

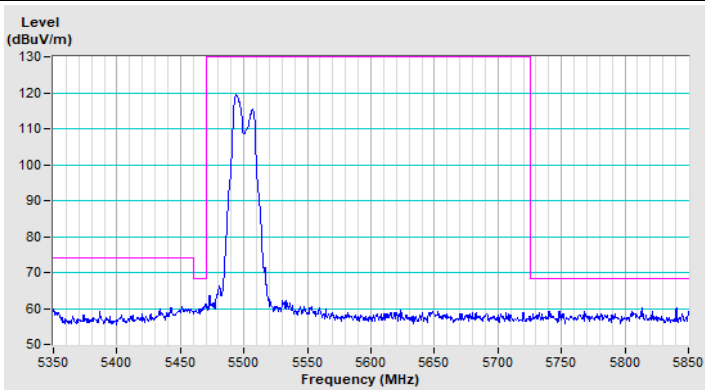


Vertical (Peak)

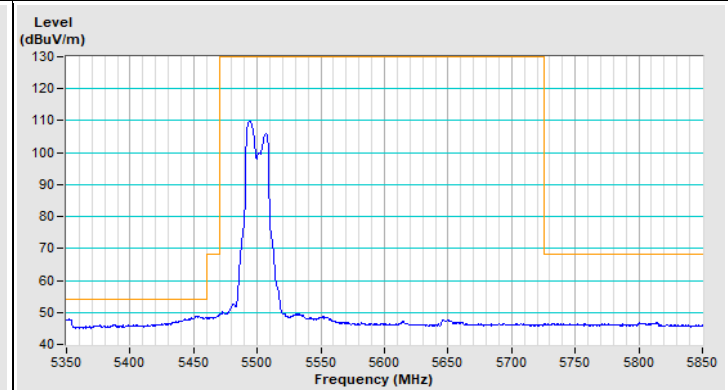


Vertical (Average)

802.11a Channel 140

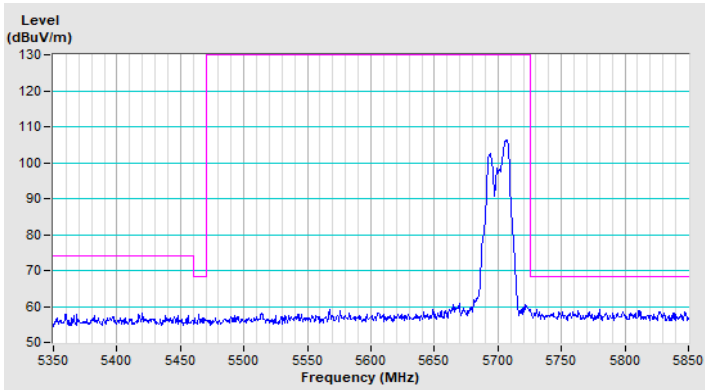


Horizontal (Peak)

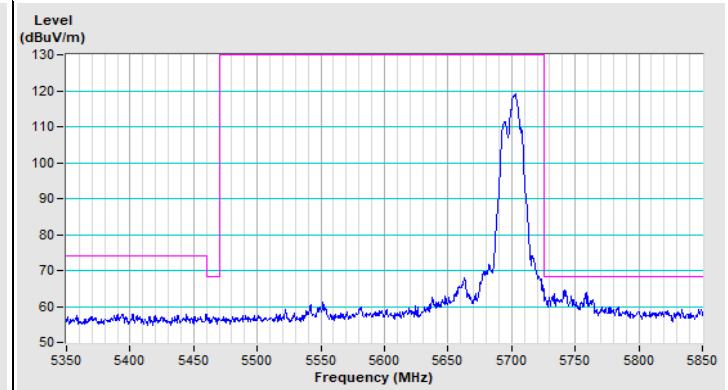

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 144




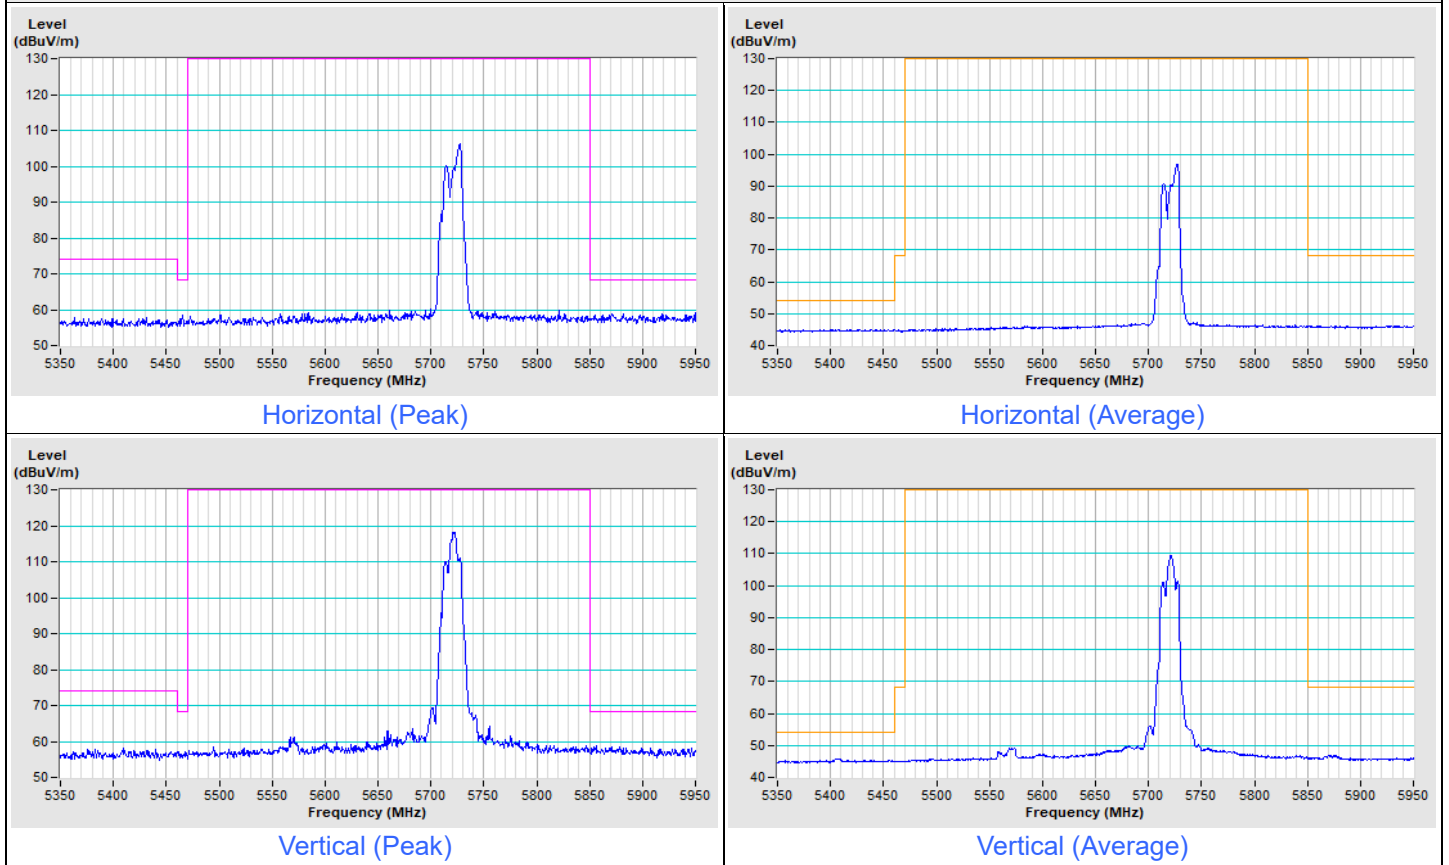


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 52

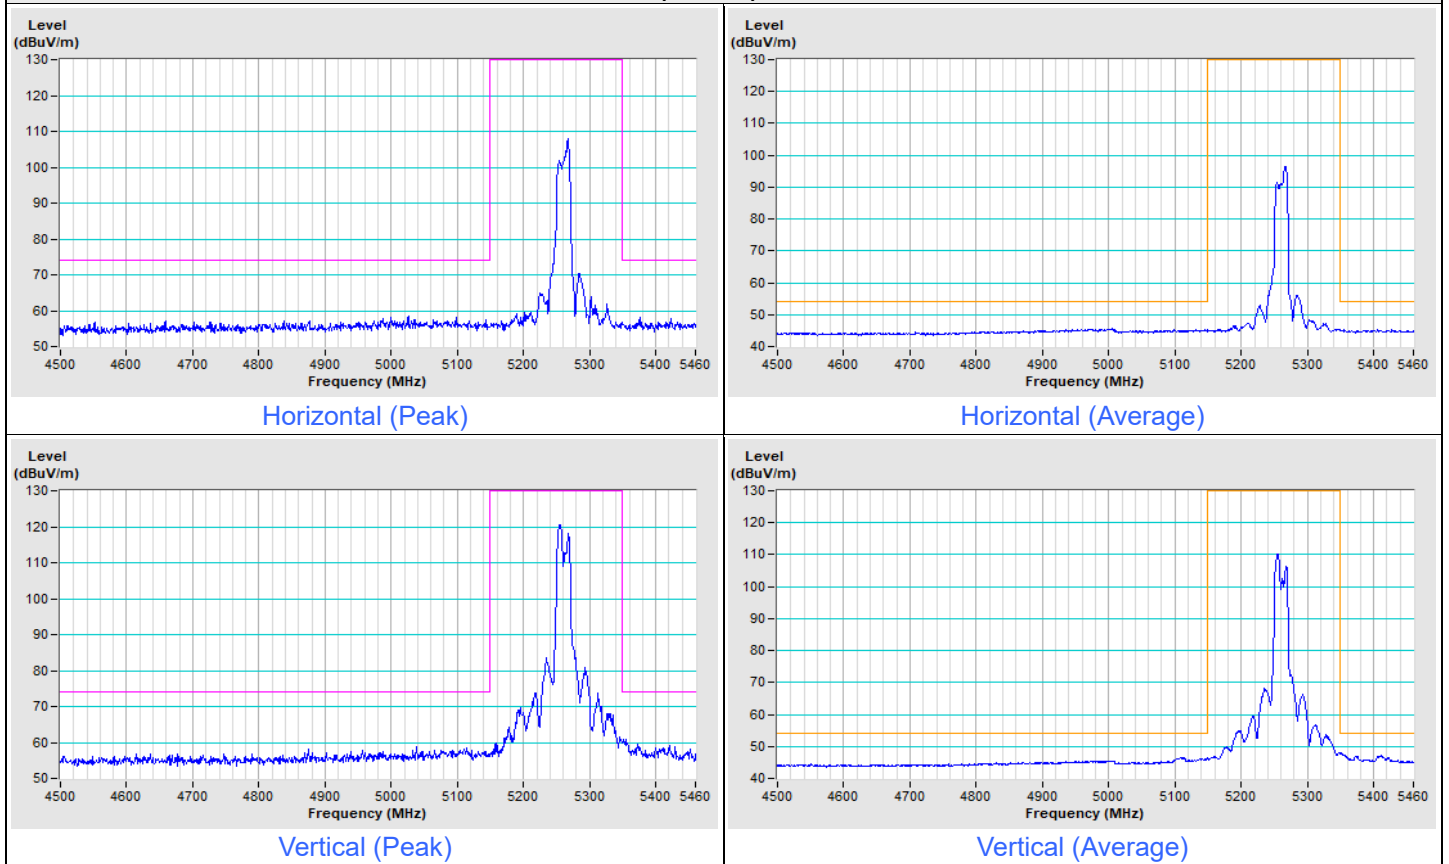

802.11be (EHT20) Channel 60

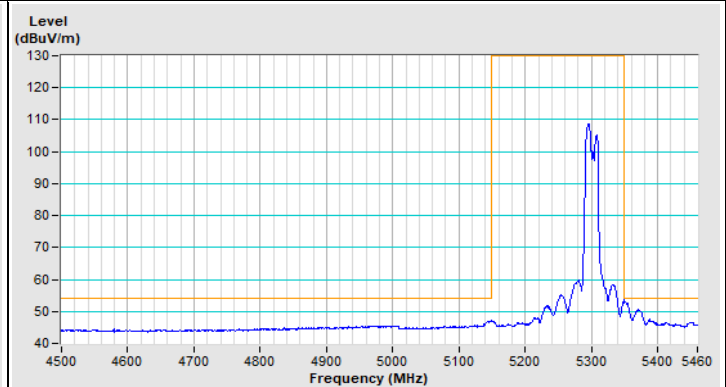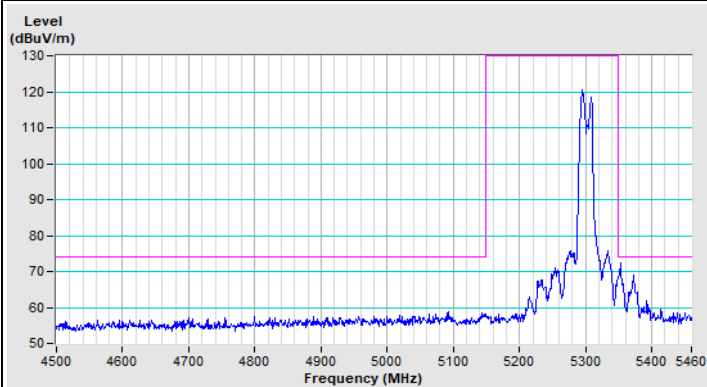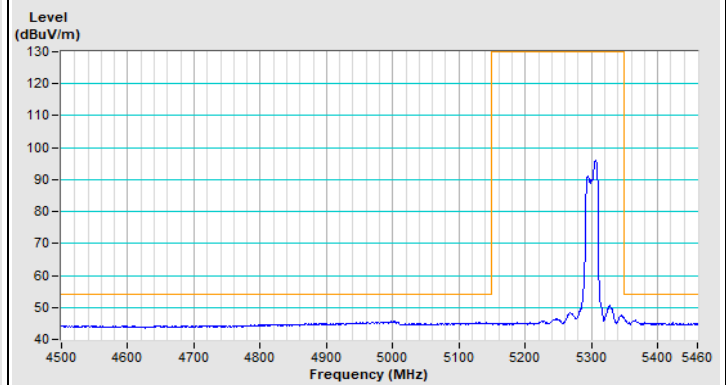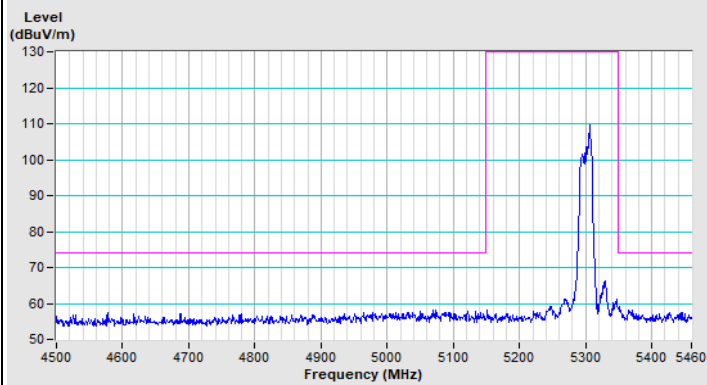


802.11be (EHT20) Channel 64

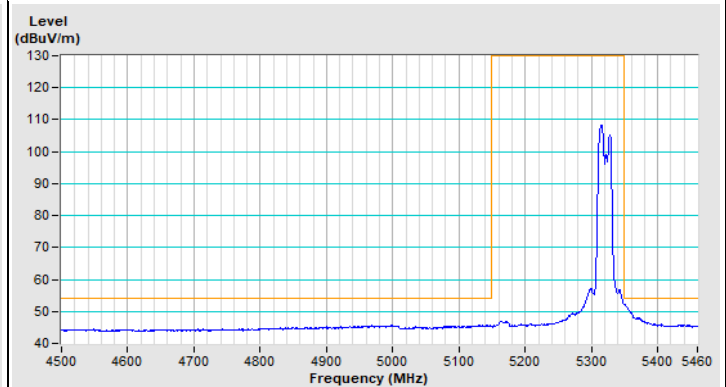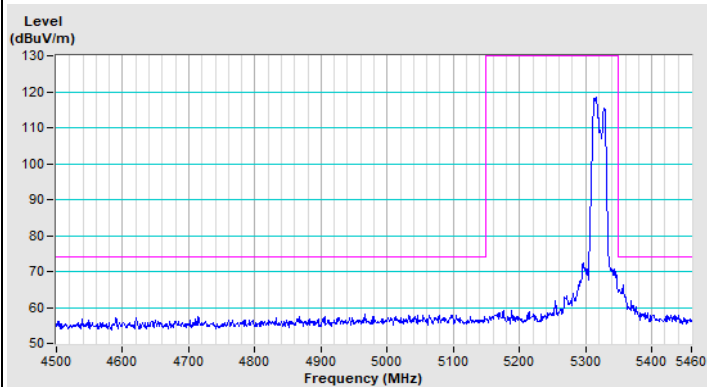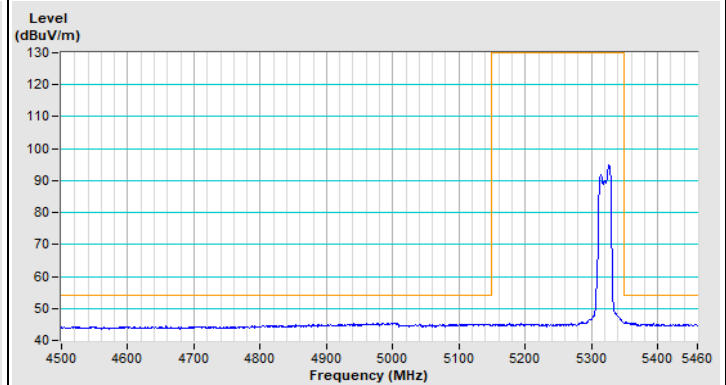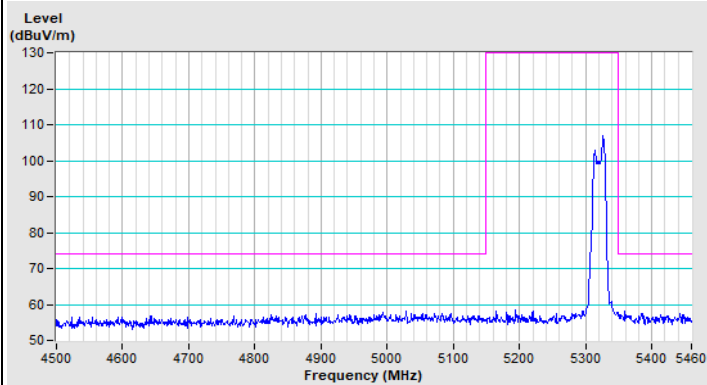


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

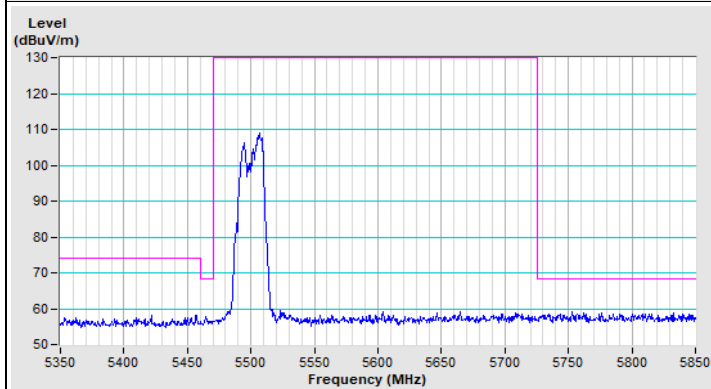


Horizontal (Peak)

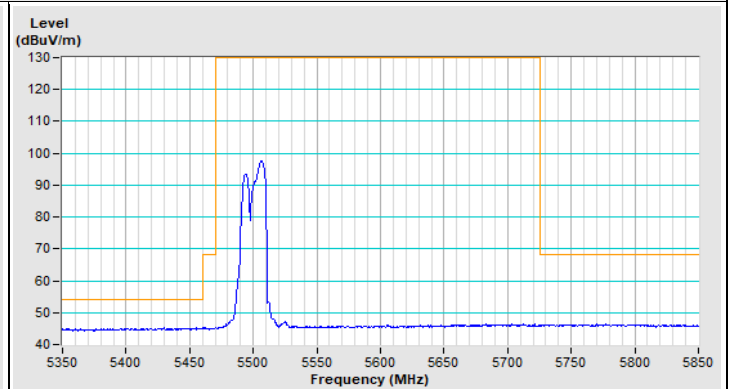

Horizontal (Average)

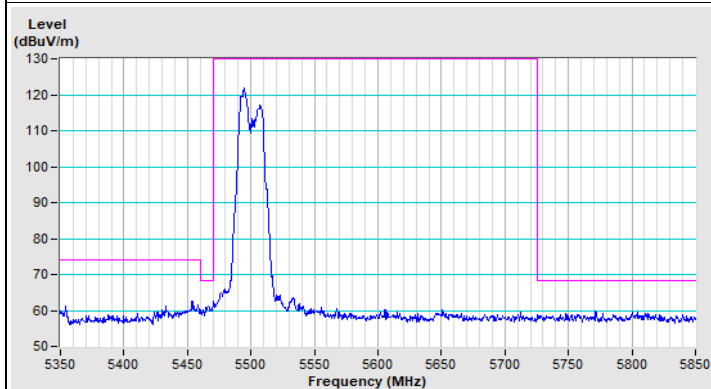


Vertical (Peak)

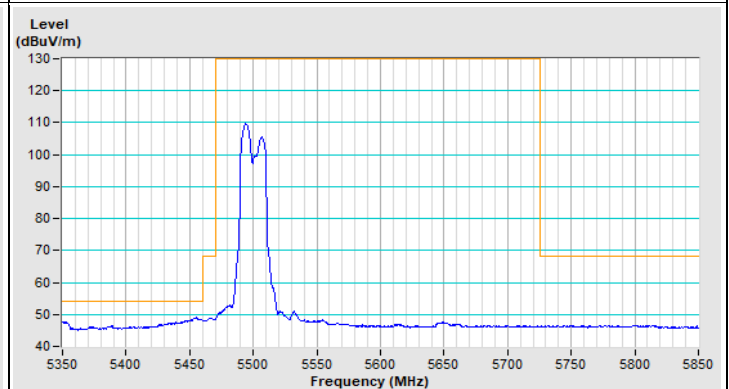


Vertical (Average)

802.11be (EHT20) Channel 140

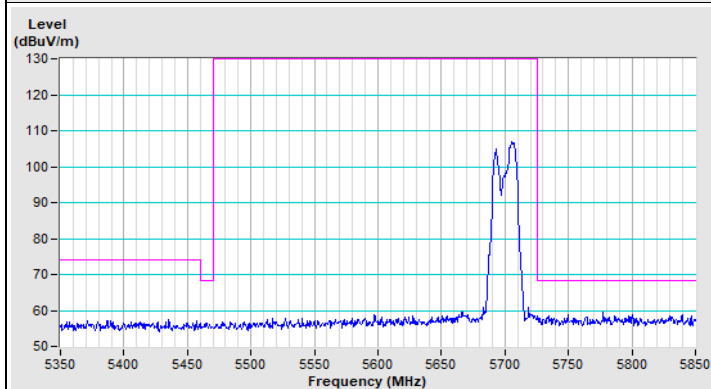


Horizontal (Peak)

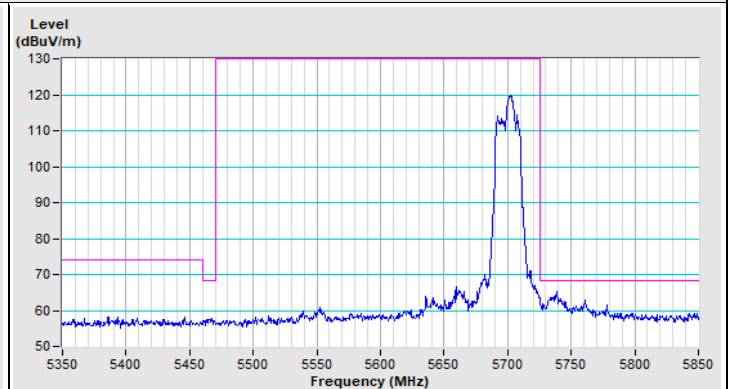

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 144

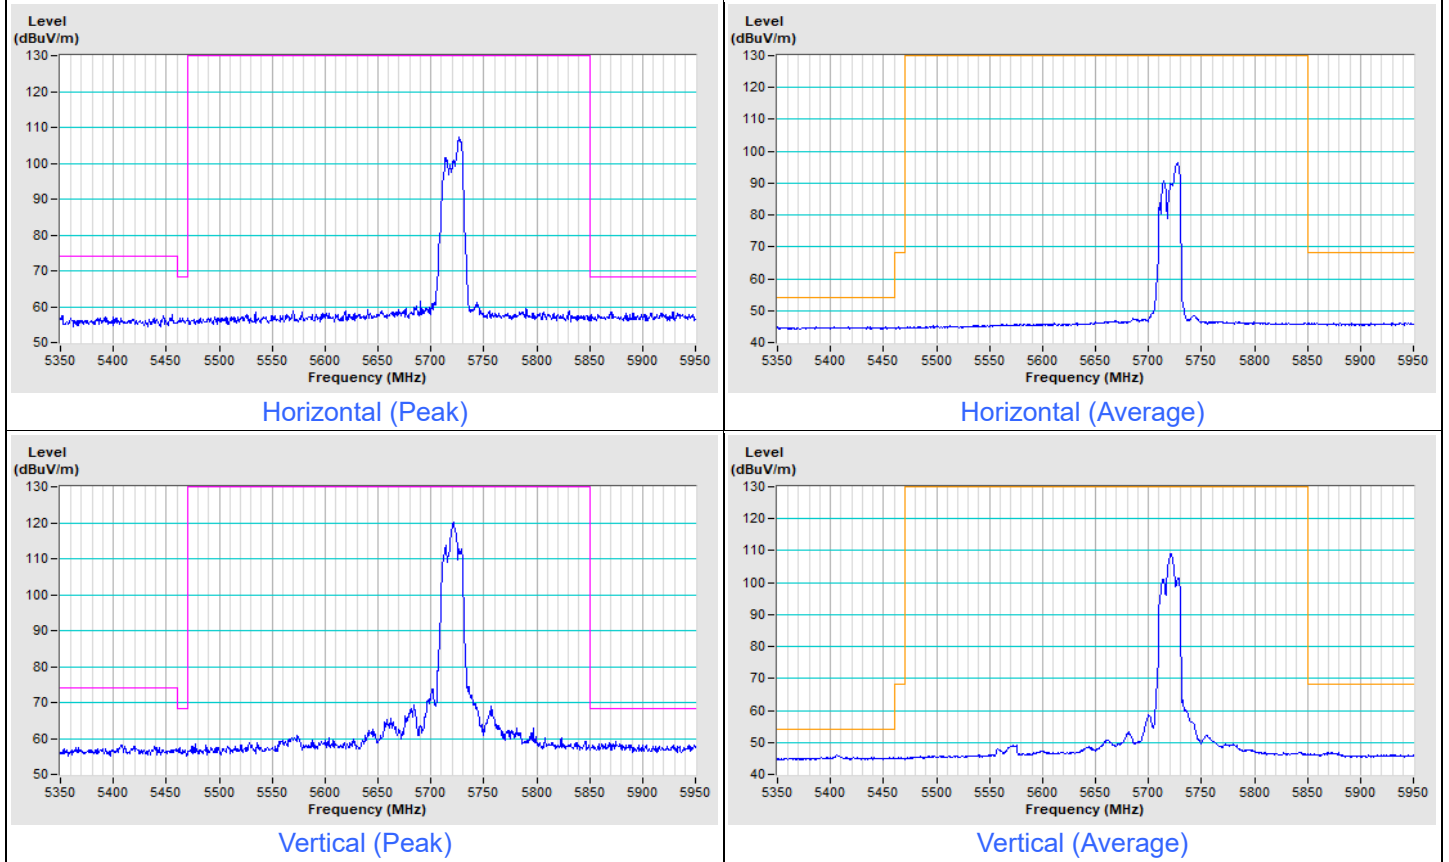


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 54

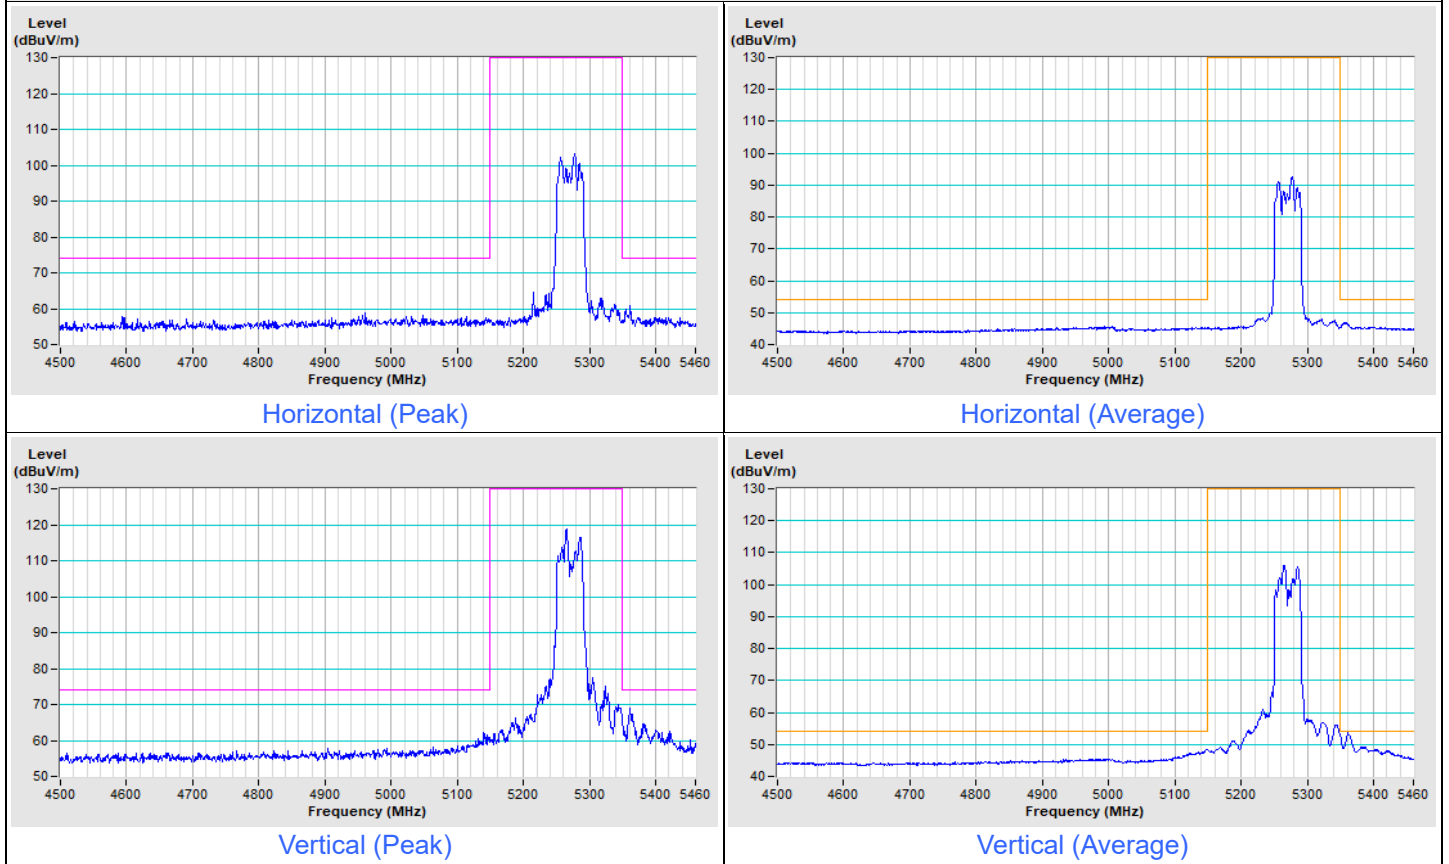


802.11be (EHT40) Channel 62

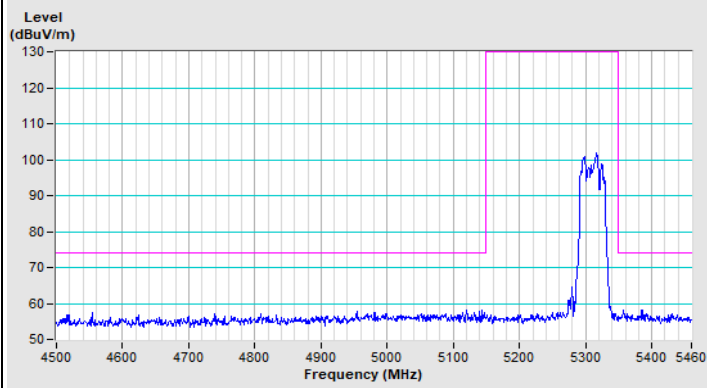


Horizontal (Peak)

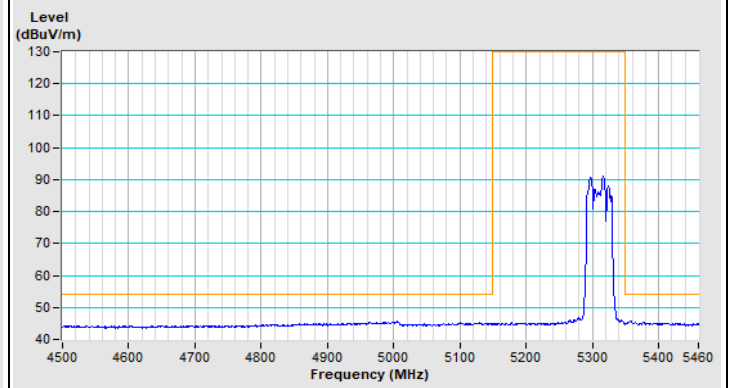

Horizontal (Average)

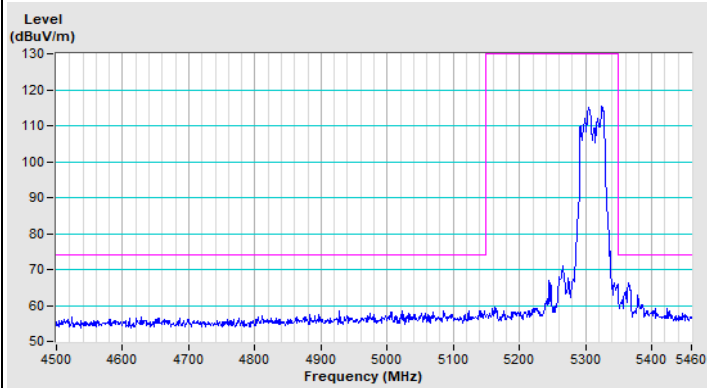


Vertical (Peak)

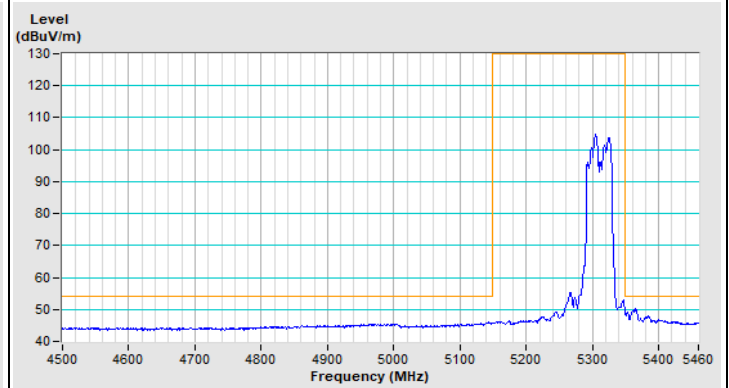


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 102

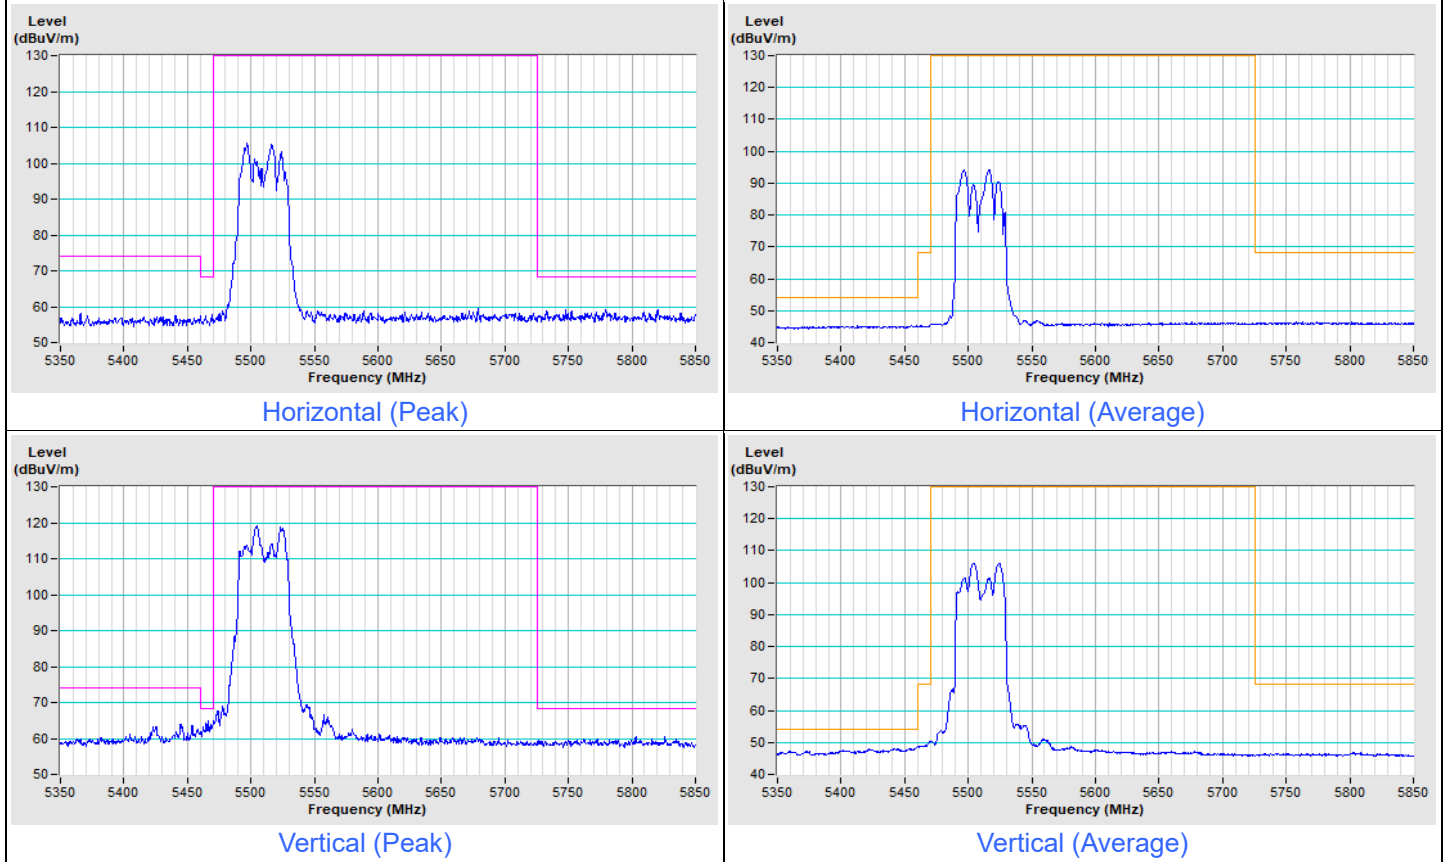


802.11be (EHT40) Channel 126

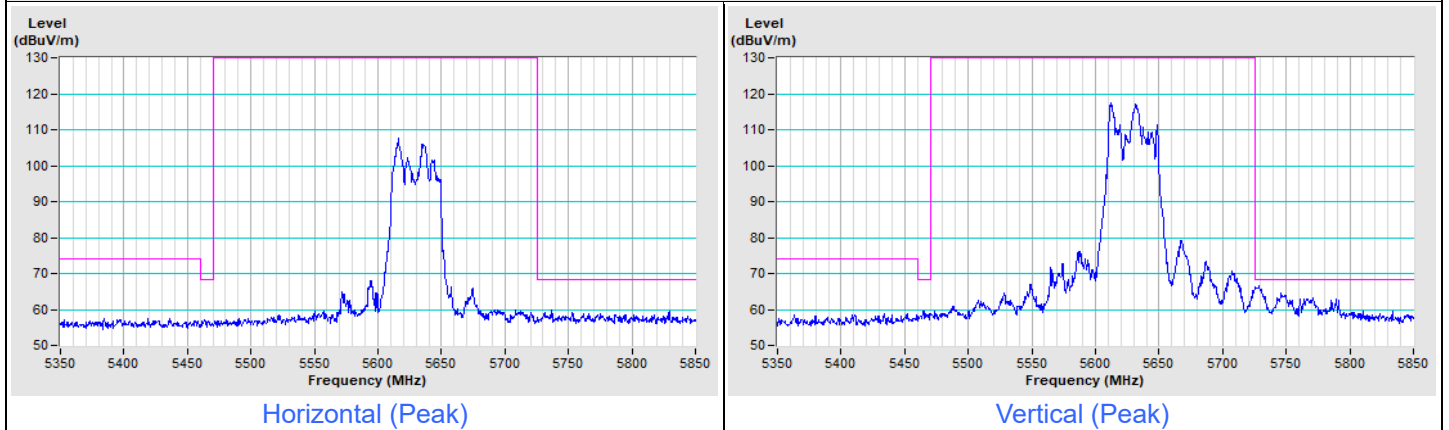


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 142

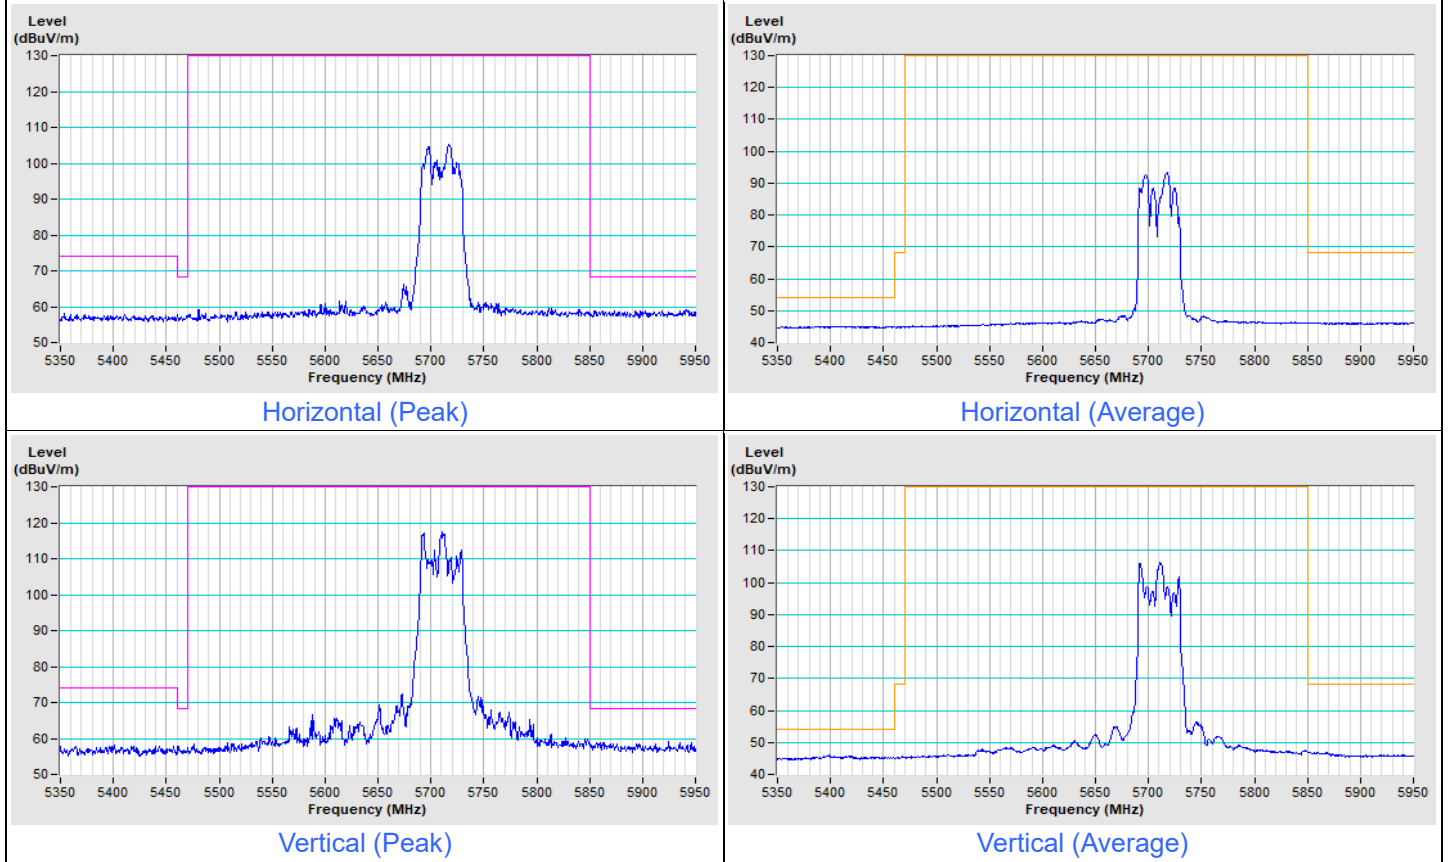


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT80) Channel 58

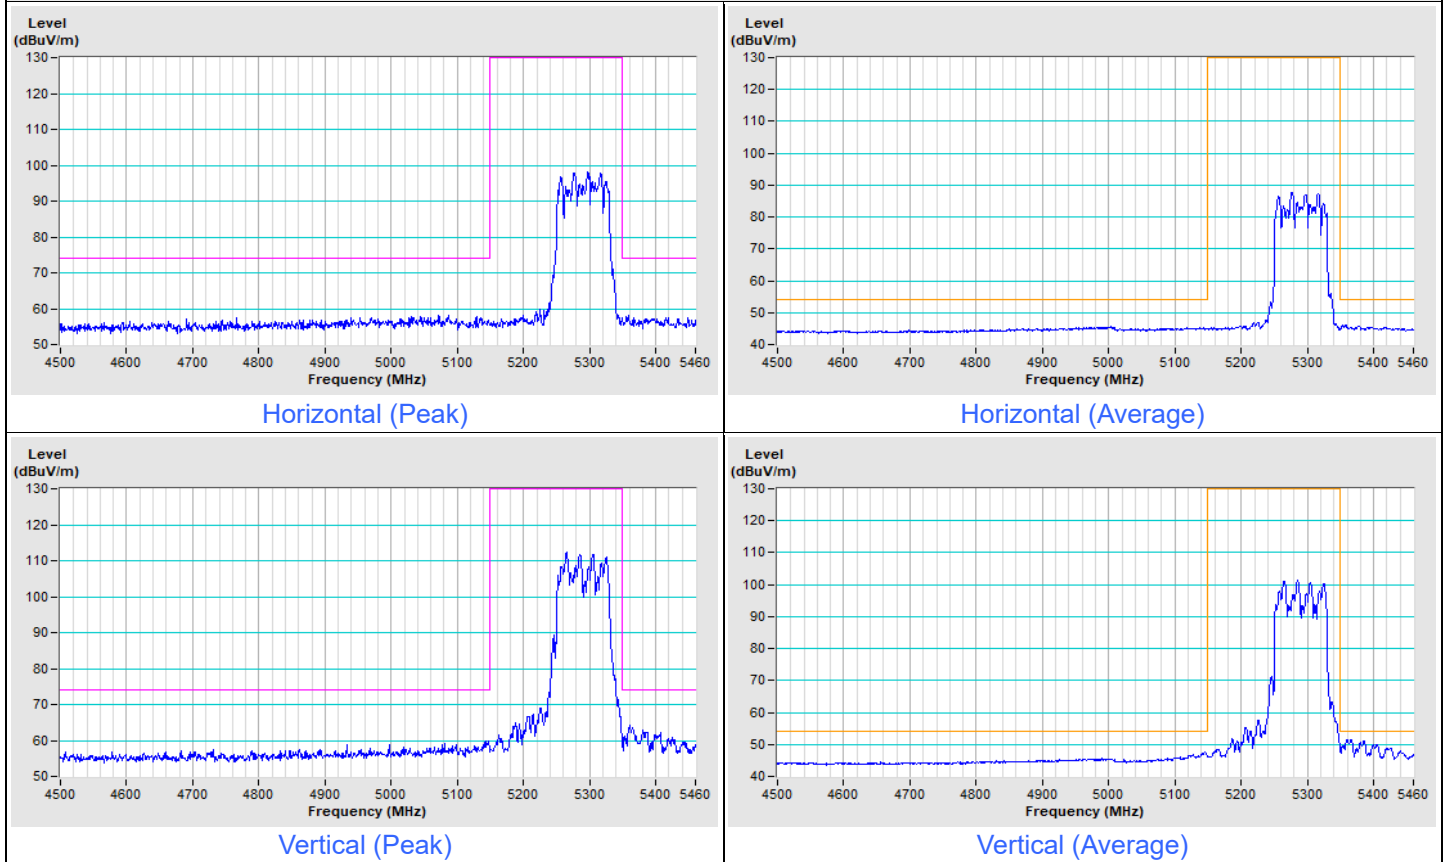


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

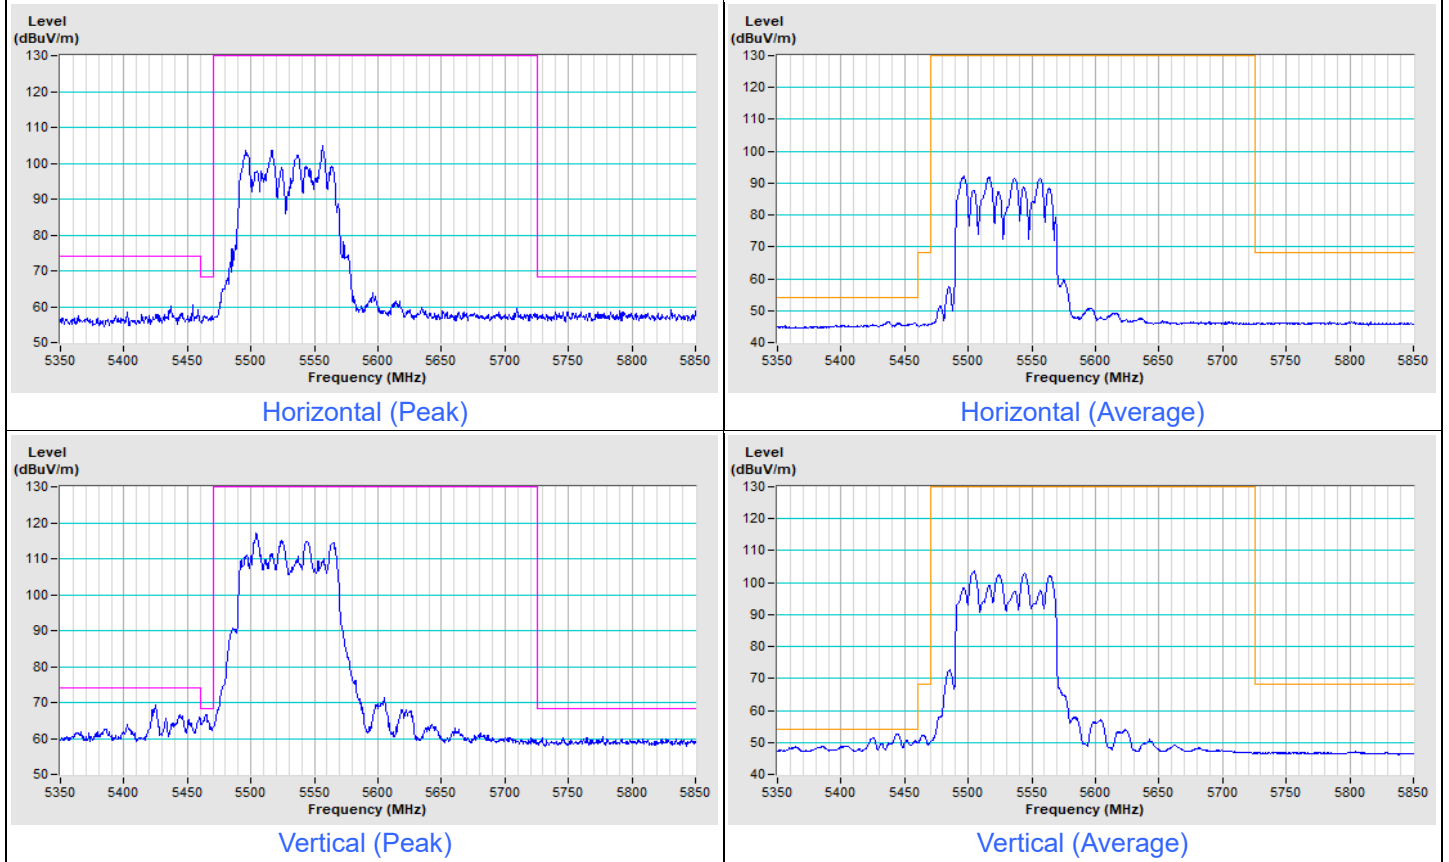


802.11be (EHT80) Channel 122

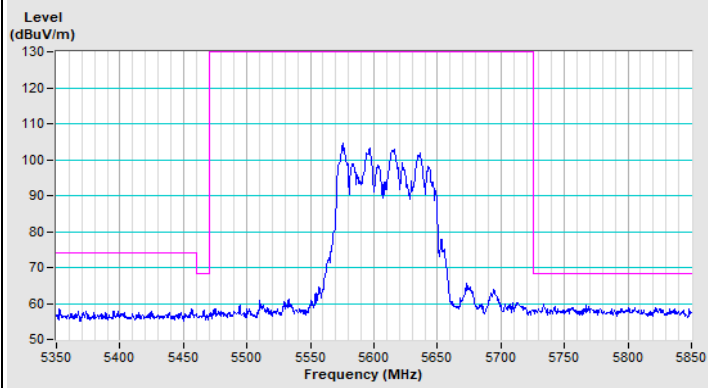


Horizontal (Peak)

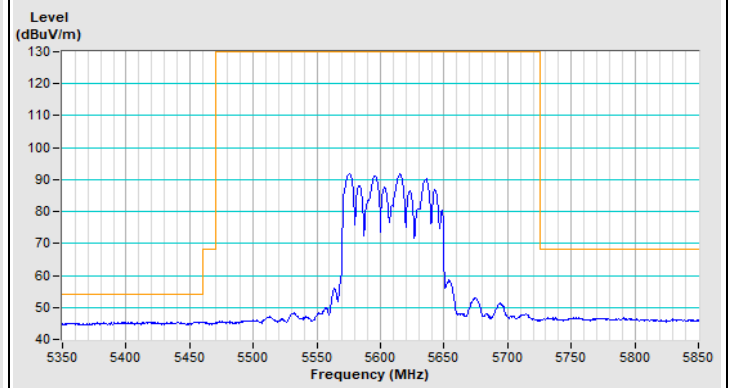

Horizontal (Average)

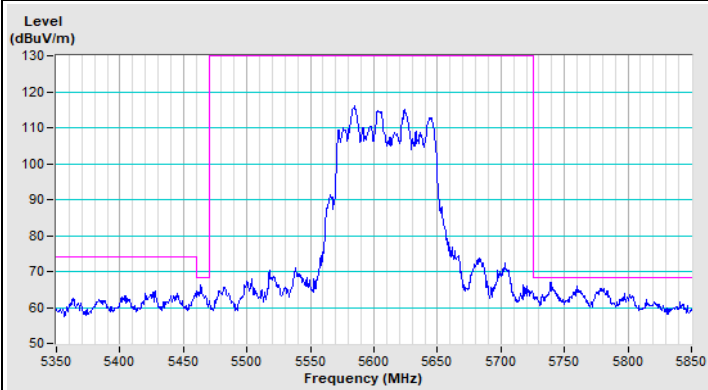


Vertical (Peak)

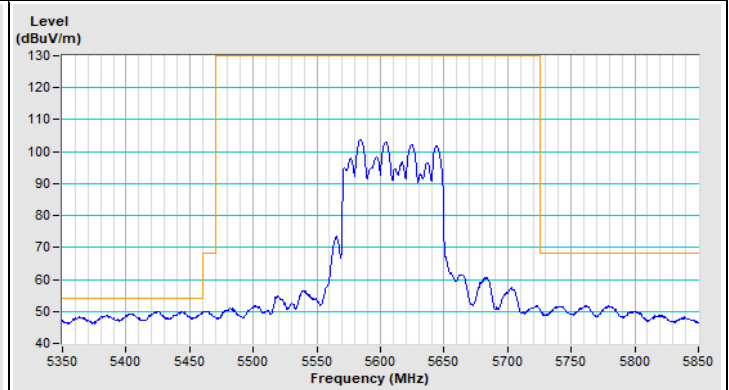

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 138

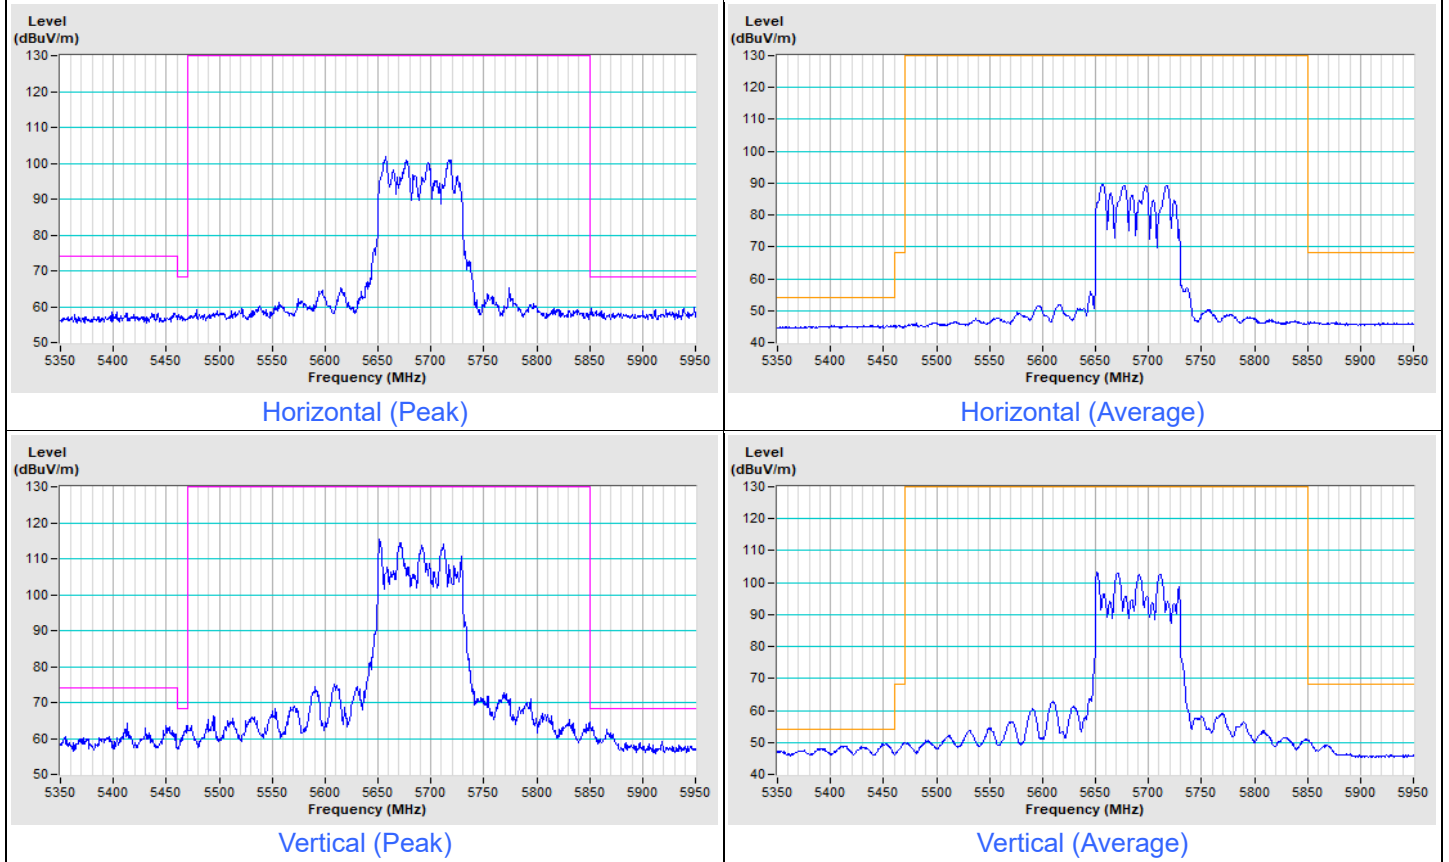


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT160) Channel 50

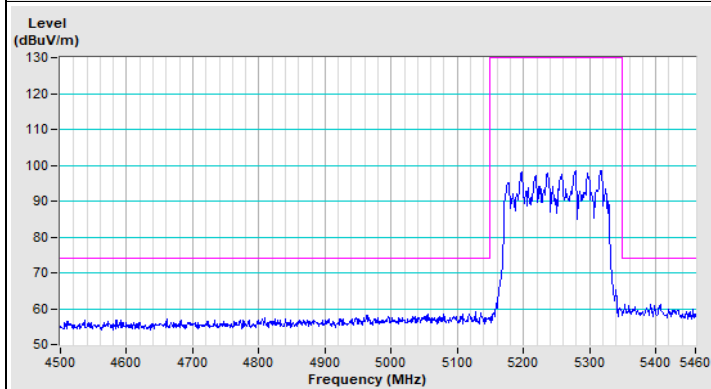


Horizontal (Peak)

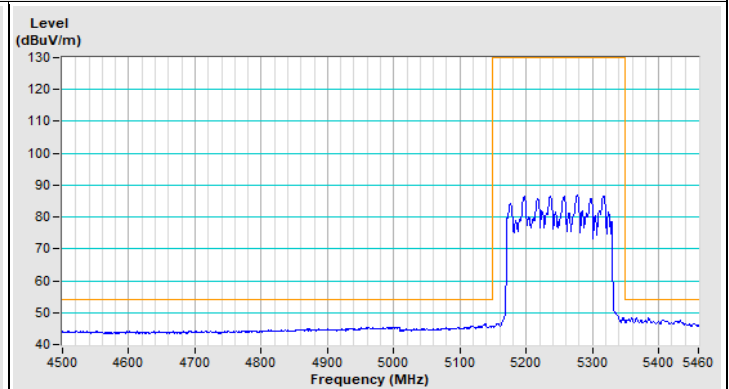

Horizontal (Average)

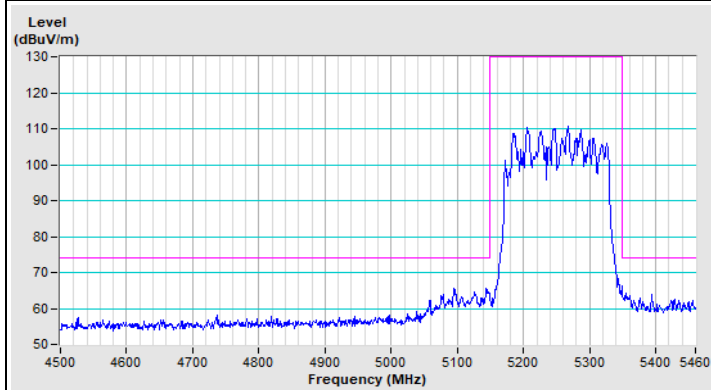


Vertical (Peak)

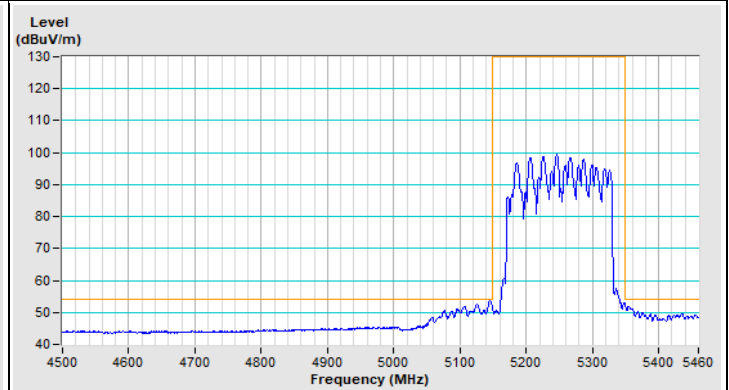

Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 114

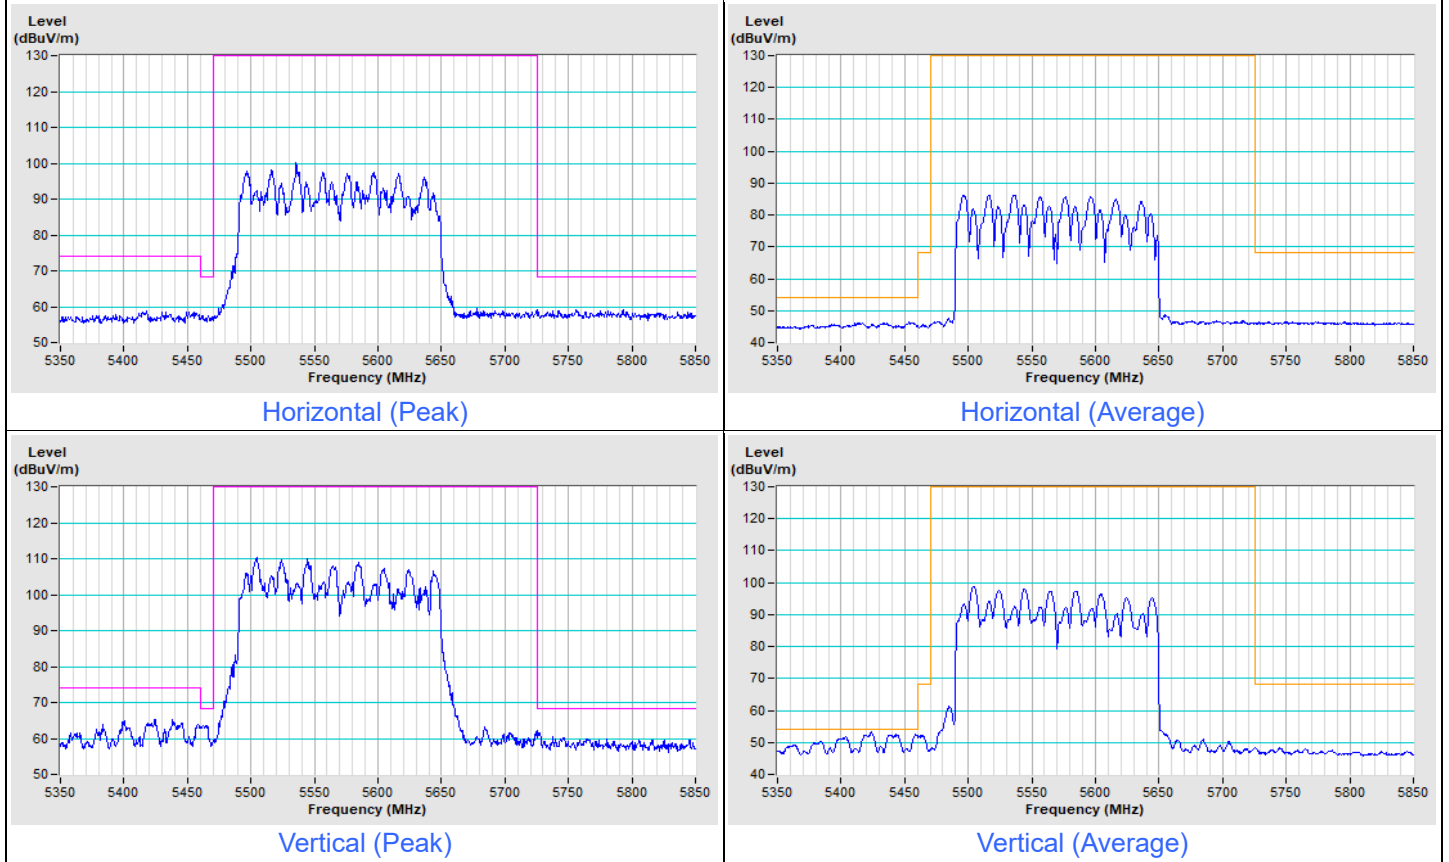


Mode A_PIFA Ant.

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 52

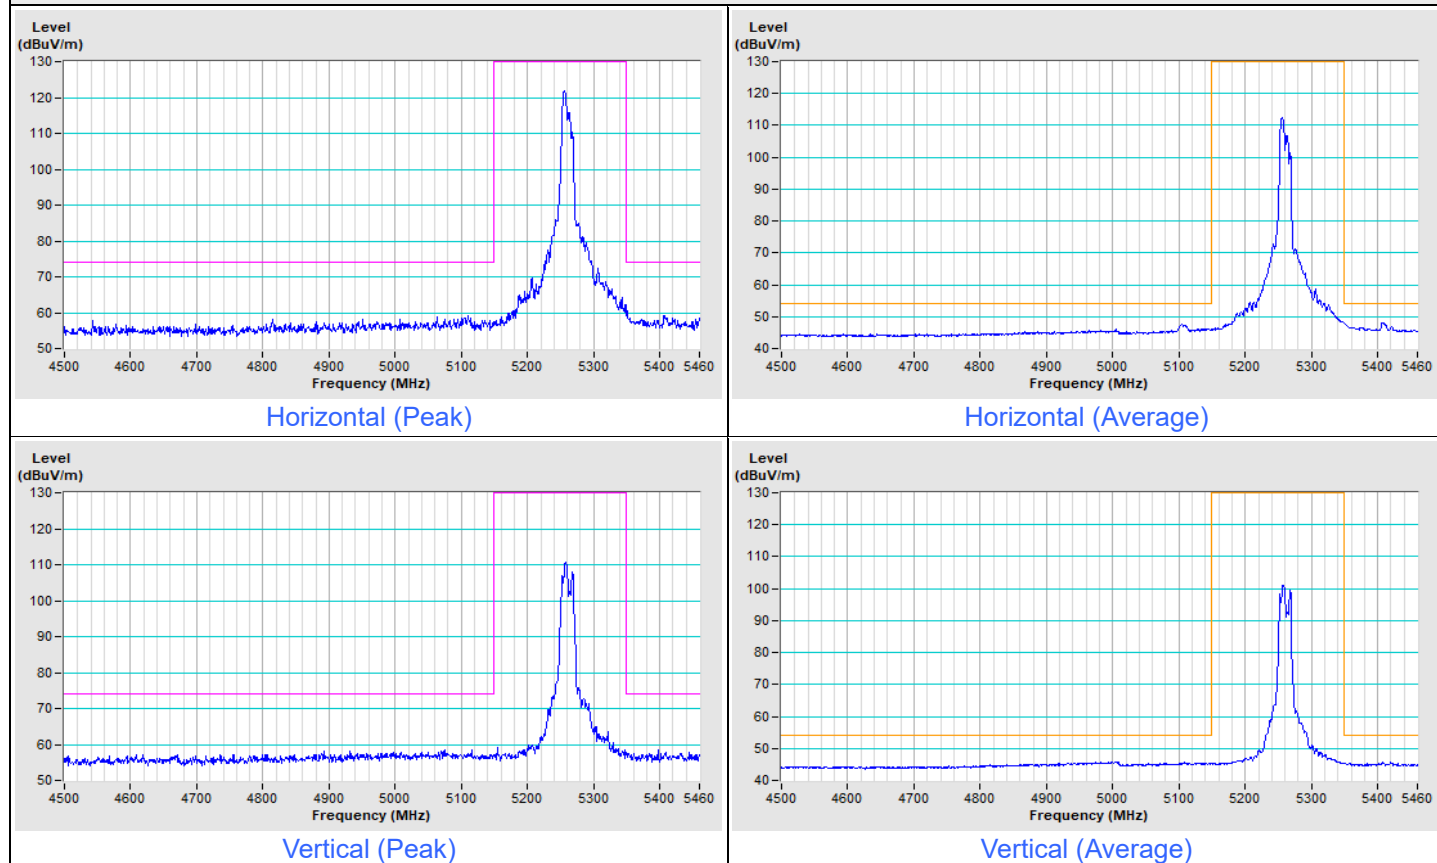


802.11a Channel 60

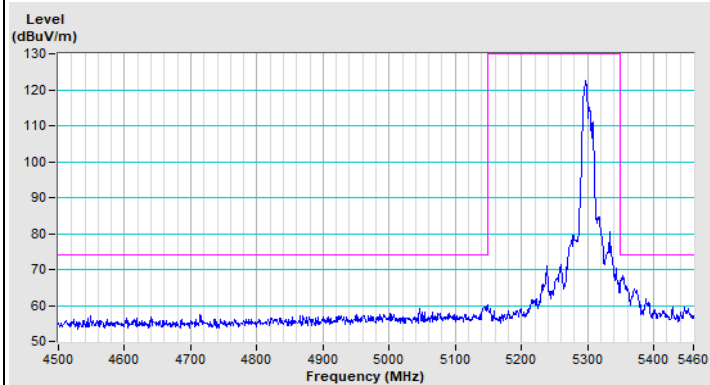


Horizontal (Peak)

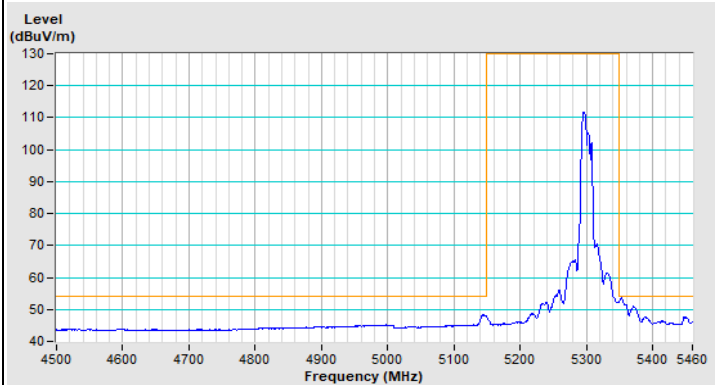

Horizontal (Average)

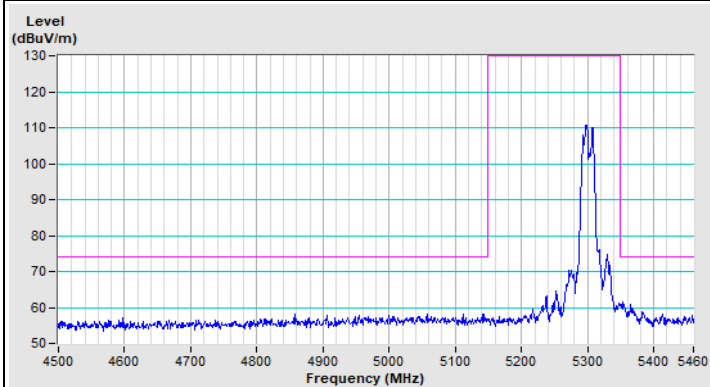


Vertical (Peak)

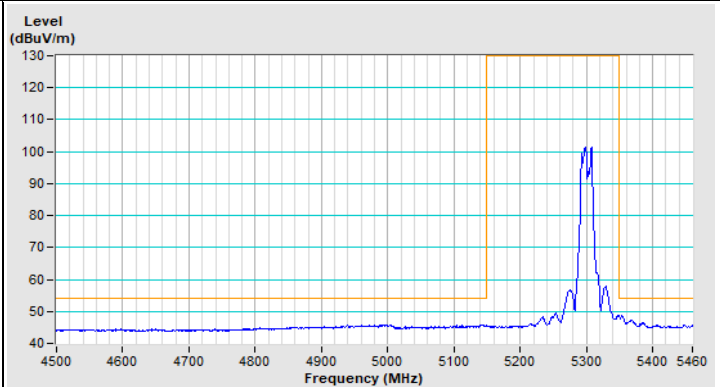


Vertical (Average)


802.11a Channel 64

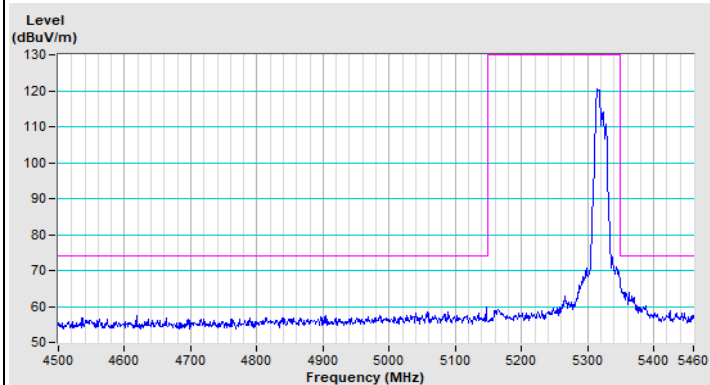


Horizontal (Peak)

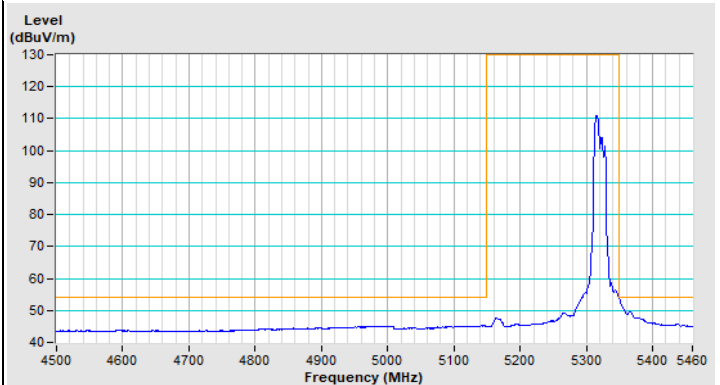

Horizontal (Average)

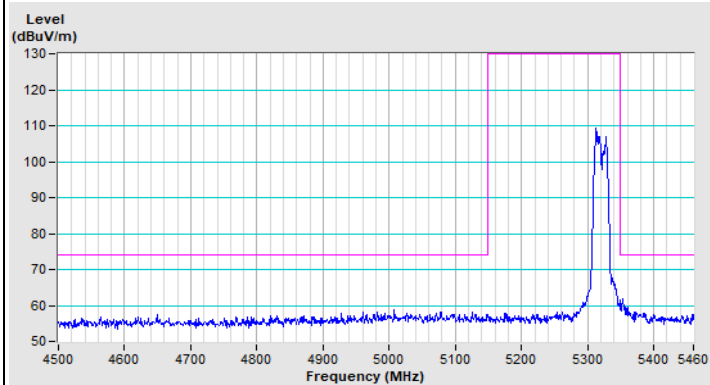


Vertical (Peak)

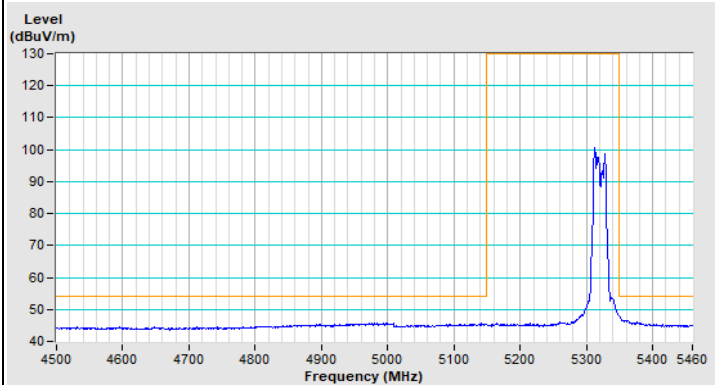


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

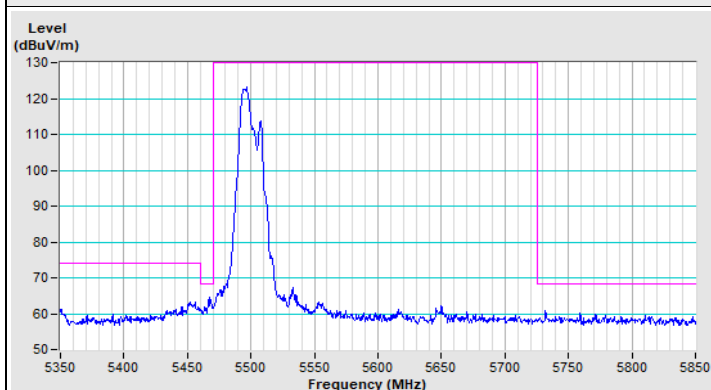


Horizontal (Peak)

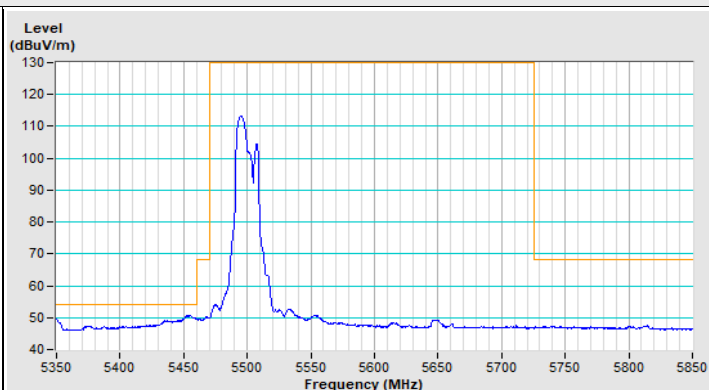

Horizontal (Average)

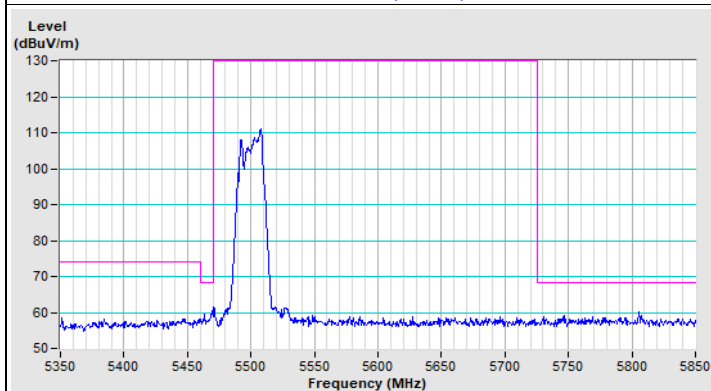


Vertical (Peak)

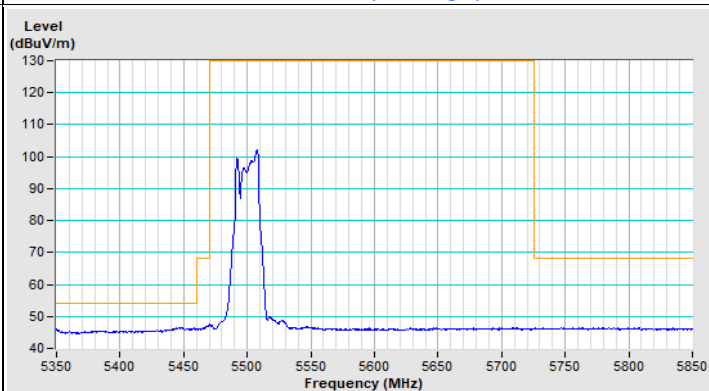


Vertical (Average)

802.11a Channel 140

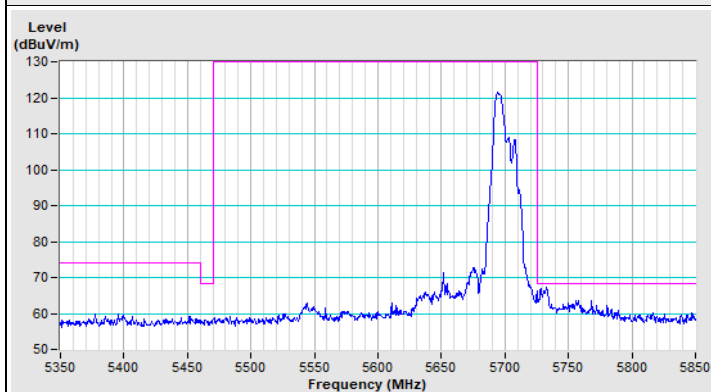


Horizontal (Peak)

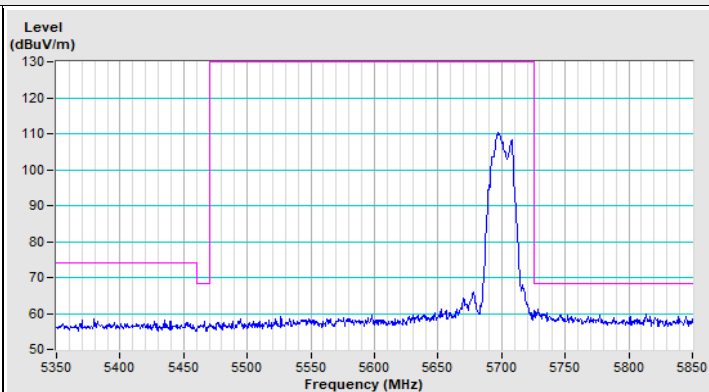

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 144

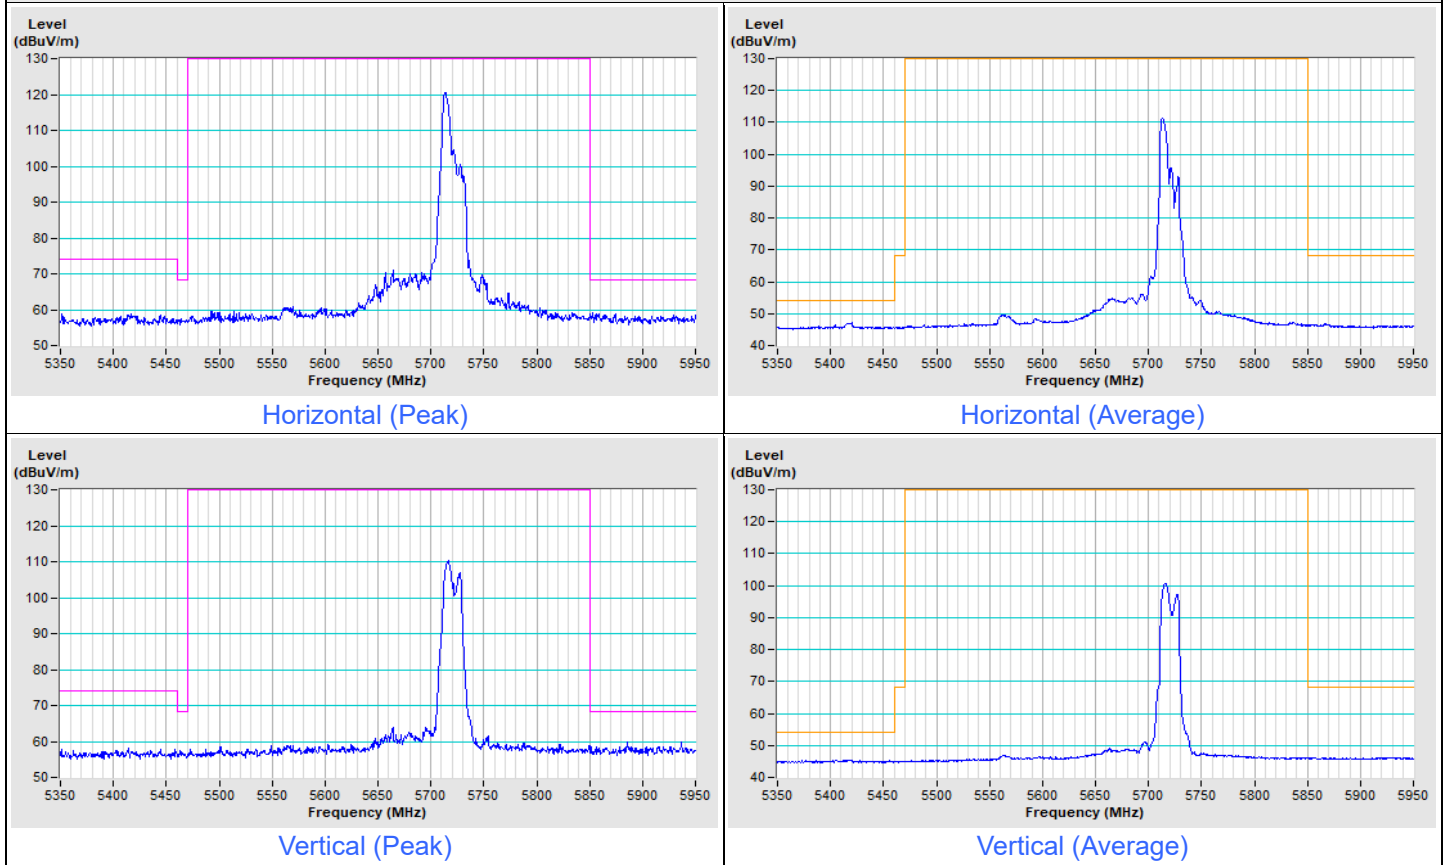


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 52

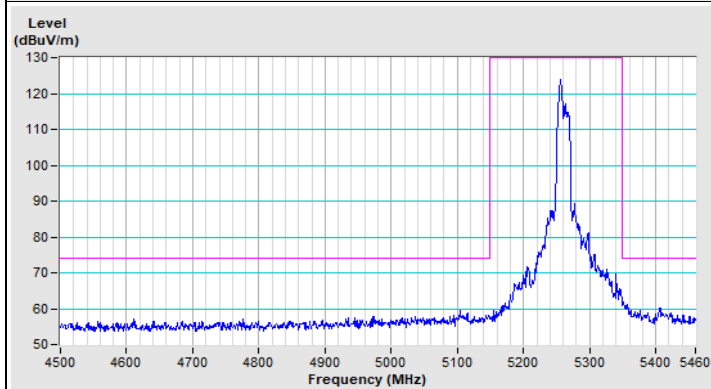


Horizontal (Peak)

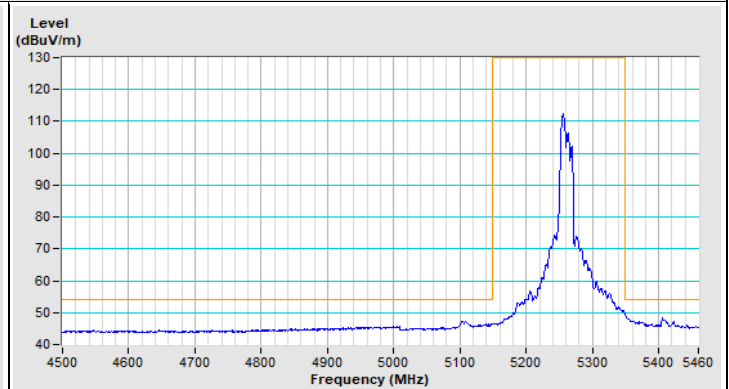

Horizontal (Average)




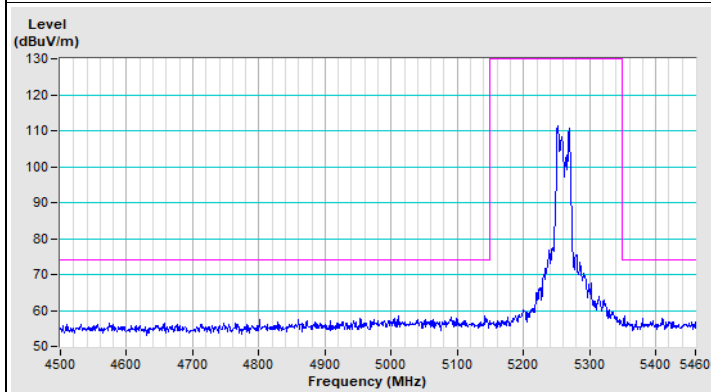


Vertical (Peak)




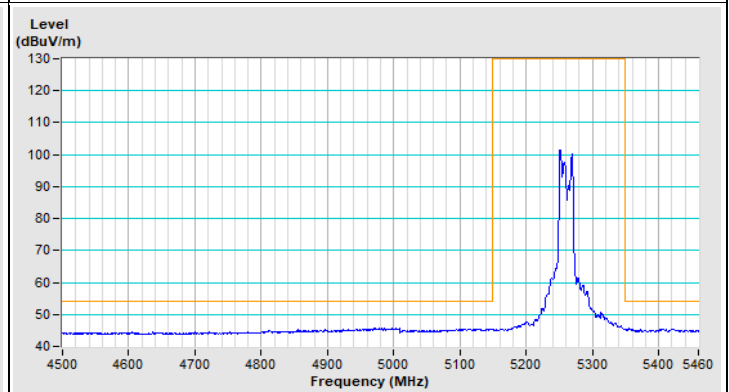


Vertical (Average)

802.11be (EHT20) Channel 60

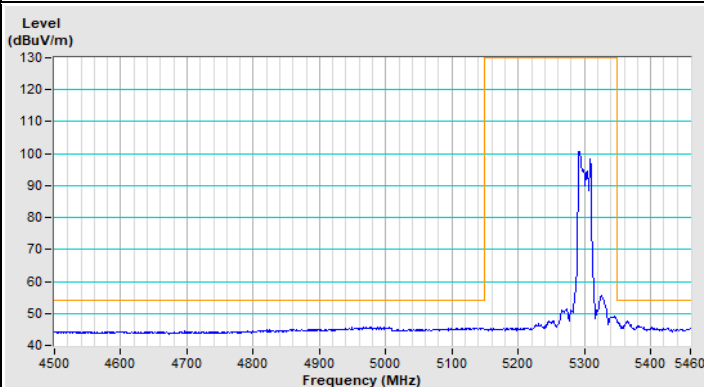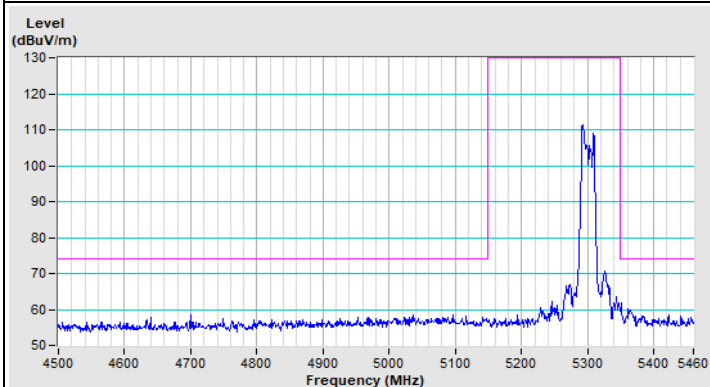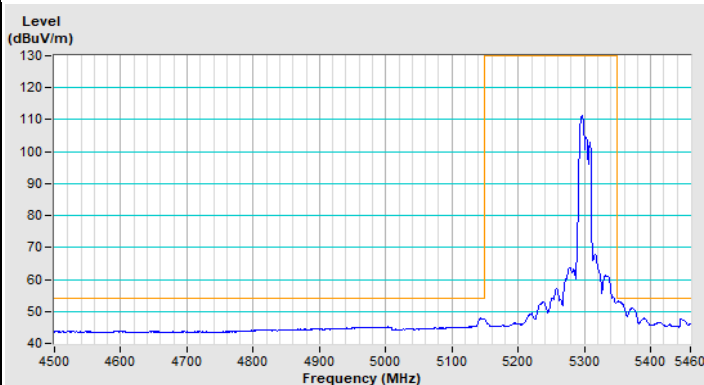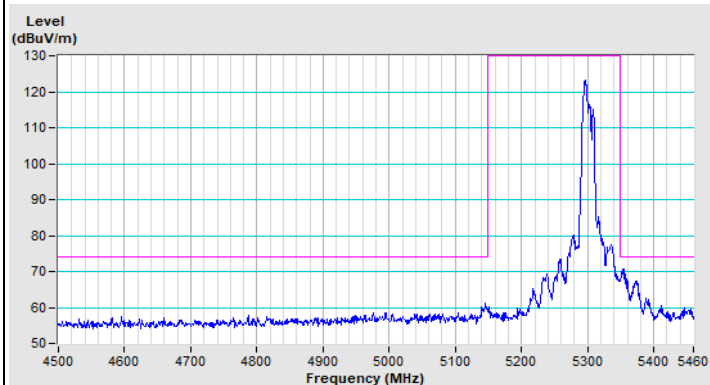


802.11be (EHT20) Channel 64

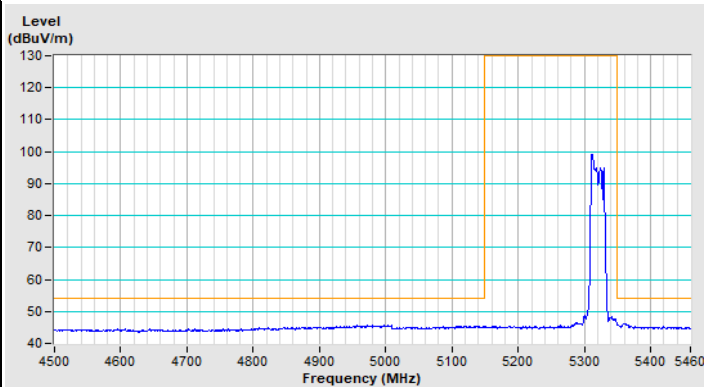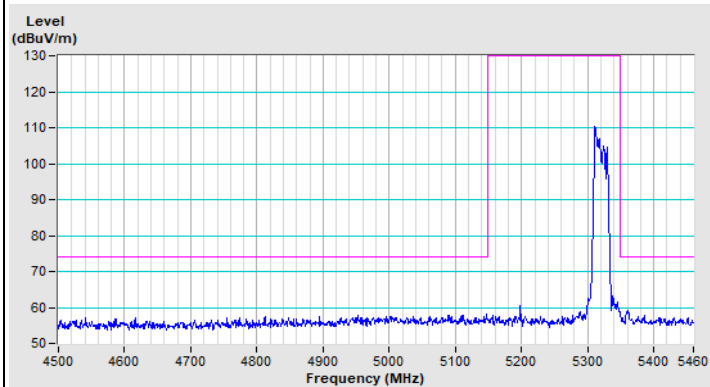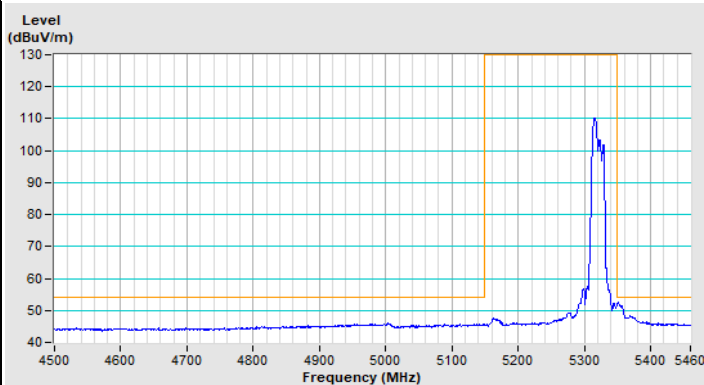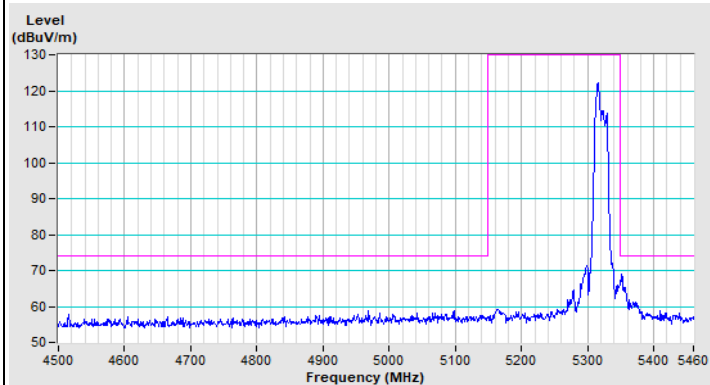


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

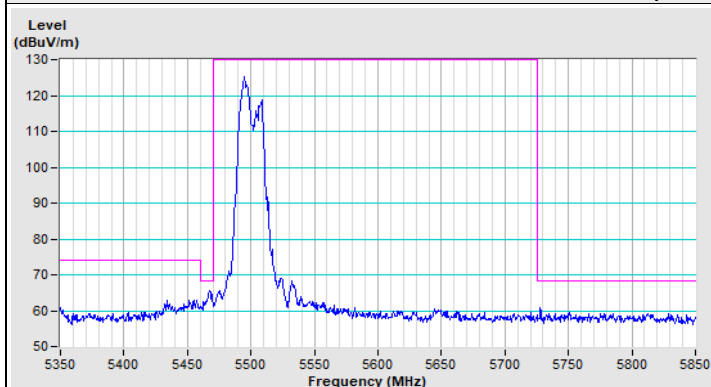


Horizontal (Peak)

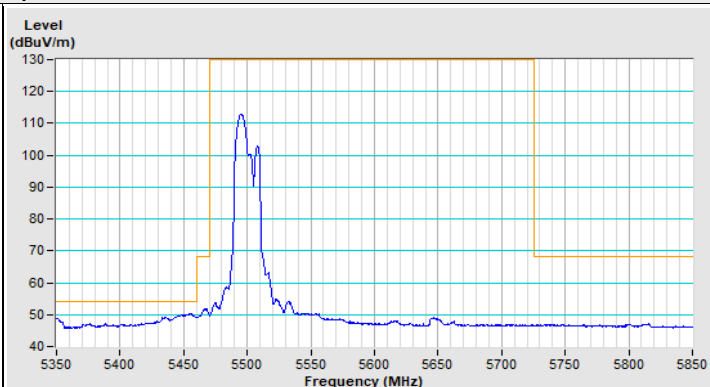

Horizontal (Average)

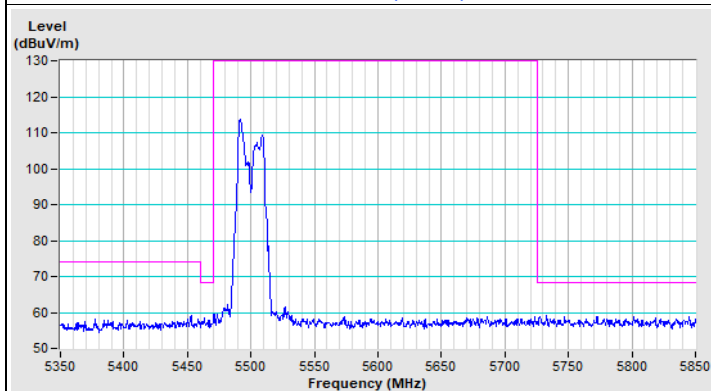


Vertical (Peak)

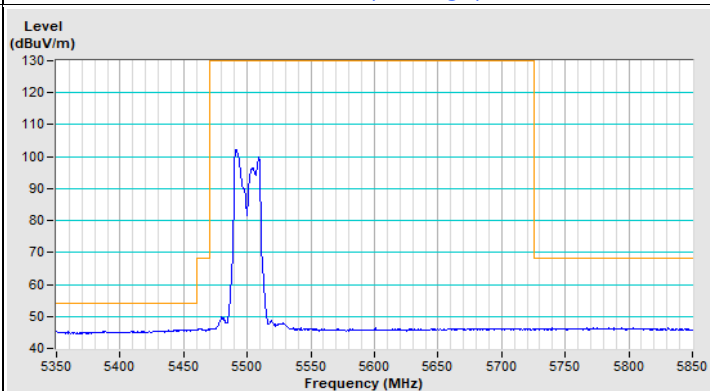


Vertical (Average)

802.11be (EHT20) Channel 140

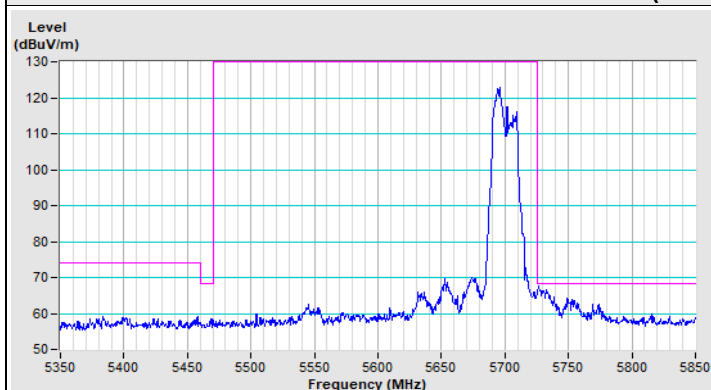


Horizontal (Peak)

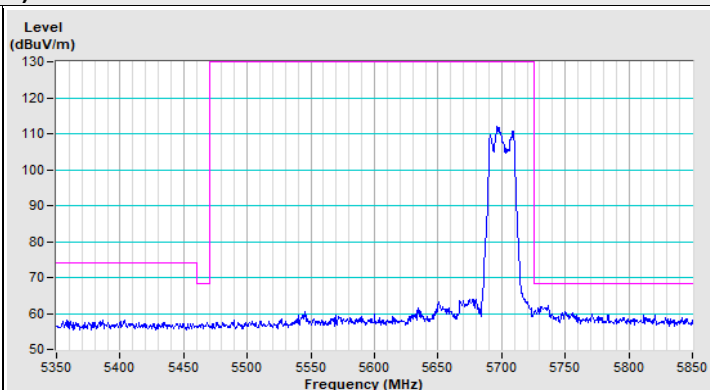

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 144

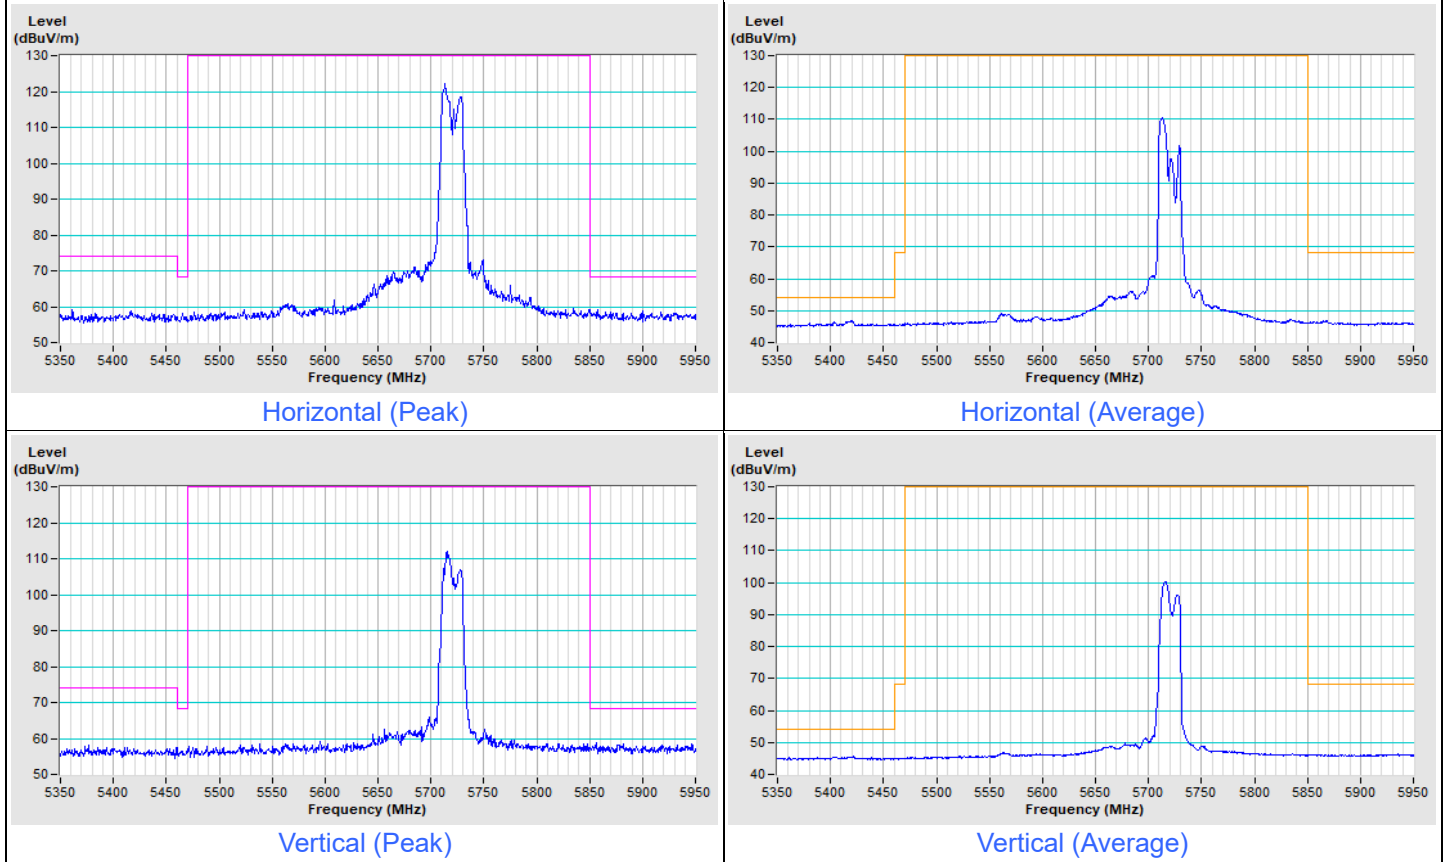


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 54

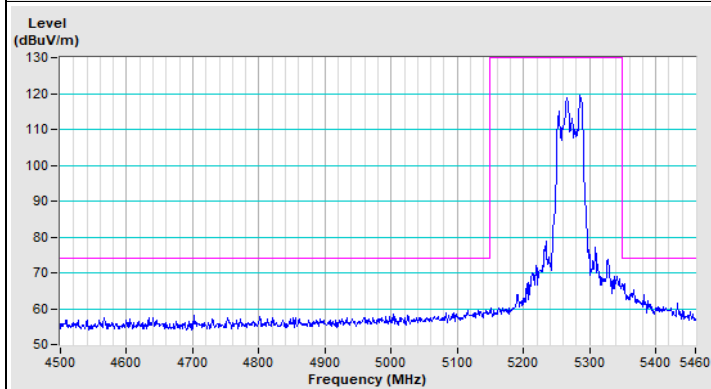


Horizontal (Peak)

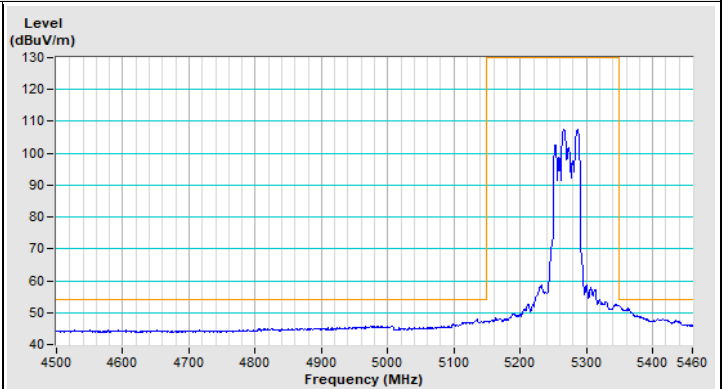


Horizontal (Average)

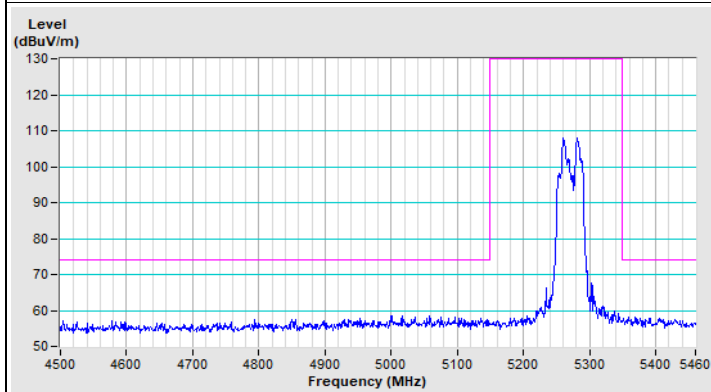


Vertical (Peak)

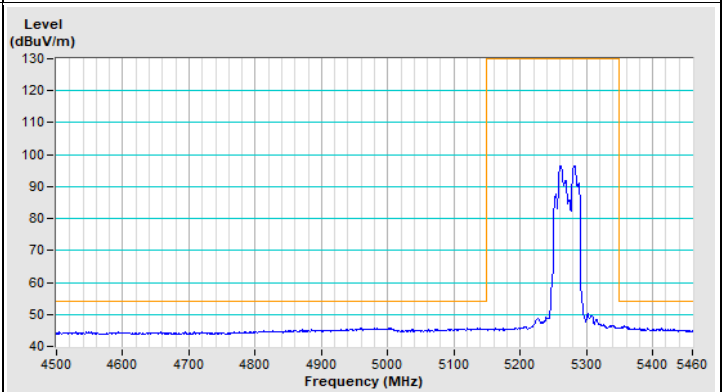


Vertical (Average)

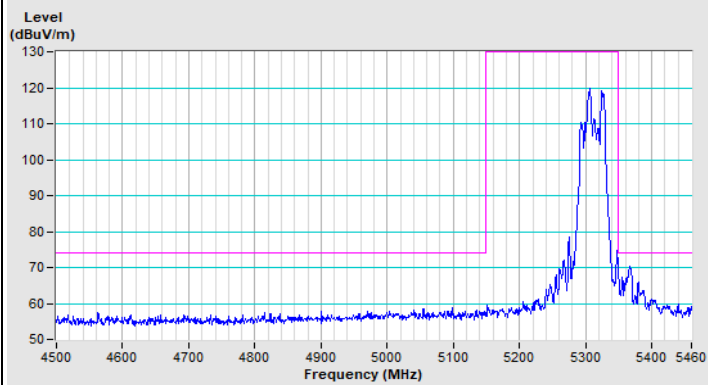802.11be (EHT40) Channel 62


Horizontal (Peak)

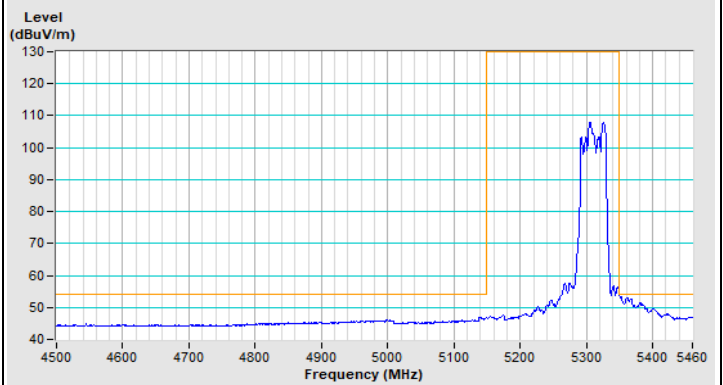

Horizontal (Average)

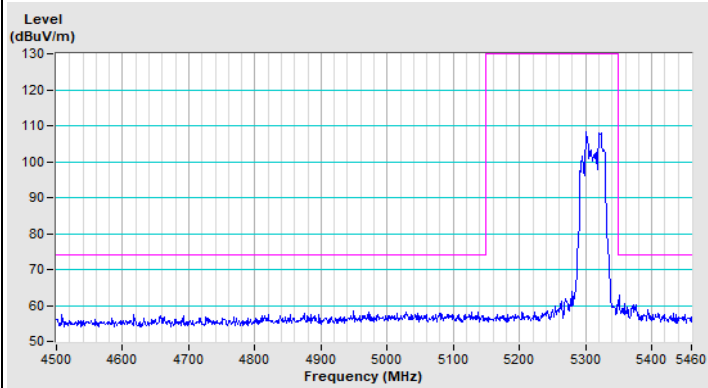


Vertical (Peak)

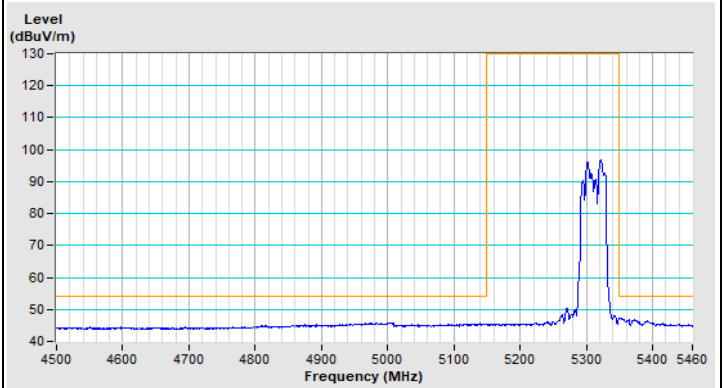





Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--



802.11be (EHT40) Channel 102

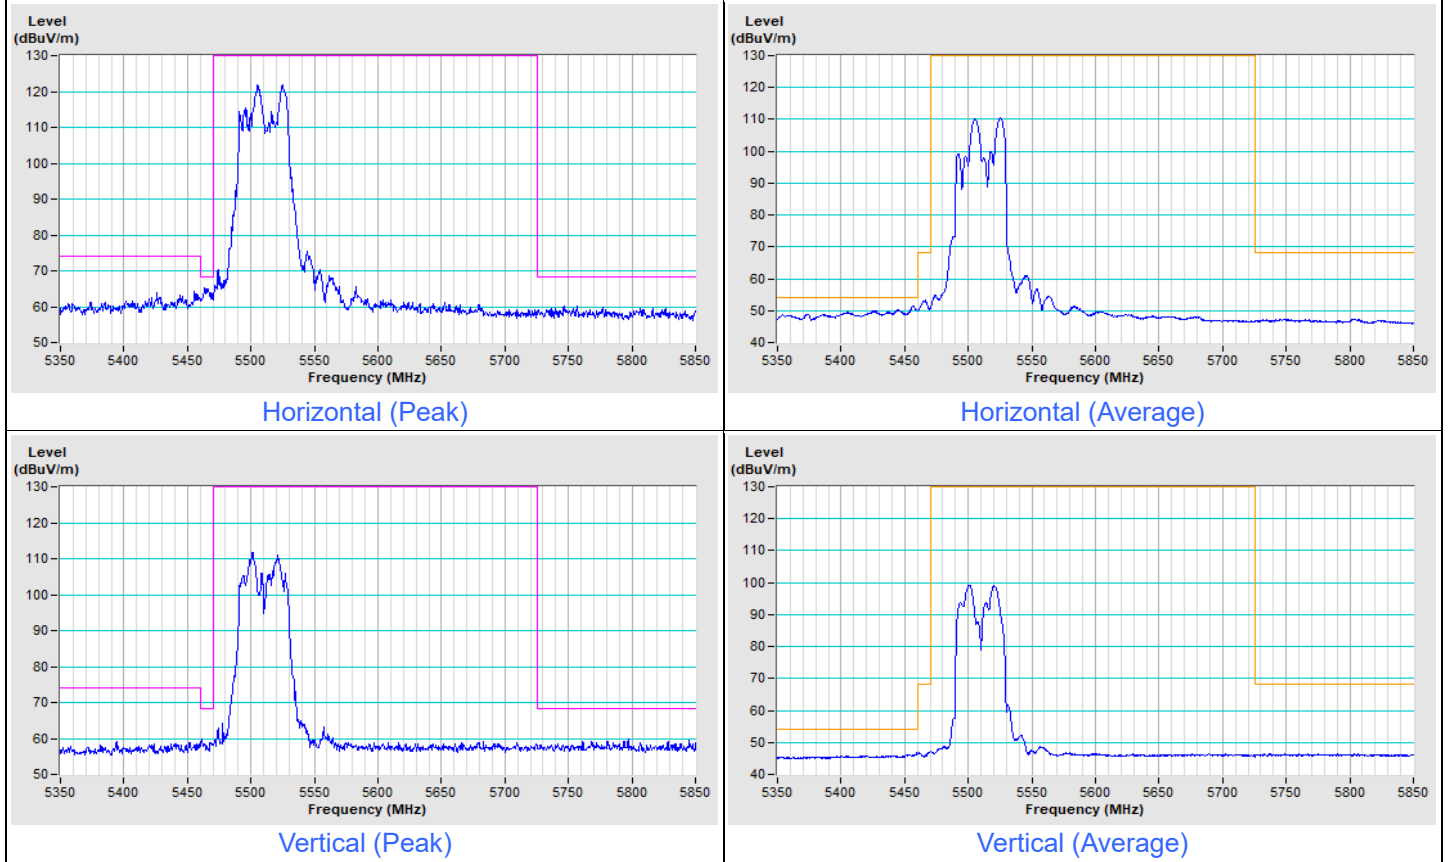

802.11be (EHT40) Channel 110

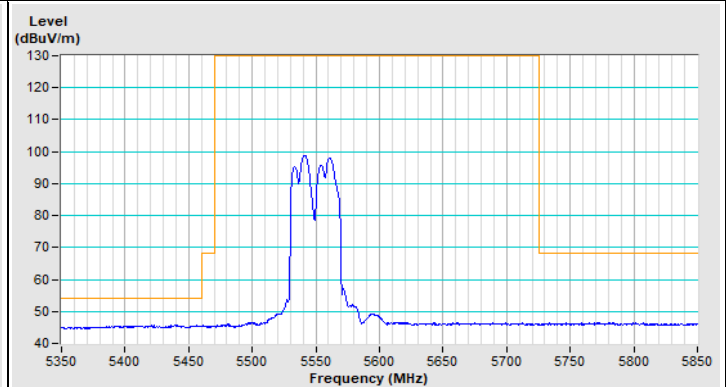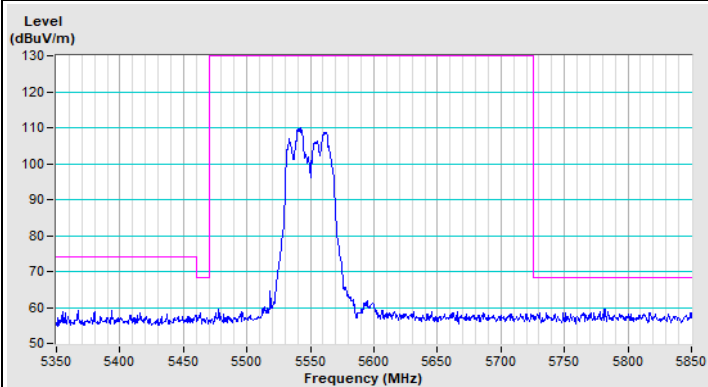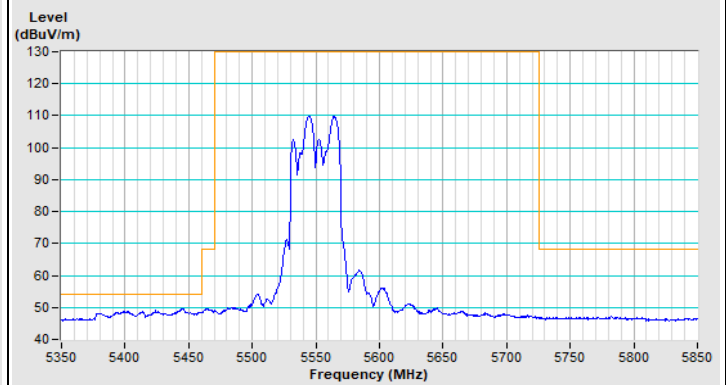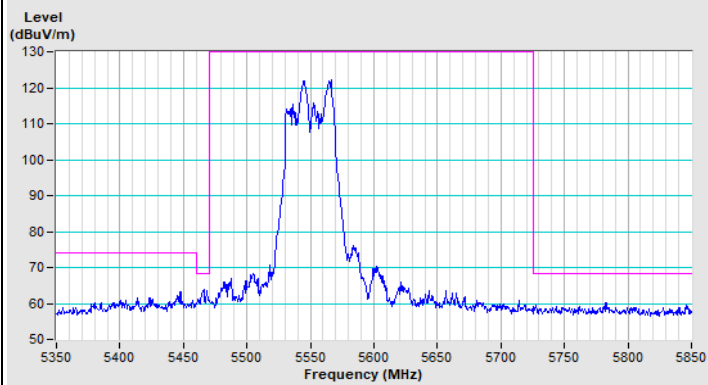


802.11be (EHT40) Channel 126

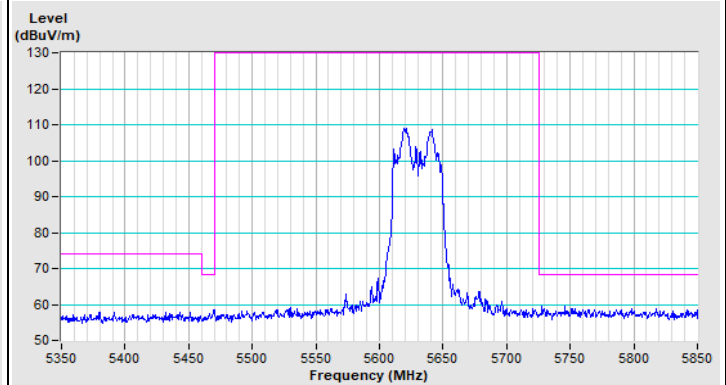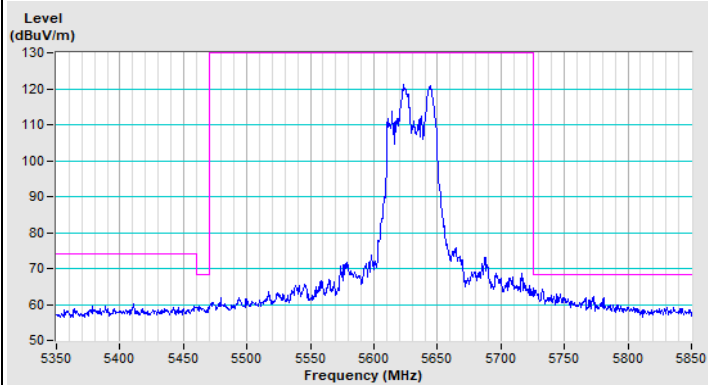


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 142

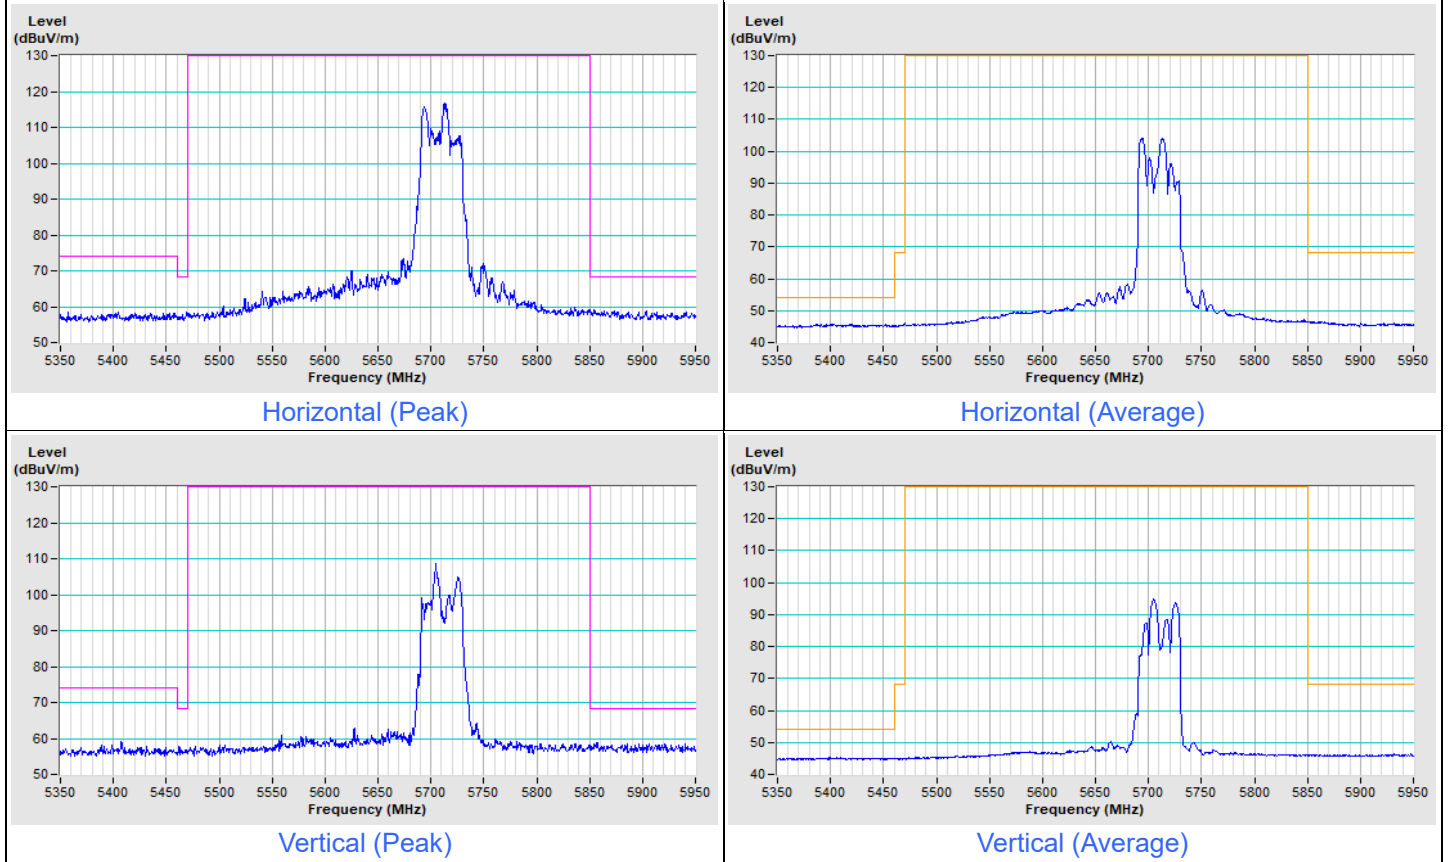


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT80) Channel 58




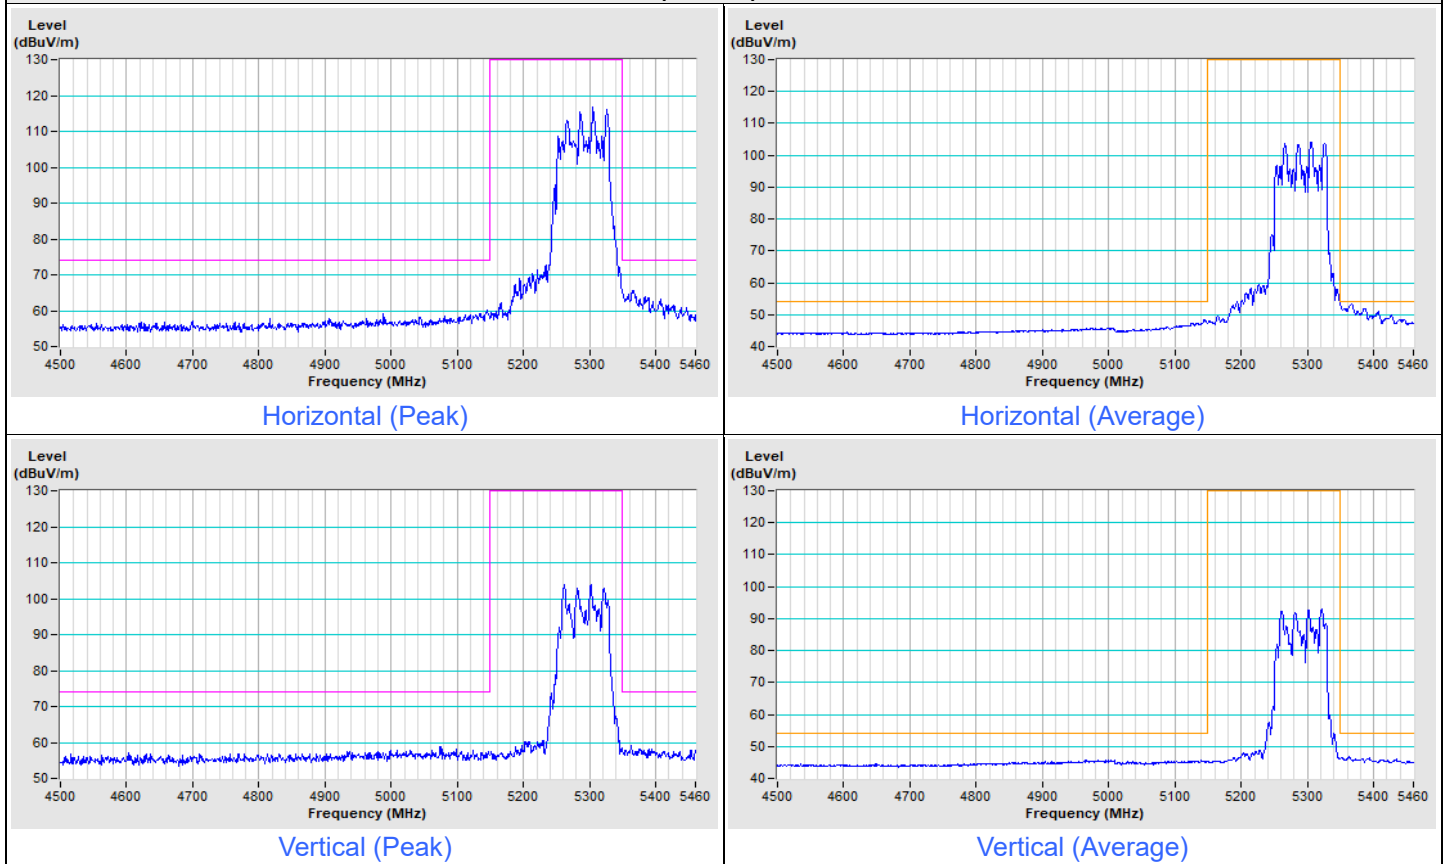


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 106

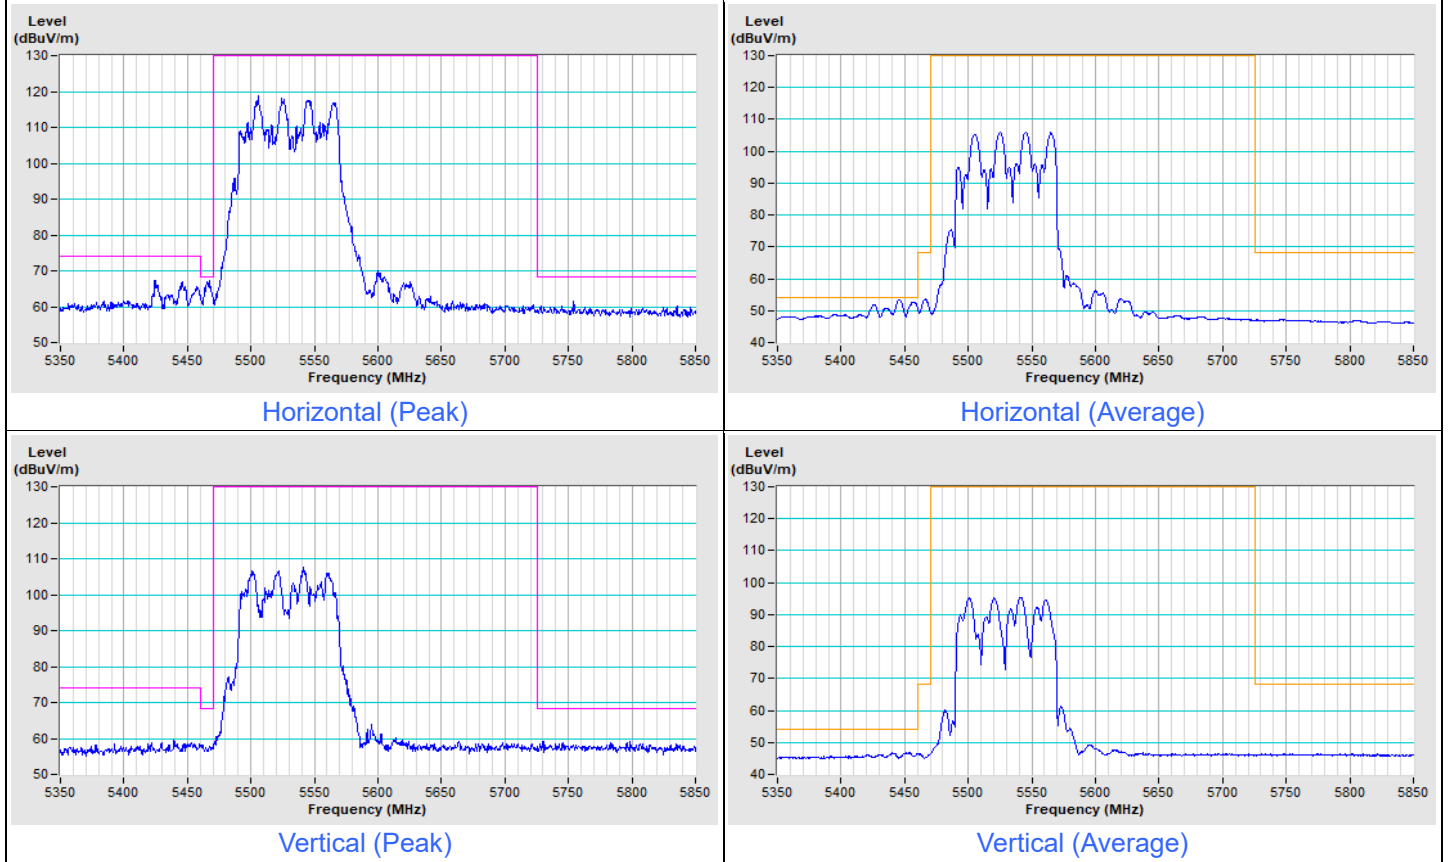


802.11be (EHT80) Channel 122

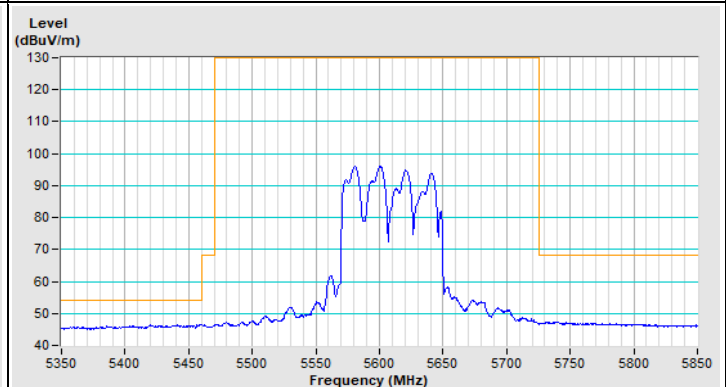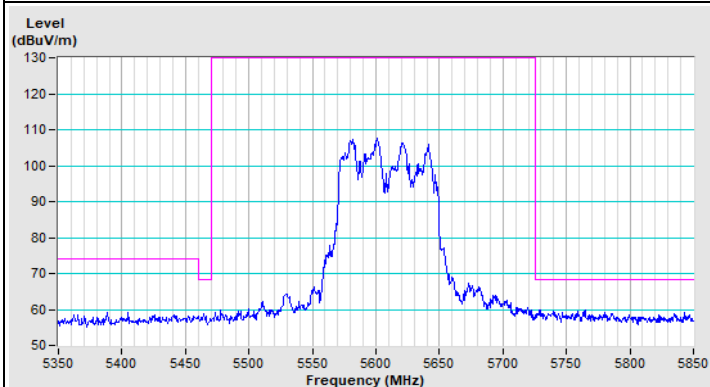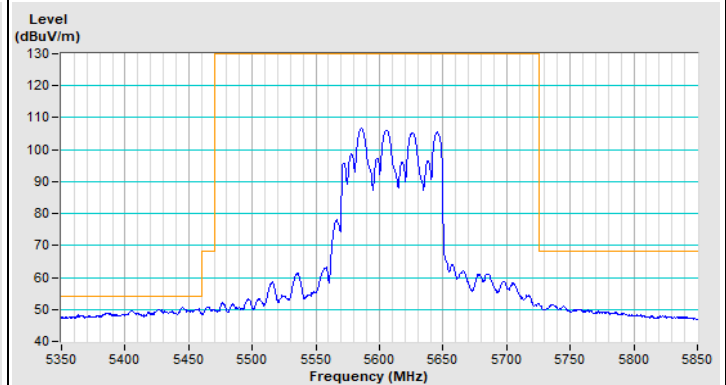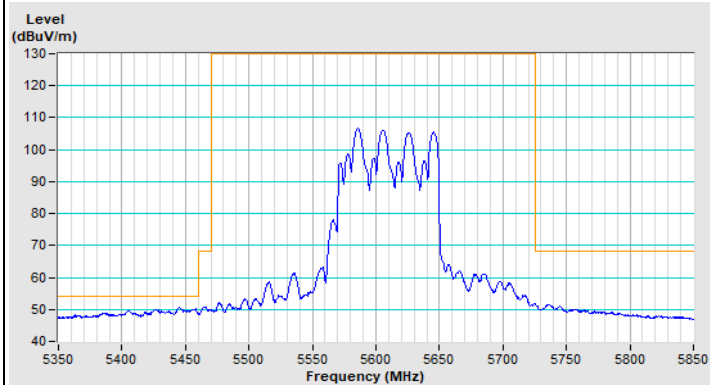


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 138

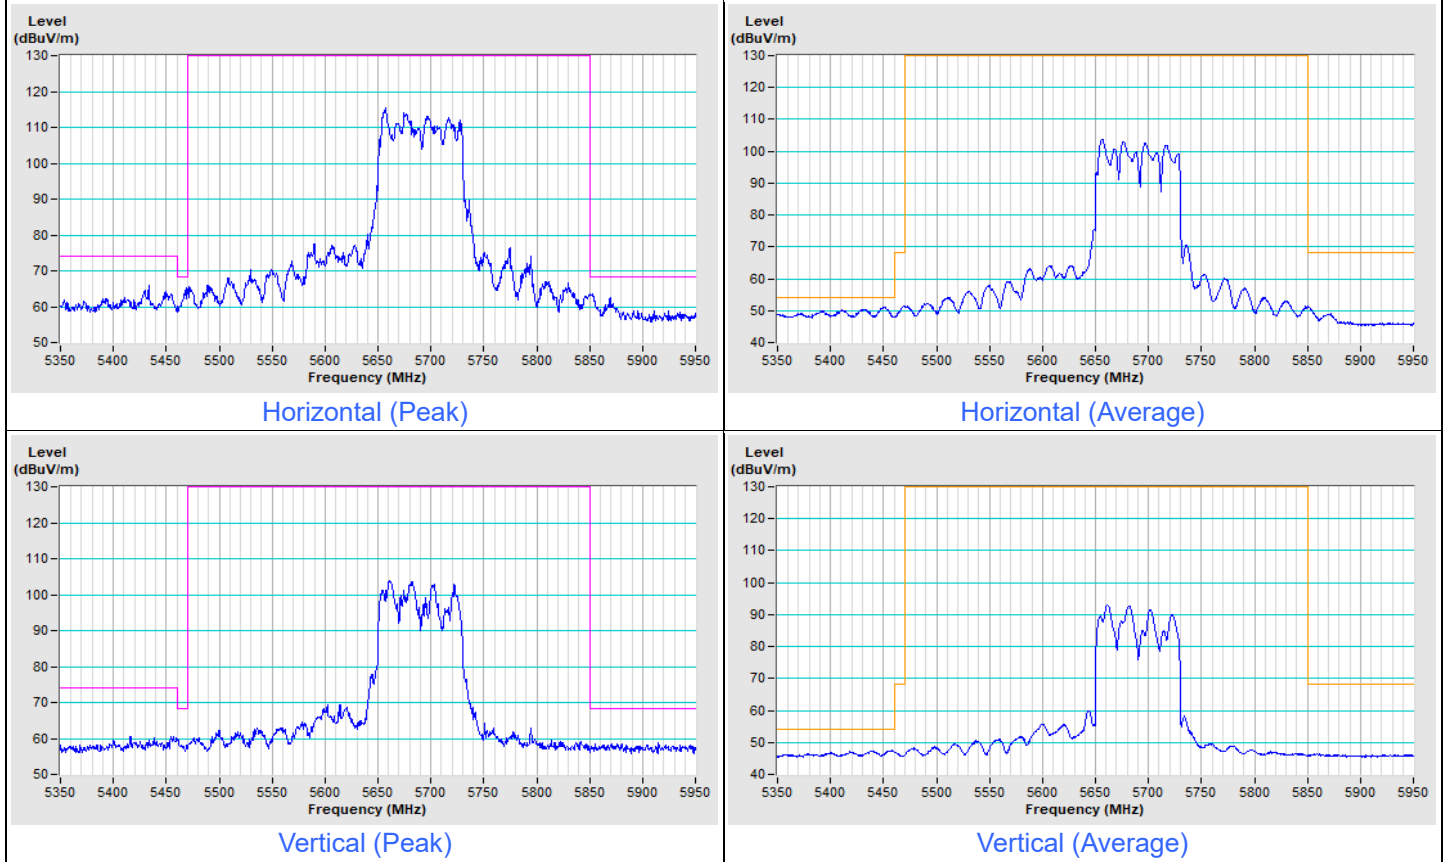


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT160) Channel 50

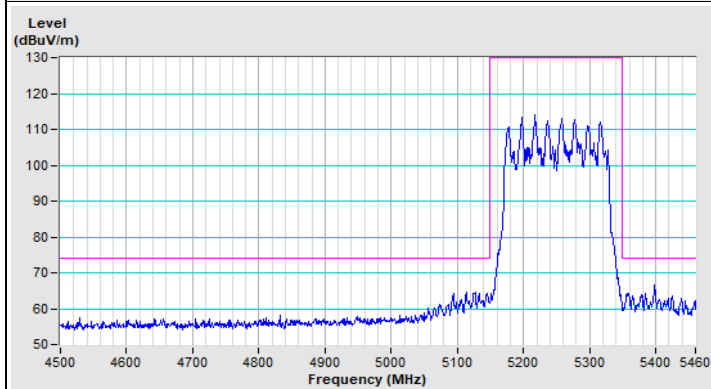


Horizontal (Peak)

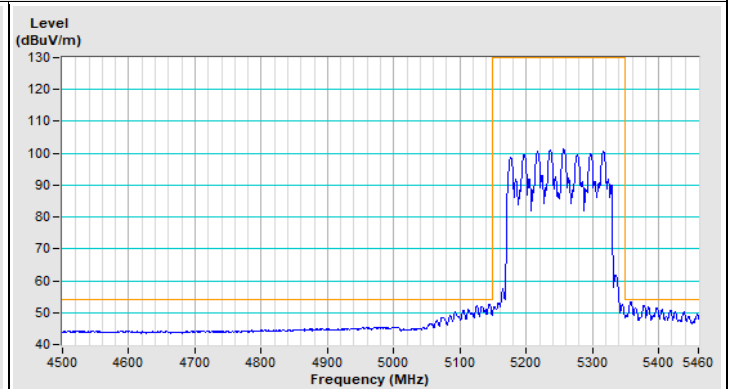

Horizontal (Average)

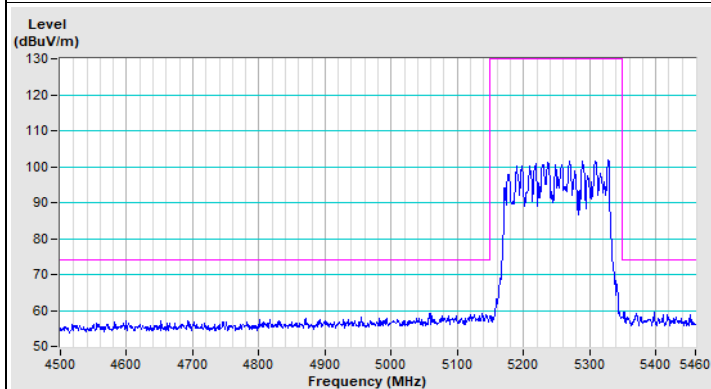


Vertical (Peak)

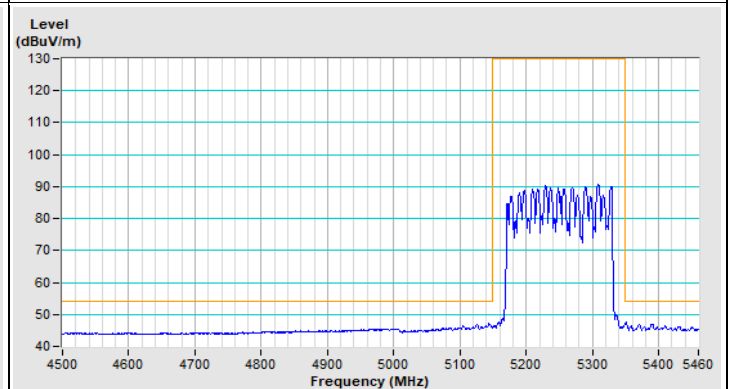

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

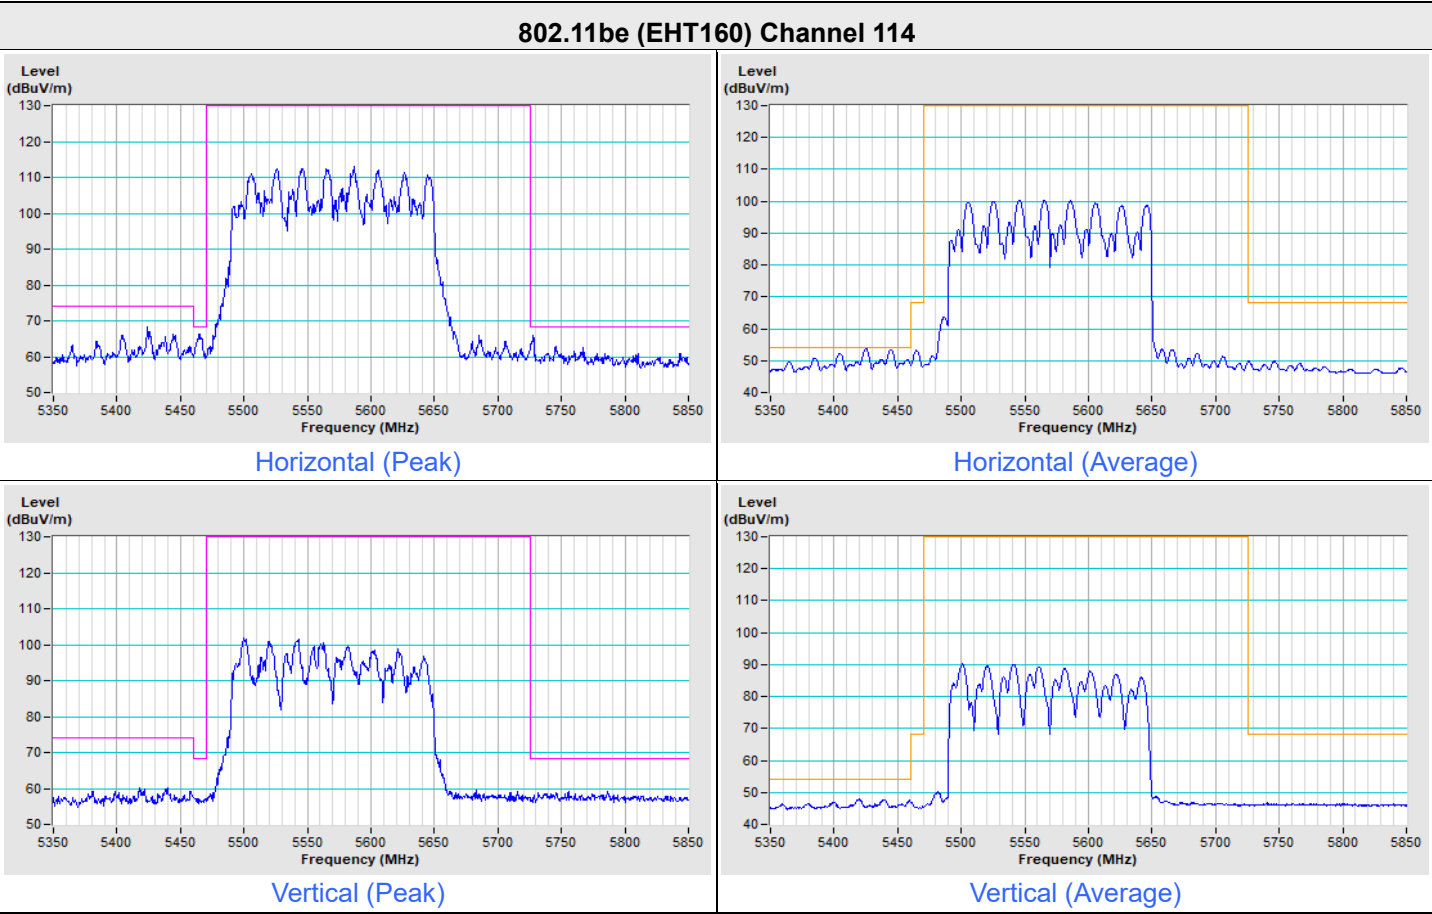


Mode B_PIFA Ant.

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 52

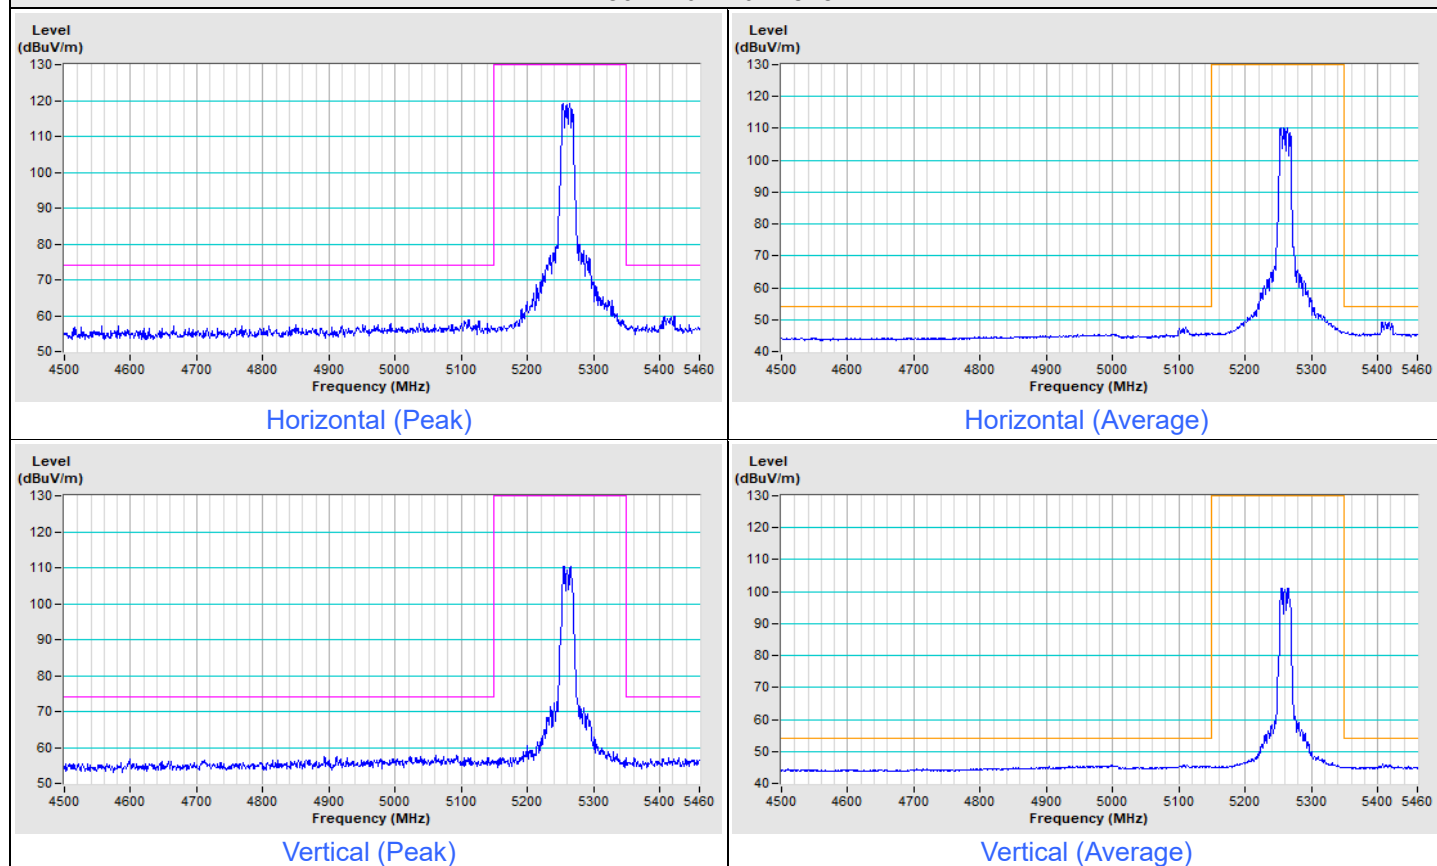


802.11a Channel 60

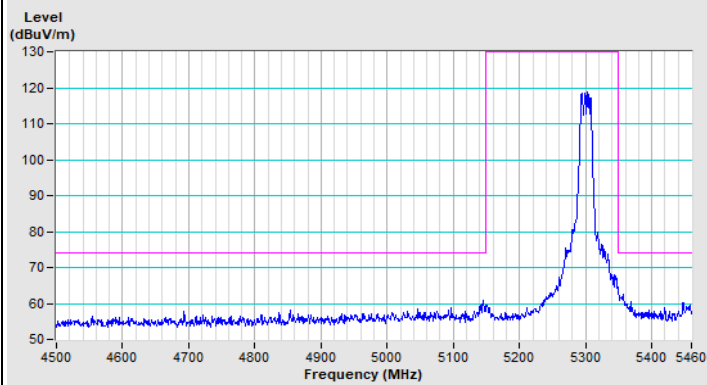


Horizontal (Peak)

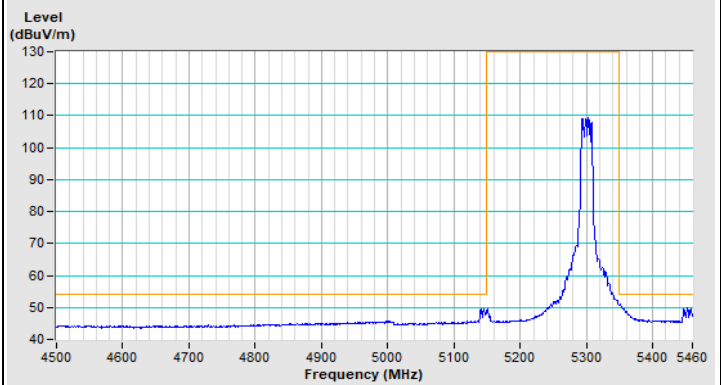

Horizontal (Average)

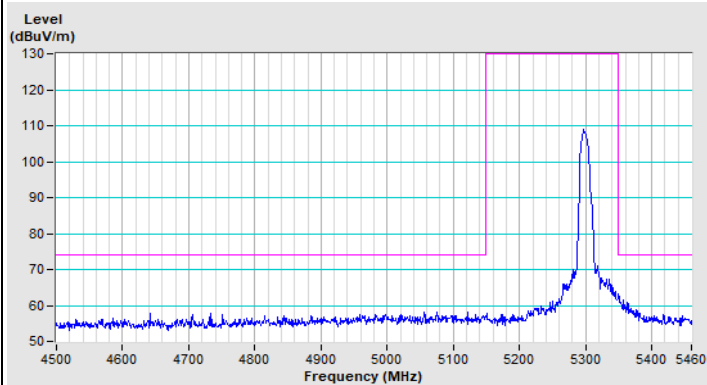


Vertical (Peak)

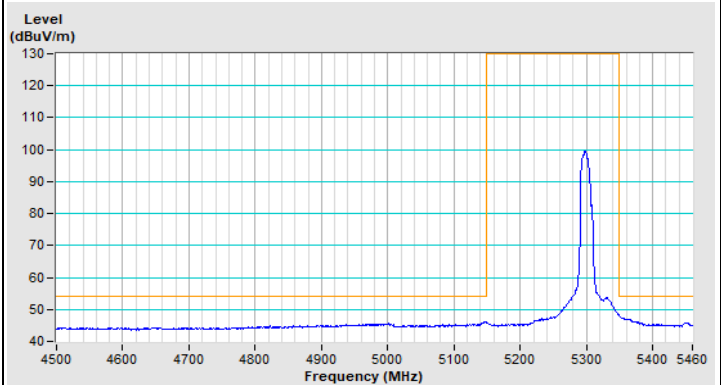


Vertical (Average)


802.11a Channel 64

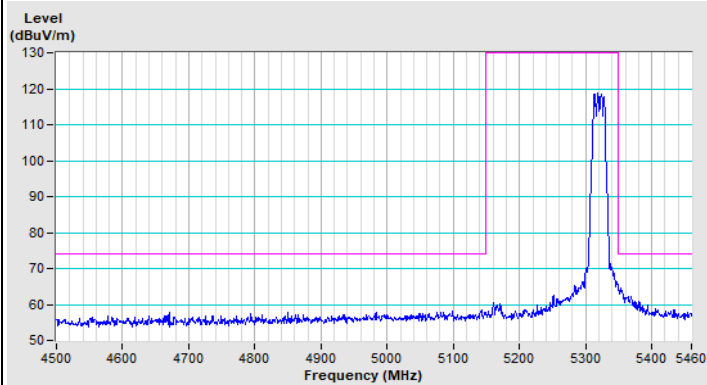


Horizontal (Peak)

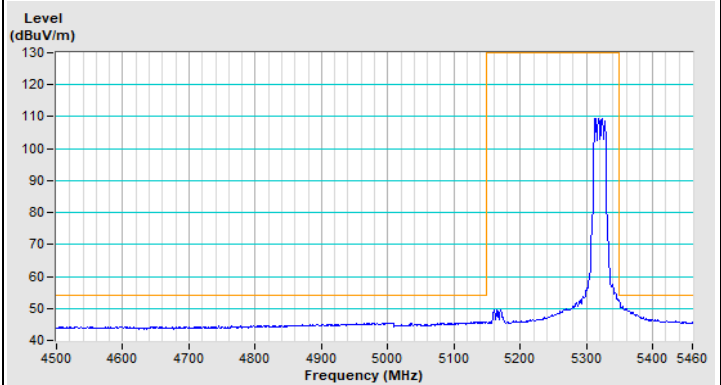

Horizontal (Average)

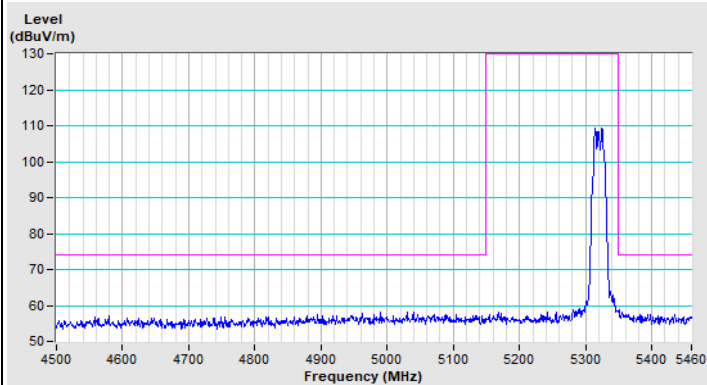


Vertical (Peak)

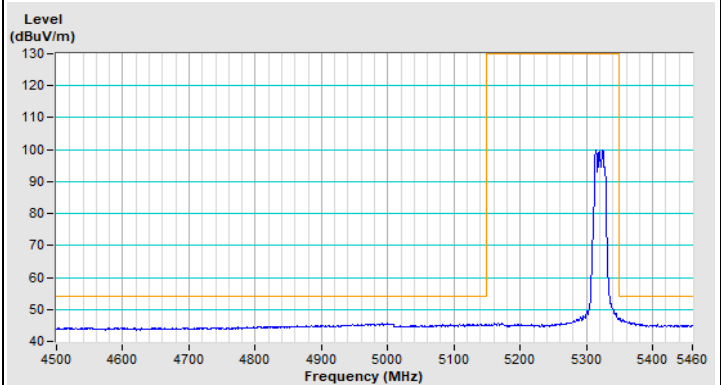


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

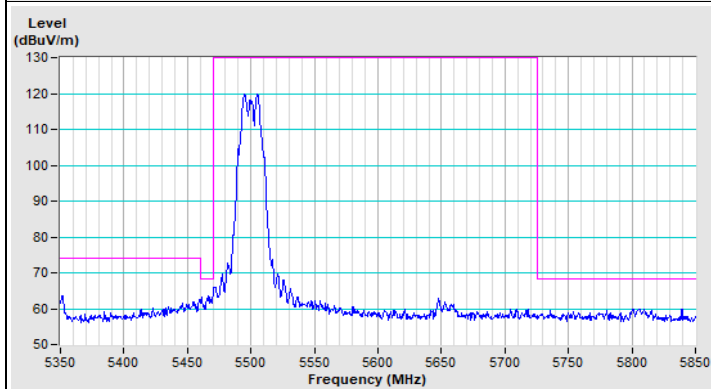


Horizontal (Peak)

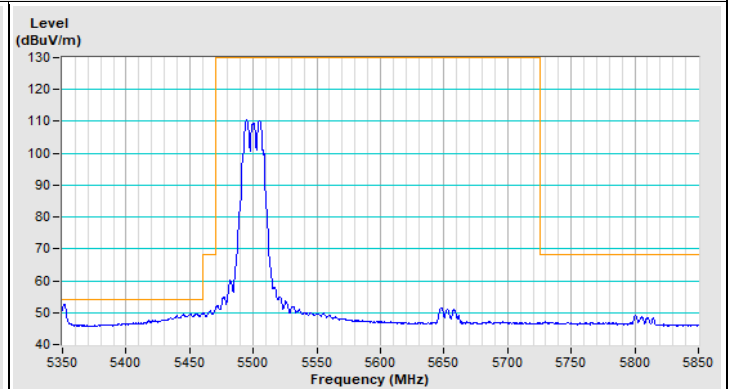

Horizontal (Average)

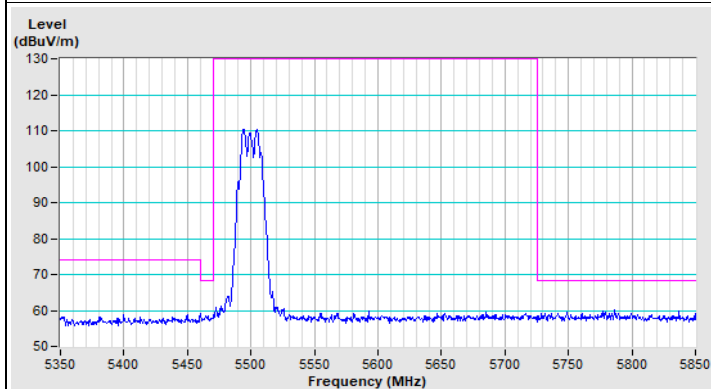


Vertical (Peak)

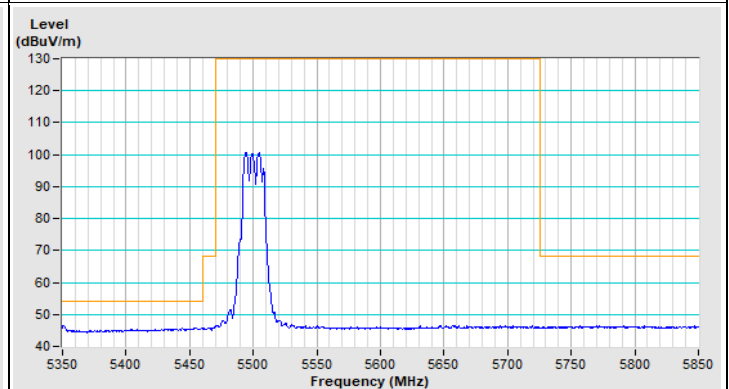


Vertical (Average)

802.11a Channel 140

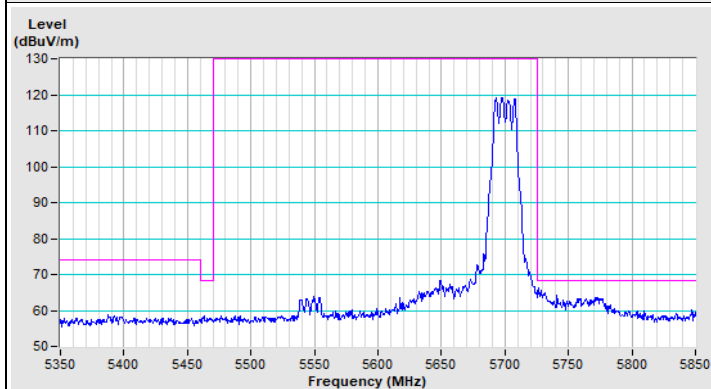


Horizontal (Peak)

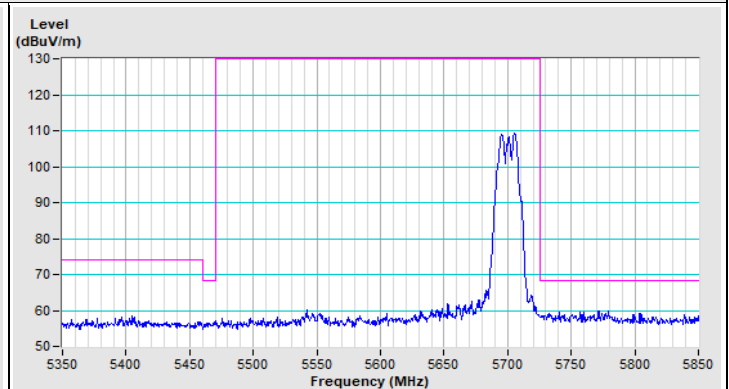

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 144




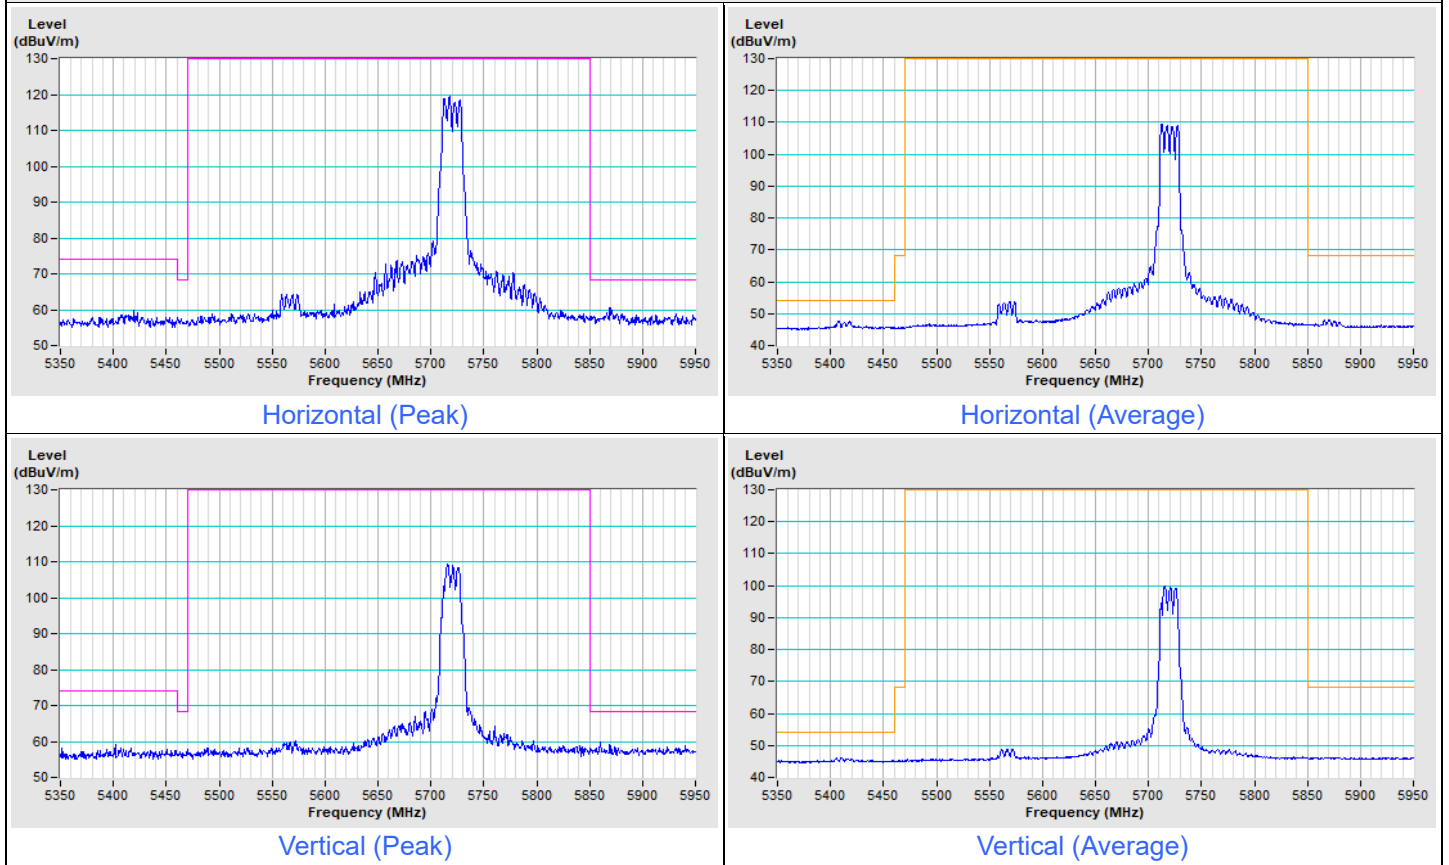


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 52

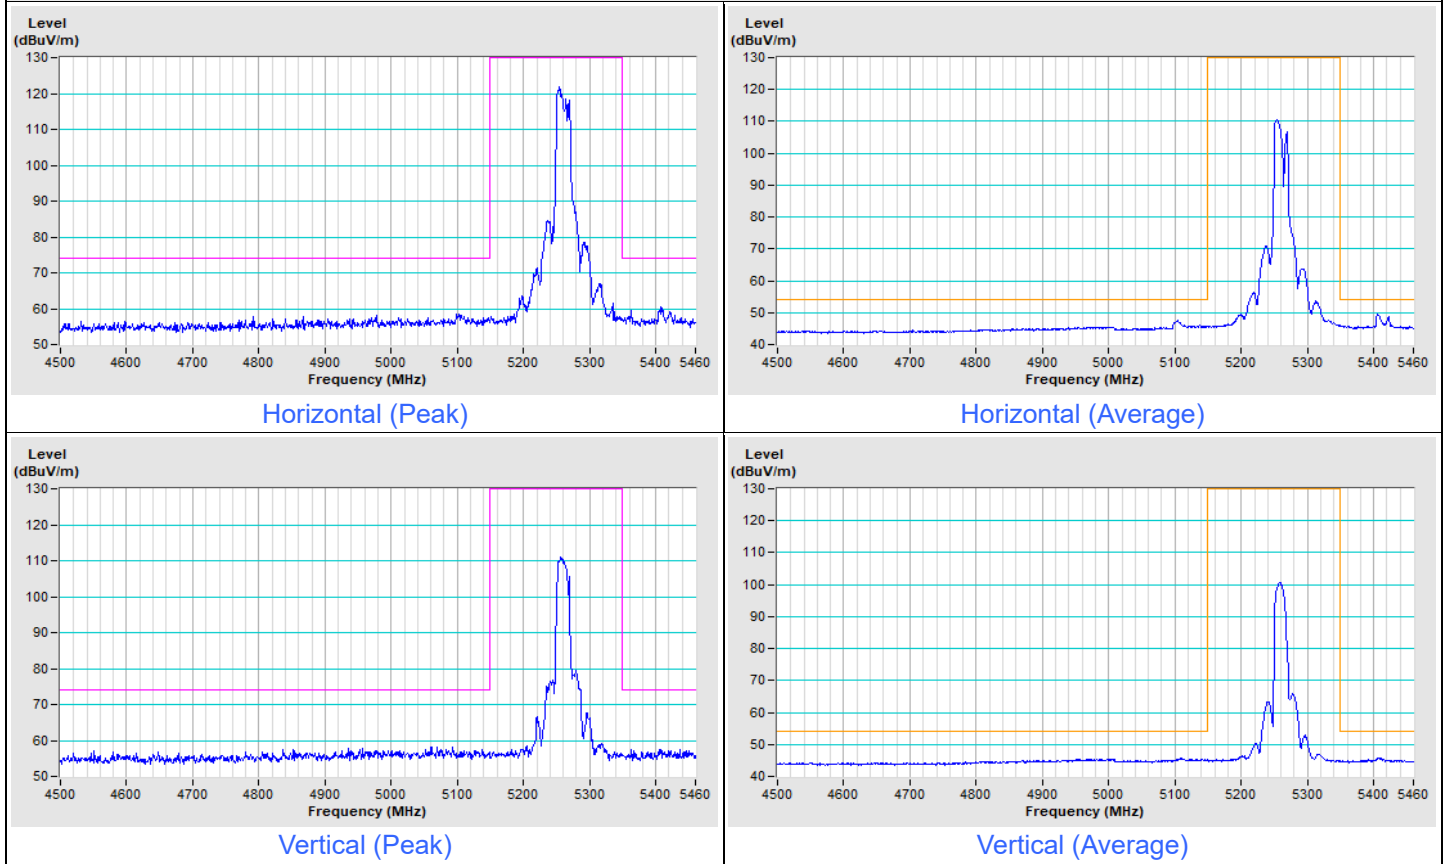

802.11be (EHT20) Channel 60

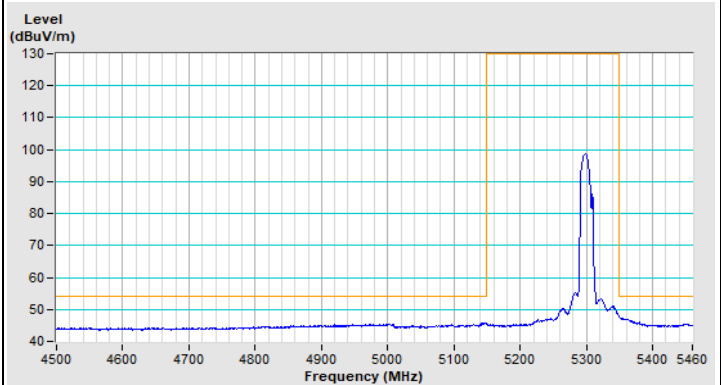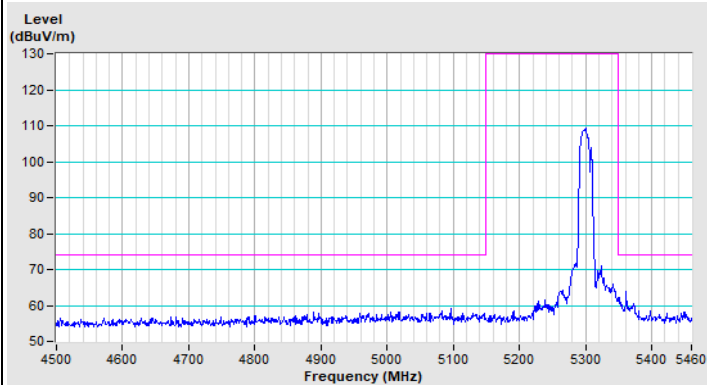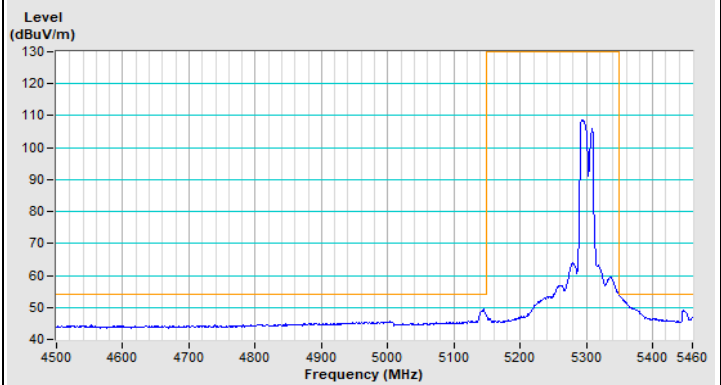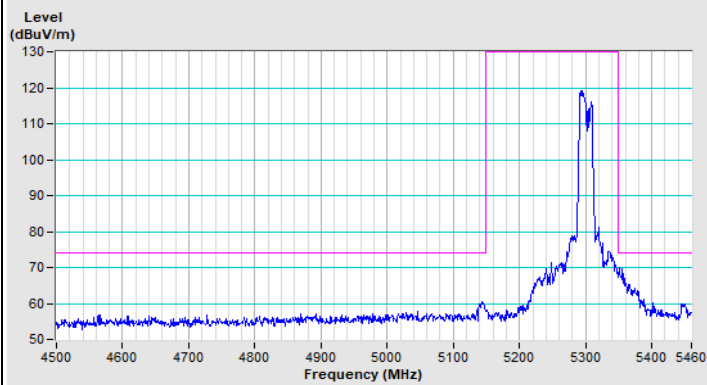


802.11be (EHT20) Channel 64

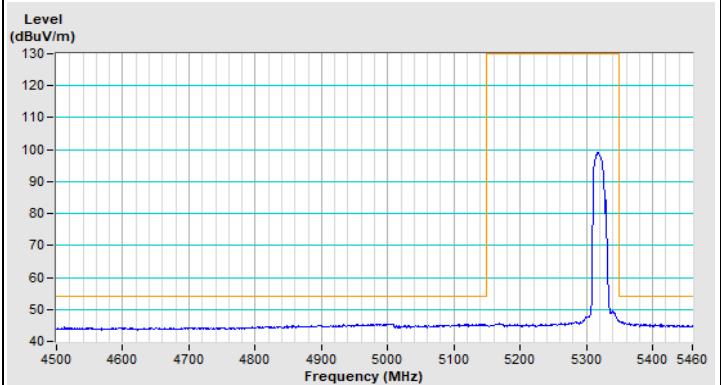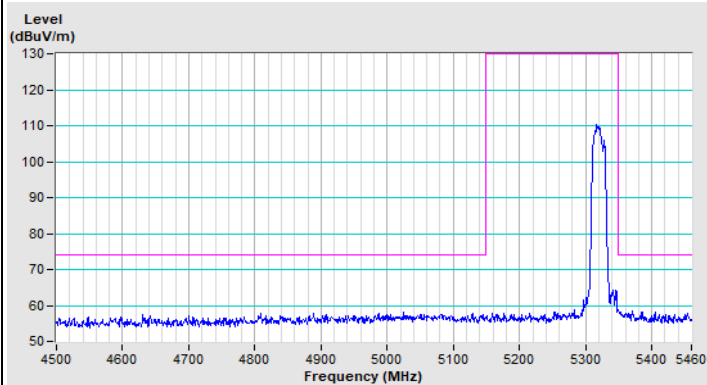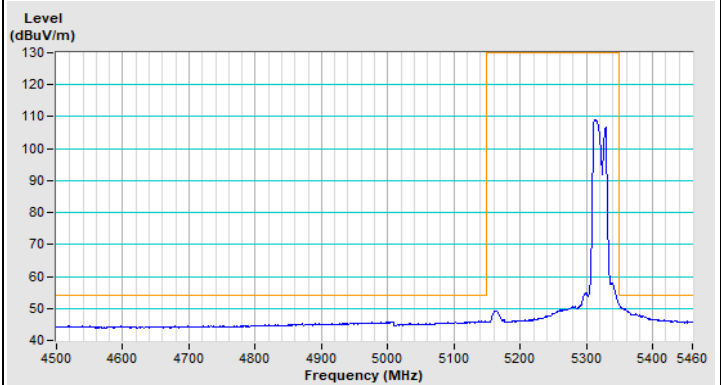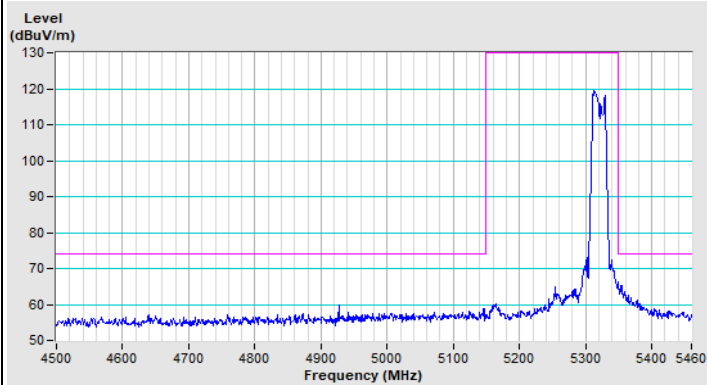


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

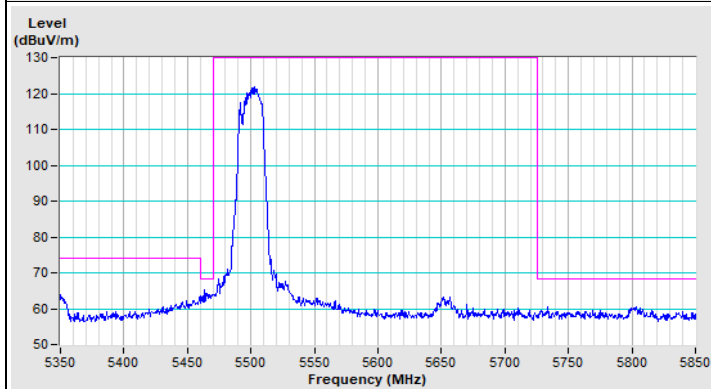


Horizontal (Peak)

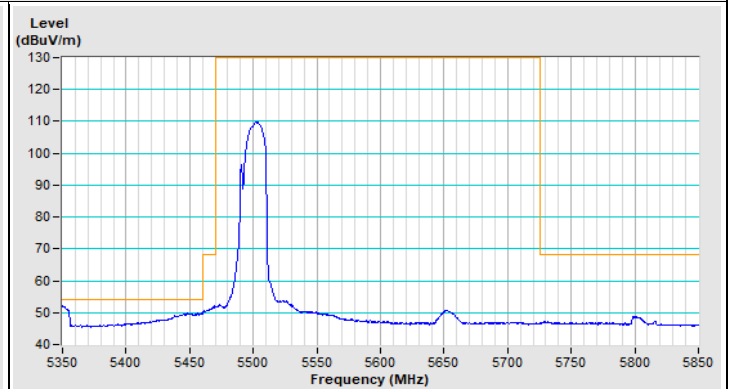

Horizontal (Average)

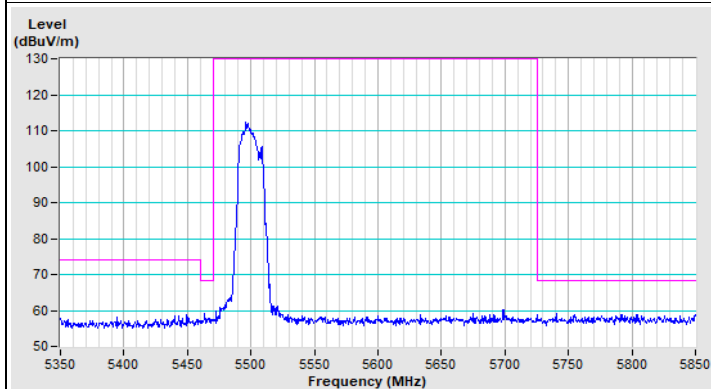


Vertical (Peak)

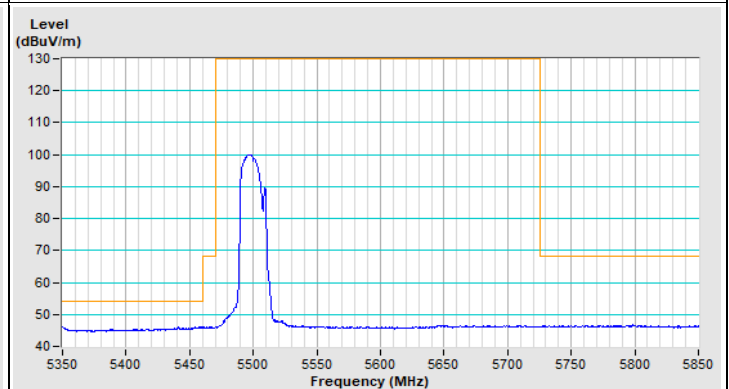


Vertical (Average)

802.11be (EHT20) Channel 140

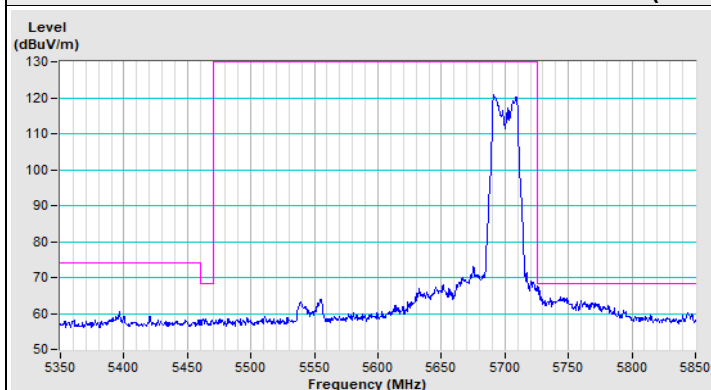


Horizontal (Peak)

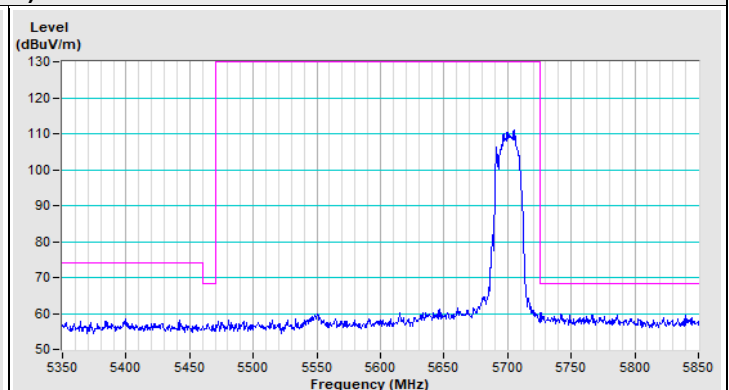

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 144

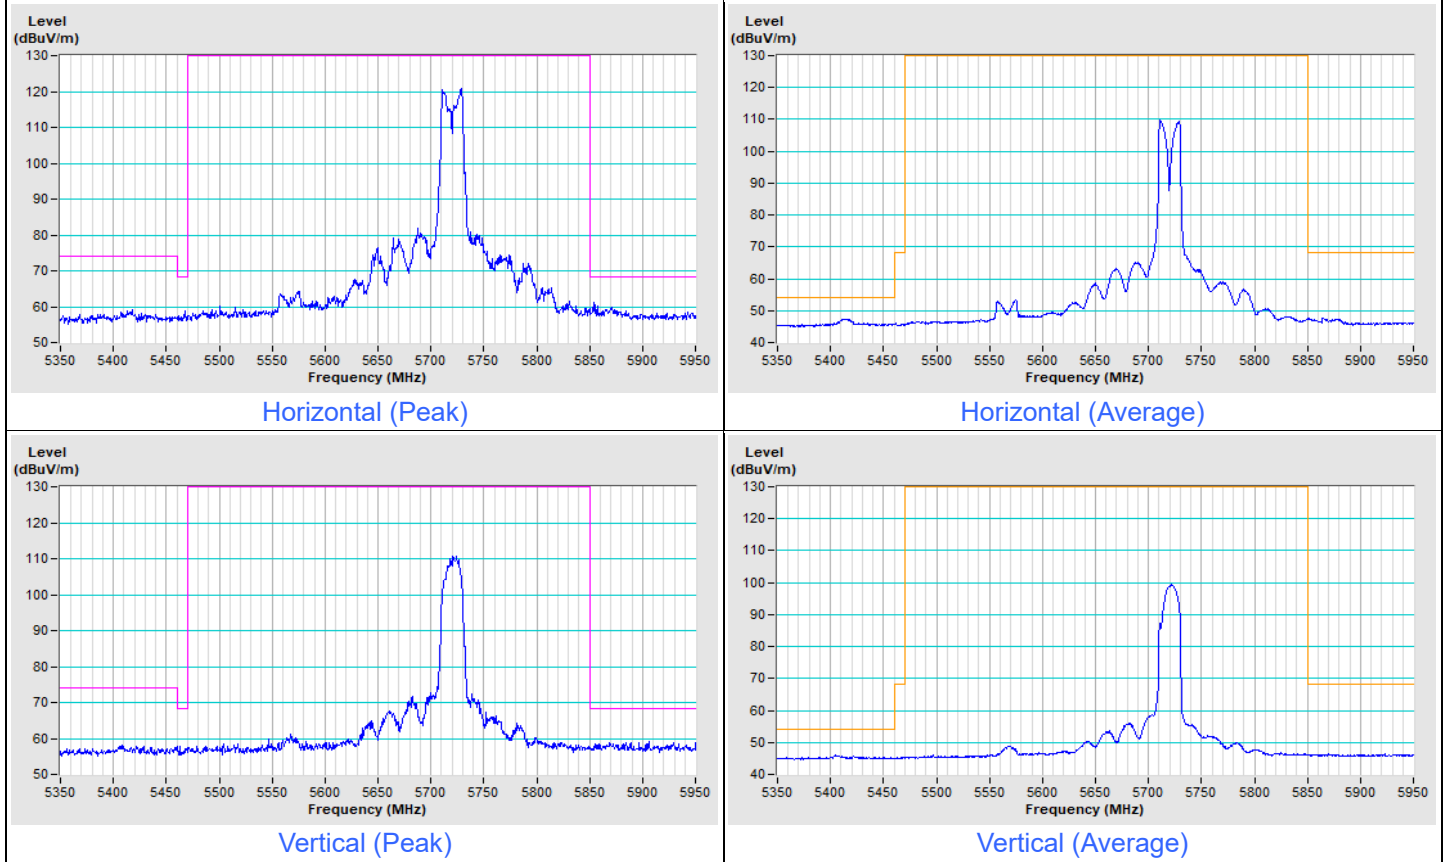


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 54

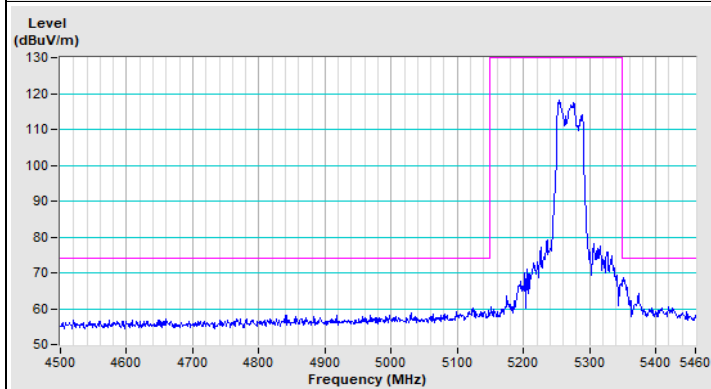


Horizontal (Peak)

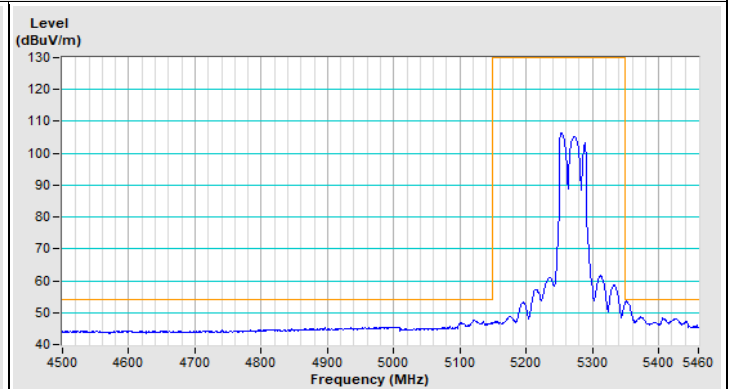


Horizontal (Average)

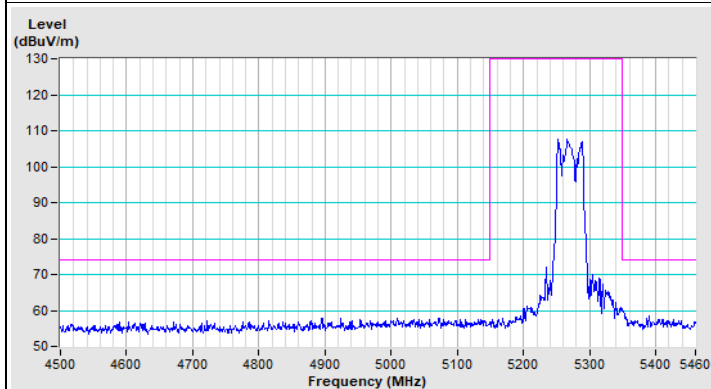


Vertical (Peak)

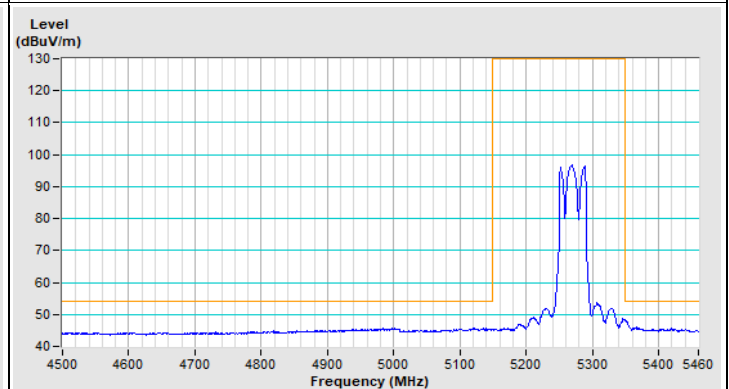


Vertical (Average)

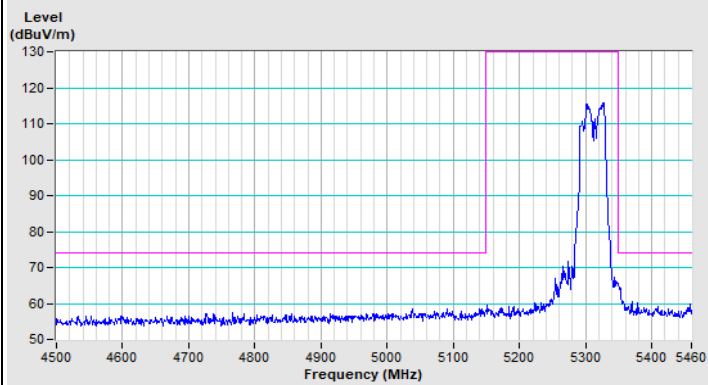802.11be (EHT40) Channel 62


Horizontal (Peak)

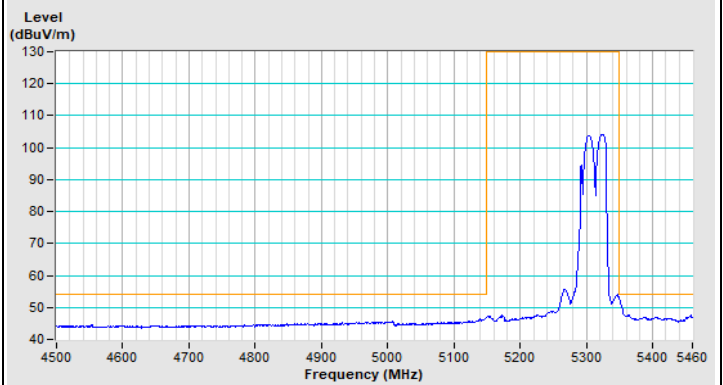

Horizontal (Average)

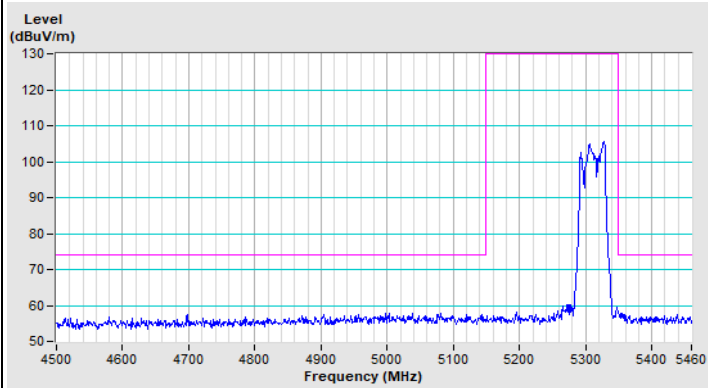


Vertical (Peak)

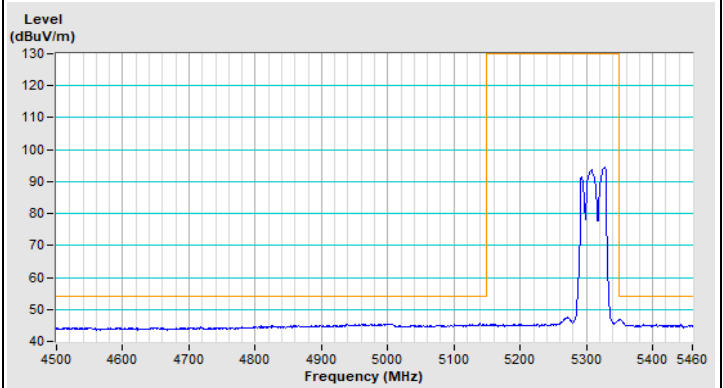





Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--



802.11be (EHT40) Channel 102

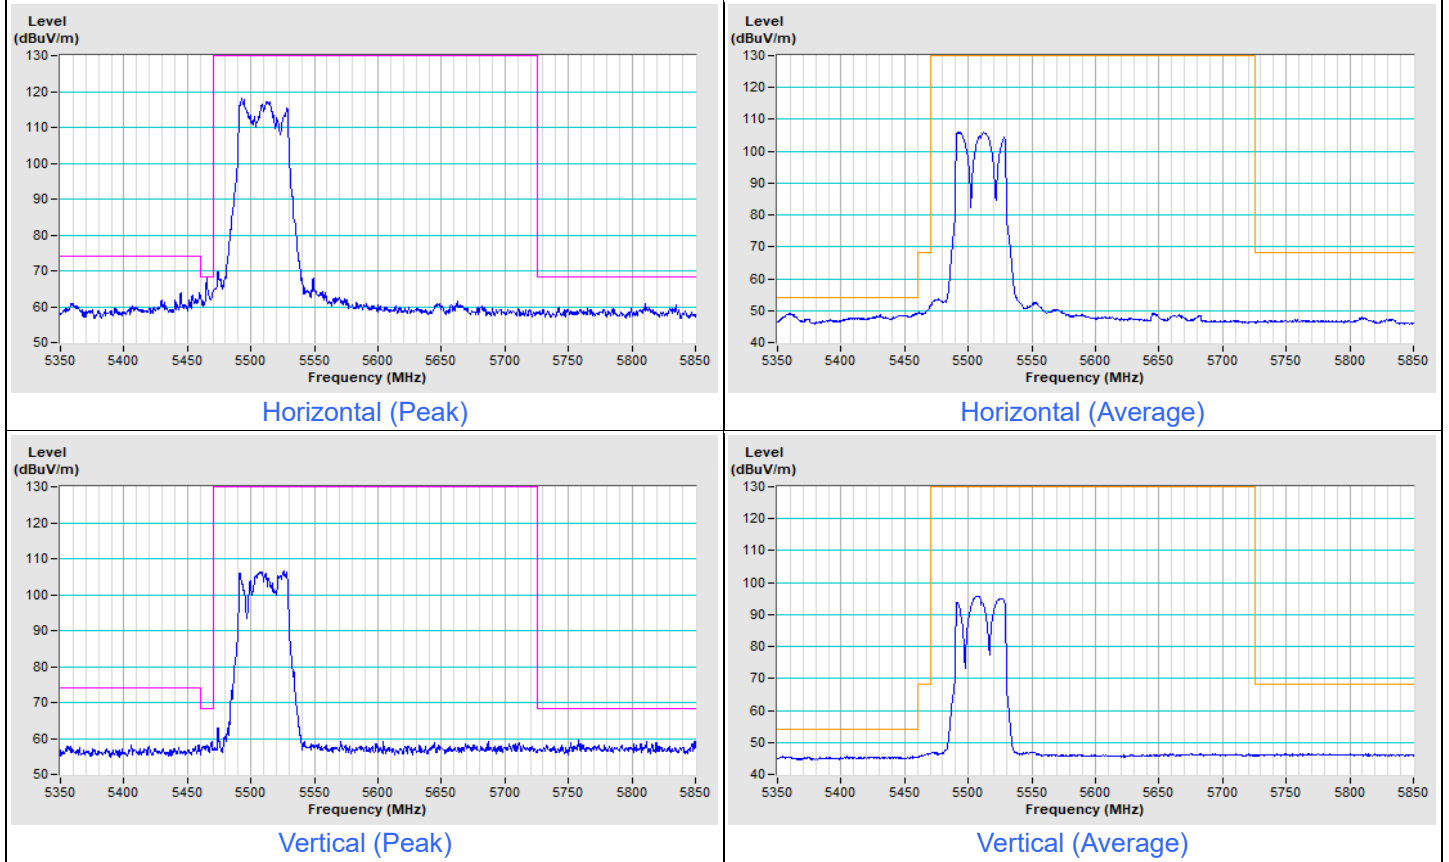

802.11be (EHT40) Channel 110

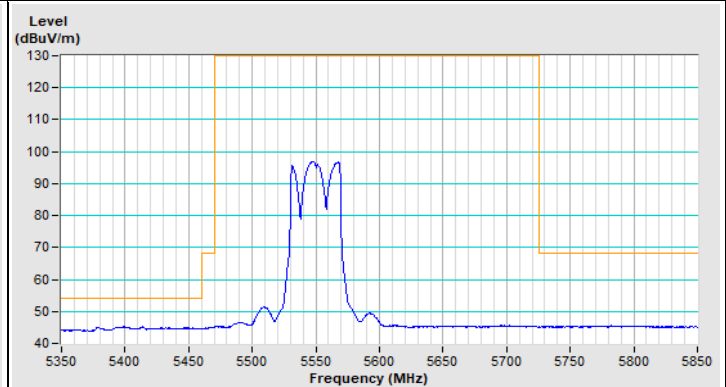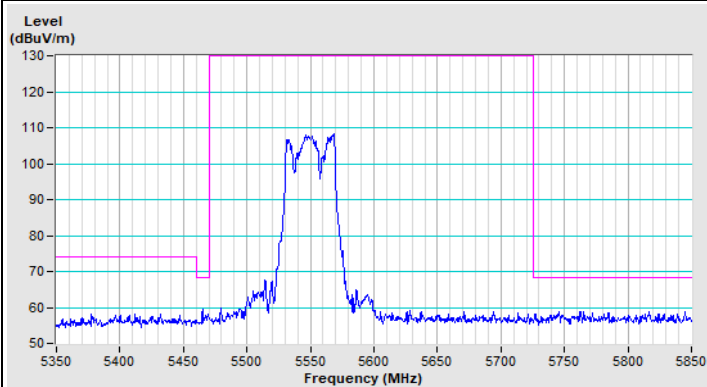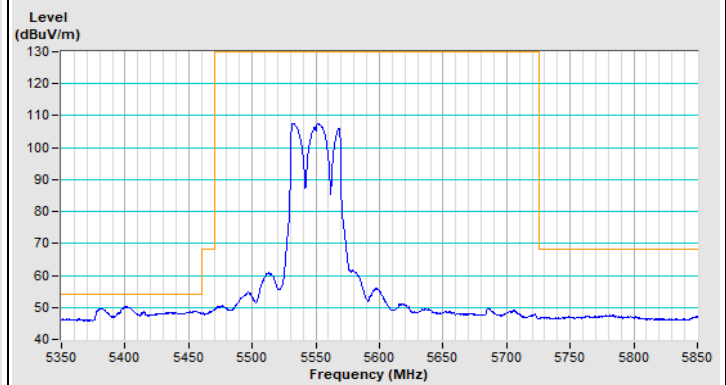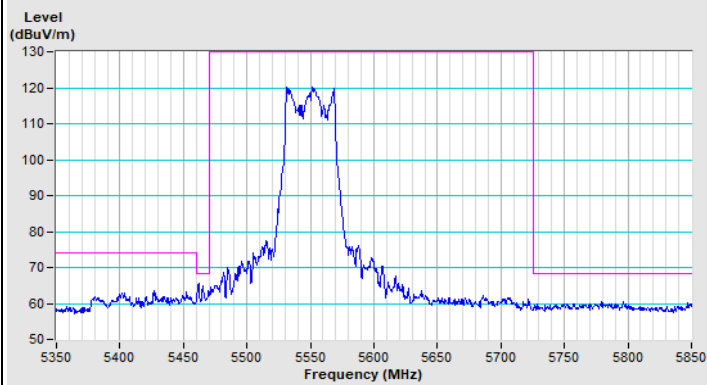


802.11be (EHT40) Channel 126

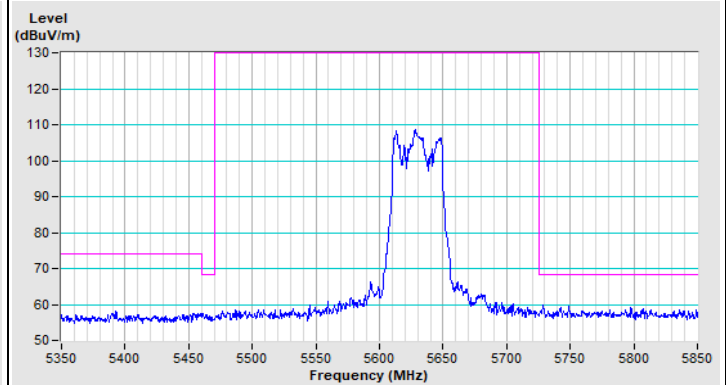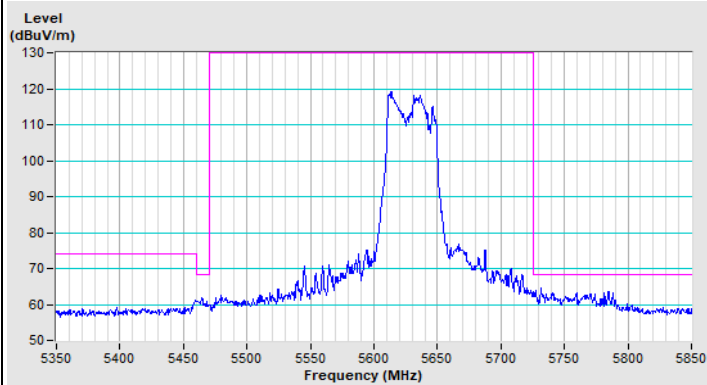


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 142

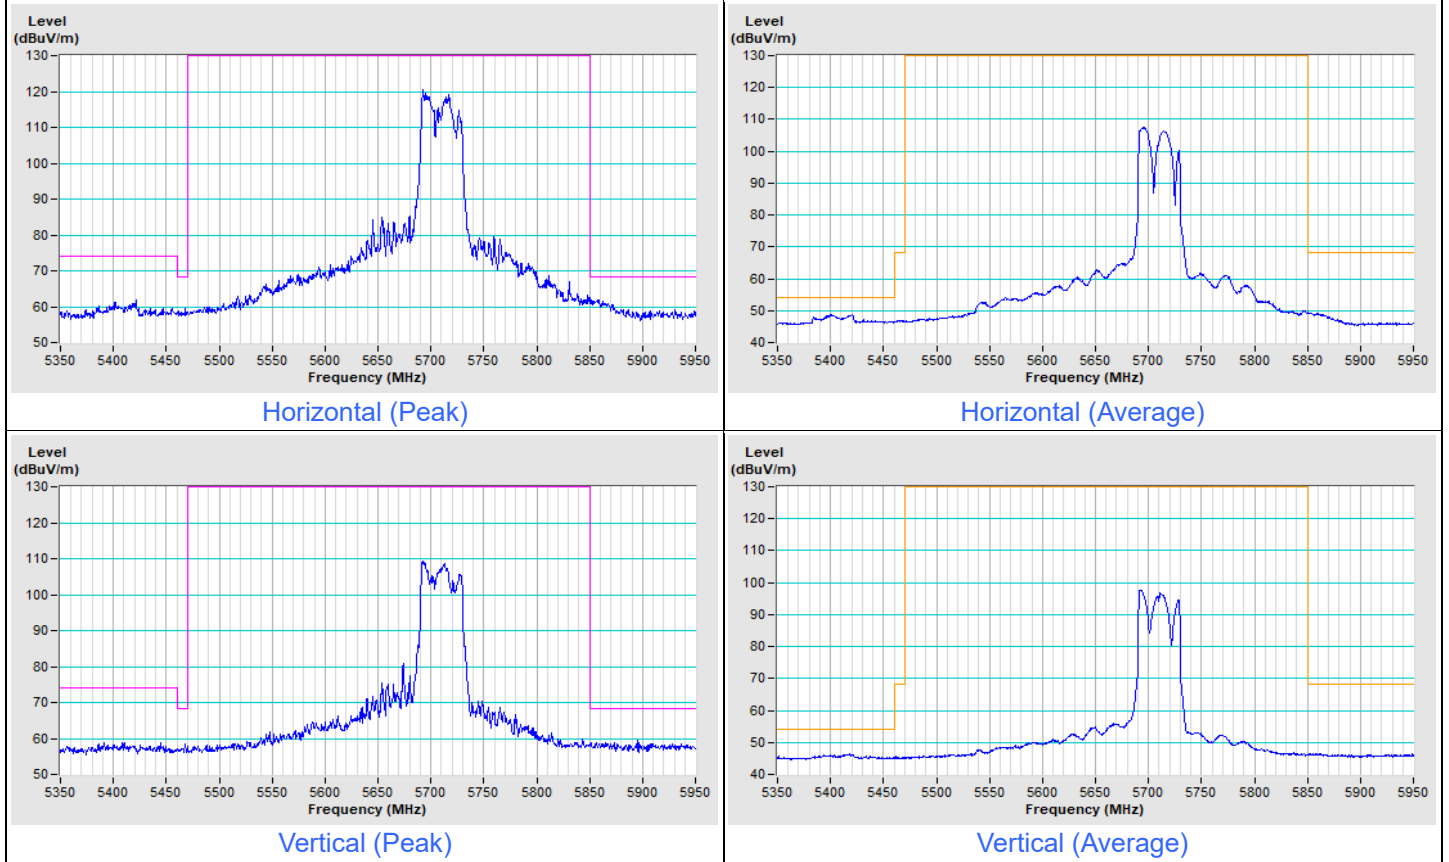


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 58

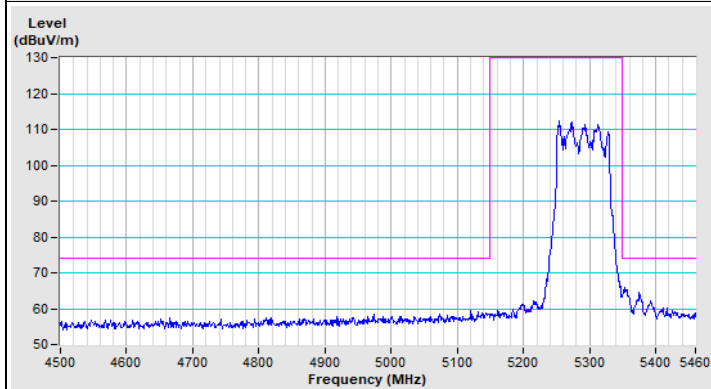


Horizontal (Peak)

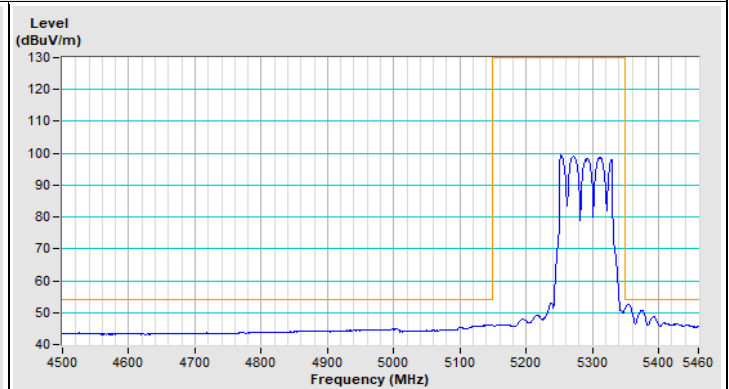

Horizontal (Average)

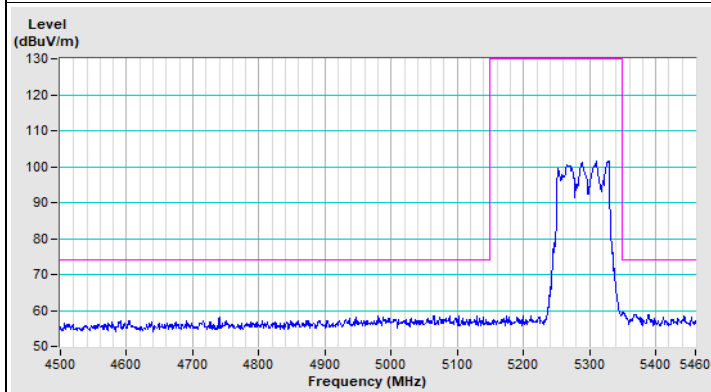


Vertical (Peak)

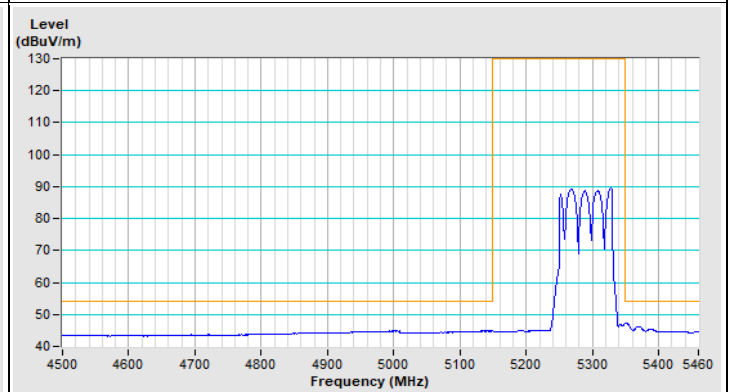


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

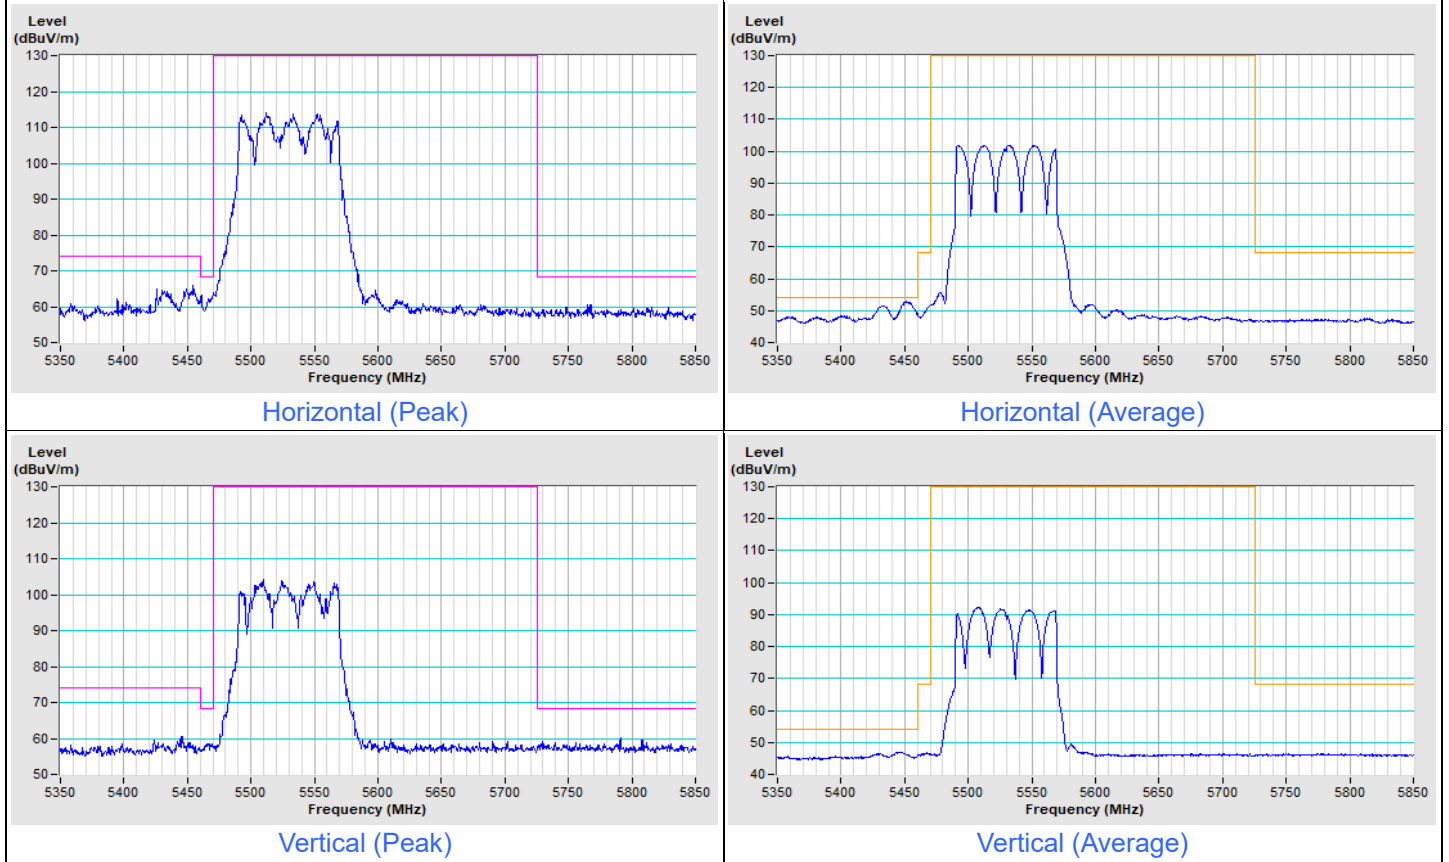


802.11be (EHT80) Channel 122

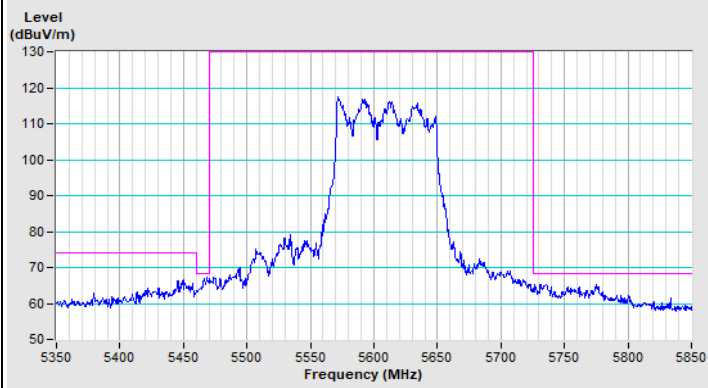


Horizontal (Peak)

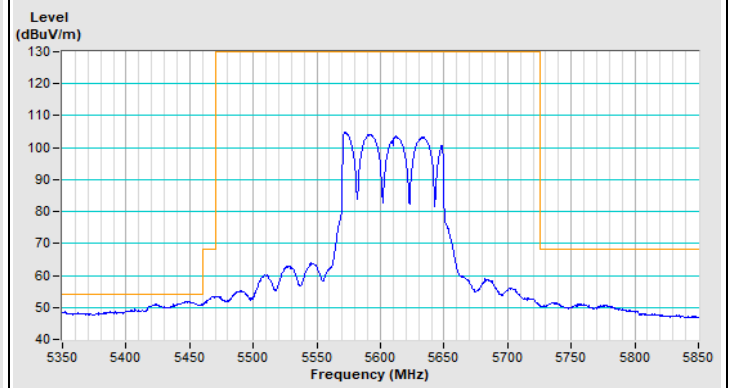

Horizontal (Average)

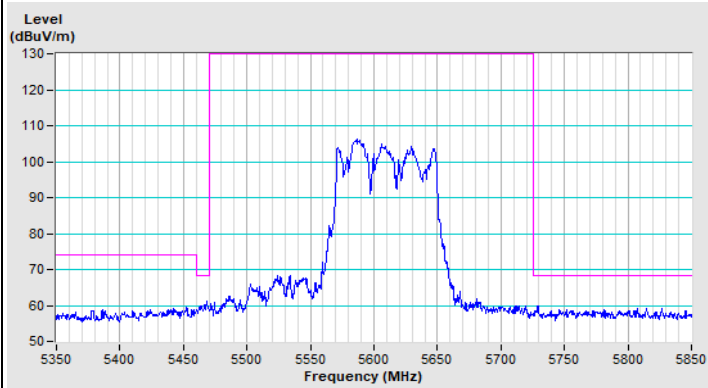


Vertical (Peak)

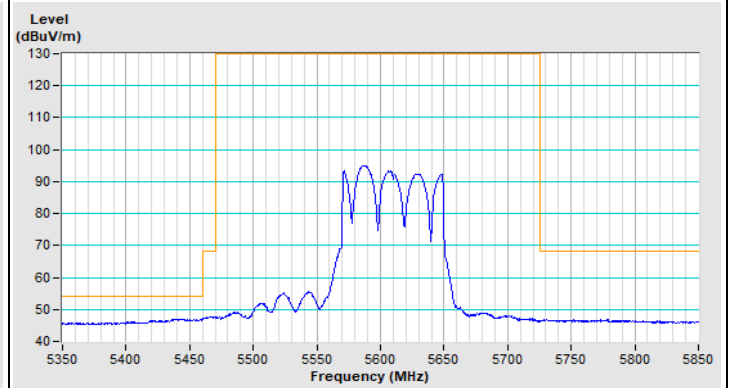

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 138

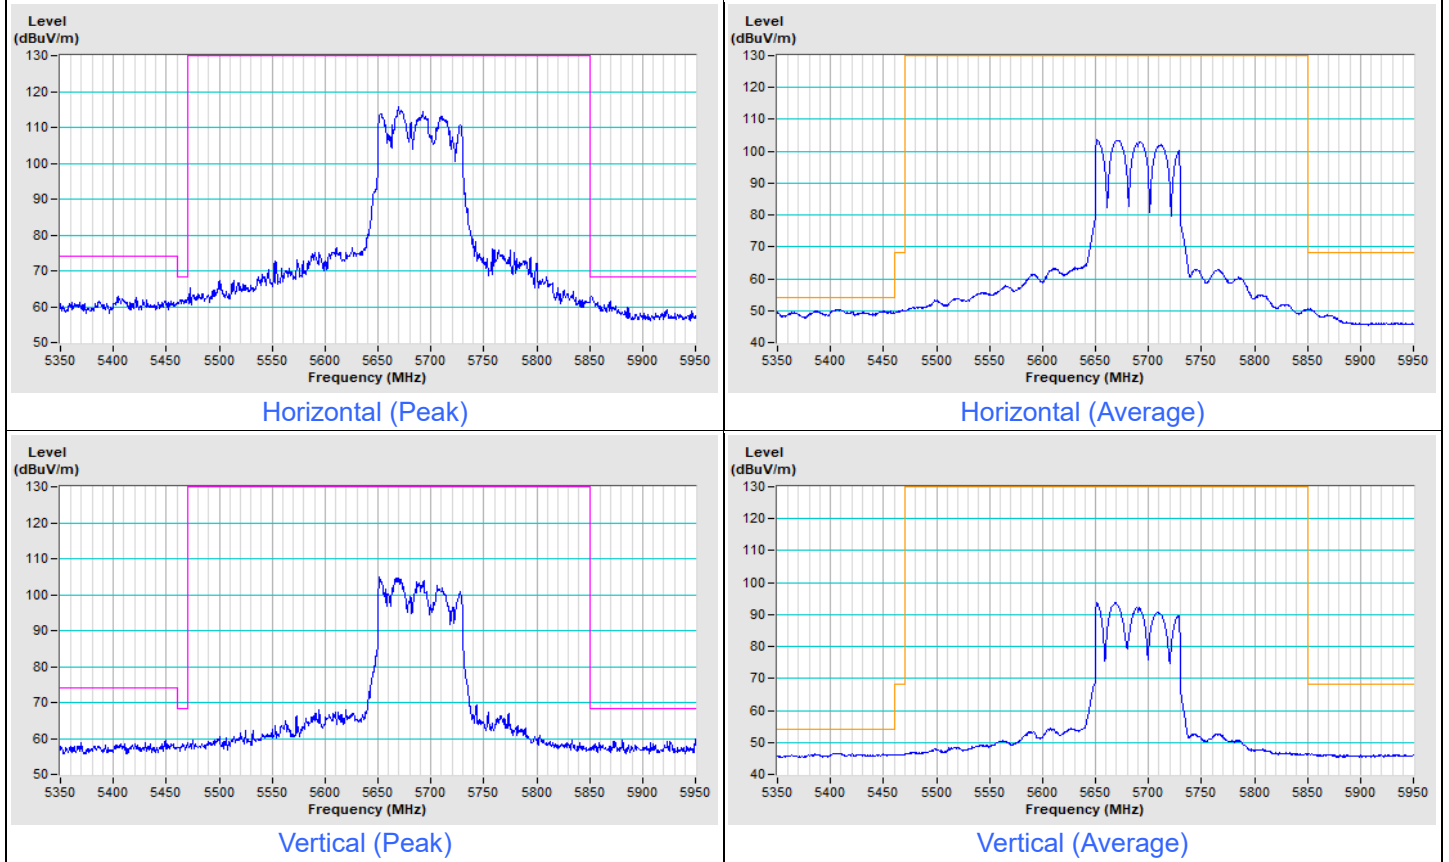


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT160) Channel 50

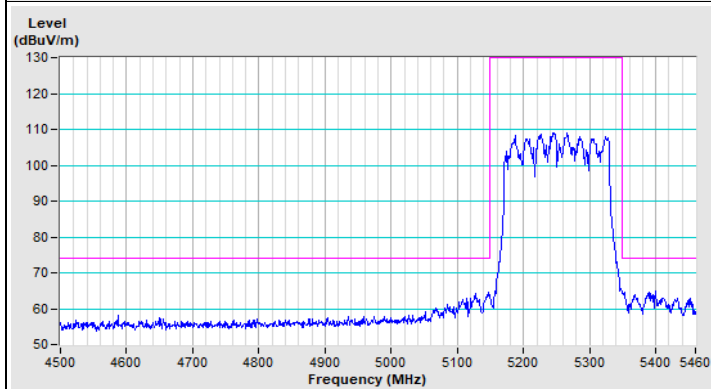


Horizontal (Peak)

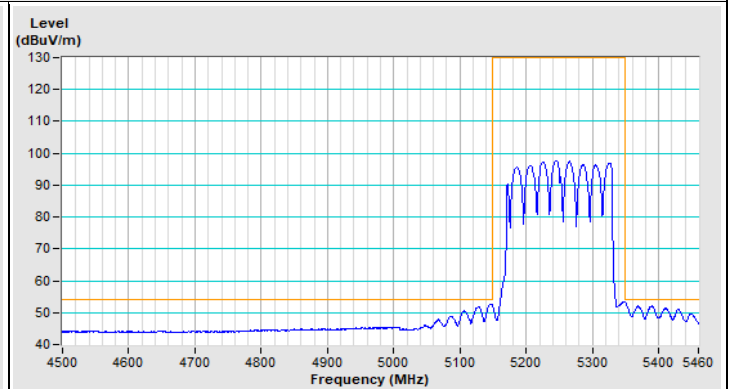

Horizontal (Average)

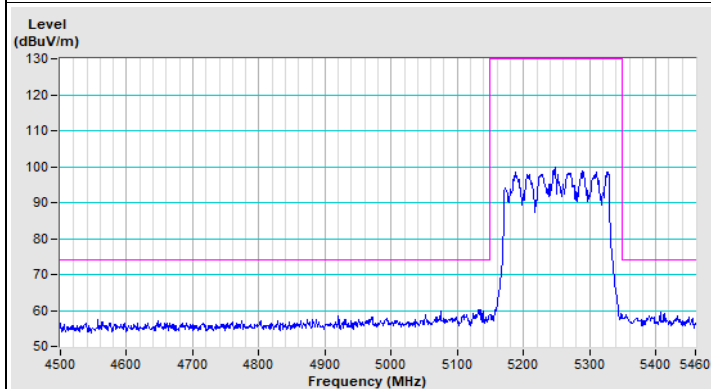


Vertical (Peak)

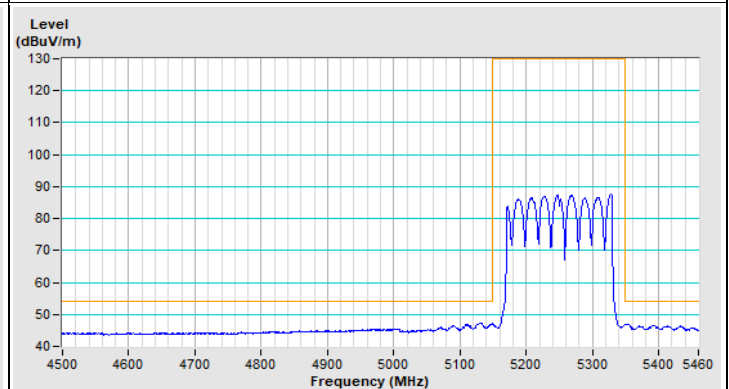

Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 114

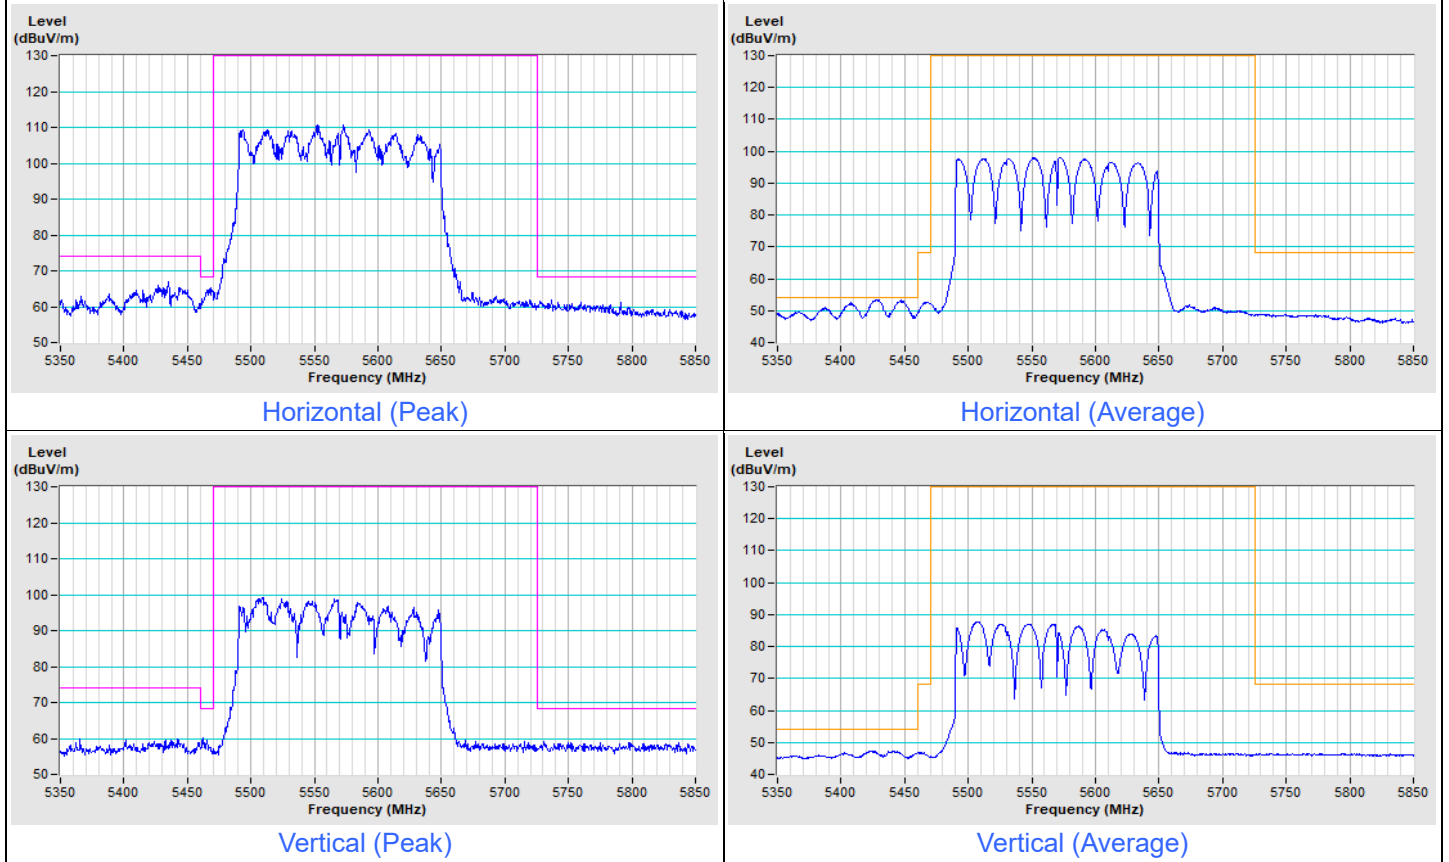


Mode C_Dipole Ant.

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 52

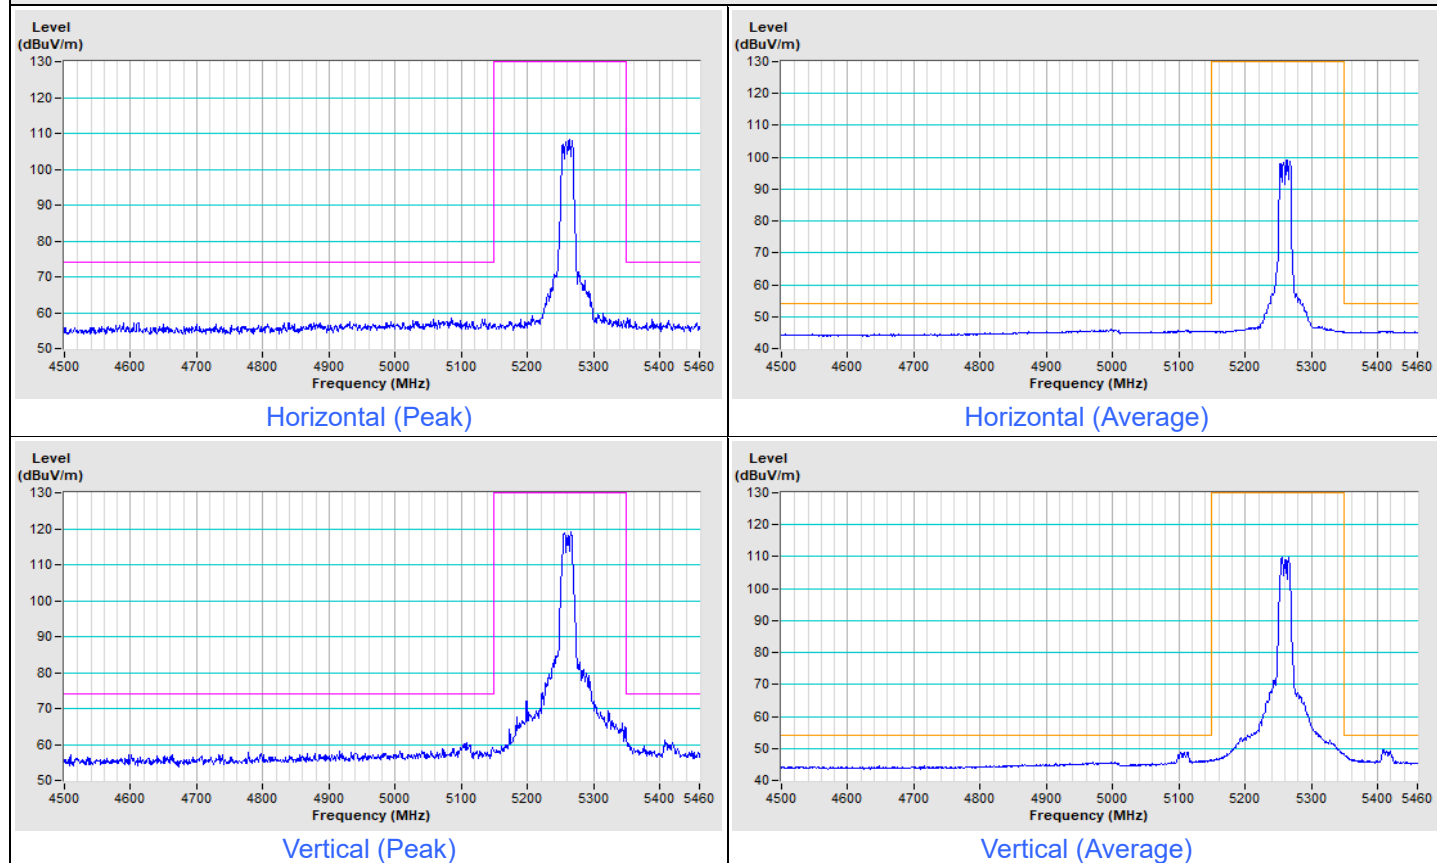


802.11a Channel 60

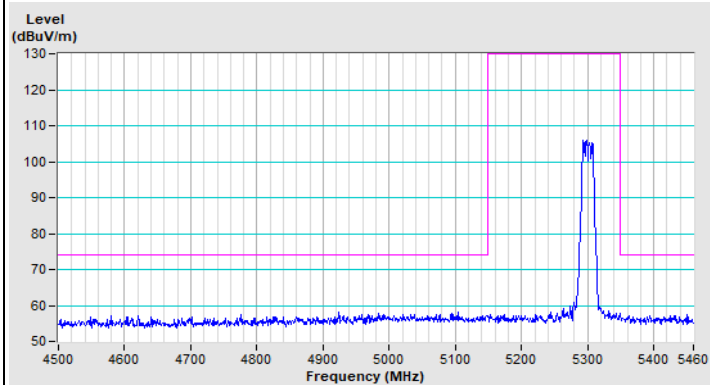


Horizontal (Peak)

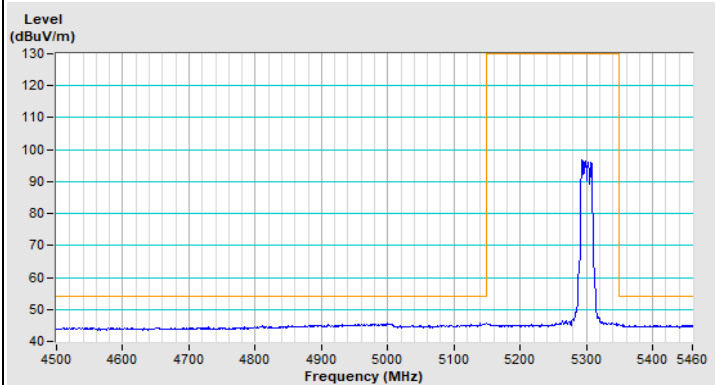

Horizontal (Average)

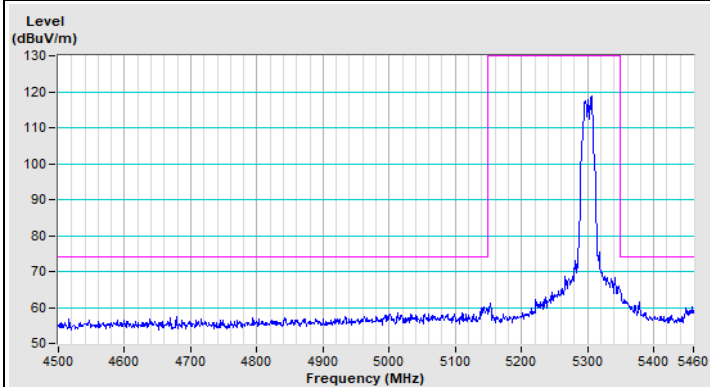


Vertical (Peak)

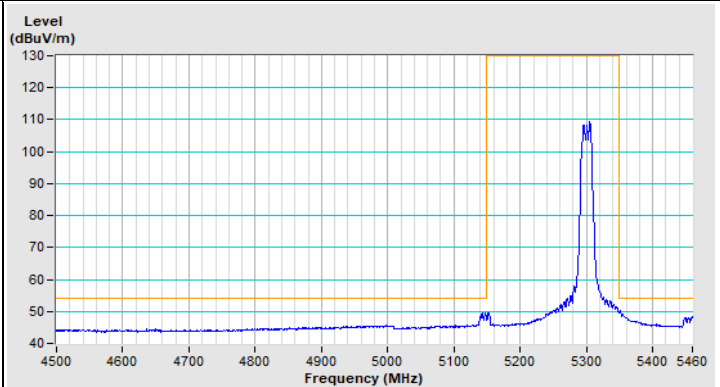


Vertical (Average)


802.11a Channel 64

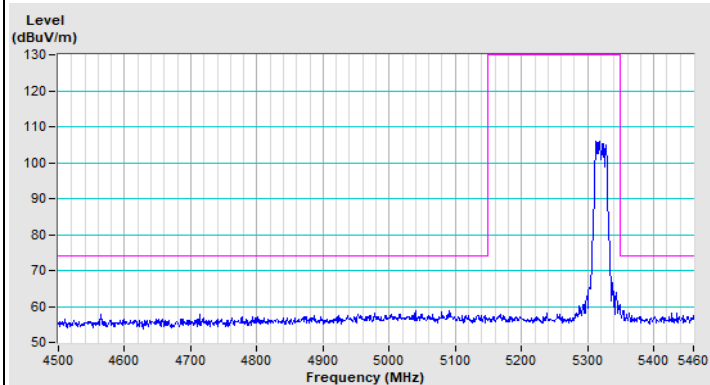


Horizontal (Peak)

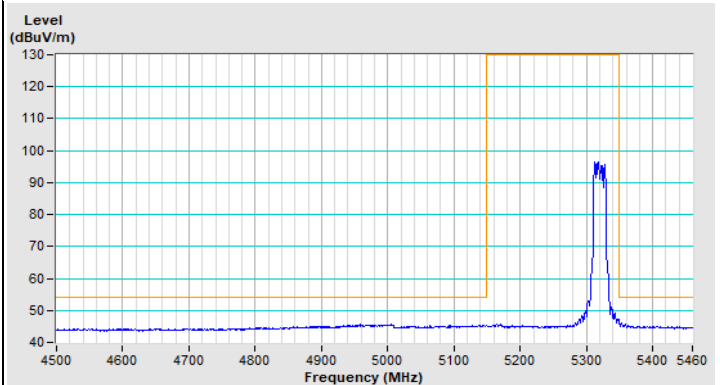

Horizontal (Average)

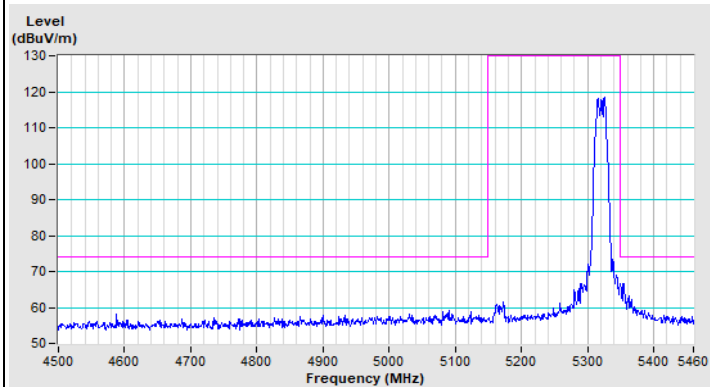


Vertical (Peak)

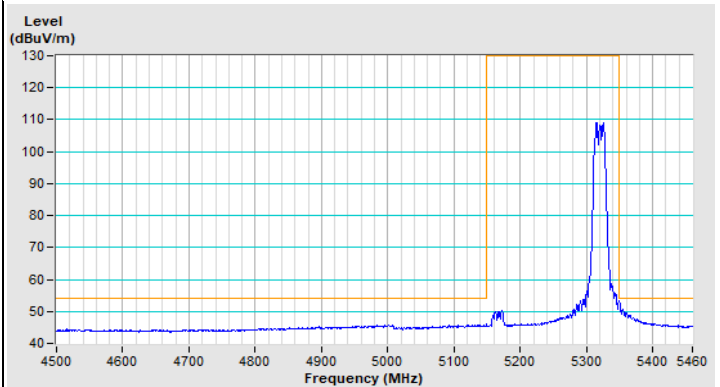


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

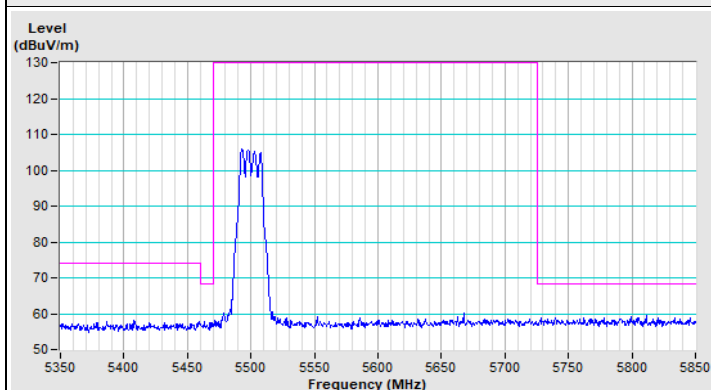


Horizontal (Peak)

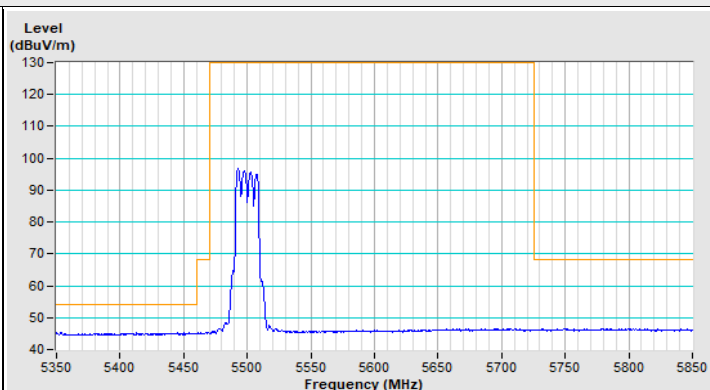

Horizontal (Average)

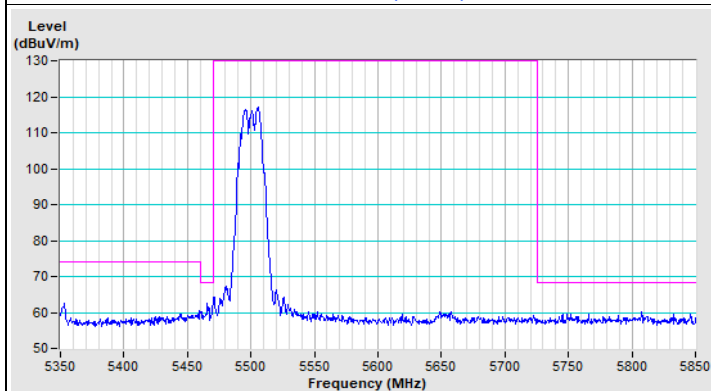


Vertical (Peak)

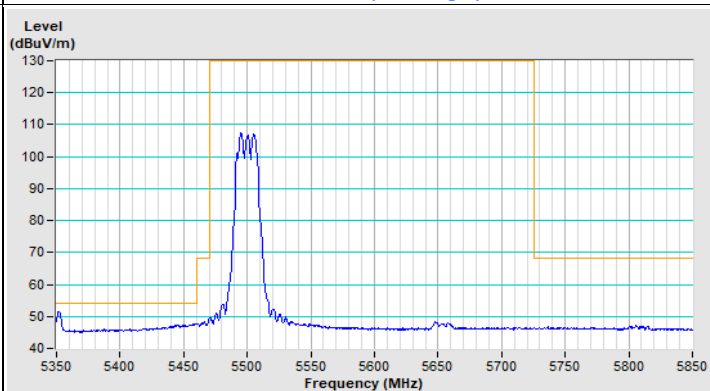


Vertical (Average)

802.11a Channel 140

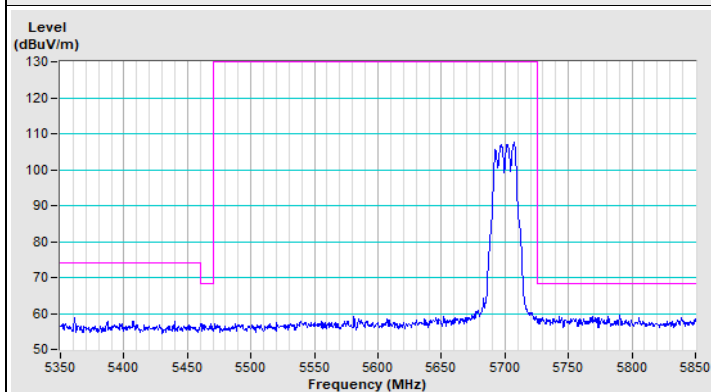


Horizontal (Peak)

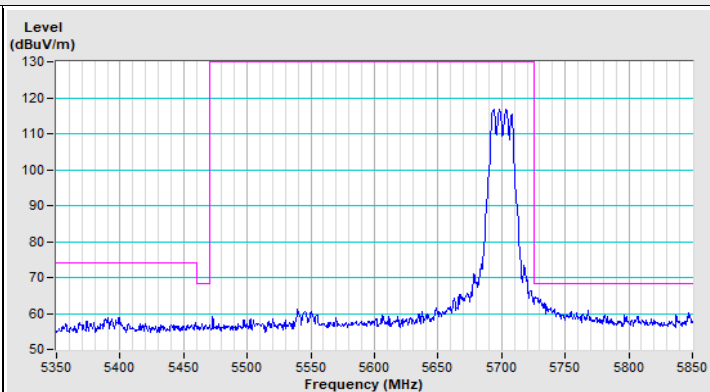

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 144




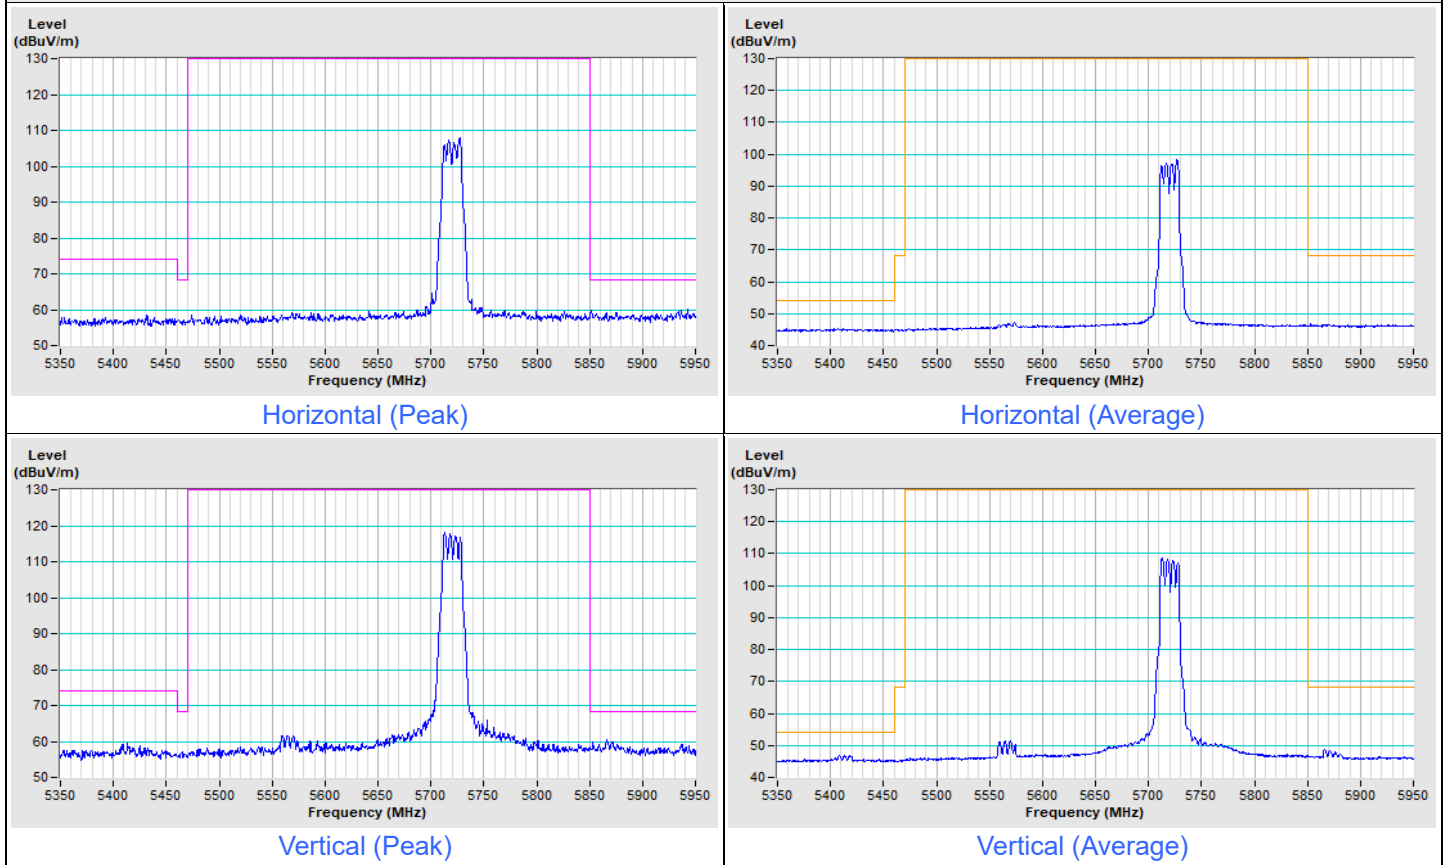


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 52

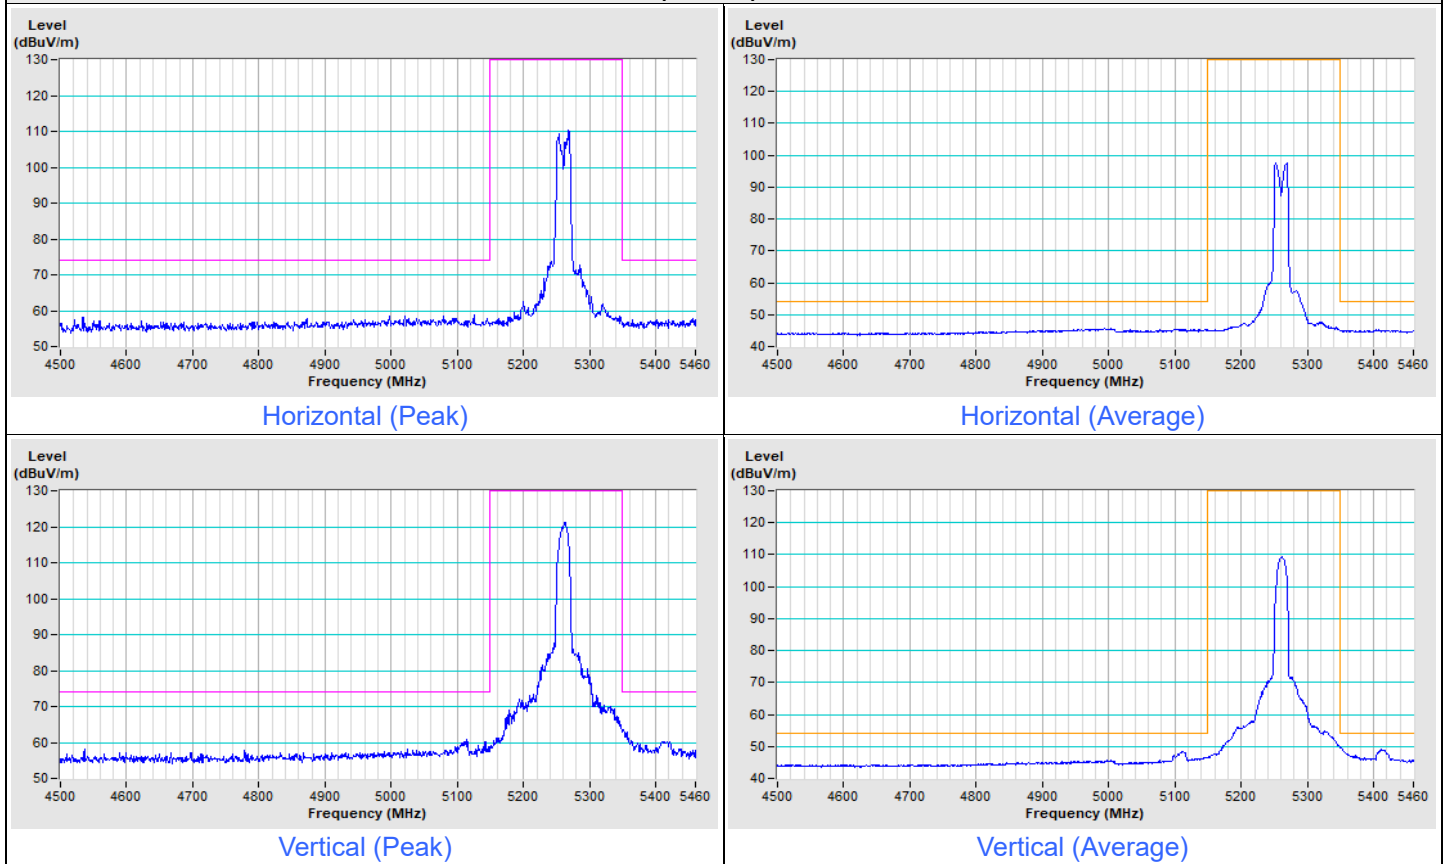

802.11be (EHT20) Channel 60

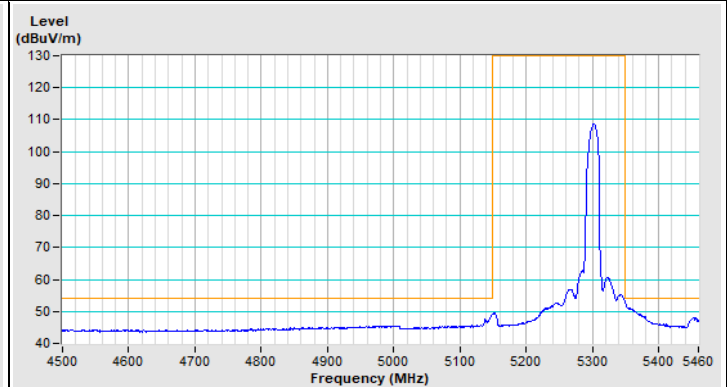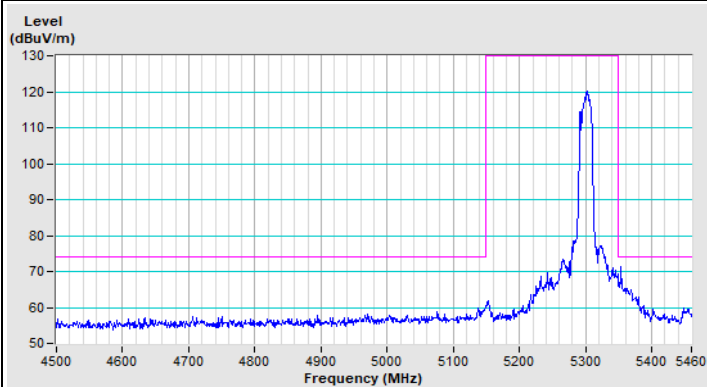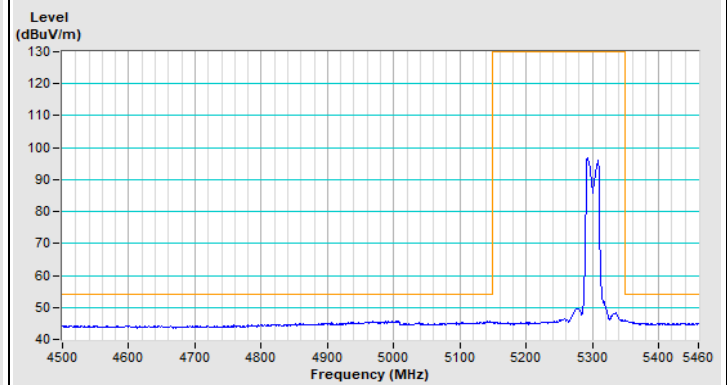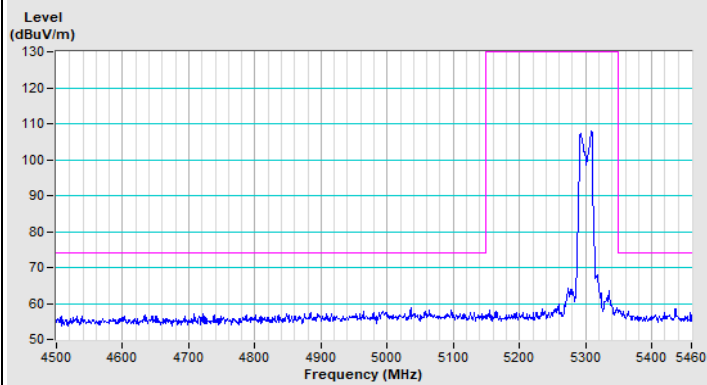


802.11be (EHT20) Channel 64

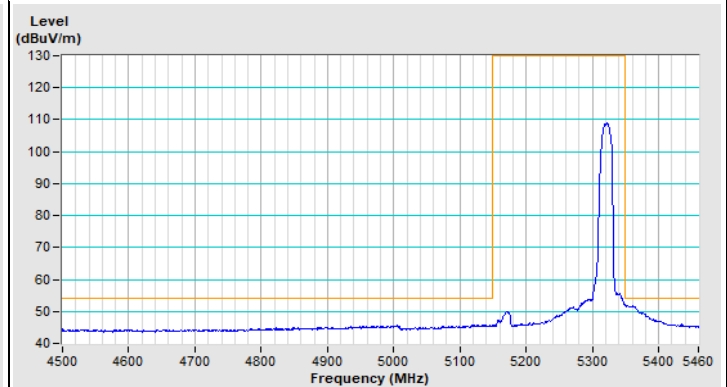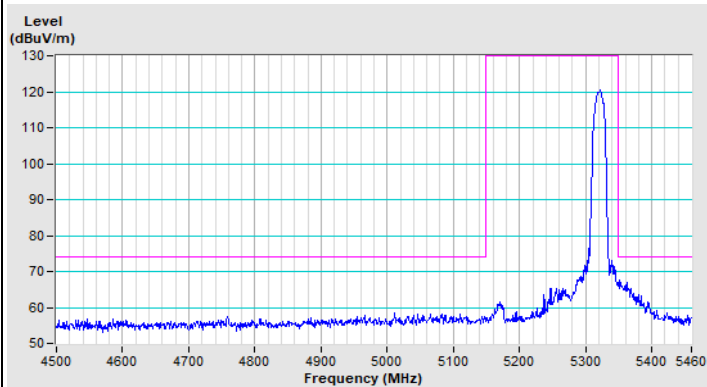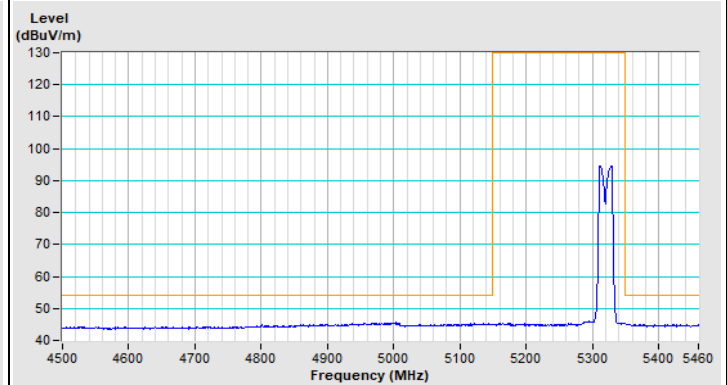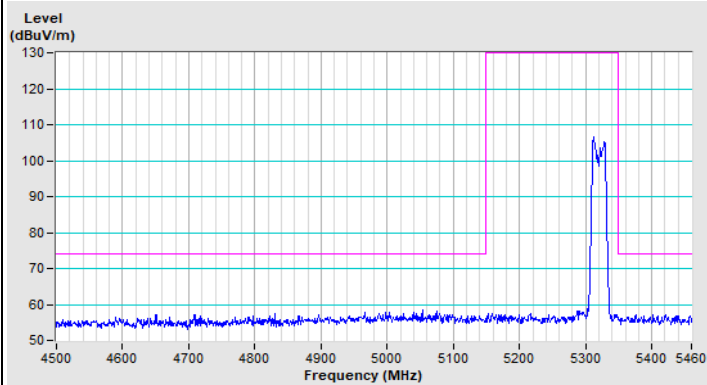


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

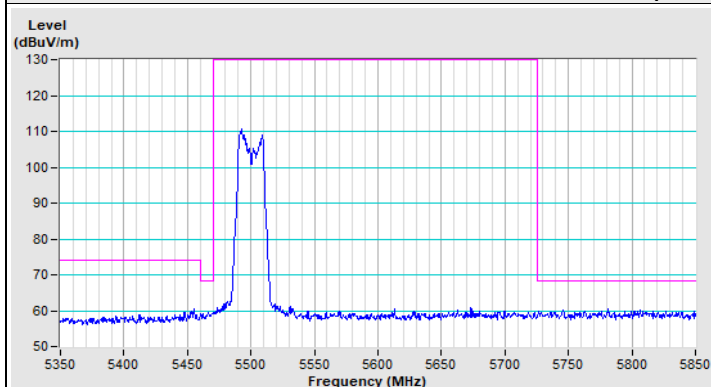


Horizontal (Peak)

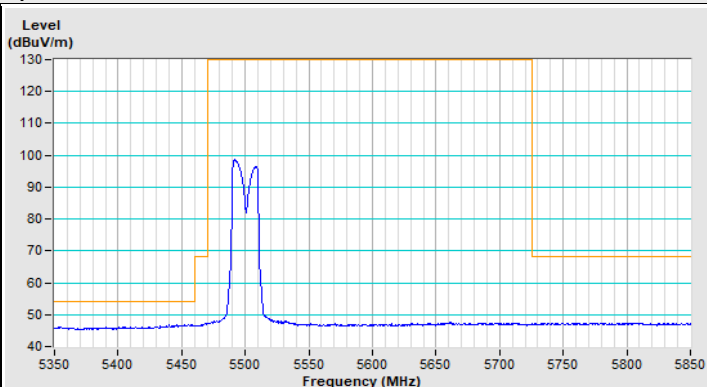

Horizontal (Average)

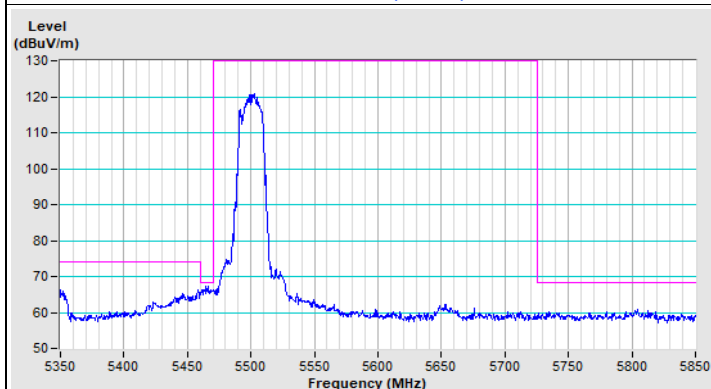


Vertical (Peak)

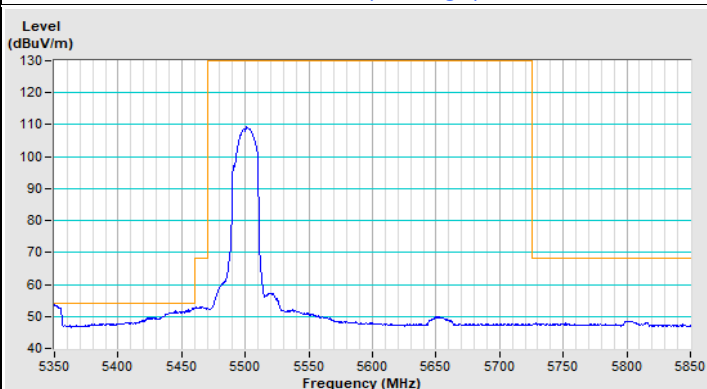


Vertical (Average)

802.11be (EHT20) Channel 140

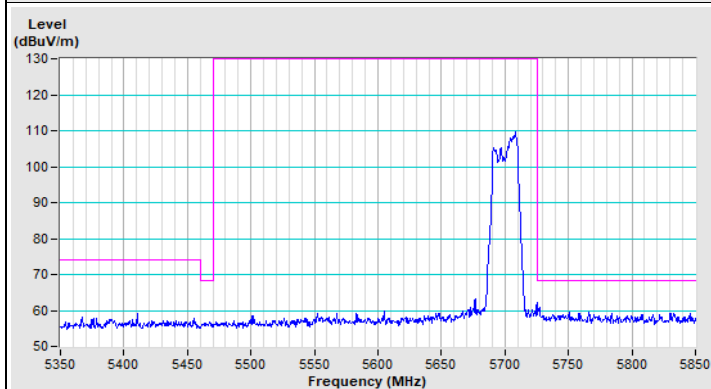


Horizontal (Peak)

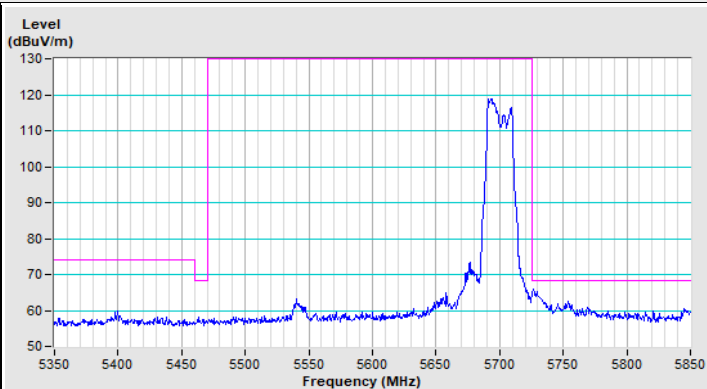

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 144

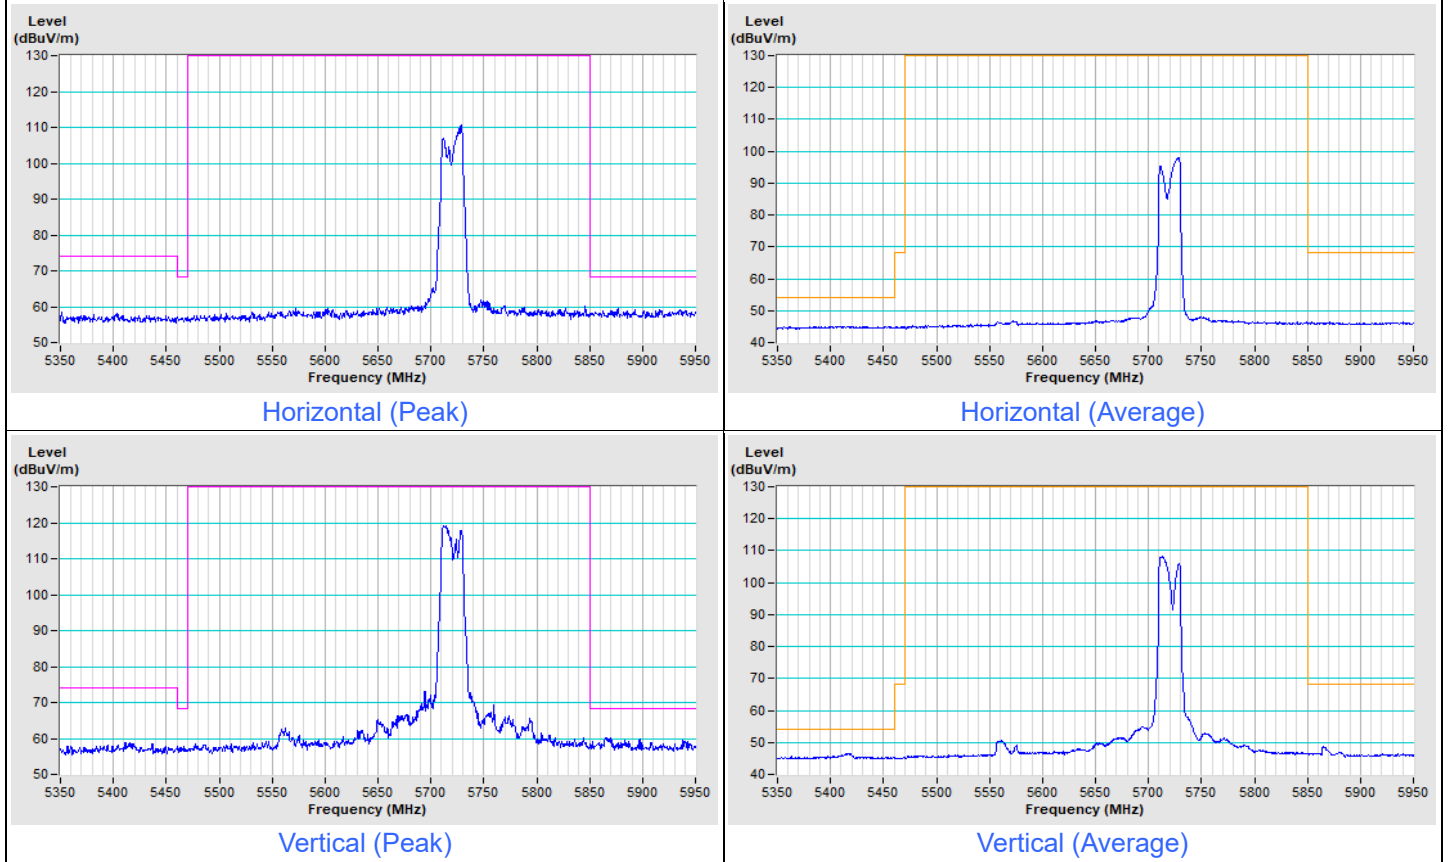


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT40) Channel 54

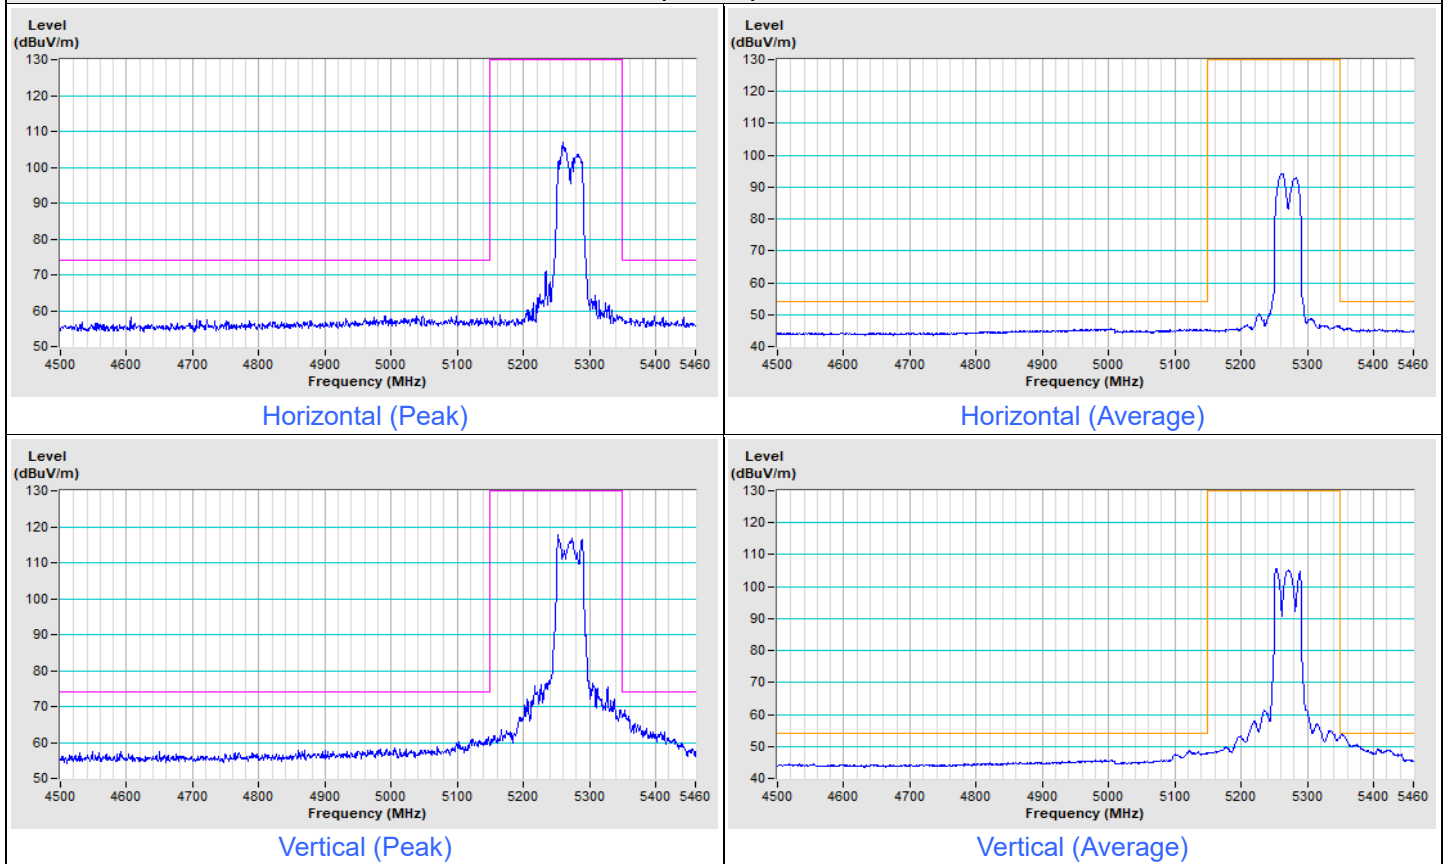


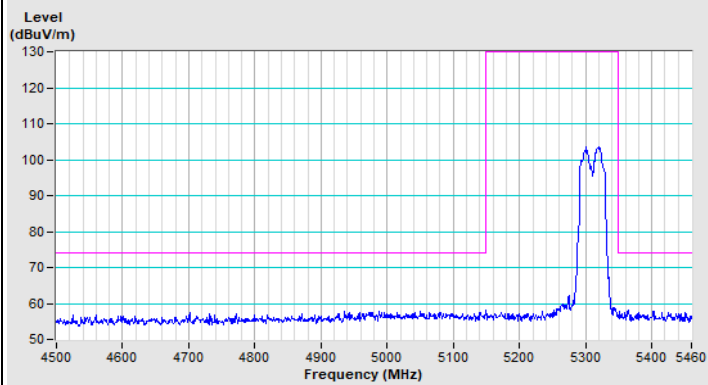802.11be (EHT40) Channel 62


Horizontal (Peak)

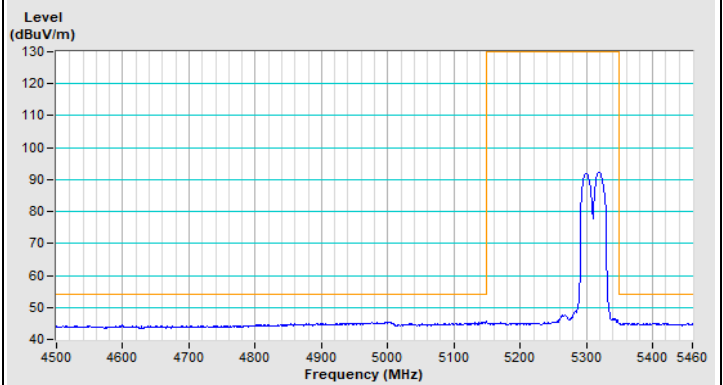

Horizontal (Average)

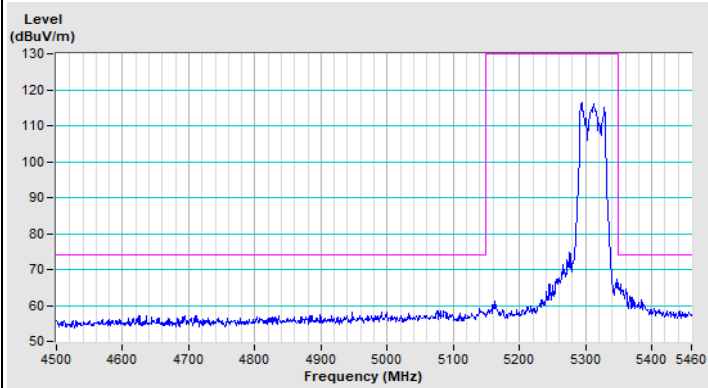





Vertical (Peak)

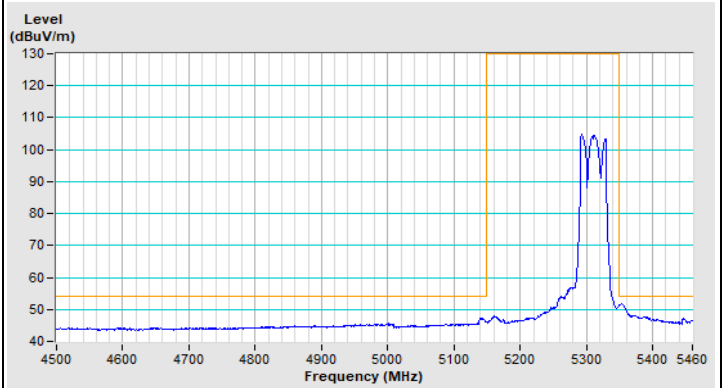



Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 102

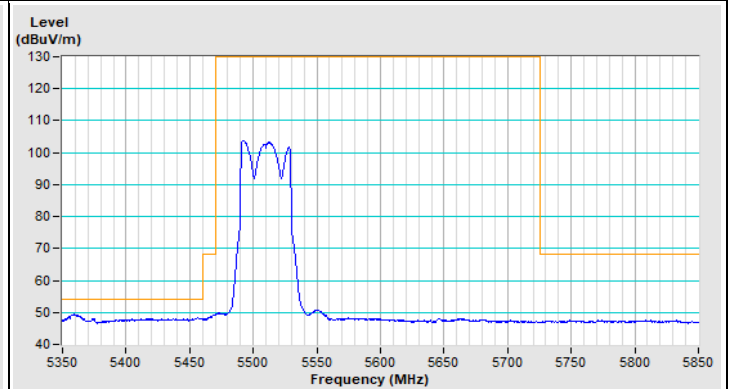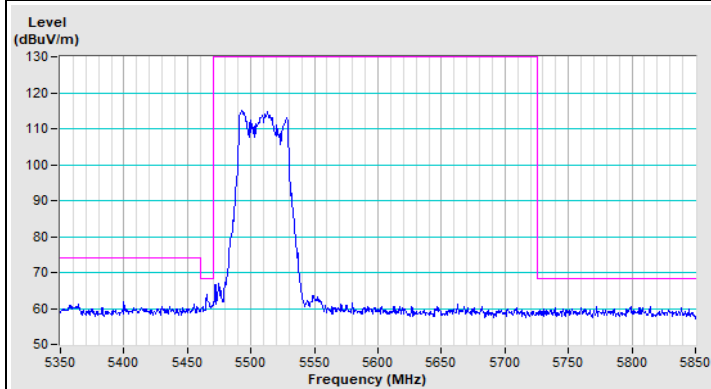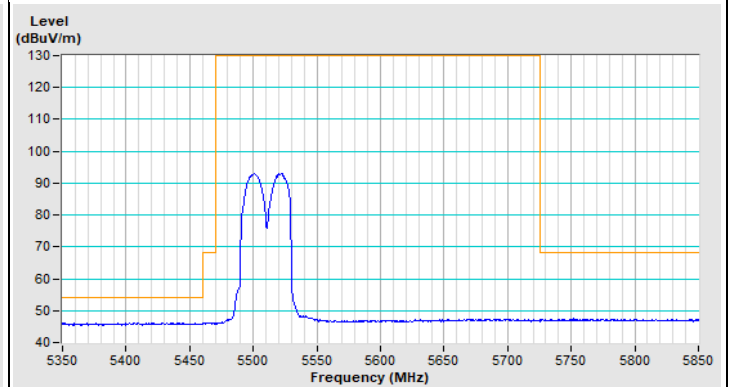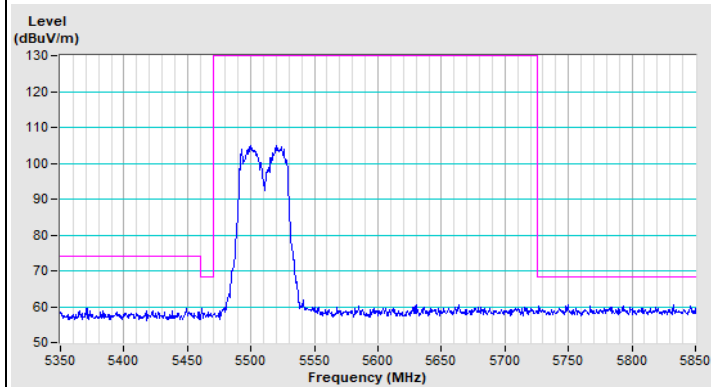


802.11be (EHT40) Channel 126

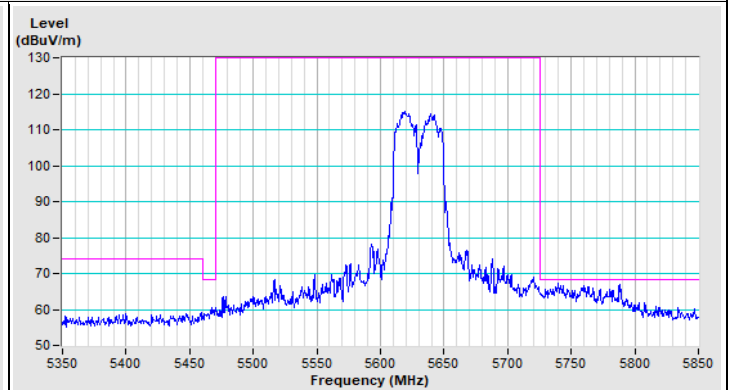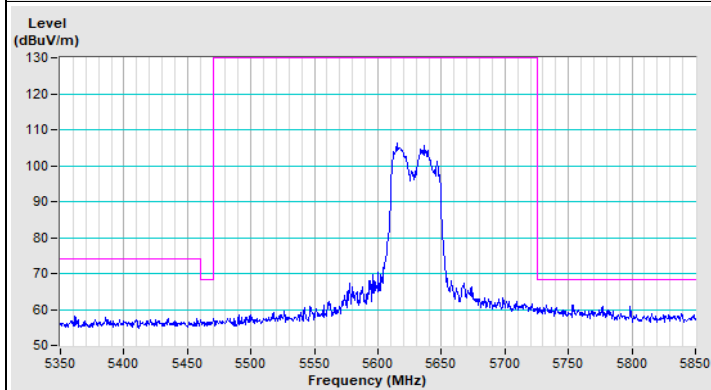


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 142

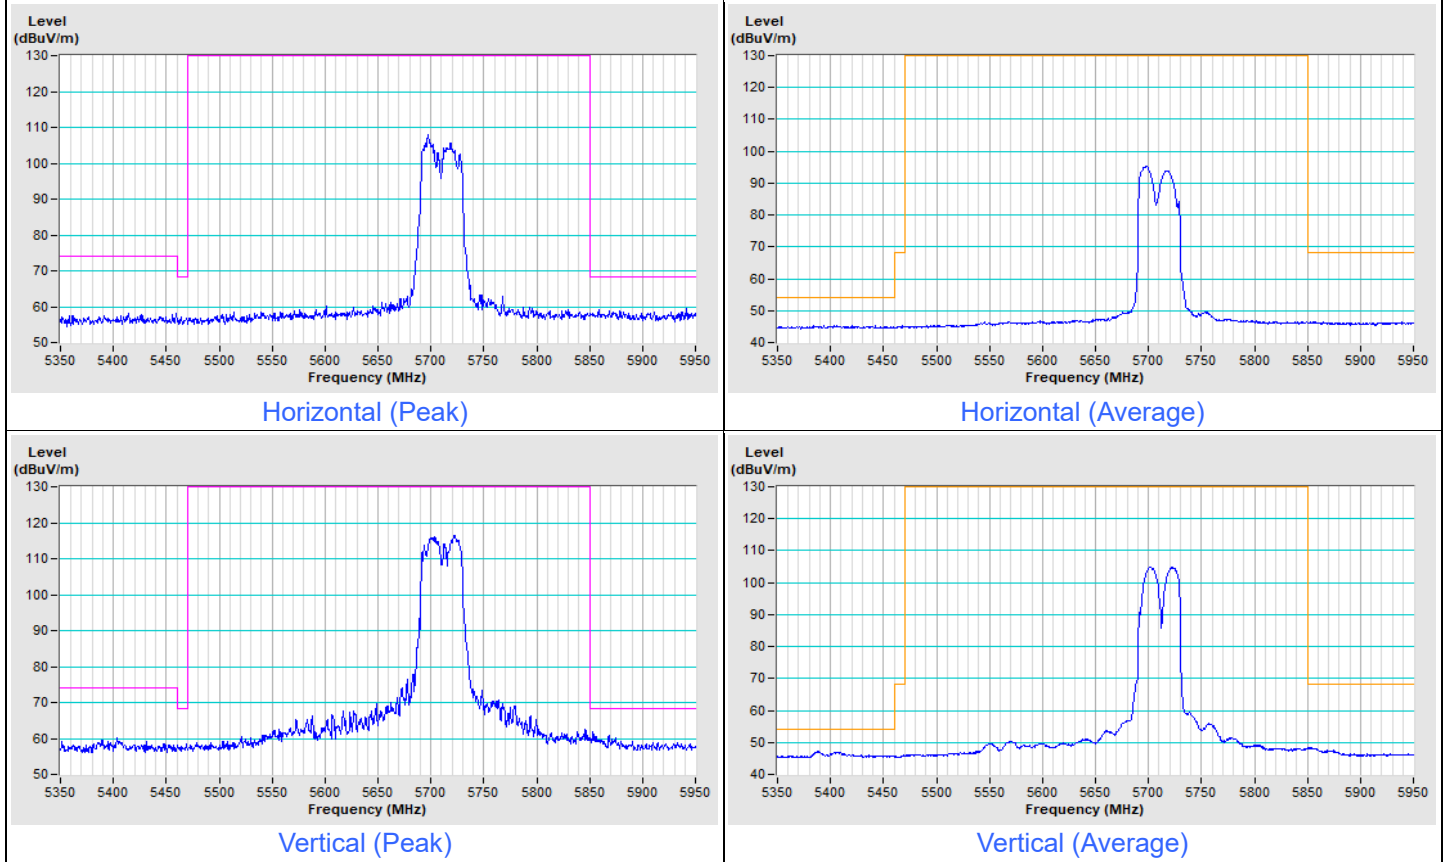


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT80) Channel 58

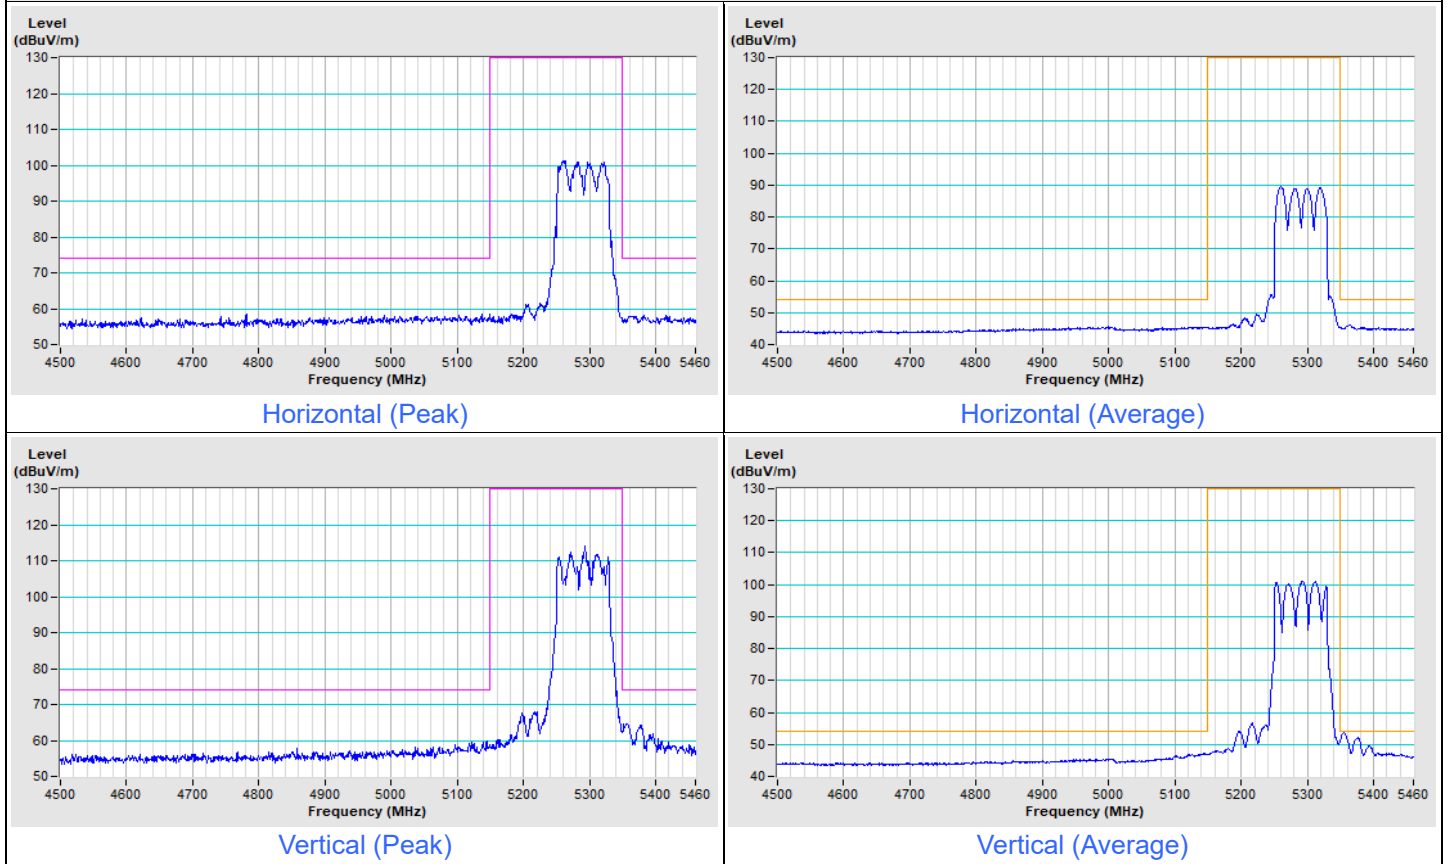


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

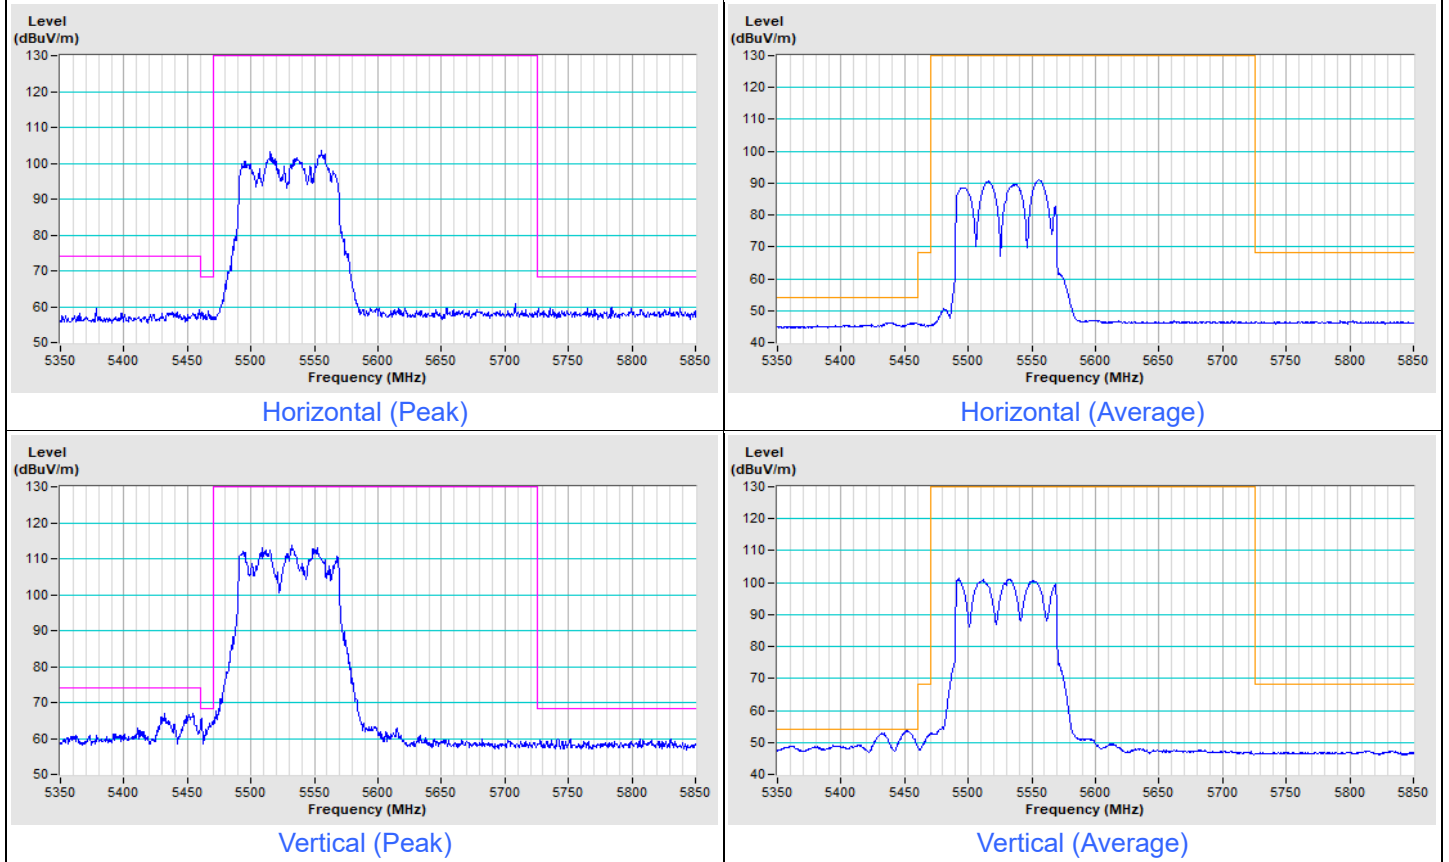


802.11be (EHT80) Channel 122

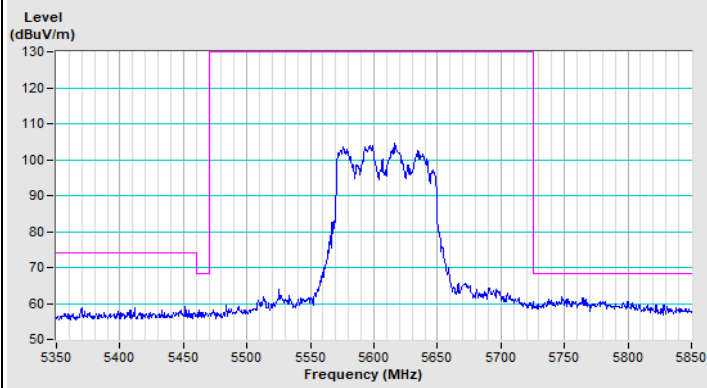


Horizontal (Peak)

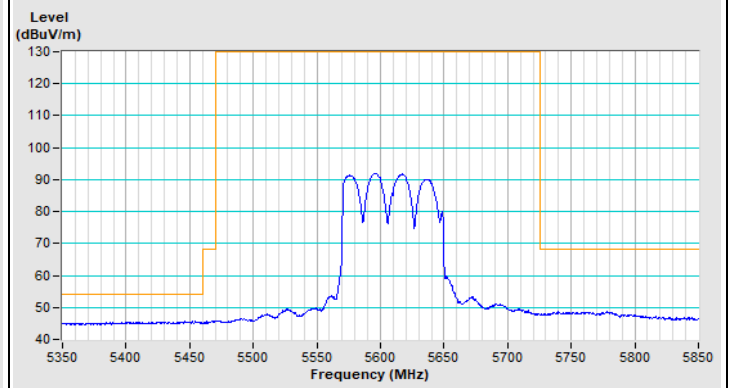

Horizontal (Average)

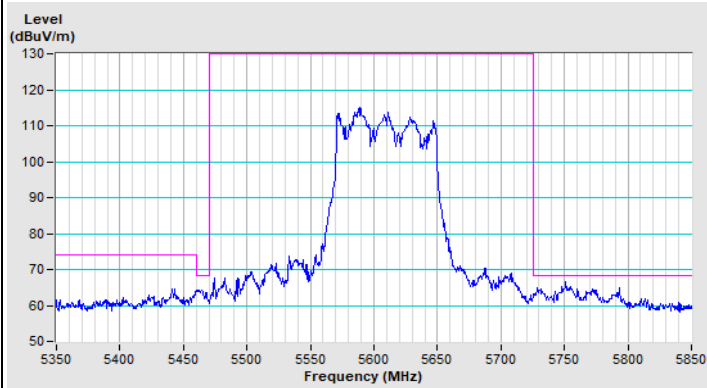


Vertical (Peak)

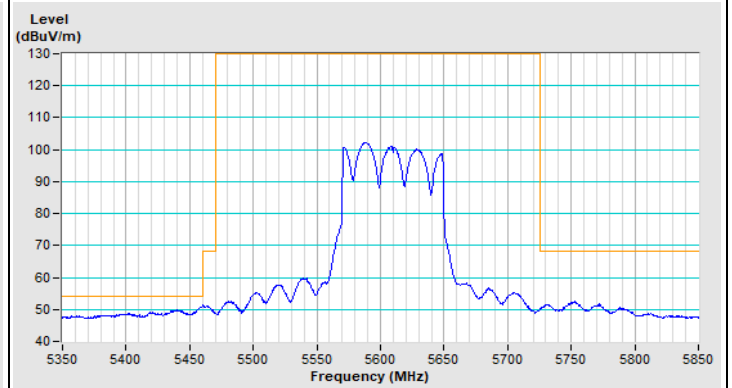

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 138

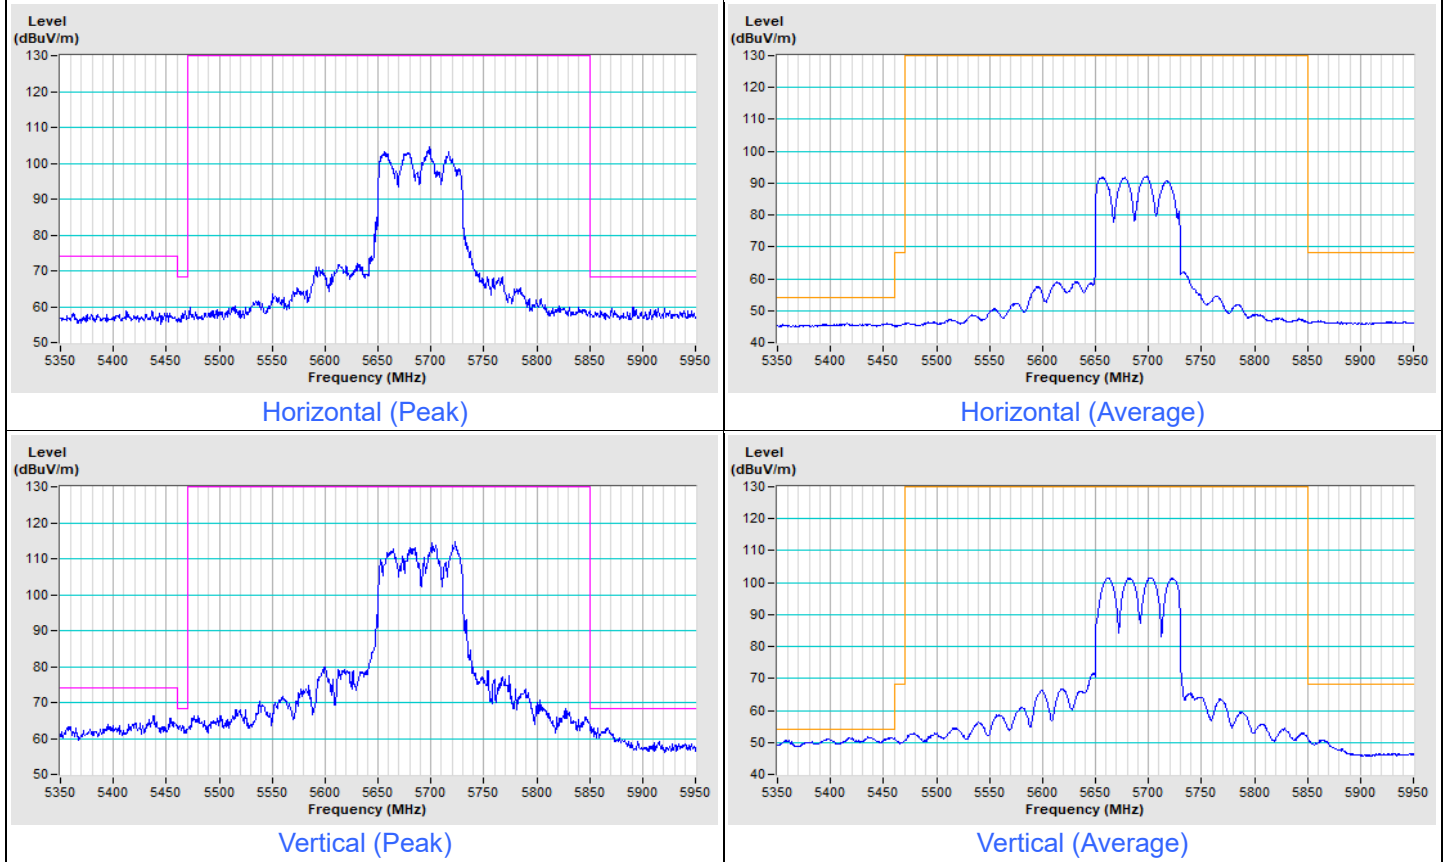


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

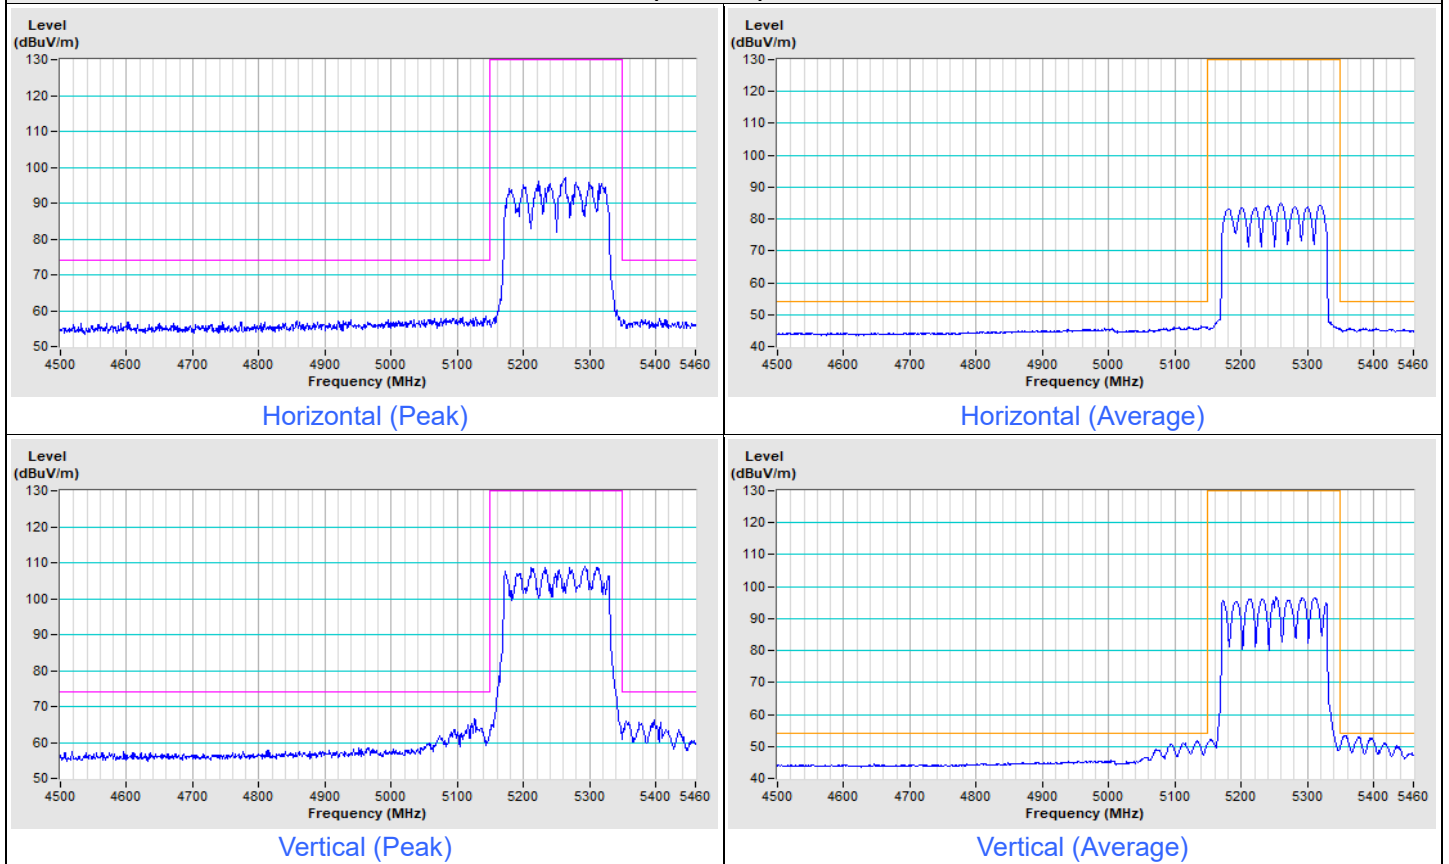

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 114

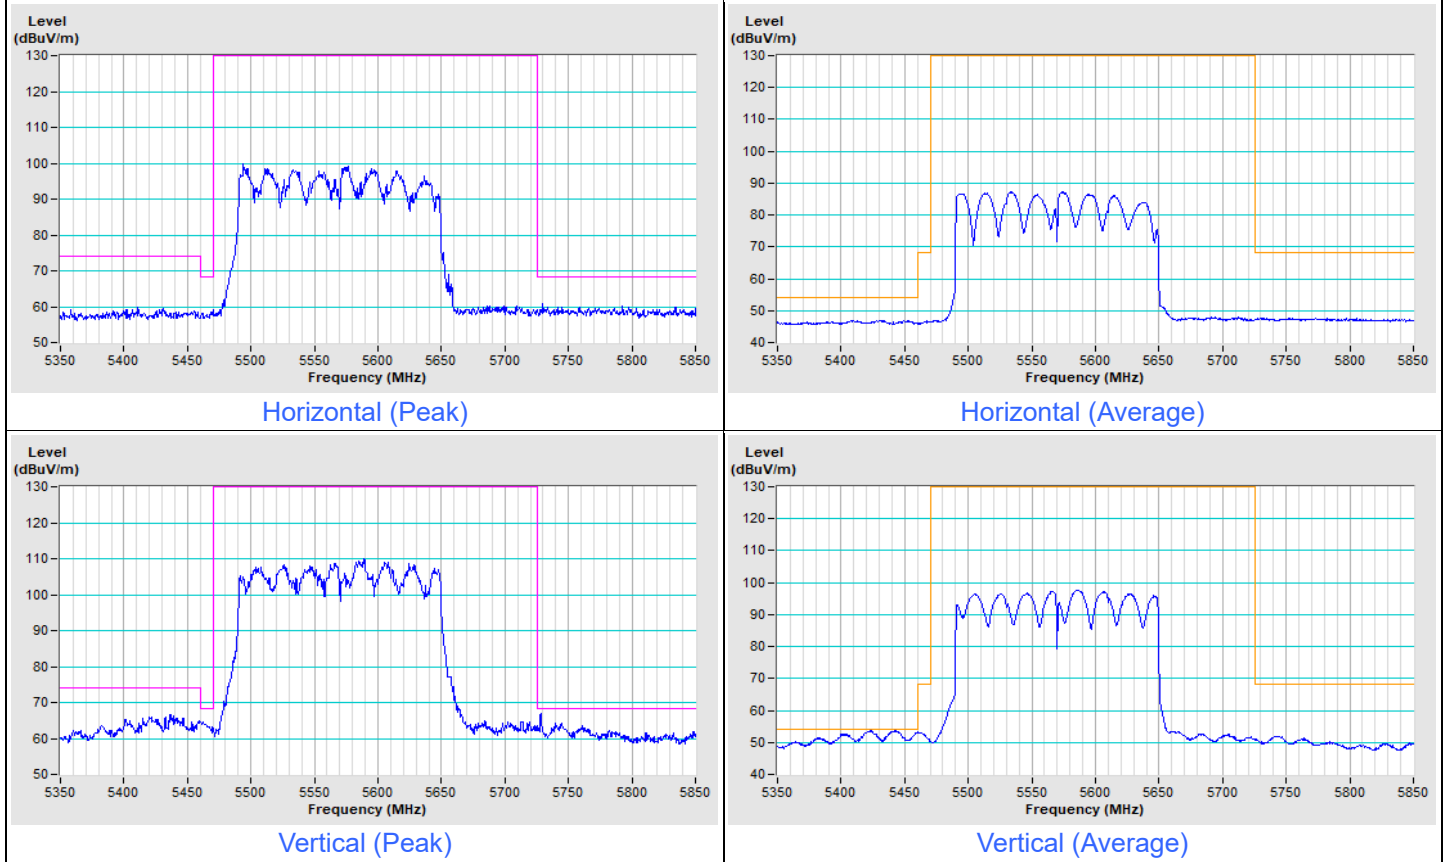


Mode C_PIFA Ant.

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 52

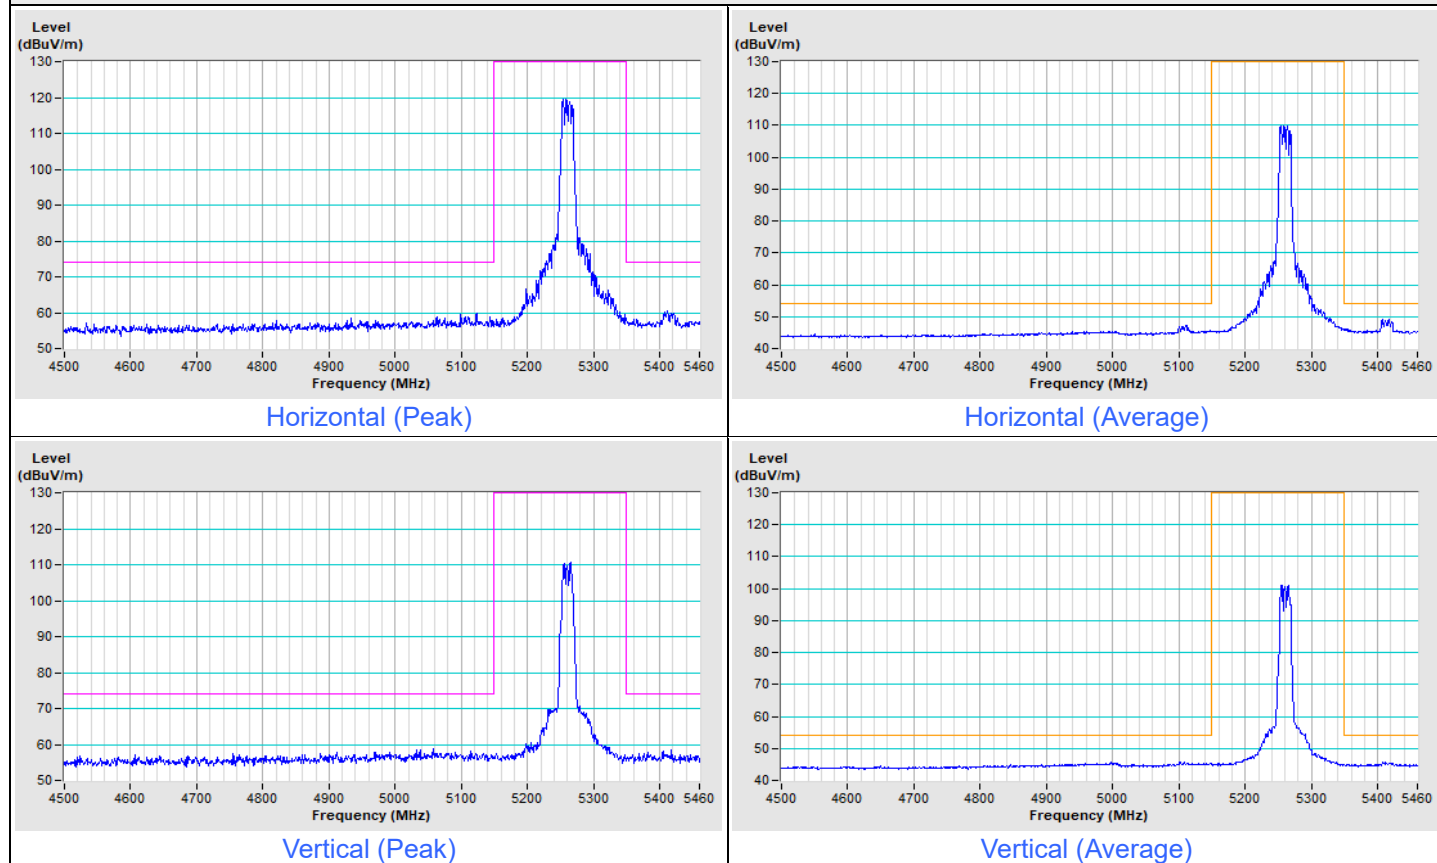


802.11a Channel 60

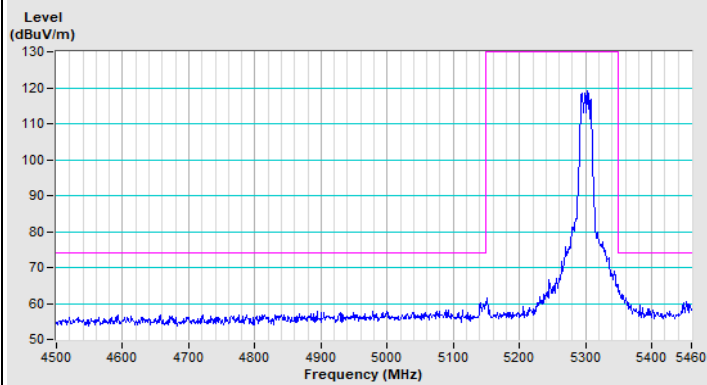


Horizontal (Peak)

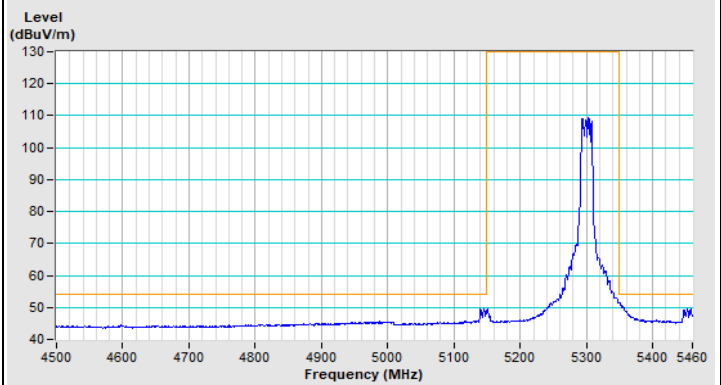

Horizontal (Average)

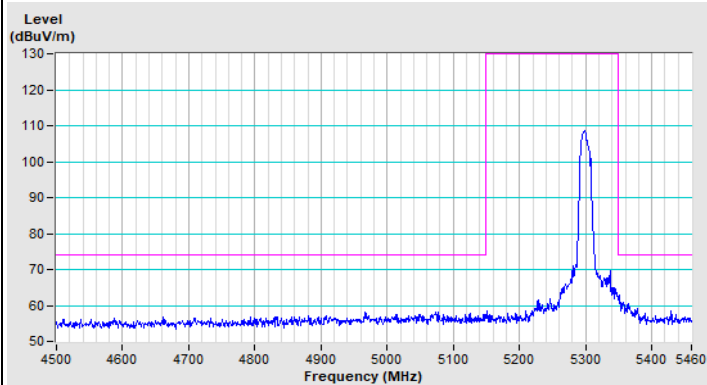


Vertical (Peak)

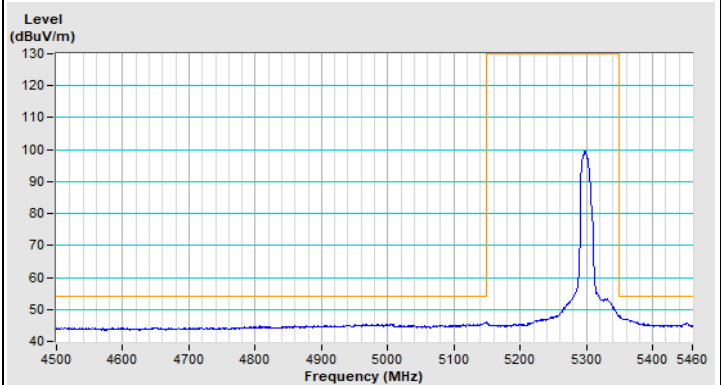


Vertical (Average)


802.11a Channel 64

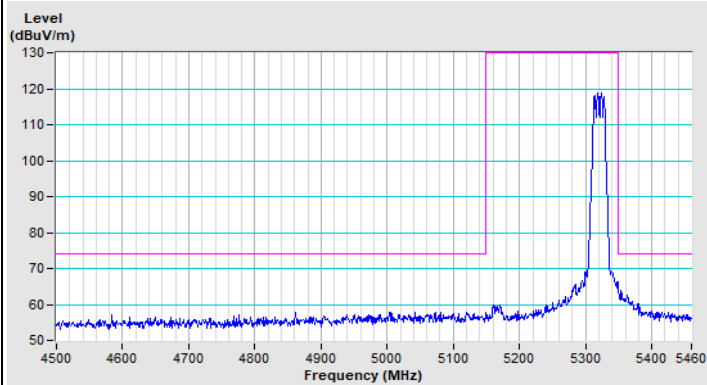


Horizontal (Peak)

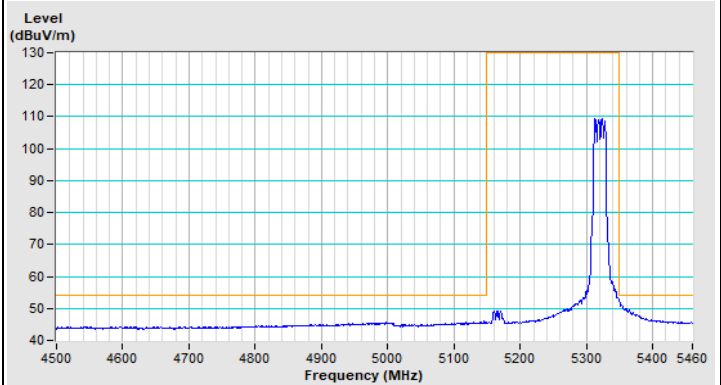

Horizontal (Average)

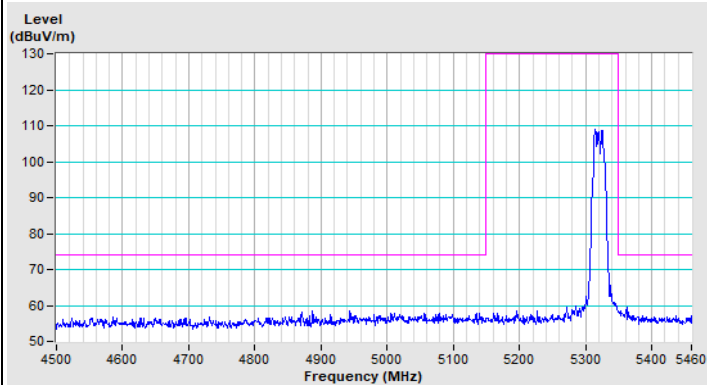


Vertical (Peak)

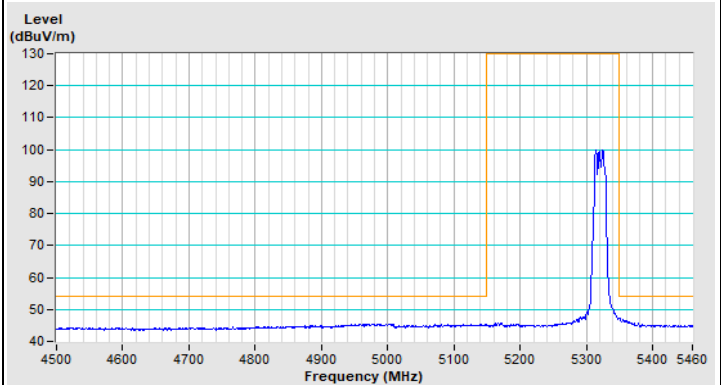


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

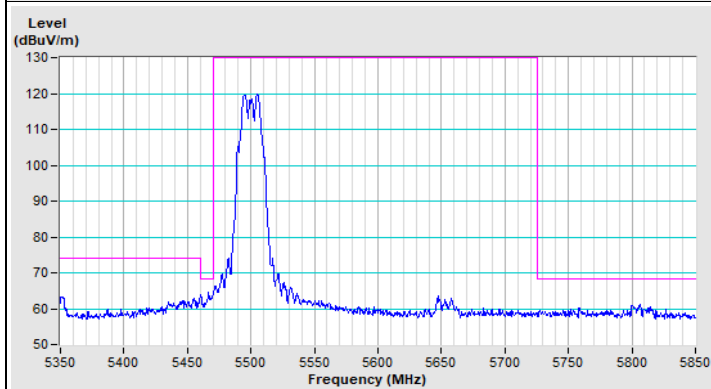


Horizontal (Peak)

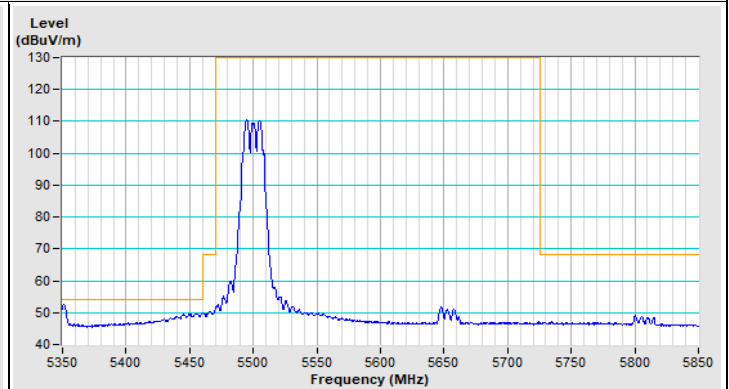

Horizontal (Average)

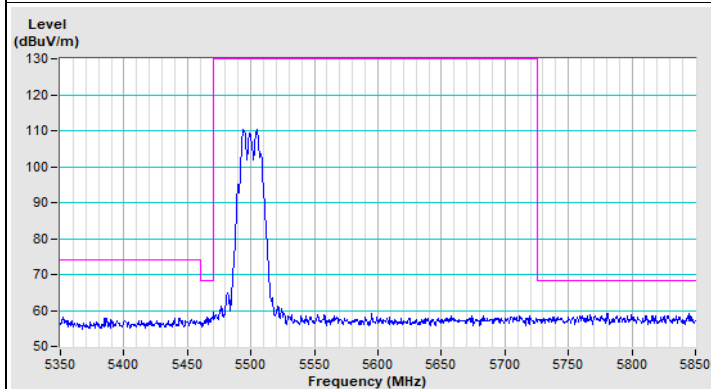


Vertical (Peak)

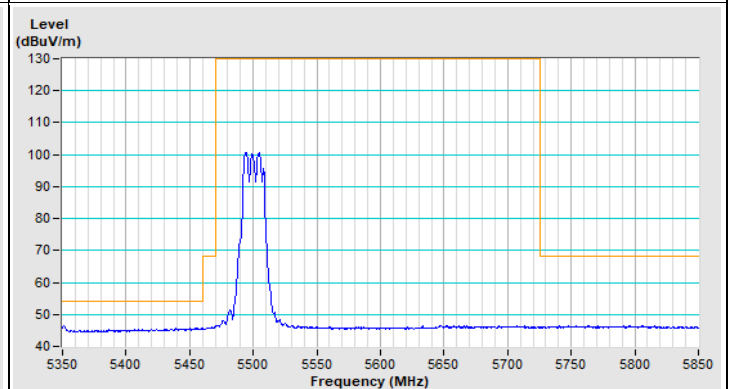


Vertical (Average)

802.11a Channel 140

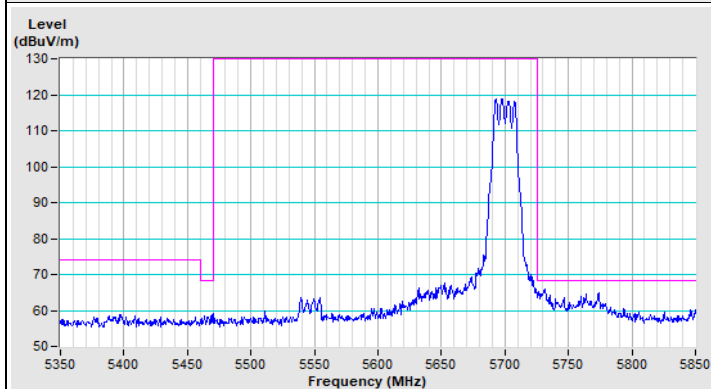


Horizontal (Peak)

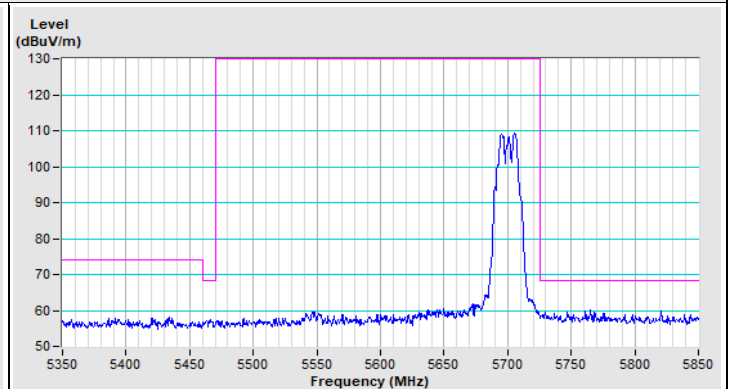

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 144

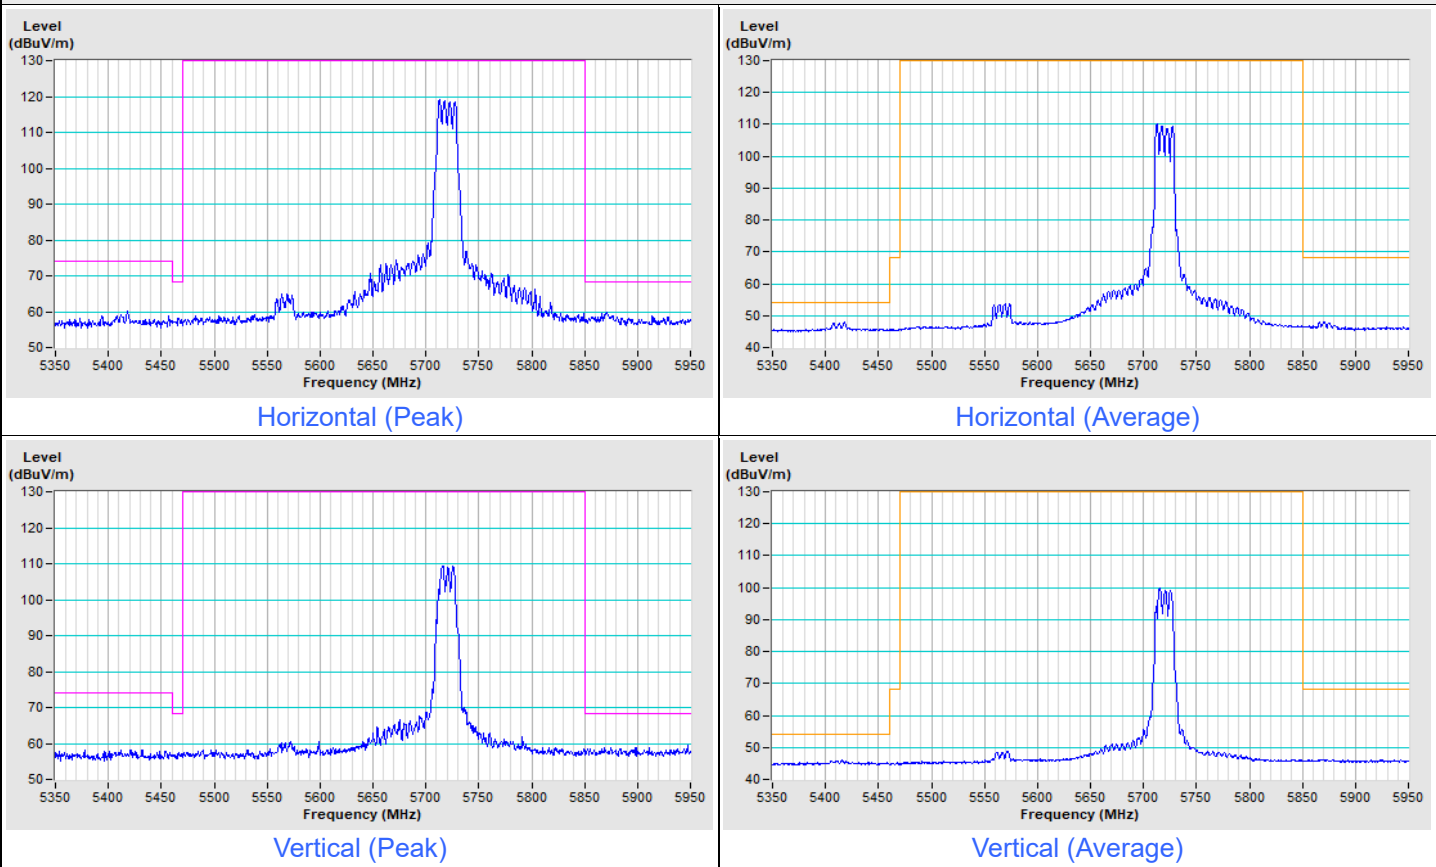


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 52

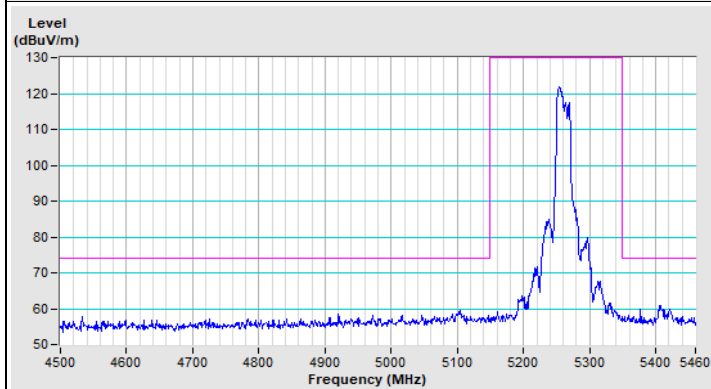


Horizontal (Peak)

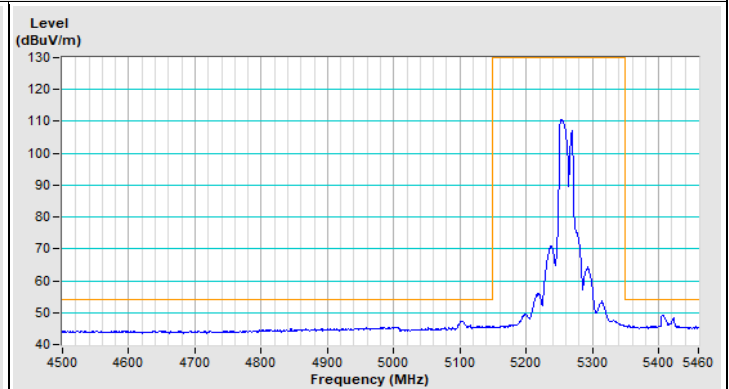

Horizontal (Average)




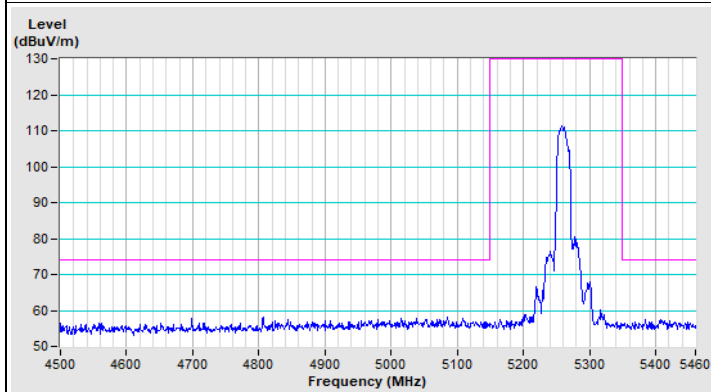


Vertical (Peak)




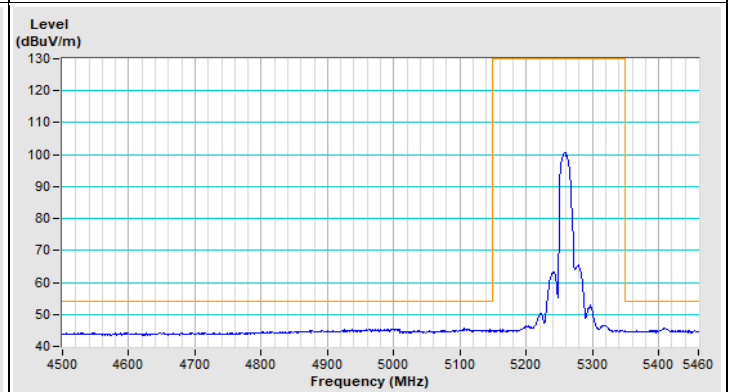


Vertical (Average)

802.11be (EHT20) Channel 60

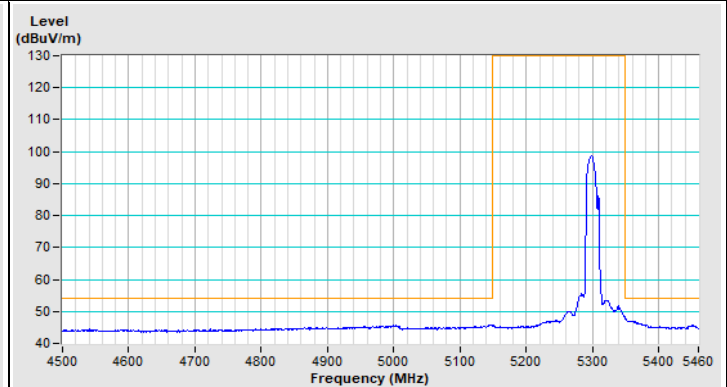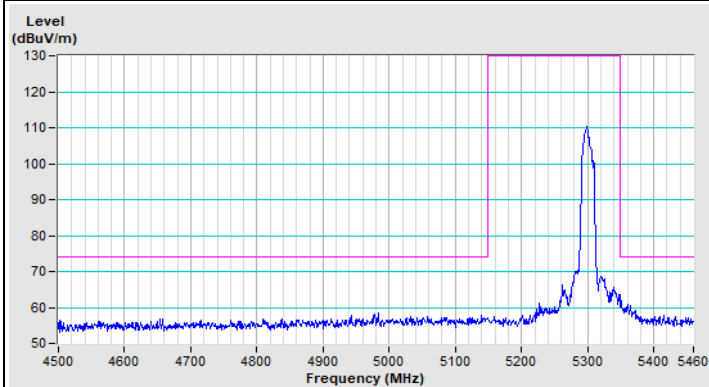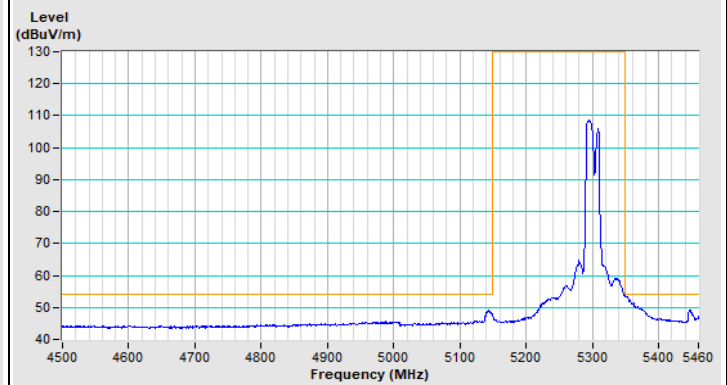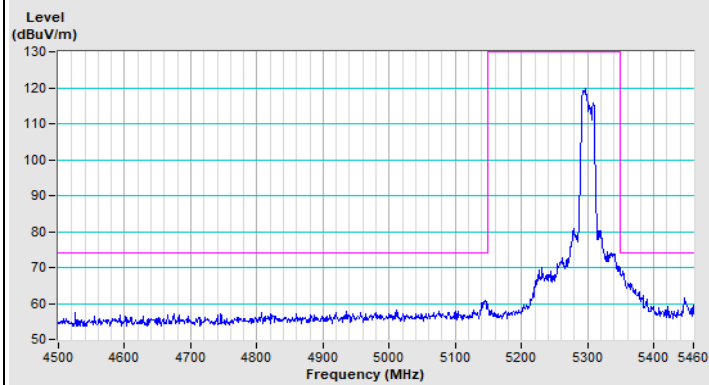


802.11be (EHT20) Channel 64

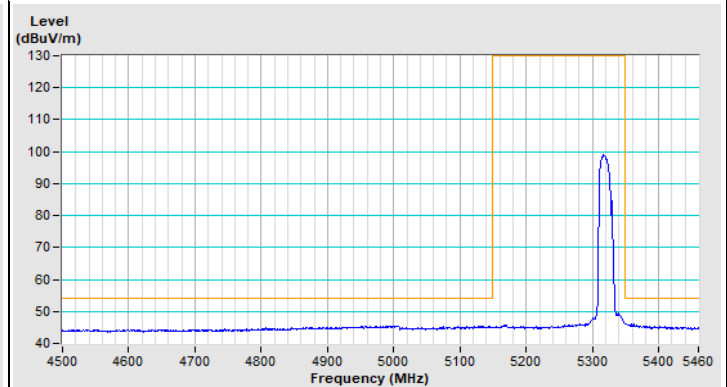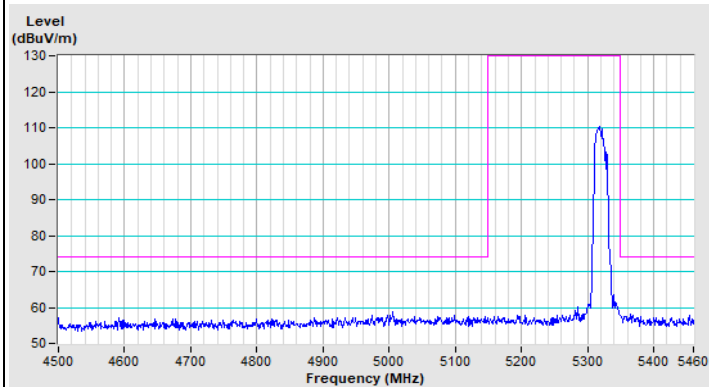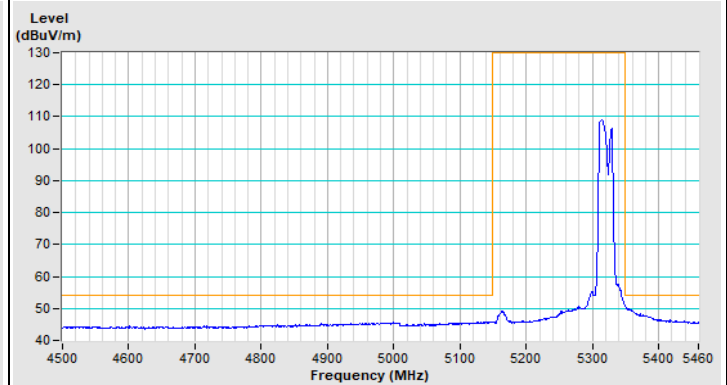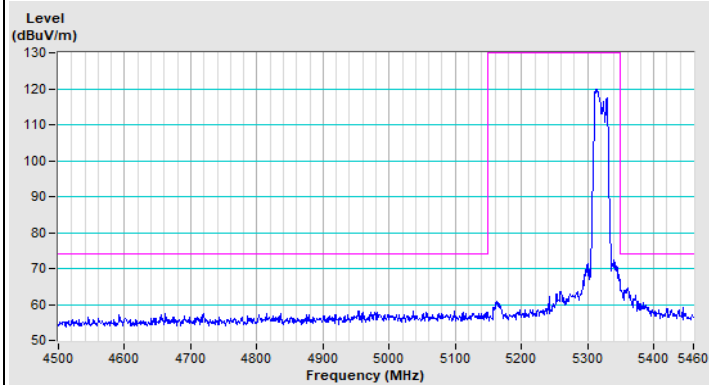


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

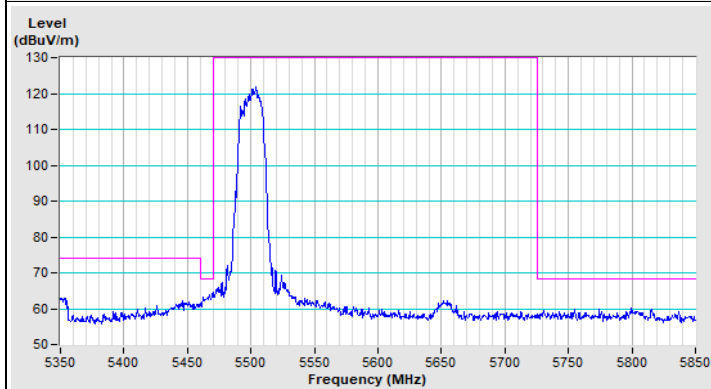


Horizontal (Peak)

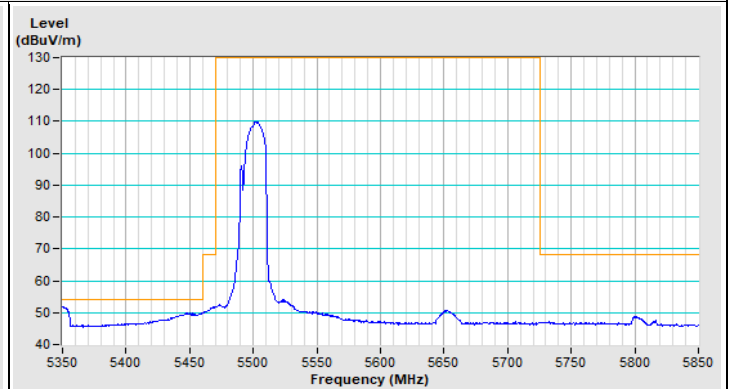

Horizontal (Average)

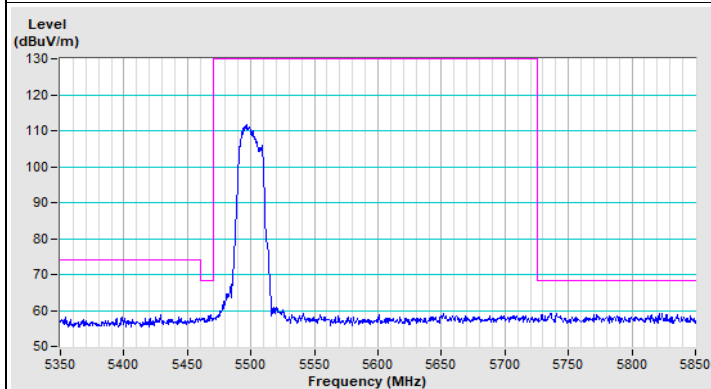


Vertical (Peak)

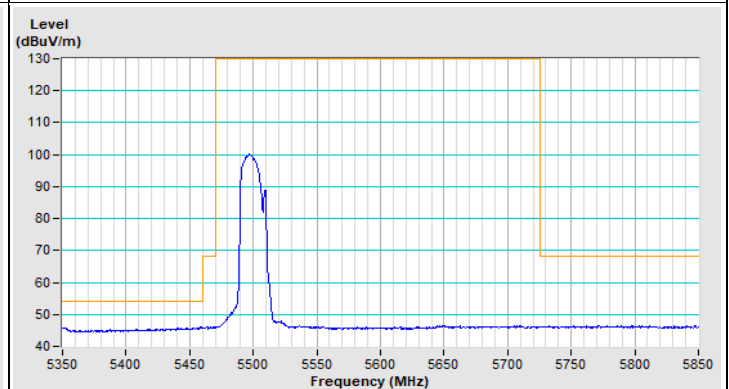


Vertical (Average)

802.11be (EHT20) Channel 140

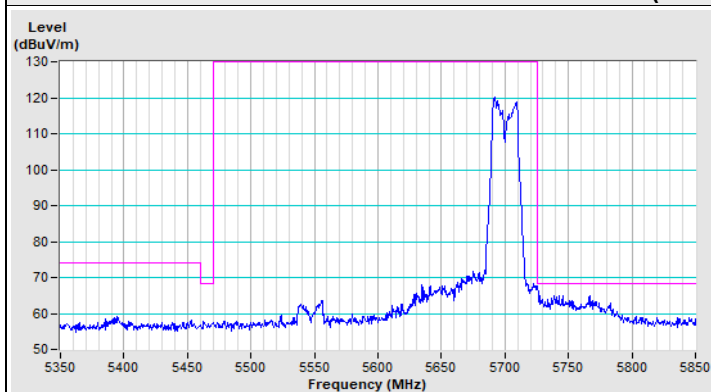


Horizontal (Peak)

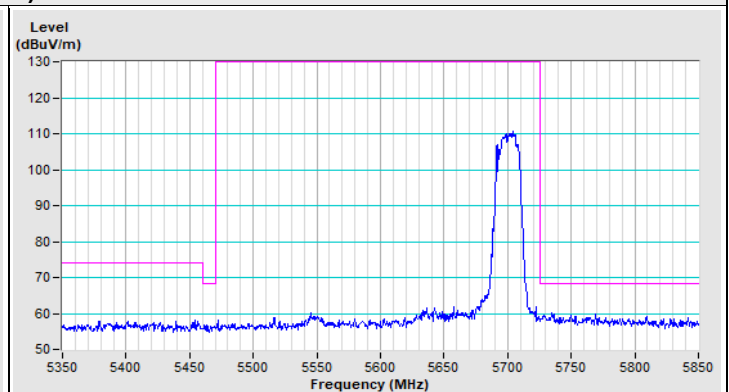

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 144

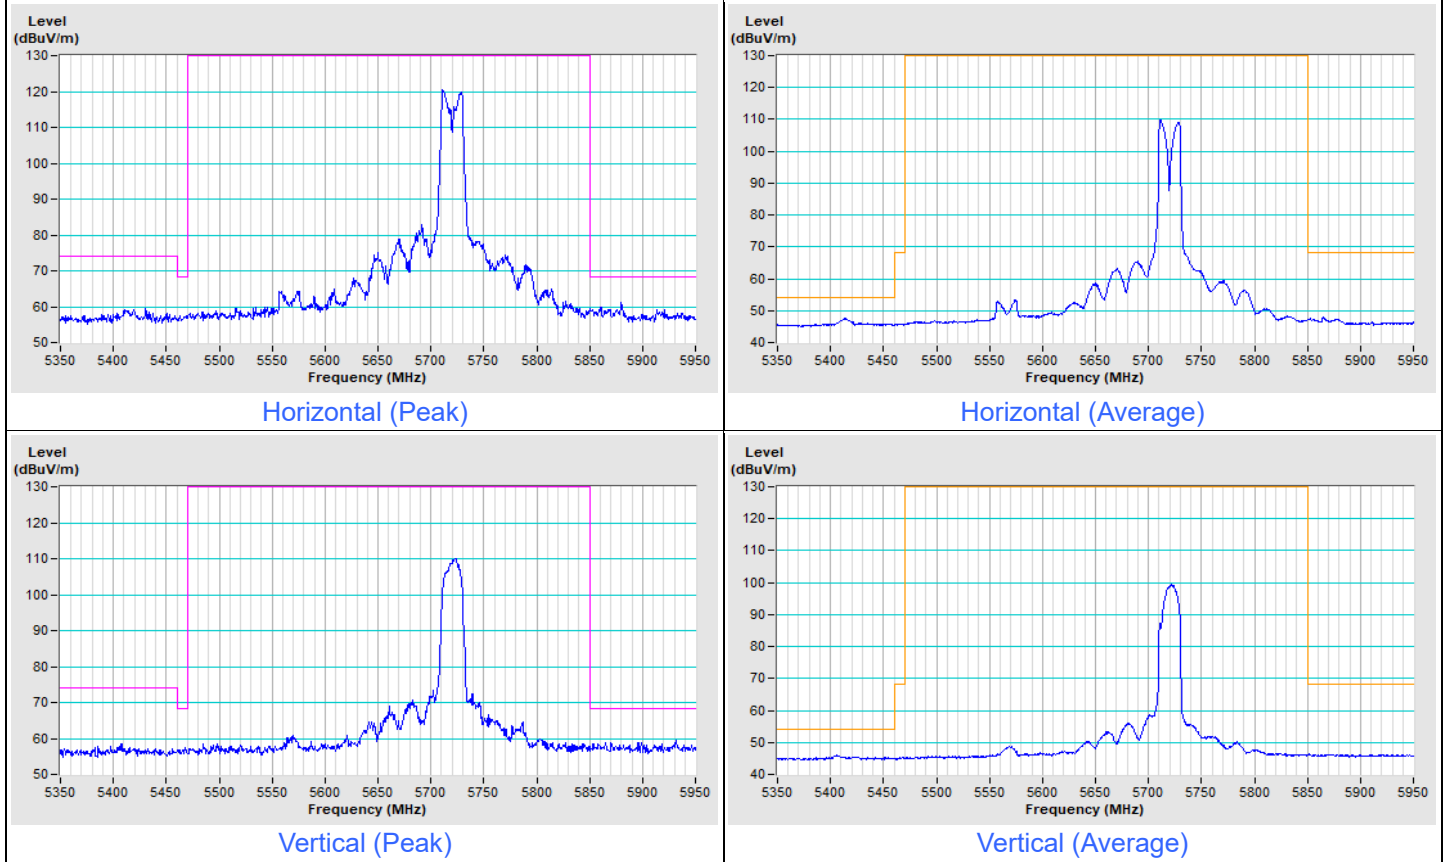


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 54

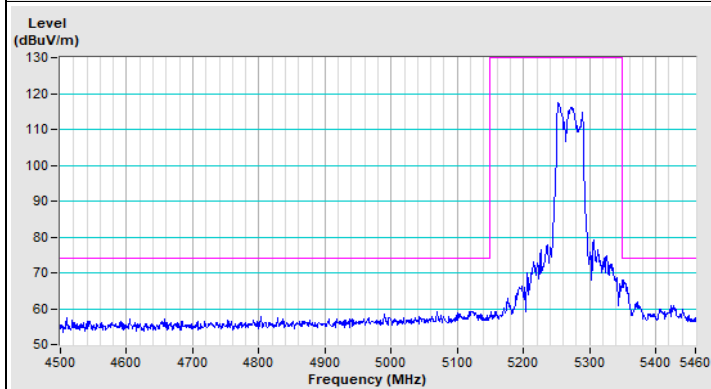


Horizontal (Peak)

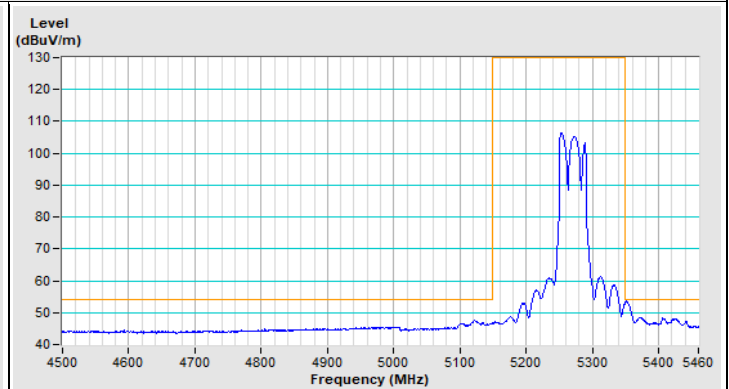


Horizontal (Average)

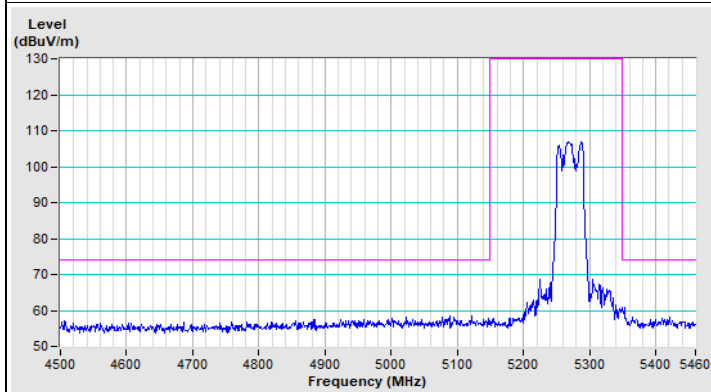


Vertical (Peak)

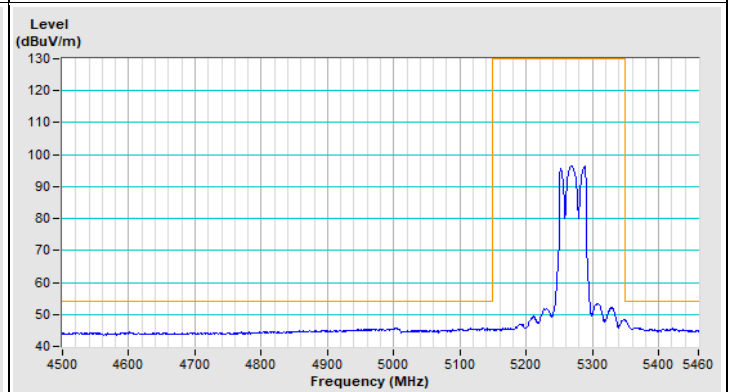


Vertical (Average)

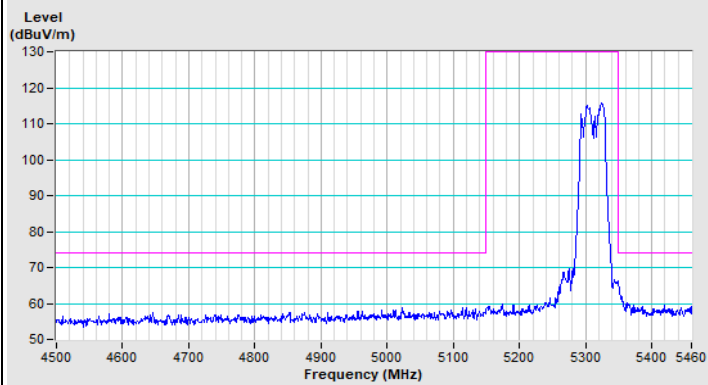802.11be (EHT40) Channel 62


Horizontal (Peak)

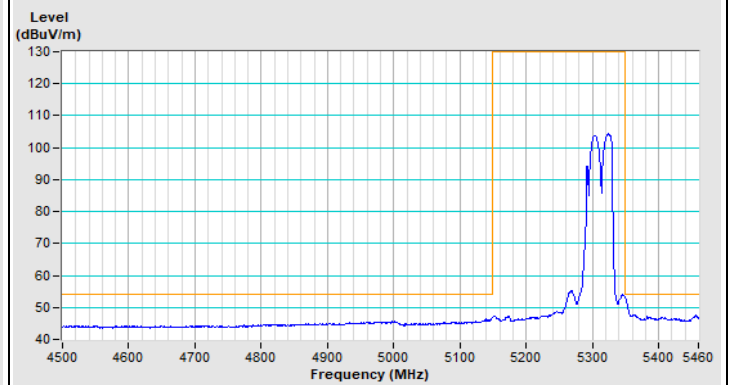

Horizontal (Average)

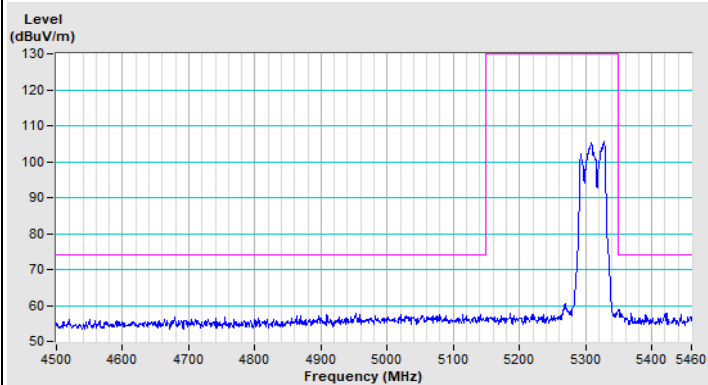


Vertical (Peak)

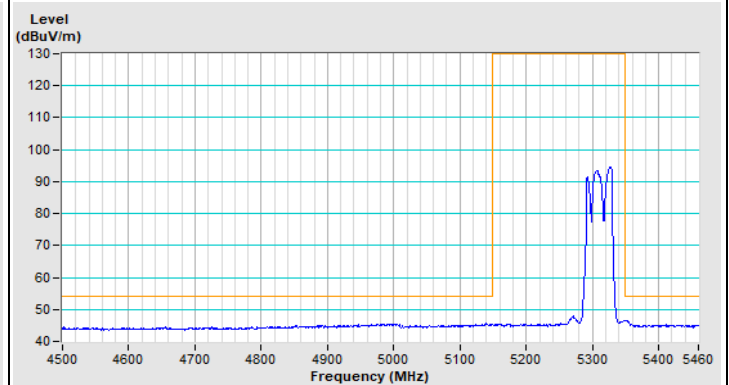





Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--



802.11be (EHT40) Channel 102

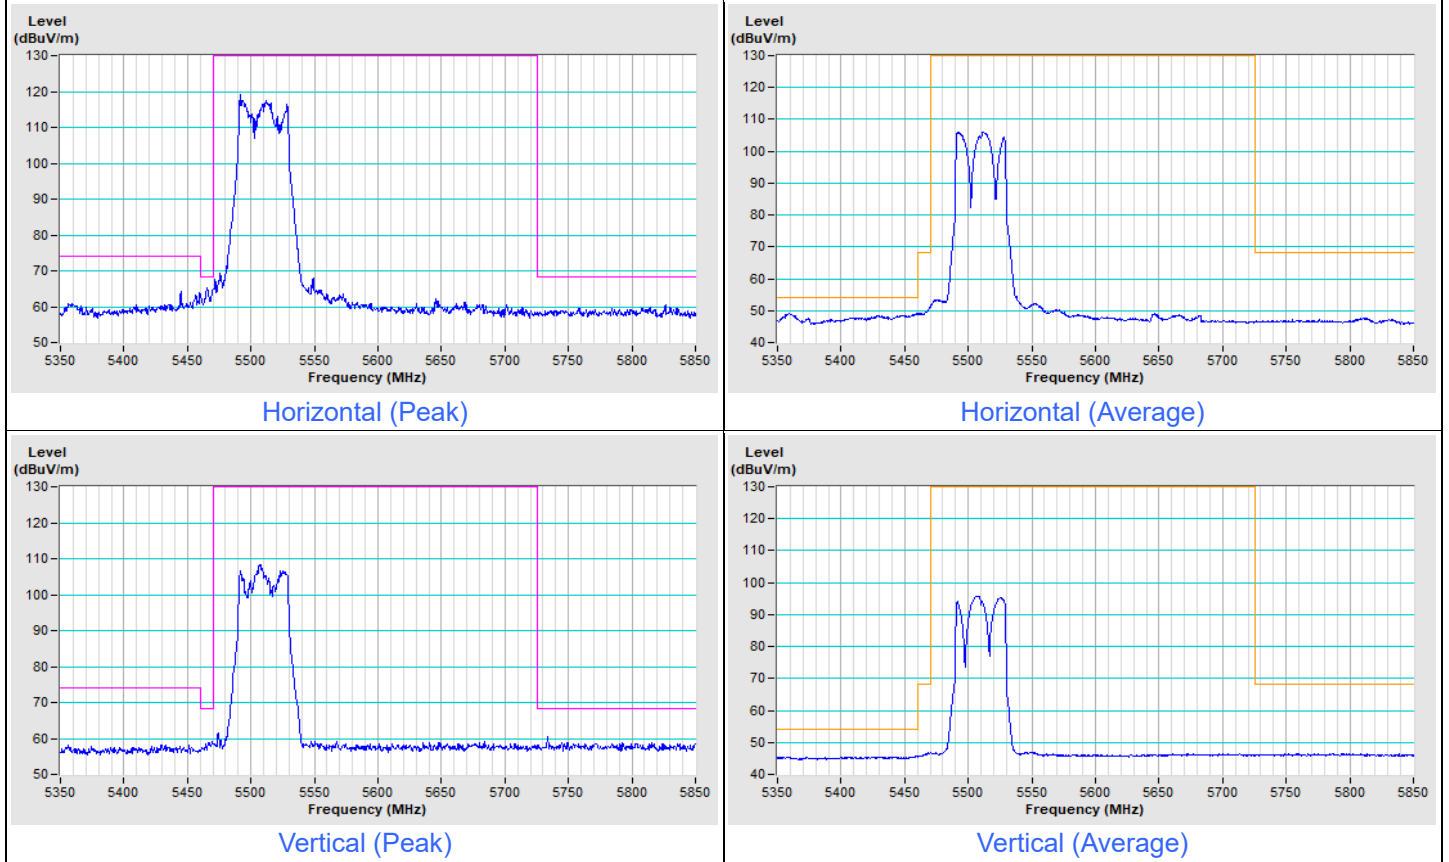

802.11be (EHT40) Channel 110

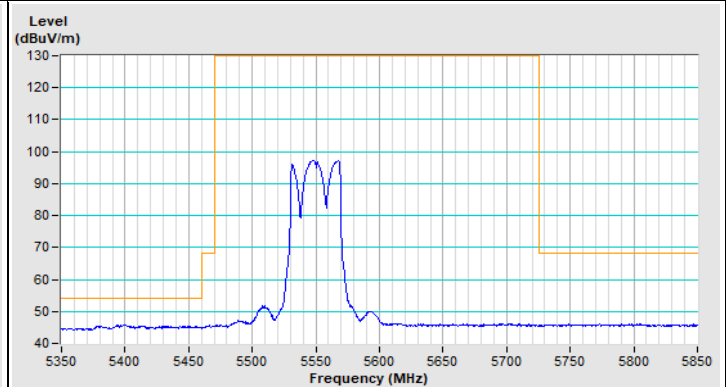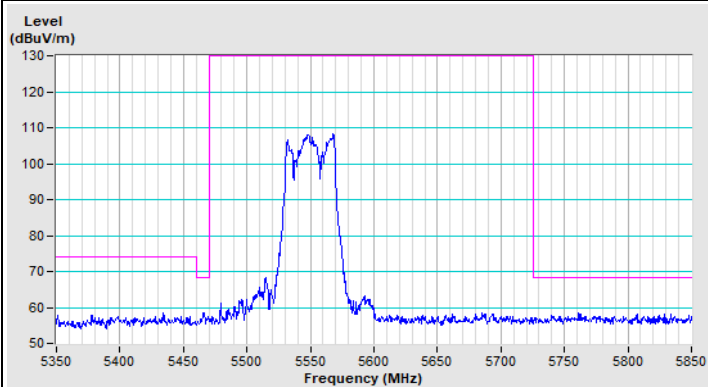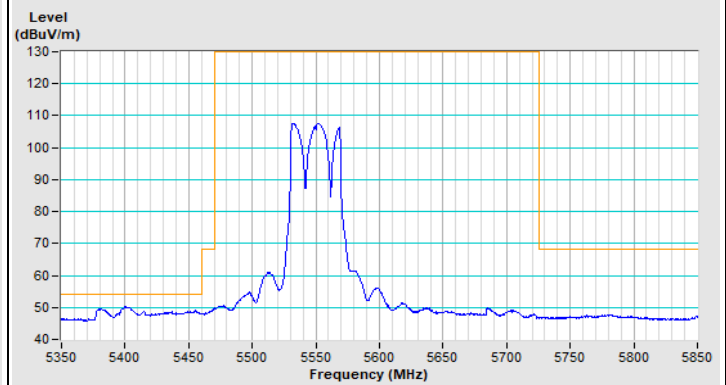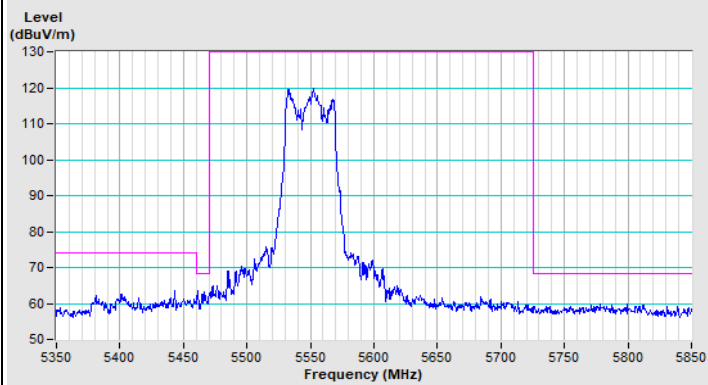


802.11be (EHT40) Channel 126

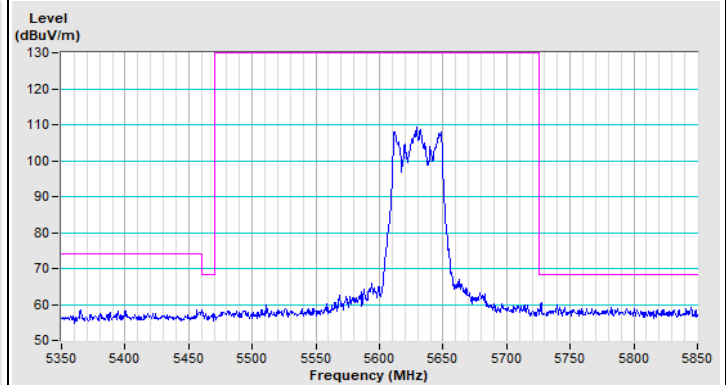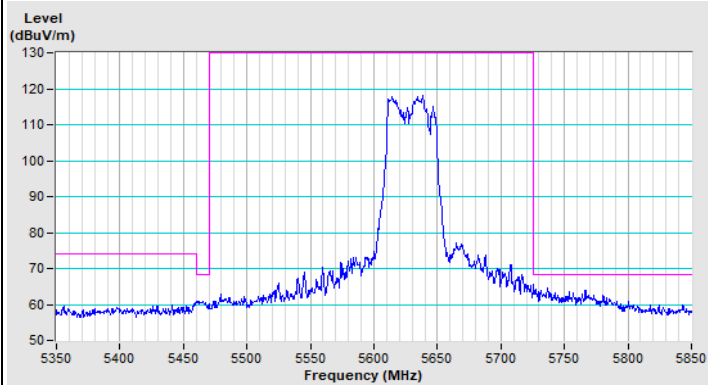


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 142

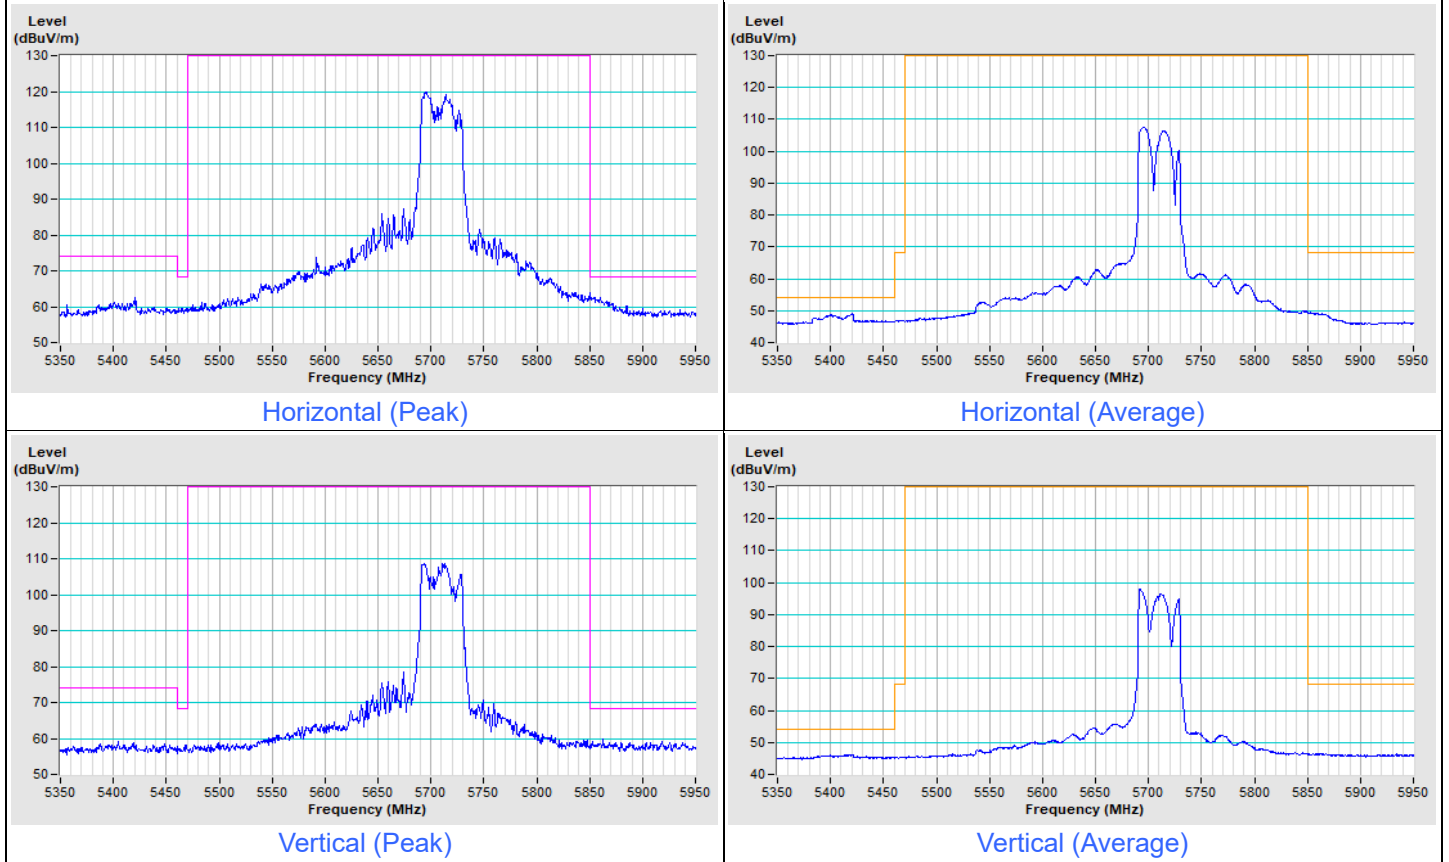


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT80) Channel 58

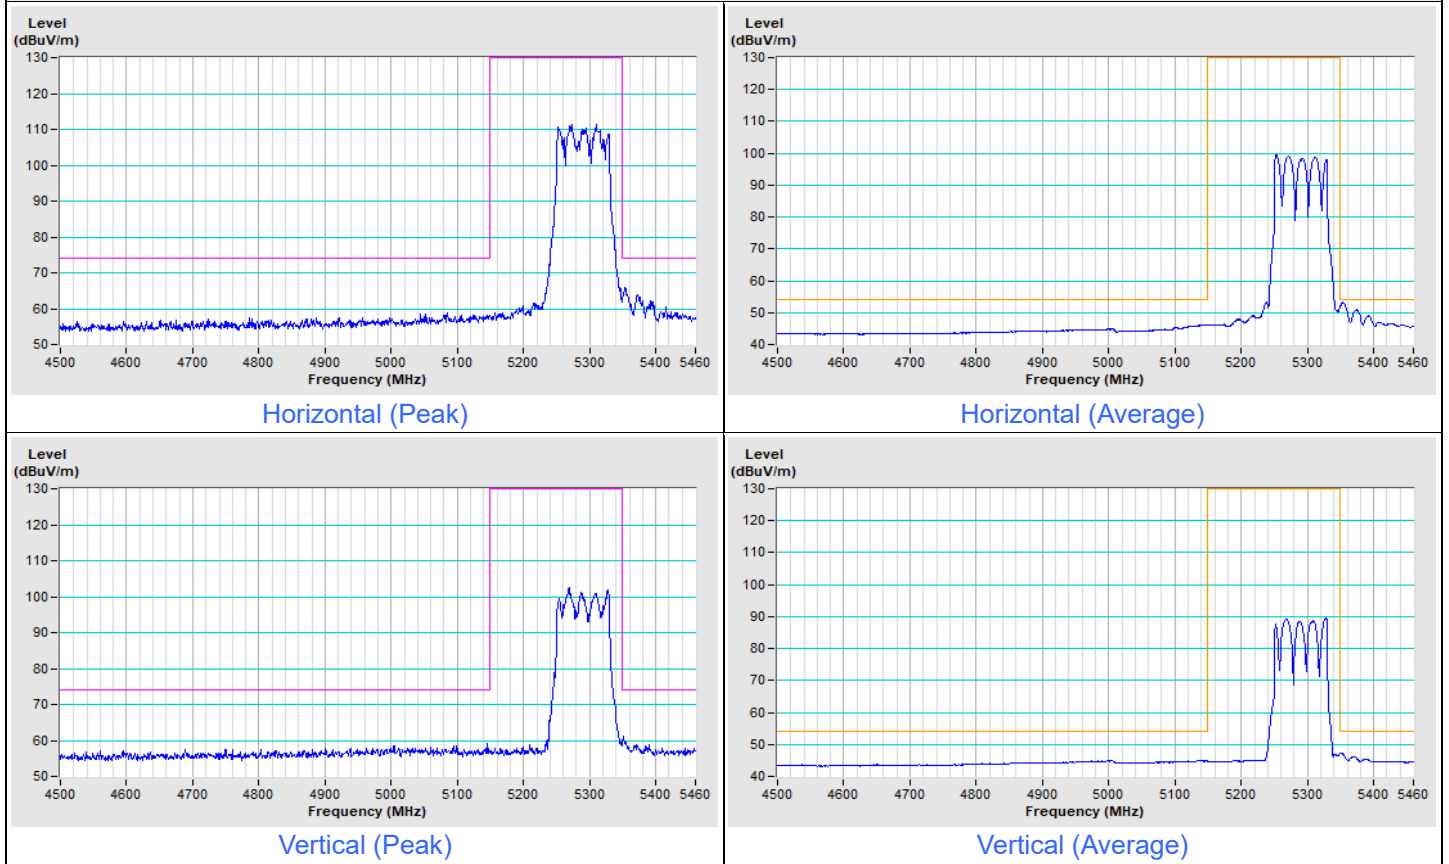


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

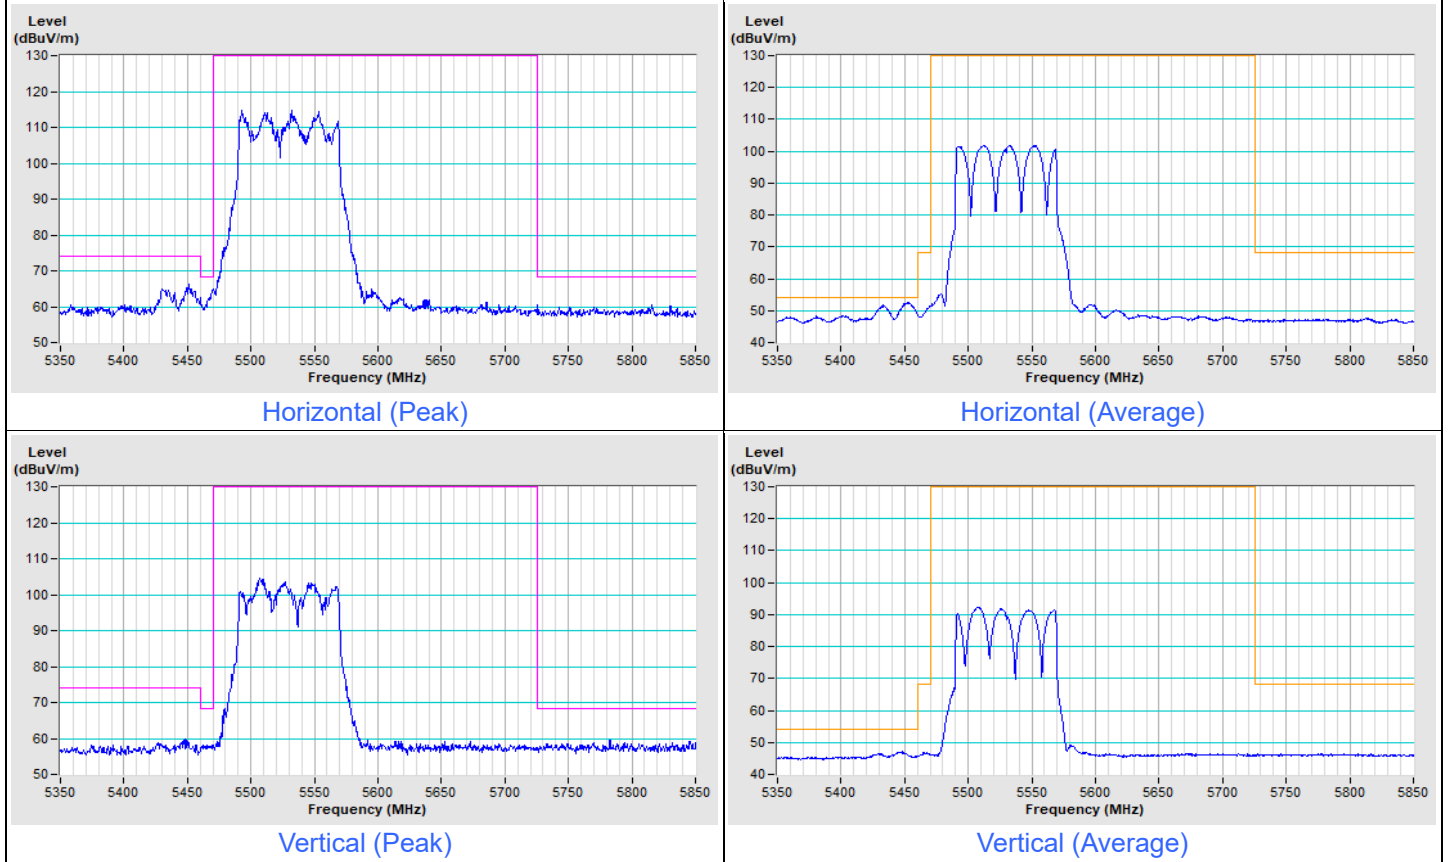


802.11be (EHT80) Channel 122

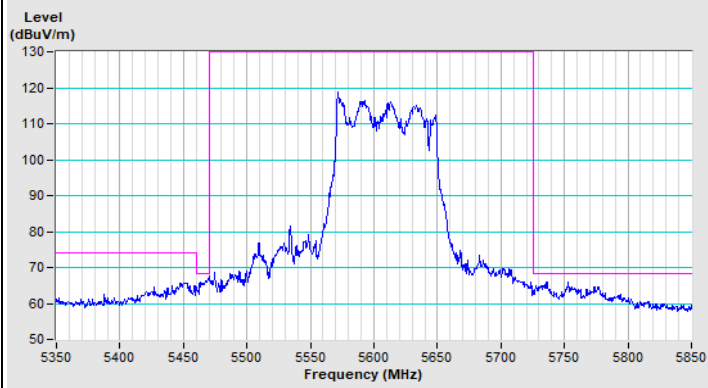


Horizontal (Peak)

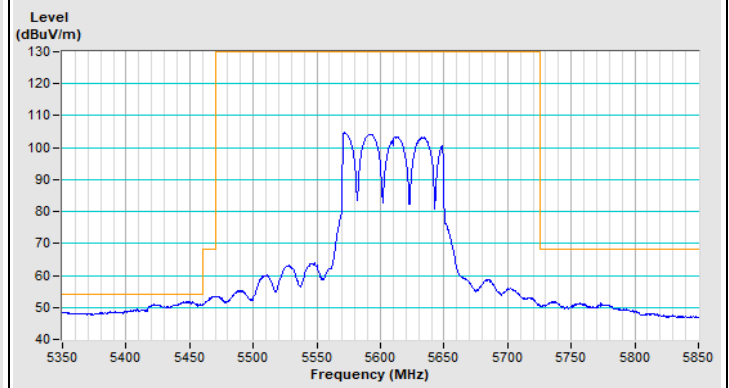

Horizontal (Average)

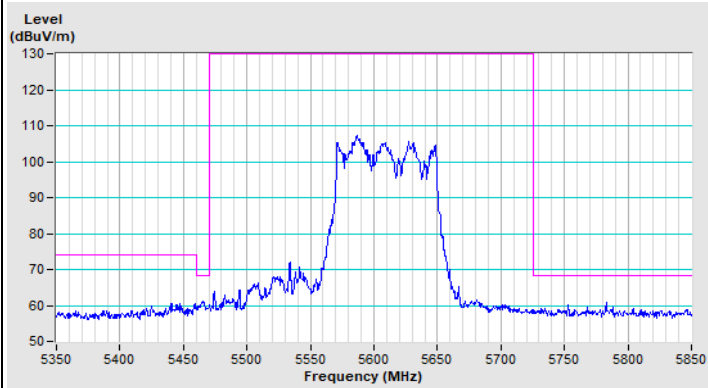


Vertical (Peak)

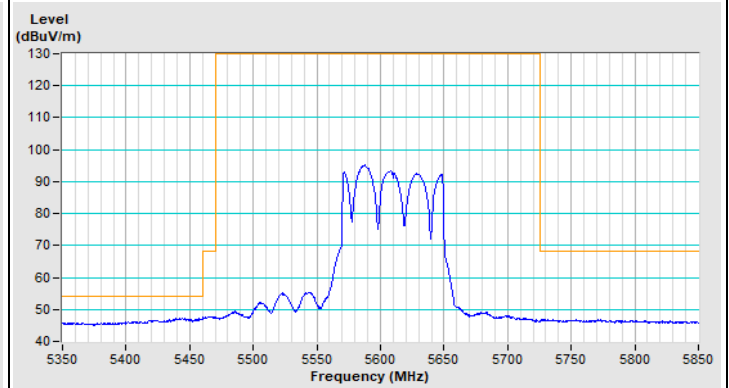

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 138

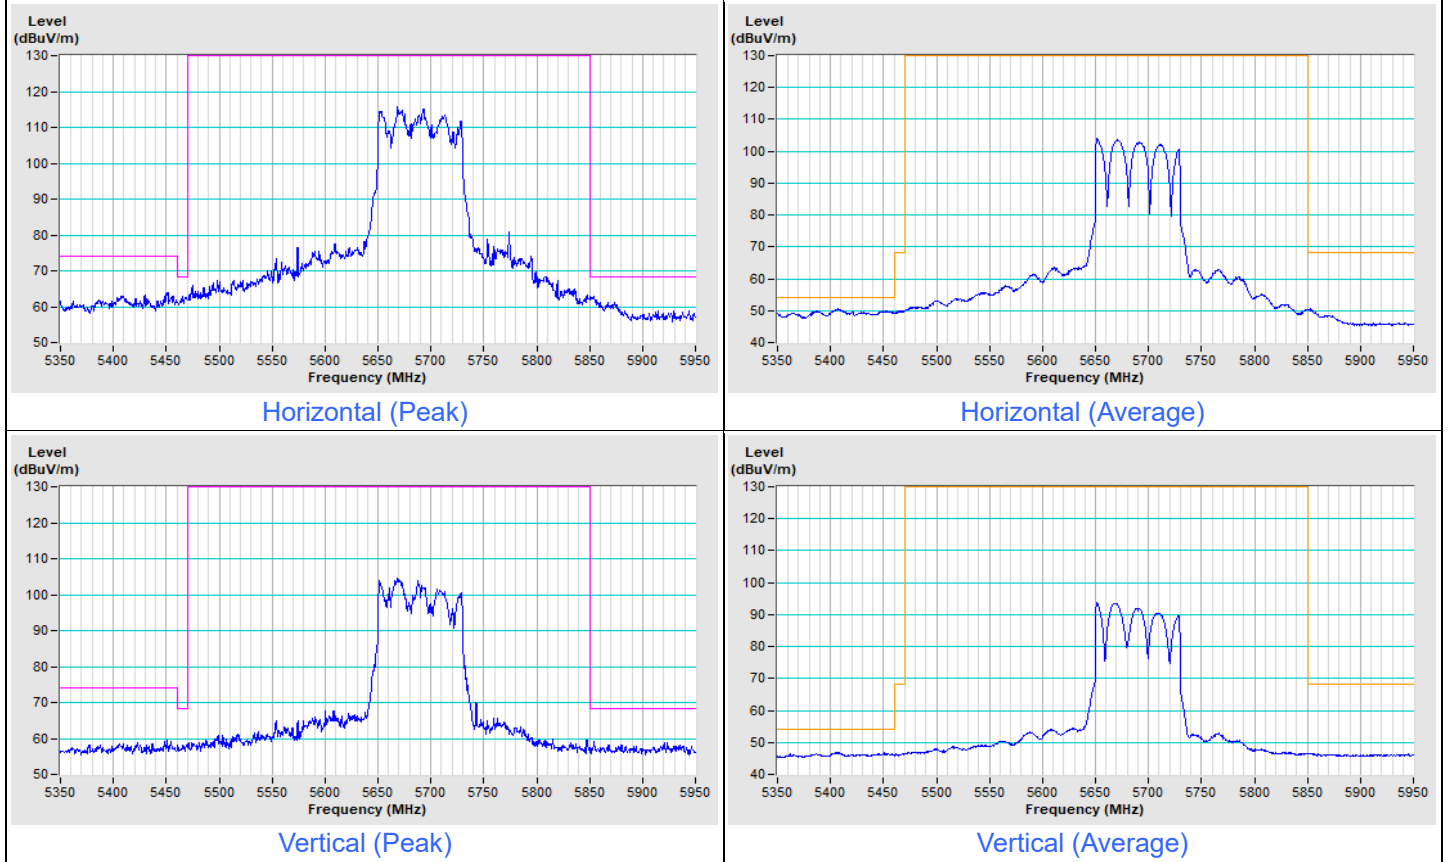


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

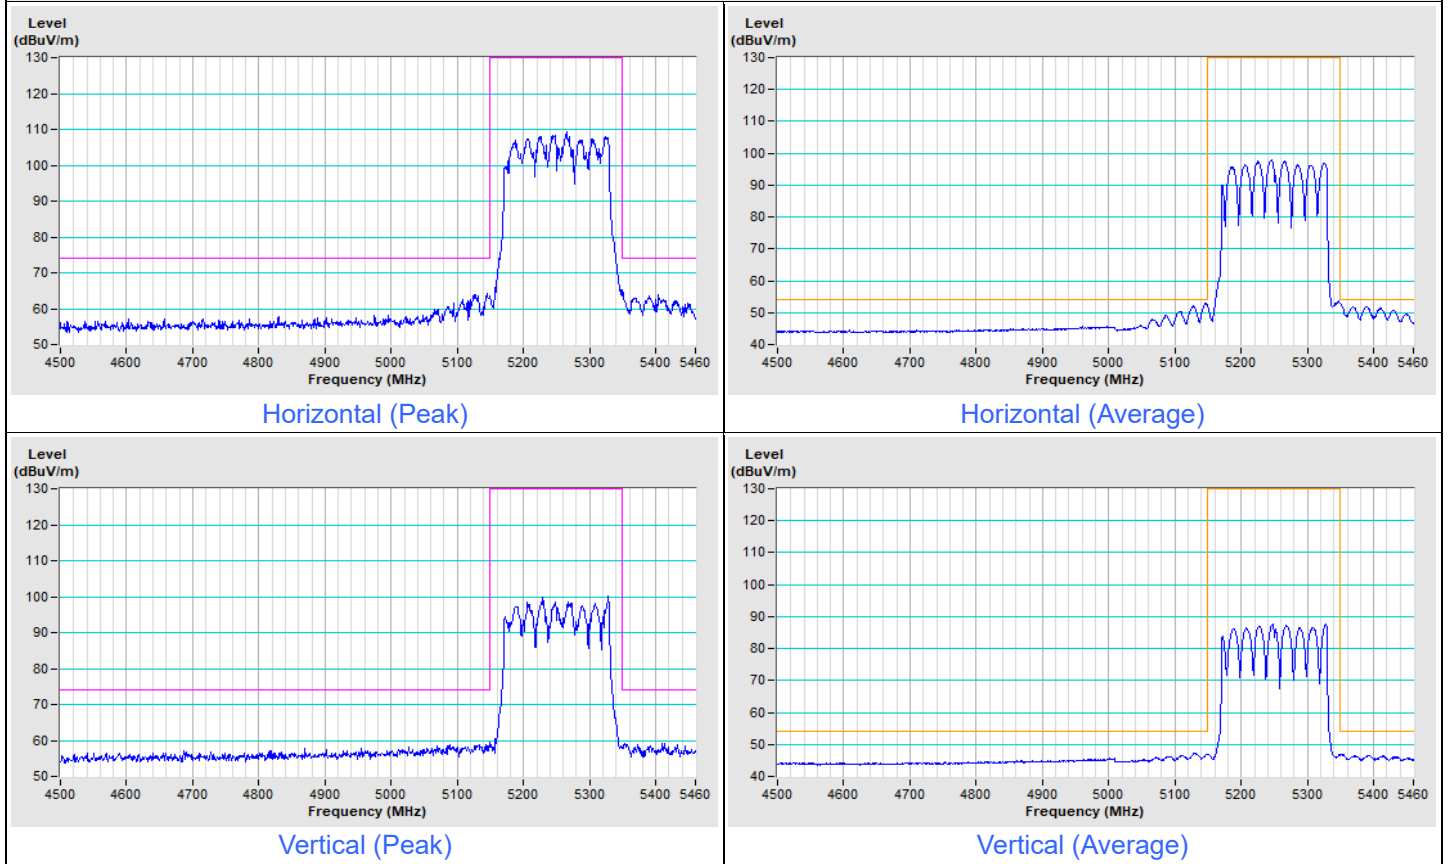

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

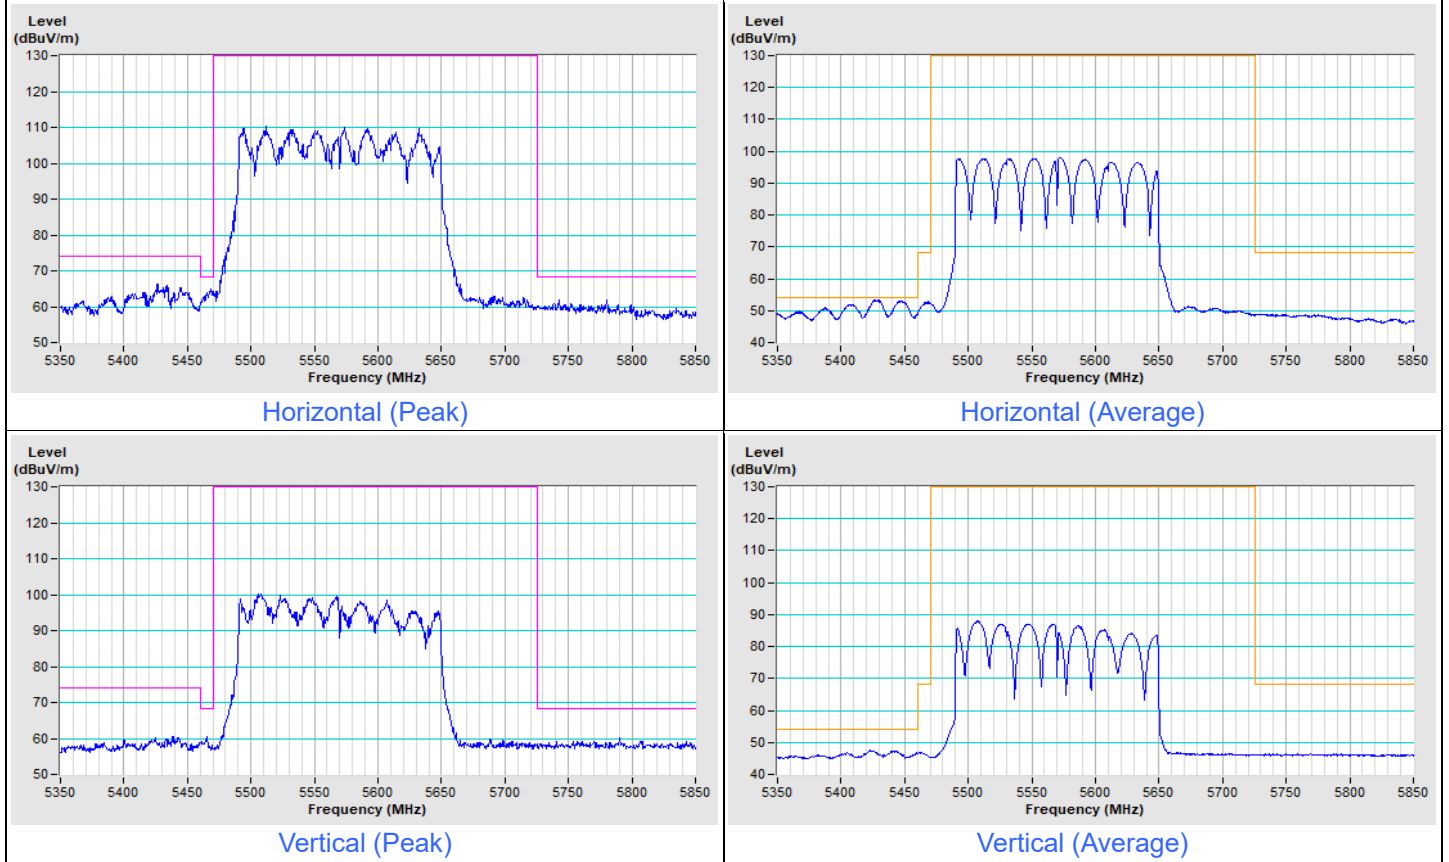


Plot of Band Edge 3


Mode B_Dipole Ant.

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 52

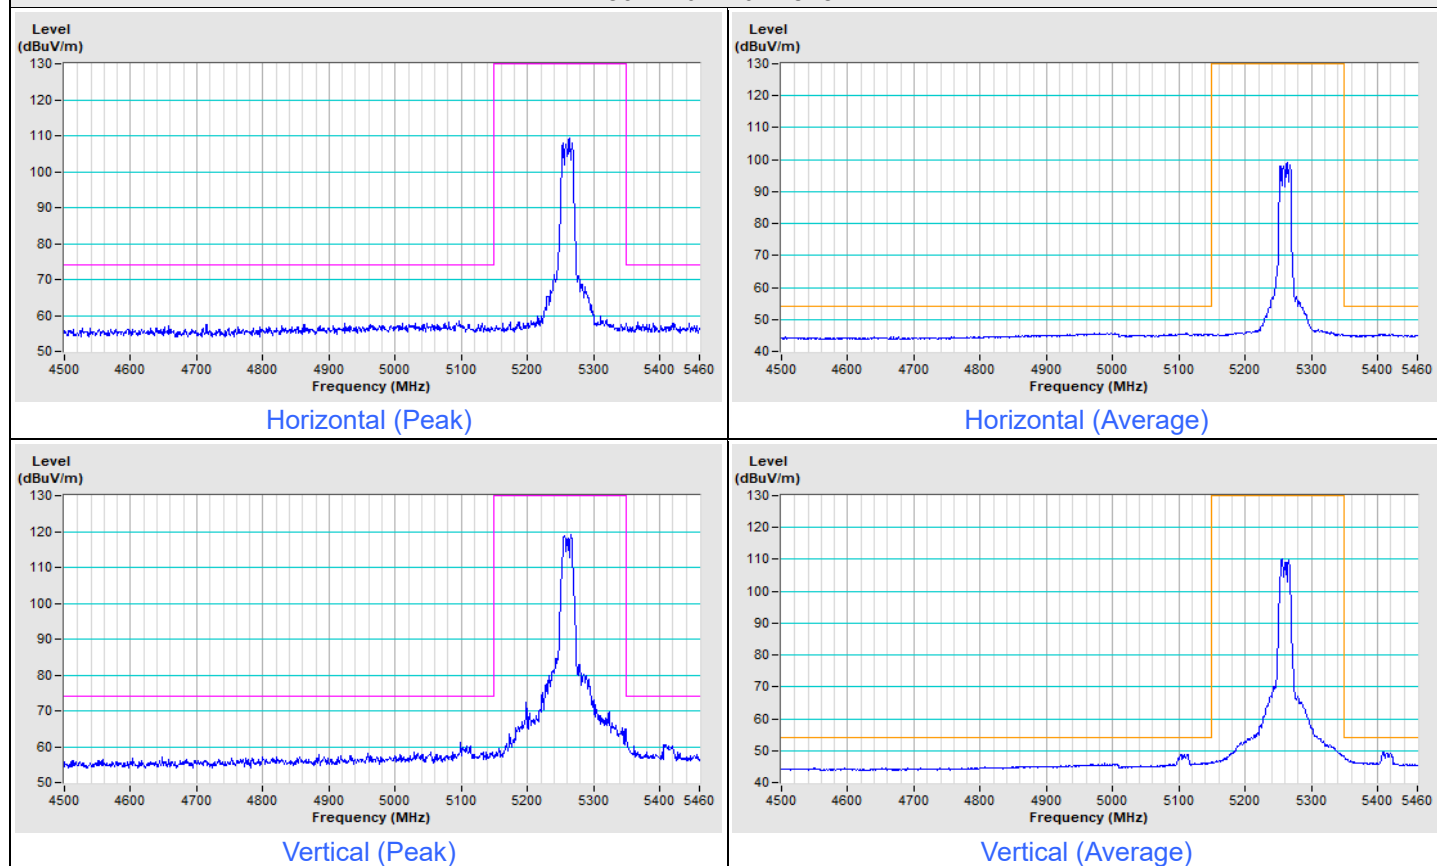


802.11a Channel 60

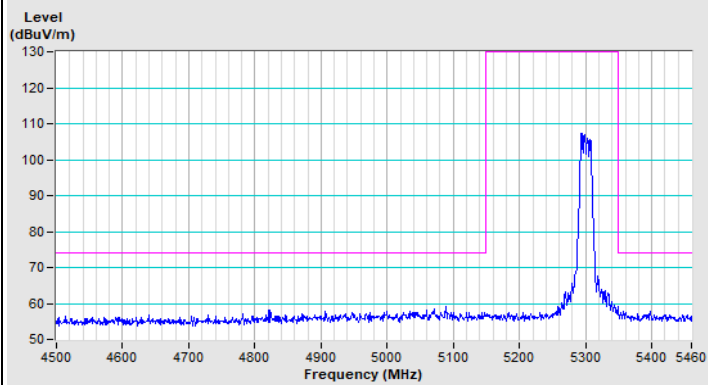


Horizontal (Peak)

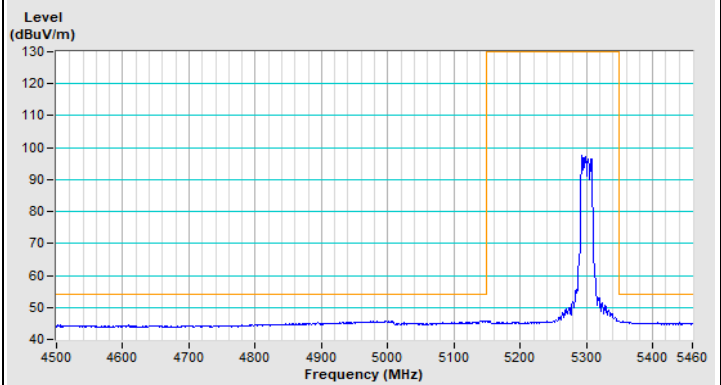

Horizontal (Average)

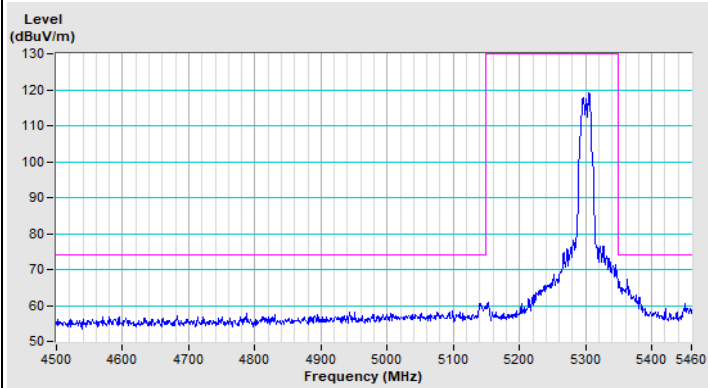


Vertical (Peak)

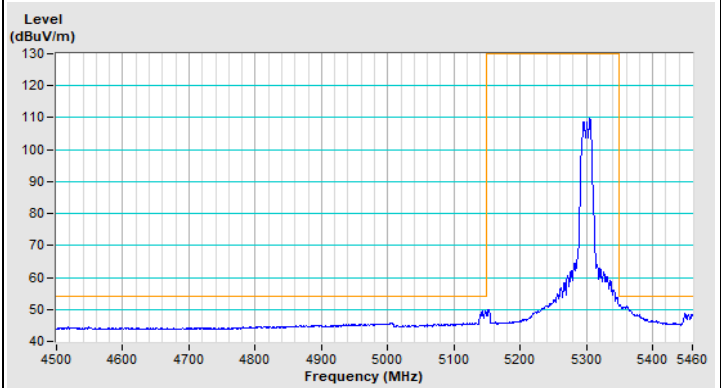


Vertical (Average)


802.11a Channel 64

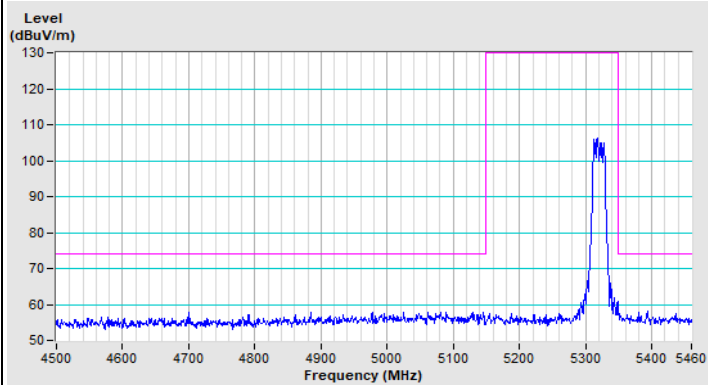


Horizontal (Peak)

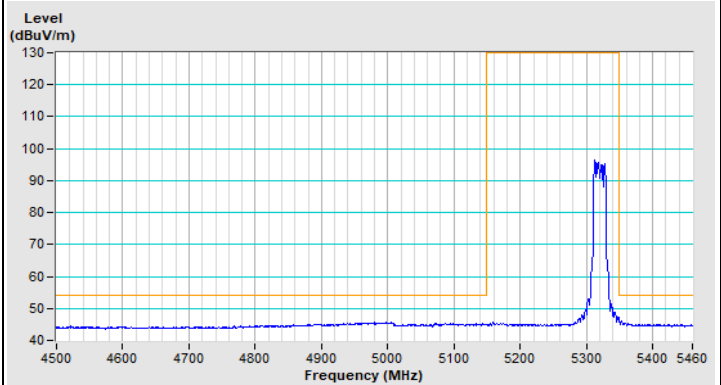

Horizontal (Average)

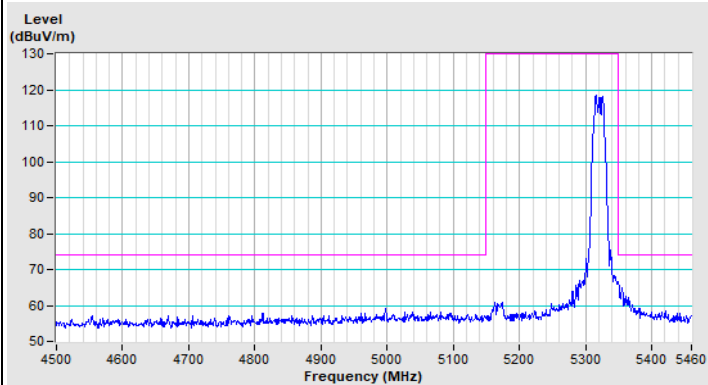


Vertical (Peak)

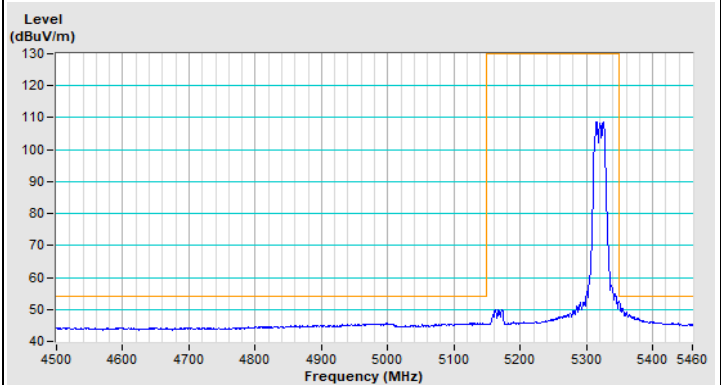


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

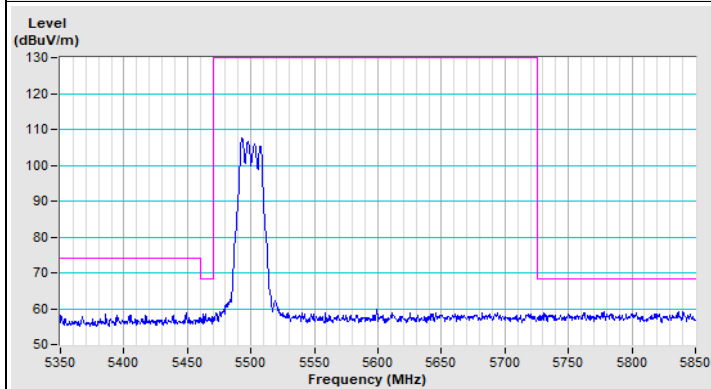


Horizontal (Peak)

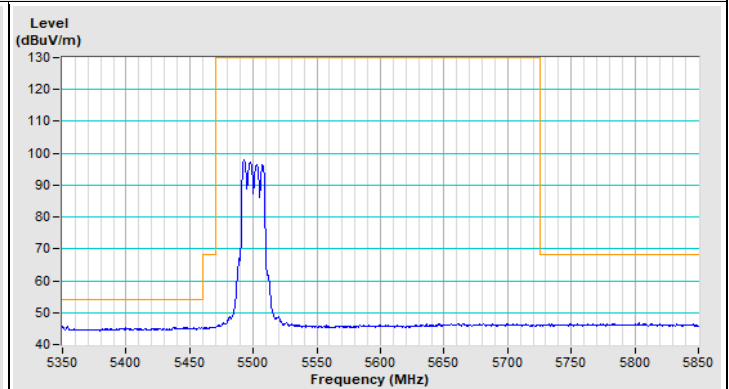

Horizontal (Average)

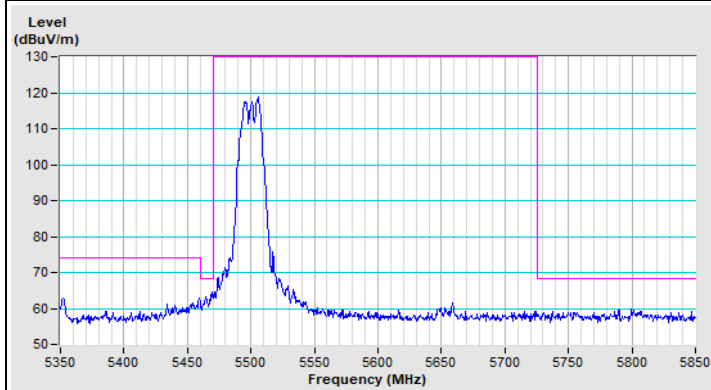


Vertical (Peak)

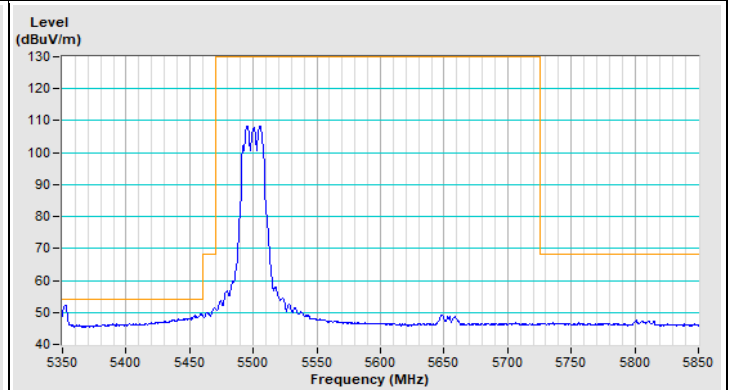


Vertical (Average)

802.11a Channel 140

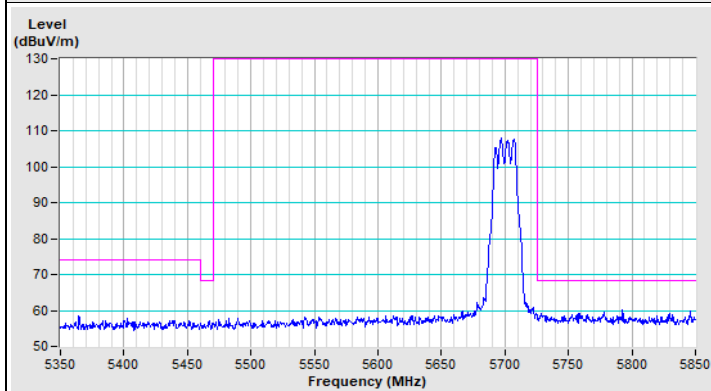


Horizontal (Peak)

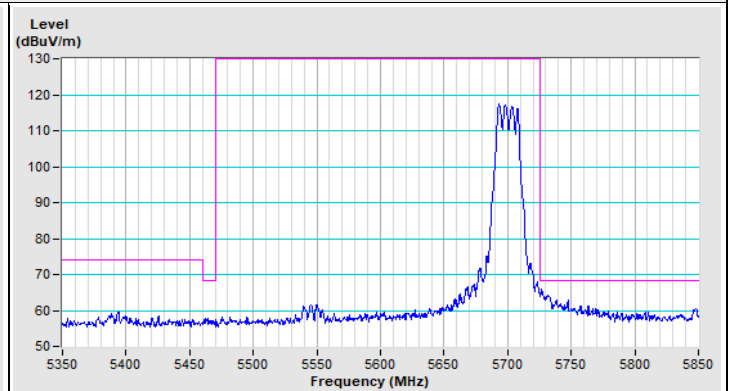

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 144

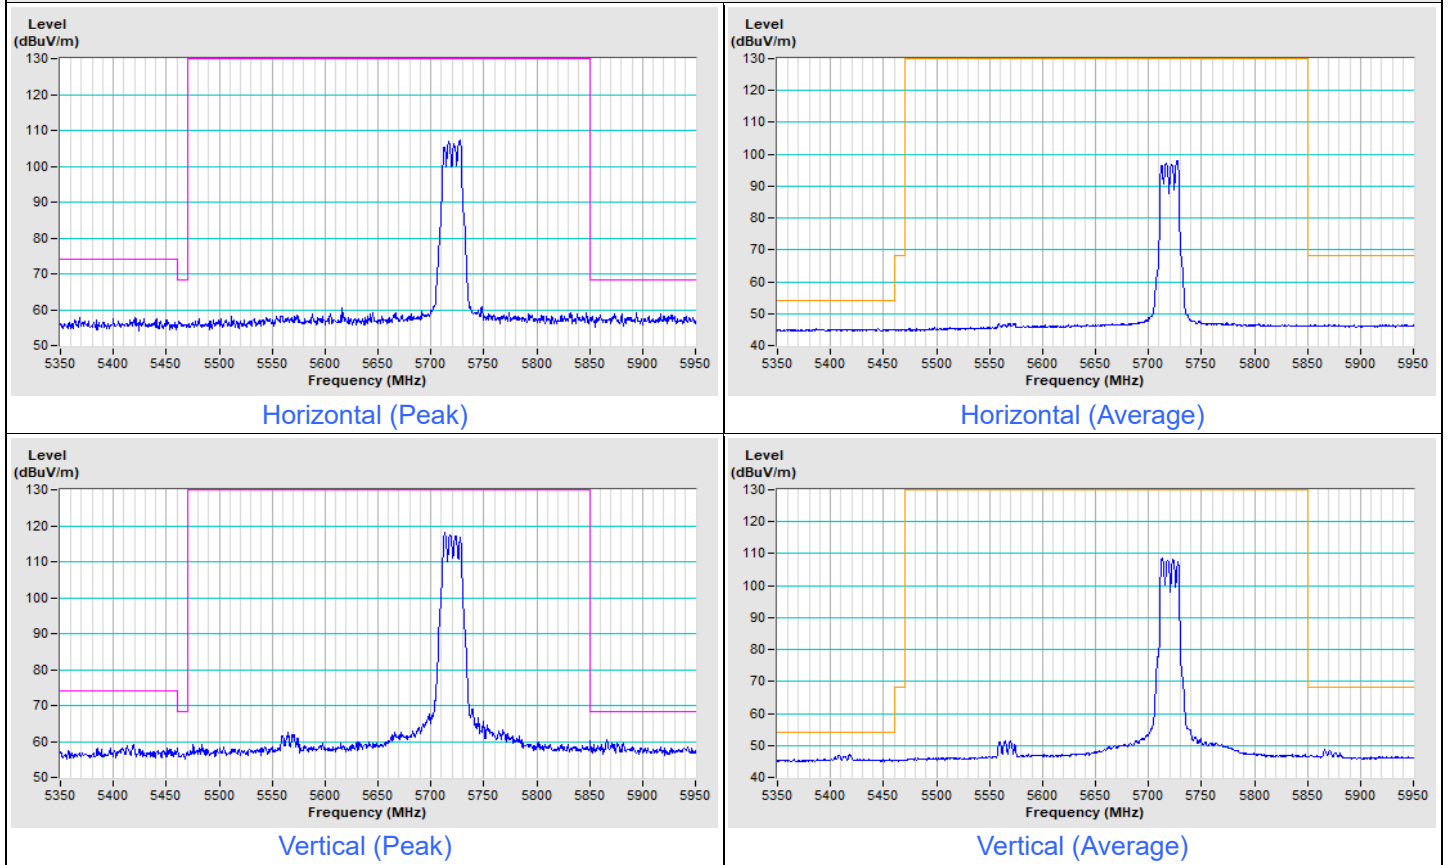


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 52

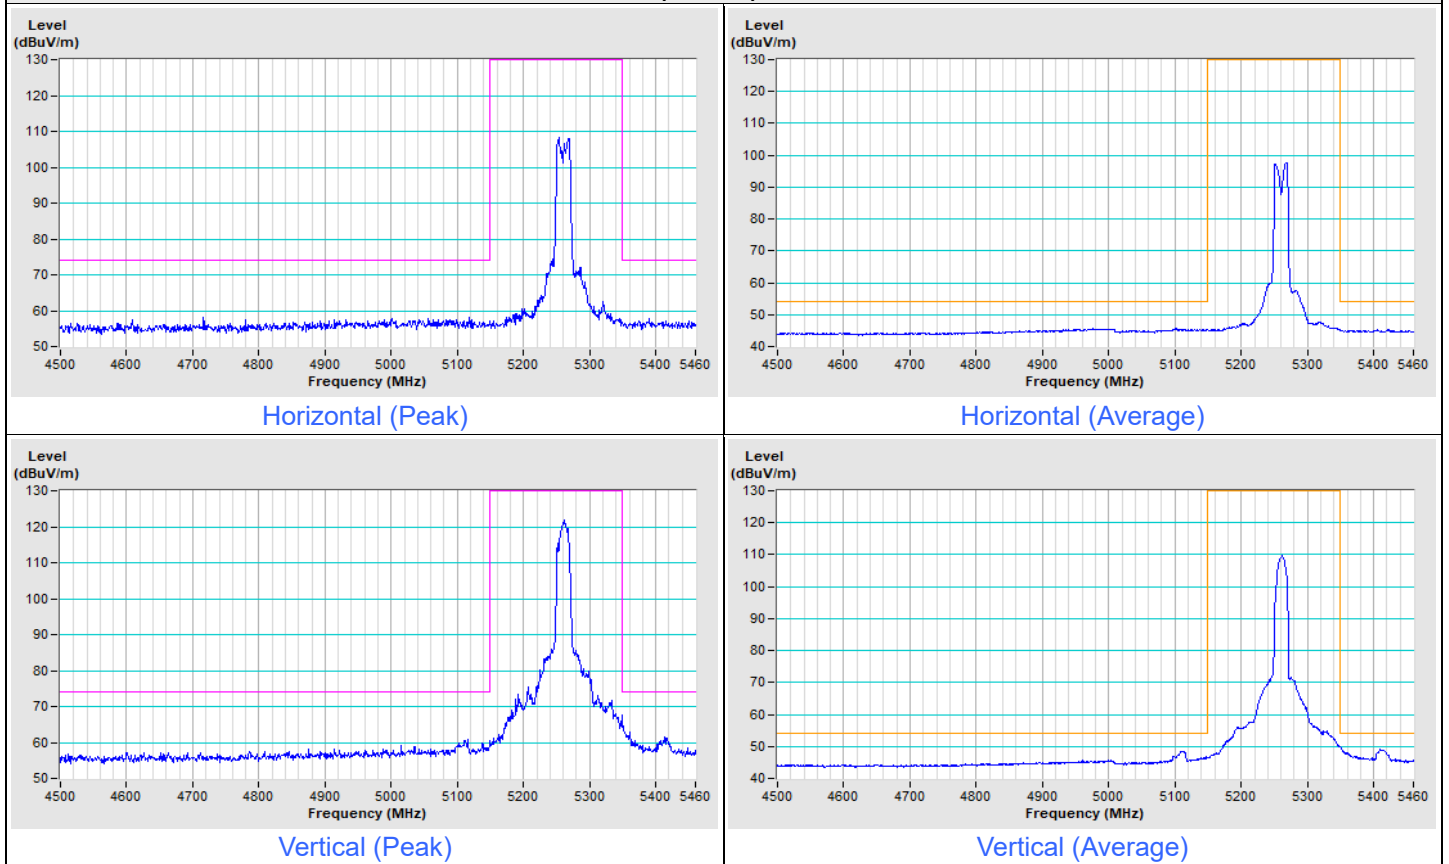


802.11be (EHT20) Channel 60

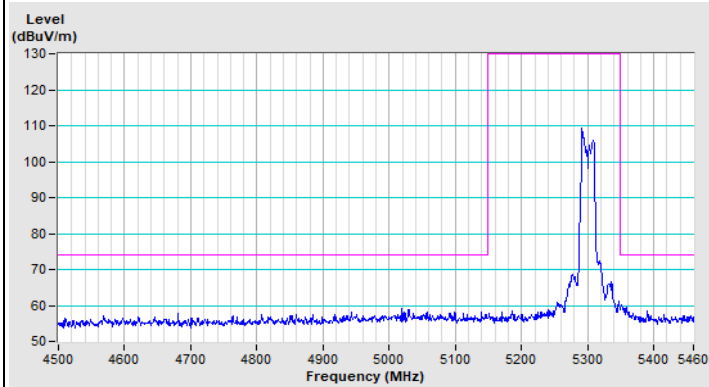


Horizontal (Peak)

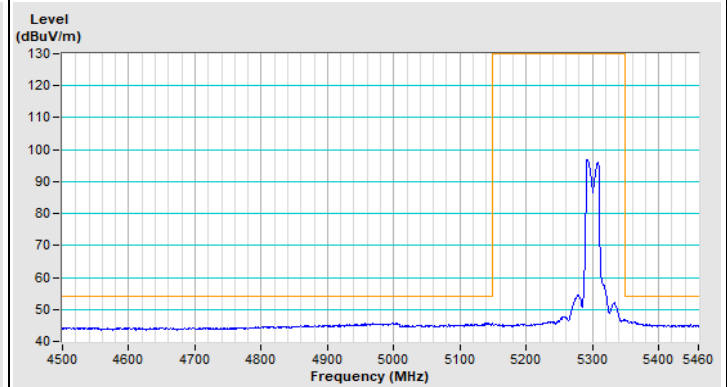

Horizontal (Average)

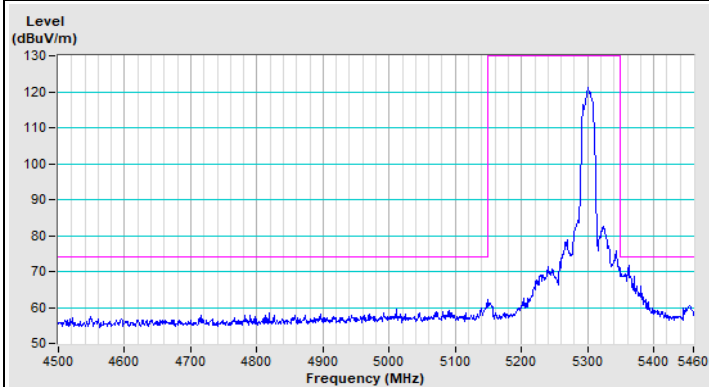


Vertical (Peak)

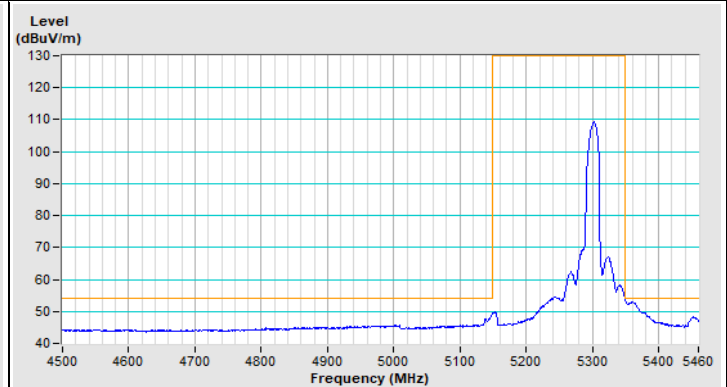


Vertical (Average)


802.11be (EHT20) Channel 64

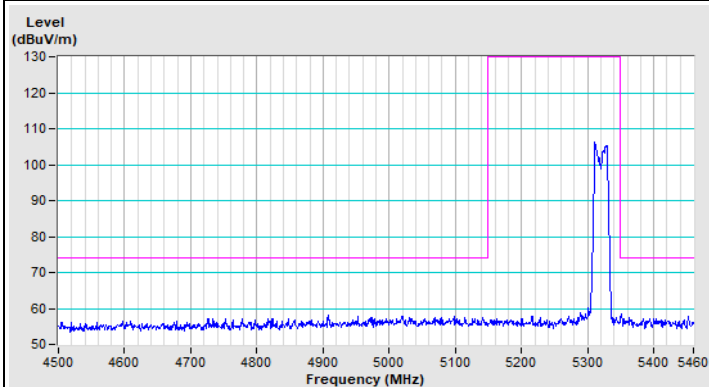


Horizontal (Peak)

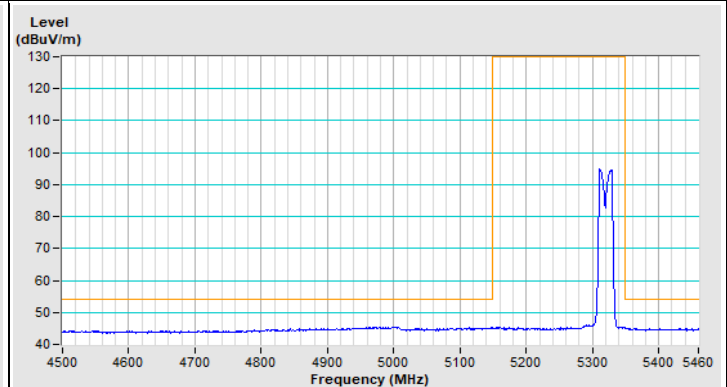

Horizontal (Average)

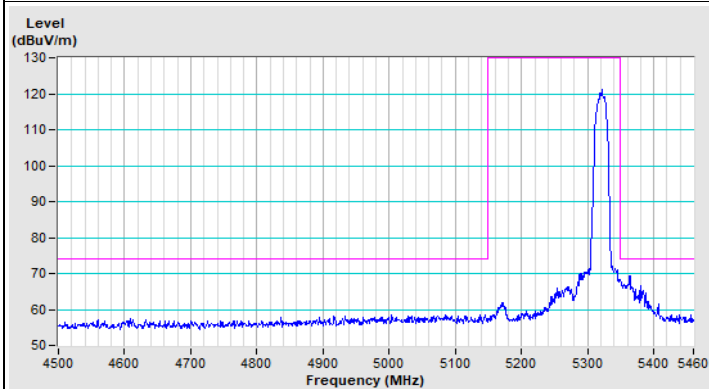


Vertical (Peak)

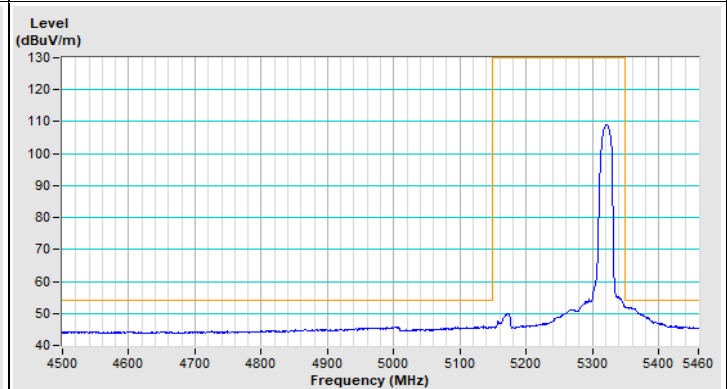


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

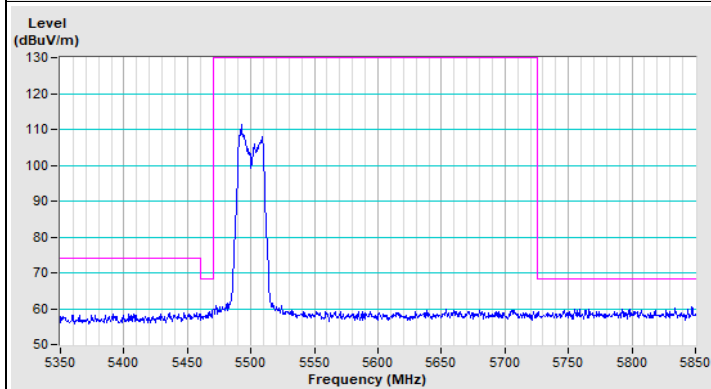


Horizontal (Peak)

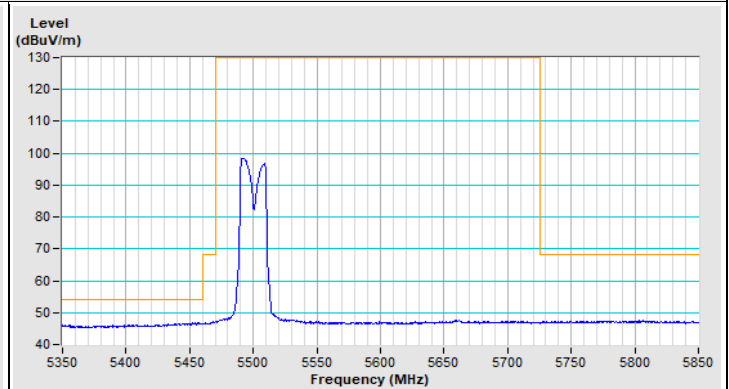

Horizontal (Average)

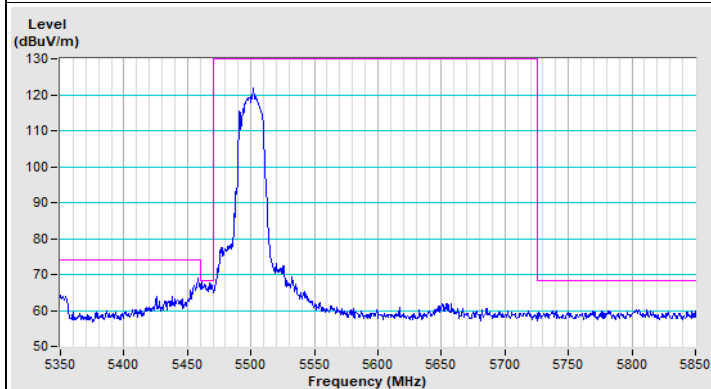


Vertical (Peak)

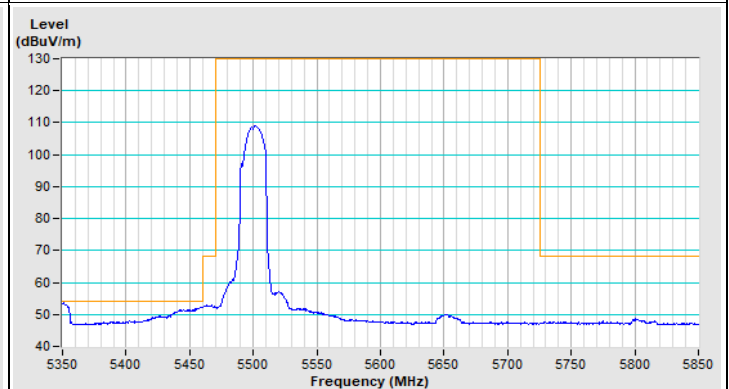


Vertical (Average)

802.11be (EHT20) Channel 140

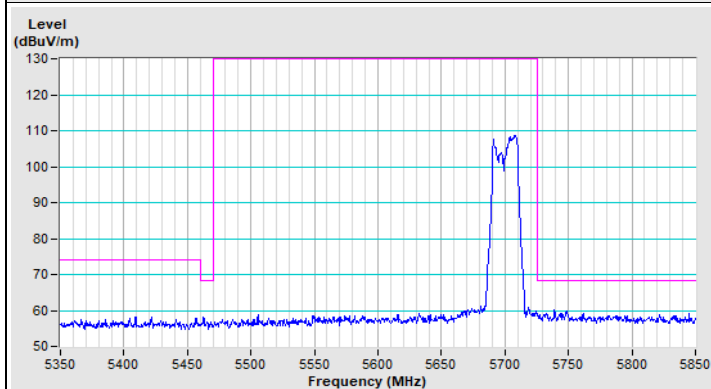


Horizontal (Peak)

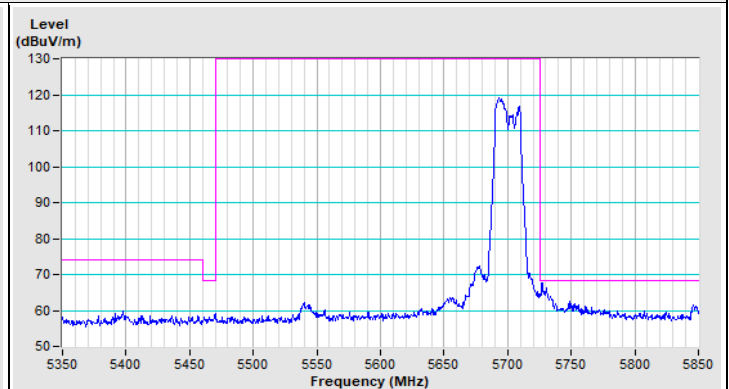

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 144

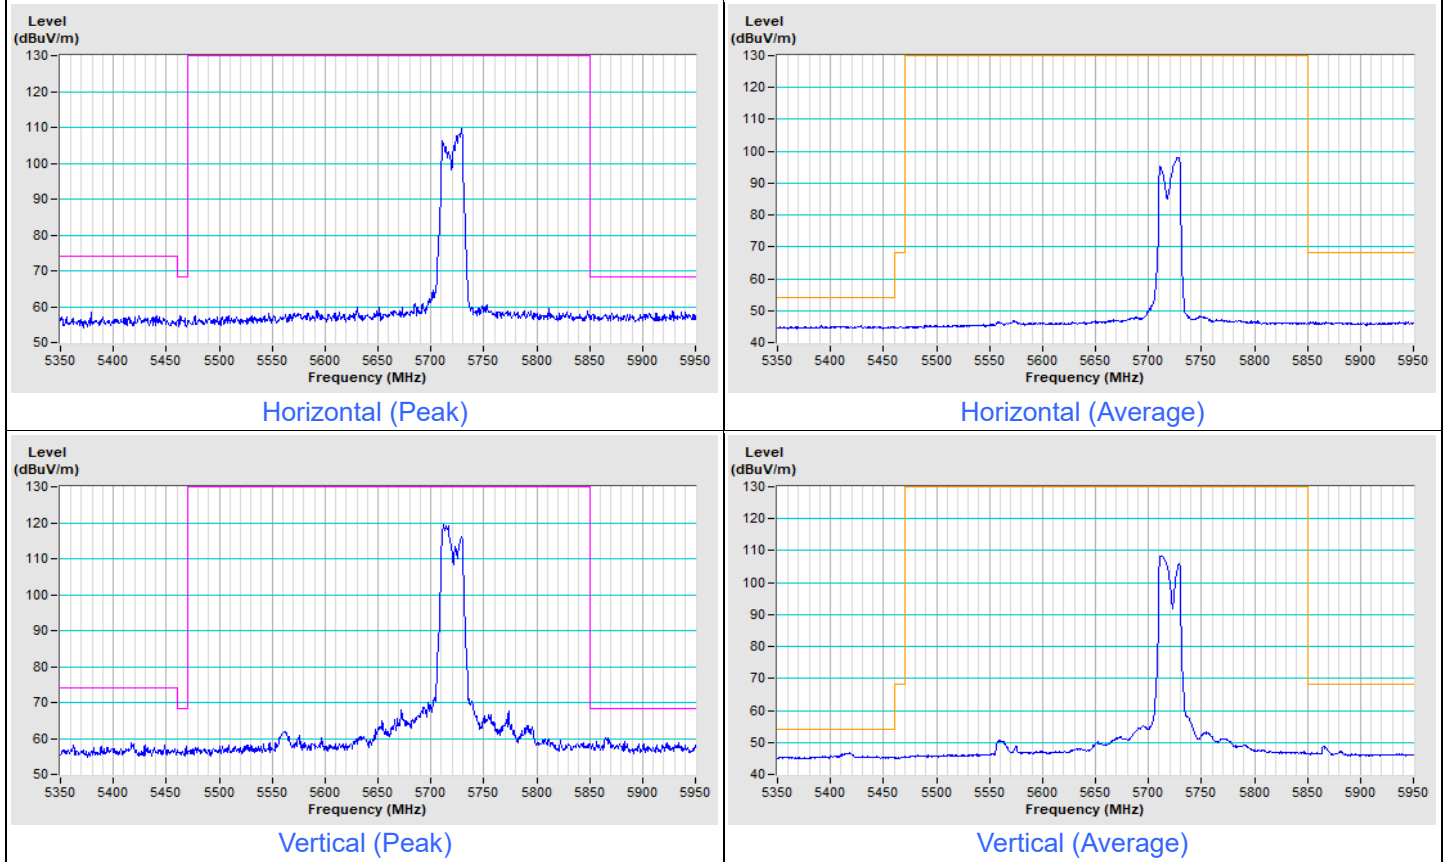


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT40) Channel 54

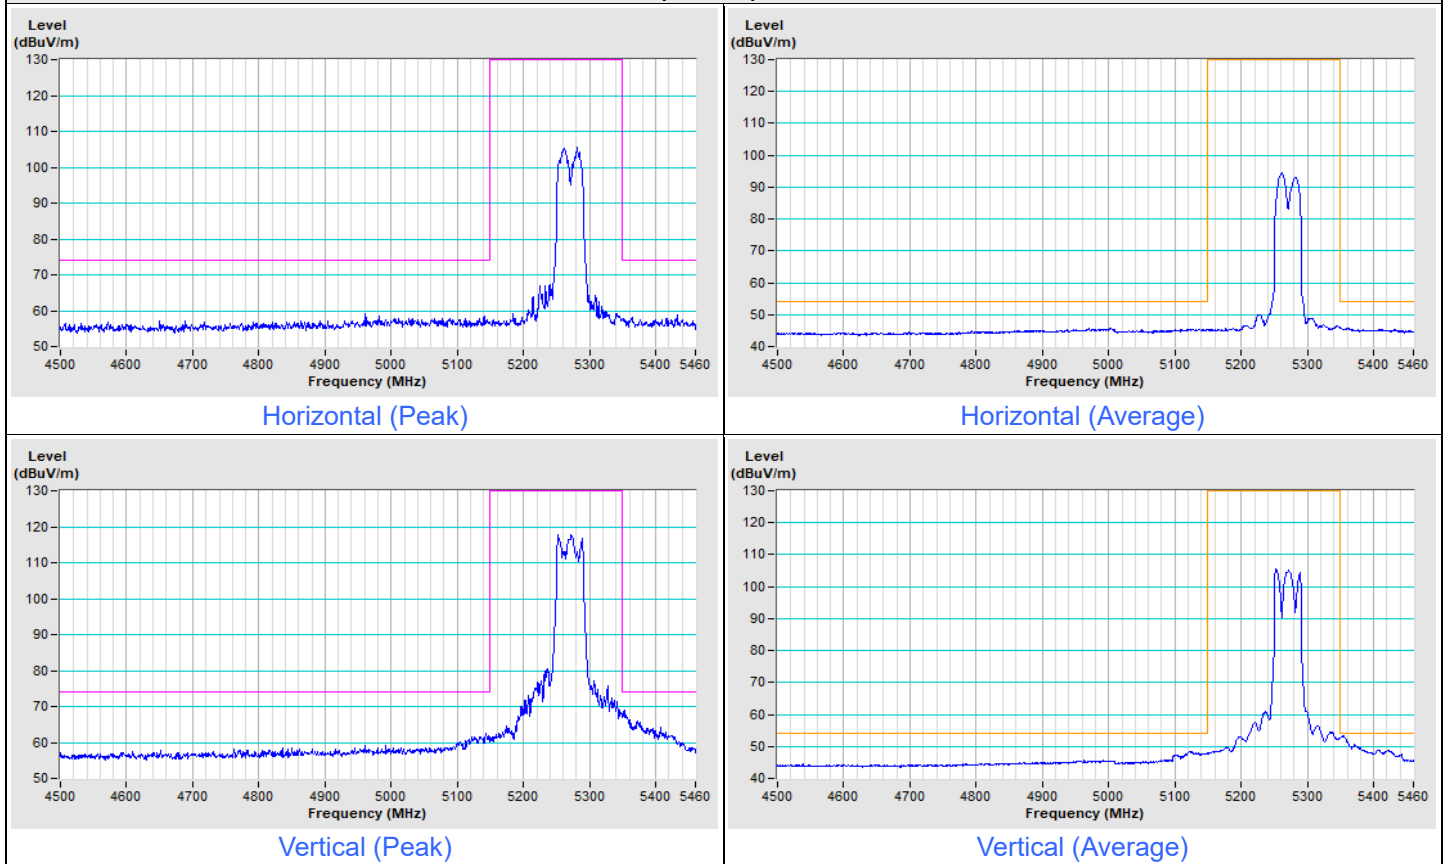


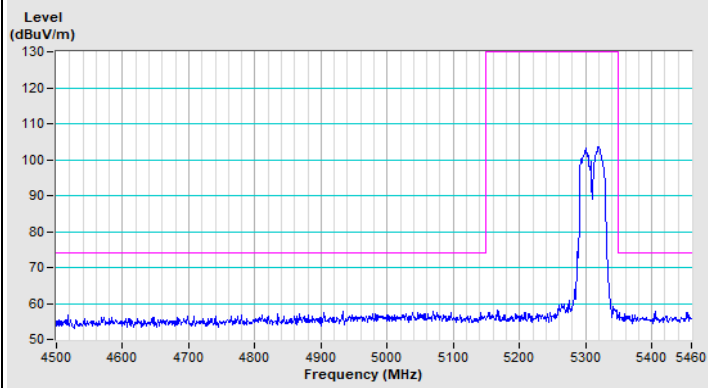802.11be (EHT40) Channel 62


Horizontal (Peak)

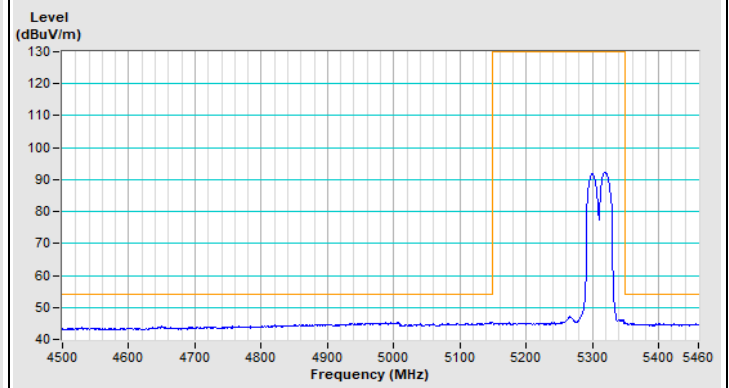

Horizontal (Average)

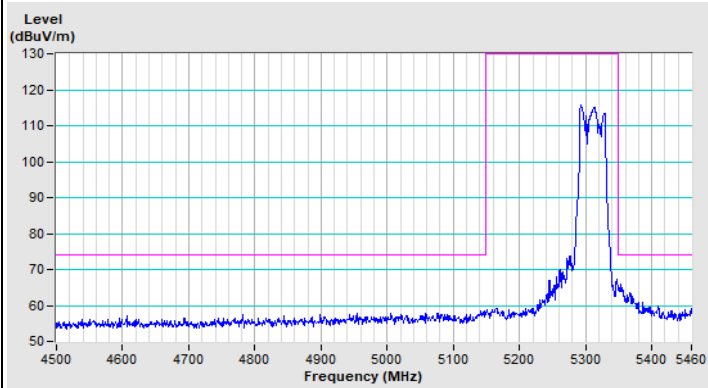


Vertical (Peak)

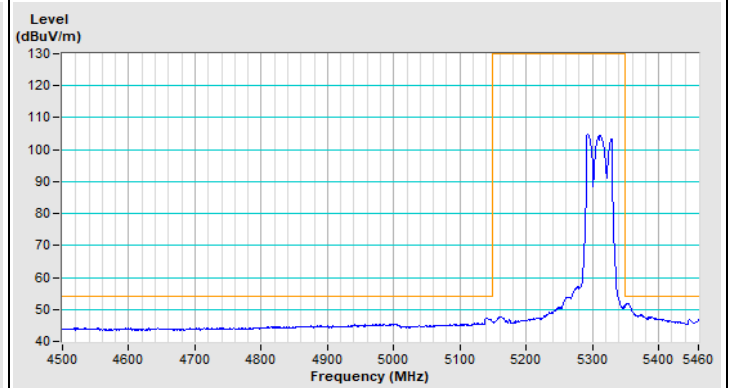


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 102

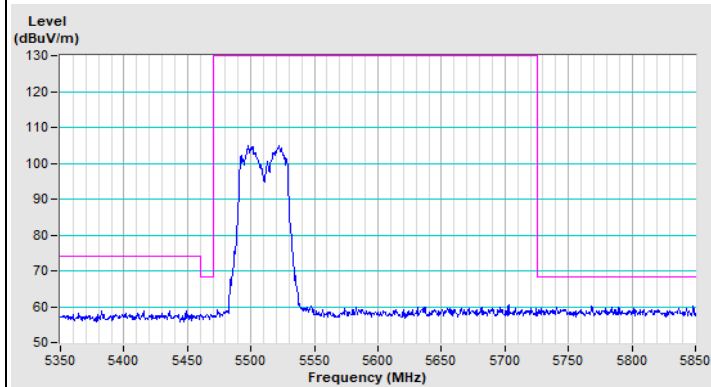


Horizontal (Peak)

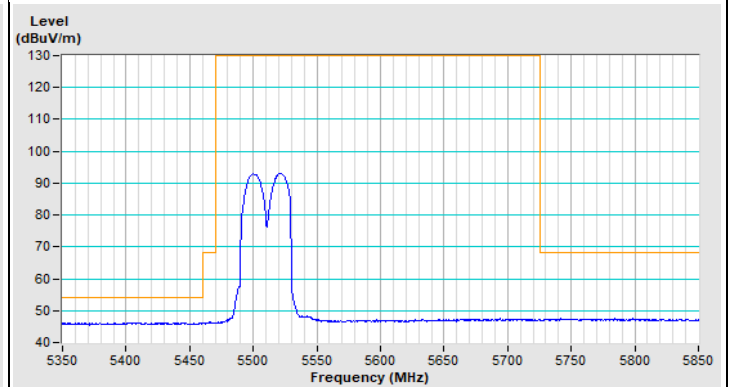

Horizontal (Average)

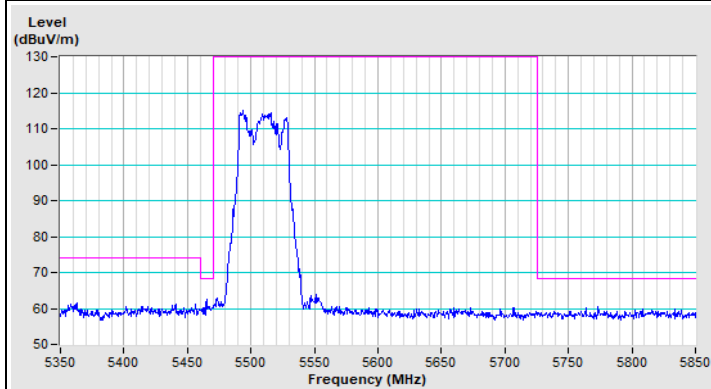


Vertical (Peak)

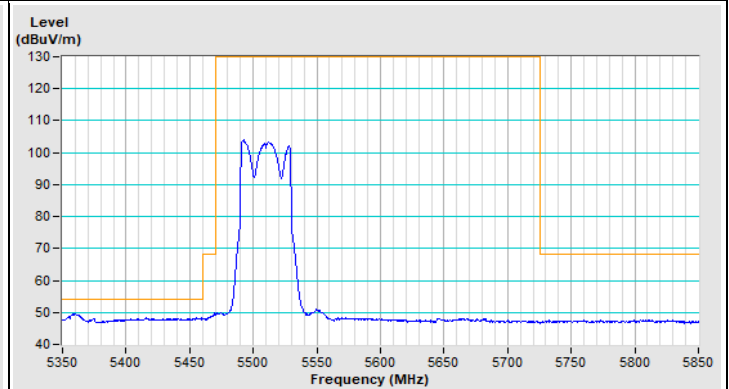


Vertical (Average)

802.11be (EHT40) Channel 126

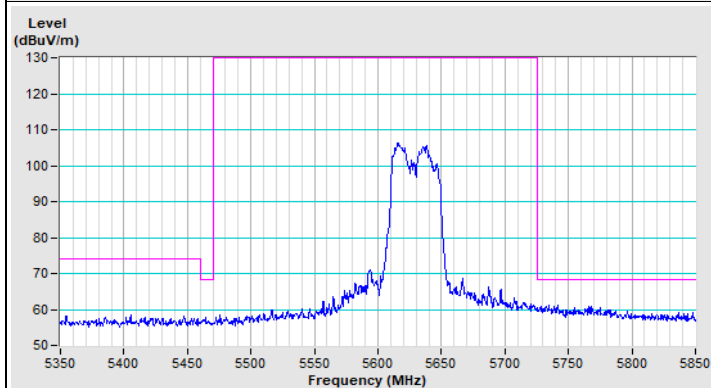


Horizontal (Peak)

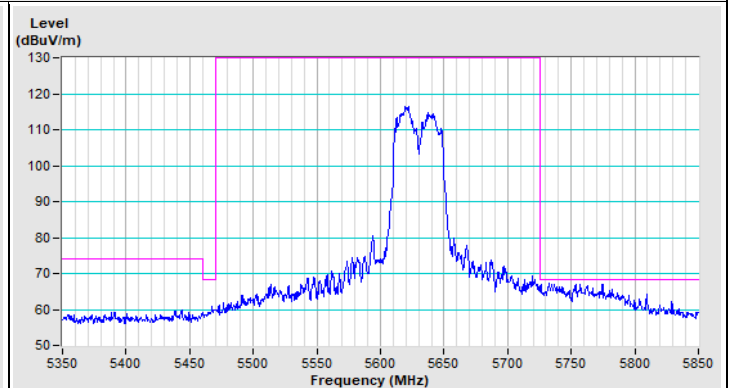

Vertical (Peak)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 142

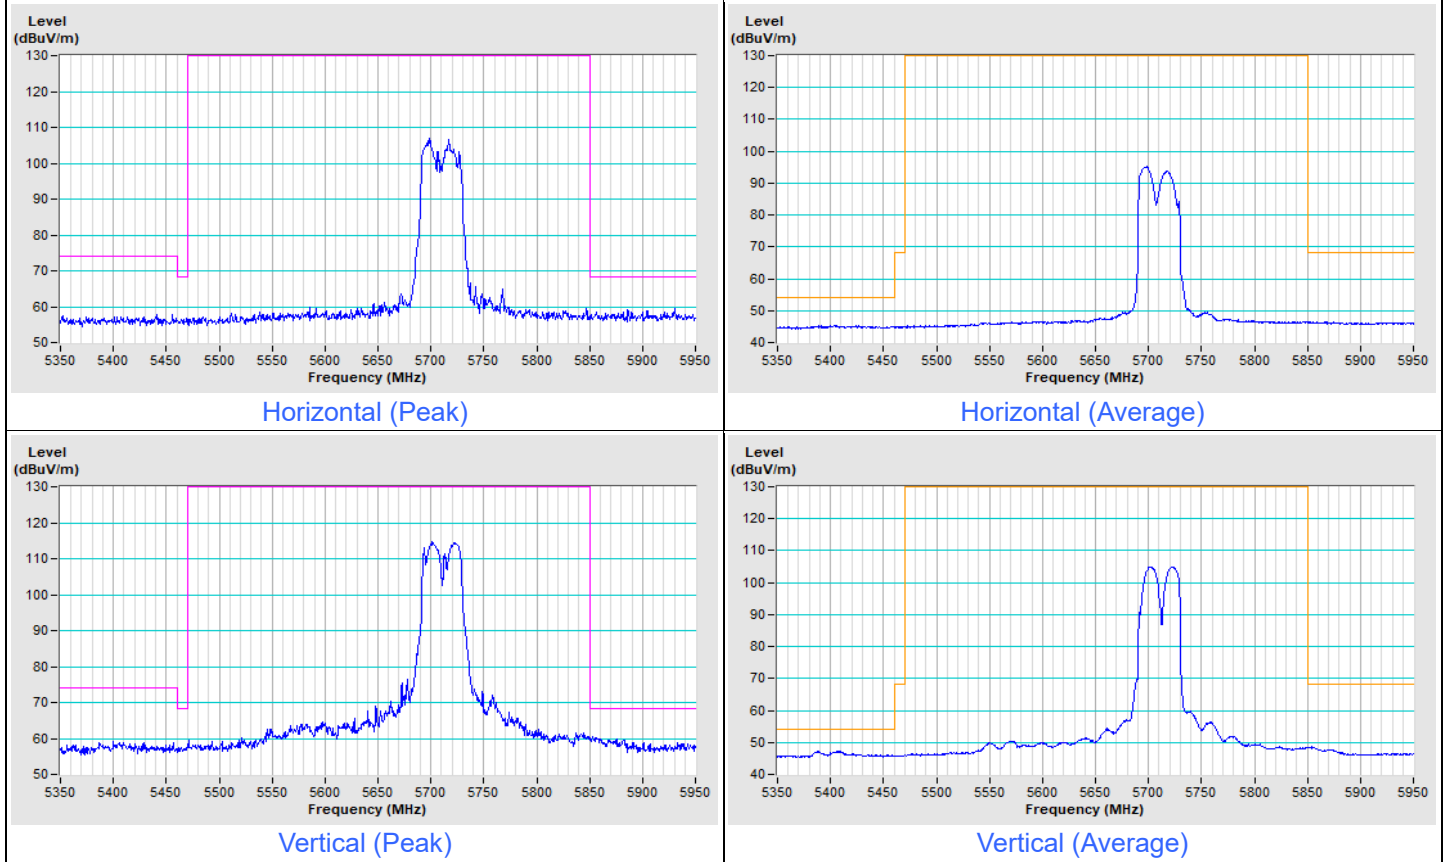


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT80) Channel 58

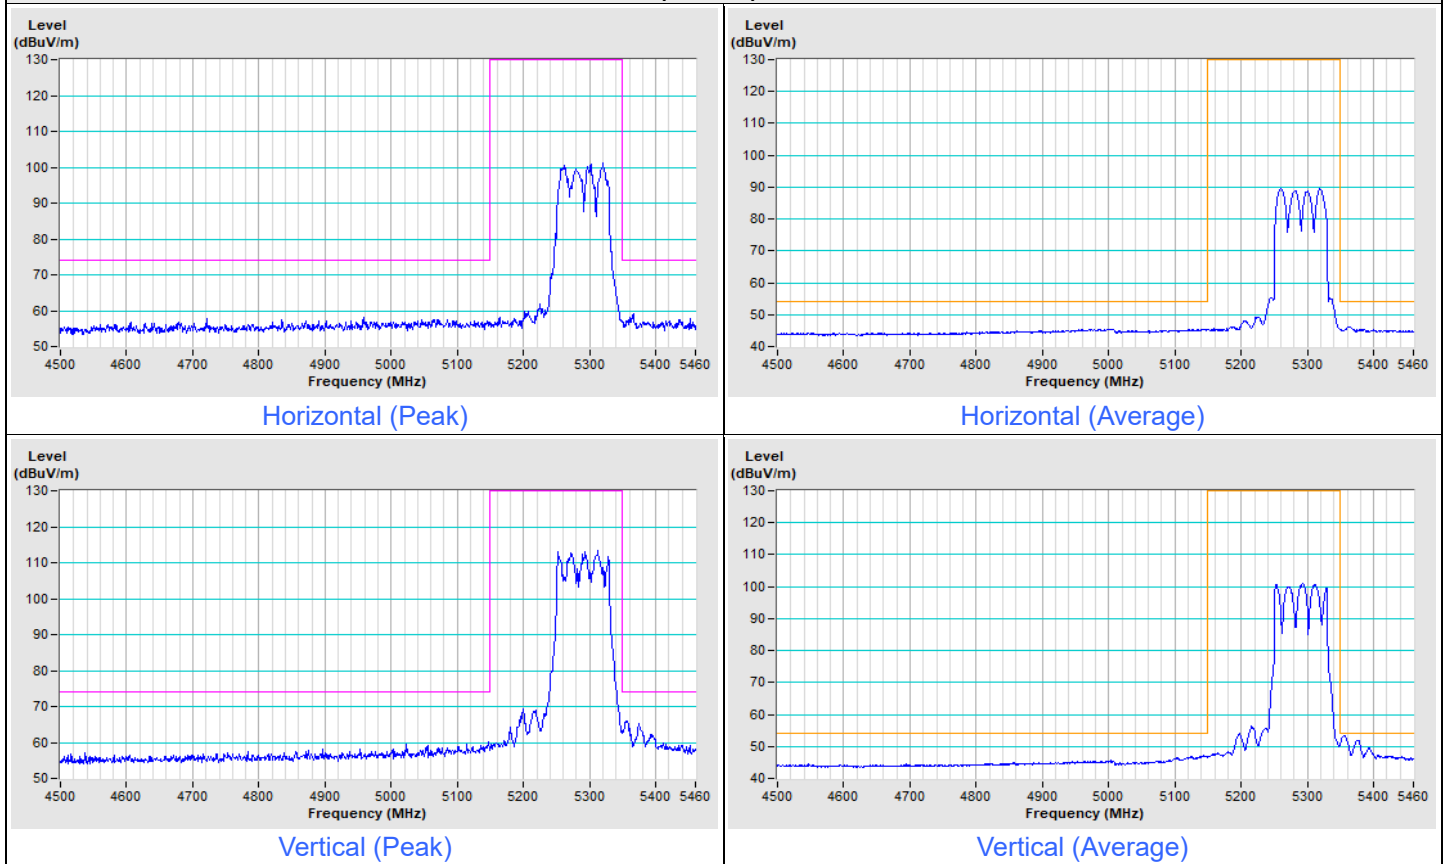


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

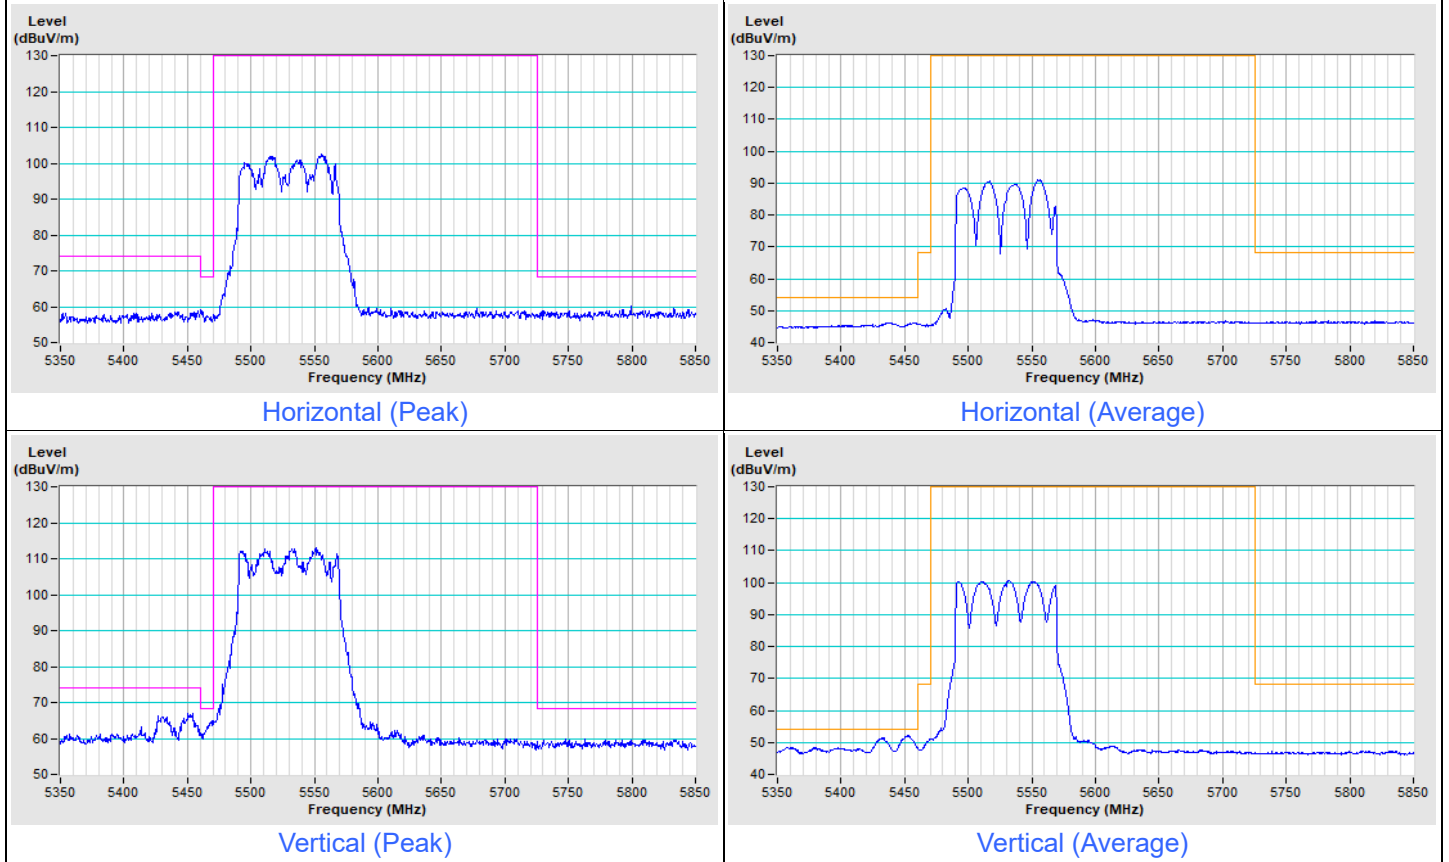


802.11be (EHT80) Channel 122

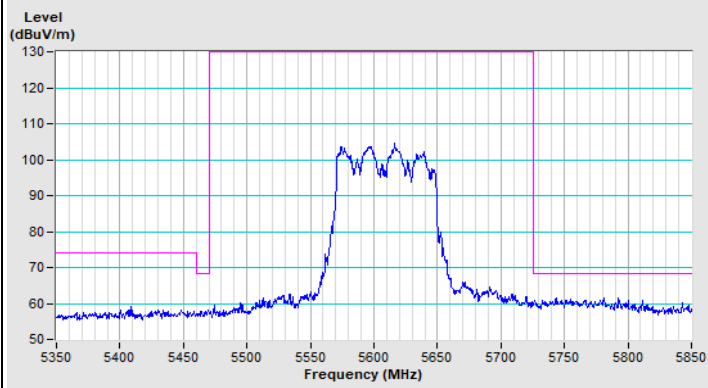


Horizontal (Peak)

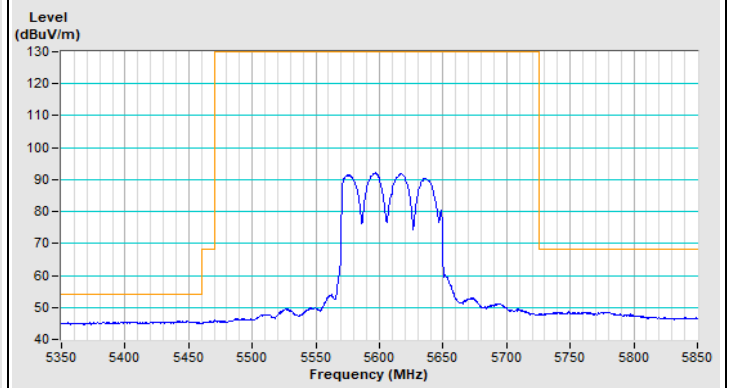

Horizontal (Average)

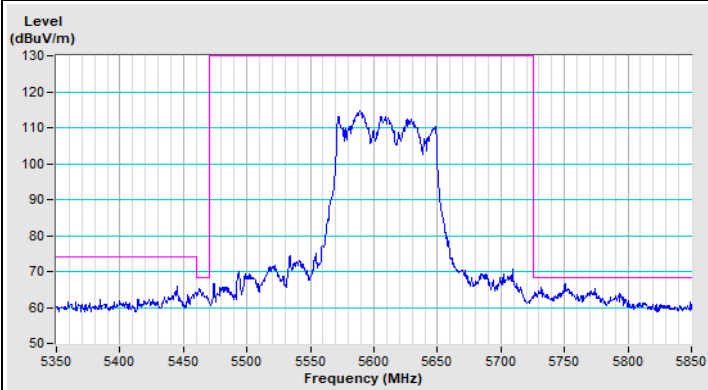


Vertical (Peak)

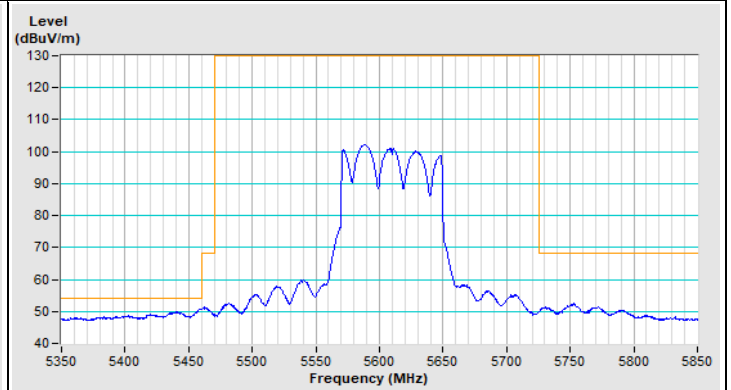

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 138

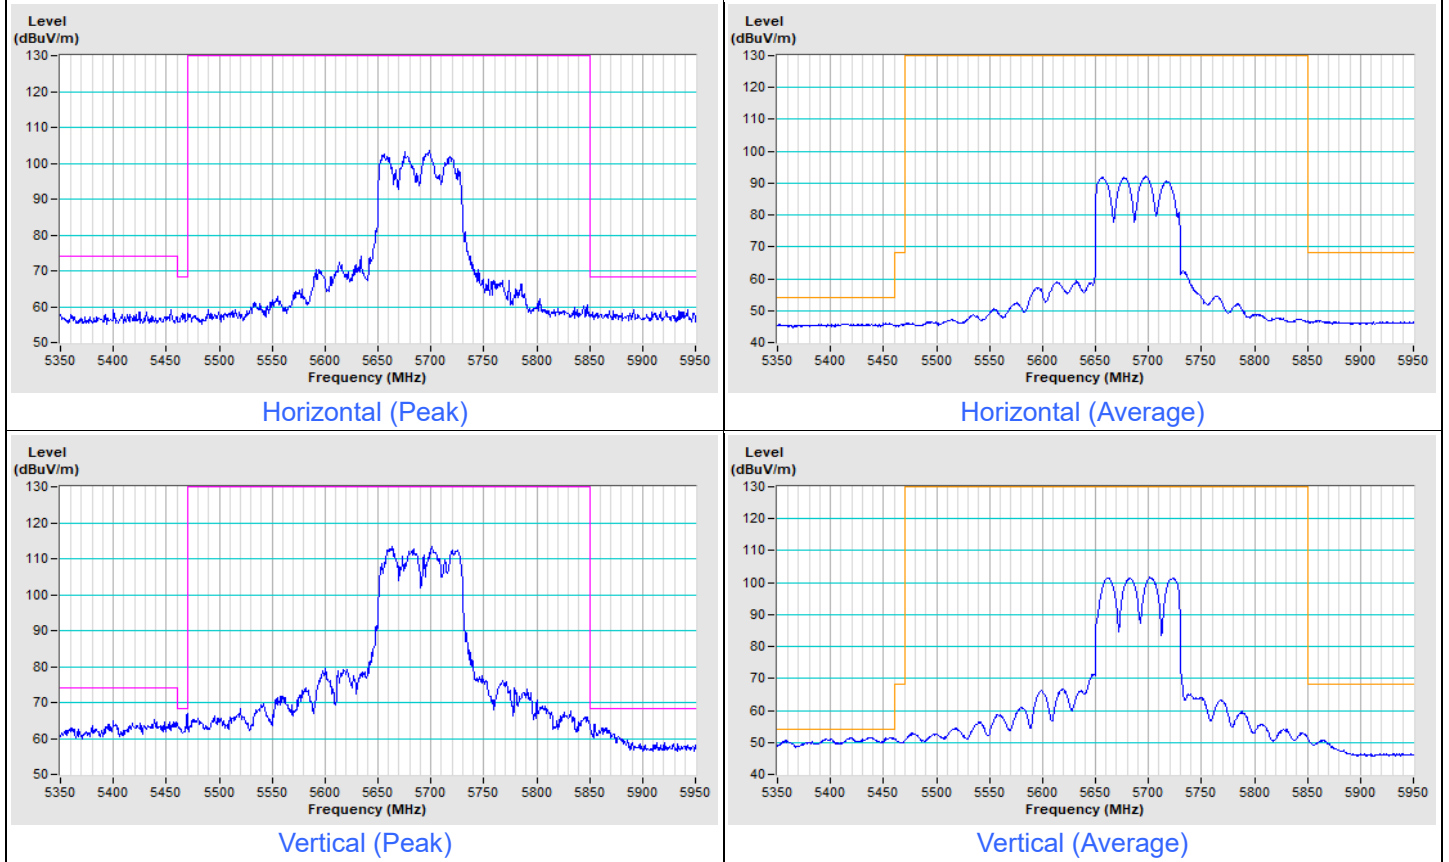


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT160) Channel 50

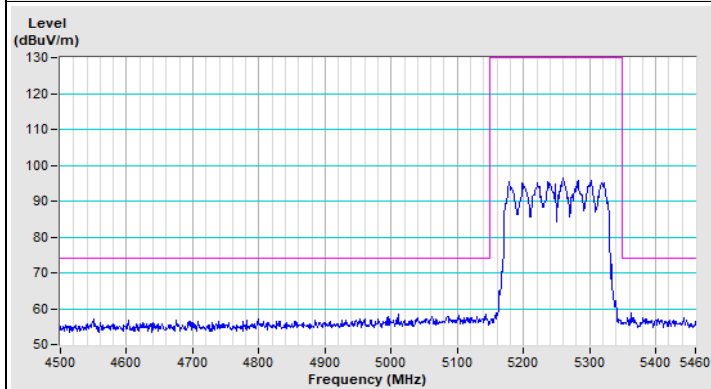


Horizontal (Peak)

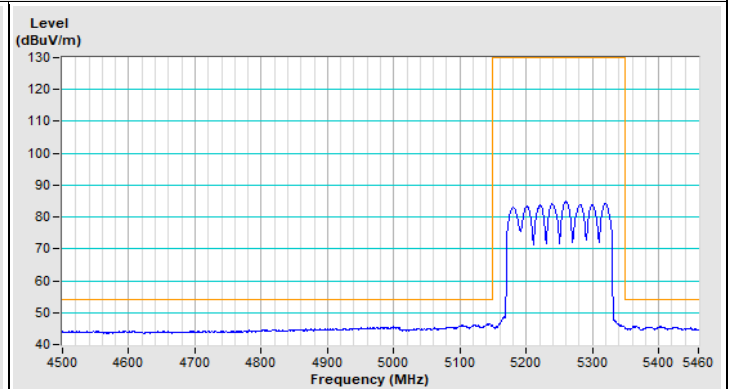

Horizontal (Average)

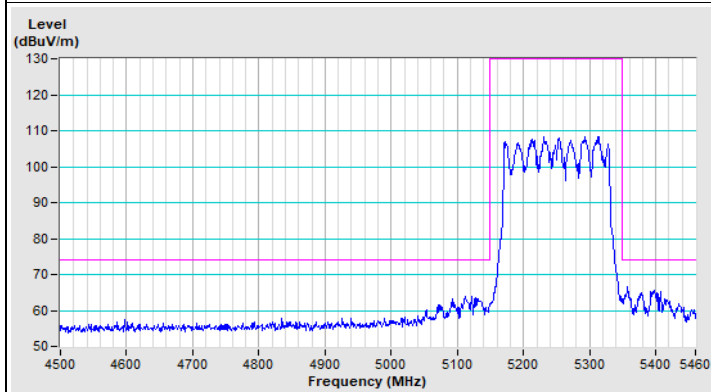


Vertical (Peak)

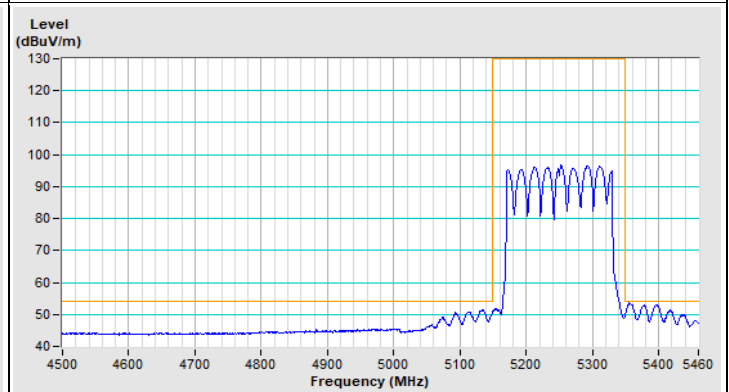

Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

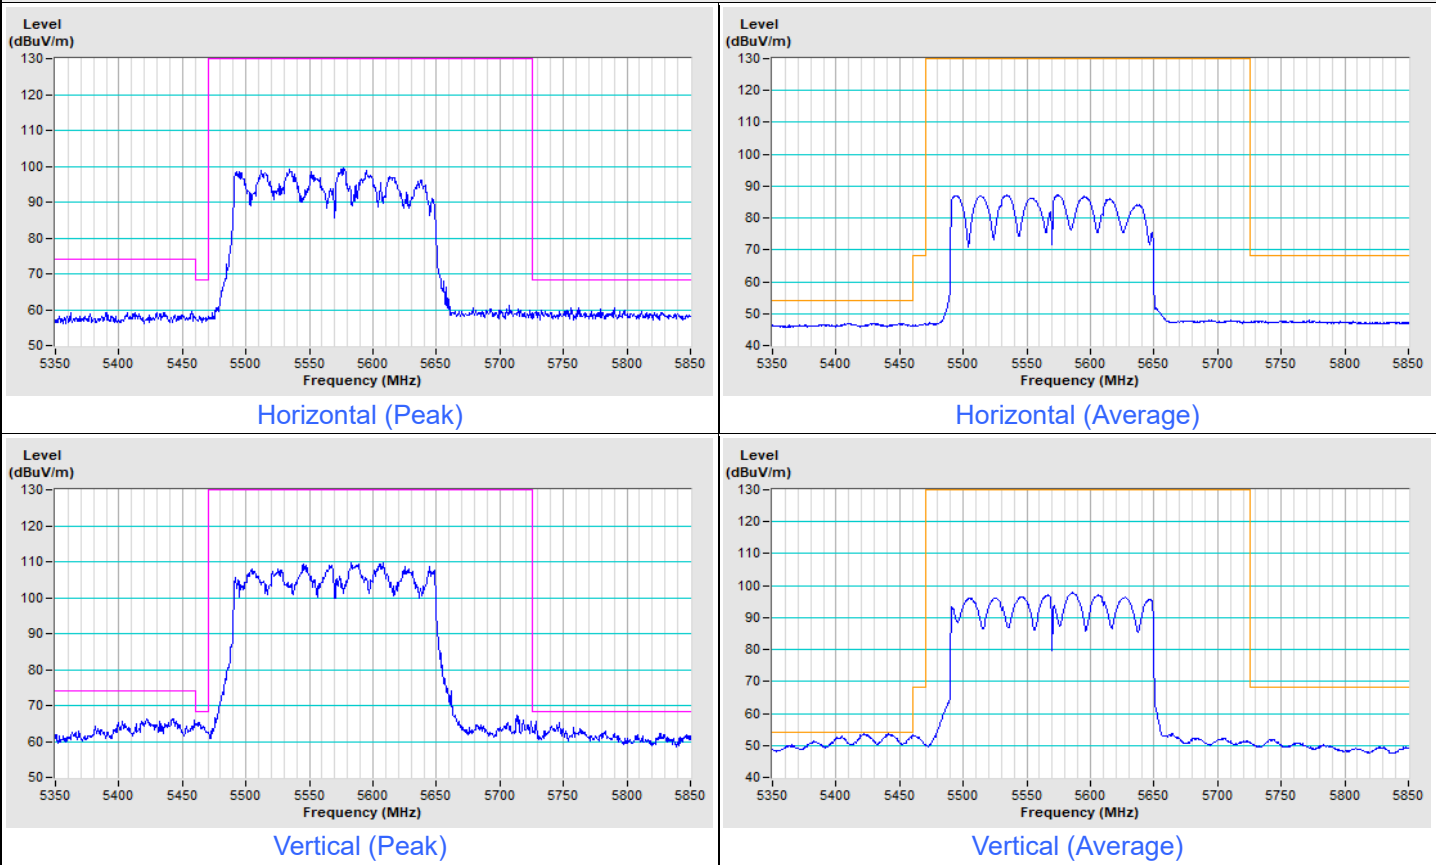

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---