


## Appendix C. Co-location

## 1. Results of Radiated Emissions for Co-located


|               |                                                                                              |                |                           |
|---------------|----------------------------------------------------------------------------------------------|----------------|---------------------------|
| Temperature   | 26°C                                                                                         | Humidity       | 60%                       |
| Test Engineer | Jim Huang                                                                                    | Configurations | 2.4GHz + 5GHz TX function |
| Test Mode     | Mode 2. EUT 2 (with internal antenna) + Embedded antenna / Ant. 18 (2.4GHz) + Ant. 19 (5GHz) |                |                           |

### Horizontal

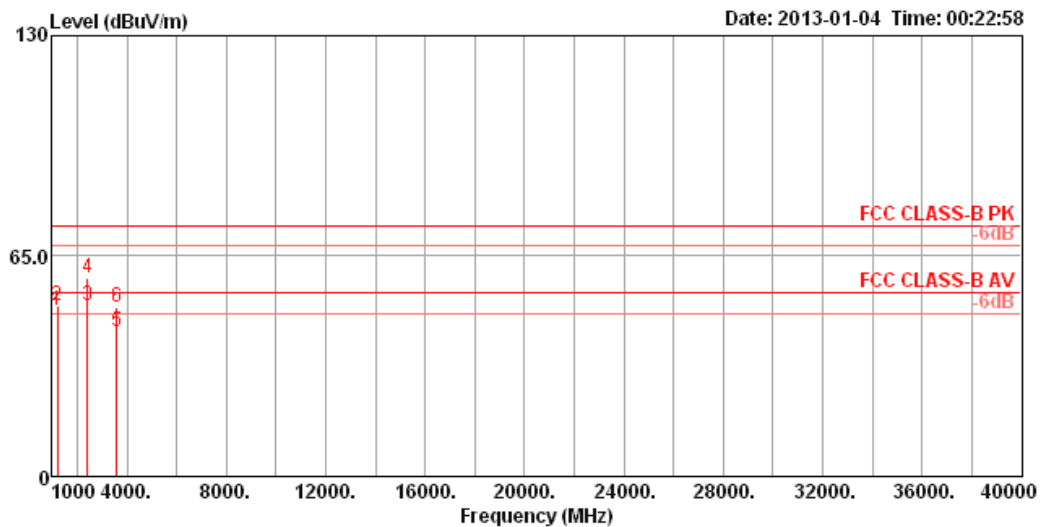

|      | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | A/Pos | T/Pos | Pol/Phase  | Remark  |
|------|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|------------|---------|
|      | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | cm    | deg   |            |         |
| 1 !  | 1200.00 | 48.96  | 54.00  | -5.04  | 59.75 | 2.52  | 24.46   | 37.77  | 102   | 344   | HORIZONTAL | Average |
| 2    | 1200.00 | 50.56  | 74.00  | -23.44 | 61.35 | 2.52  | 24.46   | 37.77  | 102   | 344   | HORIZONTAL | Peak    |
| 3 pp | 2399.94 | 50.32  | 54.00  | -3.68  | 54.41 | 3.69  | 27.90   | 35.68  | 100   | 309   | HORIZONTAL | Average |
| 4 pk | 2400.11 | 58.55  | 74.00  | -15.45 | 62.64 | 3.69  | 27.90   | 35.68  | 100   | 309   | HORIZONTAL | Peak    |
| 5    | 3599.90 | 42.48  | 54.00  | -11.52 | 42.90 | 4.72  | 30.83   | 35.97  | 100   | 268   | HORIZONTAL | Average |
| 6    | 3599.93 | 49.71  | 74.00  | -24.29 | 50.13 | 4.72  | 30.83   | 35.97  | 100   | 268   | HORIZONTAL | Peak    |

# Vertical

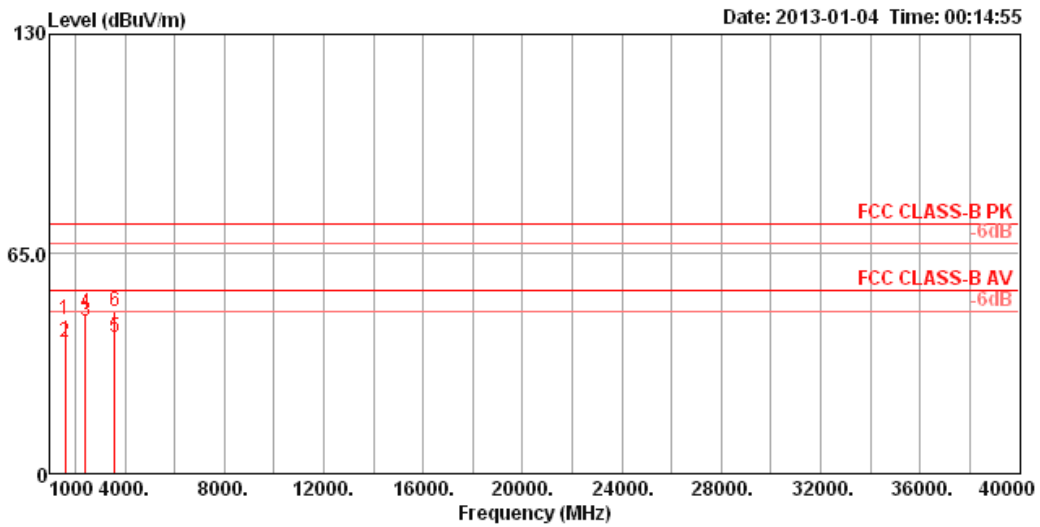

|      | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | A/Pos | T/Pos | Pol/Phase | Remark  |
|------|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|-----------|---------|
|      | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | cm    | deg   |           |         |
| 1    | 1599.78 | 45.47  | 74.00  | -28.53 | 53.73 | 2.97  | 25.66   | 36.89  | 100   | 330   | VERTICAL  | Peak    |
| 2    | 1599.92 | 39.00  | 54.00  | -15.00 | 47.26 | 2.97  | 25.66   | 36.89  | 100   | 330   | VERTICAL  | Average |
| 3 pp | 2399.98 | 44.90  | 54.00  | -9.10  | 48.99 | 3.69  | 27.90   | 35.68  | 100   | 358   | VERTICAL  | Average |
| 4    | 2399.98 | 47.41  | 74.00  | -26.59 | 51.50 | 3.69  | 27.90   | 35.68  | 100   | 358   | VERTICAL  | Peak    |
| 5    | 3600.00 | 40.48  | 54.00  | -13.52 | 40.90 | 4.72  | 30.83   | 35.97  | 100   | 56    | VERTICAL  | Average |
| 6 pk | 3600.00 | 48.07  | 74.00  | -25.93 | 48.49 | 4.72  | 30.83   | 35.97  | 100   | 56    | VERTICAL  | Peak    |