FCC LABEL LOCATION

The label will be permanently affixed at a conspicuous location on the device.

Back Side:

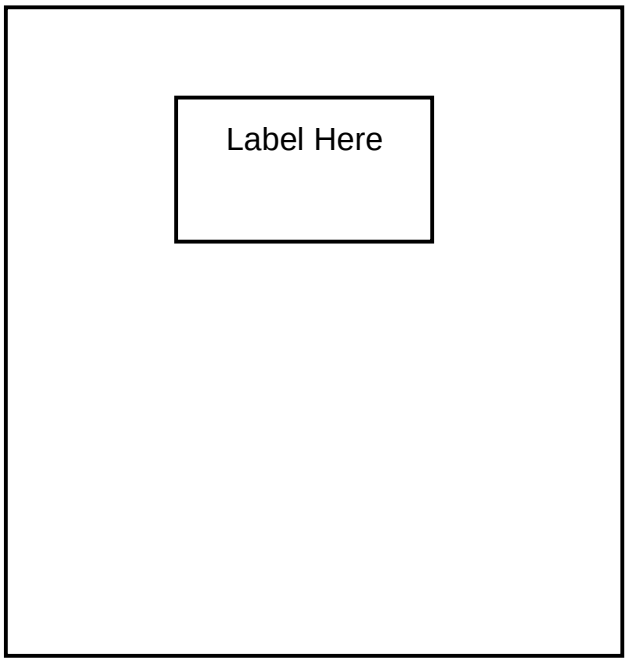

(Fig.1) FCC ID: UZ7AP7502

Safety Label Note:

1. Printing color: Black
2. 製造國家(MFG Country):

   Decide by import and export country
   for example:
   1. MADE IN TAIWAN
   2. MADE IN CHINA

   印刷廠商代號(Vender ID): (CSA 要求標示)

   Decide by Vendor

   製造工廠代號 (MFG Factory): (UL 要求標示)

   視代工廠而定 (Decide by MFG Factory)
   1.昊陽 / JoyTech (深圳/ ShenZhen) ----->None
   2.Accton---------->AC



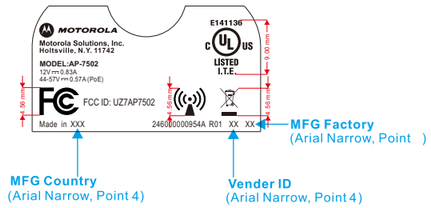

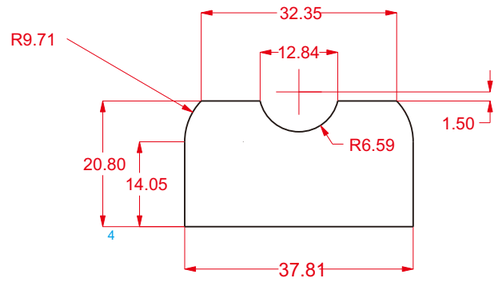

Modification	
1	
2	
3	
4	
5	
6	
7	

This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.

Card Paper / Top lineboard

Paper GSM (g/m²)	CCNB	SBS	Double SBS
250			
280			
300			
310			
340			
350			

Coated	UV		Mar Resistant Varnish	
PP Film	LF / T= 0.15 mm		DF / T= 0.18 mm	

Corrugate list

Flute (A Degree)		Single wall/ Double wall GSM g/m (Reference) (Top lineboard/Medium/Bottom lineboard)		Bursting Strength (Kgf/cm²)	End Crush Test (Kgf/cm)
Yellow	A/C	Taiwan	230 X 180 X 230	16	33.6
		China	250 X 150 X 250		
	B	Taiwan	230 X 100 X 230	14	26.2
		China	250 X 112 X 250		
	E	Taiwan	230 X 100 X 230	14	22.5
		China	250 X 100 X 250		
	AB	Taiwan	230X100X100X100X230	18	37.1
	BC	China	250X100X100X150X250		
White	A/C	Taiwan	230 X 100 X 230	16	26
		China	205 X 140 X 230		
	B	Taiwan	220 X 100 X 200	14	20.5
		China	175 X 140 X 230		
	E	Taiwan	220 X 100 X 200	12	18.6
		China	175 X 100 X 250		
	AB	Taiwan	230X100X100X100X230	18	37.4
	BC	China	175X100X100X150X250		

Cardboard Die Cut Legend

(CL) Cutting Line
(CI) Crease Line
(PBL) Partial Blunt Line
(SO) Slit-Score Line
(SL) Slit Line

Flute Direction	
Manufactory Stamp	MFG STAMP
Glue Joint	

Unspecialized Die Cut Tolerance =+/-0.5mm

Unit	GRADE	0	1	2	3	4	5
0 —	16	0.05	0.1	0.15	0.2	0.2	0.5
16 —	63	0.05	0.15	0.2	0.3	0.3	0.8
63 —	250	0.05	0.2	0.25	0.4	0.5	1.2
250 —	500	0.1	0.25	0.3	0.6	0.8	1.8
500 —	1000		0.3	0.5	0.8	1.2	3.0

Printing Tolerance = +/ - mm

Pulp Tray Recycle Kraft 80% + Newspaper 20%

Weight/gs=	+/-5%		
Thickness/mm	1.5		2.0
Draft Angle	3°	Hydrous %	7-11%

PE Bag (A Degree) | Clear | Pink

Normal (None Anti-Static)		Anti-Static	ESD Value/Ω/ohm = 9-11		
		Electronic	ESD Value/Ω/ohm < 5		
Thickness/mm		0.04	0.06	0.08	
Bubble Bag (Bubble Ø=10mm)		Single layer	Put-in material >= 8 kg (By 1.5M / Width x 100M / Length)		
		Double layer	Put-in material >= 16 kg (By 1.5M / Width x 100M / Length)		

EPE Foam | White | Pink

Density (kg / m³)		>=27	Other
Laminated		Non - laminated	

Label list (Total Thickness = mm±10%)

Material & Thickness				Adhesive (Except all leds in FP label)	
	Art paper		0.025mm / 25# / 1mil		Acrylic T=0.022mm
✓	3M7872	✓	0.050mm / 50# / 2mil	✓	Acrylic UL approved T=0.046mm
	Metalized		0.076mm / 75# / 3mil		"R" Adhesive T=0.022mm
	White Polyester		0.178mm / 7mil		Water Adhesive T=0.022mm
	(PP)Pepa paper		0.254mm / 10mil		3M 467 T=0.05mm / 2mil
	PC 8B35		0.381mm / 15mil		3M 468 T=0.127mm / 5mil
	PC 8010		0.500mm / 20mil		3M 7945 T=0.127mm / 5mil
	PP Film	✓	LF (T = 0.045mm)		DF (T = 0.035mm)

Comply with RoHs

Others

Material Spec:

IQC Inspect Color

Please refer to

Approve	Lin	MAY07.14
Check		
Design	Carry	MAY07.14

Accton TECHNOLOGY CORP.

Part No. 246000000954A REV. 01

Description:
UL LABEL WAP1022A-FLF-D8 US

UNIT	SCALE 1 / 1	SIZE A3
MM / (IN)	Outside View	Sheet 1 of 1