



FCC RF Test Report

FCC ID : UZ7EM45B2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45B2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Jul. 13, 2024 ~ Jul. 30, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Test Software.....	6
1.6 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	14
3.3 Dwell Time Measurement.....	17
3.4 20dB and 99% Bandwidth Measurement	19
3.5 Output Power Measurement.....	24
3.6 Conducted Band Edges Measurement.....	25
3.7 Conducted Spurious Emission Measurement	28
3.8 Radiated Band Edges and Spurious Emission Measurement	32
3.9 AC Conducted Emission Measurement.....	36
3.10 Antenna Requirements.....	38
4 LIST OF MEASURING EQUIPMENT.....	39
5 UNCERTAINTY OF EVALUATION.....	40
APPENDIX A. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR460508E	Rev. 01	Initial issue of report	Sep. 11, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 50\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 25\text{KHz}$ or 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 20sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	500 KHz	Pass	-
3.4	2.1049	99% Bandwidth	-	Report only	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 1\text{W}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.15 dB at 902.75 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.75 dB at 0.538 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B2
FCC ID	UZ7EM45B2
IMEI Code	Conducted: 350854420027373/350854420030385 Radiation: 350854420030286/350854420030294 Conduction: 350854420026896/350854420028314
HW Version	EV2.5
SW Version	13-32-02.00-TG-U06-STD-ATH-04
MFD	02AUG24
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	902.75 MHz ~ 927.25 MHz
Number of Channels	50
Channel Spacing	0.5 MHz
Maximum Output Power to Antenna	23.96 dBm (0.2489 W)
99% Occupied Bandwidth	0.056 MHz
Antenna Type / Gain	IFA Antenna type with gain -3.50 dBi
Type of Modulation	ASK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902.75-927.25 MHz	1	902.75	26	915.25
	2	903.25	27	915.75
	3	903.75	28	916.25
	4	904.25	29	916.75
	5	904.75	30	917.25
	6	905.25	31	917.75
	7	905.75	32	918.25
	8	906.25	33	918.75
	9	906.75	34	919.25
	10	907.25	35	919.75
	11	907.75	36	920.25
	12	908.25	37	920.75
	13	908.75	38	921.25
	14	909.25	39	921.75
	15	909.75	40	922.25
	16	910.25	41	922.75
	17	910.75	42	923.25
	18	911.25	43	923.75
	19	911.75	44	924.25
	20	912.25	45	924.75
	21	912.75	46	925.25
	22	913.25	47	925.75
	23	913.75	48	926.25
	24	914.25	49	926.75
	25	914.75	50	927.25

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	UHF RFID
Conducted Test Cases	Mode 1: RFID Tx 902.75 MHz Mode 2: RFID Tx 914.75 MHz Mode 3: RFID Tx 927.25 MHz
	UHF RFID
Radiated Test Cases	Mode 1: RFID Tx 902.75 MHz Mode 2: RFID Tx 914.75 MHz Mode 3: RFID Tx 927.25 MHz
AC Conducted Emission	Mode 1 : RFID read + USB Cable1 + Charging from AC Adapter 1 + Battery
Remark: For Radiated Test Cases, The tests were performed with Adapter 1 and USB Cable 1.	

2.3 Connection Diagram of Test System

For Conducted Emission

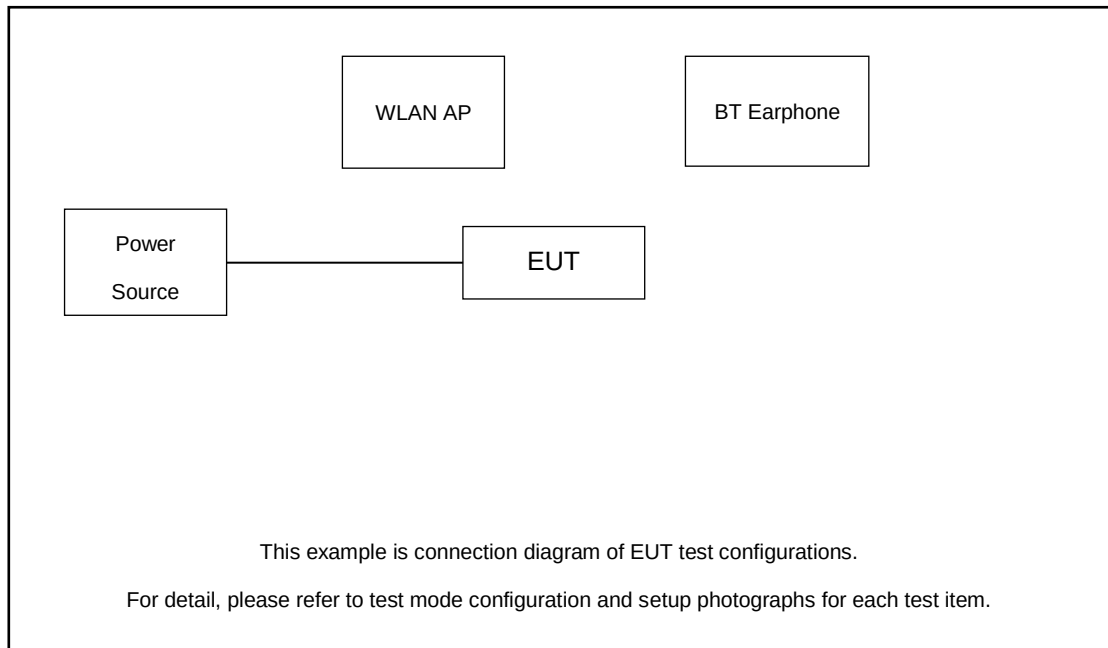

For Radiated Emission

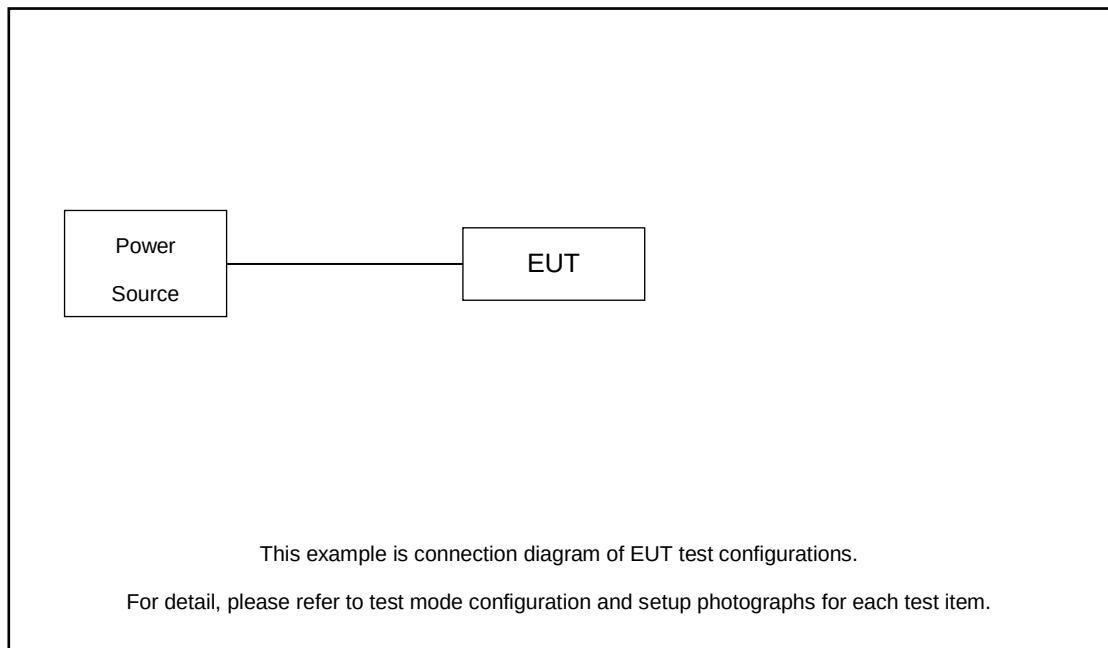

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.95 / Tera Term Version 4.105” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 0.50 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 0.50 + 10 = 10.50 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
Set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

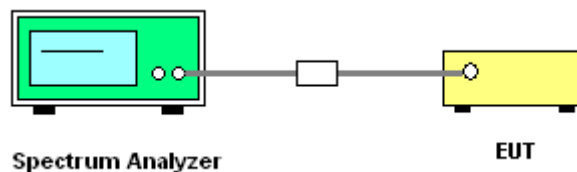




3.1.5 Test Result of Number of Hopping Frequency

TestMode	Result[Num]	Limit[Num]	Verdict
RFID	50	≥50	PASS

Number of Hopping Channel Plot on Channel 00 - 49

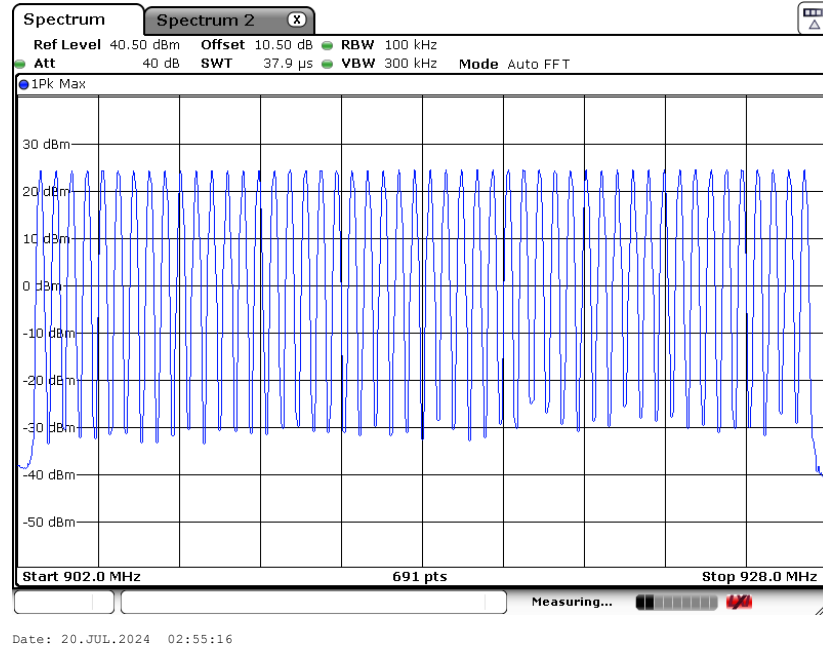

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
6. Span = wide enough to capture the peaks of two adjacent channels;
RBW Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
7. Measure and record the results in the test report.

3.2.4 Test Setup

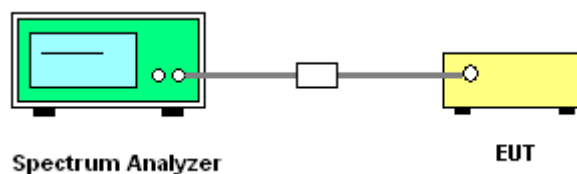




3.2.5 Test Result of Hopping Channel Separation


TestMode	NTX	Freq(MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
RFID	1	902.75	0.509	0.055	PASS
RFID	1	914.75	0.498	0.056	PASS
RFID	1	927.25	0.498	0.056	PASS

Channel Separation Plot on 902.75 MHz

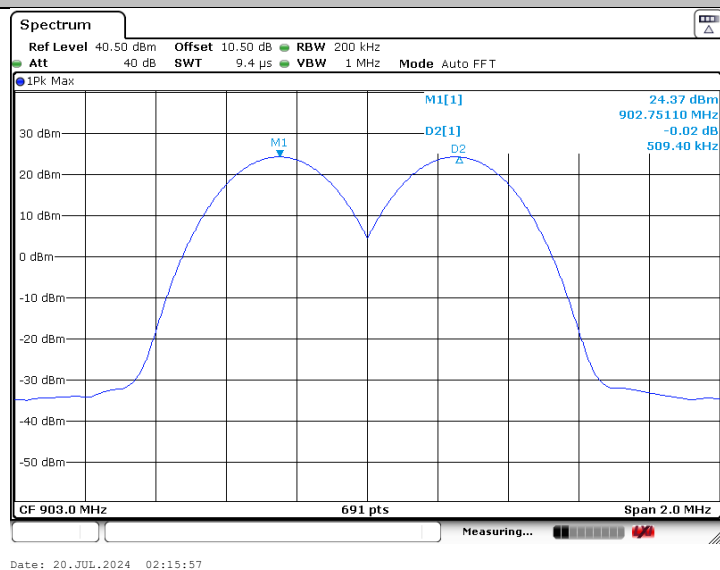




Channel Separation Plot on 914.75 MHz

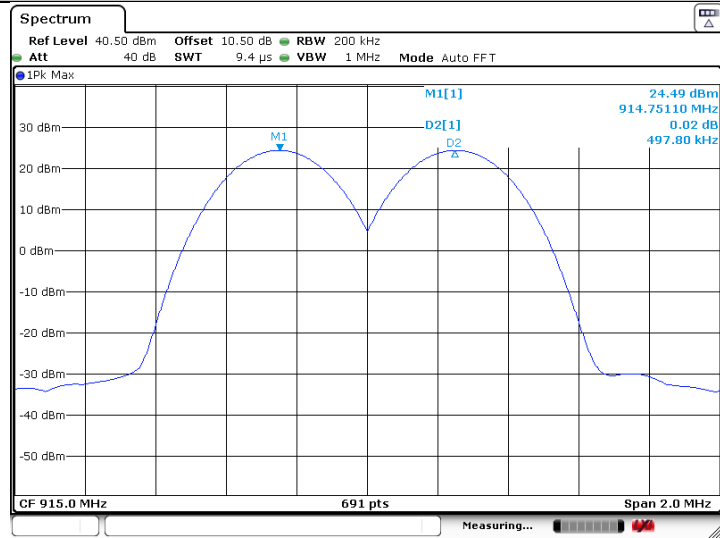

Channel Separation Plot on 927.25 MHz

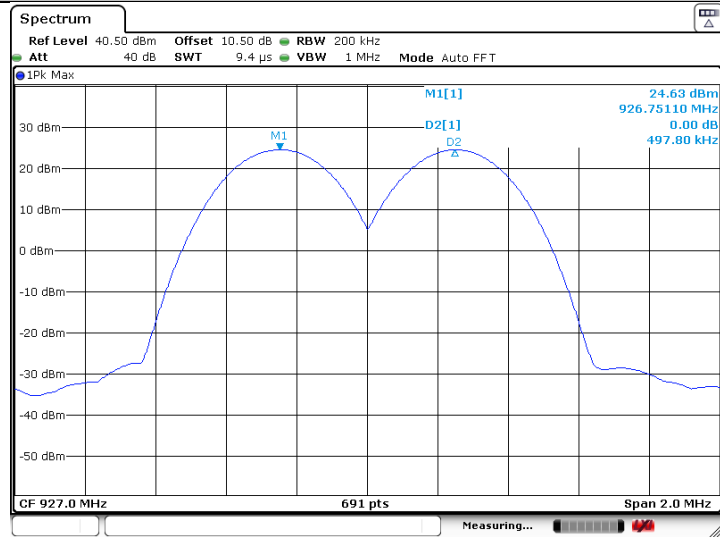

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 20 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.


3.3.4 Test Setup

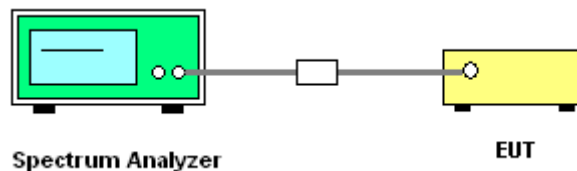


3.3.5 Test Result of Dwell Time

Mod.	DT On-time per hop (ms)	Total hops over 20sec	Dwell Time (sec)	Limits (sec)	Pass/Fail
RFID	11.25538	15.00	0.169	0.4	Pass

RFID _ DT On-time per hop

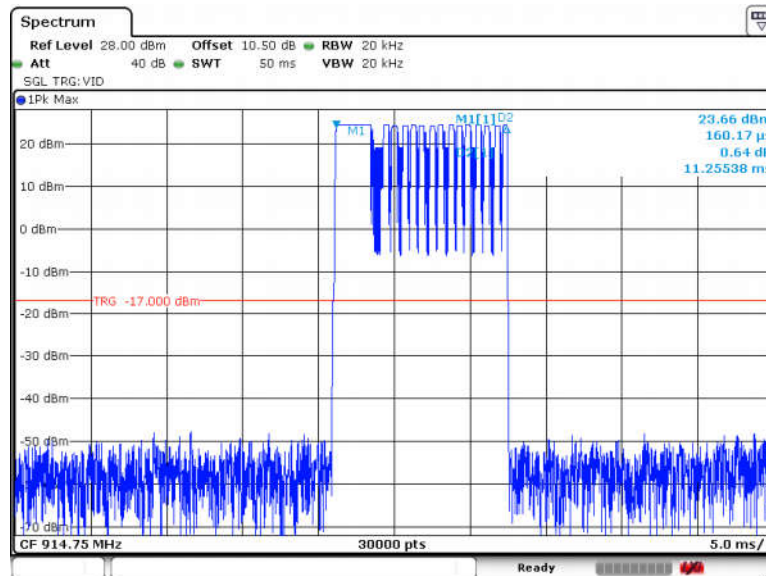

RFID _ Total hops over 20sec

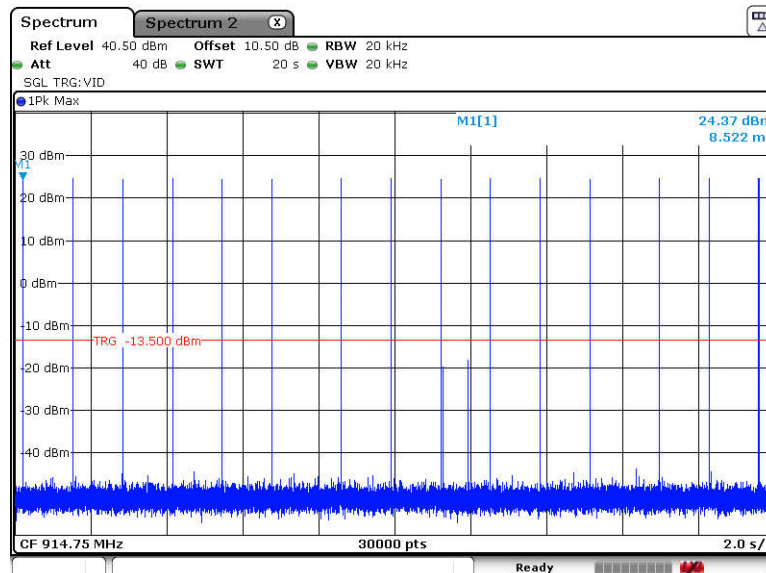

Remark: Dwell Time(s) = DT On-time per hop * Hops Over Occupancy Time (hops)

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

For frequency hopping systems operating in the 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
The RBW is set to 1% to 5% of the 99% OBW, the VBW is set to 3 times the RBW;
Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

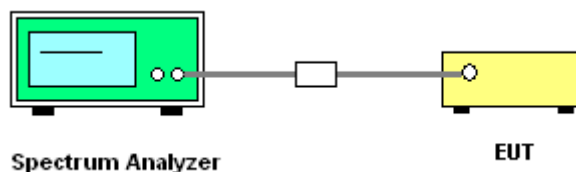




3.4.5 Test Result of 20dB Bandwidth


Mod.	NTX	Freq. (MHz)	20dB BW (MHz)	20dB BW Limit (MHz)	Pass/Fail
RFID	1	902.75	0.055	0.5	Pass
RFID	1	914.75	0.056	0.5	Pass
RFID	1	927.25	0.056	0.5	Pass

20 dB Bandwidth Plot on 902.75 MHz

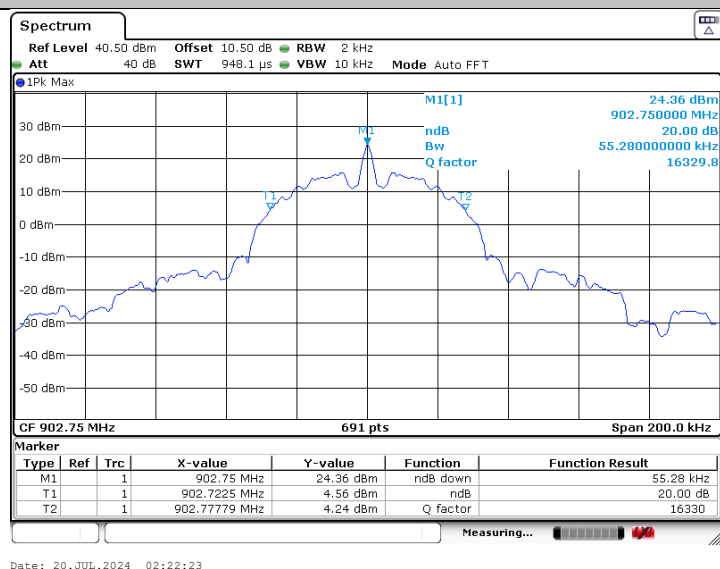




20 dB Bandwidth Plot on 914.75 MHz

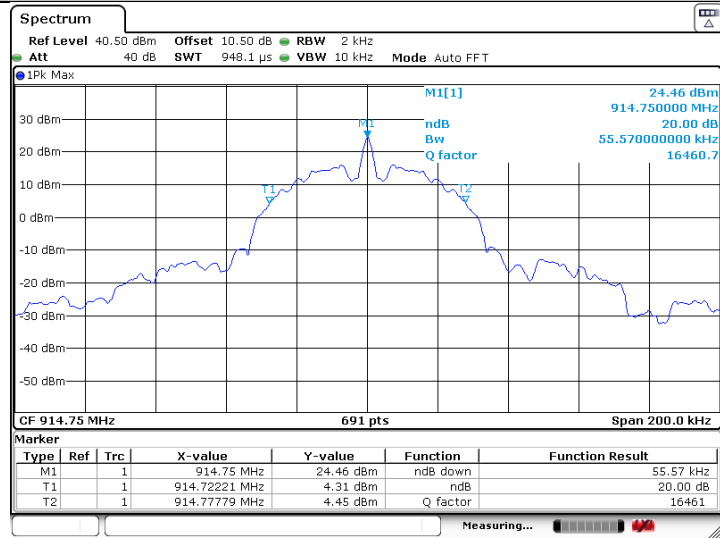

Date: 20.JUL.2024 02:23:21

20 dB Bandwidth Plot on 927.25 MHz

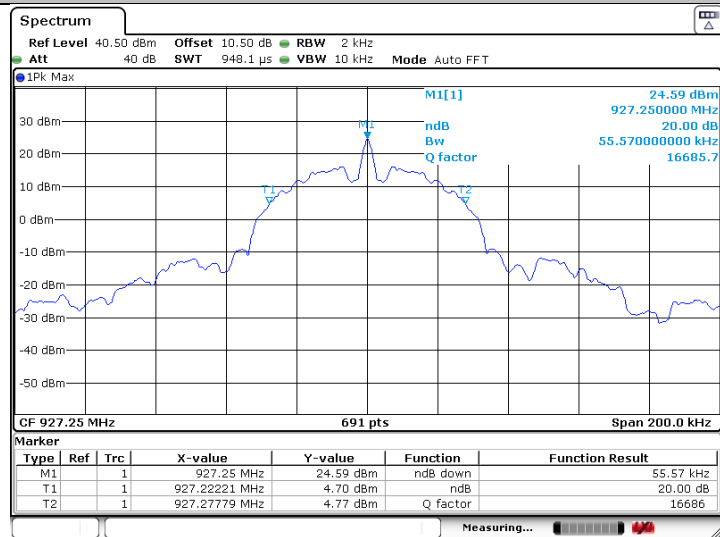


Date: 20.JUL.2024 02:24:05



3.4.6 Test Result of 99% Occupied Bandwidth


Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
RFID	1	902.75	0.056	Pass
RFID	1	914.75	0.056	Pass
RFID	1	927.25	0.056	Pass

99% Occupied Bandwidth Plot on 902.75 MHz

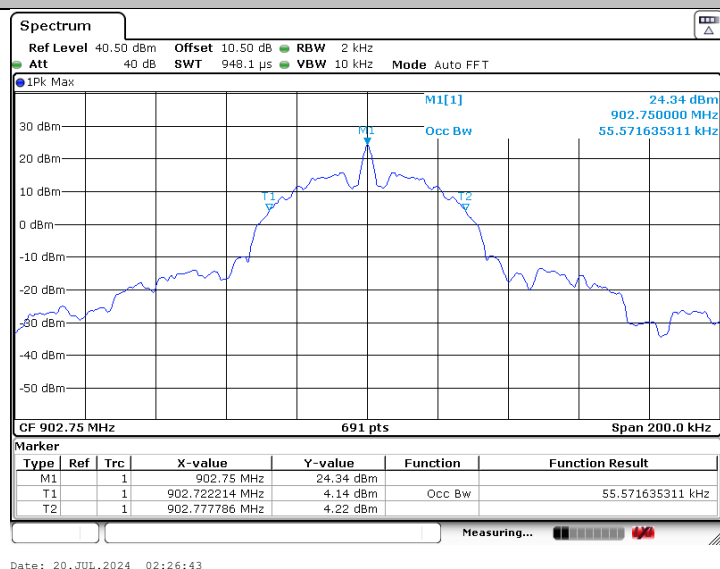




99% Occupied Bandwidth Plot on 914.75 MHz

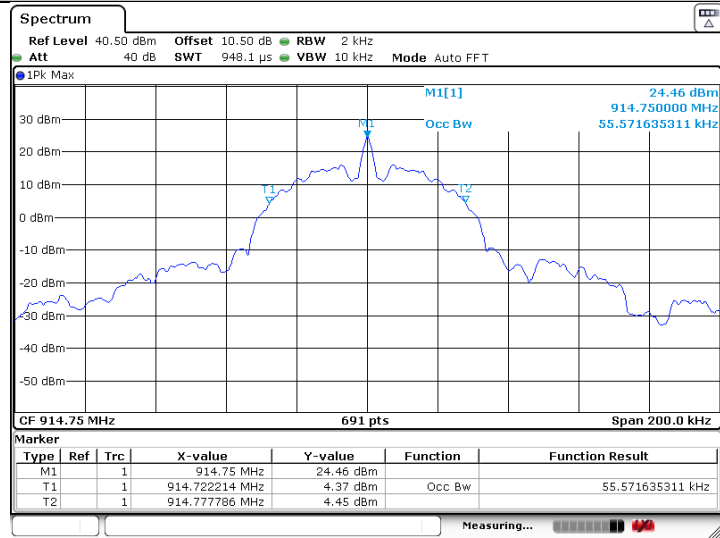

Date: 20.JUL.2024 02:26:05

99% Occupied Bandwidth Plot on 927.25MHz

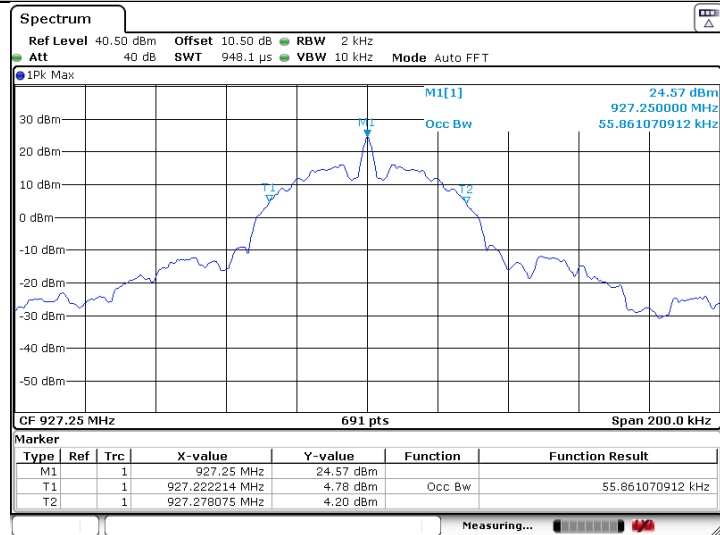

Date: 20.JUL.2024 02:25:13

3.5 Output Power Measurement

3.5.1 Limit of Output Power

15.247(b)(2): For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

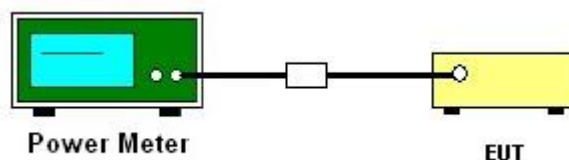

3.5.5 Test Result of Peak Output Power

DH	Freq. (MHz)	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
RFID	902.75	1	23.96	30.00	Pass
	914.75	1	23.89	30.00	Pass
	927.25	1	23.92	30.00	Pass

3.5.6 Test Result of Average Output Power (Reporting Only)

DH	Freq. (MHz)	NTX	Average Power (dBm)
RFID	902.75	1	23.88
	914.75	1	23.84
	927.25	1	23.81

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

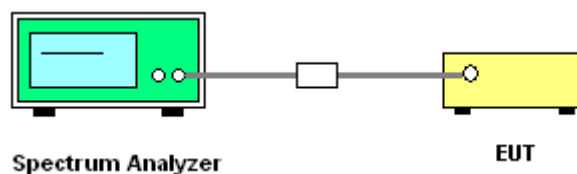





3.6.5 Test Result of Conducted Band Edges

<RFID>

Low Band Edge Plot on 902.75 MHz

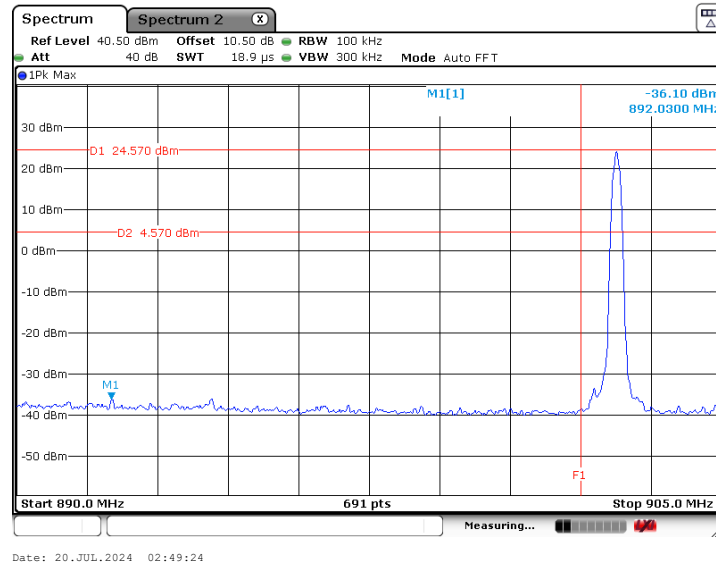

High Band Edge Plot on 927.25 MHz

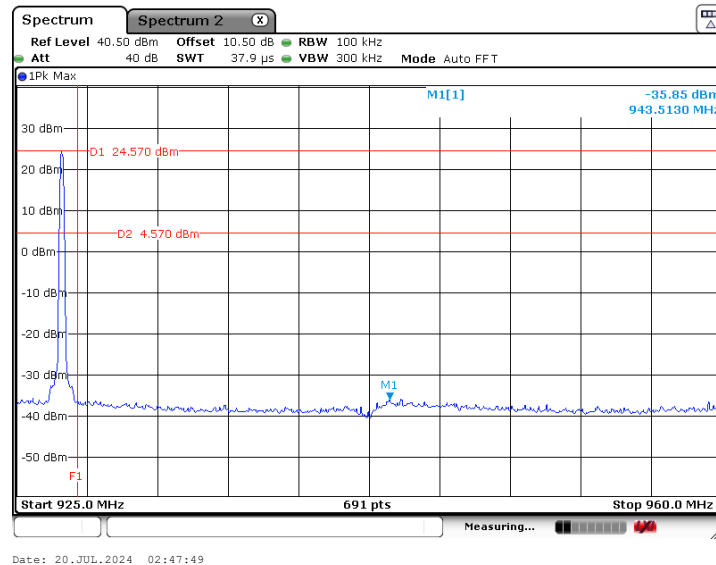





3.6.6 Test Result of Conducted Hopping Mode Band Edges

<RFID>

Hopping Mode Low Band Edge Plot on 902.75 MHz

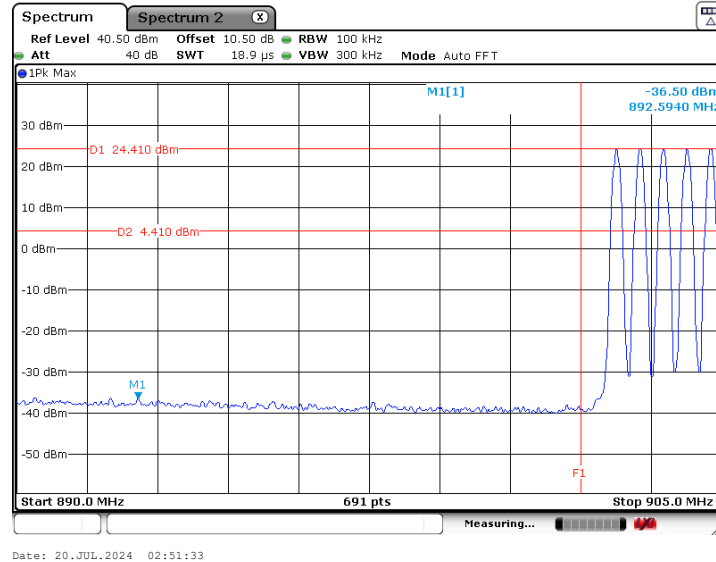

Hopping Mode High Band Edge Plot on 927.25 MHz

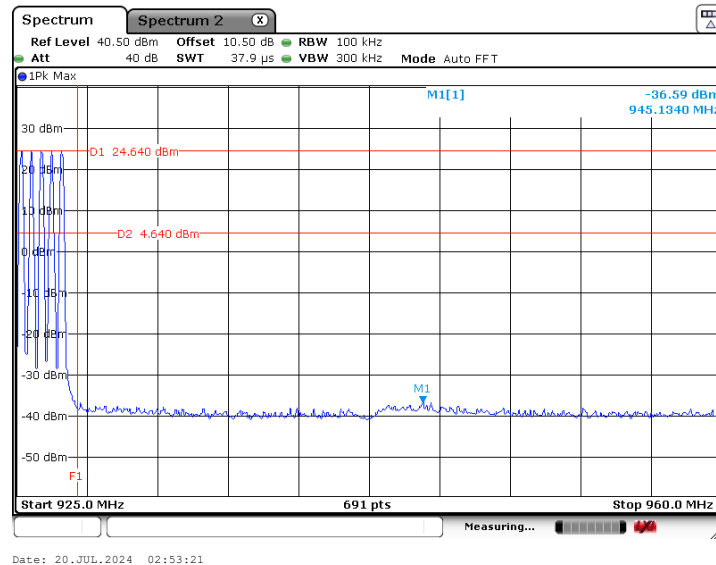

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

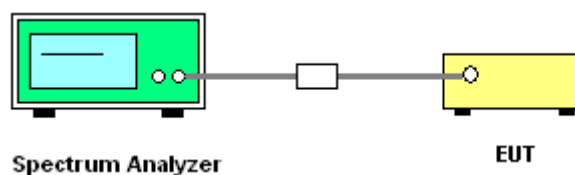


3.7.5 Test Result of Conducted Spurious Emission

<RFID>

CSE Plot on Ch 902.75 MHz

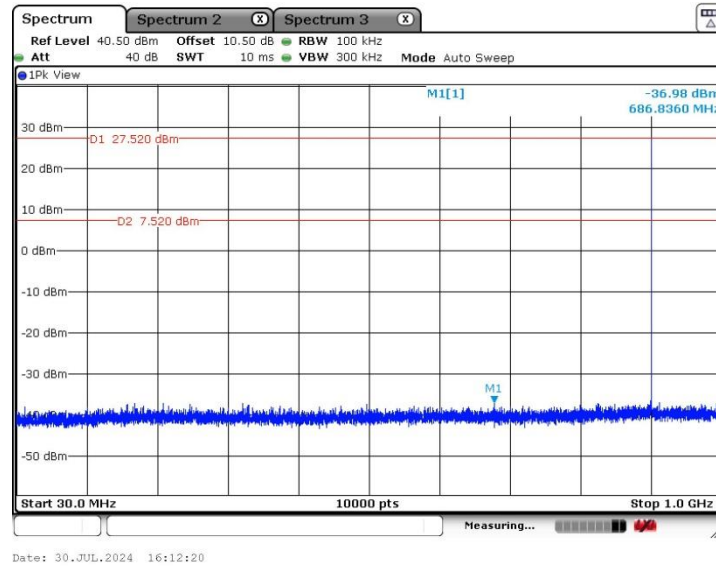


CSE Plot on Ch 902.75 MHz

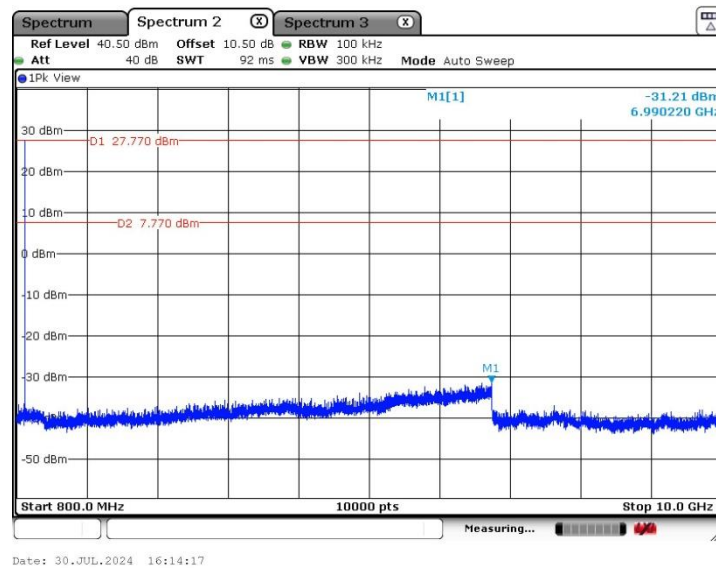




CSE Plot on Ch 914.75 MHz

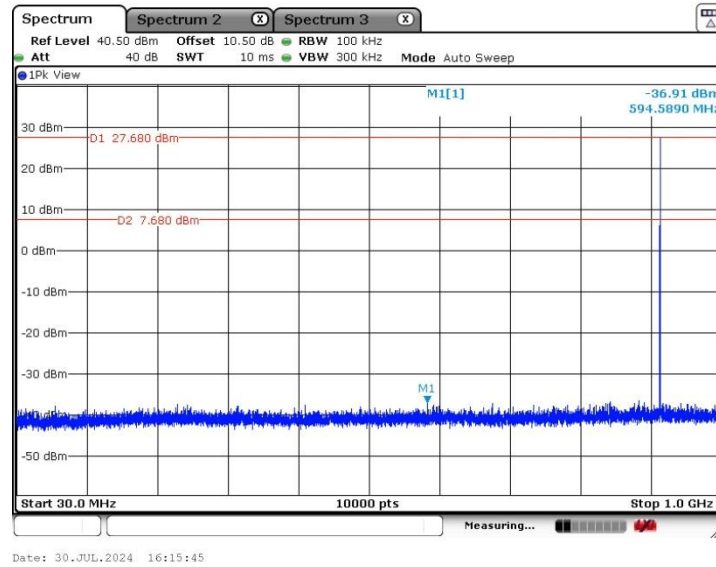


CSE Plot on Ch 914.75 MHz

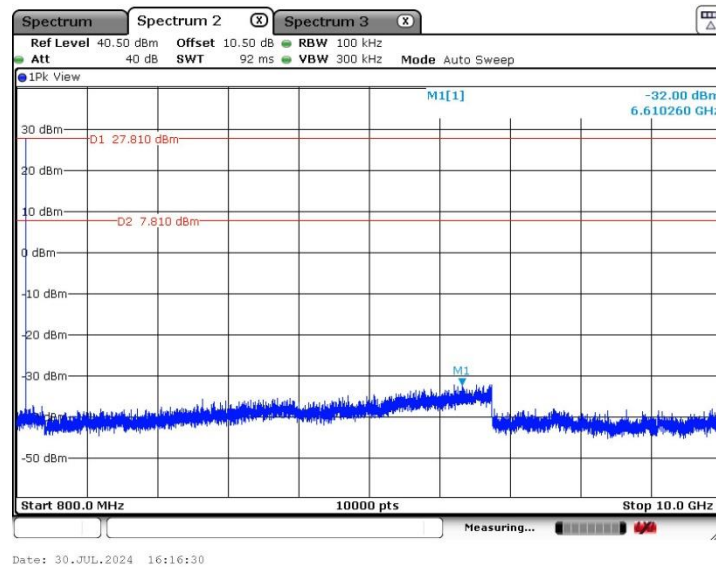




CSE Plot on Ch 927.25 MHz

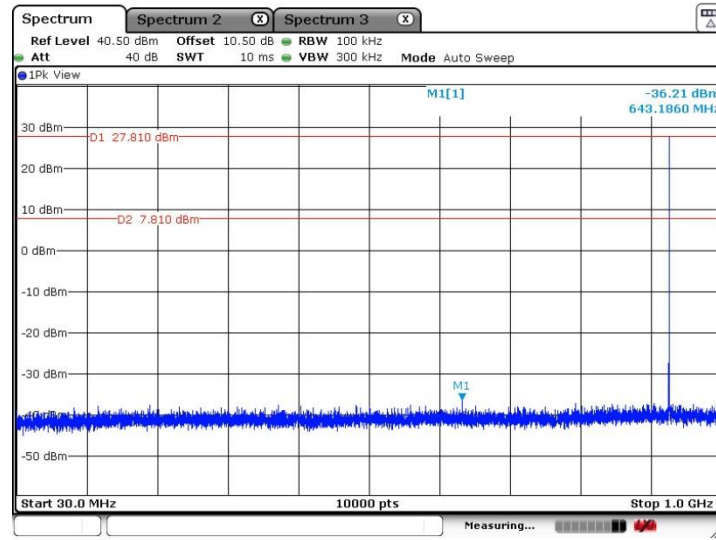

Date: 30.JUL.2024 16:17:39

CSE Plot on Ch 927.25 MHz

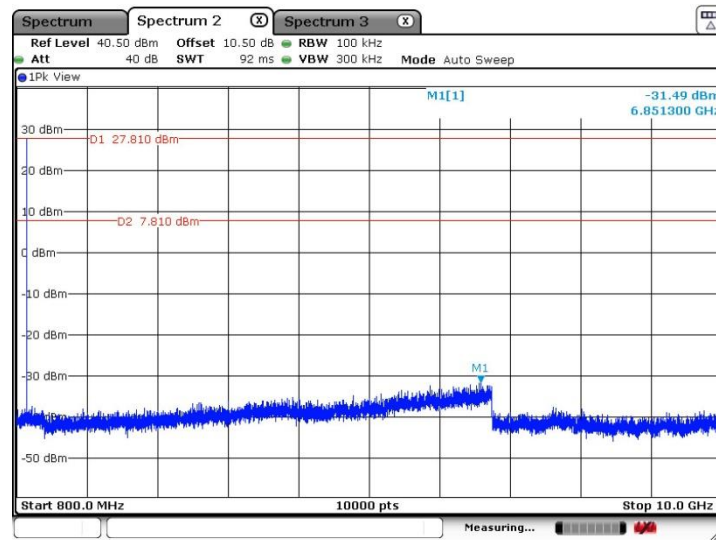

Date: 30.JUL.2024 16:19:04



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$


Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.8.4 Test Setup


For radiated emissions below 30MHz

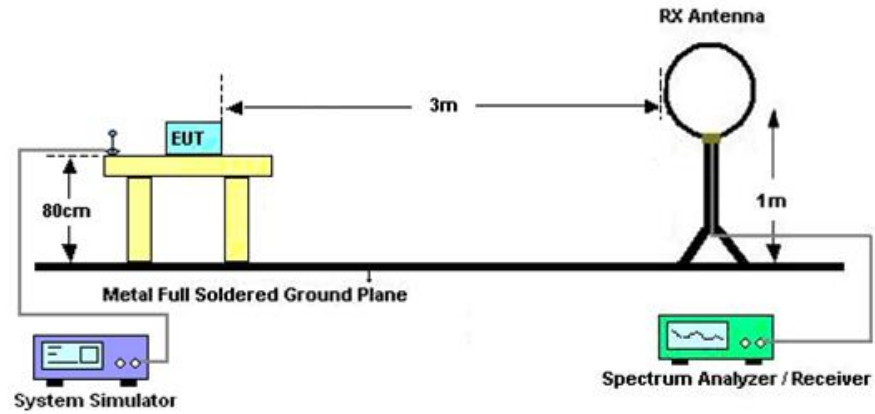

For radiated emissions from 30MHz to 1GHz

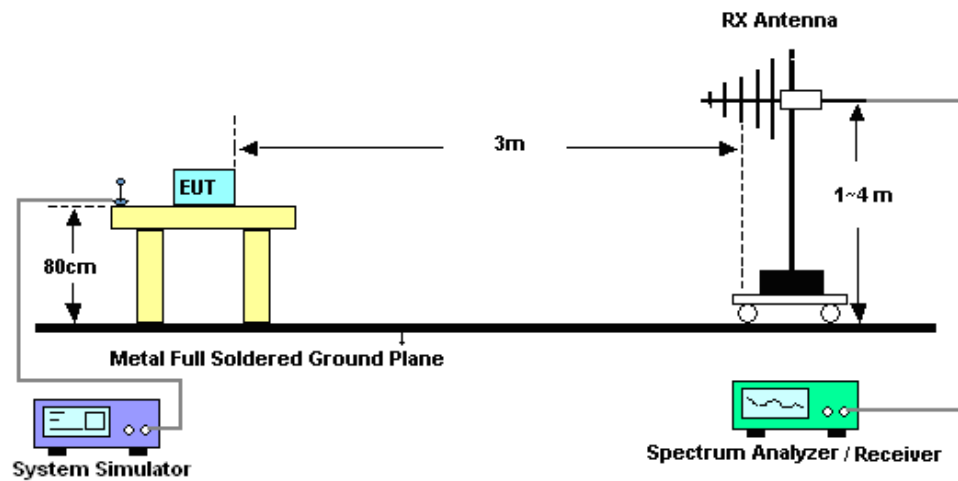

For radiated emissions above 1GHz

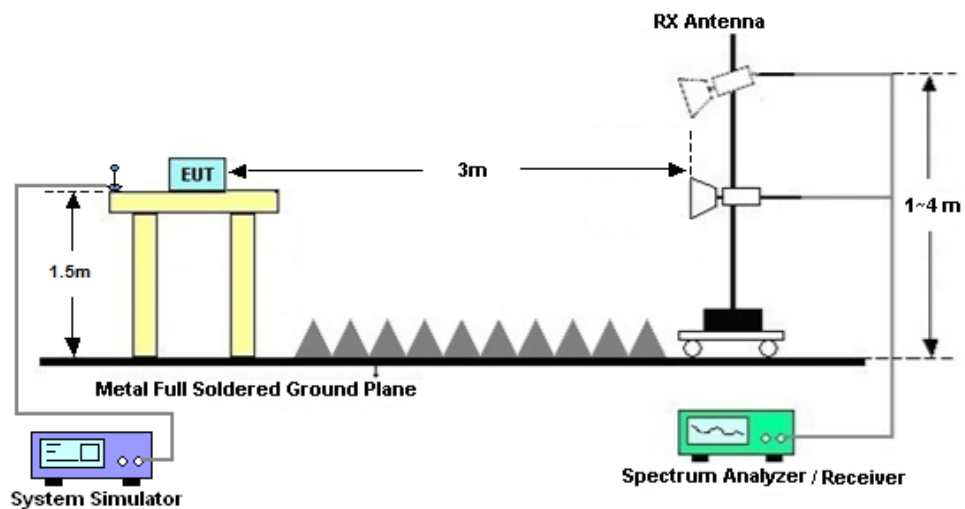

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix C.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

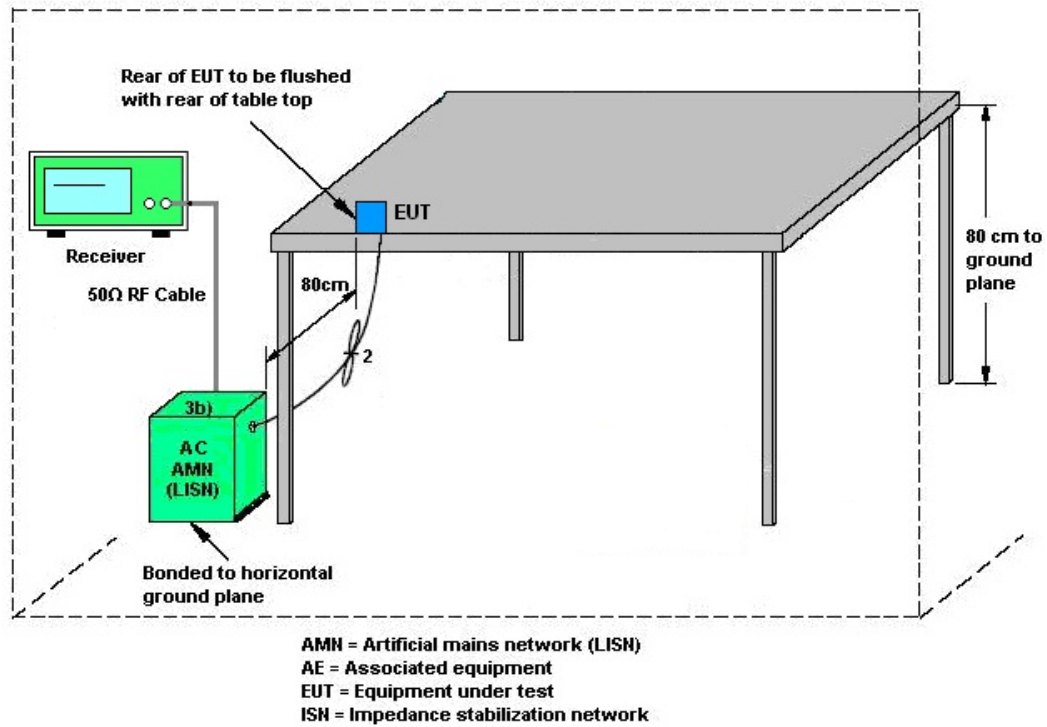

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Jul. 13, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Jul. 13, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Jul. 13, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 19, 2023	Jul. 13, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Jul. 13, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Jul. 13, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Jul. 13, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Jul. 13, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz~18Ghz	Jan. 02, 2024	Jul. 13, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 11, 2023	Jul. 13, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 13, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 13, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 13, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr 18, 2024	Jul. 21, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jul. 21, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr 18, 2024	Jul. 21, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jul. 21, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 20, 2024~Jul. 30, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Jul. 20, 2024~Jul. 30, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Jul. 20, 2024~Jul. 30, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)


Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

----- THE END -----



Appendix A. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

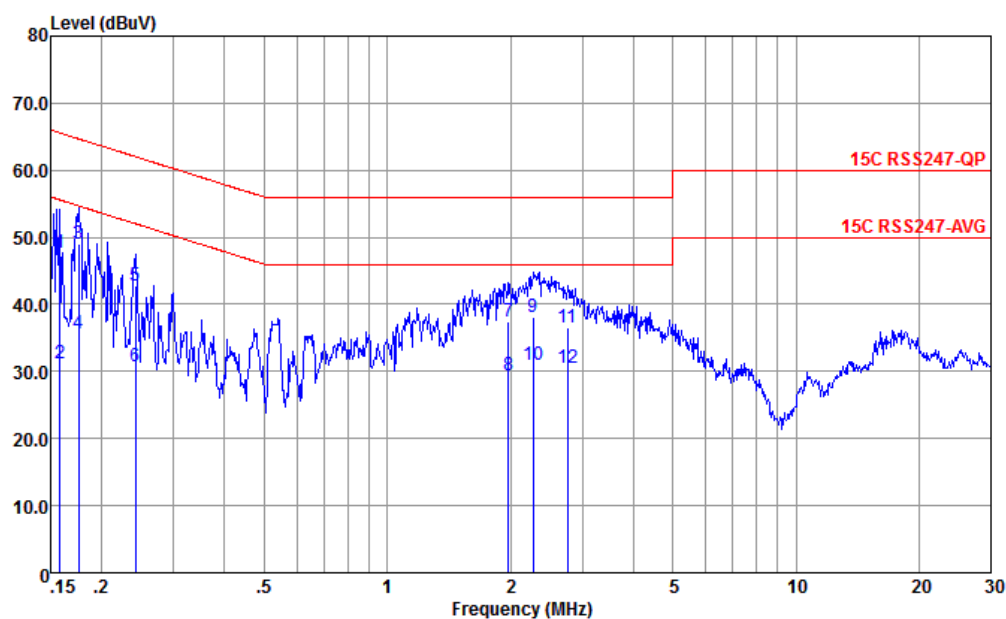


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.158	47.73	-17.83	65.56	37.20	0.11	10.42	QP
2	0.158	31.13	-24.43	55.56	20.60	0.11	10.42	Average
3	0.176	49.11	-15.57	64.68	38.60	0.10	10.41	QP
4	0.176	35.71	-18.97	54.68	25.20	0.10	10.41	Average
5	0.242	42.76	-19.28	62.04	32.31	0.08	10.37	QP
6	0.242	30.66	-21.38	52.04	20.21	0.08	10.37	Average
7	1.980	37.46	-18.54	56.00	27.60	-0.22	10.08	QP
8	1.980	29.46	-16.54	46.00	19.60	-0.22	10.08	Average
9	2.273	38.07	-17.93	56.00	28.20	-0.20	10.07	QP
10 *	2.273	31.07	-14.93	46.00	21.20	-0.20	10.07	Average
11	2.765	36.50	-19.50	56.00	26.60	-0.17	10.07	QP
12	2.765	30.50	-15.50	46.00	20.60	-0.17	10.07	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

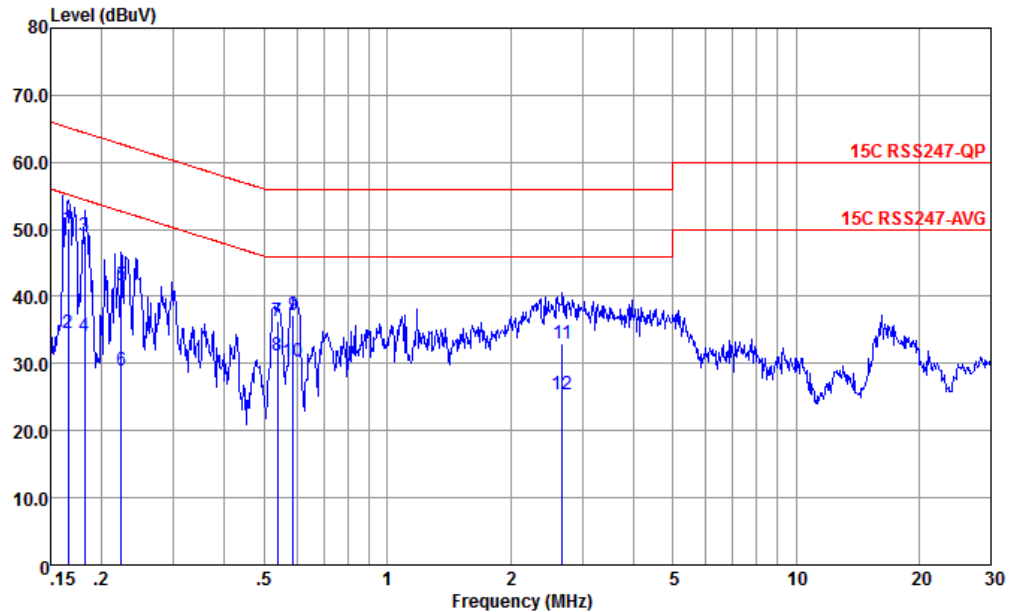

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.166	50.14	-15.02	65.16	39.60	0.12	10.42	QP
2	0.166	34.44	-20.72	55.16	23.90	0.12	10.42	Average
3	0.182	49.04	-15.38	64.42	38.50	0.13	10.41	QP
4	0.182	34.14	-20.28	54.42	23.60	0.13	10.41	Average
5	0.223	41.65	-21.05	62.70	31.20	0.06	10.39	QP
6	0.223	28.95	-23.75	52.70	18.50	0.06	10.39	Average
7	0.538	36.25	-19.75	56.00	26.20	-0.15	10.20	QP
8 *	0.538	31.25	-14.75	46.00	21.20	-0.15	10.20	Average
9	0.589	37.12	-18.88	56.00	27.10	-0.16	10.18	QP
10	0.589	30.32	-15.68	46.00	20.30	-0.16	10.18	Average
11	2.678	33.07	-22.93	56.00	23.20	-0.20	10.07	QP
12	2.678	25.47	-20.53	46.00	15.60	-0.20	10.07	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	levi zhao	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C



Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Data Rate	RU	Remark
Mode 1	902.75-927.25	0	RFID	902.75	-	-	-
Mode 2	902.75-927.25	0	RFID	914.75	-	-	-
Mode 3	902.75-927.25	0	RFID	927.25	-	-	-



Summary of each worse mode

Mode	Modulation	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	RFID_ASK	61.04	33.85	40	-6.15	V	Peak	-	Band Edge
1	RFID_ASK	2708.2	37.71	74	-36.29	V	Peak	-	Harmonic
2	RFID_ASK	50.37	30.73	40	-9.27	V	Peak	-	Band Edge
2	RFID_ASK	2744.20	38.68	74	-35.32	V	Peak	-	Harmonic
3	RFID_ASK	53.28	31.09	40	-8.91	V	Peak	-	Band Edge
3	RFID_ASK	2782	39.88	74	-34.12	V	Peak	-	Harmonic

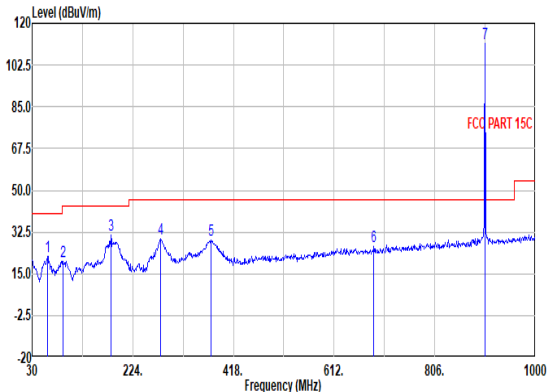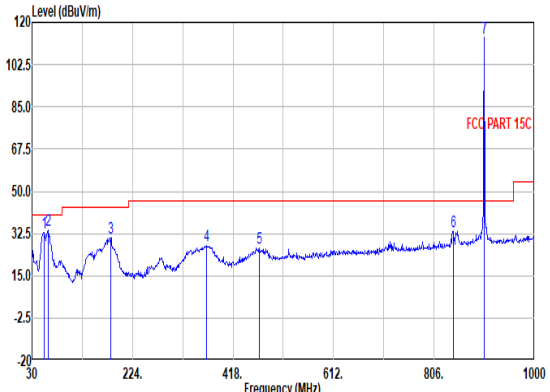

Mode	1																																																																																																																														
	BE																																																																																																																														
	RFID 902.75																																																																																																																														
ANT	0																																																																																																																														
Pol.	Horizontal																																																																																																																														
Peak Avg																																																																																																																															
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>60.07</td><td>22.48</td><td>40.00</td><td>-17.52</td><td>42.00</td><td>12.14</td><td>1.07</td><td>32.73</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>2</td><td>90.14</td><td>20.06</td><td>43.50</td><td>-23.44</td><td>36.61</td><td>14.84</td><td>1.34</td><td>32.73</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>3</td><td>182.29</td><td>31.32</td><td>43.50</td><td>-12.18</td><td>47.06</td><td>15.08</td><td>1.97</td><td>32.79</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>4</td><td>278.32</td><td>29.46</td><td>46.00</td><td>-16.54</td><td>41.06</td><td>18.98</td><td>2.35</td><td>32.93</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>5</td><td>374.35</td><td>29.03</td><td>46.00</td><td>-16.97</td><td>38.09</td><td>21.23</td><td>2.87</td><td>33.16</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>6</td><td>688.63</td><td>26.26</td><td>46.00</td><td>-19.74</td><td>29.26</td><td>26.66</td><td>3.90</td><td>33.56</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>7</td><td>903.00</td><td>111.28</td><td>46.00</td><td>65.28</td><td>110.25</td><td>29.13</td><td>4.49</td><td>32.59</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr></table>												Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	60.07	22.48	40.00	-17.52	42.00	12.14	1.07	32.73	0.00	100	0	Peak	2	90.14	20.06	43.50	-23.44	36.61	14.84	1.34	32.73	0.00	100	0	Peak	3	182.29	31.32	43.50	-12.18	47.06	15.08	1.97	32.79	0.00	100	0	Peak	4	278.32	29.46	46.00	-16.54	41.06	18.98	2.35	32.93	0.00	100	0	Peak	5	374.35	29.03	46.00	-16.97	38.09	21.23	2.87	33.16	0.00	100	0	Peak	6	688.63	26.26	46.00	-19.74	29.26	26.66	3.90	33.56	0.00	100	0	Peak	7	903.00	111.28	46.00	65.28	110.25	29.13	4.49	32.59	0.00	100	0
	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																			
1	60.07	22.48	40.00	-17.52	42.00	12.14	1.07	32.73	0.00	100	0	Peak																																																																																																																			
2	90.14	20.06	43.50	-23.44	36.61	14.84	1.34	32.73	0.00	100	0	Peak																																																																																																																			
3	182.29	31.32	43.50	-12.18	47.06	15.08	1.97	32.79	0.00	100	0	Peak																																																																																																																			
4	278.32	29.46	46.00	-16.54	41.06	18.98	2.35	32.93	0.00	100	0	Peak																																																																																																																			
5	374.35	29.03	46.00	-16.97	38.09	21.23	2.87	33.16	0.00	100	0	Peak																																																																																																																			
6	688.63	26.26	46.00	-19.74	29.26	26.66	3.90	33.56	0.00	100	0	Peak																																																																																																																			
7	903.00	111.28	46.00	65.28	110.25	29.13	4.49	32.59	0.00	100	0	Peak																																																																																																																			
Peak Avg																																																																																																																															
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>53.28</td><td>33.07</td><td>40.00</td><td>-6.93</td><td>51.09</td><td>13.78</td><td>1.01</td><td>32.81</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>61.04</td><td>33.85</td><td>40.00</td><td>-6.15</td><td>53.01</td><td>12.48</td><td>1.08</td><td>32.72</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>3</td><td>181.32</td><td>30.84</td><td>43.50</td><td>-12.66</td><td>46.57</td><td>15.09</td><td>1.97</td><td>32.79</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>4</td><td>366.59</td><td>27.58</td><td>46.00</td><td>-18.42</td><td>36.82</td><td>21.03</td><td>2.84</td><td>33.11</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>5</td><td>468.44</td><td>26.26</td><td>46.00</td><td>-19.74</td><td>32.98</td><td>23.35</td><td>3.14</td><td>33.21</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>6</td><td>842.86</td><td>33.55</td><td>46.00</td><td>-12.45</td><td>33.56</td><td>28.58</td><td>4.26</td><td>32.85</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>7</td><td>903.00</td><td>113.53</td><td>46.00</td><td>67.53</td><td>112.50</td><td>29.13</td><td>4.49</td><td>32.59</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr></table>												Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	53.28	33.07	40.00	-6.93	51.09	13.78	1.01	32.81	0.00	100	360	Peak	2	61.04	33.85	40.00	-6.15	53.01	12.48	1.08	32.72	0.00	100	360	Peak	3	181.32	30.84	43.50	-12.66	46.57	15.09	1.97	32.79	0.00	100	360	Peak	4	366.59	27.58	46.00	-18.42	36.82	21.03	2.84	33.11	0.00	100	360	Peak	5	468.44	26.26	46.00	-19.74	32.98	23.35	3.14	33.21	0.00	100	360	Peak	6	842.86	33.55	46.00	-12.45	33.56	28.58	4.26	32.85	0.00	100	360	Peak	7	903.00	113.53	46.00	67.53	112.50	29.13	4.49	32.59	0.00	100	360
	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																			
1	53.28	33.07	40.00	-6.93	51.09	13.78	1.01	32.81	0.00	100	360	Peak																																																																																																																			
2	61.04	33.85	40.00	-6.15	53.01	12.48	1.08	32.72	0.00	100	360	Peak																																																																																																																			
3	181.32	30.84	43.50	-12.66	46.57	15.09	1.97	32.79	0.00	100	360	Peak																																																																																																																			
4	366.59	27.58	46.00	-18.42	36.82	21.03	2.84	33.11	0.00	100	360	Peak																																																																																																																			
5	468.44	26.26	46.00	-19.74	32.98	23.35	3.14	33.21	0.00	100	360	Peak																																																																																																																			
6	842.86	33.55	46.00	-12.45	33.56	28.58	4.26	32.85	0.00	100	360	Peak																																																																																																																			
7	903.00	113.53	46.00	67.53	112.50	29.13	4.49	32.59	0.00	100	360	Peak																																																																																																																			

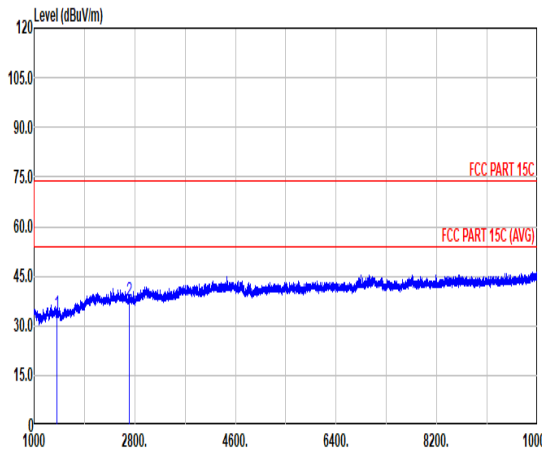
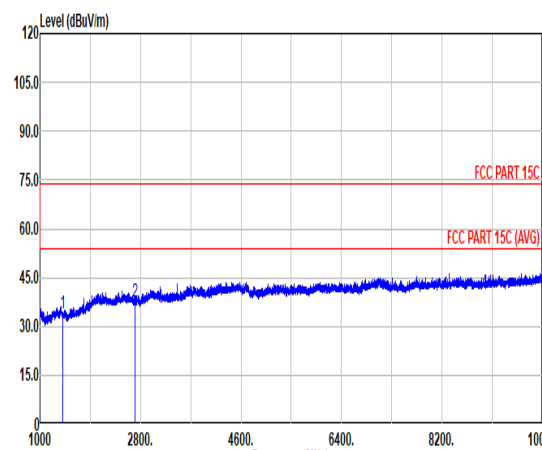


Mode	1																																																																				
	Harmonic																																																																				
	RFID 902.75																																																																				
ANT	0																																																																				
Pol.	Horizontal						Vertical																																																														
Peak Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1405.90</td><td>33.69</td><td>74.00</td><td>-40.31</td><td>62.35</td><td>28.62</td><td>5.04</td><td>62.32</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>2708.20</td><td>37.49</td><td>74.00</td><td>-36.51</td><td>60.42</td><td>31.73</td><td>7.05</td><td>61.71</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	1405.90	33.69	74.00	-40.31	62.35	28.62	5.04	62.32	0.00	---	Peak	2	2708.20	37.49	74.00	-36.51	60.42	31.73	7.05	61.71	0.00	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	1405.90	33.69	74.00	-40.31	62.35	28.62	5.04	62.32	0.00	---	Peak																																																										
2	2708.20	37.49	74.00	-36.51	60.42	31.73	7.05	61.71	0.00	---	Peak																																																										
Peak Avg																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1405.90</td><td>34.15</td><td>74.00</td><td>-39.85</td><td>62.81</td><td>28.62</td><td>5.04</td><td>62.32</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>2708.20</td><td>37.71</td><td>74.00</td><td>-36.29</td><td>60.64</td><td>31.73</td><td>7.05</td><td>61.71</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	1405.90	34.15	74.00	-39.85	62.81	28.62	5.04	62.32	0.00	---	Peak	2	2708.20	37.71	74.00	-36.29	60.64	31.73	7.05	61.71	0.00	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	1405.90	34.15	74.00	-39.85	62.81	28.62	5.04	62.32	0.00	---	Peak																																																										
2	2708.20	37.71	74.00	-36.29	60.64	31.73	7.05	61.71	0.00	---	Peak																																																										





Mode	2																																																																																																																																							
	BE																																																																																																																																							
	RFID 914.75																																																																																																																																							
ANT	0																																																																																																																																							
Pol.	Horizontal											Vertical																																																																																																																												
Peak Avg																																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>99.84</td><td>18.79</td><td>43.50</td><td>-24.71</td><td>34.14</td><td>16.04</td><td>1.46</td><td>32.85</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>185.20</td><td>28.98</td><td>43.50</td><td>-14.52</td><td>44.73</td><td>15.07</td><td>1.99</td><td>32.81</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>3</td><td>278.32</td><td>27.79</td><td>46.00</td><td>-18.21</td><td>39.39</td><td>18.98</td><td>2.35</td><td>32.93</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>4</td><td>381.14</td><td>27.70</td><td>46.00</td><td>-18.30</td><td>36.59</td><td>21.40</td><td>2.91</td><td>33.20</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>5</td><td>620.73</td><td>25.74</td><td>46.00</td><td>-20.26</td><td>29.28</td><td>26.30</td><td>3.68</td><td>33.52</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>6</td><td>784.66</td><td>28.11</td><td>46.00</td><td>-17.89</td><td>29.25</td><td>27.97</td><td>4.18</td><td>33.29</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr><tr><td>7</td><td>914.64</td><td>111.78</td><td>46.00</td><td>65.78</td><td>110.39</td><td>29.31</td><td>4.51</td><td>32.43</td><td>0.00</td><td>100</td><td>360</td><td>Peak</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	99.84	18.79	43.50	-24.71	34.14	16.04	1.46	32.85	0.00	100	360	Peak	2	185.20	28.98	43.50	-14.52	44.73	15.07	1.99	32.81	0.00	100	360	Peak	3	278.32	27.79	46.00	-18.21	39.39	18.98	2.35	32.93	0.00	100	360	Peak	4	381.14	27.70	46.00	-18.30	36.59	21.40	2.91	33.20	0.00	100	360	Peak	5	620.73	25.74	46.00	-20.26	29.28	26.30	3.68	33.52	0.00	100	360	Peak	6	784.66	28.11	46.00	-17.89	29.25	27.97	4.18	33.29	0.00	100	360	Peak	7	914.64	111.78	46.00	65.78	110.39	29.31	4.51	32.43	0.00	100	360	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	99.84	18.79	43.50	-24.71	34.14	16.04	1.46	32.85	0.00	100	360	Peak																																																																																																																												
2	185.20	28.98	43.50	-14.52	44.73	15.07	1.99	32.81	0.00	100	360	Peak																																																																																																																												
3	278.32	27.79	46.00	-18.21	39.39	18.98	2.35	32.93	0.00	100	360	Peak																																																																																																																												
4	381.14	27.70	46.00	-18.30	36.59	21.40	2.91	33.20	0.00	100	360	Peak																																																																																																																												
5	620.73	25.74	46.00	-20.26	29.28	26.30	3.68	33.52	0.00	100	360	Peak																																																																																																																												
6	784.66	28.11	46.00	-17.89	29.25	27.97	4.18	33.29	0.00	100	360	Peak																																																																																																																												
7	914.64	111.78	46.00	65.78	110.39	29.31	4.51	32.43	0.00	100	360	Peak																																																																																																																												
<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>31.94</td><td>26.93</td><td>40.00</td><td>-13.07</td><td>34.74</td><td>24.39</td><td>0.76</td><td>32.96</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>2</td><td>50.37</td><td>30.73</td><td>40.00</td><td>-9.27</td><td>48.15</td><td>14.49</td><td>0.99</td><td>32.90</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>3</td><td>172.59</td><td>29.11</td><td>43.50</td><td>-14.39</td><td>44.31</td><td>15.63</td><td>1.91</td><td>32.74</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>4</td><td>184.23</td><td>29.21</td><td>43.50</td><td>-14.29</td><td>44.95</td><td>15.07</td><td>1.99</td><td>32.80</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>5</td><td>374.35</td><td>28.29</td><td>46.00</td><td>-17.71</td><td>37.35</td><td>21.23</td><td>2.87</td><td>33.16</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>6</td><td>472.32</td><td>25.50</td><td>46.00</td><td>-20.50</td><td>32.16</td><td>23.43</td><td>3.14</td><td>33.23</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr><tr><td>7</td><td>914.64</td><td>113.71</td><td>46.00</td><td>67.71</td><td>112.32</td><td>29.31</td><td>4.51</td><td>32.43</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	31.94	26.93	40.00	-13.07	34.74	24.39	0.76	32.96	0.00	100	0	Peak	2	50.37	30.73	40.00	-9.27	48.15	14.49	0.99	32.90	0.00	100	0	Peak	3	172.59	29.11	43.50	-14.39	44.31	15.63	1.91	32.74	0.00	100	0	Peak	4	184.23	29.21	43.50	-14.29	44.95	15.07	1.99	32.80	0.00	100	0	Peak	5	374.35	28.29	46.00	-17.71	37.35	21.23	2.87	33.16	0.00	100	0	Peak	6	472.32	25.50	46.00	-20.50	32.16	23.43	3.14	33.23	0.00	100	0	Peak	7	914.64	113.71	46.00	67.71	112.32	29.31	4.51	32.43	0.00	100	0	Peak	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	31.94	26.93	40.00	-13.07	34.74	24.39	0.76	32.96	0.00	100	0	Peak																																																																																																																												
2	50.37	30.73	40.00	-9.27	48.15	14.49	0.99	32.90	0.00	100	0	Peak																																																																																																																												
3	172.59	29.11	43.50	-14.39	44.31	15.63	1.91	32.74	0.00	100	0	Peak																																																																																																																												
4	184.23	29.21	43.50	-14.29	44.95	15.07	1.99	32.80	0.00	100	0	Peak																																																																																																																												
5	374.35	28.29	46.00	-17.71	37.35	21.23	2.87	33.16	0.00	100	0	Peak																																																																																																																												
6	472.32	25.50	46.00	-20.50	32.16	23.43	3.14	33.23	0.00	100	0	Peak																																																																																																																												
7	914.64	113.71	46.00	67.71	112.32	29.31	4.51	32.43	0.00	100	0	Peak																																																																																																																												

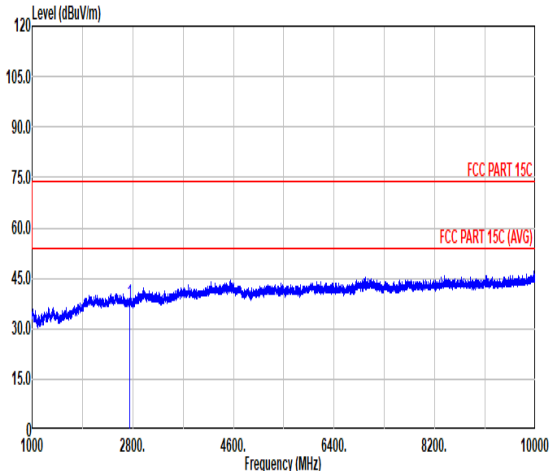
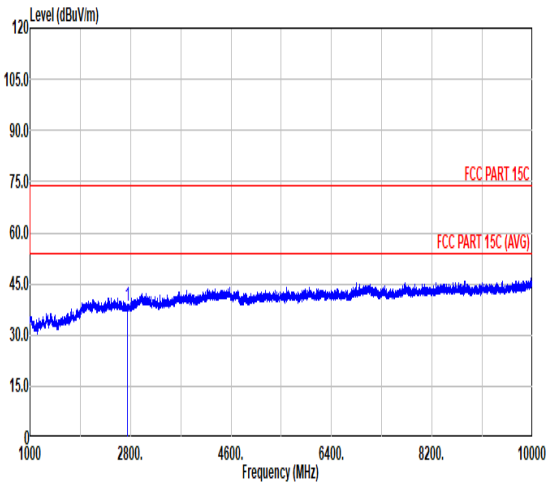


Mode	2																																																										
	Harmonic																																																										
	RFID 914.75																																																										
ANT	0																																																										
Pol.	Horizontal						Vertical																																																				
Peak Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2744.20</td><td>37.58</td><td>74.00</td><td>-36.42</td><td>60.28</td><td>31.88</td><td>7.11</td><td>61.69</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2744.20	37.58	74.00	-36.42	60.28	31.88	7.11	61.69	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	2744.20	37.58	74.00	-36.42	60.28	31.88	7.11	61.69	0.00	---	---	Peak																																															
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2744.20</td><td>38.68</td><td>74.00</td><td>-35.32</td><td>61.38</td><td>31.88</td><td>7.11</td><td>61.69</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2744.20	38.68	74.00	-35.32	61.38	31.88	7.11	61.69	0.00	---	---	Peak	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	2744.20	38.68	74.00	-35.32	61.38	31.88	7.11	61.69	0.00	---	---	Peak																																															

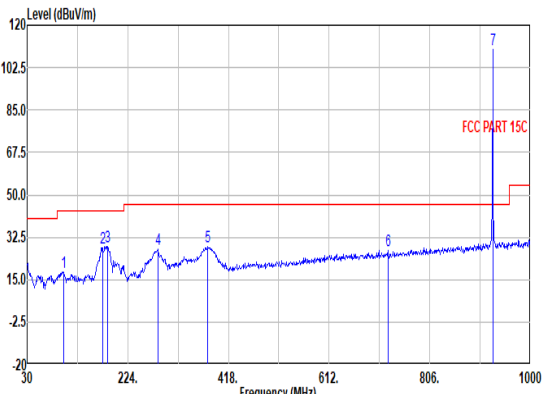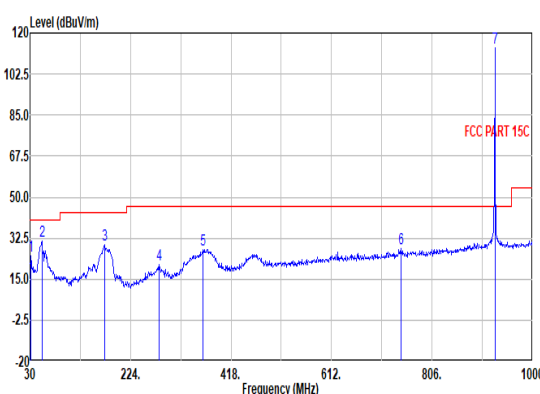


Mode	3																																																																																																																																		
	BE																																																																																																																																		
	RFID 927.25																																																																																																																																		
ANT	0																																																																																																																																		
Pol.	Horizontal																																																																																																																																		
Peak Avg																																																																																																																																			
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>100.81</td><td>18.14</td><td>43.50</td><td>-25.36</td><td>33.41</td><td>16.11</td><td>1.47</td><td>32.85</td><td>0.00</td><td>100</td><td>0 Peak</td></tr><tr><td>2</td><td>175.50</td><td>28.17</td><td>43.50</td><td>-15.33</td><td>43.57</td><td>15.43</td><td>1.93</td><td>32.76</td><td>0.00</td><td>100</td><td>0 Peak</td></tr><tr><td>3</td><td>185.20</td><td>28.82</td><td>43.50</td><td>-14.68</td><td>44.57</td><td>15.07</td><td>1.99</td><td>32.81</td><td>0.00</td><td>100</td><td>0 Peak</td></tr><tr><td>4</td><td>282.20</td><td>27.30</td><td>46.00</td><td>-18.70</td><td>38.87</td><td>18.95</td><td>2.39</td><td>32.91</td><td>0.00</td><td>100</td><td>0 Peak</td></tr><tr><td>5</td><td>378.23</td><td>28.48</td><td>46.00</td><td>-17.52</td><td>37.44</td><td>21.33</td><td>2.89</td><td>33.18</td><td>0.00</td><td>100</td><td>0 Peak</td></tr><tr><td>6</td><td>725.49</td><td>26.95</td><td>46.00</td><td>-19.05</td><td>29.27</td><td>27.09</td><td>4.01</td><td>33.42</td><td>0.00</td><td>100</td><td>0 Peak</td></tr><tr><td>7</td><td>927.25</td><td>110.10</td><td>46.00</td><td>64.10</td><td>108.31</td><td>29.50</td><td>4.54</td><td>32.25</td><td>0.00</td><td>100</td><td>0 Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	100.81	18.14	43.50	-25.36	33.41	16.11	1.47	32.85	0.00	100	0 Peak	2	175.50	28.17	43.50	-15.33	43.57	15.43	1.93	32.76	0.00	100	0 Peak	3	185.20	28.82	43.50	-14.68	44.57	15.07	1.99	32.81	0.00	100	0 Peak	4	282.20	27.30	46.00	-18.70	38.87	18.95	2.39	32.91	0.00	100	0 Peak	5	378.23	28.48	46.00	-17.52	37.44	21.33	2.89	33.18	0.00	100	0 Peak	6	725.49	26.95	46.00	-19.05	29.27	27.09	4.01	33.42	0.00	100	0 Peak	7	927.25	110.10	46.00	64.10	108.31	29.50	4.54	32.25	0.00	100	0 Peak
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	100.81	18.14	43.50	-25.36	33.41	16.11	1.47	32.85	0.00	100	0 Peak																																																																																																																								
2	175.50	28.17	43.50	-15.33	43.57	15.43	1.93	32.76	0.00	100	0 Peak																																																																																																																								
3	185.20	28.82	43.50	-14.68	44.57	15.07	1.99	32.81	0.00	100	0 Peak																																																																																																																								
4	282.20	27.30	46.00	-18.70	38.87	18.95	2.39	32.91	0.00	100	0 Peak																																																																																																																								
5	378.23	28.48	46.00	-17.52	37.44	21.33	2.89	33.18	0.00	100	0 Peak																																																																																																																								
6	725.49	26.95	46.00	-19.05	29.27	27.09	4.01	33.42	0.00	100	0 Peak																																																																																																																								
7	927.25	110.10	46.00	64.10	108.31	29.50	4.54	32.25	0.00	100	0 Peak																																																																																																																								
Peak Avg																																																																																																																																			
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>31.94</td><td>24.86</td><td>40.00</td><td>-15.14</td><td>32.67</td><td>24.39</td><td>0.76</td><td>32.96</td><td>0.00</td><td>100</td><td>360 Peak</td></tr><tr><td>2</td><td>53.28</td><td>31.09</td><td>40.00</td><td>-8.91</td><td>49.11</td><td>13.78</td><td>1.01</td><td>32.81</td><td>0.00</td><td>100</td><td>360 Peak</td></tr><tr><td>3</td><td>173.56</td><td>29.69</td><td>43.50</td><td>-13.81</td><td>44.95</td><td>15.57</td><td>1.92</td><td>32.75</td><td>0.00</td><td>100</td><td>360 Peak</td></tr><tr><td>4</td><td>279.29</td><td>21.44</td><td>46.00</td><td>-24.56</td><td>33.05</td><td>18.95</td><td>2.36</td><td>32.92</td><td>0.00</td><td>100</td><td>360 Peak</td></tr><tr><td>5</td><td>363.68</td><td>27.71</td><td>46.00</td><td>-18.29</td><td>37.02</td><td>20.96</td><td>2.82</td><td>33.09</td><td>0.00</td><td>100</td><td>360 Peak</td></tr><tr><td>6</td><td>745.86</td><td>27.81</td><td>46.00</td><td>-18.19</td><td>29.65</td><td>27.40</td><td>4.06</td><td>33.30</td><td>0.00</td><td>100</td><td>360 Peak</td></tr><tr><td>7</td><td>927.25</td><td>113.86</td><td>46.00</td><td>67.86</td><td>112.07</td><td>29.50</td><td>4.54</td><td>32.25</td><td>0.00</td><td>100</td><td>360 Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	31.94	24.86	40.00	-15.14	32.67	24.39	0.76	32.96	0.00	100	360 Peak	2	53.28	31.09	40.00	-8.91	49.11	13.78	1.01	32.81	0.00	100	360 Peak	3	173.56	29.69	43.50	-13.81	44.95	15.57	1.92	32.75	0.00	100	360 Peak	4	279.29	21.44	46.00	-24.56	33.05	18.95	2.36	32.92	0.00	100	360 Peak	5	363.68	27.71	46.00	-18.29	37.02	20.96	2.82	33.09	0.00	100	360 Peak	6	745.86	27.81	46.00	-18.19	29.65	27.40	4.06	33.30	0.00	100	360 Peak	7	927.25	113.86	46.00	67.86	112.07	29.50	4.54	32.25	0.00	100	360 Peak
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	31.94	24.86	40.00	-15.14	32.67	24.39	0.76	32.96	0.00	100	360 Peak																																																																																																																								
2	53.28	31.09	40.00	-8.91	49.11	13.78	1.01	32.81	0.00	100	360 Peak																																																																																																																								
3	173.56	29.69	43.50	-13.81	44.95	15.57	1.92	32.75	0.00	100	360 Peak																																																																																																																								
4	279.29	21.44	46.00	-24.56	33.05	18.95	2.36	32.92	0.00	100	360 Peak																																																																																																																								
5	363.68	27.71	46.00	-18.29	37.02	20.96	2.82	33.09	0.00	100	360 Peak																																																																																																																								
6	745.86	27.81	46.00	-18.19	29.65	27.40	4.06	33.30	0.00	100	360 Peak																																																																																																																								
7	927.25	113.86	46.00	67.86	112.07	29.50	4.54	32.25	0.00	100	360 Peak																																																																																																																								

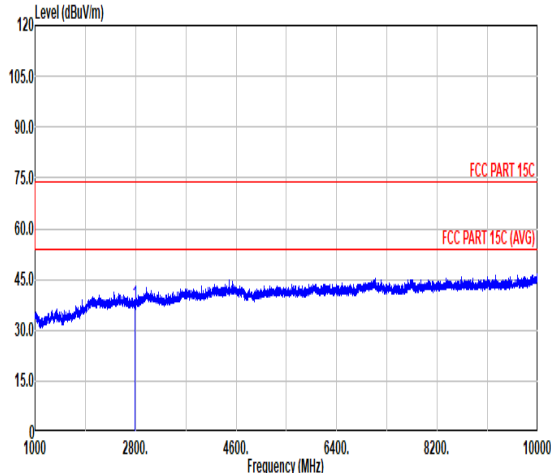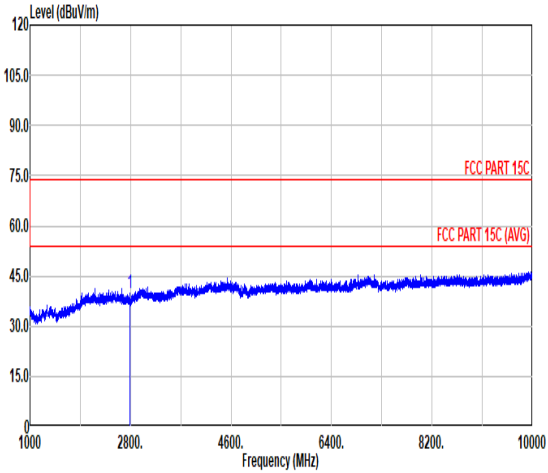


Mode	3																																																																																																			
	Harmonic																																																																																																			
	RFID 927.25																																																																																																			
ANT	0																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2782.00</td><td>37.53</td><td>74.00</td><td>-36.47</td><td>60.07</td><td>31.96</td><td>7.16</td><td>61.66</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2782.00	37.53	74.00	-36.47	60.07	31.96	7.16	61.66	0.00	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2782.00</td><td>39.88</td><td>74.00</td><td>-34.12</td><td>62.42</td><td>31.96</td><td>7.16</td><td>61.66</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2782.00	39.88	74.00	-34.12	62.42	31.96	7.16	61.66	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2782.00	37.53	74.00	-36.47	60.07	31.96	7.16	61.66	0.00	---	Peak																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2782.00	39.88	74.00	-34.12	62.42	31.96	7.16	61.66	0.00	---	Peak																																																																																									

Appendix C. Duty Cycle Plots

RFID on time (One Pulse) Plot

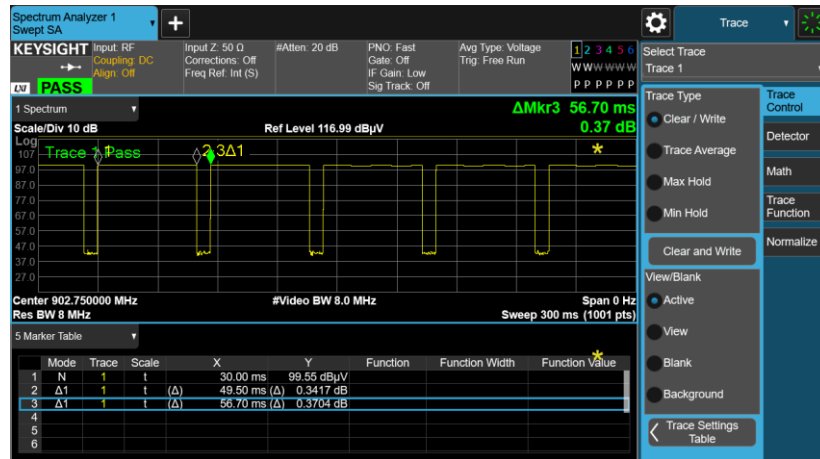

RFID on time (Count Pulses) Plot

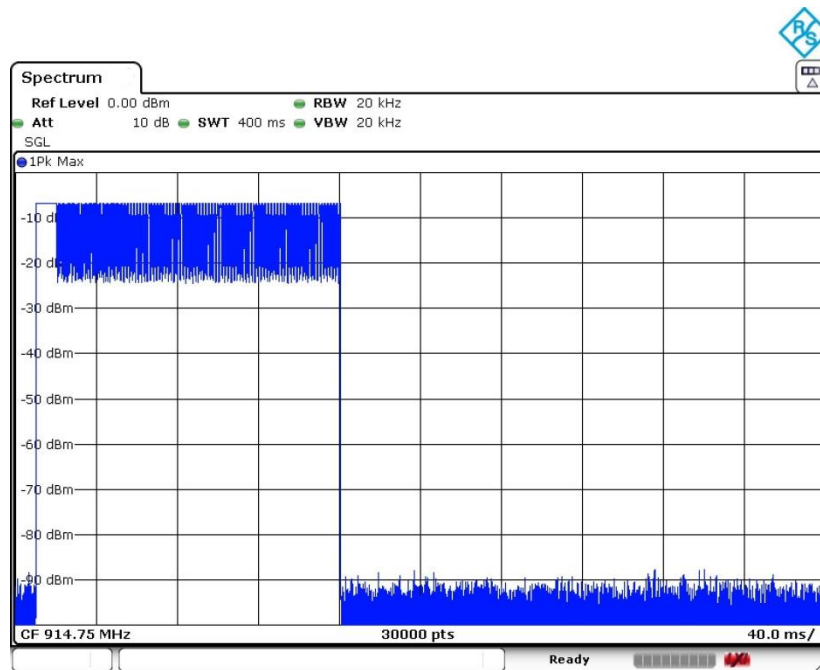

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $1 * 49.5 / 100 = 49.50 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -6.11 \text{ dB}$
3. RFID has the highest duty cycle worst case and is reported.