



Zebra Technologies Corporation

SPECIFICATION

Antenna Manufacturer Name	T2Mobile Limited
Address	6F Building C, No.232 Liangjing Road, Zhangjiang High-tech Park, Shanghai 201203, China
ODM P/N:	BQA3B50A1FC0 ANT7+ANT8 LDS BQA3B30A1CC0 only ANT6 LDS F-0W-A0-1512-000-K0 NFC Value F-0W-A0-1531-000-K0 NFC STD
Test DATE	2025.12.22
DATASHEET REVISION	V1.0

Test Software: GTS Maxsign-RayZone2800E_Z



Kun.Liu

Test Engineer: Kun.Liu



ZEBRA

Zebra Technologies Corporation


Description of Antenna

A6 antenna peak Gain (dBi)


Frequency Range	WIFI(2.4G) (2400-2500MHZ) WIFI(5G/6e) (5150-7125MHZ)
Antenna type	PIFA

Band	Peak Gain(dBi)
WIFI 2.4G(2400~2500MHz)	0.72
WIFI 5G(5150~5250MHz)	1.01
WIFI 5G(5250~5350MHz)	1.6
WIFI 5G(5470~5725MHz)	0.8
WIFI 5G(5725~5850MHz)	-0.03
WIFI 6e(5850~5925MHz)	-0.24
WIFI 6e(5925~6425MHz)	-0.3
WIFI 6e(6425~6525MHz)	-0.41
WIFI 6e(6525~6875MHz)	0.54
WIFI 6e(6875~7125MHz)	-0.2

2450MHZ

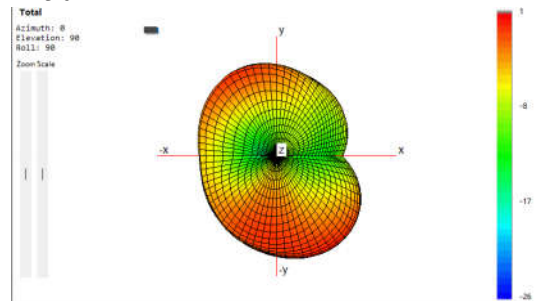

5200MHZ

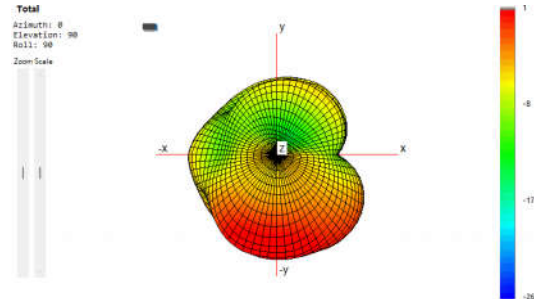


5300MHZ




ZEBRA


Zebra Technologies Corporation

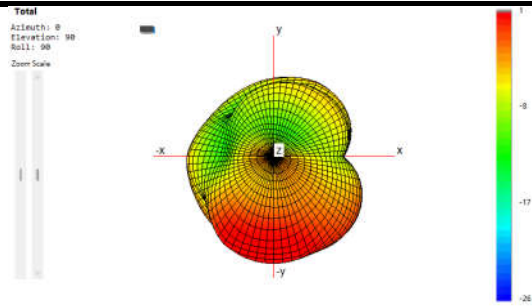


5500MHZ

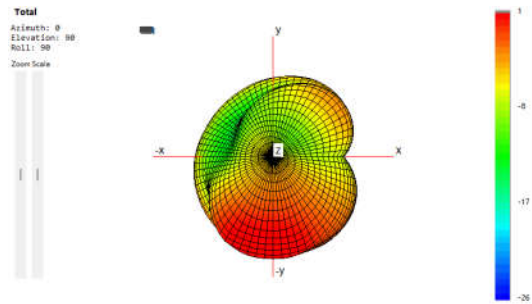


5800MHZ

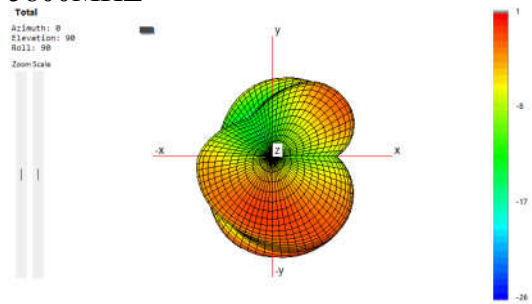

5925MHZ

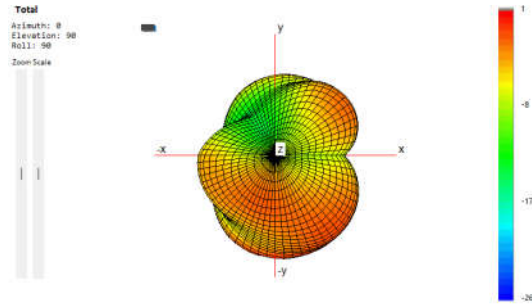

6225MHZ

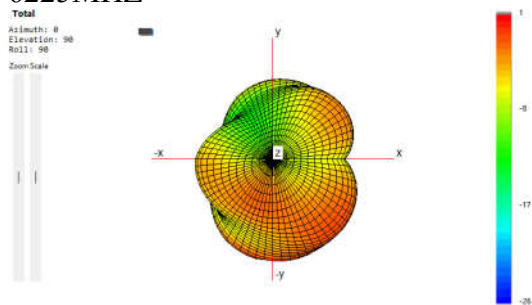


6425MHZ



ZEBRA

Zebra Technologies Corporation

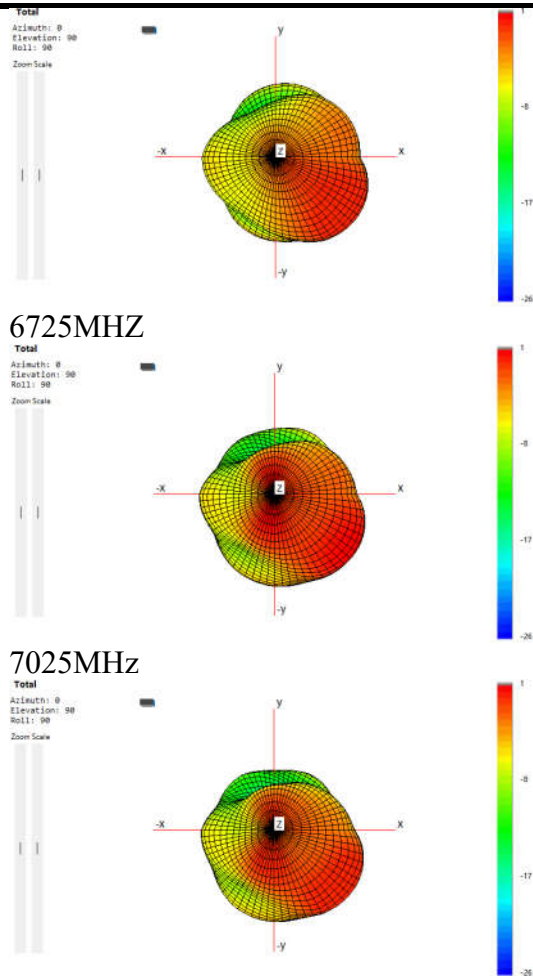

Description of Antenna

A7 antenna peak Gain (dBi)

Frequency Range	WIFI(2.4G) (2400-2500MHZ) WIFI(5G/6e) (5150-7125MHZ)
Antenna type	PIFA


Band	Peak Gain(dBi)
WIFI 2.4G(2400~2500MHz)	1.01
WIFI 5G(5150~5250MHz)	1.72
WIFI 5G(5250~5350MHz)	1.01
WIFI 5G(5470~5725MHz)	0.36
WIFI 5G(5725~5850MHz)	-0.14
WIFI 6e(5850~5925MHz)	-0.3
WIFI 6e(5925~6425MHz)	1.01
WIFI 6e(6425~6525MHz)	0.02
WIFI 6e(6525~6875MHz)	0.23
WIFI 6e(6875~7125MHz)	0.01




ZEBRA

Zebra Technologies Corporation


2450MHZ

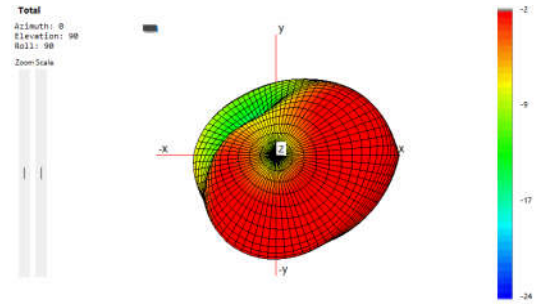


5200MHZ

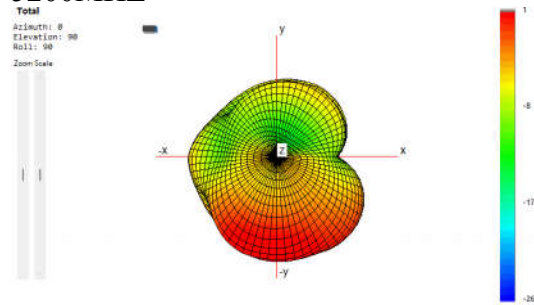


5300MHZ

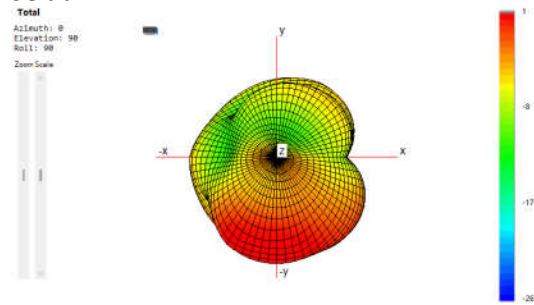

5500MHZ

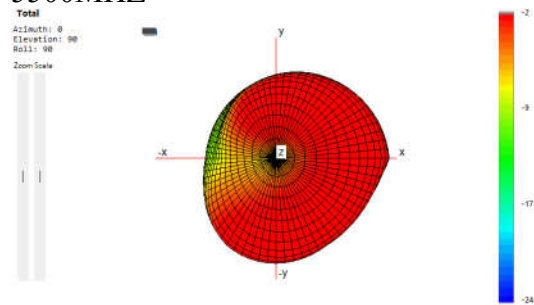

5800MHZ

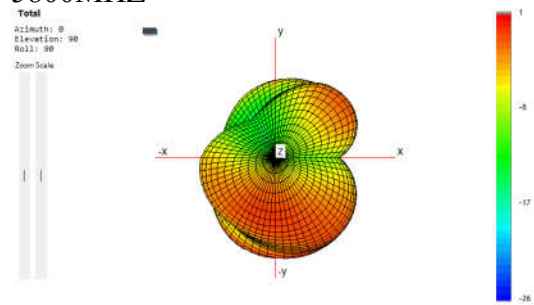





ZEBRA

Zebra Technologies Corporation


5925MHZ

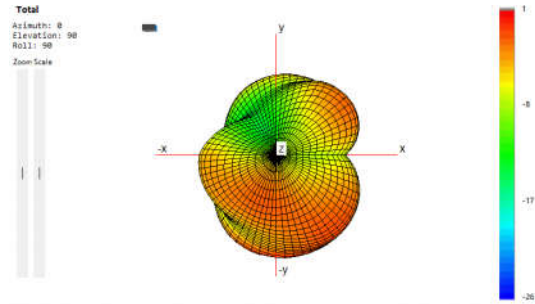


6225MHZ

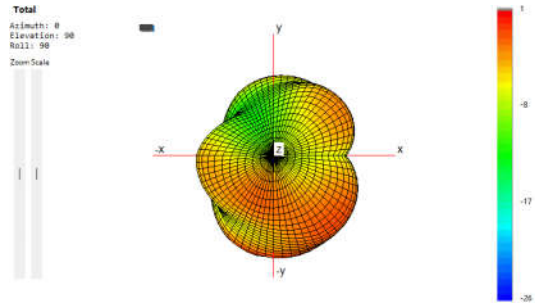


6425MHZ

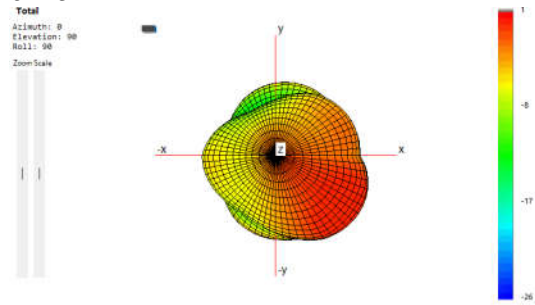

6725MHZ

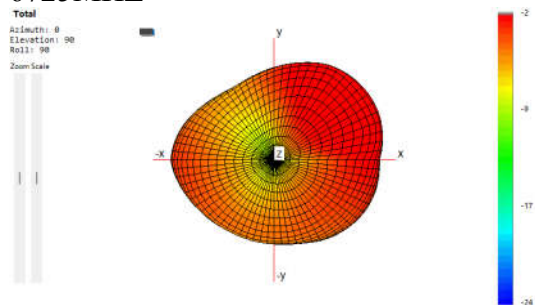

7025MHz

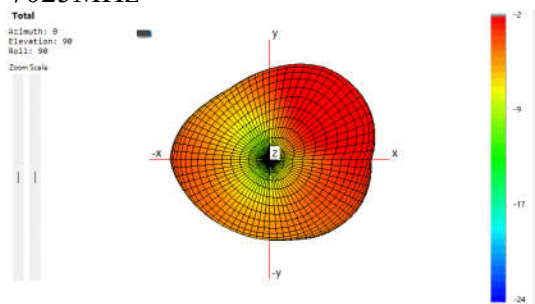

Description of Antenna



ZEBRA

Zebra Technologies Corporation

A8 antenna peak Gain (dBi)

Frequency Range	860MHz-930 MHz
Antenna type	PIFA


Band Freq MHz	Peak Gain(dBi)
868	0.32
920	-1.36
902	-0.27
925	-1.25

868M:

Total

Azimuth: 0
Elevation: 90
Roll: 90

Zoom Scale


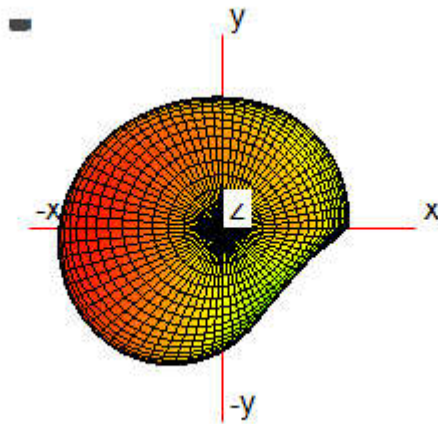


902M:

Total

Azimuth: 0
Elevation: 90
Roll: 90

Zoom Scale

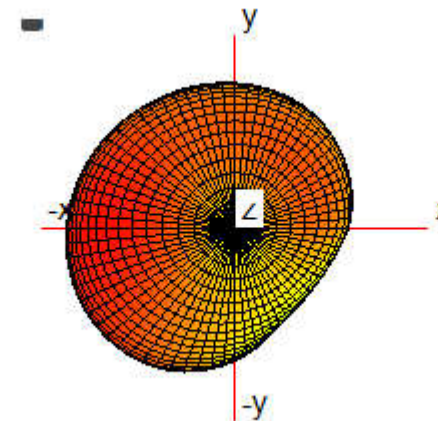

920M:




ZEBRA

Total

Azimuth: 0
Elevation: 90
Roll: 90

Zoom Scale

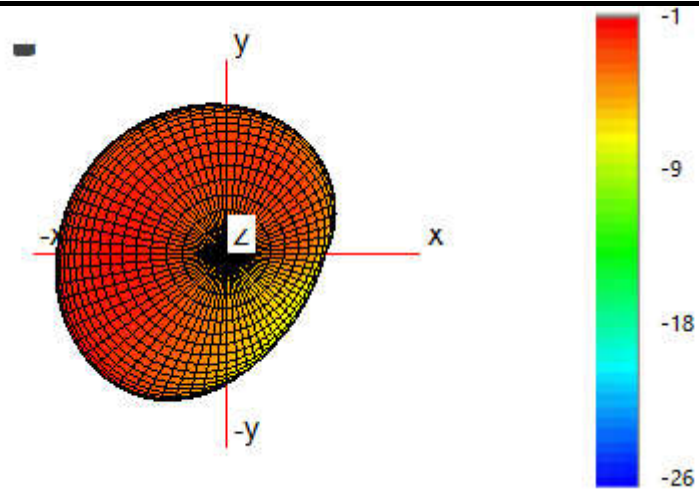


925M:

Total

Azimuth: 0
Elevation: 90
Roll: 90

Zoom Scale

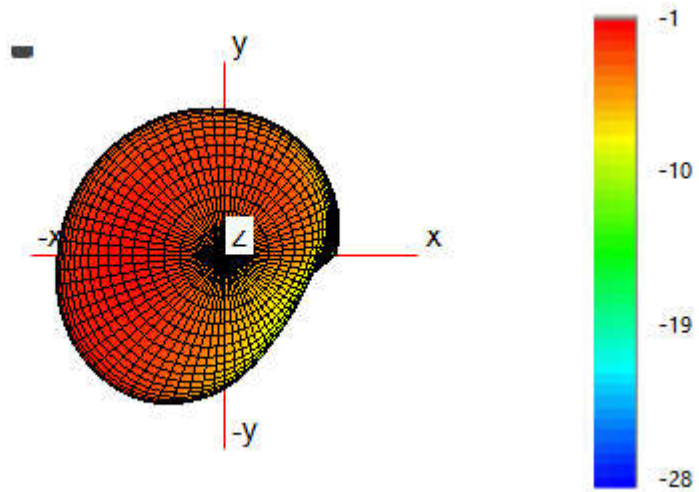

A11, NFC

Type	Dimension(mm)
Loop	Coil size: 68*68



Test Environment, list of calibrated test equipment

Test Environment: E5071C

Test Environment: Temperature 18-23 ° c Celsius humidity 40%-70%

Last Calibration date:	2024/09/29
Due Calibration date:	2025/09/29
Next Calibration date:	2025/09/29



Zebra Technologies Corporation

Test Environment: Temperature 18-23 ° c Celsius humidity 40%-70%

ETS-LINDGREN

Last Calibration date:	2024/09/29
Due Calibration date:	2025/09/29
Next Calibration date:	2025/09/29