



Zebra Technologies Corporation

SPECIFICATION

Antenna Manufacturer Name	T2Mobile Limited
Address	6F Building C, No.232 Liangjing Road, Zhangjiang High-tech Park, Shanghai 201203, China
ODM P/N:	BQA3B20A1EC0 ANT7 BQA3B20A1HC0 ANT6 BQA3B50A1FC0 ANT8 F-0W-A0-1526-000-K0 Buddy8gp-NFC STD F-0W-A0-1511-000-K0 Buddy8-NFC VALUE
Test DATE	2025.11.14
DATASHEET REVISION	

Test Software: EMQuest EMQ-100



EMQuest EMQ-100 Pattern Measurement Softwar

Huahua Hu

Test Engineer: Huahua Hu



ZEBRA

Zebra Technologies Corporation


Description of Antenna

A6 antenna peak Gain (dBi)


Frequency Range	BT/WIFI(2.4G) (2400-2500MHZ) WIFI(5G/6e) (5150-7125MHZ)
Antenna type	IFA

Band	Peak Gain(dBi)
WIFI 2.4G(2400~2500MHz)	2.35
WIFI 5G(5150~5250MHz)	0
WIFI 5G(5250~5350MHz)	-0.3
WIFI 5G(5470~5725MHz)	-0.1
WIFI 5G(5725~5850MHz)	-1.2
WIFI 6e(5850~5925MHz)	-1.7
WIFI 6e(5925~6425MHz)	0.2
WIFI 6e(6425~6525MHz)	0.6
WIFI 6e(6525~6875MHz)	0
WIFI 6e(6875~7125MHz)	-0.5

2400MHz

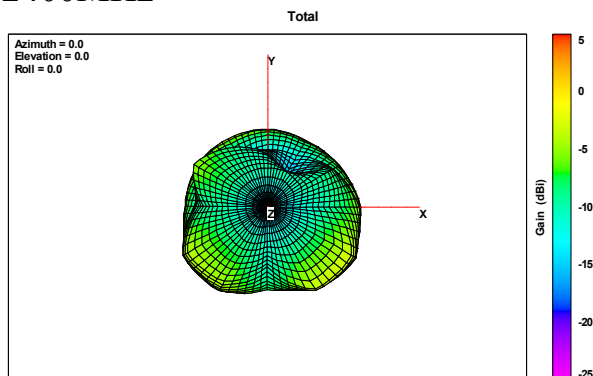


5150 MHz

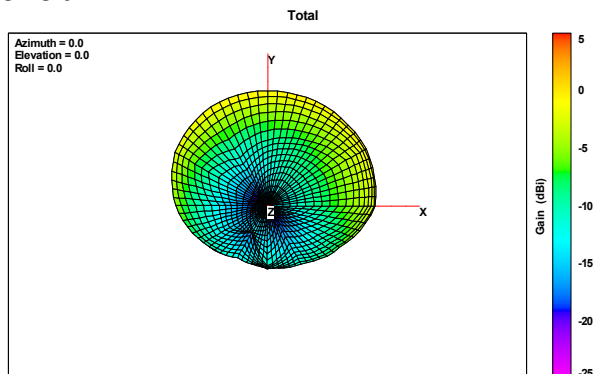





5250 MHz

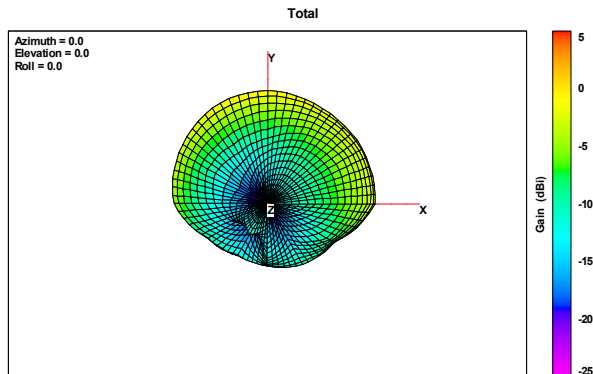


5600 MHz

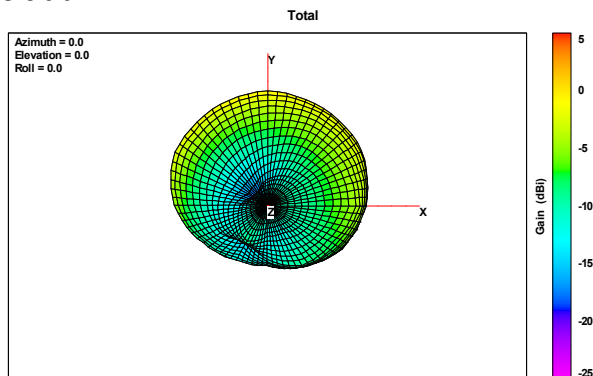

5750 MHz

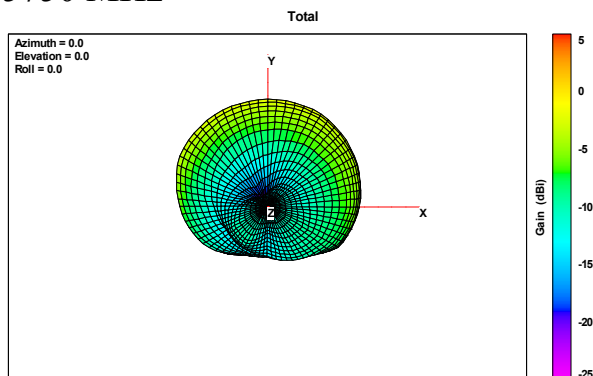


5850 MHz

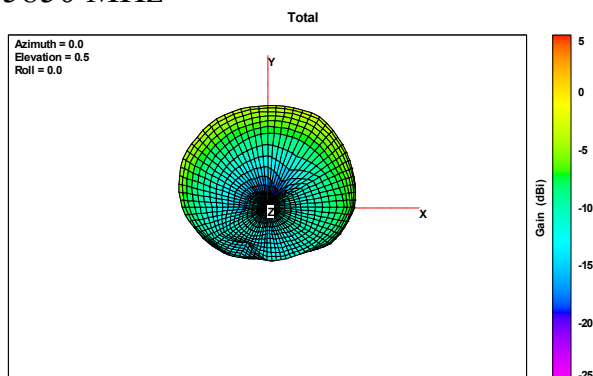





6400 MHz

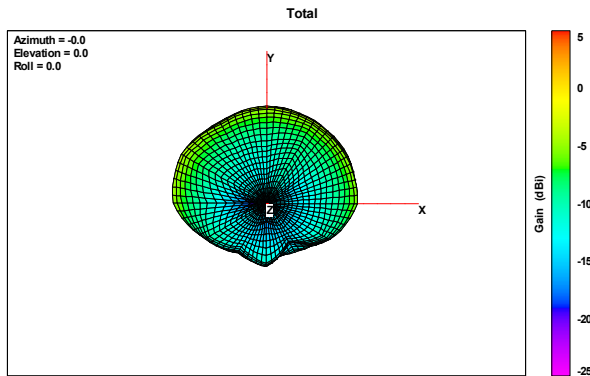

6450 MHz

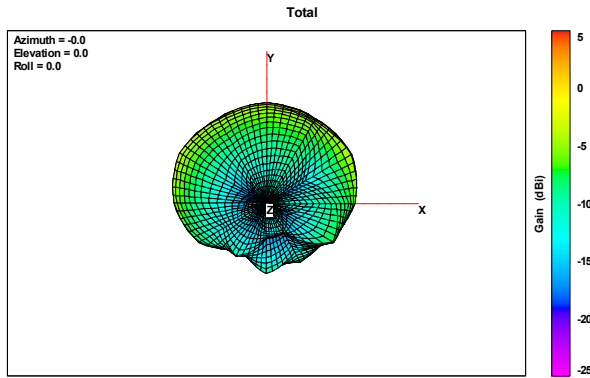

6600 MHz

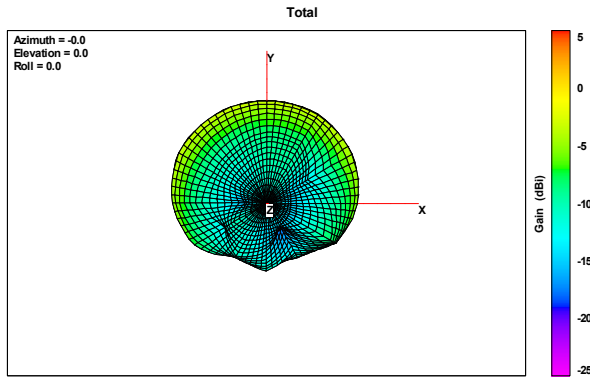


6900 MHz



ZEBRA

Zebra Technologies Corporation

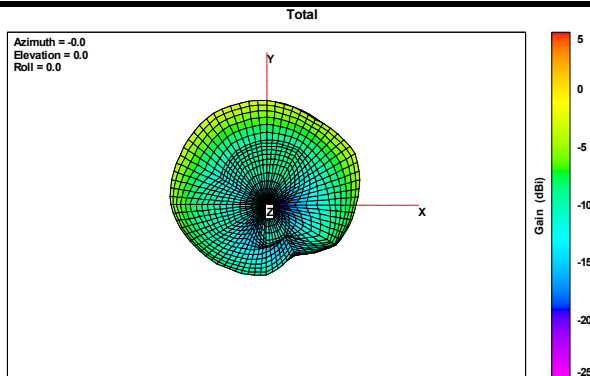


A7 antenna peak Gain (dBi)

Frequency Range	BT/WIFI(2.4G) (2400-2500MHZ) WIFI(5G/6e) (5150-7125MHZ)
Antenna type	IFA

Band	Peak Gain(dBi)
WIFI 2.4G(2400~2500MHz)	2.6
WIFI 5G(5150~5250MHz)	-1.4
WIFI 5G(5250~5350MHz)	-1.3
WIFI 5G(5470~5725MHz)	0.3
WIFI 5G(5725~5850MHz)	0
WIFI 6e(5850~5925MHz)	-0.6
WIFI 6e(5925~6425MHz)	-0.3
WIFI 6e(6425~6525MHz)	-0.6
WIFI 6e(6525~6875MHz)	-0.4
WIFI 6e(6875~7125MHz)	-0.2


2460MHz

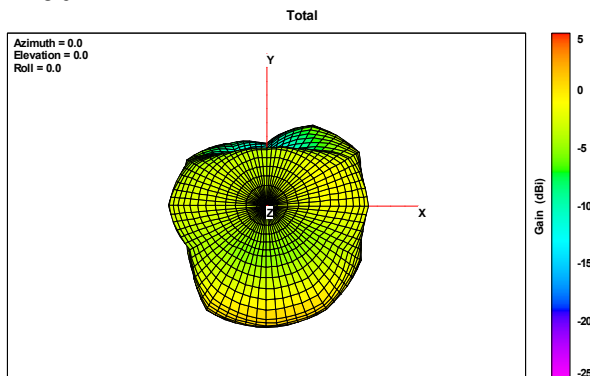


5250 MHz




Zebra Technologies Corporation

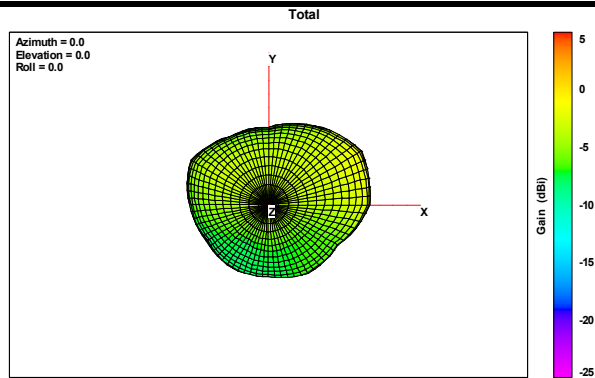

5350 MHz

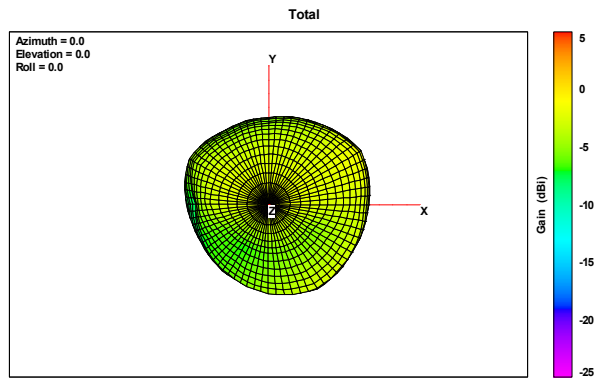

5600 MHz

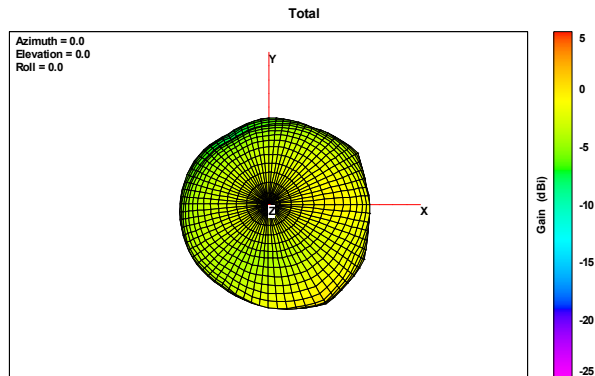


5750 MHz




ZEBRA


Zebra Technologies Corporation

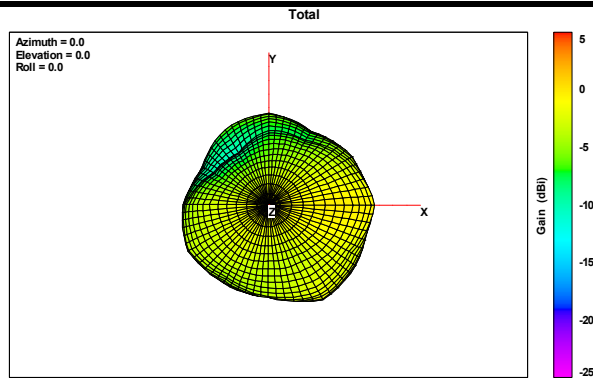


5850 MHz

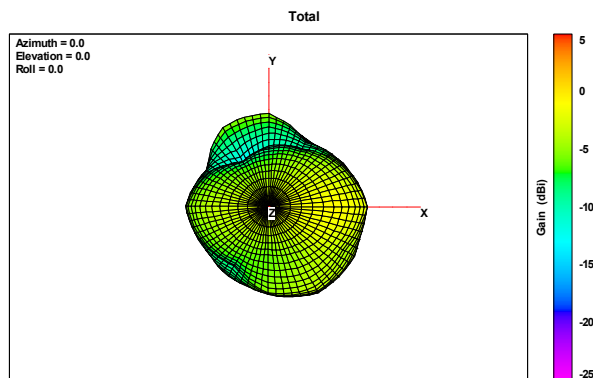


6300 MHz

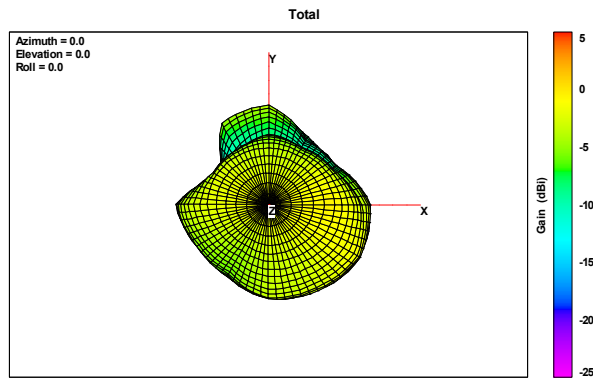


6525 MHz

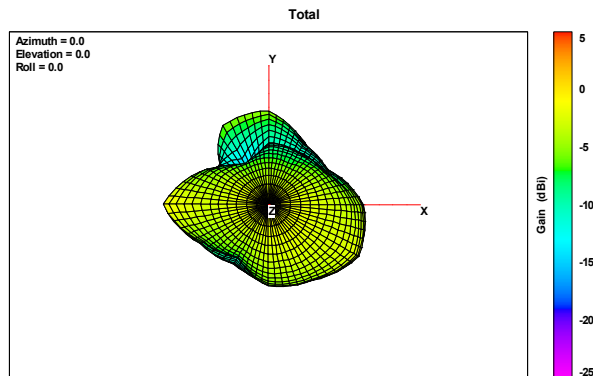

6650 MHz

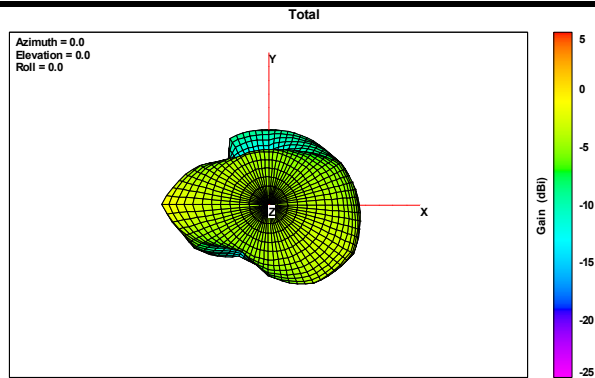


7050 MHz

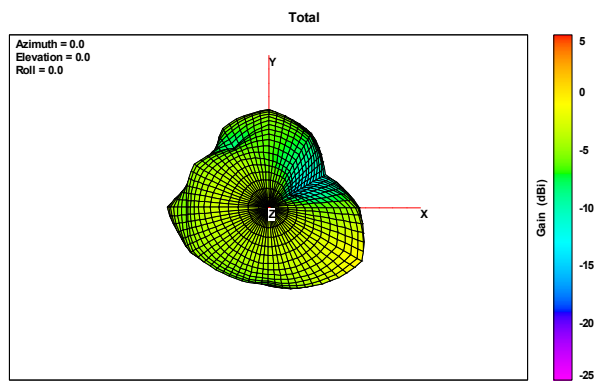

A8 antenna peak Gain (dBi), IFA

RFID Peak Gain (dBi)	
RFID	-0.86

(910)

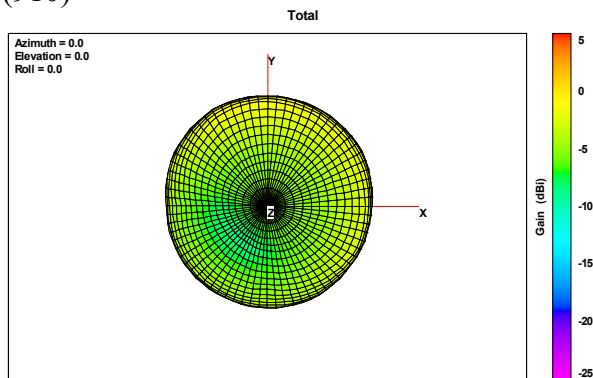

STD: A11 NFC

Type	Dimension(mm)
Loop	Coil size: 68*68

Value : A11 NFC

Type	Dimension(mm)
Loop	Coil size: 65*65



Test Environment, list of calibrated test equipment

Test Environment: E5071C

Test Environment: Temperature 18-23 ° c Celsius humidity 40%-70%

Last Calibration date:	2025/03/01
Due Calibration date:	2025/12/31
Next Calibration date:	2025/12/01

ETS-LINDGREN

Test Environment: Temperature 18-23 ° c Celsius humidity 40%-70%

Last Calibration date:	2025/03/01
Due Calibration date:	2025/12/31
Next Calibration date:	2025/12/01