



FCC RADIO TEST REPORT

FCC ID : UZ7ET401EB
Equipment : Enterprise Tablet
Brand Name : Zebra
Model Name : ET401EB
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Oct. 20, 2025 and testing was performed from Nov. 06, 2025 to Nov. 26, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards.....	7
2 Test Result	8
2.1 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC) ...	8
2.2 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	13
3 List of Measuring Equipment.....	16
Appendix A. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR590934A	01	Initial issue of report	Jan. 02, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2.1	15.407 KDB 987594 D02 Section II. L.	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point(APC)	Pass	-
2.2	15.407 KDB 987594 D02 Section II. K.	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	Pass	-

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Shannon Huang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Tablet
Brand Name	Zebra
Model Name	ET401EB
FCC ID	UZ7ET401EB
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE
HW Version	EV2
MFD	04AUG25
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
AC Adapter (TYPE C Wall Charger 1)	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
	Brand Name	Zebra	Part Number	PWR-WUA5V45W1EU
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT 1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-0TH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT 1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-0TH
Battery	Brand Name	Zebra	Part Number	BT-000528
Type C-Audio Cable Type C to 3.5mm	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-TN28-USBC2C-01

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Channel Frequency Range	5925 MHz ~ 6425 MHz 6525 MHz ~ 6875 MHz
Antenna Type / Gain	<5925 MHz ~ 6425 MHz> <Ant. 6>: IFA Antenna with gain -0.3 dBi <Ant. 7>: IFA Antenna with gain 1.01 dBi <6525 MHz ~ 6875 MHz> <Ant. 6>: IFA Antenna with gain -0.41 dBi <Ant. 7>: IFA Antenna with gain 0.02 dBi
Type of Modulation	802.11a : OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ax : OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM) 802.11be:OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/4096QAM)

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333 TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. DF02-HY
Temperature	22.3 ~ 24.3 °C
Humidity	48.6 ~ 53.6 %
Test Engineer	Ray Wang

FCC designation No.: TW1190

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Result

2.1 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

2.1.1 Limit of Standard Client Proper Power Adjustment

ISED RSS-248 issue 2 Clause 4.5.5. Power limits for standard client devices

c) The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point

2.1.2 Test Procedures of Standard Client Proper Power Adjustment

The testing follows FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01.

Section L. Proper Power Adjustment

2.1.3 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

Test procedure to show that the client device can lower its power accordingly.

2.1.4 Test Procedure:

1. Connect equipment as shown in Figure 7 below.
2. Adjust Atten 1 to Std Power AP so as to facilitate error free communication with the Client but protect the Client receiver from overload or damage.
3. Configure the Client and AP so that they associate and start sending data (stream data). The AP should be configured such that its registered power is 36 dBm EIRP.
4. Verify transmission between Client and Std Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices.
5. Use this power, along with its antenna gain, to calculate the Client EIRP.
6. The Client EIRP should be minimally 6 dB lower than that of the AP.
7. Repeat Steps 2 through 5 at two other selected measurement points – the first at the midpoint and the second at the lowest rated power of the client as declared by the manufacturer.

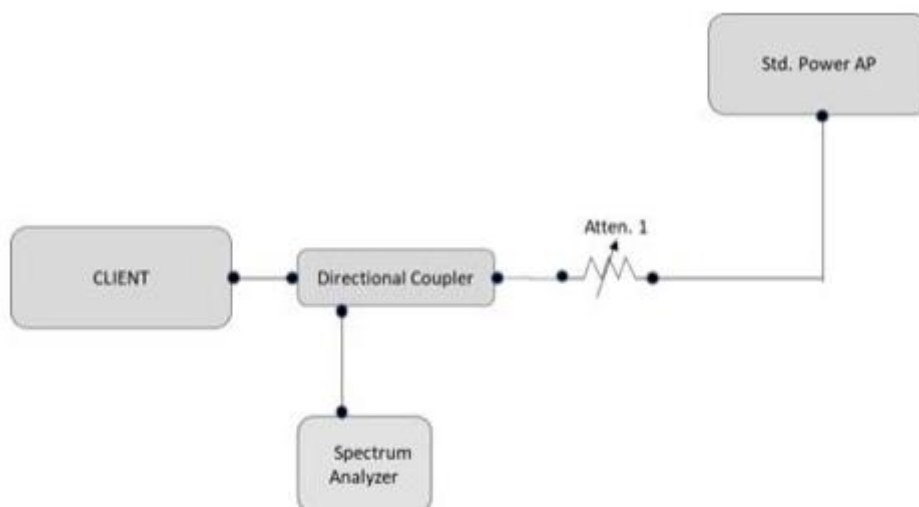


Figure 7. Test setup for conducted testing

2.1.5 Test Result Summary

Companion Standard Power AP: Brand name: Qualcomm, Model name: Wakiki

802.11be 20MHz bandwidth


Test channel 69

	Client Conducted Power (dBm)			Client EIRP (dBm)	AP EIRP (dBm)	AP to client EIRP Delta (dB)
	Ant6	Ant7	MIMO			
Maximum EIRP	11.9	11.81	14.87	15.88	33.8	18.82
Midpoint EIRP	6.41	5.56	9.02	10.03	24.5	14.47
Lowest EIRP	-0.82	-2.64	1.37	2.38	21.2	17.92
Requirement						At least 6 dB
Result						Pass

Note: Client EIRP = Client MIMO conducted power + antenna gain (1.01dBi)




2.1.6 Test Result Plot

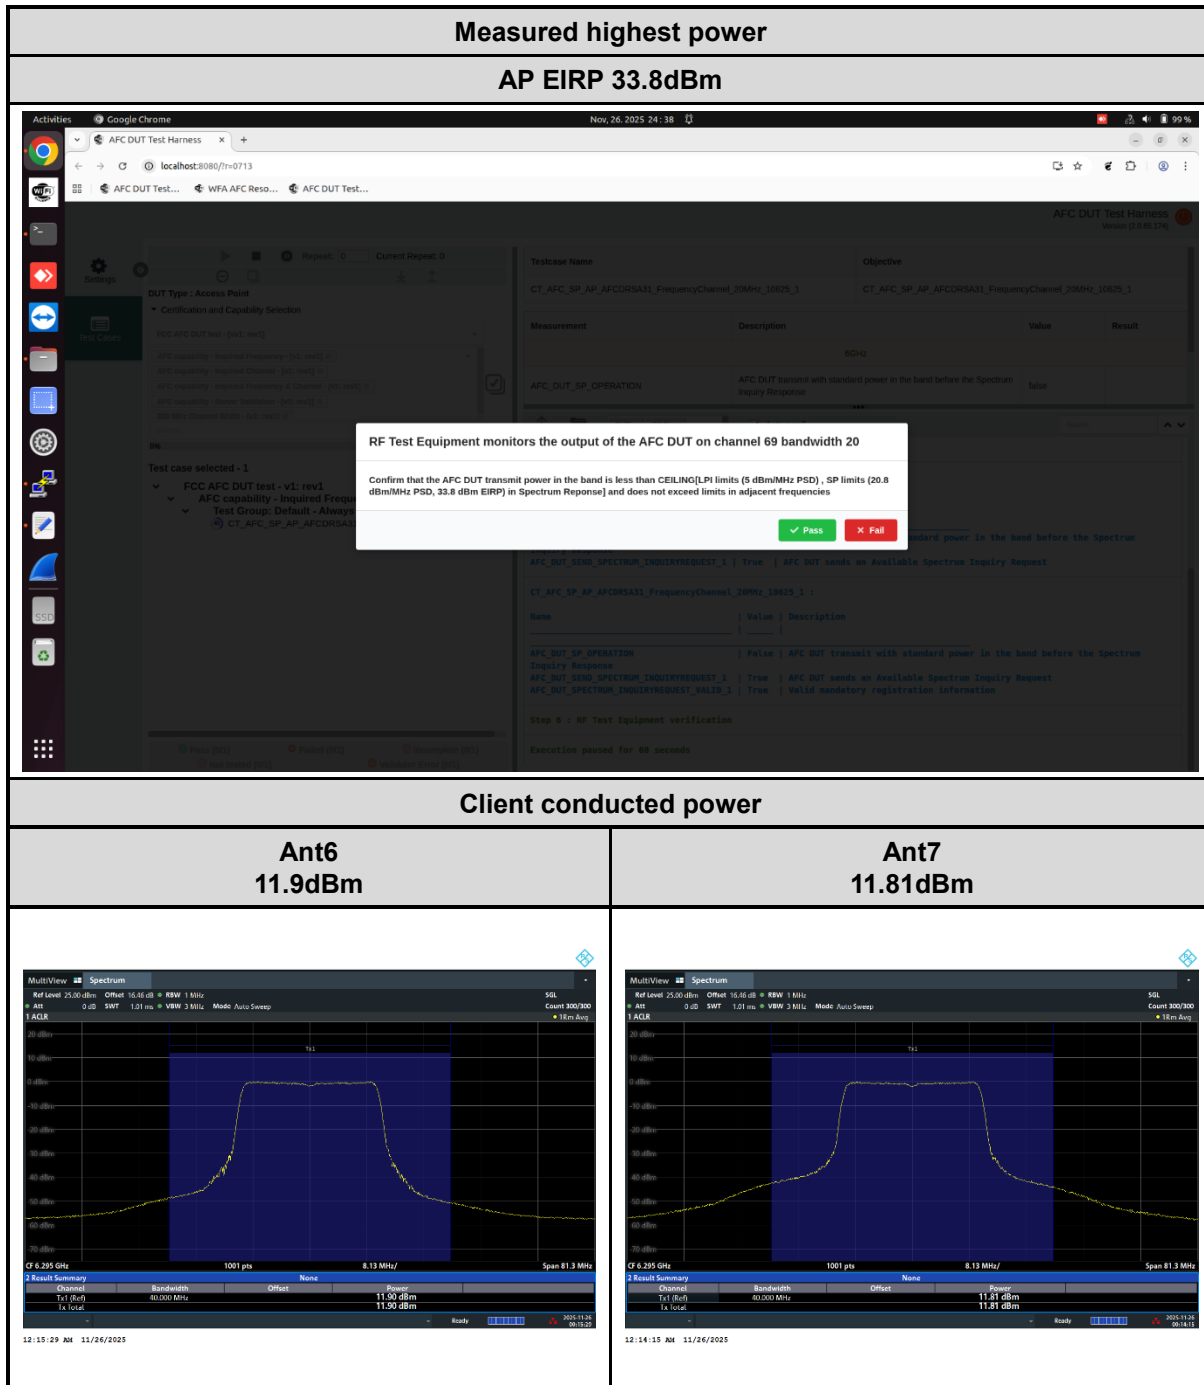





Measured mid-point power

AP EIRP 24.5dBm

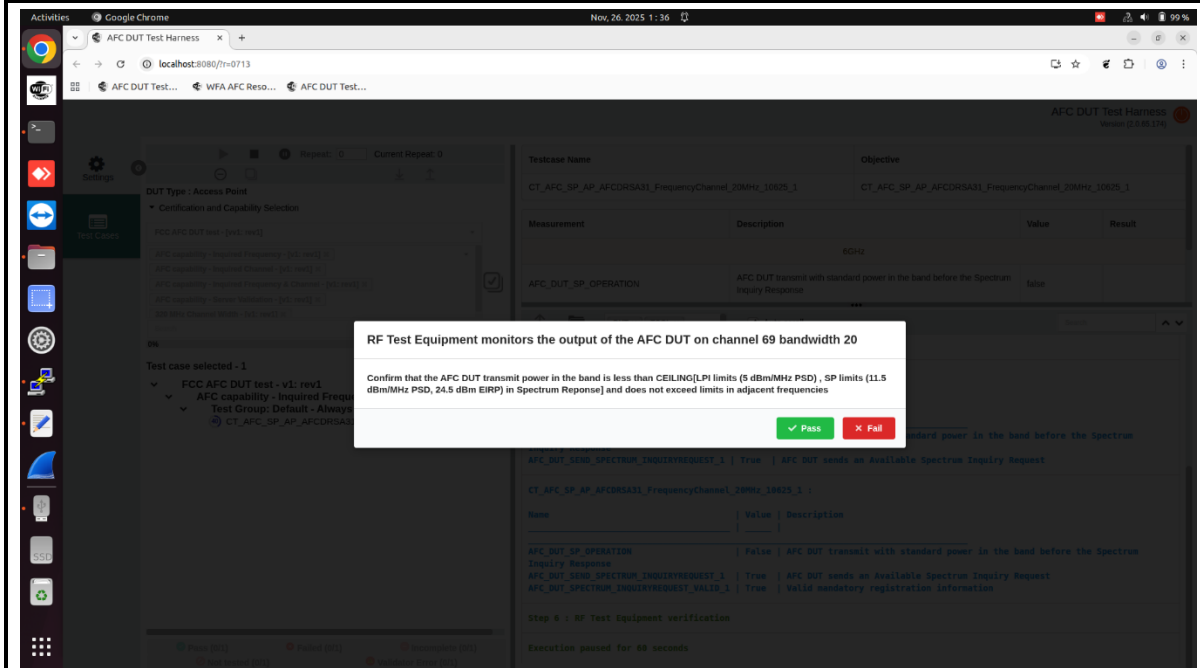

Client conducted power

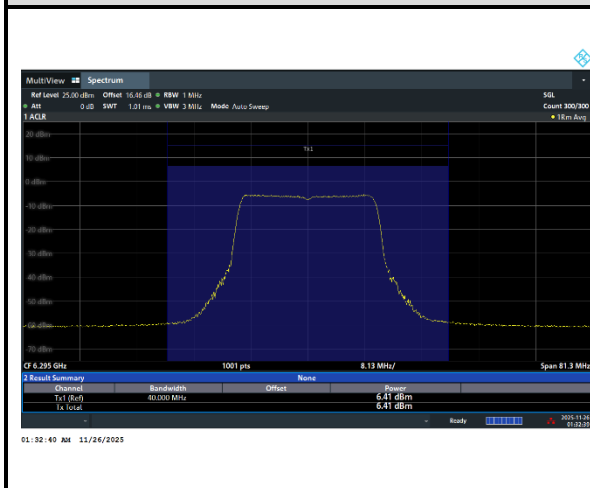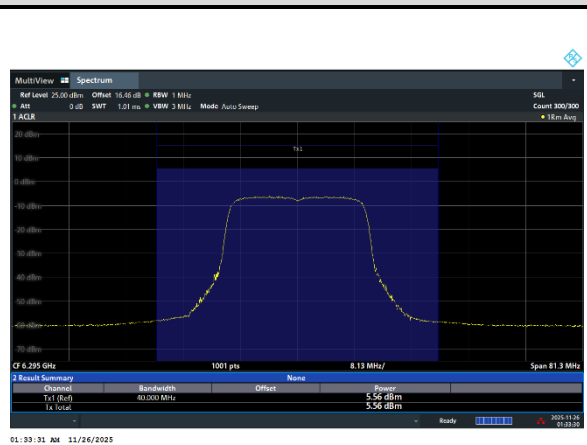Ant6
6.41dBmAnt7
5.56dBm



Measured lowest power

AP EIRP 21.2dBm

Activities Google Chrome Nov 25, 2025 22:30

localhost:8080/?m=0713

AFC DUT Test... WFA AFC Reso... AFC DUT Test...

AFC DUT Test Harness
Version 2.0.0.1174

Testcase Name: CT_AFC_SP_AP_AFCORSA31_FrequencyChannel_20MHz_10025_1
Objective: CT_AFC_SP_AP_AFCORSA31_FrequencyChannel_20MHz_10025_1

Measurement	Description	Value	Result
60Hz			
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Request	True	Pass

RF Test Equipment monitors the output of the AFC DUT on channel 69 bandwidth 20

Confirm that the AFC DUT transmit power in the band is less than CEILING/LPI limits (5 dBm/MHz PSD), SP limits (8.2 dBm/MHz PSD, 21.2 dBm EIRP) in Spectrum Response and does not exceed limits in adjacent frequencies

Pass Fail

AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1: True | AFC DUT sends an Available Spectrum Inquiry Request



CT_AFC_SP_AP_AFCORSA31_FrequencyChannel_20MHz_10025_1:

Name	Value	Description
AFC_DUT_SP_OPERATION	False	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Request
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	True	AFC DUT sends an Available Spectrum Inquiry Request
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_VALID_1	True	Valid mandatory registration information

Step 6 : RF Test Equipment verification

Execution passed for 60 seconds

Client conducted power

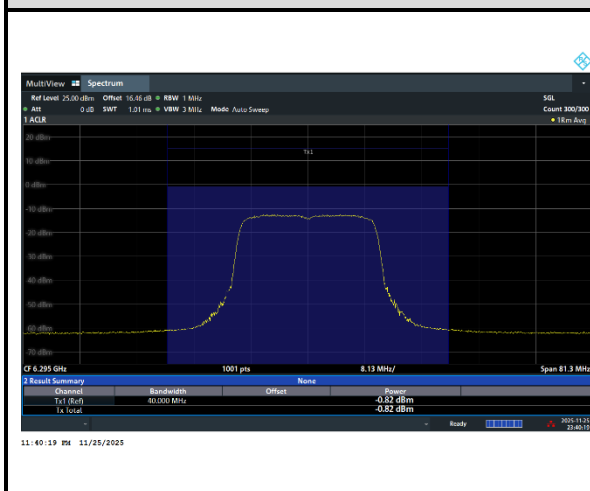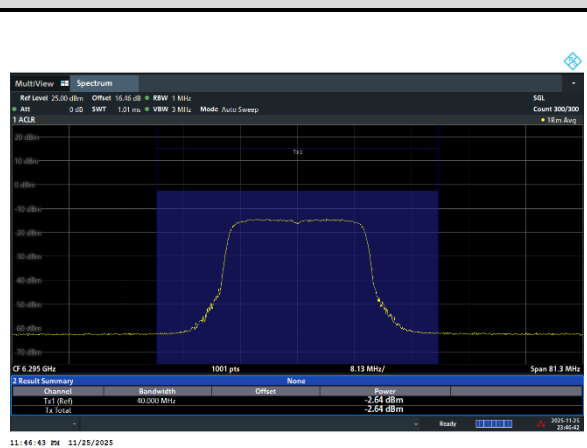Ant6
-0.82dBmAnt7
-2.64dBm



2.2 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

2.2.1 Limit of Proper Power Adjustment

15.407 KDB 987594 D02 Section II. K. Power limits for standard client devices.

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP. A client may also connect to a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP.

2.2.2 Test Procedures of Standard Client Proper Power Adjustment

The testing follows FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01.

Section K. Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

2.2.3 Test Procedure:

1. Connect equipment as shown in Figure 6 below.
2. Adjust Atten 2 to Std Power AP so as to facilitate error free communication with the Client (Atten 1 should be set to High on the RF path to the Low Power AP)
3. Configure the Client and APs so that they associate and start sending data (stream data). It is important that the client is configured to transmit at its highest power level. Initially, because the attenuation on Atten 1 is set high, the Client will only associate with the Std Power AP.
4. Verify transmission between Client and Std Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices.
5. Gradually increase Atten 2 while at the same time decreasing Atten 1. This simulates the Client moving from outdoors to indoors. At some level of attenuation the Client should associate with the Low Power indoor AP.
Verify transmission between Client and Low Power AP.
6. Measure the RF power of the Client device using the same method as in step 4. Verify the power is no more than 24 dBm EIRP

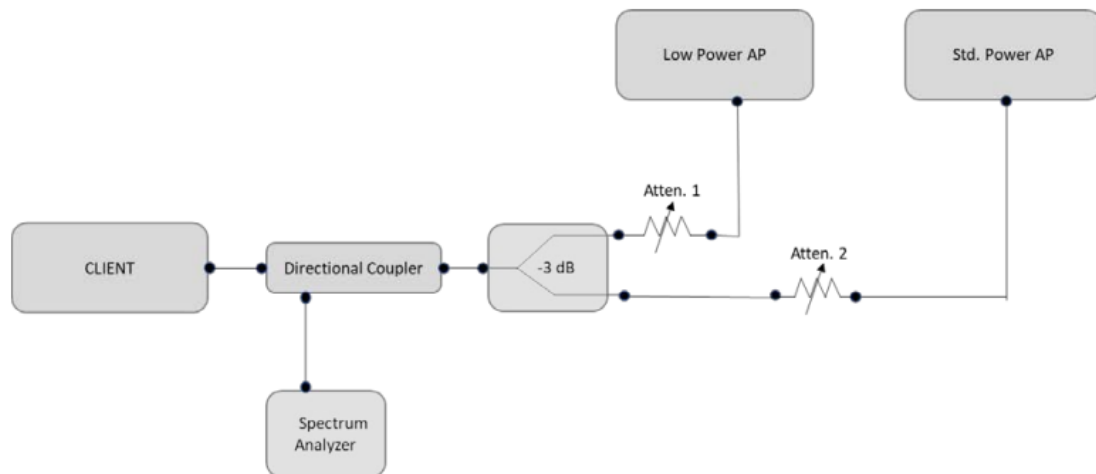


Figure 6. Test setup for conducted testing

2.2.4 Test Result Summary

Companion Standard Power AP: Brand name:Qualcomm, Model name:Wakiki

Companion Low Power indoor AP: Brand name: ASUS, Model name: RT-BE92U

802.11be 20MHz bandwidth


Test channel 69

	Client Conducted Power (dBm)			Client EIRP (dBm)	Limit EIRP (dBm)	Result
	Ant6	Ant7	MIMO			
Indoor EIRP	6.68	3.36	8.34	9.35	24	Pass
Standard EIRP	11.82	11.75	14.80	15.81	30	Pass

Note: Client EIRP = Client MIMO conducted power + antenna gain (1.01dBi)



2.2.5 Test Result Plot

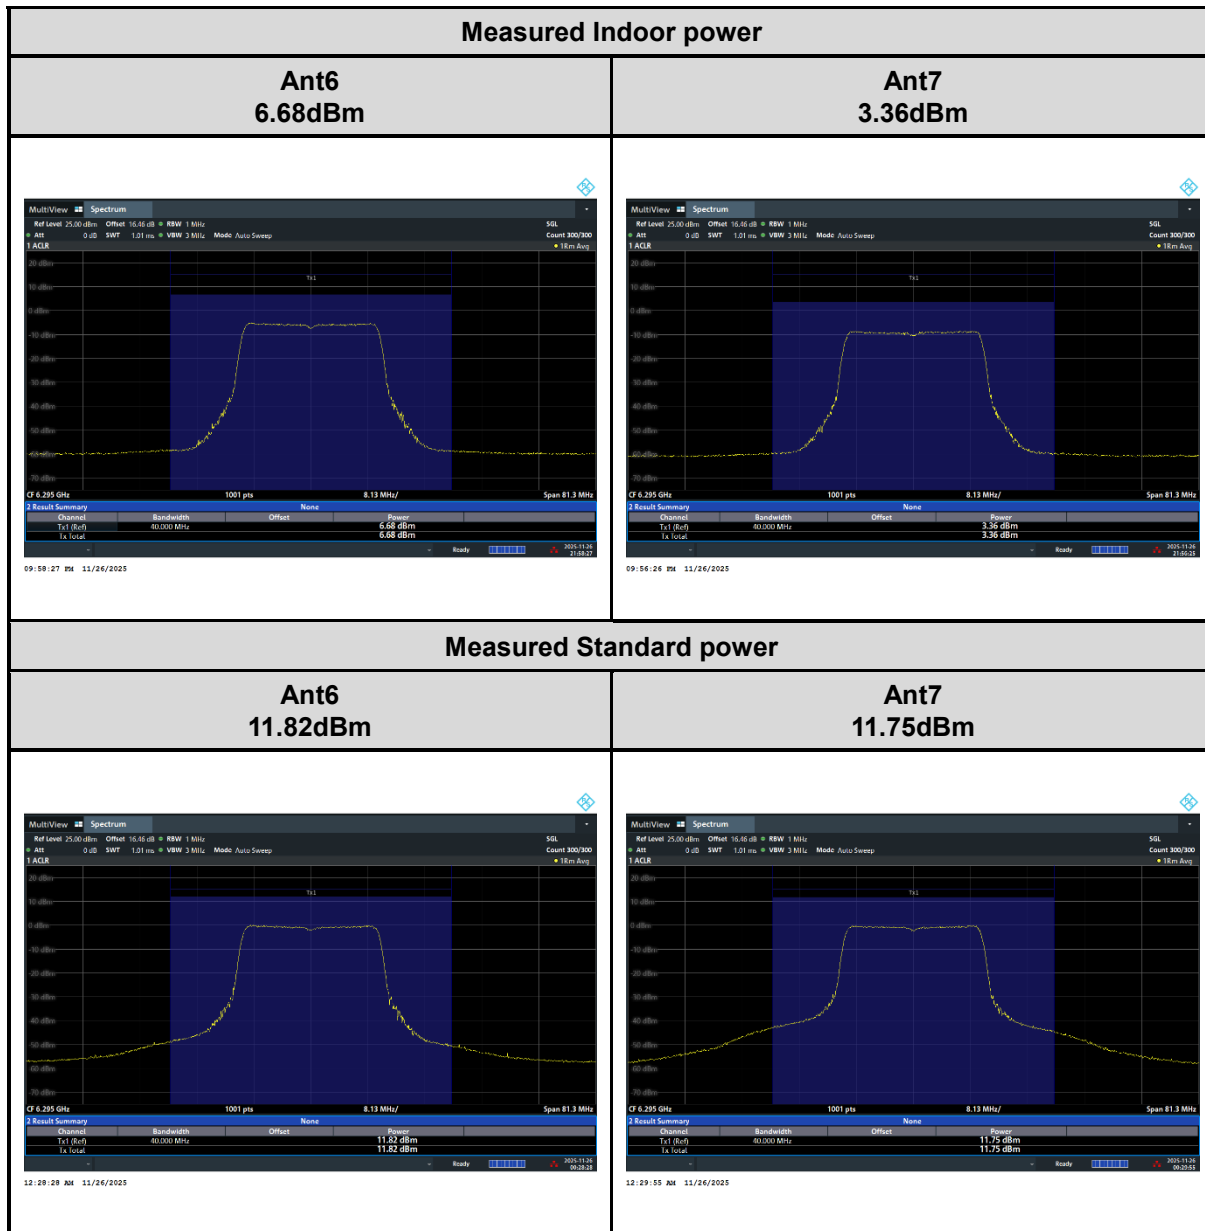



3 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101549	10Hz~13.6GHz	Jan. 20,2025	Nov. 06.2025~ Nov. 26.2025	Jan. 19,2026	APC (DF02-HY)
Coupler	Woken	10dB 30W SMA	DOM5CIW3A 1	0.5-18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
Power Divider	Woken	2Way Divider	DCMB1KW7A 1	0.5GHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
Power Divider	Woken	2Way Divider	DCMB1KW7A 2	0.5GHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
Power Divider	MVE	MVE8576-1	F300658	0.5GHz~8GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	EM	SFL402	30cm-#6	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-01	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-08	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-09	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-01	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-03	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-05	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-08	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-10	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-11	30 kHz~18GHz	Calibration from System	Nov. 06.2025~ Nov. 26.2025	Calibration from System	APC (DF02-HY)