

**#01\_WCDMA II\_RMC 12.2Kbps\_Edge 1\_0mm\_Ch9262**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_190709 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.404$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.14, 5.14, 5.14) @ 1852.4 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.842 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.97 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.02 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.491 W/kg**

Maximum value of SAR (measured) = 1.36 W/kg

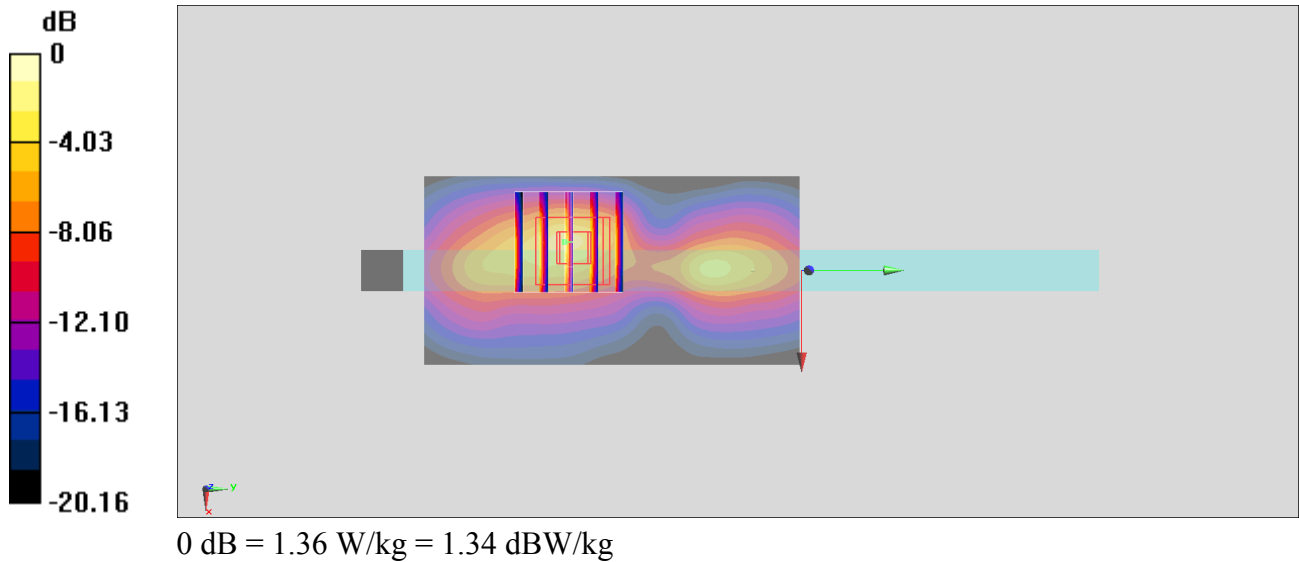

**#02\_WCDMA IV\_RMC 12.2Kbps\_Edge 1\_0mm\_Ch1312**

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_190709 Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.33$  S/m;  $\epsilon_r = 40.76$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.34, 5.34, 5.34) @ 1712.4 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.45 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.00 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.10 W/kg

**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.491 W/kg**

Maximum value of SAR (measured) = 1.44 W/kg

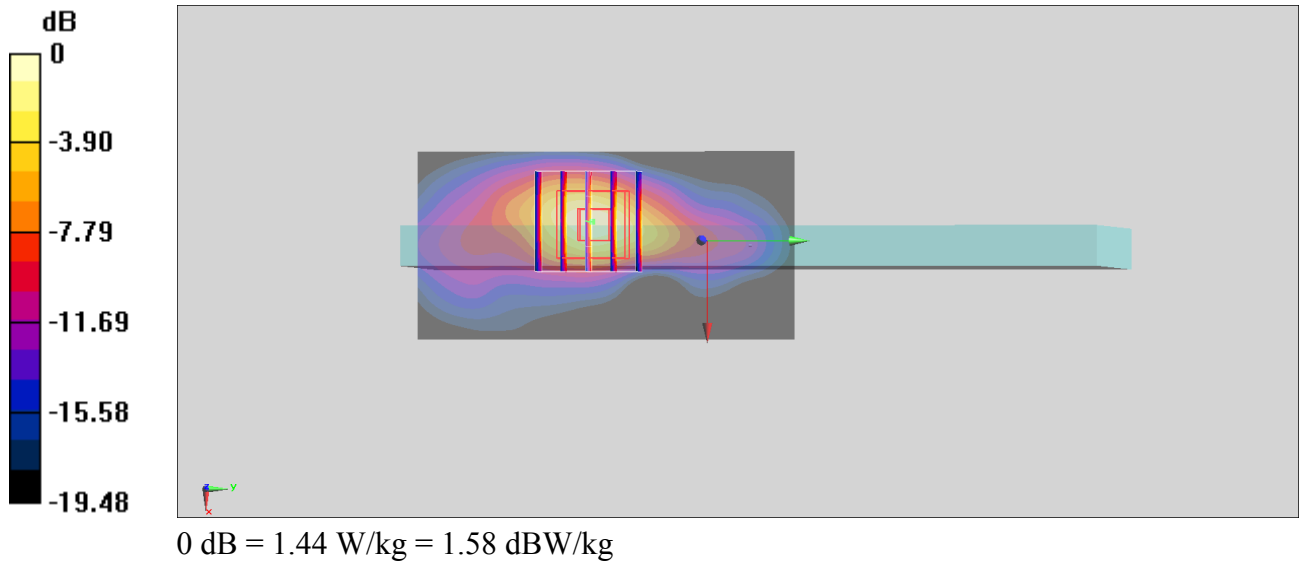

**#03\_WCDMA V\_RMC 12.2Kbps\_Bottom Face\_0mm\_Ch4233**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_190705 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.886$  S/m;  $\epsilon_r = 42.608$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.07, 10.07, 10.07) @ 846.6 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.94 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.56 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.06 W/kg

**SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.586 W/kg**

Maximum value of SAR (measured) = 1.96 W/kg

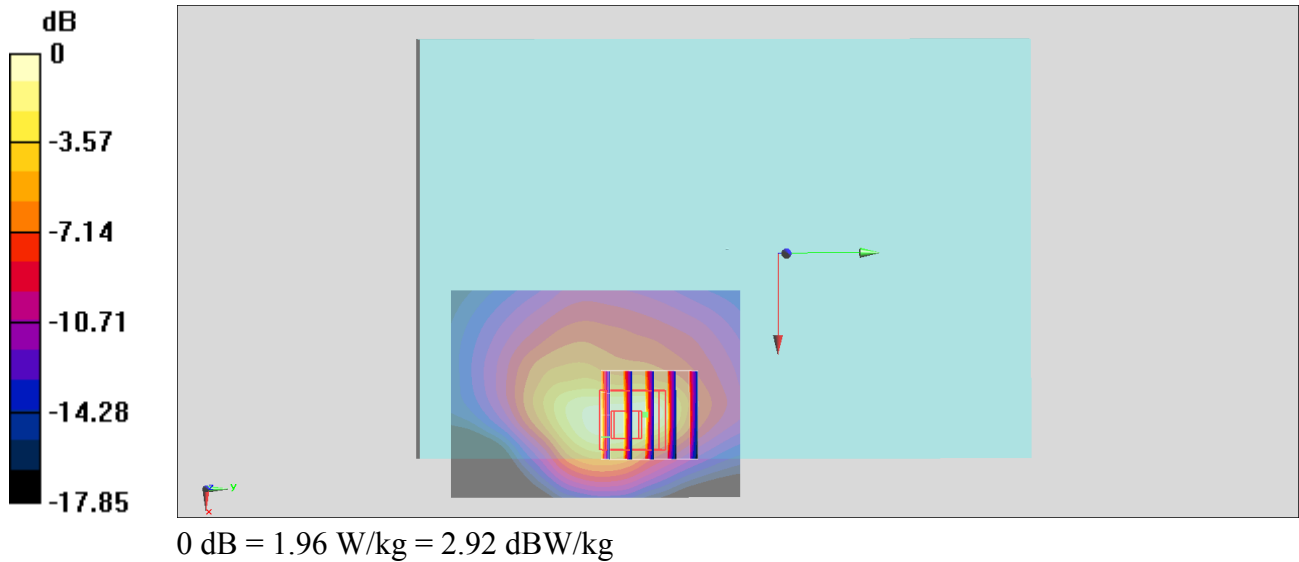

**#04\_LTE Band 7\_20M\_QPSK\_1\_99\_Edge 1\_0mm\_Ch21350**

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_190706 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.985$  S/m;  $\epsilon_r = 40.078$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.3, 7.3, 7.3) @ 2560 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.57 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.91 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.15 W/kg

**SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.469 W/kg**

Maximum value of SAR (measured) = 2.40 W/kg

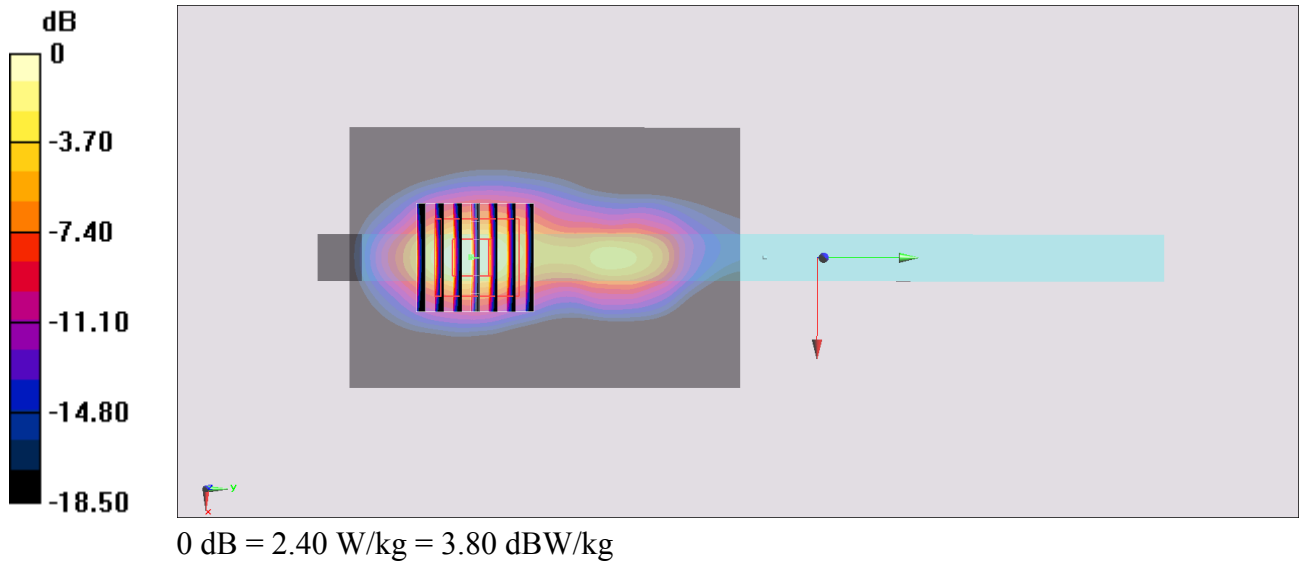

**#05\_LTE Band 12\_10M\_QPSK\_1\_49\_Bottom Face\_0mm\_Ch23095**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_190704 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.853$  S/m;  $\epsilon_r = 41.036$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.54, 10.54, 10.54) @ 707.5 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.70 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.70 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.25 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.552 W/kg**

Maximum value of SAR (measured) = 1.61 W/kg

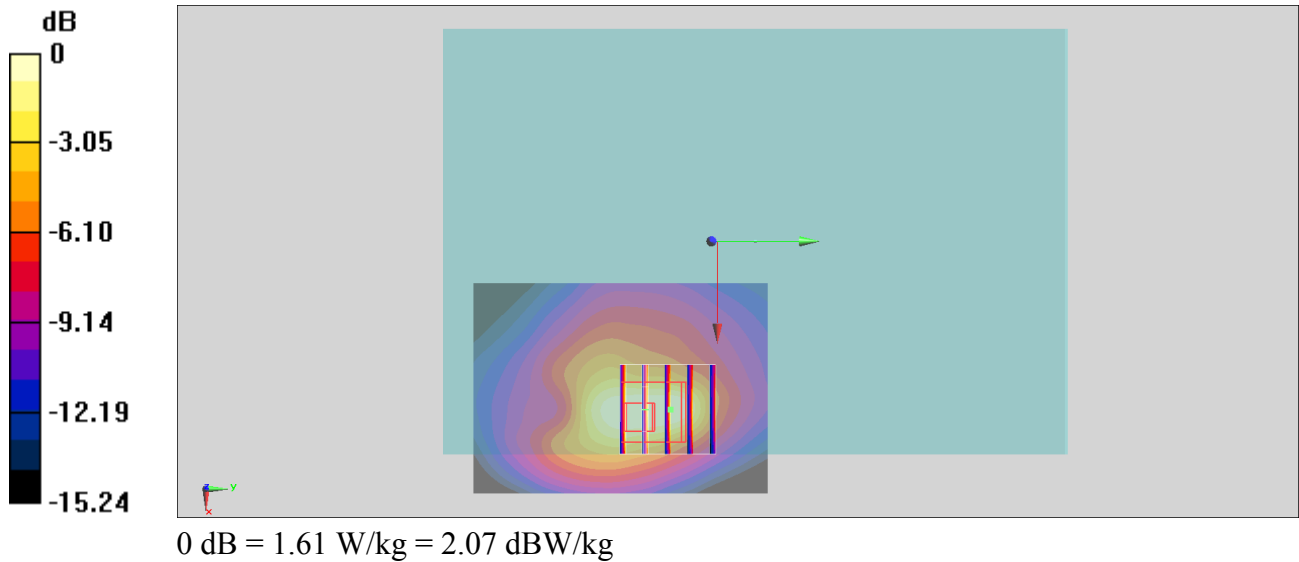

**#06\_LTE Band 13\_10M\_QPSK\_1\_49\_Bottom Face\_0mm\_Ch23230**

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_190704 Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 40.078$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.54, 10.54, 10.54) @ 782 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.09 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.68 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.82 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.614 W/kg**

Maximum value of SAR (measured) = 1.98 W/kg

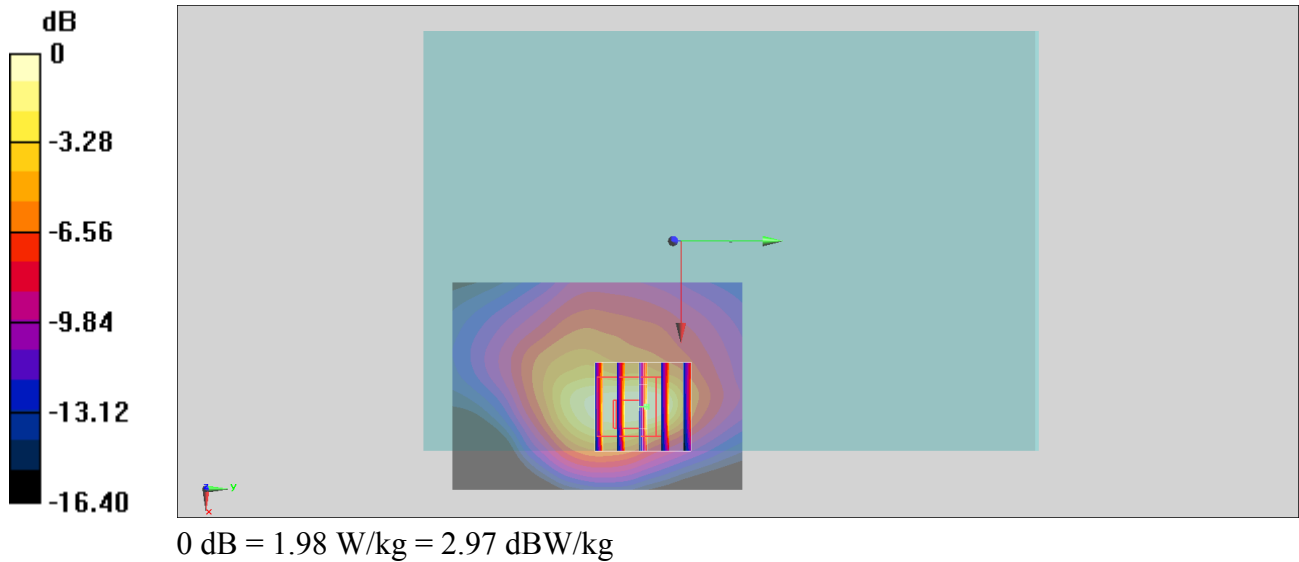

**#07\_LTE Band 14\_10M\_QPSK\_1\_25\_Bottom Face\_0mm\_Ch23330**

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_190704 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.932$  S/m;  $\epsilon_r = 39.942$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.54, 10.54, 10.54) @ 793 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.09 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.26 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.81 W/kg

**SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.608 W/kg**

Maximum value of SAR (measured) = 1.99 W/kg

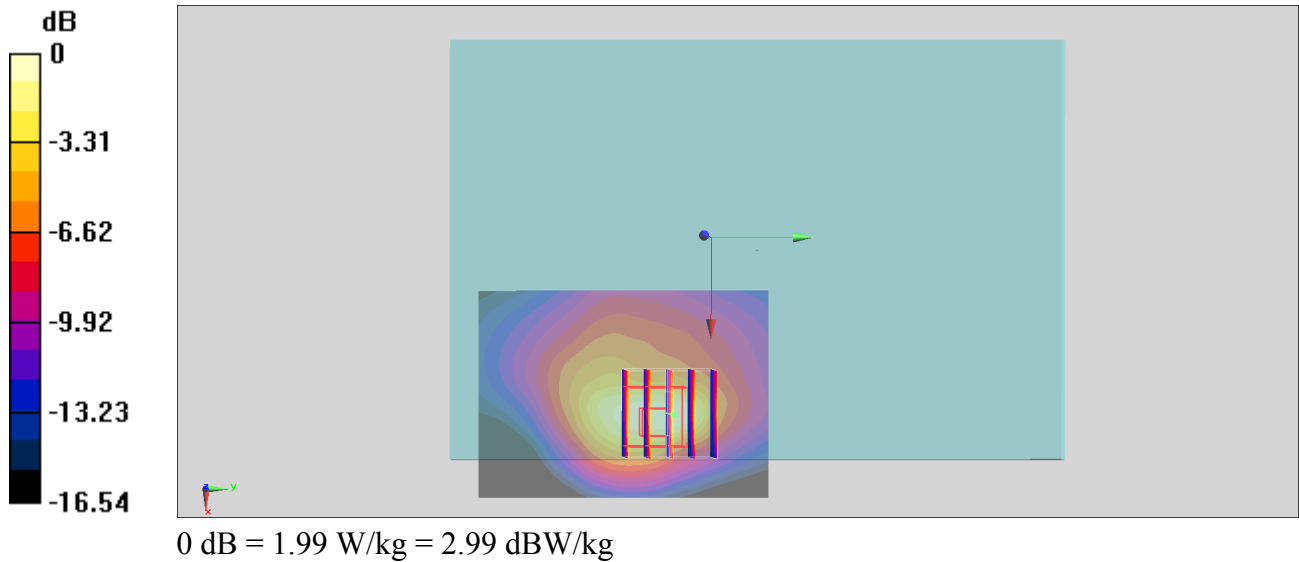

**#08\_LTE Band 25\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch26140**

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_190708 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.386$  S/m;  $\epsilon_r = 41.127$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.14, 5.14, 5.14) @ 1860 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.55 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.02 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.33 W/kg

**SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.554 W/kg**

Maximum value of SAR (measured) = 1.54 W/kg

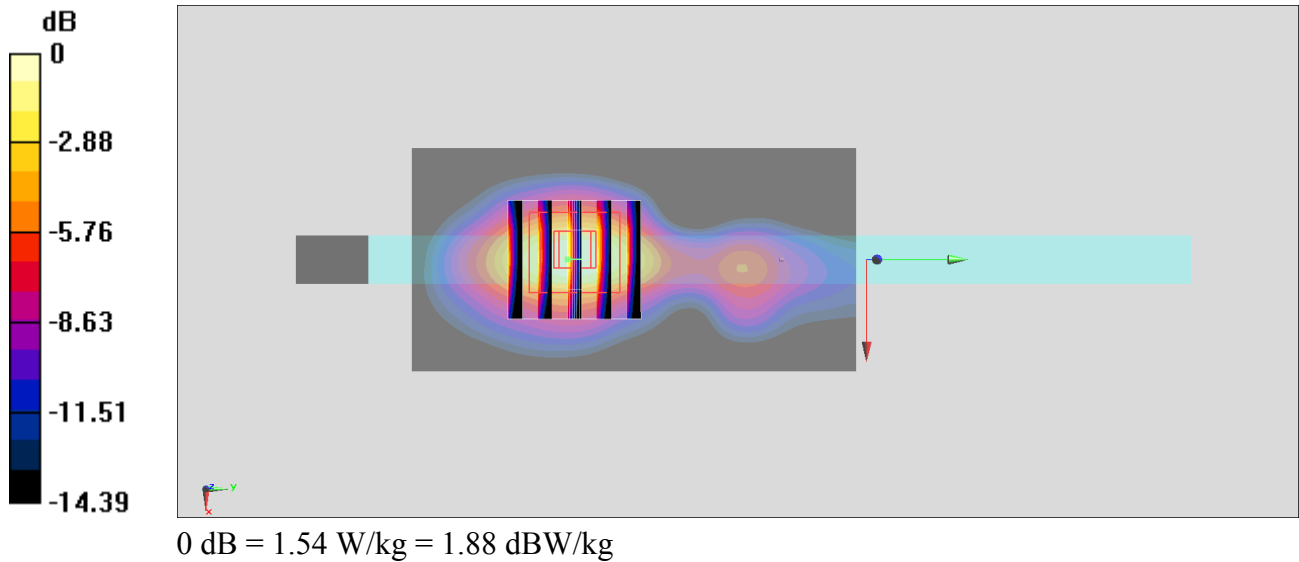

**#09\_LTE Band 26\_15M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch26865**

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_190704 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 41.694$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.07, 10.07, 10.07) @ 831.5 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.03 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.66 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.80 W/kg

**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.560 W/kg**

Maximum value of SAR (measured) = 1.95 W/kg

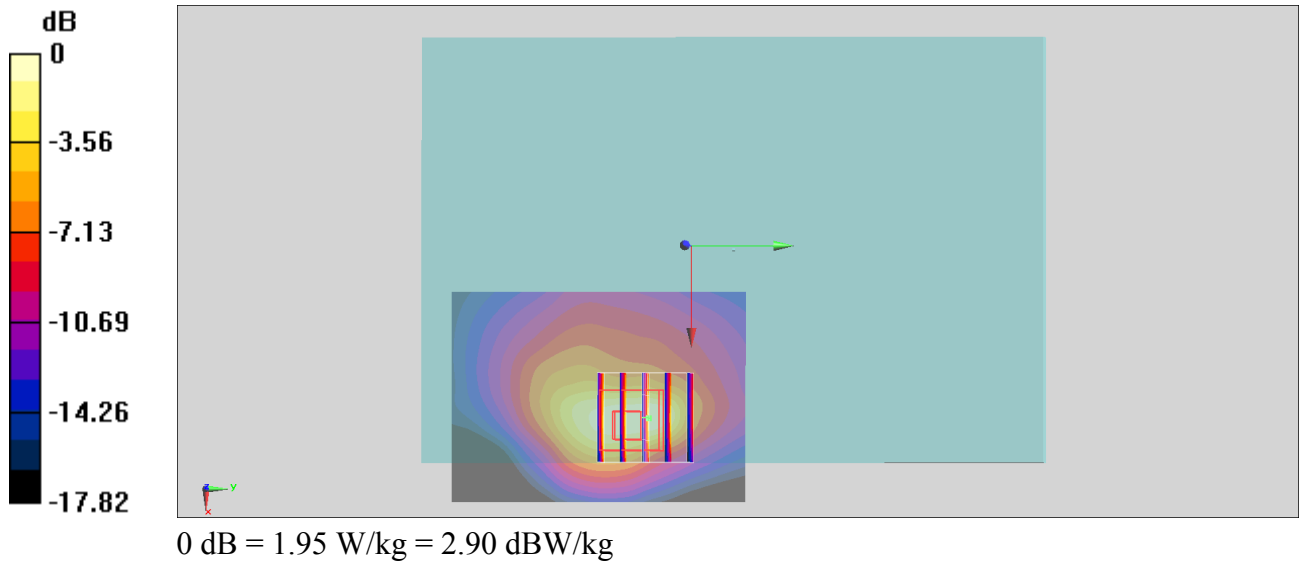

**#10\_LTE Band 66\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch132322**

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_190709 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.363$  S/m;  $\epsilon_r = 40.637$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.34, 5.34, 5.34) @ 1745 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.88 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.18 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.52 W/kg

**SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.569 W/kg**

Maximum value of SAR (measured) = 1.74 W/kg

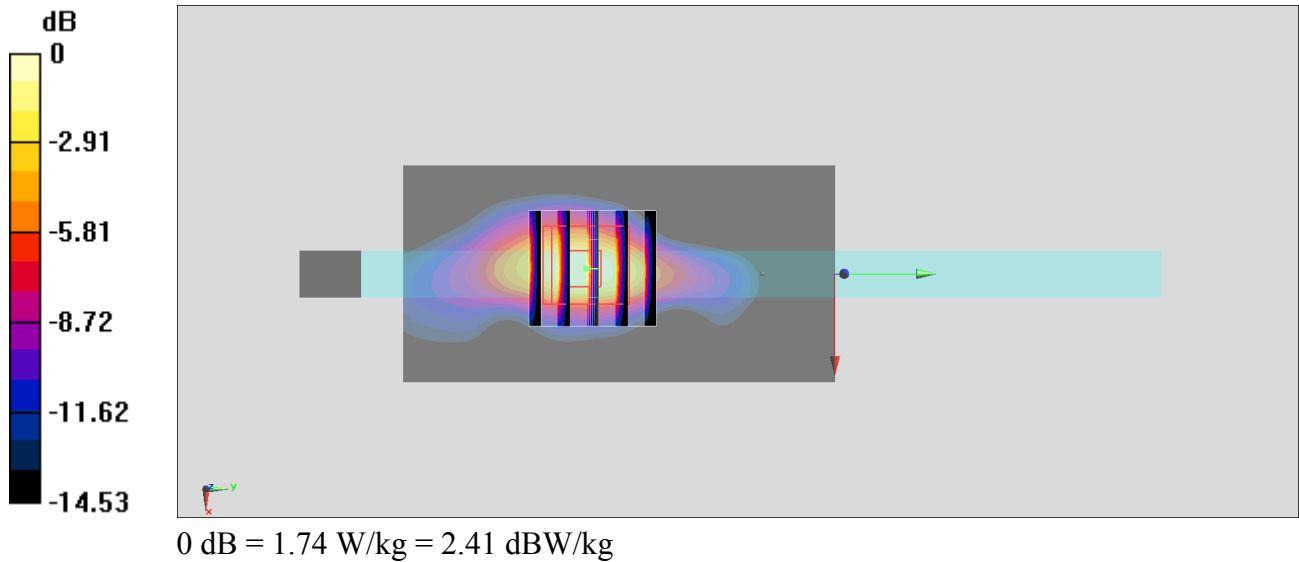

**#11\_LTE Band 38\_20M\_QPSK\_1\_99\_Edge 1\_0mm\_Ch38150**

Communication System: LTE; Frequency: 2610 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2600\_190708 Medium parameters used:  $f = 2610$  MHz;  $\sigma = 1.981$  S/m;  $\epsilon_r = 38.304$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.38, 4.38, 4.38) @ 2610 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x91x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 1.73 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.067 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.09 W/kg

**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.456 W/kg**

Maximum value of SAR (measured) = 1.75 W/kg

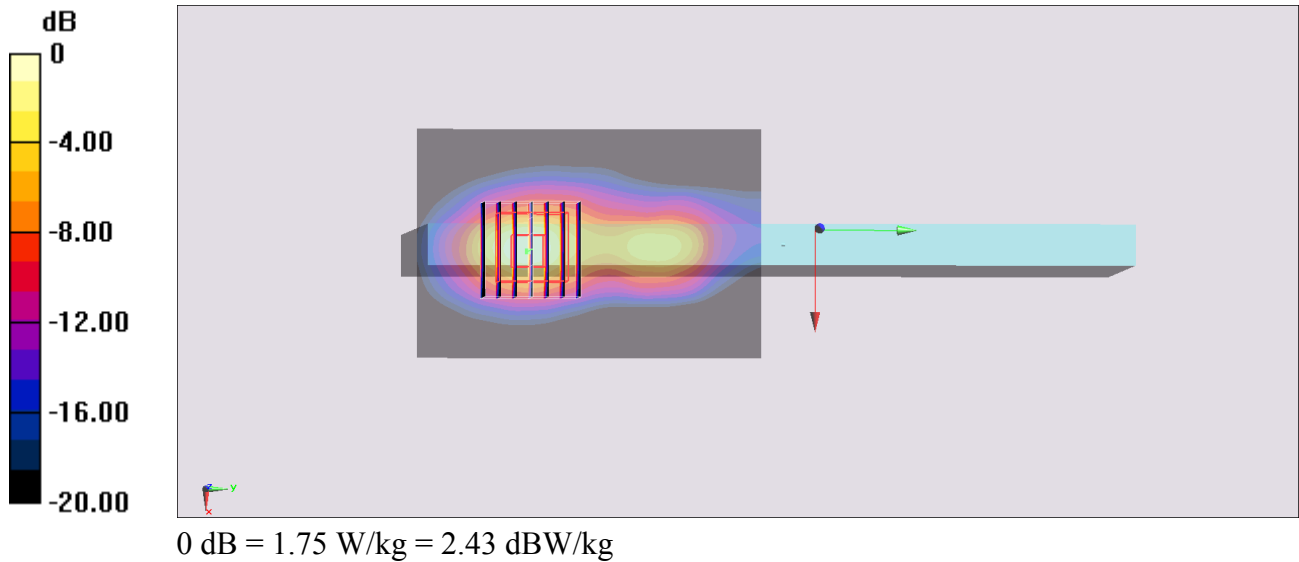

**#12\_LTE Band 41\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch41490**

Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2600\_190706 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.128$  S/m;  $\epsilon_r = 39.64$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.3, 7.3, 7.3) @ 2680 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.42 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.093 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 3.31 W/kg

**SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.442 W/kg**

Maximum value of SAR (measured) = 2.49 W/kg

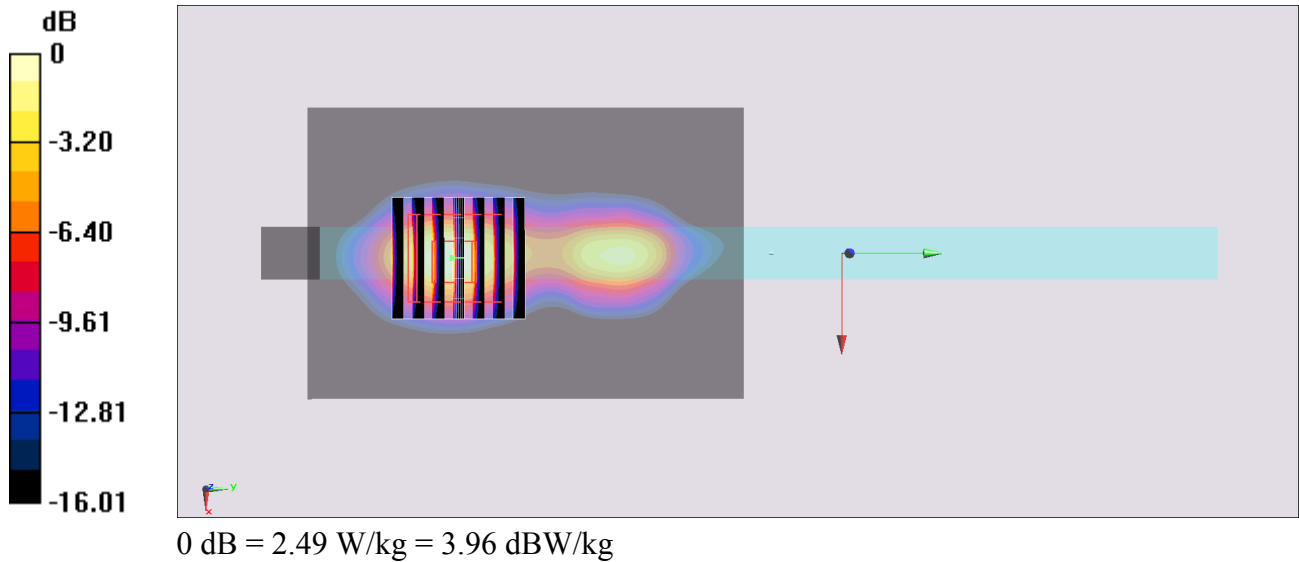

**#13\_WLAN2.4GHz\_802.11b 1Mbps\_Bottom Face\_0mm\_Ch11;Ant 1**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_190716 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.77$  S/m;  $\epsilon_r = 38.642$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.54, 7.54, 7.54) @ 2462 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (101x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.88 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.93 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.29 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.396 W/kg**

Maximum value of SAR (measured) = 2.18 W/kg

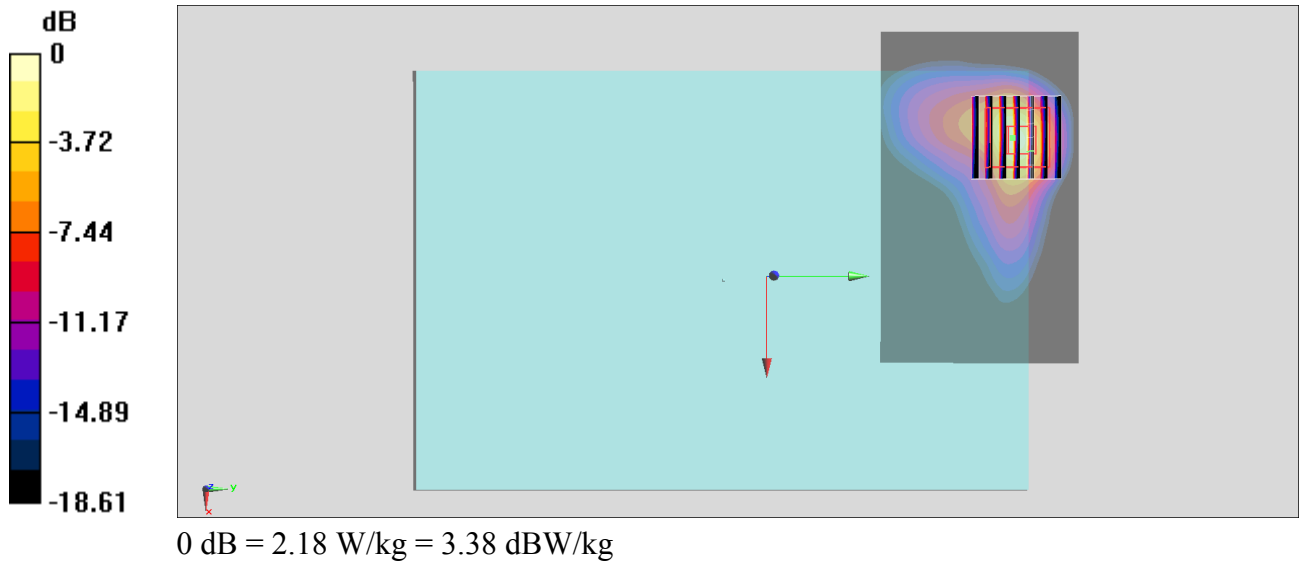

**#14\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 2\_0mm\_Ch42;Ant 1**

Communication System: 802.11ac; Frequency: 5210 MHz; Duty Cycle: 1:1.135

Medium: HSL\_5G\_190711 Medium parameters used:  $f = 5210$  MHz;  $\sigma = 4.471$  S/m;  $\epsilon_r = 36.882$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.54, 4.54, 4.54) @ 5210 MHz; Calibrated: 2019/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 2.50 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 22.73 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 4.38 W/kg

**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.312 W/kg**

Maximum value of SAR (measured) = 2.77 W/kg

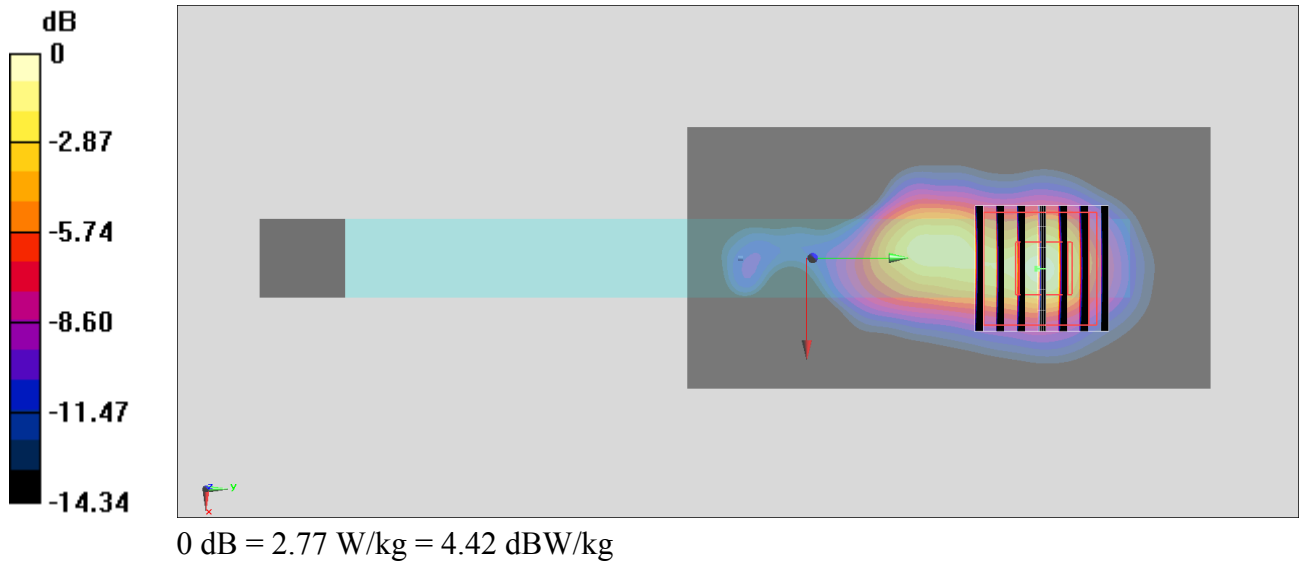

**#15\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 2\_0mm\_Ch58;Ant 1**

Communication System: 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1.135

Medium: HSL\_5G\_190711 Medium parameters used:  $f = 5290$  MHz;  $\sigma = 4.552$  S/m;  $\epsilon_r = 36.772$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(4.54, 4.54, 4.54) @ 5290 MHz; Calibrated: 2019/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.68 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.00 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 4.18 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.316 W/kg**

Maximum value of SAR (measured) = 2.39 W/kg

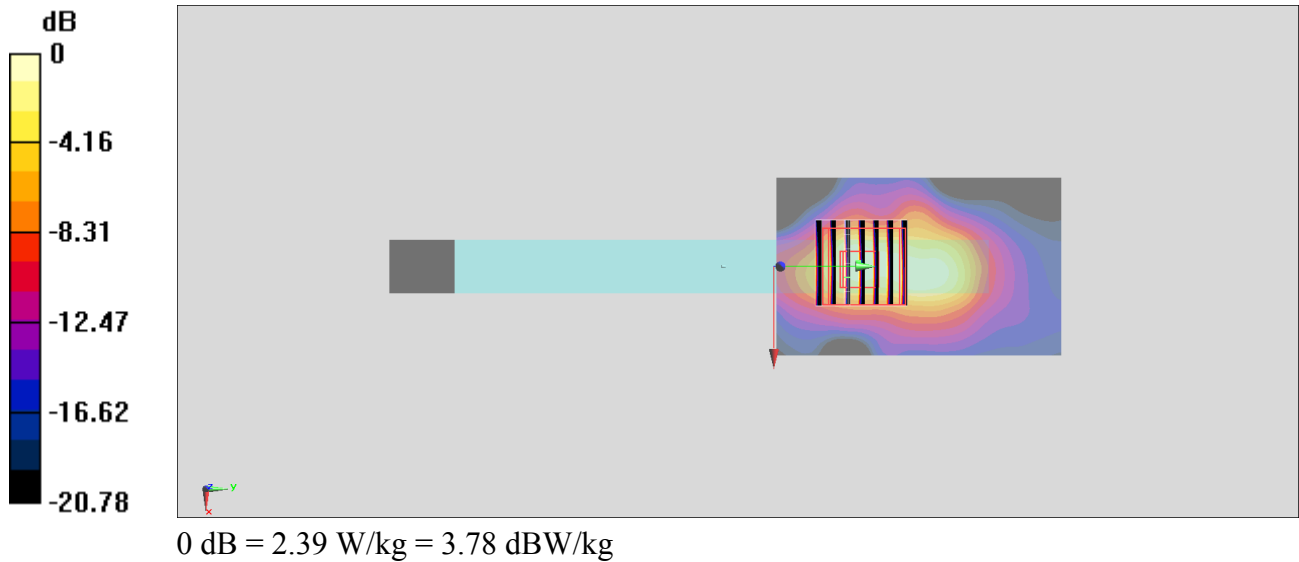

**#16\_WLAN5GHz\_802.11a 6Mbps\_Edge 3\_0mm\_Ch124;Ant 1**

Communication System: 802.11a; Frequency: 5620 MHz; Duty Cycle: 1:1.049

Medium: HSL\_5G\_190714 Medium parameters used:  $f = 5620$  MHz;  $\sigma = 4.892$  S/m;  $\epsilon_r = 36.425$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3642; ConvF(4.28, 4.28, 4.28) @ 5620 MHz; Calibrated: 2019/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 2.50 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=1.4$ mm

Reference Value = 24.57 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.35 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.414 W/kg**

Maximum value of SAR (measured) = 2.51 W/kg

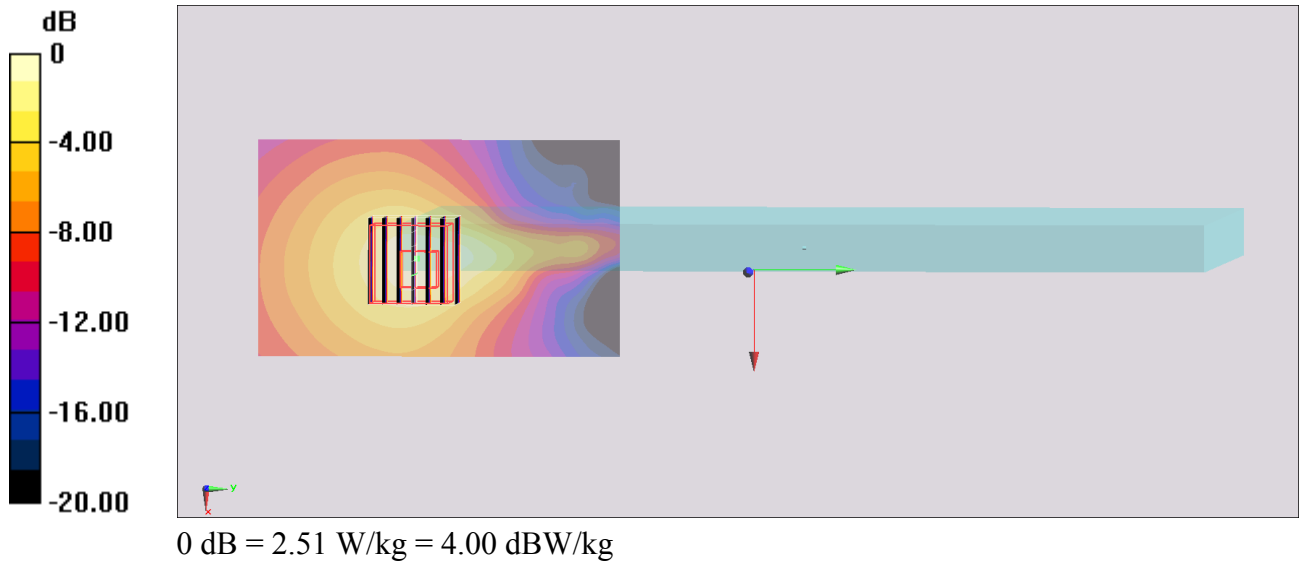

**#17\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 2\_0mm\_Ch155;Ant 1**

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.135

Medium: HSL\_5G\_190717 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.166$  S/m;  $\epsilon_r = 36.629$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.72, 4.72, 4.72) @ 5775 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2018/9/18
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (51x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.03 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.5450 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 5.12 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.344 W/kg**

Maximum value of SAR (measured) = 2.86 W/kg

