

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	275.0 x 199.0 x 23.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 14.00	6025.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – xxxx	Air –	EUmmWV4 – SN9441_F1-55GHz, 2022-11-18	DAE4 Sn853, 2022-07-20


Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	14.0

Measurement Results

Date	2023-05-22, 05:00
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.87
psPDtot+ [W/m ²]	4.17
H _{max} [A/m]	0.110
E _{max} [V/m]	53.9
max(Stot) [W/m ²]	4.82
Power Drift [dB]	-0.02
iPDn	4.13

sPDtot+ (4.0cm2, circ) [dB(4.17W/m^2)]

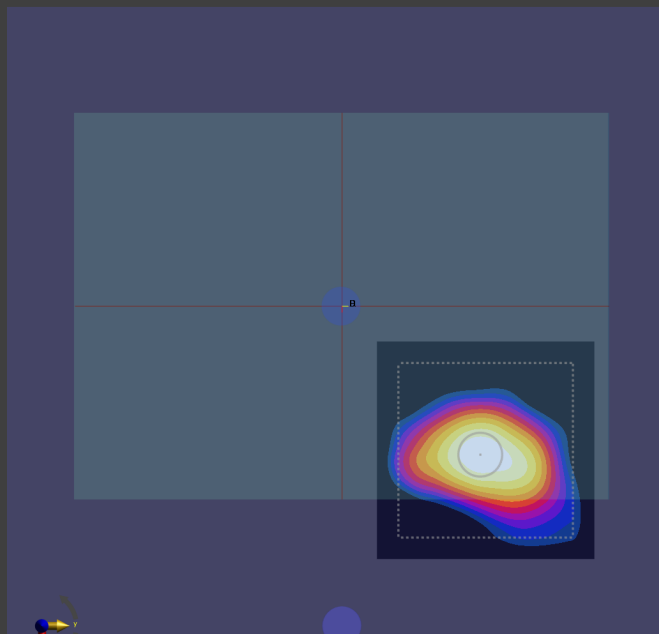

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	275.0 x 199.0 x 23.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	EDGE 2, 3.00	6665.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – xxxx	Air –	EUmmWV4 – SN9441_F1-55GHz, 2022-11-18	DAE4 Sn853, 2022-07-20

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	3.0

Measurement Results

Date	2023-05-22, 03:23
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.61
psPDtot+ [W/m ²]	3.41
H _{max} [A/m]	0.134
E _{max} [V/m]	42.4
max _(Stot) [W/m ²]	4.71
Power Drift [dB]	0.13
iPDn	3.07

sPDtot+ (4.0cm2, circ) [dB(3.41W/m^2)]

