


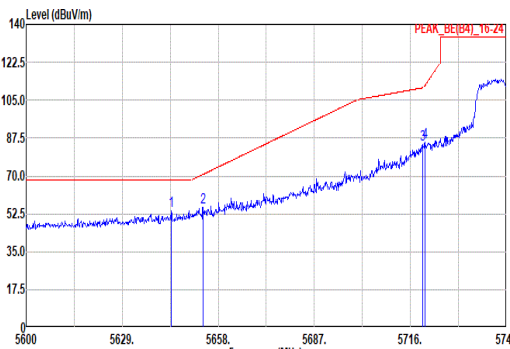
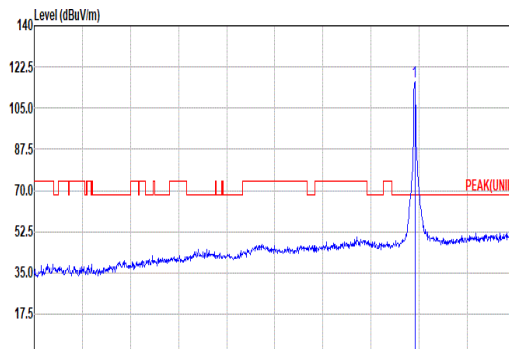
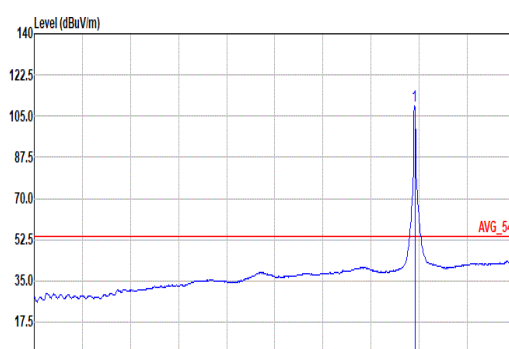



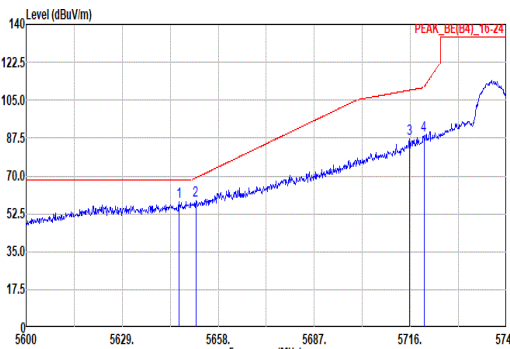


Mode	71																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																							
ANT	6+7																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(B4)_16-24 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5643.79</td><td>53.77</td><td>68.20</td><td>-14.43</td><td>44.96</td><td>33.18</td><td>13.55</td><td>37.92</td><td>0.00 100 200 PEAK</td></tr><tr><td>2</td><td>5653.36</td><td>55.64</td><td>70.70</td><td>-15.06</td><td>46.77</td><td>33.23</td><td>13.56</td><td>37.92</td><td>0.00 100 200 PEAK</td></tr><tr><td>3</td><td>5719.77</td><td>84.51</td><td>110.74</td><td>-26.23</td><td>75.14</td><td>33.64</td><td>13.65</td><td>37.92</td><td>0.00 100 200 PEAK</td></tr><tr><td>4</td><td>5720.35</td><td>85.36</td><td>111.60</td><td>-26.24</td><td>75.99</td><td>33.64</td><td>13.65</td><td>37.92</td><td>0.00 100 200 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5643.79	53.77	68.20	-14.43	44.96	33.18	13.55	37.92	0.00 100 200 PEAK	2	5653.36	55.64	70.70	-15.06	46.77	33.23	13.56	37.92	0.00 100 200 PEAK	3	5719.77	84.51	110.74	-26.23	75.14	33.64	13.65	37.92	0.00 100 200 PEAK	4	5720.35	85.36	111.60	-26.24	75.99	33.64	13.65	37.92	0.00 100 200 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5745.00</td><td>116.41</td><td>-----</td><td>-----</td><td>106.91</td><td>33.72</td><td>13.70</td><td>37.92</td><td>0.00 100 200 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5745.00	116.41	-----	-----	106.91	33.72	13.70	37.92	0.00 100 200 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5643.79	53.77	68.20	-14.43	44.96	33.18	13.55	37.92	0.00 100 200 PEAK																																																																																																															
2	5653.36	55.64	70.70	-15.06	46.77	33.23	13.56	37.92	0.00 100 200 PEAK																																																																																																															
3	5719.77	84.51	110.74	-26.23	75.14	33.64	13.65	37.92	0.00 100 200 PEAK																																																																																																															
4	5720.35	85.36	111.60	-26.24	75.99	33.64	13.65	37.92	0.00 100 200 PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5745.00	116.41	-----	-----	106.91	33.72	13.70	37.92	0.00 100 200 PEAK																																																																																																															
Avg.	Blank					 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5745.00</td><td>109.23</td><td>-----</td><td>-----</td><td>99.79</td><td>33.68</td><td>13.68</td><td>37.92</td><td>0.00 100 200 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5745.00	109.23	-----	-----	99.79	33.68	13.68	37.92	0.00 100 200 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5745.00	109.23	-----	-----	99.79	33.68	13.68	37.92	0.00 100 200 AVERAGE																																																																																																															

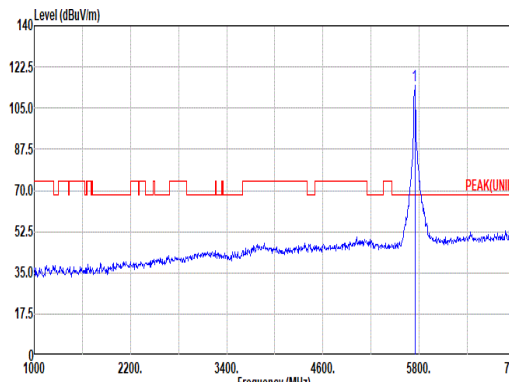

	71																																																																																																																																								
Mode	Band Edge																																																																																																																																								
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																																								
ANT	6+7																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(B4)_16-24 1 2 3 4 Site : 03CH20-HY Condition: PEAK_BE(B4)_16-24 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5646.26</td><td>58.21</td><td>68.20</td><td>-9.99</td><td>49.39</td><td>33.19</td><td>13.55</td><td>37.92</td><td>0.00</td><td>100</td><td>331</td><td>PEAK</td></tr><tr><td>2</td><td>5651.19</td><td>58.73</td><td>69.08</td><td>-10.35</td><td>49.88</td><td>33.21</td><td>13.56</td><td>37.92</td><td>0.00</td><td>100</td><td>331</td><td>PEAK</td></tr><tr><td>3</td><td>5715.71</td><td>87.32</td><td>109.60</td><td>-22.28</td><td>77.96</td><td>33.63</td><td>13.65</td><td>37.92</td><td>0.00</td><td>100</td><td>331</td><td>PEAK</td></tr><tr><td>4</td><td>5720.06</td><td>88.55</td><td>110.94</td><td>-22.39</td><td>79.18</td><td>33.64</td><td>13.65</td><td>37.92</td><td>0.00</td><td>100</td><td>331</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.26	58.21	68.20	-9.99	49.39	33.19	13.55	37.92	0.00	100	331	PEAK	2	5651.19	58.73	69.08	-10.35	49.88	33.21	13.56	37.92	0.00	100	331	PEAK	3	5715.71	87.32	109.60	-22.28	77.96	33.63	13.65	37.92	0.00	100	331	PEAK	4	5720.06	88.55	110.94	-22.39	79.18	33.64	13.65	37.92	0.00	100	331	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNI) Site : 03CH20-HY Condition: PEAK(UNI) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>114.72</td><td>-----</td><td>-----</td><td>105.22</td><td>33.72</td><td>13.70</td><td>37.92</td><td>0.00</td><td>100</td><td>331</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	114.72	-----	-----	105.22	33.72	13.70	37.92	0.00	100	331	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5646.26	58.21	68.20	-9.99	49.39	33.19	13.55	37.92	0.00	100	331	PEAK																																																																																																																													
2	5651.19	58.73	69.08	-10.35	49.88	33.21	13.56	37.92	0.00	100	331	PEAK																																																																																																																													
3	5715.71	87.32	109.60	-22.28	77.96	33.63	13.65	37.92	0.00	100	331	PEAK																																																																																																																													
4	5720.06	88.55	110.94	-22.39	79.18	33.64	13.65	37.92	0.00	100	331	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5745.00	114.72	-----	-----	105.22	33.72	13.70	37.92	0.00	100	331	PEAK																																																																																																																													
Avg.	Blank						 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>107.95</td><td>-----</td><td>-----</td><td>98.45</td><td>33.72</td><td>13.70</td><td>37.92</td><td>0.00</td><td>100</td><td>331</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	107.95	-----	-----	98.45	33.72	13.70	37.92	0.00	100	331	AVERAGE																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5745.00	107.95	-----	-----	98.45	33.72	13.70	37.92	0.00	100	331	AVERAGE																																																																																																																													

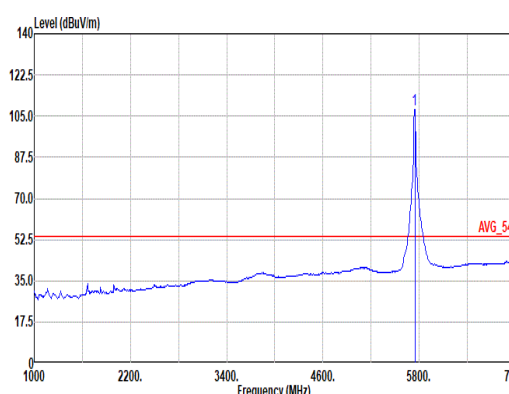

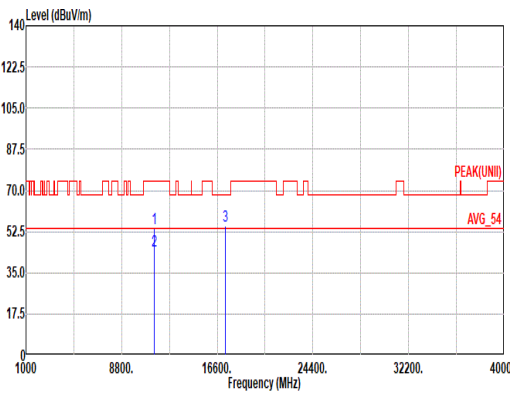
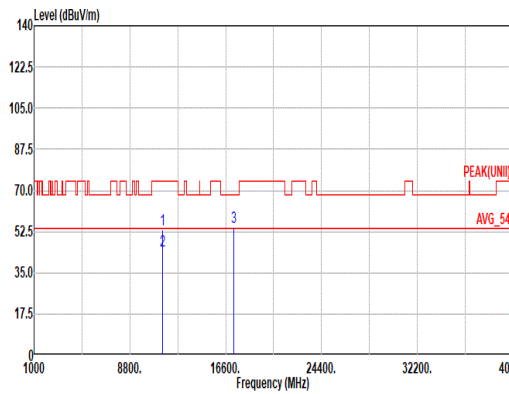
Mode	71																									
	Harmonic																									
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																									
ANT	6+7																									
Pol.	Horizontal							Vertical																		
Peak Avg.																										
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL							Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11490.00	53.69	74.00	-20.31	36.58	39.20	19.46	42.47	0.92	100	29	PEAK		1	11490.00	53.45	74.00	-20.55	36.34	39.20	19.46	42.47	0.92	100	237	PEAK
2	11490.00	44.61	54.00	-9.39	27.50	39.20	19.46	42.47	0.92	100	29	Average		2	11490.00	44.45	54.00	-9.55	27.34	39.20	19.46	42.47	0.92	100	237	Average
3	17235.00	54.92	68.20	-13.28	34.96	39.57	24.06	44.61	0.94	--	--	PEAK		3	17235.00	54.24	68.20	-13.96	34.28	39.57	24.06	44.61	0.94	--	--	PEAK




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
6+7	802.11a	99.29	-	-	10Hz
6+7	5GHz 802.11ac VHT20	99.76	-	-	10Hz
6+7	5GHz 802.11ax HE20 Full RU	99.63	-	-	10Hz
6+7	5GHz 802.11ax HE20 106 RU	92.50	9250	0.11	110Hz
6+7	5GHz 802.11ax HE40 Full RU	99.57	-	-	10Hz
6+7	5GHz 802.11ax HE40 242 RU	98.72	-	-	10Hz
6+7	5GHz 802.11ax HE80 Full RU	99.68	-	-	10Hz
6+7	5GHz 802.11ax HE80 484 RU	99.29	-	-	10Hz

MIMO <Ant. 6+7>

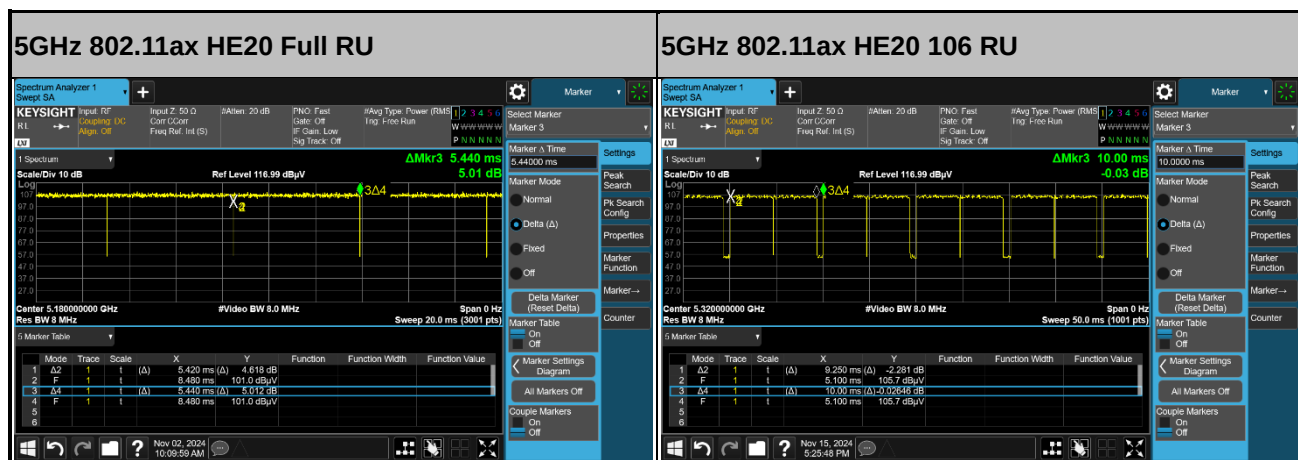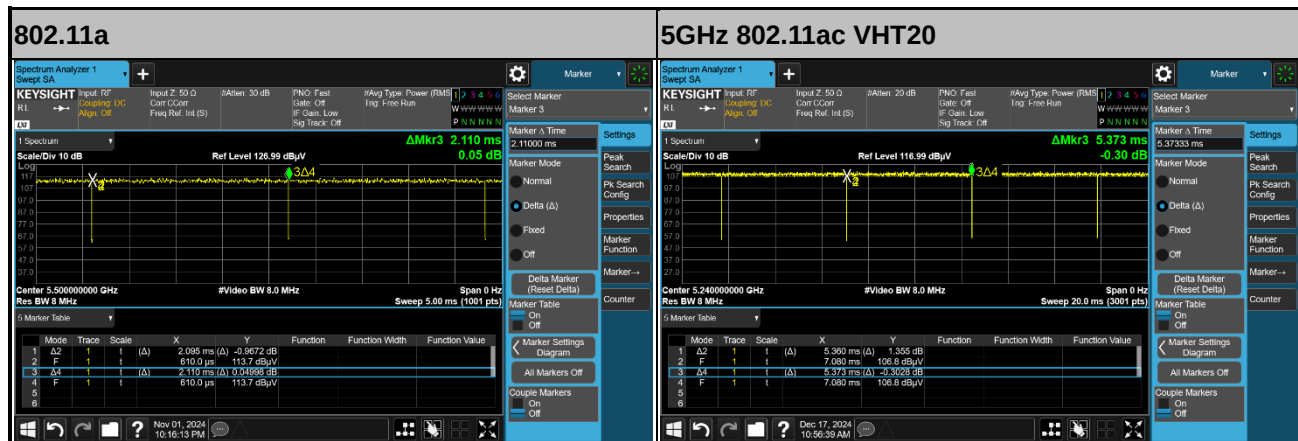

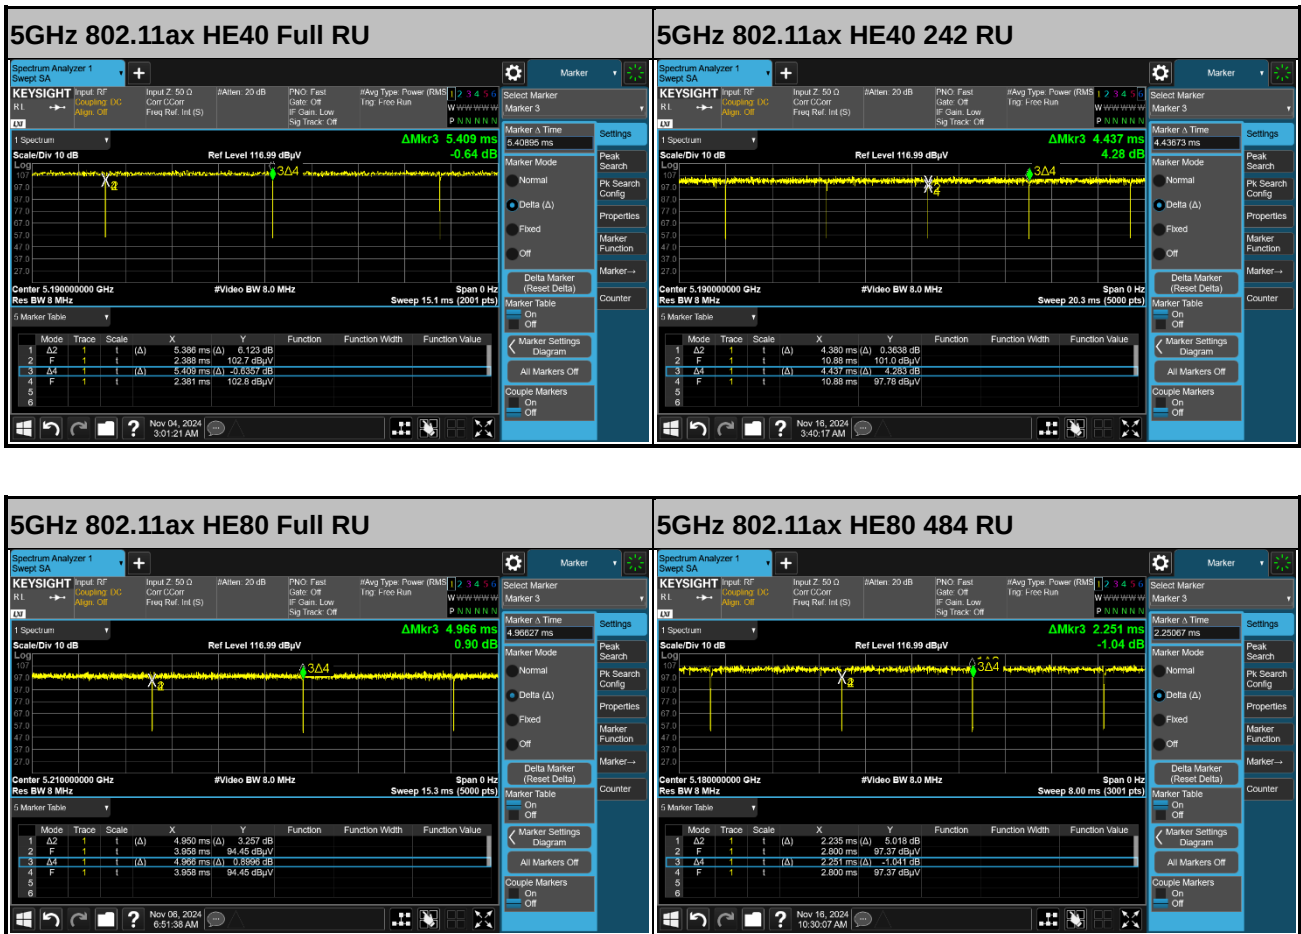



Appendix F. Spot Check Evaluation on MC345B

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry

Mode	Test Item	UZ7MC345A Reference Worst mode Test Result	UZ7MC345B Variant Check Test Result	Deviation	Limit (dB)
WLAN 5G B4	26dB Bandwidth	20.71 MHz	20.93 MHz	-	Within the authorized frequency block
	99% Bandwidth	16.55 MHz	16.59 MHz	-	Within the authorized frequency block
	6dB Bandwidth	16.29 MHz	16.03 MHz	0.26	Deviation (ddB) < 3 dB
	Power Spectral Density	9.47 (dBm/500kHz)	9.15 (dBm/500kHz)	0.32	Deviation (ddB) < 3 dB
	Conducted Output Power	24.32 dBm	24.16 dBm	0.16	Deviation (ddB) < 3 dB
	Unwanted Emissions	67.03 dBuV/m	66.78 dBuV/m	0.25	Deviation (ddB) < 3 dB
	AC Conducted Emission	Under limit14.56db	Under limit17.85db	-	compliant rule parts



List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Jan. 21, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Jan. 21, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Jan. 21, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Jan. 21, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Jan. 21, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWiFi_Final version_240513	N/A	Conducted Other Test Item	N/A	Jan. 21, 2025	N/A	Conducted (TH05-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	Dec. 01, 2024~Dec. 12, 2024	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Dec. 01, 2024~Dec. 12, 2024	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Dec. 01, 2024~Dec. 12, 2024	May 26, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec. 01, 2024~Dec. 12, 2024	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 01, 2024~Dec. 12, 2024	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 01, 2024~Dec. 12, 2024	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY64320114	N/A	Oct. 05, 2024	Dec. 01, 2024~Dec. 12, 2024	Oct. 04, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	Dec. 01, 2024~Dec. 12, 2024	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 01, 2024	Dec. 01, 2024~Dec. 12, 2024	Oct. 31, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1230	18GHz-40GHz	Oct. 25, 2024	Dec. 01, 2024~Dec. 12, 2024	Oct. 24, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Jan. 01, 2024	Dec. 01, 2024~Dec. 12, 2024	Dec. 31, 2024	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 12, 2024	Dec. 01, 2024~Dec. 12, 2024	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 17, 2024	Dec. 01, 2024~Dec. 12, 2024	Jan. 16, 2025	Radiation (03CH20-HY)
Hygrometer	TECEPEL	DTM-303A	TP211382	N/A	Mar. 27, 2024	Dec. 01, 2024~Dec. 12, 2024	Mar. 26, 2025	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Dec. 01, 2024~Dec. 12, 2024	N/A	Radiation (03CH20-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Dec. 04, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 04, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Dec. 04, 2024	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Dec. 04, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Dec. 04, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Dec. 04, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESC17	100724	9kHz~7GHz	Feb. 20, 2024	Dec. 04, 2024	Feb. 19, 2025	Conduction (CO07-HY)

————THE END————