




FCC RADIO TEST REPORT

FCC ID : UZ7TC1010
Equipment : Touch Computer
Brand Name : Zebra
Model Name : TC1010
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Nov. 28, 2025 and testing was performed from Dec. 02, 2025 to Jan. 29, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	9
1.4 Testing Location	9
1.5 Applicable Standards.....	9
2 Test Configuration of Equipment Under Test	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	12
2.3 Connection Diagram of Test System.....	14
2.4 Support Unit used in test configuration and system	15
2.5 EUT Operation Test Setup	15
2.6 Measurement Results Explanation Example.....	15
3 Test Result	16
3.1 26dB & 99% Occupied Bandwidth Measurement	16
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement.....	21
3.5 AC Conducted Emission Measurement.....	26
3.6 Antenna Requirements.....	28
4 List of Measuring Equipment.....	29
5 Measurement Uncertainty	31
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5N2828E	01	Initial issue of report	Feb. 10, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	1.18 dB under the limit at 5149.94 MHz
3.5	15.207	AC Conducted Emission	Pass	10.93 dB under the limit at 0.57 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Julia Chang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	TC1010
FCC ID	UZ7TC1010
Sample 1	Scan engine (SR500)
Sample 2	Scan engine (SE4100)
EUT supports Radios application	Bluetooth BR/EDR/LE WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 NFC
HW Version	EV
SW Version	15-11-18.00VG-U00-PRD-NEM-04
MFD	17NOV25
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.



Specification of Accessories				
Adapter 1	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Adapter 2	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
Battery 1 (1x)	Brand Name	Zebra	Part Number	BT-000473-0020
Battery 2 (1.5x)	Brand Name	Zebra	Part Number	BT-000473-0820
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB TYPE C to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TN28USBC2C-01
PTT Headset with USB-C connector	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
PTT and VoIP headset with 3.5mm standard jack.	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-02
USB-C to 3.5mm adapter cable	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
HS2100 rugged wired headset	Brand Name	Zebra	Part Number	HS2100-BTN-LSB
HS2100 standard cable	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Handstrap	Brand Name	Zebra	Part Number	SG-TC2L-HSTRP1-01
Trigger Handle	Brand Name	Zebra	Part Number	CRG-TC2L-SNP1-01
Arm Mounts	Brand Name	Zebra	Part Number	SG-TC2L-ARMNT-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC2L-HLSTR1-01
USB TYPE C to TYPE C cable	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
HS3100 rugged Bluetooth headset	Brand Name	Zebra	Part Number	HS3100-OTH
Rugged boot	Brand Name	Zebra	Part Number	SG-TCVT-BOOT-01

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Antenna Type	<Ant. 7>: PIFA Antenna <Ant. 6>: PIFA Antenna
Antenna Gain	<5150MHz ~ 5250MHz> : <Ant. 7>: 0.79 dBi <Ant. 6>: 1.17 dBi <5250MHz ~ 5350MHz> : <Ant. 7>: 0.79 dBi <Ant. 6>: 1.17 dBi <5470MHz ~ 5725MHz> : <Ant. 7>: 1.35 dBi <Ant. 6>: 1.28 dBi
Type of Modulation	802.11a/g/n: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) 802.11ax: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM)

Remark:

1. MIMO Ant. 7+6 Directional Gain is a calculated result from MIMO Ant. 7 and MIMO Ant. 6. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 7 + Ant. 6 is a calculated result from sum of the power MIMO Ant. 7 and MIMO Ant. 6.
3. 802.11ax Support Tx Beamforming mode, and the manufacturer declares that Tx Beamforming power/EIRP is less than CDD mode 3dbm, so CDD mode cover Tx Beamforming mode.
4. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2.1 Antenna Directional Gain

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant 7 (dBi)	Ant 6 (dBi)	(dBi)	(dBi)	(dB)	(dB)
Band I	1.17	0.79	1.17	3.99	0.00	0.00
Band II	1.17	0.79	1.17	3.99	0.00	0.00
Band III	1.28	1.35	1.35	4.33	0.00	0.00

Calculation example:

If a device has two antenna, $G_{ANT7} = 1.17$ dBi; $G_{ANT6} = 0.79$ dBi

Directional gain of power measurement = $\max(1.17, 0.79) + 0 = 1.17$ dBi

Directional gain of PSD derived from formula which is

$10 \times \log \left\{ \left[10^{(1.17 \text{ dBi} / 20)} + 10^{(0.79 \text{ dBi} / 20)} \right]^2 / 2 \right\} = 3.99$ dBi

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)



1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and Accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

The device WIFI MIMO support 1S2T (CDD & Tx Beamforming) (Nss=1) mode by manufacturer declared.

The device supports 1S2T (CDD & Tx Beamforming); 1S2T: Nss=1, MIMO 2Tx

802.11be support full RU tone and partial RU tone, both full RU and partial are tested for conducted power/PSD in appendix A, for Channel Mask in section 3.4.5, all the other test case were performed with full RU with its maximum power/PSD.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)
5150-5350 MHz	50@	5250
5470-5725 MHz	114@	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 , 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80.
3. The above Frequency and Channel with "@" are 802.11ac VHT160 and 802.11ax HE160.

2.2 Test Mode

This device support 26/52/106/242/484/996/2*996-tone RU.

The PSD of partial RU are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel , 996-tone RU is covered by 80MHz channel and 2*996-tone RU is covered by 160MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11an and 802.11ac are smaller than 802.11ax mode, so all other conducted test is covered by 802.11ax mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ac VHT20 (Covered by HE20)	MCS0
802.11ac VHT40 (Covered by HE40)	MCS0
802.11ac VHT80 (Covered by HE80)	MCS0
802.11ac VHT160 (Covered by HE160)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.



Test Cases	
AC Conducted Emission	Mode 1 : BT link + WLAN 2.4G link + Battery 2 Extended (5200 mAh) + AC Adapter + USB TYPE-C to TYPE-C cable with AC Adapter for Sample 1
Remark: 1. The detailed Radiated test modes are shown in Appendix C.	

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	120
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	36	52	100
M	Middle	44	60	120
H	High	48	64	140
Straddle		-	-	144


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	38	54	102
M	Middle	-	-	118
H	High	46	62	134
Straddle		-	-	142

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

BW160	5150-5350 MHz	5470-5725MHz
	802.11ax HE160	802.11ax HE160
Ch. #	50	114

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

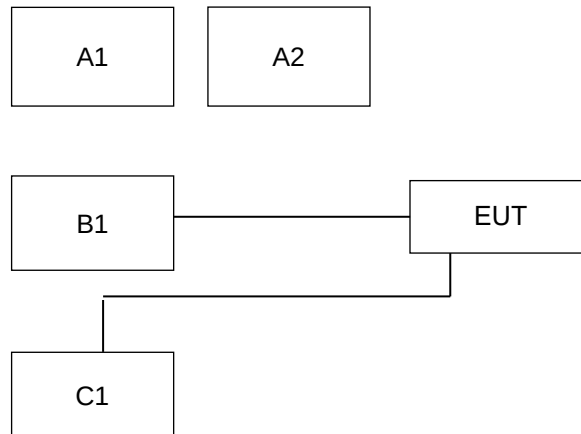

Conduction Test Setup			
No.	Wireless Station	Connection Type	Test Mode
			1
A1	BT Earphone	Bluetooth	X
A2	AP router	WiFi	X
No.	Power Source	Connection Type	1
B1	AC : 120V/60Hz	AC Power Cable	X

Radiation TX Test Setup				
No.	Power Source	Connection Type	Test Mode	
			2.4G 1-54	5G 1-136
B1	AC : 120V/60Hz	AC Power Cable	X	X
No.	Setup Peripherals	Connection Type	2.4G 1-54	5G 1-136
C1	Adapter	USB Cable to C	X	X

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	SonyEricsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded,1.8m
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	Notebook	DELL	Latitude5310	N/A	N/A	unshielded, 1.8m

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.0.180.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules **v02r01**, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

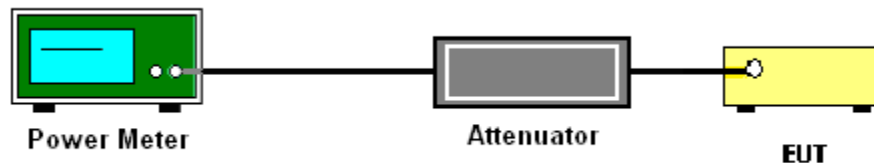

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

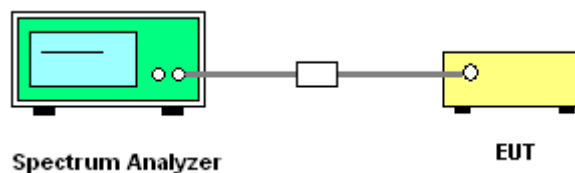

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

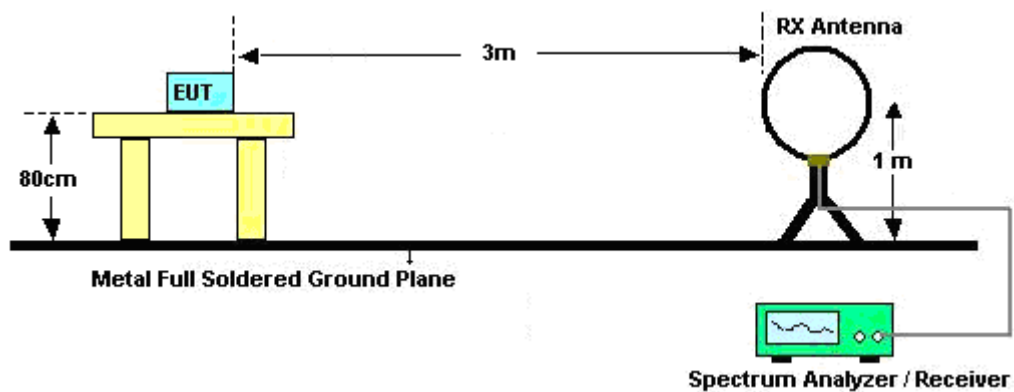


For radiated emissions from 30MHz to 1GHz

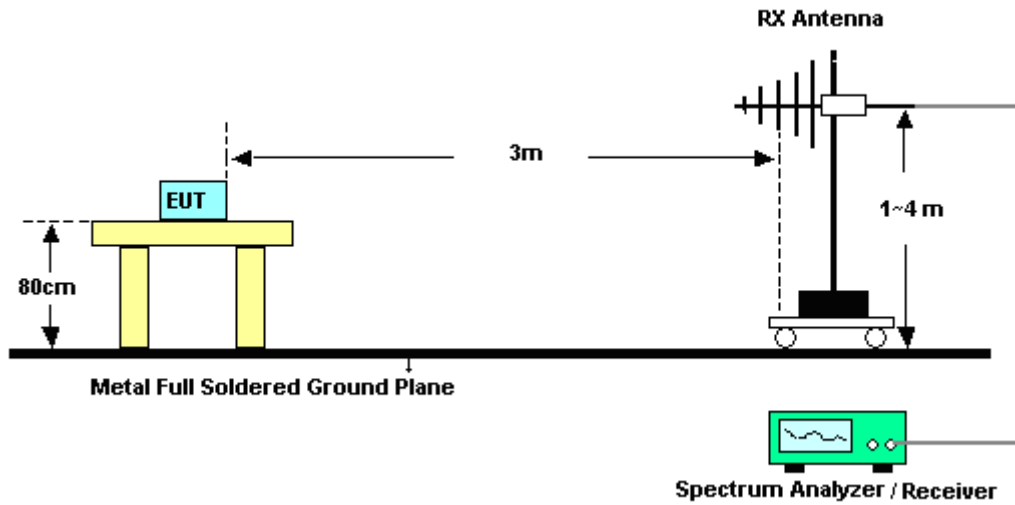

For radiated test from 1GHz to 18GHz

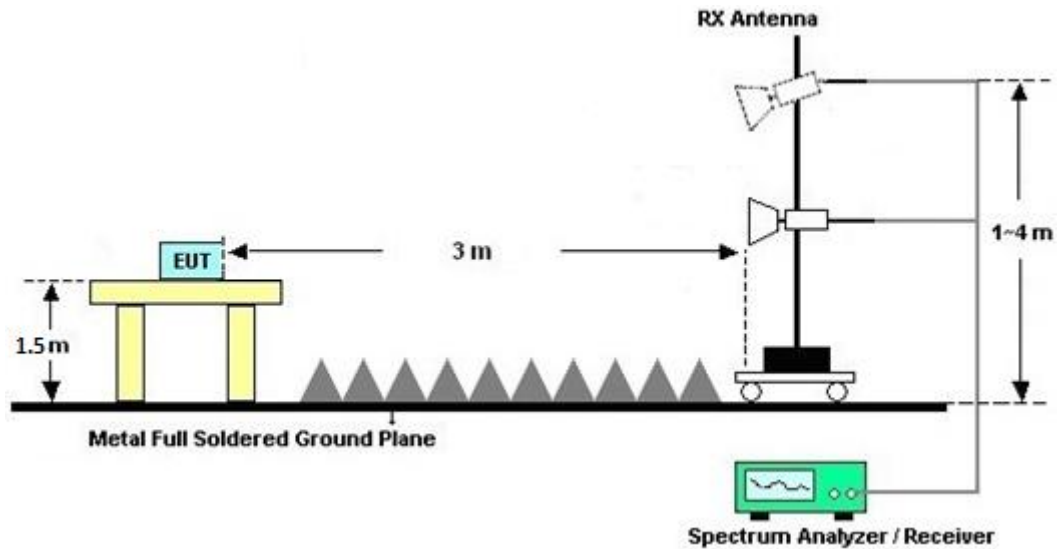

For radiated test above 18GHz

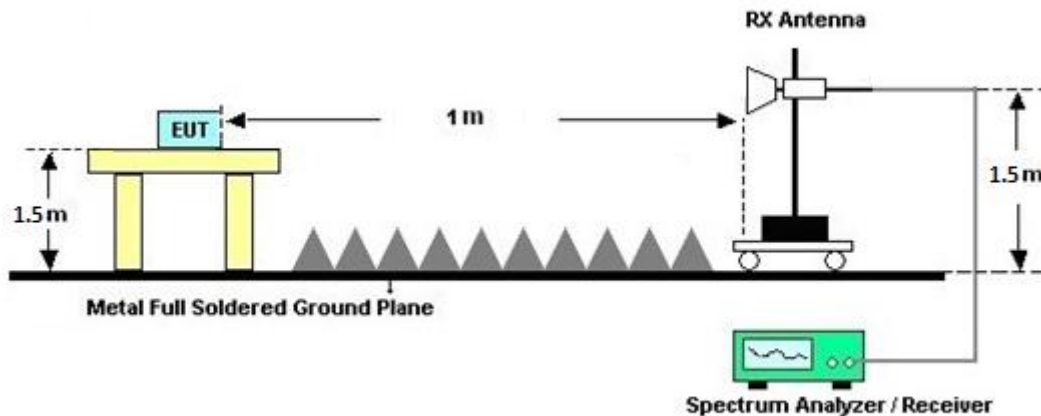

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

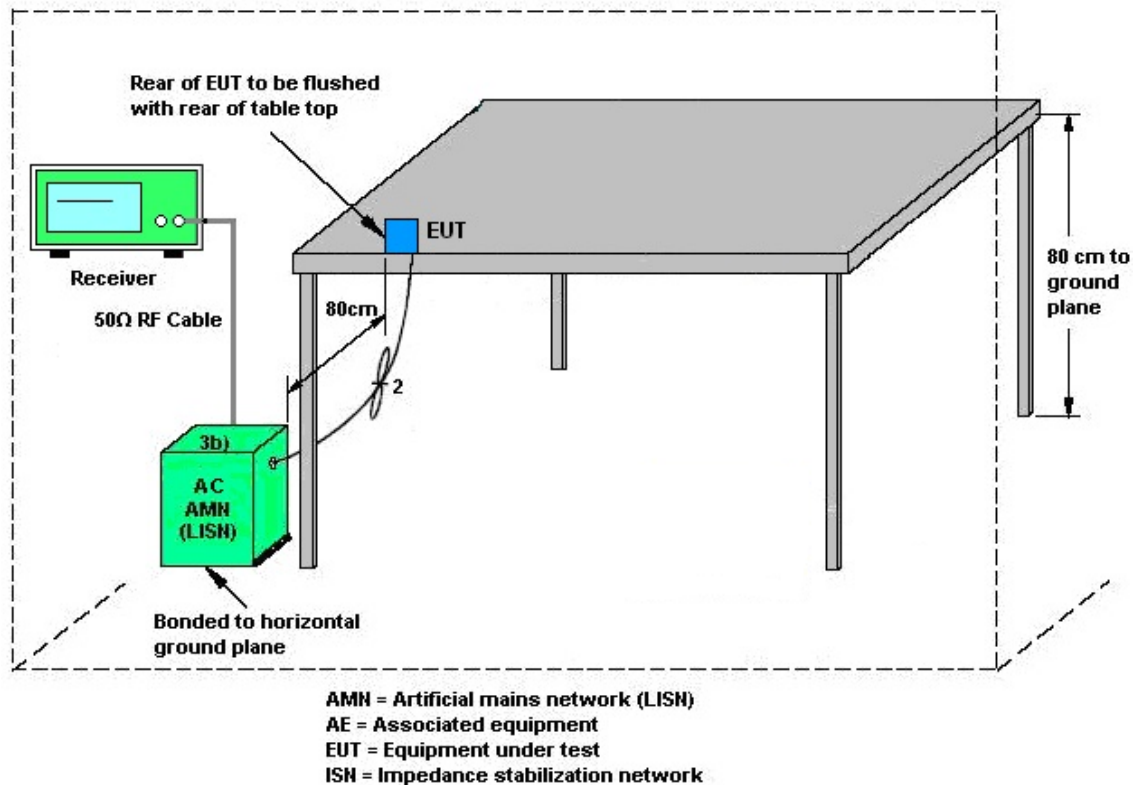

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2025	Dec. 04, 2025 ~ Jan. 29, 2026	Oct. 15, 2026	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 18, 2024	Dec. 04, 2025 ~ Dec. 10, 2025	Dec. 17, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Dec. 11, 2025 ~ Jan. 29, 2026	Dec. 10, 2026	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 25, 2025	Dec. 04, 2025 ~ Jan. 29, 2026	Aug. 24, 2026	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec. 04, 2025 ~ Jan. 29, 2026	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 04, 2025 ~ Jan. 29, 2026	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 04, 2025 ~ Jan. 29, 2026	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	10Hz~44GHz	Dec. 09, 2024	Dec. 04, 2025 ~ Dec. 07, 2025	Dec. 08, 2025	Radiation (03CH20-HY)
EXA Signal Analyzer	Keysight	N9010B	MY64320114	10Hz~44GHz	Oct. 07, 2025	Dec. 08, 2025 ~ Dec. 09, 2025	Oct. 06, 2025	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	10Hz~44GHz	Dec. 10, 2025	Dec. 10, 2025 ~ Jan. 29, 2026	Dec. 09, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz~1GHz	Oct. 04, 2025	Dec. 04, 2025 ~ Jan. 29, 2026	Oct. 03, 2026	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 05, 2025	Dec. 04, 2025 ~ Jan. 29, 2026	Nov. 04, 2026	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz-40GHz	Jul. 02, 2025	Dec. 04, 2025 ~ Jan. 29, 2026	Jul. 01, 2026	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Dec. 31, 2024	Dec. 04, 2025 ~ Dec. 29, 2025	Dec. 30, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Dec. 30, 2025	Dec. 30, 2025 ~ Jan. 29, 2026	Dec. 29, 2026	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45S E	980792	N/A	Nov. 11, 2025	Dec. 04, 2025 ~ Jan. 29, 2026	Nov. 10, 2026	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 16, 2025	Dec. 04, 2025 ~ Jan. 14, 2026	Jan. 15, 2026	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 15, 2026	Jan. 15, 2026 ~ Jan. 29, 2026	Jan. 14, 2027	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 31, 2025	Dec. 04, 2025 ~ Jan. 29, 2026	Mar. 30, 2026	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Dec. 04, 2025 ~ Jan. 29, 2026	N/A	Radiation (03CH20-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jan. 9, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 9, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Jan. 9, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Jan. 9, 2026	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Jan. 9, 2026	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Jan. 9, 2026	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Jan. 9, 2026	Oct. 20, 2026	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 02, 2025 ~ Jan. 16, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Dec. 02, 2025 ~ Jan. 16, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101468	10HZ~44GHZ	Mar. 13, 2025	Dec. 02, 2025 ~ Jan. 16, 2026	Mar. 12, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Dec. 02, 2025 ~ Jan. 16, 2026	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Dec. 02, 2025 ~ Jan. 16, 2026	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jay Chen	Temperature:	21~25	°C
Test Date:	2025/12/2~2025/1/16	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	36	5180	18.96	18.72	21.85	24.00		1.17		-	Pass
11a	6Mbps	2	44	5220	19.84	20.01	22.94	24.00		1.17			Pass
11a	6Mbps	2	48	5240	20.69	20.01	23.37	24.00		1.17			Pass
HT20	MCS0	2	36	5180	17.64	17.55	20.61	24.00		1.17			Pass
HT20	MCS0	2	44	5220	20.66	20.51	23.60	24.00		1.17			Pass
HT20	MCS0	2	48	5240	20.32	20.05	23.20	24.00		1.17			Pass
HT40	MCS0	2	38	5190	16.86	16.02	19.47	24.00		1.17			Pass
HT40	MCS0	2	46	5230	18.96	18.91	21.95	24.00		1.17			Pass
VHT20	MCS0	2	36	5180	17.97	17.77	20.88	24.00		1.17			Pass
VHT20	MCS0	2	44	5220	20.71	20.59	23.66	24.00		1.17			Pass
VHT20	MCS0	2	48	5240	20.40	20.16	23.29	24.00		1.17			Pass
VHT40	MCS0	2	38	5190	16.92	16.13	19.55	24.00		1.17			Pass
VHT40	MCS0	2	46	5230	19.11	18.99	22.06	24.00		1.17			Pass
VHT80	MCS0	2	42	5210	15.86	15.21	18.56	24.00		1.17			Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	36	5180	16.66	16.64	20.41	20.43	-		22.21		-	
11a	6Mbps	2	44	5220	16.67	16.66	20.50	20.28	-		22.22			
11a	6Mbps	2	48	5240	16.67	16.66	20.50	20.28	-		22.22			

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	36	5180	0.03	0.03	-		10.08	11.00		3.99	-	Pass
11a	6Mbps	2	44	5220	0.03	0.03			10.85	11.00		3.99		Pass
11a	6Mbps	2	48	5240	0.03	0.03			10.92	11.00		3.99		Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	52	5260	19.12	19.18	22.16	23.98		1.17		30	Pass
11a	6Mbps	2	60	5300	19.36	19.50	22.44	23.98		1.17		30	Pass
11a	6Mbps	2	64	5320	18.10	18.45	21.29	23.98		1.17		30	Pass
HT20	MCS0	2	60	5300	19.16	19.51	22.35	23.98		1.17		30	Pass
HT20	MCS0	2	64	5320	17.02	17.20	20.12	23.98		1.17		30	Pass
HT40	MCS0	2	54	5270	18.85	18.97	21.92	23.98		1.17		30	Pass
HT40	MCS0	2	62	5310	16.41	15.77	19.11	23.98		1.17		30	Pass
VHT20	MCS0	2	52	5260	19.74	19.76	22.76	23.98		1.17		30	Pass
VHT20	MCS0	2	60	5300	19.52	19.67	22.61	23.98		1.17		30	Pass
VHT20	MCS0	2	64	5320	17.23	17.36	20.31	23.98		1.17		30	Pass
VHT40	MCS0	2	54	5270	18.89	19.07	21.99	23.98		1.17		30	Pass
VHT40	MCS0	2	62	5310	16.52	15.85	19.21	23.98		1.17		30	Pass
VHT80	MCS0	2	58	5290	15.88	15.46	18.69	23.98		1.17		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	52	5260	16.67	16.64	20.83	20.19	23.21		29.21		23.98		-
11a	6Mbps	2	60	5300	16.66	16.63	20.43	20.04	23.21		29.21		23.98		
11a	6Mbps	2	64	5320	16.67	16.64	20.48	20.22	23.21		29.21		23.98		

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	52	5260	0.03	0.03	-		10.48	11.00		3.99	-	Pass
11a	6Mbps	2	60	5300	0.03	0.03			10.37	11.00		3.99		Pass
11a	6Mbps	2	64	5320	0.03	0.03			9.16	11.00		3.99		Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	100	5500	19.62	19.61	22.63	23.98		1.35		30	Pass
11a	6Mbps	2	120	5600	19.37	19.88	22.64	23.98		1.35		30	Pass
11a	6Mbps	2	140	5700	19.41	19.15	22.29	23.98		1.35		30	Pass
HT20	MCS0	2	100	5500	19.40	19.51	22.47	23.98		1.35		30	Pass
HT20	MCS0	2	120	5600	19.32	19.79	22.57	23.98		1.35		30	Pass
HT20	MCS0	2	140	5700	18.19	18.11	21.16	23.98		1.35		30	Pass
HT40	MCS0	2	102	5510	18.60	18.67	21.65	23.98		1.35		30	Pass
HT40	MCS0	2	118	5590	20.08	20.09	23.10	23.98		1.35		30	Pass
HT40	MCS0	2	134	5670	19.00	18.87	21.95	23.98		1.35		30	Pass
VHT20	MCS0	2	100	5500	19.74	19.73	22.75	23.98		1.35		30	Pass
VHT20	MCS0	2	120	5600	19.45	19.91	22.70	23.98		1.35		30	Pass
VHT20	MCS0	2	140	5700	18.40	18.29	21.36	23.98		1.35		30	Pass
VHT40	MCS0	2	102	5510	18.69	18.74	21.73	23.98		1.35		30	Pass
VHT40	MCS0	2	118	5590	20.24	20.18	23.22	23.98		1.35		30	Pass
VHT40	MCS0	2	134	5670	19.09	18.99	22.05	23.98		1.35		30	Pass
VHT80	MCS0	2	106	5530	16.74	16.91	19.84	23.98		1.35		30	Pass
VHT80	MCS0	2	122	5610	19.65	19.79	22.73	23.98		1.35		30	Pass

FCC U-NII-2C straddle channel MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	144	5720	19.25	18.98	22.13	23.98		1.35		30	Pass
HT20	MCS0	2	144	5720	20.63	20.34	23.50	23.98		1.35		30	Pass
HT40	MCS0	2	142	5710	20.82	20.48	23.66	23.98		1.35		30	Pass
VHT20	MCS0	2	144	5720	20.83	20.30	23.58	23.98		1.35		30	Pass
VHT40	MCS0	2	142	5710	20.98	20.63	23.82	23.98		1.35		30	Pass
VHT80	MCS0	2	138	5690	19.63	19.28	22.47	23.98		1.35		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7
11a	6Mbps	2	100	5500	16.66	16.64	20.39	19.90	23.21		29.21		23.98		----	----
11a	6Mbps	2	120	5600	16.67	16.64	20.42	20.02	23.21		29.21		23.98		----	----
11a	6Mbps	2	140	5700	16.66	16.64	20.24	20.06	23.21		29.21		23.98		----	----

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7
11a	6Mbps	2	144	5720	13.36	13.34	15.34	15.08	23.21		29.21		23.98		3.185	3.215
6dB Bandwidth Limit ≥ 500kHz															Pass	

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	100	5500	0.03	0.03	-		10.52	11.00		4.33		Pass
11a	6Mbps	2	120	5600	0.03	0.03			10.73	11.00		4.33		Pass
11a	6Mbps	2	140	5700	0.03	0.03			10.39	11.00		4.33		Pass

U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	144	5720	0.03	0.03	-		10.42	11.00		4.33		Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	36	5180	Full	18.22	18.00	21.12	24.00		1.17			Pass
HE20	MCS0	2	36	5180	26/0	8.67	8.36	11.53	24.00		1.17			Pass
HE20	MCS0	2	36	5180	52/37	11.88	11.68	14.79	24.00		1.17			Pass
HE20	MCS0	2	36	5180	106/53	15.13	14.55	17.86	24.00		1.17			Pass
HE20	MCS0	2	44	5220	Full	20.76	20.61	23.70	24.00		1.17			Pass
HE20	MCS0	2	44	5220	26/4	11.82	11.64	14.74	24.00		1.17			Pass
HE20	MCS0	2	44	5220	52/38	13.93	13.74	16.85	24.00		1.17			Pass
HE20	MCS0	2	44	5220	106/53	16.81	16.39	19.62	24.00		1.17			Pass
HE20	MCS0	2	48	5240	Full	20.54	20.19	23.38	24.00		1.17			Pass
HE20	MCS0	2	48	5240	26/8	10.45	10.60	13.54	24.00		1.17			Pass
HE20	MCS0	2	48	5240	52/40	13.81	13.34	16.59	24.00		1.17			Pass
HE20	MCS0	2	48	5240	106/54	17.40	16.98	20.21	24.00		1.17			Pass
HE40	MCS0	2	38	5190	Full	17.00	16.16	19.61	24.00		1.17			Pass
HE40	MCS0	2	38	5190	242/61	14.05	13.47	16.78	24.00		1.17			Pass
HE40	MCS0	2	46	5230	Full	19.13	19.07	22.11	24.00		1.17			Pass
HE40	MCS0	2	46	5230	242/62	16.26	15.88	19.08	24.00		1.17			Pass
HE80	MCS0	2	42	5210	Full	15.90	15.39	18.66	24.00		1.17			Pass
HE80	MCS0	2	42	5210	484/65	12.82	12.39	15.62	24.00		1.17			Pass
HE160	MCS0	2	50	5250	Full	12.51	12.09	15.32	24.00		1.17			Pass
HE160	MCS0	2	50	5250	996/67	9.78	9.60	12.70	24.00		1.17			Pass
HE160	MCS0	2	50	5250	996/S67	9.66	9.36	12.52	24.00		1.17			Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	36	5180	Full	19.02	19.06	21.75	22.04	-	-	22.79	-	-	
HE20	MCS0	2	44	5220	Full	19.10	19.22	22.38	30.05	-	-	22.81	-	-	
HE20	MCS0	2	48	5240	Full	19.14	19.31	27.19	33.62	-	-	22.82	-	-	
HE40	MCS0	2	38	5190	Full	37.87	37.91	41.41	41.92	-	-	23.01	-	-	
HE40	MCS0	2	46	5230	Full	37.89	38.03	41.60	42.14	-	-	23.01	-	-	
HE80	MCS0	2	42	5210	Full	77.43	77.43	85.34	84.67	-	-	23.01	-	-	
HE160	MCS0	2	50	5250	Full	156.10	156.39	166.70	166.51	-	-	23.01	-	-	

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	36	5180	Full	0.02	0.01	-		8.60	11.00	3.99			Pass	
HE20	MCS0	2	36	5180	26/0	0.01	0.02			8.32	11.00	3.99			Pass	
HE20	MCS0	2	36	5180	52/37	0.02	0.02			8.50	11.00	3.99			Pass	
HE20	MCS0	2	36	5180	106/53	0.01	0.01			8.50	11.00	3.99			Pass	
HE20	MCS0	2	44	5220	Full	0.02	0.01			10.35	11.00	3.99			Pass	
HE20	MCS0	2	44	5220	26/4	0.01	0.02			10.11	11.00	3.99			Pass	
HE20	MCS0	2	44	5220	52/38	0.02	0.02			10.33	11.00	3.99			Pass	
HE20	MCS0	2	44	5220	106/53	0.01	0.01			9.98	11.00	3.99			Pass	
HE20	MCS0	2	48	5240	Full	0.02	0.01			10.99	11.00	3.99			Pass	
HE20	MCS0	2	48	5240	26/8	0.01	0.02			10.47	11.00	3.99			Pass	
HE20	MCS0	2	48	5240	52/40	0.02	0.02			10.55	11.00	3.99		-	Pass	
HE20	MCS0	2	48	5240	106/54	0.01	0.01			10.94	11.00	3.99			Pass	
HE40	MCS0	2	38	5190	Full	0.02	0.01			4.13	11.00	3.99			Pass	
HE40	MCS0	2	38	5190	242/61	0.02	0.02			4.12	11.00	3.99			Pass	
HE40	MCS0	2	46	5230	Full	0.02	0.01			6.25	11.00	3.99			Pass	
HE40	MCS0	2	46	5230	242/62	0.02	0.02			5.93	11.00	3.99			Pass	
HE80	MCS0	2	42	5210	Full	0.03	0.03			0.13	11.00	3.99			Pass	
HE80	MCS0	2	42	5210	484/65	0.03	0.03			-0.18	11.00	3.99			Pass	
HE160	MCS0	2	50	5250	Full	0.03	0.03			-5.51	11.00	3.99			Pass	
HE160	MCS0	2	50	5250	996/67	0.10	0.09			-5.69	11.00	3.99			Pass	
HE160	MCS0	2	50	5250	996/S67	0.10	0.09			-5.98	11.00	3.99			Pass	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	52	5260	Full	19.98	19.96	22.98	23.98		1.17		30	Pass
HE20	MCS0	2	52	5260	26/0	10.40	10.85	13.64	23.98		1.17		30	Pass
HE20	MCS0	2	52	5260	52/37	13.31	13.15	16.24	23.98		1.17		30	Pass
HE20	MCS0	2	52	5260	106/53	16.82	16.42	19.63	23.98		1.17		30	Pass
HE20	MCS0	2	60	5300	Full	19.82	19.94	22.89	23.98		1.17		30	Pass
HE20	MCS0	2	60	5300	26/4	11.22	11.66	14.46	23.98		1.17		30	Pass
HE20	MCS0	2	60	5300	52/38	13.72	13.49	16.62	23.98		1.17		30	Pass
HE20	MCS0	2	60	5300	106/53	16.40	16.19	19.31	23.98		1.17		30	Pass
HE20	MCS0	2	64	5320	Full	17.54	17.67	20.62	23.98		1.17		30	Pass
HE20	MCS0	2	64	5320	26/8	8.22	8.33	11.29	23.98		1.17		30	Pass
HE20	MCS0	2	64	5320	52/40	11.32	11.11	14.23	23.98		1.17		30	Pass
HE20	MCS0	2	64	5320	106/54	14.68	14.33	17.52	23.98		1.17		30	Pass
HE40	MCS0	2	54	5270	Full	18.97	19.15	22.07	23.98		1.17		30	Pass
HE40	MCS0	2	54	5270	242/61	16.26	15.82	19.06	23.98		1.17		30	Pass
HE40	MCS0	2	62	5310	Full	16.57	16.01	19.31	23.98		1.17		30	Pass
HE40	MCS0	2	62	5310	242/62	13.67	13.38	16.54	23.98		1.17		30	Pass
HE80	MCS0	2	58	5290	Full	15.96	15.46	18.73	23.98		1.17		30	Pass
HE80	MCS0	2	58	5290	484/66	12.79	12.56	15.69	23.98		1.17		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	52	5260	Full	19.08	19.25	23.02	30.88	23.81		29.81		23.98		
HE20	MCS0	2	60	5300	Full	19.03	19.10	22.01	23.04	23.80		29.80		23.98		
HE20	MCS0	2	64	5320	Full	19.03	19.04	21.64	21.78	23.79		29.79		23.98		
HE40	MCS0	2	54	5270	Full	37.90	38.04	41.58	41.97	23.98		30.00		23.98		
HE40	MCS0	2	62	5310	Full	37.84	37.89	41.42	41.50	23.98		30.00		23.98		
HE80	MCS0	2	58	5290	Full	77.37	77.40	84.51	84.96	23.98		30.00		23.98		

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass. /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	52	5260	Full	0.02	0.01			10.64	11.00	3.99			Pass	
HE20	MCS0	2	52	5260	26/0	0.01	0.02			10.62	11.00	3.99			Pass	
HE20	MCS0	2	52	5260	52/37	0.02	0.02			10.34	11.00	3.99			Pass	
HE20	MCS0	2	52	5260	106/53	0.01	0.01			10.61	11.00	3.99			Pass	
HE20	MCS0	2	60	5300	Full	0.02	0.01			10.20	11.00	3.99			Pass	
HE20	MCS0	2	60	5300	26/4	0.01	0.02			9.75	11.00	3.99			Pass	
HE20	MCS0	2	60	5300	52/38	0.02	0.02			10.11	11.00	3.99			Pass	
HE20	MCS0	2	60	5300	106/53	0.01	0.01			9.74	11.00	3.99			Pass	
HE20	MCS0	2	64	5320	Full	0.02	0.01			7.95	11.00	3.99			Pass	
HE20	MCS0	2	64	5320	26/8	0.01	0.02			7.91	11.00	3.99			Pass	
HE20	MCS0	2	64	5320	52/40	0.02	0.02			7.82	11.00	3.99			Pass	
HE20	MCS0	2	64	5320	106/54	0.01	0.01			7.91	11.00	3.99			Pass	
HE40	MCS0	2	54	5270	Full	0.02	0.01			6.48	11.00	3.99			Pass	
HE40	MCS0	2	54	5270	242/61	0.02	0.02			6.32	11.00	3.99			Pass	
HE40	MCS0	2	62	5310	Full	0.02	0.01			3.62	11.00	3.99			Pass	
HE40	MCS0	2	62	5310	242/62	0.02	0.02			3.46	11.00	3.99			Pass	
HE80	MCS0	2	58	5290	Full	0.03	0.03		0.17	11.00	3.99			Pass		
HE80	MCS0	2	58	5290	484/66	0.03	0.03		-0.19	11.00	3.99			Pass		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	100	5500	Full	19.99	20.00	23.01	23.98		1.35		30	Pass
HE20	MCS0	2	100	5500	26/0	10.50	10.69	13.61	23.98		1.35		30	Pass
HE20	MCS0	2	100	5500	52/37	13.33	13.54	16.45	23.98		1.35		30	Pass
HE20	MCS0	2	100	5500	106/53	16.68	16.68	19.69	23.98		1.35		30	Pass
HE20	MCS0	2	120	5600	Full	19.77	20.16	22.98	23.98		1.35		30	Pass
HE20	MCS0	2	120	5600	26/4	11.35	11.69	14.53	23.98		1.35		30	Pass
HE20	MCS0	2	120	5600	52/38	13.59	13.45	16.53	23.98		1.35		30	Pass
HE20	MCS0	2	120	5600	106/53	16.28	16.82	19.57	23.98		1.35		30	Pass
HE20	MCS0	2	140	5700	Full	18.66	18.72	21.70	23.98		1.35		30	Pass
HE20	MCS0	2	140	5700	26/8	9.47	9.14	12.32	23.98		1.35		30	Pass
HE20	MCS0	2	140	5700	52/40	12.23	11.66	14.96	23.98		1.35		30	Pass
HE20	MCS0	2	140	5700	106/54	15.66	15.04	18.37	23.98		1.35		30	Pass
HE40	MCS0	2	102	5510	Full	18.87	18.86	21.88	23.98		1.35		30	Pass
HE40	MCS0	2	102	5510	242/61	16.06	15.55	18.82	23.98		1.35		30	Pass
HE40	MCS0	2	118	5590	Full	20.40	20.19	23.31	23.98		1.35		30	Pass
HE40	MCS0	2	118	5590	242/61	17.11	17.35	20.24	23.98		1.35		30	Pass
HE40	MCS0	2	134	5670	Full	19.13	19.10	22.13	23.98		1.35		30	Pass
HE40	MCS0	2	134	5670	242/62	15.83	16.27	19.07	23.98		1.35		30	Pass
HE80	MCS0	2	106	5530	Full	16.89	16.94	19.93	23.98		1.35		30	Pass
HE80	MCS0	2	106	5530	484/65	13.77	13.79	16.79	23.98		1.35		30	Pass
HE80	MCS0	2	122	5610	Full	19.80	19.73	22.78	23.98		1.35		30	Pass
HE80	MCS0	2	122	5610	484/66	17.05	17.23	20.15	23.98		1.35		30	Pass
HE160	MCS0	2	114	5570	Full	14.12	13.89	17.02	23.98		1.35		30	Pass
HE160	MCS0	2	114	5570	996/67	11.22	11.44	14.34	23.98		1.35		30	Pass
HE160	MCS0	2	114	5570	996/S67	11.70	11.66	14.69	23.98		1.35		30	Pass

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	144	5720	Full	20.89	20.72	23.82	23.98		1.35		30	Pass
HE20	MCS0	2	144	5720	26/8	10.28	10.21	13.26	23.98		1.35		30	Pass
HE20	MCS0	2	144	5720	52/40	13.83	13.18	16.53	23.98		1.35		30	Pass
HE20	MCS0	2	144	5720	106/54	16.78	16.43	19.62	23.98		1.35		30	Pass
HE40	MCS0	2	142	5710	Full	20.95	20.76	23.87	23.98		1.35		30	Pass
HE40	MCS0	2	142	5710	242/62	18.18	18.02	21.11	23.98		1.35		30	Pass
HE80	MCS0	2	138	5690	Full	19.68	19.38	22.54	23.98		1.35		30	Pass
HE80	MCS0	2	138	5690	484/66	16.90	16.78	19.85	23.98		1.35		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7
HE20	MCS0	2	100	5500	Full	19.03	19.07	21.57	22.30	23.79		29.79		23.98		----	----
HE20	MCS0	2	120	5600	Full	19.01	19.05	21.65	21.70	23.79		29.79		23.98		----	----
HE20	MCS0	2	140	5700	Full	19.04	19.03	21.98	21.61	23.79		29.79		23.98		----	----
HE40	MCS0	2	102	5510	Full	37.88	37.88	41.34	41.58	23.98		30.00		23.98		----	----
HE40	MCS0	2	118	5590	Full	37.89	37.93	41.58	41.44	23.98		30.00		23.98		----	----
HE40	MCS0	2	134	5670	Full	37.93	37.93	41.55	41.58	23.98		30.00		23.98		----	----
HE80	MCS0	2	106	5530	Full	77.41	77.40	84.00	84.32	23.98		30.00		23.98		----	----
HE80	MCS0	2	122	5610	Full	77.41	77.47	84.32	84.58	23.98		30.00		23.98		----	----
HE160	MCS0	2	114	5570	Full	156.18	156.35	166.46	166.42	23.98		30.00		23.98		----	----

U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7
HE20	MCS0	2	144	5720	Full	14.53	14.53	15.78	15.96	23.80		29.80		23.98		4.425	4.415
HE80	MCS0	2	138	5690	Full	73.82	73.80	77.24	77.30	23.98		30.00		23.98		3.272	3.112
6dB Bandwidth Limit ≥ 500kHz																Pass	

TEST RESULTS DATA
Power Spectral Density


U-NII-2C MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	100	5500	Full	0.02	0.01	-		10.40	11.00	4.33			Pass	
HE20	MCS0	2	100	5500	26/0	0.01	0.02			10.14	11.00	4.33			Pass	
HE20	MCS0	2	100	5500	52/37	0.02	0.02			10.05	11.00	4.33			Pass	
HE20	MCS0	2	100	5500	106/53	0.01	0.01			10.20	11.00	4.33			Pass	
HE20	MCS0	2	120	5600	Full	0.02	0.01			10.51	11.00	4.33			Pass	
HE20	MCS0	2	120	5600	26/4	0.01	0.02			10.31	11.00	4.33			Pass	
HE20	MCS0	2	120	5600	52/38	0.02	0.02			10.38	11.00	4.33			Pass	
HE20	MCS0	2	120	5600	106/53	0.01	0.01			10.29	11.00	4.33			Pass	
HE20	MCS0	2	140	5700	Full	0.02	0.01			9.21	11.00	4.33			Pass	
HE20	MCS0	2	140	5700	26/8	0.01	0.02			9.08	11.00	4.33			Pass	
HE20	MCS0	2	140	5700	52/40	0.02	0.02			8.77	11.00	4.33			Pass	
HE20	MCS0	2	140	5700	106/54	0.01	0.01			8.98	11.00	4.33			Pass	
HE40	MCS0	2	102	5510	Full	0.02	0.01			6.17	11.00	4.33			Pass	
HE40	MCS0	2	102	5510	242/61	0.02	0.02			5.85	11.00	4.33			Pass	
HE40	MCS0	2	118	5590	Full	0.02	0.01			7.30	11.00	4.33			Pass	
HE40	MCS0	2	118	5590	242/61	0.02	0.02			7.28	11.00	4.33			Pass	
HE40	MCS0	2	134	5670	Full	0.02	0.01			6.57	11.00	4.33			Pass	
HE40	MCS0	2	134	5670	242/62	0.02	0.02			6.05	11.00	4.33			Pass	
HE80	MCS0	2	106	5530	Full	0.03	0.03			1.37	11.00	4.33			Pass	
HE80	MCS0	2	106	5530	484/65	0.03	0.03			0.97	11.00	4.33			Pass	
HE80	MCS0	2	122	5610	Full	0.03	0.03			4.43	11.00	4.33			Pass	
HE80	MCS0	2	122	5610	484/66	0.03	0.03			4.30	11.00	4.33			Pass	
HE160	MCS0	2	114	5570	Full	0.03	0.03			-4.27	11.00	4.33			Pass	
HE160	MCS0	2	114	5570	996/67	0.10	0.09			-4.49	11.00	4.33			Pass	
HE160	MCS0	2	114	5570	996/S67	0.10	0.09			-4.38	11.00	4.33			Pass	

U-NII-2C straddle channel MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	144	5720	Full	0.02	0.01	-	10.75	11.00	4.33		-	Pass	
HE20	MCS0	2	144	5720	26/8	0.01	0.02		10.39	11.00	4.33			Pass	
HE20	MCS0	2	144	5720	52/40	0.02	0.02		10.66	11.00	4.33			Pass	
HE20	MCS0	2	144	5720	106/54	0.01	0.01		10.46	11.00	4.33			Pass	
HE40	MCS0	2	142	5710	Full	0.02	0.01		8.56	11.00	4.33			Pass	
HE40	MCS0	2	142	5710	242/62	0.02	0.02		8.44	11.00	4.33			Pass	
HE80	MCS0	2	138	5690	Full	0.03	0.03		4.17	11.00	4.33			Pass	
HE80	MCS0	2	138	5690	484/66	0.03	0.03		4.04	11.00	4.33			Pass	

**Test Result of 26dB & 99% Occupied Bandwidth**

MIMO <Ant. 6+7>


<802.11a>

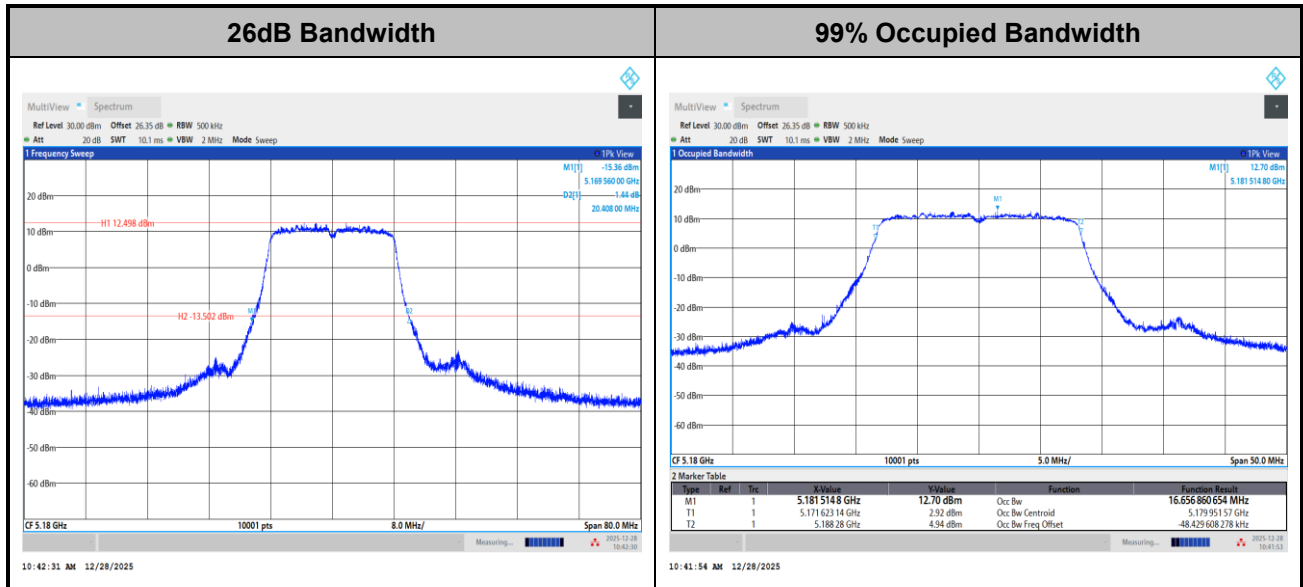

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE20>

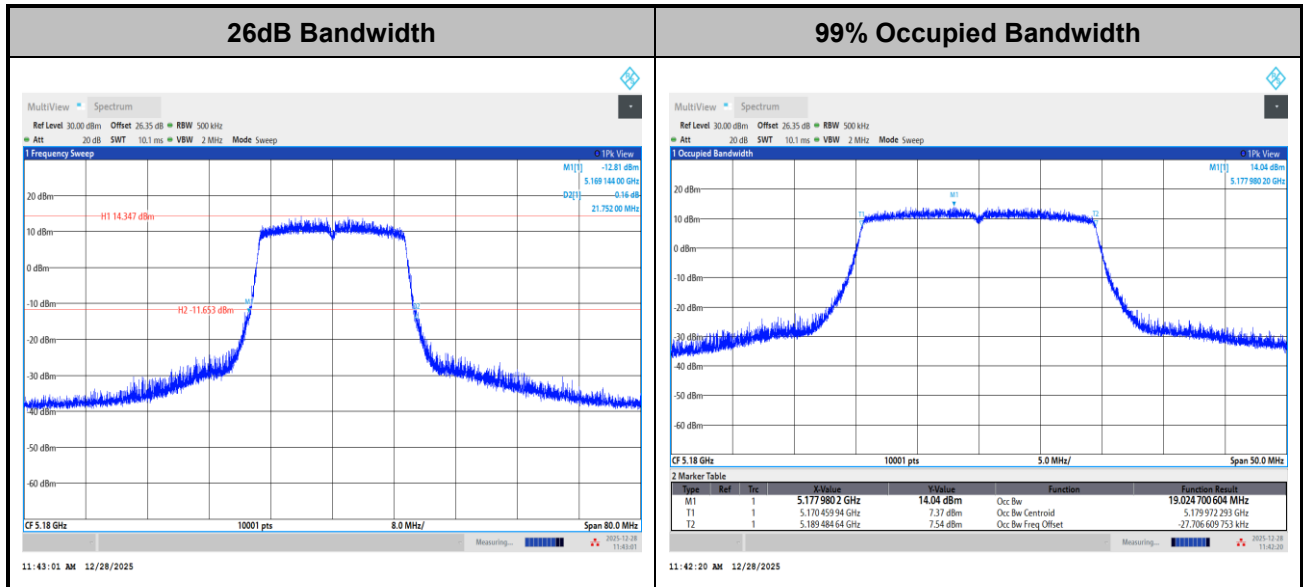

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE40>

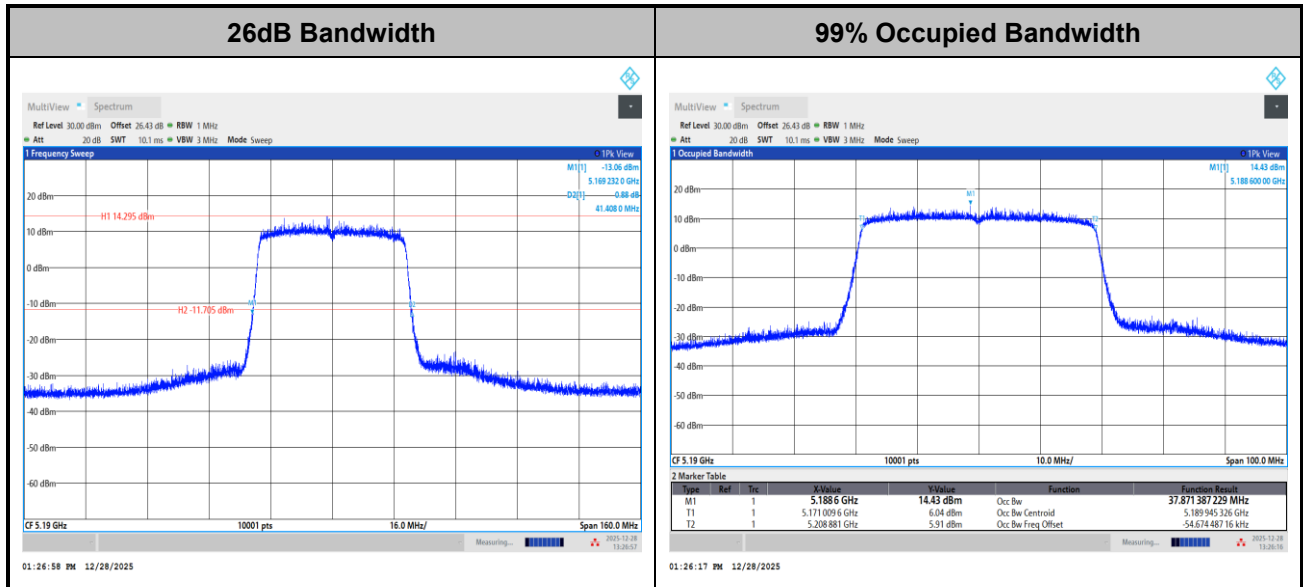

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE80>

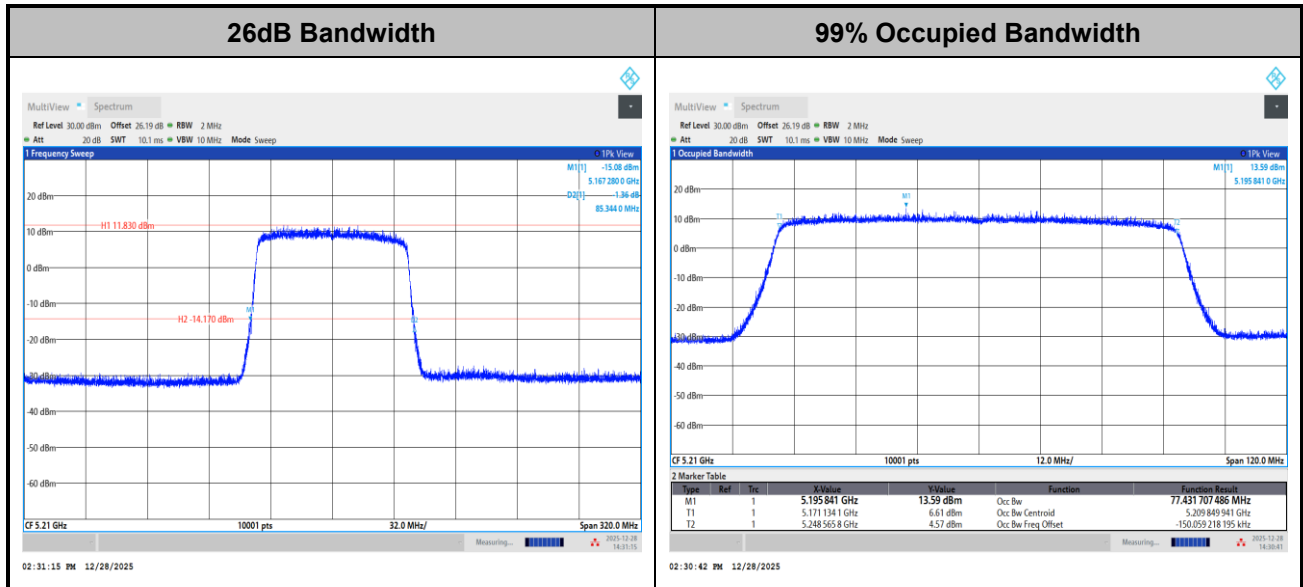

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE160>

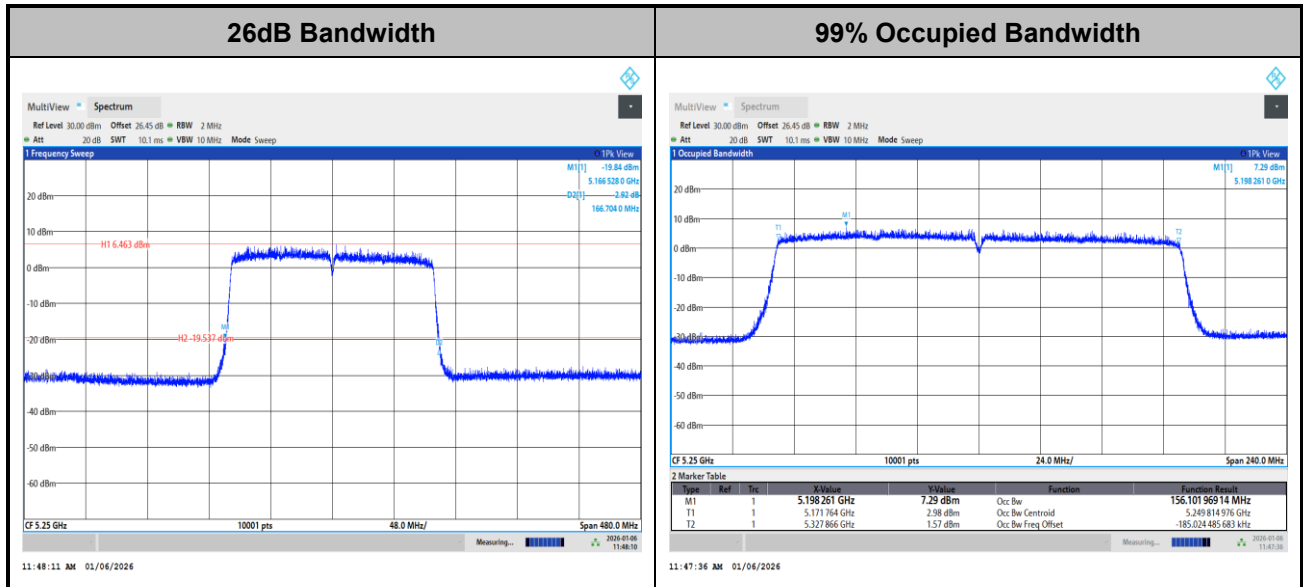


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11a>

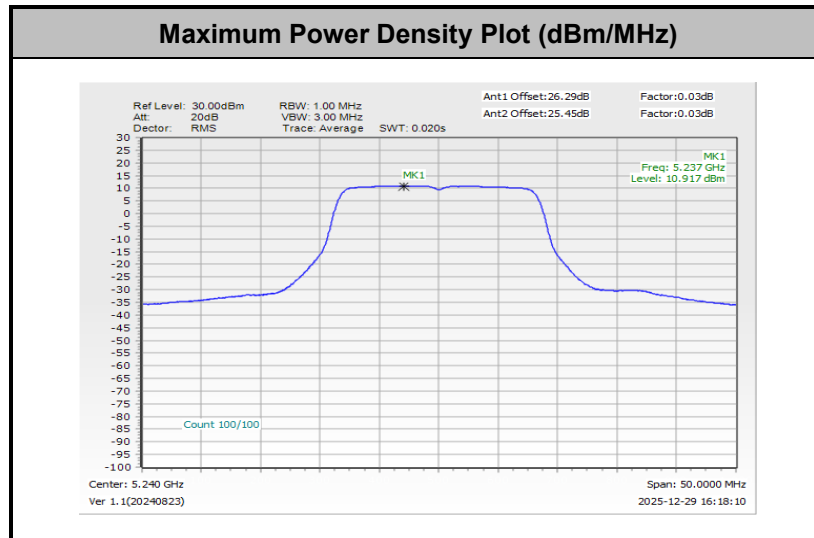


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

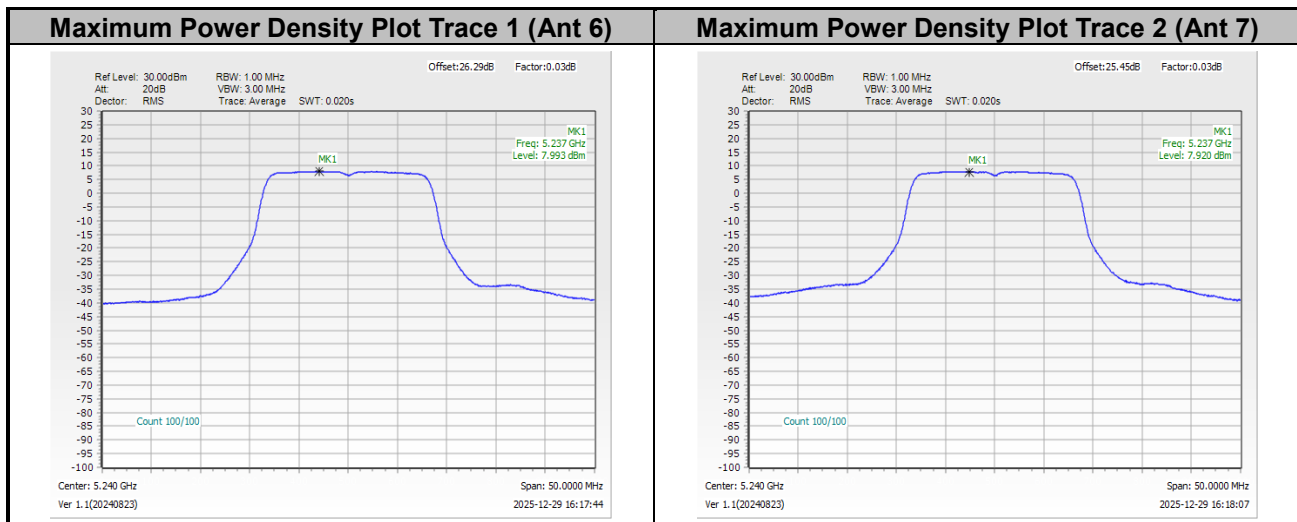




<802.11ax HE20>

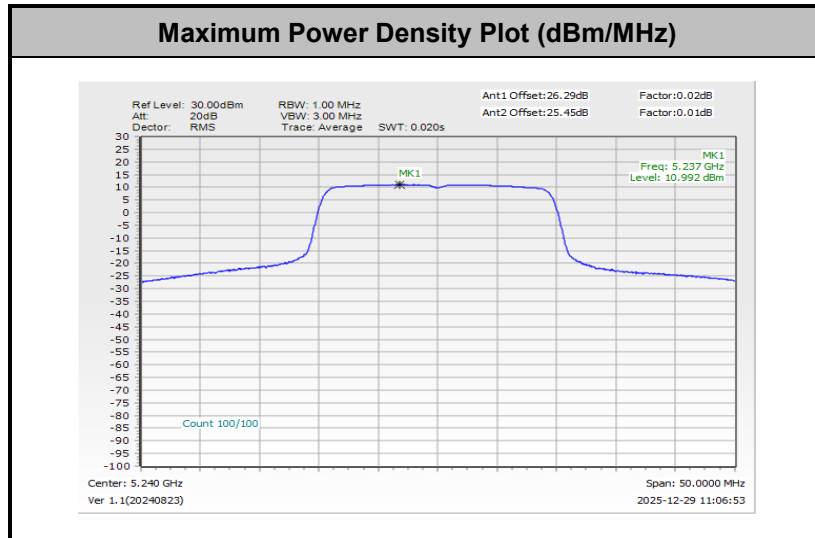


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

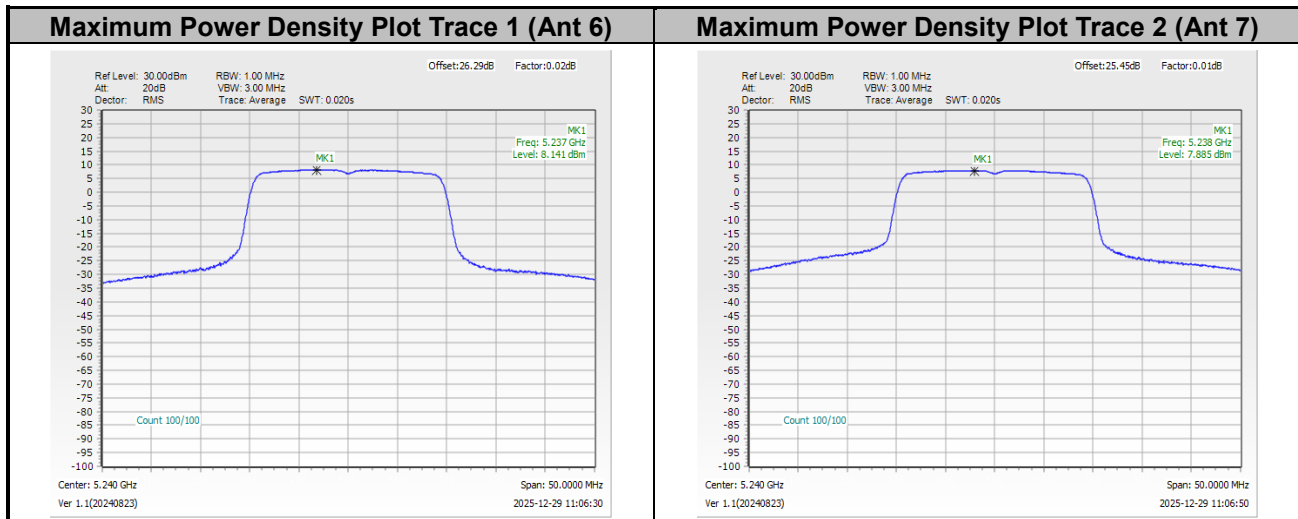




<802.11ax HE40>

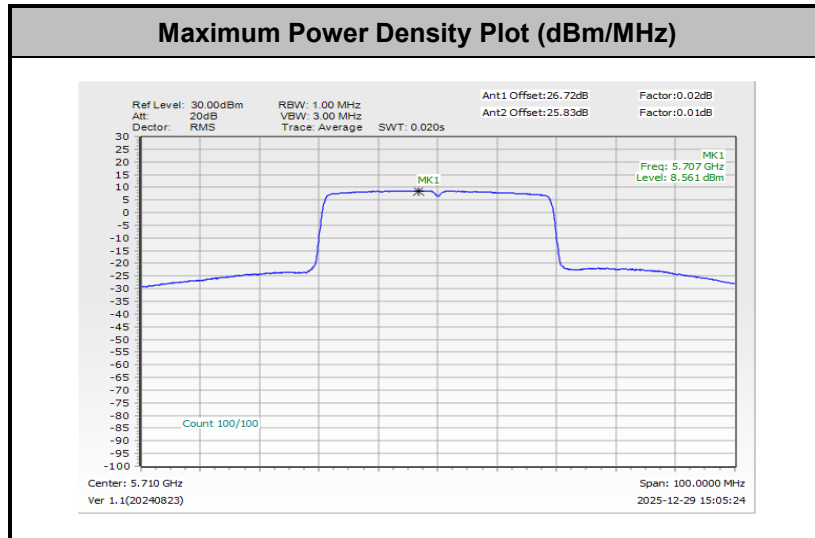


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

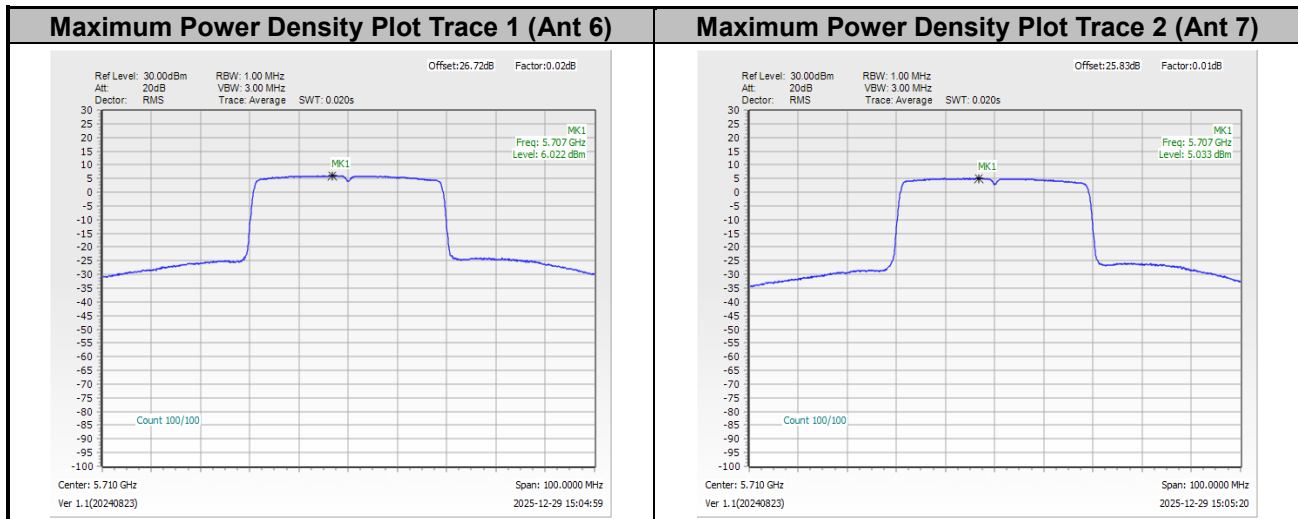




<802.11ax HE80>

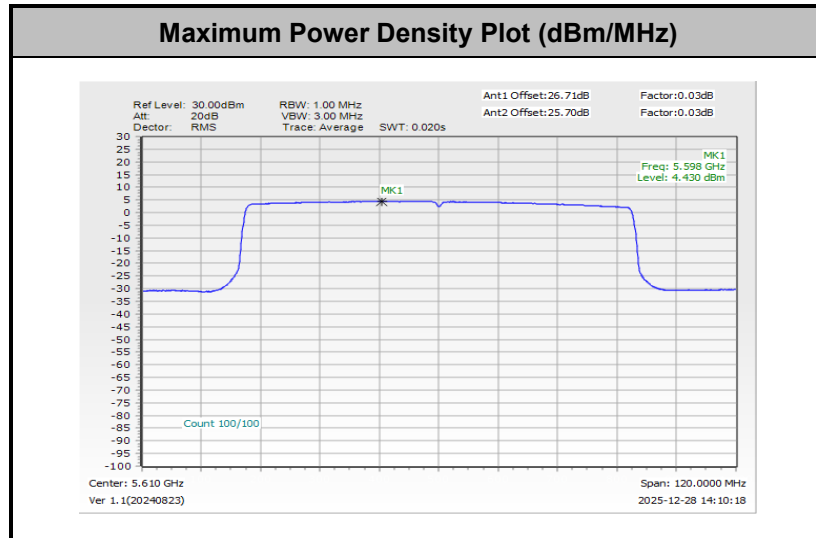


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

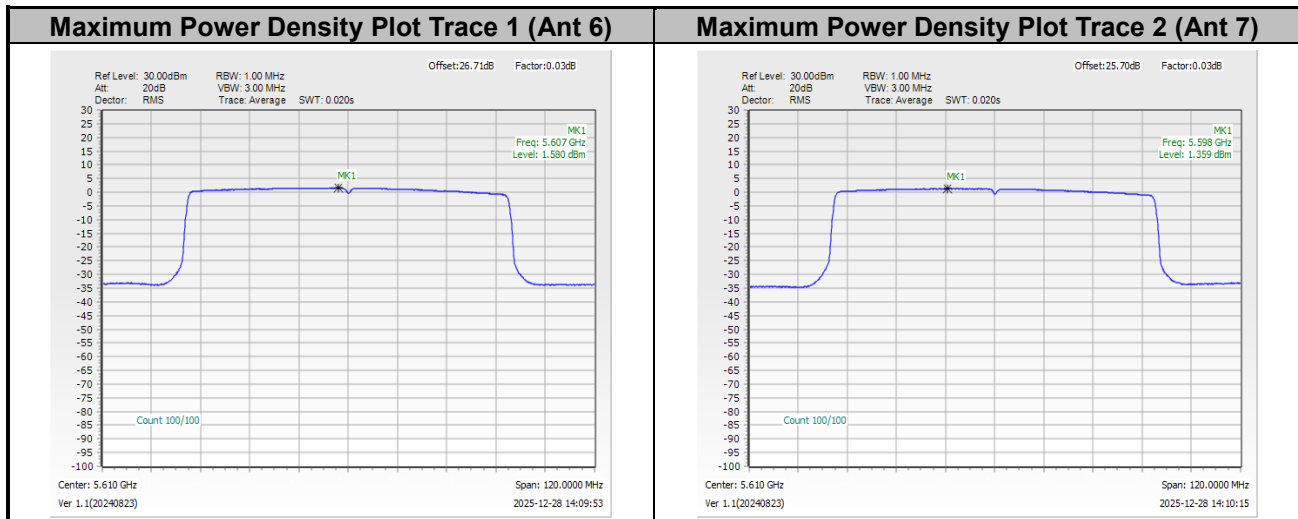




<802.11ax HE160>

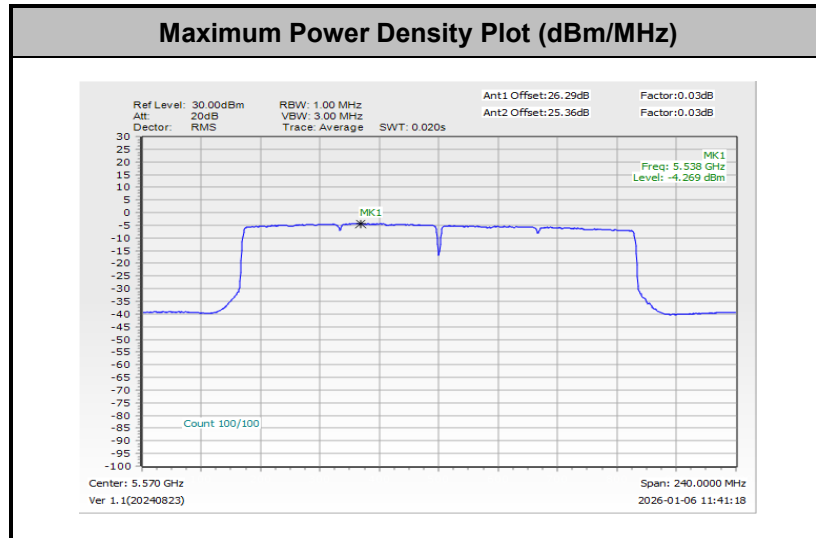

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

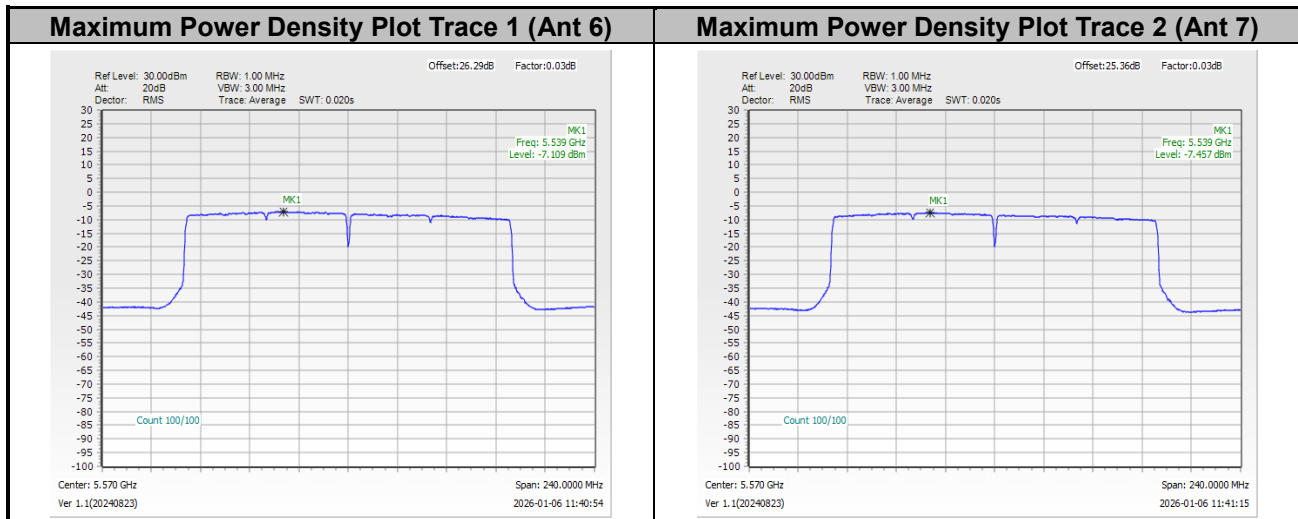




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	15~18.9°C
		Relative Humidity :	43.3~48.7%

EUT Information

Report NO : 5N2828
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

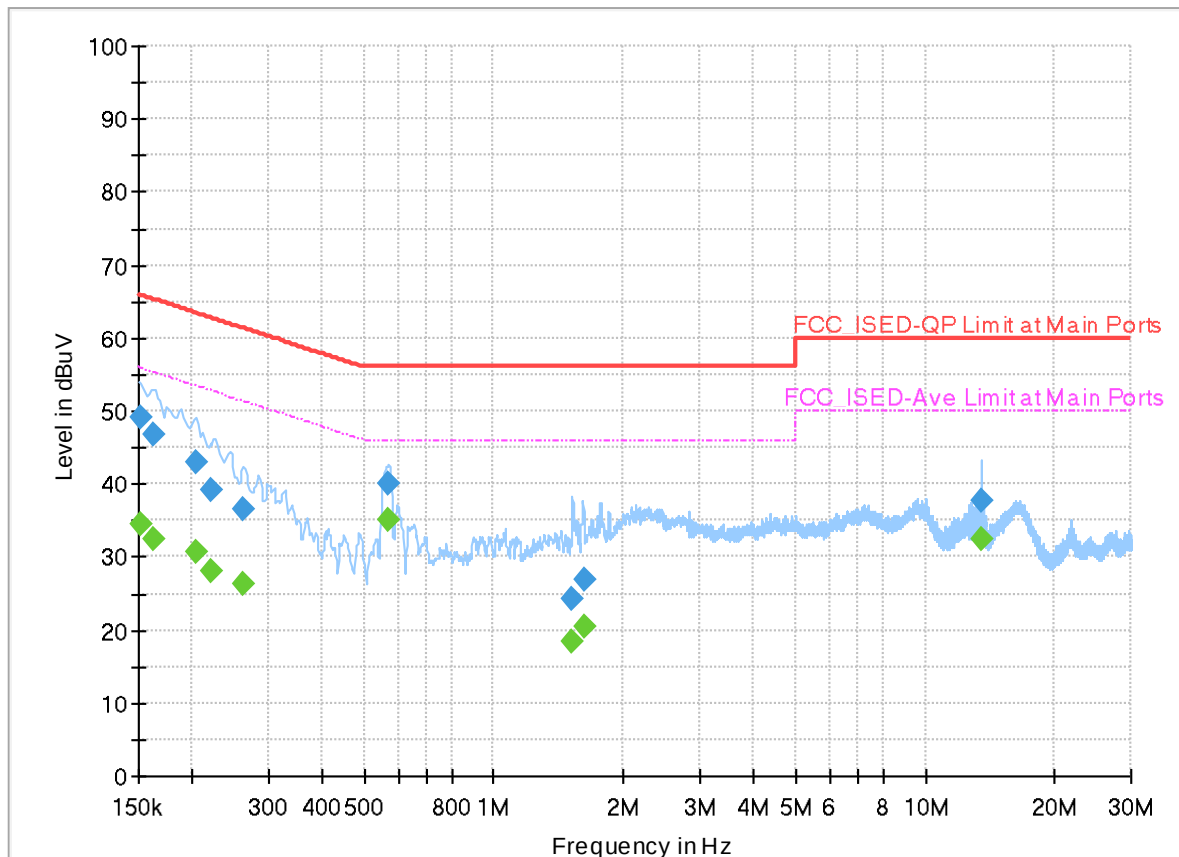


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.151148	---	34.44	55.94	21.50	L1	ON	20.1
0.151148	49.26	---	65.94	16.68	L1	ON	20.1
0.162375	---	32.51	55.34	22.83	L1	ON	20.1
0.162375	46.76	---	65.34	18.58	L1	ON	20.1
0.203010	---	30.82	53.49	22.67	L1	ON	20.1
0.203010	43.11	---	63.49	20.38	L1	ON	20.1
0.222000	---	27.98	52.74	24.76	L1	ON	20.1
0.222000	39.12	---	62.74	23.62	L1	ON	20.1
0.263220	---	26.23	51.33	25.10	L1	ON	20.1
0.263220	36.62	---	61.33	24.71	L1	ON	20.1
0.570390	---	35.07	46.00	10.93	L1	ON	20.0
0.570390	40.20	---	56.00	15.80	L1	ON	20.0
1.516335	---	18.53	46.00	27.47	L1	ON	20.0
1.516335	24.18	---	56.00	31.82	L1	ON	20.0
1.613985	---	20.35	46.00	25.65	L1	ON	20.0
1.613985	26.92	---	56.00	29.08	L1	ON	20.0
13.560225	---	32.55	50.00	17.45	L1	ON	20.6
13.560225	37.85	---	60.00	22.15	L1	ON	20.6

EUT Information

Report NO : 5D0539
Test Mode : Mode 1
Test Voltage : 110Vac/60Hz
Phase : Neutral

Full Spectrum

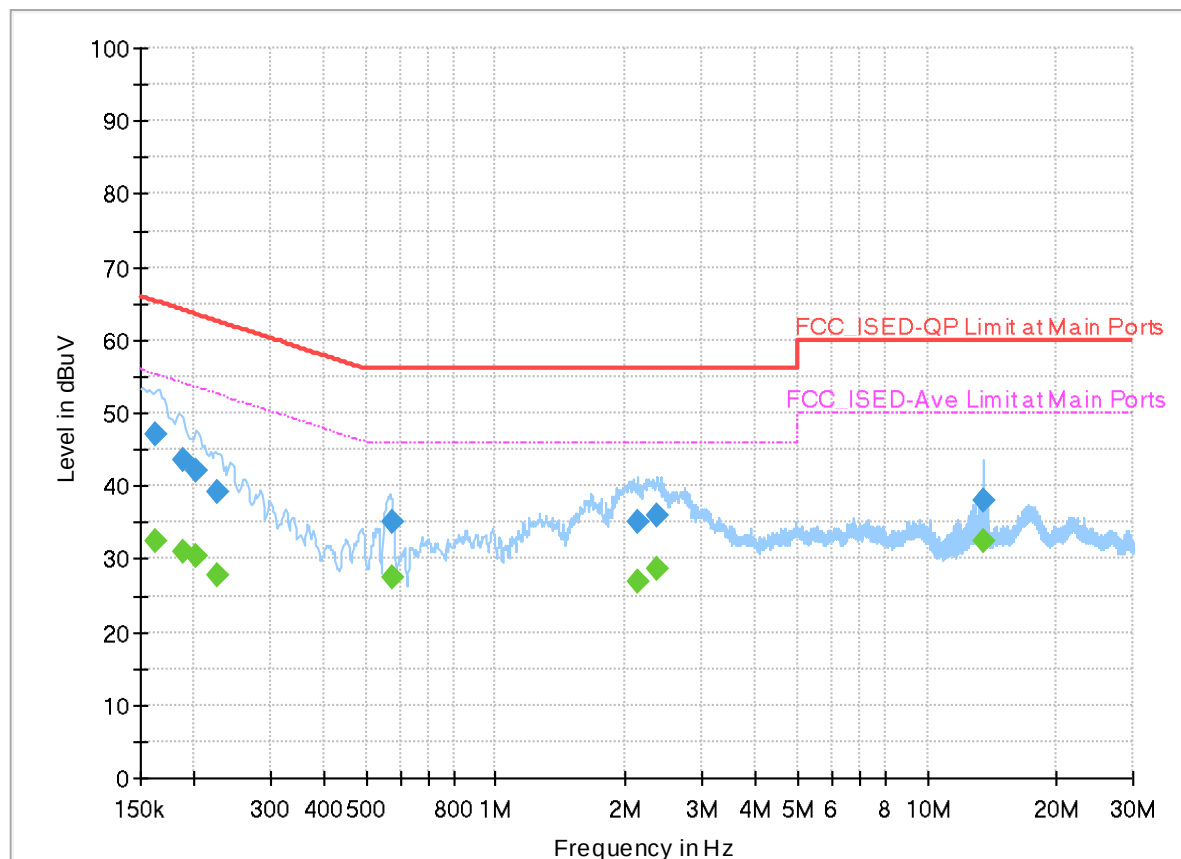

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.163095	---	32.38	55.31	22.93	N	ON	20.1
0.163095	47.00	---	65.31	18.31	N	ON	20.1
0.188205	---	31.02	54.12	23.10	N	ON	20.1
0.188205	43.66	---	64.12	20.46	N	ON	20.1
0.202335	---	30.51	53.51	23.00	N	ON	20.1
0.202335	42.21	---	63.51	21.30	N	ON	20.1
0.226050	---	27.71	52.59	24.88	N	ON	20.1
0.226050	39.31	---	62.59	23.28	N	ON	20.1
0.572685	---	27.55	46.00	18.45	N	ON	20.0
0.572685	35.18	---	56.00	20.82	N	ON	20.0
2.128200	---	26.90	46.00	19.10	N	ON	20.0
2.128200	35.20	---	56.00	20.80	N	ON	20.0
2.363190	---	28.59	46.00	17.41	N	ON	20.0
2.363190	35.87	---	56.00	20.13	N	ON	20.0
13.558875	---	32.44	50.00	17.56	N	ON	20.6
13.558875	38.00	---	60.00	22.00	N	ON	20.6



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	John Chuang 、 David Dai 、 Sam Chou	Temperature :	17.7~20.6 °C
		Relative Humidity :	64.3~70.8 %

Note symbol

-L	Low channel location
-R	High channel location



C1.Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	6+7	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	6+7	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	6+7	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	6+7	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	6+7	802.11ax HE20	36	5180	MCS0	Partial_106/53RU	-
Mode 6	U-NII-1	5.15-5.25	6+7	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 7	U-NII-1	5.15-5.25	6+7	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 8	U-NII-1	5.15-5.25	6+7	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	6+7	802.11ax HE40	38	5190	MCS0	Partial_242/61RU	-
Mode 10	U-NII-1	5.15-5.25	6+7	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 11	U-NII-1	5.15-5.25	6+7	802.11ax HE80	42	5210	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-1	5.15-5.25	6+7	802.11ax HE80	42	5210	MCS0	Partial_484/65RU	-
Mode 13	U-NII-1	5.15-5.25	6+7	802.11ax HE160	50	5250	MCS0	Partial_996/67RU	-
Mode 14	U-NII-2A	5.25-5.35	6+7	802.11a	52	5260	6Mbps	-	-
Mode 15	U-NII-2A	5.25-5.35	6+7	802.11a	60	5300	6Mbps	-	-
Mode 16	U-NII-2A	5.25-5.35	6+7	802.11a	64	5320	6Mbps	-	-
Mode 17	U-NII-2A	5.25-5.35	6+7	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 18	U-NII-2A	5.25-5.35	6+7	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 19	U-NII-2A	5.25-5.35	6+7	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 20	U-NII-2A	5.25-5.35	6+7	802.11ax HE20	64	5320	MCS0	Partial_106/54RU	-
Mode 21	U-NII-2A	5.25-5.35	6+7	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 22	U-NII-2A	5.25-5.35	6+7	802.11ax HE40	62	5310	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2A	5.25-5.35	6+7	802.11ax HE40	62	5310	MCS0	Partial_242/62RU	-
Mode 24	U-NII-2A	5.25-5.35	6+7	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 25	U-NII-2A	5.25-5.35	6+7	802.11ax HE80	58	5290	MCS0	Partial_484/66RU	-
Mode 26	U-NII-1	5.15-5.25	6+7	802.11ax HE160	50	5250	MCS0	Full RU	-
Mode 27	U-NII-1	5.15-5.25	6+7	802.11ax HE160	50	5250	MCS0	Partial_996/68RU	-
Mode 28	U-NII-2C	5.47-5.725	6+7	802.11a	100	5500	6Mbps	-	-
Mode 29	U-NII-2C	5.47-5.725	6+7	802.11a	116	5580	6Mbps	-	-
Mode 30	U-NII-2C	5.47-5.725	6+7	802.11a	140	5700	6Mbps	-	-
Mode 31	U-NII-2C	5.47-5.725	6+7	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 32	U-NII-2C	5.47-5.725	6+7	802.11ax HE20	100	5500	MCS0	Partial_106/53RU	-
Mode 33	U-NII-2C	5.47-5.725	6+7	802.11ax HE20	116	5580	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 34	U-NII-2C	5.47-5.725	6+7	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 35	U-NII-2C	5.47-5.725	6+7	802.11ax HE20	140	5700	MCS0	Partial_106/54RU	-
Mode 36	U-NII-2C	5.47-5.725	6+7	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 37	U-NII-2C	5.47-5.725	6+7	802.11ax HE40	102	5510	MCS0	Partial_242/61RU	-
Mode 38	U-NII-2C	5.47-5.725	6+7	802.11ax HE40	110	5550	MCS0	Full RU	-
Mode 39	U-NII-2C	5.47-5.725	6+7	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 40	U-NII-2C	5.47-5.725	6+7	802.11ax HE40	134	5670	MCS0	Partial_242/62RU	-
Mode 41	U-NII-2C	5.47-5.725	6+7	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 42	U-NII-2C	5.47-5.725	6+7	802.11ax HE80	106	5530	MCS0	Partial_484/65RU	-
Mode 43	U-NII-2C	5.47-5.725	6+7	802.11ax HE80	122	5610	MCS0	Full RU	-
Mode 44	U-NII-2C	5.47-5.725	6+7	802.11ax HE80	122	5610	MCS0	Partial_484/66RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 45	U-NII-2C	5.47-5.725	6+7	802.11ax HE160	114	5570	MCS0	Full RU	-
Mode 46	U-NII-2C	5.47-5.725	6+7	802.11ax HE160	114	5570	MCS0	Partial_996/67RU	-
Mode 47	U-NII-2C	5.47-5.725	6+7	802.11a	144	5720	6Mbps	-	-
Mode 48	U-NII-2C	5.47-5.725	6+7	802.11ax HE20	144	5720	MCS0	Full RU	-
Mode 49	U-NII-2C	5.47-5.725	6+7	802.11ax HE40	142	5710	MCS0	Full RU	-
Mode 50	U-NII-2C	5.47-5.725	6+7	802.11ax HE80	138	5690	MCS0	Full RU	-
Mode 128	U-NII-1	5.15-5.25	6+7	802.11ax HE20	36	5180	MCS0	Full RU	LF
Mode 129	U-NII-1	5.15-5.25	6+7	802.11ax HE20	36	5180	MCS0	Full RU	SHF



C2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	36	5149.58	51.54	54.00	-2.46	H	Avg.	Pass	-	Band Edge
	802.11a	36	6907.00	59.44	68.20	-8.76	H	Peak	Pass	-	Harmonic
2	802.11a	44	5149.82	51.62	54.00	-2.38	H	Avg.	Pass	-	Band Edge
	802.11a	44	6960.00	61.75	68.20	-6.45	H	Peak	Pass	-	Harmonic
3	802.11a	48	5149.52	49.64	54.00	-4.36	H	Avg.	Pass	-	Band Edge
	802.11a	48	6987.00	60.30	68.20	-7.90	H	Peak	Pass	-	Harmonic
4	802.11ax HE20	36	5149.94	52.82	54.00	-1.18	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	36	6907.00	62.08	68.20	-6.12	H	Peak	Pass	Full RU	Harmonic
5	802.11ax HE20	36	5146.88	69.68	74.00	-4.32	H	Peak	Pass	Partial_106/53RU	Band Edge
	802.11ax HE20	36	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic
6	802.11ax HE20	44	5149.38	51.78	54.00	-2.22	H	Avg.	Pass	Full RU	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11ax HE20	44	6960.00	61.81	68.20	-6.39	H	Peak	Pass	Full RU	Harmonic
7	802.11ax HE20	48	5150.00	49.60	54.00	-4.40	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	48	6987.00	60.78	68.20	-7.42	H	Peak	Pass	Full RU	Harmonic
8	802.11ax HE40	38	5149.91	52.48	54.00	-1.52	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	38	6920.00	60.86	68.20	-7.34	H	Peak	Pass	Full RU	Harmonic
9	802.11ax HE40	38	5144.78	71.19	74.00	-2.81	H	Peak	Pass	Partial_242/61RU	Band Edge
	802.11ax HE40	38	-	-	-	-	-	-	-	Partial_242/61RU	Harmonic
10	802.11ax HE40	46	5149.96	51.38	54.00	-2.62	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	46	6973.00	60.17	68.20	-8.03	H	Peak	Pass	Full RU	Harmonic
11	802.11ax HE80	42	5148.05	51.23	54.00	-2.77	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	42	6946.00	59.87	68.20	-8.33	H	Peak	Pass	Full RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11ax HE80	42	5148.26	72.55	74.00	-1.45	H	Peak	Pass	Partial_484/65RU	Band Edge
	802.11ax HE80	42	-	-	-	-	-	-	-	Partial_484/65RU	Harmonic
13	802.11ax HE160	50	5402.67	71.81	74.00	-2.19	H	Peak	Pass	Partial_996/67RU	Band Edge
	802.11ax HE160	50	-	-	-	-	-	-	-	Partial_996/67RU	Harmonic
14	802.11a	52	5350.20	46.35	54.00	-7.65	H	Avg.	Pass	-	Band Edge
	802.11a	52	7013.00	59.18	68.20	-9.02	H	Peak	Pass	-	Harmonic
15	802.11a	60	5350.40	51.84	54.00	-2.16	H	Avg.	Pass	-	Band Edge
	802.11a	60	7067.00	60.13	68.20	-8.07	H	Peak	Pass	-	Harmonic
16	802.11a	64	5350.66	52.19	54.00	-1.81	H	Avg.	Pass	-	Band Edge
	802.11a	64	7093.00	58.11	68.20	-10.09	H	Peak	Pass	-	Harmonic
17	802.11ax HE20	52	5350.20	52.66	54.00	-1.34	H	Avg.	Pass	Full RU	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11ax HE20	52	7013.00	60.47	68.20	-7.73	H	Peak	Pass	Full RU	Harmonic
18	802.11ax HE20	60	5350.08	52.05	54.00	-1.95	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	60	7067.00	58.38	68.20	-9.82	H	Peak	Pass	Full RU	Harmonic
19	802.11ax HE20	64	5350.24	49.93	54.00	-4.07	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	64	7093.00	59.58	68.20	-8.62	H	Peak	Pass	Full RU	Harmonic
20	802.11ax HE20	64	5350.10	51.33	54.00	-2.67	H	Avg.	Pass	Partial_106/54RU	Band Edge
	802.11ax HE20	64	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic
21	802.11ax HE40	54	5350.18	50.20	54.00	-3.80	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	54	7027.00	57.80	68.20	-10.40	H	Peak	Pass	Full RU	Harmonic
22	802.11ax HE40	62	5350.05	52.24	54.00	-1.76	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	62	7080.00	58.64	68.20	-9.56	H	Peak	Pass	Full RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	802.11ax HE40	62	5359.95	70.38	74.00	-3.62	H	Peak	Pass	Partial_242/62RU	Band Edge
	802.11ax HE40	62	-	-	-	-	-	-	-	Partial_242/62RU	Harmonic
24	802.11ax HE80	58	5356.47	52.46	54.00	-1.54	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	58	7053.00	58.52	68.20	-9.68	H	Peak	Pass	Full RU	Harmonic
25	802.11ax HE80	58	5385.71	70.96	74.00	-3.04	H	Peak	Pass	Partial_484/66RU	Band Edge
	802.11ax HE80	58	-	-	-	-	-	-	-	Partial_484/66RU	Harmonic
26	802.11ax HE160	50	5397.00	51.84	54.00	-2.16	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE160	50	7000.00	58.36	68.20	-9.84	H	Peak	Pass	Full RU	Harmonic
27	802.11ax HE160	50	5402.88	72.23	74.00	-1.77	H	Peak	Pass	Partial_996/68RU	Band Edge
	802.11ax HE160	50	-	-	-	-	-	-	-	Partial_996/68RU	Harmonic
28	802.11a	100	5459.95	52.33	54.00	-1.67	H	Avg.	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
28	802.11a	100	7700.00	44.07	54.00	-9.93	H	Avg.	Pass	-	Harmonic
29	802.11a	116	5429.12	40.13	54.00	-13.87	H	Avg.	Pass	-	Band Edge
	802.11a	116	6696.00	62.07	68.20	-6.13	V	Peak	Pass	-	Harmonic
30	802.11a	140	5729.77	64.99	68.20	-3.21	H	Peak	Pass	-	Band Edge
	802.11a	140	7980.00	55.35	68.20	-12.85	V	Peak	Pass	-	Harmonic
31	802.11ax HE20	100	5467.45	63.99	68.20	-4.21	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	100	7700.00	49.40	54.00	-4.60	H	Avg.	Pass	Full RU	Harmonic
32	802.11ax HE20	100	5469.40	66.96	68.20	-1.24	H	Peak	Pass	Partial_106/53RU	Band Edge
	802.11ax HE20	100	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic
33	802.11ax HE20	116	5425.67	42.56	54.00	-11.44	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	116	7812.00	59.75	68.20	-8.45	V	Peak	Pass	Full RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
34	802.11ax HE20	140	5725.68	64.29	68.20	-3.91	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	140	7980.00	55.54	68.20	-12.66	V	Peak	Pass	Full RU	Harmonic
35	802.11ax HE20	140	5728.54	65.14	68.20	-3.06	H	Peak	Pass	Partial_106/54RU	Band Edge
	802.11ax HE20	140	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic
36	802.11ax HE40	102	5468.08	64.86	68.20	-3.34	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	102	7714.00	46.68	54.00	-7.32	V	Avg.	Pass	Full RU	Harmonic
37	802.11ax HE40	102	5464.24	66.40	68.20	-1.80	H	Peak	Pass	Partial_242/61RU	Band Edge
	802.11ax HE40	102	-	-	-	-	-	-	-	Partial_242/61RU	Harmonic
38	802.11ax HE40	110	5458.60	49.81	54.00	-4.19	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	110	7770.00	57.01	68.20	-11.19	V	Peak	Pass	Full RU	Harmonic
39	802.11ax HE40	134	5725.29	65.55	68.20	-2.65	H	Peak	Pass	Full RU	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
39	802.11ax HE40	134	7938.00	57.66	68.20	-10.54	V	Peak	Pass	Full RU	Harmonic
40	802.11ax HE40	134	5732.99	65.33	68.20	-2.87	H	Peak	Pass	Partial_242/62RU	Band Edge
	802.11ax HE40	134	-	-	-	-	-	-	-	Partial_242/62RU	Harmonic
41	802.11ax HE80	106	5457.10	51.66	54.00	-2.34	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	106	7742.00	42.85	54.00	-11.15	V	Avg.	Pass	Full RU	Harmonic
42	802.11ax HE80	106	5464.30	63.57	68.20	-4.63	H	Peak	Pass	Partial_484/65RU	Band Edge
	802.11ax HE80	106	-	-	-	-	-	-	-	Partial_484/65RU	Harmonic
43	802.11ax HE80	122	5727.34	63.64	68.20	-4.56	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE80	122	11220.00	40.75	54.00	-13.25	V	Avg.	Pass	Full RU	Harmonic
44	802.11ax HE80	122	5757.56	64.49	68.20	-3.71	H	Peak	Pass	Partial_484/66RU	Band Edge
	802.11ax HE80	122	-	-	-	-	-	-	-	Partial_484/66RU	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
45	802.11ax HE160	114	5457.80	52.34	54.00	-1.66	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE160	114	11140.00	40.88	54.00	-13.12	H	Avg.	Pass	Full RU	Harmonic
46	802.11ax HE160	114	5727.76	65.62	68.20	-2.58	H	Peak	Pass	Partial_996/67RU	Band Edge
	802.11ax HE160	114	-	-	-	-	-	-	-	Partial_996/67RU	Harmonic
47	802.11a	144	5411.62	39.31	54.00	-14.69	H	Avg.	Pass	-	Band Edge
	802.11a	144	8008.00	45.71	54.00	-8.29	H	Avg.	Pass	-	Harmonic
48	802.11ax HE20	144	5409.67	39.73	54.00	-14.27	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	144	6864.00	57.98	68.20	-10.22	H	Peak	Pass	Full RU	Harmonic
49	802.11ax HE40	142	5853.00	62.06	68.20	-6.14	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	142	11420.00	40.96	54.00	-13.04	H	Avg.	Pass	Full RU	Harmonic
50	802.11ax HE80	138	5855.50	64.36	68.20	-3.84	H	Peak	Pass	Full RU	Band Edge







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
50	802.11ax HE80	138	11380.00	40.95	54.00	-13.05	H	Avg.	Pass	Full RU	Harmonic
128	LF	36	53.28	33.26	40.00	-6.74	V	Peak	Pass	-	LF
129	SHF	36	39560.00	52.42	74.00	-21.58	V	Peak	Pass	-	SHF

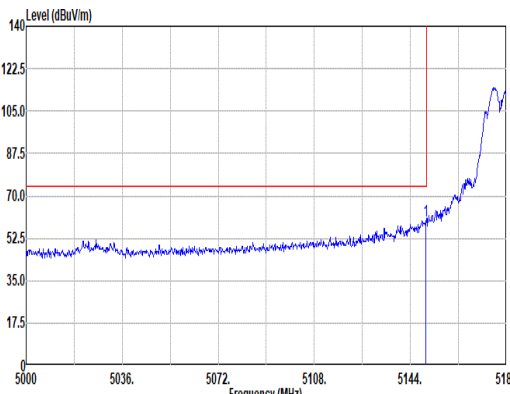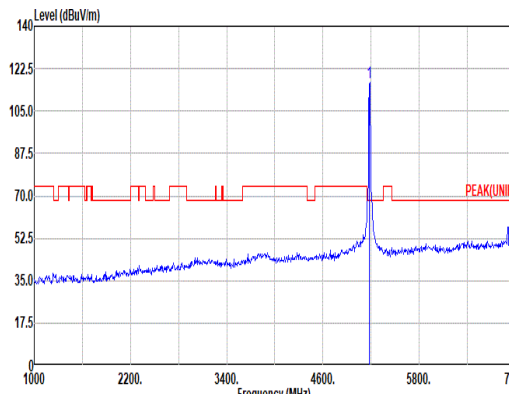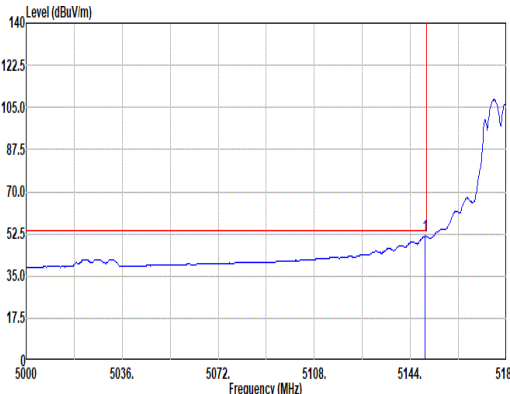
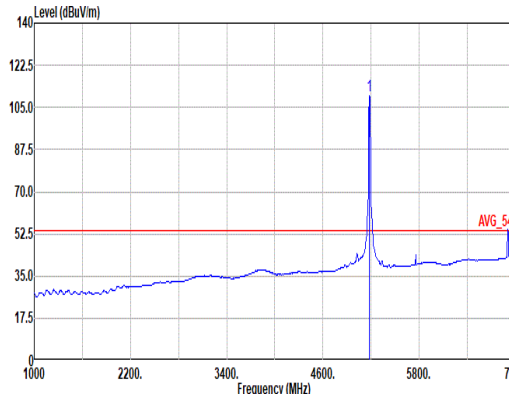


Mode	1																																																																																																	
	Band Edge																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																	
ANT	6+7																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>59.49</td><td>74.00</td><td>-14.51</td><td>51.23</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>4</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.76	59.49	74.00	-14.51	51.23	33.10	12.80	37.64	0.00	100	4	Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>116.70</td><td>-----</td><td>-----</td><td>100.40</td><td>33.10</td><td>12.85</td><td>37.65</td><td>0.00</td><td>100</td><td></td><td>4</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	116.70	-----	-----	100.40	33.10	12.85	37.65	0.00	100		4
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5149.76	59.49	74.00	-14.51	51.23	33.10	12.80	37.64	0.00	100	4	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	116.70	-----	-----	100.40	33.10	12.85	37.65	0.00	100		4	Peak																																																																																					
Avg																																																																																																		
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>51.54</td><td>54.00</td><td>-2.46</td><td>43.28</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>4</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.58	51.54	54.00	-2.46	43.28	33.10	12.80	37.64	0.00	100	4	Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>109.67</td><td>-----</td><td>-----</td><td>101.38</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>100</td><td></td><td>4</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	109.67	-----	-----	101.38	33.10	12.84	37.65	0.00	100		4
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5149.58	51.54	54.00	-2.46	43.28	33.10	12.80	37.64	0.00	100	4	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	109.67	-----	-----	101.38	33.10	12.84	37.65	0.00	100		4	Average																																																																																					

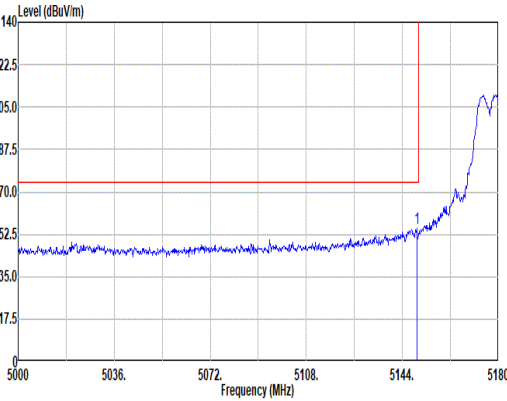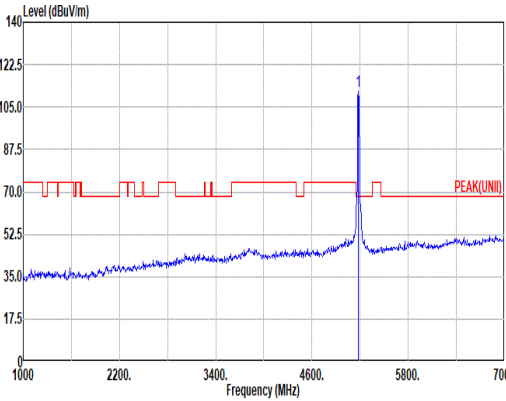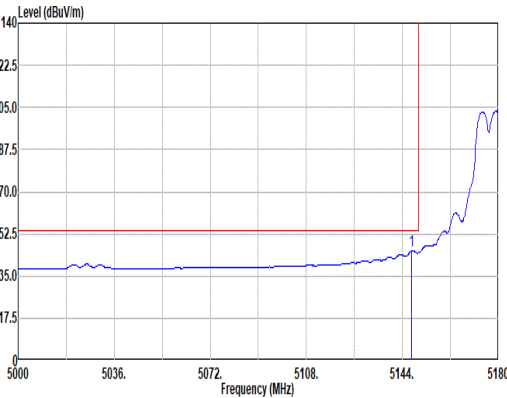
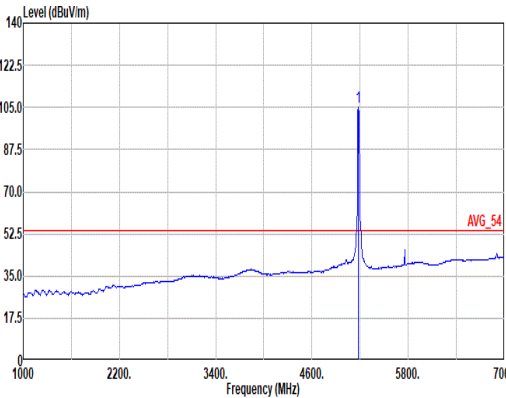


Mode	1																																																																																																	
	Band Edge																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																	
ANT	6+7																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.40</td><td>55.17</td><td>74.00</td><td>-18.83</td><td>46.91</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>92 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.40	55.17	74.00	-18.83	46.91	33.10	12.80	37.64	0.00	100	92 Peak	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>111.54</td><td>-----</td><td>-----</td><td>103.25</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>100</td><td>92 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	111.54	-----	-----	103.25	33.10	12.84	37.65	0.00	100	92 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5149.40	55.17	74.00	-18.83	46.91	33.10	12.80	37.64	0.00	100	92 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	111.54	-----	-----	103.25	33.10	12.84	37.65	0.00	100	92 Peak																																																																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.42</td><td>45.56</td><td>54.00</td><td>-8.44</td><td>37.30</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>100</td><td>92 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.42	45.56	54.00	-8.44	37.30	33.09	12.80	37.63	0.00	100	92 Average	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.89</td><td>-----</td><td>-----</td><td>96.60</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>100</td><td>92 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.89	-----	-----	96.60	33.10	12.84	37.65	0.00	100	92 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5147.42	45.56	54.00	-8.44	37.30	33.09	12.80	37.63	0.00	100	92 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	104.89	-----	-----	96.60	33.10	12.84	37.65	0.00	100	92 Average																																																																																							

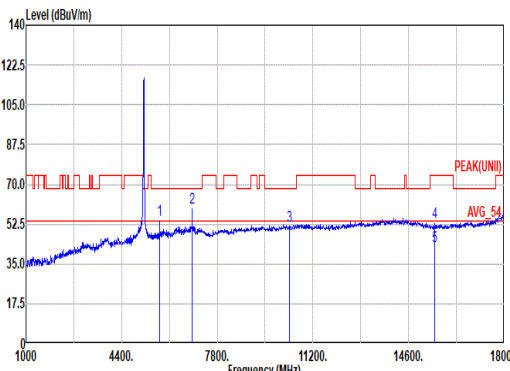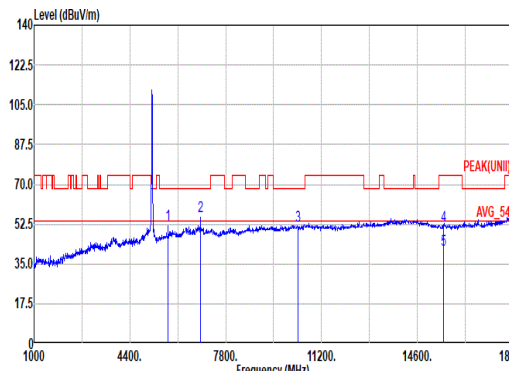

Mode	1																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																					
ANT	6+7																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 VERTICAL																																																																																															
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.00</td><td>54.52</td><td>68.20</td><td>-13.68</td><td>44.88</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>234</td><td>14 Peak</td></tr><tr><td>2</td><td>6907.00</td><td>59.44</td><td>68.20</td><td>-8.76</td><td>46.53</td><td>35.90</td><td>14.89</td><td>37.88</td><td>0.00</td><td>198</td><td>16 Peak</td></tr><tr><td>3</td><td>10360.00</td><td>51.65</td><td>68.20</td><td>-16.55</td><td>34.93</td><td>38.76</td><td>18.40</td><td>41.27</td><td>0.83</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15540.00</td><td>53.60</td><td>74.00</td><td>-20.40</td><td>36.75</td><td>38.38</td><td>22.66</td><td>44.67</td><td>0.48</td><td>209</td><td>61 Peak</td></tr><tr><td>5</td><td>15540.00</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>25.88</td><td>38.38</td><td>22.66</td><td>44.67</td><td>0.48</td><td>209</td><td>61 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	54.52	68.20	-13.68	44.88	33.86	13.56	37.78	0.00	234	14 Peak	2	6907.00	59.44	68.20	-8.76	46.53	35.90	14.89	37.88	0.00	198	16 Peak	3	10360.00	51.65	68.20	-16.55	34.93	38.76	18.40	41.27	0.83	--	-- Peak	4	15540.00	53.60	74.00	-20.40	36.75	38.38	22.66	44.67	0.48	209	61 Peak	5	15540.00	42.73	54.00	-11.27	25.88	38.38	22.66	44.67	0.48	209	61 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5760.00	54.52	68.20	-13.68	44.88	33.86	13.56	37.78	0.00	234	14 Peak																																																																																											
2	6907.00	59.44	68.20	-8.76	46.53	35.90	14.89	37.88	0.00	198	16 Peak																																																																																											
3	10360.00	51.65	68.20	-16.55	34.93	38.76	18.40	41.27	0.83	--	-- Peak																																																																																											
4	15540.00	53.60	74.00	-20.40	36.75	38.38	22.66	44.67	0.48	209	61 Peak																																																																																											
5	15540.00	42.73	54.00	-11.27	25.88	38.38	22.66	44.67	0.48	209	61 Average																																																																																											

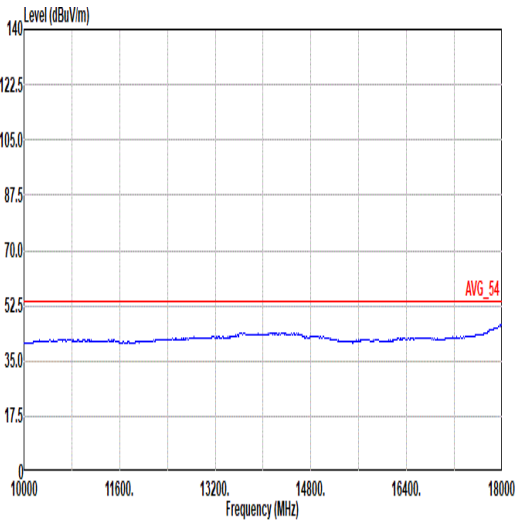
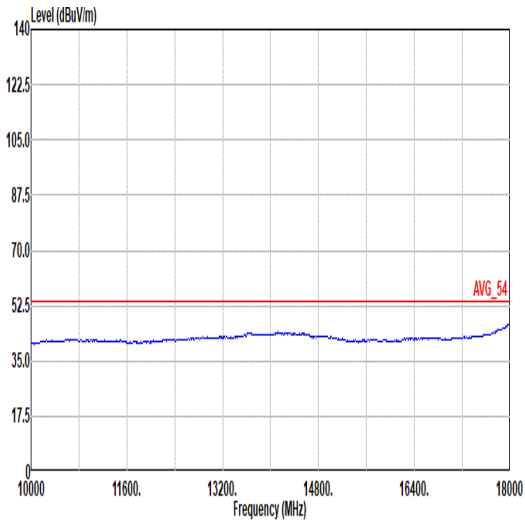


Mode	1	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 VERTICAL



Mode	2																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																	
ANT	6+7																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-12-16 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5137.72</td><td>63.06</td><td>74.00 -10.94</td><td>54.85</td><td>33.05</td><td>12.79</td><td>37.63</td><td>0.00</td><td>263</td><td>12 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5137.72	63.06	74.00 -10.94	54.85	33.05	12.79	37.63	0.00	263	12 Peak	Level (dBuV/m) Date: 2025-12-16 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5220.00</td><td>118.17</td><td>-----</td><td>109.86</td><td>33.08</td><td>12.89</td><td>37.66</td><td>0.00</td><td>263</td><td>12 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5220.00	118.17	-----	109.86	33.08	12.89	37.66	0.00	263	12 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5137.72	63.06	74.00 -10.94	54.85	33.05	12.79	37.63	0.00	263	12 Peak																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5220.00	118.17	-----	109.86	33.08	12.89	37.66	0.00	263	12 Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-12-16 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.82</td><td>51.62</td><td>54.00 -2.38</td><td>43.36</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>263</td><td>12 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5149.82	51.62	54.00 -2.38	43.36	33.10	12.80	37.64	0.00	263	12 Average	Level (dBuV/m) Date: 2025-12-16 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5220.00</td><td>110.99</td><td>-----</td><td>102.68</td><td>33.08</td><td>12.89</td><td>37.66</td><td>0.00</td><td>263</td><td>12 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5220.00	110.99	-----	102.68	33.08	12.89	37.66	0.00	263	12 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5149.82	51.62	54.00 -2.38	43.36	33.10	12.80	37.64	0.00	263	12 Average																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5220.00	110.99	-----	102.68	33.08	12.89	37.66	0.00	263	12 Average																																																																									

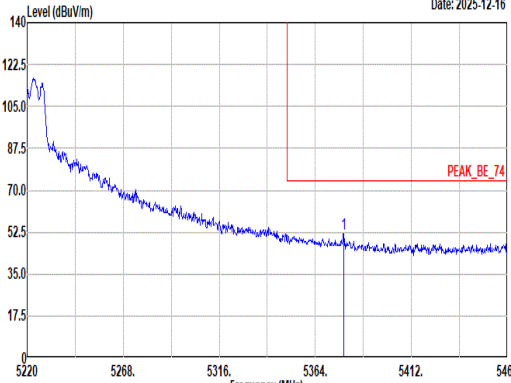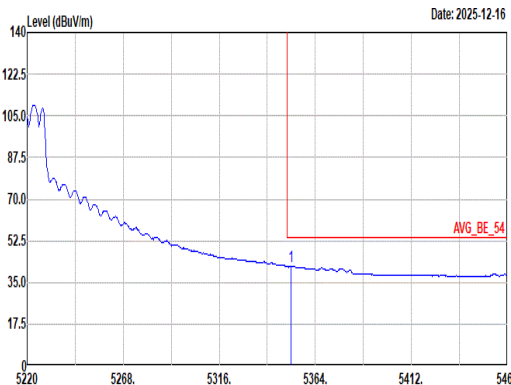

Mode	2																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																		
ANT	6+7																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Level (dBuV/m) Date: 2025-12-16  Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5378.16</td><td>51.63</td><td>74.00</td><td>-22.37</td><td>43.44</td><td>32.84</td><td>13.09</td><td>37.74</td><td>0.00</td><td>263</td><td>12</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5378.16	51.63	74.00	-22.37	43.44	32.84	13.09	37.74	0.00	263	12	Peak	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5378.16	51.63	74.00	-22.37	43.44	32.84	13.09	37.74	0.00	263	12	Peak																																							
Avg	Level (dBuV/m) Date: 2025-12-16  Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5352.00</td><td>41.94</td><td>54.00</td><td>-12.06</td><td>33.70</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>263</td><td>12</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5352.00	41.94	54.00	-12.06	33.70	32.90	13.06	37.72	0.00	263	12	Average	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5352.00	41.94	54.00	-12.06	33.70	32.90	13.06	37.72	0.00	263	12	Average																																							





Mode	2																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																			
ANT	6+7																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-12-16 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.18</td><td>53.87</td><td>74.00</td><td>-20.13</td><td>45.61</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>100</td><td>270</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5147.18	53.87	74.00	-20.13	45.61	33.09	12.80	37.63	0.00	100	270	Peak	Level (dBuV/m) Date: 2025-12-16 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>113.81</td><td>-----</td><td>-----</td><td>105.53</td><td>33.05</td><td>12.90</td><td>37.67</td><td>0.00</td><td>100</td><td>270</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5220.00	113.81	-----	-----	105.53	33.05	12.90	37.67	0.00	100	270	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5147.18	53.87	74.00	-20.13	45.61	33.09	12.80	37.63	0.00	100	270	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5220.00	113.81	-----	-----	105.53	33.05	12.90	37.67	0.00	100	270	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-12-16 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.60</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>36.03</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>270</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5149.60	44.29	54.00	-9.71	36.03	33.10	12.80	37.64	0.00	100	270	Average	Level (dBuV/m) Date: 2025-12-16 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>106.95</td><td>-----</td><td>-----</td><td>98.67</td><td>33.05</td><td>12.90</td><td>37.67</td><td>0.00</td><td>100</td><td>270</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5220.00	106.95	-----	-----	98.67	33.05	12.90	37.67	0.00	100	270	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5149.60	44.29	54.00	-9.71	36.03	33.10	12.80	37.64	0.00	100	270	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5220.00	106.95	-----	-----	98.67	33.05	12.90	37.67	0.00	100	270	Average																																																																																								





Mode	2	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	</	



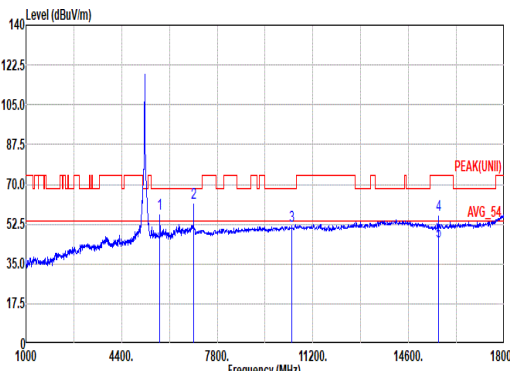
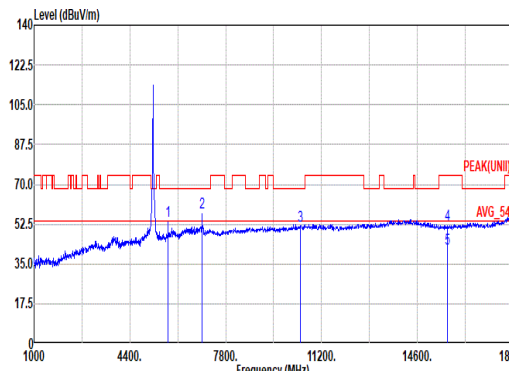


Mode	2																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																																																																	
ANT	6+7																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak Avg	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5760.00</td><td>57.13</td><td>68.20</td><td>-11.07</td><td>47.49</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>248 14 Peak</td></tr><tr><td>2 6960.00</td><td>61.75</td><td>68.20</td><td>-6.45</td><td>48.00</td><td>35.90</td><td>14.95</td><td>37.90</td><td>0.00</td><td>230 18 Peak</td></tr><tr><td>3 10440.00</td><td>51.66</td><td>68.20</td><td>-16.54</td><td>35.02</td><td>38.68</td><td>18.47</td><td>41.33</td><td>0.82</td><td>-- -- Peak</td></tr><tr><td>4 15660.00</td><td>56.41</td><td>74.00</td><td>-17.59</td><td>39.60</td><td>38.12</td><td>22.76</td><td>44.53</td><td>0.46</td><td>205 50 Peak</td></tr><tr><td>5 15660.00</td><td>45.14</td><td>54.00</td><td>-8.86</td><td>28.33</td><td>38.12</td><td>22.76</td><td>44.53</td><td>0.46</td><td>205 50 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5760.00	57.13	68.20	-11.07	47.49	33.86	13.56	37.78	0.00	248 14 Peak	2 6960.00	61.75	68.20	-6.45	48.00	35.90	14.95	37.90	0.00	230 18 Peak	3 10440.00	51.66	68.20	-16.54	35.02	38.68	18.47	41.33	0.82	-- -- Peak	4 15660.00	56.41	74.00	-17.59	39.60	38.12	22.76	44.53	0.46	205 50 Peak	5 15660.00	45.14	54.00	-8.86	28.33	38.12	22.76	44.53	0.46	205 50 Average	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5760.00</td><td>53.85</td><td>68.20</td><td>-14.35</td><td>44.21</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>100 301 Peak</td></tr><tr><td>2 6960.00</td><td>57.39</td><td>68.20</td><td>-10.81</td><td>44.44</td><td>35.90</td><td>14.95</td><td>37.90</td><td>0.00</td><td>241 47 Peak</td></tr><tr><td>3 10440.00</td><td>51.58</td><td>68.20</td><td>-16.62</td><td>34.94</td><td>38.68</td><td>18.47</td><td>41.33</td><td>0.82</td><td>-- -- Peak</td></tr><tr><td>4 15660.00</td><td>52.20</td><td>74.00</td><td>-21.80</td><td>35.39</td><td>38.12</td><td>22.76</td><td>44.53</td><td>0.46</td><td>298 22 Peak</td></tr><tr><td>5 15660.00</td><td>41.61</td><td>54.00</td><td>-12.39</td><td>24.80</td><td>38.12</td><td>22.76</td><td>44.53</td><td>0.46</td><td>298 22 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5760.00	53.85	68.20	-14.35	44.21	33.86	13.56	37.78	0.00	100 301 Peak	2 6960.00	57.39	68.20	-10.81	44.44	35.90	14.95	37.90	0.00	241 47 Peak	3 10440.00	51.58	68.20	-16.62	34.94	38.68	18.47	41.33	0.82	-- -- Peak	4 15660.00	52.20	74.00	-21.80	35.39	38.12	22.76	44.53	0.46	298 22 Peak	5 15660.00	41.61	54.00	-12.39	24.80	38.12	22.76	44.53	0.46	298 22 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																									
1 5760.00	57.13	68.20	-11.07	47.49	33.86	13.56	37.78	0.00	248 14 Peak																																																																																																																																																									
2 6960.00	61.75	68.20	-6.45	48.00	35.90	14.95	37.90	0.00	230 18 Peak																																																																																																																																																									
3 10440.00	51.66	68.20	-16.54	35.02	38.68	18.47	41.33	0.82	-- -- Peak																																																																																																																																																									
4 15660.00	56.41	74.00	-17.59	39.60	38.12	22.76	44.53	0.46	205 50 Peak																																																																																																																																																									
5 15660.00	45.14	54.00	-8.86	28.33	38.12	22.76	44.53	0.46	205 50 Average																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																									
1 5760.00	53.85	68.20	-14.35	44.21	33.86	13.56	37.78	0.00	100 301 Peak																																																																																																																																																									
2 6960.00	57.39	68.20	-10.81	44.44	35.90	14.95	37.90	0.00	241 47 Peak																																																																																																																																																									
3 10440.00	51.58	68.20	-16.62	34.94	38.68	18.47	41.33	0.82	-- -- Peak																																																																																																																																																									
4 15660.00	52.20	74.00	-21.80	35.39	38.12	22.76	44.53	0.46	298 22 Peak																																																																																																																																																									
5 15660.00	41.61	54.00	-12.39	24.80	38.12	22.76	44.53	0.46	298 22 Average																																																																																																																																																									

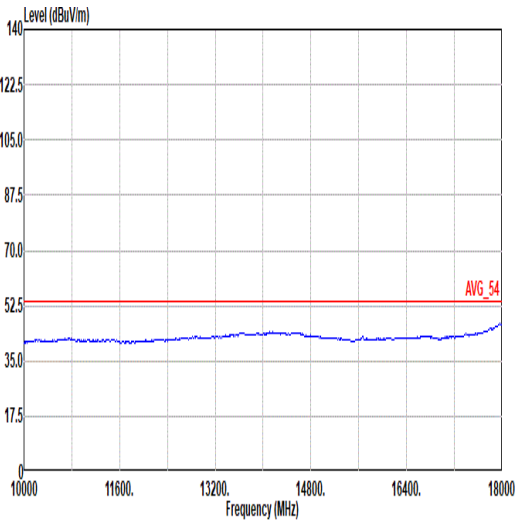
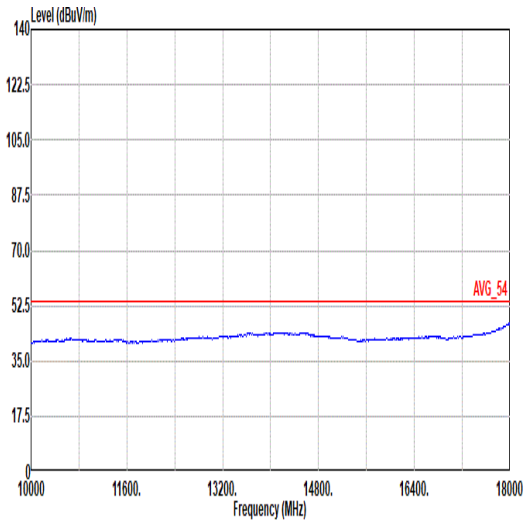


Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 VERTICAL

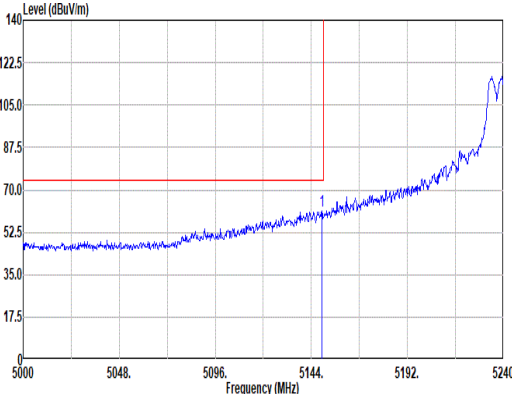
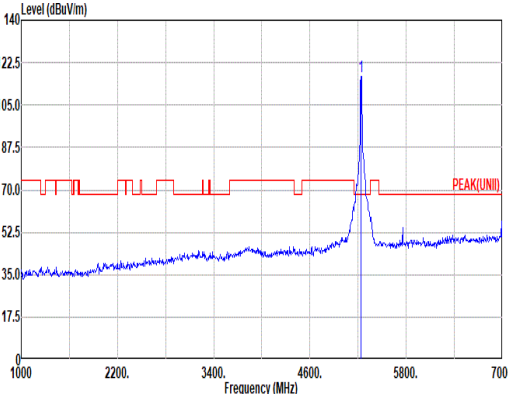
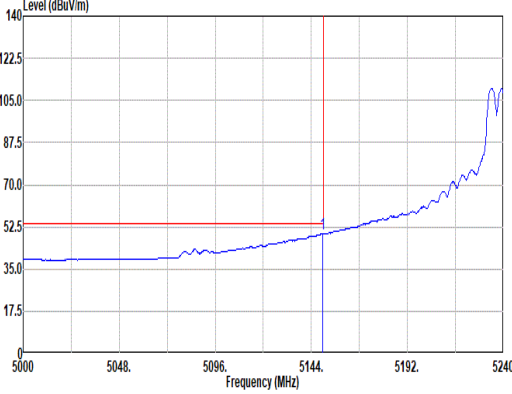
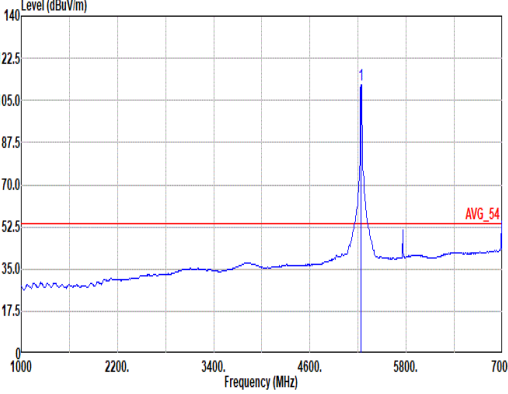


Mode	3																																																																																																
	Band Edge - L																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																
ANT	6+7																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.28</td><td>61.23</td><td>74.00</td><td>-12.77</td><td>52.97</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>200</td><td>8 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.28	61.23	74.00	-12.77	52.97	33.10	12.80	37.64	0.00	200	8 Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>116.72</td><td>-----</td><td>-----</td><td>108.45</td><td>33.03</td><td>12.91</td><td>37.67</td><td>0.00</td><td>200</td><td>8 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	116.72	-----	-----	108.45	33.03	12.91	37.67	0.00	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5149.28	61.23	74.00	-12.77	52.97	33.10	12.80	37.64	0.00	200	8 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5240.00	116.72	-----	-----	108.45	33.03	12.91	37.67	0.00	200	8 Peak																																																																																						
Avg																																																																																																	
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.52</td><td>49.64</td><td>54.00</td><td>-4.36</td><td>41.38</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>200</td><td>8 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.52	49.64	54.00	-4.36	41.38	33.10	12.80	37.64	0.00	200	8 Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>111.30</td><td>-----</td><td>-----</td><td>103.04</td><td>33.02</td><td>12.92</td><td>37.68</td><td>0.00</td><td>200</td><td>8 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	111.30	-----	-----	103.04	33.02	12.92	37.68	0.00	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5149.52	49.64	54.00	-4.36	41.38	33.10	12.80	37.64	0.00	200	8 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5240.00	111.30	-----	-----	103.04	33.02	12.92	37.68	0.00	200	8 Average																																																																																						

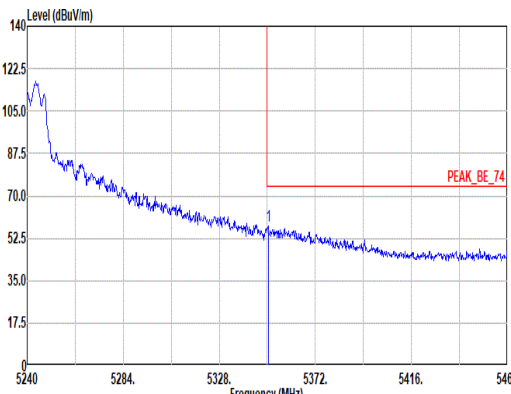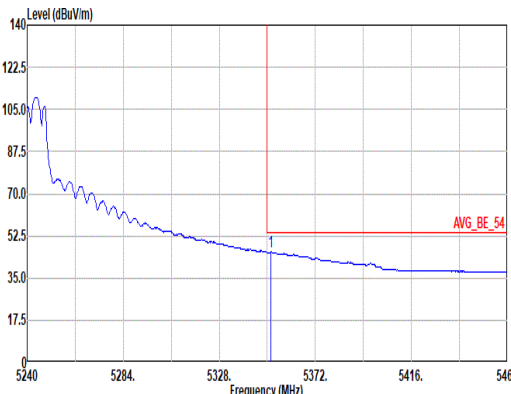

Mode	3																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																		
ANT	6+7																																																		
Pol.	Horizontal						Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.44</td><td>57.43</td><td>74.00</td><td>-16.57</td><td>49.19</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>200</td><td>8</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5350.44	57.43	74.00	-16.57	49.19	32.90	13.06	37.72	0.00	200	8	Peak	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5350.44	57.43	74.00	-16.57	49.19	32.90	13.06	37.72	0.00	200	8	Peak																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5351.76</td><td>45.76</td><td>54.00</td><td>-8.24</td><td>37.52</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>200</td><td>8</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5351.76	45.76	54.00	-8.24	37.52	32.90	13.06	37.72	0.00	200	8	Average	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5351.76	45.76	54.00	-8.24	37.52	32.90	13.06	37.72	0.00	200	8	Average																																							

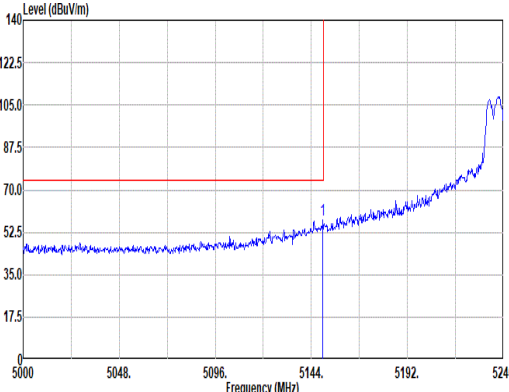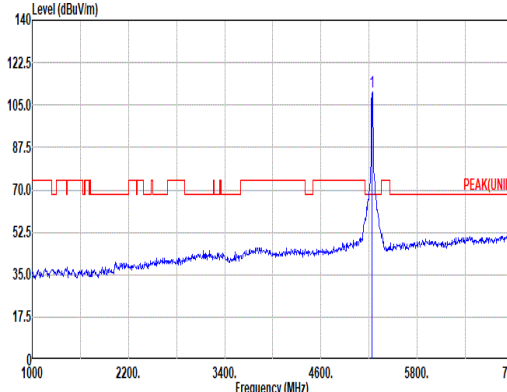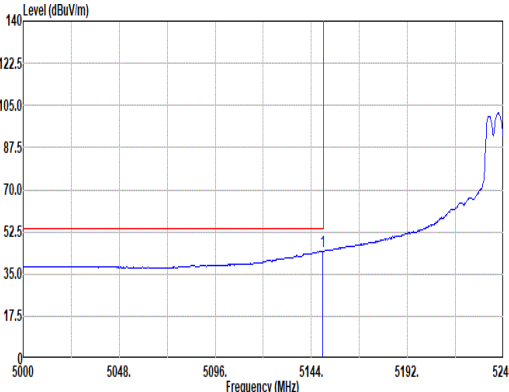
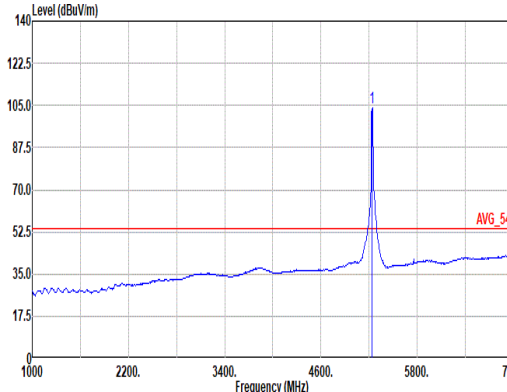


	3																																																																																											
Mode	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																											
ANT	6+7																																																																																											
Pol.	Vertical					Fundamental																																																																																						
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>57.33</td><td>74.00</td><td>-16.67</td><td>49.07</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00 400 88 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	57.33	74.00	-16.67	49.07	33.10	12.80	37.64	0.00 400 88 Peak	 Site : 03CH20-HY Condition: PEAK(UNI) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>110.56</td><td>-----</td><td>-----</td><td>102.30</td><td>33.02</td><td>12.92</td><td>37.68</td><td>0.00 400 88 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5240.00	110.56	-----	-----	102.30	33.02	12.92	37.68	0.00 400 88 Peak	
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5149.76	57.33	74.00	-16.67	49.07	33.10	12.80	37.64	0.00 400 88 Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5240.00	110.56	-----	-----	102.30	33.02	12.92	37.68	0.00 400 88 Peak																																																																																			
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>44.57</td><td>54.00</td><td>-9.43</td><td>36.31</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00 400 88 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.76	44.57	54.00	-9.43	36.31	33.10	12.80	37.64	0.00 400 88 Average	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>103.92</td><td>-----</td><td>-----</td><td>95.66</td><td>33.02</td><td>12.92</td><td>37.68</td><td>0.00 400 88 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5240.00	103.92	-----	-----	95.66	33.02	12.92	37.68	0.00 400 88 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5149.76	44.57	54.00	-9.43	36.31	33.10	12.80	37.64	0.00 400 88 Average																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5240.00	103.92	-----	-----	95.66	33.02	12.92	37.68	0.00 400 88 Average																																																																																			





Mode	3																																																				
	Band Edge - R																																																				
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																				
ANT	6+7																																																				
Pol.	Vertical						Fundamental																																														
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5359.90</td><td>50.68</td><td>74.00</td><td>-23.32</td><td>42.46</td><td>32.88</td><td>13.07</td><td>37.73</td><td>0.00</td><td>400</td><td>88</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5359.90	50.68	74.00	-23.32	42.46	32.88	13.07	37.73	0.00	400	88	Peak	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																									
1	5359.90	50.68	74.00	-23.32	42.46	32.88	13.07	37.73	0.00	400	88	Peak																																									
Avg	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5351.54</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>31.21</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>400</td><td>88</td><td>Average</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5351.54	39.45	54.00	-14.55	31.21	32.90	13.06	37.72	0.00	400	88	Average	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																									
1	5351.54	39.45	54.00	-14.55	31.21	32.90	13.06	37.72	0.00	400	88	Average																																									



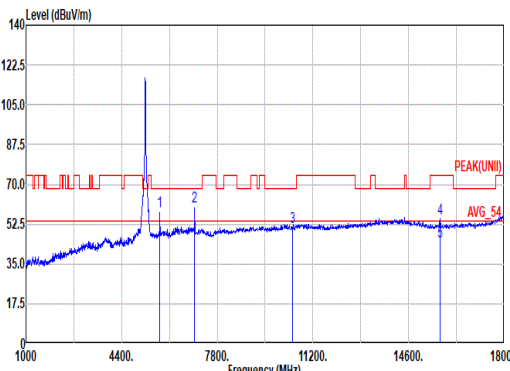
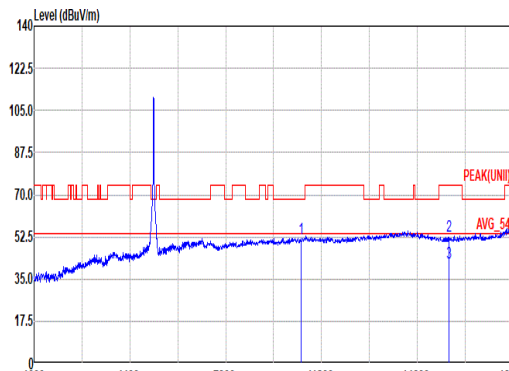


Mode	3																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																																																																	
ANT	6+7																																																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																																																											
Peak Avg																																																																																																																																																																																		
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.00</td><td>58.02</td><td>68.20</td><td>-10.18</td><td>48.38</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>235</td><td>14</td><td>Peak</td></tr><tr><td>2</td><td>6987.00</td><td>60.30</td><td>68.20</td><td>-7.90</td><td>47.33</td><td>35.90</td><td>14.98</td><td>37.91</td><td>0.00</td><td>233</td><td>339</td><td>Peak</td></tr><tr><td>3</td><td>10480.00</td><td>51.44</td><td>68.20</td><td>-16.76</td><td>34.78</td><td>38.70</td><td>18.51</td><td>41.36</td><td>0.81</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>15720.00</td><td>55.06</td><td>74.00</td><td>-18.94</td><td>38.02</td><td>38.24</td><td>22.81</td><td>44.46</td><td>0.45</td><td>205</td><td>59</td><td>Peak</td></tr><tr><td>5</td><td>15720.00</td><td>44.87</td><td>54.00</td><td>-9.13</td><td>27.83</td><td>38.24</td><td>22.81</td><td>44.46</td><td>0.45</td><td>205</td><td>59</td><td>Average</td></tr></table> Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>52.02</td><td>68.20</td><td>-16.18</td><td>35.36</td><td>38.70</td><td>18.51</td><td>41.36</td><td>0.81</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>52.90</td><td>74.00</td><td>-21.10</td><td>35.86</td><td>38.24</td><td>22.81</td><td>44.46</td><td>0.45</td><td>332</td><td>360</td><td>Peak</td></tr><tr><td>3</td><td>15720.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>24.77</td><td>38.24</td><td>22.81</td><td>44.46</td><td>0.45</td><td>332</td><td>360</td><td>Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	58.02	68.20	-10.18	48.38	33.86	13.56	37.78	0.00	235	14	Peak	2	6987.00	60.30	68.20	-7.90	47.33	35.90	14.98	37.91	0.00	233	339	Peak	3	10480.00	51.44	68.20	-16.76	34.78	38.70	18.51	41.36	0.81	--	--	Peak	4	15720.00	55.06	74.00	-18.94	38.02	38.24	22.81	44.46	0.45	205	59	Peak	5	15720.00	44.87	54.00	-9.13	27.83	38.24	22.81	44.46	0.45	205	59	Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10480.00	52.02	68.20	-16.18	35.36	38.70	18.51	41.36	0.81	--	--	Peak	2	15720.00	52.90	74.00	-21.10	35.86	38.24	22.81	44.46	0.45	332	360	Peak	3	15720.00	41.81	54.00	-12.19	24.77	38.24	22.81	44.46	0.45	332	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																								
1	5760.00	58.02	68.20	-10.18	48.38	33.86	13.56	37.78	0.00	235	14	Peak																																																																																																																																																																						
2	6987.00	60.30	68.20	-7.90	47.33	35.90	14.98	37.91	0.00	233	339	Peak																																																																																																																																																																						
3	10480.00	51.44	68.20	-16.76	34.78	38.70	18.51	41.36	0.81	--	--	Peak																																																																																																																																																																						
4	15720.00	55.06	74.00	-18.94	38.02	38.24	22.81	44.46	0.45	205	59	Peak																																																																																																																																																																						
5	15720.00	44.87	54.00	-9.13	27.83	38.24	22.81	44.46	0.45	205	59	Average																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	10480.00	52.02	68.20	-16.18	35.36	38.70	18.51	41.36	0.81	--	--	Peak																																																																																																																																																																						
2	15720.00	52.90	74.00	-21.10	35.86	38.24	22.81	44.46	0.45	332	360	Peak																																																																																																																																																																						
3	15720.00	41.81	54.00	-12.19	24.77	38.24	22.81	44.46	0.45	332	360	Average																																																																																																																																																																						



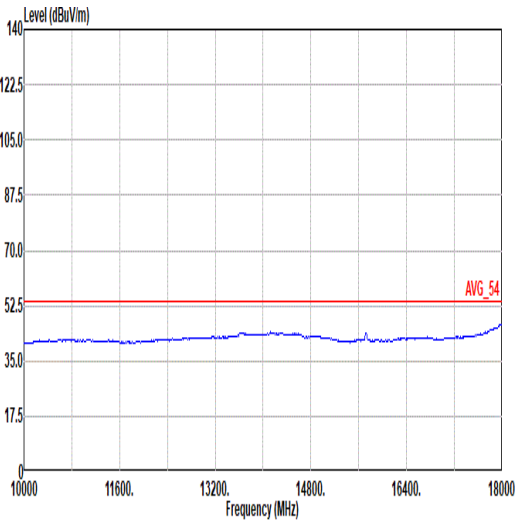
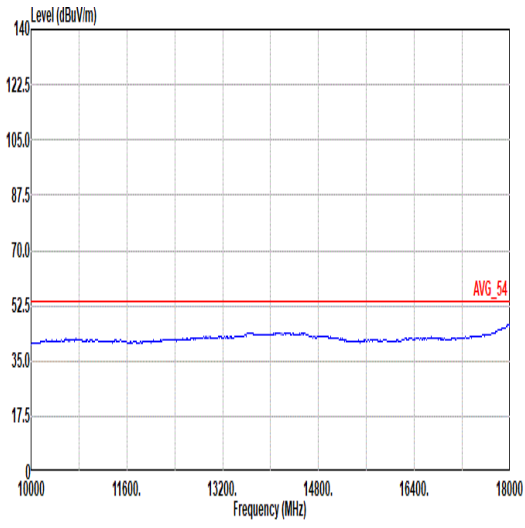


Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 VERTICAL

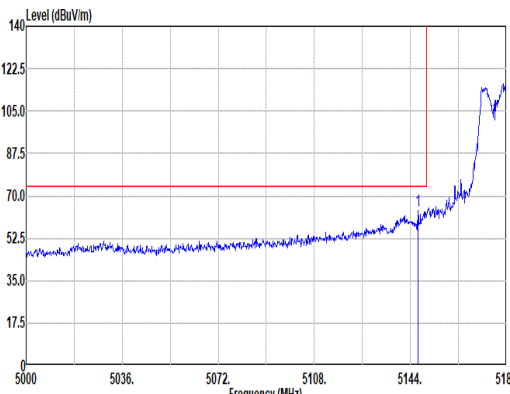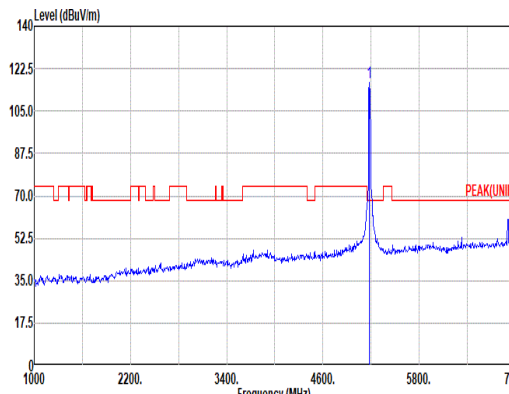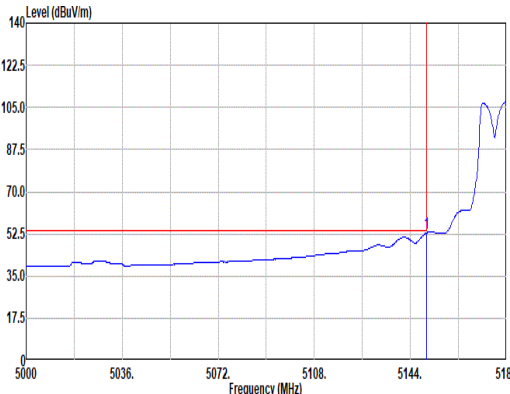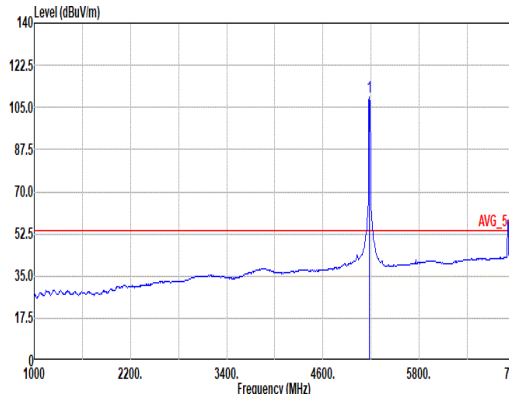

Mode	4																																																																																																	
	Band Edge																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																	
ANT	6+7																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.88</td><td>63.86</td><td>74.00</td><td>-10.14</td><td>55.60</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>109</td><td>6 Peak</td></tr></table>  Site : 03CH20-HY Condition: PEAK(UNI) 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>116.54</td><td>-----</td><td>-----</td><td>108.24</td><td>33.10</td><td>12.85</td><td>37.65</td><td>0.00</td><td>109</td><td>6 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.88	63.86	74.00	-10.14	55.60	33.09	12.80	37.63	0.00	109	6 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	116.54	-----	-----	108.24	33.10	12.85	37.65	0.00	109	6 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5146.88	63.86	74.00	-10.14	55.60	33.09	12.80	37.63	0.00	109	6 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	116.54	-----	-----	108.24	33.10	12.85	37.65	0.00	109	6 Peak																																																																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>52.82</td><td>54.00</td><td>-1.18</td><td>44.56</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>109</td><td>6 Average</td></tr></table>  Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>109.61</td><td>-----</td><td>-----</td><td>101.31</td><td>33.10</td><td>12.85</td><td>37.65</td><td>0.00</td><td>109</td><td>6 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.94	52.82	54.00	-1.18	44.56	33.10	12.80	37.64	0.00	109	6 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	109.61	-----	-----	101.31	33.10	12.85	37.65	0.00	109	6 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5149.94	52.82	54.00	-1.18	44.56	33.10	12.80	37.64	0.00	109	6 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	109.61	-----	-----	101.31	33.10	12.85	37.65	0.00	109	6 Average																																																																																							

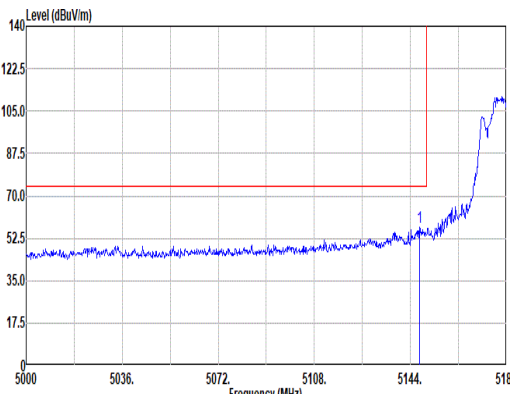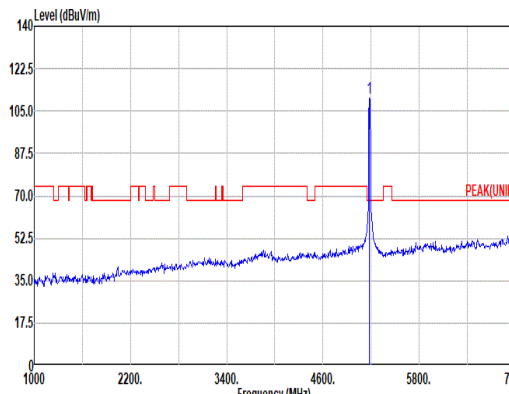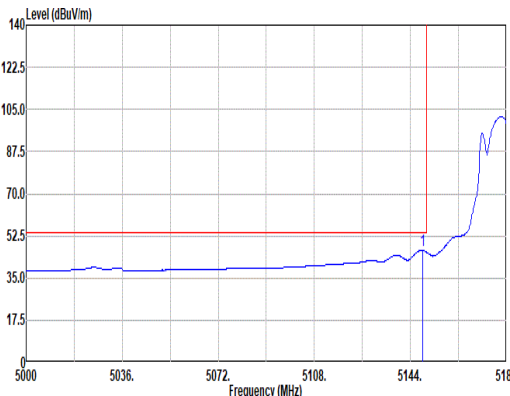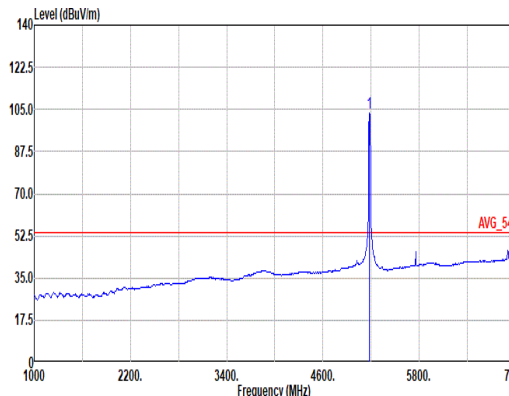

Mode	4																																																																																																			
	Band Edge																																																																																																			
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																			
ANT	6+7																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.42</td><td>56.89</td><td>74.00</td><td>-17.11</td><td>48.63</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>100</td><td>89 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.42	56.89	74.00	-17.11	48.63	33.09	12.80	37.63	0.00	100	89 Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>110.24</td><td>-----</td><td>-----</td><td>101.95</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>100</td><td>89 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	110.24	-----	-----	101.95	33.10	12.84	37.65	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5147.42	56.89	74.00	-17.11	48.63	33.09	12.80	37.63	0.00	100	89 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	110.24	-----	-----	101.95	33.10	12.84	37.65	0.00	100	89 Peak																																																																																									
Avg																																																																																																				
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.50</td><td>46.48</td><td>54.00</td><td>-7.52</td><td>38.23</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>89 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.50	46.48	54.00	-7.52	38.23	33.09	12.80	37.64	0.00	100	89 Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>103.78</td><td>-----</td><td>-----</td><td>95.49</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>100</td><td>89 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	103.78	-----	-----	95.49	33.10	12.84	37.65	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5148.50	46.48	54.00	-7.52	38.23	33.09	12.80	37.64	0.00	100	89 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	103.78	-----	-----	95.49	33.10	12.84	37.65	0.00	100	89 Average																																																																																									



Mode	4																																																																																																																																																																																																
	Harmonic																																																																																																																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																																																																																																																
ANT	6+7																																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																																										
Peak Avg	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.00</td><td>55.98</td><td>68.20</td><td>-12.22</td><td>46.34</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>250</td><td>20 Peak</td></tr><tr><td>2</td><td>6907.00</td><td>62.08</td><td>68.20</td><td>-6.12</td><td>49.17</td><td>35.90</td><td>14.89</td><td>37.88</td><td>0.00</td><td>225</td><td>22 Peak</td></tr><tr><td>3</td><td>10360.00</td><td>50.84</td><td>68.20</td><td>-17.36</td><td>34.45</td><td>38.76</td><td>18.40</td><td>41.27</td><td>0.50</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15540.00</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>38.96</td><td>38.38</td><td>22.79</td><td>44.67</td><td>0.42</td><td>189</td><td>356 Peak</td></tr><tr><td>5</td><td>15540.00</td><td>45.31</td><td>54.00</td><td>-8.69</td><td>28.39</td><td>38.38</td><td>22.79</td><td>44.67</td><td>0.42</td><td>189</td><td>356 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	55.98	68.20	-12.22	46.34	33.86	13.56	37.78	0.00	250	20 Peak	2	6907.00	62.08	68.20	-6.12	49.17	35.90	14.89	37.88	0.00	225	22 Peak	3	10360.00	50.84	68.20	-17.36	34.45	38.76	18.40	41.27	0.50	--	-- Peak	4	15540.00	55.88	74.00	-18.12	38.96	38.38	22.79	44.67	0.42	189	356 Peak	5	15540.00	45.31	54.00	-8.69	28.39	38.38	22.79	44.67	0.42	189	356 Average	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.00</td><td>51.52</td><td>68.20</td><td>-16.68</td><td>41.88</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>100</td><td>304 Peak</td></tr><tr><td>2</td><td>6907.00</td><td>57.78</td><td>68.20</td><td>-10.42</td><td>44.87</td><td>35.90</td><td>14.89</td><td>37.88</td><td>0.00</td><td>250</td><td>47 Peak</td></tr><tr><td>3</td><td>10360.00</td><td>50.73</td><td>68.20</td><td>-17.47</td><td>34.34</td><td>38.76</td><td>18.40</td><td>41.27</td><td>0.50</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15540.00</td><td>54.09</td><td>74.00</td><td>-19.91</td><td>37.17</td><td>38.38</td><td>22.79</td><td>44.67</td><td>0.42</td><td>193</td><td>11 Peak</td></tr><tr><td>5</td><td>15540.00</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>25.95</td><td>38.38</td><td>22.79</td><td>44.67</td><td>0.42</td><td>193</td><td>11 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	51.52	68.20	-16.68	41.88	33.86	13.56	37.78	0.00	100	304 Peak	2	6907.00	57.78	68.20	-10.42	44.87	35.90	14.89	37.88	0.00	250	47 Peak	3	10360.00	50.73	68.20	-17.47	34.34	38.76	18.40	41.27	0.50	--	-- Peak	4	15540.00	54.09	74.00	-19.91	37.17	38.38	22.79	44.67	0.42	193	11 Peak	5	15540.00	42.87	54.00	-11.13	25.95	38.38	22.79	44.67	0.42	193	11 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	5760.00	55.98	68.20	-12.22	46.34	33.86	13.56	37.78	0.00	250	20 Peak																																																																																																																																																																																						
2	6907.00	62.08	68.20	-6.12	49.17	35.90	14.89	37.88	0.00	225	22 Peak																																																																																																																																																																																						
3	10360.00	50.84	68.20	-17.36	34.45	38.76	18.40	41.27	0.50	--	-- Peak																																																																																																																																																																																						
4	15540.00	55.88	74.00	-18.12	38.96	38.38	22.79	44.67	0.42	189	356 Peak																																																																																																																																																																																						
5	15540.00	45.31	54.00	-8.69	28.39	38.38	22.79	44.67	0.42	189	356 Average																																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	5760.00	51.52	68.20	-16.68	41.88	33.86	13.56	37.78	0.00	100	304 Peak																																																																																																																																																																																						
2	6907.00	57.78	68.20	-10.42	44.87	35.90	14.89	37.88	0.00	250	47 Peak																																																																																																																																																																																						
3	10360.00	50.73	68.20	-17.47	34.34	38.76	18.40	41.27	0.50	--	-- Peak																																																																																																																																																																																						
4	15540.00	54.09	74.00	-19.91	37.17	38.38	22.79	44.67	0.42	193	11 Peak																																																																																																																																																																																						
5	15540.00	42.87	54.00	-11.13	25.95	38.38	22.79	44.67	0.42	193	11 Average																																																																																																																																																																																						



Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2026-01-22 Frequency (MHz) Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL	Level (dBuV/m) Date: 2026-01-22 Frequency (MHz) Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL



		5									
Mode	Band Edge										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_106/53RU_5180MHz										
ANT	6+7										
Pol.	Horizontal										
Peak	Fundamental										
	Fundamental										
Peak	Horizontal										
	Fundamental										
Avg	Horizontal										
	Fundamental										

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

5000

5036

5072

5108

5144

5180

Frequency (MHz)

Site : 03CH20-HY

Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL

: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	5146.88	69.68	74.00	-4.32	61.42	33.09	12.80	37.63	0.00	111	12 Peak

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

2200

3400

4600

5800

7000

Frequency (MHz)

Site : 03CH20-HY

Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL

: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	5180.00	114.39	-----	-----	106.10	33.10	12.83	37.64	0.00	111	12 Peak

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

5000

5036

5072

5108

5144

5180

Frequency (MHz)

Site : 03CH20-HY

Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL

: RBW:1000.000kHz VBW:0.010kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	5149.94	48.88	54.00	-5.12	40.62	33.10	12.80	37.64	0.00	111	12 Average

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

2200

3400

4600

5800

7000

Frequency (MHz)

Site : 03CH20-HY

Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL





: RBW:1000.000kHz VBW:0.010kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	5180.00	109.38	-----	-----	101.09	33.10	12.83	37.64	0.00	111	12 Average





Mode	5																																																	
	Band Edge																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_106/53RU_5180MHz																																																	
ANT	6+7																																																	
Pol.	Vertical																																																	
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5147.96</td><td>62.67</td><td>74.00</td><td>-11.33</td><td>54.42</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>104</td><td>91</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5147.96	62.67	74.00	-11.33	54.42	33.09	12.80	37.64	0.00	104	91	Peak
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5147.96	62.67	74.00	-11.33	54.42	33.09	12.80	37.64	0.00	104	91	Peak																																						
Fundamental	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>112.73</td><td>-----</td><td>-----</td><td>104.44</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>104</td><td>91</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	112.73	-----	-----	104.44	33.10	12.84	37.65	0.00	104	91	Peak
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5180.00	112.73	-----	-----	104.44	33.10	12.84	37.65	0.00	104	91	Peak																																						
Avg	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.04</td><td>46.02</td><td>54.00</td><td>-7.98</td><td>37.76</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>104</td><td>91</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.04	46.02	54.00	-7.98	37.76	33.10	12.80	37.64	0.00	104	91	Average
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5149.04	46.02	54.00	-7.98	37.76	33.10	12.80	37.64	0.00	104	91	Average																																						
AVG_54	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>105.39</td><td>-----</td><td>-----</td><td>97.10</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>104</td><td>91</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	105.39	-----	-----	97.10	33.10	12.84	37.65	0.00	104	91	Average
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5180.00	105.39	-----	-----	97.10	33.10	12.84	37.65	0.00	104	91	Average																																						

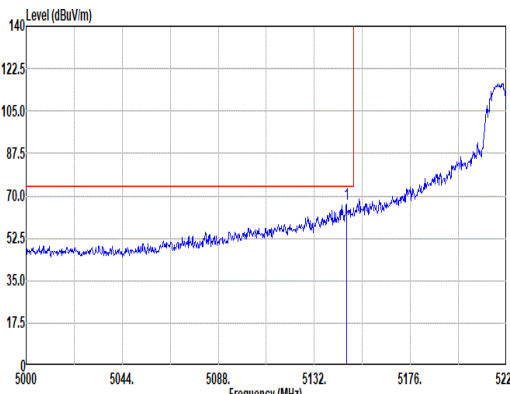
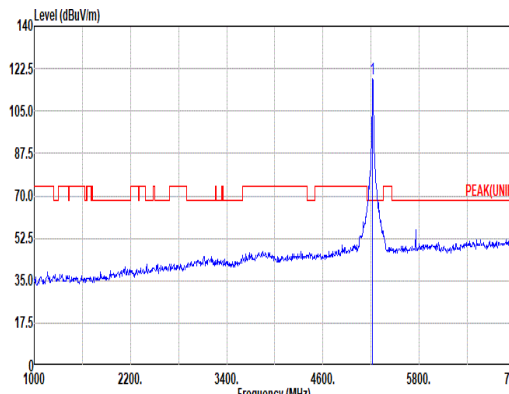
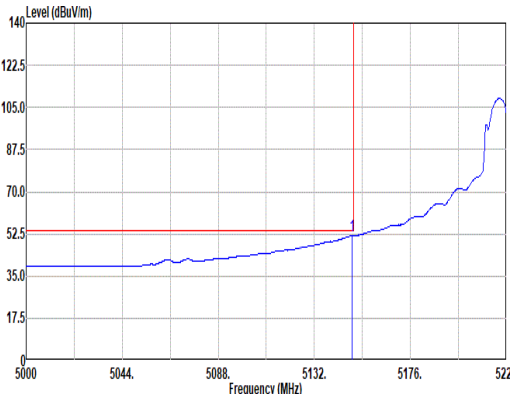
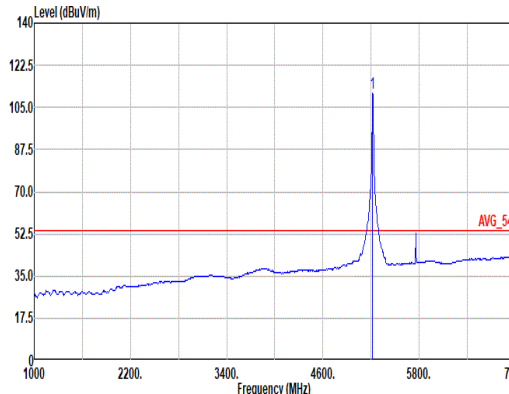


Mode	6																																																																																																
	Band Edge - L																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																
ANT	6+7																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.74</td><td>66.31</td><td>74.00</td><td>-7.69</td><td>58.05</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>266</td><td>5 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.74	66.31	74.00	-7.69	58.05	33.09	12.80	37.63	0.00	266	5 Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>118.14</td><td>-----</td><td>-----</td><td>109.86</td><td>33.06</td><td>12.89</td><td>37.67</td><td>0.00</td><td>266</td><td>5 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	118.14	-----	-----	109.86	33.06	12.89	37.67	0.00	266
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5146.74	66.31	74.00	-7.69	58.05	33.09	12.80	37.63	0.00	266	5 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5220.00	118.14	-----	-----	109.86	33.06	12.89	37.67	0.00	266	5 Peak																																																																																						
Avg																																																																																																	
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.38</td><td>51.78</td><td>54.00</td><td>-2.22</td><td>43.52</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>266</td><td>5 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.38	51.78	54.00	-2.22	43.52	33.10	12.80	37.64	0.00	266	5 Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>110.79</td><td>-----</td><td>-----</td><td>102.51</td><td>33.06</td><td>12.89</td><td>37.67</td><td>0.00</td><td>266</td><td>5 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	110.79	-----	-----	102.51	33.06	12.89	37.67	0.00	266
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5149.38	51.78	54.00	-2.22	43.52	33.10	12.80	37.64	0.00	266	5 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5220.00	110.79	-----	-----	102.51	33.06	12.89	37.67	0.00	266	5 Average																																																																																						

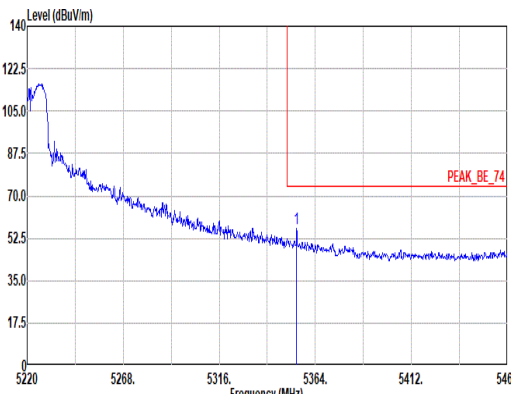
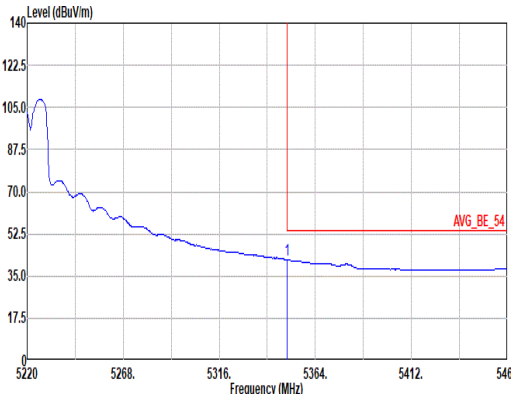


Mode	6																																											
	Band Edge - R																																											
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																											
ANT	6+7																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5354.64</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>48.06</td><td>32.89</td><td>13.06</td><td>37.73</td><td>0.00</td><td>266</td><td></td><td>5</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5354.64	56.28	74.00	-17.72	48.06	32.89	13.06	37.73	0.00	266		5	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	5354.64	56.28	74.00	-17.72	48.06	32.89	13.06	37.73	0.00	266		5	Peak																															
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.08</td><td>41.67</td><td>54.00</td><td>-12.33</td><td>33.43</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>266</td><td></td><td>5</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5350.08	41.67	54.00	-12.33	33.43	32.90	13.06	37.72	0.00	266		5	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	5350.08	41.67	54.00	-12.33	33.43	32.90	13.06	37.72	0.00	266		5	Average																															

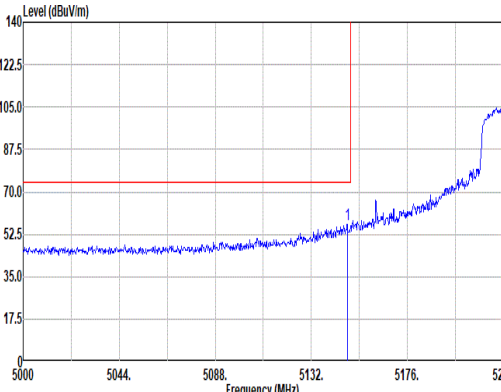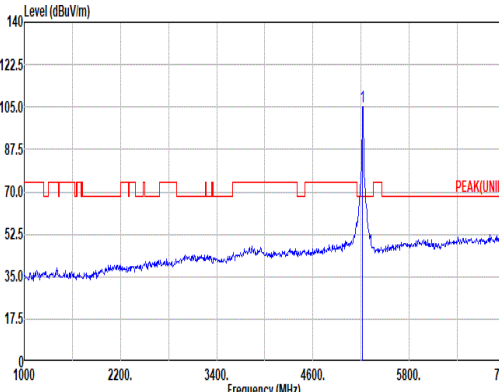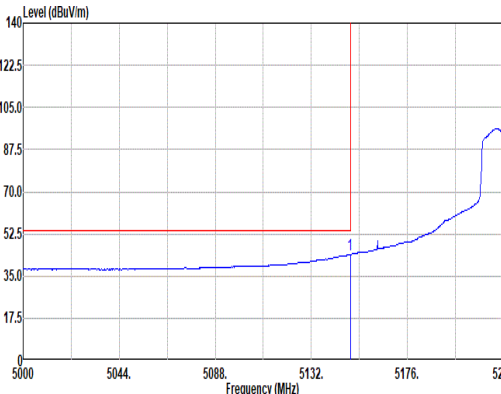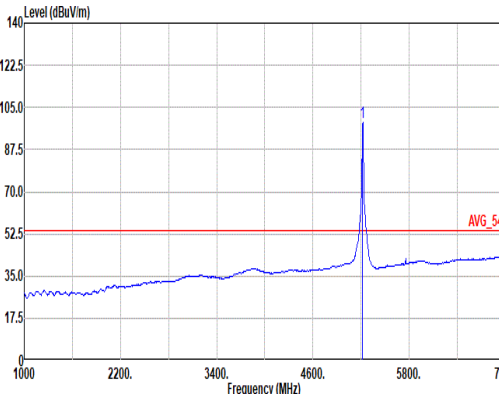

Mode	6																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																		
ANT	6+7																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.50</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>48.27</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>400</td><td>100</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.50	56.52	74.00	-17.48	48.27	33.09	12.80	37.64	0.00	400	100	Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>104.97</td><td>-----</td><td>-----</td><td>96.69</td><td>33.06</td><td>12.89</td><td>37.67</td><td>0.00</td><td>400</td><td>100</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	104.97	-----	-----	96.69	33.06	12.89	37.67	0.00	400	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.50	56.52	74.00	-17.48	48.27	33.09	12.80	37.64	0.00	400	100	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	104.97	-----	-----	96.69	33.06	12.89	37.67	0.00	400	100	Peak																																																																																							
Avg																																																																																																			
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.82</td><td>43.88</td><td>54.00</td><td>-10.12</td><td>35.62</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>400</td><td>100</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.82	43.88	54.00	-10.12	35.62	33.10	12.80	37.64	0.00	400	100	Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>98.59</td><td>-----</td><td>-----</td><td>90.31</td><td>33.05</td><td>12.90</td><td>37.67</td><td>0.00</td><td>400</td><td>100</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	98.59	-----	-----	90.31	33.05	12.90	37.67	0.00	400	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.82	43.88	54.00	-10.12	35.62	33.10	12.80	37.64	0.00	400	100	Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	98.59	-----	-----	90.31	33.05	12.90	37.67	0.00	400	100	Average																																																																																							

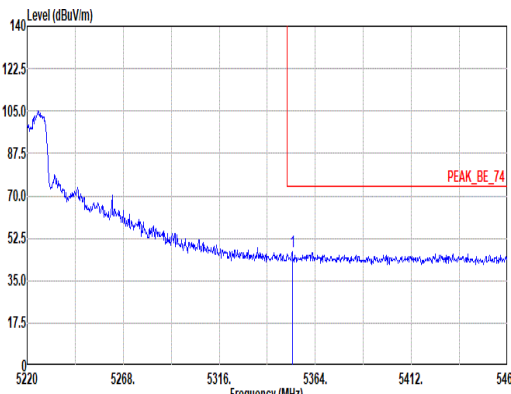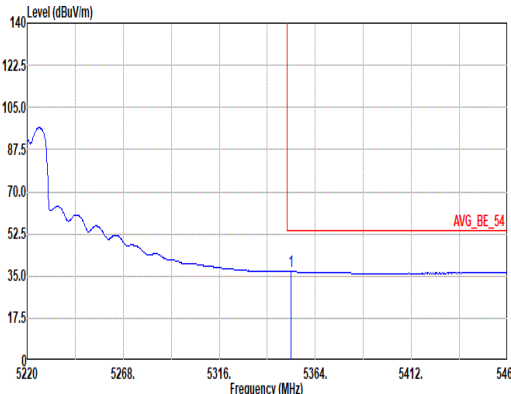

Mode	6																																											
	Band Edge - R																																											
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																											
ANT	6+7																																											
Pol.	Vertical	Fundamental																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5352.48</td><td>46.76</td><td>74.00</td><td>-27.24</td><td></td><td>38.53</td><td>32.90</td><td>13.06</td><td>37.73</td><td>0.00</td><td>400</td><td>100</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	5352.48	46.76	74.00	-27.24		38.53	32.90	13.06	37.73	0.00	400	100	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	5352.48	46.76	74.00	-27.24		38.53	32.90	13.06	37.73	0.00	400	100	Peak																															
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5351.76</td><td>36.77</td><td>54.00</td><td>-17.23</td><td></td><td>28.53</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>400</td><td>100</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	5351.76	36.77	54.00	-17.23		28.53	32.90	13.06	37.72	0.00	400	100	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	5351.76	36.77	54.00	-17.23		28.53	32.90	13.06	37.72	0.00	400	100	Average																															







Mode	6																																																																																																																																																					
	Harmonic																																																																																																																																																					
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																																																																					
ANT	6+7																																																																																																																																																					
Pol.	Horizontal					Vertical																																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5760.00</td><td>58.30</td><td>68.20</td><td>-9.90</td><td>48.66</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>250 21 Peak</td></tr><tr><td>2 6960.00</td><td>61.81</td><td>68.20</td><td>-6.39</td><td>48.86</td><td>35.90</td><td>14.95</td><td>37.90</td><td>0.00</td><td>150 14 Peak</td></tr><tr><td>3 10440.00</td><td>50.83</td><td>68.20</td><td>-17.37</td><td>34.51</td><td>38.68</td><td>18.47</td><td>41.33</td><td>0.50</td><td>-- -- Peak</td></tr><tr><td>4 15660.00</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>38.71</td><td>38.12</td><td>22.89</td><td>44.53</td><td>0.42</td><td>197 359 Peak</td></tr><tr><td>5 15660.00</td><td>45.08</td><td>54.00</td><td>-8.92</td><td>28.18</td><td>38.12</td><td>22.89</td><td>44.53</td><td>0.42</td><td>197 359 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5760.00	58.30	68.20	-9.90	48.66	33.86	13.56	37.78	0.00	250 21 Peak	2 6960.00	61.81	68.20	-6.39	48.86	35.90	14.95	37.90	0.00	150 14 Peak	3 10440.00	50.83	68.20	-17.37	34.51	38.68	18.47	41.33	0.50	-- -- Peak	4 15660.00	55.61	74.00	-18.39	38.71	38.12	22.89	44.53	0.42	197 359 Peak	5 15660.00	45.08	54.00	-8.92	28.18	38.12	22.89	44.53	0.42	197 359 Average	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 10440.00</td><td>51.10</td><td>68.20</td><td>-17.10</td><td>34.78</td><td>38.68</td><td>18.47</td><td>41.33</td><td>0.50</td><td>-- -- Peak</td></tr><tr><td>2 15660.00</td><td>52.74</td><td>74.00</td><td>-21.26</td><td>35.84</td><td>38.12</td><td>22.89</td><td>44.53</td><td>0.42</td><td>100 12 Peak</td></tr><tr><td>3 15660.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>25.78</td><td>38.12</td><td>22.89</td><td>44.53</td><td>0.42</td><td>100 12 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10440.00	51.10	68.20	-17.10	34.78	38.68	18.47	41.33	0.50	-- -- Peak	2 15660.00	52.74	74.00	-21.26	35.84	38.12	22.89	44.53	0.42	100 12 Peak	3 15660.00	42.68	54.00	-11.32	25.78	38.12	22.89	44.53	0.42	100 12 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																													
1 5760.00	58.30	68.20	-9.90	48.66	33.86	13.56	37.78	0.00	250 21 Peak																																																																																																																																													
2 6960.00	61.81	68.20	-6.39	48.86	35.90	14.95	37.90	0.00	150 14 Peak																																																																																																																																													
3 10440.00	50.83	68.20	-17.37	34.51	38.68	18.47	41.33	0.50	-- -- Peak																																																																																																																																													
4 15660.00	55.61	74.00	-18.39	38.71	38.12	22.89	44.53	0.42	197 359 Peak																																																																																																																																													
5 15660.00	45.08	54.00	-8.92	28.18	38.12	22.89	44.53	0.42	197 359 Average																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																													
1 10440.00	51.10	68.20	-17.10	34.78	38.68	18.47	41.33	0.50	-- -- Peak																																																																																																																																													
2 15660.00	52.74	74.00	-21.26	35.84	38.12	22.89	44.53	0.42	100 12 Peak																																																																																																																																													
3 15660.00	42.68	54.00	-11.32	25.78	38.12	22.89	44.53	0.42	100 12 Average																																																																																																																																													





Mode	6	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 HORIZONTAL	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 VERTICAL

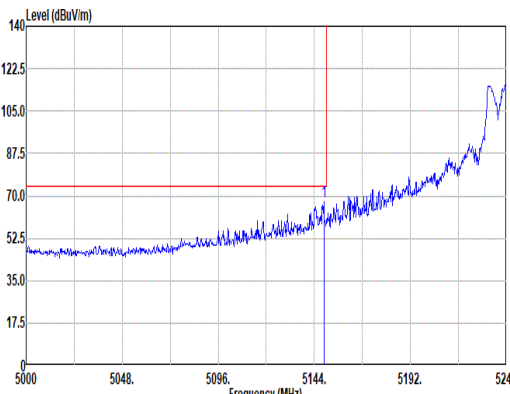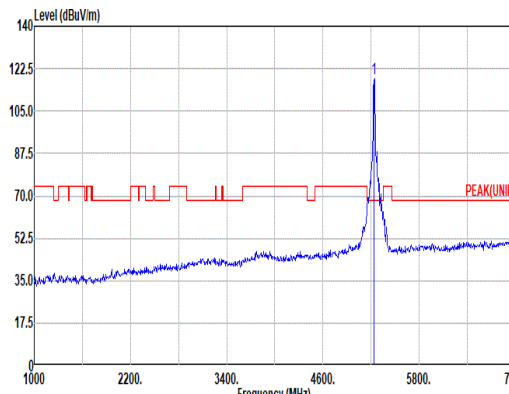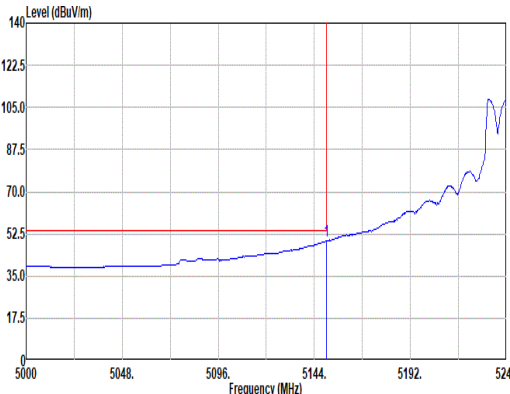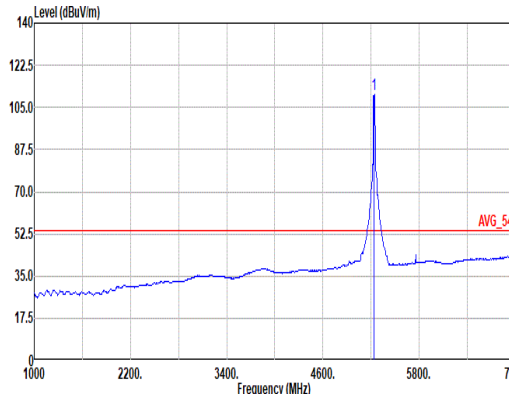

	7																																																																																																
Mode	Band Edge - L																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																
ANT	6+7																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.00</td><td>67.67</td><td>74.00</td><td>-6.33</td><td>59.41</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.00	67.67	74.00	-6.33	59.41	33.10	12.80	37.64	0.00	100	0 Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>118.56</td><td>-----</td><td>-----</td><td>110.30</td><td>33.02</td><td>12.92</td><td>37.68</td><td>0.00</td><td>100</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	118.56	-----	-----	110.30	33.02	12.92	37.68	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5148.00	67.67	74.00	-6.33	59.41	33.10	12.80	37.64	0.00	100	0 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5240.00	118.56	-----	-----	110.30	33.02	12.92	37.68	0.00	100	0 Peak																																																																																						
Avg																																																																																																	
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>49.60</td><td>54.00</td><td>-4.40</td><td>41.33</td><td>33.10</td><td>12.81</td><td>37.64</td><td>0.00</td><td>100</td><td>0 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	49.60	54.00	-4.40	41.33	33.10	12.81	37.64	0.00	100	0 Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>110.59</td><td>-----</td><td>-----</td><td>102.33</td><td>33.02</td><td>12.92</td><td>37.68</td><td>0.00</td><td>100</td><td>0 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	110.59	-----	-----	102.33	33.02	12.92	37.68	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5150.00	49.60	54.00	-4.40	41.33	33.10	12.81	37.64	0.00	100	0 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5240.00	110.59	-----	-----	102.33	33.02	12.92	37.68	0.00	100	0 Average																																																																																						

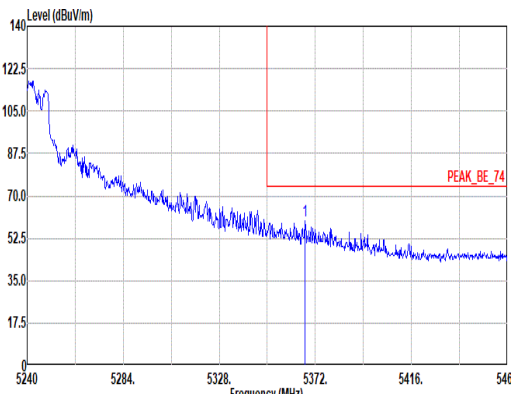
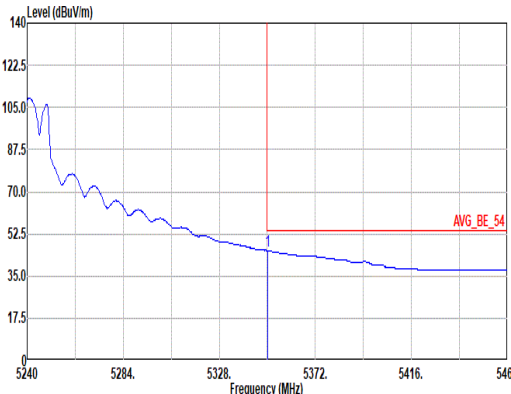


Mode	7																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																								
ANT	6+7																																								
Pol.	Horizontal	Fundamental																																							
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5367.16</td><td>59.79</td><td>74.00</td><td>-14.21</td><td>51.57</td><td>32.87</td><td>13.08</td><td>37.73</td><td>0.00</td><td>100</td><td>0</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5367.16	59.79	74.00	-14.21	51.57	32.87	13.08	37.73	0.00	100	0	Peak	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5367.16	59.79	74.00	-14.21	51.57	32.87	13.08	37.73	0.00	100	0	Peak																													
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.22</td><td>45.42</td><td>54.00</td><td>-8.58</td><td>37.18</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>100</td><td>0</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5350.22	45.42	54.00	-8.58	37.18	32.90	13.06	37.72	0.00	100	0	Average	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5350.22	45.42	54.00	-8.58	37.18	32.90	13.06	37.72	0.00	100	0	Average																													



Mode	7																																																					
	Band Edge - L																																																					
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																					
ANT	6+7																																																					
Pol.	Vertical																																																					
Peak	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.84</td><td>57.83</td><td>74.00</td><td>-16.17</td><td>49.58</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>0 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.84	57.83	74.00	-16.17	49.58	33.09	12.80	37.64	0.00	100	0 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5147.84	57.83	74.00	-16.17	49.58	33.09	12.80	37.64	0.00	100	0 Peak																																											
Fundamental	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>109.46</td><td>-----</td><td>-----</td><td>101.20</td><td>33.02</td><td>12.92</td><td>37.68</td><td>0.00</td><td>100</td><td>0 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	109.46	-----	-----	101.20	33.02	12.92	37.68	0.00	100	0 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5240.00	109.46	-----	-----	101.20	33.02	12.92	37.68	0.00	100	0 Peak																																											
Avg	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.52</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>33.90</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>0 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.52	42.16	54.00	-11.84	33.90	33.10	12.80	37.64	0.00	100	0 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5149.52	42.16	54.00	-11.84	33.90	33.10	12.80	37.64	0.00	100	0 Average																																											
Avg	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>102.81</td><td>-----</td><td>-----</td><td>94.55</td><td>33.02</td><td>12.92</td><td>37.68</td><td>0.00</td><td>100</td><td>0 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	102.81	-----	-----	94.55	33.02	12.92	37.68	0.00	100	0 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5240.00	102.81	-----	-----	94.55	33.02	12.92	37.68	0.00	100	0 Average																																											

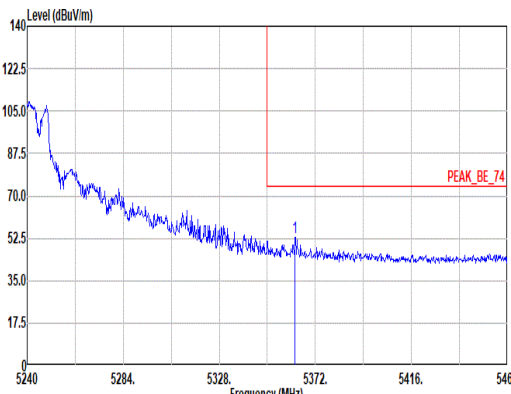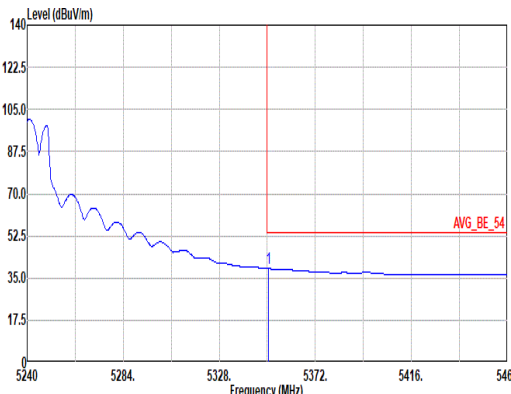

Mode	7																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																					
ANT	6+7																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5362.76</td><td>52.90</td><td>74.00</td><td>-21.10</td><td>44.69</td><td>32.87</td><td>13.07</td><td>37.73</td><td>0.00</td><td>100</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5362.76	52.90	74.00	-21.10	44.69	32.87	13.07	37.73	0.00	100	0 Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5362.76	52.90	74.00	-21.10	44.69	32.87	13.07	37.73	0.00	100	0 Peak																																											
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.44</td><td>38.99</td><td>54.00</td><td>-15.01</td><td>30.75</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>100</td><td>0 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.44	38.99	54.00	-15.01	30.75	32.90	13.06	37.72	0.00	100	0 Average	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5350.44	38.99	54.00	-15.01	30.75	32.90	13.06	37.72	0.00	100	0 Average																																											







Mode	7																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																																																																																																																	
ANT	6+7																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.00</td><td>57.80</td><td>68.20</td><td>-10.40</td><td>48.16</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>250</td><td>20</td><td>Peak</td></tr><tr><td>2</td><td>6987.00</td><td>60.78</td><td>68.20</td><td>-7.42</td><td>47.81</td><td>35.90</td><td>14.98</td><td>37.91</td><td>0.00</td><td>200</td><td>20</td><td>Peak</td></tr><tr><td>3</td><td>10480.00</td><td>51.02</td><td>68.20</td><td>-17.18</td><td>34.67</td><td>38.70</td><td>18.51</td><td>41.36</td><td>0.50</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>15720.00</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>38.84</td><td>38.24</td><td>22.94</td><td>44.46</td><td>0.42</td><td>192</td><td>359</td><td>Peak</td></tr><tr><td>5</td><td>15720.00</td><td>45.48</td><td>54.00</td><td>-8.52</td><td>28.34</td><td>38.24</td><td>22.94</td><td>44.46</td><td>0.42</td><td>192</td><td>359</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	57.80	68.20	-10.40	48.16	33.86	13.56	37.78	0.00	250	20	Peak	2	6987.00	60.78	68.20	-7.42	47.81	35.90	14.98	37.91	0.00	200	20	Peak	3	10480.00	51.02	68.20	-17.18	34.67	38.70	18.51	41.36	0.50	--	--	Peak	4	15720.00	55.98	74.00	-18.02	38.84	38.24	22.94	44.46	0.42	192	359	Peak	5	15720.00	45.48	54.00	-8.52	28.34	38.24	22.94	44.46	0.42	192	359	Average	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.00</td><td>54.52</td><td>68.20</td><td>-13.68</td><td>44.88</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>100</td><td>301</td><td>Peak</td></tr><tr><td>2</td><td>6987.00</td><td>56.85</td><td>68.20</td><td>-11.35</td><td>43.88</td><td>35.90</td><td>14.98</td><td>37.91</td><td>0.00</td><td>250</td><td>47</td><td>Peak</td></tr><tr><td>3</td><td>10480.00</td><td>51.00</td><td>68.20</td><td>-17.20</td><td>34.65</td><td>38.70</td><td>18.51</td><td>41.36</td><td>0.50</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>15720.00</td><td>53.00</td><td>74.00</td><td>-21.00</td><td>35.86</td><td>38.24</td><td>22.94</td><td>44.46</td><td>0.42</td><td>100</td><td>12</td><td>Peak</td></tr><tr><td>5</td><td>15720.00</td><td>43.07</td><td>54.00</td><td>-10.93</td><td>25.93</td><td>38.24</td><td>22.94</td><td>44.46</td><td>0.42</td><td>100</td><td>12</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	54.52	68.20	-13.68	44.88	33.86	13.56	37.78	0.00	100	301	Peak	2	6987.00	56.85	68.20	-11.35	43.88	35.90	14.98	37.91	0.00	250	47	Peak	3	10480.00	51.00	68.20	-17.20	34.65	38.70	18.51	41.36	0.50	--	--	Peak	4	15720.00	53.00	74.00	-21.00	35.86	38.24	22.94	44.46	0.42	100	12	Peak	5	15720.00	43.07	54.00	-10.93	25.93	38.24	22.94	44.46	0.42	100	12	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	5760.00	57.80	68.20	-10.40	48.16	33.86	13.56	37.78	0.00	250	20	Peak																																																																																																																																																																																						
2	6987.00	60.78	68.20	-7.42	47.81	35.90	14.98	37.91	0.00	200	20	Peak																																																																																																																																																																																						
3	10480.00	51.02	68.20	-17.18	34.67	38.70	18.51	41.36	0.50	--	--	Peak																																																																																																																																																																																						
4	15720.00	55.98	74.00	-18.02	38.84	38.24	22.94	44.46	0.42	192	359	Peak																																																																																																																																																																																						
5	15720.00	45.48	54.00	-8.52	28.34	38.24	22.94	44.46	0.42	192	359	Average																																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	5760.00	54.52	68.20	-13.68	44.88	33.86	13.56	37.78	0.00	100	301	Peak																																																																																																																																																																																						
2	6987.00	56.85	68.20	-11.35	43.88	35.90	14.98	37.91	0.00	250	47	Peak																																																																																																																																																																																						
3	10480.00	51.00	68.20	-17.20	34.65	38.70	18.51	41.36	0.50	--	--	Peak																																																																																																																																																																																						
4	15720.00	53.00	74.00	-21.00	35.86	38.24	22.94	44.46	0.42	100	12	Peak																																																																																																																																																																																						
5	15720.00	43.07	54.00	-10.93	25.93	38.24	22.94	44.46	0.42	100	12	Average																																																																																																																																																																																						





Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL

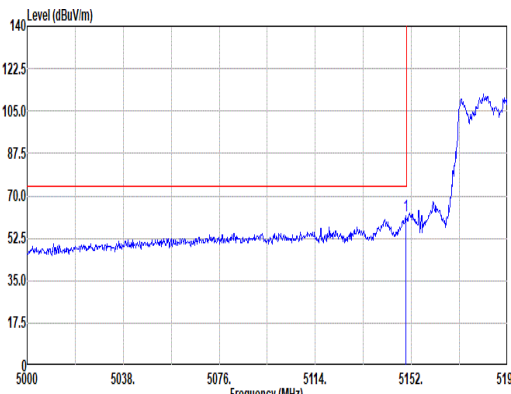
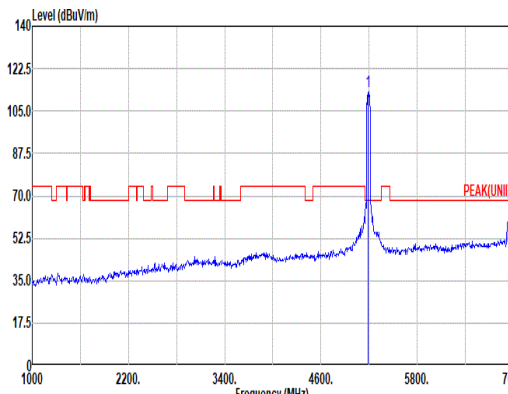
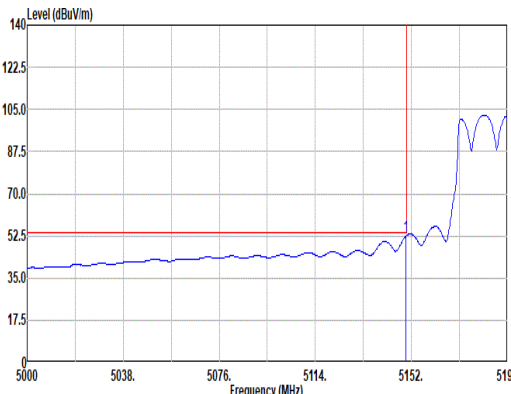
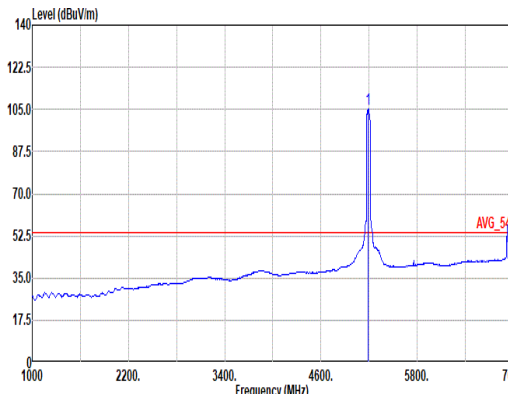


Mode	8																																																																																																
	Band Edge - L																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																
ANT	6+7																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH20-HY Condition: PEAK_BE_74_3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.72</td><td>62.01</td><td>74.00</td><td>-11.99</td><td>53.75</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>12</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.72	62.01	74.00	-11.99	53.75	33.10	12.80	37.64	0.00	100	12	Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>112.91</td><td>-----</td><td>-----</td><td>104.60</td><td>33.10</td><td>12.87</td><td>37.66</td><td>0.00</td><td>100</td><td>12</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5190.00	112.91	-----	-----	104.60	33.10	12.87	37.66	0.00	100	12
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5149.72	62.01	74.00	-11.99	53.75	33.10	12.80	37.64	0.00	100	12	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5190.00	112.91	-----	-----	104.60	33.10	12.87	37.66	0.00	100	12	Peak																																																																																					
Avg																																																																																																	
	Site : 03CH20-HY Condition: AVG_BE_54_3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>52.48</td><td>54.00</td><td>-1.52</td><td>44.22</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>12</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.91	52.48	54.00	-1.52	44.22	33.10	12.80	37.64	0.00	100	12	Average	Site : 03CH20-HY Condition: AVG_54_3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>105.03</td><td>-----</td><td>-----</td><td>96.73</td><td>33.10</td><td>12.86</td><td>37.66</td><td>0.00</td><td>100</td><td>12</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5190.00	105.03	-----	-----	96.73	33.10	12.86	37.66	0.00	100	12
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5149.91	52.48	54.00	-1.52	44.22	33.10	12.80	37.64	0.00	100	12	Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5190.00	105.03	-----	-----	96.73	33.10	12.86	37.66	0.00	100	12	Average																																																																																					

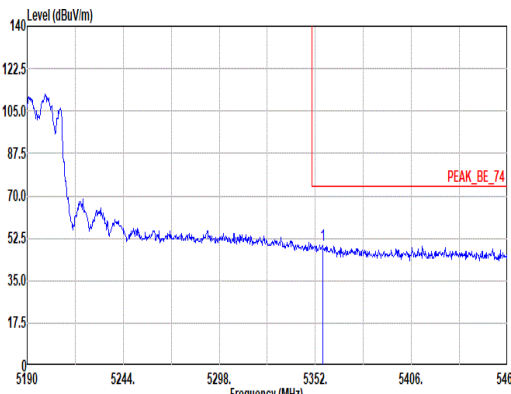
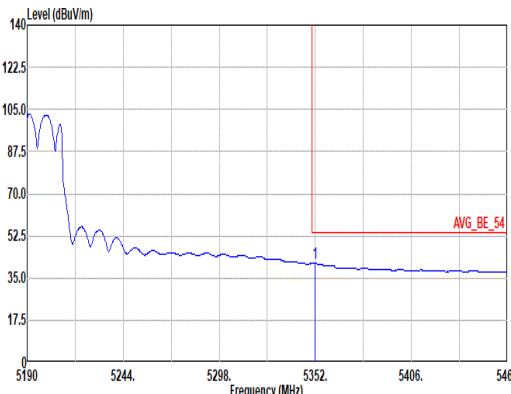


Mode	8																																																				
	Band Edge - R																																																				
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																				
ANT	6+7																																																				
Pol.	Horizontal						Fundamental																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5356.05</td><td>49.84</td><td>74.00</td><td>-24.16</td><td>41.61</td><td>32.89</td><td>13.07</td><td>37.73</td><td>0.00</td><td>100</td><td>12</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5356.05	49.84	74.00	-24.16	41.61	32.89	13.07	37.73	0.00	100	12	Peak	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																									
1	5356.05	49.84	74.00	-24.16	41.61	32.89	13.07	37.73	0.00	100	12	Peak																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5351.73</td><td>41.02</td><td>54.00</td><td>-12.98</td><td>32.78</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>100</td><td>12</td><td>Average</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5351.73	41.02	54.00	-12.98	32.78	32.90	13.06	37.72	0.00	100	12	Average	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																									
1	5351.73	41.02	54.00	-12.98	32.78	32.90	13.06	37.72	0.00	100	12	Average																																									

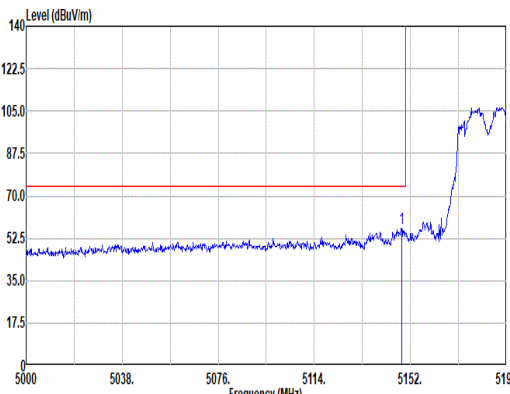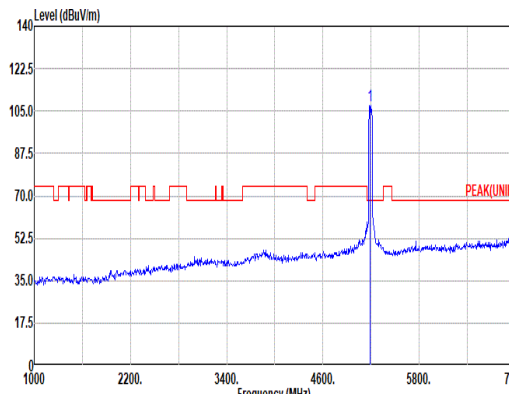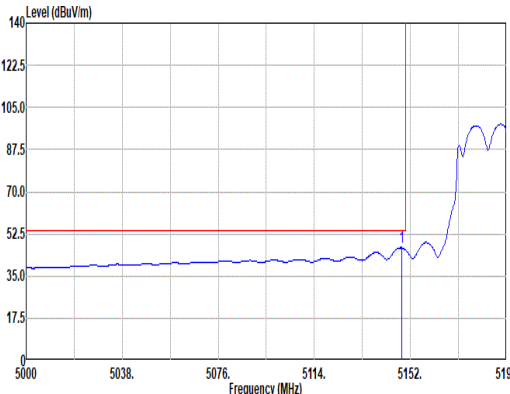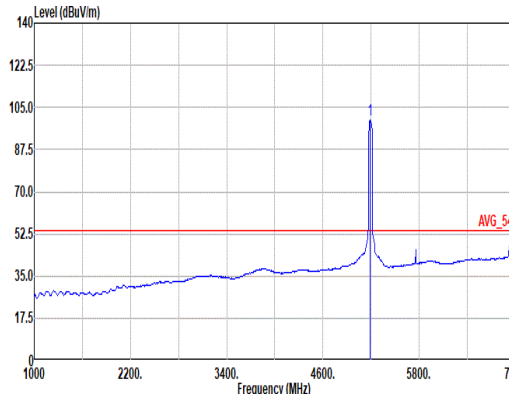

Mode	8																																																																																															
	Band Edge - L																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																															
ANT	6+7																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.58</td><td>56.79</td><td>74.00</td><td>-17.21</td><td>48.54</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>88 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.58	56.79	74.00	-17.21	48.54	33.09	12.80	37.64	0.00	100	88 Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>107.17</td><td>-----</td><td>-----</td><td>98.88</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>100</td><td>88 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	107.17	-----	-----	98.88	33.10	12.84	37.65	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5148.58	56.79	74.00	-17.21	48.54	33.09	12.80	37.64	0.00	100	88 Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5190.00	107.17	-----	-----	98.88	33.10	12.84	37.65	0.00	100	88 Peak																																																																																					
Avg																																																																																																
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.58</td><td>46.79</td><td>54.00</td><td>-7.21</td><td>38.54</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>88 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.58	46.79	54.00	-7.21	38.54	33.09	12.80	37.64	0.00	100	88 Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>99.98</td><td>-----</td><td>-----</td><td>91.68</td><td>33.10</td><td>12.85</td><td>37.65</td><td>0.00</td><td>100</td><td>88 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	99.98	-----	-----	91.68	33.10	12.85	37.65	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5148.58	46.79	54.00	-7.21	38.54	33.09	12.80	37.64	0.00	100	88 Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5190.00	99.98	-----	-----	91.68	33.10	12.85	37.65	0.00	100	88 Average																																																																																					

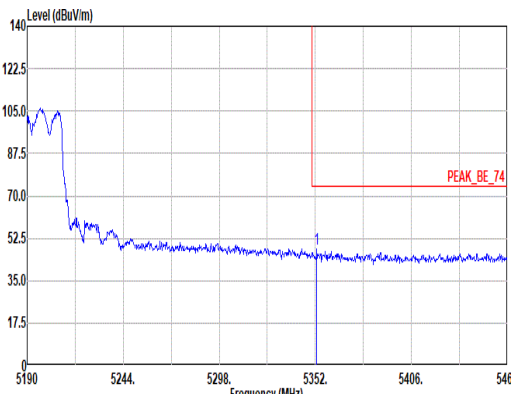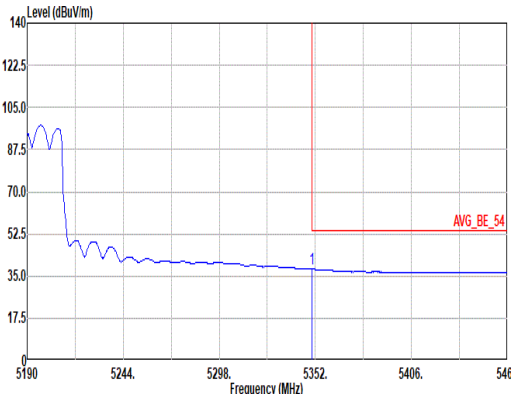

Mode	8																																																				
	Band Edge - R																																																				
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																				
ANT	6+7																																																				
Pol.	Vertical						Fundamental																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5352.81</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>39.66</td><td>32.89</td><td>13.06</td><td>37.73</td><td>0.00</td><td>100</td><td>88</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	dB	dB	cm	deg		1	5352.81	47.88	74.00	-26.12	39.66	32.89	13.06	37.73	0.00	100	88	Peak	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	dB	dB	cm	deg																																									
1	5352.81	47.88	74.00	-26.12	39.66	32.89	13.06	37.73	0.00	100	88	Peak																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.11</td><td>37.94</td><td>54.00</td><td>-16.06</td><td>29.70</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>100</td><td>88</td><td>Average</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	dB	dB	cm	deg		1	5350.11	37.94	54.00	-16.06	29.70	32.90	13.06	37.72	0.00	100	88	Average	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	dB	dB	cm	deg																																									
1	5350.11	37.94	54.00	-16.06	29.70	32.90	13.06	37.72	0.00	100	88	Average																																									







Mode	8																																																																																																																																																																																															
	Harmonic																																																																																																																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																																																																																																															
ANT	6+7																																																																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																																																																									
Peak Avg	Level (dBuV/m) Date: 2026-01-22 1000 4400. 7800. 11200. 14600. 18000 Frequency (MHz) PEAK(UNII) AVG 54						Level (dBuV/m) Date: 2026-01-22 1000 4400. 7800. 11200. 14600. 18000 Frequency (MHz) PEAK(UNII) AVG 54																																																																																																																																																																																									
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5760.00</td><td>56.63</td><td>68.20</td><td>-11.57</td><td>46.99</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>250</td><td>21 Peak</td></tr><tr><td>2</td><td>6920.00</td><td>60.86</td><td>68.20</td><td>-7.34</td><td>47.94</td><td>35.90</td><td>14.90</td><td>37.88</td><td>0.00</td><td>100</td><td>12 Peak</td></tr><tr><td>3</td><td>10380.00</td><td>51.31</td><td>68.20</td><td>-16.89</td><td>34.99</td><td>38.68</td><td>18.42</td><td>41.28</td><td>0.50</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15570.00</td><td>51.93</td><td>74.00</td><td>-22.07</td><td>34.97</td><td>38.36</td><td>22.82</td><td>44.64</td><td>0.42</td><td>200</td><td>59 Peak</td></tr><tr><td>5</td><td>15570.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>24.81</td><td>38.36</td><td>22.82</td><td>44.64</td><td>0.42</td><td>200</td><td>59 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	56.63	68.20	-11.57	46.99	33.86	13.56	37.78	0.00	250	21 Peak	2	6920.00	60.86	68.20	-7.34	47.94	35.90	14.90	37.88	0.00	100	12 Peak	3	10380.00	51.31	68.20	-16.89	34.99	38.68	18.42	41.28	0.50	--	-- Peak	4	15570.00	51.93	74.00	-22.07	34.97	38.36	22.82	44.64	0.42	200	59 Peak	5	15570.00	41.77	54.00	-12.23	24.81	38.36	22.82	44.64	0.42	200	59 Average	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5760.00</td><td>53.70</td><td>68.20</td><td>-14.50</td><td>44.06</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>100</td><td>307 Peak</td></tr><tr><td>2</td><td>6920.00</td><td>58.67</td><td>68.20</td><td>-9.53</td><td>45.75</td><td>35.90</td><td>14.90</td><td>37.88</td><td>0.00</td><td>250</td><td>49 Peak</td></tr><tr><td>3</td><td>10380.00</td><td>50.97</td><td>68.20</td><td>-17.23</td><td>34.65</td><td>38.68</td><td>18.42</td><td>41.28</td><td>0.50</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15570.00</td><td>51.84</td><td>74.00</td><td>-22.16</td><td>34.88</td><td>38.36</td><td>22.82</td><td>44.64</td><td>0.42</td><td>400</td><td>26 Peak</td></tr><tr><td>5</td><td>15570.00</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>24.40</td><td>38.36</td><td>22.82</td><td>44.64</td><td>0.42</td><td>400</td><td>26 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	53.70	68.20	-14.50	44.06	33.86	13.56	37.78	0.00	100	307 Peak	2	6920.00	58.67	68.20	-9.53	45.75	35.90	14.90	37.88	0.00	250	49 Peak	3	10380.00	50.97	68.20	-17.23	34.65	38.68	18.42	41.28	0.50	--	-- Peak	4	15570.00	51.84	74.00	-22.16	34.88	38.36	22.82	44.64	0.42	400	26 Peak	5	15570.00	41.36	54.00	-12.64	24.40	38.36	22.82	44.64	0.42	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																						
1	5760.00	56.63	68.20	-11.57	46.99	33.86	13.56	37.78	0.00	250	21 Peak																																																																																																																																																																																					
2	6920.00	60.86	68.20	-7.34	47.94	35.90	14.90	37.88	0.00	100	12 Peak																																																																																																																																																																																					
3	10380.00	51.31	68.20	-16.89	34.99	38.68	18.42	41.28	0.50	--	-- Peak																																																																																																																																																																																					
4	15570.00	51.93	74.00	-22.07	34.97	38.36	22.82	44.64	0.42	200	59 Peak																																																																																																																																																																																					
5	15570.00	41.77	54.00	-12.23	24.81	38.36	22.82	44.64	0.42	200	59 Average																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																						
1	5760.00	53.70	68.20	-14.50	44.06	33.86	13.56	37.78	0.00	100	307 Peak																																																																																																																																																																																					
2	6920.00	58.67	68.20	-9.53	45.75	35.90	14.90	37.88	0.00	250	49 Peak																																																																																																																																																																																					
3	10380.00	50.97	68.20	-17.23	34.65	38.68	18.42	41.28	0.50	--	-- Peak																																																																																																																																																																																					
4	15570.00	51.84	74.00	-22.16	34.88	38.36	22.82	44.64	0.42	400	26 Peak																																																																																																																																																																																					
5	15570.00	41.36	54.00	-12.64	24.40	38.36	22.82	44.64	0.42	400	26 Average																																																																																																																																																																																					





Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 HORIZONTAL	Level (dBuV/m) Date: 2026-01-22 Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 VERTICAL

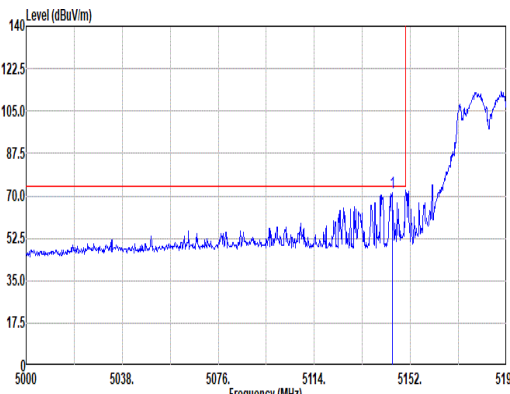
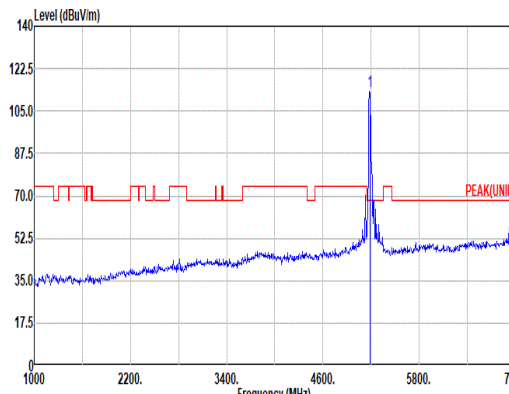
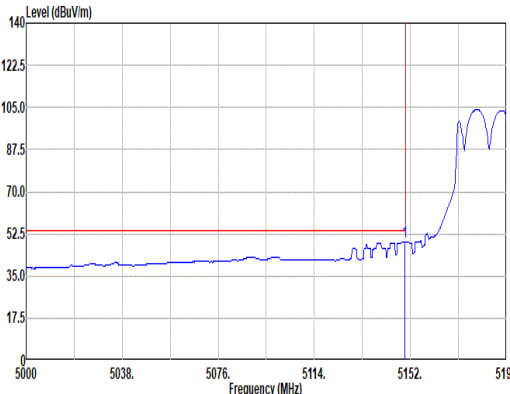
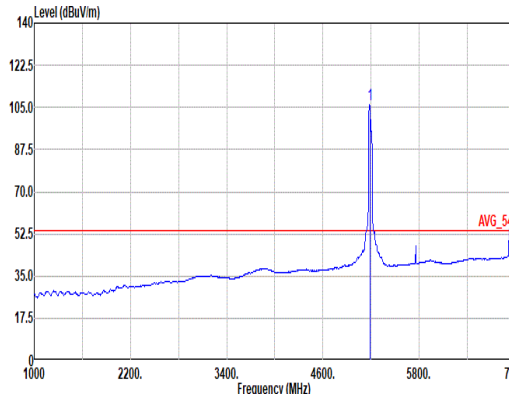


	9																																																																																																	
Mode	Band Edge - L																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Partial_242/61RU_5190MHz																																																																																																	
ANT	6+7																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5144.78</td><td>71.19</td><td>74.00</td><td>-2.81</td><td>62.94</td><td>33.00</td><td>12.80</td><td>37.63</td><td>0.00</td><td>200</td><td>9 Peak</td></tr></table>  Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>112.91</td><td>-----</td><td>-----</td><td>104.62</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>200</td><td>9 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.78	71.19	74.00	-2.81	62.94	33.00	12.80	37.63	0.00	200	9 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	112.91	-----	-----	104.62	33.10	12.84	37.65	0.00	200	9 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5144.78	71.19	74.00	-2.81	62.94	33.00	12.80	37.63	0.00	200	9 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5190.00	112.91	-----	-----	104.62	33.10	12.84	37.65	0.00	200	9 Peak																																																																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>49.26</td><td>54.00</td><td>-4.74</td><td>41.00</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>200</td><td>9 Average</td></tr></table>  Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>106.17</td><td>-----</td><td>-----</td><td>97.88</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>200</td><td>9 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.91	49.26	54.00	-4.74	41.00	33.10	12.80	37.64	0.00	200	9 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	106.17	-----	-----	97.88	33.10	12.84	37.65	0.00	200	9 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5149.91	49.26	54.00	-4.74	41.00	33.10	12.80	37.64	0.00	200	9 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5190.00	106.17	-----	-----	97.88	33.10	12.84	37.65	0.00	200	9 Average																																																																																							

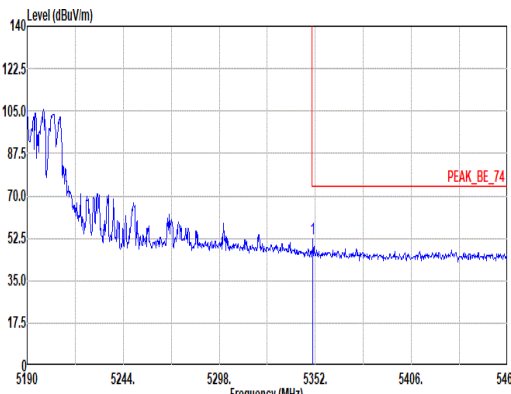
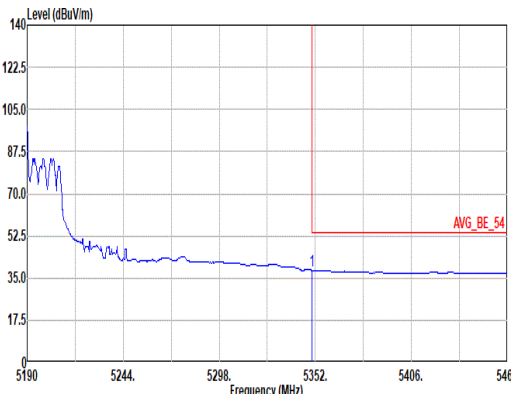


Mode	9																																											
	Band Edge - R																																											
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Partial_242/61RU_5190MHz																																											
ANT	6+7																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.65</td><td>52.32</td><td>74.00</td><td>-21.68</td><td>44.08</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>200</td><td></td><td>9</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5350.65	52.32	74.00	-21.68	44.08	32.90	13.06	37.72	0.00	200		9	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	5350.65	52.32	74.00	-21.68	44.08	32.90	13.06	37.72	0.00	200		9	Peak																															
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.11</td><td>38.24</td><td>54.00</td><td>-15.76</td><td>30.00</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>200</td><td></td><td>9</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5350.11	38.24	54.00	-15.76	30.00	32.90	13.06	37.72	0.00	200		9	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	5350.11	38.24	54.00	-15.76	30.00	32.90	13.06	37.72	0.00	200		9	Average																															

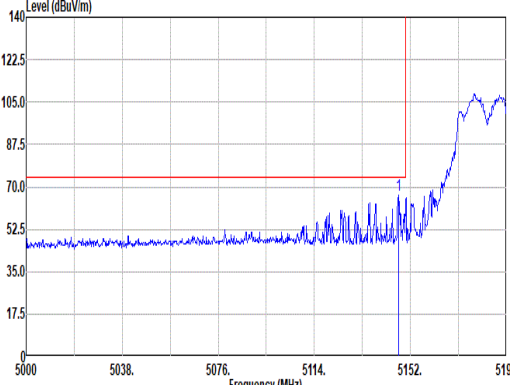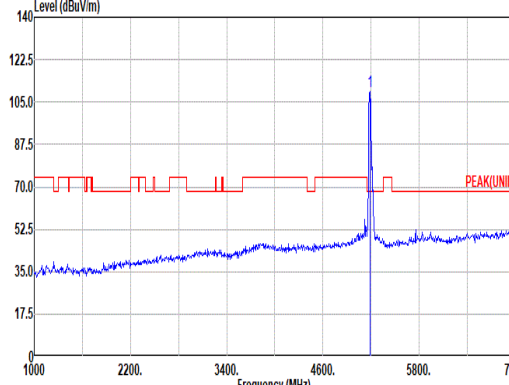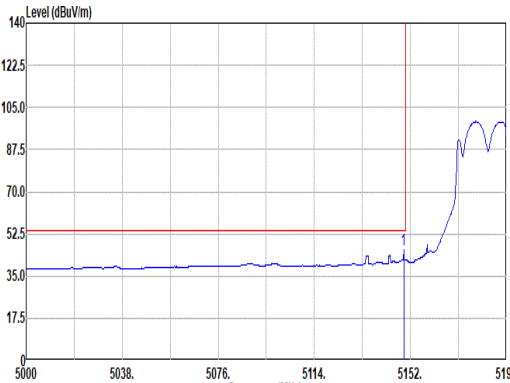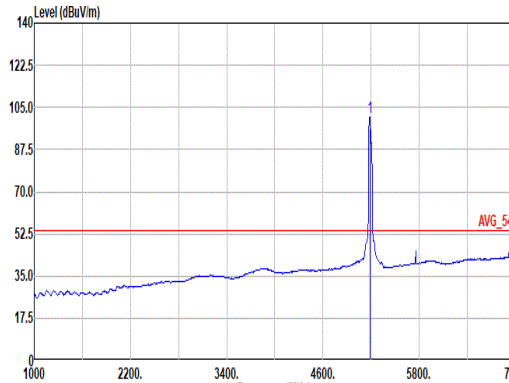

Mode	9																																																																																															
	Band Edge - L																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Partial_242/61RU_5190MHz																																																																																															
ANT	6+7																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.44</td><td>66.38</td><td>74.00</td><td>-7.62</td><td>58.12</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>100</td><td>90 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.44	66.38	74.00	-7.62	58.12	33.09	12.80	37.63	0.00	100	90 Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>109.11</td><td>-----</td><td>-----</td><td>100.81</td><td>33.10</td><td>12.85</td><td>37.65</td><td>0.00</td><td>100</td><td>90 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	109.11	-----	-----	100.81	33.10	12.85	37.65	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5147.44	66.38	74.00	-7.62	58.12	33.09	12.80	37.63	0.00	100	90 Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5190.00	109.11	-----	-----	100.81	33.10	12.85	37.65	0.00	100	90 Peak																																																																																					
Avg																																																																																																
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.34</td><td>45.93</td><td>54.00</td><td>-8.07</td><td>37.67</td><td>33.10</td><td>12.80</td><td>37.64</td><td>0.00</td><td>100</td><td>90 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.34	45.93	54.00	-8.07	37.67	33.10	12.80	37.64	0.00	100	90 Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>101.06</td><td>-----</td><td>-----</td><td>92.77</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>100</td><td>90 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	101.06	-----	-----	92.77	33.10	12.84	37.65	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5149.34	45.93	54.00	-8.07	37.67	33.10	12.80	37.64	0.00	100	90 Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5190.00	101.06	-----	-----	92.77	33.10	12.84	37.65	0.00	100	90 Average																																																																																					

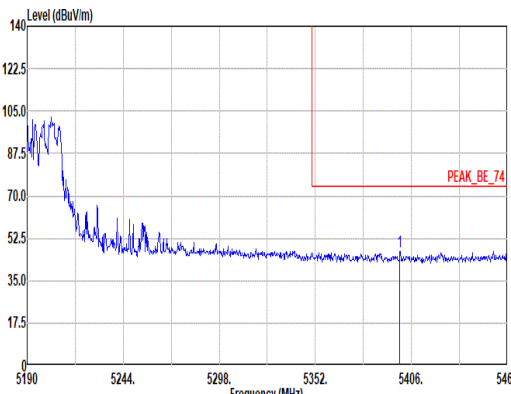
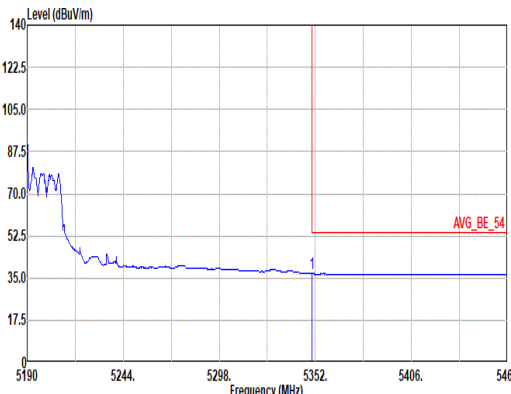


Mode	9																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Partial_242/61RU_5190MHz																																																					
ANT	6+7																																																					
Pol.	Vertical												Fundamental																																									
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5399.52</td><td>46.89</td><td>74.00</td><td>-27.11</td><td>38.72</td><td>32.00</td><td>13.12</td><td>37.75</td><td>0.00</td><td>100</td><td>90</td><td>Peak</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5399.52	46.89	74.00	-27.11	38.72	32.00	13.12	37.75	0.00	100	90	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5399.52	46.89	74.00	-27.11	38.72	32.00	13.12	37.75	0.00	100	90	Peak																																										
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.11</td><td>36.80</td><td>54.00</td><td>-17.20</td><td>28.56</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>100</td><td>90</td><td>Average</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5350.11	36.80	54.00	-17.20	28.56	32.90	13.06	37.72	0.00	100	90	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5350.11	36.80	54.00	-17.20	28.56	32.90	13.06	37.72	0.00	100	90	Average																																										







		10									
Mode	Band Edge - L										
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz										
ANT	6+7										
Pol.											
Peak	Horizontal										
	<										

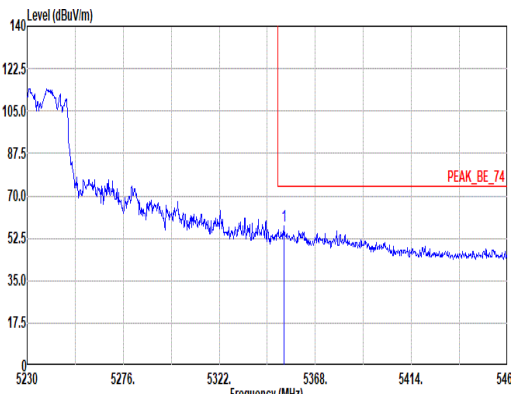
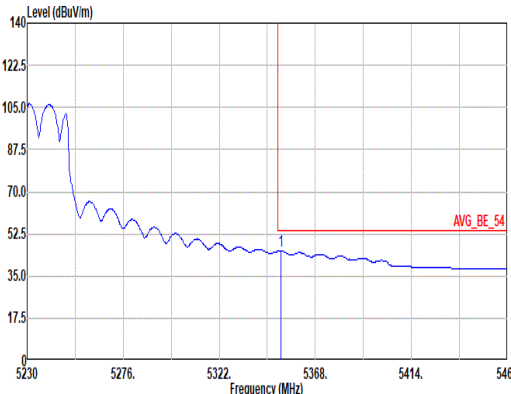


Mode	10																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																			
ANT	6+7																																																			
Pol.	Horizontal					Fundamental																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5352.82</td><td>57.47</td><td>74.00</td><td>-16.53</td><td>49.25</td><td>32.89</td><td>13.06</td><td>37.73</td><td>0.00</td><td>100</td><td></td><td>9</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	5352.82	57.47	74.00	-16.53	49.25	32.89	13.06	37.73	0.00	100		9	Peak	Blank				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																								
1	5352.82	57.47	74.00	-16.53	49.25	32.89	13.06	37.73	0.00	100		9	Peak																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5351.44</td><td>45.39</td><td>54.00</td><td>-8.61</td><td>37.15</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>100</td><td></td><td>9</td><td>Average</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	5351.44	45.39	54.00	-8.61	37.15	32.90	13.06	37.72	0.00	100		9	Average	Blank				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																								
1	5351.44	45.39	54.00	-8.61	37.15	32.90	13.06	37.72	0.00	100		9	Average																																							

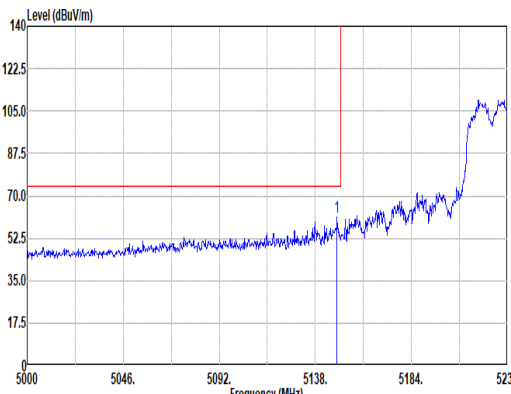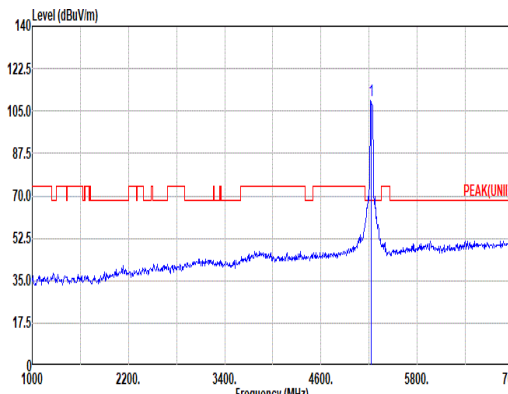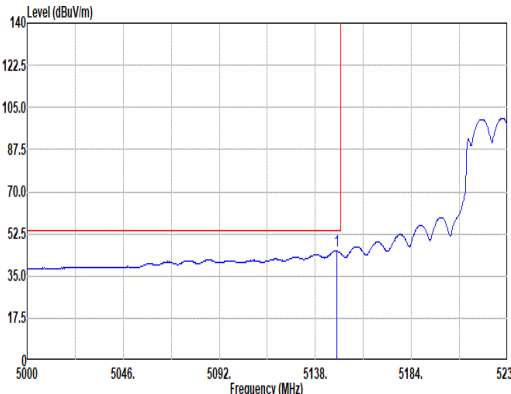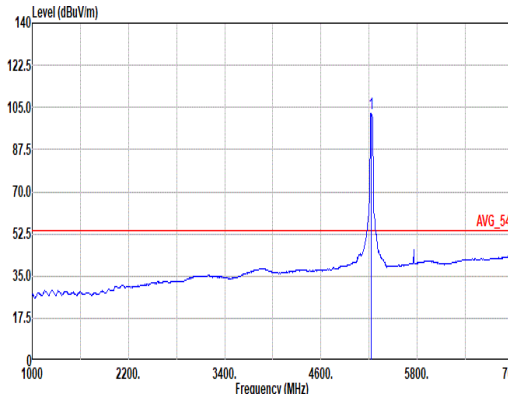

Mode	10																																																																																																
	Band Edge - L																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																																
ANT	6+7																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH20-HY Condition: PEAK_BE 74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.35</td><td>61.07</td><td>74.00</td><td>-12.93</td><td>52.82</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>101</td><td>94 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.35	61.07	74.00	-12.93	52.82	33.09	12.80	37.64	0.00	101	94 Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>109.37</td><td>-----</td><td>-----</td><td>101.09</td><td>33.06</td><td>12.89</td><td>37.67</td><td>0.00</td><td>101</td><td>94 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	109.37	-----	-----	101.09	33.06	12.89	37.67	0.00	101
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5148.35	61.07	74.00	-12.93	52.82	33.09	12.80	37.64	0.00	101	94 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5230.00	109.37	-----	-----	101.09	33.06	12.89	37.67	0.00	101	94 Peak																																																																																						
Avg																																																																																																	
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.12</td><td>45.42</td><td>54.00</td><td>-8.58</td><td>37.17</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>101</td><td>94 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.12	45.42	54.00	-8.58	37.17	33.09	12.80	37.64	0.00	101	94 Average	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>102.38</td><td>-----</td><td>-----</td><td>94.10</td><td>33.04</td><td>12.91</td><td>37.67</td><td>0.00</td><td>101</td><td>94 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	102.38	-----	-----	94.10	33.04	12.91	37.67	0.00	101
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5148.12	45.42	54.00	-8.58	37.17	33.09	12.80	37.64	0.00	101	94 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5230.00	102.38	-----	-----	94.10	33.04	12.91	37.67	0.00	101	94 Average																																																																																						

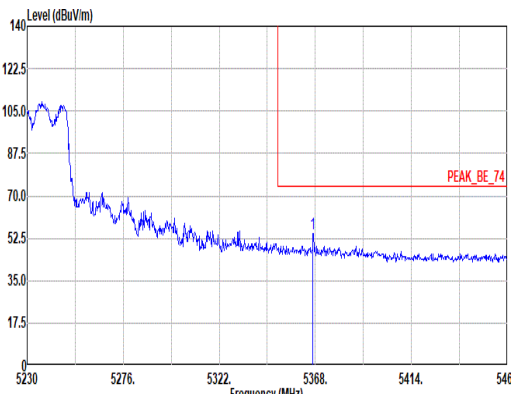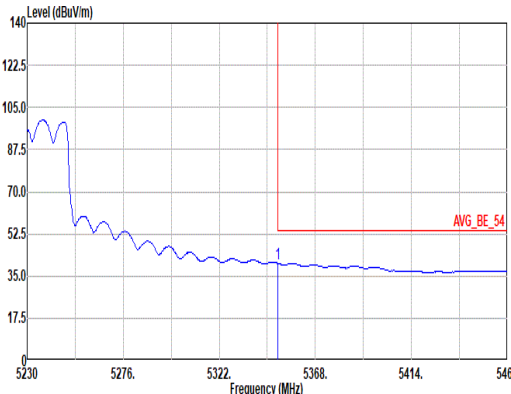

Mode	10																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																		
ANT	6+7																																																		
Pol.	Vertical						Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5366.85</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>46.44</td><td>32.87</td><td>13.08</td><td>37.73</td><td>0.00</td><td>101</td><td>94</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5366.85	54.66	74.00	-19.34	46.44	32.87	13.08	37.73	0.00	101	94	Peak	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5366.85	54.66	74.00	-19.34	46.44	32.87	13.08	37.73	0.00	101	94	Peak																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.06</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>32.00</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>101</td><td>94</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5350.06	40.24	54.00	-13.76	32.00	32.90	13.06	37.72	0.00	101	94	Average	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5350.06	40.24	54.00	-13.76	32.00	32.90	13.06	37.72	0.00	101	94	Average																																							







Mode	10																																																																																																																																																																																																
	Harmonic																																																																																																																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																																																																																																																																
ANT	6+7																																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																																										
Peak Avg	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.00</td><td>55.70</td><td>68.20</td><td>-12.50</td><td>46.06</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>250</td><td>20 Peak</td></tr><tr><td>2</td><td>6973.00</td><td>60.17</td><td>68.20</td><td>-8.03</td><td>47.21</td><td>35.90</td><td>14.96</td><td>37.90</td><td>0.00</td><td>150</td><td>15 Peak</td></tr><tr><td>3</td><td>10460.00</td><td>50.95</td><td>68.20</td><td>-17.25</td><td>34.60</td><td>38.70</td><td>18.49</td><td>41.34</td><td>0.50</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15690.00</td><td>51.96</td><td>74.00</td><td>-22.04</td><td>34.93</td><td>38.18</td><td>22.92</td><td>44.49</td><td>0.42</td><td>200</td><td>62 Peak</td></tr><tr><td>5</td><td>15690.00</td><td>42.56</td><td>54.00</td><td>-11.44</td><td>25.53</td><td>38.18</td><td>22.92</td><td>44.49</td><td>0.42</td><td>200</td><td>62 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	55.70	68.20	-12.50	46.06	33.86	13.56	37.78	0.00	250	20 Peak	2	6973.00	60.17	68.20	-8.03	47.21	35.90	14.96	37.90	0.00	150	15 Peak	3	10460.00	50.95	68.20	-17.25	34.60	38.70	18.49	41.34	0.50	--	-- Peak	4	15690.00	51.96	74.00	-22.04	34.93	38.18	22.92	44.49	0.42	200	62 Peak	5	15690.00	42.56	54.00	-11.44	25.53	38.18	22.92	44.49	0.42	200	62 Average	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.00</td><td>53.54</td><td>68.20</td><td>-14.66</td><td>43.90</td><td>33.86</td><td>13.56</td><td>37.78</td><td>0.00</td><td>100</td><td>307 Peak</td></tr><tr><td>2</td><td>6973.00</td><td>58.14</td><td>68.20</td><td>-10.06</td><td>45.18</td><td>35.90</td><td>14.96</td><td>37.90</td><td>0.00</td><td>250</td><td>47 Peak</td></tr><tr><td>3</td><td>10460.00</td><td>51.31</td><td>68.20</td><td>-16.89</td><td>34.96</td><td>38.70</td><td>18.49</td><td>41.34</td><td>0.50</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15690.00</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>35.99</td><td>38.18</td><td>22.92</td><td>44.49</td><td>0.42</td><td>300</td><td>23 Peak</td></tr><tr><td>5</td><td>15690.00</td><td>41.48</td><td>54.00</td><td>-12.52</td><td>24.45</td><td>38.18</td><td>22.92</td><td>44.49</td><td>0.42</td><td>300</td><td>23 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.00	53.54	68.20	-14.66	43.90	33.86	13.56	37.78	0.00	100	307 Peak	2	6973.00	58.14	68.20	-10.06	45.18	35.90	14.96	37.90	0.00	250	47 Peak	3	10460.00	51.31	68.20	-16.89	34.96	38.70	18.49	41.34	0.50	--	-- Peak	4	15690.00	53.02	74.00	-20.98	35.99	38.18	22.92	44.49	0.42	300	23 Peak	5	15690.00	41.48	54.00	-12.52	24.45	38.18	22.92	44.49	0.42	300	23 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	5760.00	55.70	68.20	-12.50	46.06	33.86	13.56	37.78	0.00	250	20 Peak																																																																																																																																																																																						
2	6973.00	60.17	68.20	-8.03	47.21	35.90	14.96	37.90	0.00	150	15 Peak																																																																																																																																																																																						
3	10460.00	50.95	68.20	-17.25	34.60	38.70	18.49	41.34	0.50	--	-- Peak																																																																																																																																																																																						
4	15690.00	51.96	74.00	-22.04	34.93	38.18	22.92	44.49	0.42	200	62 Peak																																																																																																																																																																																						
5	15690.00	42.56	54.00	-11.44	25.53	38.18	22.92	44.49	0.42	200	62 Average																																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	5760.00	53.54	68.20	-14.66	43.90	33.86	13.56	37.78	0.00	100	307 Peak																																																																																																																																																																																						
2	6973.00	58.14	68.20	-10.06	45.18	35.90	14.96	37.90	0.00	250	47 Peak																																																																																																																																																																																						
3	10460.00	51.31	68.20	-16.89	34.96	38.70	18.49	41.34	0.50	--	-- Peak																																																																																																																																																																																						
4	15690.00	53.02	74.00	-20.98	35.99	38.18	22.92	44.49	0.42	300	23 Peak																																																																																																																																																																																						
5	15690.00	41.48	54.00	-12.52	24.45	38.18	22.92	44.49	0.42	300	23 Average																																																																																																																																																																																						





Mode	10	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2026-01-22 Frequency (MHz) Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 HORIZONTAL	Level (dBuV/m) Date: 2026-01-22 Frequency (MHz) Site : 03CH20-HY Condition: AVG_54 3m HF_91280_02360_251105 VERTICAL

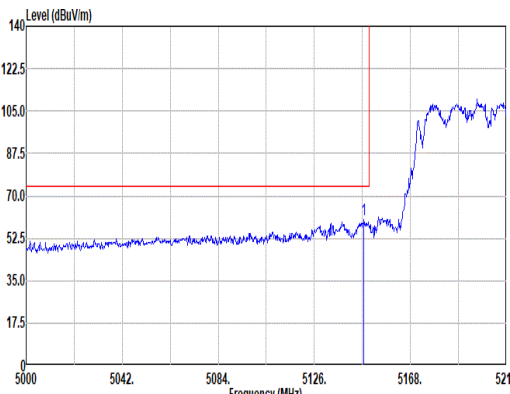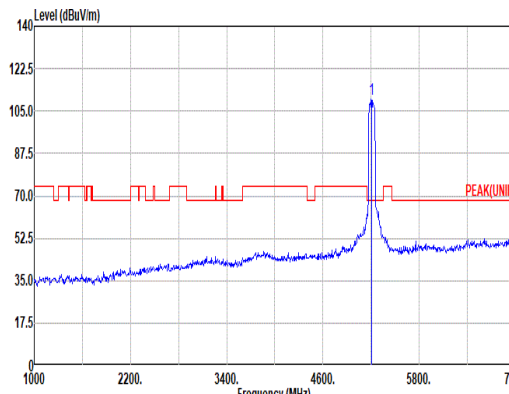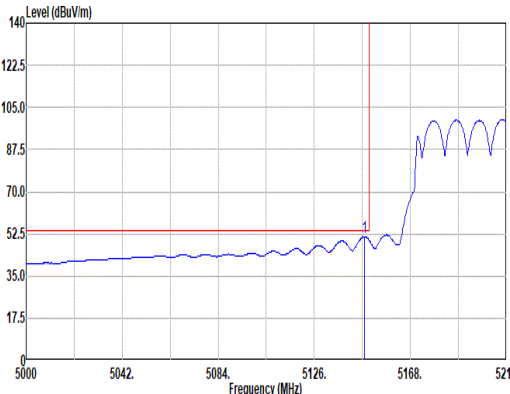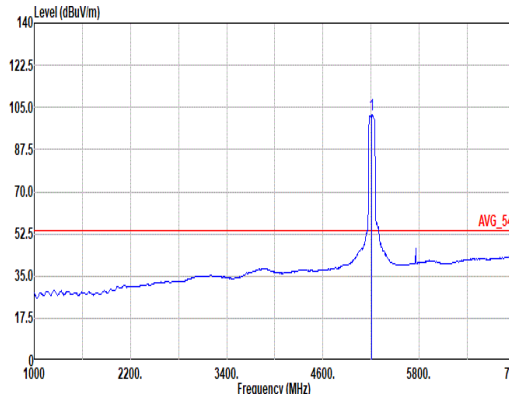

	11																																																																																																
Mode	Band Edge - L																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																																
ANT	6+7																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH20-HY Condition: PEAK_BE_74_3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.63</td><td>60.47</td><td>74.00</td><td>-13.53</td><td>52.21</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>200</td><td>7 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.63	60.47	74.00	-13.53	52.21	33.09	12.80	37.63	0.00	200	7 Peak	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>109.91</td><td>-----</td><td>-----</td><td>101.60</td><td>33.10</td><td>12.87</td><td>37.66</td><td>0.00</td><td>200</td><td>7 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	109.91	-----	-----	101.60	33.10	12.87	37.66	0.00	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5147.63	60.47	74.00	-13.53	52.21	33.09	12.80	37.63	0.00	200	7 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5210.00	109.91	-----	-----	101.60	33.10	12.87	37.66	0.00	200	7 Peak																																																																																						
Avg																																																																																																	
	Site : 03CH20-HY Condition: AVG_BE_54_3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.05</td><td>51.23</td><td>54.00</td><td>-2.77</td><td>42.98</td><td>33.09</td><td>12.80</td><td>37.64</td><td>0.00</td><td>200</td><td>7 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.05	51.23	54.00	-2.77	42.98	33.09	12.80	37.64	0.00	200	7 Average	Site : 03CH20-HY Condition: AVG_54_3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>101.86</td><td>-----</td><td>-----</td><td>93.55</td><td>33.09</td><td>12.88</td><td>37.66</td><td>0.00</td><td>200</td><td>7 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	101.86	-----	-----	93.55	33.09	12.88	37.66	0.00	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5148.05	51.23	54.00	-2.77	42.98	33.09	12.80	37.64	0.00	200	7 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5210.00	101.86	-----	-----	93.55	33.09	12.88	37.66	0.00	200	7 Average																																																																																						

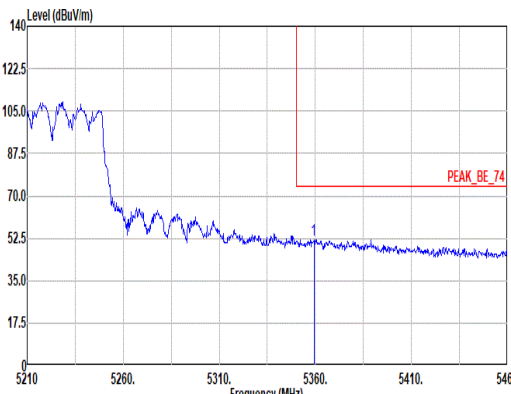
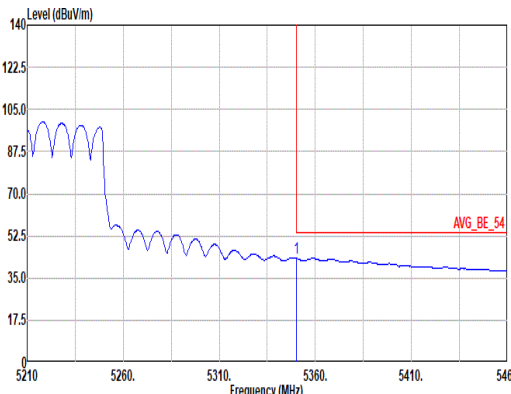


Mode	11																																											
	Band Edge - R																																											
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																											
ANT	6+7																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5359.25</td><td>51.92</td><td>74.00</td><td>-22.08</td><td>43.70</td><td>32.88</td><td>13.07</td><td>37.73</td><td>0.00</td><td>200</td><td></td><td>7</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5359.25	51.92	74.00	-22.08	43.70	32.88	13.07	37.73	0.00	200		7	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	5359.25	51.92	74.00	-22.08	43.70	32.88	13.07	37.73	0.00	200		7	Peak																															
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5359.25</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>35.00</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>200</td><td></td><td>7</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5359.25	43.24	54.00	-10.76	35.00	32.90	13.06	37.72	0.00	200		7	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																
1	5359.25	43.24	54.00	-10.76	35.00	32.90	13.06	37.72	0.00	200		7	Average																															



Mode	11																																																				
	Band Edge - L																																																				
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																				
ANT	6+7																																																				
Pol.	Vertical																																																				
Peak																																																					
	Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.37</td><td>54.89</td><td>74.00</td><td>-19.11</td><td>46.63</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>100</td><td>85 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.37	54.89	74.00	-19.11	46.63	33.09	12.80	37.63	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5146.37	54.89	74.00	-19.11	46.63	33.09	12.80	37.63	0.00	100	85 Peak																																										
Fundamental																																																					
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>104.57</td><td>-----</td><td>-----</td><td>96.28</td><td>33.10</td><td>12.84</td><td>37.65</td><td>0.00</td><td>100</td><td>85 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	104.57	-----	-----	96.28	33.10	12.84	37.65	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5210.00	104.57	-----	-----	96.28	33.10	12.84	37.65	0.00	100	85 Peak																																										
Avg																																																					
	Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.21</td><td>44.86</td><td>54.00</td><td>-9.14</td><td>36.60</td><td>33.09</td><td>12.80</td><td>37.63</td><td>0.00</td><td>100</td><td>85 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.21	44.86	54.00	-9.14	36.60	33.09	12.80	37.63	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5147.21	44.86	54.00	-9.14	36.60	33.09	12.80	37.63	0.00	100	85 Average																																										
AVG_54																																																					
	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>96.51</td><td>-----</td><td>-----</td><td>88.20</td><td>33.10</td><td>12.87</td><td>37.66</td><td>0.00</td><td>100</td><td>85 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	96.51	-----	-----	88.20	33.10	12.87	37.66	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5210.00	96.51	-----	-----	88.20	33.10	12.87	37.66	0.00	100	85 Average																																										

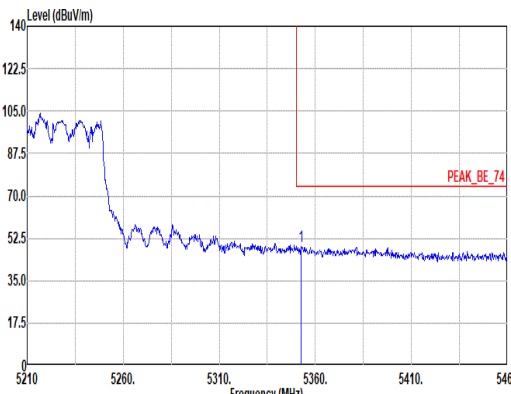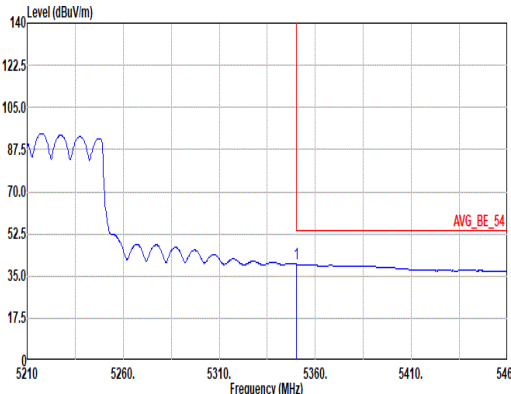

Mode	11																																												
	Band Edge - R																																												
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																												
ANT	6+7																																												
Pol.	Vertical	Fundamental																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.50</td><td>49.34</td><td>74.00</td><td>-24.66</td><td>41.11</td><td>32.90</td><td>13.06</td><td>37.73</td><td>0.00</td><td>100</td><td>85</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5352.50	49.34	74.00	-24.66	41.11	32.90	13.06	37.73	0.00	100	85	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																							
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																				
1	5352.50	49.34	74.00	-24.66	41.11	32.90	13.06	37.73	0.00	100	85	Peak																																	
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_251105 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.25</td><td>39.93</td><td>54.00</td><td>-14.07</td><td>31.69</td><td>32.90</td><td>13.06</td><td>37.72</td><td>0.00</td><td>100</td><td>85</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5350.25	39.93	54.00	-14.07	31.69	32.90	13.06	37.72	0.00	100	85	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																							
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																				
1	5350.25	39.93	54.00	-14.07	31.69	32.90	13.06	37.72	0.00	100	85	Average																																	



Mode	11																																																																																																																																																																																																
	Harmonic																																																																																																																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																																																																																																																																
ANT	6+7																																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2026-01-23 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5758.00</td><td>54.19</td><td>68.20</td><td>-14.01</td><td>44.57</td><td>33.85</td><td>13.55</td><td>37.78</td><td>0.00</td><td>250</td><td>23 Peak</td></tr><tr><td>2</td><td>6946.00</td><td>59.87</td><td>68.20</td><td>-8.33</td><td>46.93</td><td>35.90</td><td>14.93</td><td>37.89</td><td>0.00</td><td>200</td><td>20 Peak</td></tr><tr><td>3</td><td>10420.00</td><td>51.03</td><td>68.20</td><td>-17.17</td><td>34.75</td><td>38.64</td><td>18.45</td><td>41.31</td><td>0.50</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15630.00</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>35.16</td><td>38.18</td><td>22.87</td><td>44.56</td><td>0.42</td><td>100</td><td>158 Peak</td></tr><tr><td>5</td><td>15630.00</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>24.33</td><td>38.18</td><td>22.87</td><td>44.56</td><td>0.42</td><td>100</td><td>158 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5758.00	54.19	68.20	-14.01	44.57	33.85	13.55	37.78	0.00	250	23 Peak	2	6946.00	59.87	68.20	-8.33	46.93	35.90	14.93	37.89	0.00	200	20 Peak	3	10420.00	51.03	68.20	-17.17	34.75	38.64	18.45	41.31	0.50	--	-- Peak	4	15630.00	52.07	74.00	-21.93	35.16	38.18	22.87	44.56	0.42	100	158 Peak	5	15630.00	41.24	54.00	-12.76	24.33	38.18	22.87	44.56	0.42	100	158 Average	Level (dBuV/m) Date: 2026-01-23 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5758.00</td><td>51.51</td><td>68.20</td><td>-16.69</td><td>41.89</td><td>33.85</td><td>13.55</td><td>37.78</td><td>0.00</td><td>100</td><td>308 Peak</td></tr><tr><td>2</td><td>6946.00</td><td>56.55</td><td>68.20</td><td>-11.65</td><td>43.61</td><td>35.90</td><td>14.93</td><td>37.89</td><td>0.00</td><td>200</td><td>53 Peak</td></tr><tr><td>3</td><td>10420.00</td><td>52.08</td><td>68.20</td><td>-16.12</td><td>35.80</td><td>38.64</td><td>18.45</td><td>41.31</td><td>0.50</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>15630.00</td><td>51.95</td><td>74.00</td><td>-22.05</td><td>35.04</td><td>38.18</td><td>22.87</td><td>44.56</td><td>0.42</td><td>300</td><td>42 Peak</td></tr><tr><td>5</td><td>15630.00</td><td>41.20</td><td>54.00</td><td>-12.80</td><td>24.29</td><td>38.18</td><td>22.87</td><td>44.56</td><td>0.42</td><td>300</td><td>42 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5758.00	51.51	68.20	-16.69	41.89	33.85	13.55	37.78	0.00	100	308 Peak	2	6946.00	56.55	68.20	-11.65	43.61	35.90	14.93	37.89	0.00	200	53 Peak	3	10420.00	52.08	68.20	-16.12	35.80	38.64	18.45	41.31	0.50	--	-- Peak	4	15630.00	51.95	74.00	-22.05	35.04	38.18	22.87	44.56	0.42	300	42 Peak	5	15630.00	41.20	54.00	-12.80	24.29	38.18	22.87	44.56	0.42	300	42 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	5758.00	54.19	68.20	-14.01	44.57	33.85	13.55	37.78	0.00	250	23 Peak																																																																																																																																																																																						
2	6946.00	59.87	68.20	-8.33	46.93	35.90	14.93	37.89	0.00	200	20 Peak																																																																																																																																																																																						
3	10420.00	51.03	68.20	-17.17	34.75	38.64	18.45	41.31	0.50	--	-- Peak																																																																																																																																																																																						
4	15630.00	52.07	74.00	-21.93	35.16	38.18	22.87	44.56	0.42	100	158 Peak																																																																																																																																																																																						
5	15630.00	41.24	54.00	-12.76	24.33	38.18	22.87	44.56	0.42	100	158 Average																																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	5758.00	51.51	68.20	-16.69	41.89	33.85	13.55	37.78	0.00	100	308 Peak																																																																																																																																																																																						
2	6946.00	56.55	68.20	-11.65	43.61	35.90	14.93	37.89	0.00	200	53 Peak																																																																																																																																																																																						
3	10420.00	52.08	68.20	-16.12	35.80	38.64	18.45	41.31	0.50	--	-- Peak																																																																																																																																																																																						
4	15630.00	51.95	74.00	-22.05	35.04	38.18	22.87	44.56	0.42	300	42 Peak																																																																																																																																																																																						
5	15630.00	41.20	54.00	-12.80	24.29	38.18	22.87	44.56	0.42	300	42 Average																																																																																																																																																																																						



Mode	11	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
10G ~18G Avg	Level (dBuV/m) Date: 2026-01-23 Frequency (MHz) Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 HORIZONTAL	Level (dBuV/m) Date: 2026-01-23 Frequency (MHz) Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_251105 VERTICAL