




FCC RADIO TEST REPORT

FCC ID : UZ7TC101B
Equipment : Touch Computer
Brand Name : Zebra
Model Name : TC101B
Applicant : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069
USA
Manufacturer : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069
USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Nov. 28, 2025 and testing was performed from Jan. 20, 2026 to Feb. 24, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test	6
1.2 Product Specification of Equipment Under Test	8
1.3 Modification of EUT	9
1.4 Testing Location	9
1.5 Applicable Standards	9
2 Test Configuration of Equipment Under Test	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration	11
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	12
3 Conducted Test Result	13
3.1 Measuring Instruments.....	13
3.2 Conducted Output Power and ERP/EIRP	14
3.3 Peak-to-Average Ratio	15
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	16
3.5 Conducted Band Edge	17
3.6 Frequency Stability	18
4 Radiated Test Items	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Field Strength of Spurious Radiation Measurement	21
5 List of Measuring Equipment.....	22
6 Measurement Uncertainty	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG5N2836A	01	Initial issue of report	Mar. 10, 2026
FG5N2836A	02	Revised SW Version. This report is an updated version, replacing the report issued on Mar. 10, 2026.	Mar. 18, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (GSM850) (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (GSM1900) (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
3.6	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	31.45 dB under the limit at 5325 MHz
Remark: 1. Not required means after assessing, test items are not necessary to carry out.				

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Julia Chang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	TC101B
FCC ID	UZ7TC101B
Sample 1	no Scan engine
Sample 2	no Scan engine (Data only)
Sample 3	Scan engine (SE4100)
Sample 4	Scan engine (SR560), White Illum, Red Laser
Sample 5	Scan engine (SR500), Red Illum, Yellow LED Aimer
EUT supports Radios application	GSM/WCDMA/HSPA/LTE/5G NR/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE BDS/Galileo/GLONASS/GPS
HW Version	EV
SW Version	15-13-05.00-VG-U00-PRD-NEM-04
MFD	12NOV25
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

Support band and evaluated information	
Supported band	GSM850(GPRG850/EDGE850), GSM 1900(GPRS1900/EDGE 1900) WCDMA B2,B4,B5
Evaluated and Tested band	GSM850(GPRG850/EDGE850), GSM 1900(GPRS1900/EDGE 1900) WCDMA B2,B4,B5

Band Power Class				
-	PC3	-	-	-
GSM850	V	-	-	-
GSM1900	V	-	-	-
WCDMA B2	V	-	-	-
WCDMA B4	V	-	-	-
WCDMA B5	V	-	-	-

Max Antenna Gain information(dBi)							
Band	Ant 8	-	-	-	-	-	Main Ant. #
GSM850	-1.91	-	-	-	-	-	8
GSM1900	-1.16	-	-	-	-	-	8
WCDMA B2	-1.16	-	-	-	-	-	8
WCDMA B4	0.16	-	-	-	-	-	8
WCDMA B5	-1.91	-	-	-	-	-	8

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

Specification of Accessories				
Adapter 1	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Adapter 2	Brand Name	Zebra	Part Number	PWR-WUA5V45W1US
Battery 1 (1x)	Brand Name	Zebra	Part Number	BT-000473-0020
Battery 2 (1.5x)	Brand Name	Zebra	Part Number	BT-000473-0820
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB TYPE C to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TN28USBC2C-01
USB TYPE C to TYPE C cable	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
PTT Headset with USB-C connector	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
PTT and VoIP headset with 3.5mm standard jack	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-02
HS2100 rugged wired headset	Brand Name	Zebra	Part Number	HS2100-BTN-LSB
HS2100 standard cable	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
HS3100 rugged Bluetooth headset	Brand Name	Zebra	Part Number	HS3100-OTH
USB-C to 3.5mm adapter cable	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
Handstrap	Brand Name	Zebra	Part Number	SG-TC2L-HSTRP1-01
Trigger Handle	Brand Name	Zebra	Part Number	CRG-TC2L-SNP1-01
Arm Mounts	Brand Name	Zebra	Part Number	SG-TC2L-ARMNT-01
Soft Holster	Brand Name	Zebra	Part Number	SG-TC2L-HLSTR1-01
Rugged boot	Brand Name	Zebra	Part Number	SG-TCVT-BOOT-01

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	GSM: GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	GSM: GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Antenna Type	PIFA Antenna
Type of Modulation	GSM / GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH21-HY
Test Engineer	Eric Wu	Jack Cheng, Ray Lung, Sky Chang
Temperature (°C)	19.9~21.9	18~26
Relative Humidity (%)	45.6~47.6	50~70

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II


All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM850	■ GPRS Class 8 Link ■ EDGE Class 8 Link	■ GPRS Class 8 Link ■ EDGE Class 8 Link
GSM1900	■ GPRS Class 8 Link ■ EDGE Class 10 Link	■ GPRS Class 8 Link ■ EDGE Class 10 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Adapter 1 and USB Cable 1.

2.2 Connection Diagram of Test System

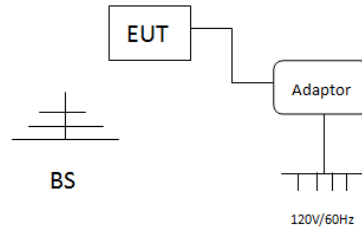

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	N/A
2.	Base Station	Anritsu	MT8821C	N/A	N/A	N/A
3.	Base Station	Anritsu	MT8000A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

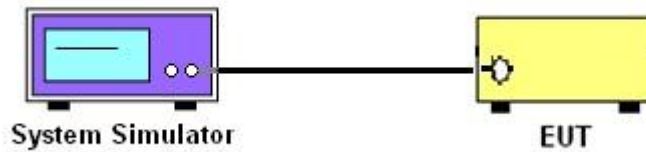

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

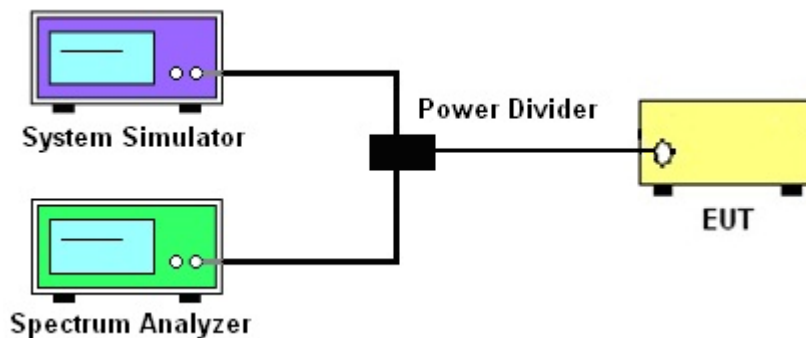

3.1.4 Frequency Stability

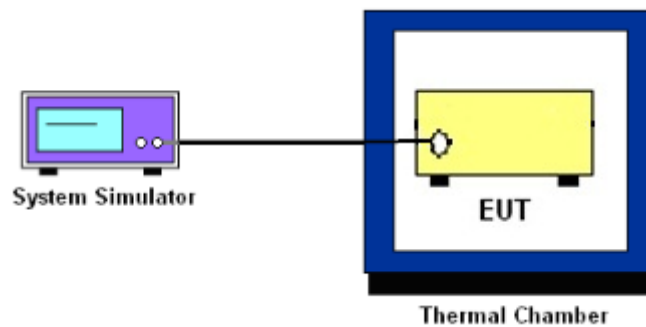

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers are measured.
4. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.6 Frequency Stability

3.6.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.6.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature is decreased to -30°C and the EUT is stabilized before testing. Power is applied and the maximum change in frequency is recorded within one minute.
3. With power OFF, the temperature is raised in 10°C steps up to 50°C . The EUT is stabilized at each step for at least half an hour. Power is applied and the maximum frequency change is recorded within one minute.

3.6.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT is varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency is measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

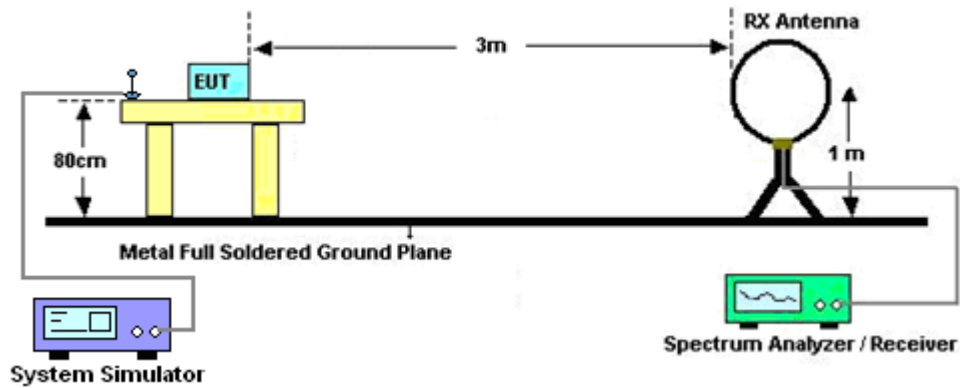


For radiated test from 30MHz to 1GHz

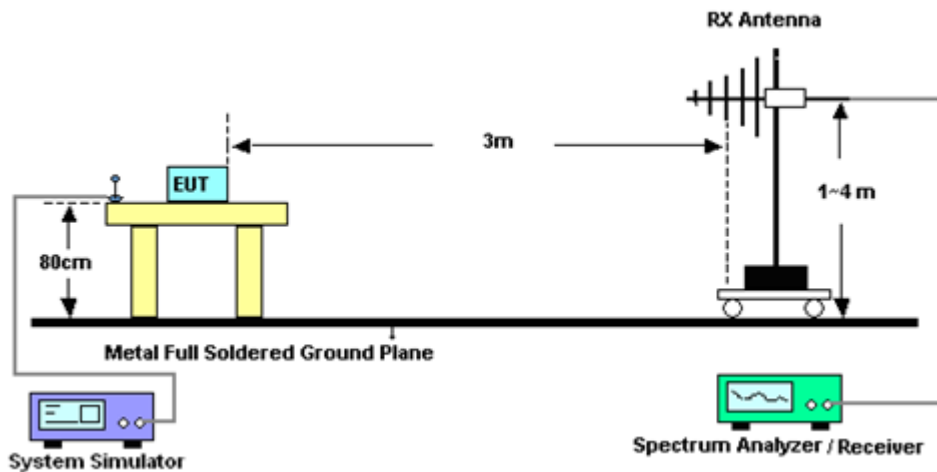

For radiated test from 1GHz to 18GHz

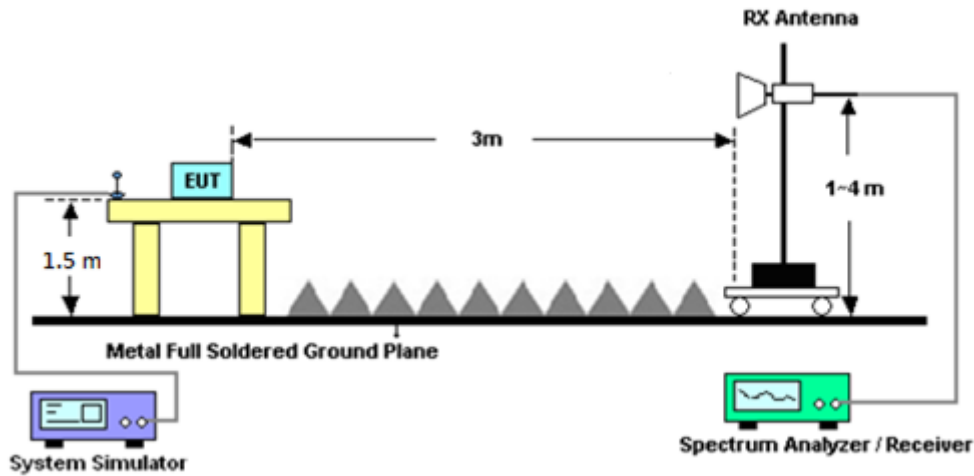

For radiated test above 18GHz

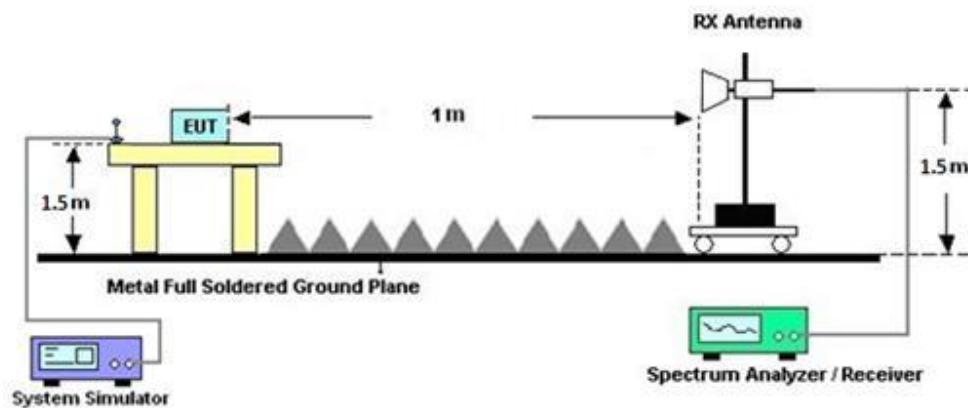

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 06, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Mar. 05, 2026	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Nov. 26, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Nov. 25, 2026	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18E N	1GHz~18GHz	Aug. 07, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Aug. 06, 2026	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 02, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Jul. 01, 2026	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 13, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Jul. 12, 2026	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 26, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Sep. 25, 2026	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Aug. 25, 2026	Radiation (03CH21-HY)
EXA Signal Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 09, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Sep. 08, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Mar. 04, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,803954/2	30MHz~40GHz	Aug. 11, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Aug. 10, 2026	Radiation (03CH21-HY)
RF Cable	EMCI	EMC101Y-KM-KM-1000	240906	30MHz~40GHz	Oct. 21, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Oct. 20, 2026	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 21, 2025	Jan. 20, 2026 ~ Feb. 11, 2026	Oct. 20, 2026	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 20, 2026 ~ Feb. 11, 2026	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jan. 20, 2026 ~ Feb. 11, 2026	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 20, 2026 ~ Feb. 11, 2026	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jan. 20, 2026 ~ Feb. 11, 2026	N/A	Radiation (03CH21-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 30, 2025	Feb. 03, 2026 ~ Feb. 24, 2026	Sep. 29, 2026	Conducted (TH05-HY)
Universal Digital Radio COMM. Tester	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 14, 2025	Feb. 03, 2026 ~ Feb. 24, 2026	Aug. 13, 2026	Conducted (TH05-HY)
DC Power Supply	GW Instek	GPE-2323	GEU871221	0V~64V ; 0A~6A	Apr. 14, 2025	Feb. 03, 2026 ~ Feb. 24, 2026	Apr. 13, 2026	Conducted (TH05-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SU-241	92003713	-30°C ~95°C	May. 12, 2025	Feb. 03, 2026 ~ Feb. 24, 2026	May. 11, 2026	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303B	TP200886	N/A	Mar. 03, 2025	Feb. 03, 2026 ~ Feb. 24, 2026	Mar. 02, 2026	Conducted (TH05-HY)

6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.40 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.80 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.30 dB
--	---------

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power and ERP/EIRP)

GSM850 Maximum Average Power [dBm] (GT - LC = -1.91 dB)					
Channel	128	189	251	ERP (dBm)	ERP (W)
Frequency	824.2	836.4	848.8		
GSM 1 Tx slot	32.53	32.83	32.90	28.86	0.7691
GPRS 1 Tx slot	32.55	32.86	32.92		
GPRS 2 Tx slot	32.87	32.69	32.75		
GPRS 3 Tx slot	32.51	32.41	32.49		
GPRS 4 Tx slot	32.19	32.12	32.21		
EDGE 1 Tx slot	26.80	27.15	27.28	23.22	0.2099
EDGE 2 Tx slot	26.59	26.93	27.00		
EDGE 3 Tx slot	26.42	26.93	27.00		
EDGE 4 Tx slot	25.43	25.88	25.91		
Limit	ERP < 7W			Result	Pass

GSM1900 Maximum Average Power [dBm] (GT - LC = -1.16 dB)					
Channel	512	661	810	EIRP (dBm)	EIRP (W)
Frequency	1850.2	1880	1909.8		
GSM 1 Tx slot	30.06	30.03	29.61	29.00	0.7943
GPRS 1 Tx slot	30.16	30.08	29.70		
GPRS 2 Tx slot	30.11	30.02	29.64		
GPRS 3 Tx slot	29.93	29.94	29.56		
GPRS 4 Tx slot	29.93	29.84	29.46		
EDGE 1 Tx slot	25.51	25.89	25.81	24.73	0.2972
EDGE 2 Tx slot	25.47	25.80	25.70		
EDGE 3 Tx slot	25.48	25.67	25.62		
EDGE 4 Tx slot	25.34	25.59	25.56		
Limit	EIRP < 2W			Result	Pass

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -1.91 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
AMR 12.2K	23.72	23.75	23.69	19.82	0.0959
RMC 12.2K	23.88	23.83	23.84		
HSDPA Subtest-1	22.88	22.84	22.74		
HSDPA Subtest-2	22.89	22.86	22.80		
HSDPA Subtest-3	22.39	22.33	22.31		
HSDPA Subtest-4	22.44	22.37	22.24		
DC-HSDPA Subtest-1	22.79	22.77	22.65		
DC-HSDPA Subtest-2	22.85	22.79	22.75		
DC-HSDPA Subtest-3	22.36	22.25	22.31		
DC-HSDPA Subtest-4	22.44	22.37	22.18		
HSUPA Subtest-1	22.89	22.87	22.81		
HSUPA Subtest-2	20.87	20.85	20.72		
HSUPA Subtest-3	21.86	21.84	21.82		
HSUPA Subtest-4	20.93	20.87	20.80		
HSUPA Subtest-5	22.90	22.80	22.70		
HSPA+ (16QAM) Subtest-1	20.33	20.21	20.18		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -1.16 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
AMR 12.2K	23.62	23.64	23.62	22.57	0.1807
RMC 12.2K	23.73	23.71	23.67		
HSDPA Subtest-1	22.79	22.74	22.73		
HSDPA Subtest-2	22.75	22.76	22.72		
HSDPA Subtest-3	22.25	22.22	22.22		
HSDPA Subtest-4	22.28	22.24	22.24		
DC-HSDPA Subtest-1	22.70	22.70	22.68		
DC-HSDPA Subtest-2	22.72	22.68	22.71		
DC-HSDPA Subtest-3	22.23	22.18	22.13		
DC-HSDPA Subtest-4	22.27	22.20	22.19		
HSUPA Subtest-1	22.72	22.62	22.68		
HSUPA Subtest-2	20.69	20.72	20.62		
HSUPA Subtest-3	21.69	21.68	21.69		
HSUPA Subtest-4	20.65	20.71	20.73		
HSUPA Subtest-5	22.80	22.80	22.70		
HSPA+ (16QAM) Subtest-1	20.21	20.29	20.10		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 0.16 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
AMR 12.2K	23.74	23.66	23.72	23.98	0.2500
RMC 12.2K	23.82	23.72	23.80		
HSDPA Subtest-1	22.78	22.75	22.86		
HSDPA Subtest-2	22.52	22.72	22.79		
HSDPA Subtest-3	22.25	22.24	22.33		
HSDPA Subtest-4	22.30	22.24	22.33		
DC-HSDPA Subtest-1	22.78	22.73	22.76		
DC-HSDPA Subtest-2	22.52	22.64	22.69		
DC-HSDPA Subtest-3	22.15	22.20	22.28		
DC-HSDPA Subtest-4	22.24	22.24	22.27		
HSUPA Subtest-1	22.84	22.68	22.74		
HSUPA Subtest-2	20.75	20.74	20.76		
HSUPA Subtest-3	21.68	21.64	21.88		
HSUPA Subtest-4	20.86	20.62	20.92		
HSUPA Subtest-5	22.80	22.90	22.90		
HSPA+ (16QAM) Subtest-1	20.22	20.34	20.31		
Limit	EIRP < 1W			Result	Pass

A.1. Conducted Test Results**GSM 850**

Environment of	Temperature	°C	19.9-21.9
Test Room	Humidity	%	45.6-47.6
Test Engineer	-----		Eric Wu
Peak Antenna Gain	dBi		-----
Tested Circuit Insertion Loss	dB		15.7
Input Power Voltage	VDC		3.85

A.1. TEST Results of GSM 850

Frequency Stability		Unit	GSM/GPRS	EDGE	Limit Line	Result	IC FS(GSM/GPRS)		IC FS(EDGE)	
Temperature	50 ℃	ppm	0.0120	0.0179	≤ 2.5	PASS	10	Hz	15	Hz
	40 ℃	ppm	0.0096	0.0155	≤ 2.5	PASS	8	Hz	13	Hz
	30 ℃	ppm	0.0024	0.0024	≤ 2.5	PASS	2	Hz	2	Hz
	20 ℃	ppm	0.0000	0.0000	≤ 2.5	PASS	0	Hz	0	Hz
	10 ℃	ppm	0.0048	0.0048	≤ 2.5	PASS	4	Hz	4	Hz
	0 ℃	ppm	0.0084	0.0096	≤ 2.5	PASS	7	Hz	8	Hz
	-10 ℃	ppm	0.0108	0.0227	≤ 2.5	PASS	9	Hz	19	Hz
	-20 ℃	ppm	0.0239	0.0299	≤ 2.5	PASS	20	Hz	25	Hz
	-30 ℃	ppm	0.0263	0.0335	≤ 2.5	PASS	22	Hz	28	Hz
Voltage (Vdc)	4.30V	ppm	0.0036	0.0060	≤ 2.5	PASS	3	Hz	5	Hz
	3.85V	ppm	0.0012	0.0012	≤ 2.5	PASS	-1	Hz	-1	Hz
	BEP= 3.65V	ppm	0.0072	0.0072	≤ 2.5	PASS	6	Hz	6	Hz

A.2. Conducted Test Results**GSM 1900**

Environment of	Temperature	°C	19.9-21.9
Test Room	Humidity	%	45.6-47.6
Test Engineer		-----	Eric Wu
Peak Antenna Gain		dBi	-----
Tested Circuit Insertion Loss		dB	17.4
Input Power Voltage		VDC	3.85

A.2. TEST Results of GSM 1900

Frequency Stability		Unit	GSM/GPRS	EDGE	Limit Line	Result
Temperature	50 °C	ppm	0.0032	0.0043	≤ 2.5	PASS
	40 °C	ppm	0.0021	0.0027	≤ 2.5	PASS
	30 °C	ppm	0.0005	0.0016	≤ 2.5	PASS
	20 °C	ppm	0.0000	0.0000	≤ 2.5	PASS
	10 °C	ppm	0.0016	0.0032	≤ 2.5	PASS
	0 °C	ppm	0.0043	0.0048	≤ 2.5	PASS
	-10 °C	ppm	0.0064	0.0080	≤ 2.5	PASS
	-20 °C	ppm	0.0080	0.0096	≤ 2.5	PASS
	-30 °C	ppm	0.0101	0.0117	≤ 2.5	PASS
Voltage (Vdc)	4.30V	ppm	0.0037	0.0053	≤ 2.5	PASS
	3.85V	ppm	0.0005	0.0005	≤ 2.5	PASS
	BEP= 3.65V	ppm	0.0048	0.0064	≤ 2.5	PASS

A.6. CONDUCTED TEST RESULTS

UMTS Band2

Environment of	Temperature	°C	19.9-21.9
Test Room	Humidity	%	45.6-47.6
Test Engineer		-----	Eric Wu
Peak Antenna Gain		dBi	-----
Tested Circuit Insertion Loss		dB	17.4
Input Power Voltage		VDC	3.85

A.6. TEST Results of UMTS Band2

RMC 12.2Kbps		Unit		Limit Line	Result	IC FS	
Temperature	50 °C	ppm	0.0059	≤ 2.5	PASS	11	Hz
	40 °C	ppm	0.0069	≤ 2.5	PASS	13	Hz
	30 °C	ppm	0.0011	≤ 2.5	PASS	2	Hz
	20 °C	ppm	0.0000	≤ 2.5	PASS	0	Hz
	10 °C	ppm	0.0011	≤ 2.5	PASS	-2	Hz
	0 °C	ppm	0.0021	≤ 2.5	PASS	-4	Hz
	-10 °C	ppm	0.0032	≤ 2.5	PASS	-6	Hz
	-20 °C	ppm	0.0016	≤ 2.5	PASS	-3	Hz
Voltage (Vdc)	-30 °C	ppm	0.0027	≤ 2.5	PASS	-5	Hz
	4.30V	ppm	0.0053	≤ 2.5	PASS	10	Hz
	3.85V	ppm	0.0016	≤ 2.5	PASS	3	Hz
	BEP= 3.65V	ppm	0.0074	≤ 2.5	PASS	14	Hz

A.7. CONDUCTED TEST RESULTS **UMTS Band4**

Environment of Test Room	Temperature	°C	19.9-21.9
	Humidity	%	45.6-47.6
Test Engineer	-----		Eric Wu
Peak Antenna Gain	dBi	-----	
Tested Circuit Insertion Loss	dB		17.1
Input Power Voltage	VDC		3.85

A.7. TEST Results of UMTS Band4

RMC 12.2Kbps		Unit		Limit Line	Result	IC FS	
Temperature	50 °C	ppm	0.0162	≤ 2.5	PASS	28	Hz
	40 °C	ppm	0.0133	≤ 2.5	PASS	23	Hz
	30 °C	ppm	0.0040	≤ 2.5	PASS	7	Hz
	20 °C	ppm	0.0000	≤ 2.5	PASS	0	Hz
	10 °C	ppm	0.0069	≤ 2.5	PASS	-12	Hz
	0 °C	ppm	0.0092	≤ 2.5	PASS	-16	Hz
	-10 °C	ppm	0.0110	≤ 2.5	PASS	-19	Hz
	-20 °C	ppm	0.0115	≤ 2.5	PASS	-20	Hz
	-30 °C	ppm	0.0040	≤ 2.5	PASS	-7	Hz
Voltage (Vdc)	4.30V	ppm	0.0046	≤ 2.5	PASS	8	Hz
	3.85V	ppm	0.0104	≤ 2.5	PASS	18	Hz
	BEP= 3.65V	ppm	0.0150	≤ 2.5	PASS	26	Hz

A.7. CONDUCTED TEST RESULTS **UMTS Band5**

Environment of Test Room	Temperature	°C	19.9-21.9
	Humidity	%	45.6-47.6
Test Engineer	-----		Eric Wu
Peak Antenna Gain	dBi	-----	
Tested Circuit Insertion Loss	dB		15.7
Input Power Voltage	VDC		3.85

A.7. TEST Results of UMTS Band5

RMC 12.2Kbps		Unit		Limit Line	Result	IC FS	
Temperature	50 °C	ppm	0.0012	≤ 2.5	PASS	1	Hz
	40 °C	ppm	0.0024	≤ 2.5	PASS	2	Hz
	30 °C	ppm	0.0012	≤ 2.5	PASS	-1	Hz
	20 °C	ppm	0.0000	≤ 2.5	PASS	0	Hz
	10 °C	ppm	0.0143	≤ 2.5	PASS	-12	Hz
	0 °C	ppm	0.0120	≤ 2.5	PASS	-10	Hz
	-10 °C	ppm	0.0167	≤ 2.5	PASS	-14	Hz
	-20 °C	ppm	0.0108	≤ 2.5	PASS	-9	Hz
Voltage (Vdc)	-30 °C	ppm	0.0132	≤ 2.5	PASS	-11	Hz
	4.30V	ppm	0.0036	≤ 2.5	PASS	3	Hz
	3.85V	ppm	0.0000	≤ 2.5	PASS	0	Hz
	BEP= 3.65V	ppm	0.0048	≤ 2.5	PASS	4	Hz









A1. GSM







Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.64	3.52	PASS
Middle CH	0.56	3.48	
Highest CH	0.48	3.52	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.48	3.36	PASS
Middle CH	0.48	3.32	
Highest CH	0.48	3.20	

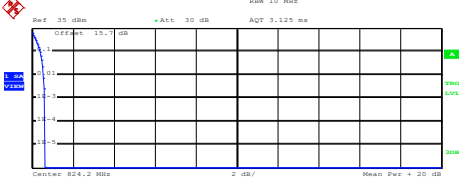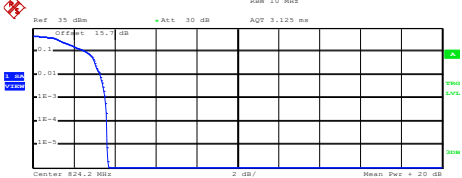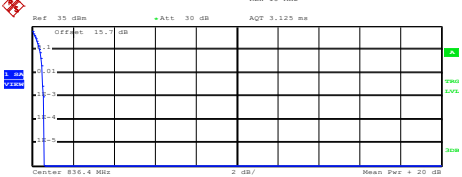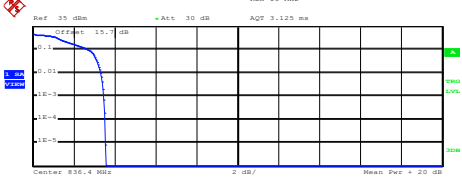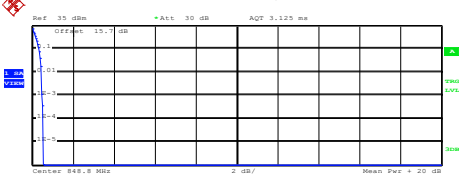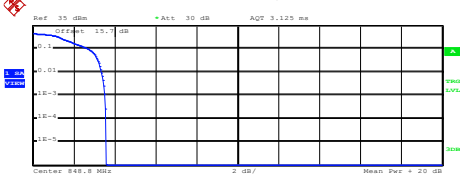GSM850 (GPRS class 8)	GSM850 (EDGE class 8)
Lowest Channel	Lowest Channel
 Center 824.2 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.07 dBm Peak 32.69 dBm Crest 0.62 dB 10 % 0.40 dB 1 % 0.56 dB .1 % 0.64 dB .01 % 0.64 dB Date: 3.FEB.2026 14:10:52	 Center 824.2 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.18 dBm Peak 29.87 dBm Crest 3.69 dB 10 % 2.60 dB 1 % 3.28 dB .1 % 3.52 dB .01 % 3.64 dB Date: 3.FEB.2026 15:05:00
Middle Channel	Middle Channel
 Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.25 dBm Peak 32.83 dBm Crest 0.58 dB 10 % 0.36 dB 1 % 0.52 dB .1 % 0.56 dB .01 % 0.60 dB Date: 3.FEB.2026 14:11:14	 Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.17 dBm Peak 29.72 dBm Crest 3.55 dB 10 % 2.76 dB 1 % 3.32 dB .1 % 3.48 dB .01 % 3.56 dB Date: 3.FEB.2026 15:05:21
Highest Channel	Highest Channel
 Center 848.8 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.29 dBm Peak 32.83 dBm Crest 0.54 dB 10 % 0.32 dB 1 % 0.44 dB .1 % 0.48 dB .01 % 0.56 dB Date: 3.FEB.2026 14:11:34	 Center 848.8 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.16 dBm Peak 29.72 dBm Crest 3.57 dB 10 % 2.72 dB 1 % 3.36 dB .1 % 3.52 dB .01 % 3.60 dB Date: 3.FEB.2026 15:05:42

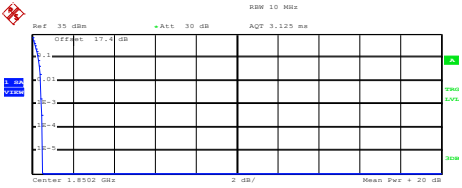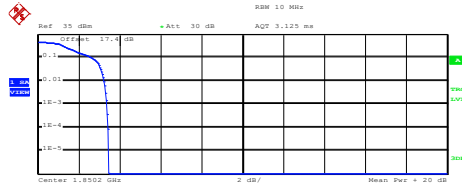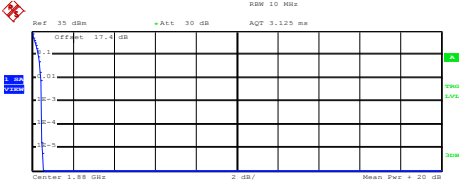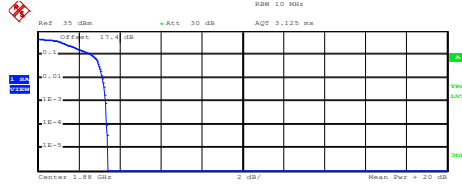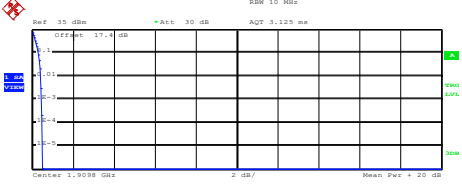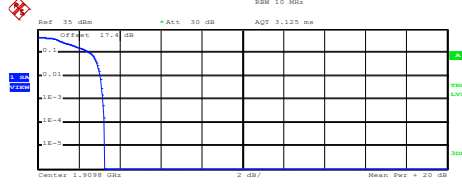



GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)
Lowest Channel	Lowest Channel
 Center 1.8502 GHz 2 dB/ Mean Pwr + 20 dB Trace 1 Mean 29.71 dBm Peak 30.22 dBm Crest 0.51 dB 10 % 0.32 dB 1 % 0.44 dB .1 % 0.48 dB .01 % 0.52 dB Date: 3.FEB.2026 15:30:10	 Center 1.8502 GHz 2 dB/ Mean Pwr + 20 dB Trace 1 Mean 25.93 dBm Peak 29.37 dBm Crest 3.45 dB 10 % 2.64 dB 1 % 3.24 dB .1 % 3.36 dB .01 % 3.44 dB Date: 3.FEB.2026 15:51:05
Middle Channel	Middle Channel
 Center 1.85 GHz 2 dB/ Mean Pwr + 20 dB Trace 1 Mean 29.54 dBm Peak 30.08 dBm Crest 0.54 dB 10 % 0.32 dB 1 % 0.44 dB .1 % 0.48 dB .01 % 0.48 dB Date: 3.FEB.2026 15:31:32	 Center 1.85 GHz 2 dB/ Mean Pwr + 20 dB Trace 1 Mean 25.81 dBm Peak 29.23 dBm Crest 3.42 dB 10 % 2.64 dB 1 % 3.16 dB .1 % 3.32 dB .01 % 3.36 dB Date: 3.FEB.2026 15:51:33
Highest Channel	Highest Channel
 Center 1.9098 GHz 2 dB/ Mean Pwr + 20 dB Trace 1 Mean 29.49 dBm Peak 30.01 dBm Crest 0.52 dB 10 % 0.32 dB 1 % 0.44 dB .1 % 0.48 dB .01 % 0.52 dB Date: 3.FEB.2026 15:32:01	 Center 1.9098 GHz 2 dB/ Mean Pwr + 20 dB Trace 1 Mean 25.98 dBm Peak 29.23 dBm Crest 3.25 dB 10 % 2.56 dB 1 % 3.04 dB .1 % 3.20 dB .01 % 3.24 dB Date: 3.FEB.2026 15:51:53

**26dB Bandwidth**

Mode	GSM850 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.308	0.308
Middle CH	0.314	0.310
Highest CH	0.312	0.311

Mode	GSM1900 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.315	0.311
Middle CH	0.317	0.311
Highest CH	0.317	0.309

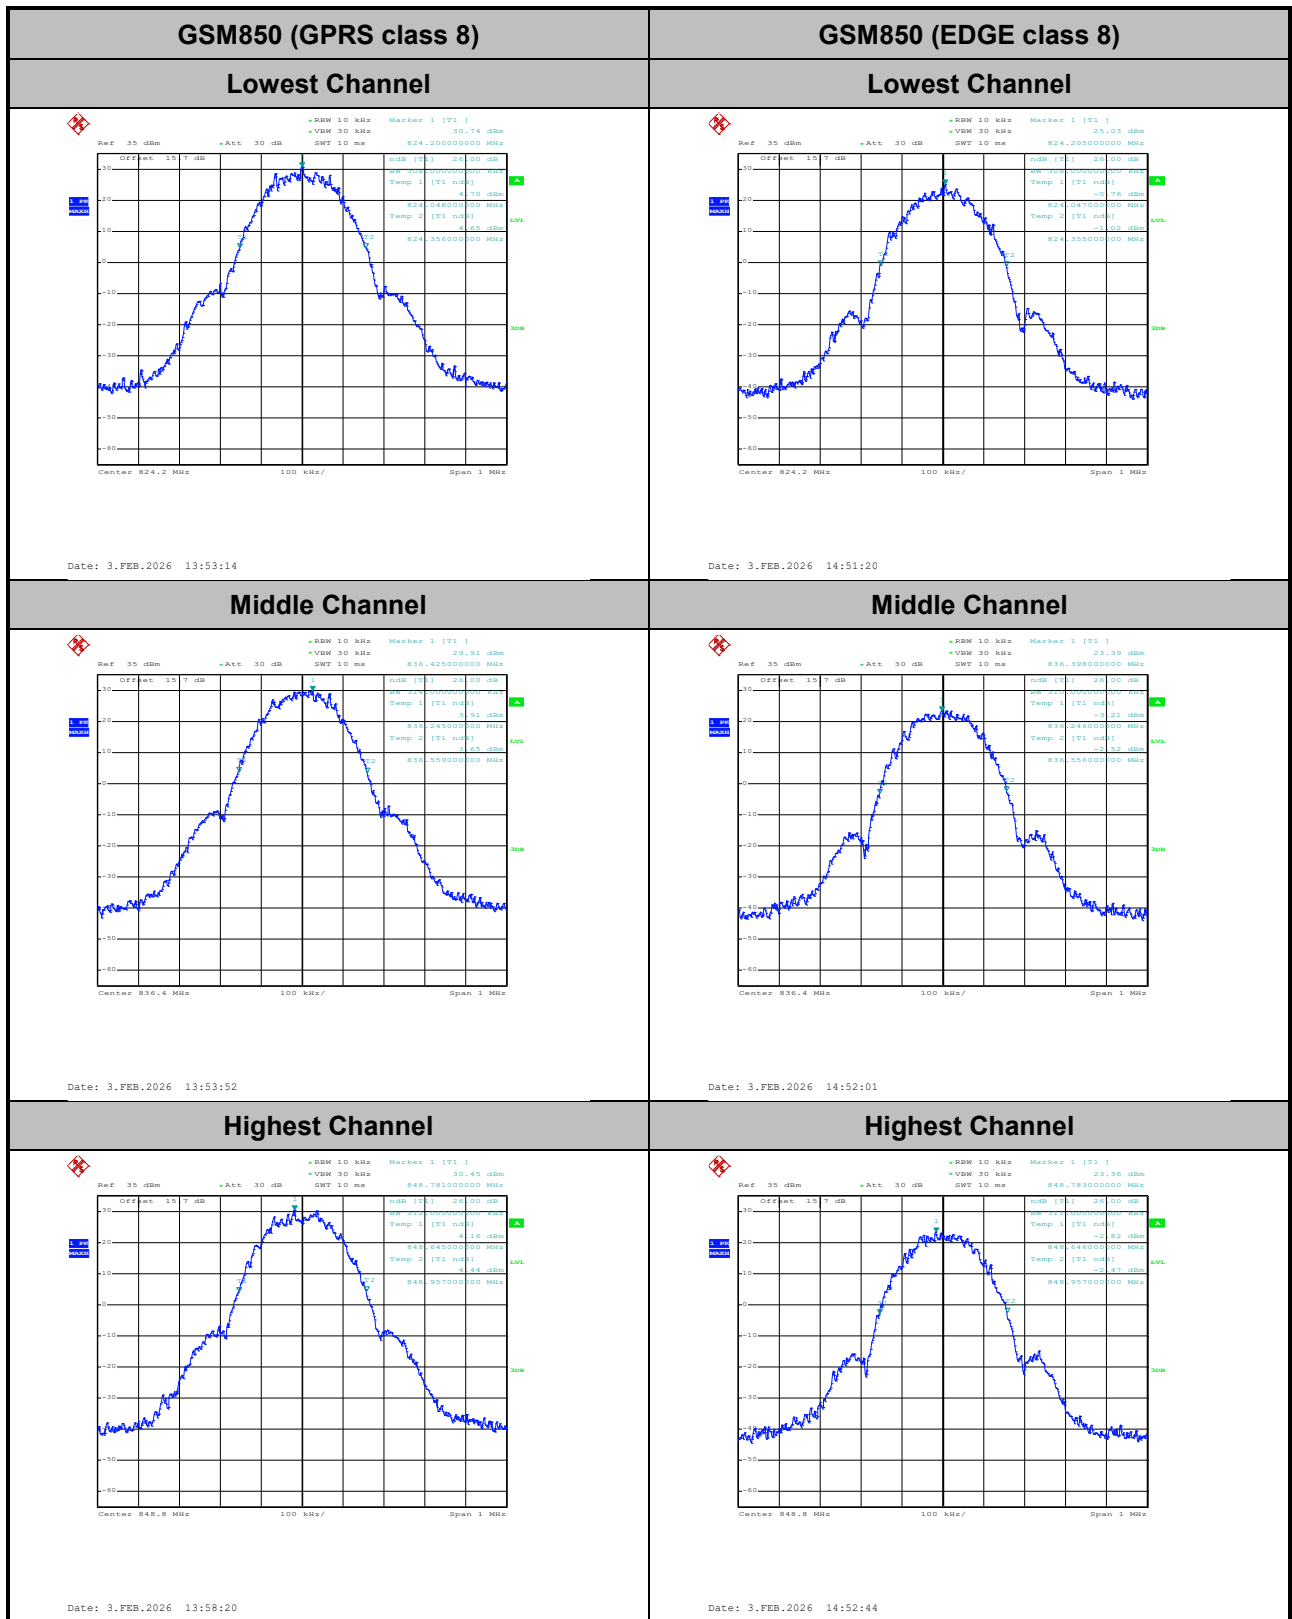


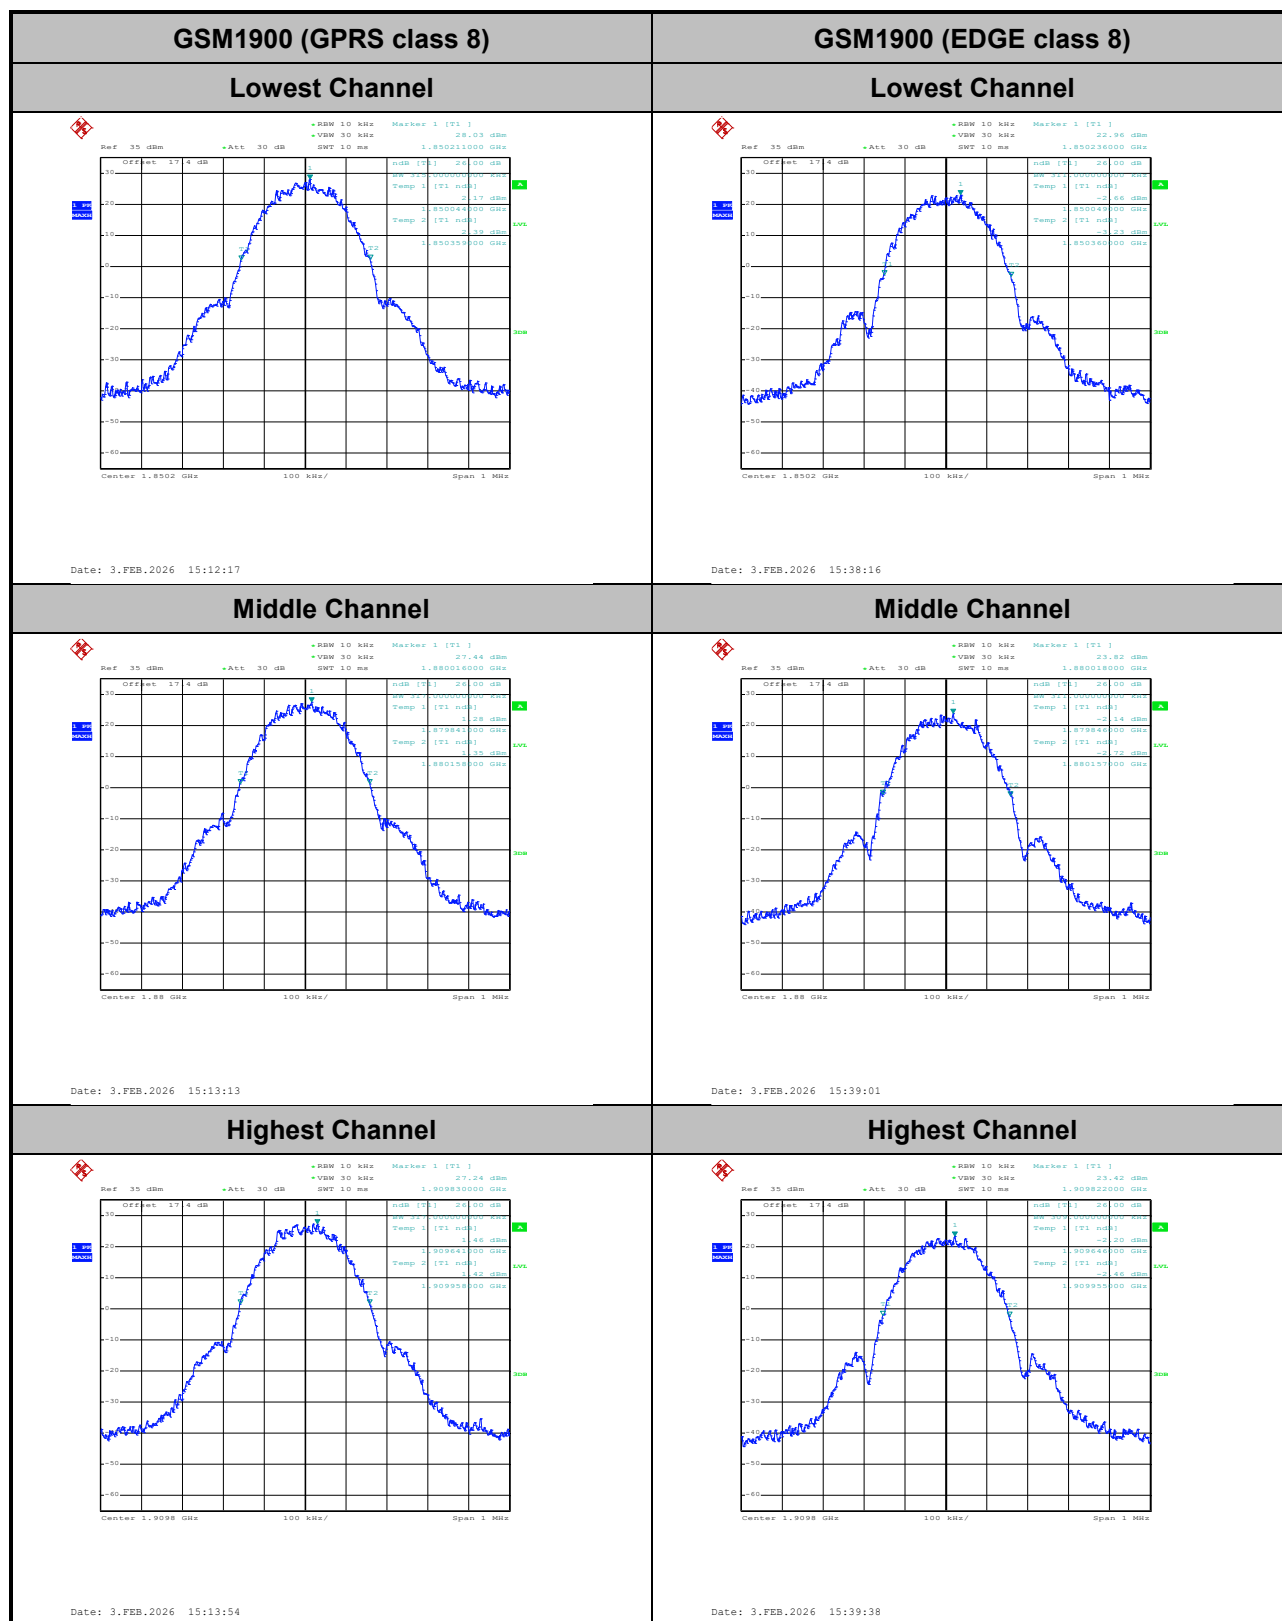


Occupied Bandwidth

Mode	GSM850 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.241	0.242
Middle CH	0.244	0.245
Highest CH	0.245	0.243


Mode	GSM1900 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.246	0.244
Middle CH	0.244	0.243
Highest CH	0.246	0.241

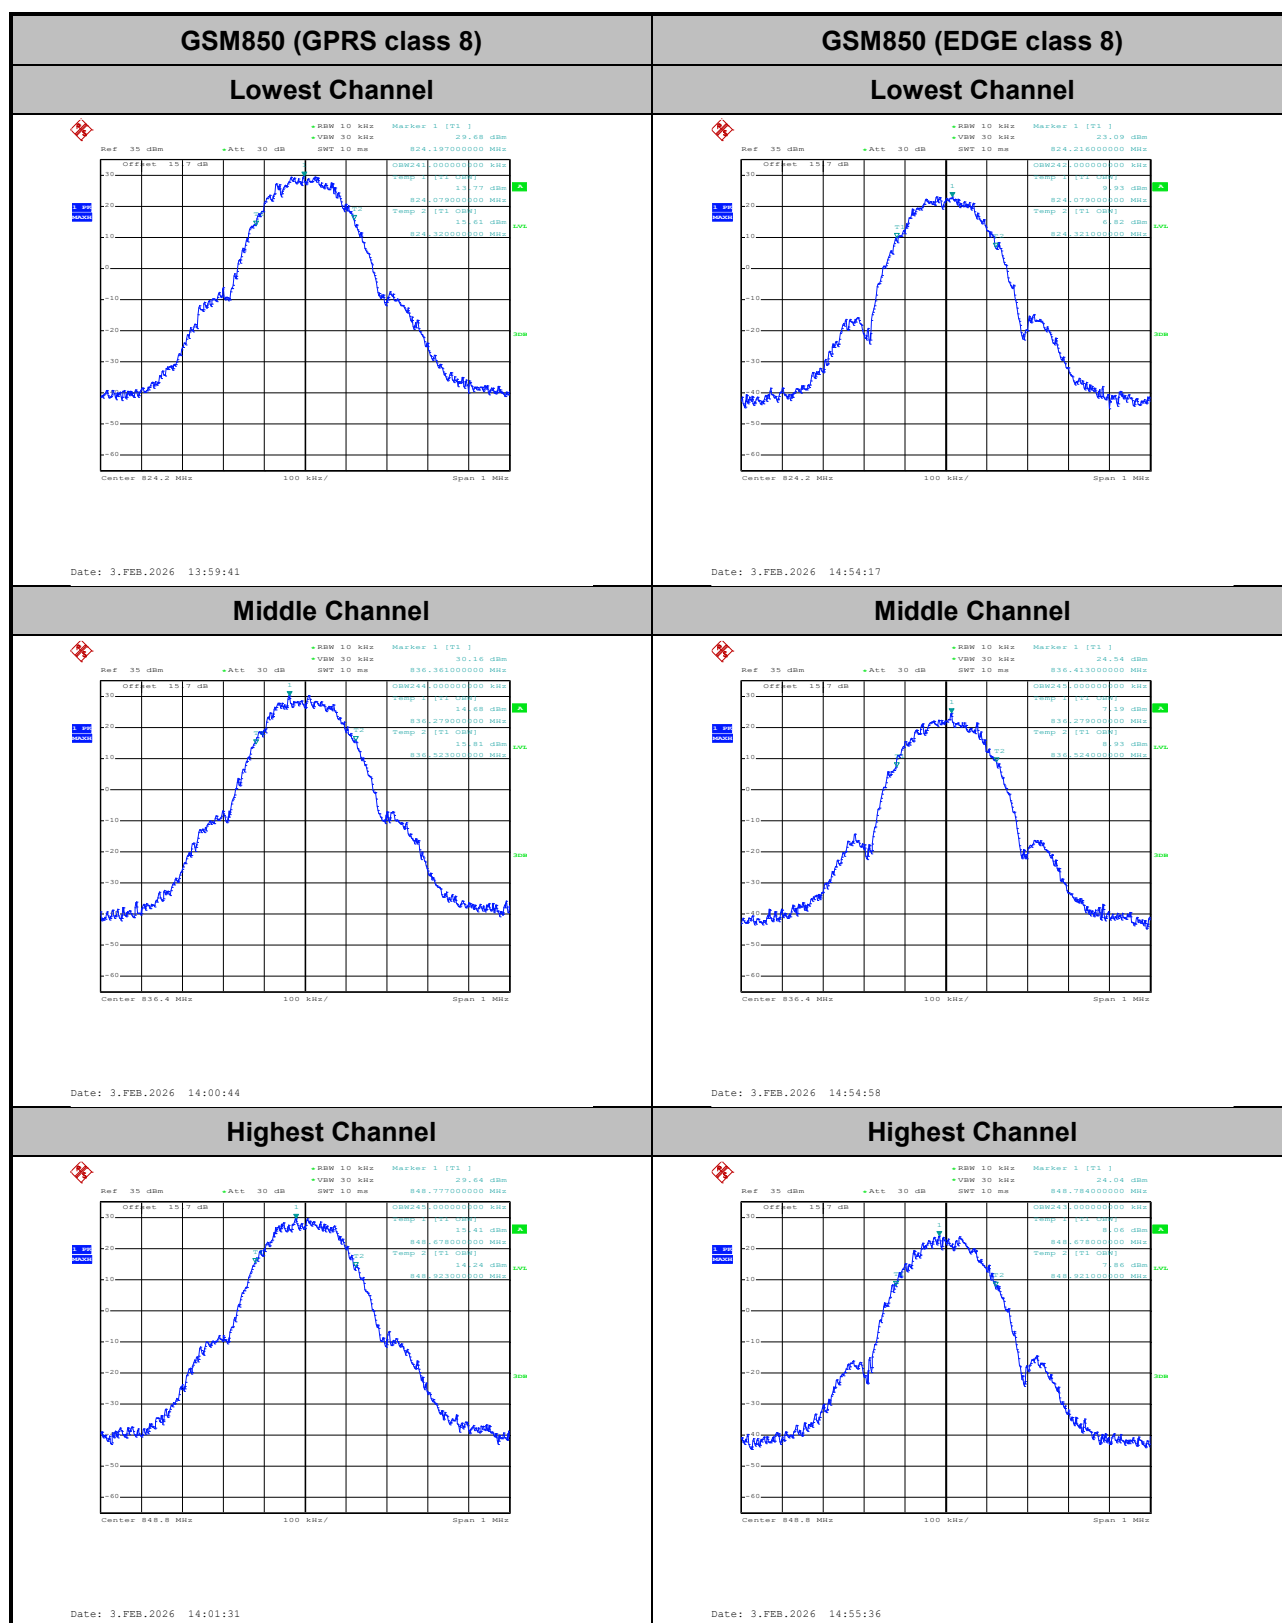

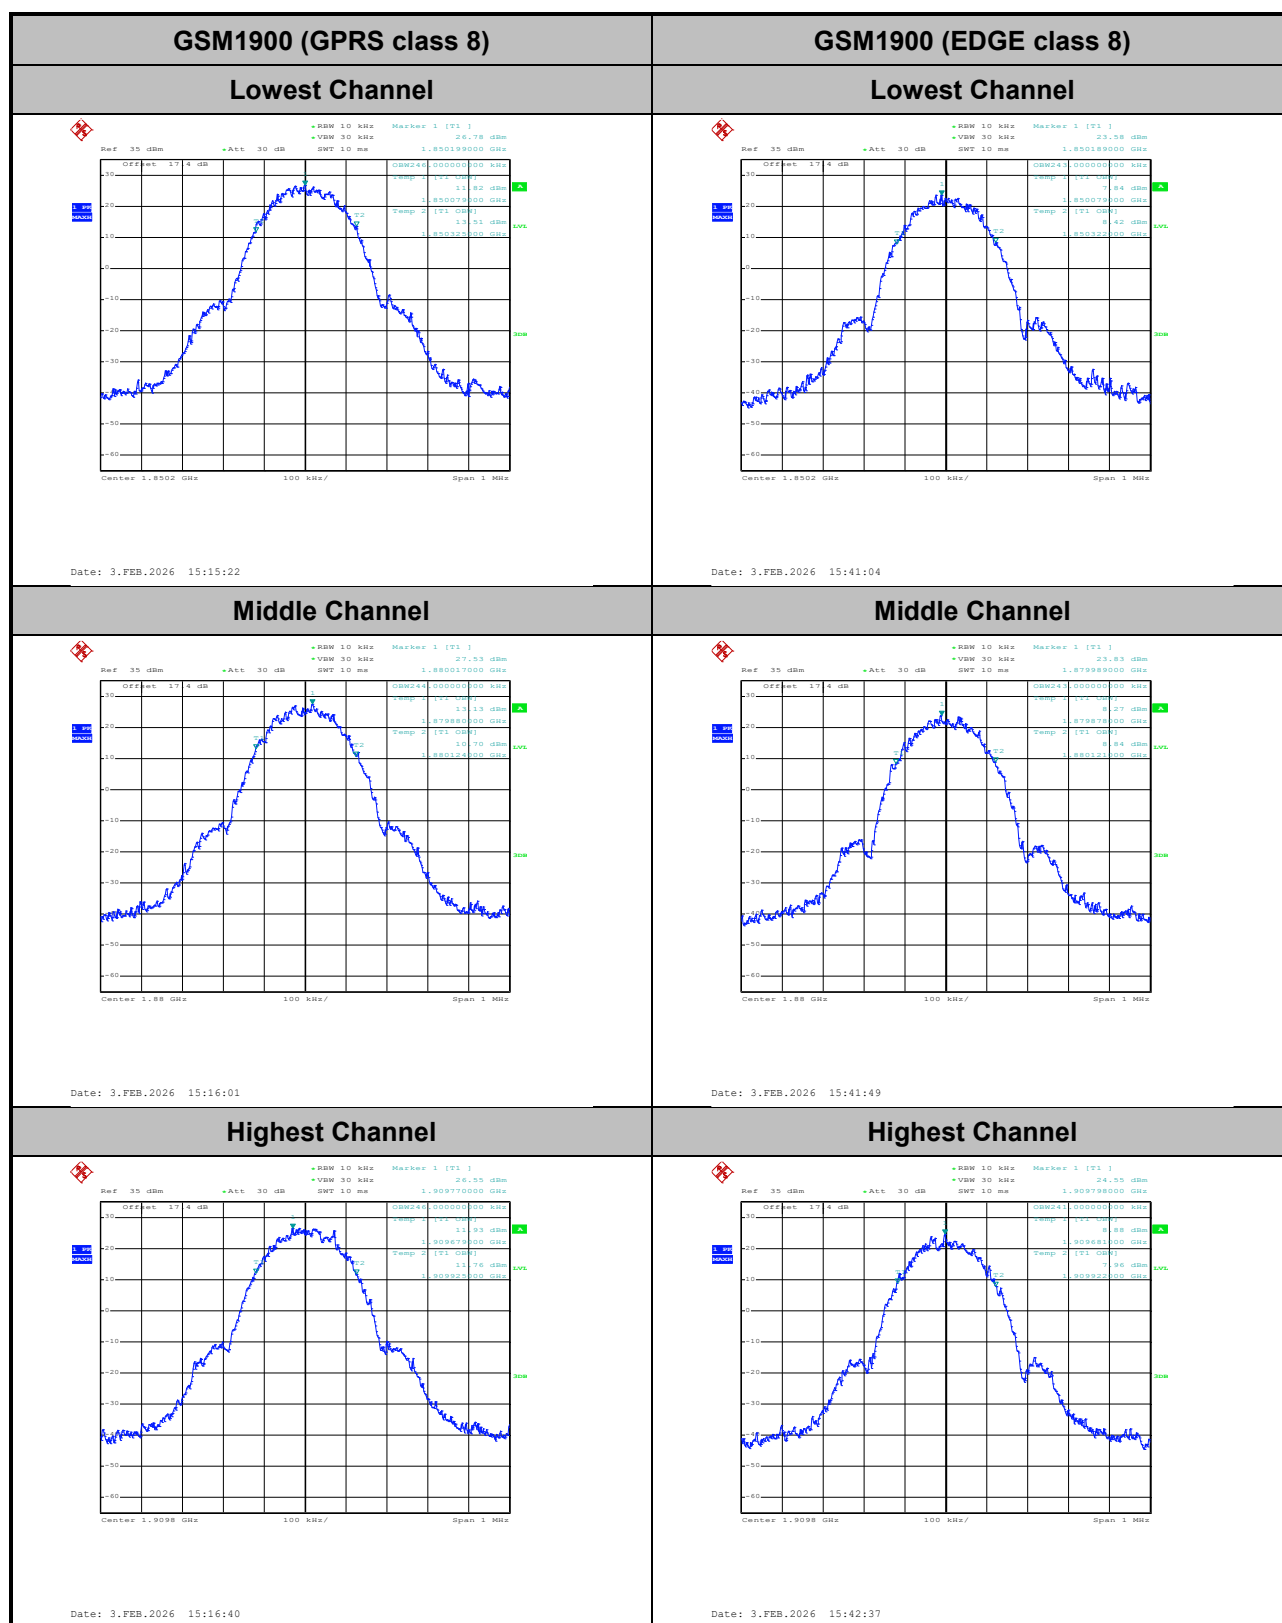



Conducted Band Edge

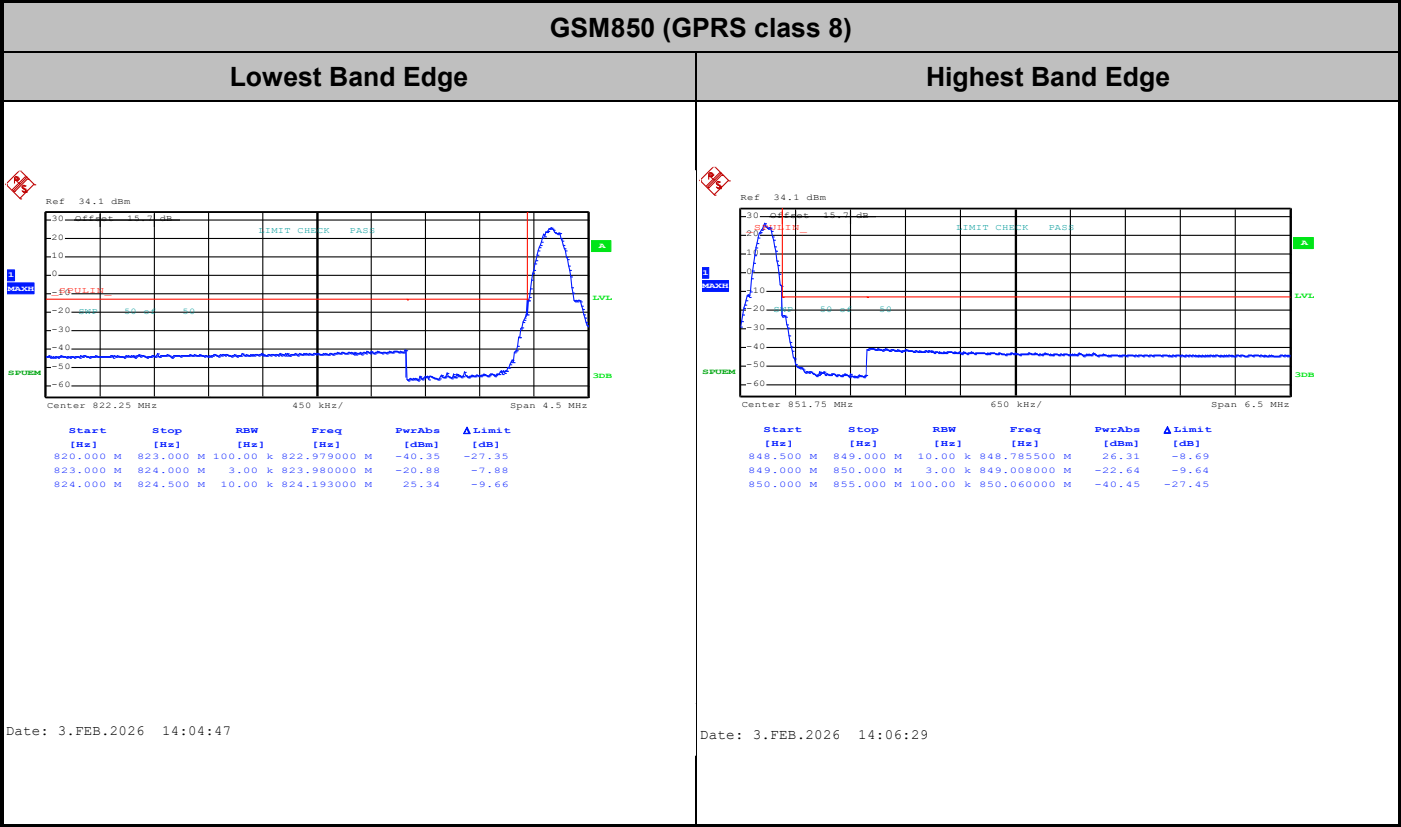





GSM850 (EDGE class 8)

Lowest Band Edge

Highest Band Edge

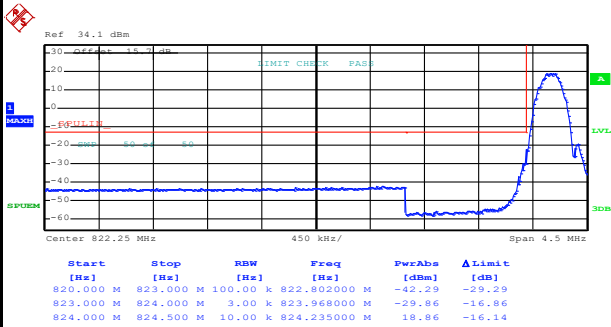

Date: 3.FEB.2026 14:57:51

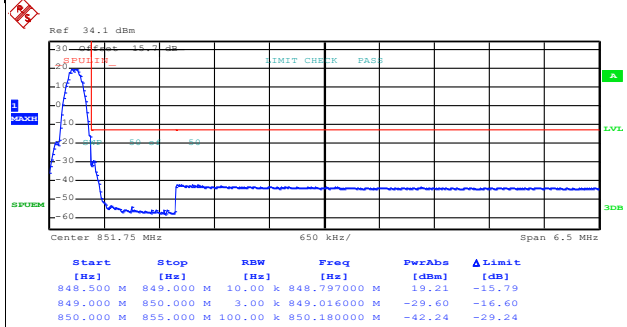


Date: 3.FEB.2026 14:59:50




GSM1900 (GPRS class 8)

Lowest Band Edge

Highest Band Edge

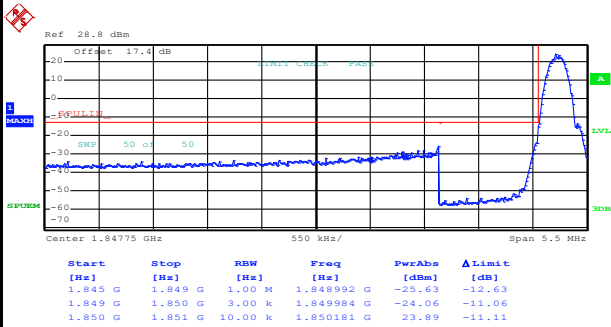

Date: 3.FEB.2026 15:19:04

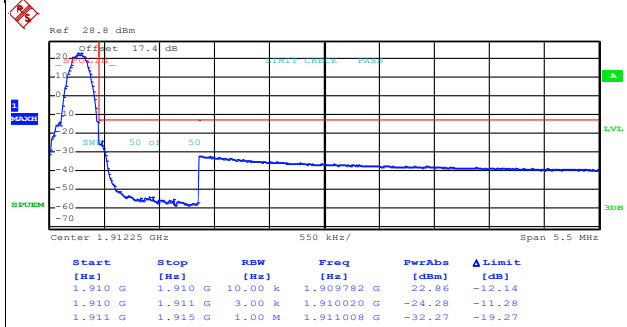


Date: 3.FEB.2026 15:20:42




GSM1900 (EDGE class 8)

Lowest Band Edge

Highest Band Edge

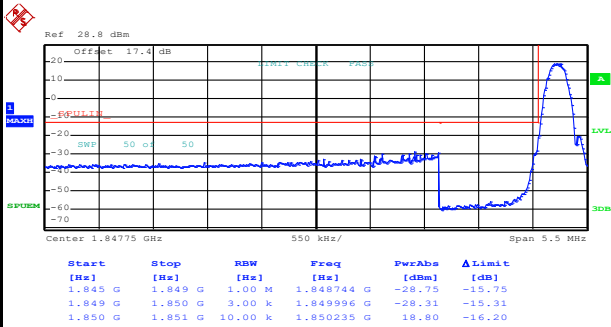

Date: 3.FEB.2026 15:45:12

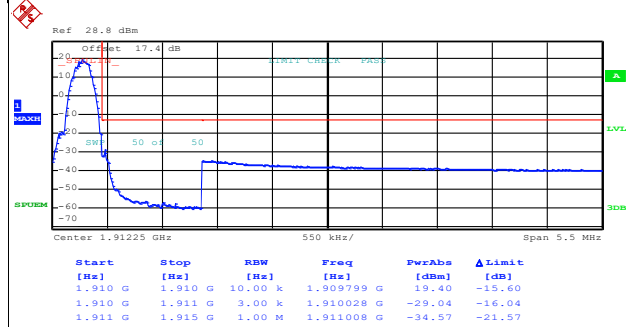


Date: 3.FEB.2026 15:46:55




Conducted Spurious Emission

GSM850 (GPRS class 8)	GSM850 (EDGE class 8)
Lowest Channel	Lowest Channel

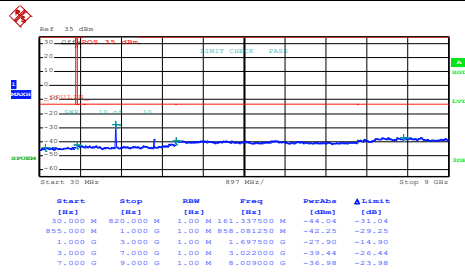

Date: 3.FEB.2026 14:09:59

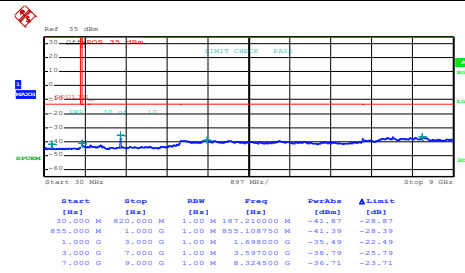


Date: 3.FEB.2026 15:03:55



GSM1900 (GPRS class 8)


Lowest Channel

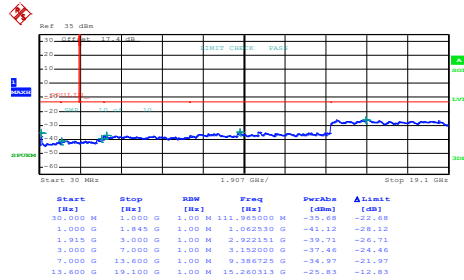

Date: 3.FEB.2026 15:22:14


GSM1900 (EDGE class 8)

Lowest Channel

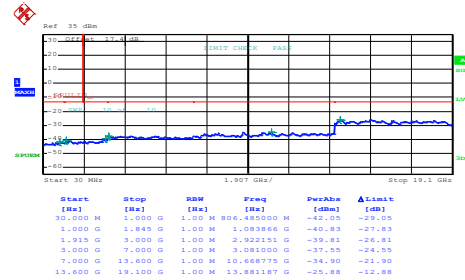


Date: 3.FEB.2026 15:48:16

Middle Channel

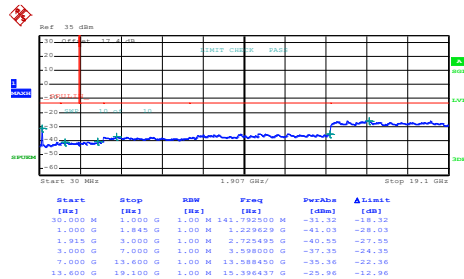


Date: 3.FEB.2026 15:23:09

Middle Channel

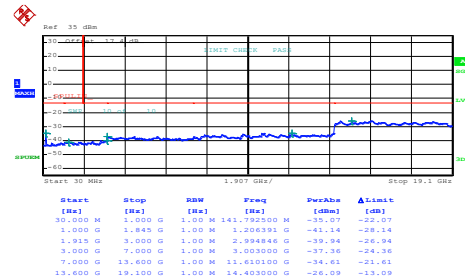


Date: 3.FEB.2026 15:49:13

Highest Channel

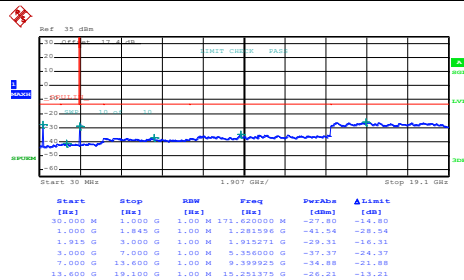

Date: 3.FEB.2026 15:24:06

Highest Channel

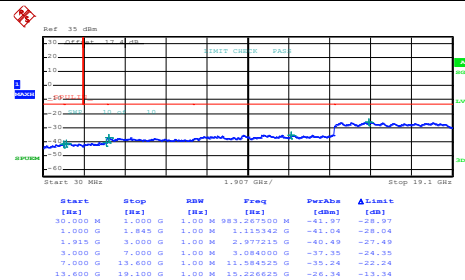

Date: 3.FEB.2026 15:50:07

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0120	0.0179	PASS
40	Normal Voltage	0.0096	0.0155	
30	Normal Voltage	0.0024	0.0024	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0048	0.0048	
0	Normal Voltage	0.0084	0.0096	
-10	Normal Voltage	0.0108	0.0227	
-20	Normal Voltage	0.0239	0.0299	
-30	Normal Voltage	0.0263	0.0335	
20	Maximum Voltage	0.0036	0.0060	
20	Normal Voltage	0.0012	0.0012	
20	Minimum Voltage	0.0072	0.0072	
Test Conditions	Middle Channel	GSM1900 (GPRS)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0032	0.0043	PASS
40	Normal Voltage	0.0021	0.0027	
30	Normal Voltage	0.0005	0.0016	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0016	0.0032	
0	Normal Voltage	0.0043	0.0048	
-10	Normal Voltage	0.0064	0.0080	
-20	Normal Voltage	0.0080	0.0096	
-30	Normal Voltage	0.0101	0.0117	
20	Maximum Voltage	0.0037	0.0053	
20	Normal Voltage	0.0005	0.0005	
20	Minimum Voltage	0.0048	0.0064	

Note:

1. Normal Voltage = 3.85V. ; Minimum Voltage = 3.65 V. ; Maximum Voltage =4.3 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.









A2. WCDMA

Peak-to-Average Ratio


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.24	3.00	3.28	PASS
Middle CH	3.20	3.04	3.20	
Highest CH	3.24	2.88	3.20	

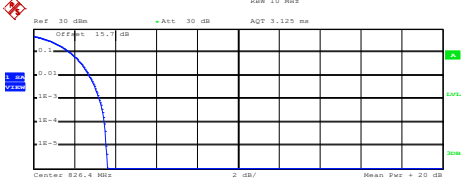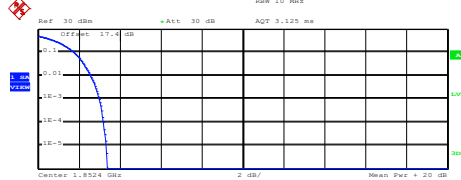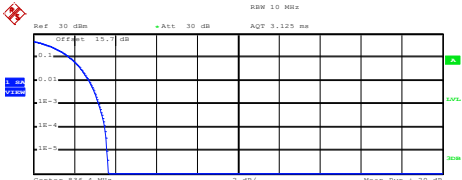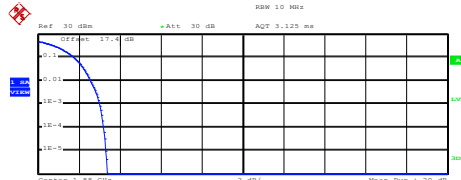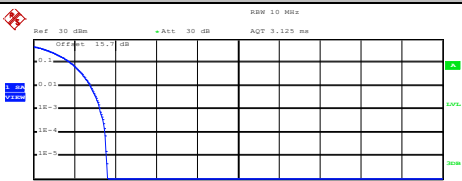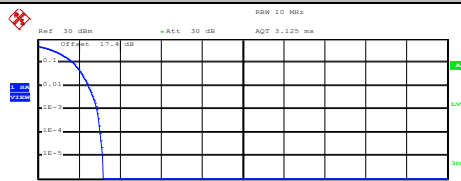

WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																												
Lowest Channel	Lowest Channel																												
 Center 826.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>23.01 dBm</td></tr><tr><td>Peak</td><td>26.63 dBm</td></tr><tr><td>Crest</td><td>3.62 dB</td></tr></table><table><tr><td>10 %</td><td>1.80 dB</td></tr><tr><td>1 %</td><td>2.72 dB</td></tr><tr><td>.1 %</td><td>3.24 dB</td></tr><tr><td>.01 %</td><td>3.48 dB</td></tr></table> Date: 3.FEB.2026 11:21:30	Mean	23.01 dBm	Peak	26.63 dBm	Crest	3.62 dB	10 %	1.80 dB	1 %	2.72 dB	.1 %	3.24 dB	.01 %	3.48 dB	 Center 1.8524 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>23.54 dBm</td></tr><tr><td>Peak</td><td>26.91 dBm</td></tr><tr><td>Crest</td><td>3.37 dB</td></tr></table><table><tr><td>10 %</td><td>1.76 dB</td></tr><tr><td>1 %</td><td>2.56 dB</td></tr><tr><td>.1 %</td><td>3.00 dB</td></tr><tr><td>.01 %</td><td>3.20 dB</td></tr></table> Date: 3.FEB.2026 10:26:59	Mean	23.54 dBm	Peak	26.91 dBm	Crest	3.37 dB	10 %	1.76 dB	1 %	2.56 dB	.1 %	3.00 dB	.01 %	3.20 dB
Mean	23.01 dBm																												
Peak	26.63 dBm																												
Crest	3.62 dB																												
10 %	1.80 dB																												
1 %	2.72 dB																												
.1 %	3.24 dB																												
.01 %	3.48 dB																												
Mean	23.54 dBm																												
Peak	26.91 dBm																												
Crest	3.37 dB																												
10 %	1.76 dB																												
1 %	2.56 dB																												
.1 %	3.00 dB																												
.01 %	3.20 dB																												
Middle Channel	Middle Channel																												
 Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.90 dBm</td></tr><tr><td>Peak</td><td>26.56 dBm</td></tr><tr><td>Crest</td><td>3.66 dB</td></tr></table><table><tr><td>10 %</td><td>1.80 dB</td></tr><tr><td>1 %</td><td>2.72 dB</td></tr><tr><td>.1 %</td><td>3.20 dB</td></tr><tr><td>.01 %</td><td>3.48 dB</td></tr></table> Date: 3.FEB.2026 11:21:57	Mean	22.90 dBm	Peak	26.56 dBm	Crest	3.66 dB	10 %	1.80 dB	1 %	2.72 dB	.1 %	3.20 dB	.01 %	3.48 dB	 Center 1.88 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>23.39 dBm</td></tr><tr><td>Peak</td><td>26.77 dBm</td></tr><tr><td>Crest</td><td>3.38 dB</td></tr></table><table><tr><td>10 %</td><td>1.76 dB</td></tr><tr><td>1 %</td><td>2.56 dB</td></tr><tr><td>.1 %</td><td>3.04 dB</td></tr><tr><td>.01 %</td><td>3.20 dB</td></tr></table> Date: 3.FEB.2026 10:27:23	Mean	23.39 dBm	Peak	26.77 dBm	Crest	3.38 dB	10 %	1.76 dB	1 %	2.56 dB	.1 %	3.04 dB	.01 %	3.20 dB
Mean	22.90 dBm																												
Peak	26.56 dBm																												
Crest	3.66 dB																												
10 %	1.80 dB																												
1 %	2.72 dB																												
.1 %	3.20 dB																												
.01 %	3.48 dB																												
Mean	23.39 dBm																												
Peak	26.77 dBm																												
Crest	3.38 dB																												
10 %	1.76 dB																												
1 %	2.56 dB																												
.1 %	3.04 dB																												
.01 %	3.20 dB																												
Highest Channel	Highest Channel																												
 Center 846.6 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.93 dBm</td></tr><tr><td>Peak</td><td>26.56 dBm</td></tr><tr><td>Crest</td><td>3.63 dB</td></tr></table><table><tr><td>10 %</td><td>1.80 dB</td></tr><tr><td>1 %</td><td>2.80 dB</td></tr><tr><td>.1 %</td><td>3.24 dB</td></tr><tr><td>.01 %</td><td>3.52 dB</td></tr></table> Date: 3.FEB.2026 11:22:18	Mean	22.93 dBm	Peak	26.56 dBm	Crest	3.63 dB	10 %	1.80 dB	1 %	2.80 dB	.1 %	3.24 dB	.01 %	3.52 dB	 Center 1.9076 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>23.44 dBm</td></tr><tr><td>Peak</td><td>26.63 dBm</td></tr><tr><td>Crest</td><td>3.19 dB</td></tr></table><table><tr><td>10 %</td><td>1.72 dB</td></tr><tr><td>1 %</td><td>2.48 dB</td></tr><tr><td>.1 %</td><td>2.88 dB</td></tr><tr><td>.01 %</td><td>3.04 dB</td></tr></table> Date: 3.FEB.2026 10:27:42	Mean	23.44 dBm	Peak	26.63 dBm	Crest	3.19 dB	10 %	1.72 dB	1 %	2.48 dB	.1 %	2.88 dB	.01 %	3.04 dB
Mean	22.93 dBm																												
Peak	26.56 dBm																												
Crest	3.63 dB																												
10 %	1.80 dB																												
1 %	2.80 dB																												
.1 %	3.24 dB																												
.01 %	3.52 dB																												
Mean	23.44 dBm																												
Peak	26.63 dBm																												
Crest	3.19 dB																												
10 %	1.72 dB																												
1 %	2.48 dB																												
.1 %	2.88 dB																												
.01 %	3.04 dB																												


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

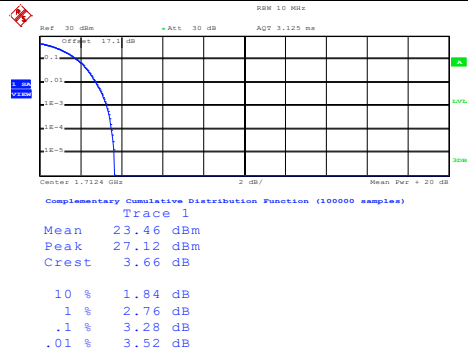


Date: 3.FEB.2026 11:44:17

Middle Channel

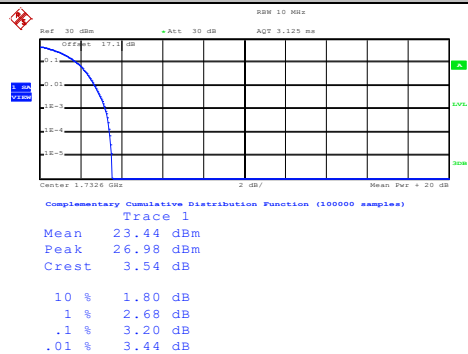

Date: 3.FEB.2026 11:44:42

Highest Channel

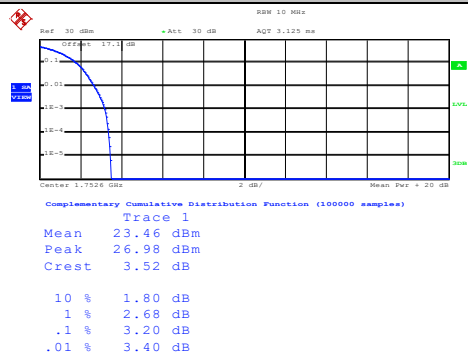

Date: 3.FEB.2026 11:45:03

**26dB Bandwidth**

Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.72	4.74	4.73
Middle CH	4.74	4.75	4.73
Highest CH	4.74	4.77	4.73




WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
Lowest Channel	Lowest Channel
Date: 3.FEB.2026 11:04:58	Date: 3.FEB.2026 10:07:48
Middle Channel	Middle Channel
Date: 3.FEB.2026 11:05:44	Date: 3.FEB.2026 10:08:43
Highest Channel	Highest Channel
Date: 3.FEB.2026 11:06:36	Date: 3.FEB.2026 10:09:28




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

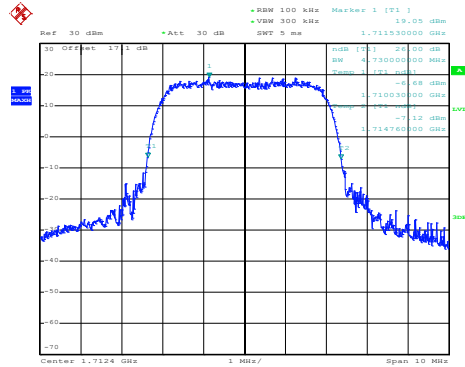


Date: 3.FEB.2026 11:26:07

Middle Channel

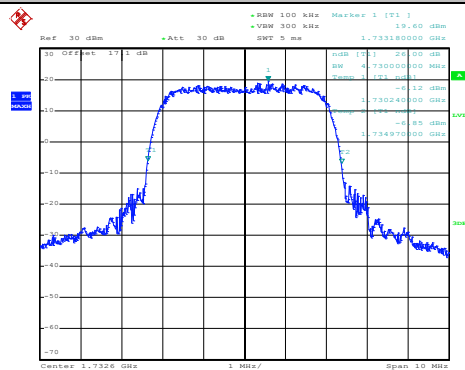

Date: 3.FEB.2026 11:27:09

Highest Channel

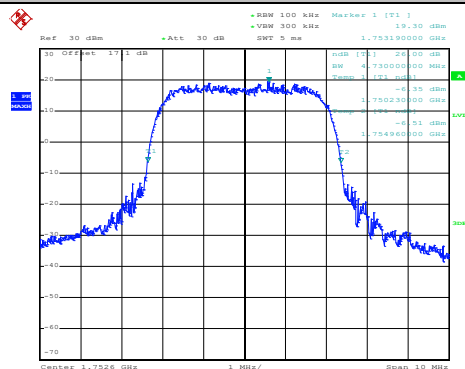

Date: 3.FEB.2026 11:27:51



Occupied Bandwidth

Mode	WCDMA Band V 99%OBW(MHz)	WCDMA Band II 99%OBW(MHz)	WCDMA Band IV 99%OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.15	4.17
Middle CH	4.15	4.17	4.16
Highest CH	4.14	4.17	4.16




WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
Lowest Channel	Lowest Channel
Ref: 30 dBm +Att: 30 dB +RBW 100 kHz Marker 1 [T1] 18.68 dBm +VSM 300 kHz SWT 5 ms 826.720000000 MHz OSW 4.150000000 MHz Temp 1 [T1 OSW] 0.43 dBm 824.330000000 MHz Temp 2 [T1 OSW] 0.43 dBm 828.450000000 MHz Center 826.4 MHz 1 MHz/ Span 10 MHz Date: 3.FEB.2026 11:08:01	Ref: 30 dBm +Att: 30 dB +RBW 100 kHz Marker 1 [T1] 19.47 dBm +VSM 300 kHz SWT 5 ms 1.852990000 GHz OSW 4.150000000 MHz Temp 1 [T1 OSW] 0.43 dBm 1.850320000 GHz Temp 2 [T1 OSW] 0.43 dBm 1.854470000 GHz Center 1.8524 GHz 1 MHz/ Span 10 MHz Date: 3.FEB.2026 10:14:26
Middle Channel	Middle Channel
Ref: 30 dBm +Att: 30 dB +RBW 100 kHz Marker 1 [T1] 18.77 dBm +VSM 300 kHz SWT 5 ms 835.570000000 MHz OSW 4.150000000 MHz Temp 1 [T1 OSW] 0.43 dBm 834.310000000 MHz Temp 2 [T1 OSW] 0.43 dBm 838.450000000 MHz Center 836.4 MHz 1 MHz/ Span 10 MHz Date: 3.FEB.2026 11:08:59	Ref: 30 dBm +Att: 30 dB +RBW 100 kHz Marker 1 [T1] 19.31 dBm +VSM 300 kHz SWT 5 ms 1.880570000 GHz OSW 4.170000000 MHz Temp 1 [T1 OSW] 0.43 dBm 1.877920000 GHz Temp 2 [T1 OSW] 0.43 dBm 1.882080000 GHz Center 1.88 GHz 1 MHz/ Span 10 MHz Date: 3.FEB.2026 10:15:07
Highest Channel	Highest Channel
Ref: 30 dBm +Att: 30 dB +RBW 100 kHz Marker 1 [T1] 19.43 dBm +VSM 300 kHz SWT 5 ms 845.720000000 MHz OSW 4.140000000 MHz Temp 1 [T1 OSW] 0.43 dBm 844.510000000 MHz Temp 2 [T1 OSW] 0.43 dBm 848.650000000 MHz Center 846.6 MHz 1 MHz/ Span 10 MHz Date: 3.FEB.2026 11:09:48	Ref: 30 dBm +Att: 30 dB +RBW 100 kHz Marker 1 [T1] 19.24 dBm +VSM 300 kHz SWT 5 ms 1.908170000 GHz OSW 4.170000000 MHz Temp 1 [T1 OSW] 0.43 dBm 1.905510000 GHz Temp 2 [T1 OSW] 0.43 dBm 1.909680000 GHz Center 1.9076 GHz 1 MHz/ Span 10 MHz Date: 3.FEB.2026 10:15:54




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

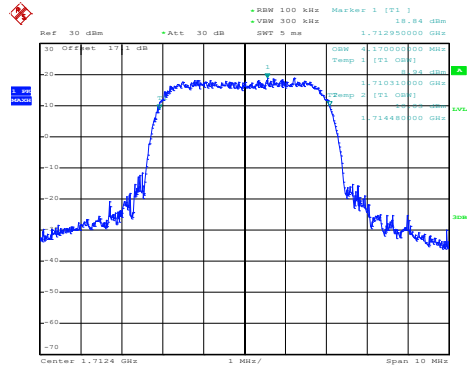


Date: 3.FEB.2026 11:29:12

Middle Channel

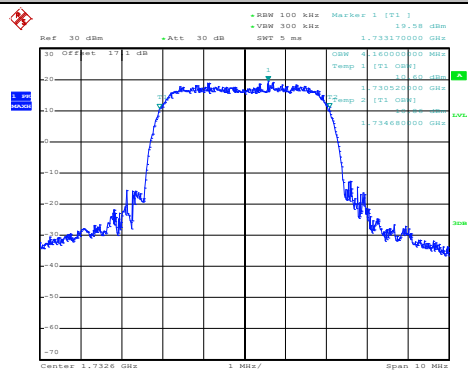

Date: 3.FEB.2026 11:30:18


Highest Channel

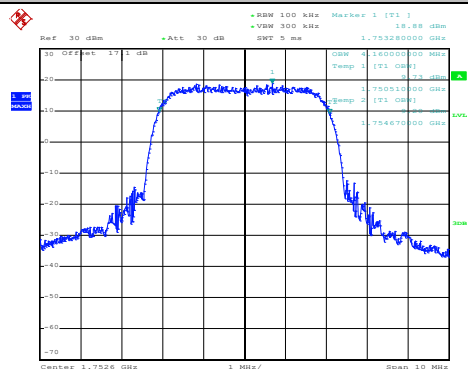

Date: 3.FEB.2026 11:31:08



Conducted Band Edge

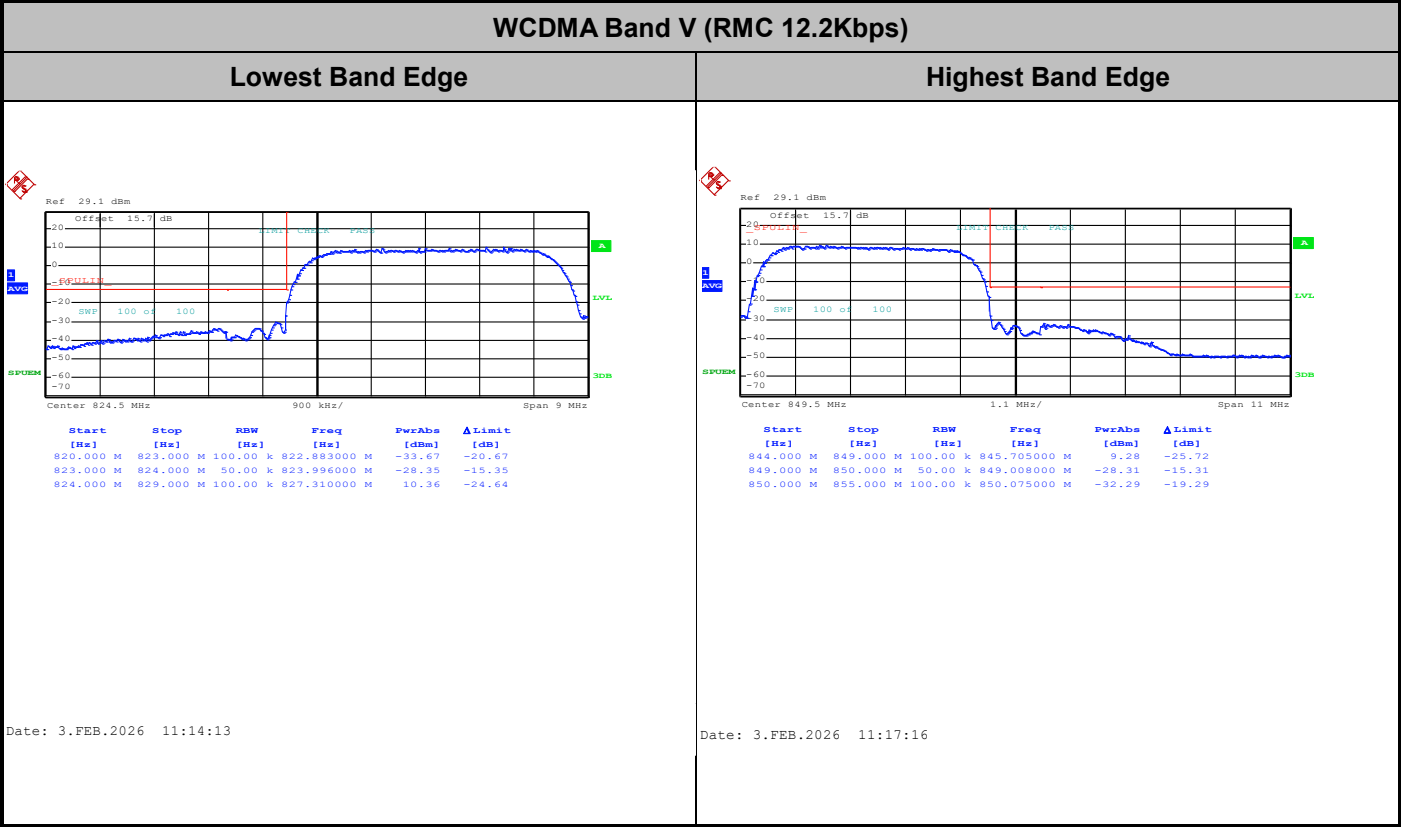





WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

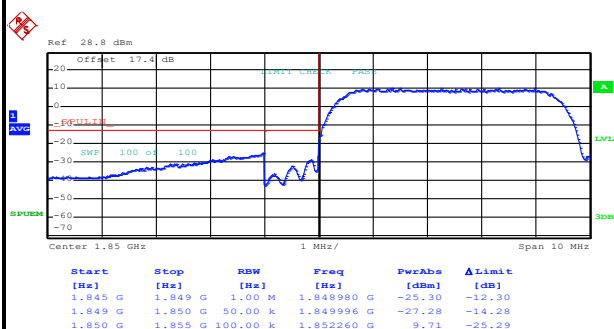

Date: 3.FEB.2026 10:19:30

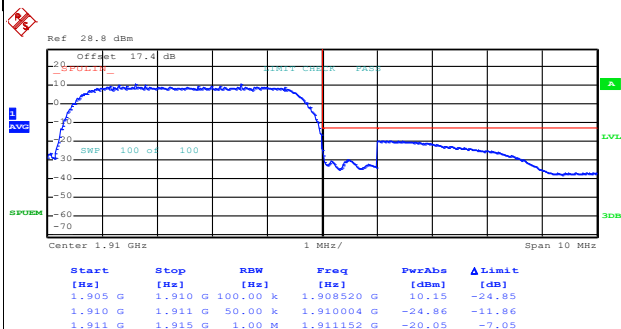


Date: 3.FEB.2026 10:22:32




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

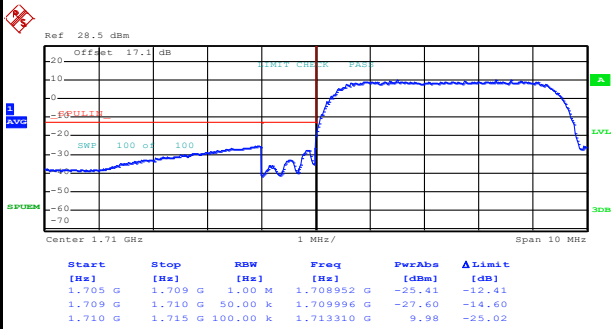

Date: 3.FEB.2026 11:35:51

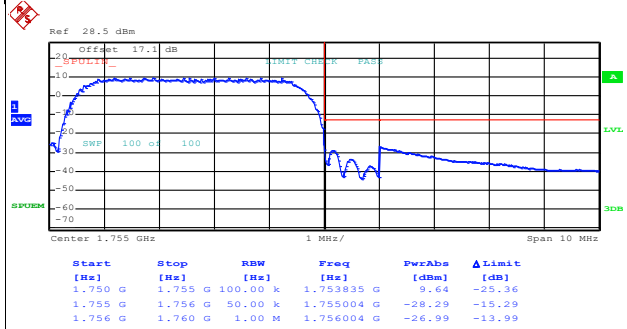


Date: 3.FEB.2026 11:38:50




Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
Lowest Channel	Lowest Channel
<	

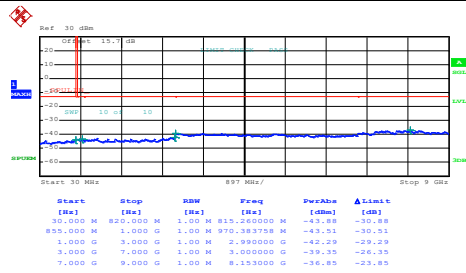

Date: 3.FEB.2026 11:20:43

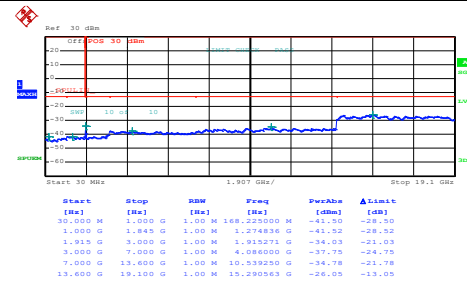


Date: 3.FEB.2026 10:26:09




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

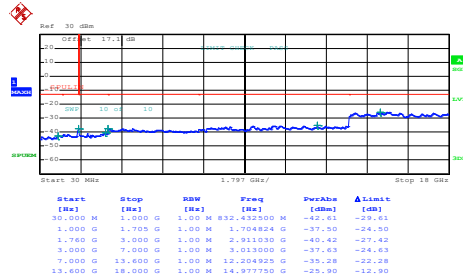


Date: 3.FEB.2026 11:40:50

Middle Channel

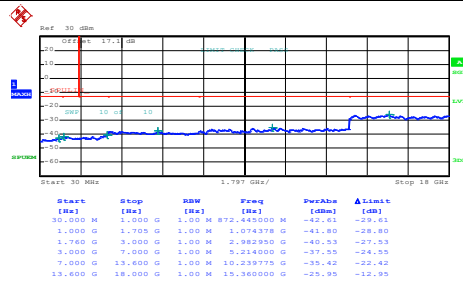

Date: 3.FEB.2026 11:42:29

Highest Channel

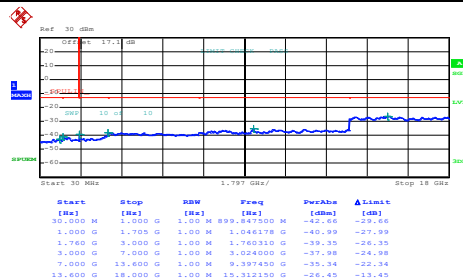

Date: 3.FEB.2026 11:43:28

Frequency Stability

Test Conditions		WCDMA Band V (RMC 12.2Kbps)/ Middle Channel			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Deviation (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0012	1	Yes	PASS
40	Normal Voltage	0.0024	2	Yes	
30	Normal Voltage	0.0012	-1	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0143	-12	Yes	
0	Normal Voltage	0.0120	-10	Yes	
-10	Normal Voltage	0.0167	-14	Yes	
-20	Normal Voltage	0.0108	-9	Yes	
-30	Normal Voltage	0.0132	-11	Yes	
20	Maximum Voltage	0.0036	3	Yes	
20	Normal Voltage	0.0000	0	Yes	
20	Minimum Voltage	0.0048	4	Yes	

Note:

1. Normal Voltage = 3.85 V. ; Minimum Voltage = 3.65 V. ; Maximum Voltage = 4.3 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.

Test Conditions		WCDMA Band II (RMC 12.2Kbps) / Middle Channel			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Deviation (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0059	11	Yes	PASS
40	Normal Voltage	0.0069	13	Yes	
30	Normal Voltage	0.0011	2	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0011	-2	Yes	
0	Normal Voltage	0.0021	-4	Yes	
-10	Normal Voltage	0.0032	-6	Yes	
-20	Normal Voltage	0.0016	-3	Yes	
-30	Normal Voltage	0.0027	-5	Yes	
20	Maximum Voltage	0.0053	10	Yes	
20	Normal Voltage	0.0016	3	Yes	
20	Minimum Voltage	0.0074	14	Yes	

Note:

1. Normal Voltage = 3.85 V. ; Minimum Voltage = 3.65 V. ; Maximum Voltage = 4.3 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.

Test Conditions		WCDMA Band IV (RMC 12.2Kbps) / Middle Channel			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Deviation (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0162	28	Yes	PASS
40	Normal Voltage	0.0133	23	Yes	
30	Normal Voltage	0.0040	7	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0069	-12	Yes	
0	Normal Voltage	0.0092	-16	Yes	
-10	Normal Voltage	0.0110	-19	Yes	
-20	Normal Voltage	0.0115	-20	Yes	
-30	Normal Voltage	0.0040	-7	Yes	
20	Maximum Voltage	0.0046	8	Yes	
20	Normal Voltage	0.0104	18	Yes	
20	Minimum Voltage	0.0150	26	Yes	

Note:

1. Normal Voltage = 3.85 V. ; Minimum Voltage = 3.65 V. ; Maximum Voltage = 4.3 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Jack Cheng, Ray Lung, Sky Chang	Temperature :	21.1 ~ 25.7°C
		Relative Humidity :	55.8 ~ 63.2%

B1. Summary of each worse mode

Mode	Band	Part	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	GPRS 850	Part 22H	M	2512	-42.22	RMS	26.82	-24.17	0.90	-95.23	49.46	-13.00	-29.22	H	8
2	EDGE 850	Part 22H	H	2552	-37.88	RMS	27.10	-24.12	0.90	-95.23	53.47	-13.00	-24.88	V	8
3	WCDMA B5	Part 22H	H	3386	-63.02	RMS	28.27	-23.90	1.06	-95.23	26.78	-13.00	-50.02	V	8
1	GPRS 1900	Part 24E	L	5565	-37.28	RMS	32.76	-21.83	1.54	-95.23	45.48	-13.00	-24.28	V	8
2	EDGE 1900	Part 24E	M	5640	-37.11	RMS	33.06	-21.84	1.54	-95.23	45.36	-13.00	-24.11	V	8
3	WCDMA B2	Part 24E	L	7410	-54.17	RMS	36.88	-21.25	1.45	-95.23	23.98	-13.00	-41.17	V	8
1	WCDMA B4	Part 27L	H	7010	-55.02	RMS	36.18	-21.59	1.43	-95.23	24.19	-13.00	-42.02	H	8




Ant. 8

Part 22H Mode 1

GPRS 850 Ch128

L

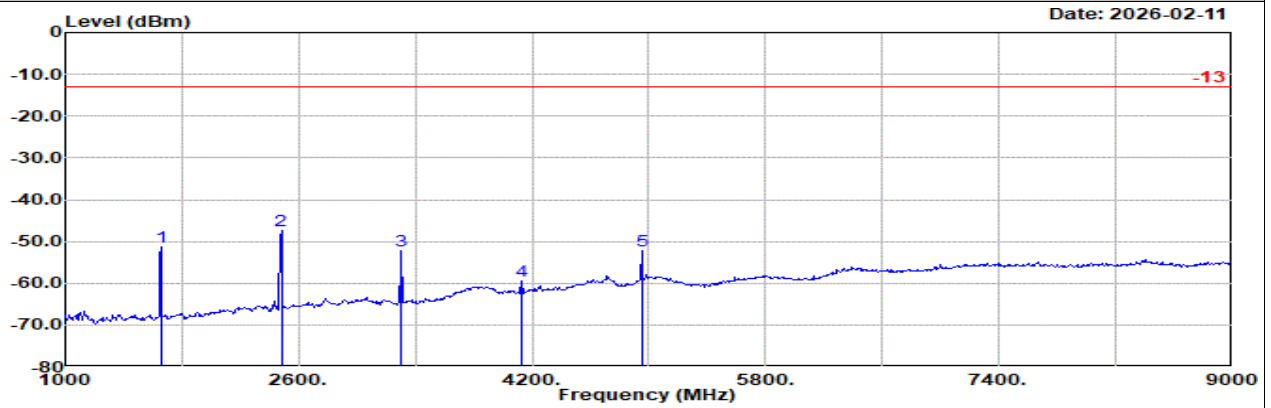


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: GPRS 850 Ch128

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-51.42	RMS	24.64	-25.13	1.08	-95.23	43.22	-13.00	-38.42	Horizontal
2	2480.00	-47.33	RMS	26.60	-24.21	0.91	-95.23	44.60	-13.00	-34.33	Horizontal
3	3304.00	-52.23	RMS	28.11	-23.84	1.06	-95.23	37.67	-13.00	-39.23	Horizontal
4	4128.00	-59.45	RMS	30.24	-23.25	1.09	-95.23	27.70	-13.00	-46.45	Horizontal
5	4952.00	-52.20	RMS	32.61	-21.68	1.07	-95.23	31.03	-13.00	-39.20	Horizontal

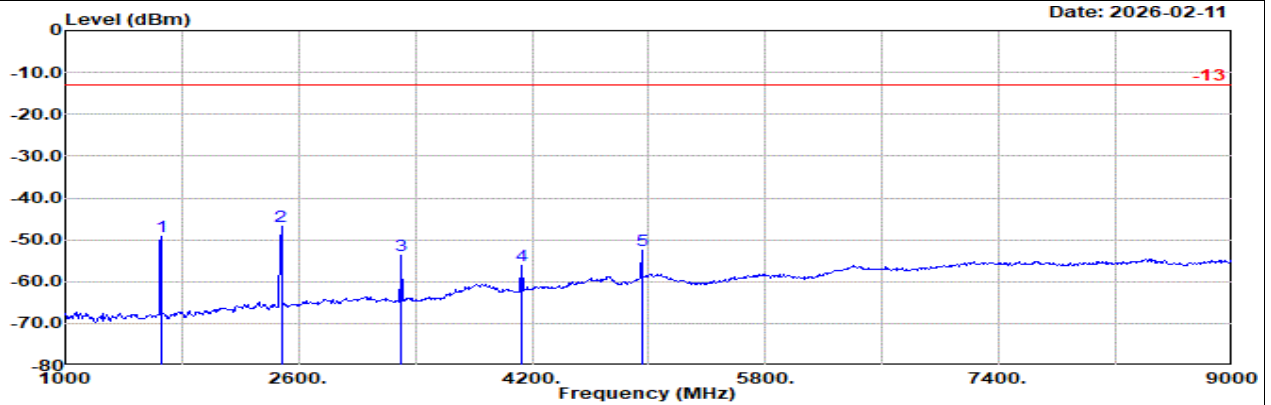

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: GPRS 850 Ch128

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-49.32	RMS	24.64	-25.13	1.08	-95.23	45.32	-13.00	-36.32	Vertical
2	2480.00	-46.76	RMS	26.60	-24.21	0.91	-95.23	45.17	-13.00	-33.76	Vertical
3	3304.00	-53.84	RMS	28.11	-23.84	1.06	-95.23	36.06	-13.00	-40.84	Vertical
4	4128.00	-56.30	RMS	30.24	-23.25	1.09	-95.23	30.85	-13.00	-43.30	Vertical
5	4952.00	-52.45	RMS	32.61	-21.68	1.07	-95.23	30.78	-13.00	-39.45	Vertical




Ant. 8

Part 22H Mode 1

GPRS 850 Ch189

M

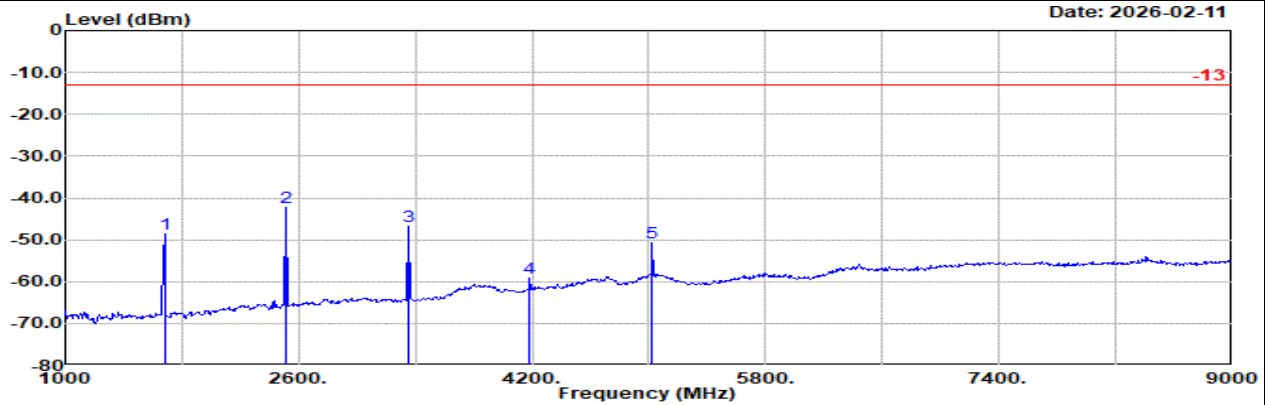


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: GPRS 850 Ch189

	Freq		Detector	Ant Factor		Amp\Cb		Filter	EIRPCF		Readin g	Limit		Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB		dB	dB		dBm	dB		
1	1680.00	-48.66	RMS	24.80	-25.11	1.08	-95.23	45.80	-13.00	-35.66	Horizontal				
2	2512.00	-42.22	RMS	26.82	-24.17	0.90	-95.23	49.46	-13.00	-29.22	Horizontal				
3	3352.00	-46.92	RMS	28.20	-23.87	1.06	-95.23	42.92	-13.00	-33.92	Horizontal				
4	4184.00	-59.09	RMS	30.20	-23.12	1.06	-95.23	28.00	-13.00	-46.09	Horizontal				
5	5024.00	-50.71	RMS	32.75	-21.60	1.06	-95.23	32.31	-13.00	-37.71	Horizontal				

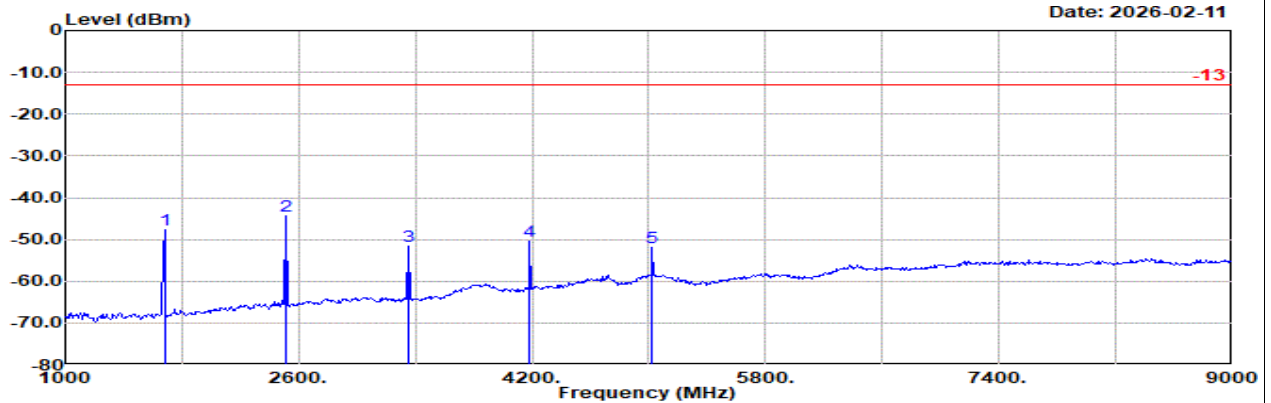

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: GPRS 850 Ch189


	Freq		Detector	Ant Factor		Amp\Cb		Filter	EIRPCF		Readin g	Limit		Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB		dB	dB		dBm	dB		
1	1680.00	-47.74	RMS	24.80	-25.11	1.08	-95.23	46.72	-13.00	-34.74	Vertical				
2	2512.00	-44.48	RMS	26.82	-24.17	0.90	-95.23	47.20	-13.00	-31.48	Vertical				
3	3352.00	-51.52	RMS	28.20	-23.87	1.06	-95.23	38.32	-13.00	-38.52	Vertical				
4	4184.00	-50.43	RMS	30.20	-23.12	1.06	-95.23	36.66	-13.00	-37.43	Vertical				
5	5024.00	-51.80	RMS	32.75	-21.60	1.06	-95.23	31.22	-13.00	-38.80	Vertical				

Ant. 8

Part 22H Mode 1

GPRS 850 Ch251

H

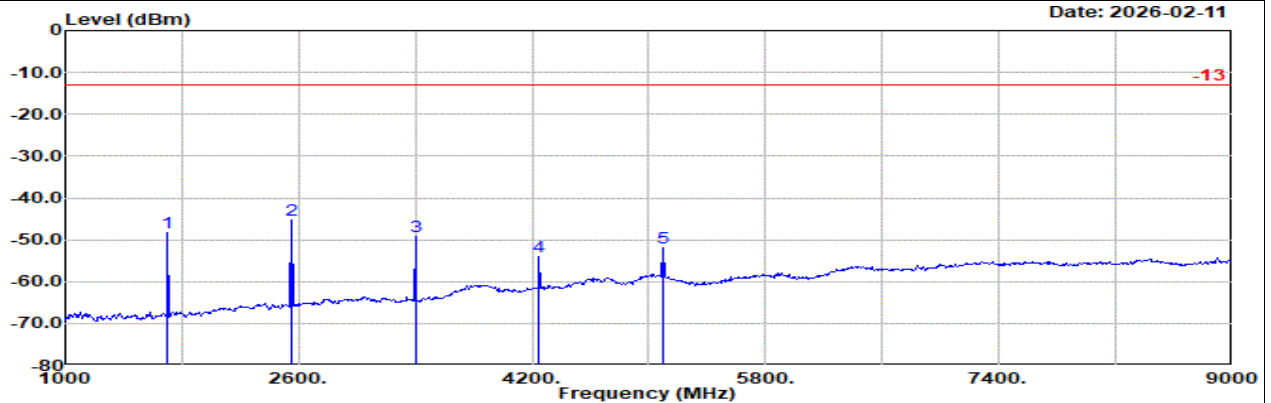


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: GPRS 850 Ch251

	Freq	Level	Detector	Ant Factor		Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB			dB	dB		dBuV	dBm	dB	
1	1704.00	-48.16	RMS	24.80	-25.09	1.08	-95.23	46.28	-13.00	-35.16	Horizontal			
2	2552.00	-45.15	RMS	27.10	-24.12	0.90	-95.23	46.20	-13.00	-32.15	Horizontal			
3	3400.00	-49.17	RMS	28.30	-23.91	1.06	-95.23	40.61	-13.00	-36.17	Horizontal			
4	4248.00	-54.14	RMS	30.30	-22.99	1.03	-95.23	32.75	-13.00	-41.14	Horizontal			
5	5096.00	-51.88	RMS	32.52	-21.65	1.01	-95.23	31.47	-13.00	-38.88	Horizontal			

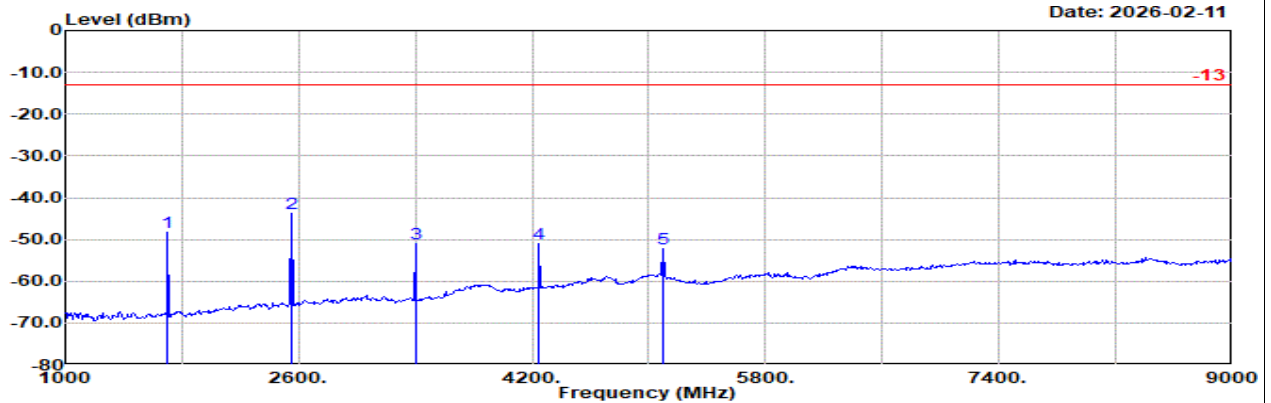

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: GPRS 850 Ch251


	Freq	Level	Detector	Ant Factor		Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB			dB	dB		dBuV	dBm	dB	
1	1704.00	-48.28	RMS	24.80	-25.09	1.08	-95.23	46.16	-13.00	-35.28	Vertical			
2	2552.00	-43.71	RMS	27.10	-24.12	0.90	-95.23	47.64	-13.00	-30.71	Vertical			
3	3400.00	-50.94	RMS	28.30	-23.91	1.06	-95.23	38.84	-13.00	-37.94	Vertical			
4	4248.00	-51.05	RMS	30.30	-22.99	1.03	-95.23	35.84	-13.00	-38.05	Vertical			
5	5096.00	-52.37	RMS	32.52	-21.65	1.01	-95.23	30.98	-13.00	-39.37	Vertical			

Ant. 8

Part 22H Mode 2

EDGE 850 Ch128

L

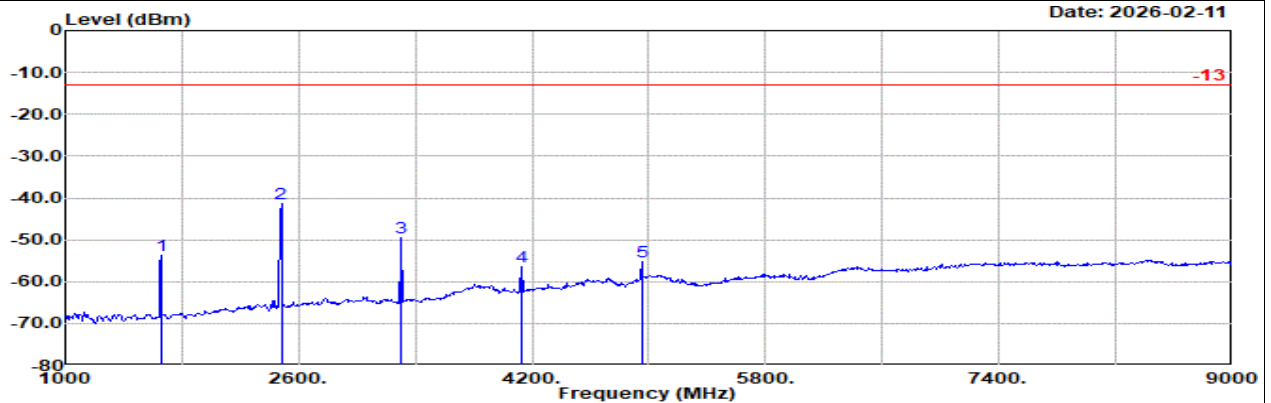


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

EDGE 850 Ch128

	Freq	Level	Detector	Ant Factor		Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-53.80	RMS	24.64	-25.13	1.08	-95.23	40.84	-13.00	-40.80	Horizontal		
2	2480.00	-41.23	RMS	26.60	-24.21	0.91	-95.23	50.70	-13.00	-28.23	Horizontal		
3	3304.00	-49.37	RMS	28.11	-23.84	1.06	-95.23	40.53	-13.00	-36.37	Horizontal		
4	4128.00	-56.49	RMS	30.24	-23.25	1.09	-95.23	30.66	-13.00	-43.49	Horizontal		
5	4952.00	-55.11	RMS	32.61	-21.68	1.07	-95.23	28.12	-13.00	-42.11	Horizontal		

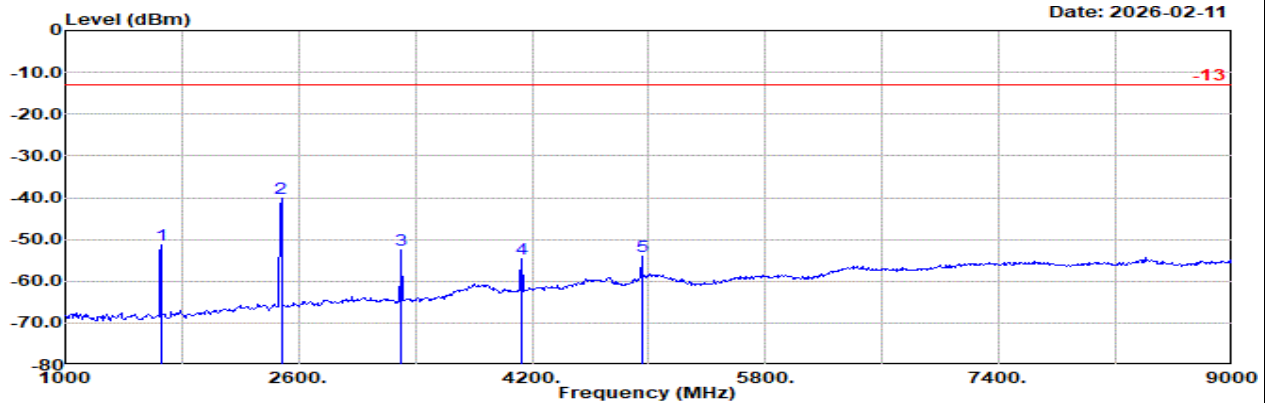

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

EDGE 850 Ch128


	Freq	Level	Detector	Ant Factor		Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dB	dB	dBuV	dBm	dB	
1	1656.00	-51.29	RMS	24.64	-25.13	1.08	-95.23	43.35	-13.00	-38.29	Vertical		
2	2480.00	-40.26	RMS	26.60	-24.21	0.91	-95.23	51.67	-13.00	-27.26	Vertical		
3	3304.00	-52.54	RMS	28.11	-23.84	1.06	-95.23	37.36	-13.00	-39.54	Vertical		
4	4128.00	-54.64	RMS	30.24	-23.25	1.09	-95.23	32.51	-13.00	-41.64	Vertical		
5	4952.00	-53.93	RMS	32.61	-21.68	1.07	-95.23	29.30	-13.00	-40.93	Vertical		

Ant. 8

Part 22H Mode 2

EDGE 850 Ch189

M

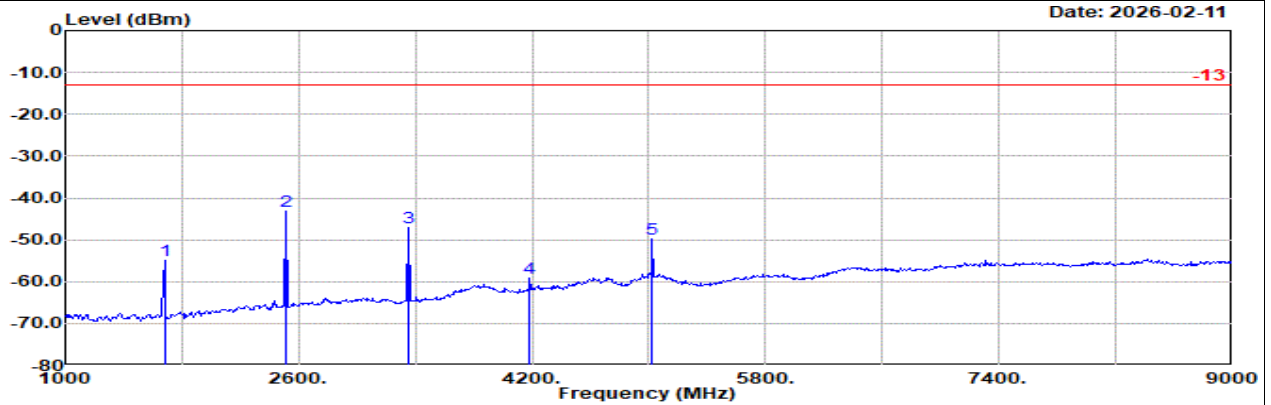


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

EDGE 850 Ch189

	Freq		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1680.00	-54.86	RMS		24.80	-25.11	1.08	-95.23	39.60	-13.00	-41.86	Horizontal
2	2512.00	-43.18	RMS		26.82	-24.17	0.90	-95.23	48.50	-13.00	-30.18	Horizontal
3	3352.00	-47.12	RMS		28.20	-23.87	1.06	-95.23	42.72	-13.00	-34.12	Horizontal
4	4184.00	-59.28	RMS		30.20	-23.12	1.06	-95.23	27.81	-13.00	-46.28	Horizontal
5	5024.00	-49.93	RMS		32.75	-21.60	1.06	-95.23	33.09	-13.00	-36.93	Horizontal

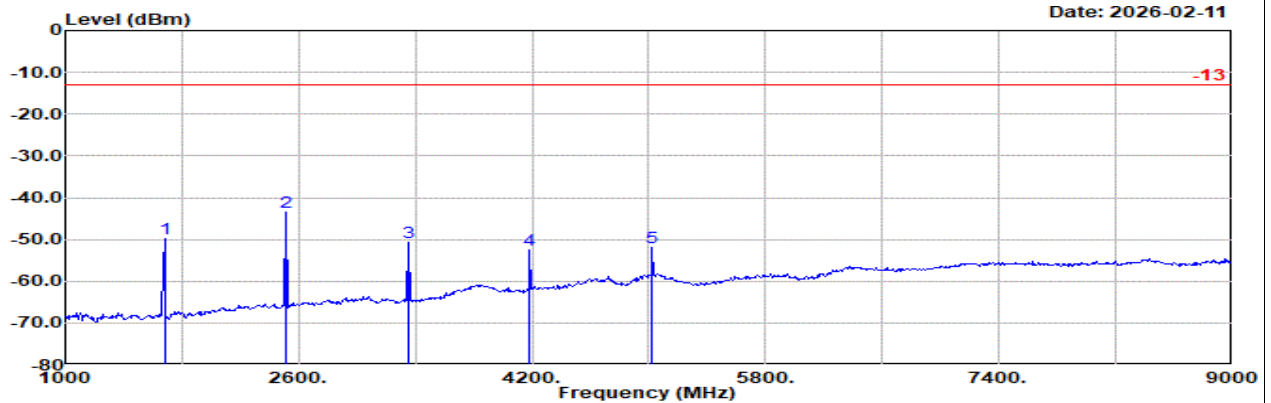

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

EDGE 850 Ch189


	Freq		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1680.00	-49.68	RMS		24.80	-25.11	1.08	-95.23	44.78	-13.00	-36.68	Vertical
2	2512.00	-43.44	RMS		26.82	-24.17	0.90	-95.23	48.24	-13.00	-30.44	Vertical
3	3352.00	-50.72	RMS		28.20	-23.87	1.06	-95.23	39.12	-13.00	-37.72	Vertical
4	4184.00	-52.64	RMS		30.20	-23.12	1.06	-95.23	34.45	-13.00	-39.64	Vertical
5	5024.00	-51.79	RMS		32.75	-21.60	1.06	-95.23	31.23	-13.00	-38.79	Vertical

Ant. 8

Part 22H Mode 2

EDGE 850 Ch251

H

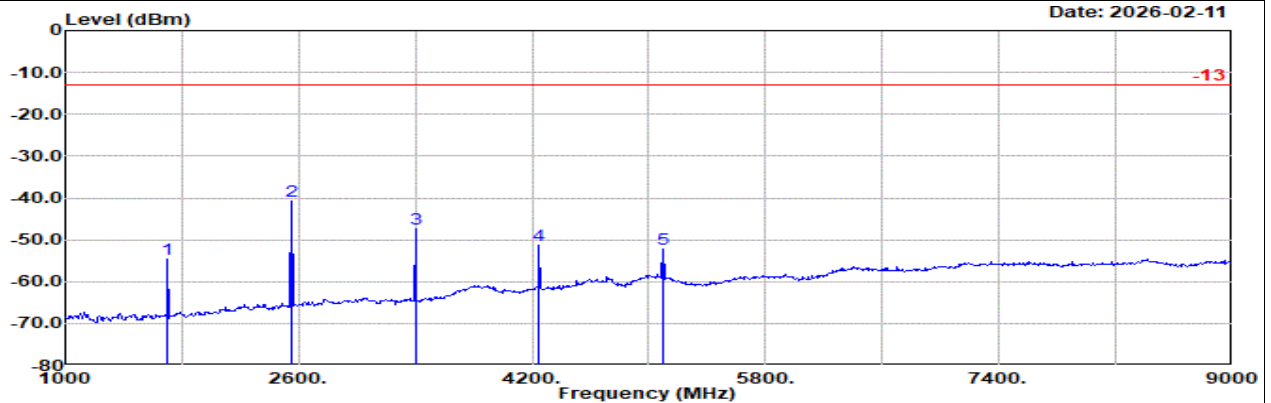


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

EDGE 850 Ch251

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1704.00	-54.62	RMS	24.80	-25.09	1.08	-95.23	39.82	-13.00	-41.62	Horizontal
2	2552.00	-40.88	RMS	27.10	-24.12	0.90	-95.23	50.47	-13.00	-27.88	Horizontal
3	3400.00	-47.40	RMS	28.30	-23.91	1.06	-95.23	42.38	-13.00	-34.40	Horizontal
4	4248.00	-51.38	RMS	30.30	-22.99	1.03	-95.23	35.51	-13.00	-38.38	Horizontal
5	5096.00	-52.35	RMS	32.52	-21.65	1.01	-95.23	31.00	-13.00	-39.35	Horizontal

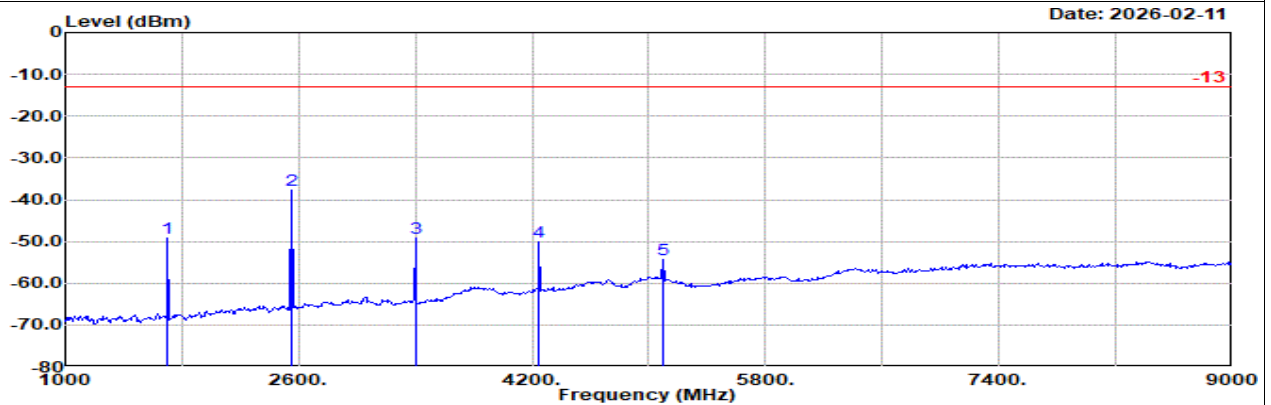

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

EDGE 850 Ch251

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1704.00	-49.17	RMS	24.80	-25.09	1.08	-95.23	45.27	-13.00	-36.17	Vertical
2	2552.00	-37.88	RMS	27.10	-24.12	0.90	-95.23	53.47	-13.00	-24.88	Vertical
3	3400.00	-49.33	RMS	28.30	-23.91	1.06	-95.23	40.45	-13.00	-36.33	Vertical
4	4248.00	-50.16	RMS	30.30	-22.99	1.03	-95.23	36.73	-13.00	-37.16	Vertical
5	5096.00	-54.40	RMS	32.52	-21.65	1.01	-95.23	28.95	-13.00	-41.40	Vertical




Ant. 8

Part 22H Mode 3

WCDMA B5 Ch4132

L

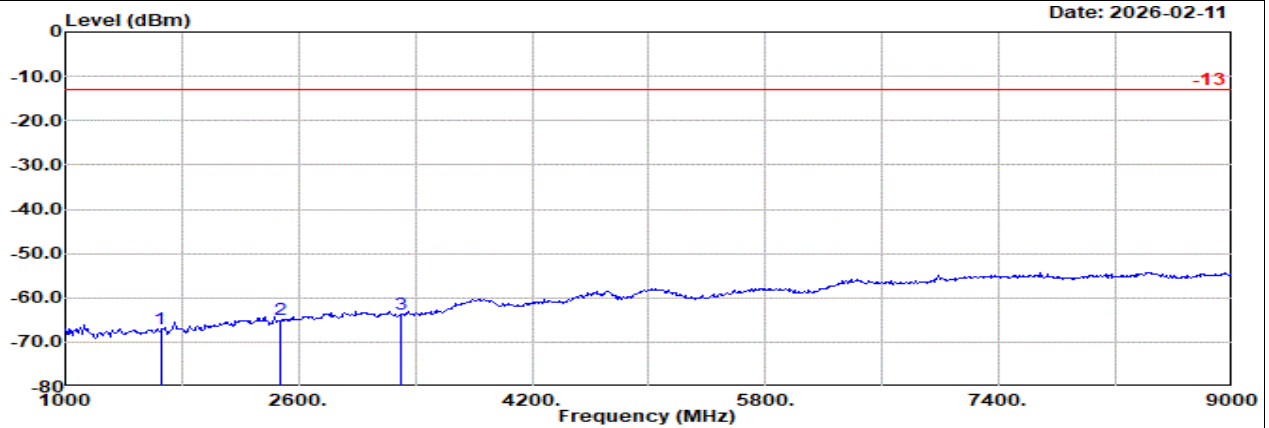


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: WCDMA B5 Ch4132

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1653.00	-67.15	RMS	24.67	-25.13	1.08	-95.23	27.46	-13.00	-54.15
2	2479.00	-64.86	RMS	26.60	-24.21	0.91	-95.23	27.07	-13.00	-51.86
3	3306.00	-63.64	RMS	28.11	-23.84	1.06	-95.23	26.26	-13.00	-50.64

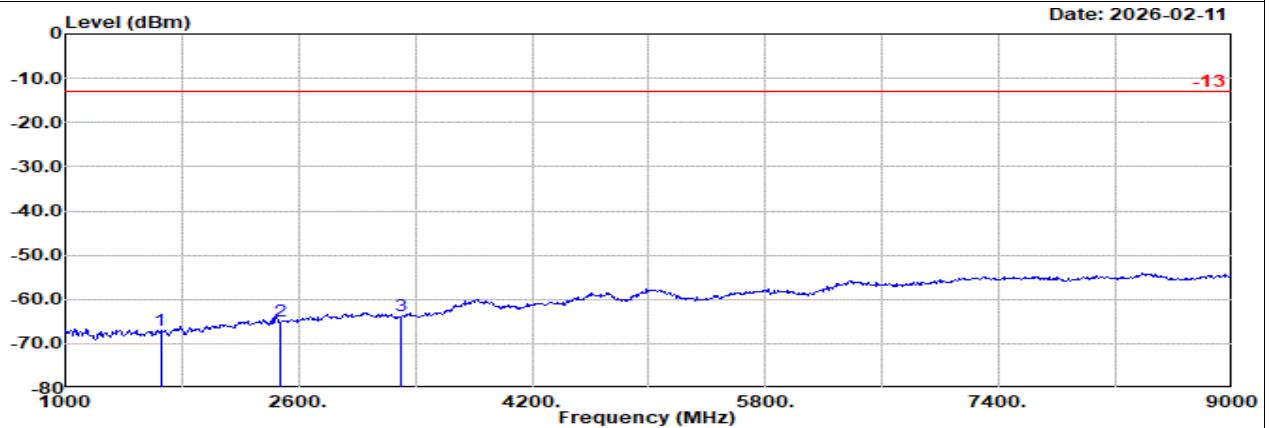

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: WCDMA B5 Ch4132

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	1653.00	-67.14	RMS	24.67	-25.13	1.08	-95.23	27.47	-13.00	-54.14
2	2479.00	-64.96	RMS	26.60	-24.21	0.91	-95.23	26.97	-13.00	-51.96
3	3306.00	-63.55	RMS	28.11	-23.84	1.06	-95.23	26.35	-13.00	-50.55




Ant. 8

Part 22H Mode 3

WCDMA B5 Ch4182

M

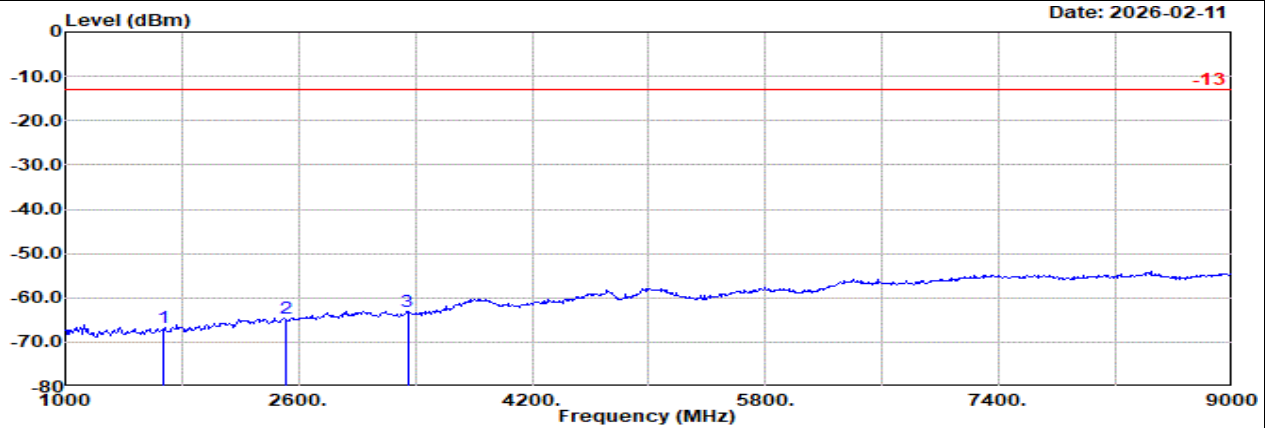


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: WCDMA B5 Ch4182

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1673.00	-66.62	RMS	24.66	-25.11	1.08	-95.23	27.98	-13.00	-53.62			Horizontal
2	2509.00	-64.58	RMS	26.80	-24.17	0.90	-95.23	27.12	-13.00	-51.58			Horizontal
3	3346.00	-63.02	RMS	28.19	-23.87	1.06	-95.23	26.83	-13.00	-50.02			Horizontal

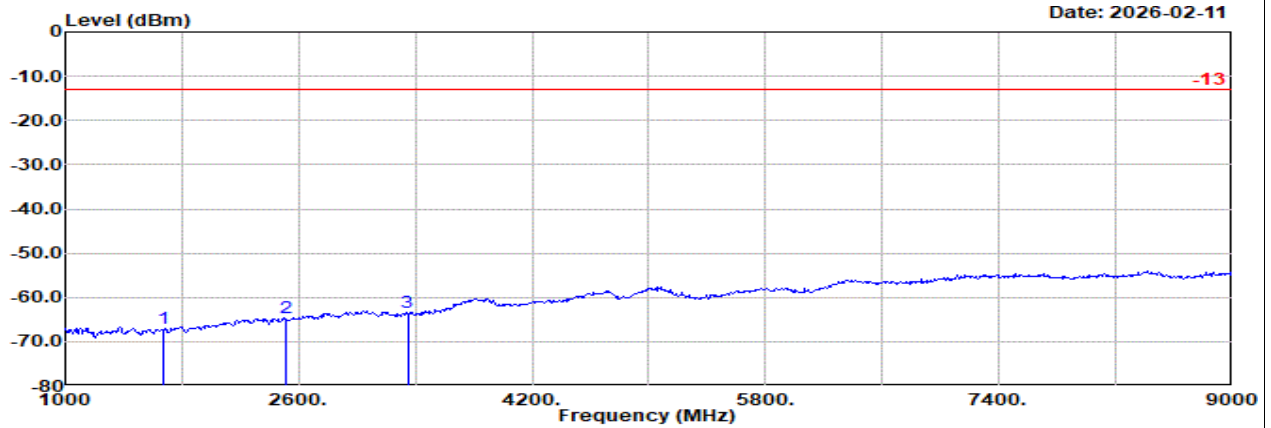

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: WCDMA B5 Ch4182

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1673.00	-67.03	RMS	24.66	-25.11	1.08	-95.23	27.57	-13.00	-54.03			Vertical
2	2509.00	-64.50	RMS	26.80	-24.17	0.90	-95.23	27.20	-13.00	-51.50			Vertical
3	3346.00	-63.52	RMS	28.19	-23.87	1.06	-95.23	26.33	-13.00	-50.52			Vertical




Ant. 8

Part 22H Mode 3

WCDMA B5 Ch4233

H

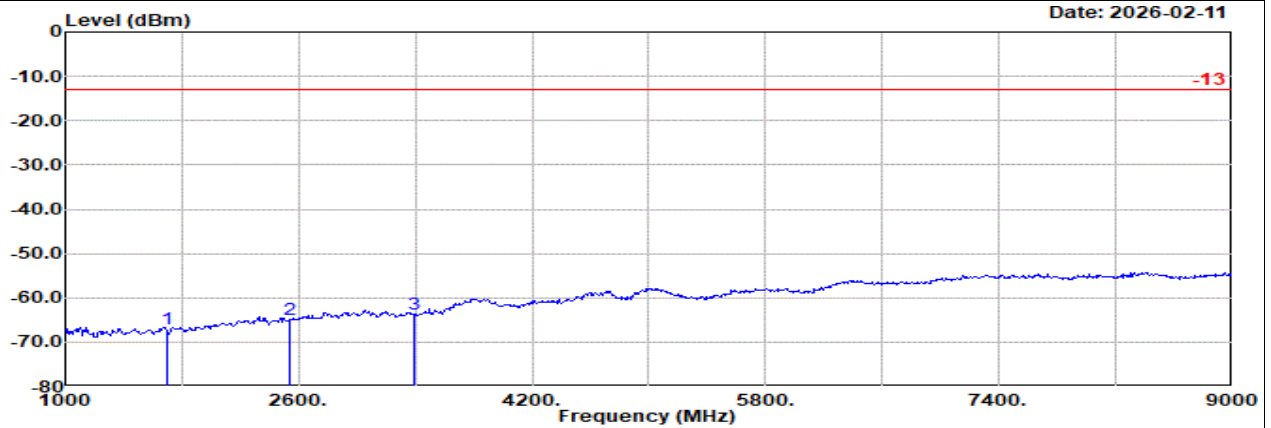


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: WCDMA B5 Ch4233

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1693.00	-67.15	RMS		24.80	-25.10	1.08	-95.23	27.30	-13.00	-54.15		Horizontal
2	2540.00	-65.01	RMS		27.00	-24.13	0.90	-95.23	26.45	-13.00	-52.01		Horizontal
3	3386.00	-63.61	RMS		28.27	-23.90	1.06	-95.23	26.19	-13.00	-50.61		Horizontal

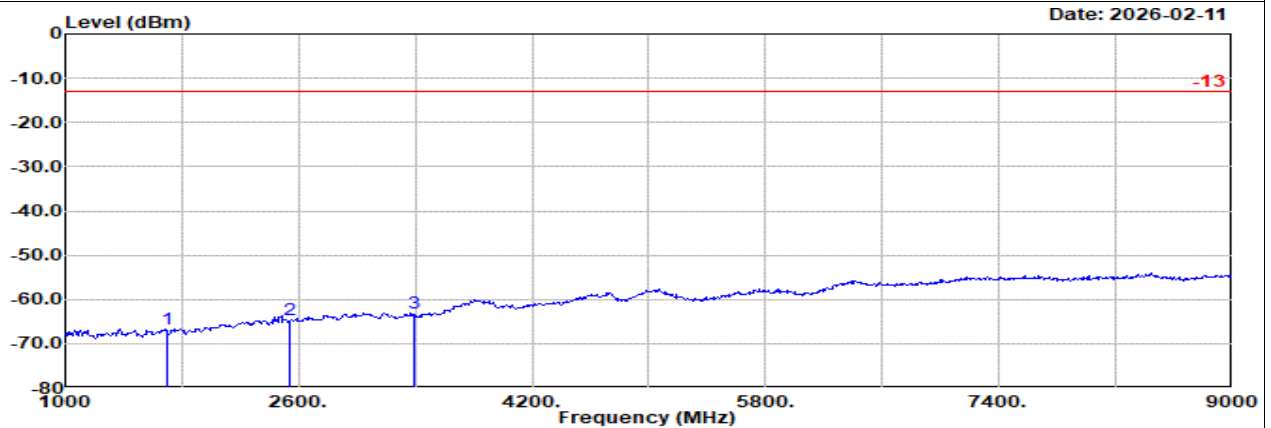

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: WCDMA B5 Ch4233


	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	1		dB	dB					
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB		
1	1693.00	-66.74	RMS		24.80	-25.10	1.08	-95.23	27.71	-13.00	-53.74		Vertical
2	2540.00	-64.73	RMS		27.00	-24.13	0.90	-95.23	26.73	-13.00	-51.73		Vertical
3	3386.00	-63.02	RMS		28.27	-23.90	1.06	-95.23	26.78	-13.00	-50.02		Vertical

Ant. 8

Part 24E Mode 1

GPRS 1900 Ch512

L

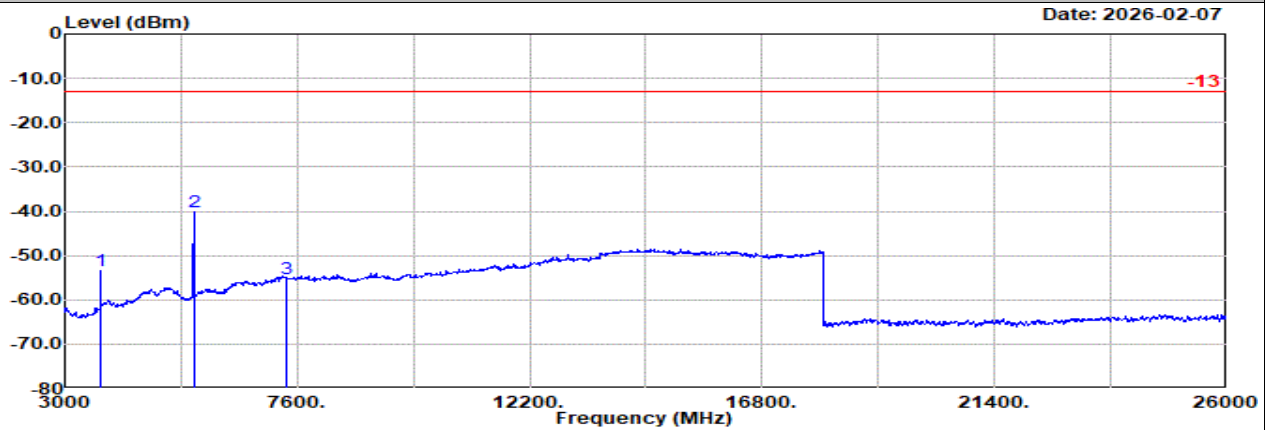


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: GPRS 1900 Ch512

	Freq	Level	Detector	Ant	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1				g		
	MHz	dBm		dB/m	dB	dB		dBuV	dBm	dB	
1	3705.00	-53.47	RMS	29.64	-23.74	1.68	-95.23	34.18	-13.00	-40.47	Horizontal
2	5565.00	-40.20	RMS	32.76	-21.83	1.54	-95.23	42.56	-13.00	-27.20	Horizontal
3	7401.00	-55.34	RMS	36.90	-21.26	1.44	-95.23	22.81	-13.00	-42.34	Horizontal

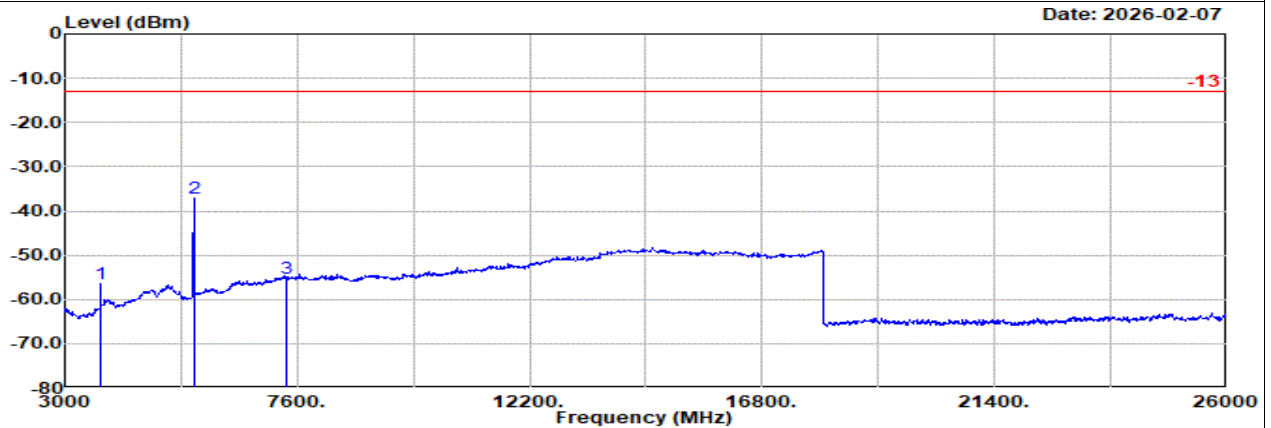

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: GPRS 1900 Ch512

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3705.00	-56.51	RMS	29.64	-23.74	1.68	-95.23	31.14	-13.00	-43.51	Vertical
2	5565.00	-37.28	RMS	32.76	-21.83	1.54	-95.23	45.48	-13.00	-24.28	Vertical
3	7401.00	-55.10	RMS	36.90	-21.26	1.44	-95.23	23.05	-13.00	-42.10	Vertical




Ant. 8

Part 24E Mode 1

GPRS 1900 Ch661

M

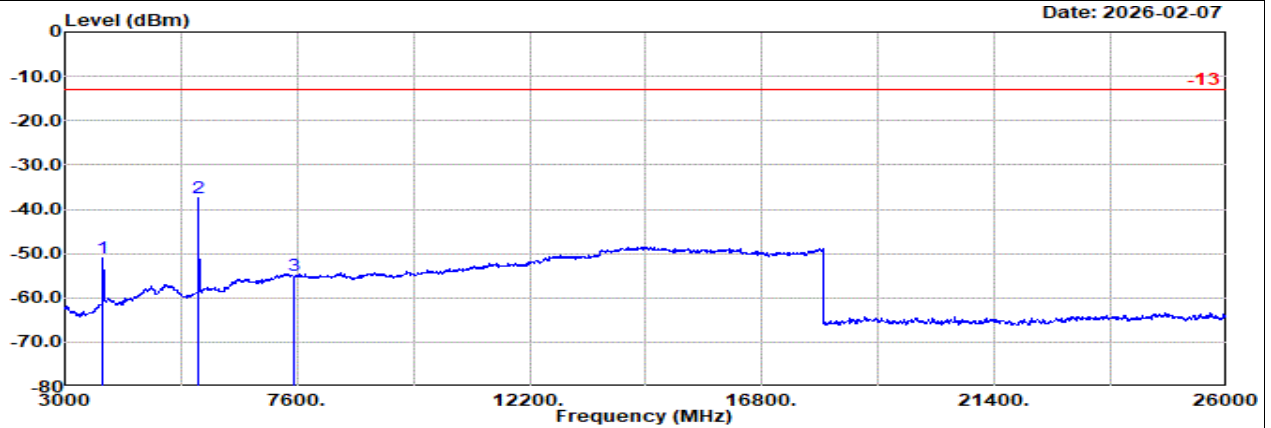


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: GPRS 1900 Ch661

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-51.00	RMS	30.04	-23.62	1.67	-95.23	36.14	-13.00	-38.00	Horizontal
2	5640.00	-37.58	RMS	33.06	-21.84	1.54	-95.23	44.89	-13.00	-24.58	Horizontal
3	7520.00	-55.08	RMS	36.66	-21.17	1.55	-95.23	23.11	-13.00	-42.08	Horizontal

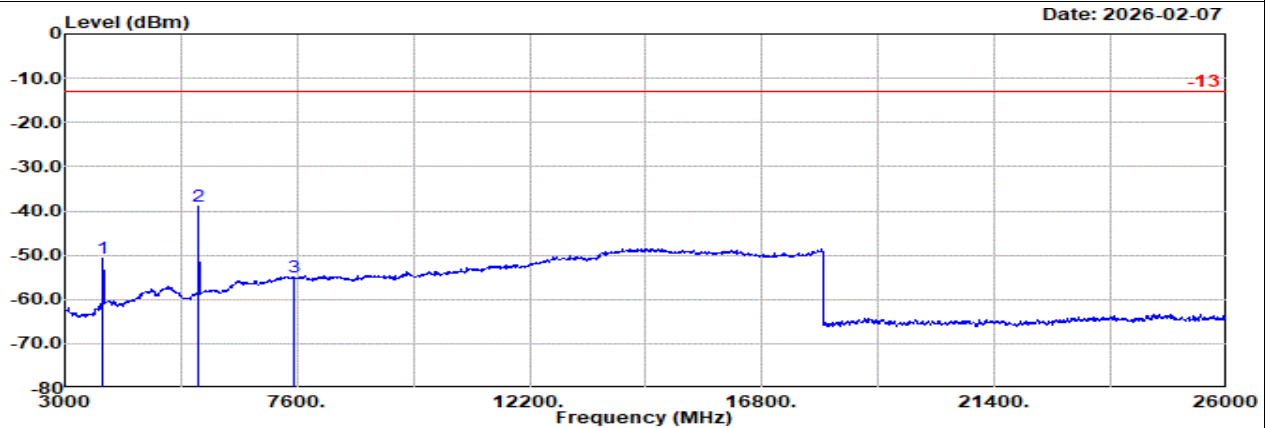

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: GPRS 1900 Ch661

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-50.66	RMS	30.04	-23.62	1.67	-95.23	36.48	-13.00	-37.66	Vertical
2	5640.00	-38.93	RMS	33.06	-21.84	1.54	-95.23	43.54	-13.00	-25.93	Vertical
3	7520.00	-55.06	RMS	36.66	-21.17	1.55	-95.23	23.13	-13.00	-42.06	Vertical




Ant. 8

Part 24E Mode 1

GPRS 1900 Ch810

H

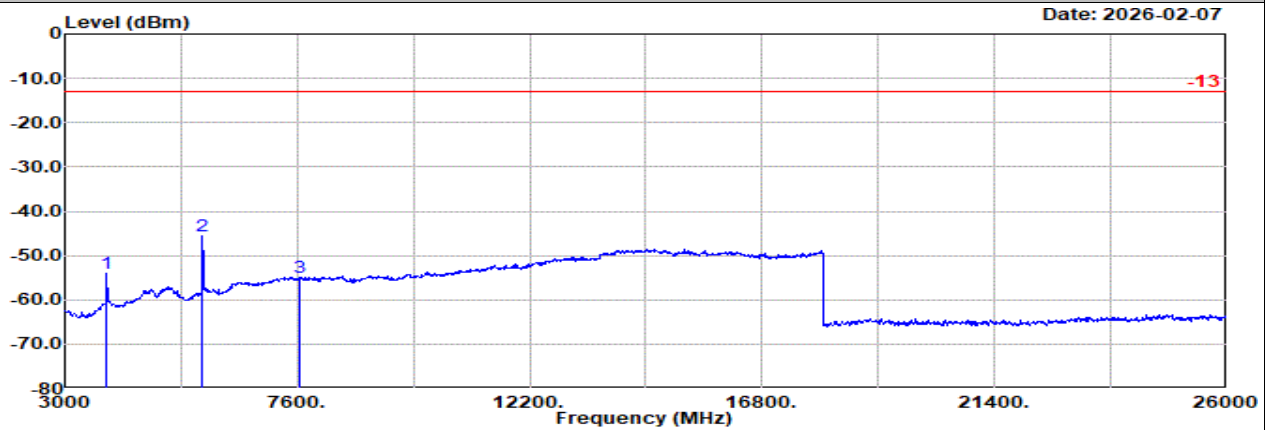


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: GPRS 1900 Ch810

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3825.00	-54.18	RMS	30.40	-23.53	1.69	-95.23	32.49	-13.00	-41.18	Horizontal	
2	5729.00	-45.49	RMS	33.57	-21.84	1.59	-95.23	36.42	-13.00	-32.49	Horizontal	
3	7639.00	-55.06	RMS	36.60	-21.26	1.61	-95.23	23.22	-13.00	-42.06	Horizontal	

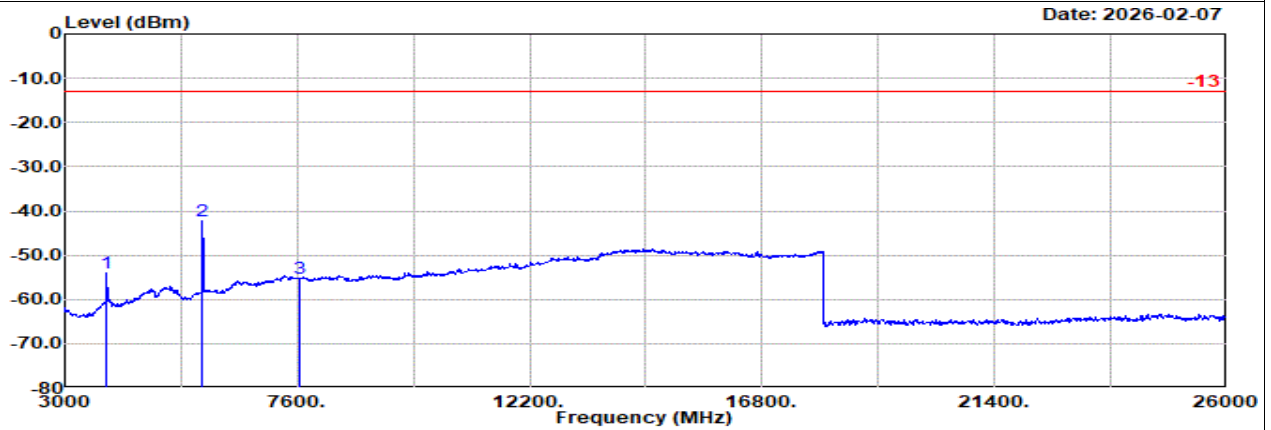

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: GPRS 1900 Ch810

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3825.00	-54.05	RMS	30.40	-23.53	1.69	-95.23	32.62	-13.00	-41.05	Vertical	
2	5729.00	-42.34	RMS	33.57	-21.84	1.59	-95.23	39.57	-13.00	-29.34	Vertical	
3	7639.00	-55.30	RMS	36.60	-21.26	1.61	-95.23	22.98	-13.00	-42.30	Vertical	




Ant. 8

Part 24E Mode 2


EDGE 1900 Ch512

L

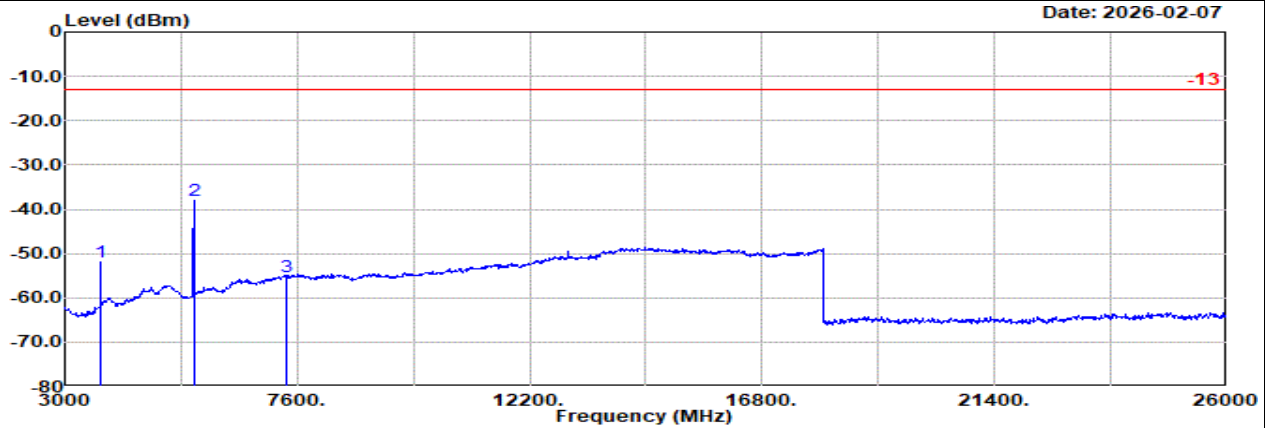

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Horizontal
EDGE 1900 Ch512

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3705.00	-51.95	RMS	29.64	-23.74	1.68	-95.23	0.00	-13.00	-38.95	Horizontal	
2	5565.00	-38.06	RMS	32.76	-21.83	1.54	-95.23	44.70	-13.00	-25.06	Horizontal	
3	7395.00	-55.14	RMS	36.90	-21.26	1.44	-95.23	23.01	-13.00	-42.14	Horizontal	

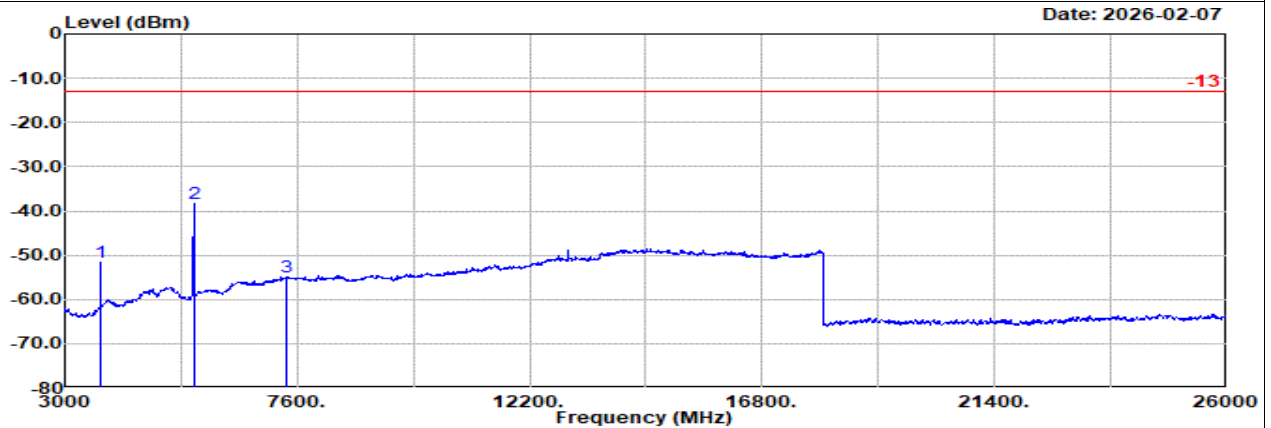

Site : 03CH21-HY
Condition: -13 1m BBHA9170_1223_250702 Vertical
EDGE 1900 Ch512

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3705.00	-51.50	RMS	29.64	-23.74	1.68	-95.23	36.15	-13.00	-38.50	Vertical	
2	5565.00	-38.23	RMS	32.76	-21.83	1.54	-95.23	44.53	-13.00	-25.23	Vertical	
3	7395.00	-54.92	RMS	36.90	-21.26	1.44	-95.23	23.23	-13.00	-41.92	Vertical	




Ant. 8

Part 24E Mode 2

EDGE 1900 Ch661

M

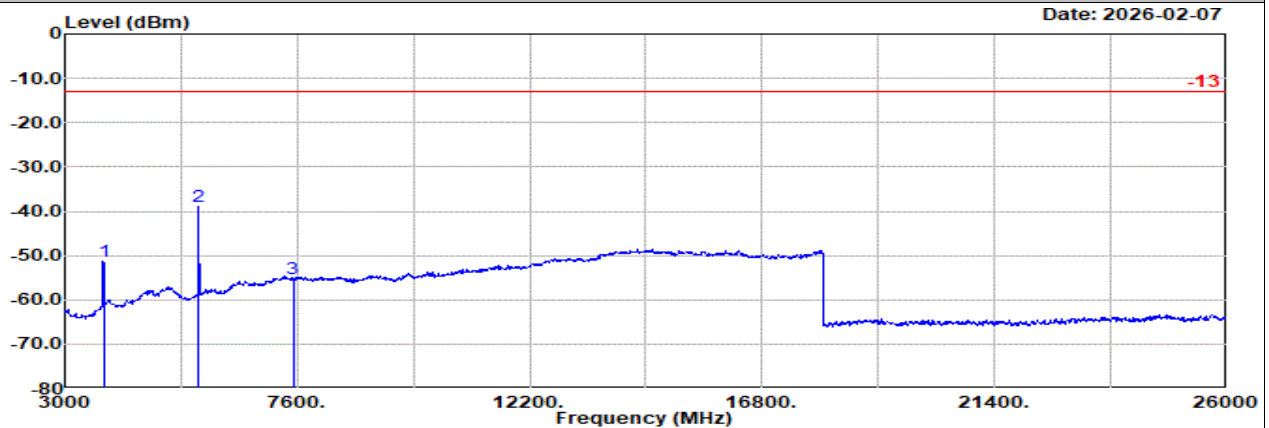


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

EDGE 1900 Ch661

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm		
1	3765.00	-51.43	RMS	30.06	-23.61	1.67	-95.23	35.68	-13.00	-38.43	Horizontal
2	5640.00	-39.05	RMS	33.06	-21.84	1.54	-95.23	43.42	-13.00	-26.05	Horizontal
3	7515.00	-55.36	RMS	36.67	-21.17	1.55	-95.23	22.82	-13.00	-42.36	Horizontal

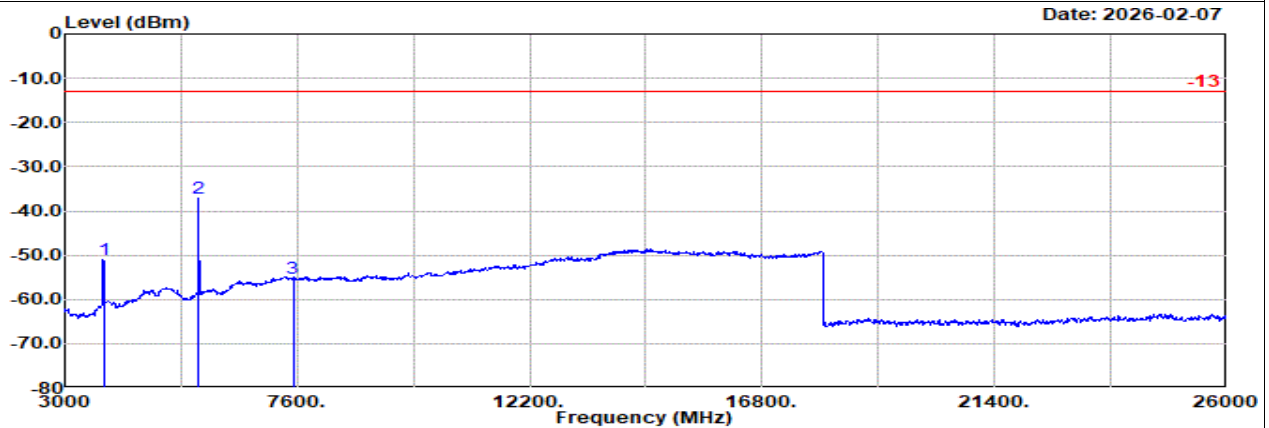

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

EDGE 1900 Ch661

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3765.00	-51.08	RMS	30.06	-23.61	1.67	-95.23	36.03	-13.00	-38.08	Vertical
2	5640.00	-37.11	RMS	33.06	-21.84	1.54	-95.23	45.36	-13.00	-24.11	Vertical
3	7515.00	-55.35	RMS	36.67	-21.17	1.55	-95.23	22.83	-13.00	-42.35	Vertical




Ant. 8

Part 24E Mode 2

EDGE 1900 Ch810

H

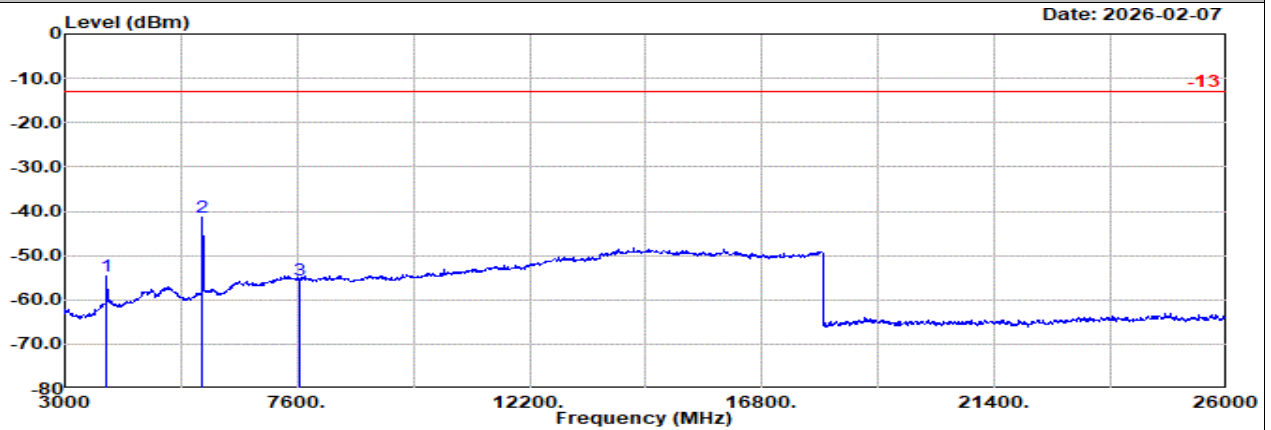


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: EDGE 1900 Ch810

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3825.00	-54.70	RMS	30.40	-23.53	1.69	-95.23	31.97	-13.00	-41.70	Horizontal	
2	5730.00	-41.23	RMS	33.58	-21.84	1.59	-95.23	40.67	-13.00	-28.23	Horizontal	
3	7635.00	-55.61	RMS	36.60	-21.25	1.61	-95.23	22.66	-13.00	-42.61	Horizontal	

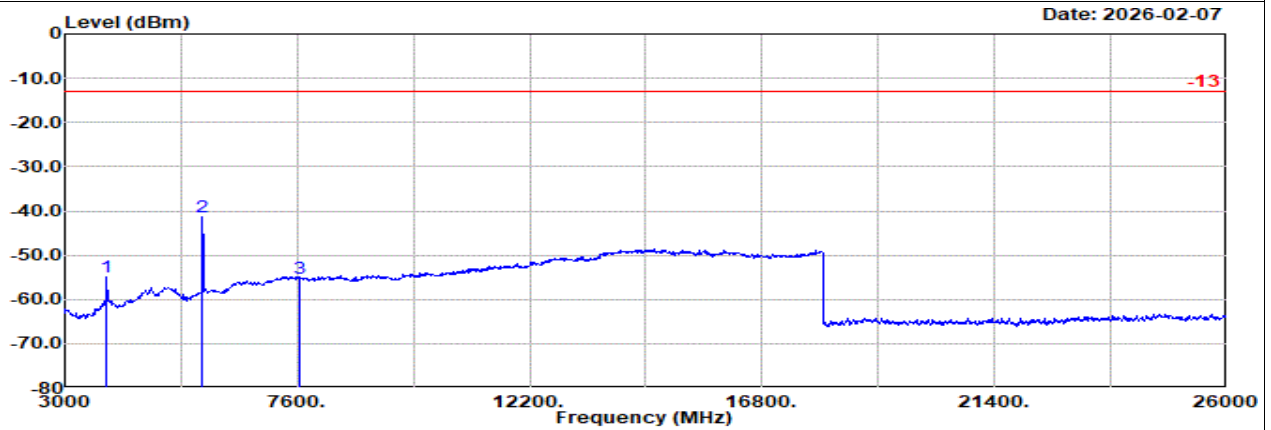

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: EDGE 1900 Ch810

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3825.00	-54.82	RMS	30.40	-23.53	1.69	-95.23	31.85	-13.00	-41.82	Vertical	
2	5730.00	-41.39	RMS	33.58	-21.84	1.59	-95.23	40.51	-13.00	-28.39	Vertical	
3	7635.00	-55.13	RMS	36.60	-21.25	1.61	-95.23	23.14	-13.00	-42.13	Vertical	




Ant. 8

Part 24E Mode 3

WCDMA B2 Ch9262

L

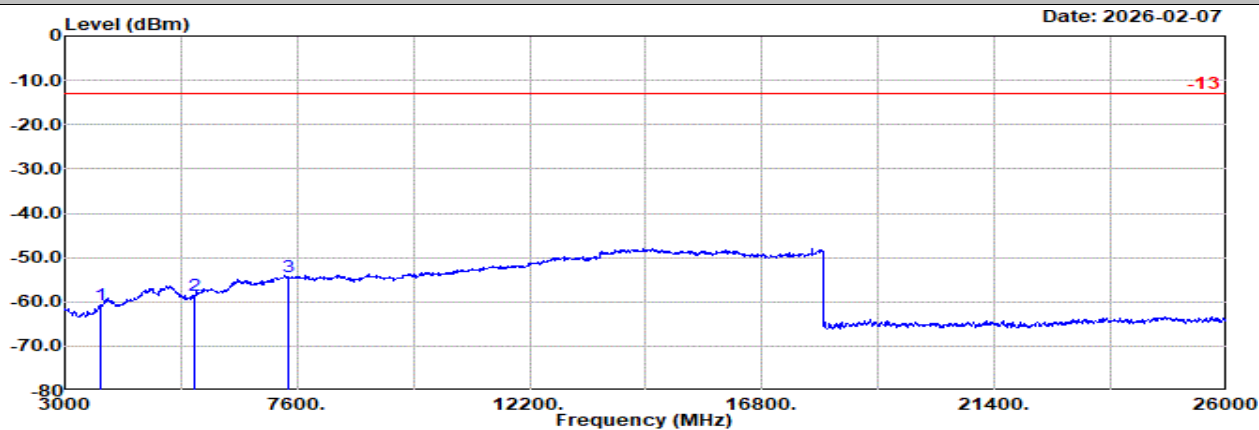


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: WCDMA B2 Ch9262

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin Pol	
	MHz	dBm		Factor	dB		dB	dB				
1	3705.00	-60.66	RMS	29.64	-23.74	1.68	-95.23	26.99	-13.00	-47.66	Horizontal	
2	5557.00	-58.44	RMS	32.73	-21.83	1.54	-95.23	24.35	-13.00	-45.44	Horizontal	
3	7410.00	-54.41	RMS	36.88	-21.25	1.45	-95.23	23.74	-13.00	-41.41	Horizontal	

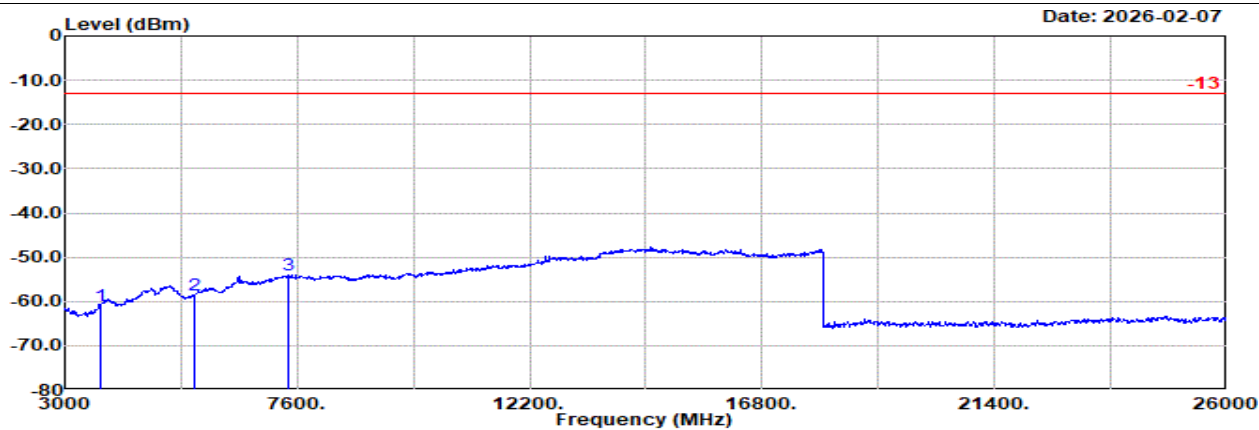

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: WCDMA B2 Ch9262

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin Pol	
	MHz	dBm		Factor	dB		dB	dB				
1	3705.00	-61.13	RMS	29.64	-23.74	1.68	-95.23	26.52	-13.00	-48.13	Vertical	
2	5557.00	-58.57	RMS	32.73	-21.83	1.54	-95.23	24.22	-13.00	-45.57	Vertical	
3	7410.00	-54.17	RMS	36.88	-21.25	1.45	-95.23	23.98	-13.00	-41.17	Vertical	




Ant. 8

Part 24E Mode 3

WCDMA B2 Ch9400

M

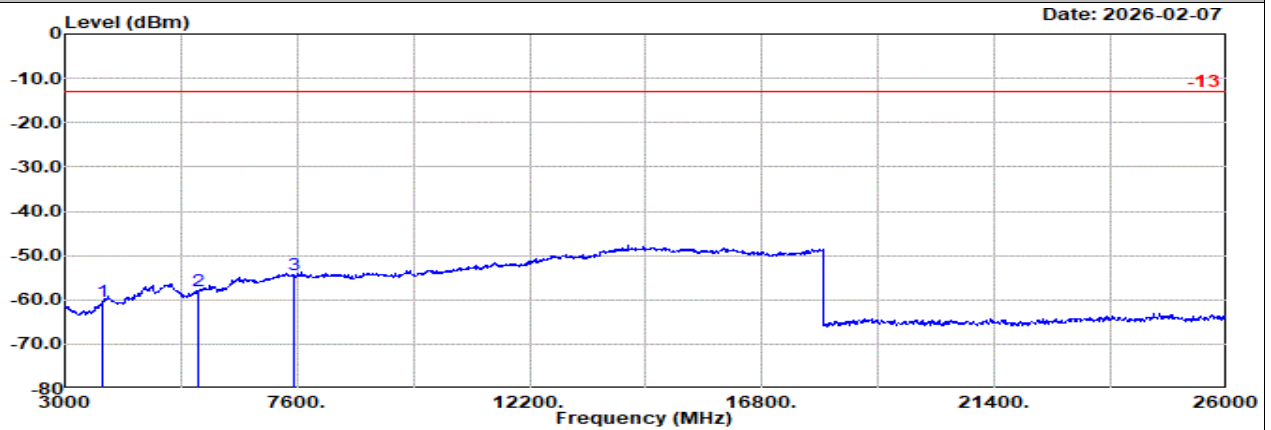


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: WCDMA B2 Ch9400

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-60.53	RMS	30.04	-23.62	1.67	-95.23	26.61	-13.00	-47.53	Horizontal	
2	5640.00	-57.86	RMS	33.06	-21.84	1.54	-95.23	24.61	-13.00	-44.86	Horizontal	
3	7520.00	-54.19	RMS	36.66	-21.17	1.55	-95.23	24.00	-13.00	-41.19	Horizontal	

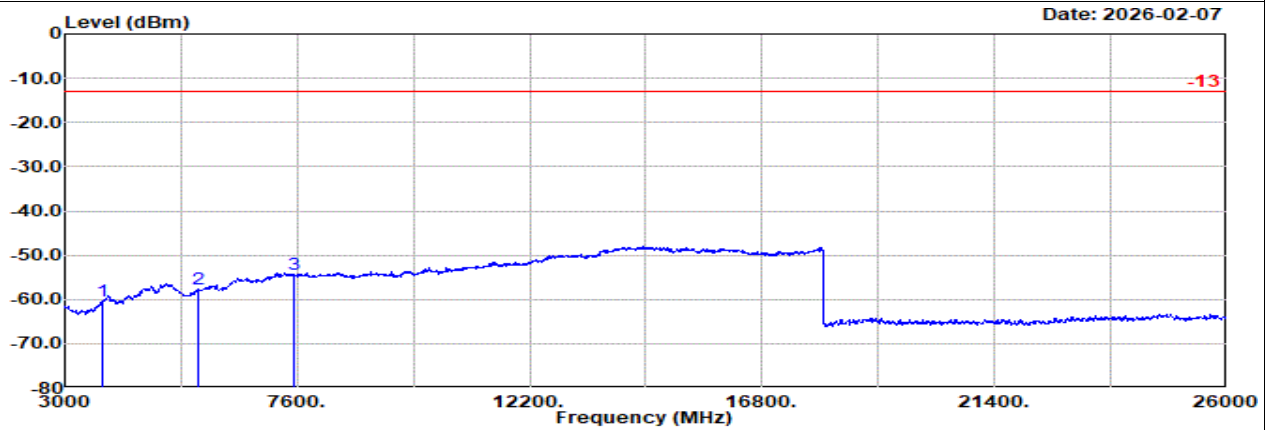

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: WCDMA B2 Ch9400

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-60.47	RMS	30.04	-23.62	1.67	-95.23	26.67	-13.00	-47.47	Vertical	
2	5640.00	-57.79	RMS	33.06	-21.84	1.54	-95.23	24.68	-13.00	-44.79	Vertical	
3	7520.00	-54.28	RMS	36.66	-21.17	1.55	-95.23	23.91	-13.00	-41.28	Vertical	




Ant. 8

Part 24E Mode 3

WCDMA B2 Ch9538

H

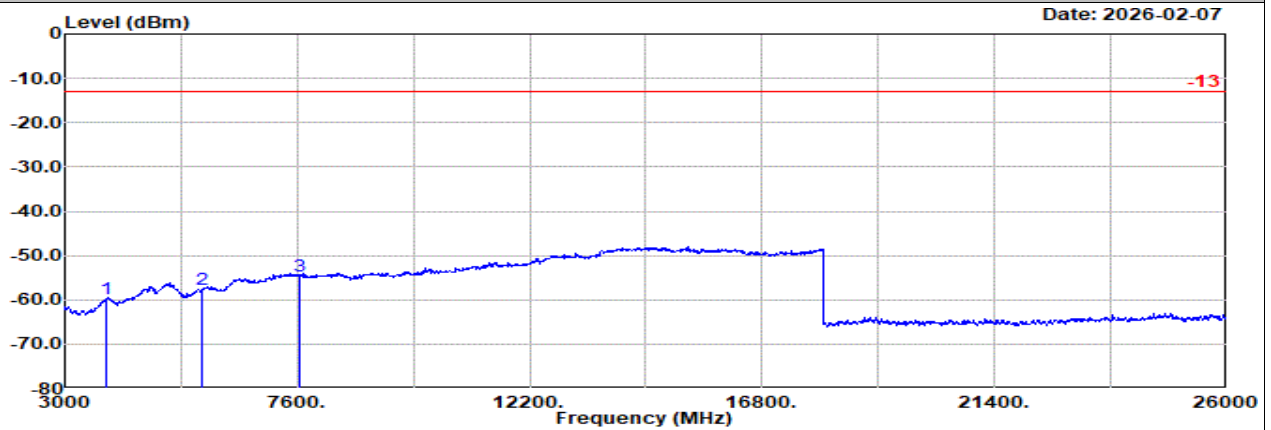


Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Horizontal

: WCDMA B2 Ch9538

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3815.00	-59.92	RMS	30.32	-23.53	1.68	-95.23	26.84	-13.00	-46.92	Horizontal	
2	5723.00	-57.71	RMS	33.54	-21.84	1.59	-95.23	24.23	-13.00	-44.71	Horizontal	
3	7630.00	-54.51	RMS	36.60	-21.25	1.62	-95.23	23.75	-13.00	-41.51	Horizontal	

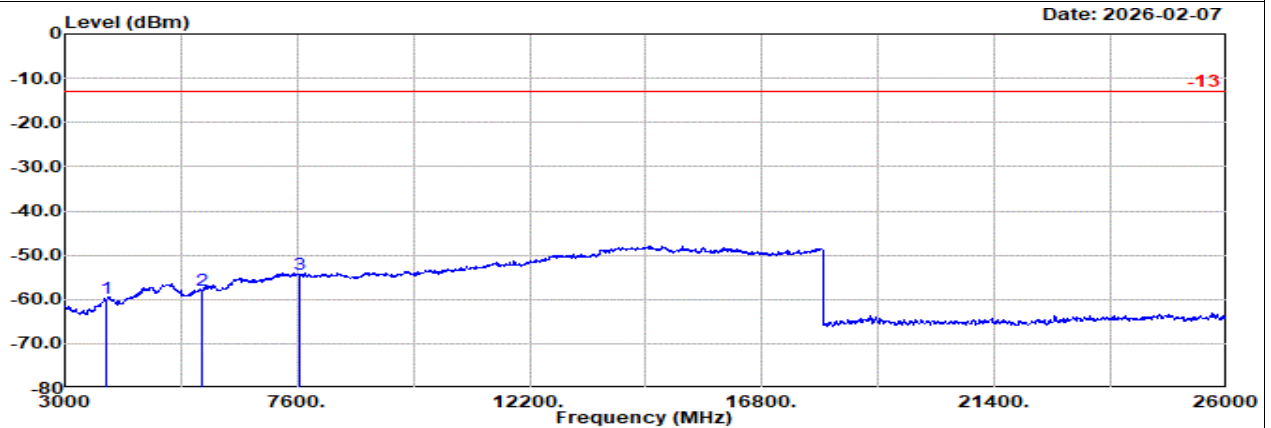

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_250702 Vertical

: WCDMA B2 Ch9538

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3815.00	-59.88	RMS	30.32	-23.53	1.68	-95.23	26.88	-13.00	-46.88	Vertical	
2	5723.00	-58.02	RMS	33.54	-21.84	1.59	-95.23	23.92	-13.00	-45.02	Vertical	
3	7630.00	-54.35	RMS	36.60	-21.25	1.62	-95.23	23.91	-13.00	-41.35	Vertical	




Ant. 8

Part 27L Mode 1

WCDMA B4 Ch1312

L

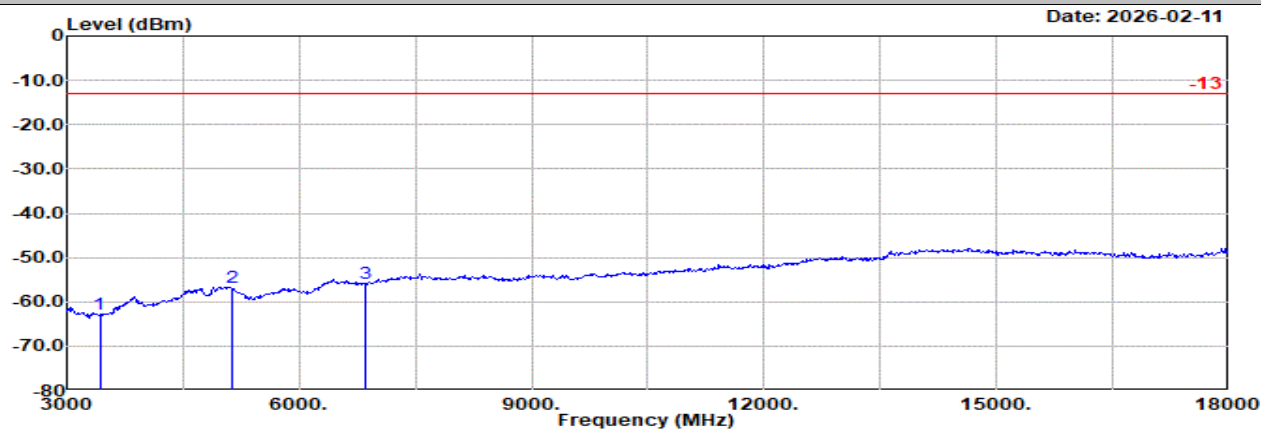


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: WCDMA B4 Ch1312

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBuV	dBm		
1	3425.00	-62.82	RMS	28.35	-23.94	1.88	-95.23	26.12	-13.00	-49.82	Horizontal
2	5137.00	-56.75	RMS	32.50	-21.67	2.09	-95.23	25.56	-13.00	-43.75	Horizontal
3	6850.00	-55.91	RMS	36.00	-21.56	1.46	-95.23	23.42	-13.00	-42.91	Horizontal

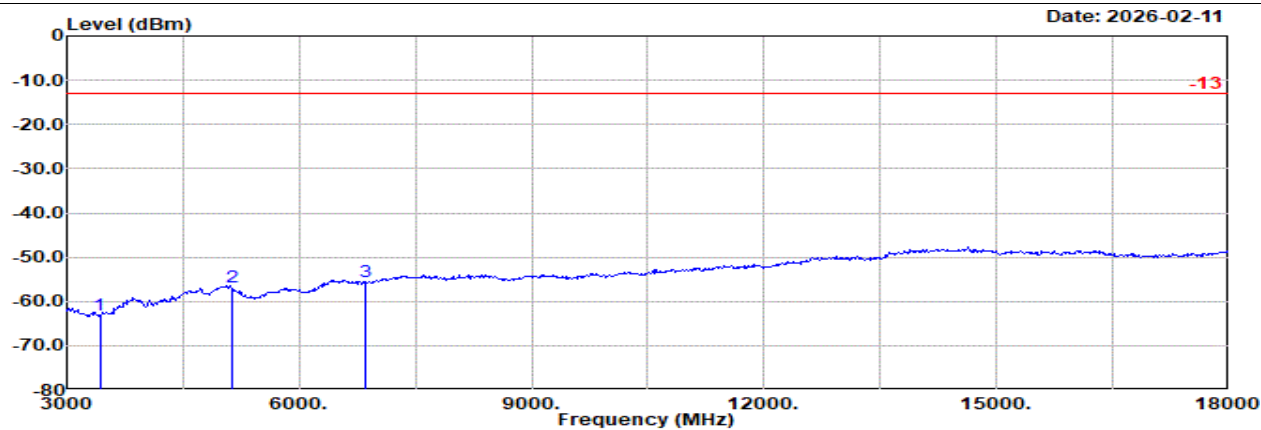

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: WCDMA B4 Ch1312

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	dB			dBuV	dBm		
1	3425.00	-63.13	RMS	28.35	-23.94	1.88	-95.23	25.81	-13.00	-50.13	Vertical
2	5137.00	-56.78	RMS	32.50	-21.67	2.09	-95.23	25.53	-13.00	-43.78	Vertical
3	6850.00	-55.64	RMS	36.00	-21.56	1.46	-95.23	23.69	-13.00	-42.64	Vertical




Ant. 8

Part 27L Mode 1

WCDMA B4 Ch1413

M

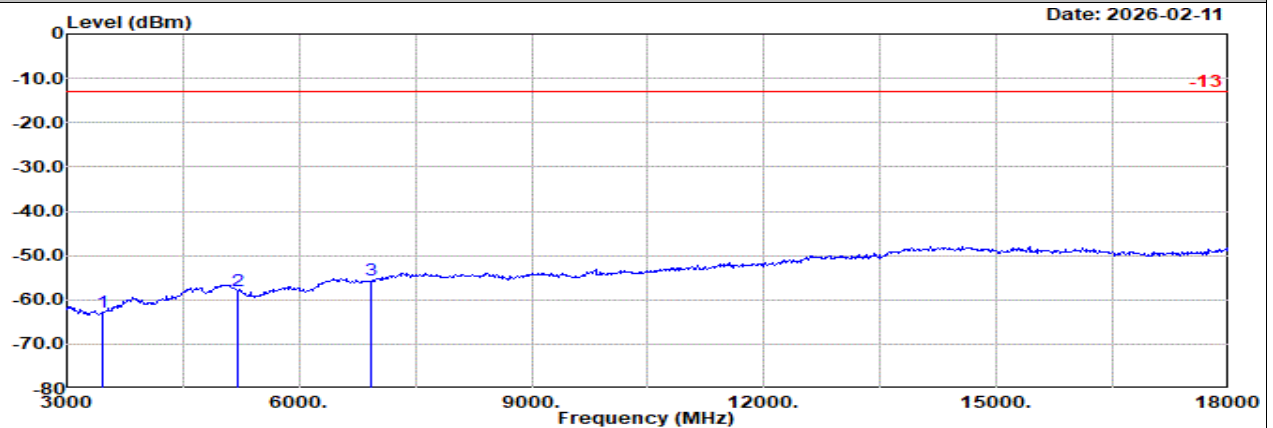


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: WCDMA B4 Ch1413

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	Filter		EIRPCF	Readin Limit		Margin	Pol
	MHz	dBm		dB/m	dB		dB	dB		dBuV	dBm	dB	
1	3465.00	-62.76	RMS	28.49	-24.00	1.84	-95.23	26.14	-13.00	-49.76	Horizontal		
2	5198.00	-57.84	RMS	32.50	-21.72	2.00	-95.23	24.61	-13.00	-44.84	Horizontal		
3	6930.00	-55.64	RMS	36.06	-21.58	1.44	-95.23	23.67	-13.00	-42.64	Horizontal		

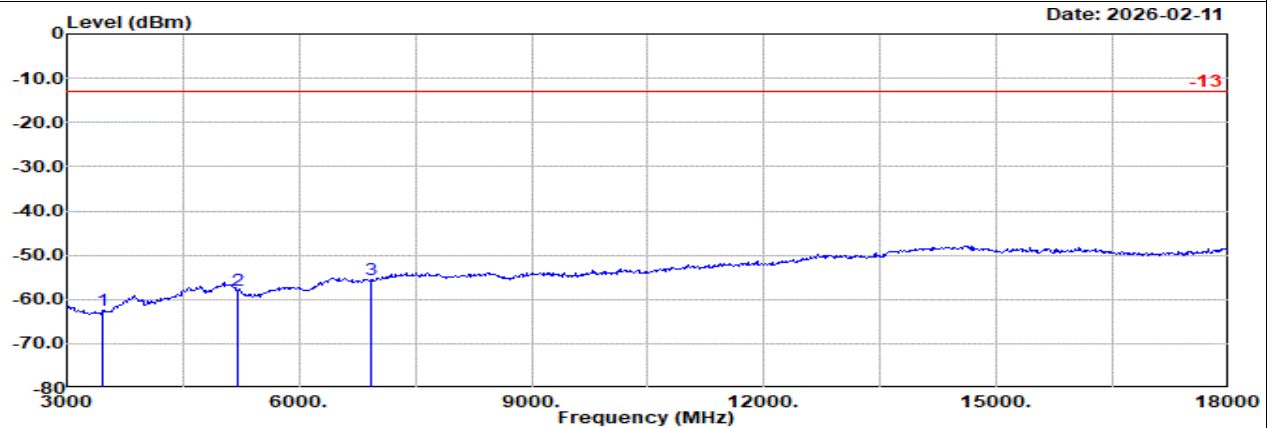

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: WCDMA B4 Ch1413

	Freq Level		Detector	Ant Amp\Cb Filter		Factor	Filter		EIRPCF	Readin Limit		Margin	Pol
	MHz	dBm		dB/m	dB		dB	dB		dBuV	dBm	dB	
1	3465.00	-62.64	RMS	28.49	-24.00	1.84	-95.23	26.26	-13.00	-49.64	Vertical		
2	5198.00	-57.95	RMS	32.50	-21.72	2.00	-95.23	24.50	-13.00	-44.95	Vertical		
3	6930.00	-55.45	RMS	36.06	-21.58	1.44	-95.23	23.86	-13.00	-42.45	Vertical		




Ant. 8

Part 27L Mode 1

WCDMA B4 Ch1513

H

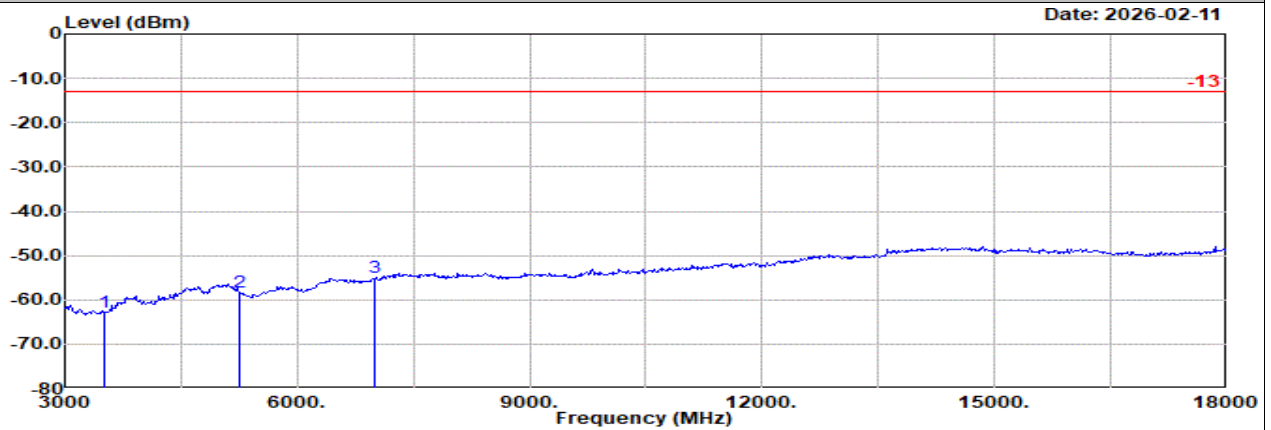


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: WCDMA B4 Ch1513

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin Limit		Margin Pol	
	MHz	dBm		Factor	1		g			
1	3505.00	-62.83	RMS	28.74	-24.04	1.79	-95.23	25.91	-13.00	-49.83 Horizontal
2	5258.00	-58.33	RMS	32.38	-21.73	1.89	-95.23	24.36	-13.00	-45.33 Horizontal
3	7010.00	-55.02	RMS	36.18	-21.59	1.43	-95.23	24.19	-13.00	-42.02 Horizontal

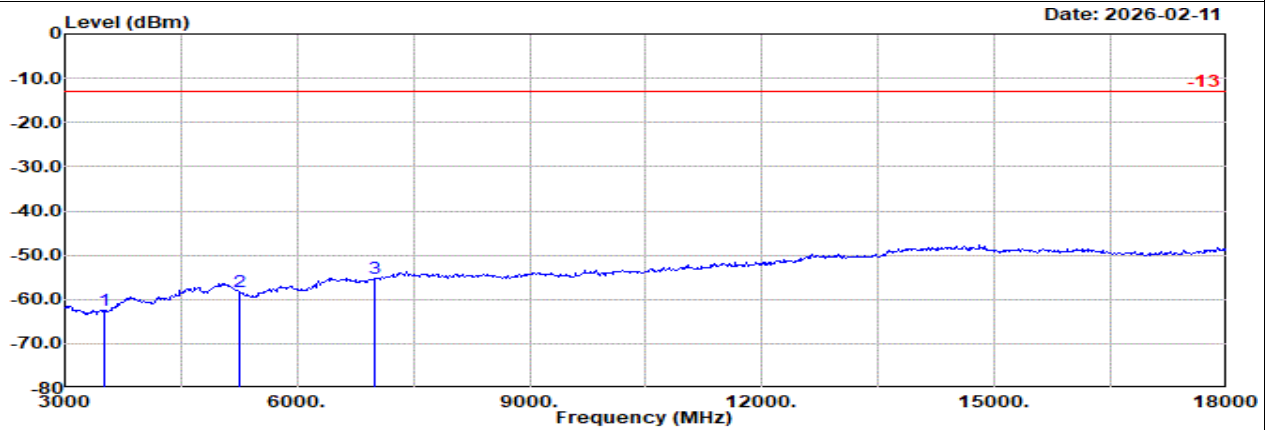

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: WCDMA B4 Ch1513

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin Limit		Margin Pol	
	MHz	dBm		Factor	1		g			
1	3505.00	-62.59	RMS	28.74	-24.04	1.79	-95.23	26.15	-13.00	-49.59 Vertical
2	5258.00	-58.29	RMS	32.38	-21.73	1.89	-95.23	24.40	-13.00	-45.29 Vertical
3	7010.00	-55.14	RMS	36.18	-21.59	1.43	-95.23	24.07	-13.00	-42.14 Vertical




Ant. 8

Part 24E Mode 2

EDGE 1900 Ch661

M

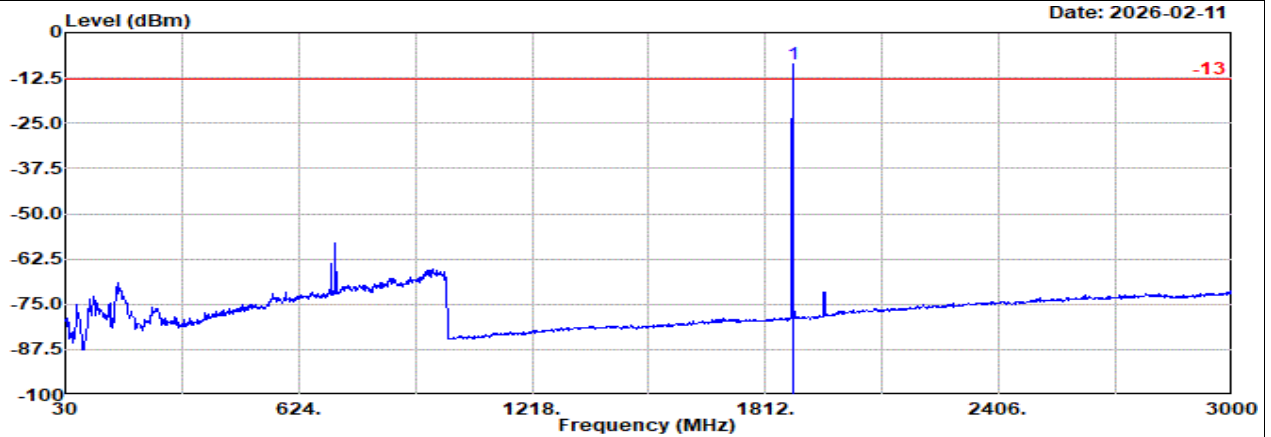


Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Horizontal

: EDGE 1900 Ch661

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm									
1	1880.00	-8.77	RMS	25.10	-24.94	0.60	-95.23	85.70	-13.00	4.23	Horizontal

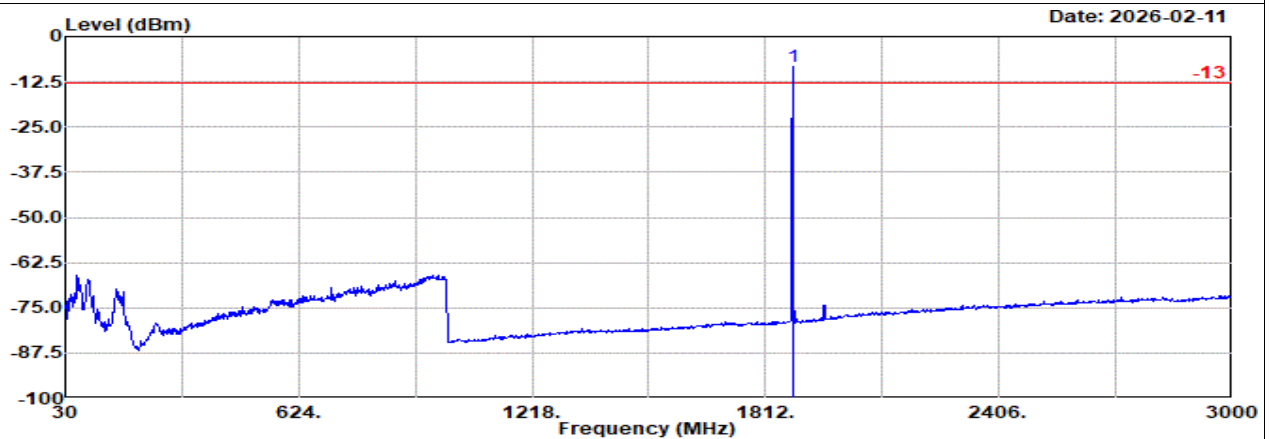

Site : 03CH21-HY

Condition: -13 3m DRH18-E_LE2C03A18EN_250807 Vertical

: EDGE 1900 Ch661

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm									
1	1880.00	-8.16	RMS	25.10	-24.94	0.60	-95.23	86.31	-13.00	4.84	Vertical