

TC22R

Integrated RFID Touch Computer



ZEBRA

Quick Start Guide

2025/08/13

ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corporation, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2025 Zebra Technologies Corporation and/or its affiliates. All rights reserved.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements.

For further information regarding legal and proprietary statements, please go to:

SOFTWARE: zebra.com/informationpolicy.

COPYRIGHTS: zebra.com/copyright.

PATENTS: ip.zebra.com.

WARRANTY: zebra.com/warranty.

END USER LICENSE AGREEMENT: zebra.com/eula.

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Model Numbers

This guide applies to the following model number: TC2205

Unpacking the Device

When you receive the TC22R, ensure that all the items are in the shipping container.

1. Carefully remove all protective material from the device and save the shipping container for later storage and shipping.
2. Verify that the following were received:
 - RFID touch computer
 - PowerPrecision Lithium-ion battery
 - Regulatory Guide
3. Inspect the equipment for damage. If any equipment is missing or damaged, contact the Global Customer Support Center immediately.
4. Prior to using the device for the first time, remove the protective shipping film that covers the scan window, display, and camera window.

Features

This section lists all the features of the TC22R.

Figure 1 Front Right View

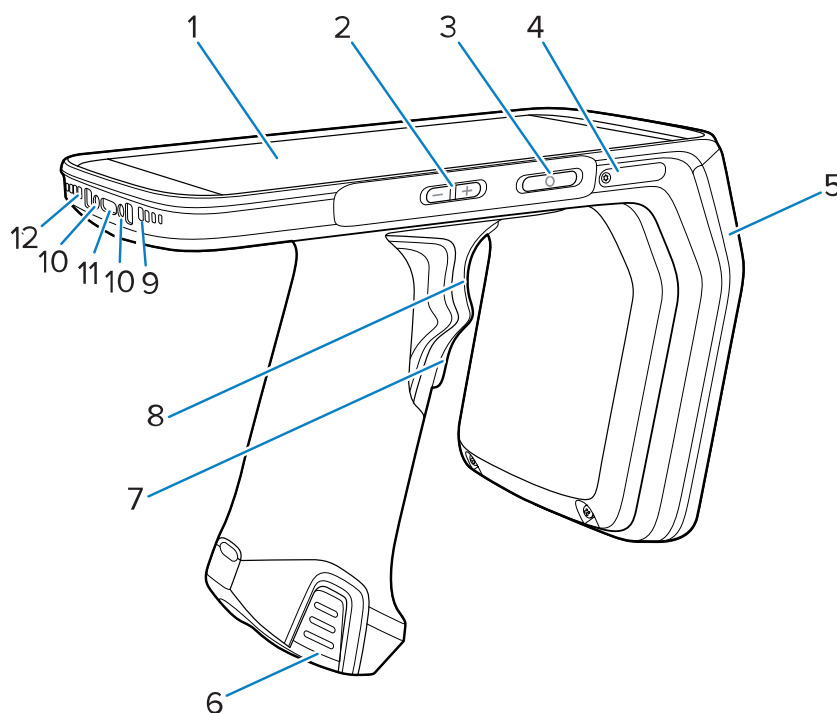
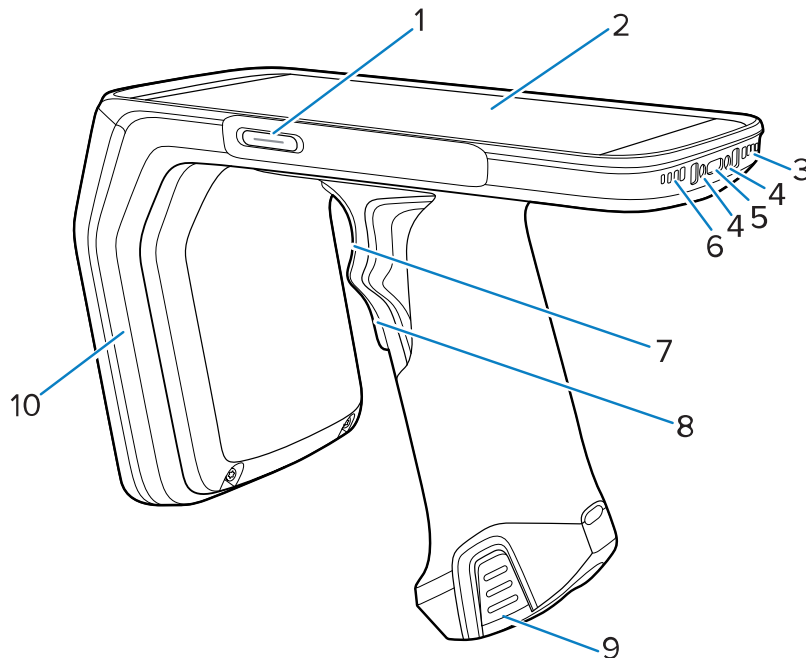


Table 1 Right View Features

Number	Item	Description
1	Touch Screen	Displays all information needed to operate the device.
2	Volume Up/Down Button	Increase and decrease audio volume (programmable).
3	Power Button	Turns the display on and off. Press and hold to reset the device or power it off.
4	Card Holder	Holds a SIM card and an SD card.
5	RFID Antenna	Antenna for RFID functionality.
6	Battery Release Latches	Press to remove the battery.
7	Upper Trigger	By default, for RFID.
8	Lower Trigger	By default, for barcode scanning.
9	Speaker	Provides audio output for video and music playback. Provides audio in speakerphone mode.
10	Cradle Charging Contacts	Provides device charging via cradles and accessories.

Table 1 Right View Features (Continued)

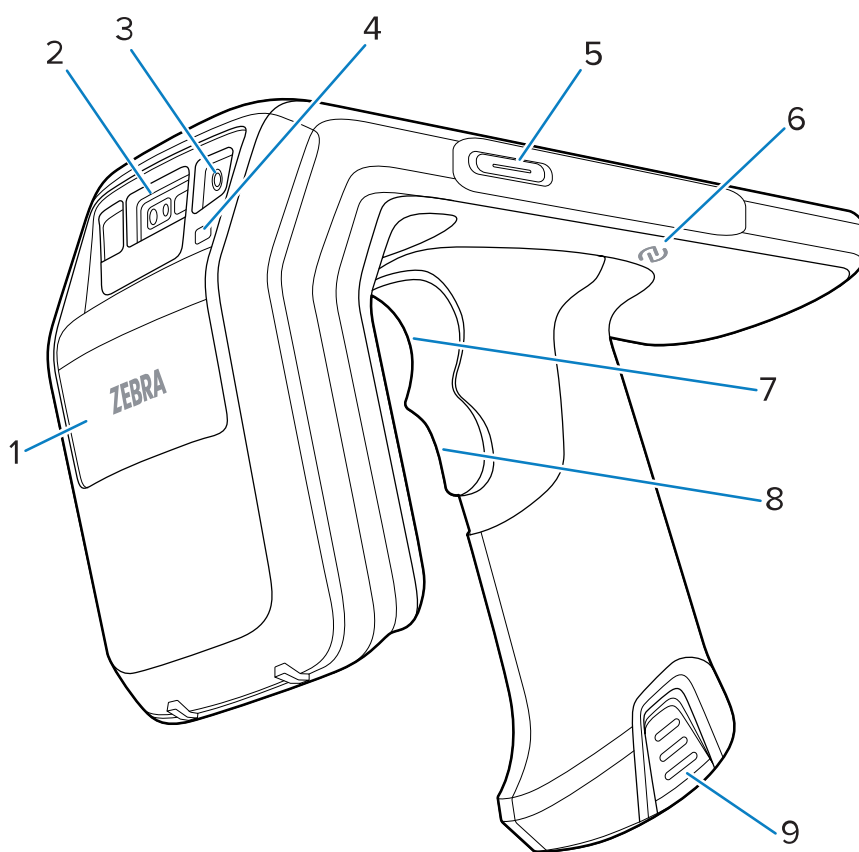
Number	Item	Description
11	USB-C Connector with plug	Provides USB host, client communications, and device charging via cables and accessories.
12	Microphone	Use for communications in Handset mode.

Figure 2 Front Left View

Table 2 Left View Features

Number	Item	Description
1	Programmable Button	This button is typically used for barcode scanning or Push-to-Talk communications. Where regulatory restrictions exist for push-to-talk VoIP communication, this button is configurable for use with other applications.
2	Touch Screen	Displays all information needed to operate the device.
3	Speaker	Provides audio output for video and music playback. Provides audio in speakerphone mode.
4	Cradle Charging Contacts	Provides device charging via cradles and accessories.

Table 2 Left View Features (Continued)

Number	Item	Description
5	USB-C Connector with plug	Provides USB host, client communications, and device charging via cables and accessories.
6	Microphone	Use for communications in Handset mode.
7	Upper Trigger	By default, for RFID.
8	Lower Trigger	By default, for barcode scanning.
9	Battery Release Latches	Press to remove the battery.
10	RFID Antenna	Antenna for RFID functionality.

Figure 3 Side and Bottom View**Table 3** Side and Bottom View Features

Number	Item	Description
1	Label Placement	Allows for customer branding if desired.
2	Scanner Exit Window	Provides data capture using the imager.

Table 3 Side and Bottom View Features (Continued)

Number	Item	Description
3	Forward-Facing Camera	Takes photos and videos.
4	Camera Flash	Provides illumination for the camera and operates as a flashlight.
5	Programmable Button	This button is typically used for barcode scanning or Push-to-Talk communications. Where regulatory restrictions exist for push-to-talk VoIP communication, this button is configurable for use with other applications.
6	NFC Icon (laser etched)	Provides communication with other NFC-enabled devices.
7	Upper Trigger	By default, for RFID.
8	Lower Trigger	By default, for barcode scanning.
9	Battery Release Latches	Press to remove the battery.

Setting Up the Device

Complete the following procedures to start using the device.

To start using the device for the first time.

1. Install a micro secure digital (SD) card (optional).
2. Install the battery.
3. Charge the device.


Installing a microSD Card

The TC22R microSD card slot provides secondary non-volatile storage. The slot is located under the battery pack. Refer to the documentation provided with the card for more information, and follow the manufacturer's recommendations for use.




CAUTION: Follow proper electrostatic discharge (ESD) precautions to avoid damaging the microSD card. Proper ESD precautions include but are not limited to, working on an ESD mat and ensuring that the operator is properly grounded.


1. Pull the card holder out of the device.

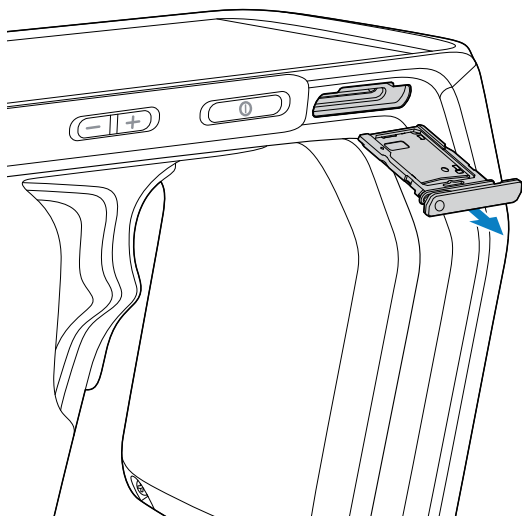

2. Place the microSD card, contact end first, with contacts facing up, into the card holder, then rotate the microSD card down.

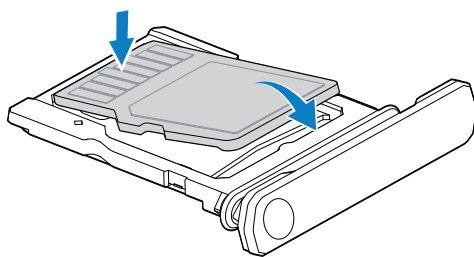

3. Press the card down into the cardholder and ensure that it seats properly.
4. Re-install the cardholder.

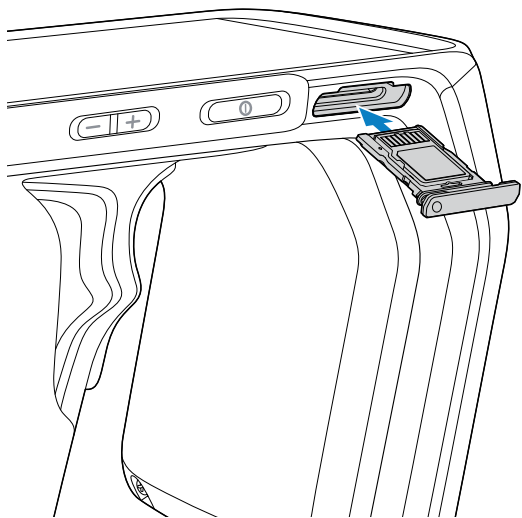

Installing the Battery

Installing the battery in the device.




NOTE: User modification of the device, particularly in the battery well, such as labels, asset tags, engravings, stickers, etc., may compromise the intended performance of the device or accessories. Performance levels such as sealing (Ingress Protection (IP)), impact performance (drop and tumble), functionality, temperature resistance, etc. could be affected. DO NOT put labels, asset tags, engravings, stickers, etc., in the battery well.




NOTE: The battery is keyed to ensure correct insertion. The notch on the battery faces the back of the device.

1. Align the battery with the notch facing the back of the device, and slide the battery into the handle of the device.

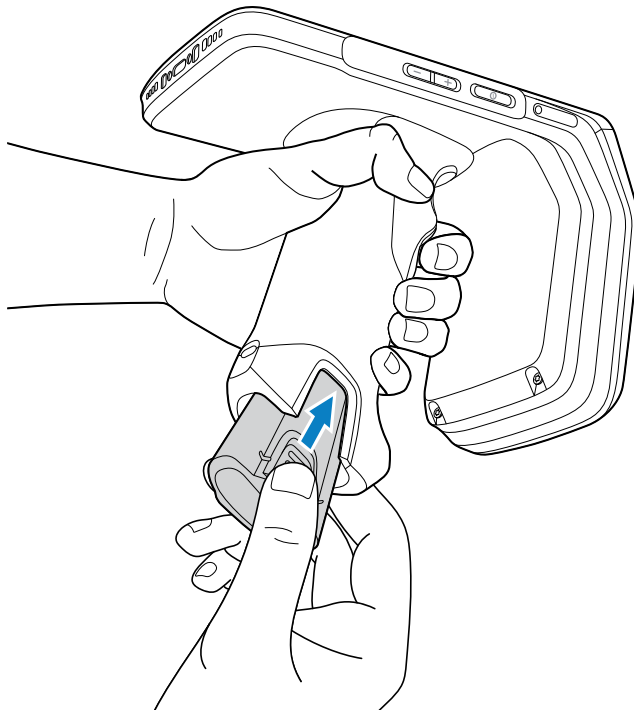

2. Press the battery down into the handle until the battery release latches snap into place.

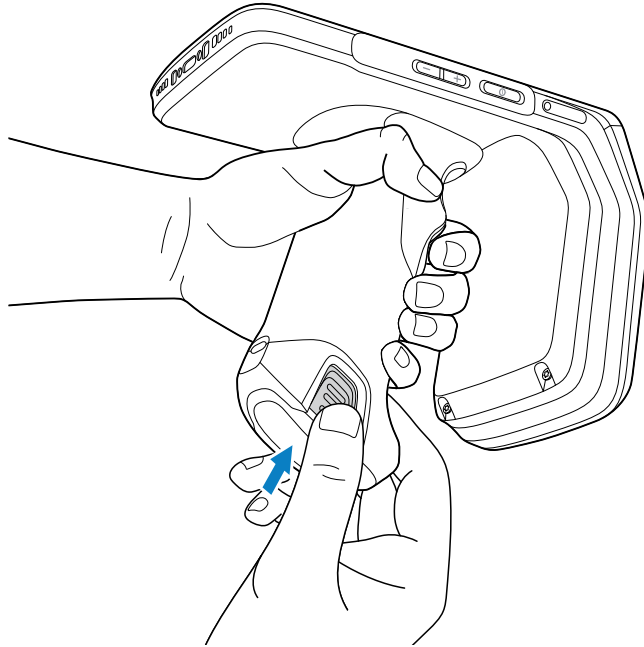

Replacing the Battery

Replace the battery in the device.




NOTE: User modification of the device, particularly in the battery well, such as labels, asset tags, engravings, stickers, etc., may compromise the intended performance of the device or accessories. Performance levels such as sealing (Ingress Protection (IP)), impact performance (drop and tumble), functionality, temperature resistance, etc. could be affected. DO NOT put labels, asset tags, engravings, stickers, etc., in the battery well.



CAUTION: Do not add or remove the microSD card during battery replacement.


1. Press the Power button until the menu appears.
2. Touch **Power Off**.

3. Press the two latches down.

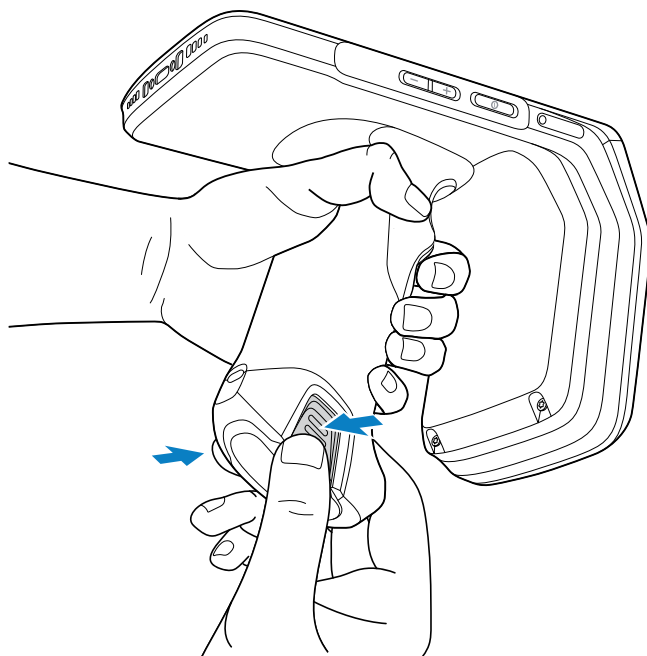

NOTE: Do not attempt to insert fingers under the latches when pulling on the battery. Damage to the latches may occur.

4. While pressing the latches down, press the two latches in toward the center of the device. The latches must be pressed in completely to release the battery.

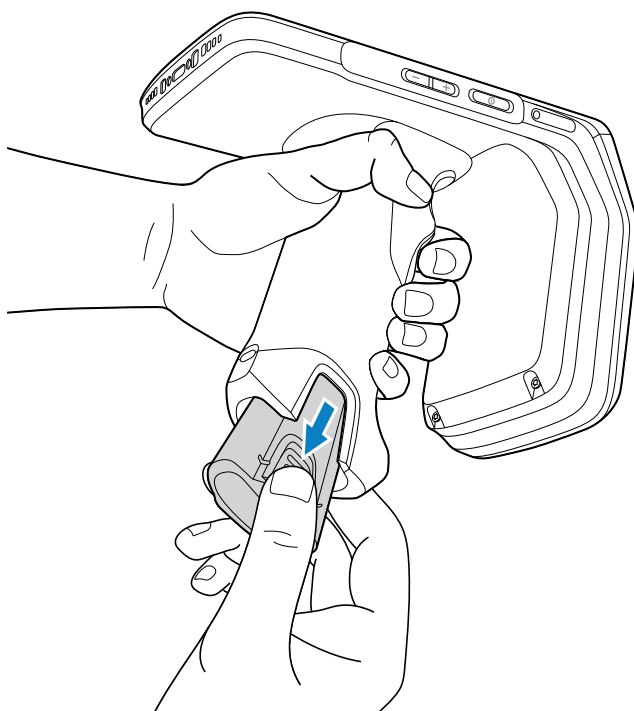


5. Lift the battery from the handle.


6. Insert the replacement battery into the handle of the device.



NOTE: The battery is keyed to ensure correct insertion. The notch on the battery faces the back of the device.

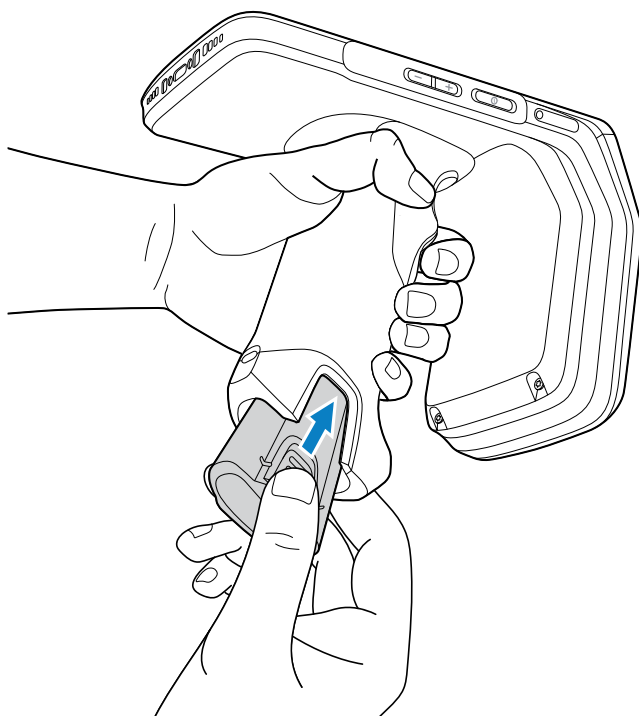

7. Press the battery down into the handle until the battery release latches snap into place.

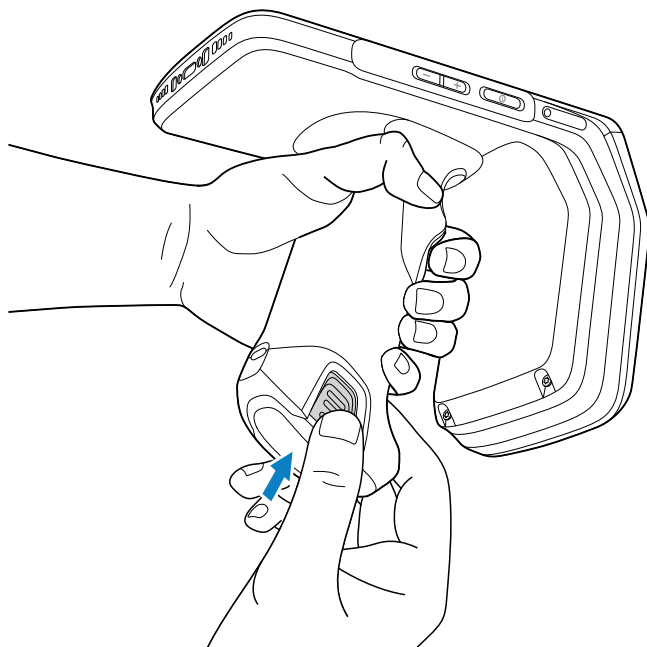

8. Press the Power button to turn on the device.

Charging the Device

To achieve optimal charging results, use only Zebra charging accessories and batteries. Charge batteries at room temperature with the device in Sleep mode.

The device goes into Sleep mode when you press Power or after a period of inactivity.

A battery charges from fully depleted to 90% in approximately 2 hours. In many cases, a 90% charge provides enough charge for daily use. Depending on the usage profile, a full 100% charge may last for approximately 14 hours of use.

The device or accessory always performs battery charging in a safe and intelligent manner and indicates when charging is disabled due to abnormal temperatures via its LED, and a notification appears on the device display.

Temperature	Battery Charging Behavior
20 to 45°C (68 to 113°F)	Optimal charging range.
0 to 20°C (32 to 68°F) / 45 to 50°C (113 to 122°F)	Charging slows to optimize the JEITA requirements of the cell.
Below 0°C (32°F) / Above 50°C (122°F)	Charging stops.
Above 55°C (131°F)	The device shuts down.

Main Battery Charging

Before using the device for the first time, charge the main battery until the green Charging/Notification light-emitting diode (LED) remains lit. Use a cable or a cradle with the appropriate power supply to charge the device.

The compatible battery specification for the product is as follows:

- TC22R 7000 mAh PowerPrecision Plus Li-Ion Battery, part number: BT-000380-80 (World Wide) and BT-000380-A0 (India)

The device's Charging/Notification LED indicates the battery charging status. The battery typically charges from 5% to 95% in approximately 3 hours and 40 minutes.



NOTE: Charge batteries at room temperature with the device in Sleep mode.

Table 4 Charging/Notification LED Charging Indicators

State	Indication
Off	The device is not charging. It is incorrectly inserted in the cradle or connected to a power source, and the charger/cradle is not powered.
Slow Blinking Amber (1 blink every 4 seconds)	The device is charging.
Slow Blinking Red (1 blink every 4 seconds)	The device is charging, but the battery is at the end of its useful life.
Solid Green	Charging complete.

Table 4 Charging/Notification LED Charging Indicators (Continued)

State	Indication
Solid Red	Charging is complete, but the battery is at the end of its useful life.
Fast Blinking Amber (2 blinks/second)	Charging error, for example: - Temperature is too low or too high. - Charging has gone on too long without completion (typically eight hours).
Fast Blinking Red (2 blinks/second)	Charging error but the battery is at the end of its useful life, for example: - Temperature is too low or too high. - Charging has gone on too long without completion (typically eight hours).

Charging Temperature

Charge batteries in temperatures from 5°C to 40°C (41°F to 104°F). The device or cradle always performs battery charging safely and intelligently. At higher temperatures (for example, approximately +37°C / +98°F), the device or cradle may, for small periods, alternately enable and disable battery charging to keep the battery at acceptable temperatures. The device and cradle indicate when charging is disabled due to abnormal temperatures via its LED.

Accessories for Charging

Use one of the following accessories to charge the device and/or spare battery.

Charging and Communication

Description	Part Number	Charging		Communication	
		Battery (In device)	Spare Battery	USB	Ethernet
1-Slot Charge Only Cradle	CRD-TC2R-BS1CG-01	Yes	No	No	No
4-Slot Charge Only Cradle	CRD-TC2R-BS4CG-01	Yes	No	No	No
4-Slot Ethernet Cradle	CRD-TC2R-SE4ET-01	Yes	No	No	Yes
USB Communication and Charge Cable	CBL-TC5X-USBC2A-01	Yes	No	Yes	No
USB-C Communication and Charge Cable	CBL-EC5X-USBC3A-01	Yes	No	Yes	No

1-Slot Charge Only Cradle

This cradle provides power to the device.




CAUTION: Ensure that you follow the guidelines for battery safety described in the Product Reference Guide.

The 1-Slot Charge Only Cradle:

- Provides 5 VDC power for operating the device.
- Charges the device’s battery.

Figure 4 1-Slot Charge Only Cradle

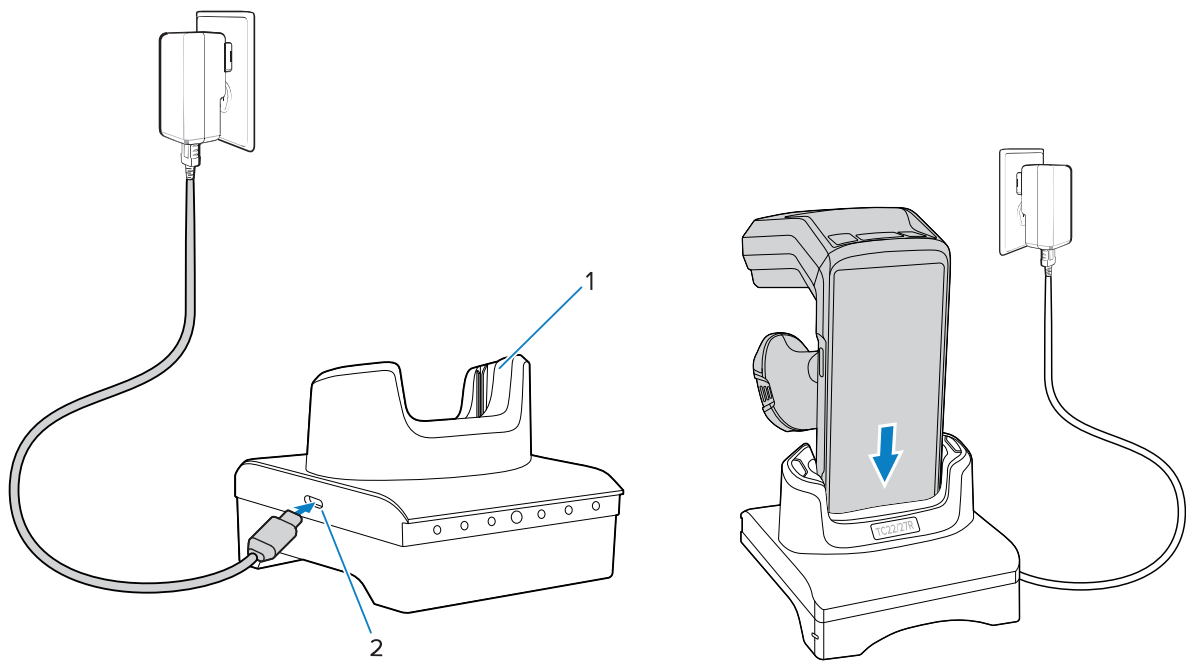

1	Device charging slot with shim.
2	USB-C power port.

4-Slot Charge Only Cradle


This section describes how to use the 4-Slot Charge Only Cradle to charge up to four devices.



CAUTION: Ensure that you follow the guidelines for battery safety described in the Product Reference Guide.

The 4-Slot Charge-Only Cradle:

- Provides 5 VDC power for operating the device.
- Simultaneously charges up to four devices.

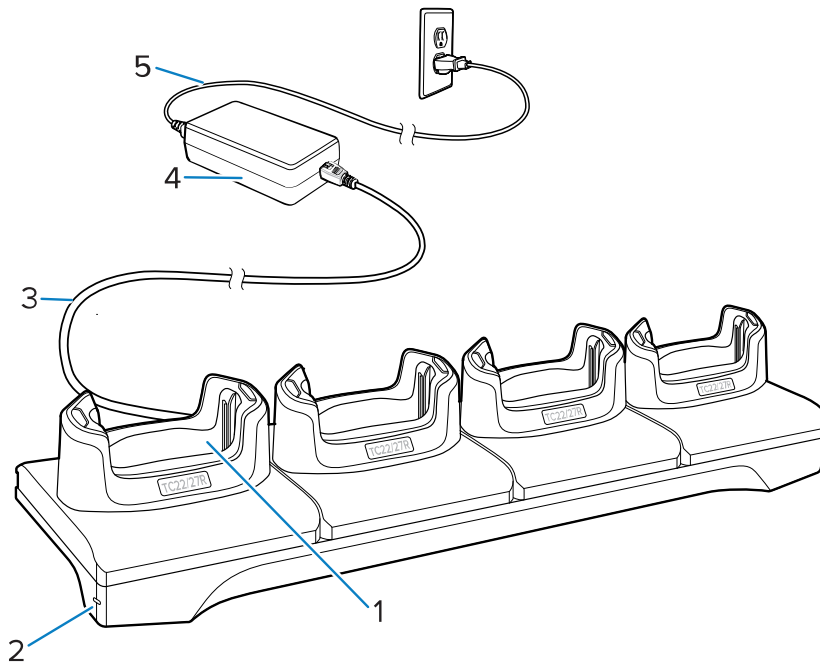Figure 5 4-Slot Charge Only Cradle

1	Device charging slot with shim
2	Power LED
3	DC line cord
4	Power supply
5	AC line cord

4-Slot Ethernet Cradle




CAUTION: Ensure that you follow the guidelines for battery safety described in the Product Reference Guide.

The 4-Slot Ethernet Cradle:

- Provides 5.0 VDC power for operating the device.
- Connects up to four devices to an Ethernet network.
- Simultaneously charges up to four devices or up to four devices and four batteries using the 4-slot battery charger adapter.

Figure 6 4-Slot Ethernet Cradle

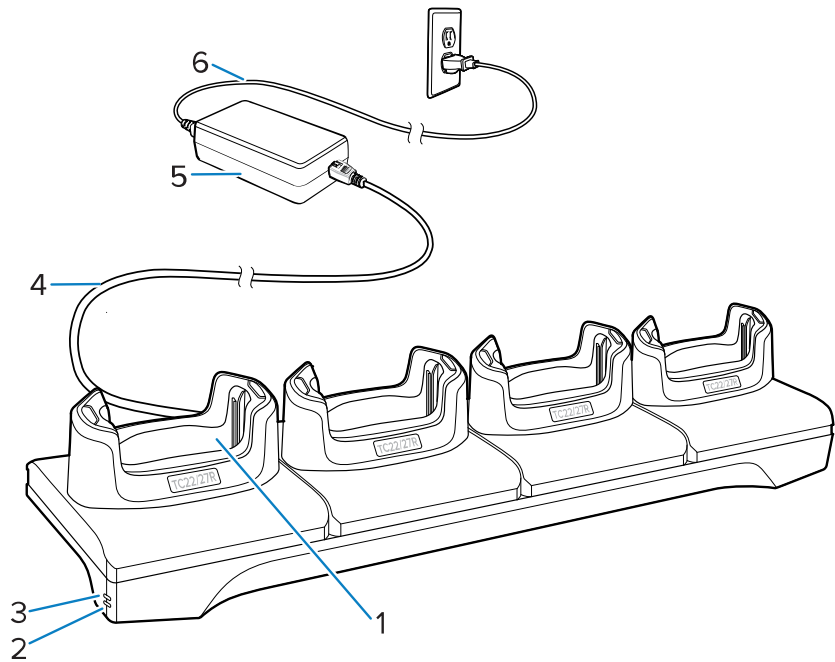

1	Device charging slot with shim
2	1000Base-T LED
3	10/100Base-T LED
4	DC line cord
5	Power supply
6	AC line cord

Charge/USB-C Cable

The USB-C Cable snaps onto the bottom of the device and removes easily when not in use.



NOTE: When attached to the device, it provides charging and allows the device to transfer data to a host computer.

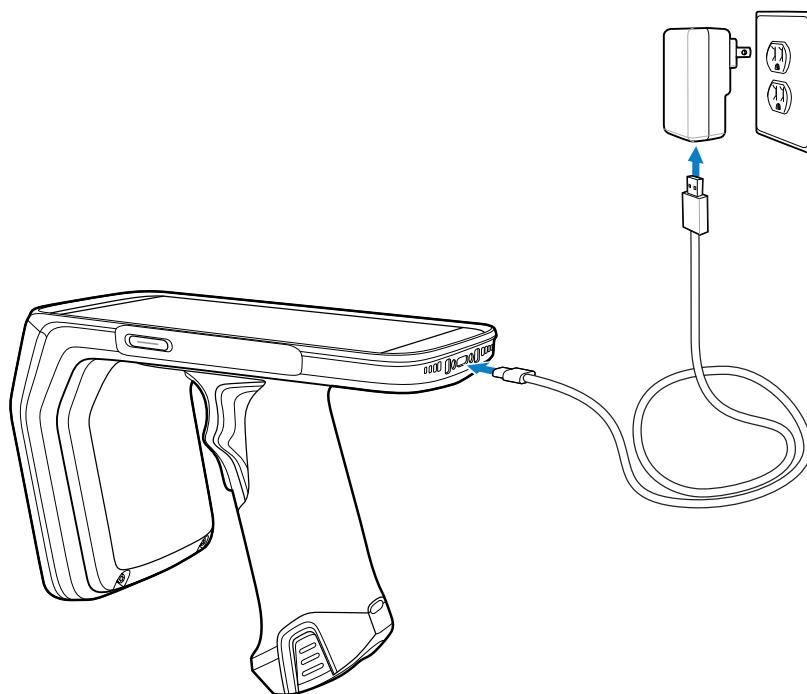


Figure 7 USB-C Cable

Scanning with Internal Imager


To read a barcode, a scan-enabled application is required. The device contains the DataWedge application, which allows you to enable the imager, decode the barcode data, and display the barcode content.



NOTE: The SE4710 imager displays a red dot aimer.


1. Ensure that an application is open on the device and a text field is in focus (text cursor in text field).

2. Point the scanner exit window of the device at a barcode.

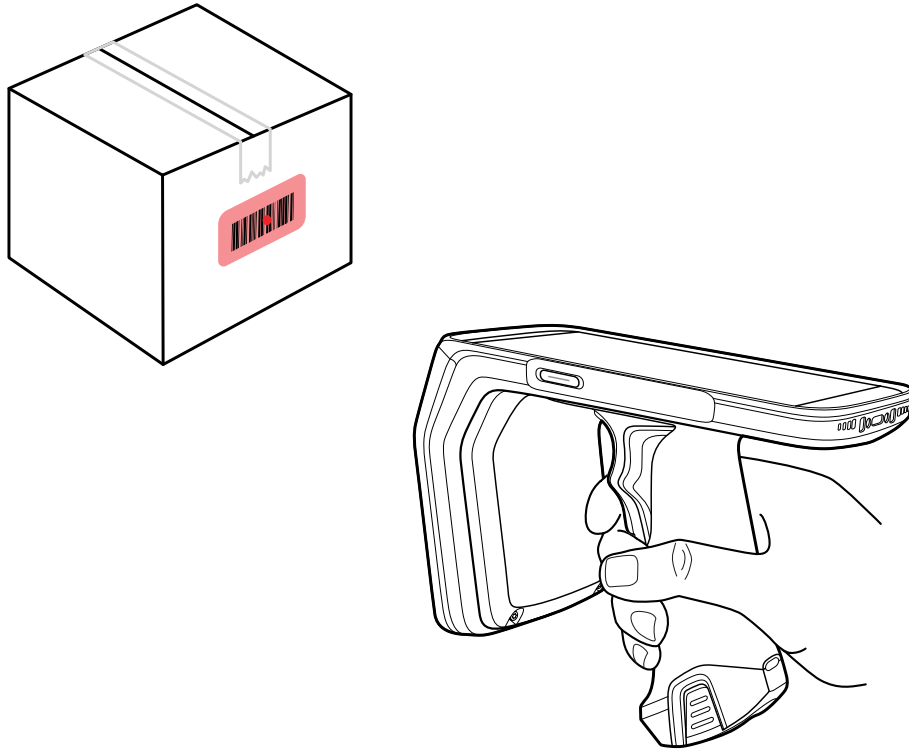

3. Press and hold the lower trigger for scanning.
The device projects the aiming pattern.

4. Ensure the barcode is within the area formed by the aiming pattern. The aiming dot is used for increased visibility in bright lighting conditions.

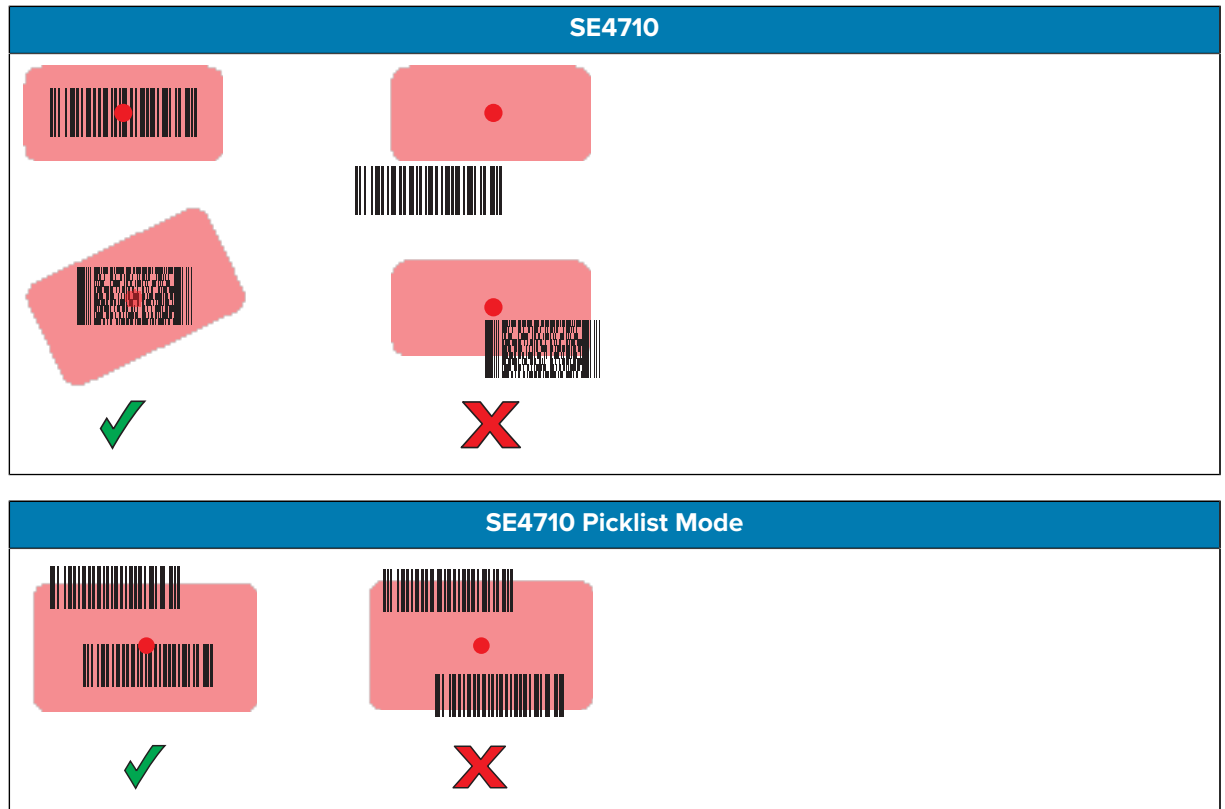

The Data Capture LED light turns on, and the device beeps, by default, to indicate that the barcode was decoded successfully.

5. Release the scan button.



NOTE: Imager decoding usually occurs instantaneously. The device repeats the steps required to take a digital picture (image) of a poor or difficult barcode as long as the scan button remains pressed.


The device displays the barcode data in the text field.

Optimum RFID Tag Decoding

Use the 123RFID mobile reader application to enable tag reading.

1. Tap the **123RFID Mobile** application to launch the RFID reader demonstration application.
2. Point the device at the tag, which is oriented horizontally or vertically, depending on its orientation. The distance between the tag and the antenna is the approximate read range.
3. Press the upper trigger or tap **Read Start** button on the screen to interrogate all RFID tags within the Radio Frequency (RF) field of view and capture data from each new tag found.

4. Release the trigger or tap **Stop Read** command to stop interrogating tags.

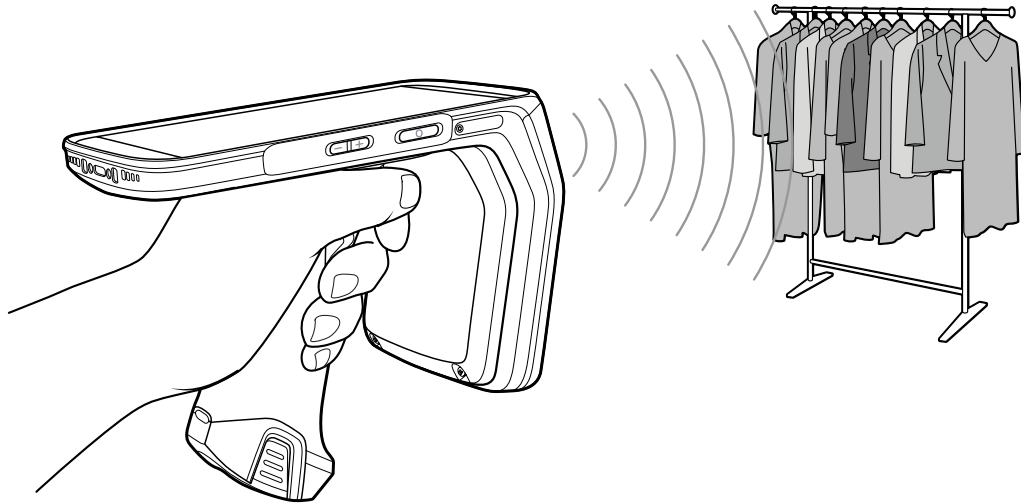

Ergonomic Considerations

Follow these ergonomic recommendations for an optimum scanning experience. Zebra recommends taking breaks and rotating tasks to prevent strain.

Optimize Body Posture

Figure 8 Upright Scanning


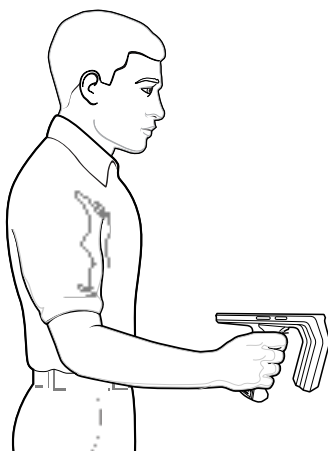


Figure 9 Low Scanning



Alternate left and right knees.

Figure 10 High Scanning

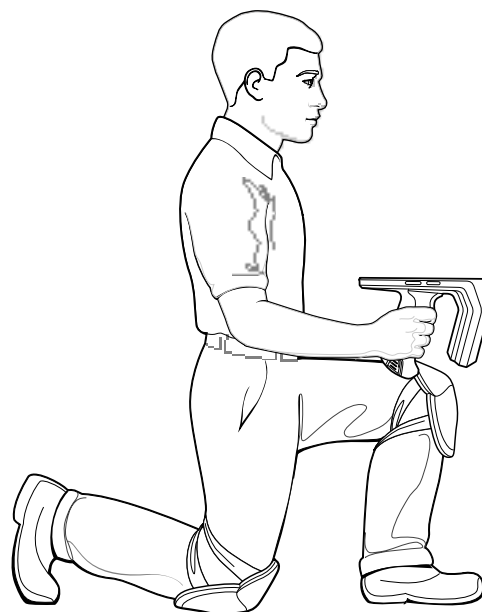

Alternate left and right hands.

Figure 11 Avoid bending



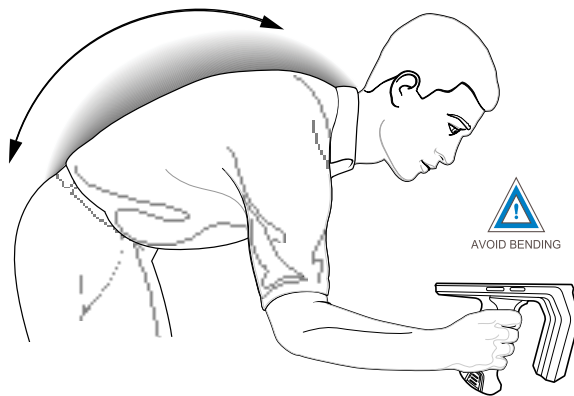


Figure 12 Avoid reaching

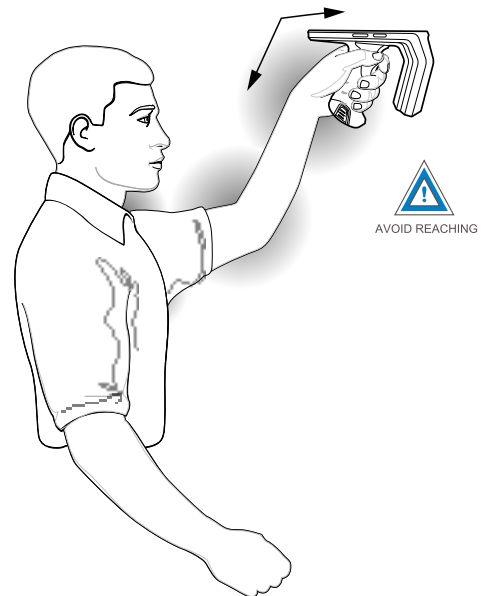

Avoid Extreme Wrist Angles

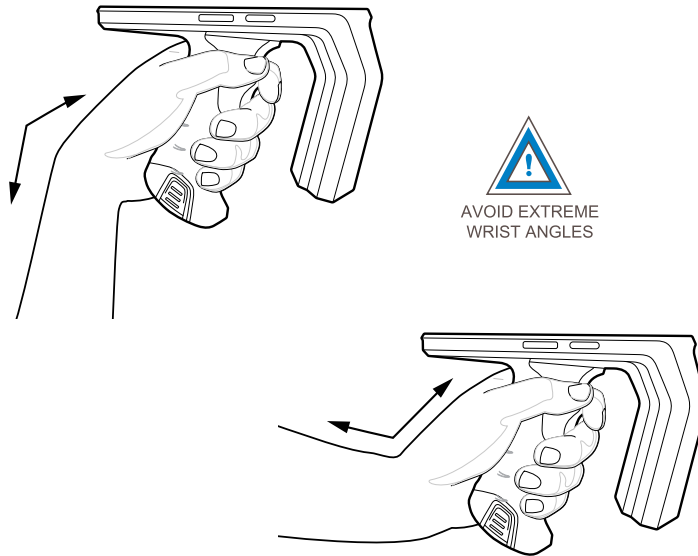

Service Information

Repair services using Zebra-qualified parts are available for at least three years after the end of production and can be requested at zebra.com/support.

