


FCC RF Test Report


APPLICANT : Motorola Solutions, Inc.
EQUIPMENT : Touch Computer
BRAND NAME : Motorola
MODEL NAME : TC55CH
FCC ID : UZ7TC55CH
STANDARD : 47 CFR Part 2, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jan. 08, 2014 and testing was completed on Jan. 24, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Louis Wu / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : UZ7TC55CH

Page Number : 1 of 68

Report Issued Date : Feb. 10, 2014

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Emission Designator.....	6
1.7 Testing Site.....	6
1.8 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	7
2.3 Support Unit used in test configuration and system	8
2.4 Measurement Results Explanation Example.....	8
3 TEST RESULT	9
3.1 Conducted Output Power Measurement	9
3.2 Peak-to-Average Ratio	11
3.3 Effective Radiated Power Measurement	14
3.4 Occupied Bandwidth.....	19
3.5 Conducted Band Edge Measurement	28
3.6 Conducted Spurious Emission Measurement	37
3.7 Radiated Spurious Emission Measurement	43
3.8 Frequency Stability Measurement.....	65
4 LIST OF MEASURING EQUIPMENT	67
5 UNCERTAINTY OF EVALUATION	68
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG3O1108-01B	Rev. 01	Initial issue of report	Feb. 10, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.2	27.50(d)(5)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§27.50(c)(10)	Effective Radiated Power (Band 13)	ERP < 3 Watts	PASS	-
3.4	§2.1049 §27.53(g)(3)	Occupied Bandwidth	Reporting Only	PASS	-
3.5	§2.1051 §27.53(c)	Conducted Band Edge Measurement (Band 13)	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	-
3.6	§2.1051 §27.53(c)	Conducted Spurious Emission (Band 13)	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	-
3.7	§2.1053 §27.53(c)	Radiated Spurious Emission (Band 13)	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	Under limit 26.13 dB at 2346.000 MHz
3.8	§2.1055 §27.54	Frequency Stability Temperature & Voltage	< 2.5 ppm	PASS	

1 General Description

1.1 Applicant

Motorola Solutions, Inc.

One Motorola Plaza, Holtsville, NY 11742-1300 USA

1.2 Manufacturer

Motorola Solutions, Inc.

One Motorola Plaza, Holtsville, NY 11742-1300 USA

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Motorola
Model Name	TC55CH
FCC ID	UZ7TC55CH
Sample 1	EUT with Scanner
Sample 2	EUT without Scanner
EUT supports Radios application	CDMA/EV-DO/LTE WLAN 11abgn / Bluetooth 2.1 / 3.0 / 4.0 / NFC
HW Version	DV2.2
SW Version	Android 4.1.2
FW Version	BSP 1.7
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	LTE Band 13 : 779.5 MHz ~ 784.5 MHz
Rx Frequency	LTE Band 13 : 748.5 MHz ~ 753.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	5MHz: 23.90 dBm / 0.25 W 10MHz: 23.97 dBm / 0.25 W
Antenna Type	Monopole Antenna
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Emission Designator

FCC Rule	System	Type of Modulation	BW	Emission Designator	Frequency Tolerance (ppm)	Maximum ERP
Part 27	LTE Band 13	QPSK	5MHz	4M51G7D	-	0.16 W
Part 27	LTE Band 13	16QAM	5MHz	4M50D7W	-	0.14 W
Part 27	LTE Band 13	QPSK	10MHz	9M08G7D	0.01 ppm	0.16 W
Part 27	LTE Band 13	16QAM	10MHz	9M04D7W	-	0.14 W

1.7 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH02-HY	03CH07-HY	722060

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission: 30MHz to 10th harmonic.

Test Modes			
Band		Radiated TCs	Conducted TCs
LTE Band 13	BW 5MHz	■ LTE (RB Size 1) Link for Sample 1 with Battery 2 ■ LTE (RB Size 1) Link for Sample 1 with Battery 1 ■ LTE (RB Size 1) Link for Sample 2 with Battery 2	■ LTE (RB Size 1) Link ■ LTE (RB Size 12) Link ■ LTE (RB Size 25) Link
	BW 10MHz	■ LTE (RB Size 1) Link for Sample 1 with Battery 2	■ LTE (RB Size 1) Link ■ LTE (RB Size 25) Link ■ LTE (RB Size 50) Link

2.2 Connection Diagram of Test System

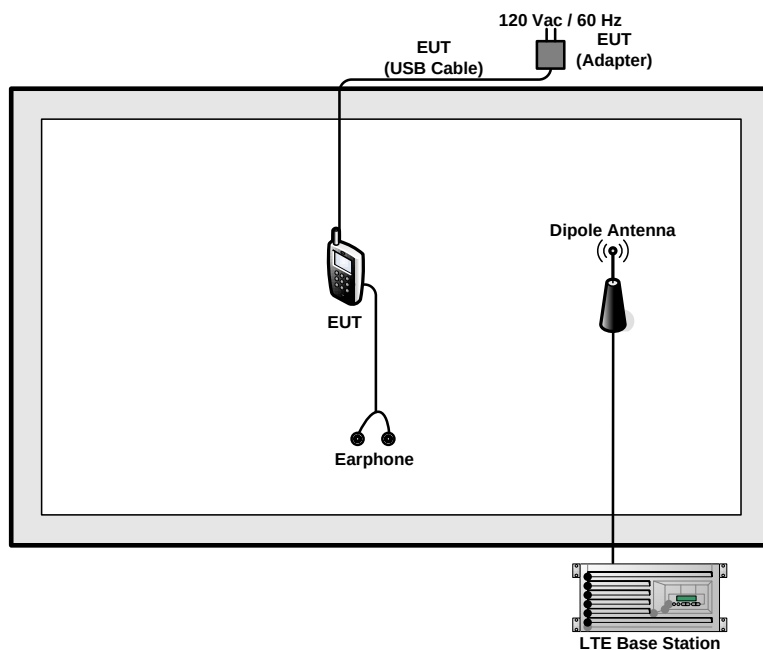

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Cotron	MAX-300	N/A	Unshielded, 1.2 m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

<LTE Band 13 Conducted Power>

BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel					23230	
Frequency (MHz)					782	
10	QPSK	1	0		23.94	
10	QPSK	1	24		23.92	
10	QPSK	1	49		23.97	
10	QPSK	25	0		22.60	
10	QPSK	25	12		22.67	
10	QPSK	25	24		22.57	
10	QPSK	50	0		22.53	
10	16QAM	1	0		22.88	
10	16QAM	1	24		22.91	
10	16QAM	1	49		22.96	
10	16QAM	25	0		21.51	
10	16QAM	25	12		21.57	
10	16QAM	25	24		21.49	
10	16QAM	50	0		21.52	
Channel				23205	23230	23255
Frequency (MHz)				779.5	782	784.5
5	QPSK	1	0	23.81	23.81	23.69
5	QPSK	1	12	23.84	23.82	23.80
5	QPSK	1	24	23.87	23.90	23.79
5	QPSK	12	0	22.79	22.78	22.91
5	QPSK	12	6	22.77	22.71	22.84
5	QPSK	12	11	22.74	22.79	22.73
5	QPSK	25	0	22.63	22.61	22.67
5	16QAM	1	0	22.74	22.79	22.74
5	16QAM	1	12	22.87	22.78	22.78
5	16QAM	1	24	22.90	22.86	22.80
5	16QAM	12	0	21.71	21.78	21.87
5	16QAM	12	6	21.79	21.82	21.79
5	16QAM	12	11	21.85	21.84	21.76
5	16QAM	25	0	21.55	21.60	21.55

Note: maximum average power for LTE.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
3. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

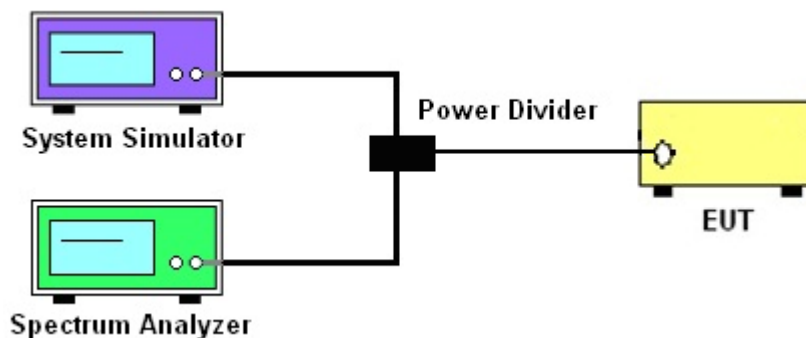


3.2.5 Test Result of Peak-to-Average Ratio

LTE Band 13						
BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel					23230	
Frequency (MHz)					782	
10	16QAM	1	0		6.35	
10	16QAM	50	0		6.57	

3.2.6 Peak to Average Power Ratio

Peak-to-Average Ratio on LTE Band 13


10MHz / 16QAM in Ch. 23230 (1RB Size)

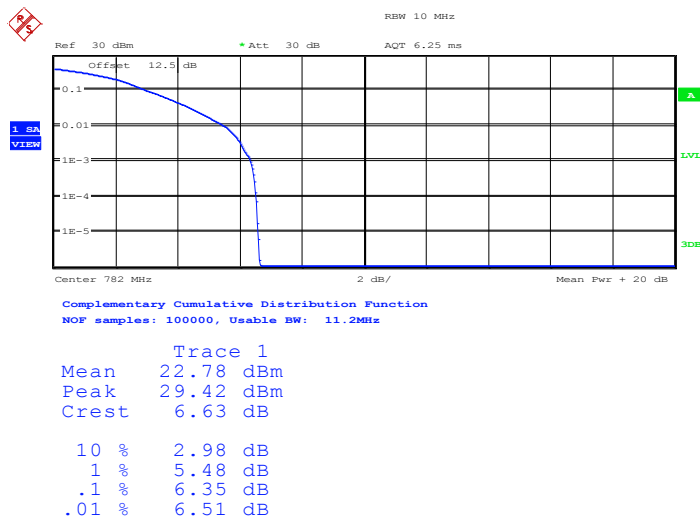

Date: 21.JAN.2014 19:20:15

Peak-to-Average Ratio on LTE Band 13

10MHz / 16QAM in Ch. 23230 (50RB Size)

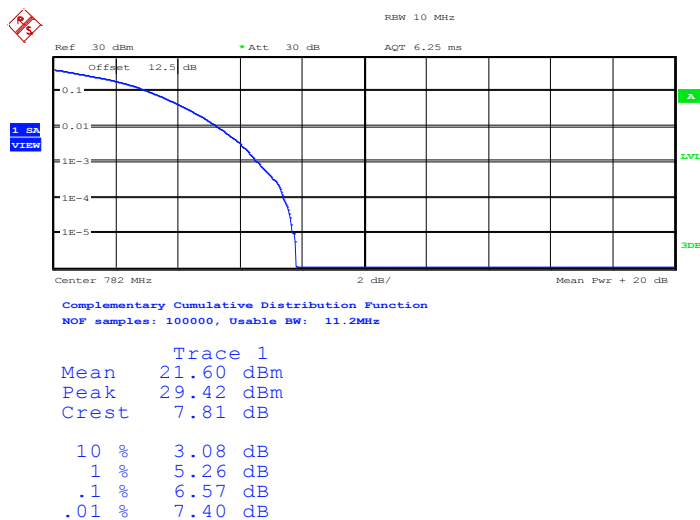

Date: 21.JAN.2014 19:20:38

3.3 Effective Radiated Power Measurement

3.3.1 Description of the ERP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01. Mobile and portable (hand-held) stations operating are limited to average ERP of 3 watts with LTE band 13.

3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed on a non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer which used a channel power option across EUT's signal bandwidth per section 4.0 of KDB 971168 D01.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.3.4 Test Setup

For Effective Radiated Power

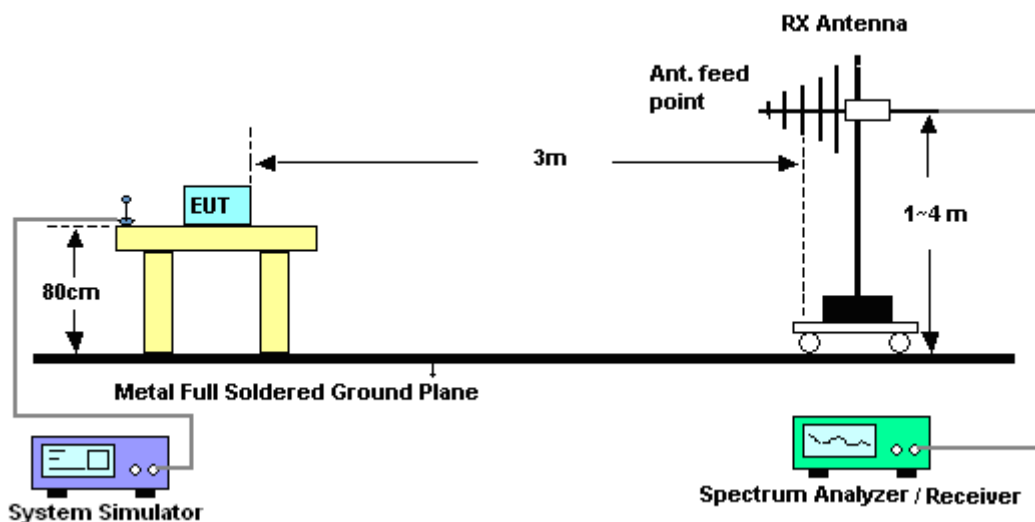

3.3.5 Test Result of ERP

LTE Band 13 Radiated Power ERP for BW 5MHz / QPSK for Sample 1 with Battery 1				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
779.50	-20.26	31.02	8.61	0.01
782.00	-19.60	32.21	10.46	0.01
784.50	-19.72	32.46	10.59	0.01
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
779.50	-10.64	33.45	20.66	0.12
782.00	-10.01	34.17	22.01	0.16
784.50	-9.98	34	21.87	0.15

LTE Band 13 Radiated Power ERP for BW 5MHz / 16QAM for Sample 1 with Battery 1				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
779.50	-21.07	31.02	7.80	0.01
782.00	-20.28	32.21	9.78	0.01
784.50	-20.35	32.46	9.96	0.01
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
779.50	-11.37	33.45	19.93	0.10
782.00	-10.63	34.17	21.39	0.14
784.50	-10.59	34	21.26	0.13

* ERP = LVL (dBm) + Correction Factor (dB) - 2.15

LTE Band 13 Radiated Power ERP for BW 10MHz / QPSK for Sample 1 with Battery 1				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
782.00	-19.31	32.21	10.75	0.01
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
782.00	-9.99	34.17	22.03	0.16

LTE Band 13 Radiated Power ERP for BW 10MHz / 16QAM for Sample 1 with Battery 1				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
782.00	-19.94	32.21	10.12	0.01
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
782.00	-10.71	34.17	21.31	0.14

* ERP = LVL (dBm) + Correction Factor (dB) - 2.15

LTE Band 13 Radiated Power ERP for BW 10MHz / QPSK for Sample 1 with Battery 2				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
782.00	-17.92	32.21	12.14	0.02
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
782.00	-10.75	34.17	21.27	0.13

LTE Band 13 Radiated Power ERP for BW 10MHz / QPSK for Sample 2 with Battery 1				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
782.00	-8.28	32.21	21.78	0.15
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
782.00	-22.41	34.17	9.61	0.01

* ERP = LVL (dBm) + Correction Factor (dB) - 2.15

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26dB occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal 26 dB.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.


3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF powers with full RB sizes were measured.

3.4.4 Test Setup

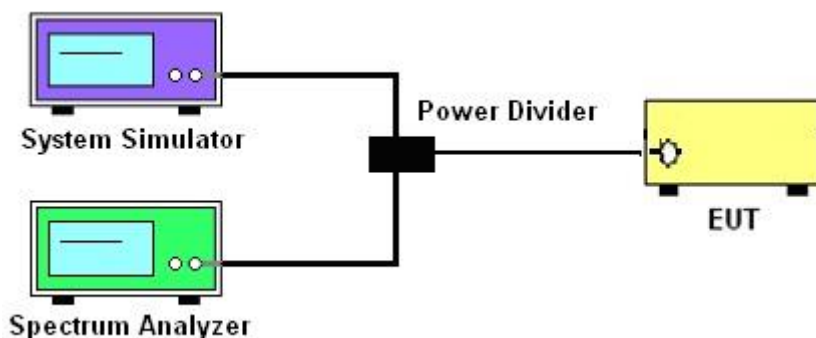

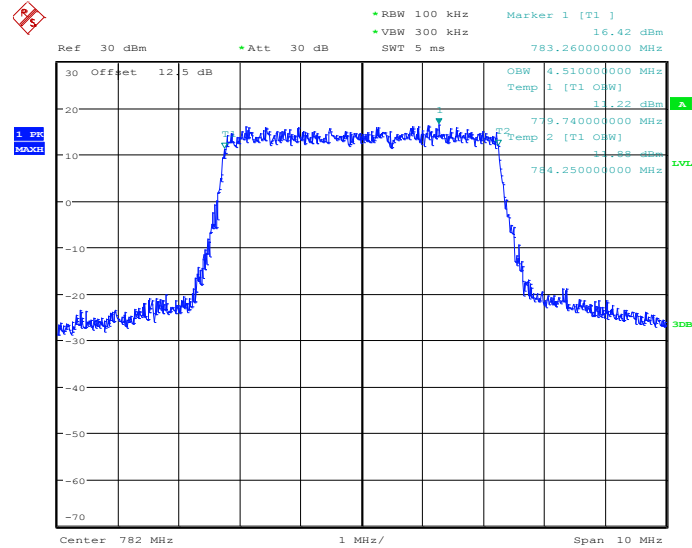99% Occupied Bandwidth Plot on Channel 23230


Date: 20.JAN.2014 20:30:41

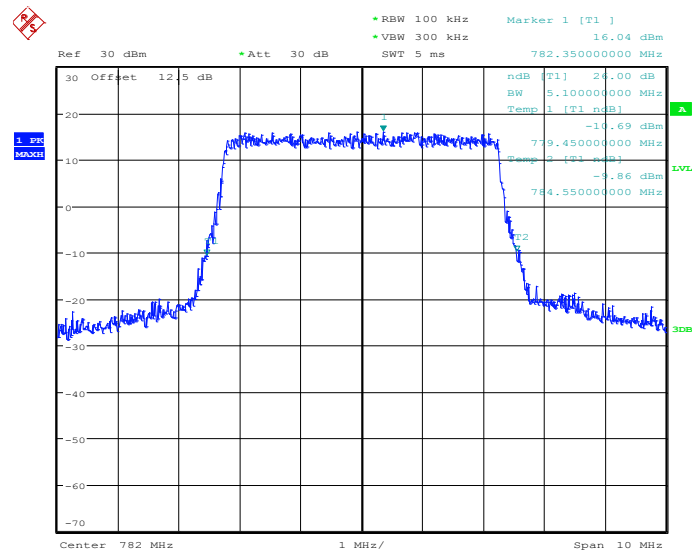26dB Bandwidth Plot on Channel 23230


Date: 20.JAN.2014 20:31:07



* RBW 100 kHz
 * VBW 300 kHz
 * Att 30 dB
 Ref 30 dBm
 Marker 1 [T1]
 16.52 dBm
 784.80000000 MHz
 SWT 5 ms

30 Offset 12.5 dB
 20
 10
 0
 -10
 -20
 -30
 -40
 -50
 -60
 -70

1. Freq
 MHz

4.500000000 MHz
 Temp 1 [T1] 0.69 dBm
 782.250000000 MHz
 Temp 2 [T1] 0.61 dBm
 786.750000000 MHz

1.000000000 MHz
 1.000000000 MHz
 1.000000000 MHz

Center 784.5 MHz
 1 MHz/
 Span 10 MHz

Date: 20.JAN.2014 20:31:32

• RBW 100 kHz
 • VBW 300 kHz
 16.45 dBm

Ref 30 dBm • Att 30 dB SWT 5 ms Marker 1 [T1] 783.780000000 MHz

30 Offset 12.5 dB

1 PR
 MAXH

dB [T1]	24.00 dB
BW	5.000000000 MHz
Temp 1 [T1] dB	-9.73 dBm
Temp 2 [T1] dB	-9.42 dBm


Center 784.5 MHz 1 MHz/ Span 10 MHz

Date: 20.JAN.2014 20:31:57




Band :	LTE Band 13	BW / Mod. :	5MHz / 16QAM
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 23205

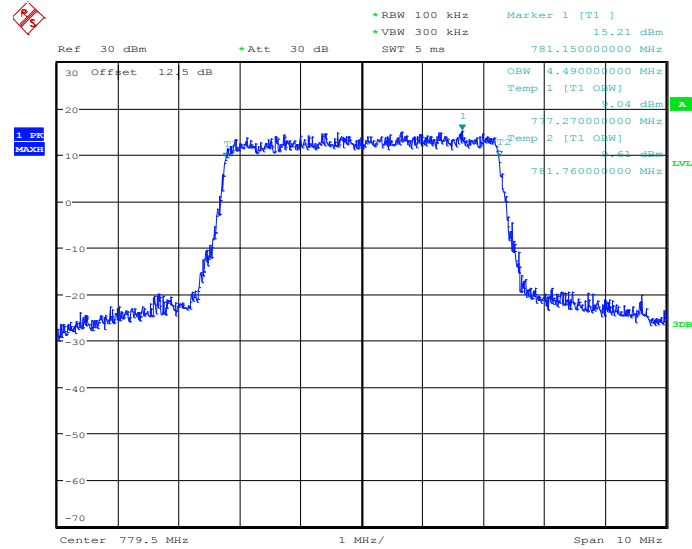

Date: 20.JAN.2014 20:30:03


26dB Bandwidth Plot on Channel 23205

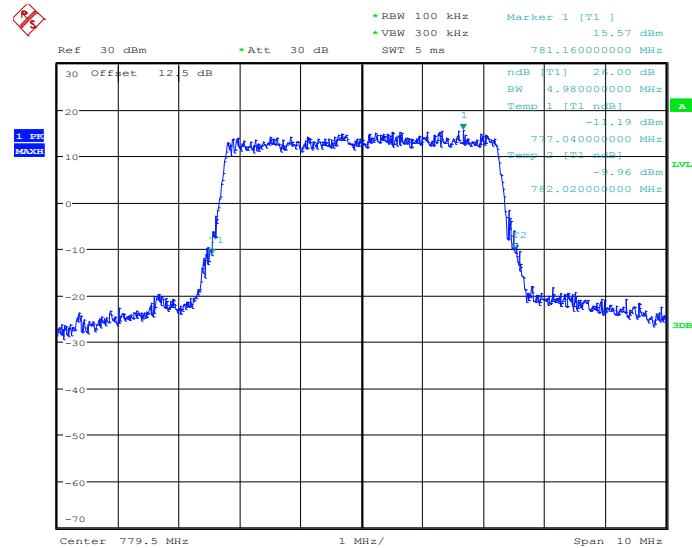

Date: 20.JAN.2014 20:30:30




99% Occupied Bandwidth Plot on Channel 23230

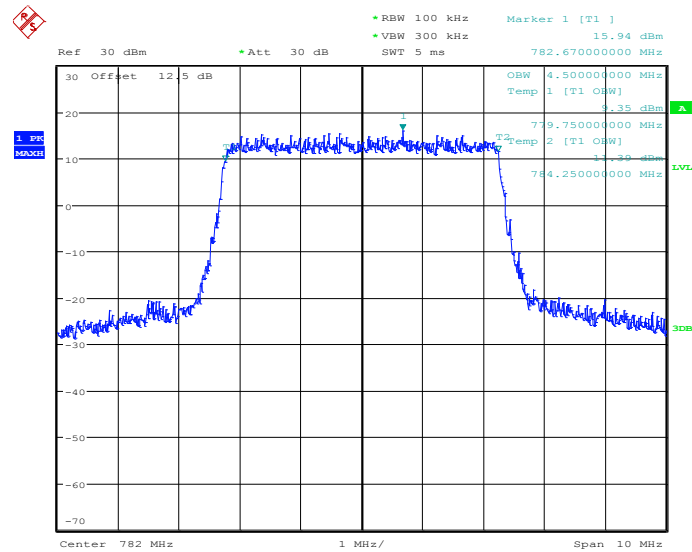

Date: 20.JAN.2014 20:30:53


26dB Bandwidth Plot on Channel 23230

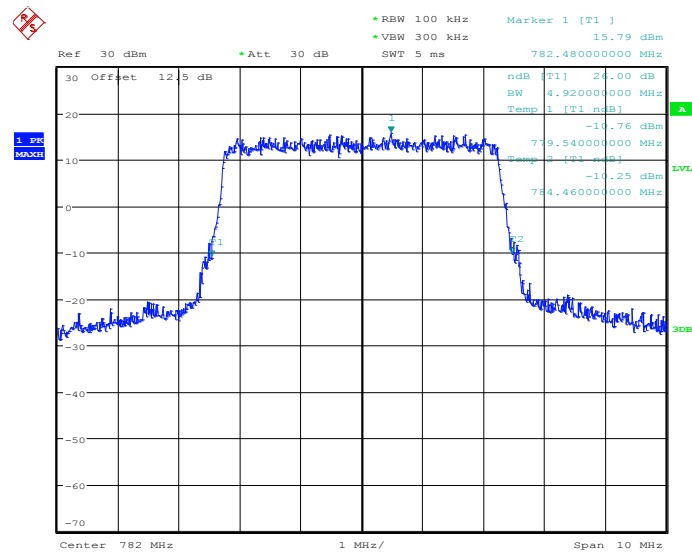

Date: 20.JAN.2014 20:31:20




99% Occupied Bandwidth Plot on Channel 23255

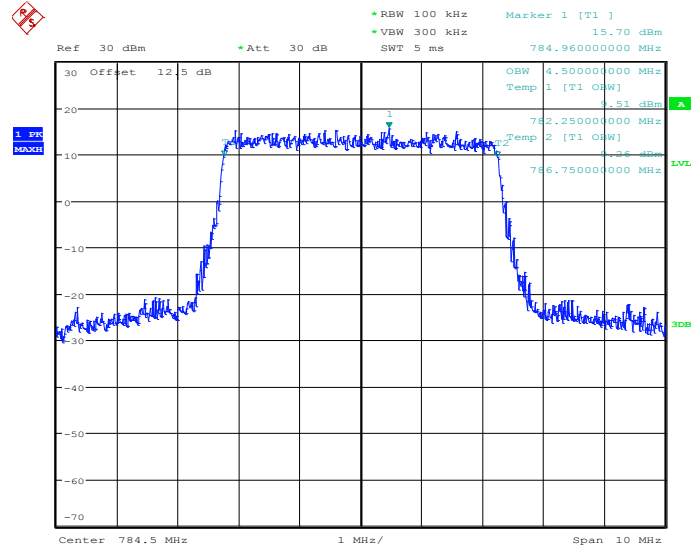

Date: 20.JAN.2014 20:31:43

26dB Bandwidth Plot on Channel 23255

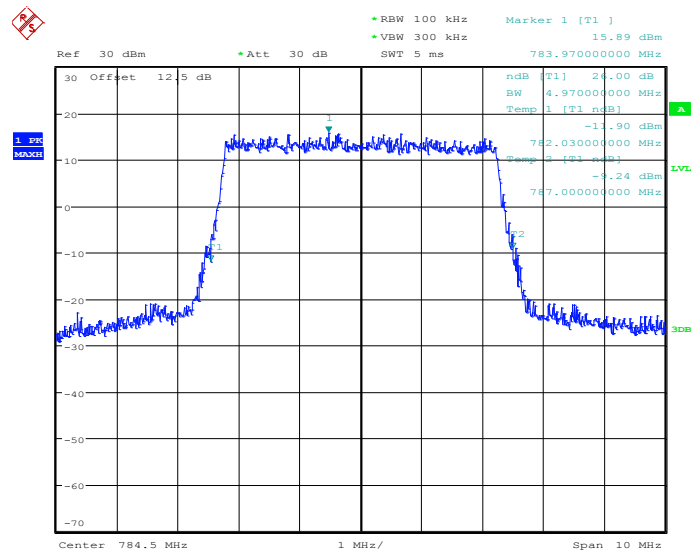


Date: 20.JAN.2014 20:32:10




Band :	LTE Band 13	BW / Mod. :	10MHz / QPSK
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 23230

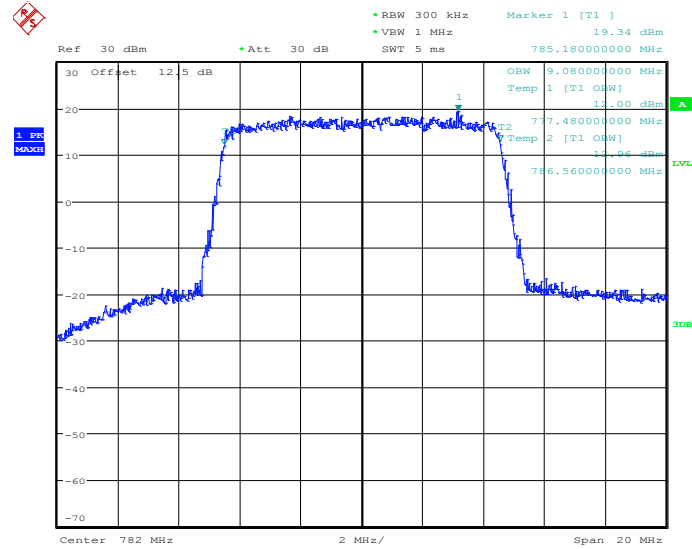

Date: 20.JAN.2014 21:04:47

26dB Bandwidth Plot on Channel 23230

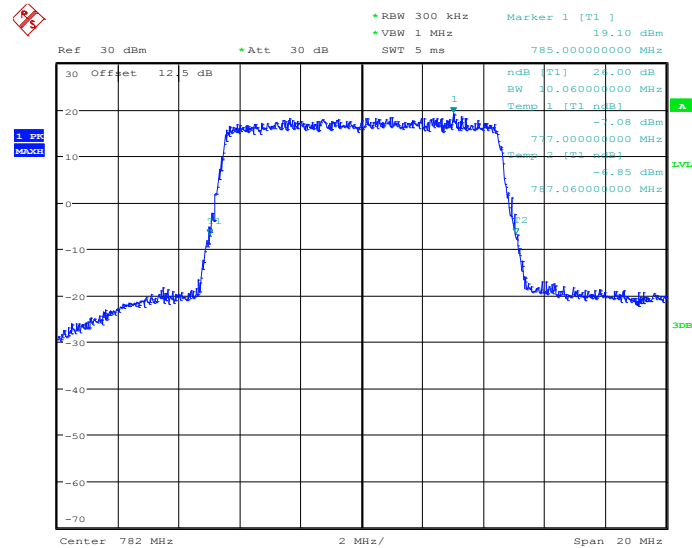


Date: 20.JAN.2014 21:05:01




Band :	LTE Band 13	BW / Mod. :	10MHz / 16QAM
--------	-------------	-------------	---------------

99% Occupied Bandwidth Plot on Channel 23230

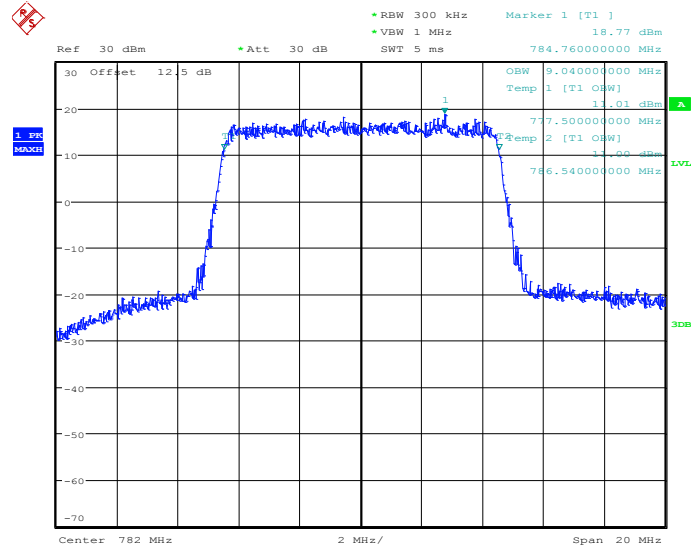

Date: 20.JAN.2014 21:05:18

26dB Bandwidth Plot on Channel 23230

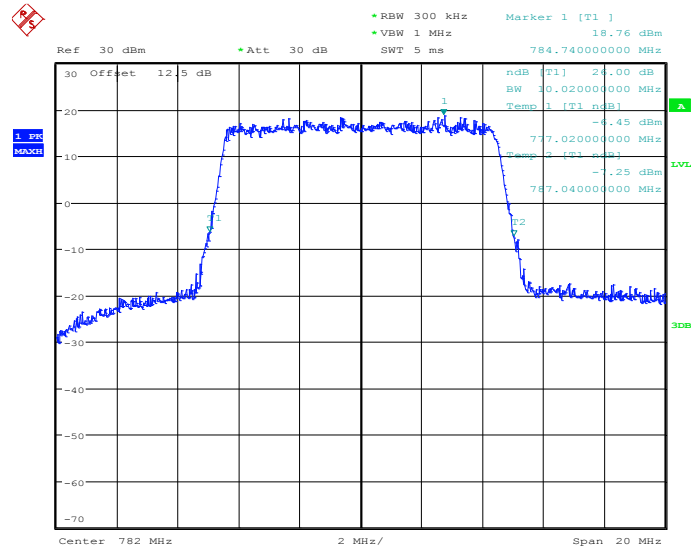

Date: 20.JAN.2014 21:05:37

3.5 Conducted Band Edge Measurement

3.5.1 Description of Conducted Band Edge Measurement

27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting $RBW \geq 1\%$ EBW, and measuring bandwidth = 1MHz.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
4. The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$


3.5.4 Test Setup

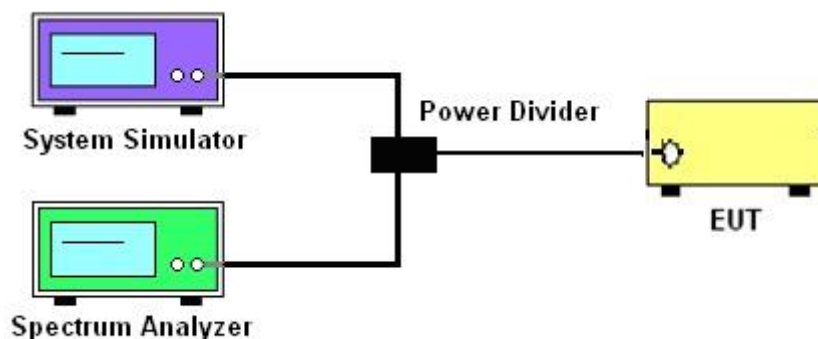

3.5.5 Test Result (Plots) of Conducted Band Edge


Band :	LTE Band 13	Band Width :	5MHz / QPSK
--------	-------------	--------------	-------------

Lower Band Edge Plot for QPSK-RB Size 1, RB Offset 0

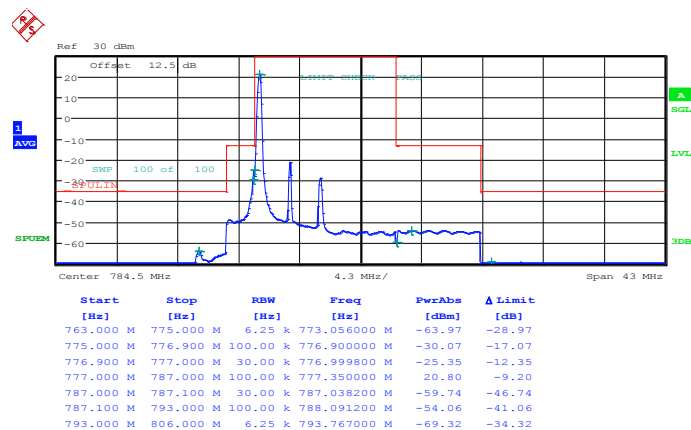


Date: 20.JAN.2014 20:37:35

Lower Band Edge Plot for QPSK-RB Size 25, RB Offset 0

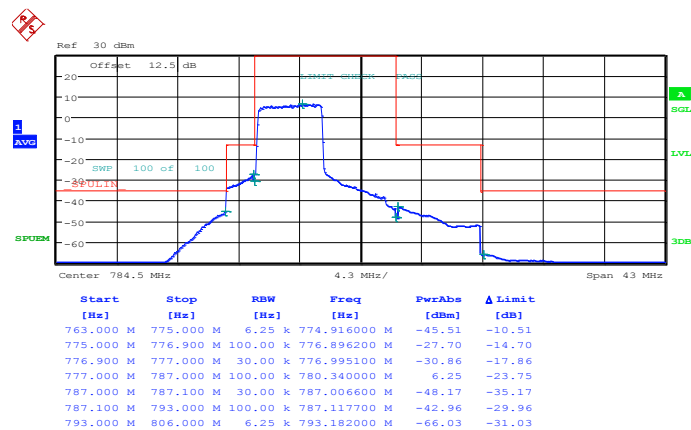


Date: 20.JAN.2014 20:44:12

Higher Band Edge Plot for QPSK-RB Size 1, RB Offset 24

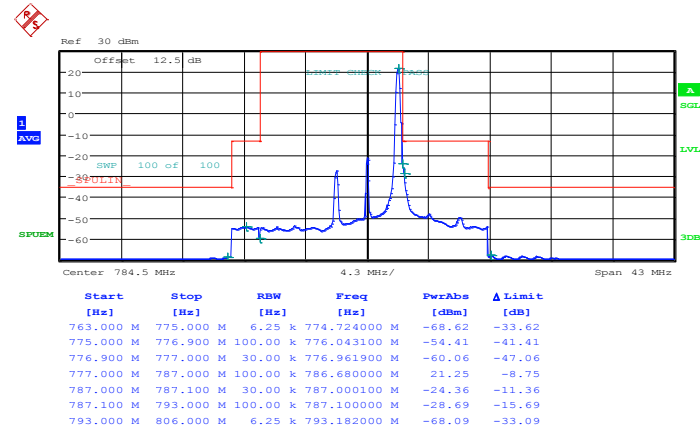

Date: 20.JAN.2014 20:53:40

Higher Band Edge Plot for QPSK-RB Size 25, RB Offset 0

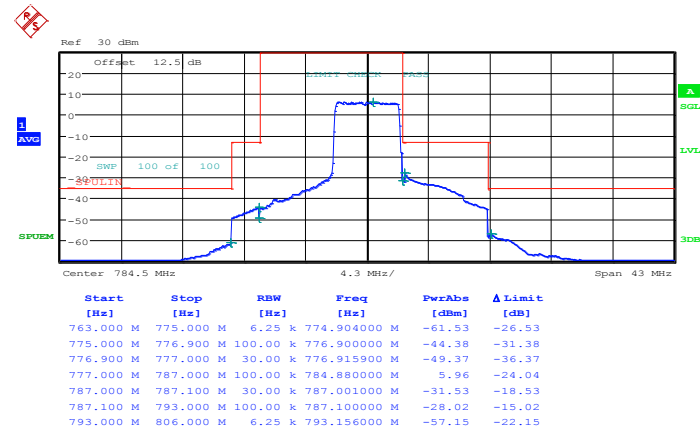


Date: 20.JAN.2014 20:46:52




Band :	LTE Band 13	Band Width :	5MHz / 16QAM
--------	-------------	--------------	--------------

Lower Band Edge Plot for 16QAM-RB Size 1, RB Offset 0

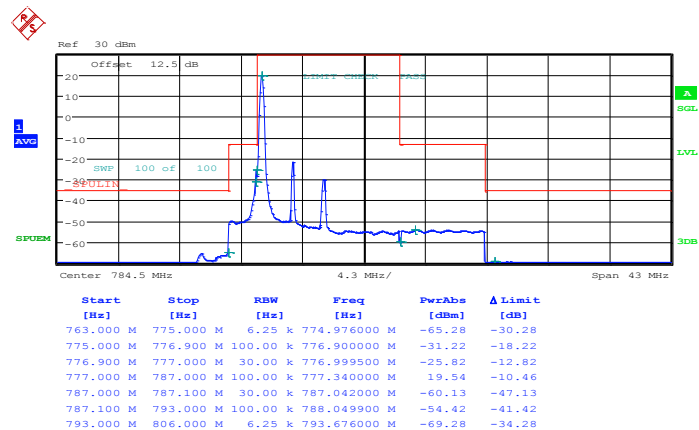

Date: 20.JAN.2014 20:39:45


Lower Band Edge Plot for 16QAM-RB Size 25, RB Offset 0

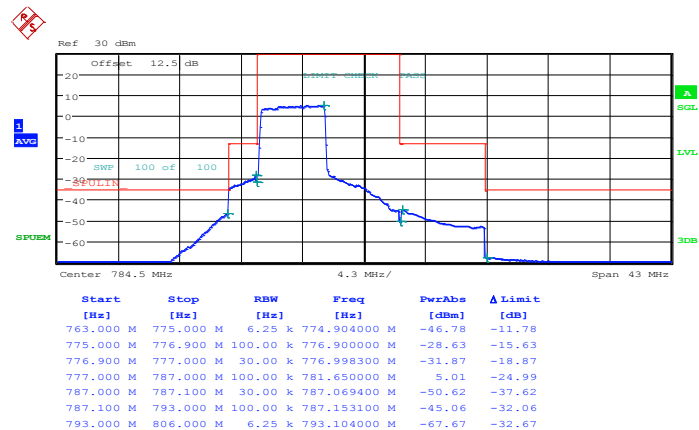

Date: 20.JAN.2014 20:41:49




Higher Band Edge Plot for 16QAM-RB Size 1, RB Offset 24

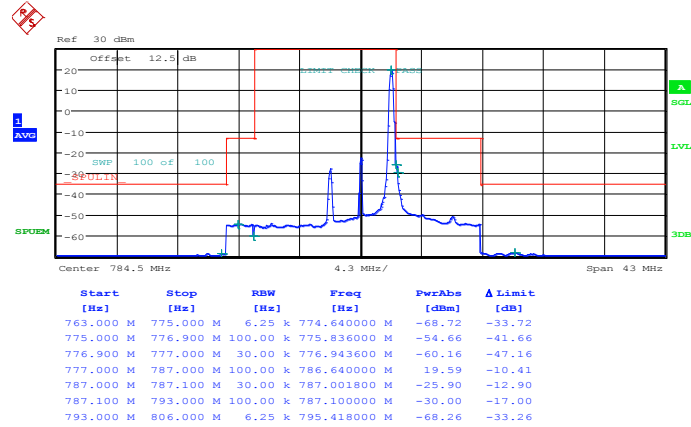

Date: 20.JAN.2014 20:51:21

Higher Band Edge Plot for 16QAM-RB Size 25, RB Offset 0

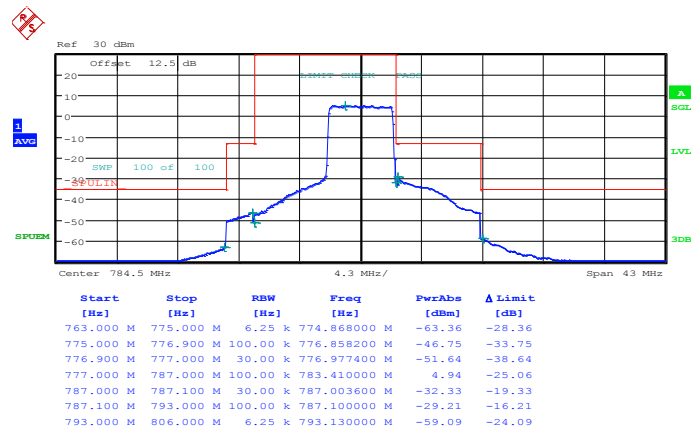


Date: 20.JAN.2014 20:48:54




Band :	LTE Band 13	Band Width :	10MHz / QPSK
--------	-------------	--------------	--------------

Middle Band Edge Plot for QPSK-RB Size 1, RB Offset 0

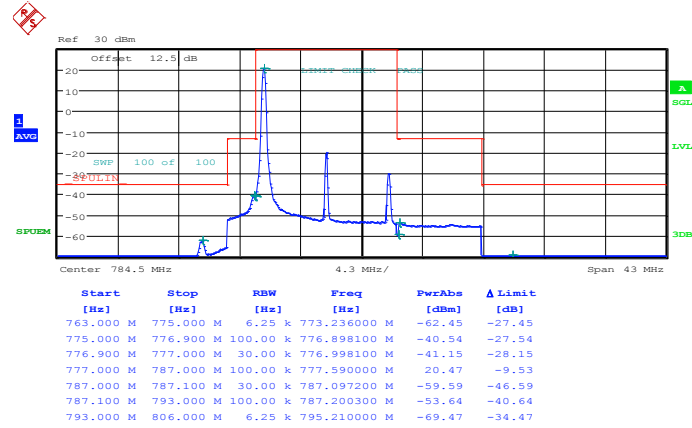

Date: 21.JAN.2014 18:47:45


Middle Band Edge Plot for QPSK-RB Size 50, RB Offset 0

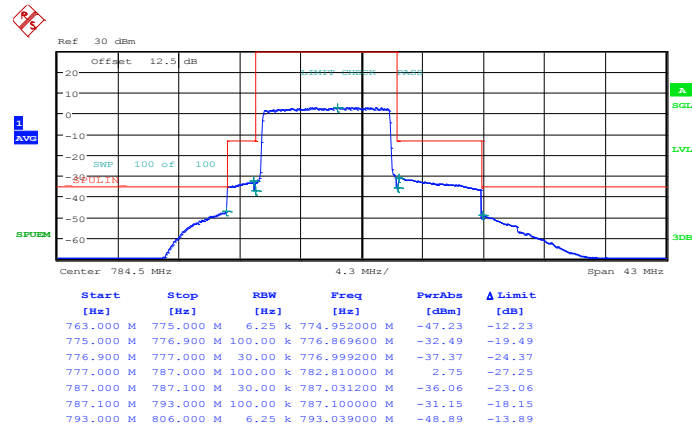

Date: 21.JAN.2014 19:23:24



Middle Band Edge Plot for QPSK-RB Size 1, RB Offset 49

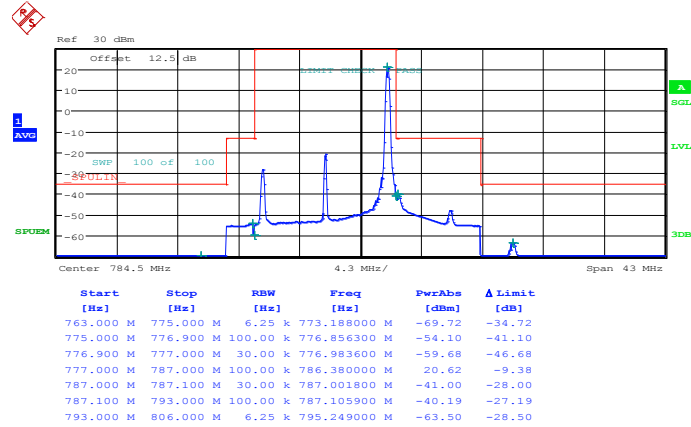


Date: 21.JAN.2014 19:34:47




Band :	LTE Band 13	Band Width :	10MHz / 16QAM
--------	-------------	--------------	---------------

Middle Band Edge Plot for 16QAM-RB Size 1, RB Offset 0

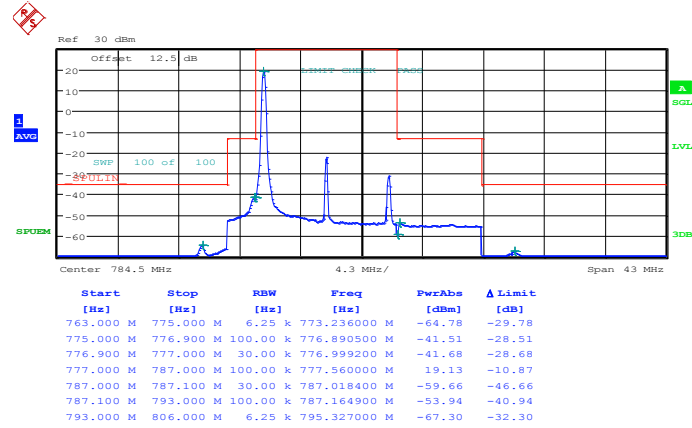

Date: 21.JAN.2014 18:50:06


Middle Band Edge Plot for 16QAM-RB Size 50, RB Offset 0

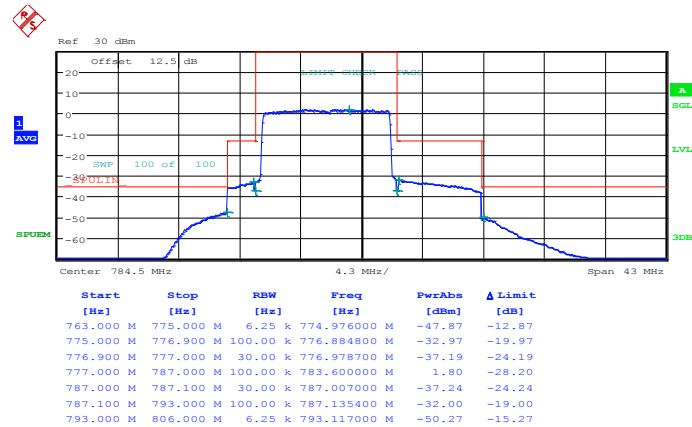

Date: 21.JAN.2014 19:27:47



Middle Band Edge Plot for 16QAM-RB Size 1, RB Offset 49

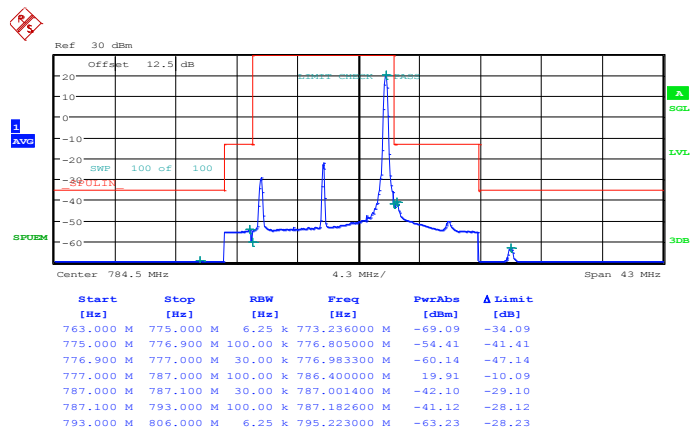

Date: 21.JAN.2014 18:52:13

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.


3.6.4 Test Setup

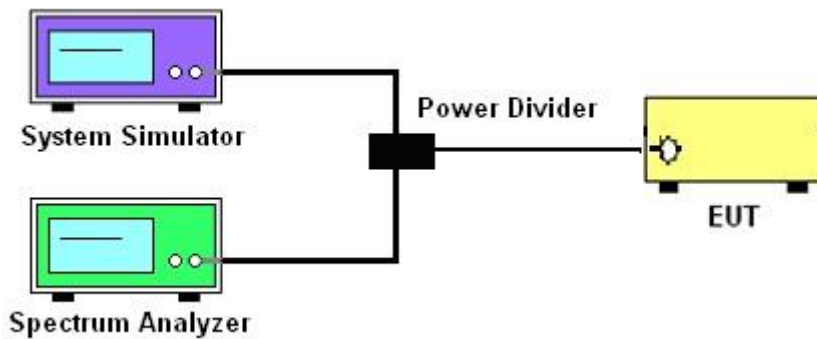

3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	LTE Band 13	Channel :	CH23205 (Low)
Band Width :	5MHz		

QPSK (RB Size 1, RB Offset 0)

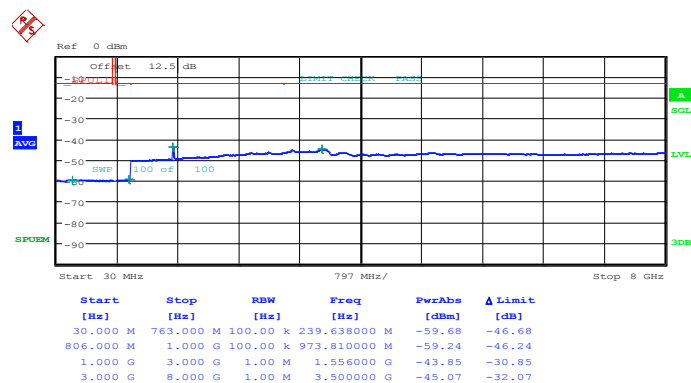

Date: 20.JAN.2014 20:54:49

16QAM (RB Size 1, RB Offset 0)

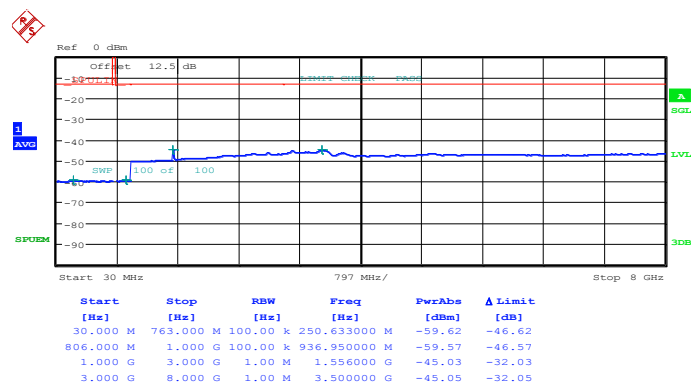


Date: 20.JAN.2014 20:55:53




Band :	LTE Band 13	Channel :	CH23230 (Middle)
Band Width :	5MHz		

QPSK (RB Size 1, RB Offset 0)

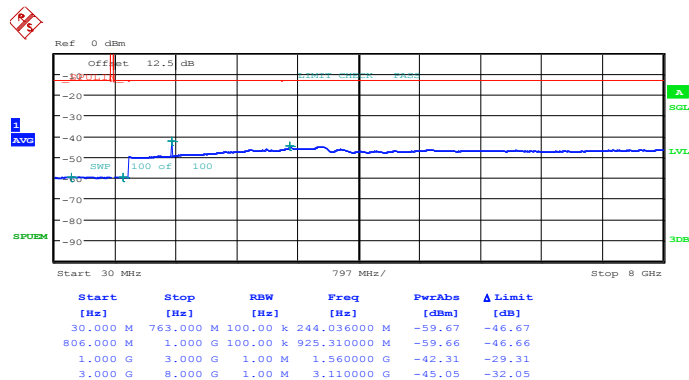

Date: 20.JAN.2014 20:59:32

16QAM (RB Size 1, RB Offset 0)

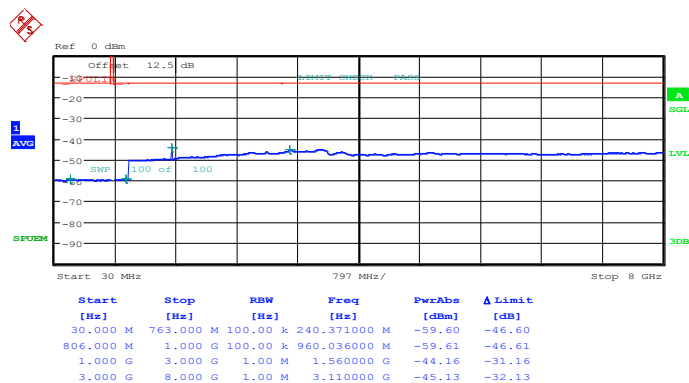


Date: 20.JAN.2014 20:57:13




Band :	LTE Band 13	Channel :	CH23255 (High)
Band Width :	5MHz		

QPSK (RB Size 1, RB Offset 0)

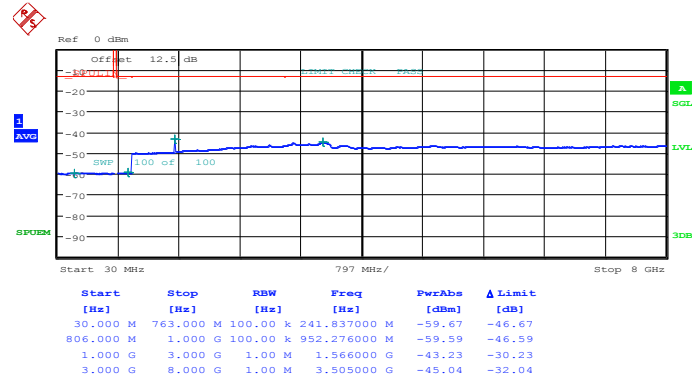

Date: 20.JAN.2014 21:00:45

16QAM (RB Size 1, RB Offset 0)

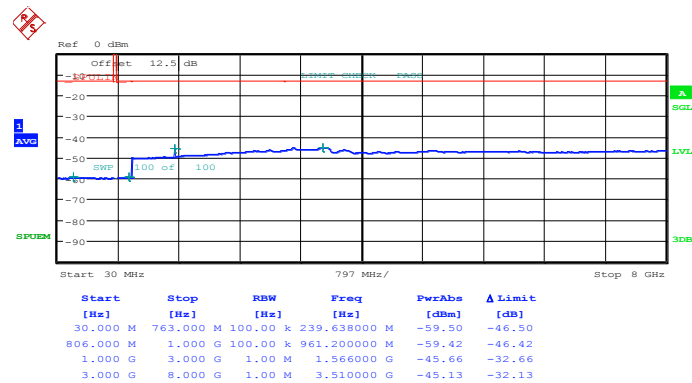


Date: 20.JAN.2014 21:01:37




Band :	LTE Band 13	Channel :	CH23230 (Middle)
Band Width :	10MHz		

QPSK (RB Size 1, RB Offset 0)

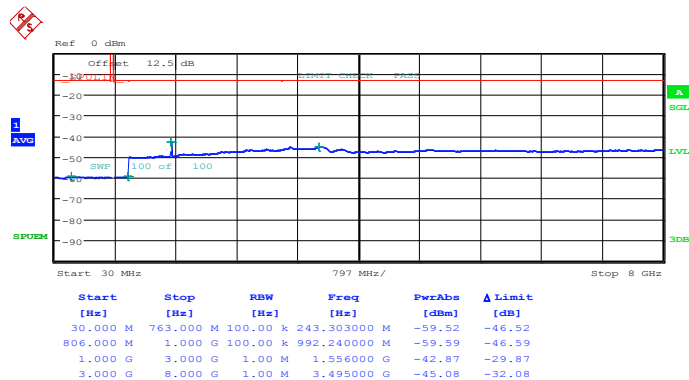

Date: 20.JAN.2014 21:04:23

16QAM (RB Size 1, RB Offset 0)

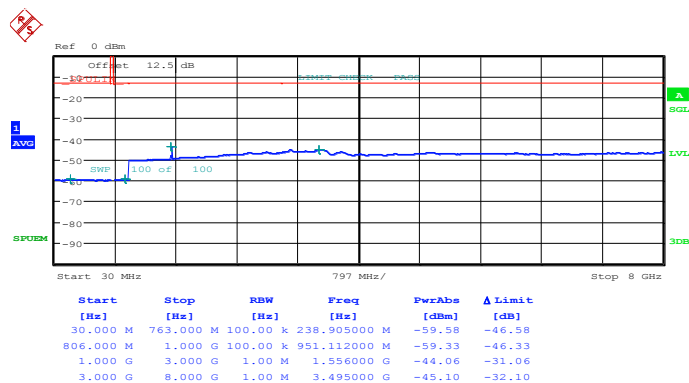

Date: 20.JAN.2014 21:03:26

3.7 Radiated Spurious Emission Measurement

3.7.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.


11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
12. ERP (dBm) = EIRP - 2.15

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

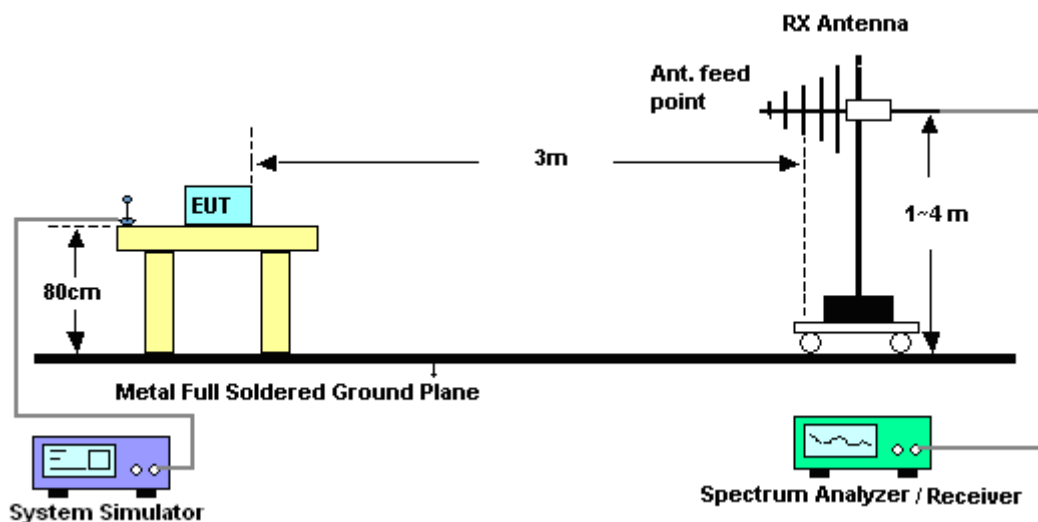


For radiated emissions above 1GHz

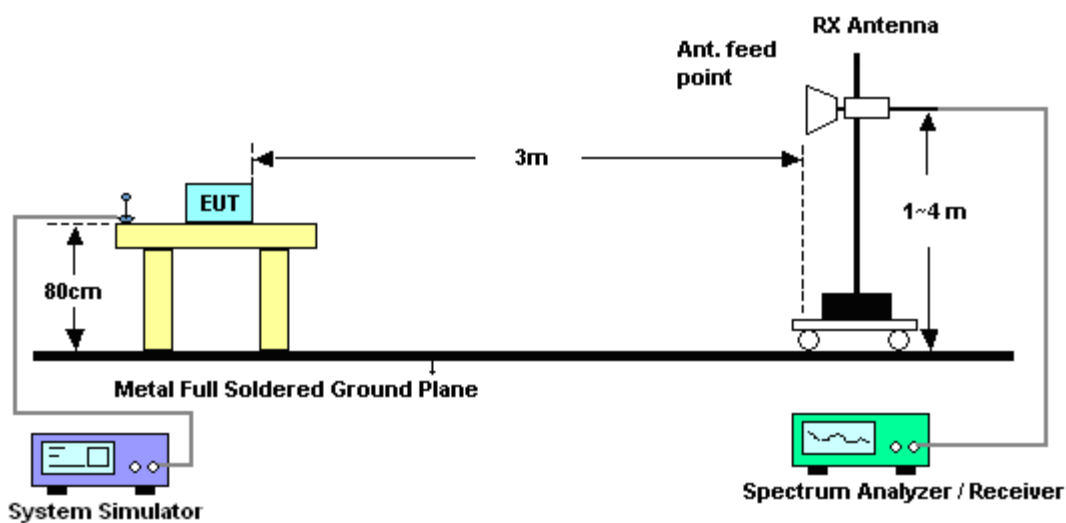

3.7.5 Test Result of Field Strength of Spurious Radiated


<Low Channel>

Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

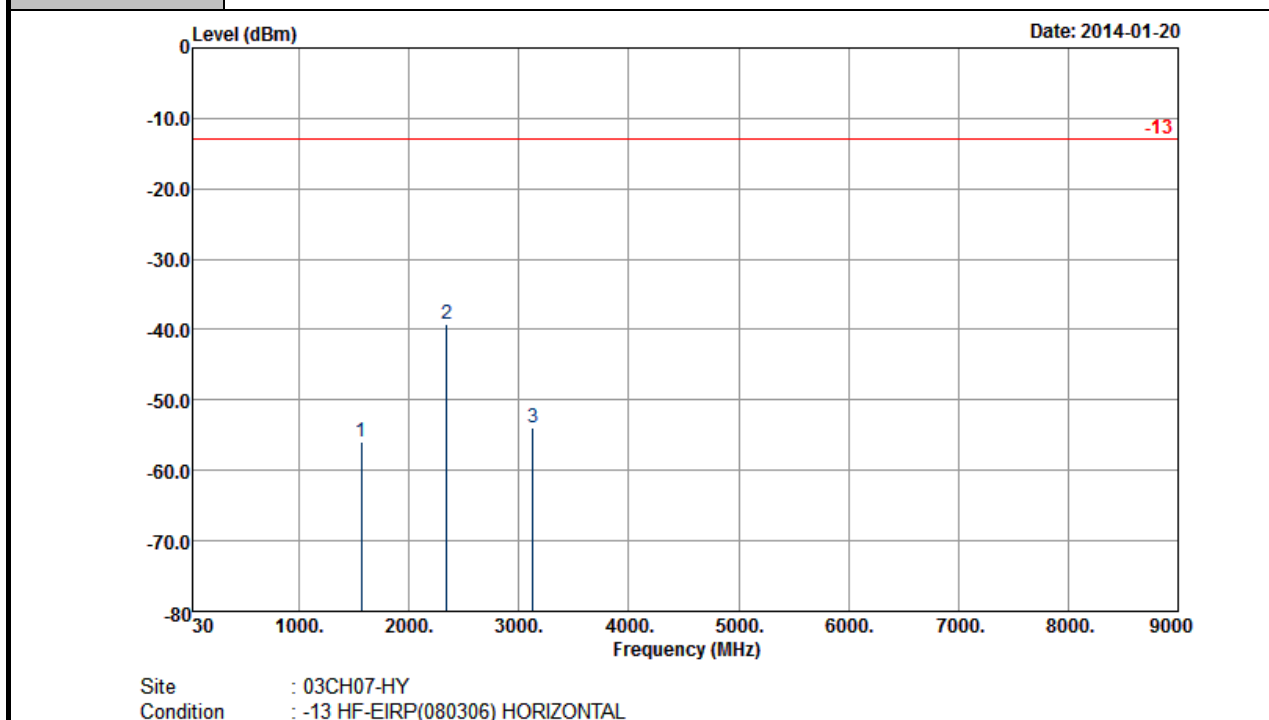

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1564	-55.95	-13	-42.95	-64.34	-59.9	1.47	5.42	H	Pass
2346	-39.13	-13	-26.13	-51.57	-43.3	1.85	6.02	H	Pass
3128	-53.84	-13	-40.84	-67.88	-59.1	2.22	7.48	H	Pass

Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

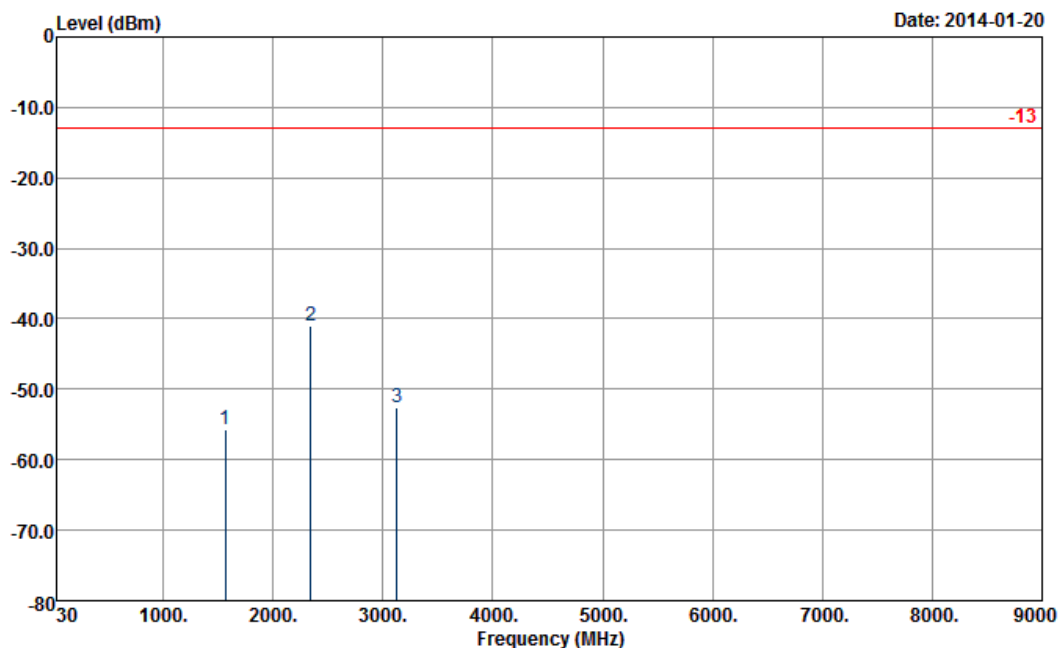


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1564	-55.65	-13	-42.65	-66.26	-59.6	1.47	5.42	V	Pass
2346	-40.93	-13	-27.93	-54.5	-45.1	1.85	6.02	V	Pass
3128	-52.54	-13	-39.54	-68.09	-57.8	2.22	7.48	V	Pass

<Middle Channel>


Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

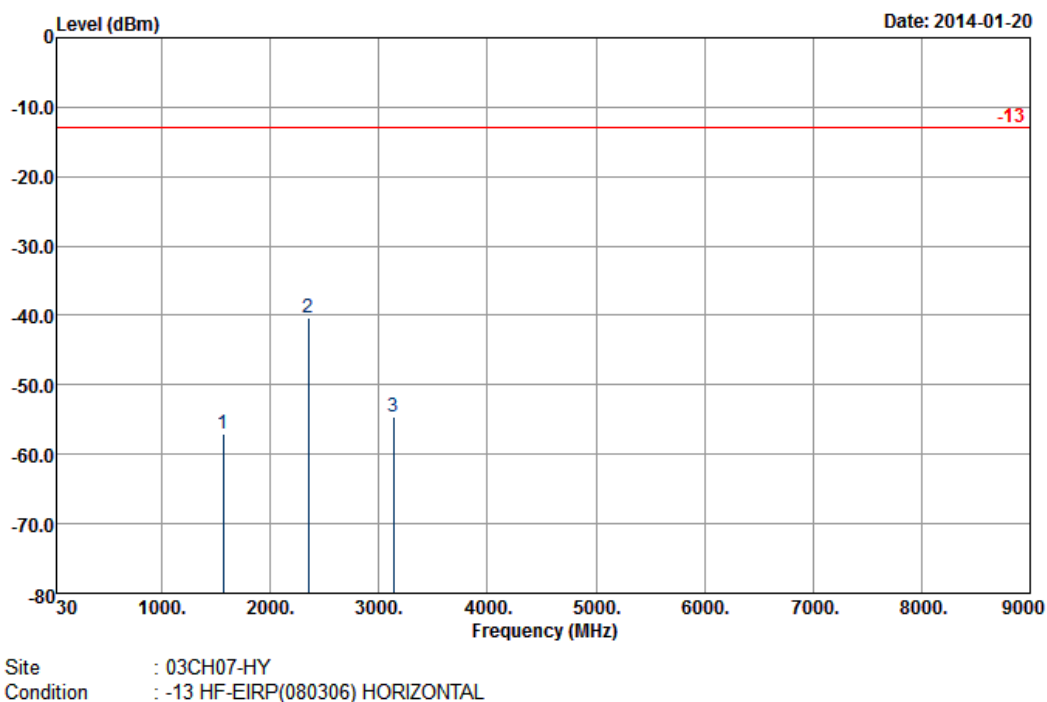

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1569	-57.12	-13	-44.12	-65.61	-61.1	1.51	5.49	H	Pass
2354	-40.43	-13	-27.43	-53.3	-44.5	1.98	6.05	H	Pass
3138	-54.53	-13	-41.53	-68.49	-59.7	2.39	7.56	H	Pass




Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

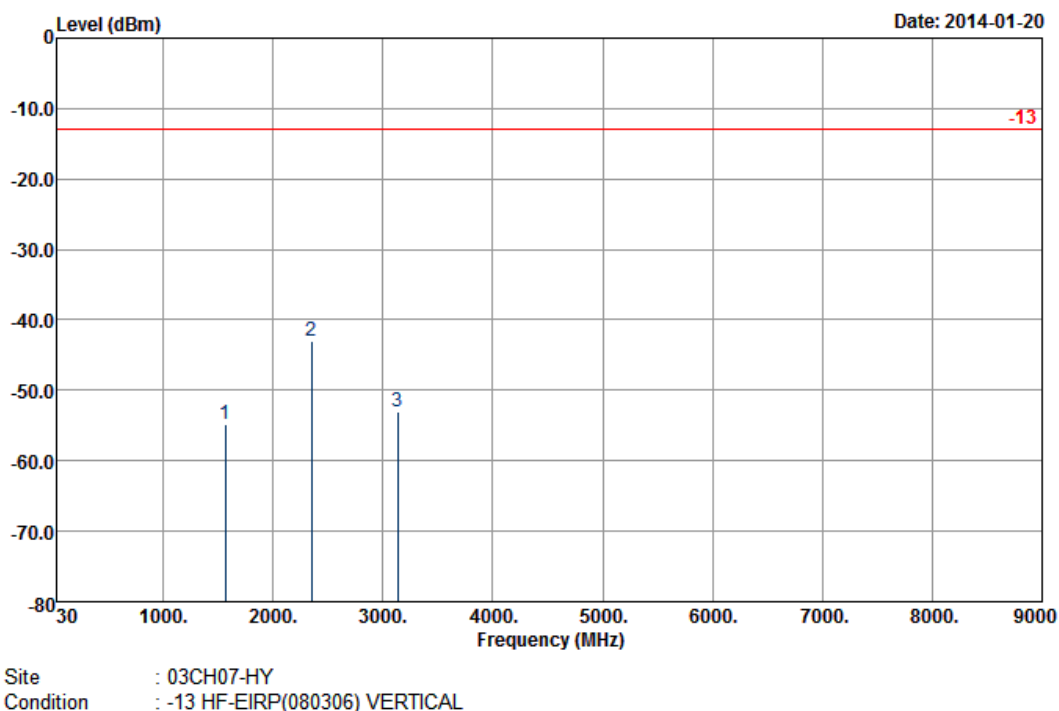

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1569	-54.92	-13	-41.92	-66.06	-58.9	1.51	5.49	V	Pass
2354	-43.03	-13	-30.03	-56.87	-47.1	1.98	6.05	V	Pass
3138	-53.13	-13	-40.13	-68.86	-58.3	2.39	7.56	V	Pass

<High Channel>

Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

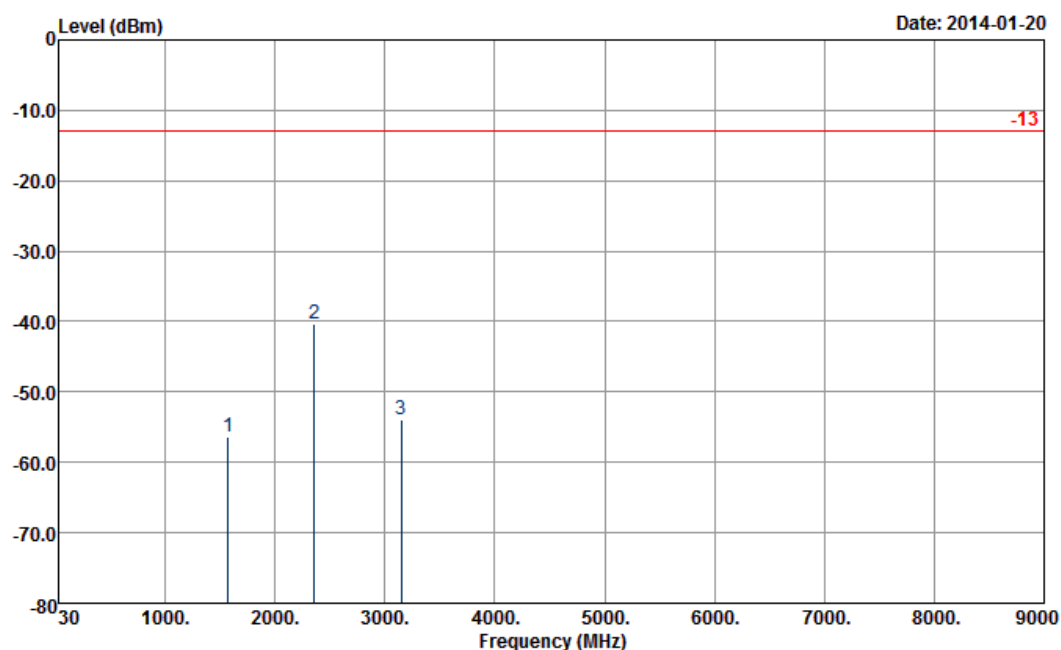


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1574	-56.30	-13	-43.30	-64.96	-60.3	1.56	5.56	H	Pass
2361	-40.42	-13	-27.42	-52.98	-44.5	2.03	6.11	H	Pass
3148	-53.99	-13	-40.99	-67.83	-59.2	2.43	7.64	H	Pass




Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

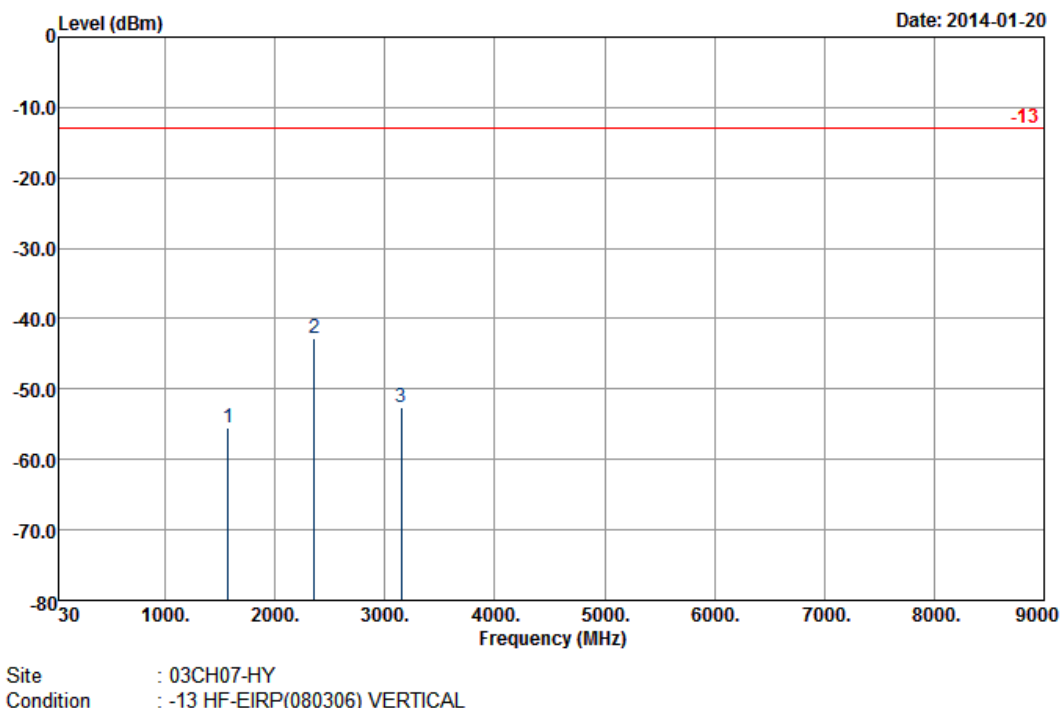

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1574	-55.40	-13	-42.40	-66.5	-59.4	1.56	5.56	V	Pass
2361	-42.72	-13	-29.72	-56.21	-46.8	2.03	6.11	V	Pass
3148	-52.59	-13	-39.59	-68.45	-57.8	2.43	7.64	V	Pass

<Middle Channel>

Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	10MHz QPSK RB Size 1 Offset 49 for Sample 1 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

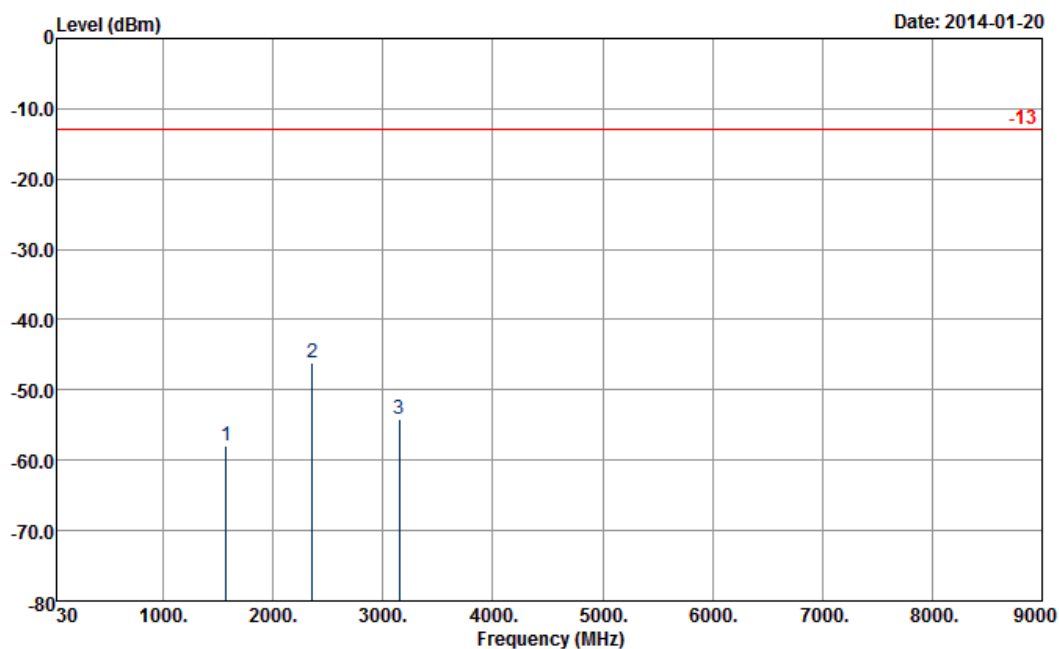


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1574	-57.97	-13	-44.97	-66.46	-59.8	1.51	5.49	H	Pass
2361	-46.18	-13	-33.18	-58.66	-48.1	1.98	6.05	H	Pass
3148	-54.18	-13	-41.18	-68.37	-57.2	2.39	7.56	H	Pass



Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	10MHz QPSK RB Size 1 Offset 49 for Sample 1 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

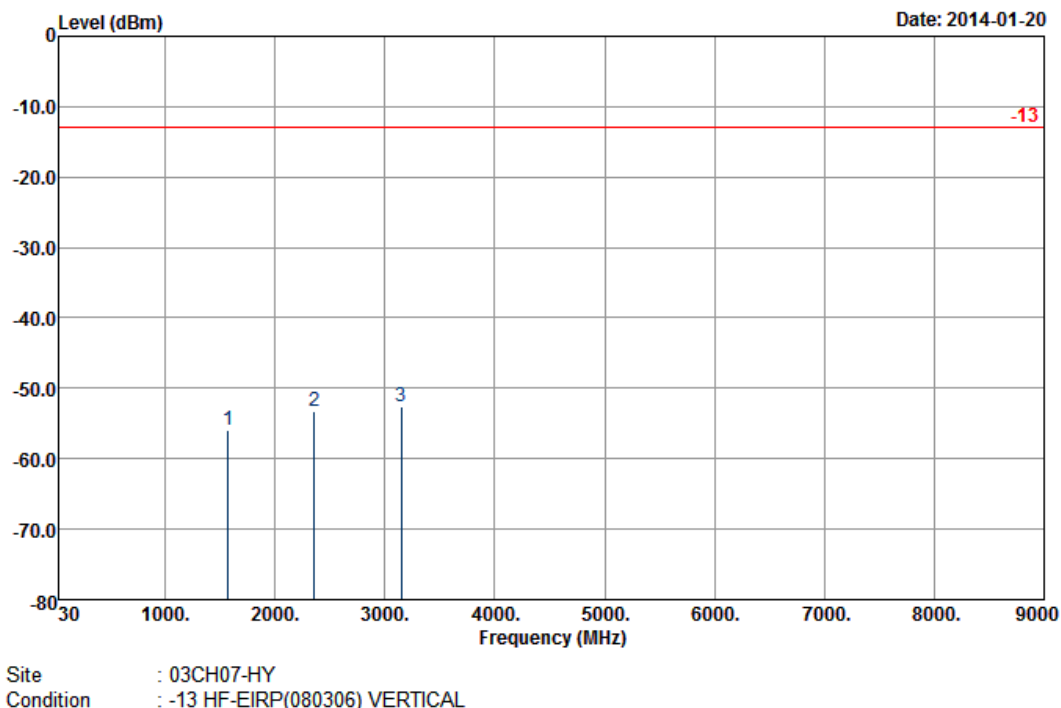


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1574	-55.97	-13	-42.97	-66.51	-57.8	1.51	5.49	V	Pass
2361	-53.18	-13	-40.18	-66.63	-55.1	1.98	6.05	V	Pass
3148	-52.48	-13	-39.48	-68.21	-55.5	2.39	7.56	V	Pass



<Low Channel>

Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 1	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

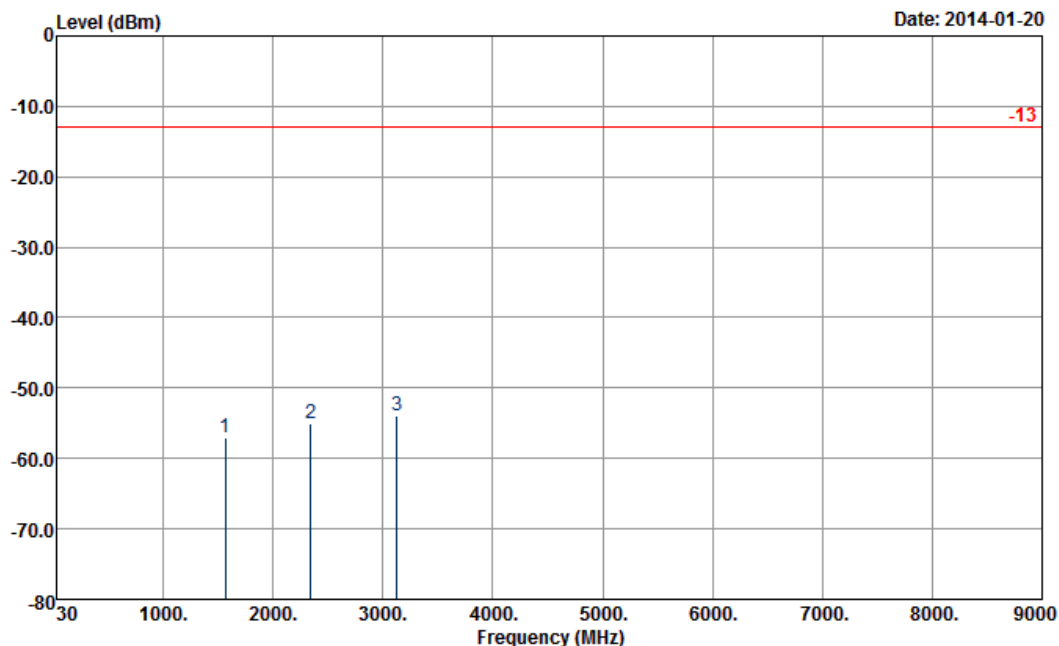


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1564	-57.15	-13	-44.15	-65.52	-61.1	1.47	5.42	H	Pass
2346	-55.03	-13	-42.03	-67.61	-59.2	1.85	6.02	H	Pass
3128	-53.94	-13	-40.94	-67.85	-59.2	2.22	7.48	H	Pass



Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 1	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

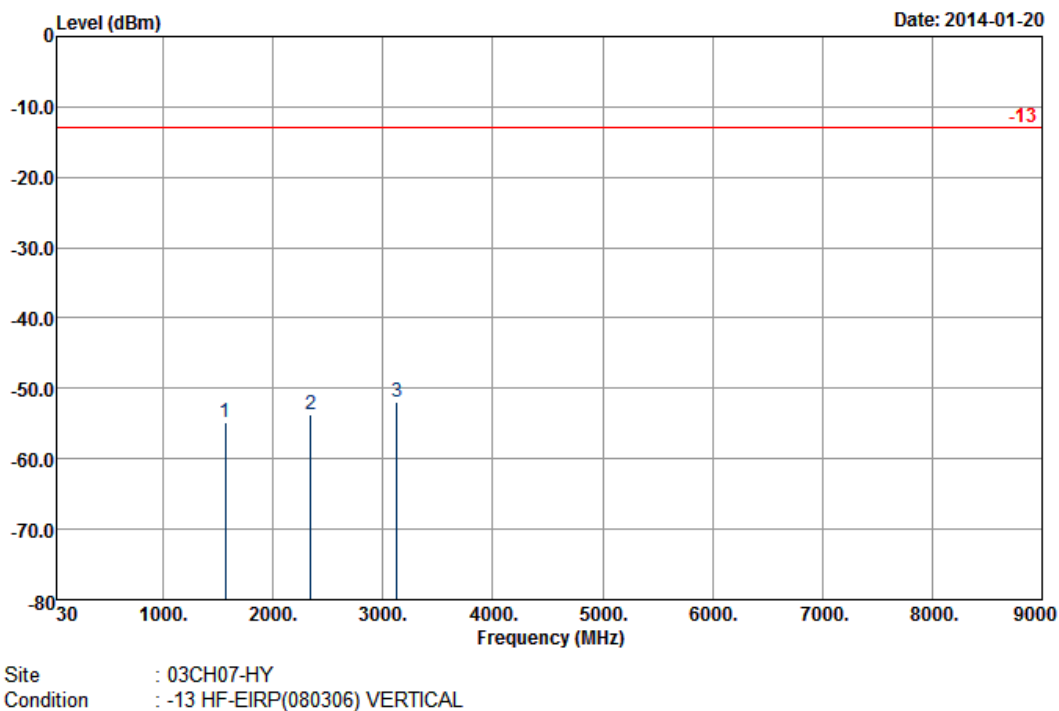


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1564	-54.85	-13	-41.85	-65.48	-58.8	1.47	5.42	V	Pass
2346	-53.73	-13	-40.73	-67.17	-57.9	1.85	6.02	V	Pass
3128	-51.84	-13	-38.84	-67.62	-57.1	2.22	7.48	V	Pass



<Middle Channel>

Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 1	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

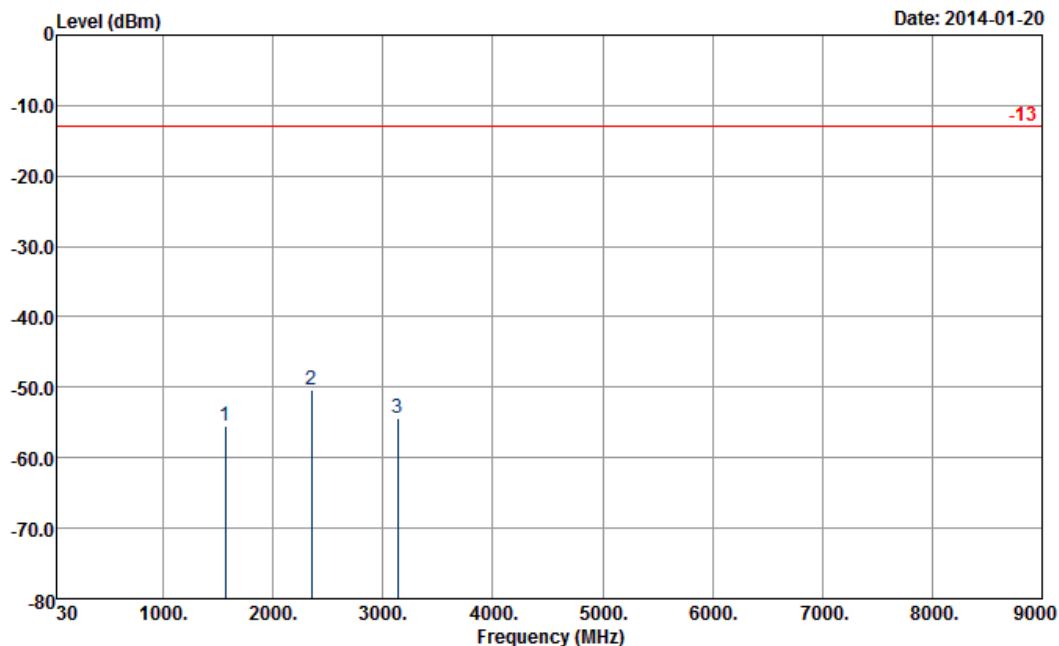


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1569	-55.42	-13	-42.42	-63.98	-59.4	1.51	5.49	H	Pass
2354	-50.43	-13	-37.43	-62.85	-54.5	1.98	6.05	H	Pass
3138	-54.43	-13	-41.43	-68.43	-59.6	2.39	7.56	H	Pass




Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 1	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

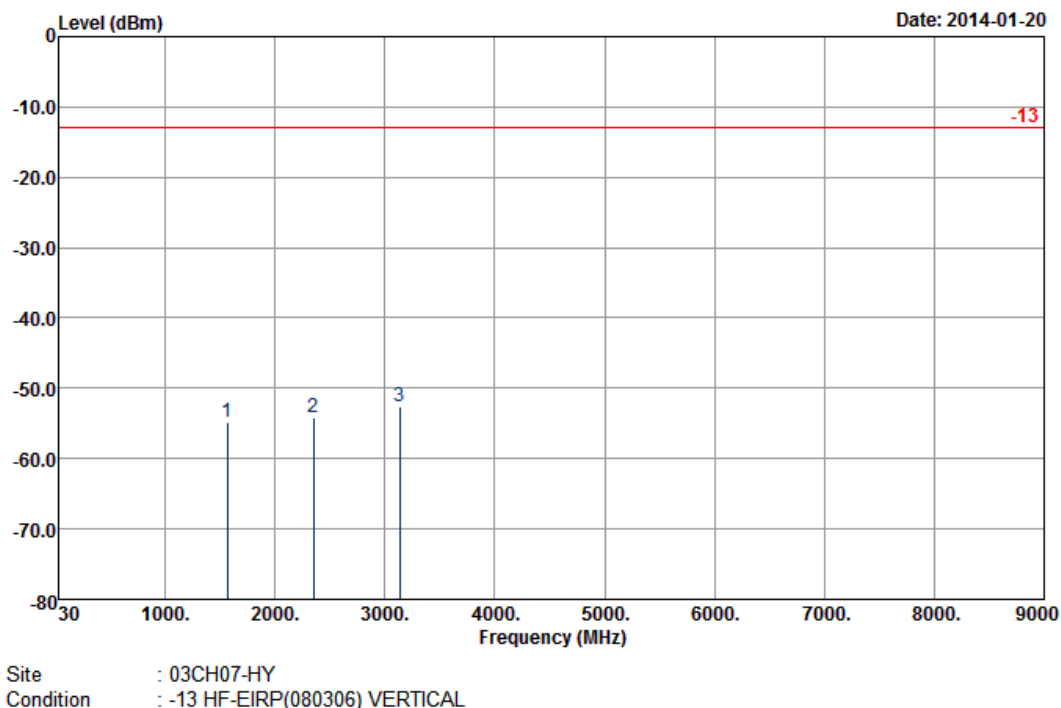

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1569	-54.82	-13	-41.82	-65.65	-58.8	1.51	5.49	V	Pass
2354	-54.13	-13	-41.13	-67.67	-58.2	1.98	6.05	V	Pass
3138	-52.63	-13	-39.63	-68.42	-57.8	2.39	7.56	V	Pass

<High Channel>

Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 1	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

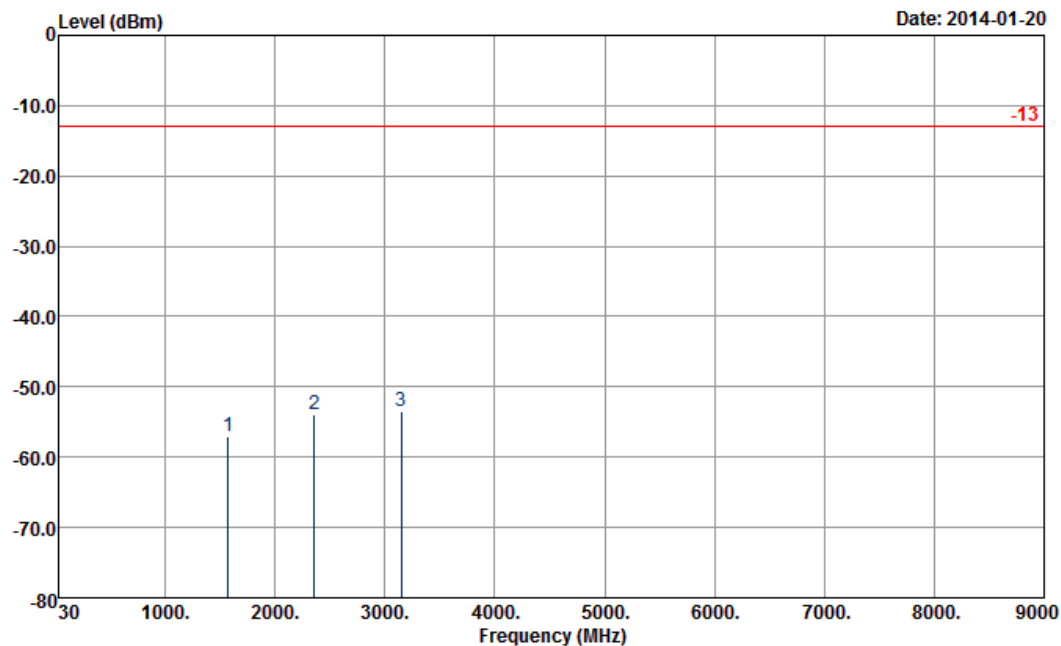


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1574	-57.10	-13	-44.10	-65.66	-61.1	1.56	5.56	H	Pass
2361	-54.02	-13	-41.02	-66.78	-58.1	2.03	6.11	H	Pass
3148	-53.59	-13	-40.59	-67.47	-58.8	2.43	7.64	H	Pass




Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 1 with Battery 1	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

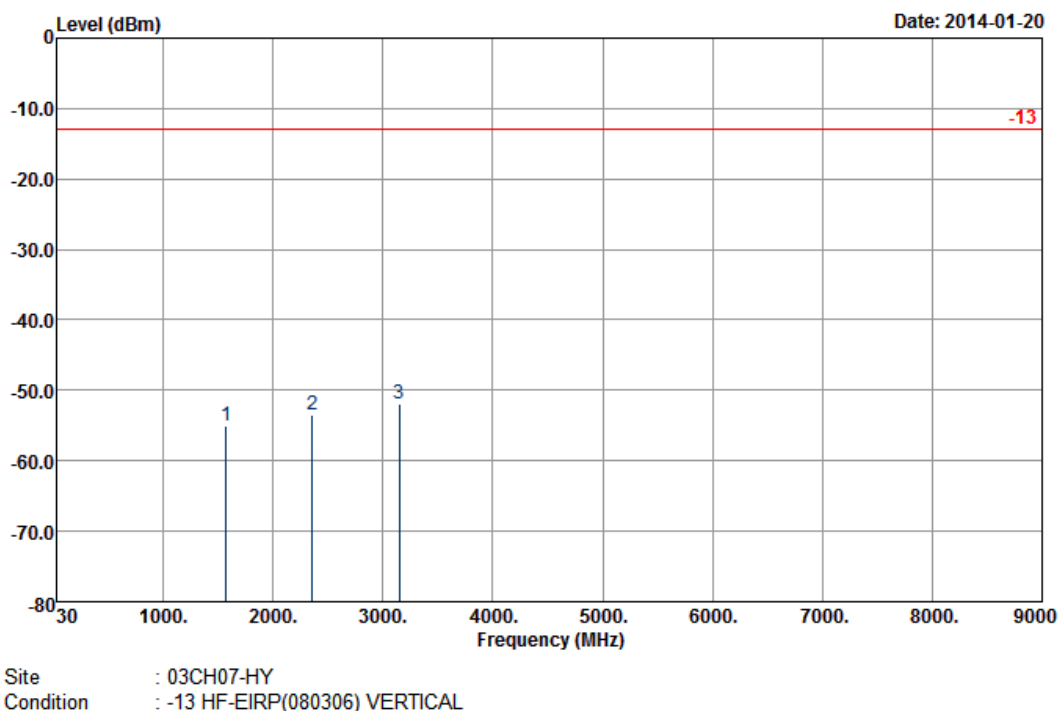

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1574	-55.10	-13	-42.10	-65.51	-59.1	1.56	5.56	V	Pass
2361	-53.42	-13	-40.42	-66.97	-57.5	2.03	6.11	V	Pass
3148	-51.99	-13	-38.99	-67.57	-57.2	2.43	7.64	V	Pass

<Low Channel>

Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 2 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

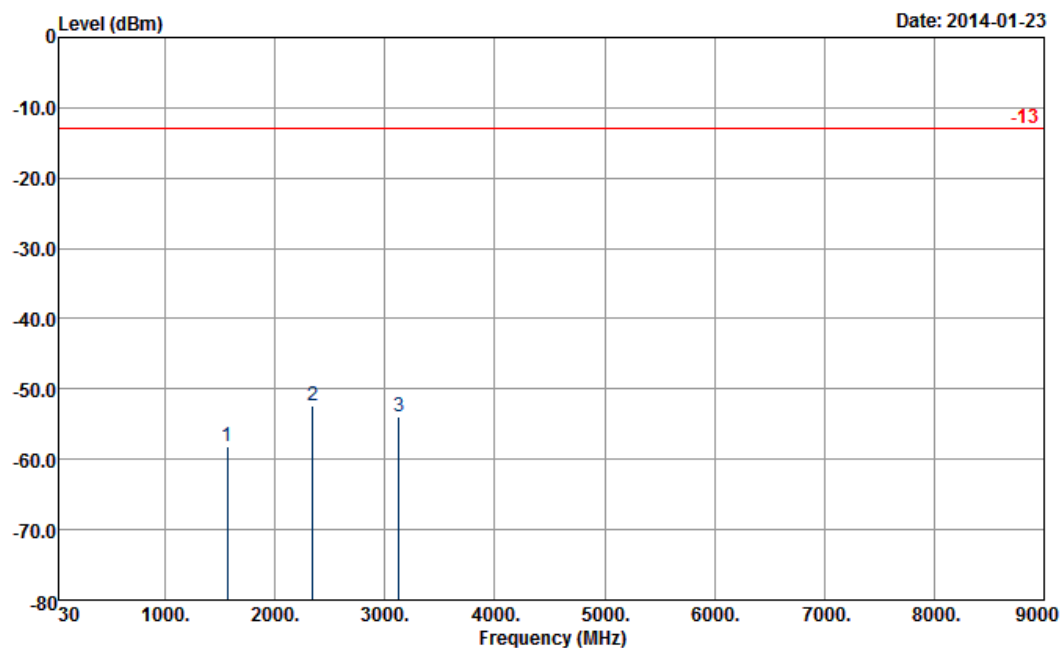


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1564	-58.15	-13	-45.15	-66.55	-62.1	1.47	5.42	H	Pass
2346	-52.33	-13	-39.33	-64.92	-56.5	1.85	6.02	H	Pass
3128	-53.94	-13	-40.94	-67.85	-59.2	2.22	7.48	H	Pass



Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 2 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

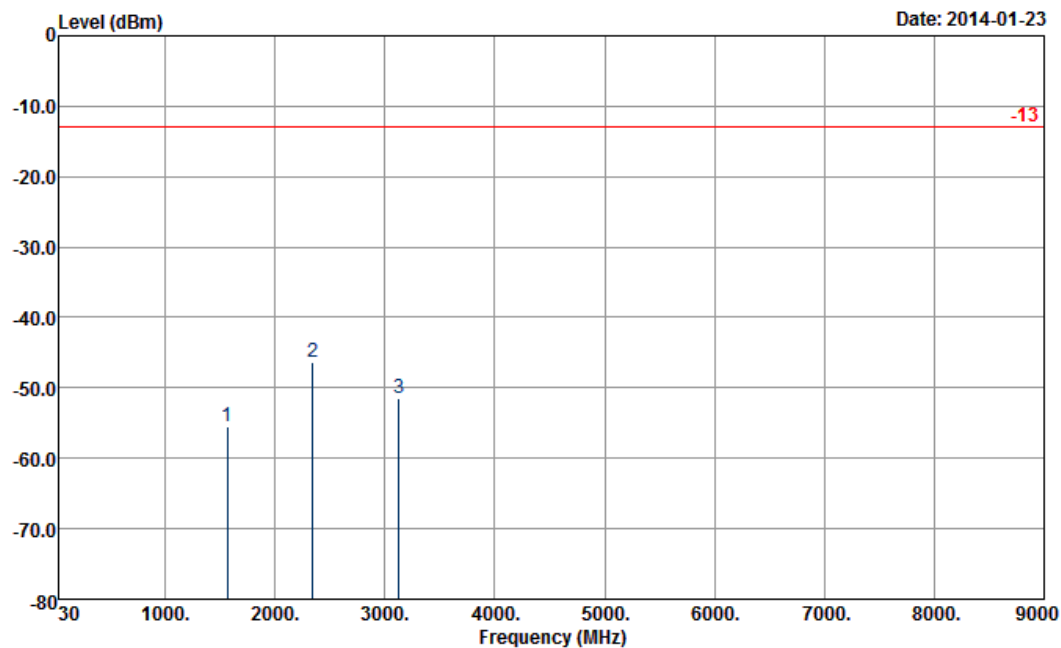


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1564	-55.55	-13	-42.55	-66.15	-59.5	1.47	5.42	V	Pass
2346	-46.43	-13	-33.43	-60.07	-50.6	1.85	6.02	V	Pass
3128	-51.44	-13	-38.44	-67.19	-56.7	2.22	7.48	V	Pass

<Middle Channel>


Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 2 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

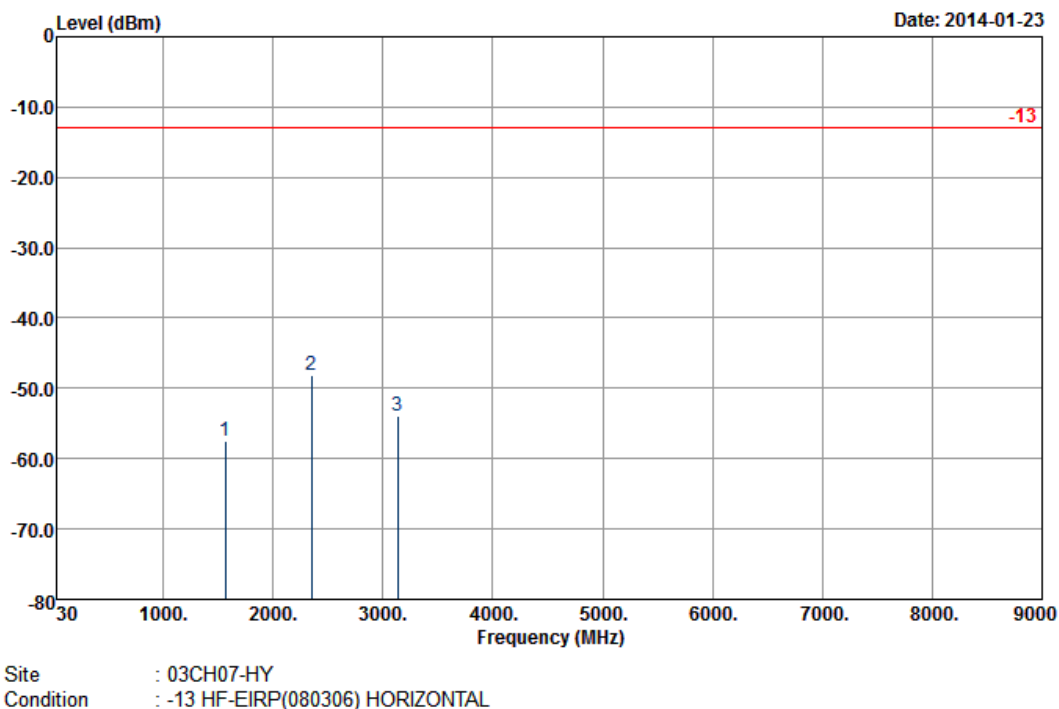

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1569	-57.52	-13	-44.52	-65.91	-61.5	1.51	5.49	H	Pass
2354	-48.23	-13	-35.23	-61.13	-52.3	1.98	6.05	H	Pass
3138	-53.93	-13	-40.93	-67.83	-59.1	2.39	7.56	H	Pass



Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 2 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

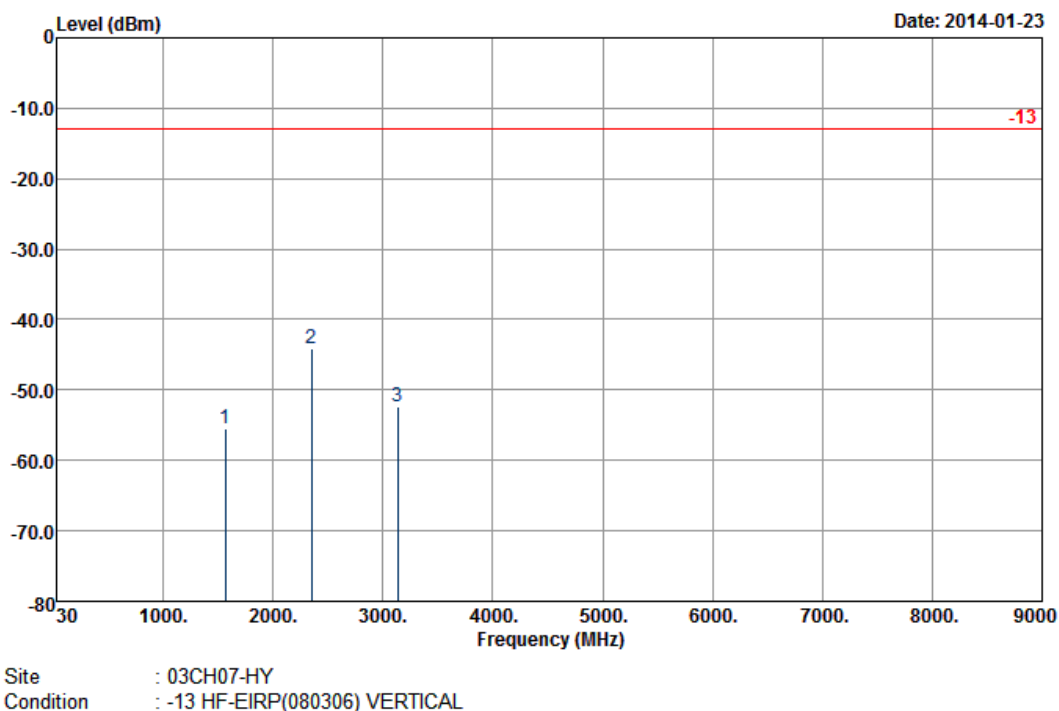


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1569	-55.52	-13	-42.52	-66.31	-59.5	1.51	5.49	V	Pass
2354	-44.03	-13	-31.03	-57.48	-48.1	1.98	6.05	V	Pass
3138	-52.33	-13	-39.33	-68.5	-57.5	2.39	7.56	V	Pass



<High Channel>


Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 2 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

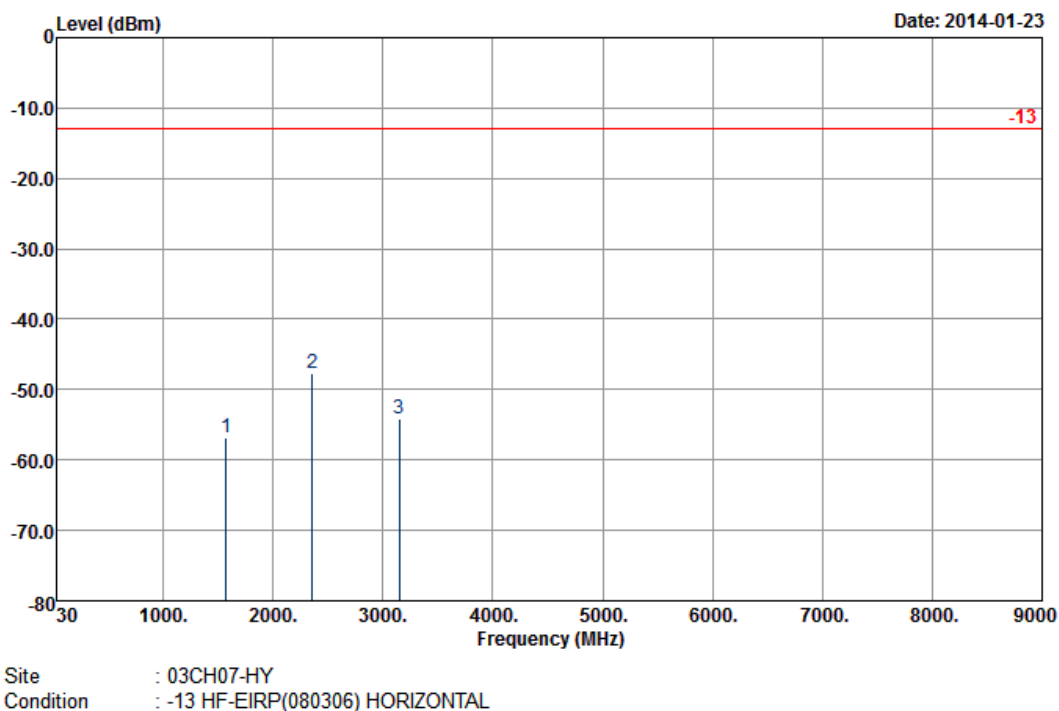

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1574	-56.80	-13	-43.80	-65.21	-60.8	1.56	5.56	H	Pass
2361	-47.72	-13	-34.72	-60.34	-51.8	2.03	6.11	H	Pass
3148	-54.09	-13	-41.09	-67.95	-59.3	2.43	7.64	H	Pass



Band :	LTE Band 13	Temperature :	21~23°C
Test Mode :	5MHz QPSK RB Size 1 Offset 24 for Sample 2 with Battery 2	Relative Humidity :	47~49%
Test Engineer :	Ken Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.		

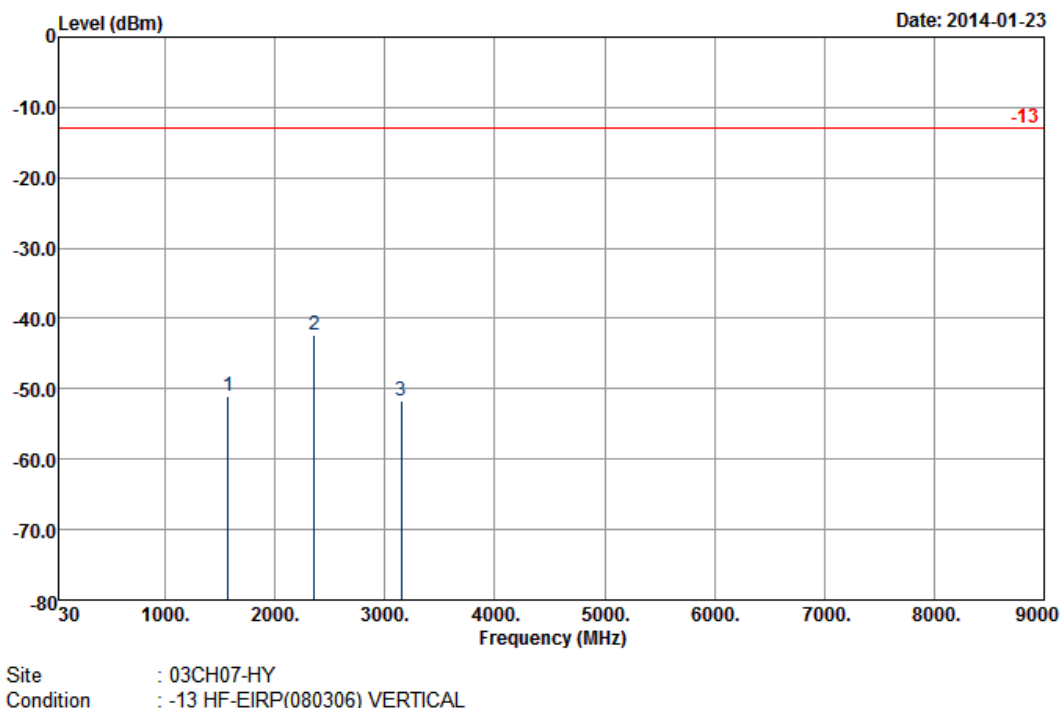

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1574	-51.10	-13	-38.10	-61.72	-55.1	1.56	5.56	V	Pass
2361	-42.42	-13	-29.42	-56.1	-46.5	2.03	6.11	V	Pass
3148	-51.59	-13	-38.59	-67.27	-56.8	2.43	7.64	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

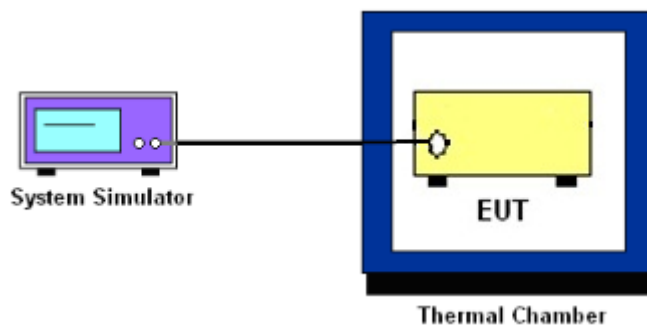

3.8.6 Test Result of Temperature Variation (FCC)

Band :	LTE Band 13 (QPSK)	Limit (ppm) :	2.5
Temperature (°C)	BW 10MHz	Result	
	Deviation (ppm)		
50	0.00	PASS	
40	0.01		
30	0.01		
20	0.00		
10	0.00		
0	0.00		
-10	0.00		
-20	0.00		
-30	0.00		

3.8.7 Test Result of Voltage Variation (FCC)

Band	Bandwidth	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
LTE Band 13	10M	4.20	0.00	2.5	PASS
		Normal	0.00		
		3.55	0.01		

Remark:

1. Normal Voltage = 3.70V.
2. The manufacturer declared that the EUT could work properly between voltage 3.55V ~ 4.20V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Jan. 20, 2014~ Jan. 21, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 19, 2013	Jan. 20, 2014~ Jan. 21, 2014	Jul. 18, 2014	Conducted (TH02-HY)
LTE Base Station	Anritsu	MT8820C	6201026480	30MHz~2.7GHz SISO	Jan. 07, 2014	Jan. 20, 2014~ Jan. 21, 2014	Jan. 06, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz~30GHz	Nov. 20, 2013	Jan. 20, 2014~ Jan. 24, 2014	Nov. 19, 2014	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz~1GHz	Oct. 10, 2013	Jan. 20, 2014~ Jan. 24, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Jan. 20, 2014~ Jan. 24, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz~40GHz	Oct. 03, 2013	Jan. 20, 2014~ Jan. 24, 2014	Oct. 02, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	30MHz~1GHz	Feb. 26, 2013	Jan. 20, 2014~ Jan. 24, 2014	Feb. 25, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Nov. 29, 2013	Jan. 20, 2014~ Jan. 24, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A01917	1GHz~26.5GHz	Aug. 12, 2013	Jan. 20, 2014~ Jan. 24, 2014	Aug. 11, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Jan. 20, 2014~ Jan. 24, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604/L	N/A	N/A	Jan. 20, 2014~ Jan. 24, 2014	N/A	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.10
---	------