

#01_LTE Band 106_3M_QPSK_1_0_Left Cheek_0mm_Ch134322

Communication System: UID 10184 - CAF, LTE-FDD; Frequency: 899 MHz

Medium: HSL_600~7200_251102 Medium parameters used: $f = 899$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 44.519$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.03, 9.32, 9.01) @ 899 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2025/1/15
- Phantom: SAM_Left; Type: QD 000 P40 CD; Serial: TP:1801
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0626 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.038 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 68.4%

Maximum value of SAR (measured) = 0.0600 W/kg

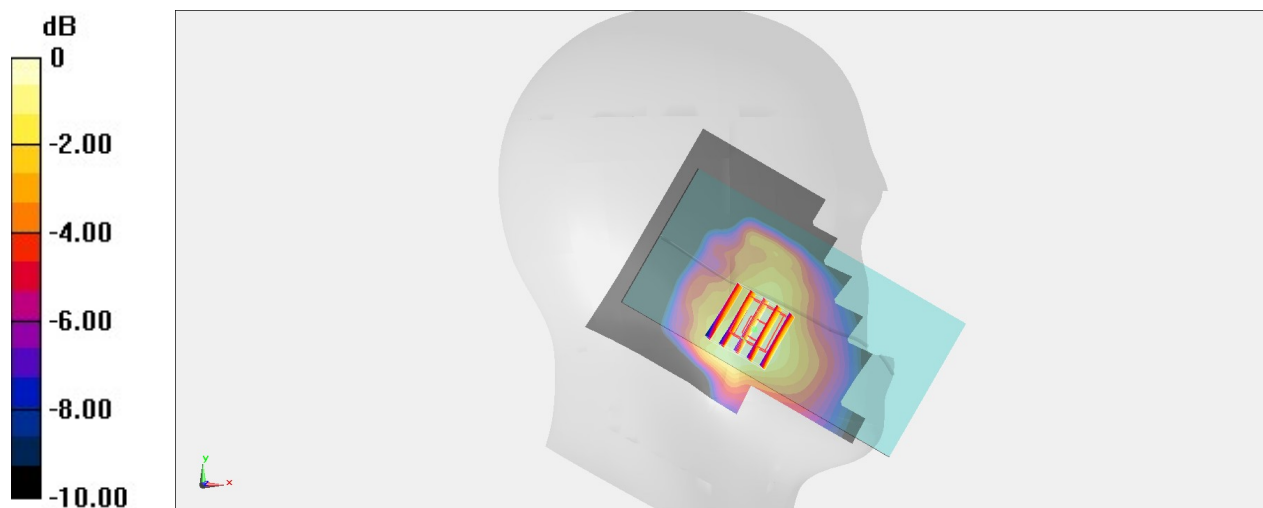

0 dB = 0.0600 W/kg = -12.22 dBW/kg

#02_LTE Band 106_3M_QPSK_1_0_Back_10mm_Ch134322

Communication System: UID 10184 - CAF, LTE-FDD; Frequency: 899 MHz

Medium: HSL_600~7200_251102 Medium parameters used: $f = 899$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 44.519$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.03, 9.32, 9.01) @ 899 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2025/1/15
- Phantom: SAM_Left; Type: QD 000 P40 CD; Serial: TP:1801
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.379 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.144 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 0.403 W/kg

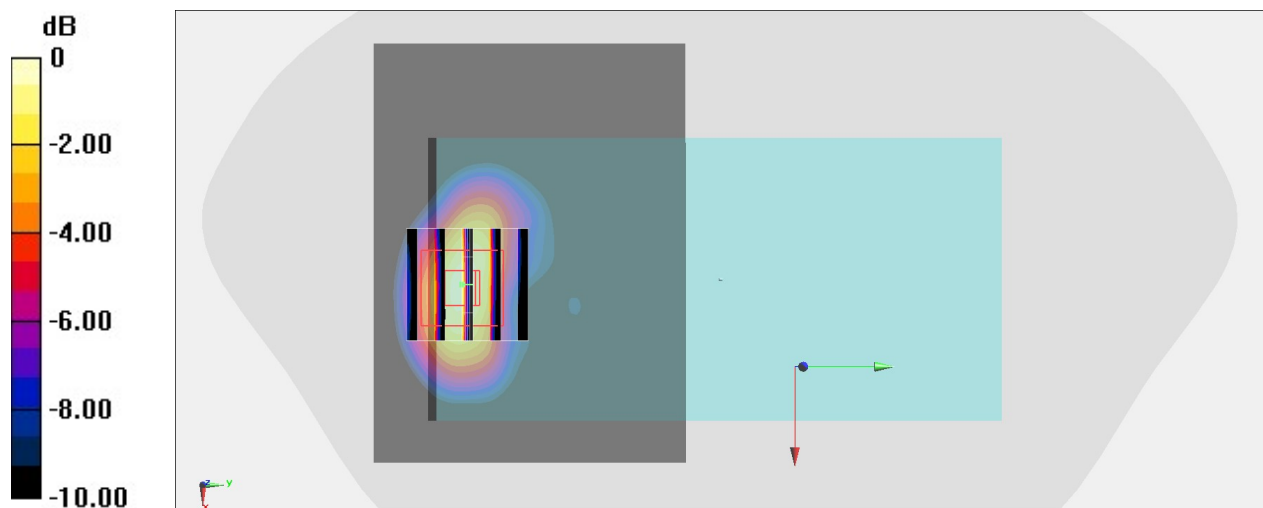

0 dB = 0.403 W/kg = -3.95 dBW/kg

#03_LTE Band 106_3M_QPSK_1_0_Back_0mm_Ch134322

Communication System: UID 10184 - CAF, LTE-FDD; Frequency: 899 MHz

Medium: HSL_600~7200_251102 Medium parameters used: $f = 899$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 44.519$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.03, 9.32, 9.01) @ 899 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2025/1/15
- Phantom: SAM_Left; Type: QD 000 P40 CD; Serial: TP:1801
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.204 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.081 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 0.197 W/kg

