

#01_WLAN2.4GHz_802.11b 1Mbps_Left Tilted_0mm_Ch11

Communication System: UID 10415 - AAA, 802.11b ; Frequency: 2462 MHz

Medium: HSL_600-7200_260111 Medium parameters used : $f = 2462$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 42.712$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.01, 6.8, 7.17) @ 2462 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.29 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.836 W/kg; SAR(10 g) = 0.446 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 1.23 W/kg

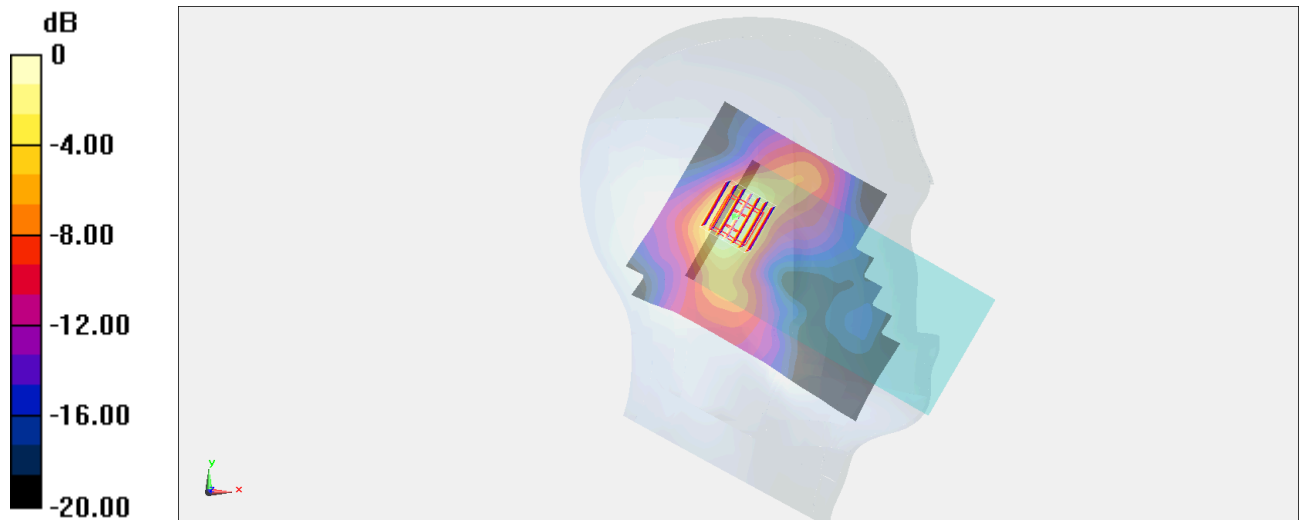

0 dB = 1.23 W/kg = 0.90 dBW/kg

#02_WLAN5GHz_802.11a 6Mbps_Left Cheek_0mm_Ch52

Communication System: UID 10417 - AAD, 802.11a; Frequency: 5260 MHz

Medium: HSL_600-7200_260112 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.636$ S/m; $\epsilon = 38.28$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.57, 5.41, 5.7) @ 5260 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.60 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 20.24 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.243 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 1.70 W/kg

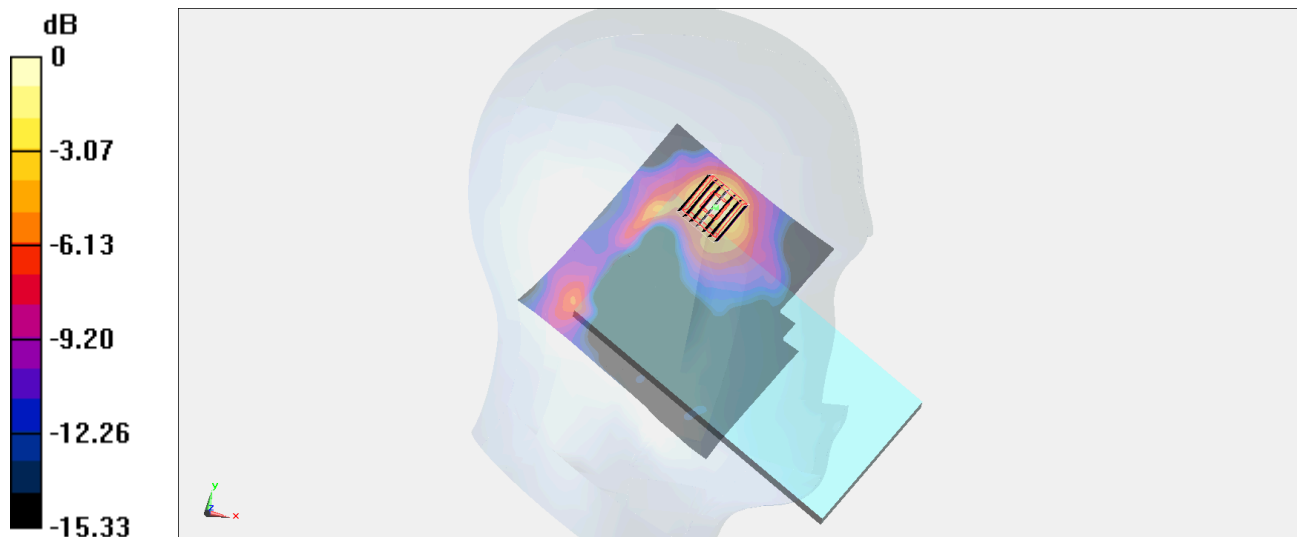

0 dB = 1.70 W/kg = 2.30 dBW/kg

#03_WLAN5GHz_802.11a 6Mbps_Left Cheek_0mm_Ch116

Communication System: UID 10417 - AAD, 802.11a; Frequency: 5580 MHz

Medium: HSL_600-7200_260112 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.013$ S/m; $\epsilon_r = 37.755$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.06, 4.91, 5.18) @ 5580 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.74 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 20.08 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.258 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

Maximum value of SAR (measured) = 1.87 W/kg

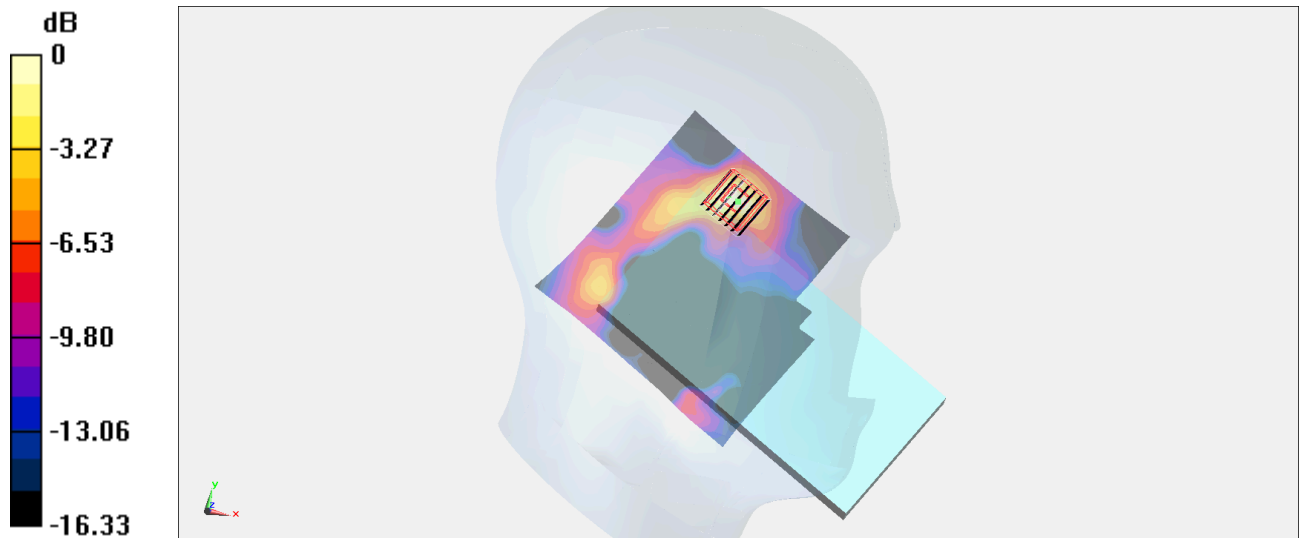

0 dB = 1.87 W/kg = 2.72 dBW/kg

#04_WLAN5GHz_802.11a 6Mbps_Left Cheek_0mm_Ch157

Communication System: UID 10417 - AAD, 802.11a; Frequency: 5785 MHz

Medium: HSL_600-7200_260112 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.272$ S/m; $\epsilon_r = 37.412$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.02, 4.87, 5.13) @ 5785 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 18.82 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.238 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 1.69 W/kg

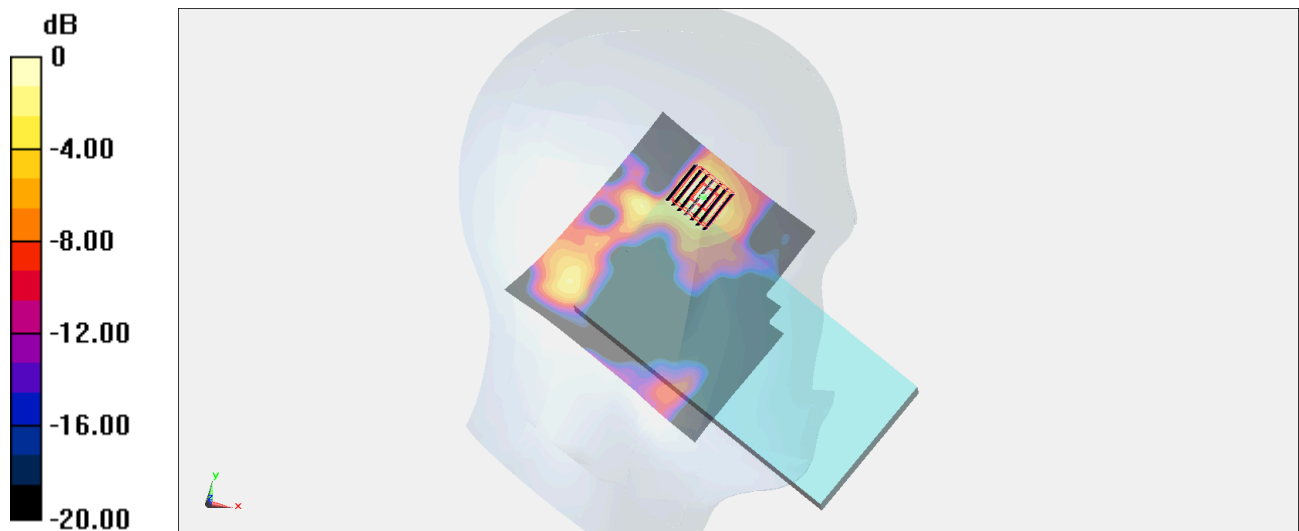

0 dB = 1.69 W/kg = 2.28 dBW/kg

#05_WLAN6GHz_802.11a 6Mbps_Left Cheek_0mm_Ch57

Communication System: 802.11a; Frequency: 6235.000 MHz

Medium: HSL_600-7200_260115 Medium parameters used: $f = 6235.000$ MHz; $\sigma = 5.78$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(4.96, 4.88, 5.04); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-09-09
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10417-AAD

Area Scan (136.0 mm x 136.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.679 W/kg; SAR (10g) = 0.207 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.05 dB


SAR (1g) = 0.726 W/kg; SAR (8g) = 0.245 W/kg; SAR (10g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.4 %

psAPD (1.0cm², sq) = 7.26 [W/m²]; psAPD (4.0cm², sq) = 4.89 [W/m²]

TSL Correction: Positive only

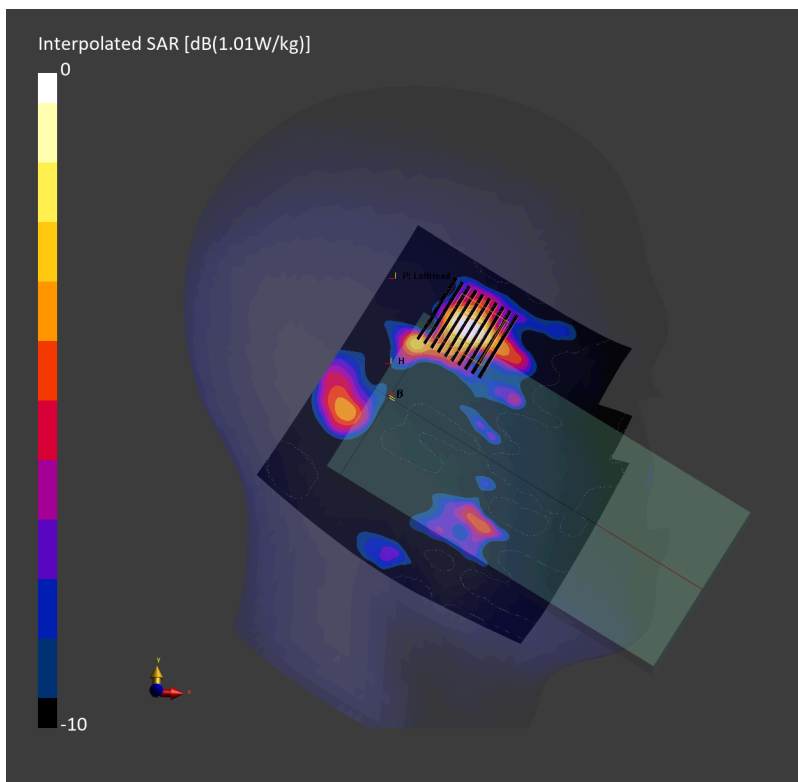

#06_Bluetooth_1Mbps_Left Cheek_0mm_Ch78

Communication System: UID 10032 - CAA, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1
Medium: HSL_600-7200_260114 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 42.687$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.01, 6.8, 7.17) @ 2480 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0826 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.994 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.021 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 0.0683 W/kg

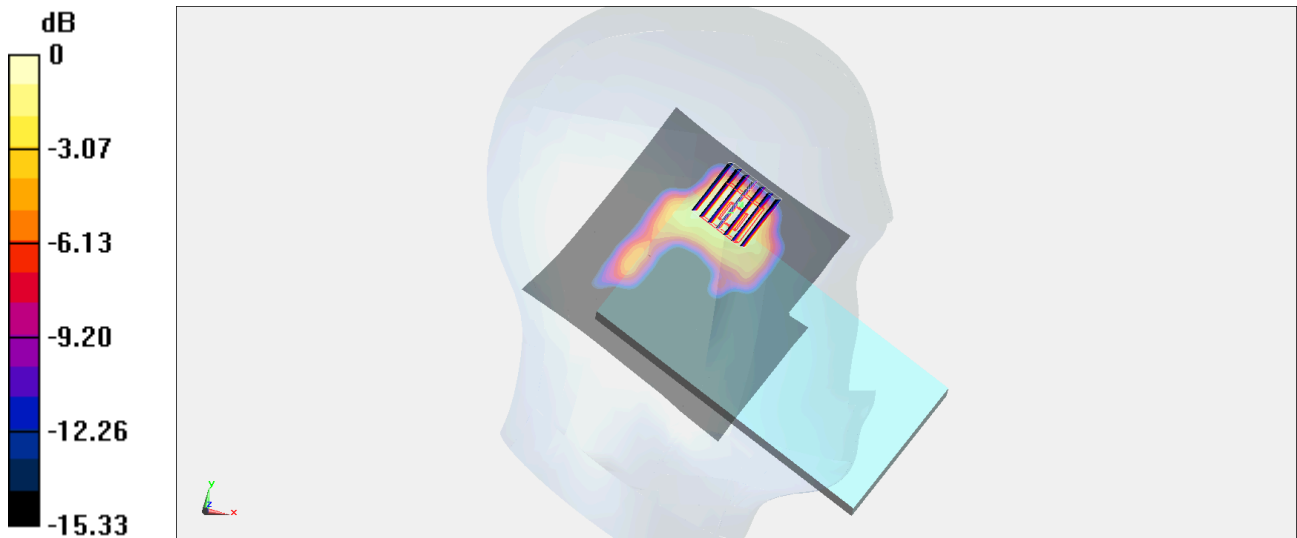

0 dB = 0.0683 W/kg = -11.66 dBW/kg

#07_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch6

Communication System: UID 10415 - AAA, 802.11b; Frequency: 2437 MHz

Medium: HSL_600-7200_260107 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 42.665$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.01, 6.8, 7.17) @ 2437 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.729 W/kg

Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.372 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.249 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 0.687 W/kg

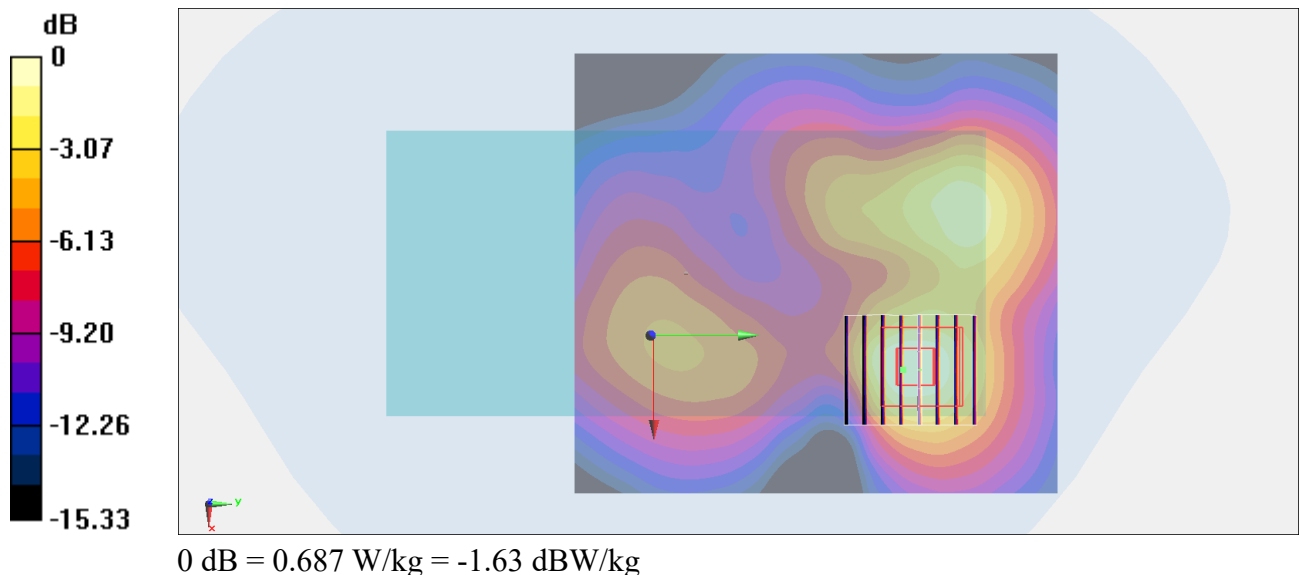

#08_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch42

Communication System: UID 10544 - AAD, 802.11ac; Frequency: 5210 MHz

Medium: HSL_600-7200_260108 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.556$ S/m; $\epsilon_r = 38.273$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.57, 5.41, 5.7) @ 5210 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.43 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 18.36 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.258 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.3%

Maximum value of SAR (measured) = 1.39 W/kg

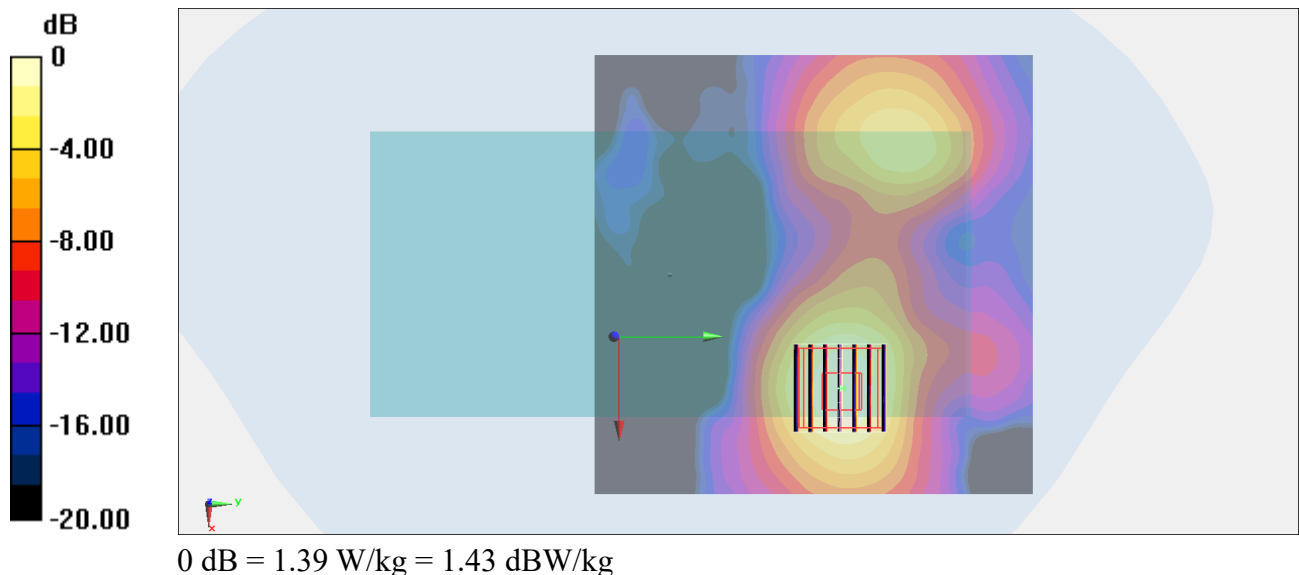

#09_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155

Communication System: UID 10544 - AAD, 802.11ac; Frequency: 5775 MHz

Medium: HSL_600-7200_260108 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.227$ S/m; $\epsilon_r = 37.31$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.02, 4.87, 5.13) @ 5775 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.68 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.40 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.323 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 12 mm)

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 1.62 W/kg

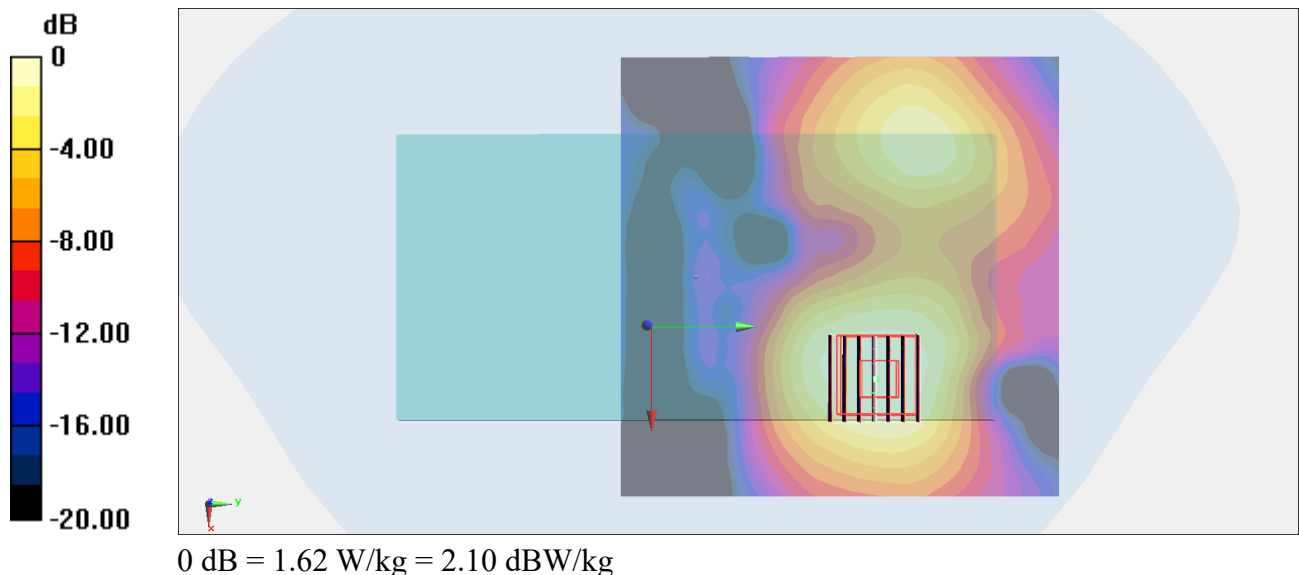

#10_WLAN6GHz_802.11be-EHT320 MCS0_Back_10mm_Ch191

Communication System: 802.11be; Frequency: 6905.000 MHz

Medium: HSL_600-7200_260115 Medium parameters used: $f = 6905.000$ MHz; $\sigma = 6.58$ S/m; $\epsilon_r = 33.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(4.96, 4.88, 5.04); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-09-09
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.209 W/kg; SAR (10g) = 0.079 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.04 dB


SAR (1g) = 0.180 W/kg; SAR (8g) = 0.074 W/kg; SAR (10g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.5 %

psAPD (1.0cm², sq) = 1.80 [W/m²]; psAPD (4.0cm², sq) = 1.48 [W/m²]

TSL Correction: Positive only

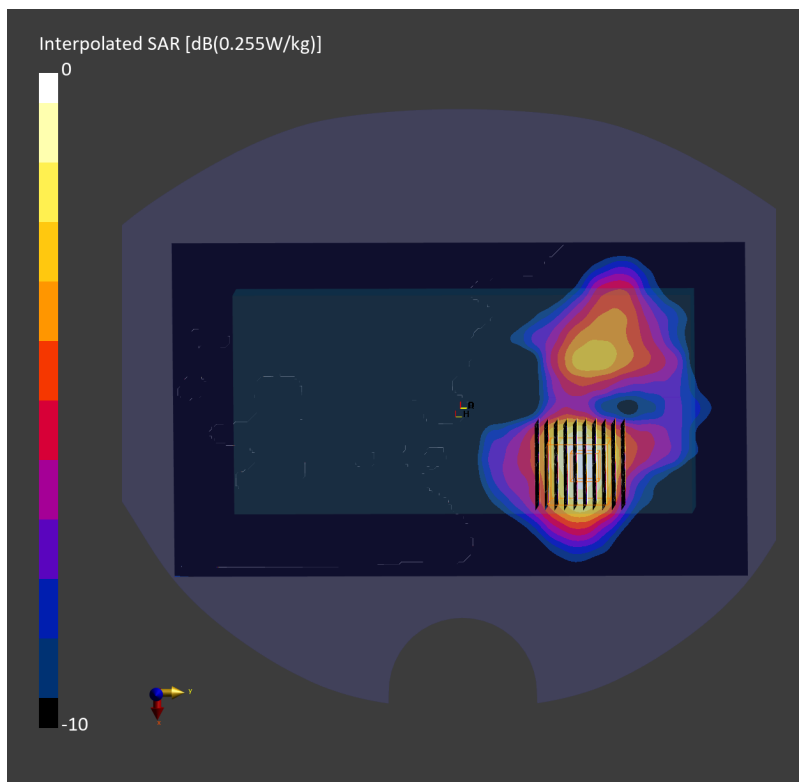

#11_Bluetooth_1Mbps_Back_10mm_Ch39

Communication System: UID 10032 - CAA, Bluetooth; Frequency: 2441 MHz

Medium: HSL_600-7200_260114 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.01, 6.8, 7.17) @ 2441 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0439 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.405 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.016 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.0449 W/kg

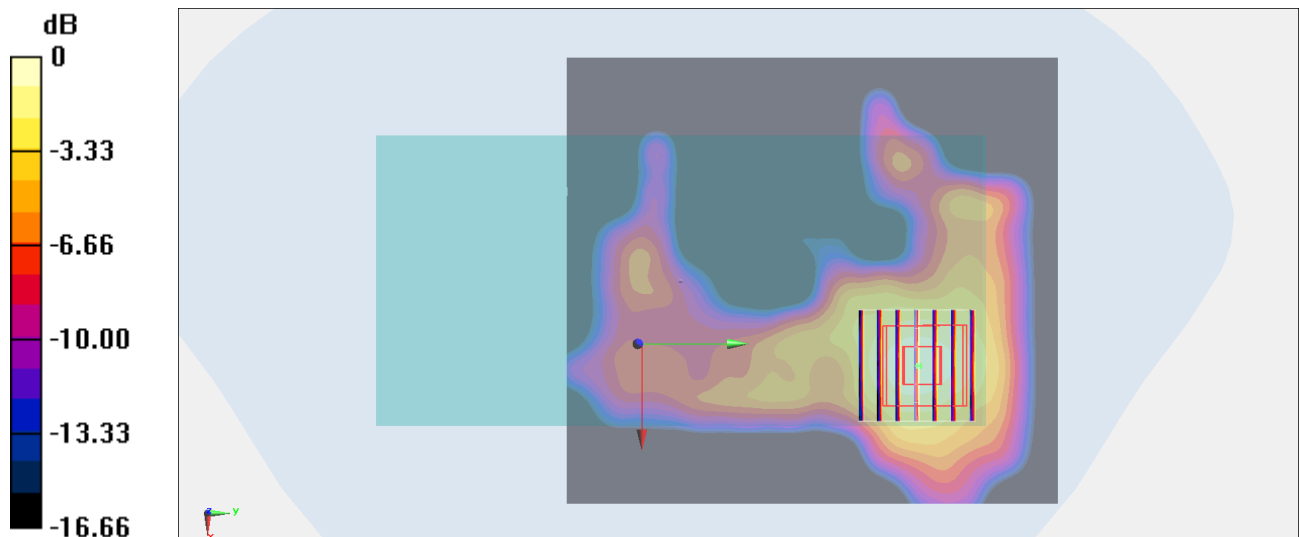

0 dB = 0.0449 W/kg = -13.48 dBW/kg

#12_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch11

Communication System: UID 10415 - AAA,802.11b ; Frequency: 2462 MHz

Medium: HSL_600-7200_260109 Medium parameters used : $f = 2462$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 42.947$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.01, 6.8, 7.17) @ 2462 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.66 W/kg

/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.781 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.499 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 1.60 W/kg

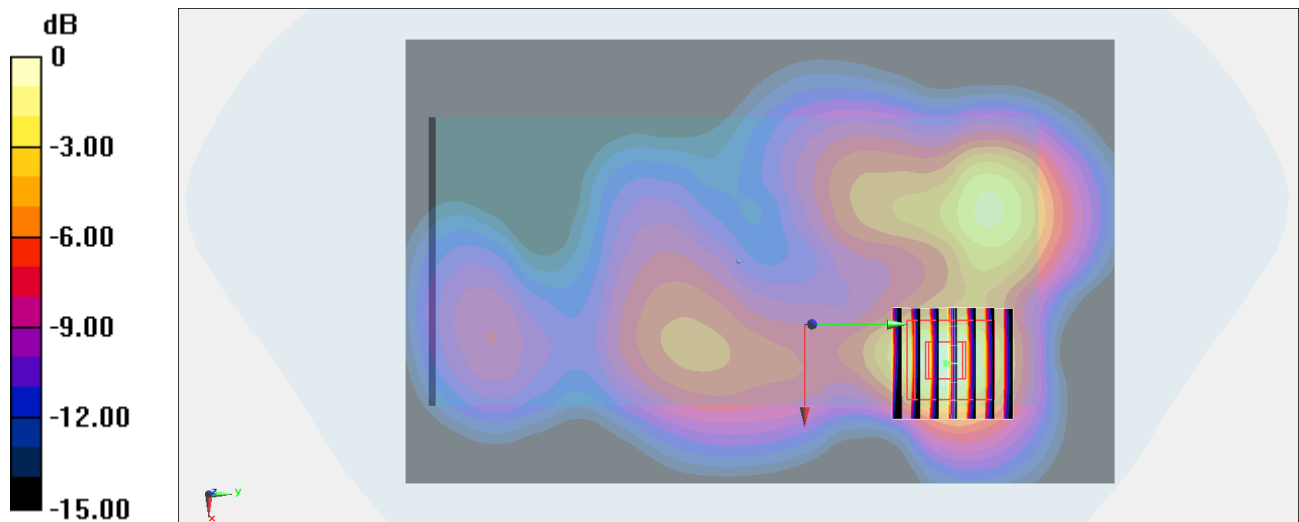

0 dB = 1.60 W/kg = 2.04 dBW/kg

#13_WLAN5GHz_802.11ac-VHT160 MCS0_Back_5mm_Ch50

Communication System: UID 10554 - AAE, 802.11ac ; Frequency: 5250 MHz

Medium: HSL_600-7200_260110 Medium parameters used : $f = 5250$ MHz; $\sigma = 4.685$ S/m; $\epsilon_r = 38.542$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.57, 5.41, 5.7) @ 5250 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.87 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.34 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.319 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 1.86 W/kg

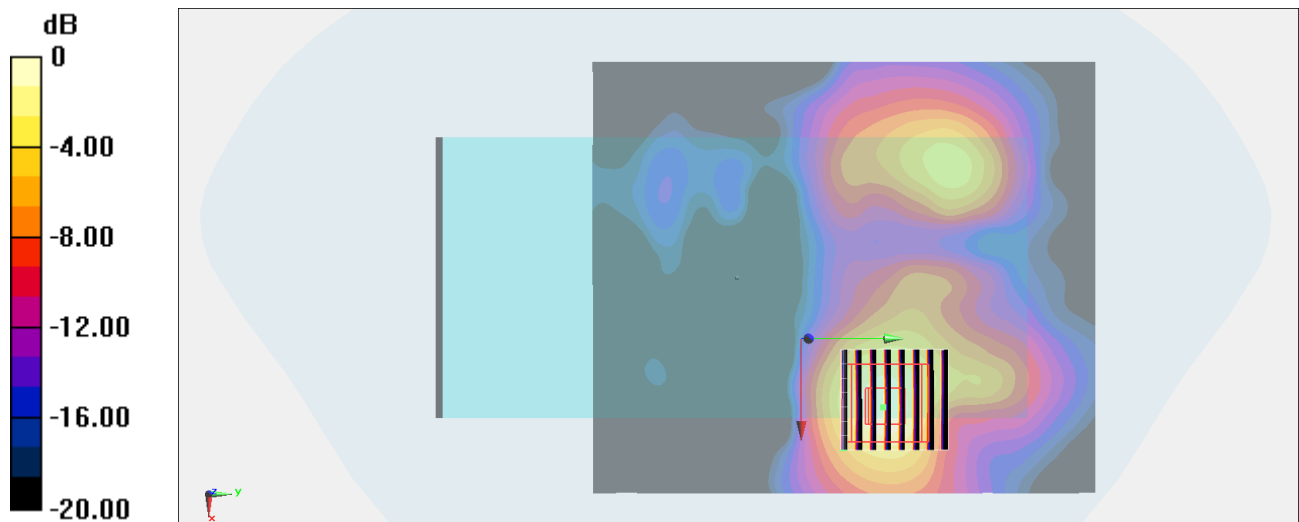

0 dB = 1.86 W/kg = 2.70 dBW/kg

#14_WLAN5GHz_802.11ac-VHT160 MCS0_Back_5mm_Ch114

Communication System: UID 10554 - AAE, 802.11ac ; Frequency: 5570 MHz

Medium: HSL_600-7200_260110 Medium parameters used : $f = 5570$ MHz; $\sigma = 5.068$ S/m; $\epsilon_r = 38.012$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.06, 4.91, 5.18) @ 5570 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.30 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 22.62 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 4.22 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.379 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 2.36 W/kg

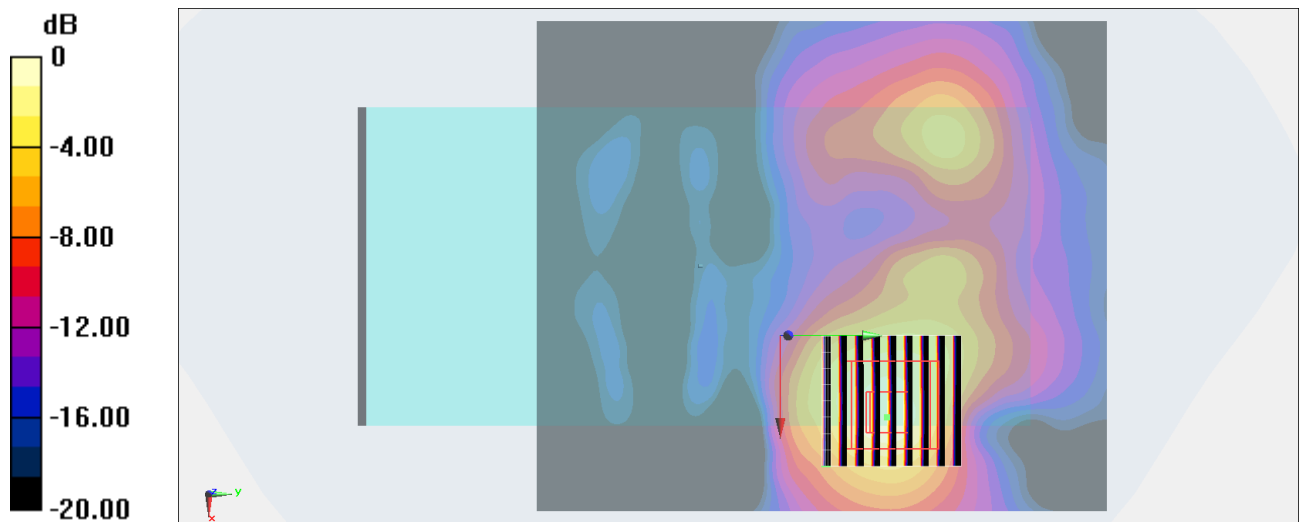

0 dB = 2.36 W/kg = 3.73 dBW/kg

#15_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: UID 10544 - AAD, 802.11ac ; Frequency: 5775 MHz

Medium: HSL_600-7200_260110 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.327$ S/m; $\epsilon_r = 37.651$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.02, 4.87, 5.13) @ 5775 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.44 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 22.63 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 4.56 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.416 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 2.49 W/kg

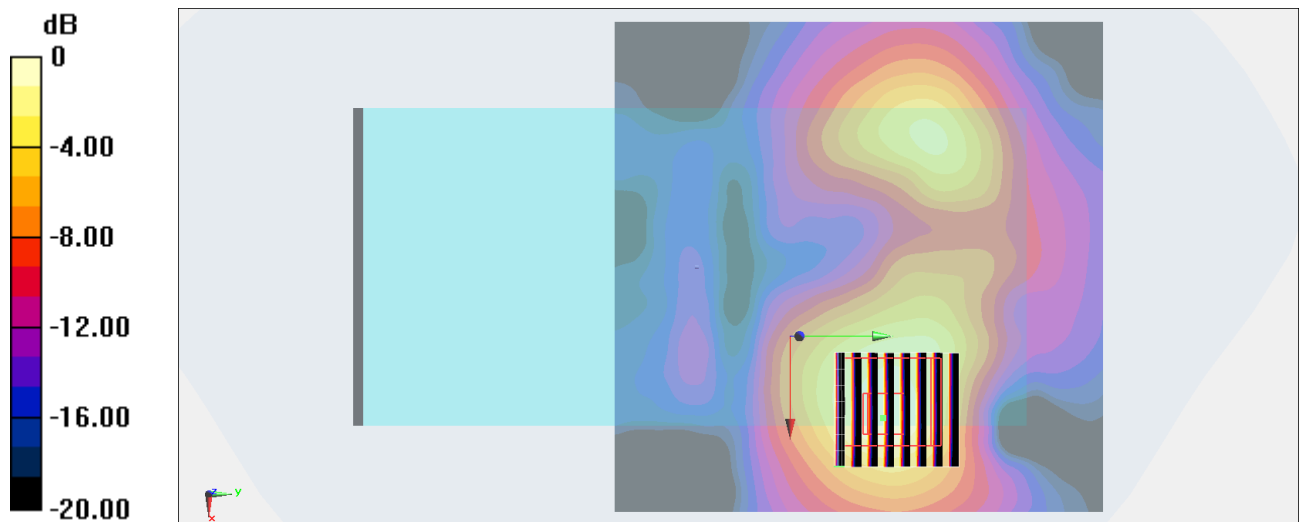

0 dB = 2.49 W/kg = 3.96 dBW/kg

#16_WLAN6GHz_802.11be-EHT320 MCS0_Back_5mm_Ch127

Communication System: 802.11be; Frequency: 6585.000 MHz

Medium: HSL_600-7200_260115 Medium parameters used: $f = 6585.000$ MHz; $\sigma = 6.20$ S/m; $\epsilon_r = 34.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(4.96, 4.88, 5.04); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-09-09
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.555 W/kg; SAR (10g) = 0.191 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.09 dB


SAR (1g) = 0.576 W/kg; SAR (8g) = 0.220 W/kg; SAR (10g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.6 %

psAPD (1.0cm², sq) = 5.76 [W/m²]; psAPD (4.0cm², sq) = 4.39 [W/m²]

TSL Correction: Positive only

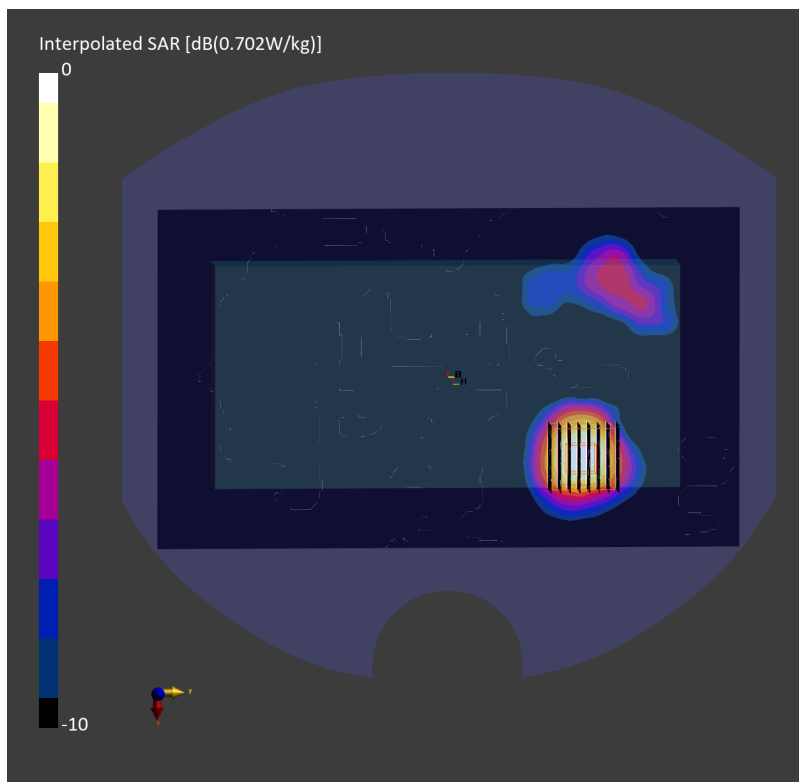

#17_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: UID 10032 - CAA, Bluetooth; Frequency: 2441 MHz

Medium: HSL_600-7200_260114 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 42.779$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.01, 6.8, 7.17) @ 2441 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0731 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.700 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.023 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 0.0693 W/kg

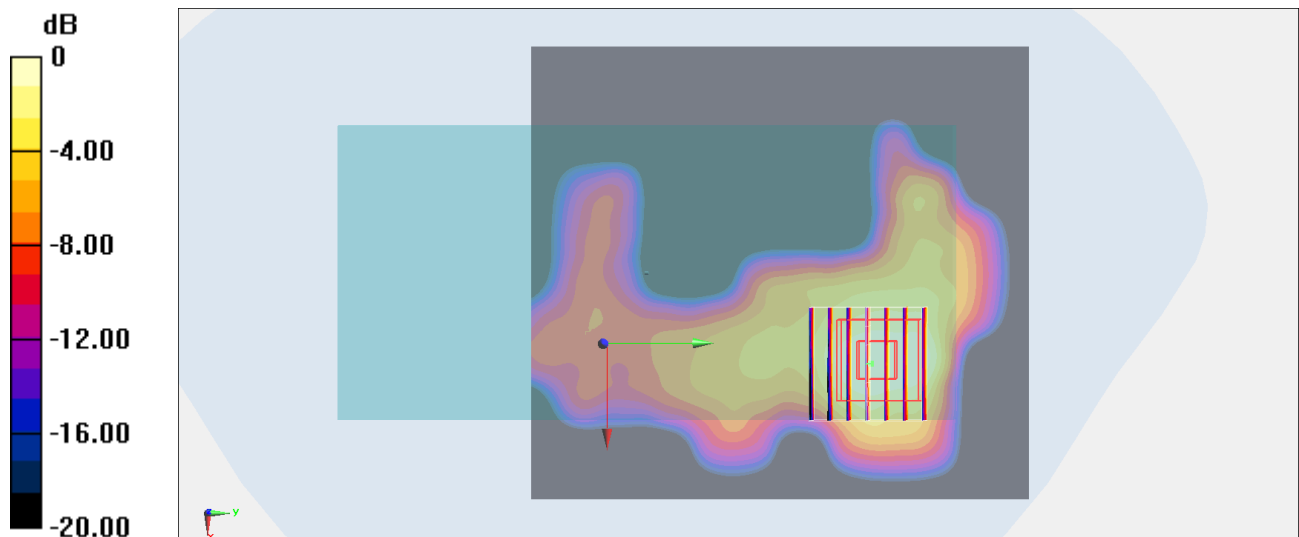

0 dB = 0.0693 W/kg = -11.59 dBW/kg

#18_WLAN5GHz_802.11ac-VHT160 MCS0_Right Edge_0mm_Ch50

Communication System: UID 10554 - AAE, 802.11ac; Frequency: 5250 MHz

Medium: HSL_600-7200_260113 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.453$ S/m; $\epsilon_r = 35.939$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.57, 5.41, 5.7) @ 5250 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.40 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 33.10 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 2.91 W/kg; SAR(10 g) = 0.670 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 8.28 W/kg

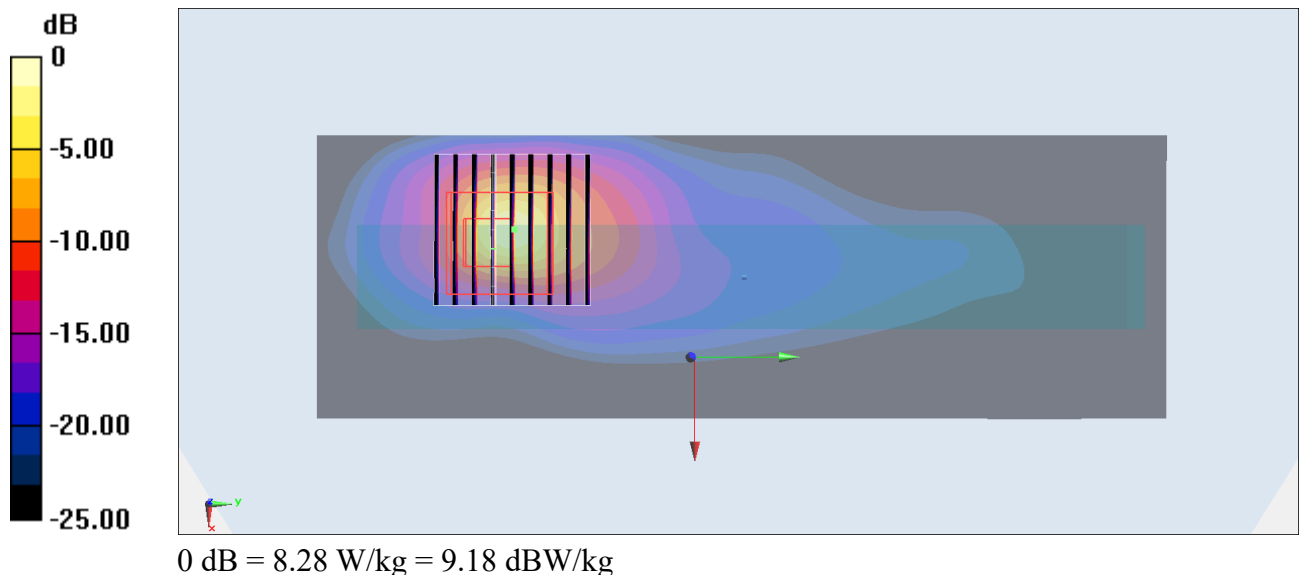

#19_WLAN5GHz_802.11ac-VHT160 MCS0_Right Edge_0mm_Ch114

Communication System: UID 10554 - AAE, 802.11ac; Frequency: 5570 MHz

Medium: HSL_600-7200_260113 Medium parameters used: $f = 5570$ MHz; $\sigma = 4.813$ S/m; $\epsilon_r = 35.416$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.06, 4.91, 5.18) @ 5570 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.78 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 3.19 W/kg; SAR(10 g) = 0.725 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 9.76 W/kg

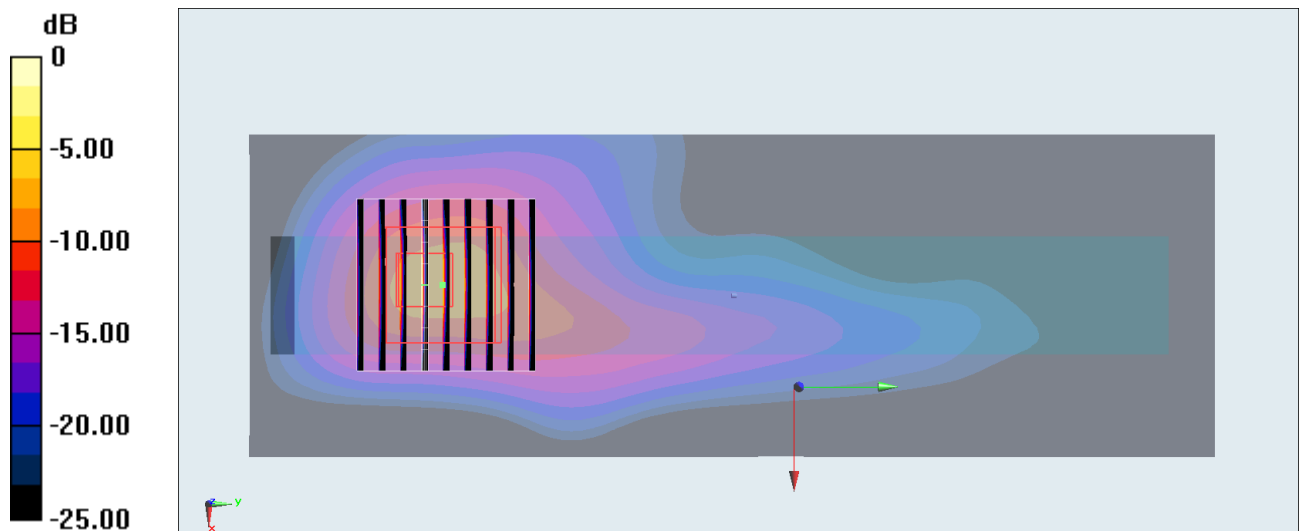

0 dB = 9.76 W/kg = 9.89 dBW/kg

#20_WLAN5GHz_802.11ac-VHT80 MCS0_Back_0mm_Ch155

Communication System: UID 10544 - AAD, 802.11ac; Frequency: 5775 MHz

Medium: HSL_600-7200_260113 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.1$ S/m; $\epsilon_r = 34.893$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.02, 4.87, 5.13) @ 5775 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.25 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.31 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 7.72 W/kg

SAR(1 g) = 1.69 W/kg; SAR(10 g) = 0.618 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 4.36 W/kg

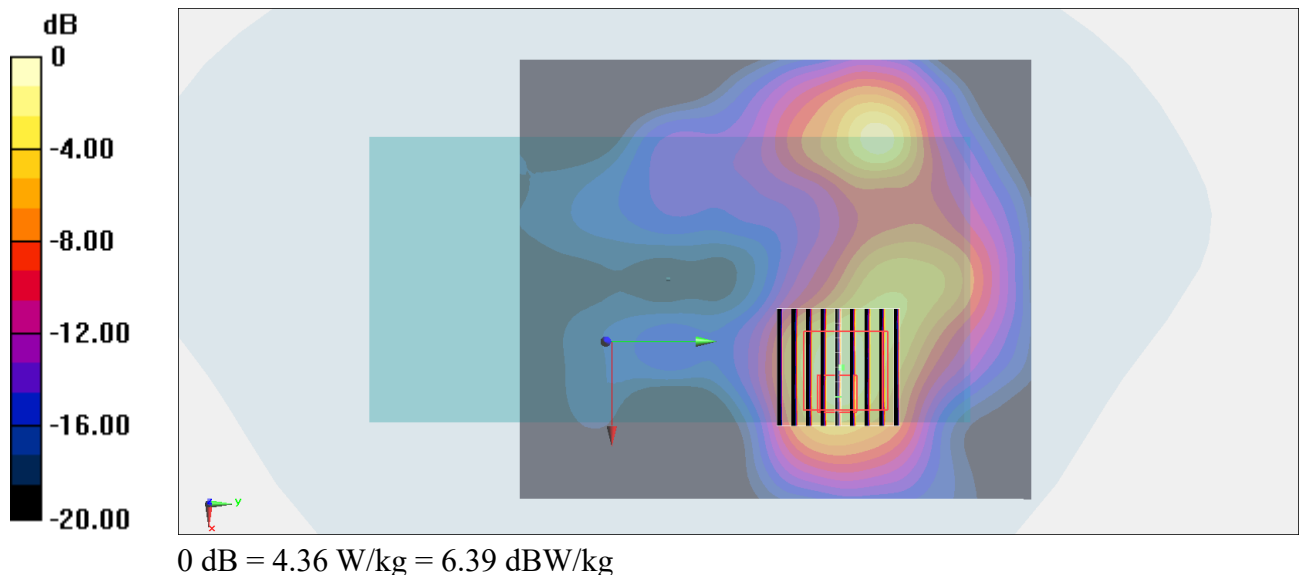

#21_WLAN6GHz_802.11be-EHT320 MCS0_Back_0mm_Ch127

Communication System: 802.11be; Frequency: 6585.000 MHz

Medium: HSL_600-7200_260115 Medium parameters used: $f = 6585.000$ MHz; $\sigma = 6.20$ S/m; $\epsilon_r = 34.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(4.96, 4.88, 5.04); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-09-09
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 1.70 W/kg; SAR (10g) = 0.468 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.06 dB


SAR (1g) = 1.75 W/kg; SAR (8g) = 0.526 W/kg; SAR (10g) = 0.449 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.3 %

psAPD (1.0cm², sq) = 17.5 [W/m²]; psAPD (4.0cm², sq) = 10.5 [W/m²]

TSL Correction: Positive only

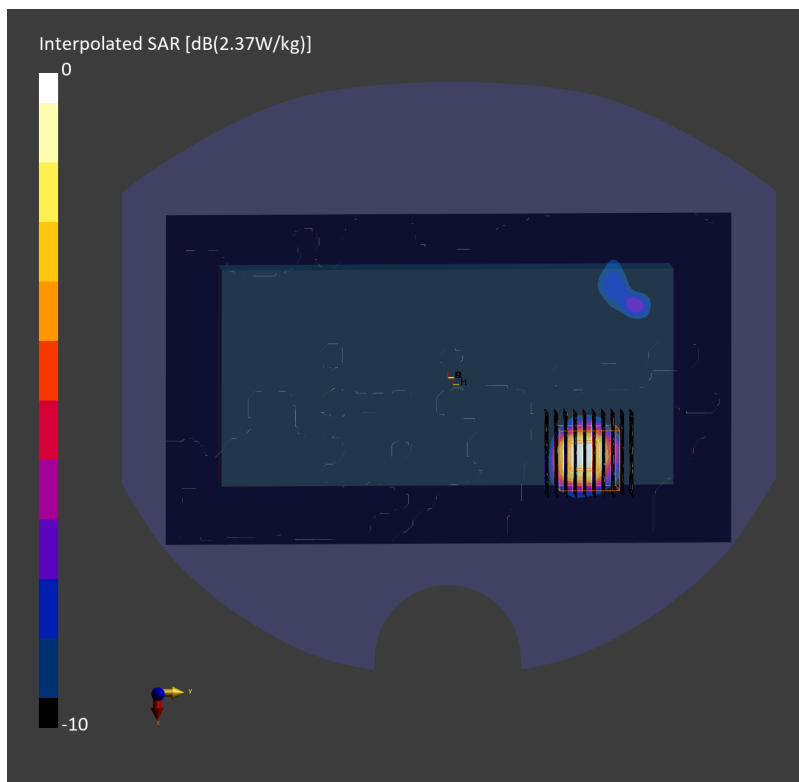

#22_NFC_ASK_Back_0mm

Communication System: NFC; Frequency: 13.56 MHz

Medium: HSL_4-250_260130 Medium parameters used: $f = 14$ MHz; $\sigma = 0.749$ S/m; $\epsilon_r = 56.982$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(14.31, 15.32, 17.61) @ 13.56 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.866 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.69 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.119 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 36.6%

Maximum value of SAR (measured) = 0.726 W/kg

