

System Check_Head_13MHz

DUT: CLA13-1022

Communication System: CW; Frequency: 13 MHz

Medium: HSL_4-250_260331 Medium parameters used: $f = 13$ MHz; $\sigma = 0.749$ S/m; $\epsilon_r = 57.136$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(14.31, 15.32, 17.61) @ 13 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2025/6/11
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.173 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.07 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.077 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.168 W/kg

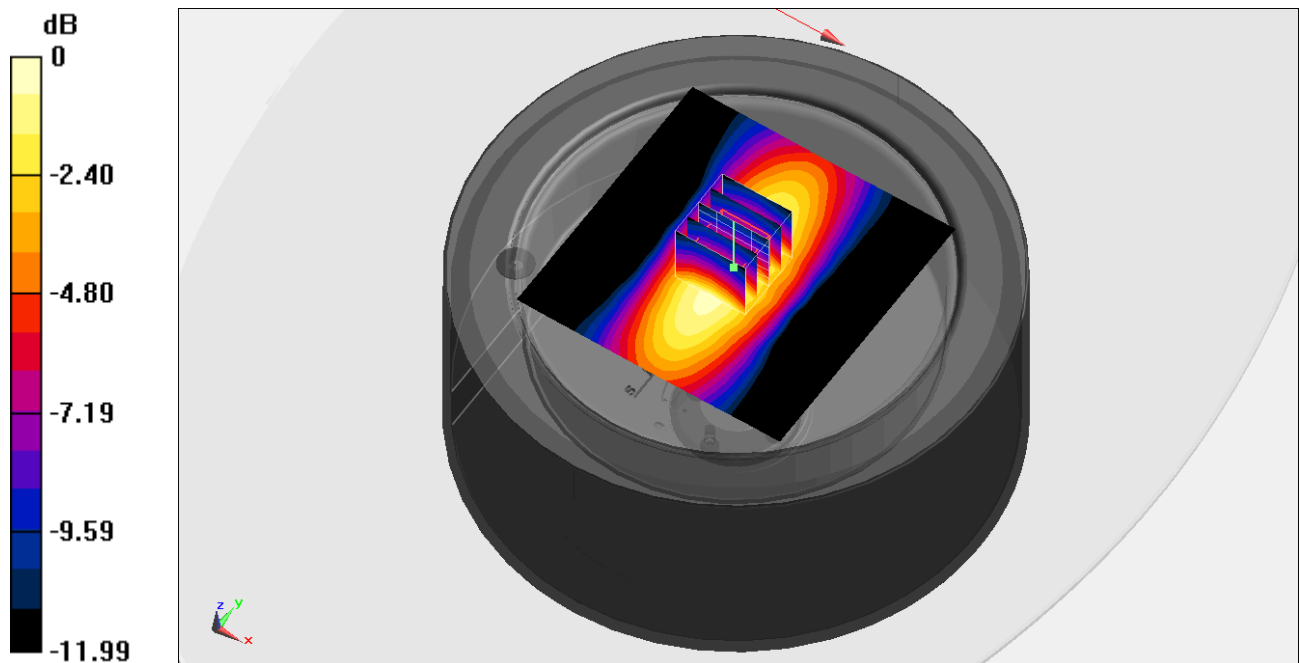

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260116 Medium parameters used: $f = 750$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 44.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.98 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.566 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.7%

Maximum value of SAR (measured) = 1.10 W/kg

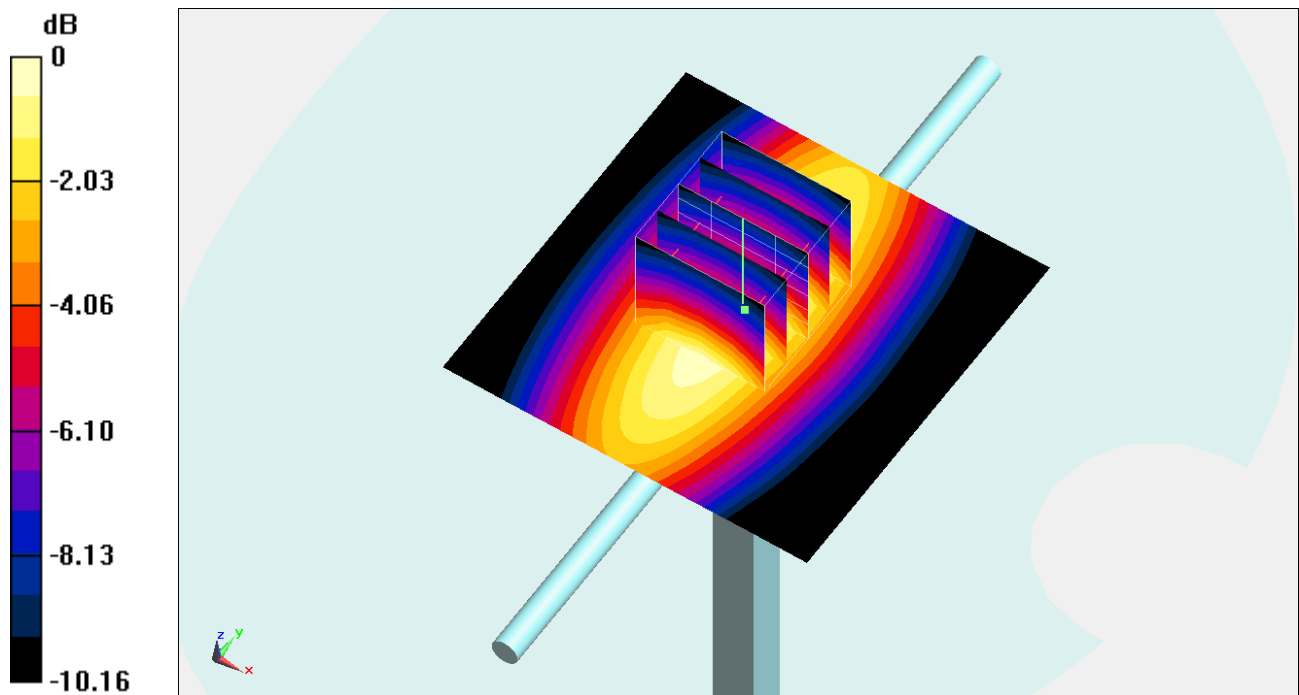

0 dB = 1.10 W/kg = 0.41 dBW/kg

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260119 Medium parameters used: $f = 750$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.741$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.14 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.12 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.582 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 69%

Maximum value of SAR (measured) = 1.14 W/kg

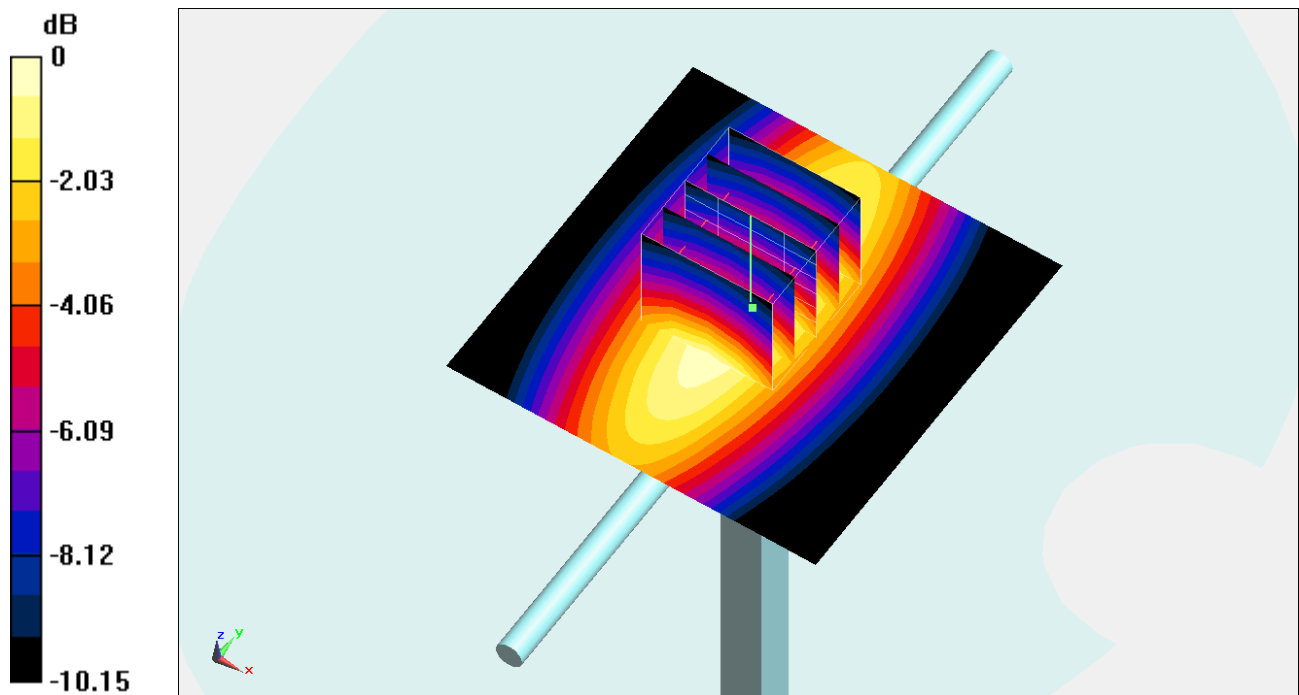

0 dB = 1.14 W/kg = 0.57 dBW/kg

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260203 Medium parameters used: $f = 750$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.648$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.95 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.564 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 69%

Maximum value of SAR (measured) = 1.10 W/kg

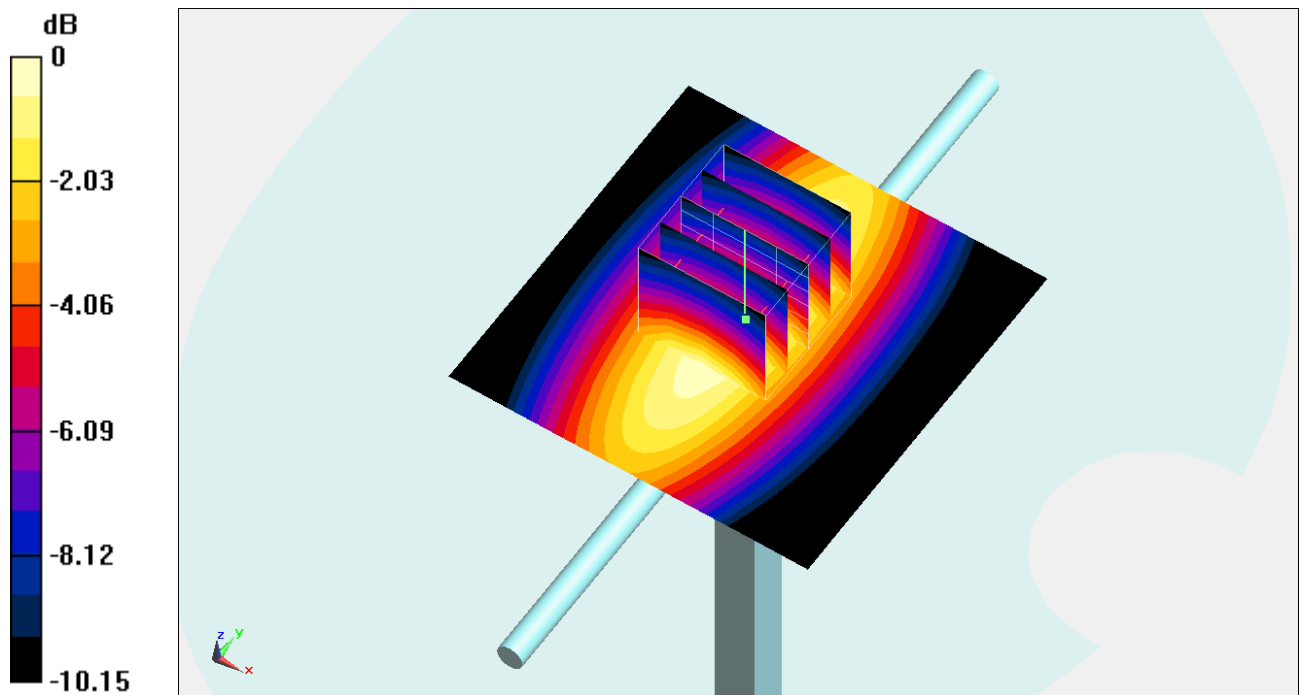

0 dB = 1.10 W/kg = 0.41 dBW/kg

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 750$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 44.232$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 750 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.65 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.88 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.4 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.2%

Maximum value of SAR (measured) = 2.65 W/kg

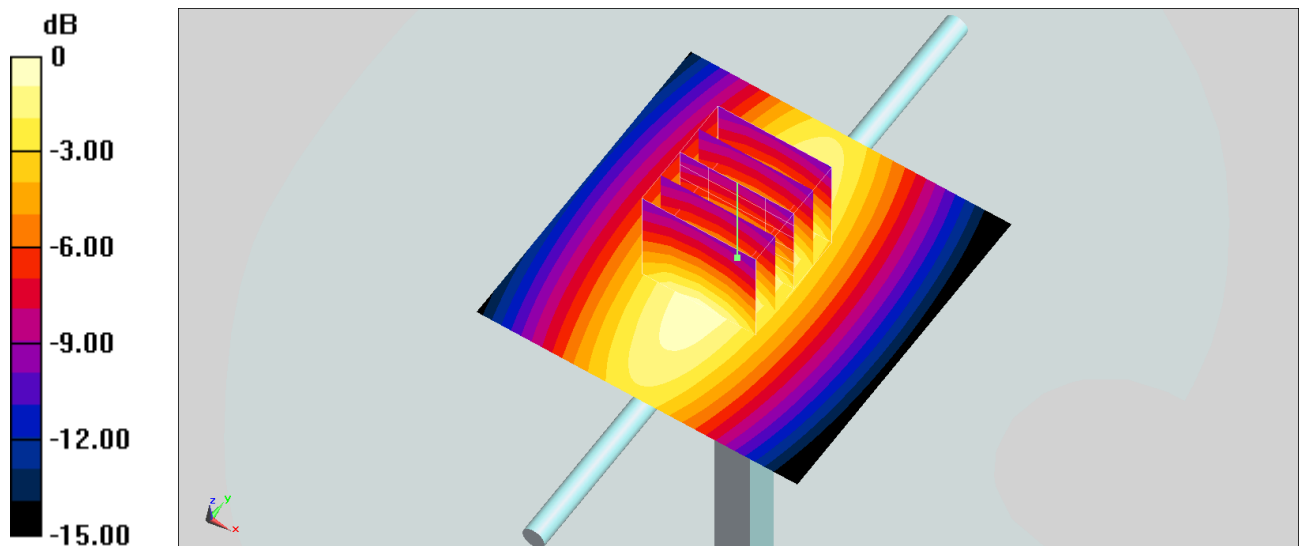

0 dB = 2.65 W/kg = 4.23 dBW/kg

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 750$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 43.288$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.70 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.574 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 68.2%

Maximum value of SAR (measured) = 1.13 W/kg

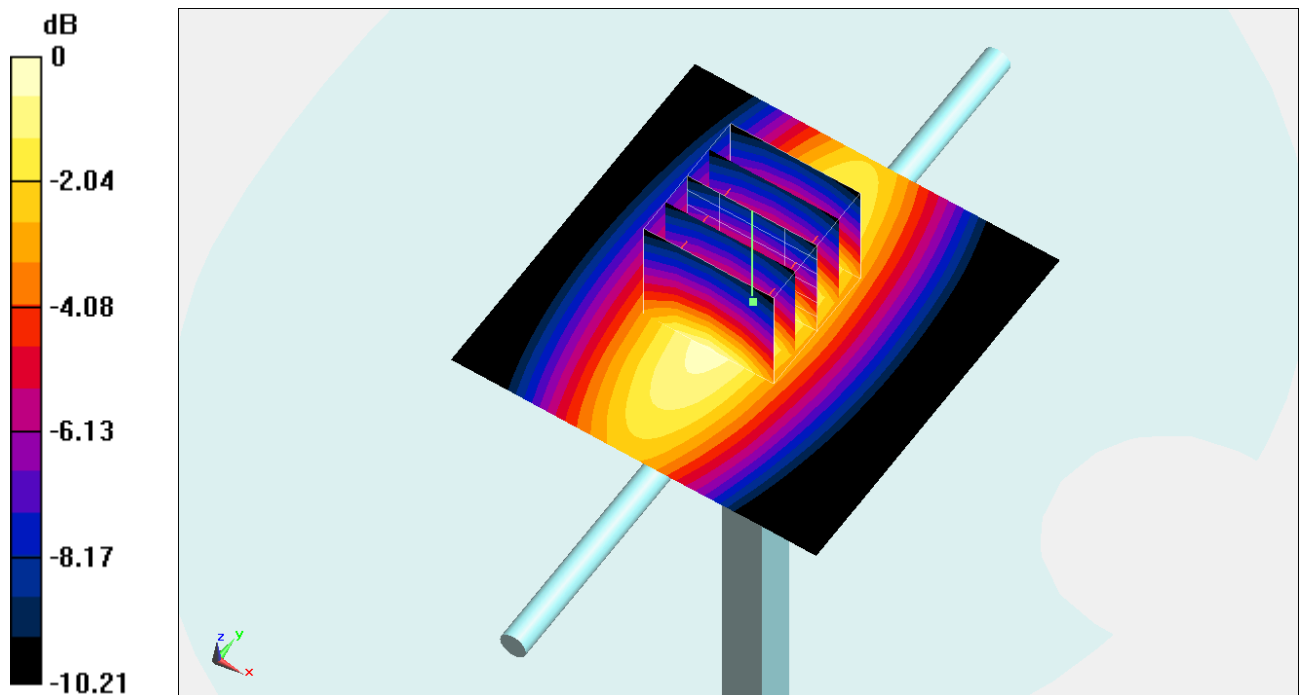

0 dB = 1.13 W/kg = 0.53 dBW/kg

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 750$ MHz; $\sigma = 0.847$ S/m; $\epsilon_r = 44.253$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 750 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.65 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.72 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.93 W/kg

SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.39 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 19.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.1%

Maximum value of SAR (measured) = 2.64 W/kg

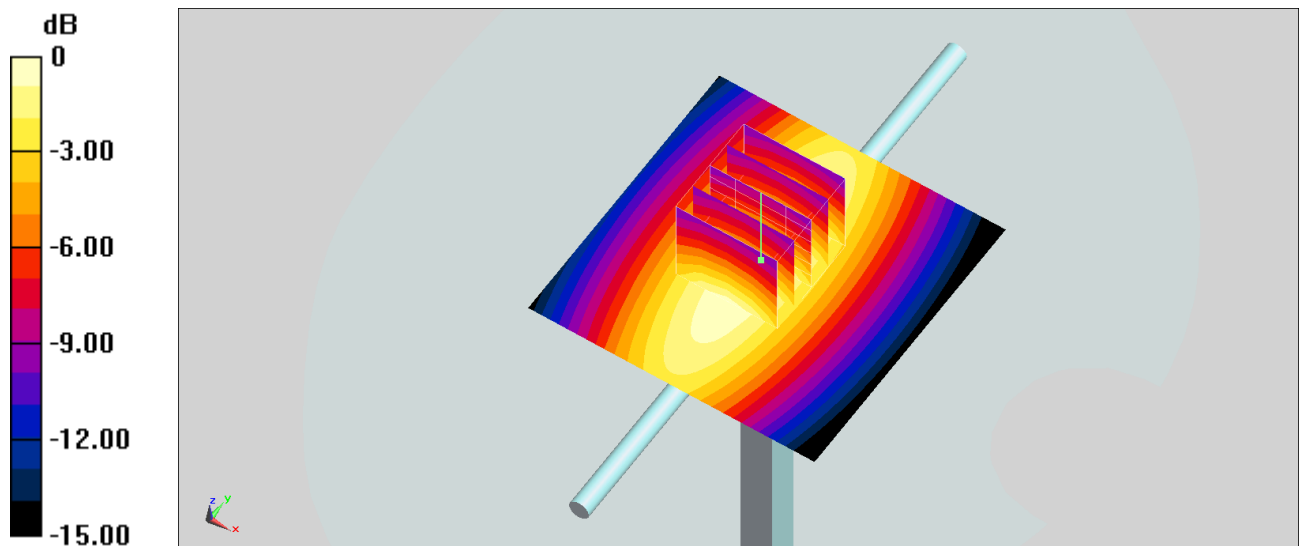

0 dB = 2.64 W/kg = 4.22 dBW/kg

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 750$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 43.258$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.10 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 37.57 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.570 W/kg (SAR corrected for target medium)
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 68%
Maximum value of SAR (measured) = 1.11 W/kg

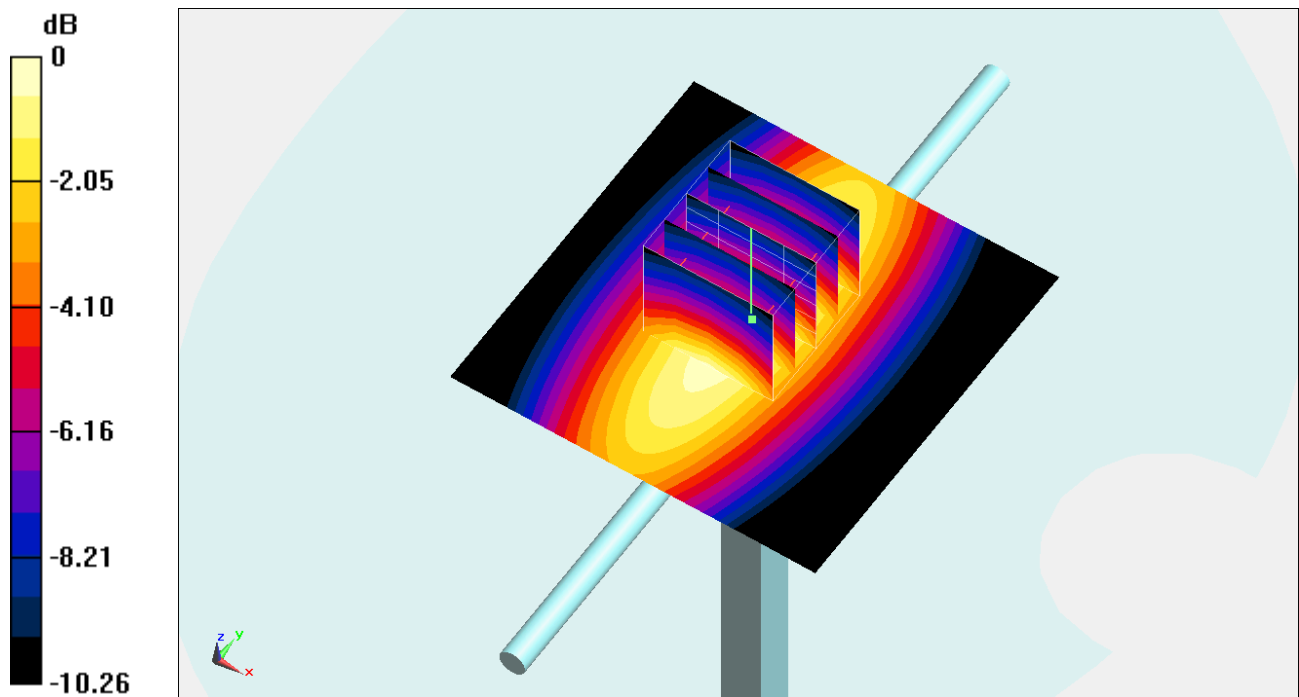

0 dB = 1.11 W/kg = 0.45 dBW/kg

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260301 Medium parameters used: $f = 750$ MHz; $\sigma = 0.84$ S/m; $\epsilon_r = 44.596$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 750 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.60 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.69 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.38 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.2%

Maximum value of SAR (measured) = 2.60 W/kg

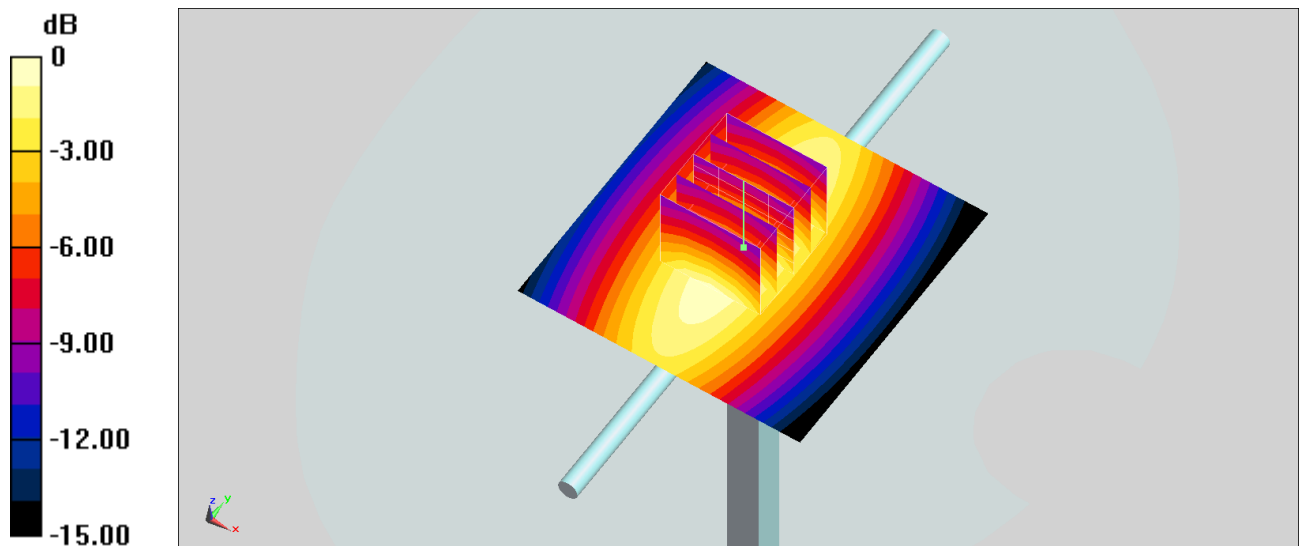

0 dB = 2.60 W/kg = 4.15 dBW/kg

System Check_Head_750MHz

DUT: D750V3-1012

Communication System: CW; Frequency: 750 MHz

Medium: HSL_600-7200_260301 Medium parameters used: $f = 750$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 44.29$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.97 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.566 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 69%

Maximum value of SAR (measured) = 1.11 W/kg

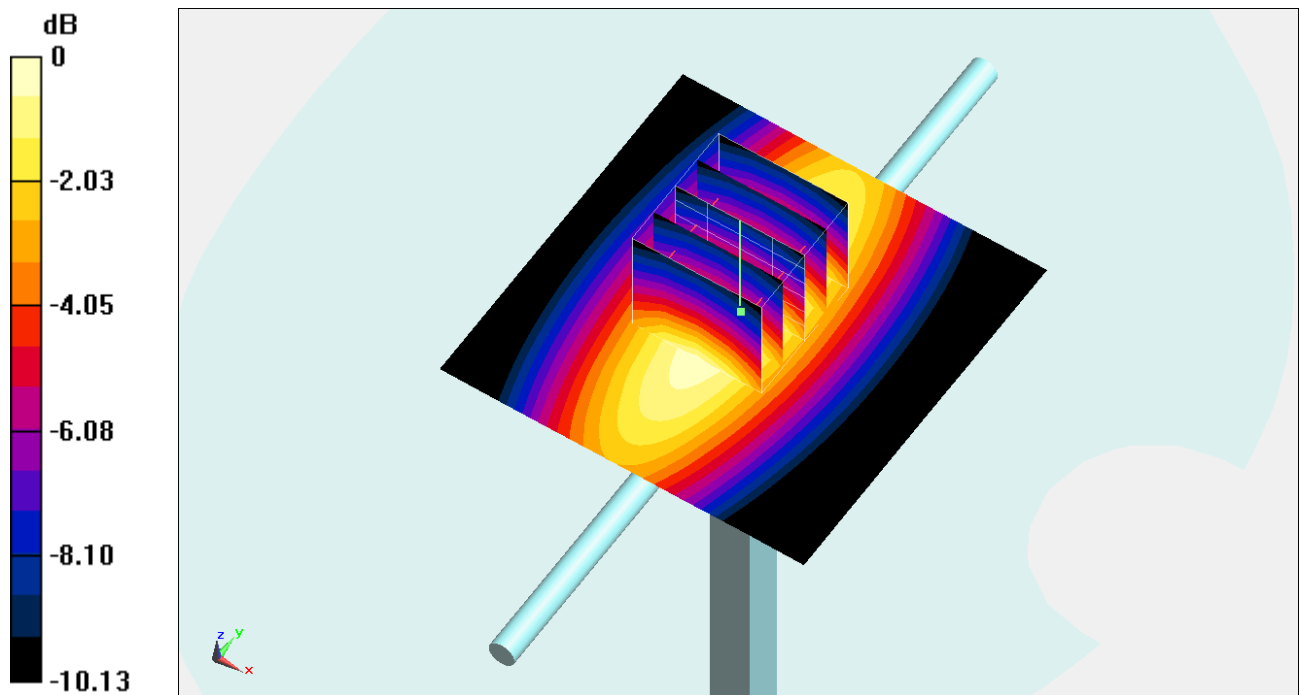

0 dB = 1.11 W/kg = 0.45 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260118 Medium parameters used: $f = 835$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 835 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.26 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 38.56 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.638 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 68.7%

Maximum value of SAR (measured) = 1.26 W/kg

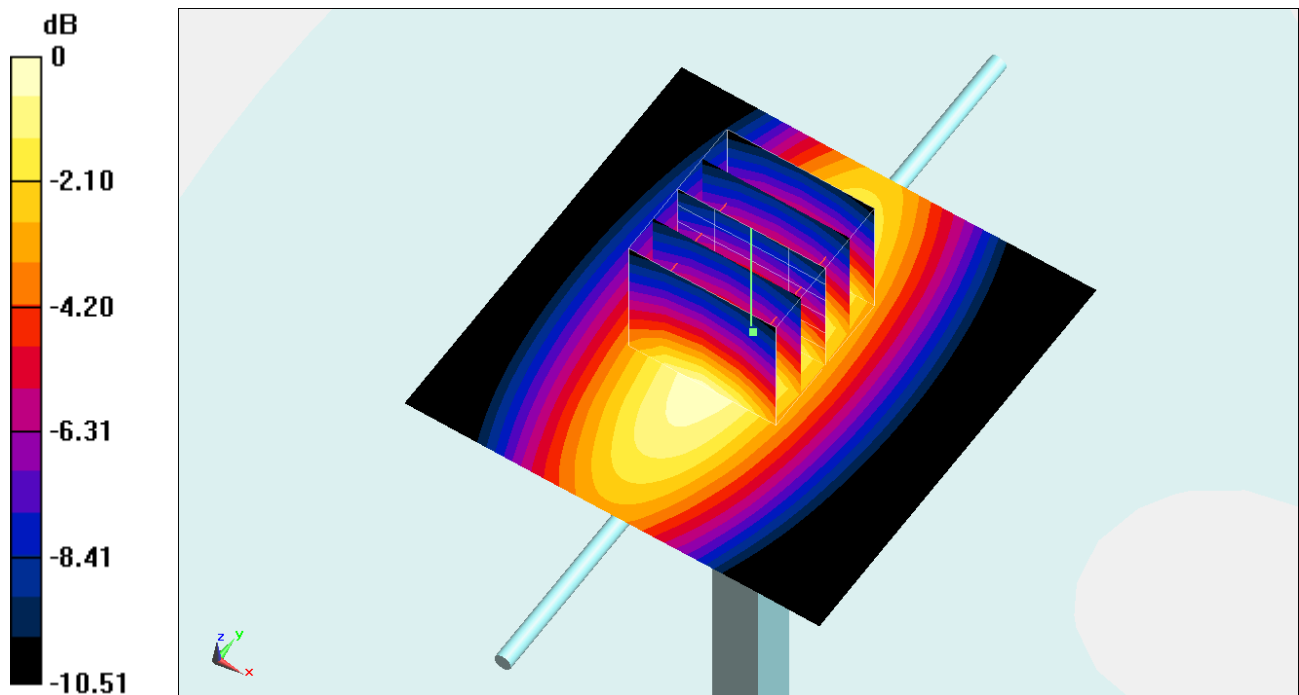

0 dB = 1.26 W/kg = 1.00 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 835$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 44.657$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 835 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.24 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.936 W/kg; SAR(10 g) = 0.618 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 68.8%

Maximum value of SAR (measured) = 1.22 W/kg

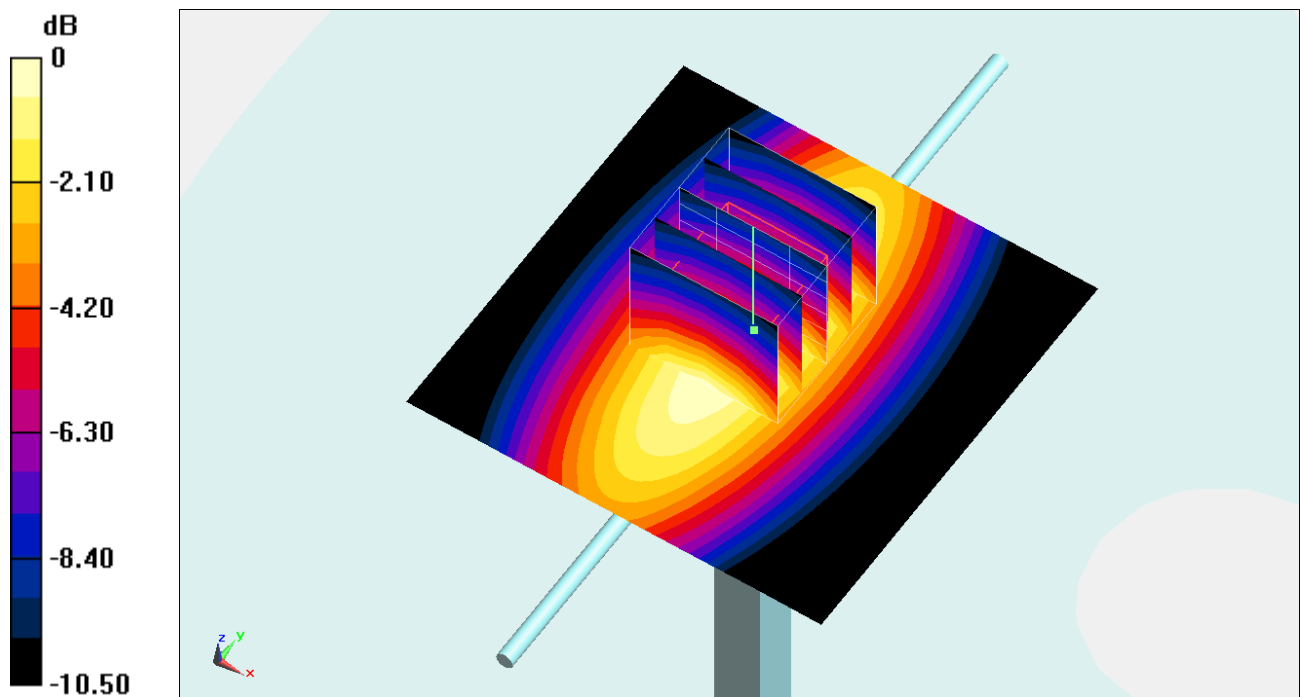

0 dB = 1.22 W/kg = 0.86 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260203 Medium parameters used: $f = 835$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.407$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 835 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.22 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 38.49 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.933 W/kg; SAR(10 g) = 0.612 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 68.9%

Maximum value of SAR (measured) = 1.22 W/kg

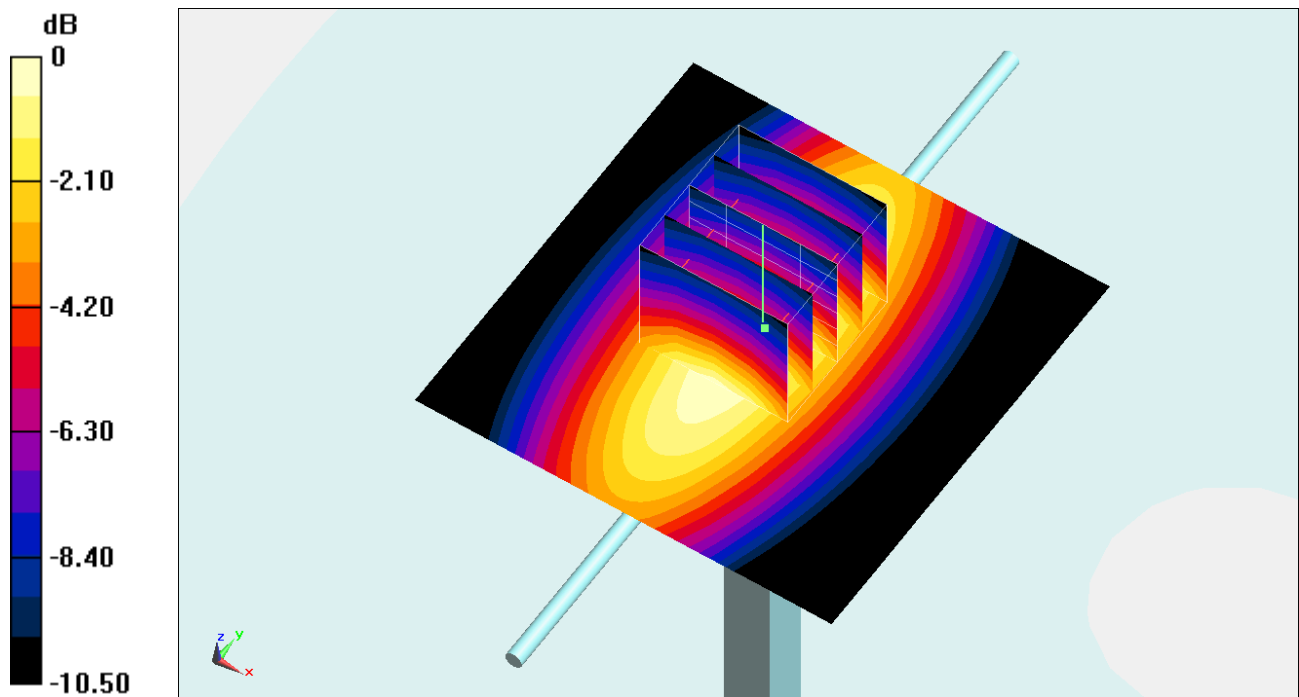

0 dB = 1.22 W/kg = 0.86 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 835$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 44.048$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17) @ 835 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 3.15 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 62.85 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.7%

Maximum value of SAR (measured) = 3.15 W/kg

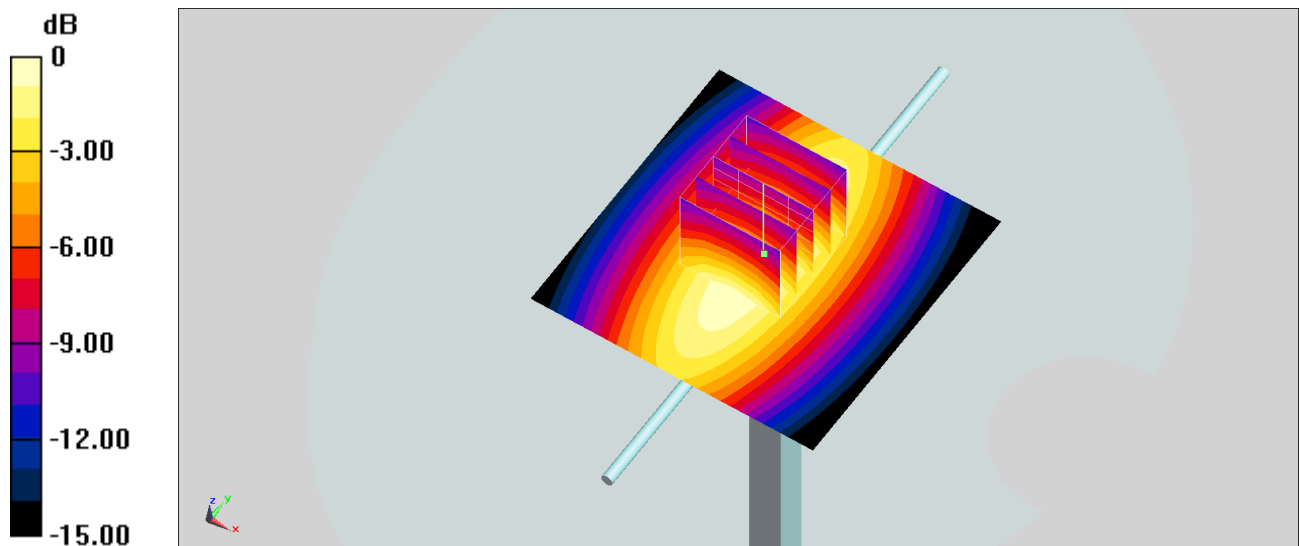

0 dB = 3.15 W/kg = 4.98 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 835$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 43.043$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 835 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.18 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 38.43 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.608 W/kg (SAR corrected for target medium)
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 68.7%
Maximum value of SAR (measured) = 1.18 W/kg

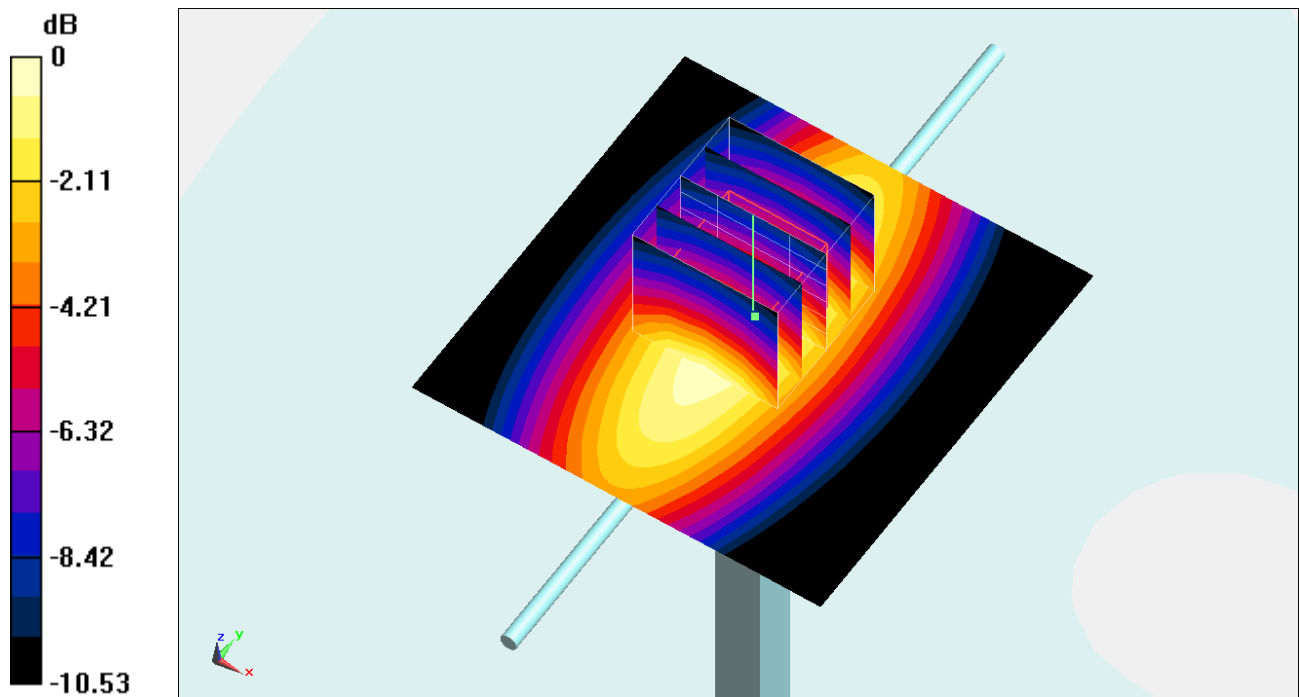

0 dB = 1.18 W/kg = 0.72 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 835$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 44.15$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17) @ 835 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.17 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.62 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.61 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 67.9%

Maximum value of SAR (measured) = 3.15 W/kg

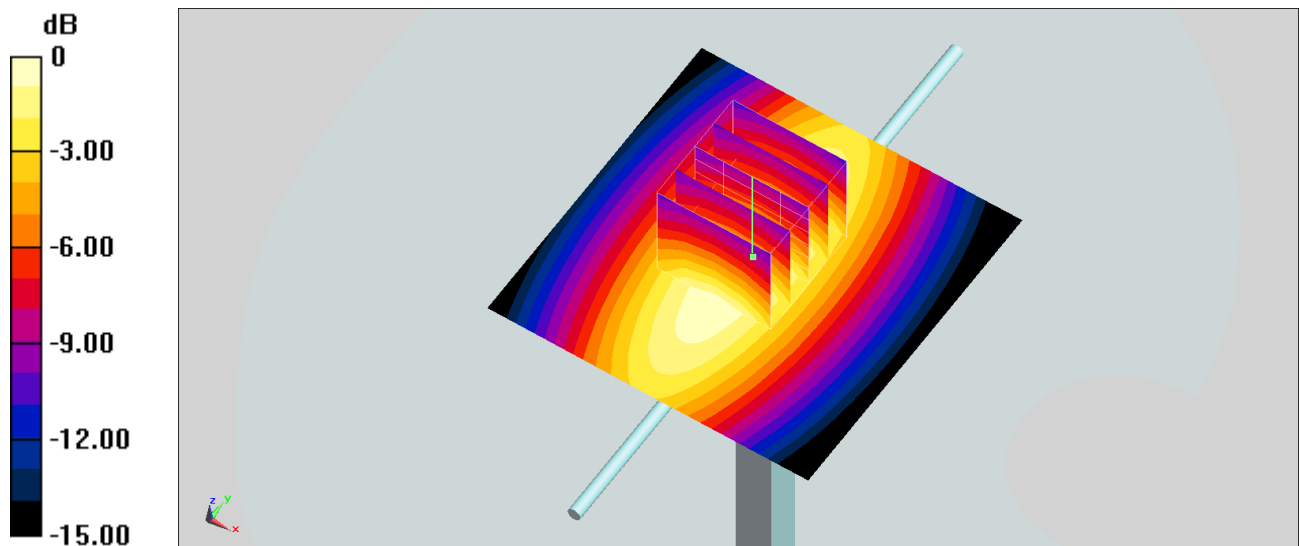

0 dB = 3.15 W/kg = 4.98 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 45.089$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 835 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.62 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.612 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 68.4%

Maximum value of SAR (measured) = 1.19 W/kg

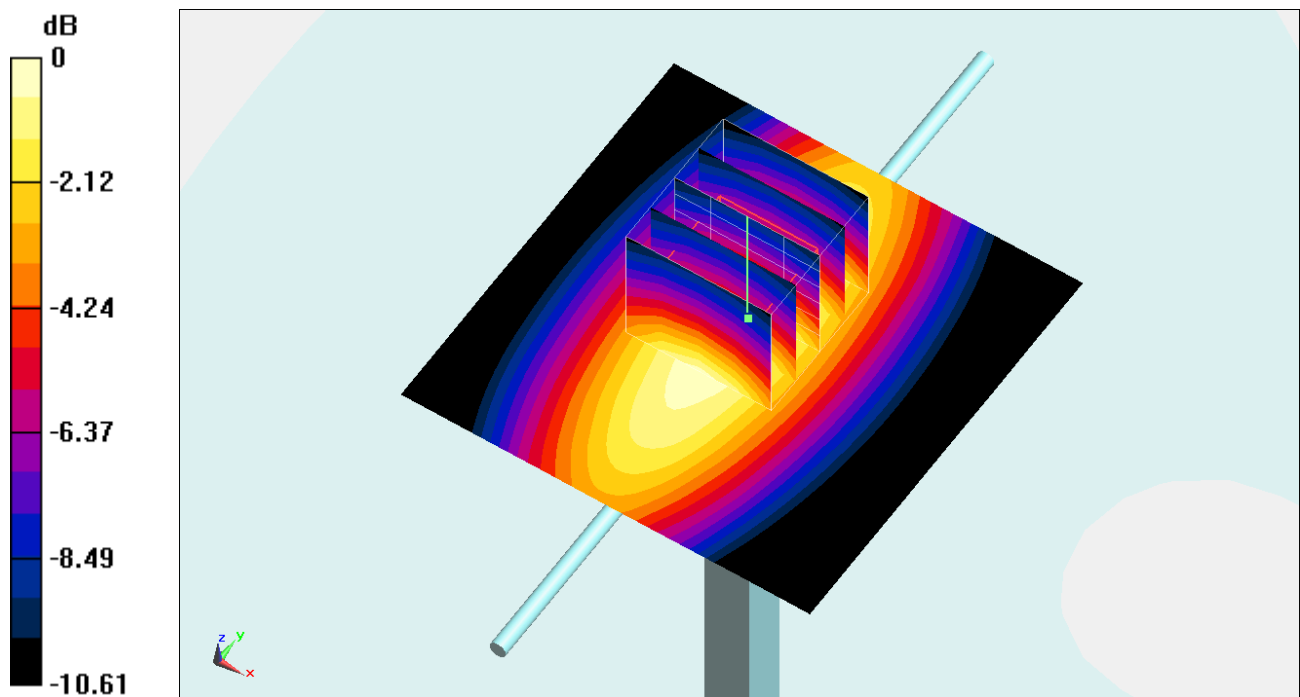

0 dB = 1.19 W/kg = 0.76 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260301 Medium parameters used: $f = 835$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 44.391$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17) @ 835 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.21 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 63.81 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.52 W/kg; SAR(10 g) = 1.65 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 68.1%

Maximum value of SAR (measured) = 3.21 W/kg

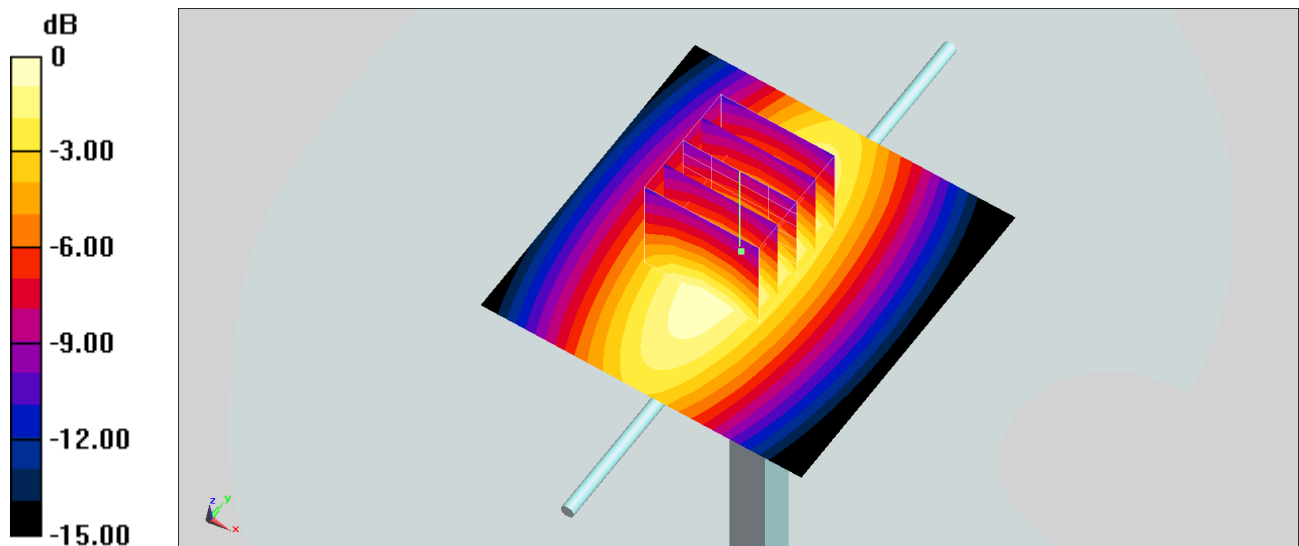

0 dB = 3.21 W/kg = 5.07 dBW/kg

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz

Medium: HSL_600-7200_260301 Medium parameters used: $f = 835$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 44.086$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 835 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.22 W/kg

Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 38.40 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.629 W/kg (SAR corrected for target medium)
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 68.7%
Maximum value of SAR (measured) = 1.22 W/kg

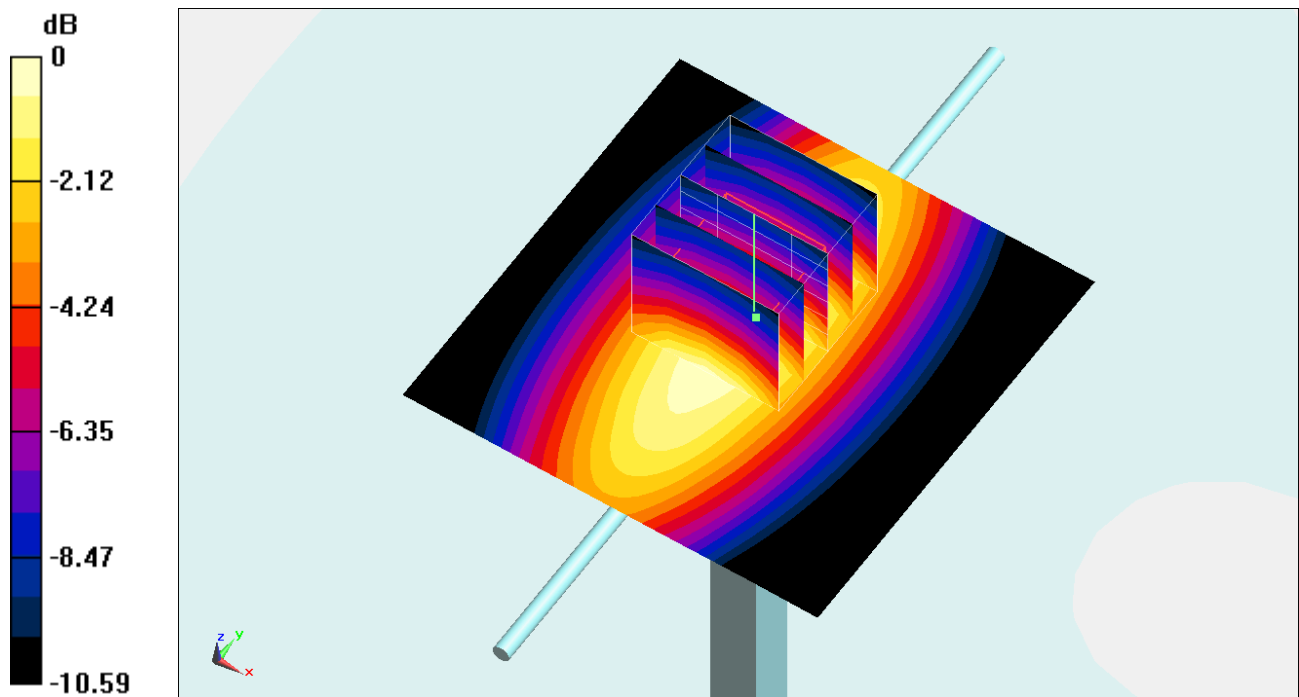

0 dB = 1.22 W/kg = 0.86 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260114 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 42.745$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.72 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.23 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 1.79 W/kg; SAR(10 g) = 0.948 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 2.61 W/kg

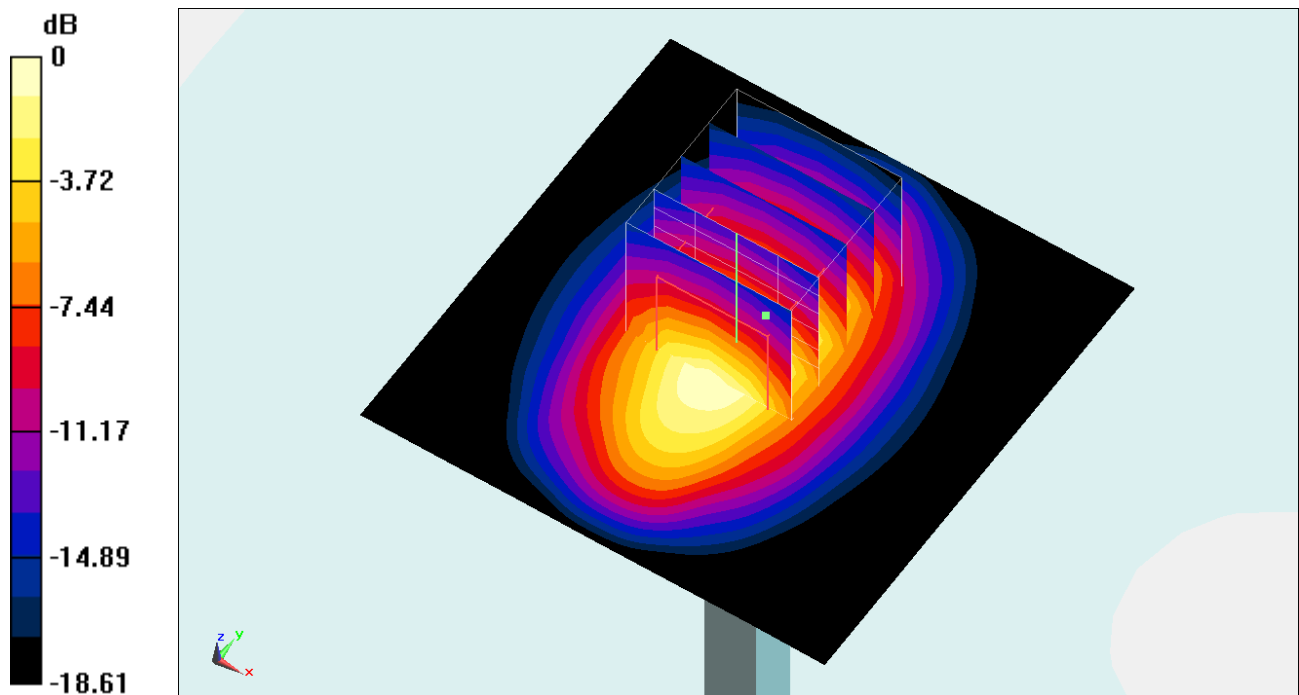

0 dB = 2.61 W/kg = 4.17 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260122 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.805$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.78 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.09 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 1.79 W/kg; SAR(10 g) = 0.958 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 2.67 W/kg

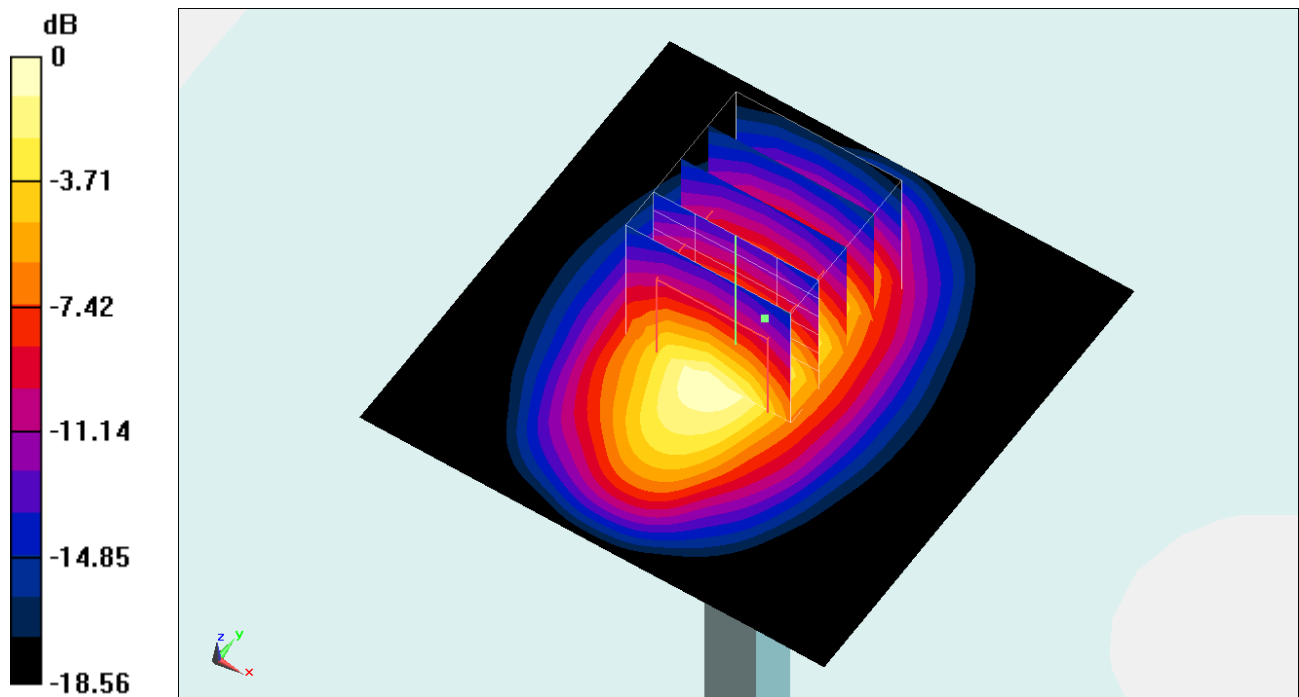

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 42.852$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.84 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.61 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 1.84 W/kg; SAR(10 g) = 0.980 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 2.67 W/kg

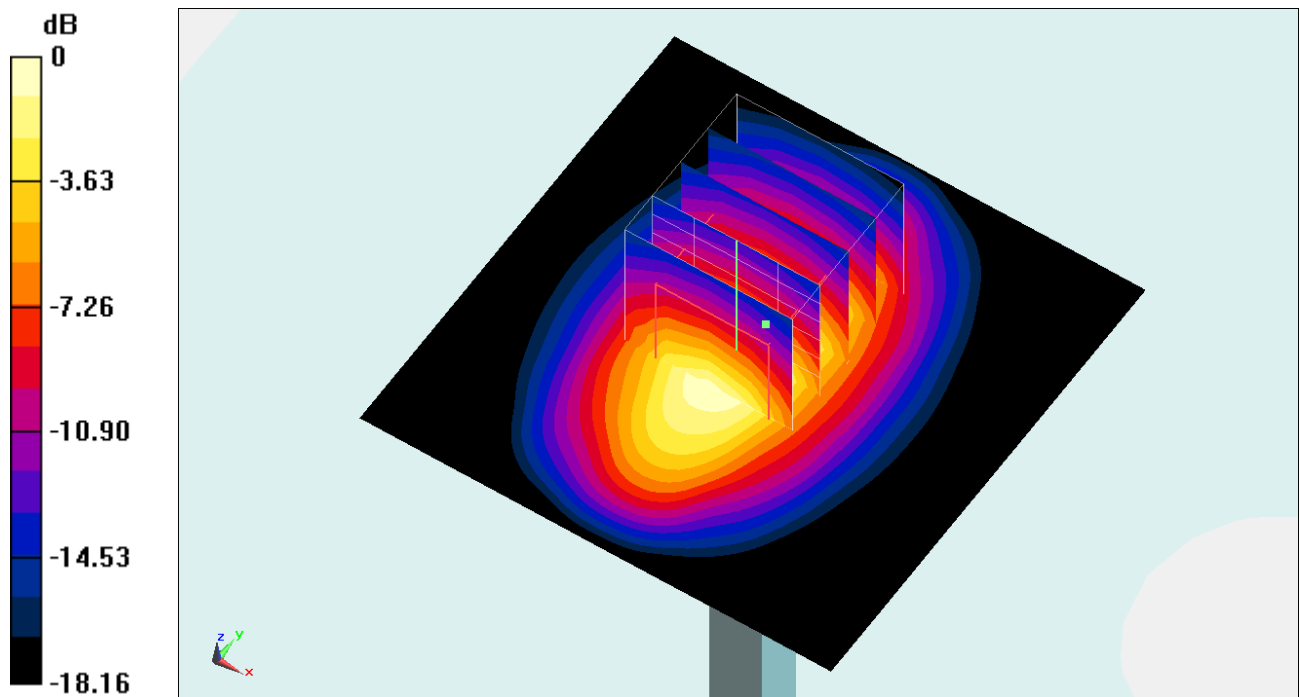

0 dB = 2.67 W/kg = 4.27 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260204 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 40.73$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.85 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.70 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 1.81 W/kg; SAR(10 g) = 0.973 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 2.68 W/kg

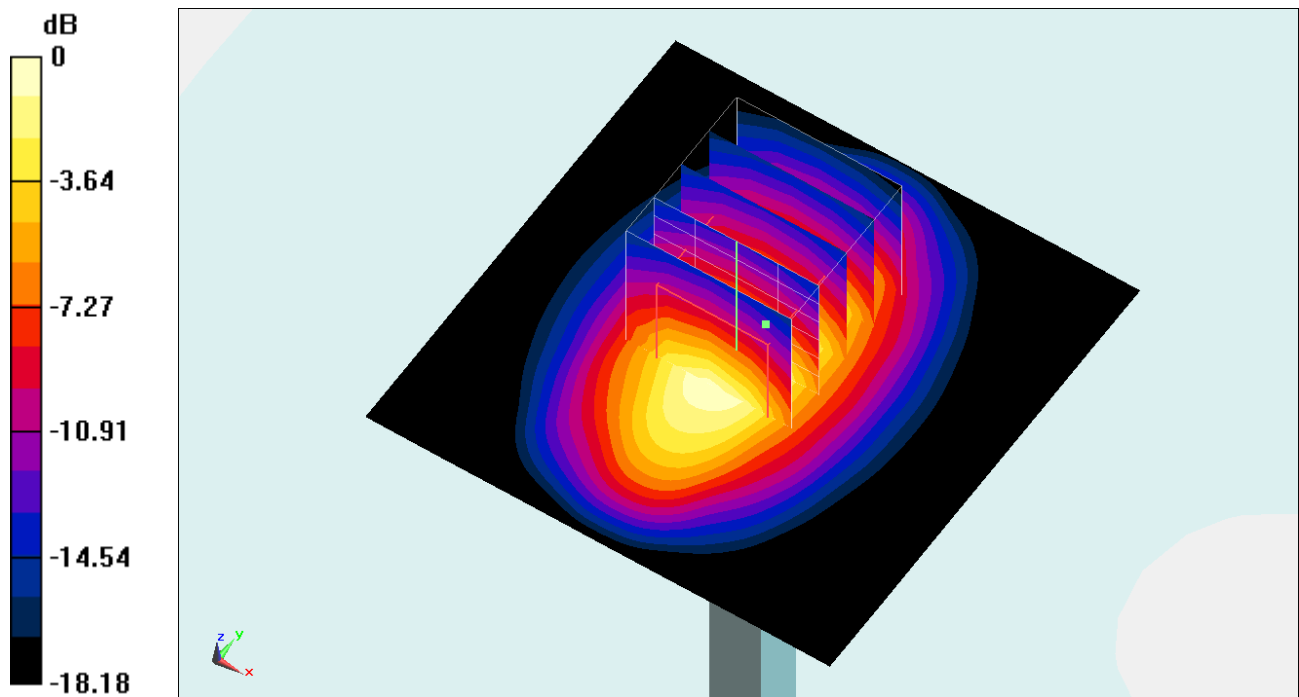

0 dB = 2.68 W/kg = 4.28 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260209 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 42.442$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1750 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.86 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.59 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 1.89 W/kg; SAR(10 g) = 0.998 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 2.80 W/kg

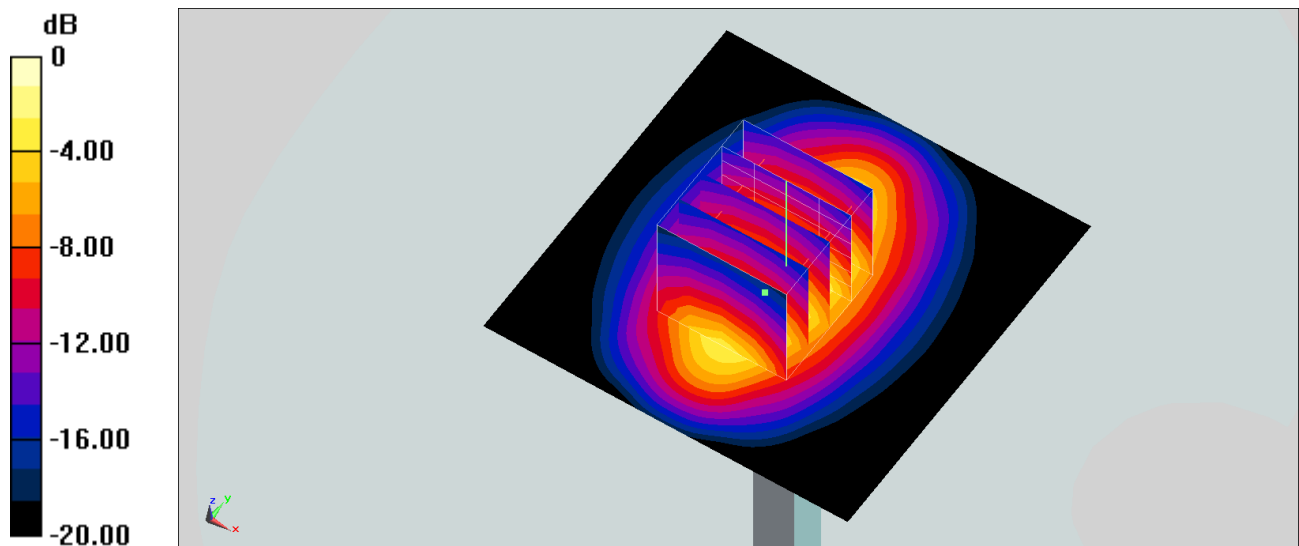

0 dB = 2.80 W/kg = 4.47 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260209 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 41.227$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.69 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.84 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 1.74 W/kg; SAR(10 g) = 0.938 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 2.60 W/kg

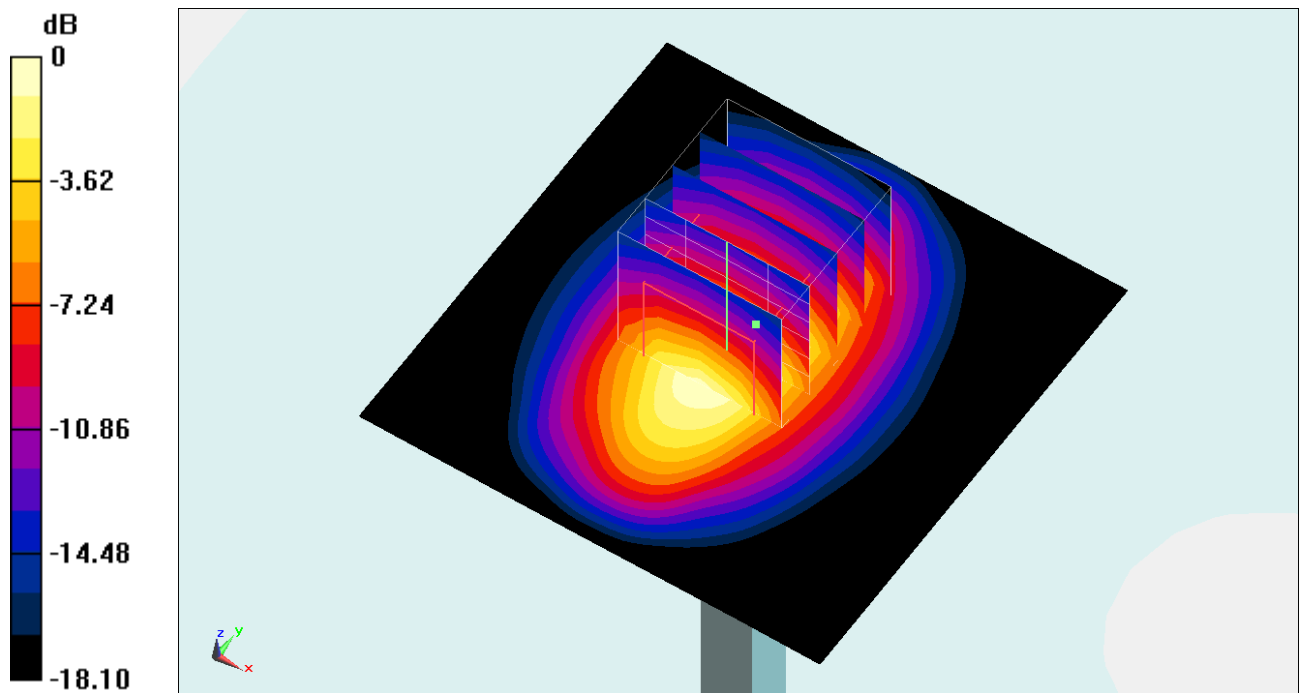

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 42.463$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1750 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.85 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.63 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 1.91 W/kg; SAR(10 g) = 0.999 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 2.80 W/kg

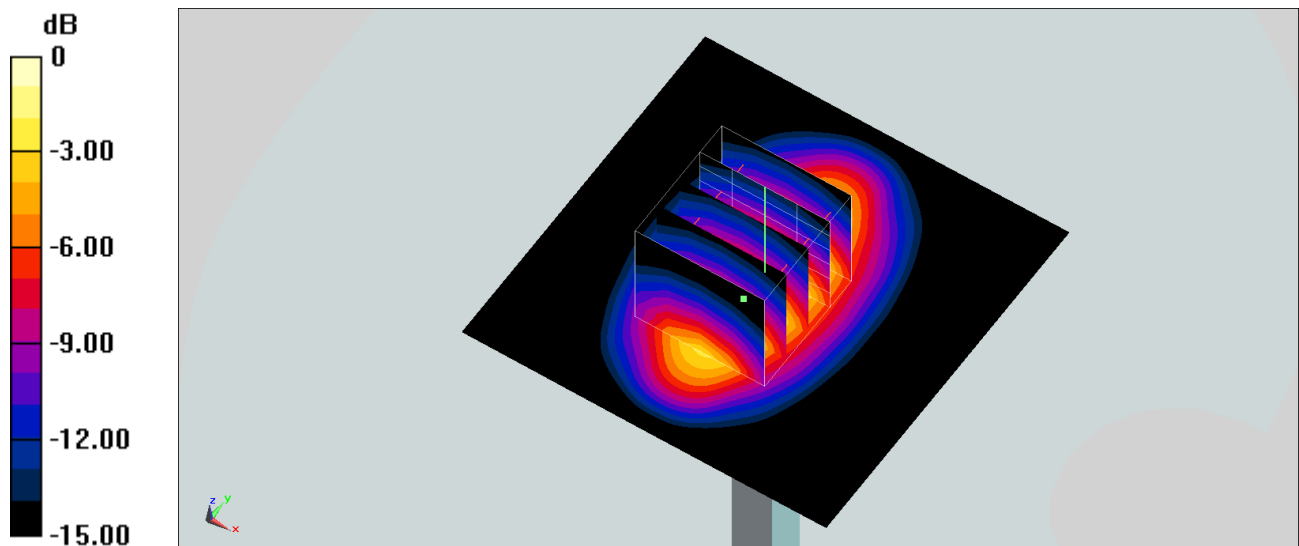

0 dB = 2.80 W/kg = 4.47 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 41.197$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.60 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.85 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 1.69 W/kg; SAR(10 g) = 0.906 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 2.52 W/kg

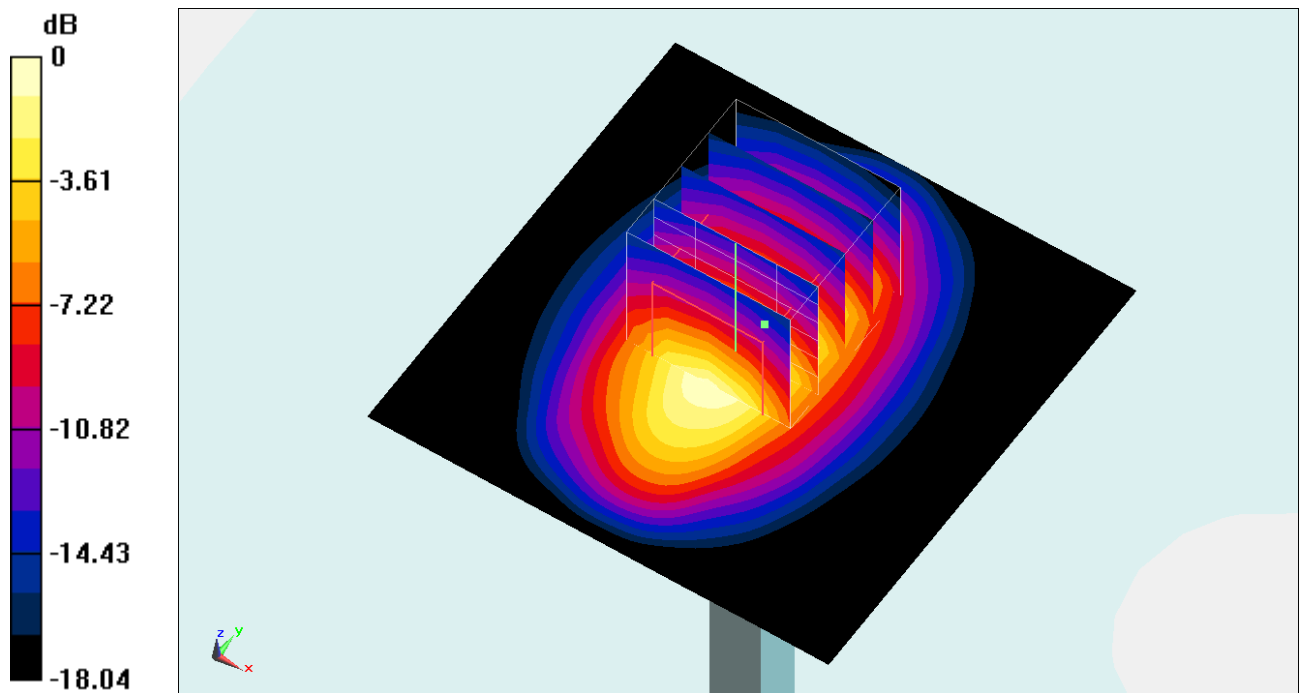

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 42.565$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1750 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.83 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.64 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 1.9 W/kg; SAR(10 g) = 0.997 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 2.78 W/kg

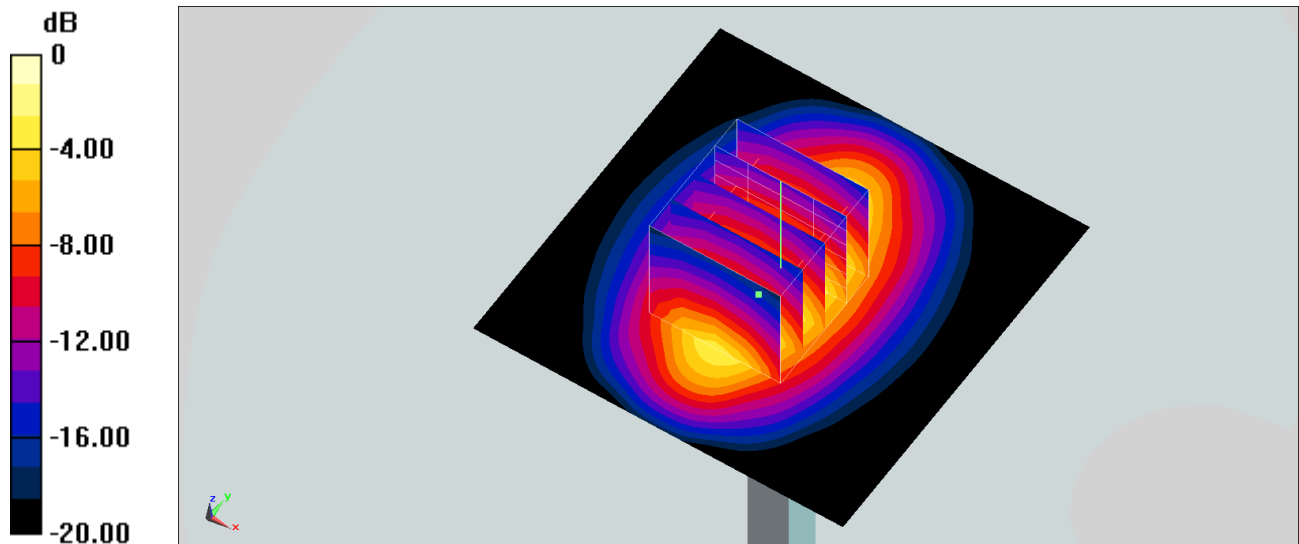

0 dB = 2.78 W/kg = 4.44 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 42.736$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.76 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.09 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 1.76 W/kg; SAR(10 g) = 0.942 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 2.64 W/kg

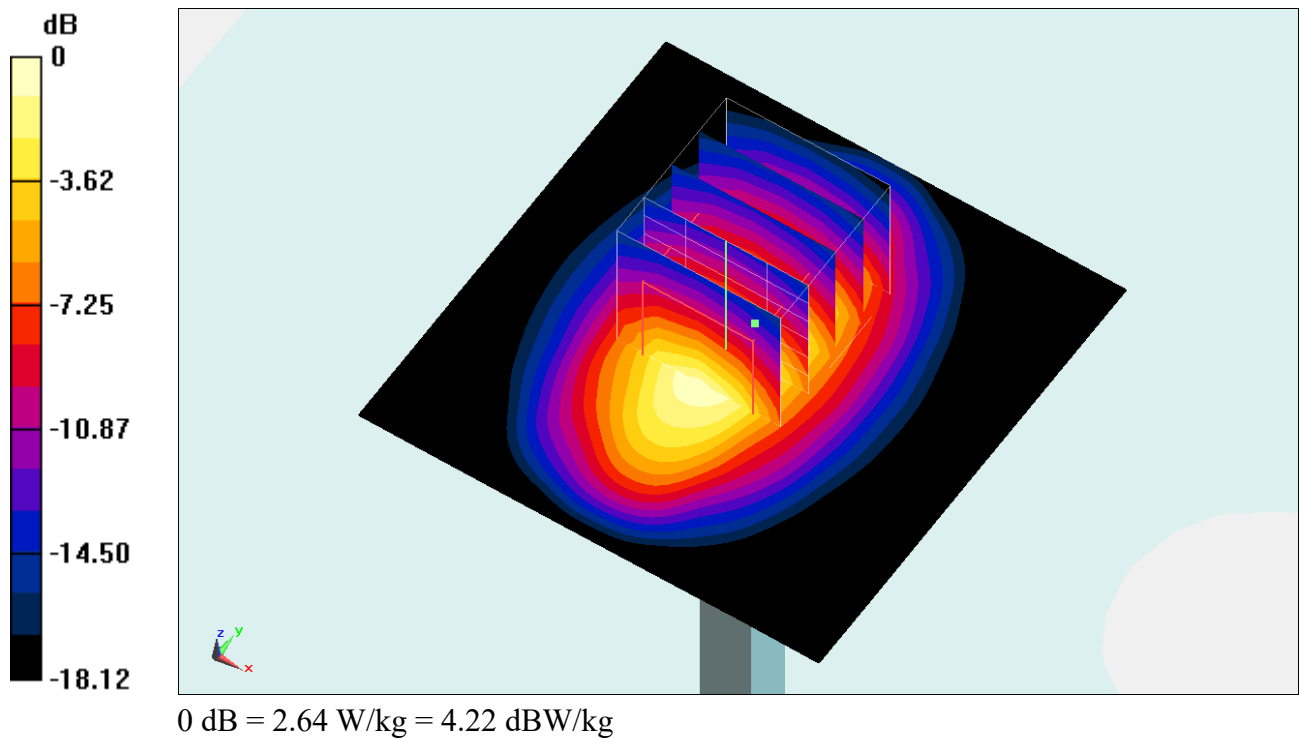

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.332$ S/m; $\epsilon_r = 42.807$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1750 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.82 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.52 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 1.89 W/kg; SAR(10 g) = 0.991 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 2.78 W/kg

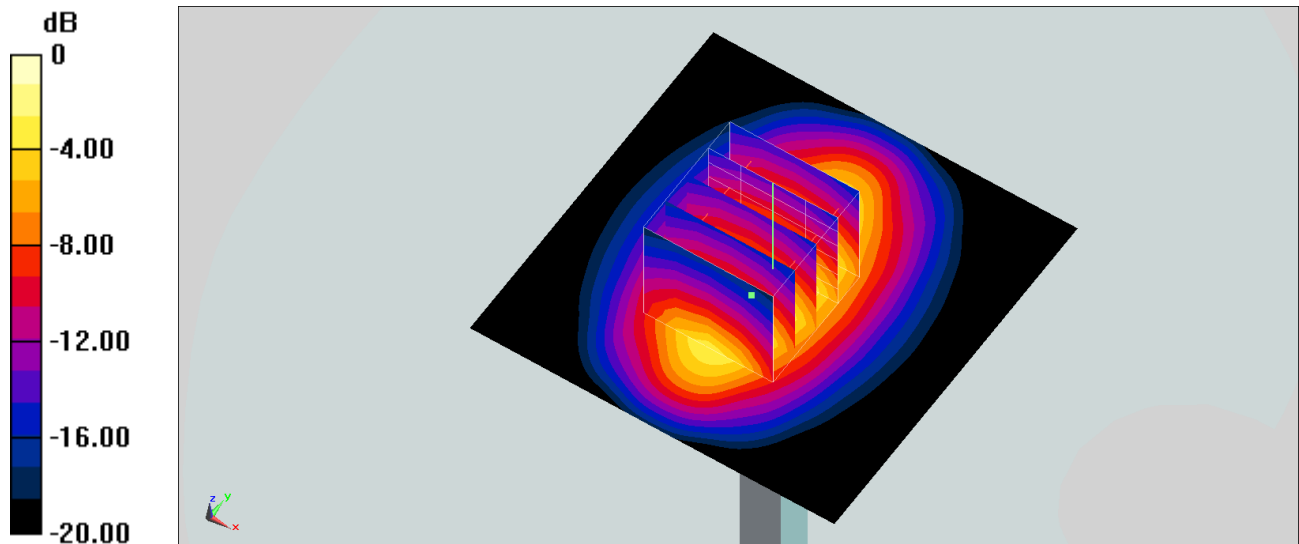

0 dB = 2.78 W/kg = 4.44 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 42.209$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1750 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.87 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.07 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 1.84 W/kg; SAR(10 g) = 0.984 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 2.72 W/kg

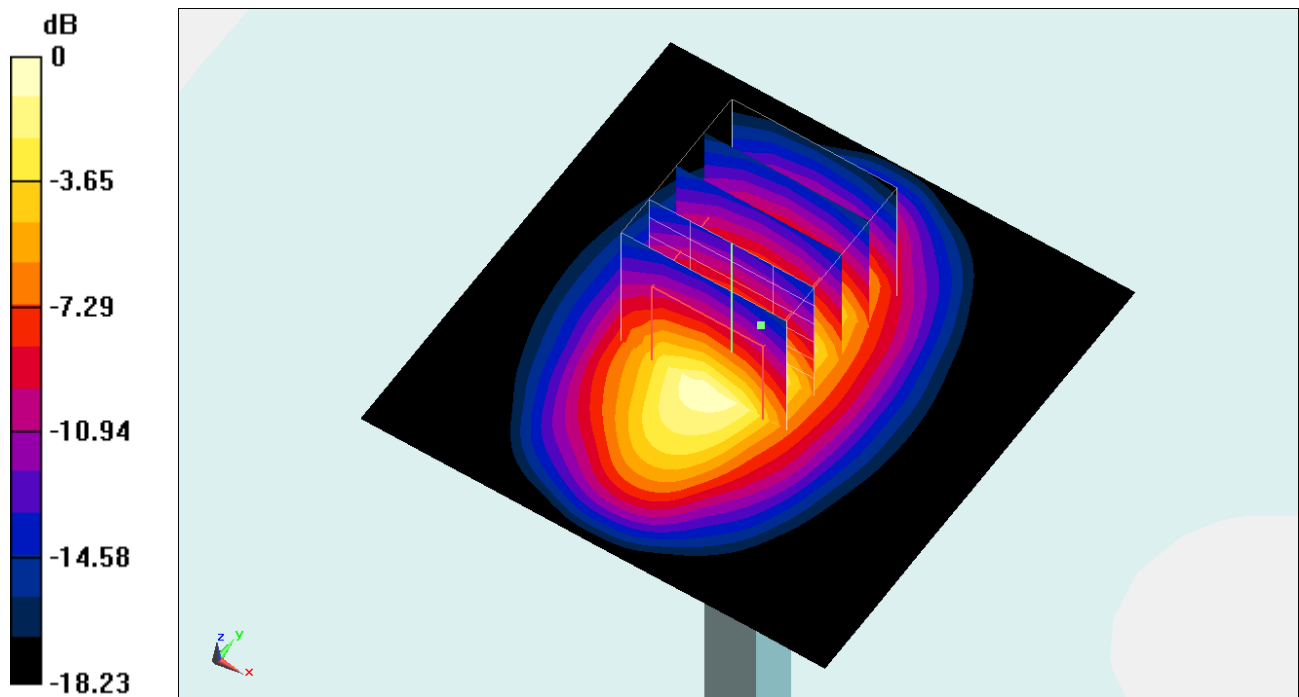

0 dB = 2.72 W/kg = 4.35 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260117 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 42.471$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.98 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.16 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 1.91 W/kg; SAR(10 g) = 0.992 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 2.86 W/kg

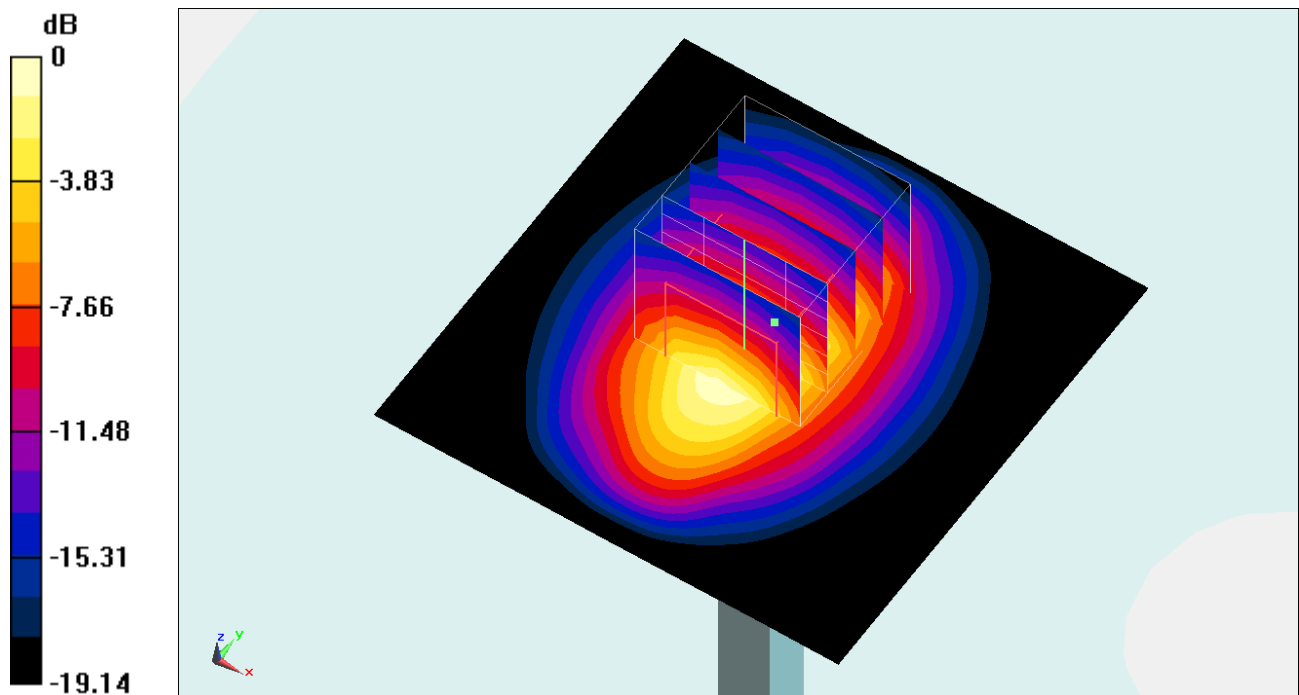

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 42.578$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.99 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.13 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 1.93 W/kg; SAR(10 g) = 0.995 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 2.90 W/kg

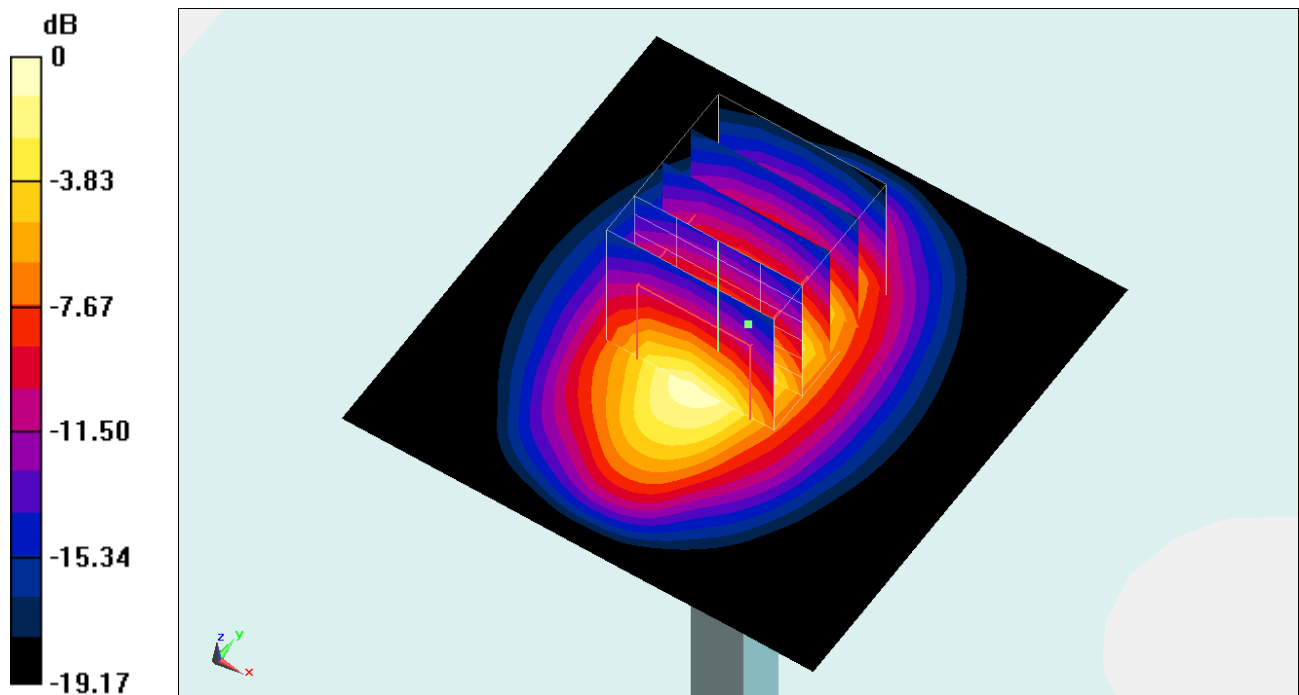

0 dB = 2.90 W/kg = 4.62 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260205 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 40.445$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.97 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.10 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 1.88 W/kg; SAR(10 g) = 0.984 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 2.86 W/kg

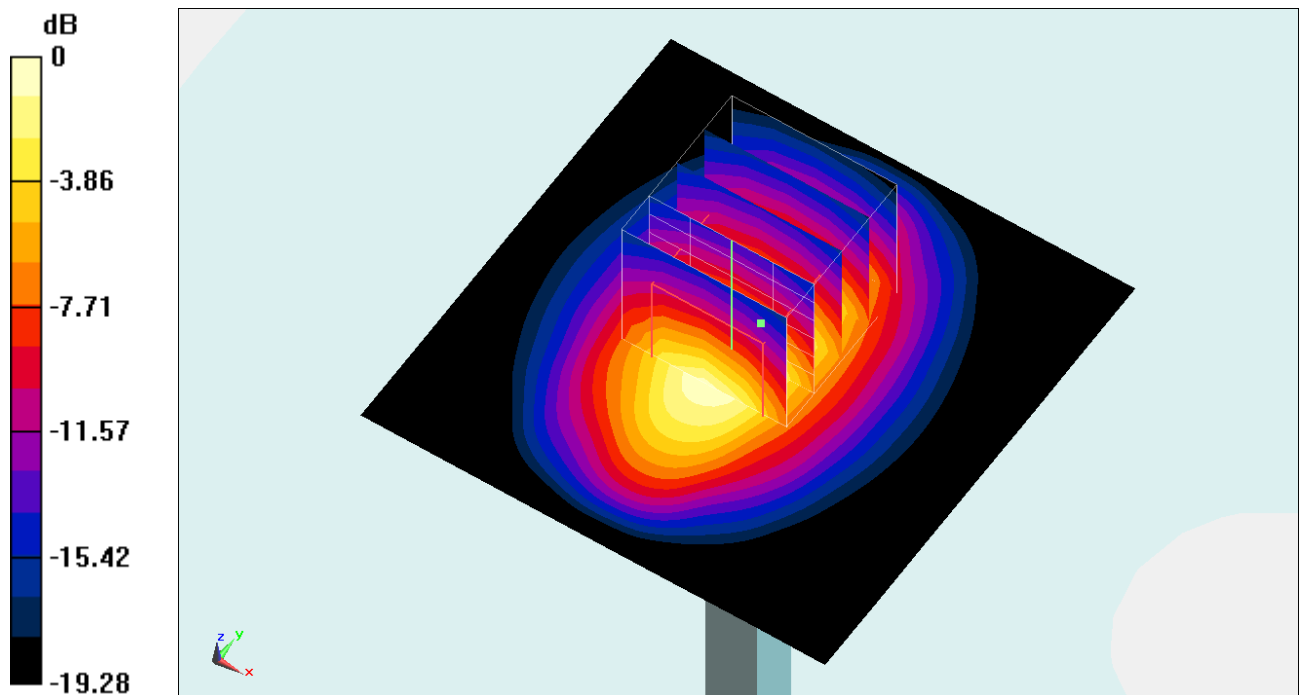

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260212 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 42.217$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35) @ 1900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.18 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.53 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.02 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 3.01 W/kg

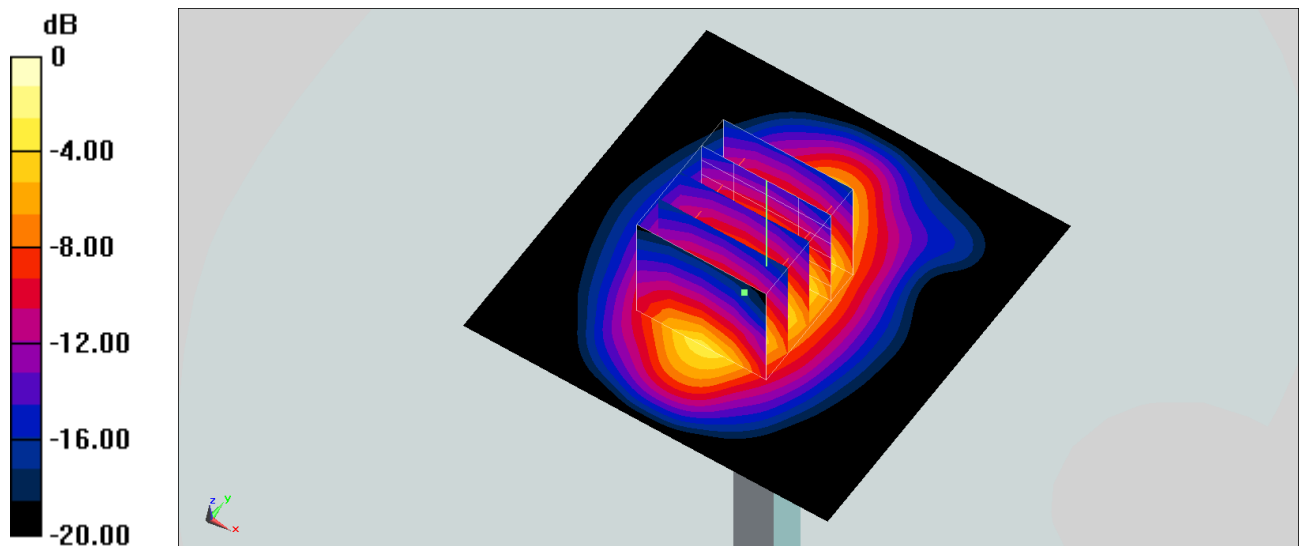

0 dB = 3.01 W/kg = 4.79 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260212 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 41.099$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.06 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.57 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 1.86 W/kg; SAR(10 g) = 0.970 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 2.73 W/kg

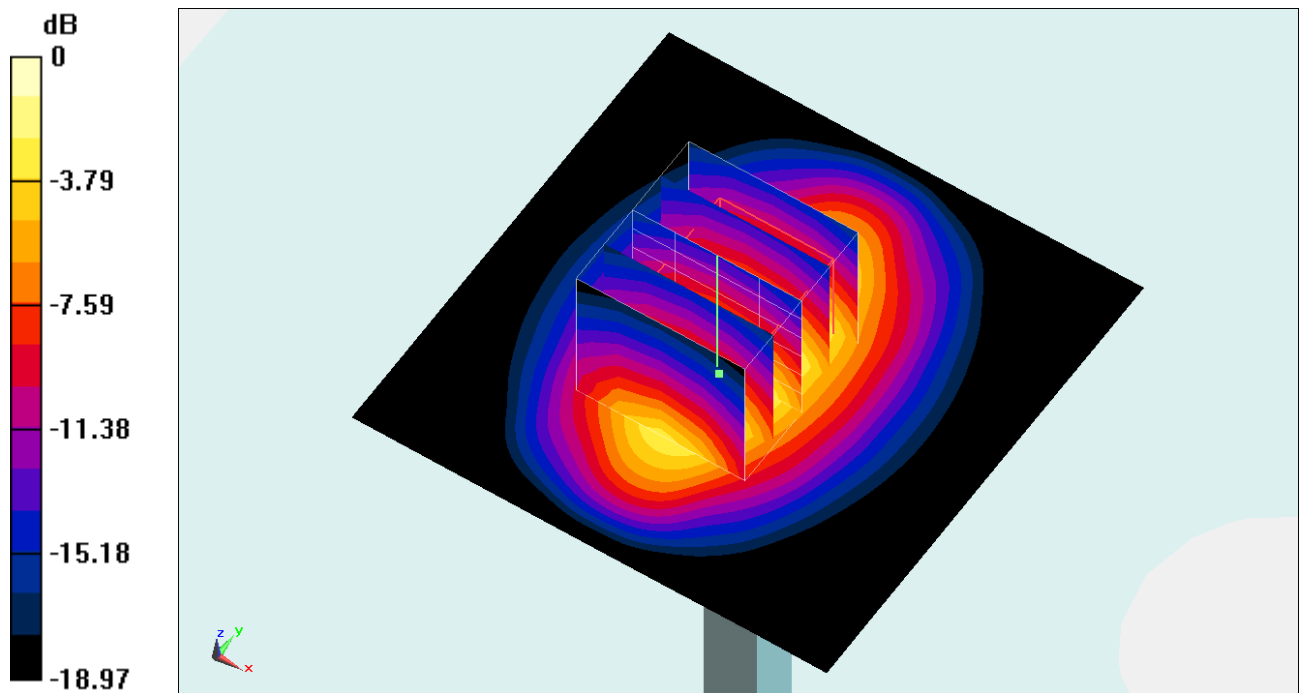

0 dB = 2.73 W/kg = 4.36 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 42.34$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35) @ 1900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.16 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.27 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 1.99 W/kg; SAR(10 g) = 1.03 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 3.00 W/kg

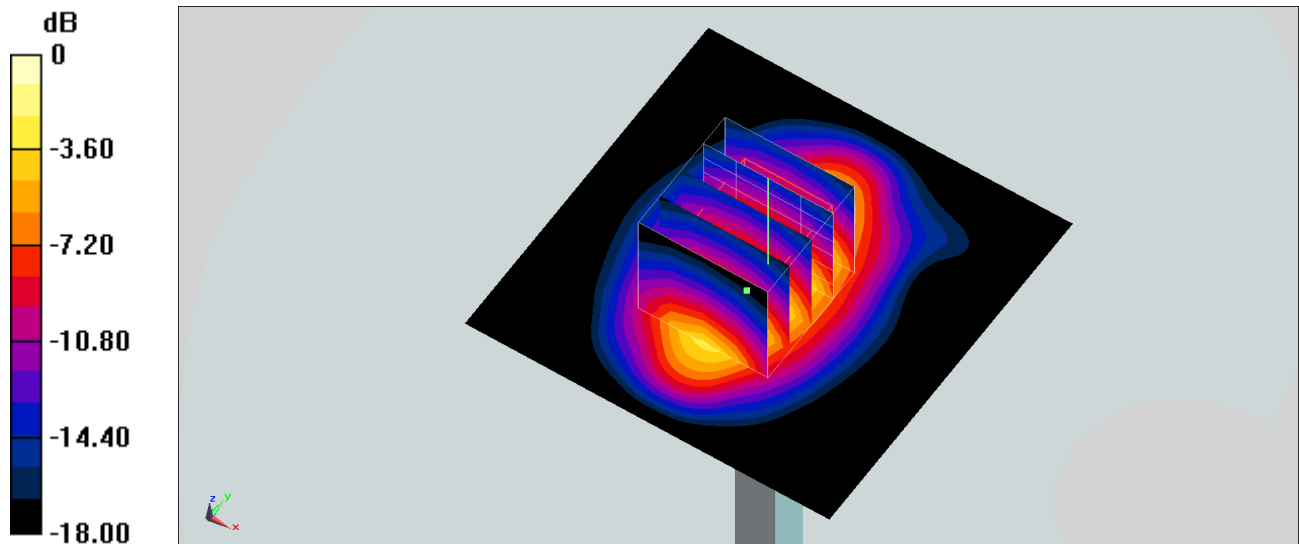

0 dB = 3.00 W/kg = 4.77 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 42.384$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.96 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.05 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 1.83 W/kg; SAR(10 g) = 0.959 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 2.69 W/kg

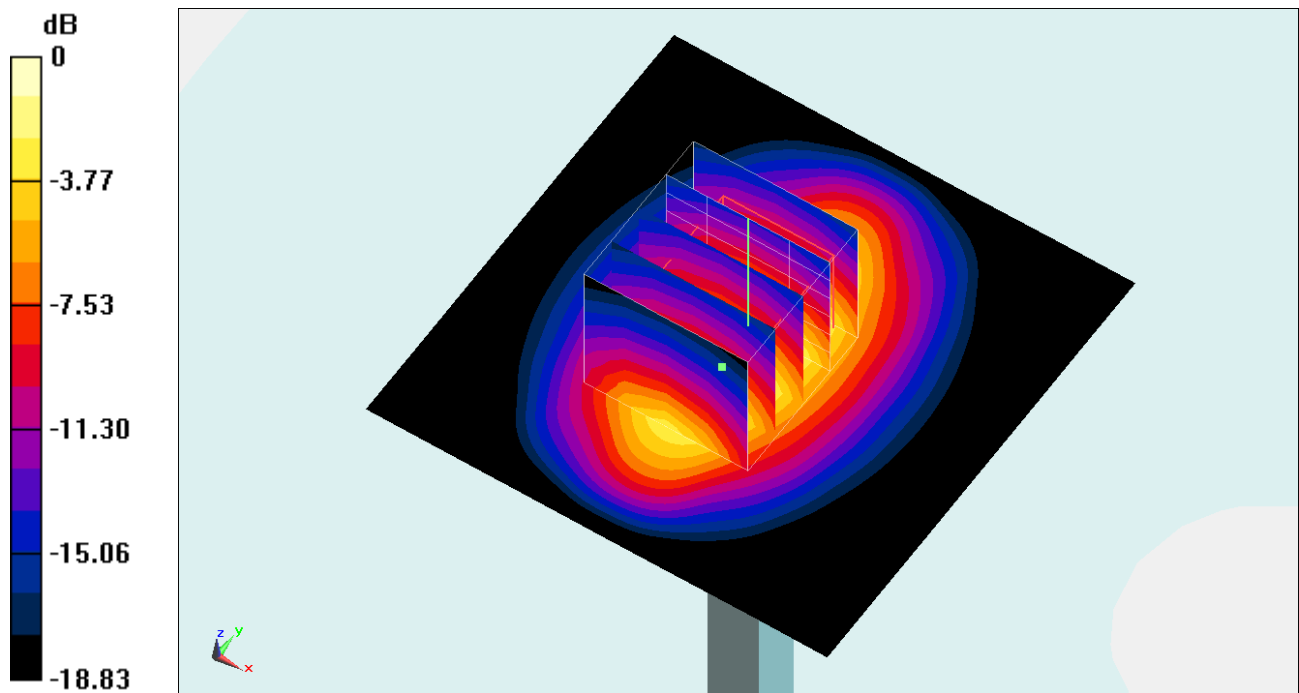

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260303 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 42.581$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35) @ 1900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.14 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.20 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.04 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 2.99 W/kg

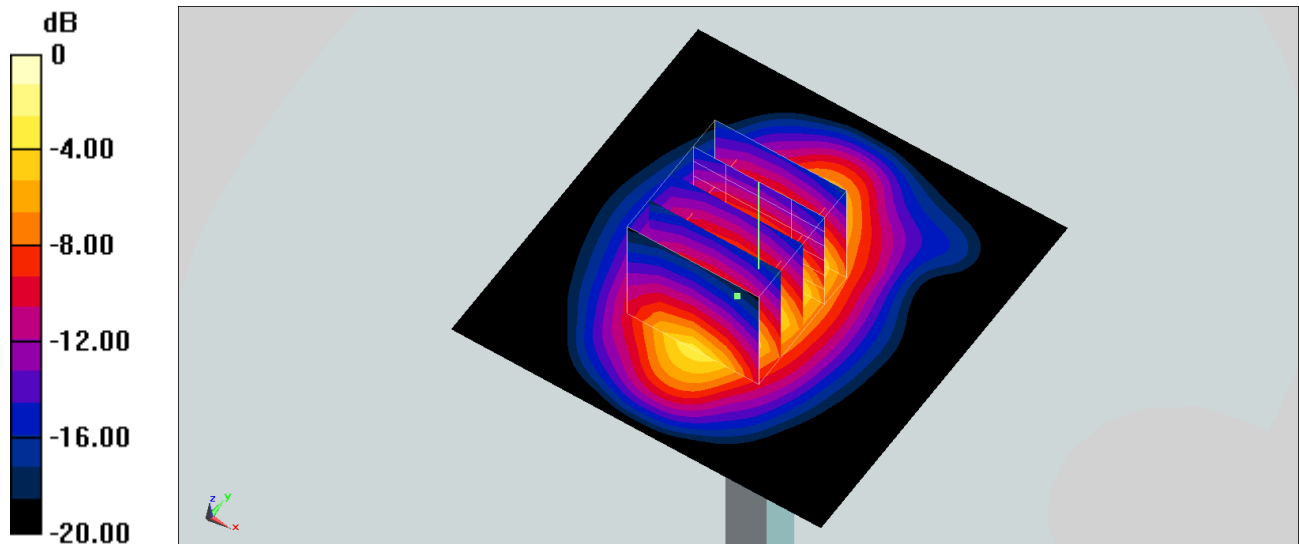

0 dB = 2.99 W/kg = 4.76 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2-5d093

Communication System: CW; Frequency: 1900 MHz

Medium: HSL_600-7200_260303 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 41.93$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.95 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.93 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 1.89 W/kg; SAR(10 g) = 0.985 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 2.87 W/kg

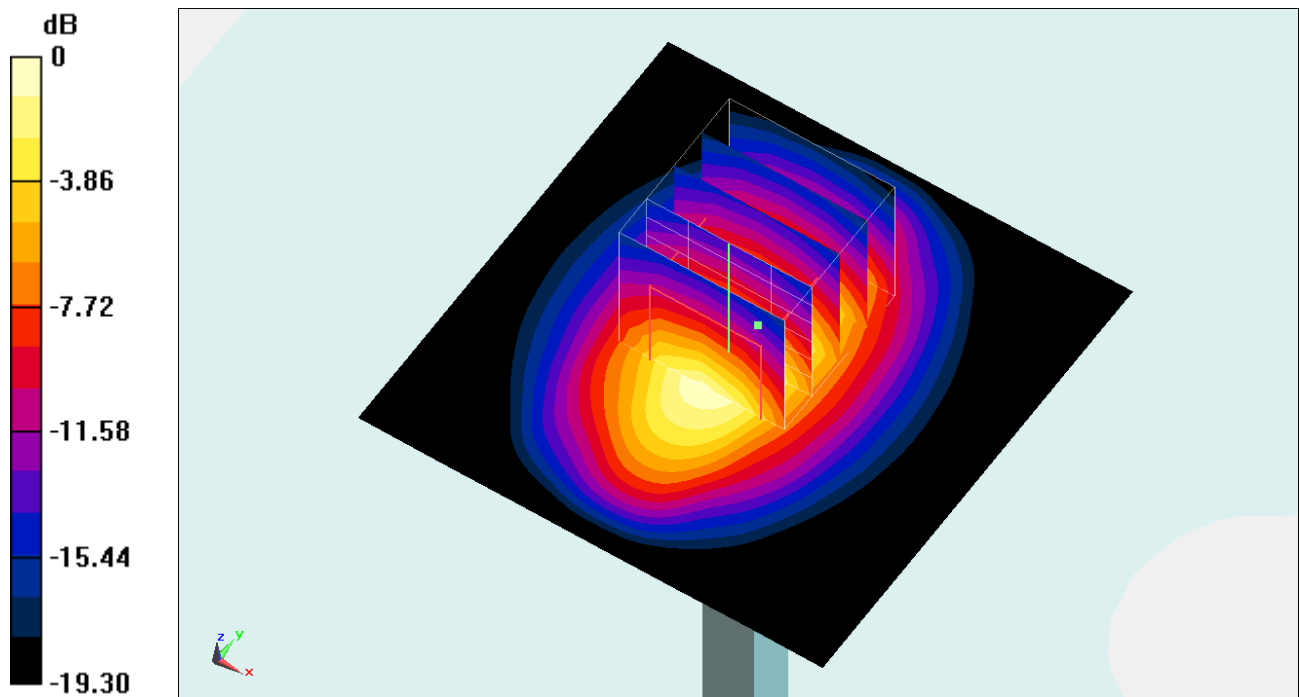

0 dB = 2.87 W/kg = 4.58 dBW/kg

System Check_Head_2300MHz

DUT: D2300V2-1088

Communication System: CW; Frequency: 2300 MHz

Medium: HSL_600-7200_260121 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.734$ S/m; $\epsilon_r = 39.997$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.15, 6.94, 7.32) @ 2300 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.72 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.84 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 4.31 W/kg

SAR(1 g) = 2.27 W/kg; SAR(10 g) = 1.09 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 3.62 W/kg

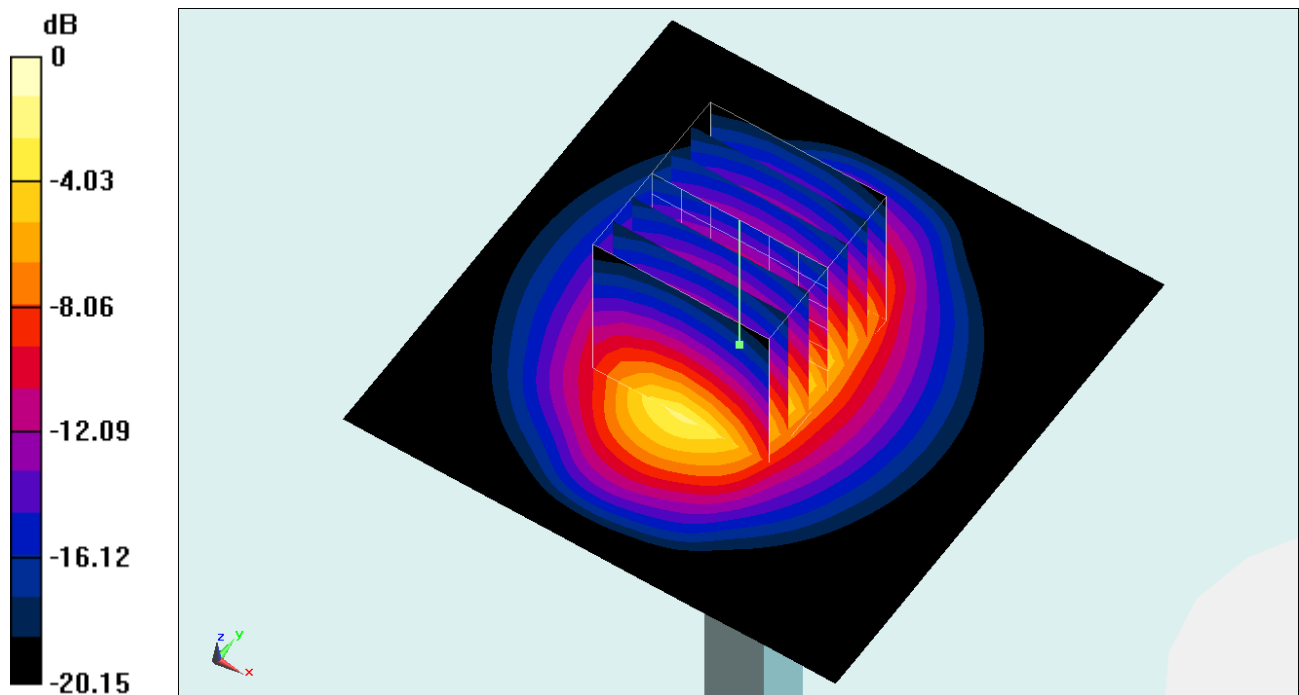

0 dB = 3.62 W/kg = 5.59 dBW/kg

System Check_Head_2300MHz

DUT: D2300V2-1088

Communication System: CW; Frequency: 2300 MHz

Medium: HSL_600-7200_260216 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 41.726$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.82, 6.71, 6.93) @ 2300 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.11 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.84 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 4.82 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.19 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 4.02 W/kg

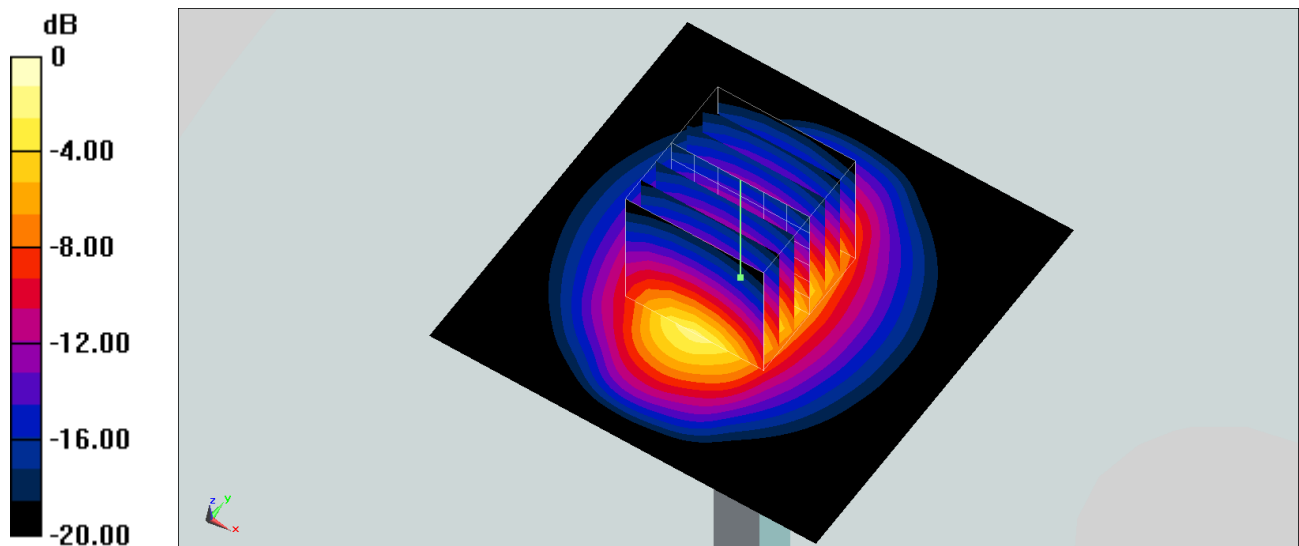

0 dB = 4.02 W/kg = 6.04 dBW/kg

System Check_Head_2300MHz

DUT: D2300V2-1088

Communication System: CW; Frequency: 2300 MHz

Medium: HSL_600-7200_260216 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.675$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.15, 6.94, 7.32) @ 2300 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.65 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.97 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 2.3 W/kg; SAR(10 g) = 1.1 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 3.72 W/kg

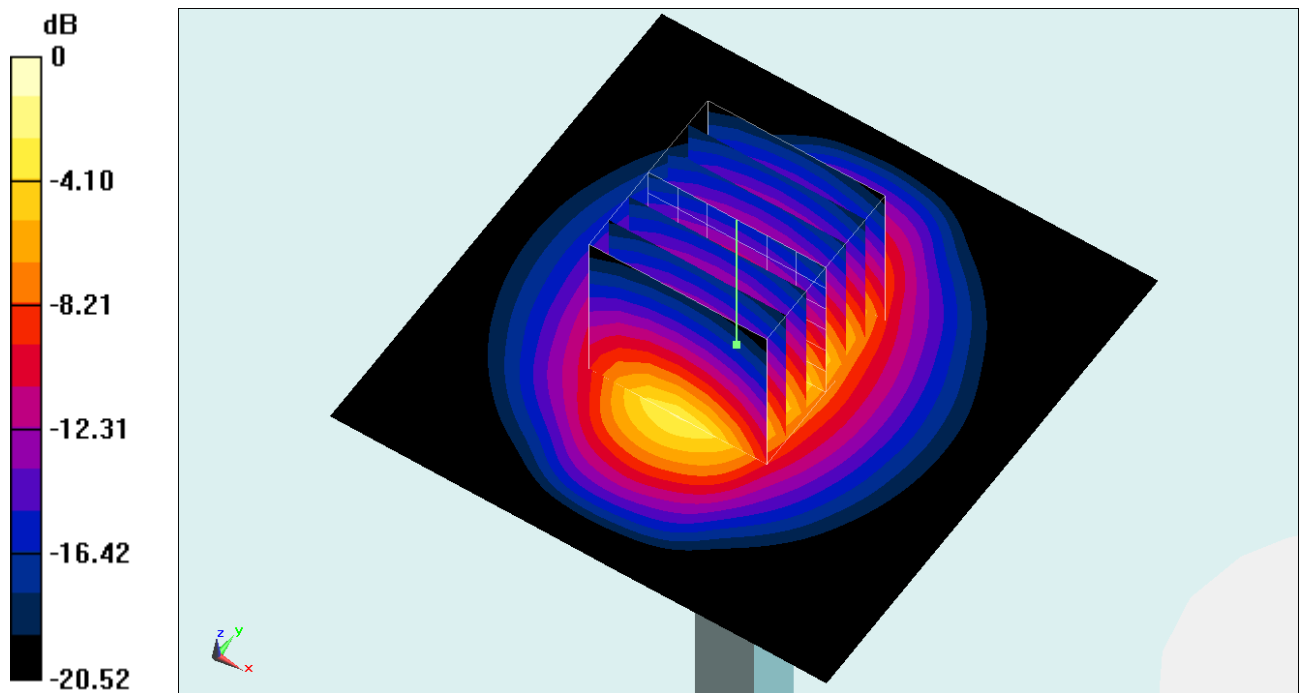

0 dB = 3.72 W/kg = 5.71 dBW/kg

System Check_Head_2450MHz

DUT: D2450V2 - SN806

Communication System: CW; Frequency: 2450 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 40.337$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.33, 7.12, 7.22) @ 2450 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.74 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.11 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 4.87 W/kg

SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.13 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 4.03 W/kg

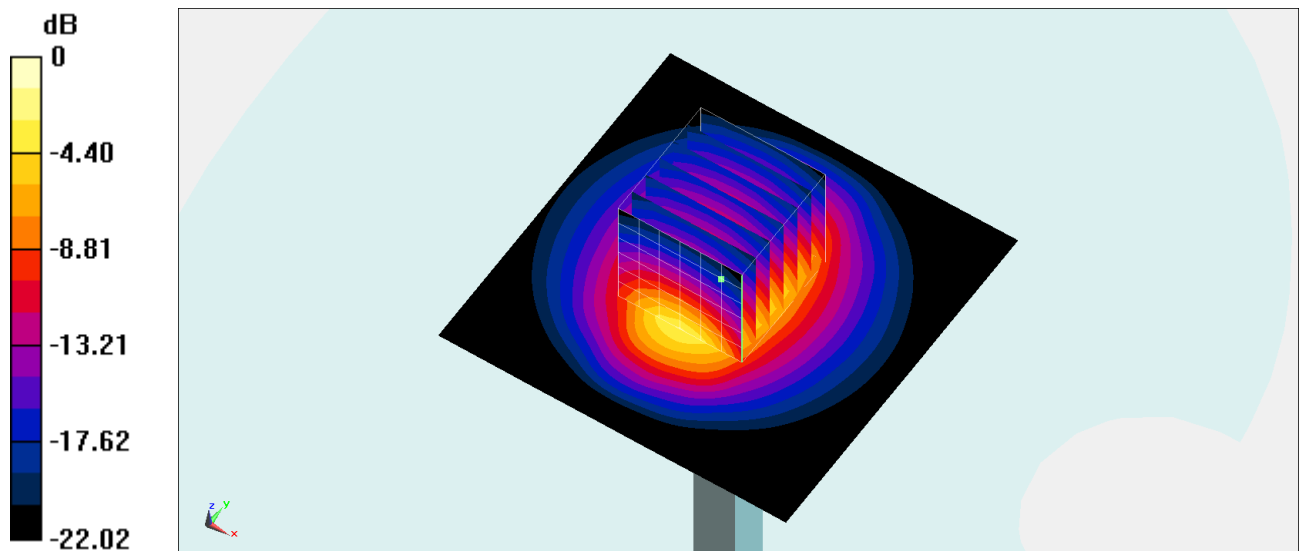

0 dB = 4.03 W/kg = 6.05 dBW/kg

System Check_Head_2450MHz

DUT: D2450V2 - SN806

Communication System: CW; Frequency: 2450 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.53$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.33, 7.12, 7.22) @ 2450 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.79 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.11 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 4.94 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.14 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 4.09 W/kg

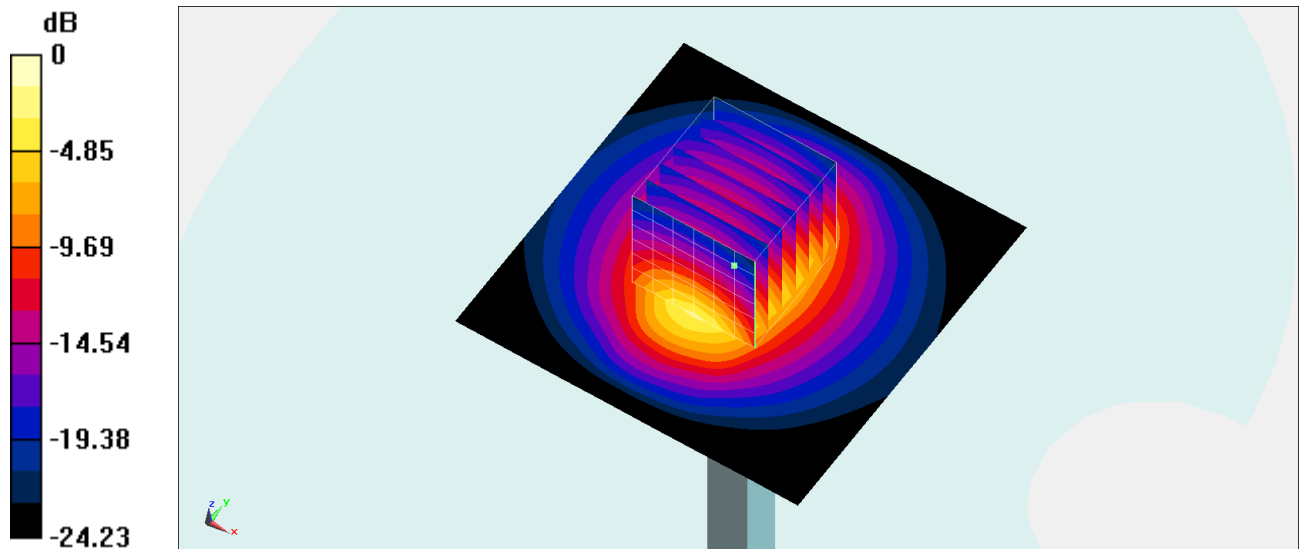

0 dB = 4.09 W/kg = 6.12 dBW/kg

System Check_Head_2450MHz

DUT: D2450V2 - SN806

Communication System: CW; Frequency: 2450 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 40.184$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.33, 7.12, 7.22) @ 2450 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.75 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.65 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 4.74 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.12 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 50.8%

Maximum value of SAR (measured) = 3.84 W/kg

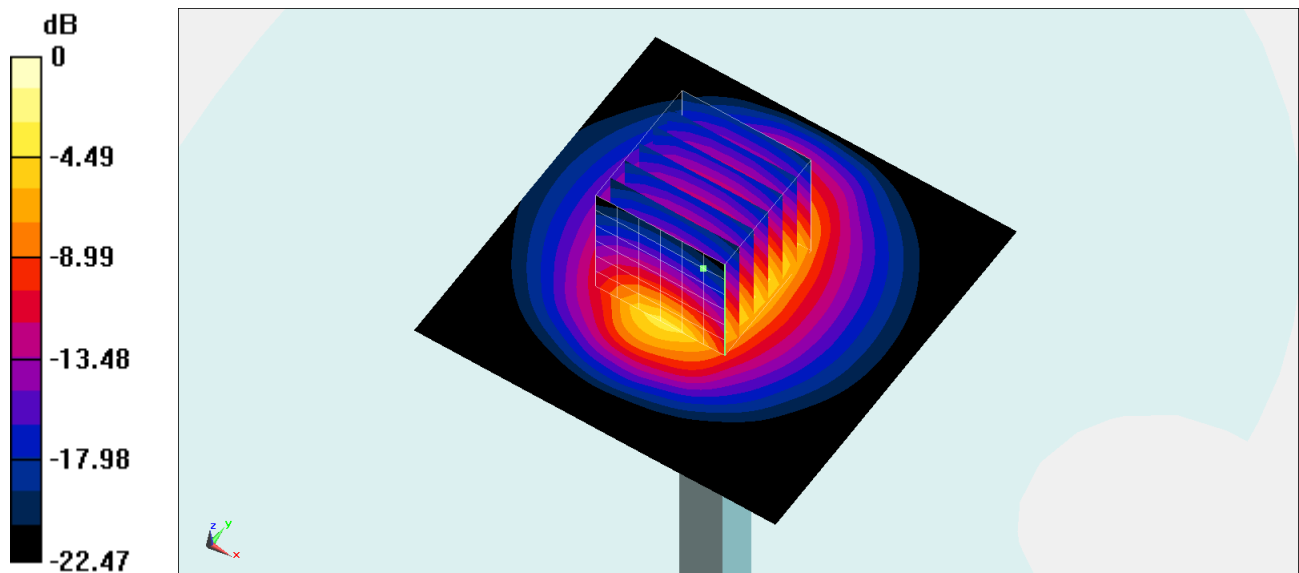

0 dB = 3.84 W/kg = 5.84 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260115 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 41.493$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.58 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.78 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 5.39 W/kg

SAR(1 g) = 2.7 W/kg; SAR(10 g) = 1.22 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 4.43 W/kg

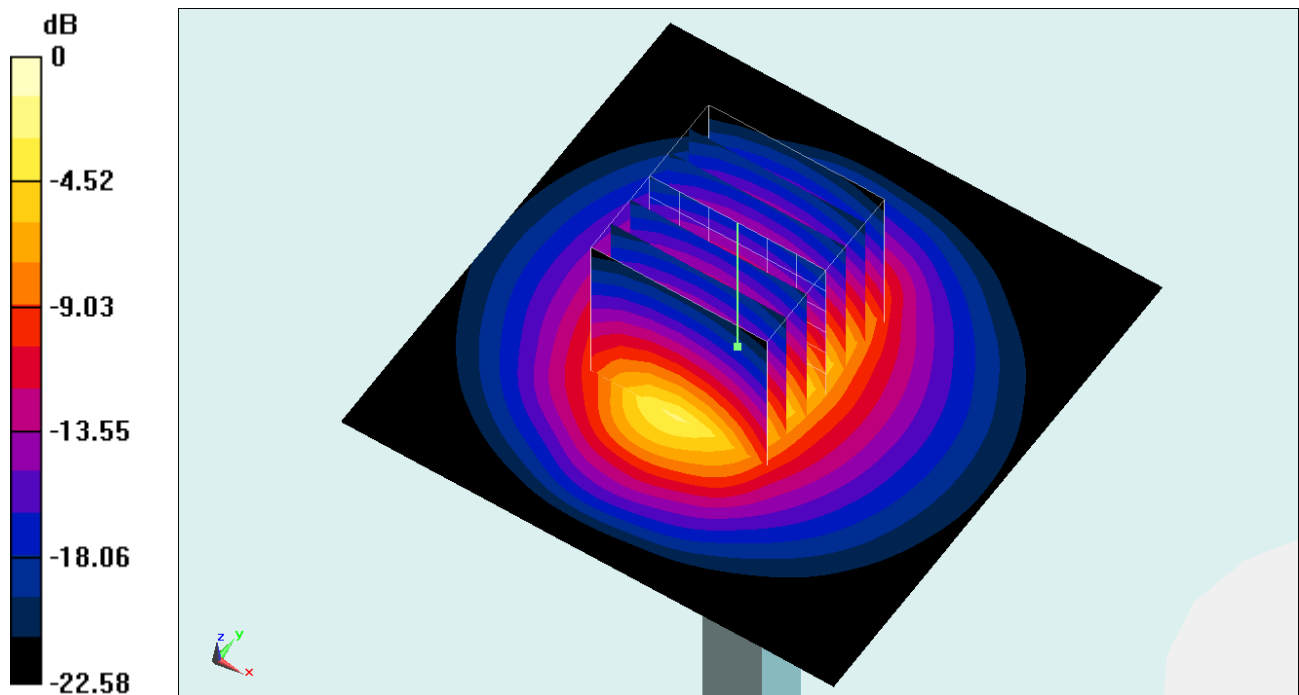

0 dB = 4.43 W/kg = 6.46 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260120 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.968$ S/m; $\epsilon_r = 39.565$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.25 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.69 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 5.26 W/kg

SAR(1 g) = 2.61 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 4.33 W/kg

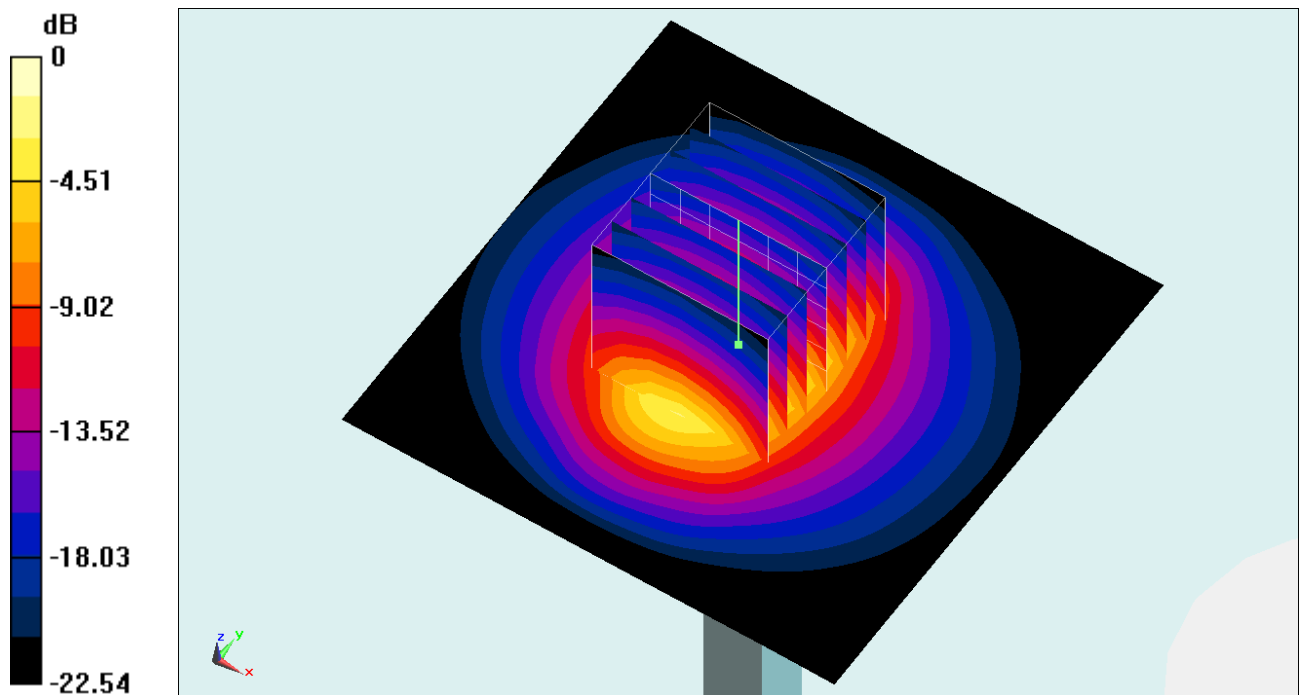

0 dB = 4.33 W/kg = 6.36 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260125 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.987$ S/m; $\epsilon_r = 41.599$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.62 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.20 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 5.49 W/kg

SAR(1 g) = 2.72 W/kg; SAR(10 g) = 1.23 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 4.52 W/kg

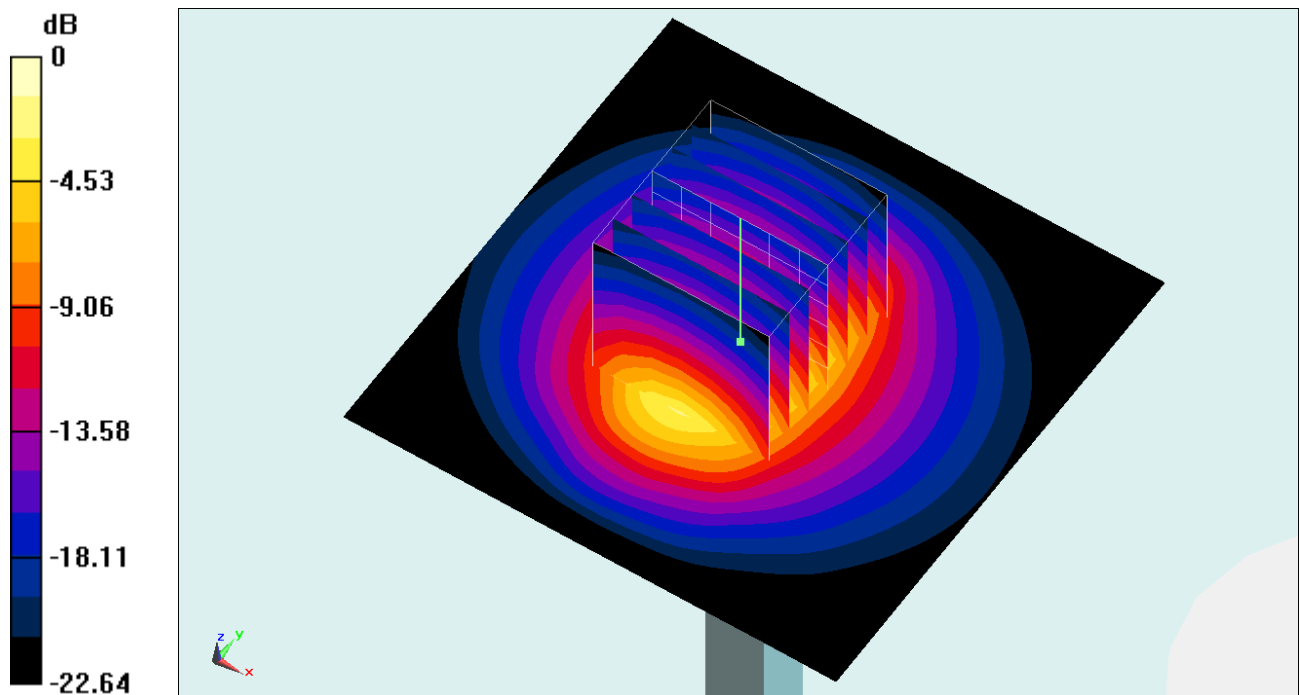

0 dB = 4.52 W/kg = 6.55 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260126 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 39.345$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.58 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 49.27 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 5.36 W/kg

SAR(1 g) = 2.66 W/kg; SAR(10 g) = 1.2 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 4.42 W/kg

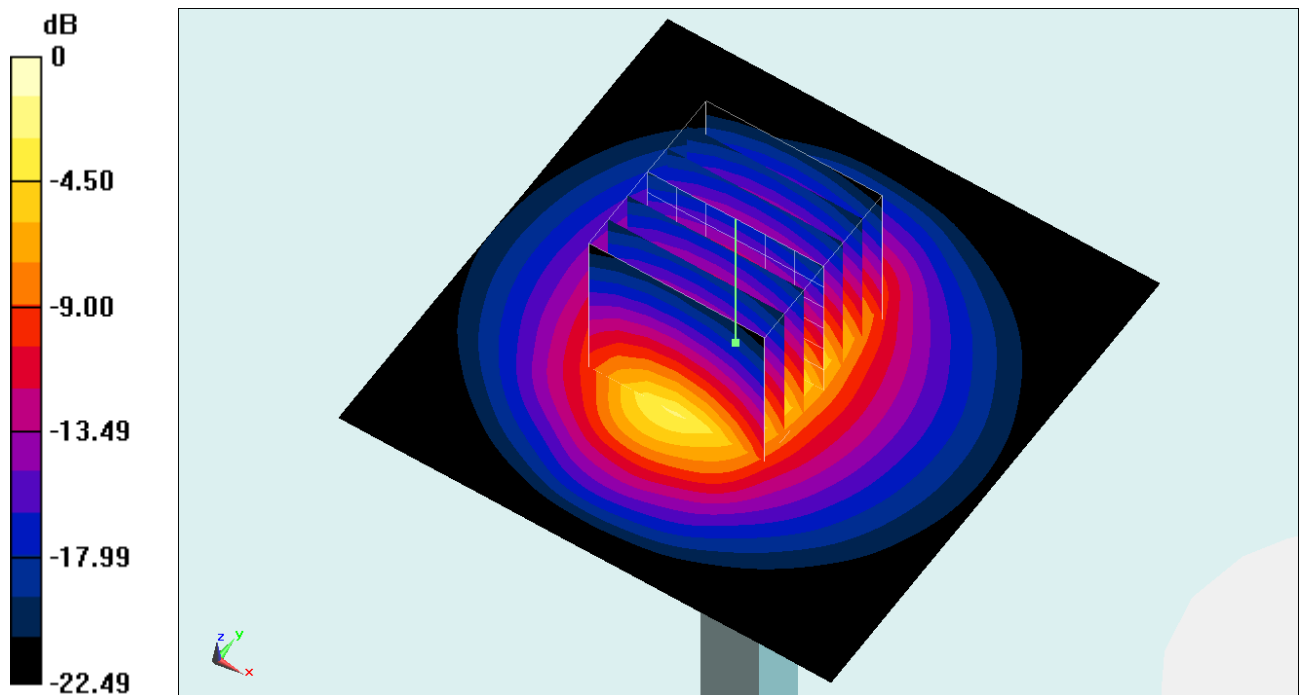

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260206 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.968$ S/m; $\epsilon_r = 39.396$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.58 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.35 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 5.68 W/kg

SAR(1 g) = 2.79 W/kg; SAR(10 g) = 1.27 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 4.65 W/kg

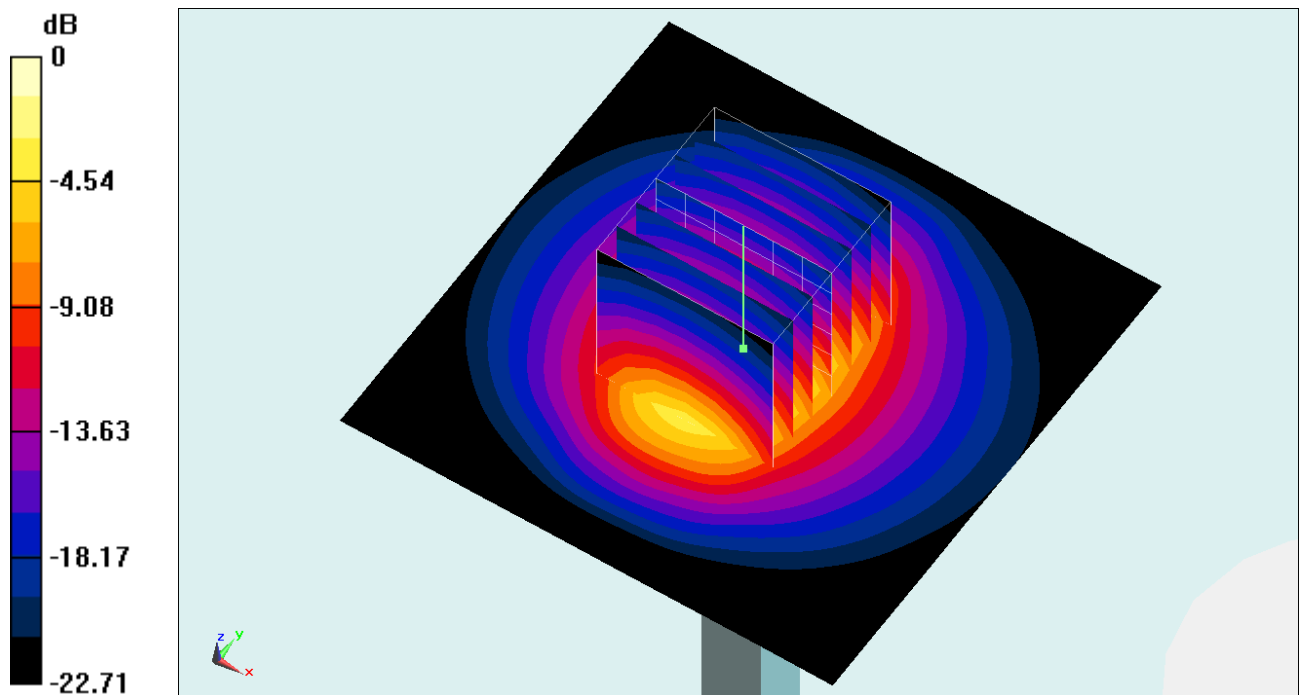

0 dB = 4.65 W/kg = 6.67 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260210 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.978$ S/m; $\epsilon_r = 41.302$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2600 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.02 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.07 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 6.01 W/kg

SAR(1 g) = 2.88 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 47.7%

Maximum value of SAR (measured) = 4.87 W/kg

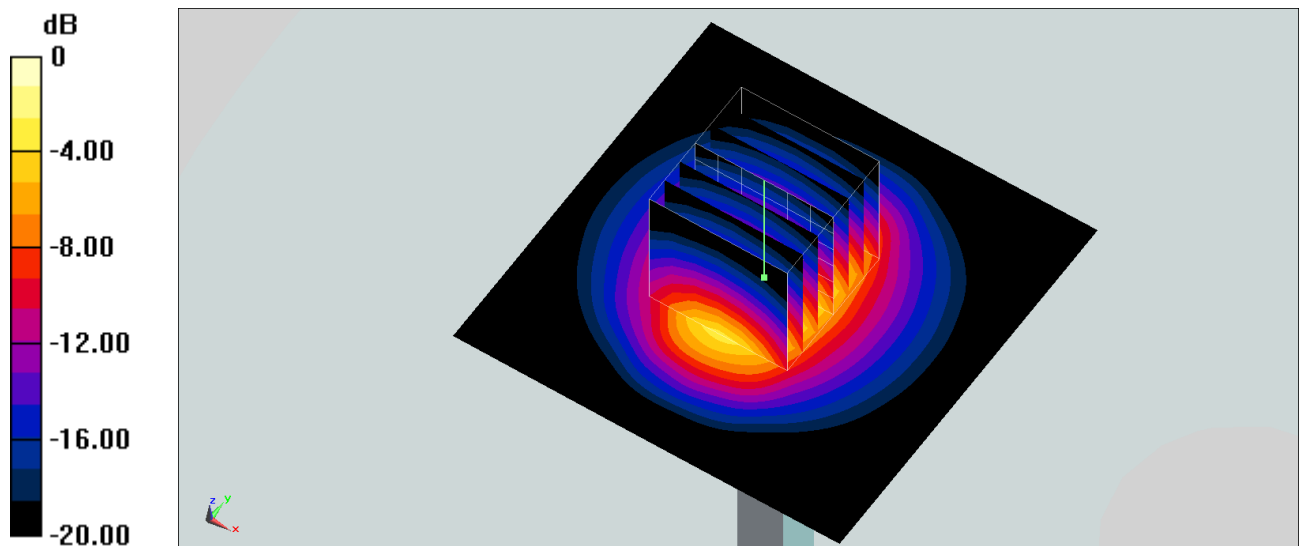

0 dB = 4.87 W/kg = 6.88 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260210 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 40.04$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.39 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.78 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 5.64 W/kg

SAR(1 g) = 2.72 W/kg; SAR(10 g) = 1.21 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 4.62 W/kg

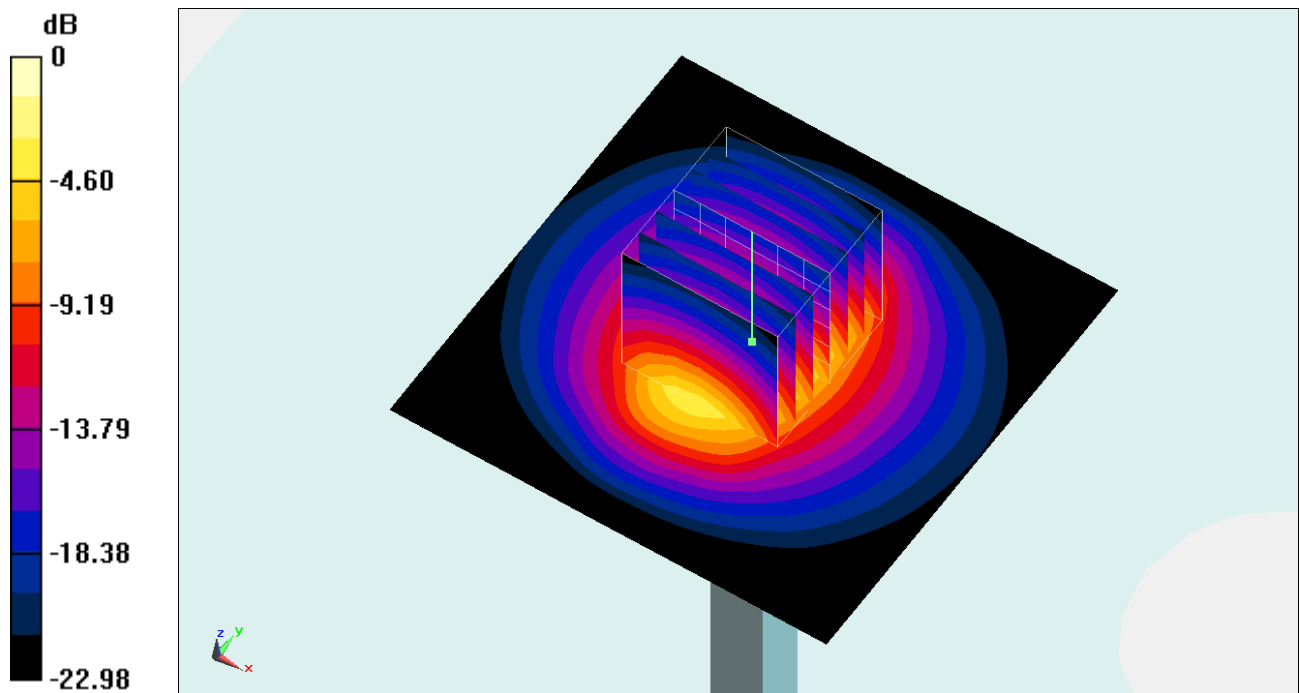

0 dB = 4.62 W/kg = 6.65 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260215 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 41.323$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2600 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.01 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.10 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 5.96 W/kg

SAR(1 g) = 2.84 W/kg; SAR(10 g) = 1.26 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 4.84 W/kg

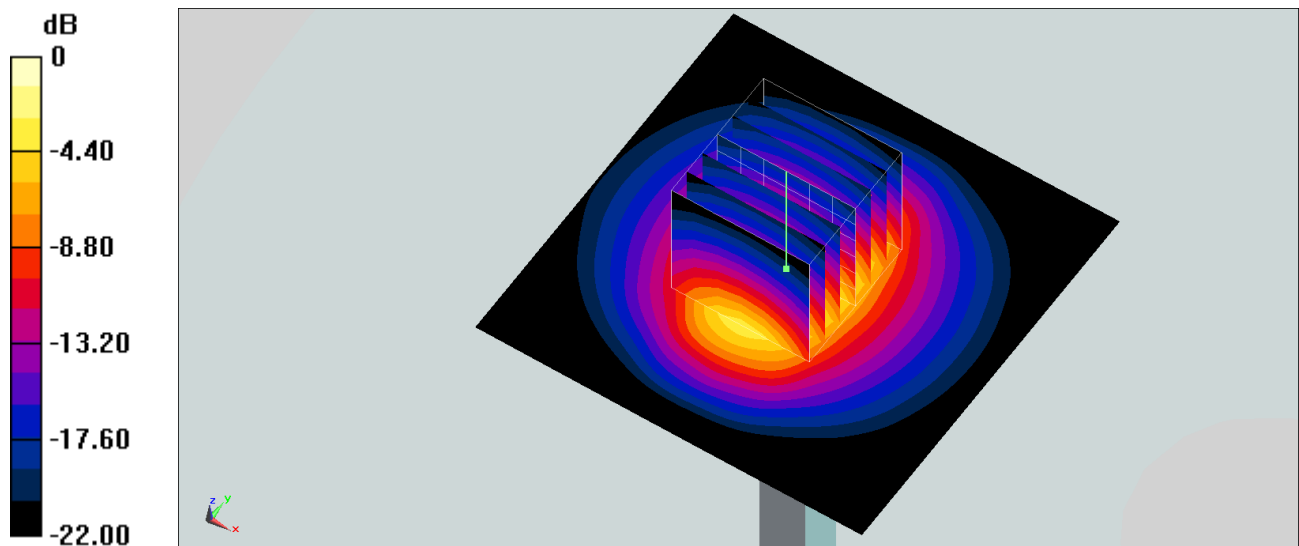

0 dB = 4.84 W/kg = 6.85 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260215 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 40.01$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.42 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.96 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 5.28 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.17 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 4.35 W/kg

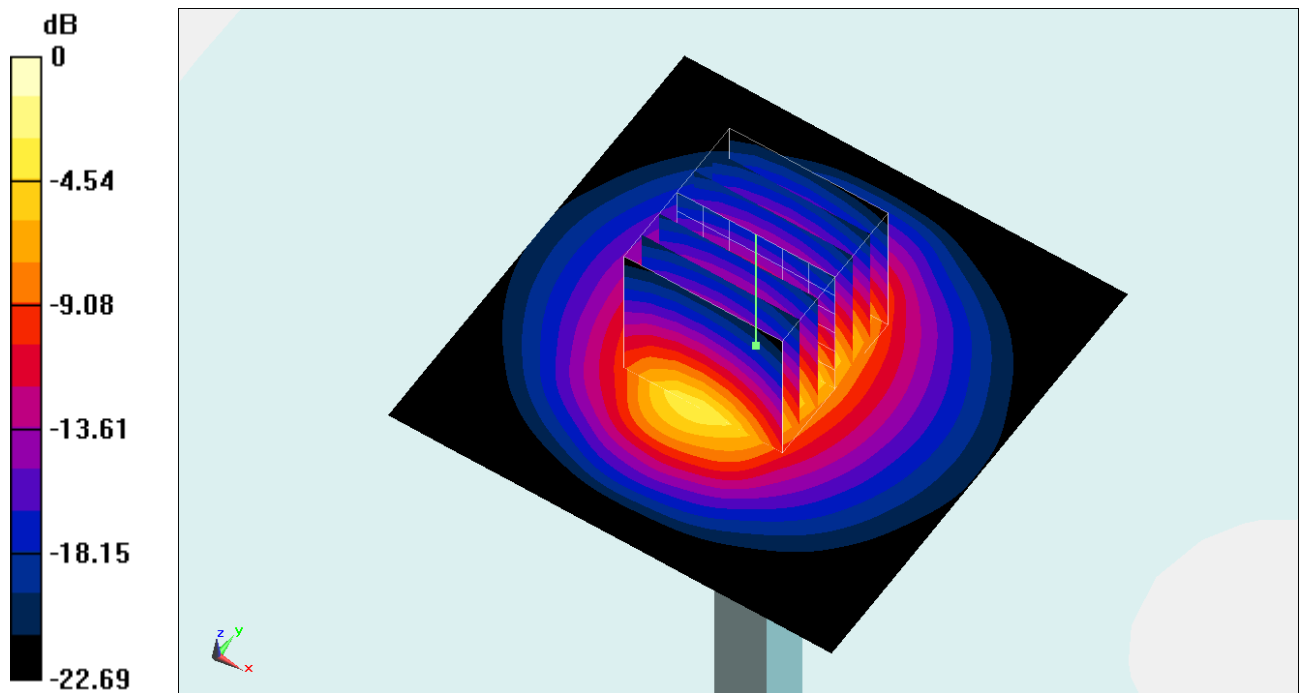

0 dB = 4.35 W/kg = 6.38 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 41.425$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2600 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.98 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.28 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 5.95 W/kg

SAR(1 g) = 2.87 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 4.82 W/kg

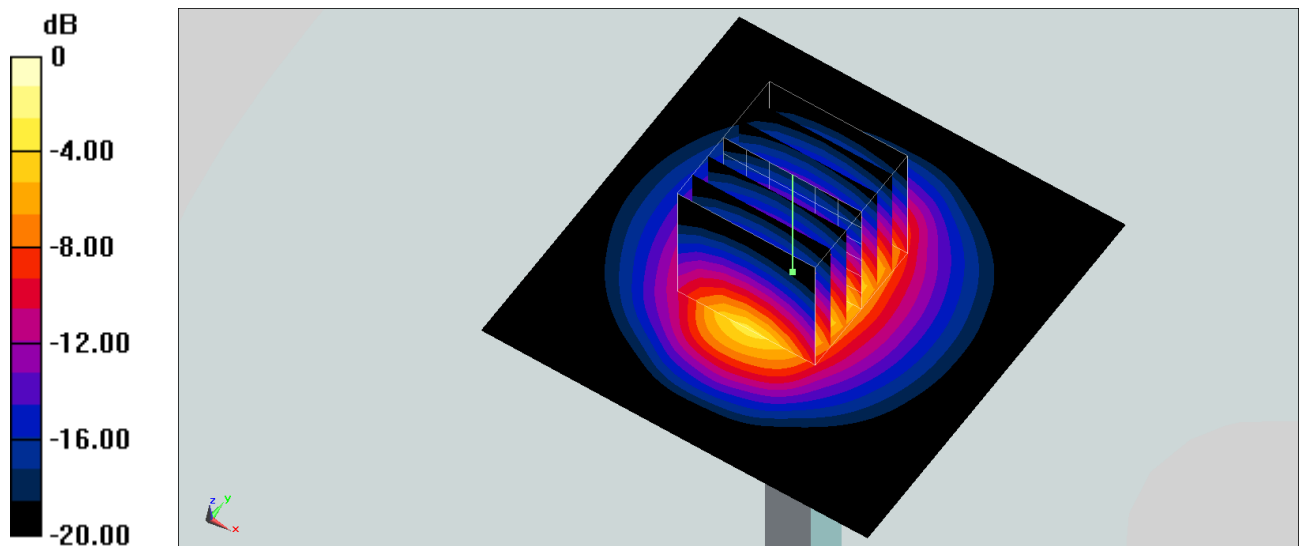

0 dB = 4.82 W/kg = 6.83 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.987$ S/m; $\epsilon_r = 40.931$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.55 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.45 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 5.53 W/kg

SAR(1 g) = 2.72 W/kg; SAR(10 g) = 1.22 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 4.55 W/kg

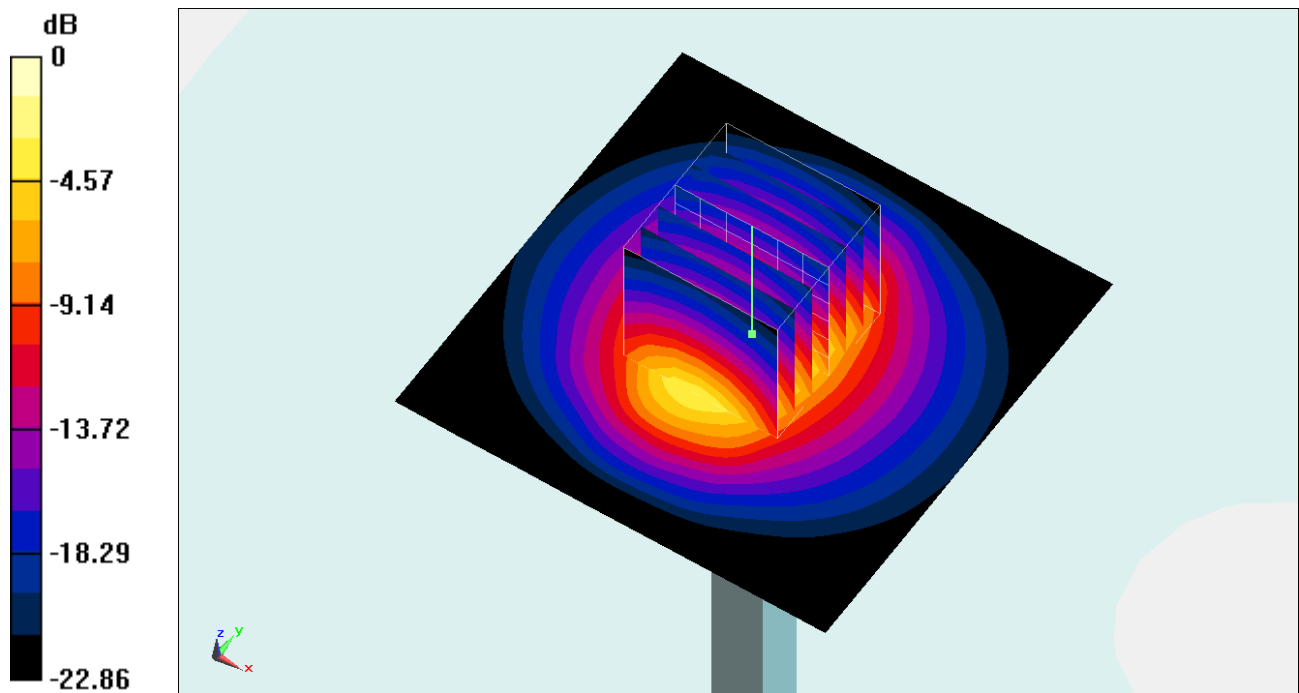

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 41.486$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2600 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.96 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.03 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 5.90 W/kg

SAR(1 g) = 2.86 W/kg; SAR(10 g) = 1.27 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 4.79 W/kg

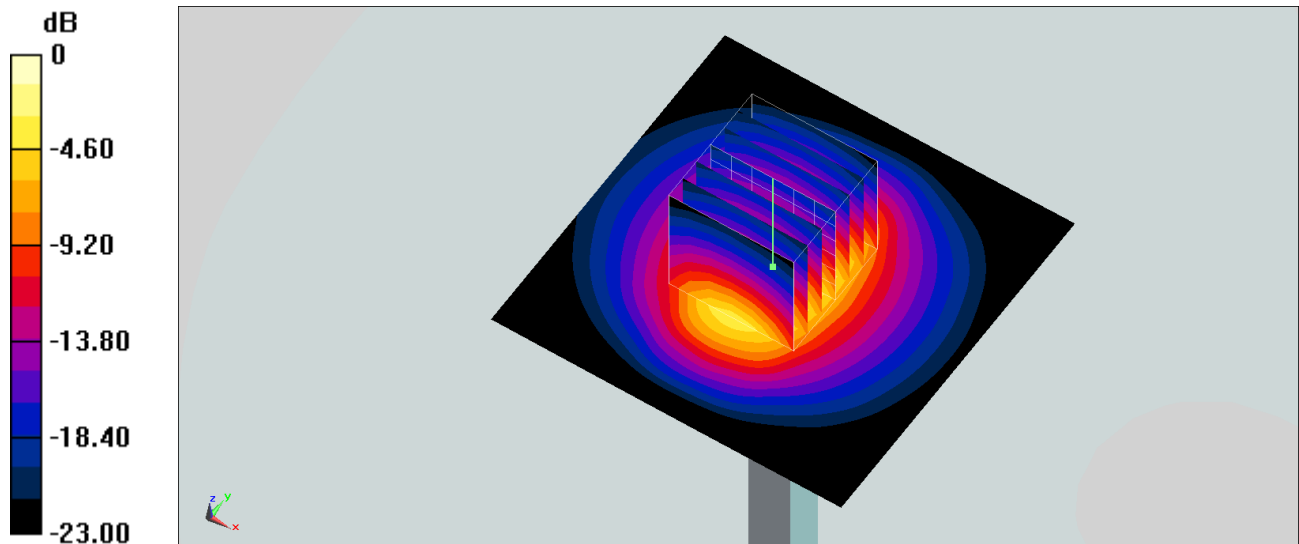

0 dB = 4.79 W/kg = 6.80 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 42.395$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.39 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.15 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 5.50 W/kg

SAR(1 g) = 2.65 W/kg; SAR(10 g) = 1.19 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 4.52 W/kg

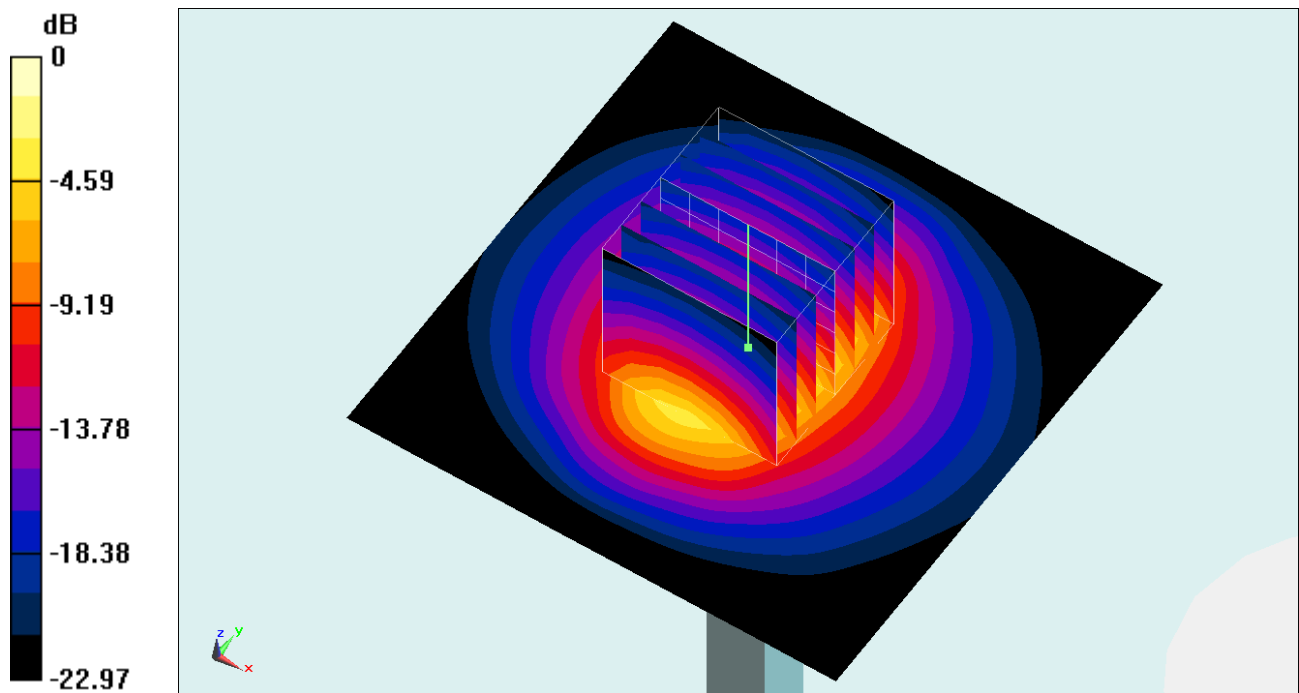

0 dB = 4.52 W/kg = 6.55 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260304 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 41.666$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2600 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.95 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.17 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 5.92 W/kg

SAR(1 g) = 2.87 W/kg; SAR(10 g) = 1.29 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 4.79 W/kg

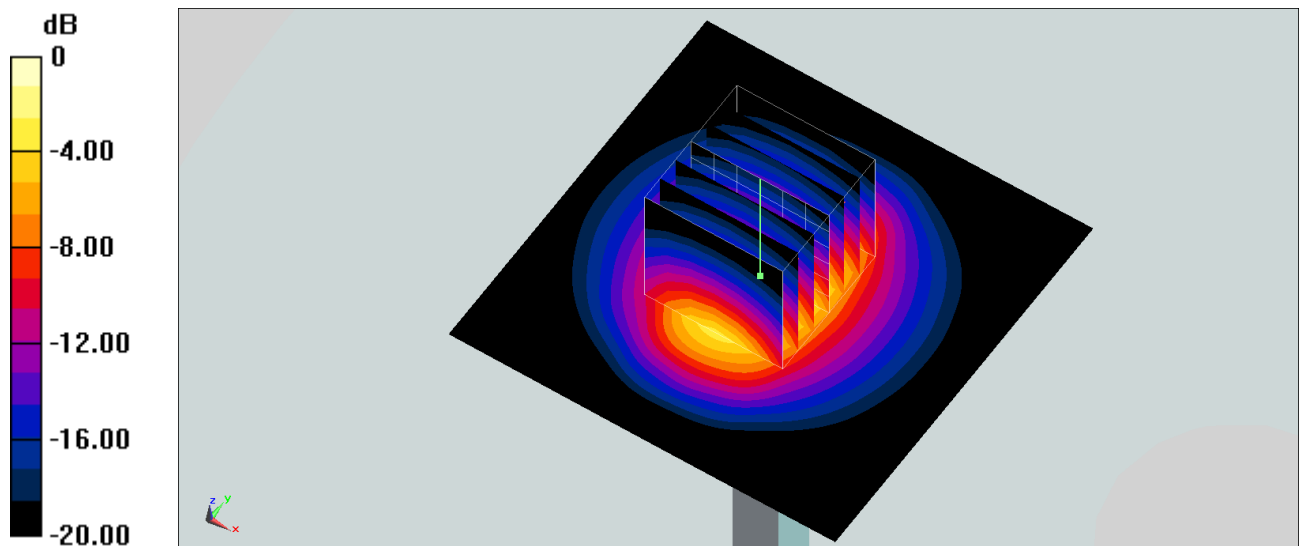

0 dB = 4.79 W/kg = 6.80 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1078

Communication System: CW; Frequency: 2600 MHz

Medium: HSL_600-7200_260304 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 40.952$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2600 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.59 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.10 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 5.64 W/kg

SAR(1 g) = 2.76 W/kg; SAR(10 g) = 1.24 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 4.62 W/kg

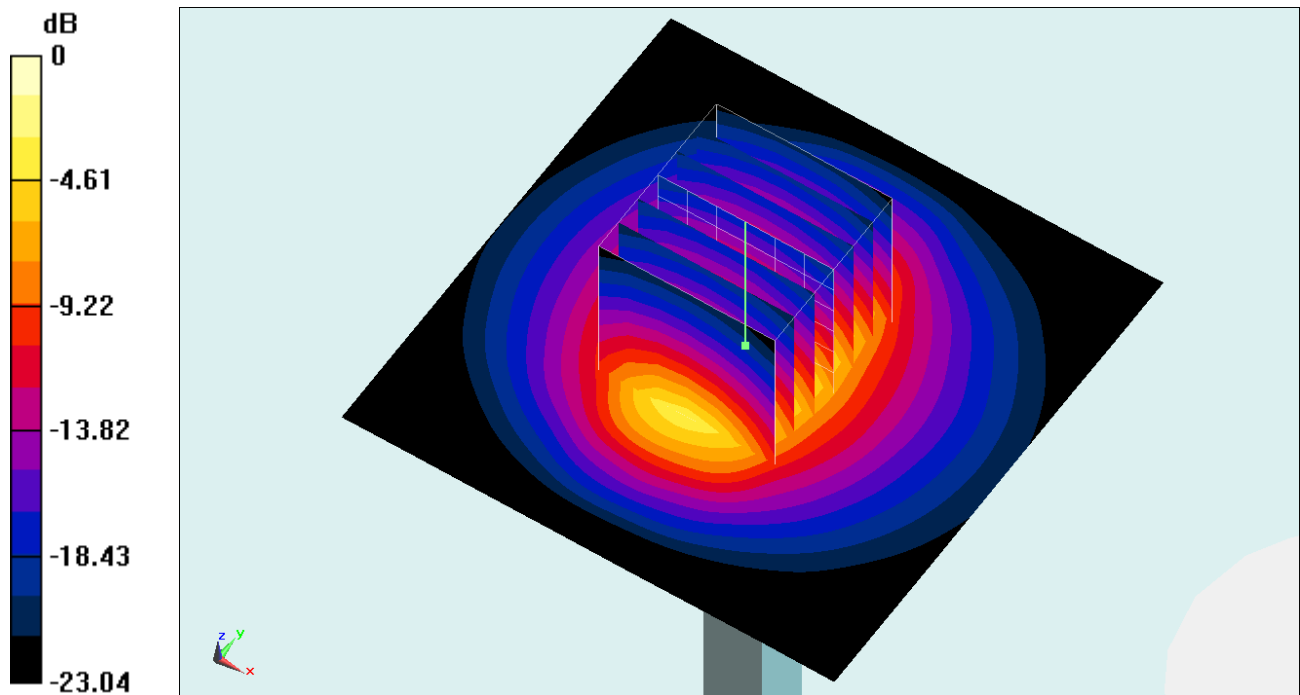

0 dB = 4.62 W/kg = 6.65 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260123 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.781$ S/m; $\epsilon_r = 39.976$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.74 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.61 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 8.65 W/kg

SAR(1 g) = 3.54 W/kg; SAR(10 g) = 1.35 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 77.1%

Maximum value of SAR (measured) = 6.56 W/kg

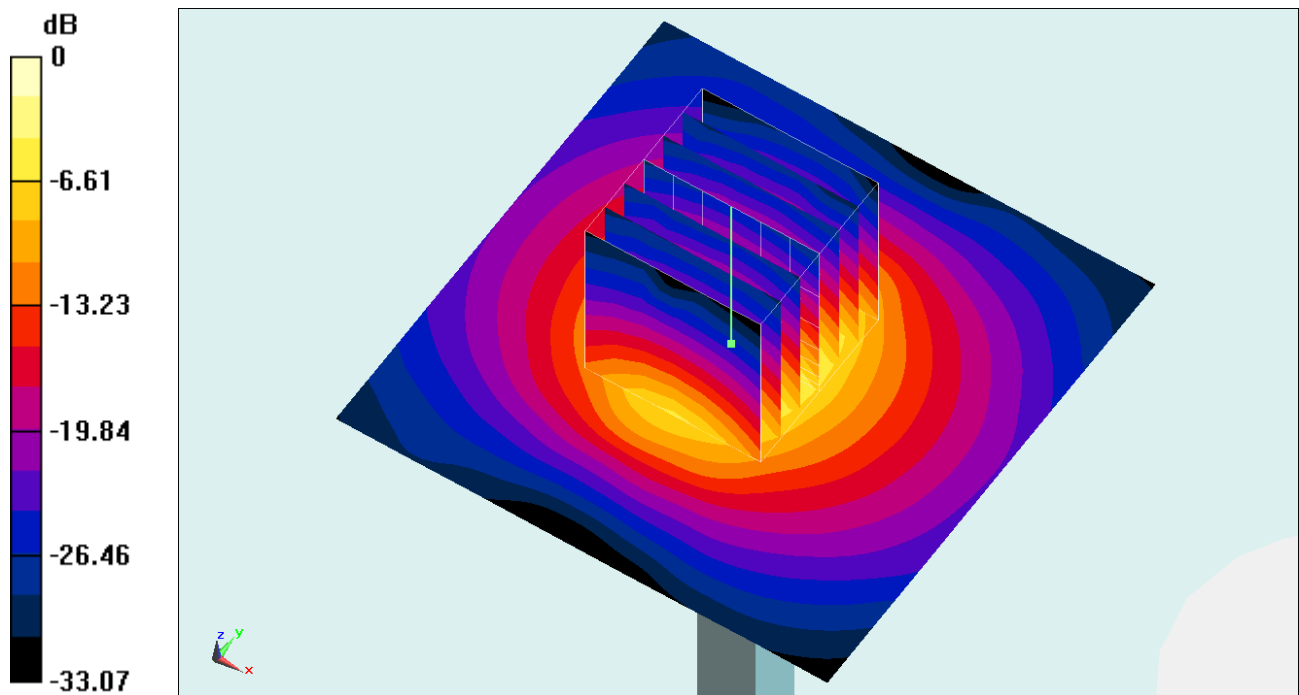

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260127 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.711$ S/m; $\epsilon_r = 37.722$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.60 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.96 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 8.52 W/kg

SAR(1 g) = 3.43 W/kg; SAR(10 g) = 1.3 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 76.8%

Maximum value of SAR (measured) = 6.38 W/kg

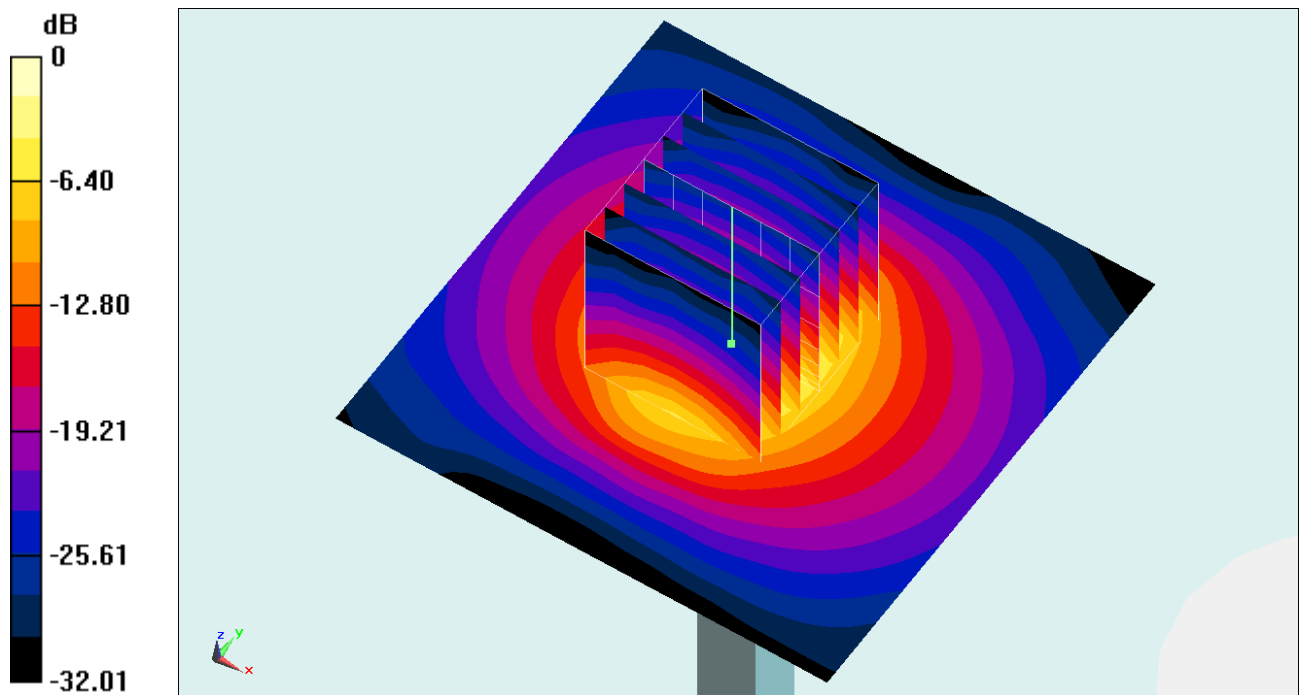

0 dB = 6.38 W/kg = 8.05 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260128 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.698$ S/m; $\epsilon_r = 37.681$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.49 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.02 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 8.12 W/kg

SAR(1 g) = 3.38 W/kg; SAR(10 g) = 1.29 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.6%

Maximum value of SAR (measured) = 6.20 W/kg

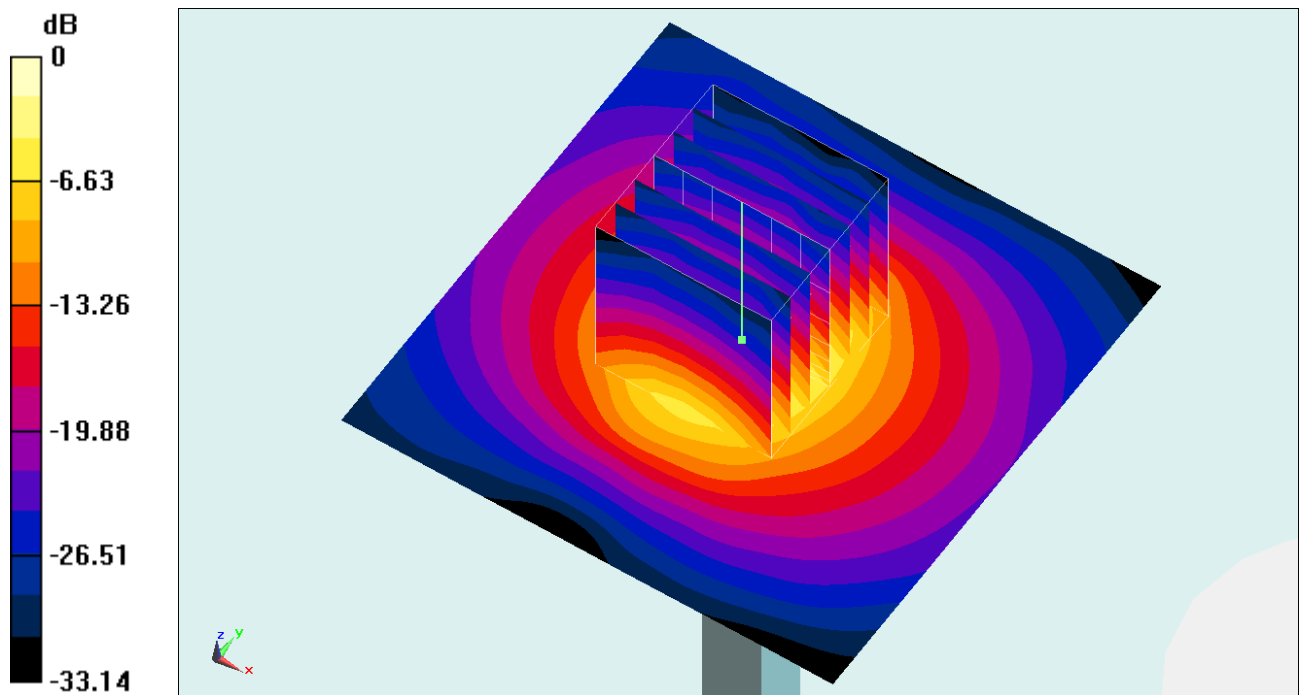

0 dB = 6.20 W/kg = 7.92 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260129 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.709$ S/m; $\epsilon_r = 37.627$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.95 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 48.90 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 7.60 W/kg

SAR(1 g) = 3.13 W/kg; SAR(10 g) = 1.2 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.3%

Maximum value of SAR (measured) = 5.83 W/kg

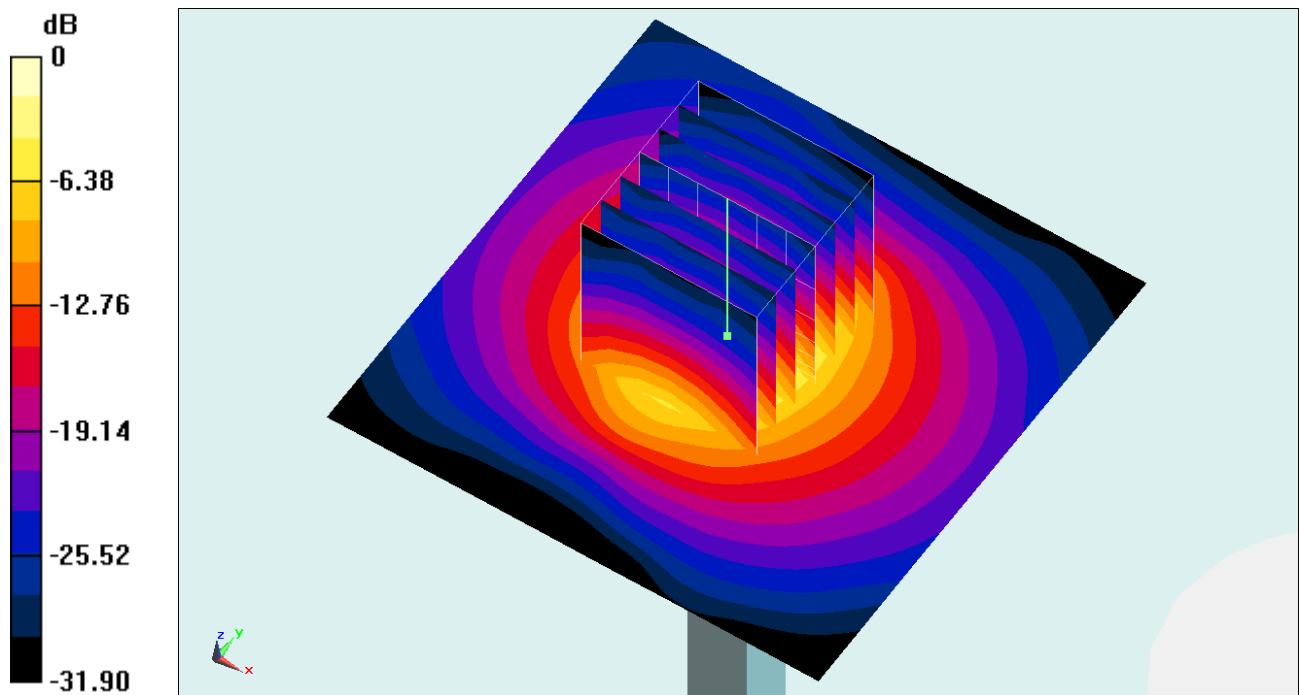

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260131 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 37.628$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.03 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 48.98 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 7.49 W/kg

SAR(1 g) = 3.11 W/kg; SAR(10 g) = 1.19 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.4%

Maximum value of SAR (measured) = 5.76 W/kg

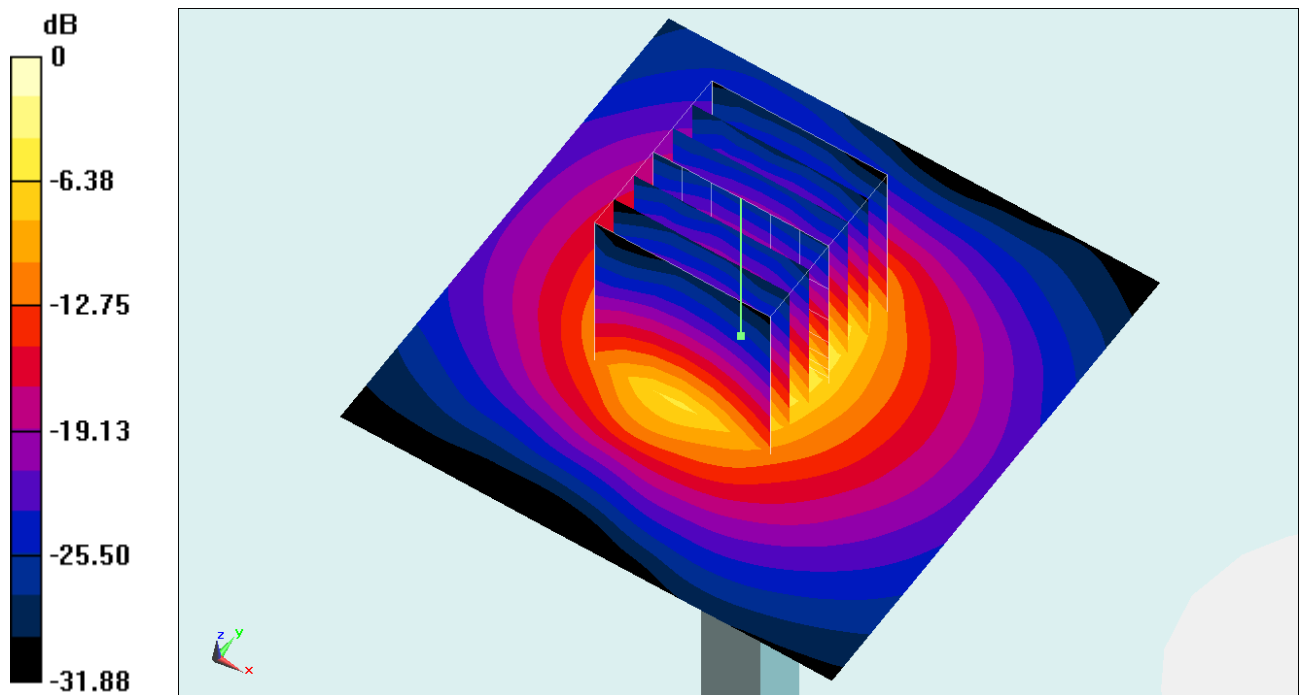

0 dB = 5.76 W/kg = 7.60 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260201 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.675$ S/m; $\epsilon_r = 37.901$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.90 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.70 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 7.42 W/kg

SAR(1 g) = 3.09 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 77.4%

Maximum value of SAR (measured) = 5.70 W/kg

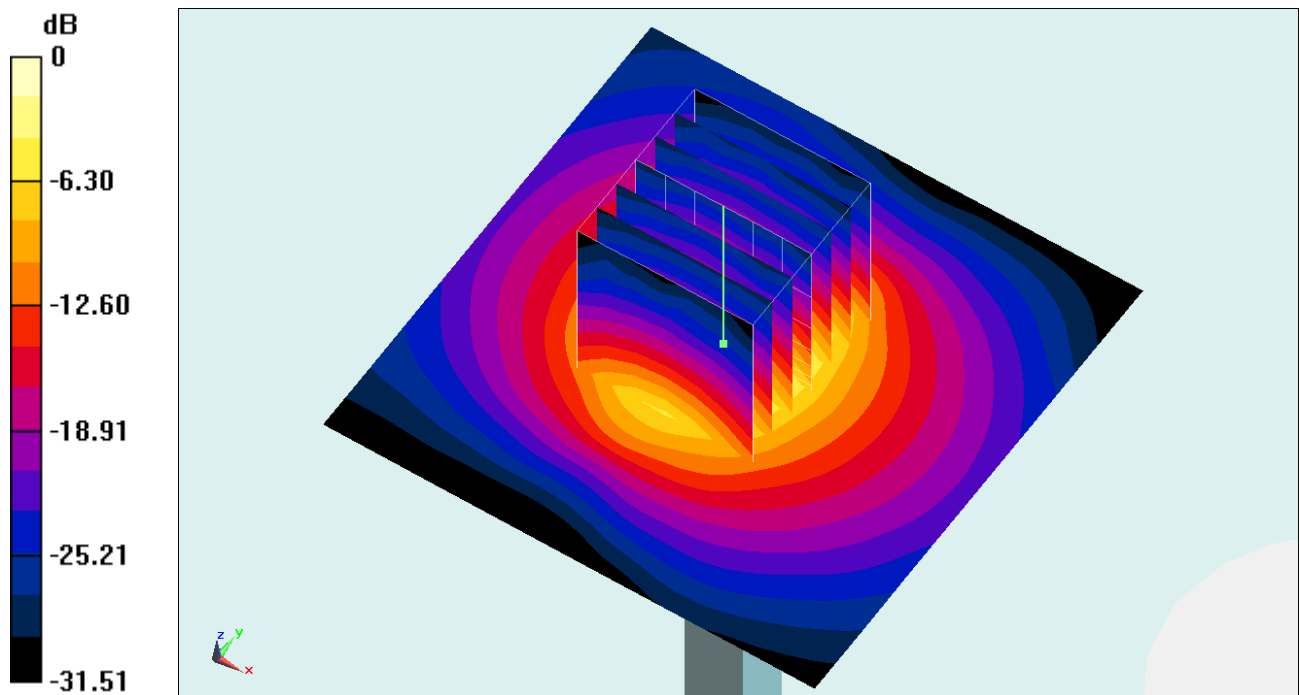

0 dB = 5.70 W/kg = 7.56 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260207 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.743$ S/m; $\epsilon_r = 37.773$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.69 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.02 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 8.29 W/kg

SAR(1 g) = 3.43 W/kg; SAR(10 g) = 1.31 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.6%

Maximum value of SAR (measured) = 6.33 W/kg

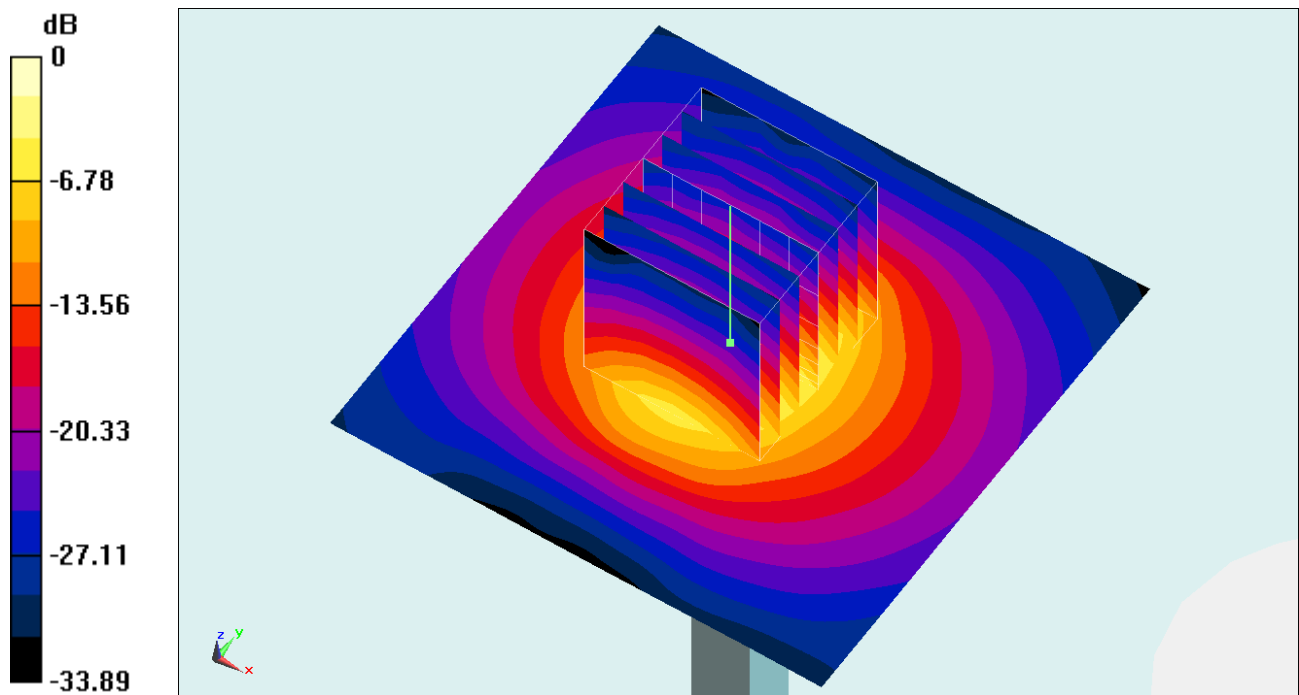

0 dB = 6.33 W/kg = 8.01 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260208 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 38.413$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.58 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.05 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 8.51 W/kg

SAR(1 g) = 3.48 W/kg; SAR(10 g) = 1.33 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 77.4%

Maximum value of SAR (measured) = 6.44 W/kg

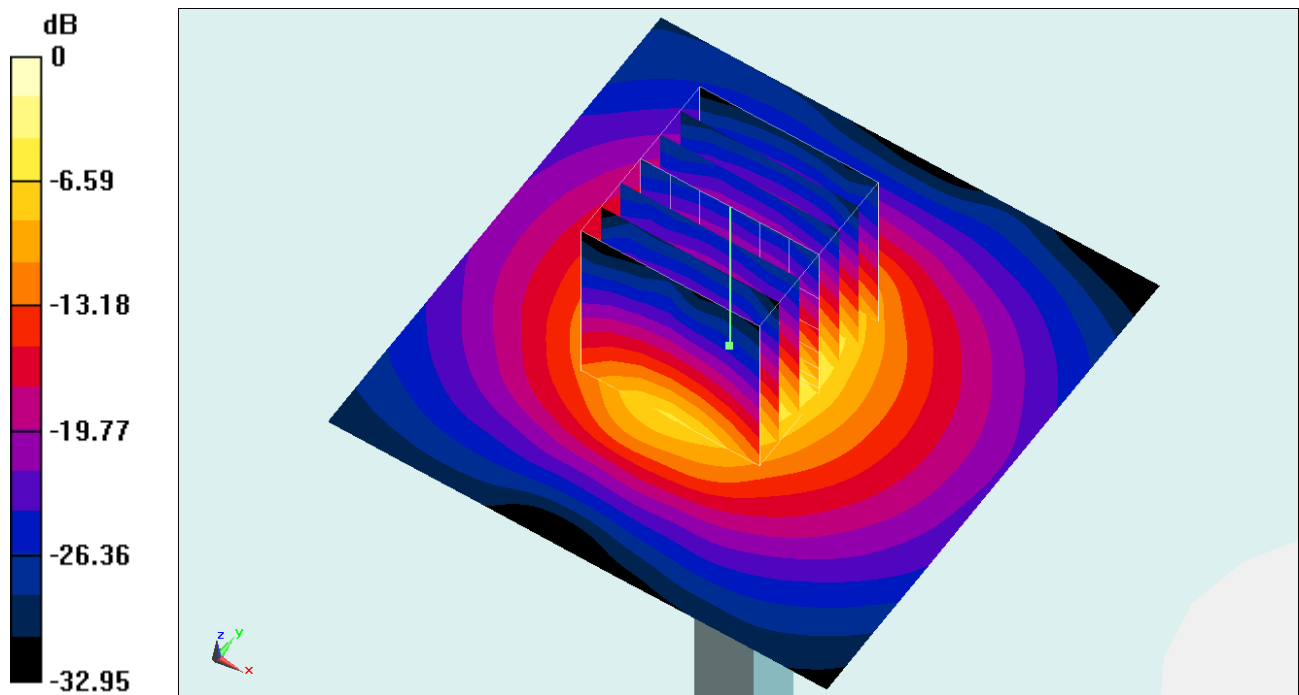

0 dB = 6.44 W/kg = 8.09 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.733$ S/m; $\epsilon_r = 39.905$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3500 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.37 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 52.24 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 8.64 W/kg

SAR(1 g) = 3.49 W/kg; SAR(10 g) = 1.32 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 76.4%

Maximum value of SAR (measured) = 6.55 W/kg

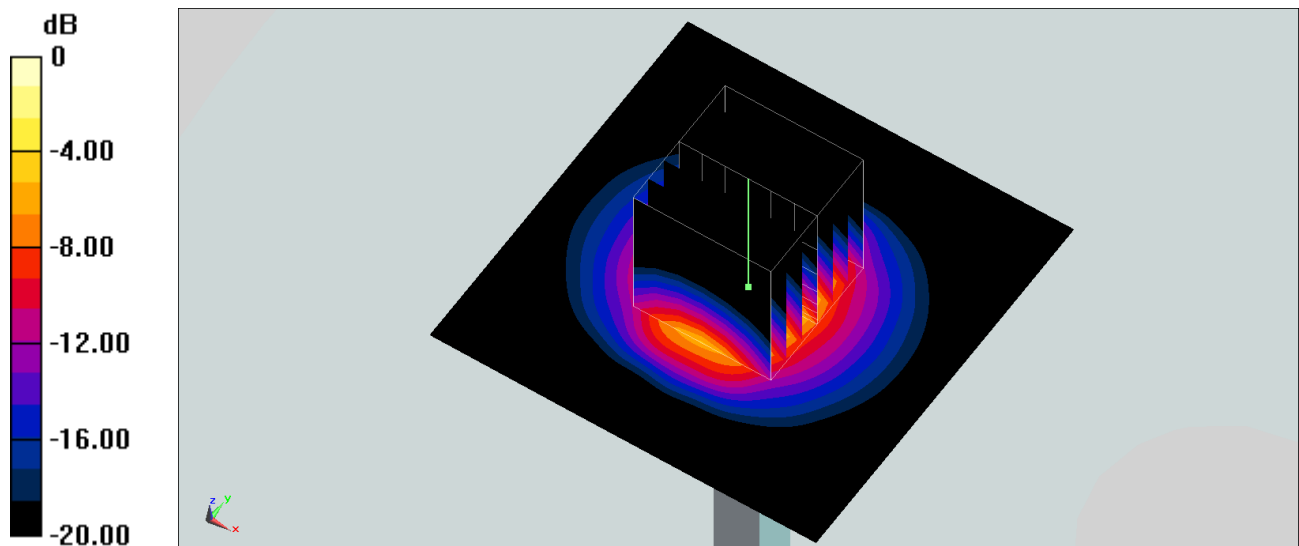

0 dB = 6.55 W/kg = 8.16 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.751$ S/m; $\epsilon_r = 39.094$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.16 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 49.69 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 7.81 W/kg

SAR(1 g) = 3.23 W/kg; SAR(10 g) = 1.24 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 77.4%

Maximum value of SAR (measured) = 5.99 W/kg

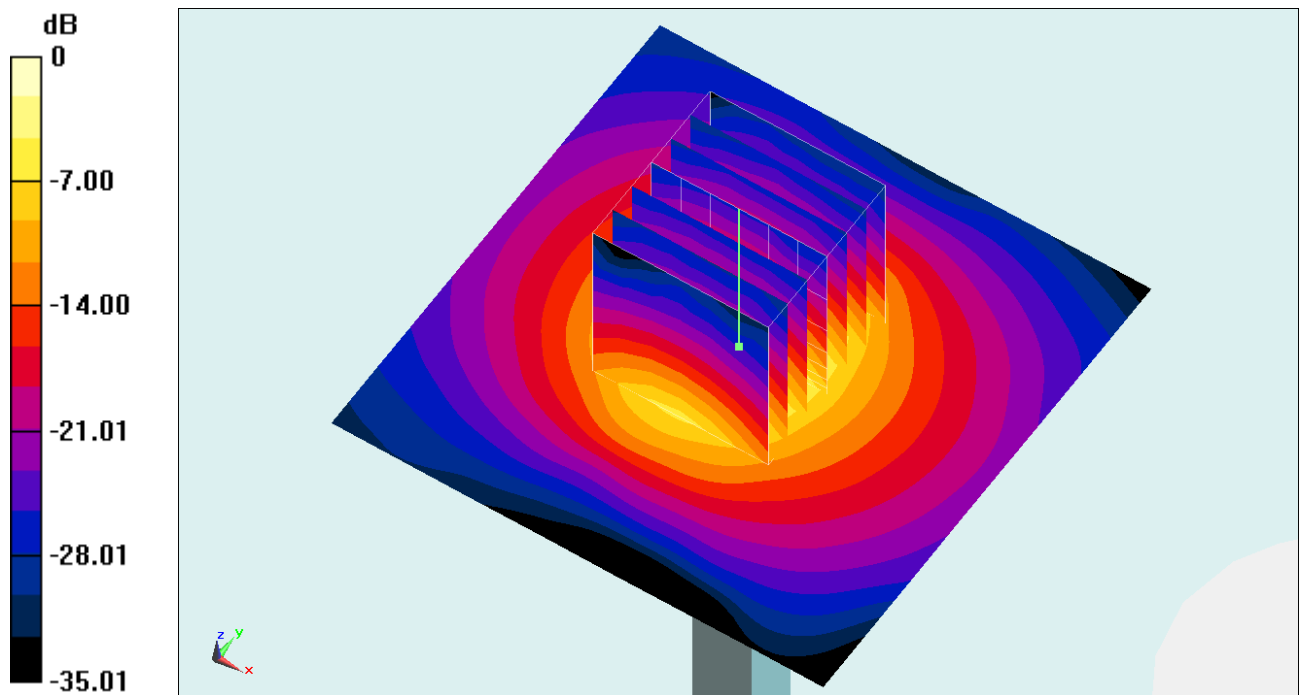

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.723$ S/m; $\epsilon_r = 39.965$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3500 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.45 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 52.04 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 8.78 W/kg

SAR(1 g) = 3.51 W/kg; SAR(10 g) = 1.33 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.8%

Maximum value of SAR (measured) = 6.59 W/kg

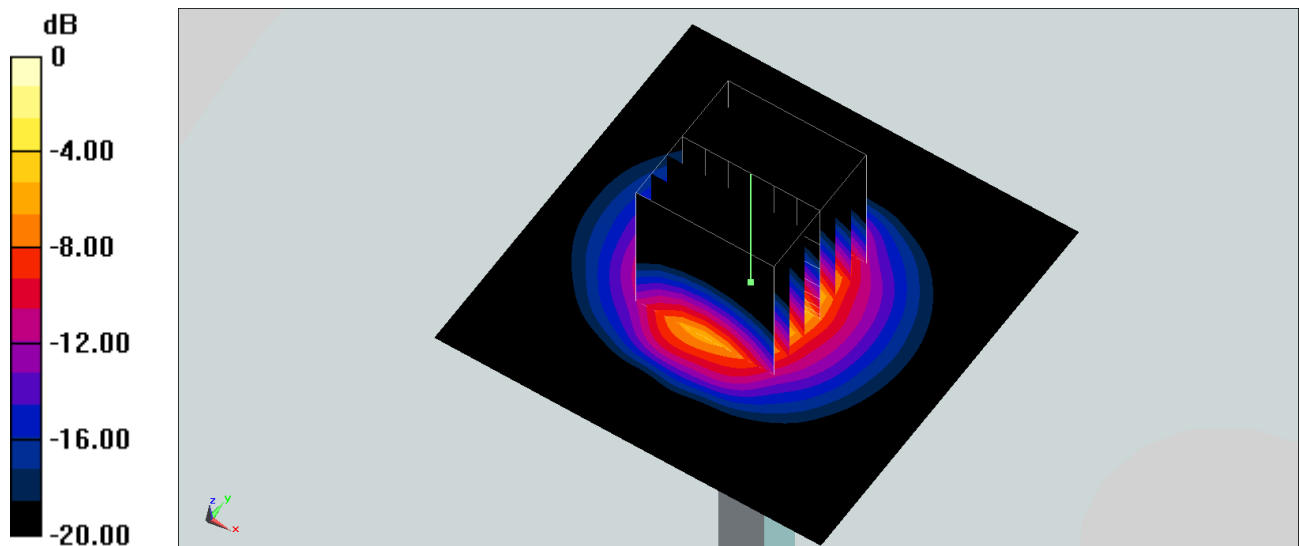

0 dB = 6.59 W/kg = 8.19 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.702$ S/m; $\epsilon_r = 40.949$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.86 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.40 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 7.81 W/kg

SAR(1 g) = 3.25 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 77.4%

Maximum value of SAR (measured) = 5.96 W/kg

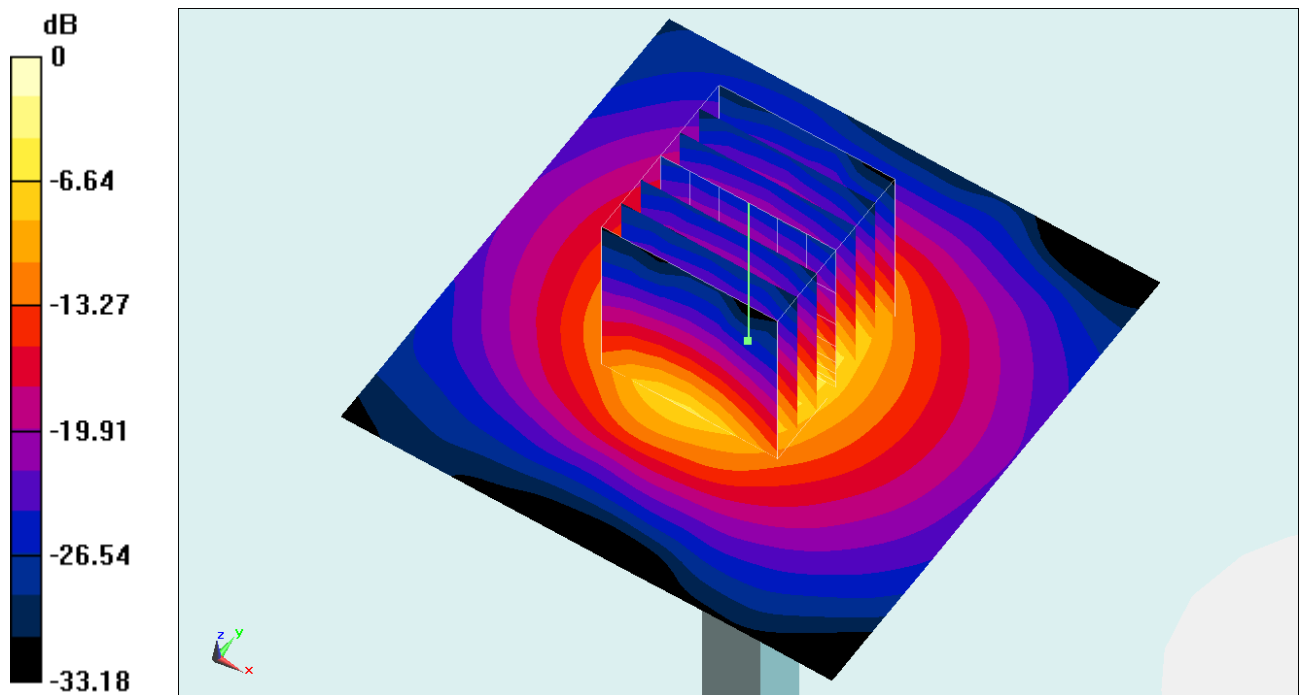

0 dB = 5.96 W/kg = 7.75 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.76$ S/m; $\epsilon_r = 40.116$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3500 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.53 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 52.08 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 8.85 W/kg

SAR(1 g) = 3.55 W/kg; SAR(10 g) = 1.34 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 6.68 W/kg

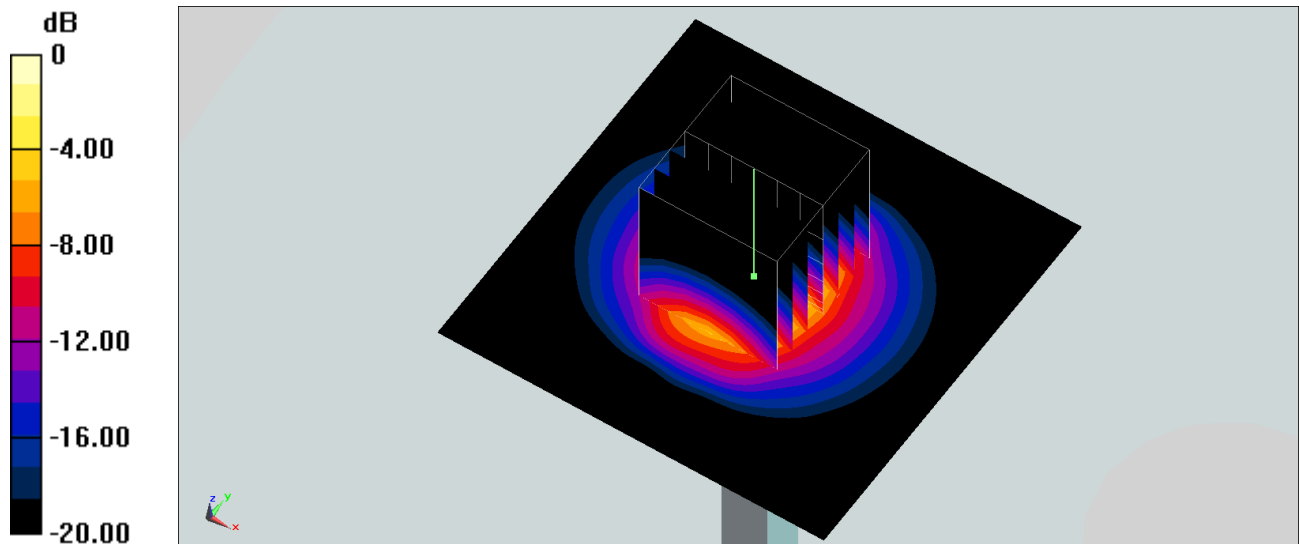

0 dB = 6.68 W/kg = 8.25 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.723$ S/m; $\epsilon_r = 37.912$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.12 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.19 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 7.92 W/kg

SAR(1 g) = 3.26 W/kg; SAR(10 g) = 1.19 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 77.3%

Maximum value of SAR (measured) = 6.04 W/kg

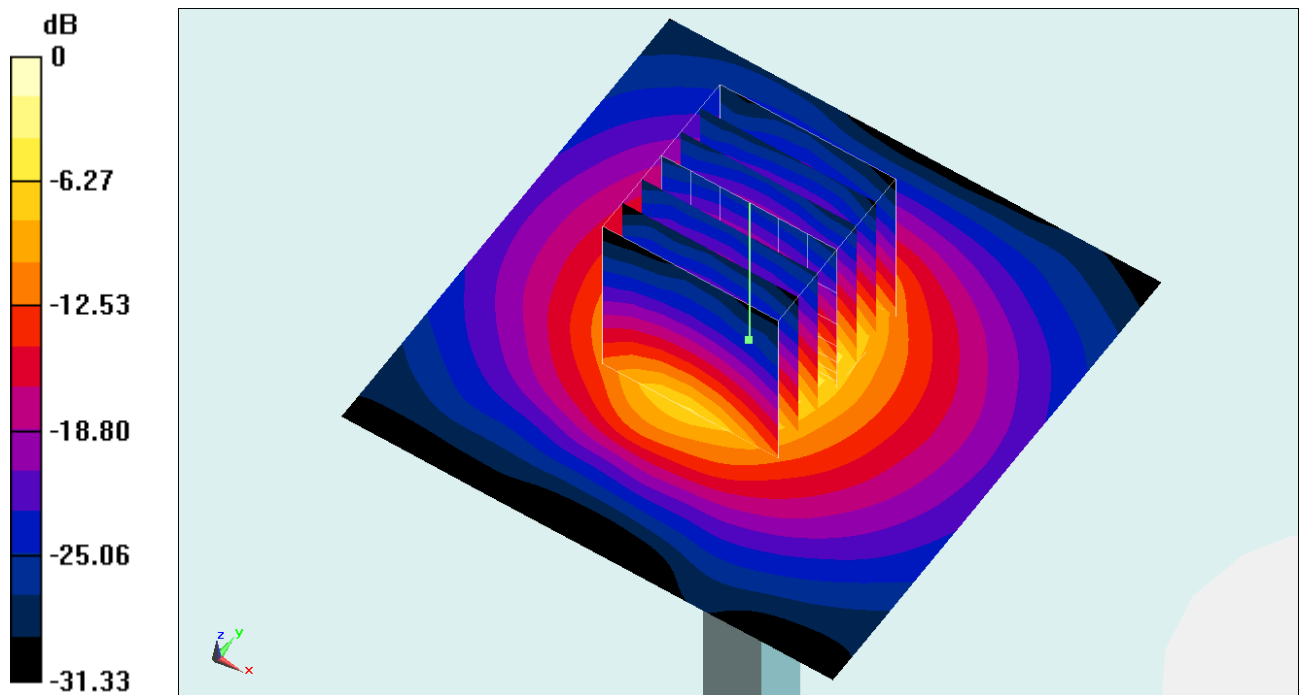

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.773$ S/m; $\epsilon_r = 40.251$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3500 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.56 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 52.10 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 8.83 W/kg

SAR(1 g) = 3.55 W/kg; SAR(10 g) = 1.35 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 6.66 W/kg

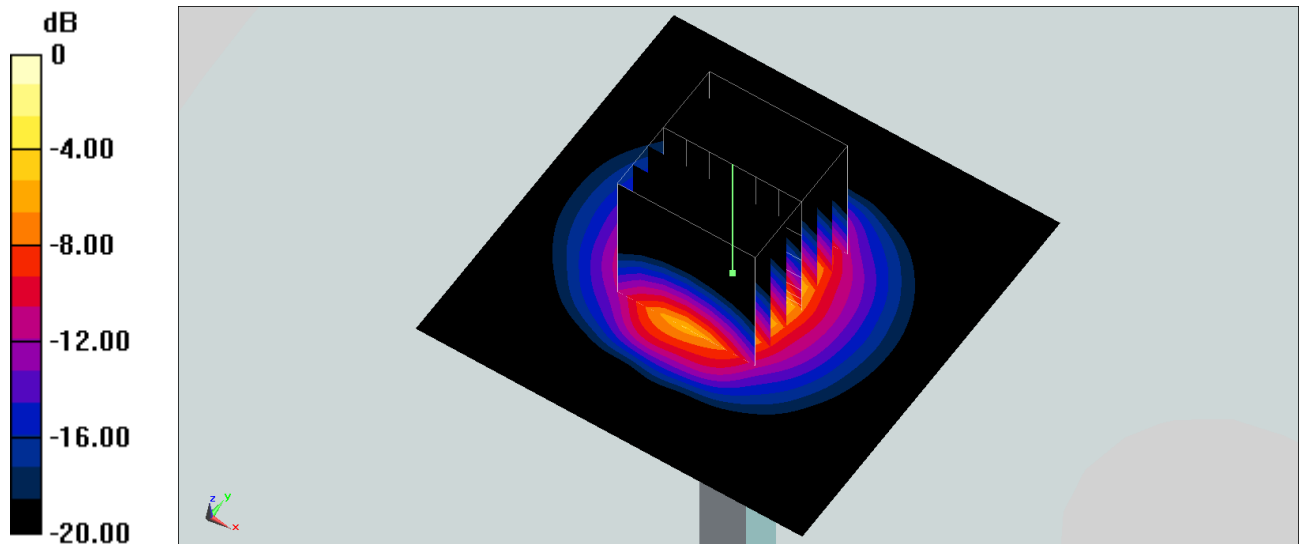

0 dB = 6.66 W/kg = 8.23 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.717$ S/m; $\epsilon_r = 37.827$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.10 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.86 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 8.00 W/kg

SAR(1 g) = 3.18 W/kg; SAR(10 g) = 1.2 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 77.5%

Maximum value of SAR (measured) = 6.04 W/kg

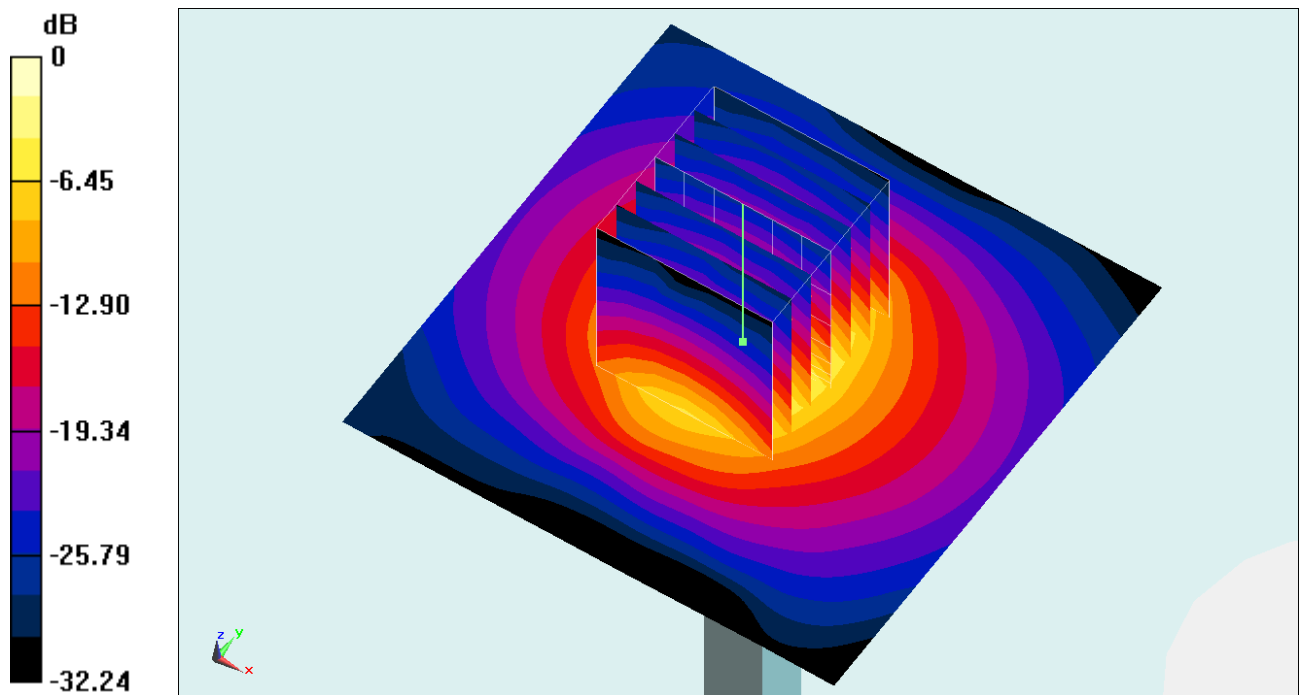

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 40.358$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3500 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.60 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.92 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 8.90 W/kg

SAR(1 g) = 3.57 W/kg; SAR(10 g) = 1.36 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 75.9%

Maximum value of SAR (measured) = 6.68 W/kg

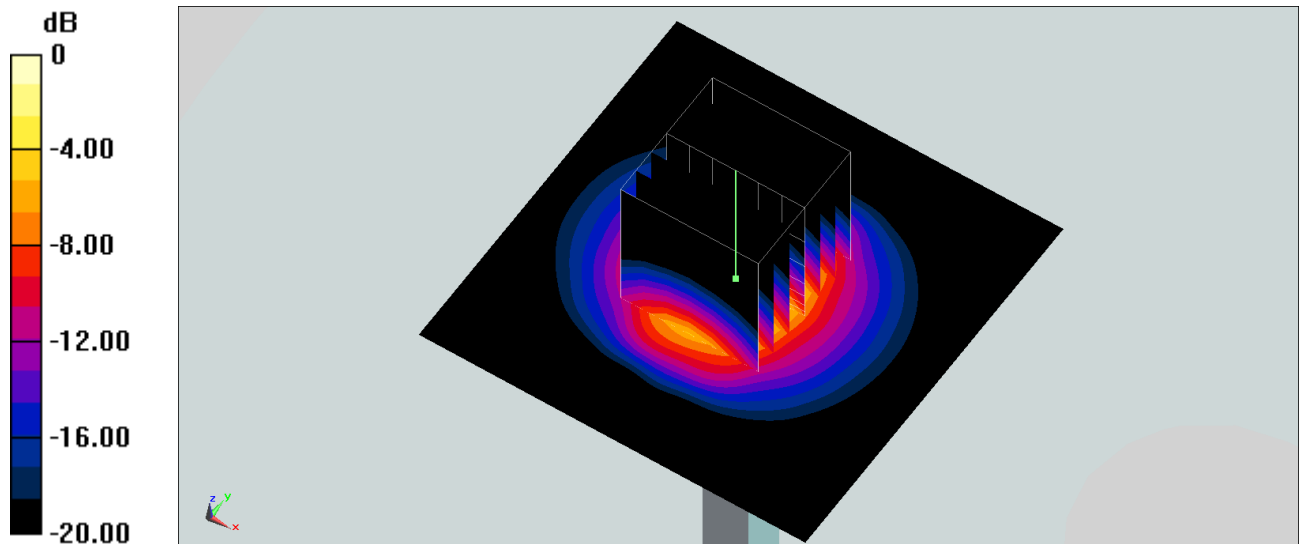

0 dB = 6.68 W/kg = 8.25 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.69$ S/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.49 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.08 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 8.35 W/kg

SAR(1 g) = 3.43 W/kg; SAR(10 g) = 1.3 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.9%

Maximum value of SAR (measured) = 6.26 W/kg

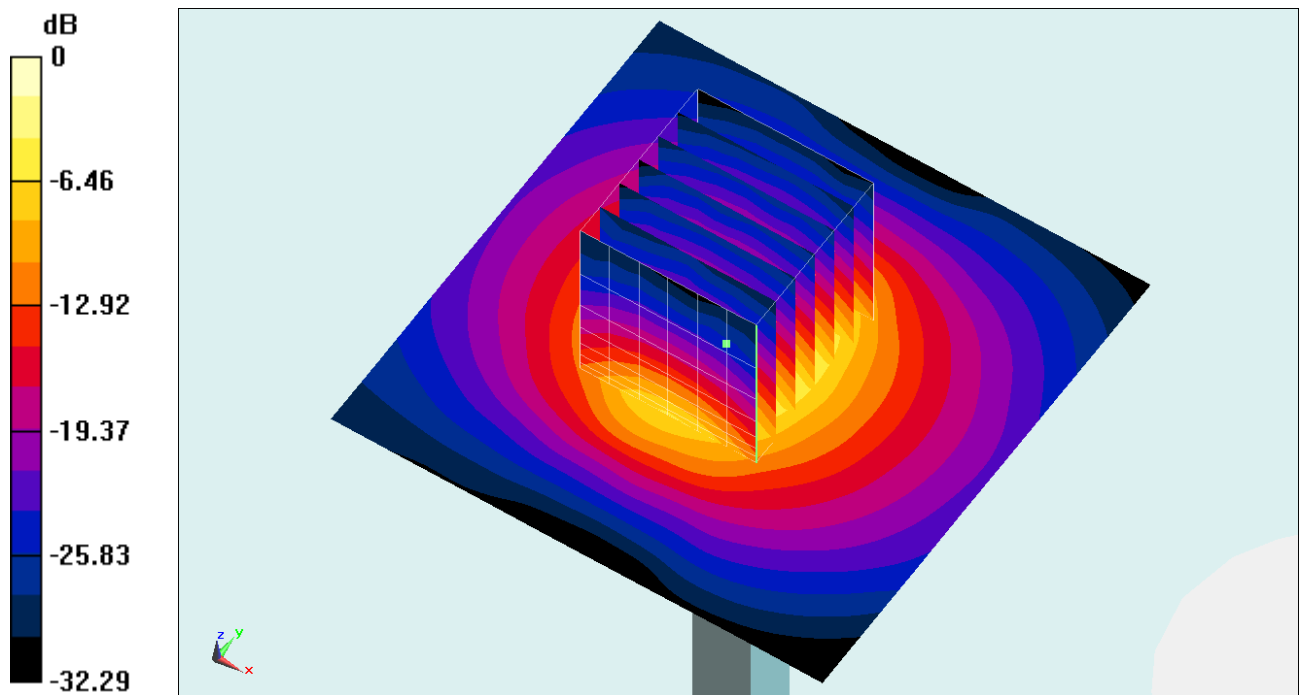

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.782$ S/m; $\epsilon_r = 40.309$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3500 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.59 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 52.06 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 8.86 W/kg

SAR(1 g) = 3.57 W/kg; SAR(10 g) = 1.35 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 6.67 W/kg

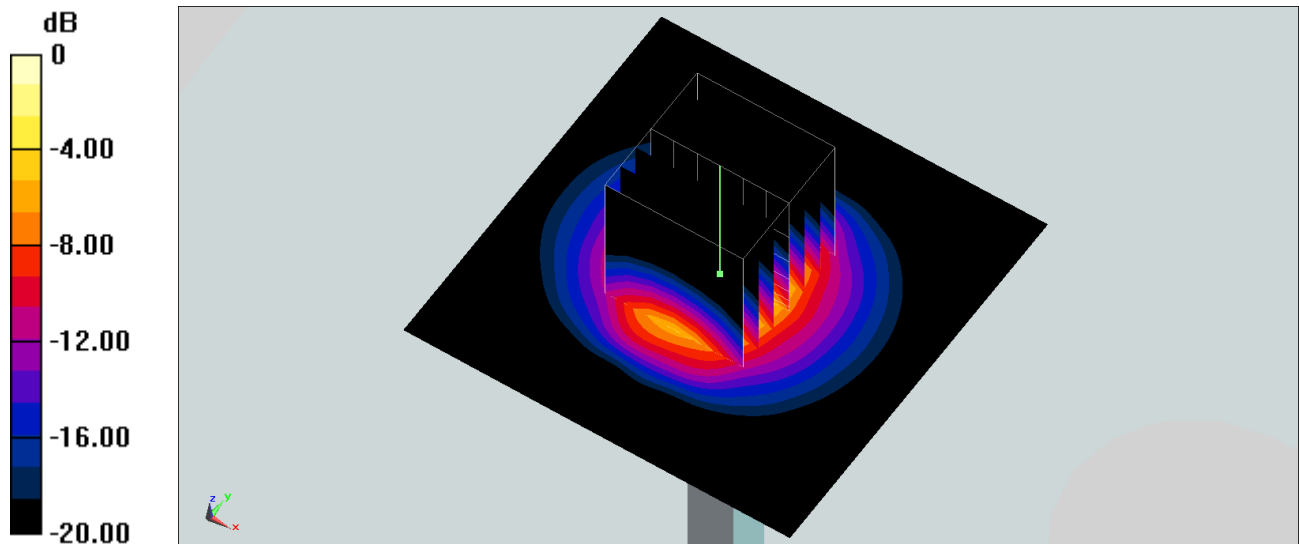

0 dB = 6.67 W/kg = 8.24 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.732$ S/m; $\epsilon_r = 37.905$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.50 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.93 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 8.30 W/kg

SAR(1 g) = 3.41 W/kg; SAR(10 g) = 1.3 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.5%

Maximum value of SAR (measured) = 6.27 W/kg

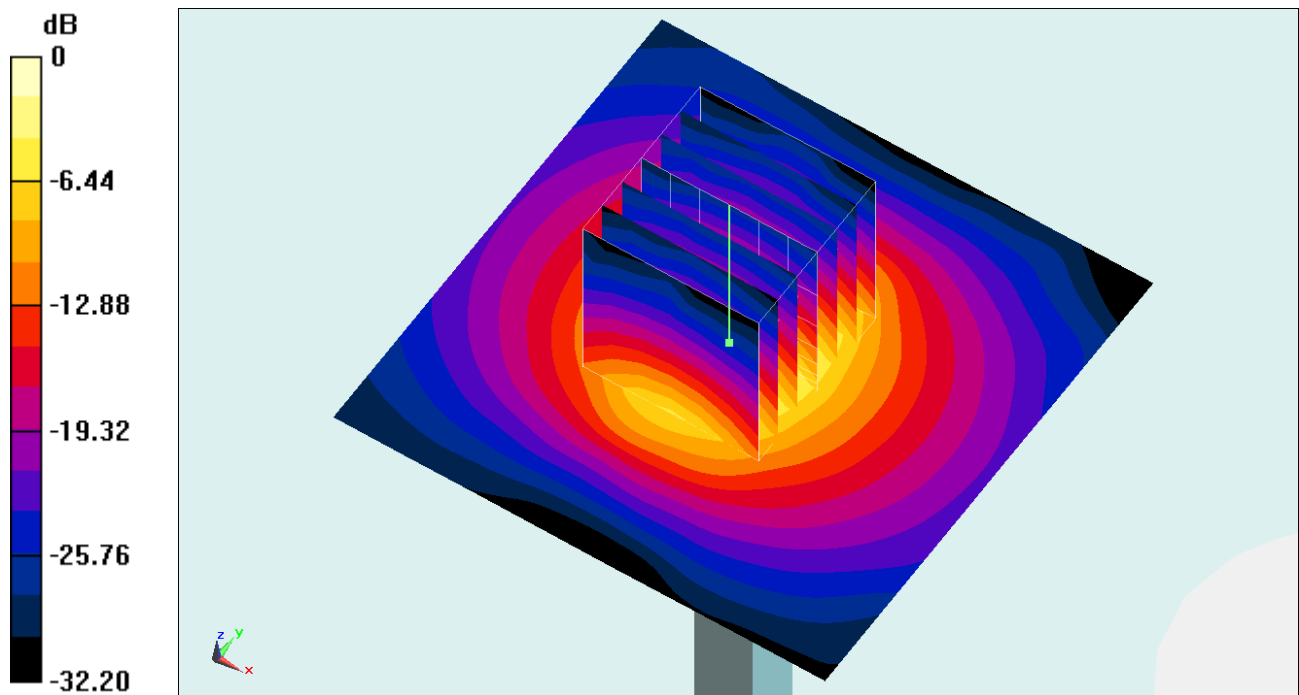

0 dB = 6.27 W/kg = 7.97 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 40.146$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3500 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.33 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 52.40 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 8.79 W/kg

SAR(1 g) = 3.5 W/kg; SAR(10 g) = 1.32 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 75.8%

Maximum value of SAR (measured) = 6.61 W/kg

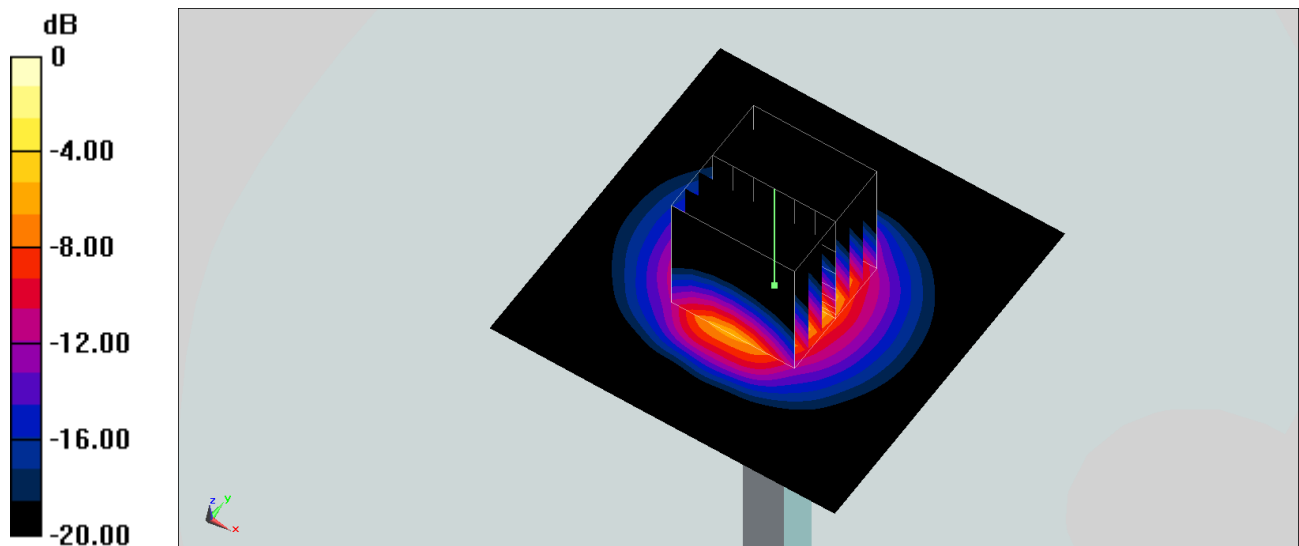

0 dB = 6.61 W/kg = 8.20 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.758$ S/m; $\epsilon_r = 39.322$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.59 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.01 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 8.40 W/kg

SAR(1 g) = 3.46 W/kg; SAR(10 g) = 1.32 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.2%

Maximum value of SAR (measured) = 6.34 W/kg

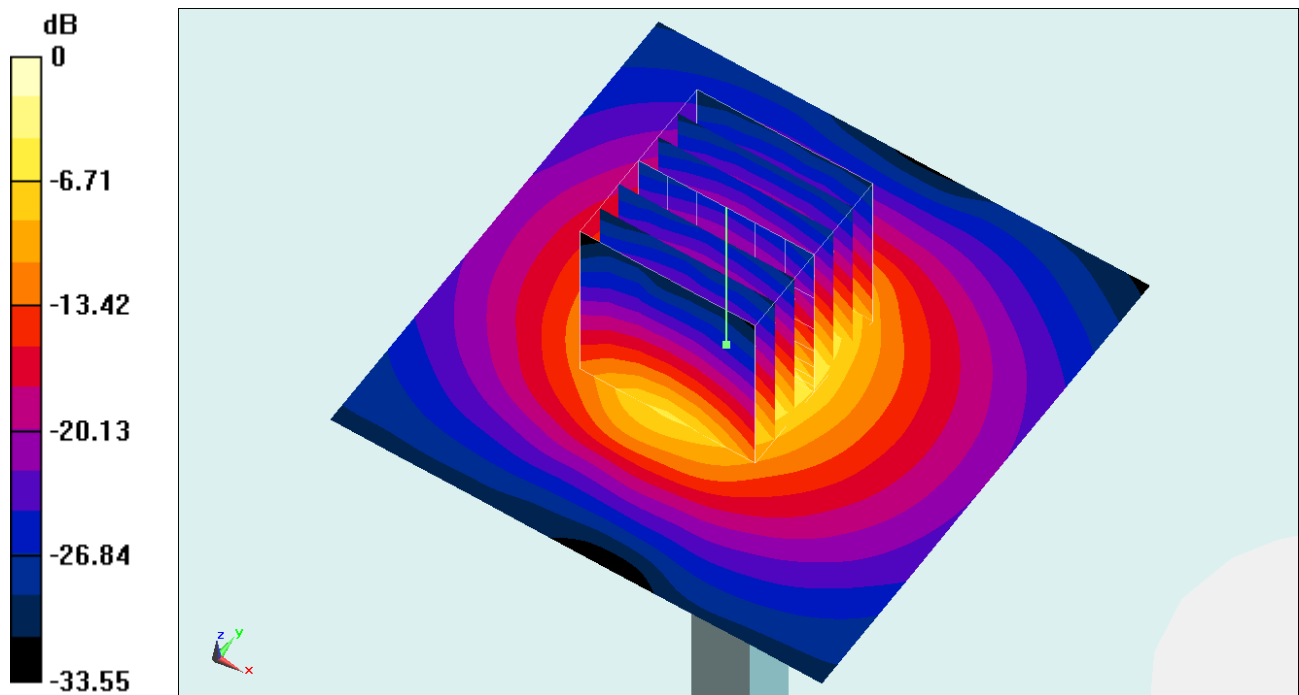

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260306 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.672$ S/m; $\epsilon_r = 36.881$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3500 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.27 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 40.56 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 7.31 W/kg

SAR(1 g) = 3.06 W/kg; SAR(10 g) = 1.19 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 78.4%

Maximum value of SAR (measured) = 5.71 W/kg

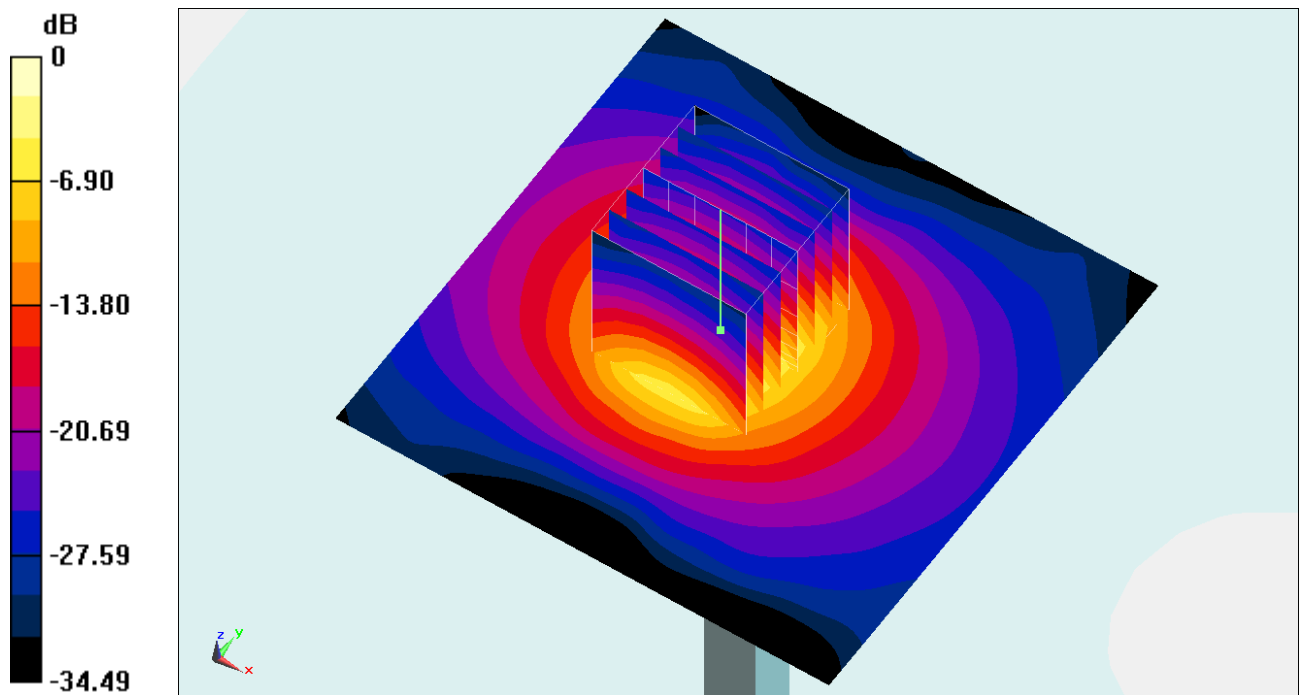

0 dB = 5.71 W/kg = 7.57 dBW/kg

System Check_Head_3500MHz

DUT: D3500V2-1036

Communication System: CW; Frequency: 3500 MHz

Medium: HSL_600-7200_260307 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.818$ S/m; $\epsilon_r = 38.951$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3500 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.95 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.10 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 8.47 W/kg

SAR(1 g) = 3.49 W/kg; SAR(10 g) = 1.34 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.5%

Maximum value of SAR (measured) = 6.48 W/kg

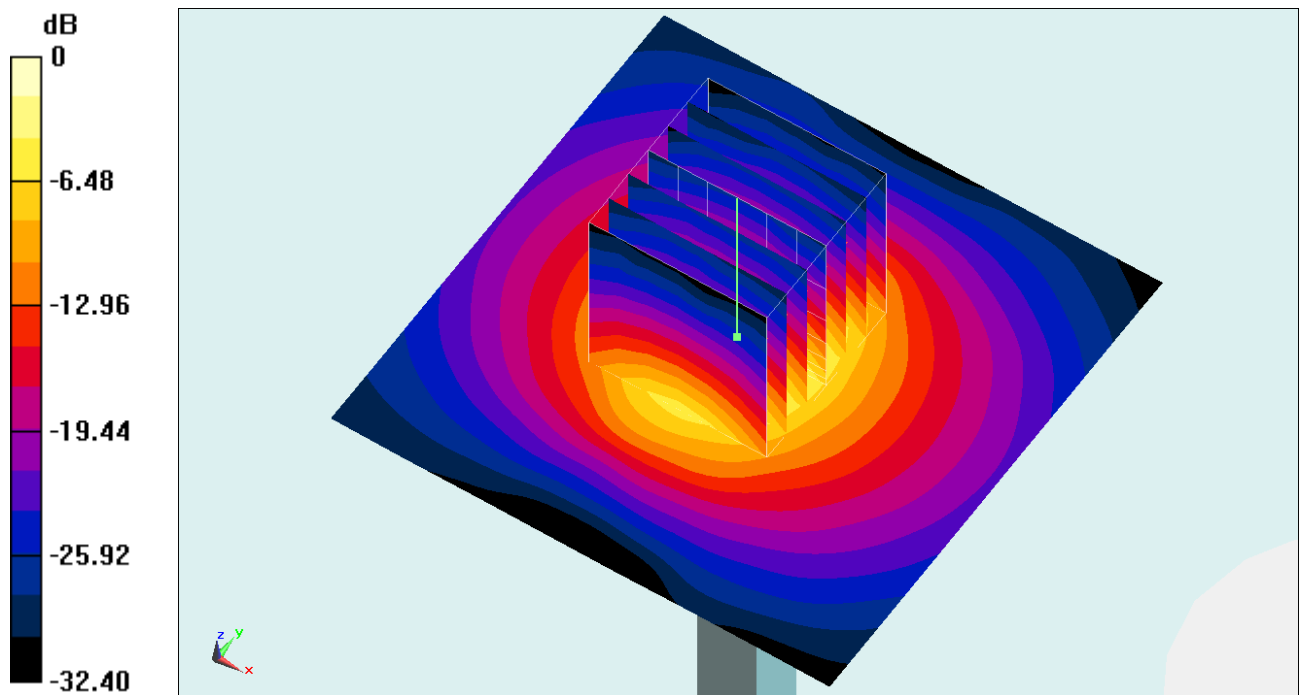

0 dB = 6.48 W/kg = 8.12 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260123 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.965$ S/m; $\epsilon_r = 39.66$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.63 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.21 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 8.65 W/kg

SAR(1 g) = 3.45 W/kg; SAR(10 g) = 1.3 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 6.58 W/kg

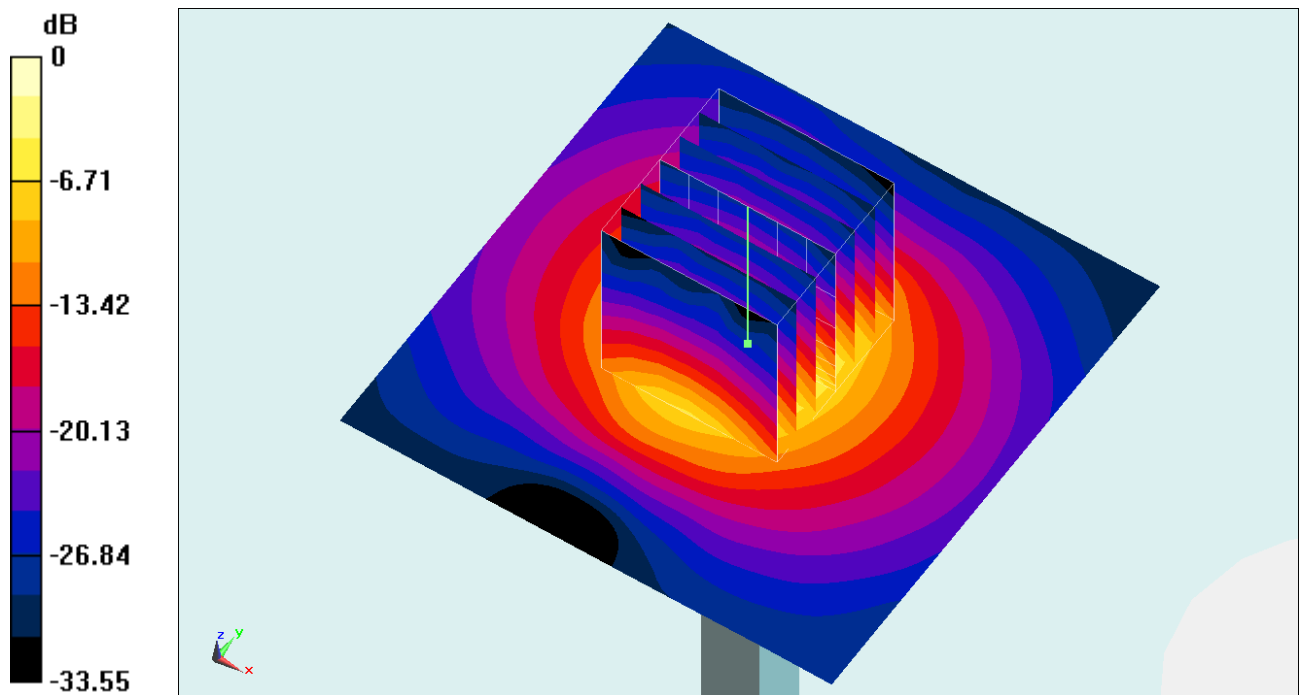

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260127 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.888$ S/m; $\epsilon_r = 37.385$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.49 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.92 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 8.39 W/kg

SAR(1 g) = 3.31 W/kg; SAR(10 g) = 1.23 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 6.37 W/kg

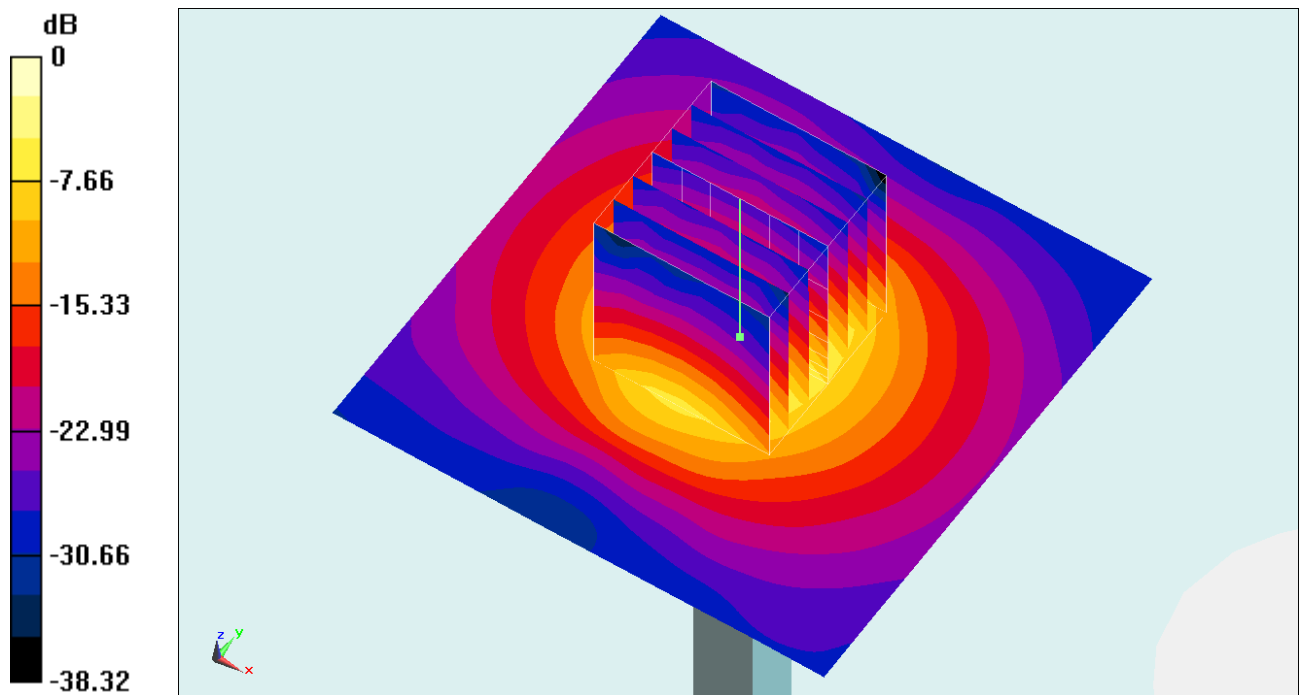

0 dB = 6.37 W/kg = 8.04 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260128 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.874$ S/m; $\epsilon_r = 37.344$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.57 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.99 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 8.38 W/kg

SAR(1 g) = 3.37 W/kg; SAR(10 g) = 1.26 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 6.37 W/kg

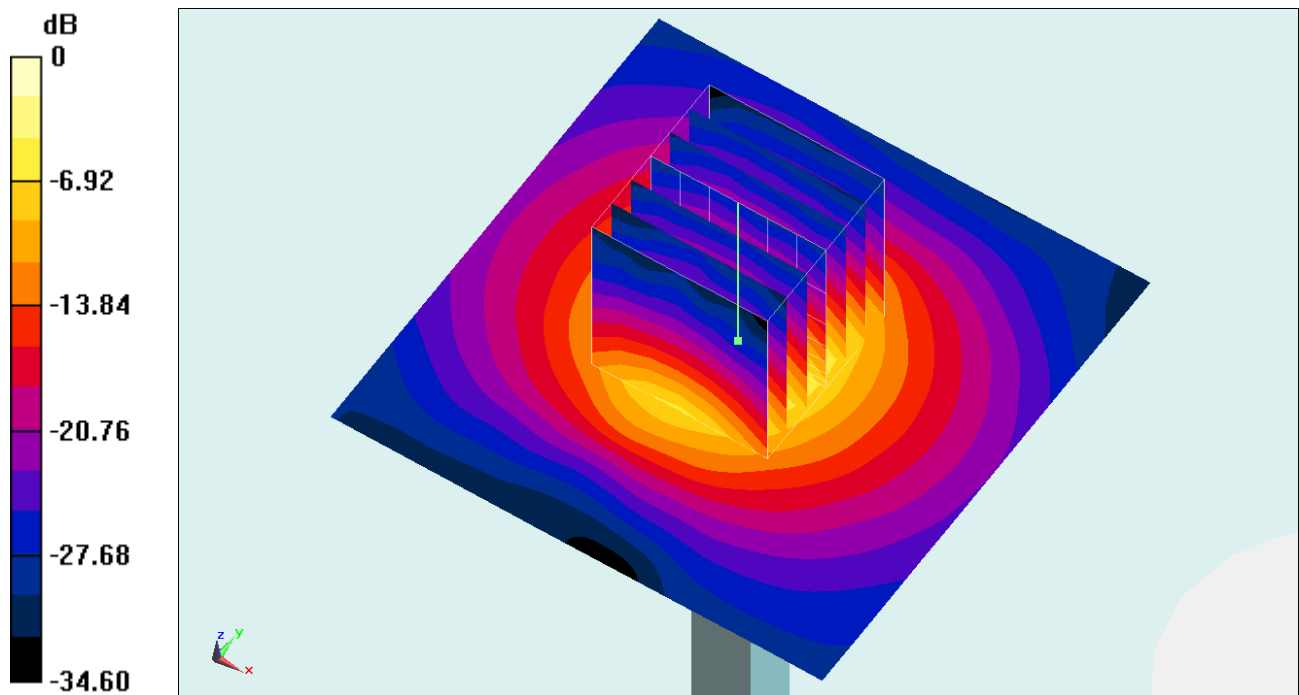

0 dB = 6.37 W/kg = 8.04 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260130 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.885$ S/m; $\epsilon_r = 37.29$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.59 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.12 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 8.46 W/kg

SAR(1 g) = 3.32 W/kg; SAR(10 g) = 1.23 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.4%

Maximum value of SAR (measured) = 6.42 W/kg

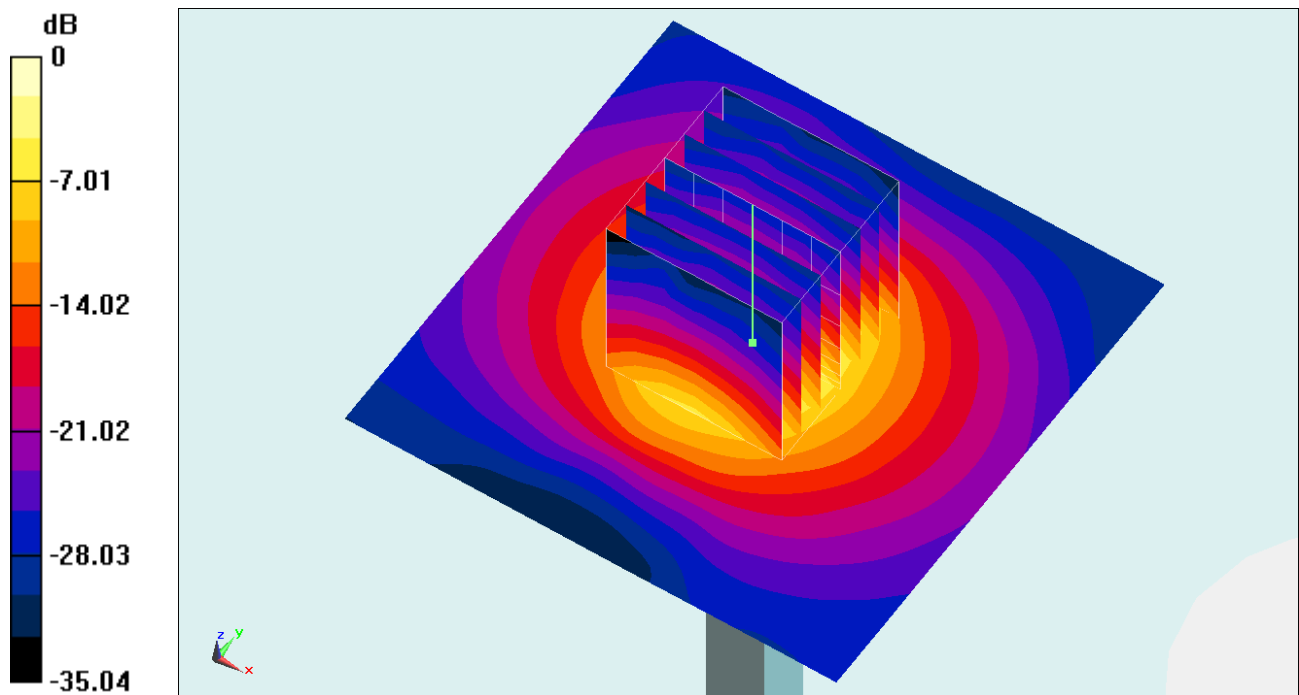

0 dB = 6.42 W/kg = 8.08 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260131 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.897$ S/m; $\epsilon_r = 37.292$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.70 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.27 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 8.63 W/kg

SAR(1 g) = 3.36 W/kg; SAR(10 g) = 1.29 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.9%

Maximum value of SAR (measured) = 6.49 W/kg

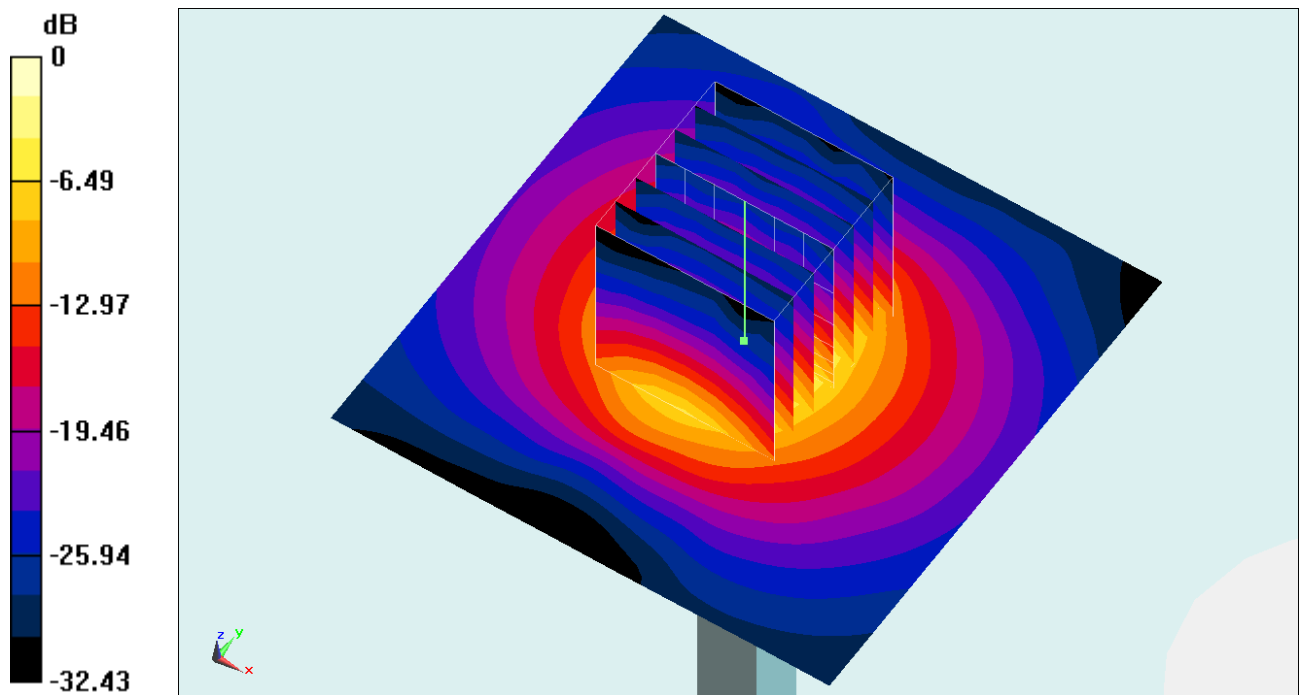

0 dB = 6.49 W/kg = 8.12 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260201 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.849$ S/m; $\epsilon_r = 37.564$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.53 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.33 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 8.51 W/kg

SAR(1 g) = 3.38 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 76%

Maximum value of SAR (measured) = 6.41 W/kg

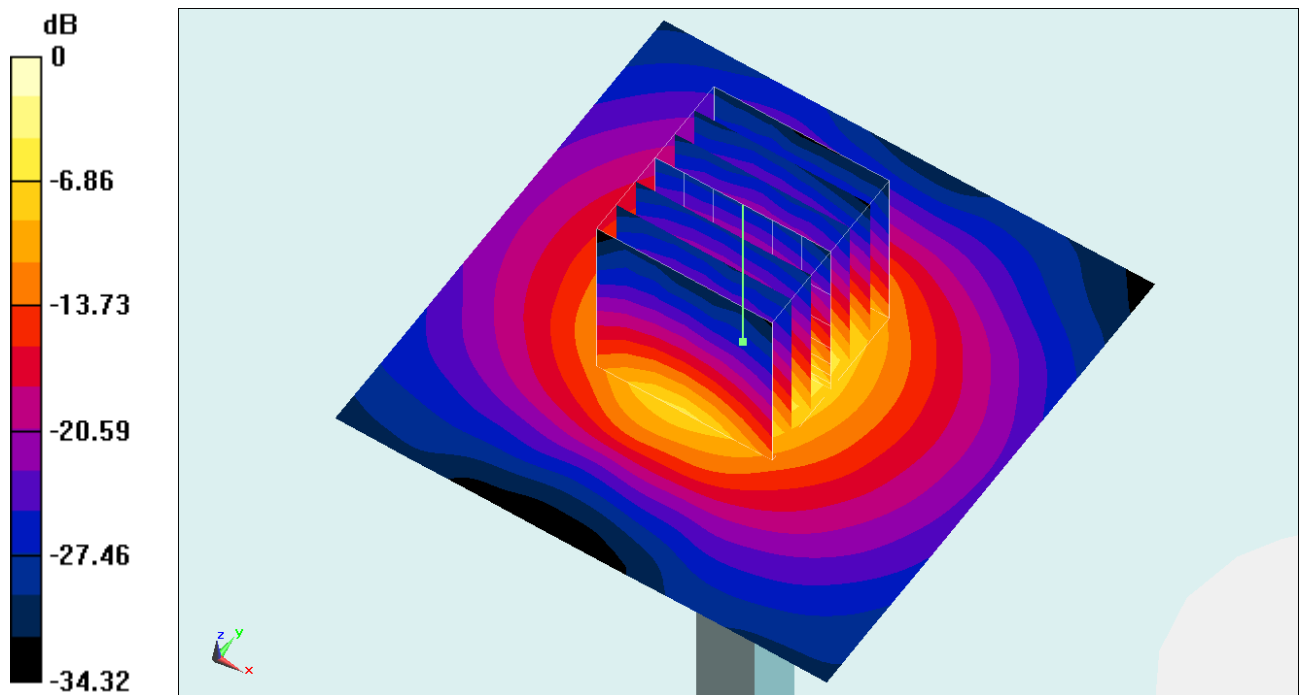

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260207 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.922$ S/m; $\epsilon_r = 37.437$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.75 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.40 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 8.72 W/kg

SAR(1 g) = 3.41 W/kg; SAR(10 g) = 1.27 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 6.58 W/kg

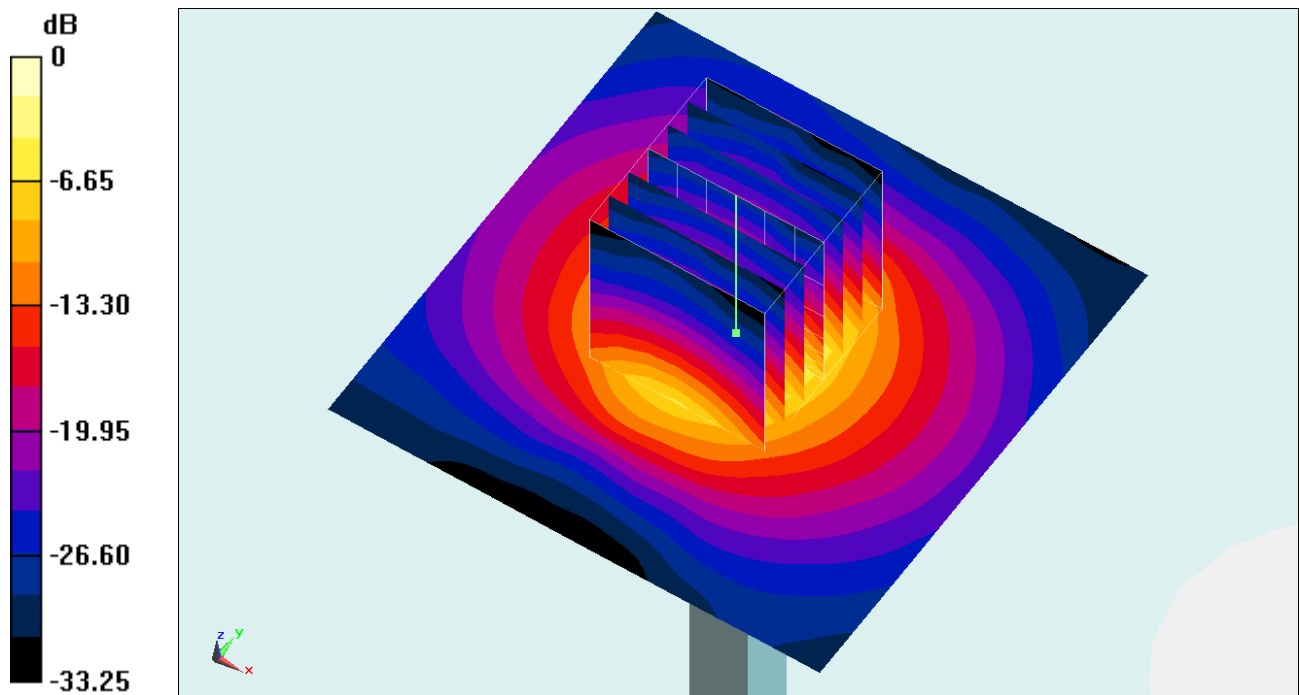

0 dB = 6.58 W/kg = 8.18 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260208 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.975$ S/m; $\epsilon_r = 38.135$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 7.02 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.60 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 8.80 W/kg

SAR(1 g) = 3.45 W/kg; SAR(10 g) = 1.29 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.2%

Maximum value of SAR (measured) = 6.66 W/kg

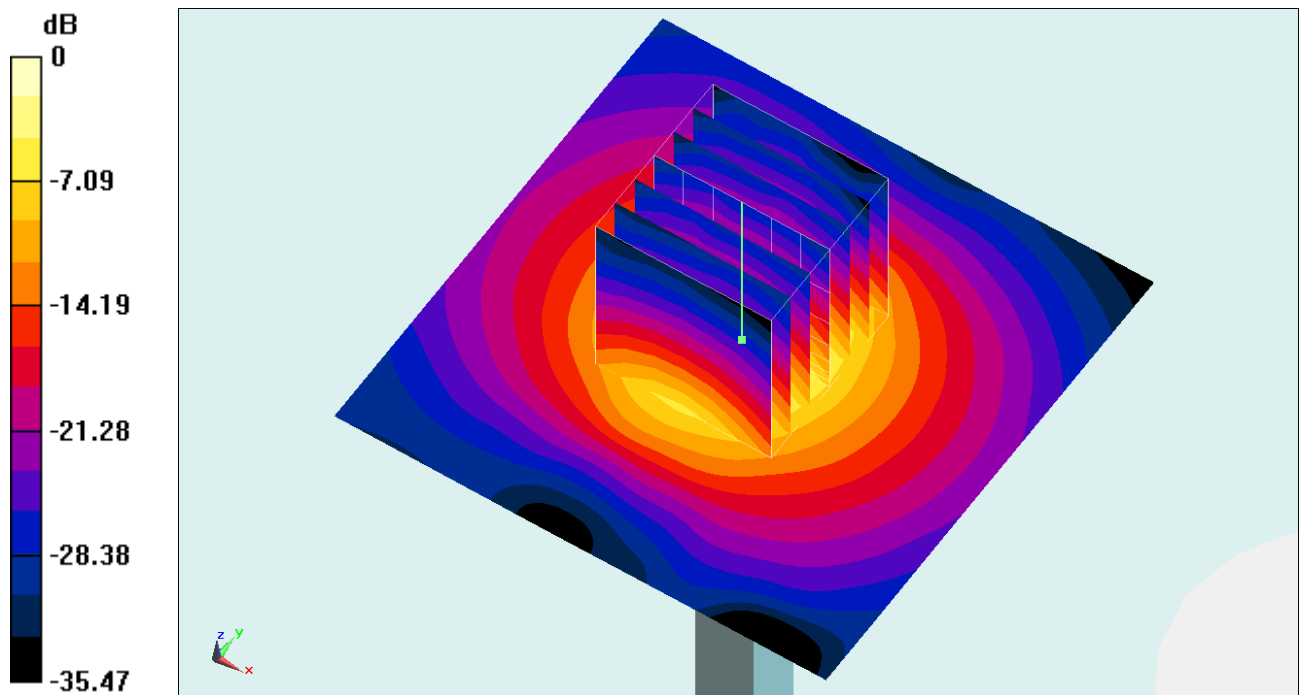

0 dB = 6.66 W/kg = 8.23 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.917$ S/m; $\epsilon_r = 39.623$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11) @ 3700 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.43 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.03 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 9.07 W/kg

SAR(1 g) = 3.46 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.6%

Maximum value of SAR (measured) = 6.69 W/kg

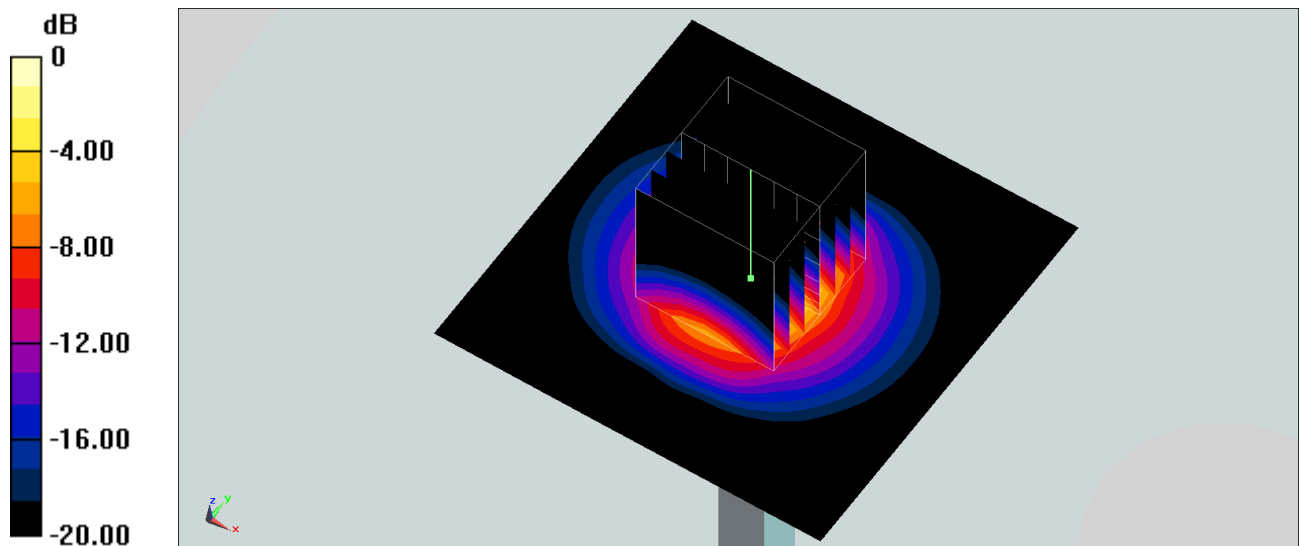

0 dB = 6.69 W/kg = 8.25 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.899$ S/m; $\epsilon_r = 38.746$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.50 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.37 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 8.37 W/kg

SAR(1 g) = 3.27 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 6.38 W/kg

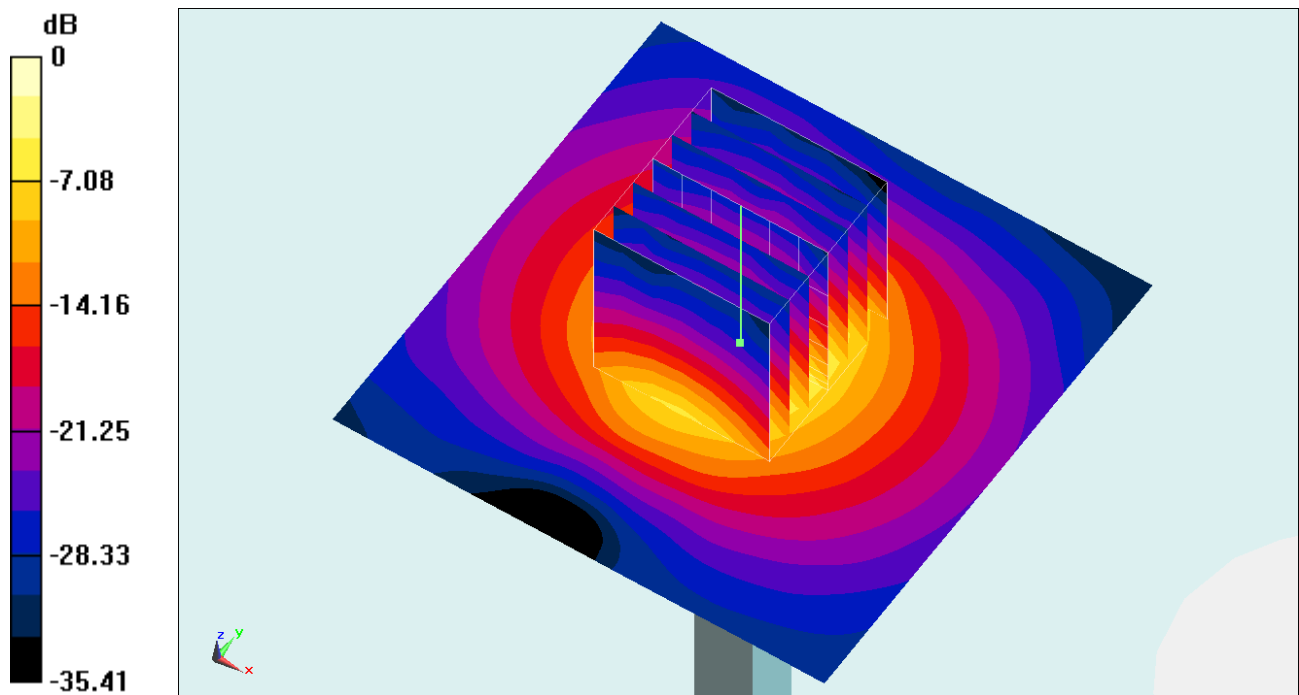

0 dB = 6.38 W/kg = 8.05 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.906$ S/m; $\epsilon_r = 39.684$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11) @ 3700 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.48 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.14 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 9.07 W/kg

SAR(1 g) = 3.45 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.4%

Maximum value of SAR (measured) = 6.66 W/kg

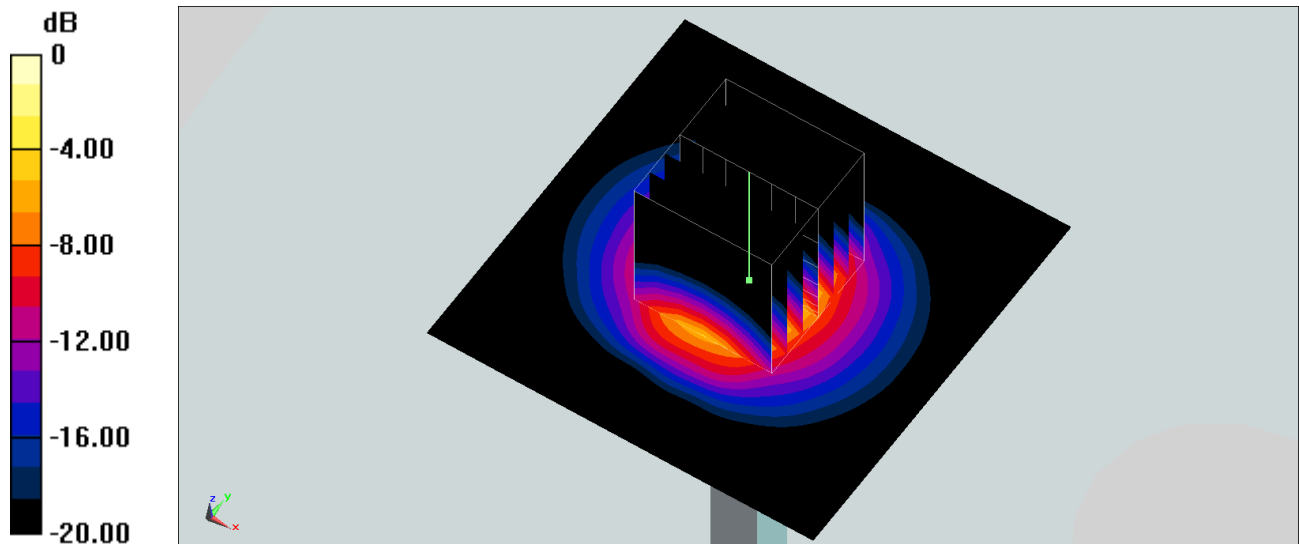

0 dB = 6.66 W/kg = 8.23 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.882$ S/m; $\epsilon_r = 40.66$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.39 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.98 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 8.42 W/kg

SAR(1 g) = 3.38 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.4%

Maximum value of SAR (measured) = 6.40 W/kg

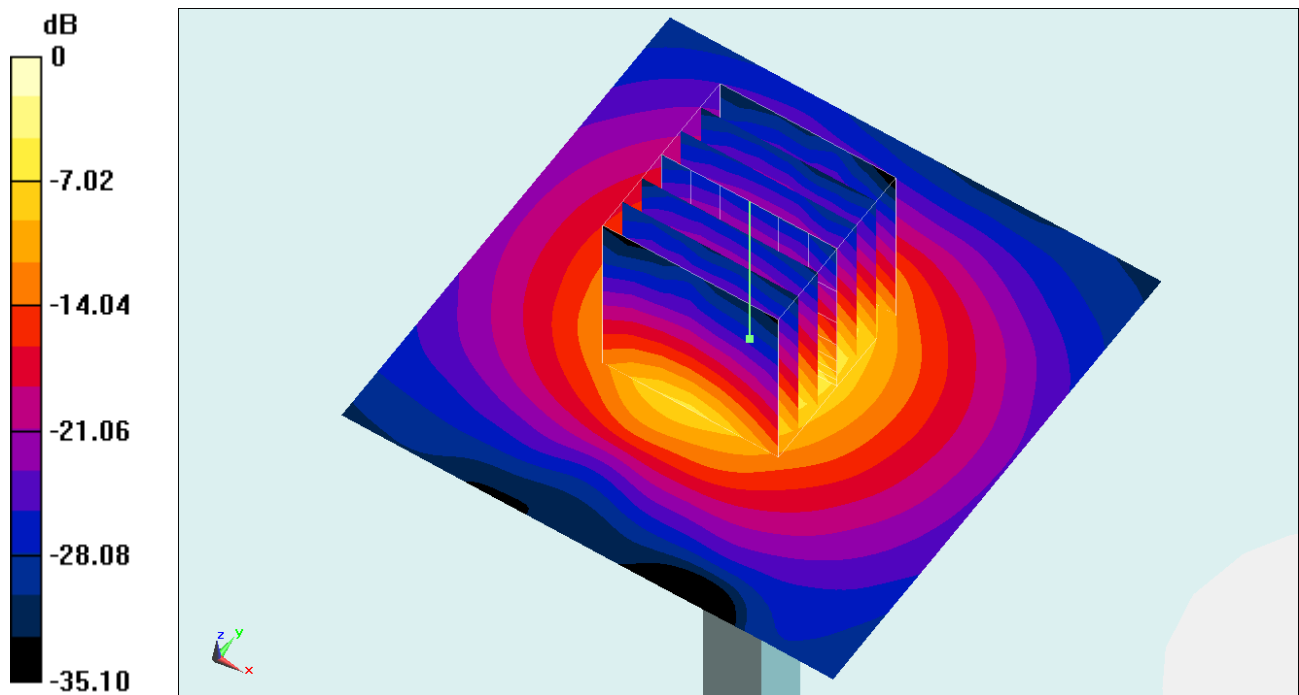

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.945$ S/m; $\epsilon_r = 39.834$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11) @ 3700 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.56 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.17 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 9.22 W/kg

SAR(1 g) = 3.49 W/kg; SAR(10 g) = 1.3 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.4%

Maximum value of SAR (measured) = 6.77 W/kg

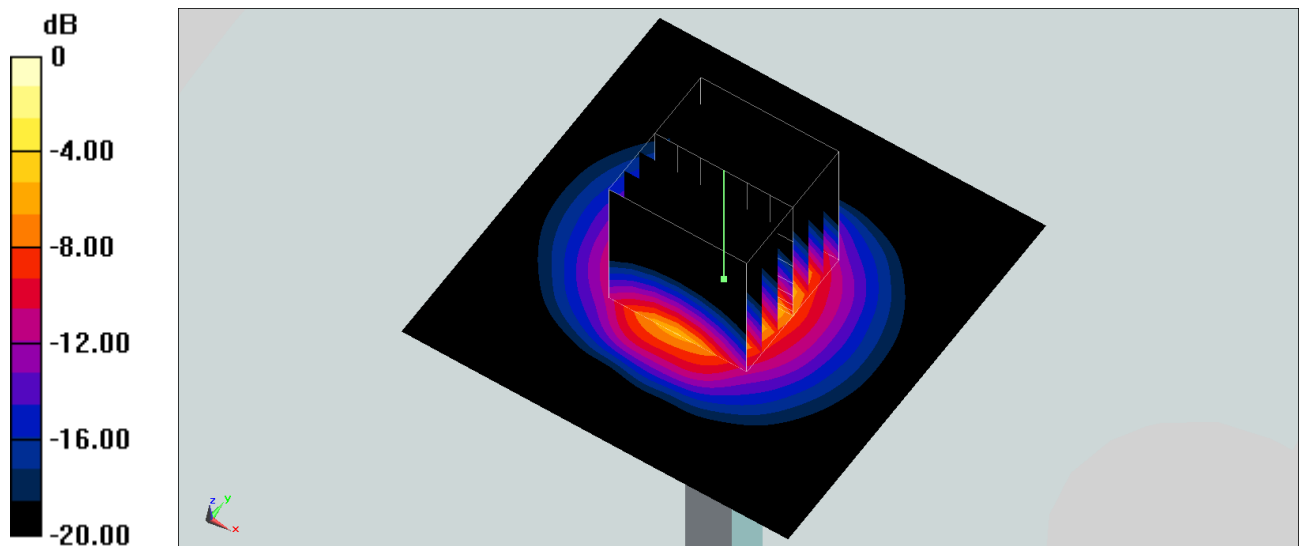

0 dB = 6.77 W/kg = 8.31 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.901$ S/m; $\epsilon_r = 37.576$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.58 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.78 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 8.45 W/kg

SAR(1 g) = 3.37 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.3%

Maximum value of SAR (measured) = 6.41 W/kg

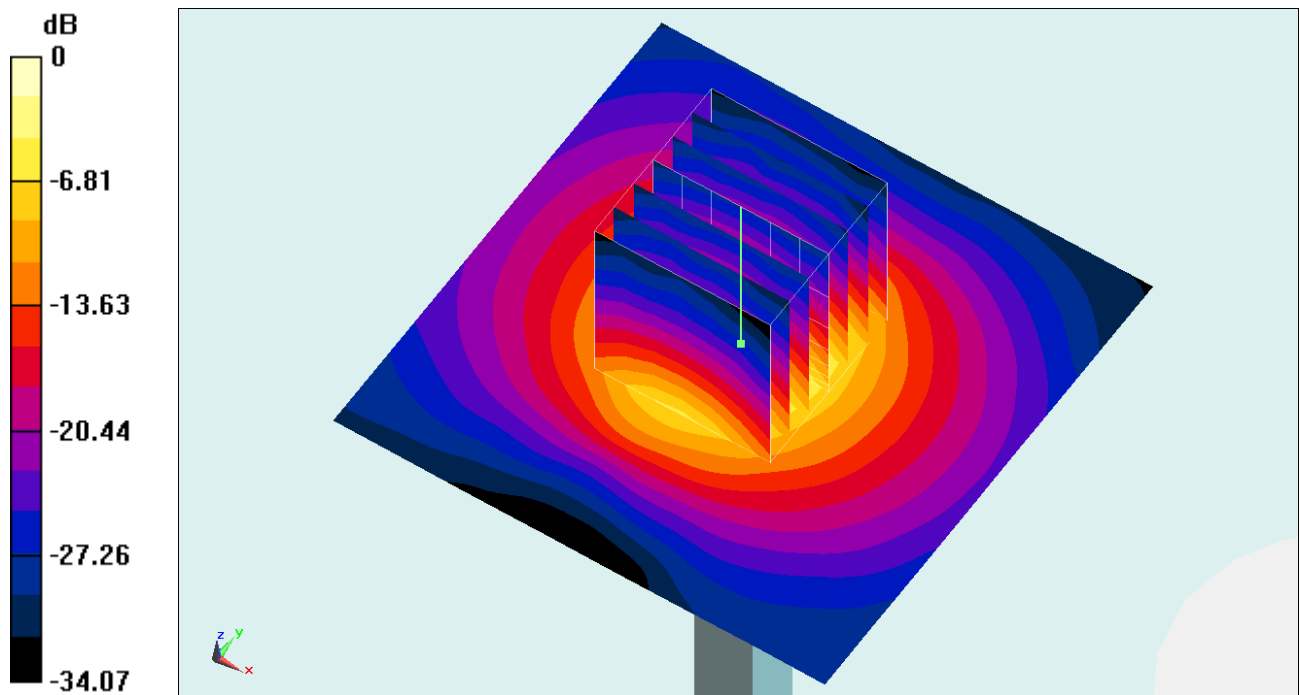

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260225 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.959$ S/m; $\epsilon_r = 39.969$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11) @ 3700 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.60 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.14 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 9.24 W/kg

SAR(1 g) = 3.51 W/kg; SAR(10 g) = 1.3 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.1%

Maximum value of SAR (measured) = 6.79 W/kg

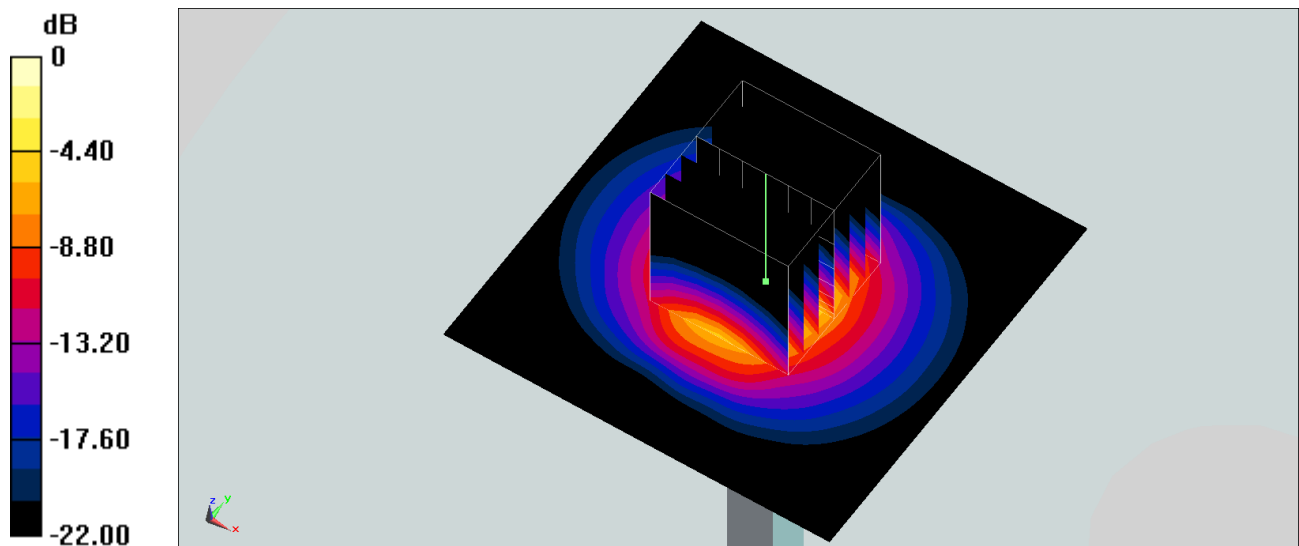

0 dB = 6.79 W/kg = 8.32 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260225 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.894$ S/m; $\epsilon_r = 37.49$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.52 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.55 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 8.34 W/kg

SAR(1 g) = 3.3 W/kg; SAR(10 g) = 1.22 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 6.33 W/kg

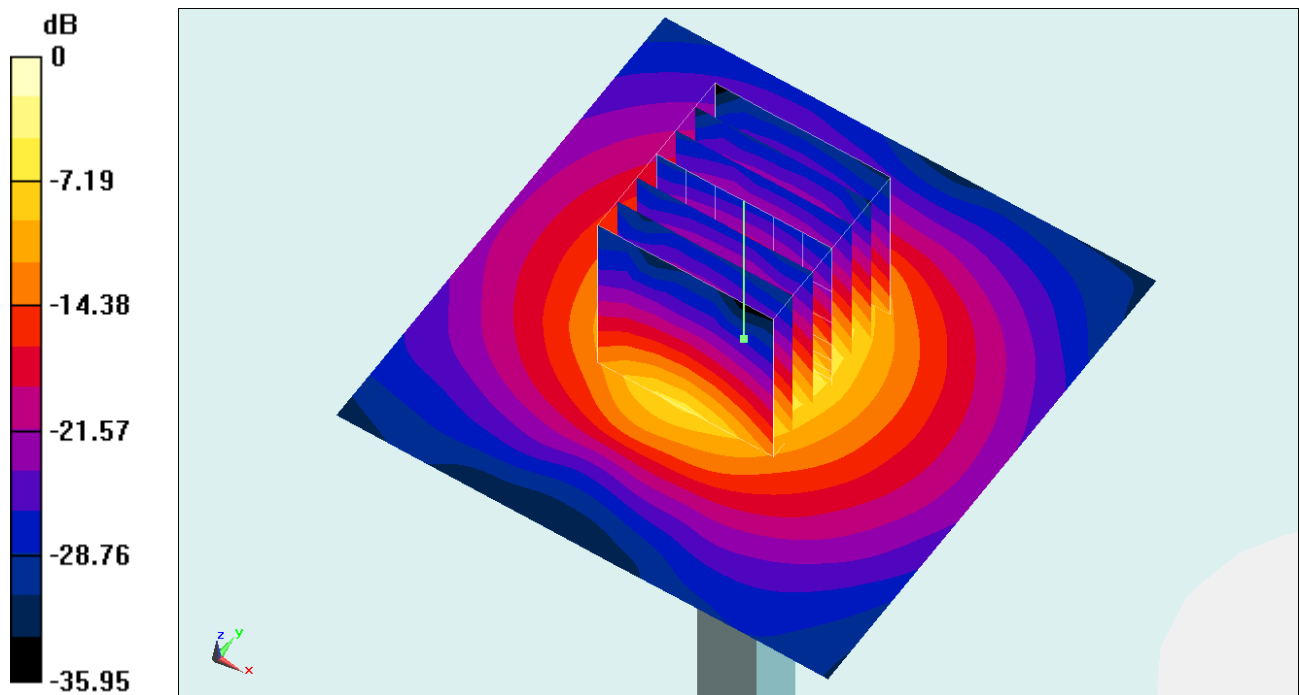

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.977$ S/m; $\epsilon_r = 40.076$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11) @ 3700 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.63 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.34 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 9.28 W/kg

SAR(1 g) = 3.54 W/kg; SAR(10 g) = 1.31 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.7%

Maximum value of SAR (measured) = 6.85 W/kg

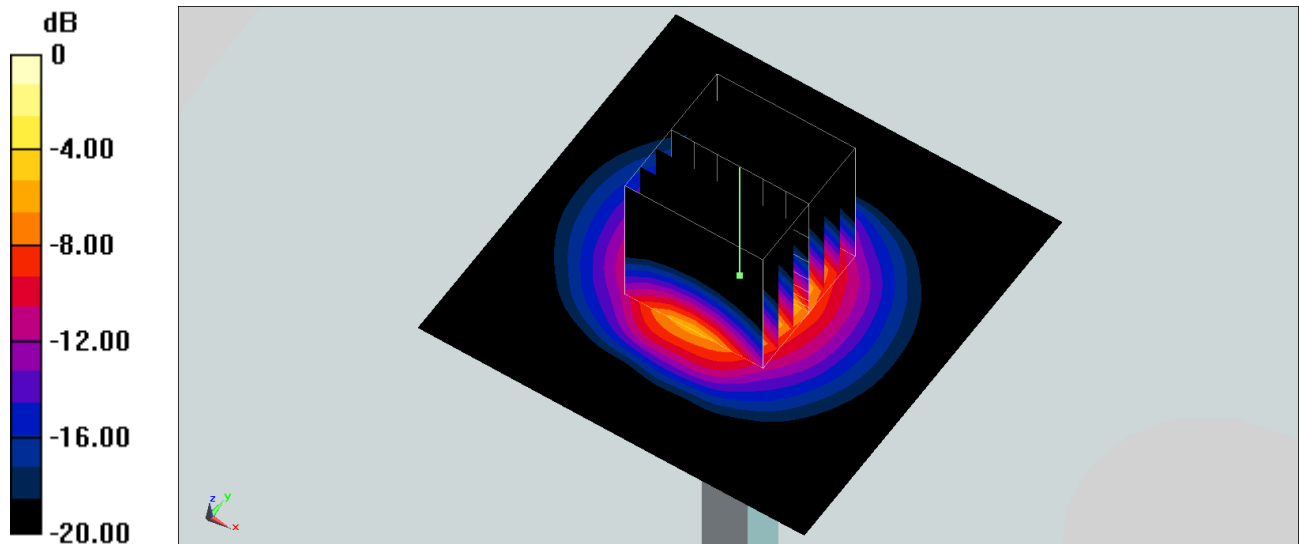

0 dB = 6.85 W/kg = 8.36 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.874$ S/m; $\epsilon_r = 40.271$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.68 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.95 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 8.36 W/kg

SAR(1 g) = 3.36 W/kg; SAR(10 g) = 1.24 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 6.34 W/kg

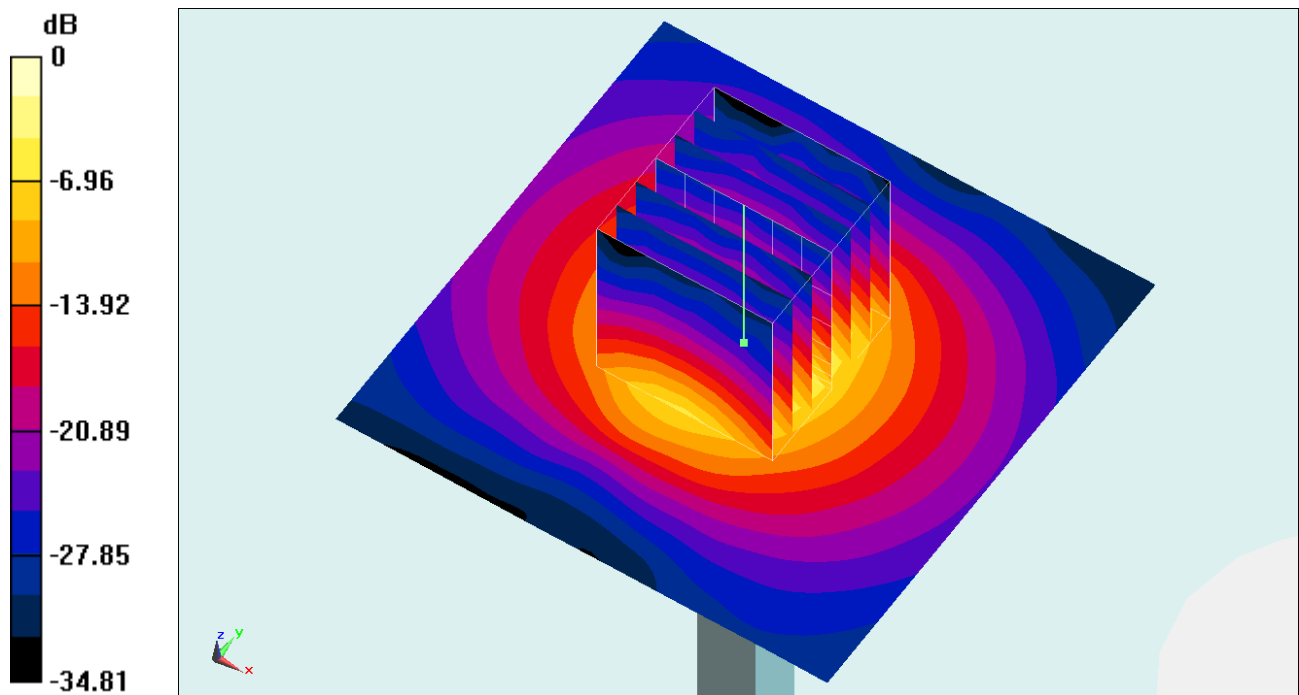

0 dB = 6.34 W/kg = 8.02 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.968$ S/m; $\epsilon_r = 40.028$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11) @ 3700 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.62 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.17 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 9.29 W/kg

SAR(1 g) = 3.52 W/kg; SAR(10 g) = 1.31 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.4%

Maximum value of SAR (measured) = 6.82 W/kg

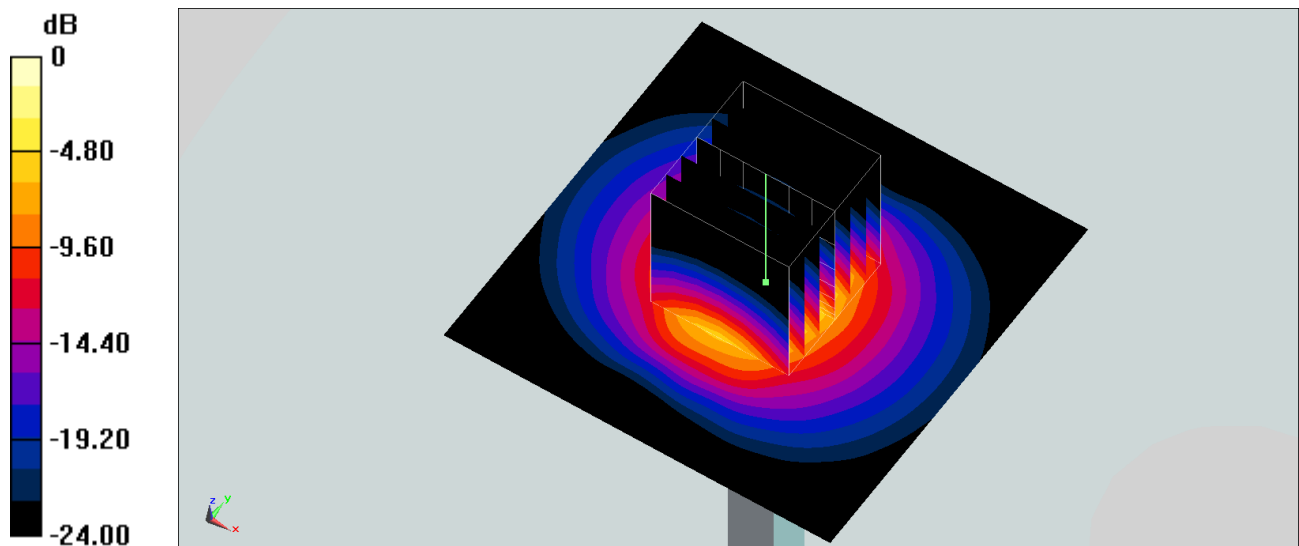

0 dB = 6.82 W/kg = 8.34 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 37.596$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.50 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.22 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 8.51 W/kg

SAR(1 g) = 3.39 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.4%

Maximum value of SAR (measured) = 6.45 W/kg

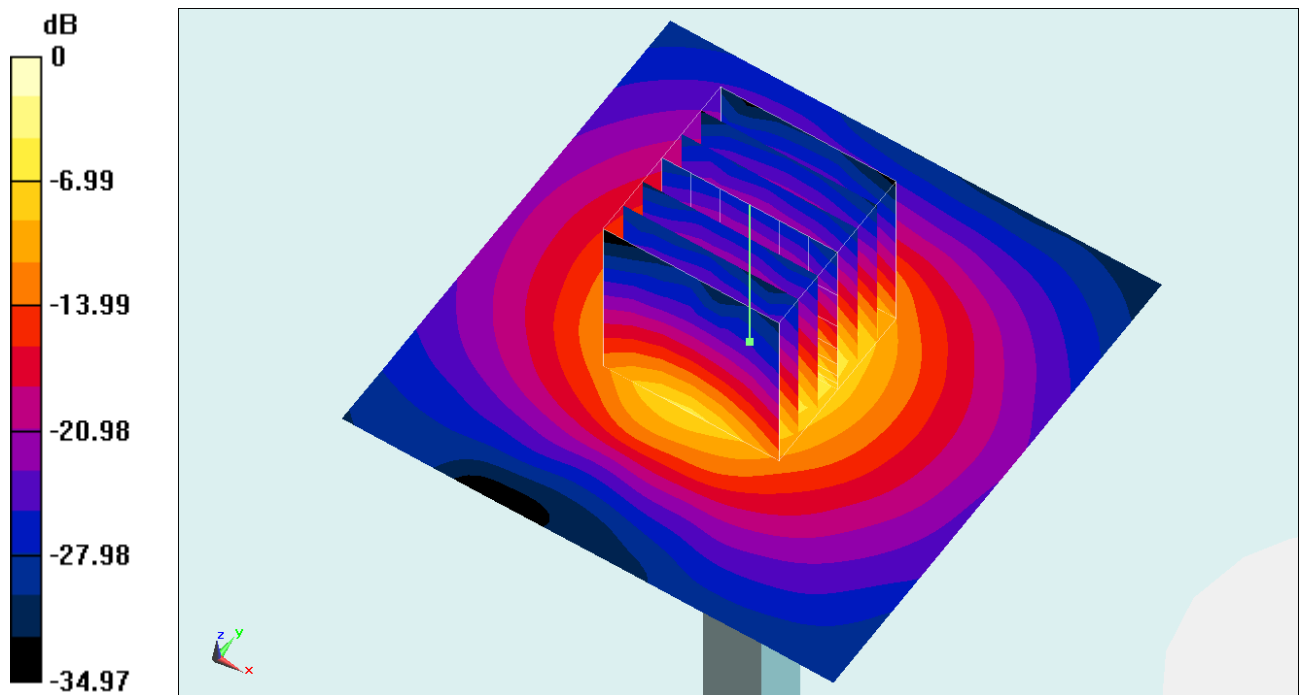

0 dB = 6.45 W/kg = 8.10 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.902$ S/m; $\epsilon_r = 39.864$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11) @ 3700 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.40 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.01 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 8.95 W/kg

SAR(1 g) = 3.45 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.9%

Maximum value of SAR (measured) = 6.63 W/kg

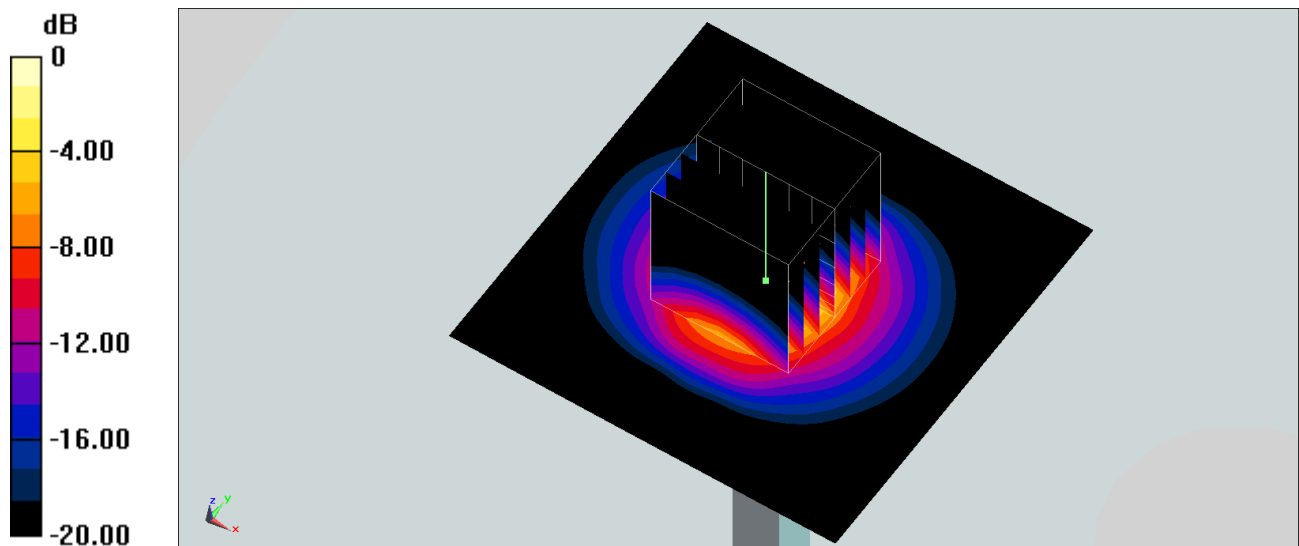

0 dB = 6.63 W/kg = 8.22 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260306 Medium parameters used: $f = 3700$ MHz; $\sigma = 2.84$ S/m; $\epsilon_r = 36.615$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.01, 5.91, 6.11) @ 3700 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.48 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 47.22 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 7.92 W/kg

SAR(1 g) = 3.36 W/kg; SAR(10 g) = 1.22 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 75.1%

Maximum value of SAR (measured) = 5.89 W/kg

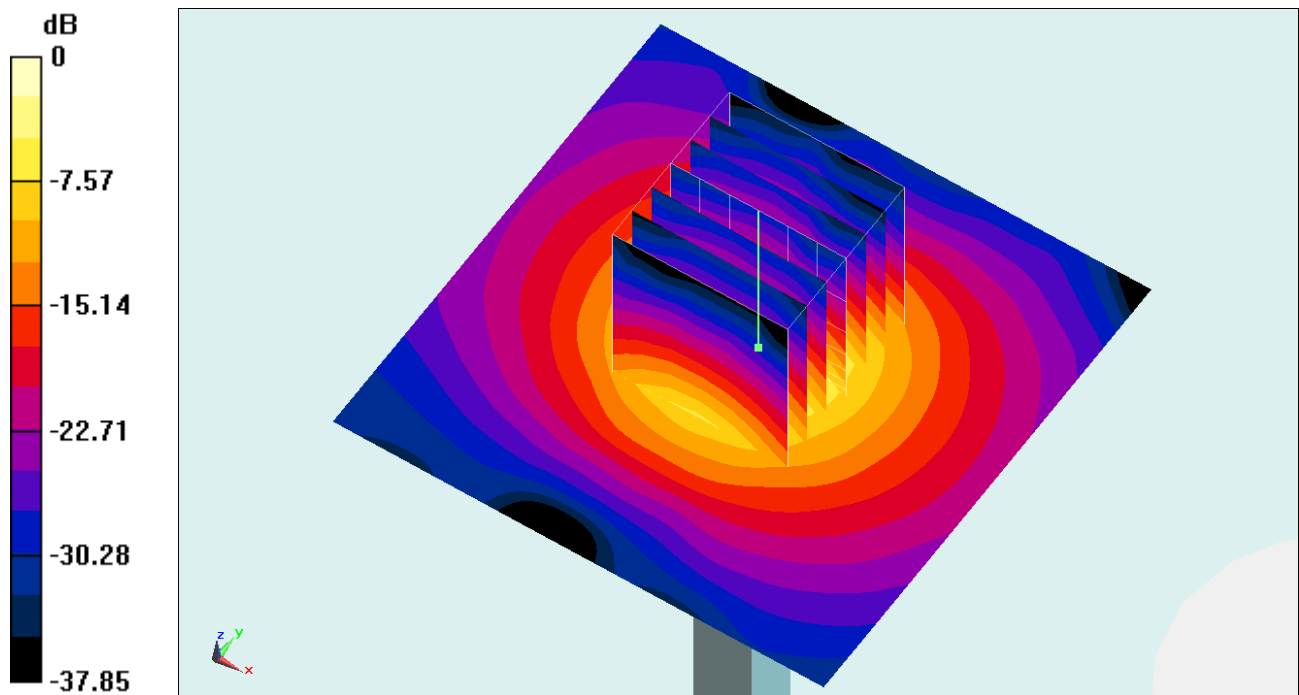

0 dB = 5.89 W/kg = 7.70 dBW/kg

System Check_Head_3700MHz

DUT: D3700V2-1022

Communication System: CW; Frequency: 3700 MHz

Medium: HSL_600-7200_260307 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.009$ S/m; $\epsilon_r = 38.658$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3700 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.74 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 50.00 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 8.75 W/kg

SAR(1 g) = 3.44 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.3%

Maximum value of SAR (measured) = 6.64 W/kg

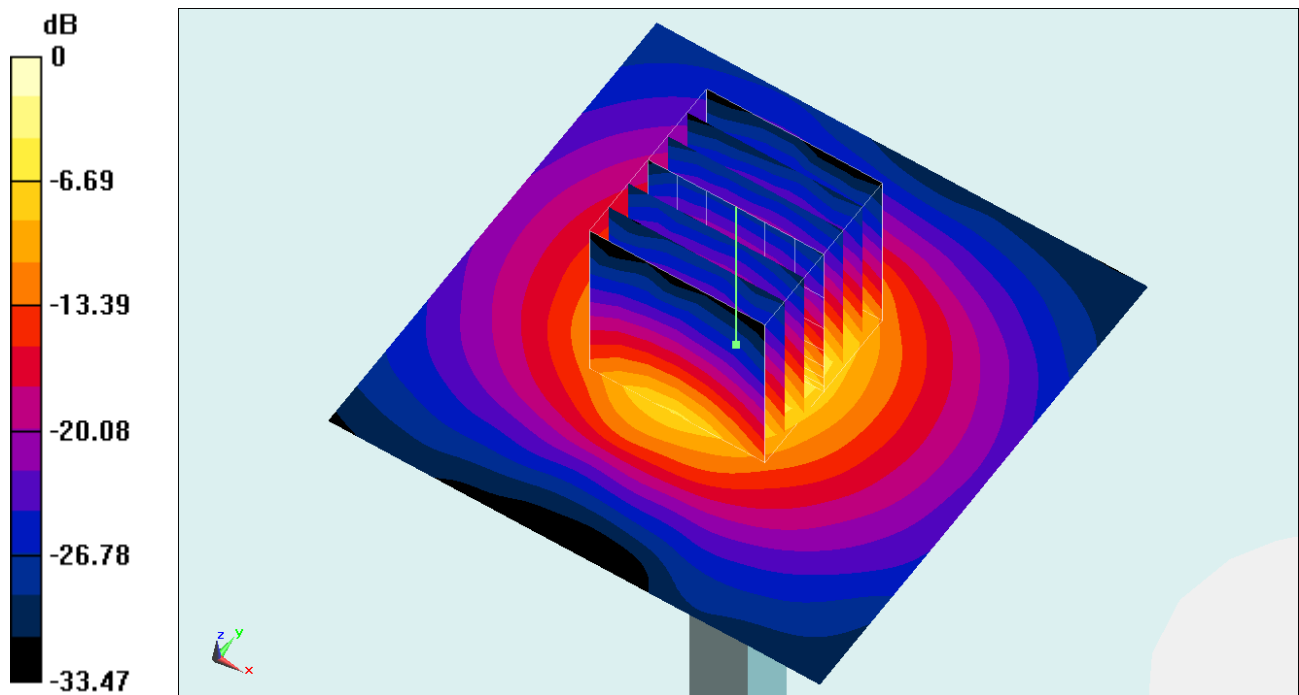

0 dB = 6.64 W/kg = 8.22 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260130 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.052$ S/m; $\epsilon_r = 37.012$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.50 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 48.93 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 8.51 W/kg

SAR(1 g) = 3.19 W/kg; SAR(10 g) = 1.13 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.5%

Maximum value of SAR (measured) = 6.23 W/kg

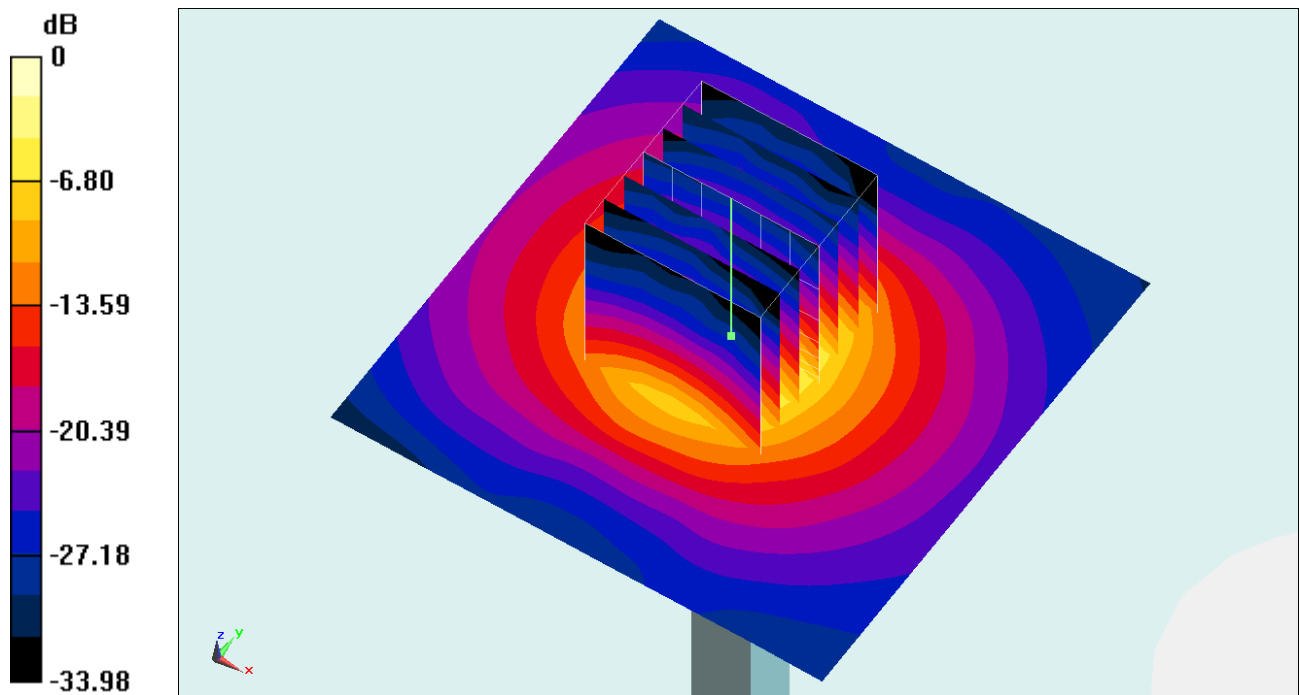

0 dB = 6.23 W/kg = 7.94 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260131 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.064$ S/m; $\epsilon_r = 37.013$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.58 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 48.93 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 8.93 W/kg

SAR(1 g) = 3.2 W/kg; SAR(10 g) = 1.12 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.7%

Maximum value of SAR (measured) = 6.52 W/kg

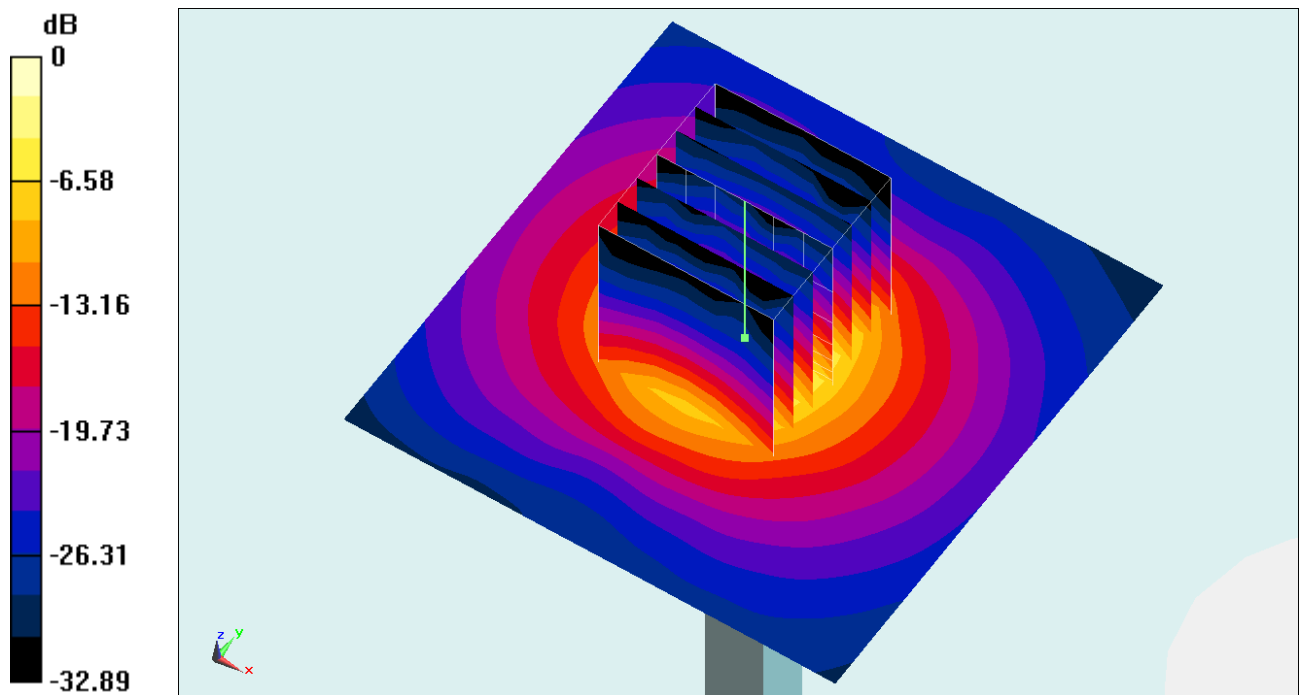

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260201 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.014$ S/m; $\epsilon_r = 37.286$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.61 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 48.50 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 8.73 W/kg

SAR(1 g) = 3.18 W/kg; SAR(10 g) = 1.11 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74%

Maximum value of SAR (measured) = 6.38 W/kg

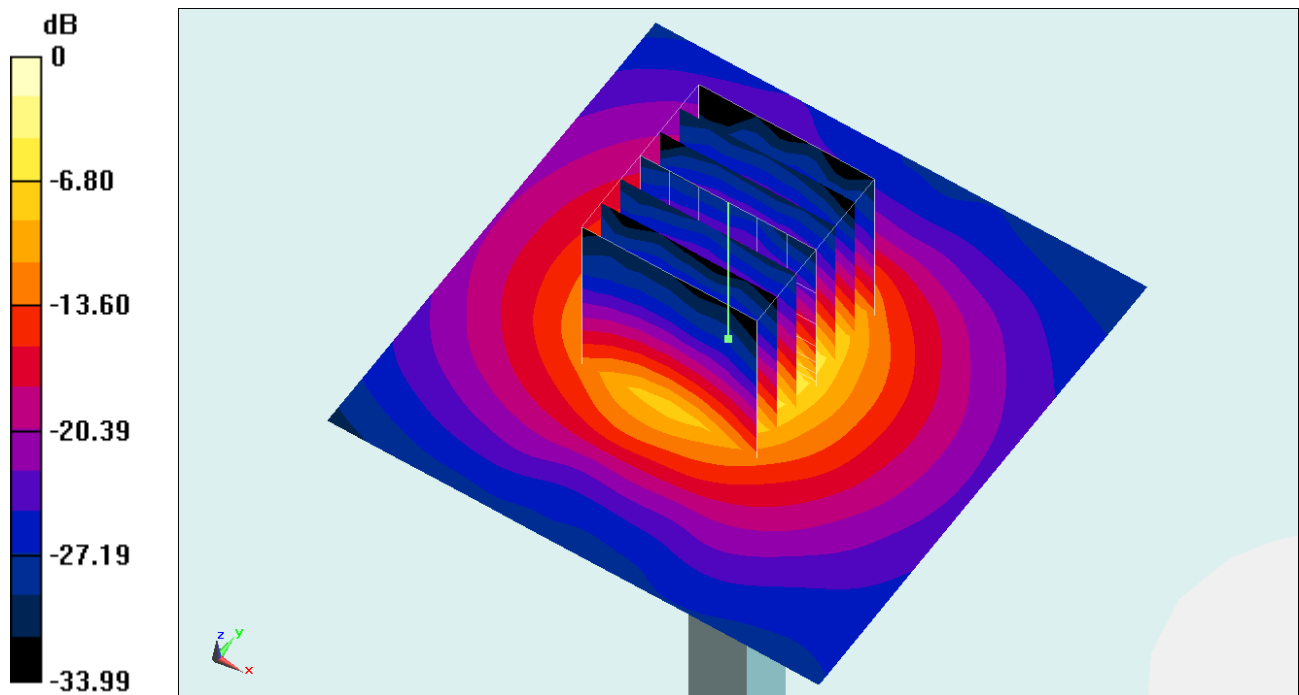

0 dB = 6.38 W/kg = 8.05 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260202 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.036$ S/m; $\epsilon_r = 37.175$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.50 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 49.12 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 8.45 W/kg

SAR(1 g) = 3.25 W/kg; SAR(10 g) = 1.14 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.8%

Maximum value of SAR (measured) = 6.25 W/kg

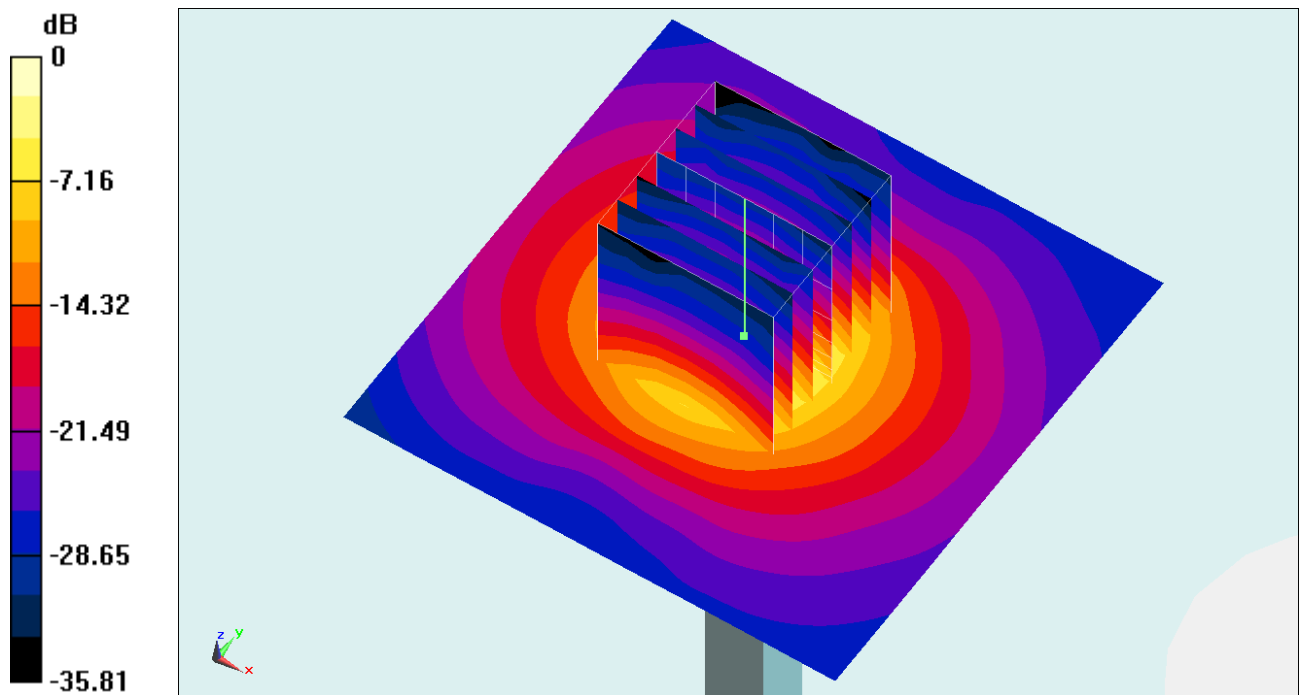

0 dB = 6.25 W/kg = 7.96 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260207 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37.158$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.15 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 47.57 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 8.67 W/kg

SAR(1 g) = 3.19 W/kg; SAR(10 g) = 1.11 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.7%

Maximum value of SAR (measured) = 6.22 W/kg

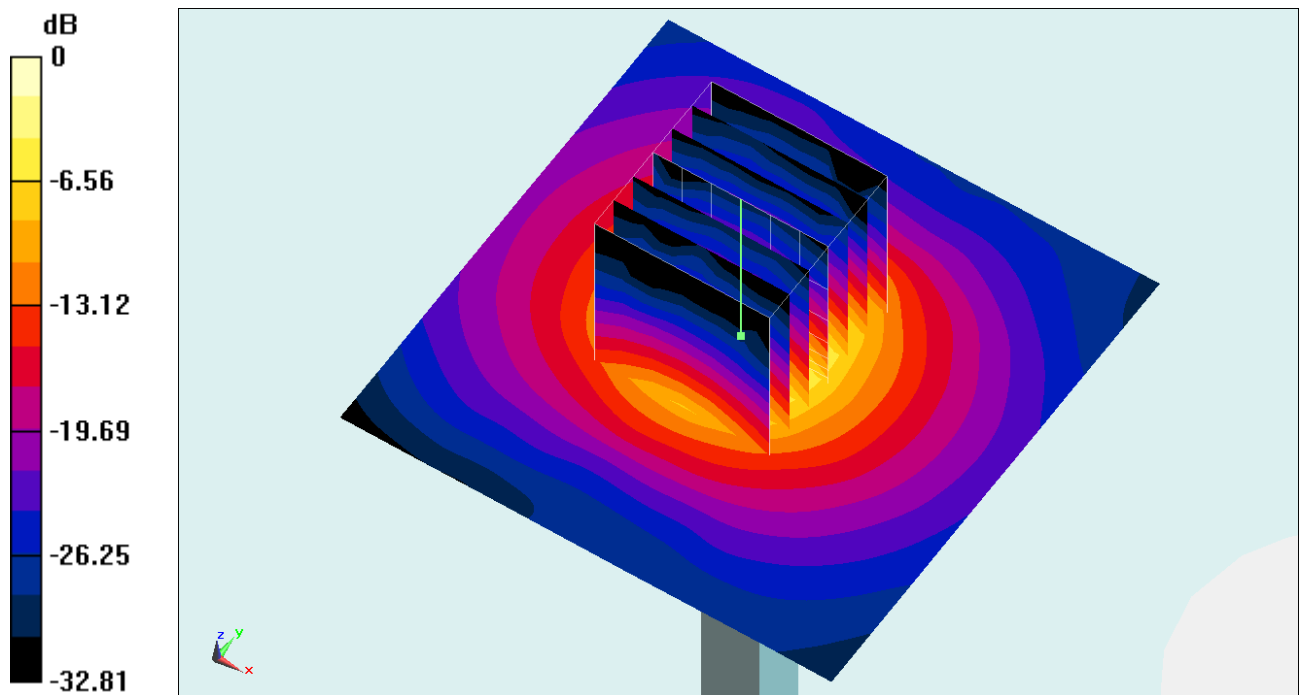

0 dB = 6.22 W/kg = 7.94 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260208 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.167$ S/m; $\epsilon_r = 37.841$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.27 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 47.59 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 8.70 W/kg

SAR(1 g) = 3.22 W/kg; SAR(10 g) = 1.13 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.1%

Maximum value of SAR (measured) = 6.22 W/kg

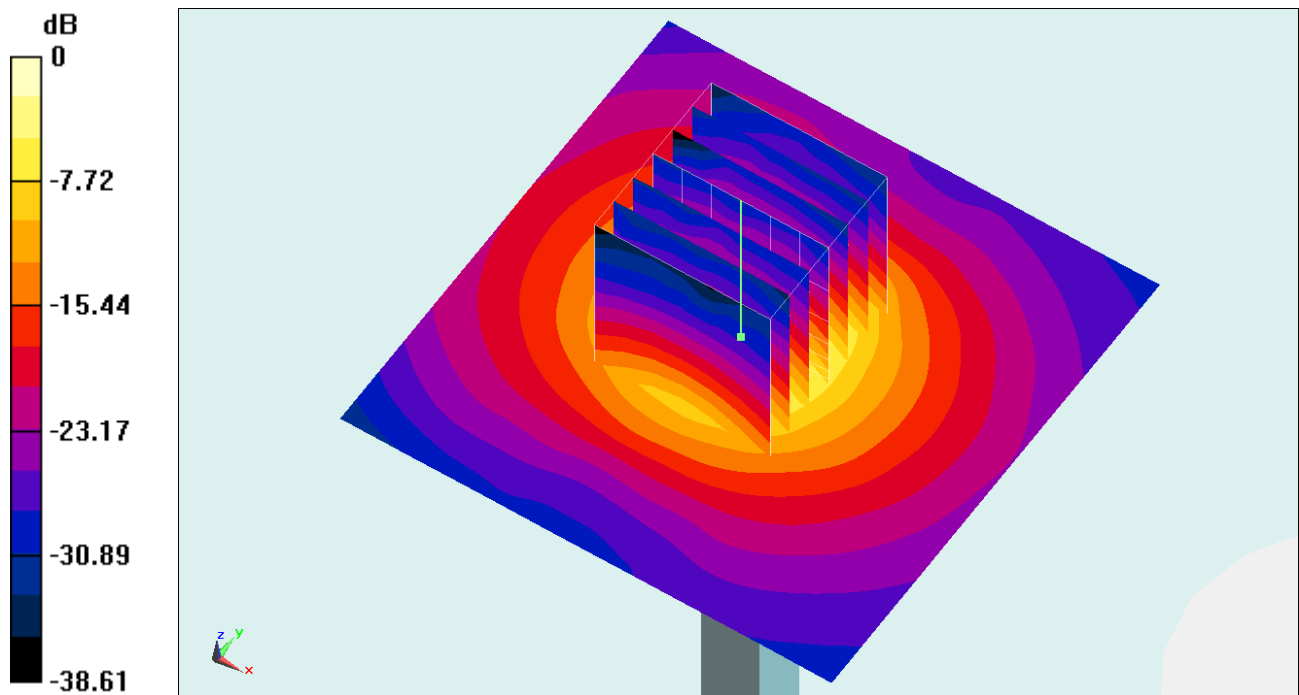

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260225 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.157$ S/m; $\epsilon_r = 39.73$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(5.94, 5.83, 6.03) @ 3900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 7.20 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.78 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.32 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.3%

Maximum value of SAR (measured) = 7.53 W/kg

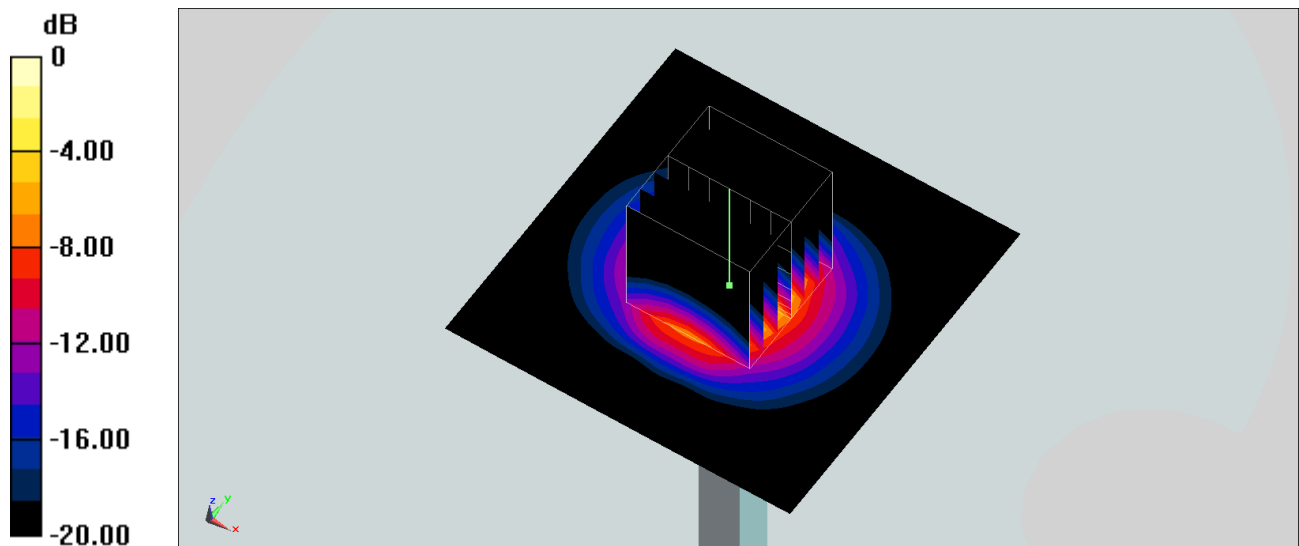

0 dB = 7.53 W/kg = 8.77 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260225 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.061$ S/m; $\epsilon_r = 37.212$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.55 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 48.09 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 8.91 W/kg

SAR(1 g) = 3.22 W/kg; SAR(10 g) = 1.12 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.1%

Maximum value of SAR (measured) = 6.53 W/kg

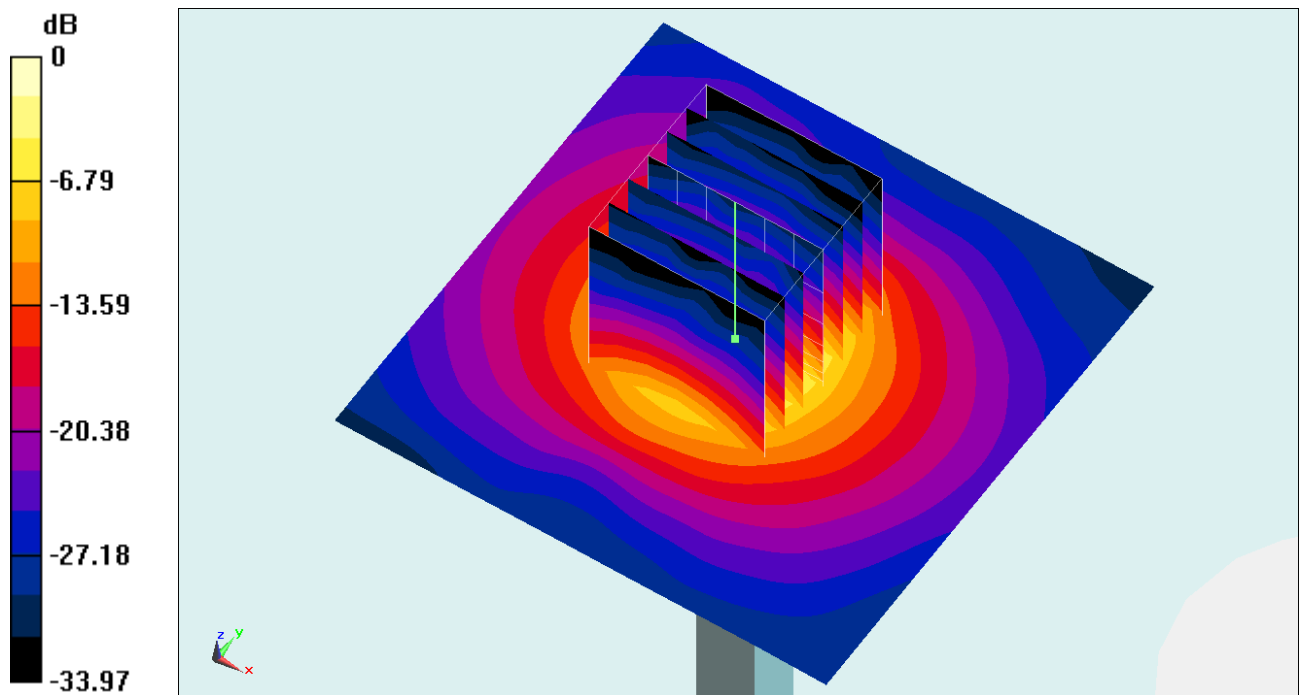

0 dB = 6.53 W/kg = 8.15 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.176$ S/m; $\epsilon_r = 39.837$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(5.94, 5.83, 6.03) @ 3900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 7.23 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.75 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 3.74 W/kg; SAR(10 g) = 1.32 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.4%

Maximum value of SAR (measured) = 7.54 W/kg

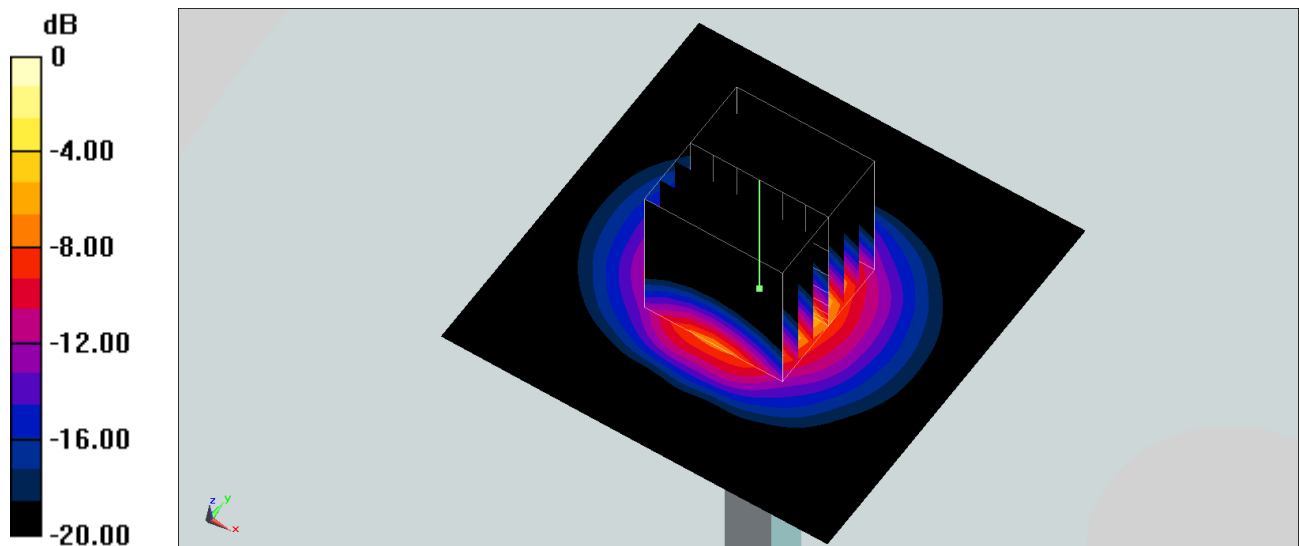

0 dB = 7.54 W/kg = 8.77 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.067$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 6.45 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 49.03 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 8.72 W/kg

SAR(1 g) = 3.25 W/kg; SAR(10 g) = 1.15 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.5%

Maximum value of SAR (measured) = 6.30 W/kg

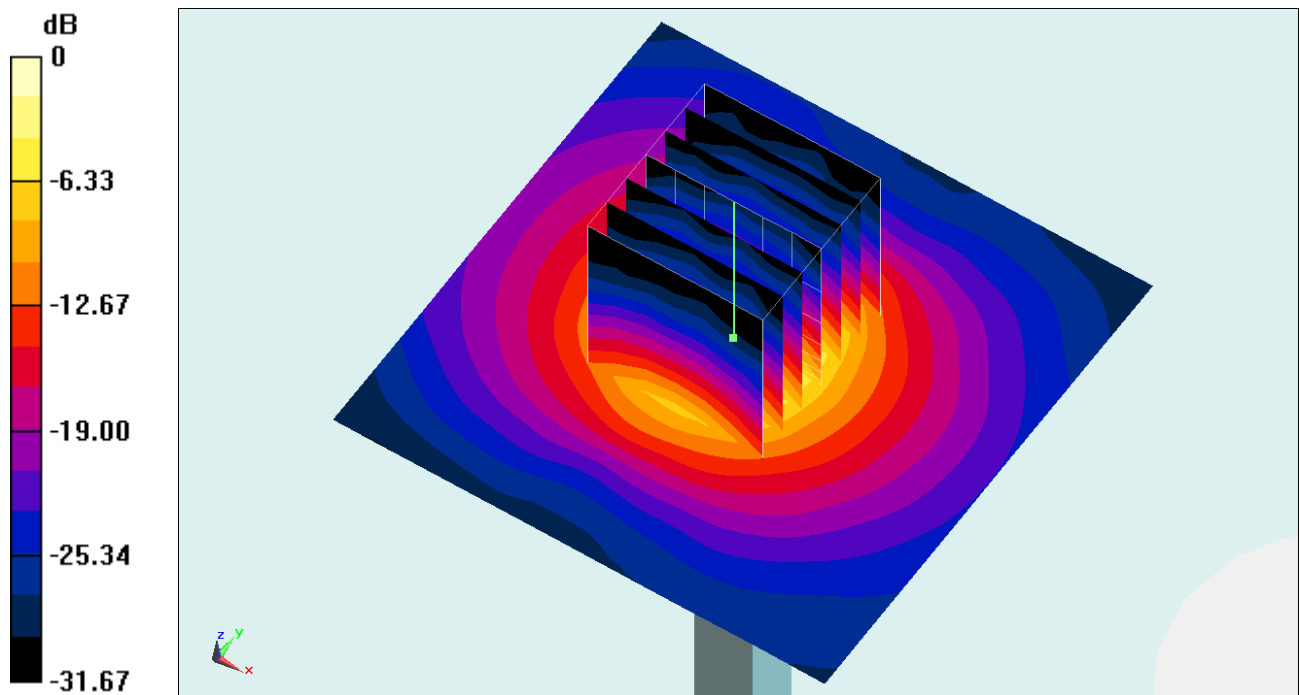

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.167$ S/m; $\epsilon_r = 39.788$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(5.94, 5.83, 6.03) @ 3900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 7.22 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.81 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.32 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 7.55 W/kg

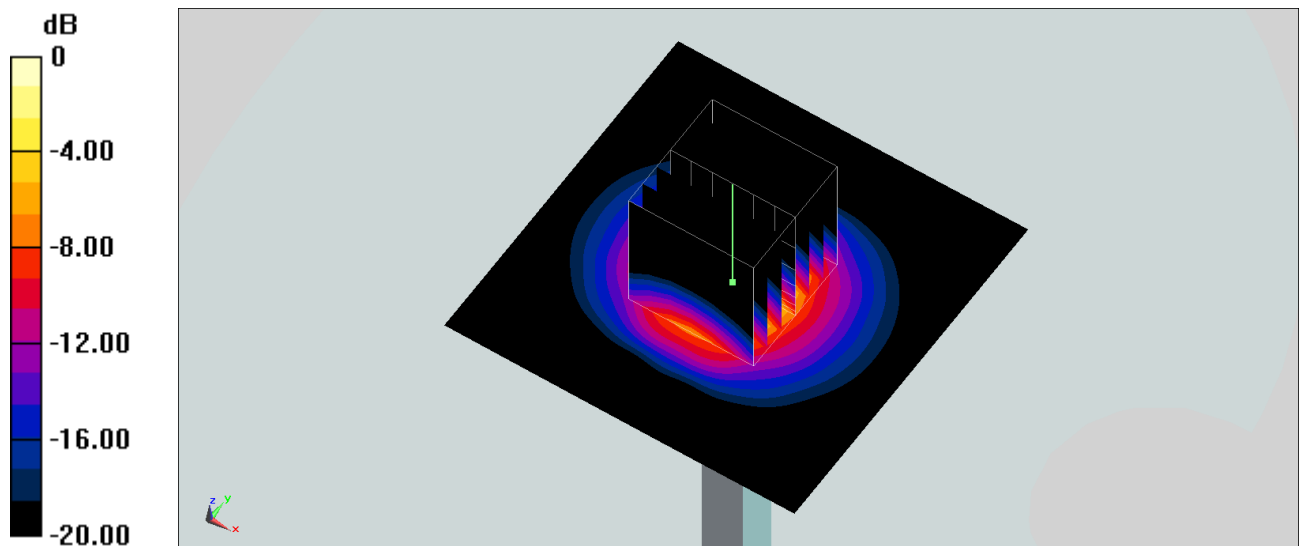

0 dB = 7.55 W/kg = 8.78 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.111$ S/m; $\epsilon_r = 37.291$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.30 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 48.62 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 9.22 W/kg

SAR(1 g) = 3.29 W/kg; SAR(10 g) = 1.16 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.6%

Maximum value of SAR (measured) = 6.69 W/kg

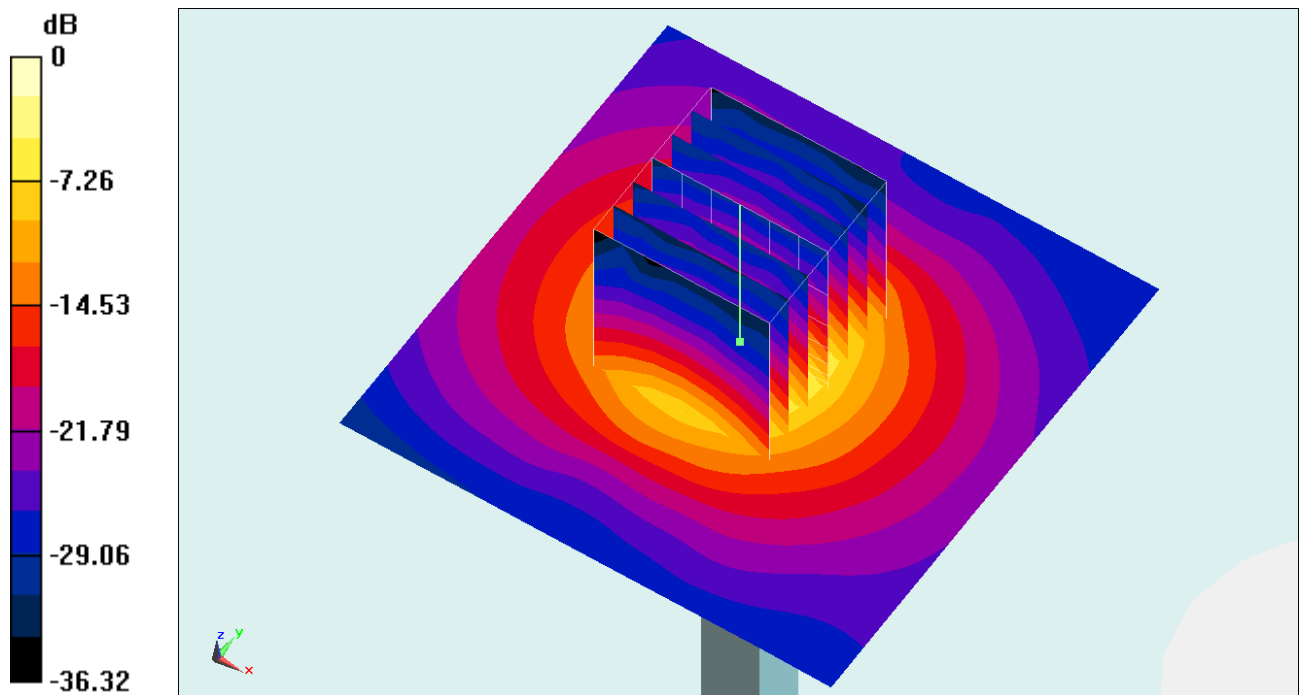

0 dB = 6.69 W/kg = 8.25 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260228 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.155$ S/m; $\epsilon_r = 39.612$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(5.94, 5.83, 6.03) @ 3900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 7.20 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.78 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 3.72 W/kg; SAR(10 g) = 1.32 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.6%

Maximum value of SAR (measured) = 7.53 W/kg

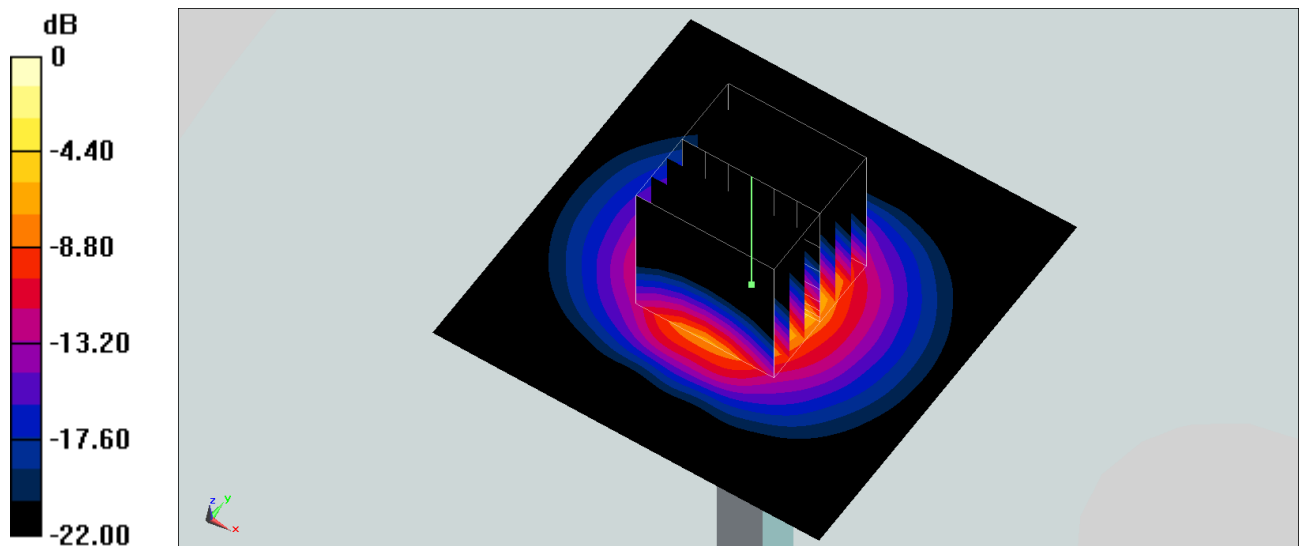

0 dB = 7.53 W/kg = 8.77 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260228 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.046$ S/m; $\epsilon_r = 40.198$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.47 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 48.68 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 8.76 W/kg

SAR(1 g) = 3.17 W/kg; SAR(10 g) = 1.12 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.6%

Maximum value of SAR (measured) = 6.38 W/kg

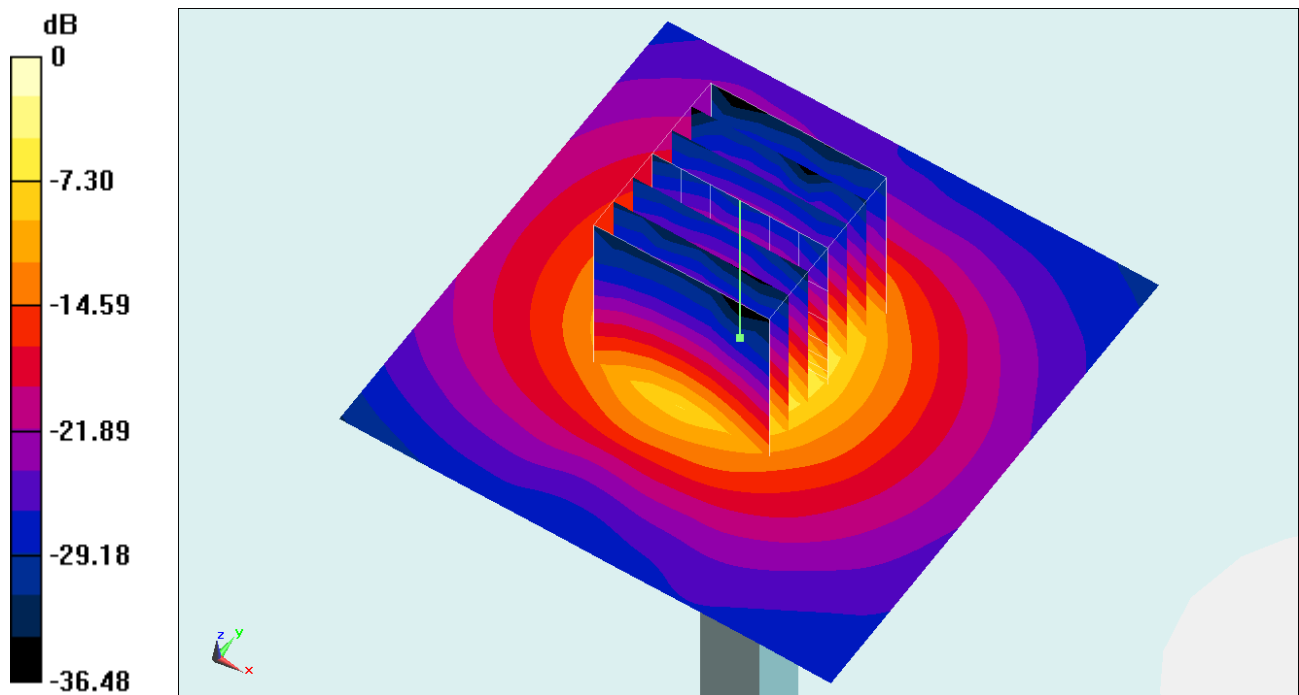

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.098$ S/m; $\epsilon_r = 39.625$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(5.94, 5.83, 6.03) @ 3900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 7.06 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 51.79 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 10.3 W/kg

SAR(1 g) = 3.66 W/kg; SAR(10 g) = 1.29 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 7.39 W/kg

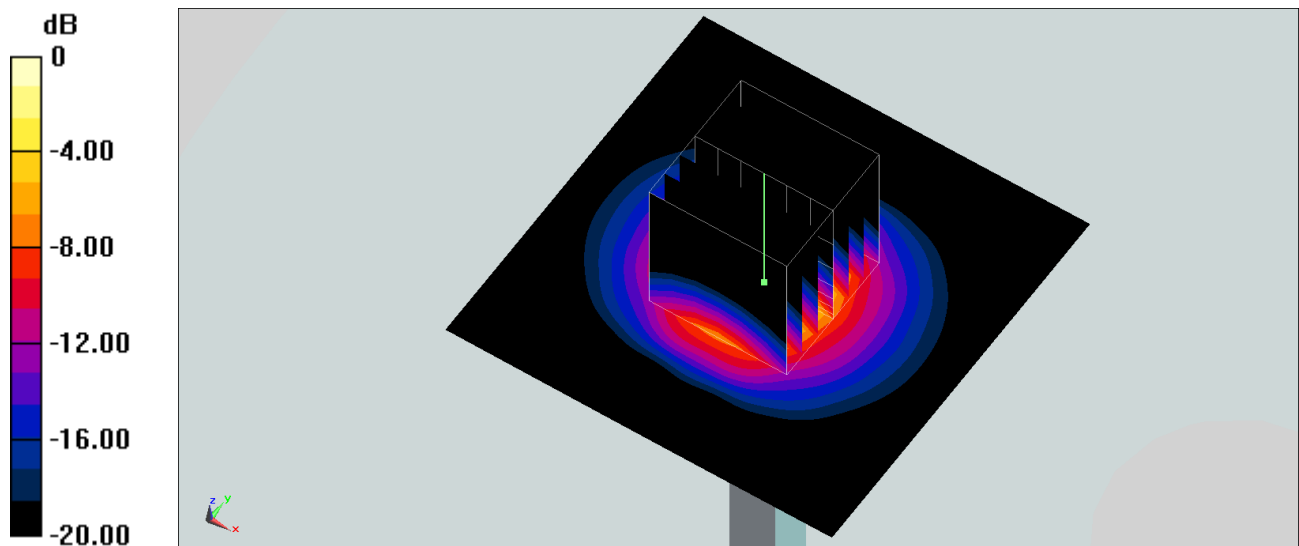

0 dB = 7.39 W/kg = 8.69 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260306 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.046$ S/m; $\epsilon_r = 36.301$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(5.94, 5.83, 6.03) @ 3900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 5.95 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 47.54 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 8.61 W/kg

SAR(1 g) = 3.28 W/kg; SAR(10 g) = 1.24 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 75.1%

Maximum value of SAR (measured) = 6.40 W/kg

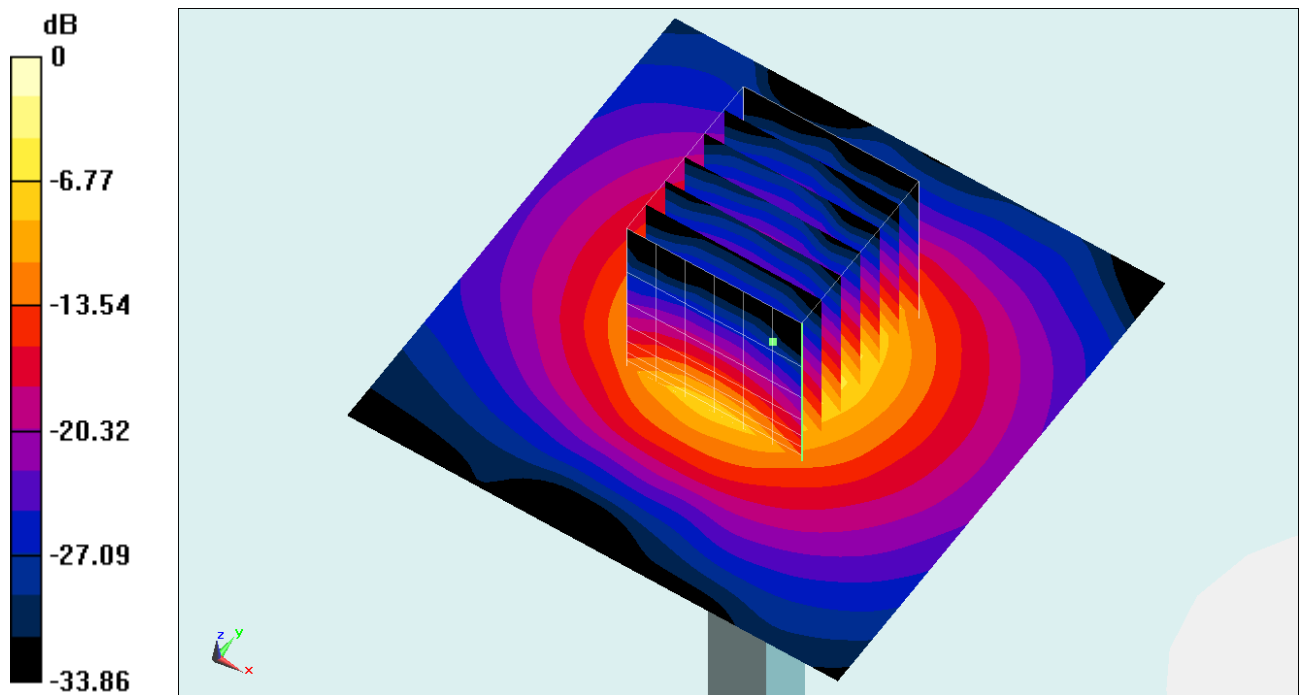

0 dB = 6.40 W/kg = 8.06 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260306 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.14$ S/m; $\epsilon_r = 38.719$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.68 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 48.87 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 9.15 W/kg

SAR(1 g) = 3.29 W/kg; SAR(10 g) = 1.16 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 73.9%

Maximum value of SAR (measured) = 6.67 W/kg

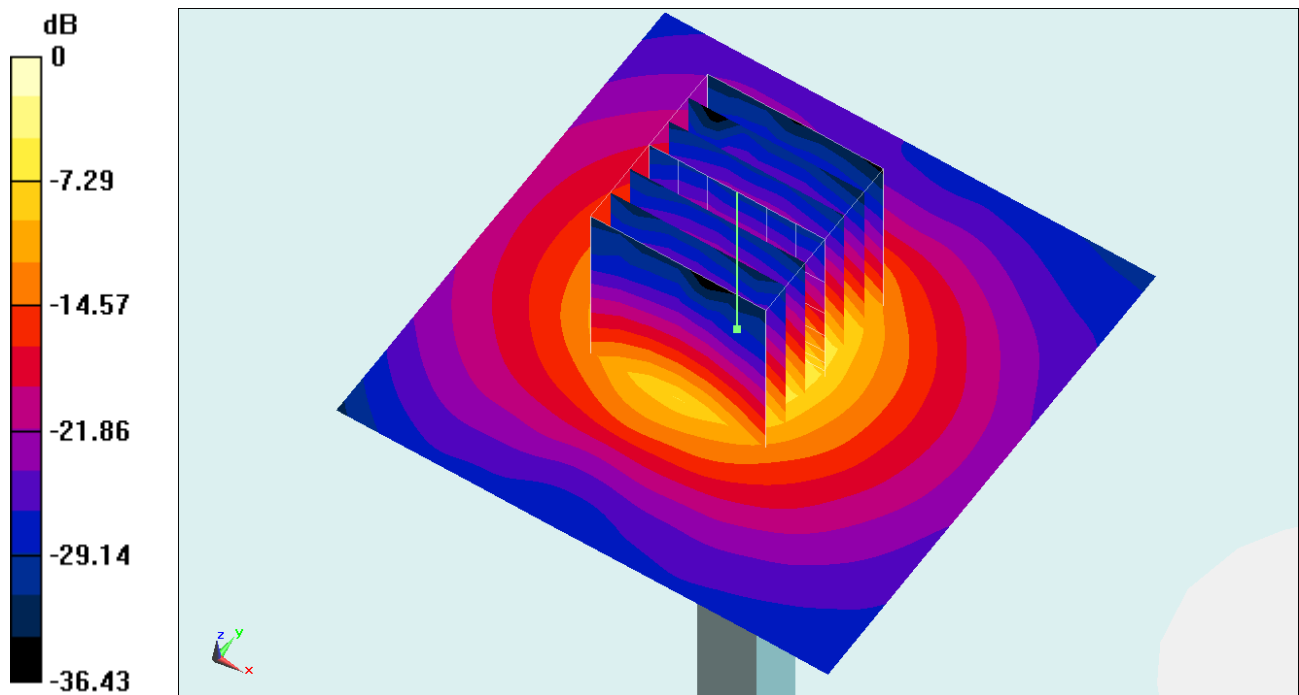

0 dB = 6.67 W/kg = 8.24 dBW/kg

System Check_Head_3900MHz

DUT: D3900V2-1017

Communication System: CW; Frequency: 3900 MHz

Medium: HSL_600-7200_260307 Medium parameters used: $f = 3900$ MHz; $\sigma = 3.214$ S/m; $\epsilon_r = 38.355$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.31, 6.12, 6.45) @ 3900 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.57 W/kg

Pin=50mW/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 47.04 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 8.65 W/kg

SAR(1 g) = 3.18 W/kg; SAR(10 g) = 1.12 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 6.34 W/kg

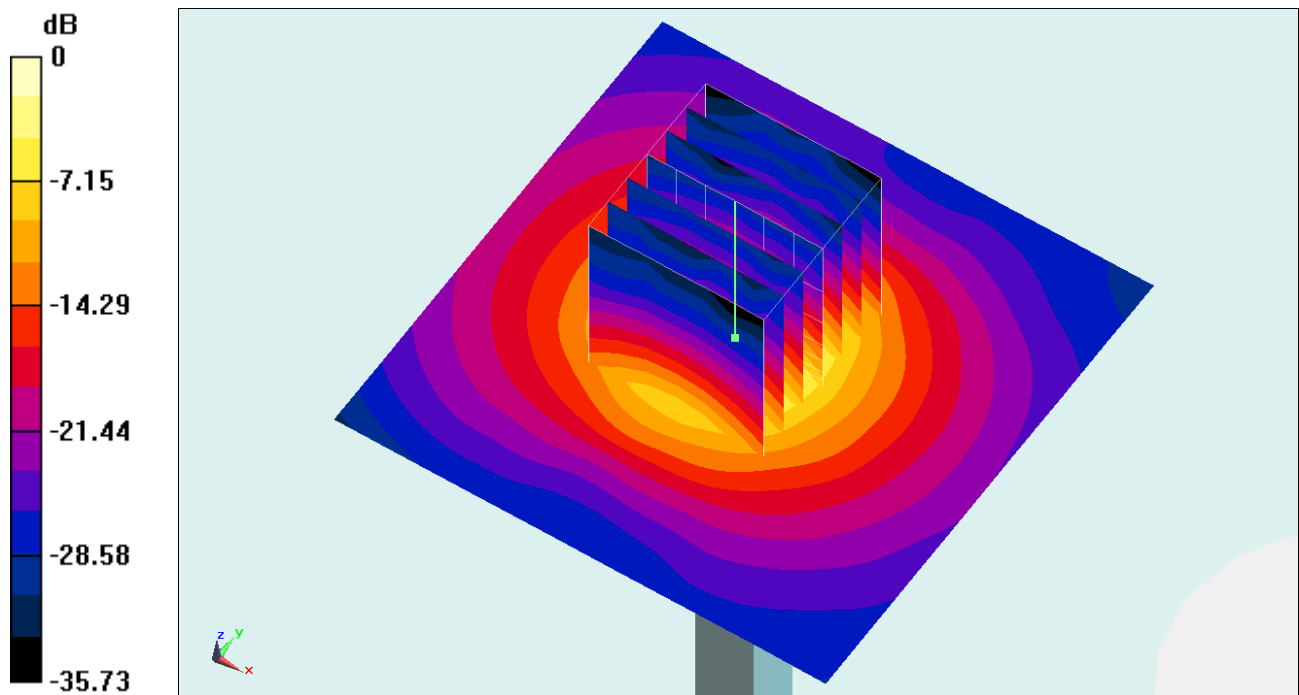

0 dB = 6.34 W/kg = 8.02 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2 - SN1128

Communication System: CW; Frequency: 5250 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.494$ S/m; $\epsilon_r = 35.148$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.82, 5.65, 5.73) @ 5250 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.03 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.22 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 3.66 W/kg; SAR(10 g) = 1.05 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 9.24 W/kg

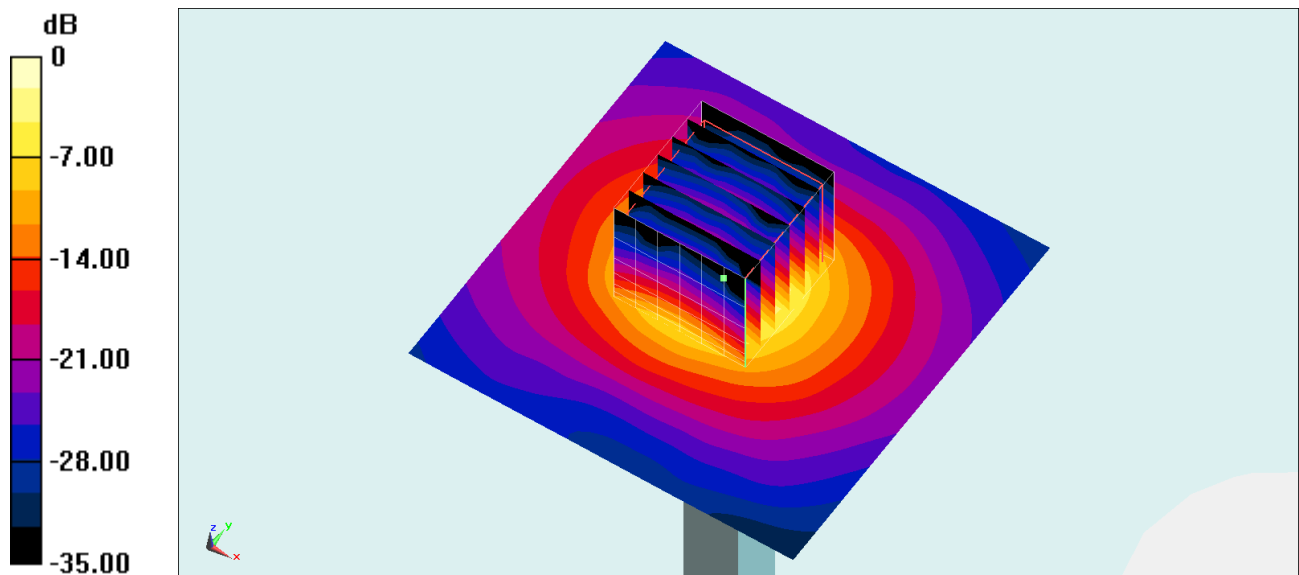

0 dB = 9.24 W/kg = 9.66 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2 - SN1128

Communication System: CW; Frequency: 5250 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.676$ S/m; $\epsilon_r = 38.489$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.82, 5.65, 5.73) @ 5250 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.82 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.06 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 3.78 W/kg; SAR(10 g) = 1.09 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 9.40 W/kg

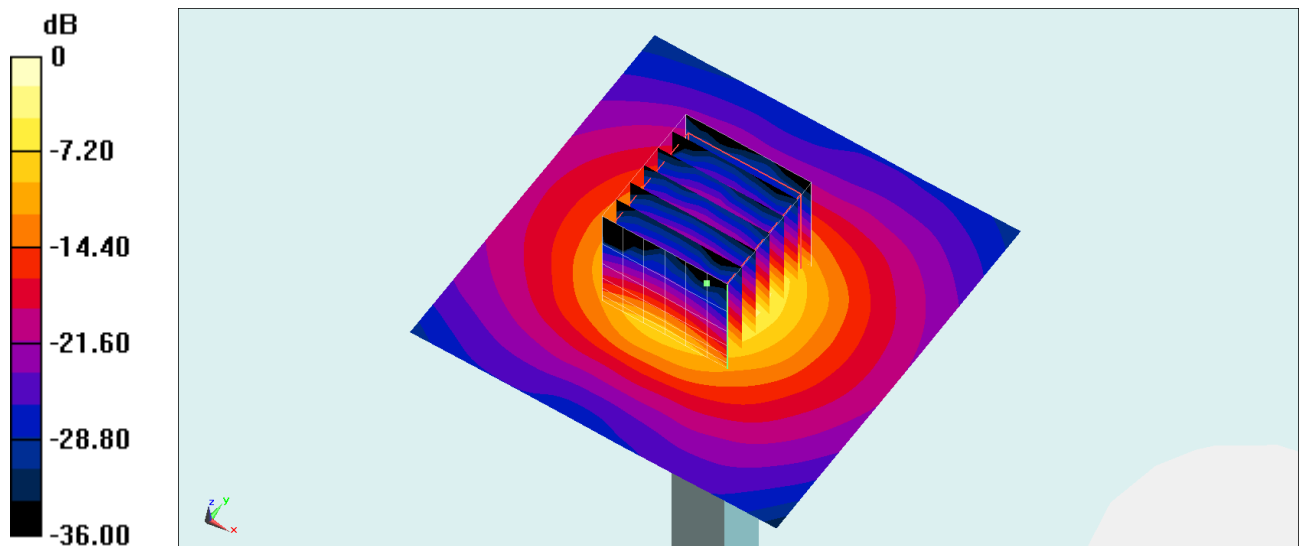

0 dB = 9.40 W/kg = 9.73 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2 - SN1128

Communication System: CW; Frequency: 5250 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 38.334$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.82, 5.65, 5.73) @ 5250 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.72 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.06 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.07 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 9.29 W/kg

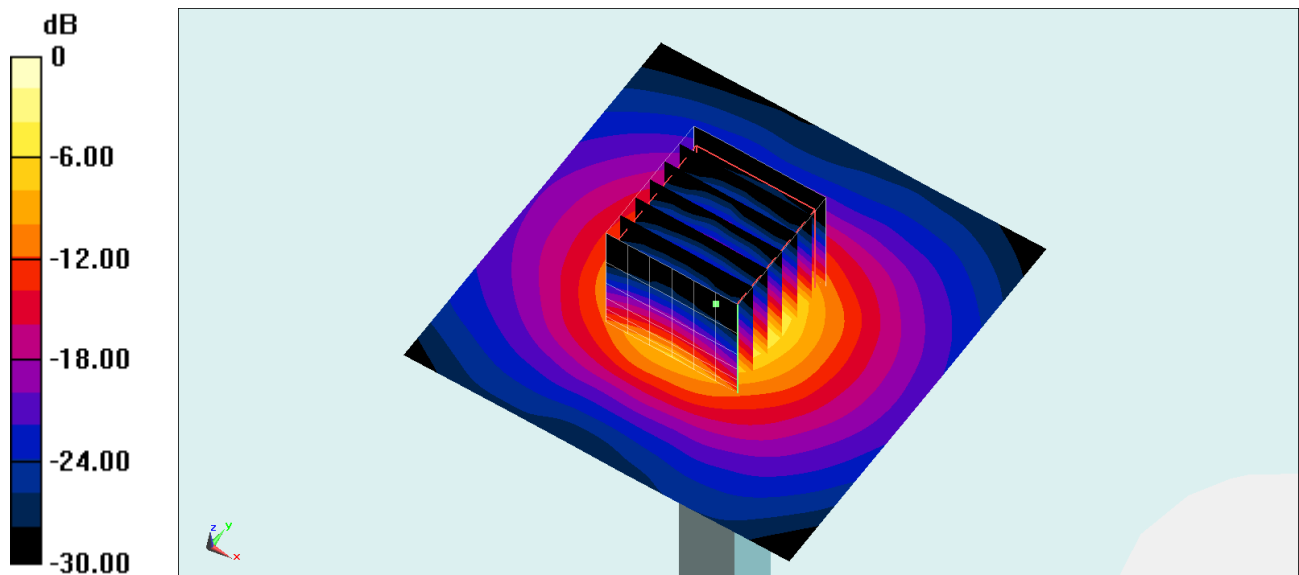

0 dB = 9.29 W/kg = 9.68 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5250 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.737$ S/m; $\epsilon_r = 36.719$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.82, 5.65, 5.73) @ 5250 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.76 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.03 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 3.8 W/kg; SAR(10 g) = 1.08 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 9.41 W/kg

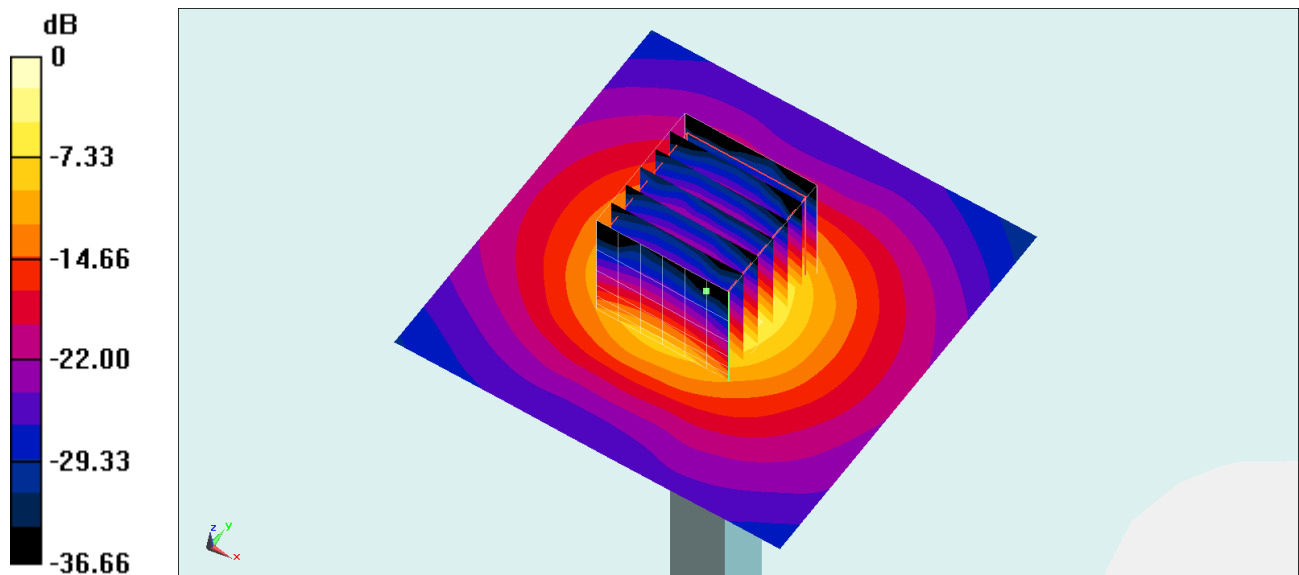

0 dB = 9.41 W/kg = 9.74 dBW/kg

System Check_Head_5600MHz

DUT: D5GHzV2 - SN1128

Communication System: CW ; Frequency: 5600 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.87$ S/m; $\epsilon_r = 34.478$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.4, 5.25, 5.32) @ 5600 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.51 W/kg

Pin=50mW/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.70 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 1.07 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 9.77 W/kg

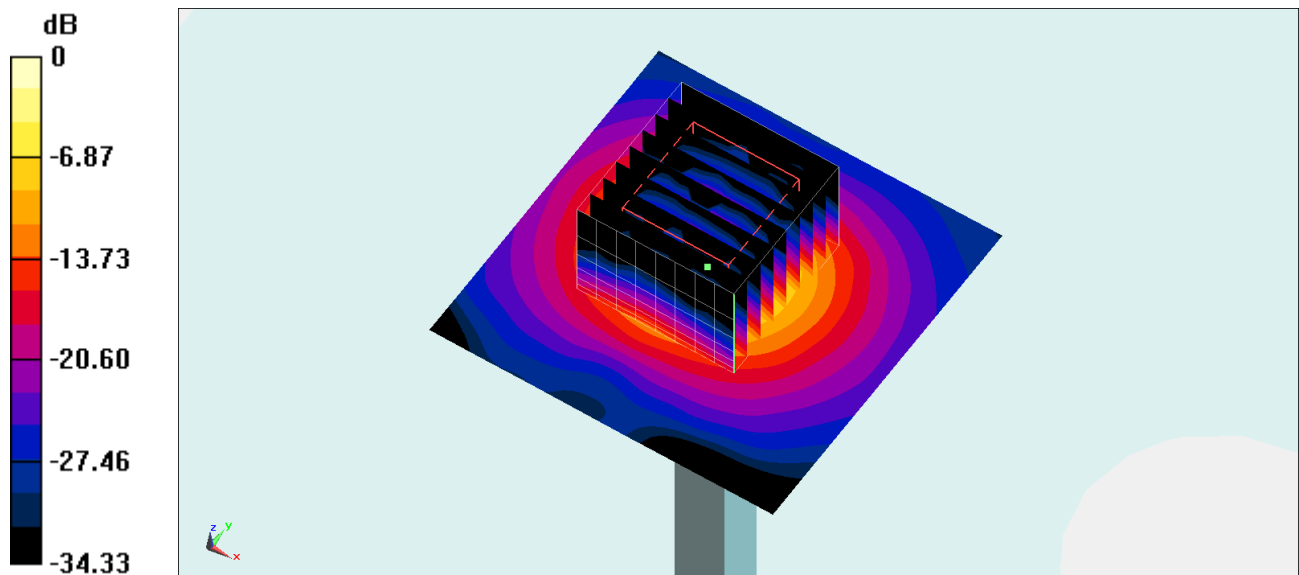

0 dB = 9.77 W/kg = 9.90 dBW/kg

System Check_Head_5600MHz

DUT: D5GHzV2 - SN1128

Communication System: CW ; Frequency: 5600 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.087$ S/m; $\epsilon_r = 37.88$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.4, 5.25, 5.32) @ 5600 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.89 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.73 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 4.11 W/kg; SAR(10 g) = 1.17 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 10.5 W/kg

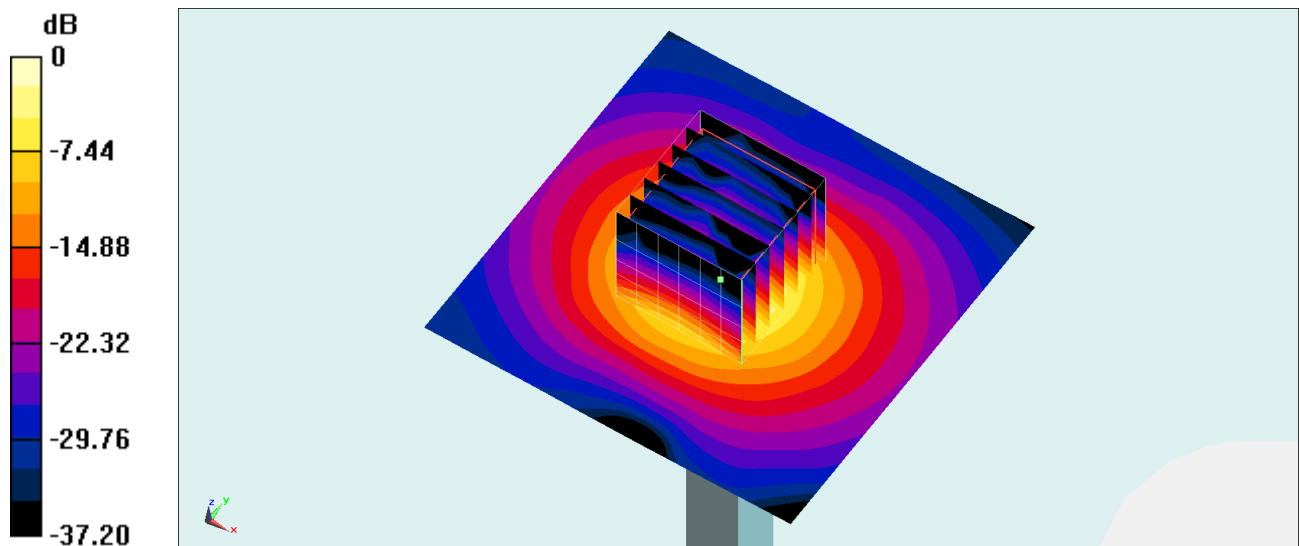

0 dB = 10.5 W/kg = 10.21 dBW/kg

System Check_Head_5600MHz

DUT: D5GHzV2 - SN1171

Communication System: CW ; Frequency: 5600 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.137$ S/m; $\epsilon_r = 35.995$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.4, 5.25, 5.32) @ 5600 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.98 W/kg

Pin=50mW/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.09 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 22.1 W/kg

SAR(1 g) = 4.3 W/kg; SAR(10 g) = 1.16 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 12.9 W/kg

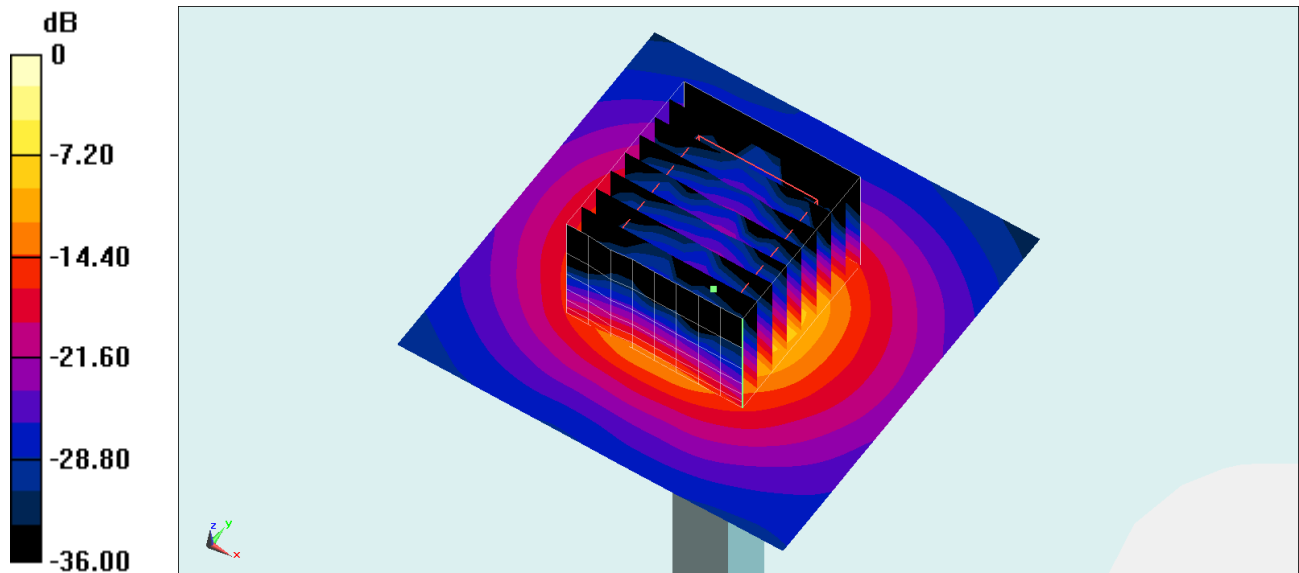

0 dB = 12.9 W/kg = 11.11 dBW/kg

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1128

Communication System: CW ; Frequency: 5800 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.096$ S/m; $\epsilon_r = 34.139$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.31, 5.16, 5.23) @ 5800 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.31 W/kg

Pin=50mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.10 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 3.68 W/kg; SAR(10 g) = 1.04 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 9.68 W/kg

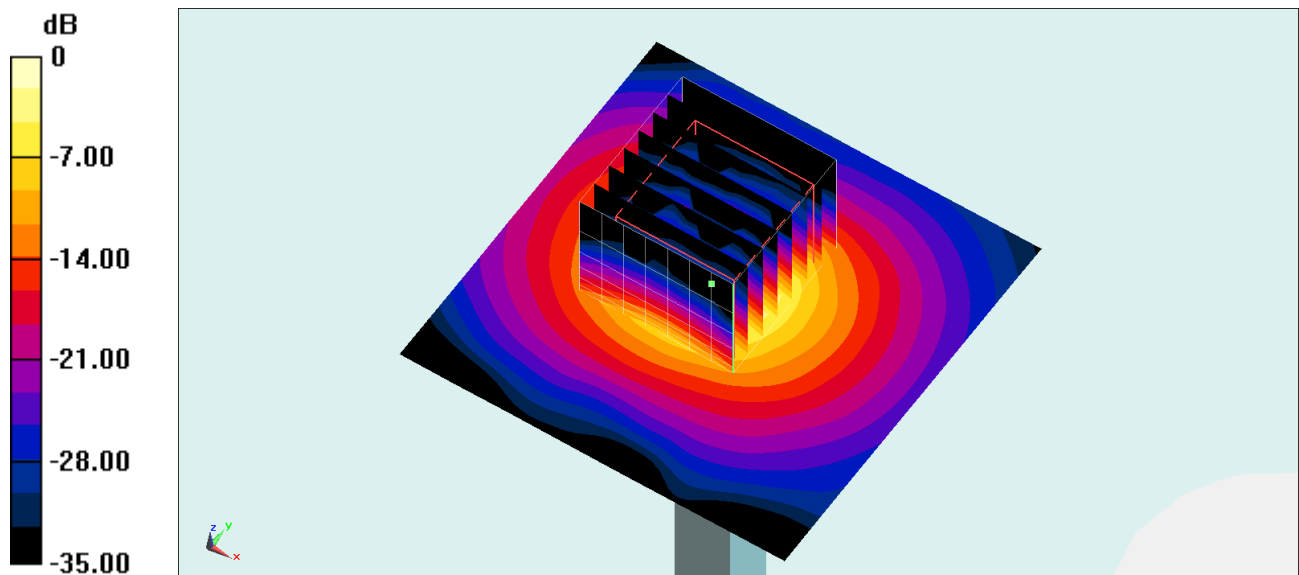

0 dB = 9.68 W/kg = 9.86 dBW/kg

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1128

Communication System: CW ; Frequency: 5800 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 37.575$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.31, 5.16, 5.23) @ 5800 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.89 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 46.37 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 3.83 W/kg; SAR(10 g) = 1.1 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 9.90 W/kg

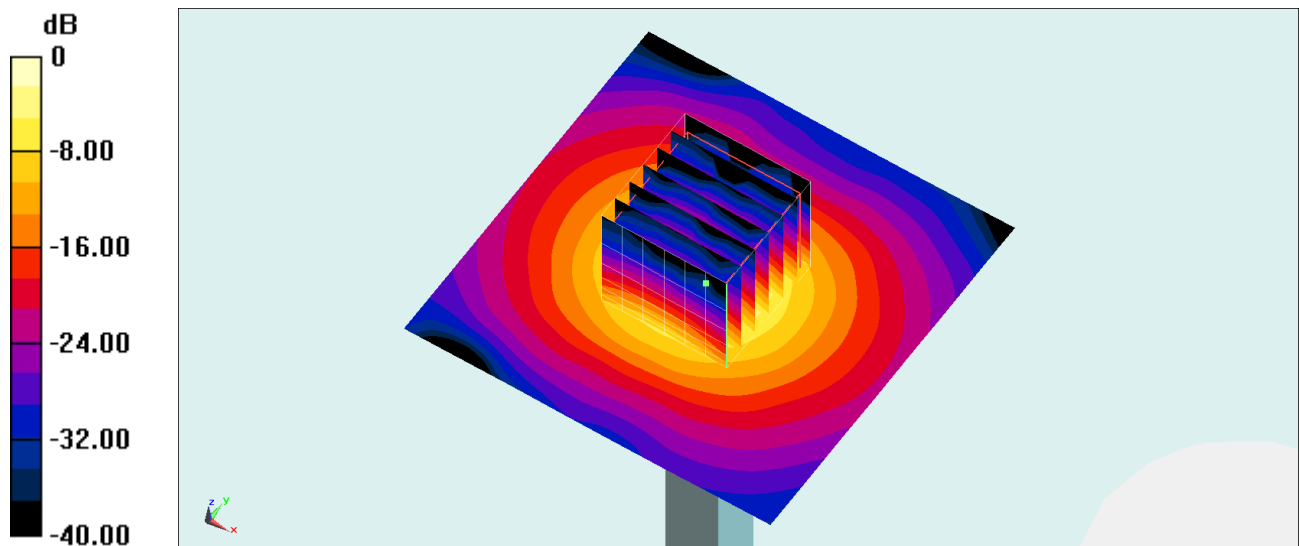

0 dB = 9.90 W/kg = 9.96 dBW/kg

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1128

Communication System: CW ; Frequency: 5800 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.279$ S/m; $\epsilon_r = 37.42$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.31, 5.16, 5.23) @ 5800 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.78 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 46.37 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 3.78 W/kg; SAR(10 g) = 1.09 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.1%

Maximum value of SAR (measured) = 9.78 W/kg

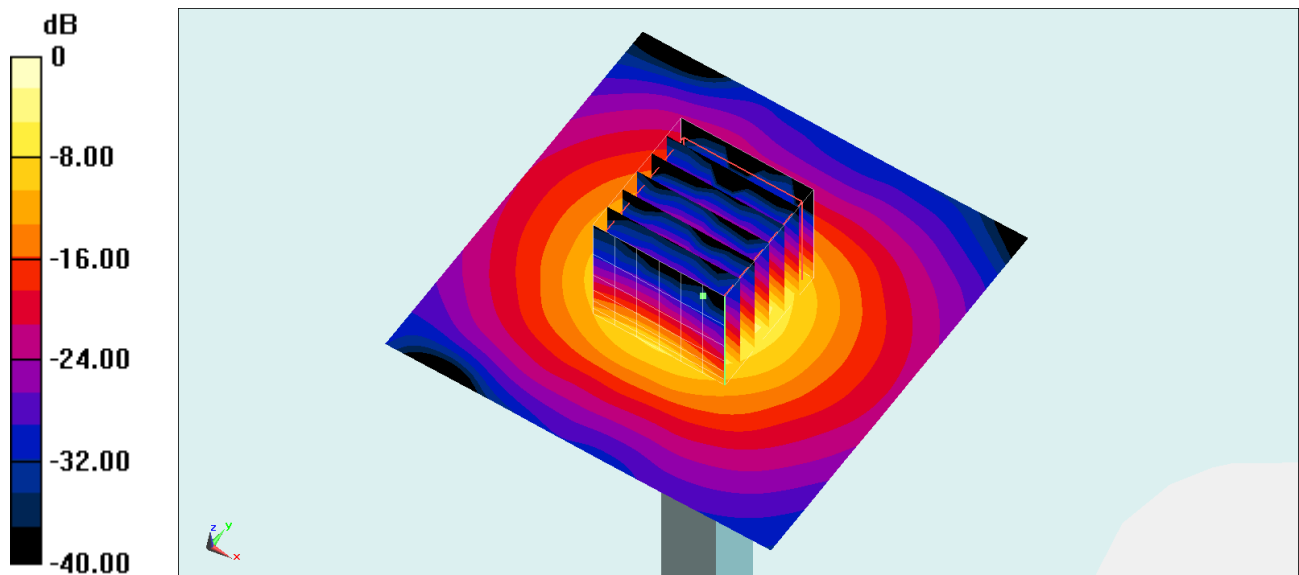

0 dB = 9.78 W/kg = 9.90 dBW/kg

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW ; Frequency: 5800 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 35.691$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.31, 5.16, 5.23) @ 5800 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.4 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 46.79 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 22.4 W/kg

SAR(1 g) = 4.24 W/kg; SAR(10 g) = 1.18 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 11.6 W/kg

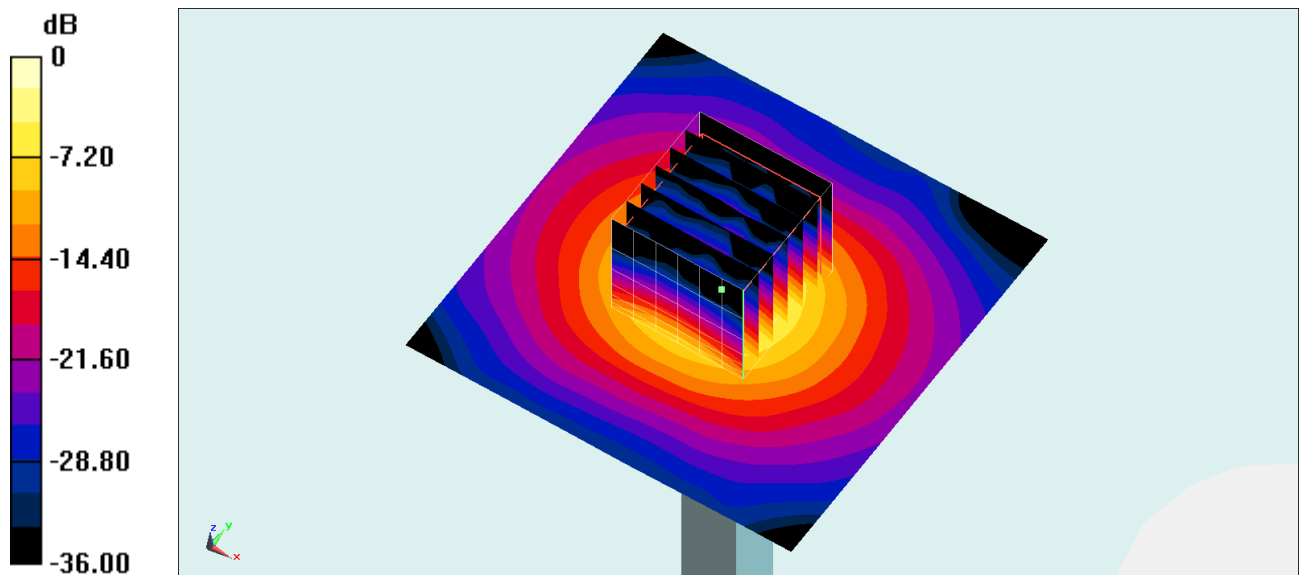

0 dB = 11.6 W/kg = 10.64 dBW/kg

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1003

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.18$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(4.96, 4.88, 5.04); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 26.2 W/kg; SAR (10g) = 4.96 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.12 dB


SAR (1g) = 30.2 W/kg; SAR (8g) = 6.81 W/kg; SAR (10g) = 5.63 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

psAPD (1.0cm², sq) = 302 [W/m²]; psAPD (4.0cm², sq) = 136 [W/m²]

TSL Correction: Positive only

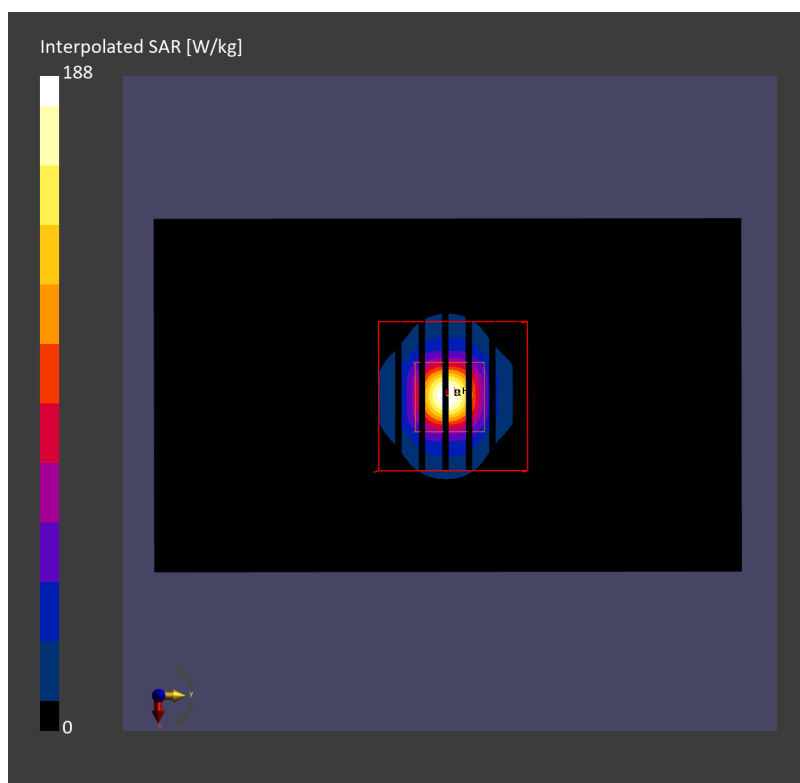

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1083

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260330 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.36, 5.21, 5.21); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 26.7 W/kg; SAR (10g) = 5.26 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (27.2 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.00 dB


SAR (1g) = 30.8 W/kg; SAR (8g) = 6.91 W/kg; SAR (10g) = 5.70 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.9 %

psAPD (1.0cm², sq) = 308 [W/m²]; psAPD (4.0cm², sq) = 138 [W/m²]

TSL Correction: Positive only

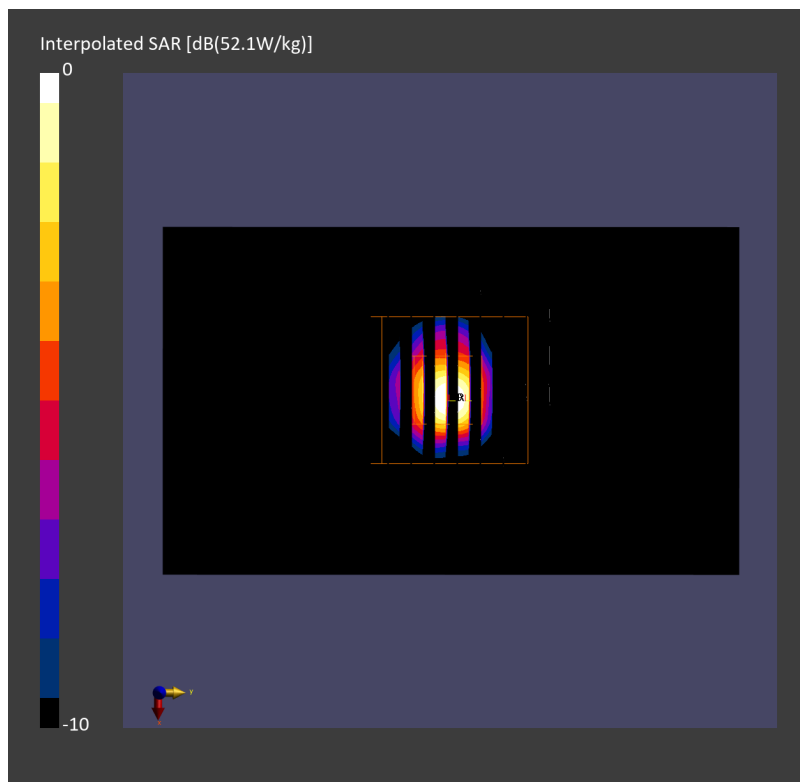

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	100.0 x 100.0 x 172.0	3.2.0.1840	5G Verification Source

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 10.00	10000.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9441_F1–55GHz, 2025–11–17	DAE4 Sn853, 2025–09–09

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0

Measurement Results

Date	2026–03–07
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	49.7
psPDtot+ [W/m ²]	50.6
H _{max} [A/m]	0.454
E _{max} [V/m]	149
max _(Stot) [W/m ²]	62.7
Power Drift [dB]	–0.14
IPDn	84.7

