

#01_GSM850_GPRS 4 Tx slots_Right Cheek_0mm_Ch251

Communication System: UID 10028 - DAC, GPRS-FDD; Frequency: 848.8 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 45.066$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 848.8 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.42 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.28 V/m; Power Drift = 0.11 dB



Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.612 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.6%

Maximum value of SAR (measured) = 1.45 W/kg

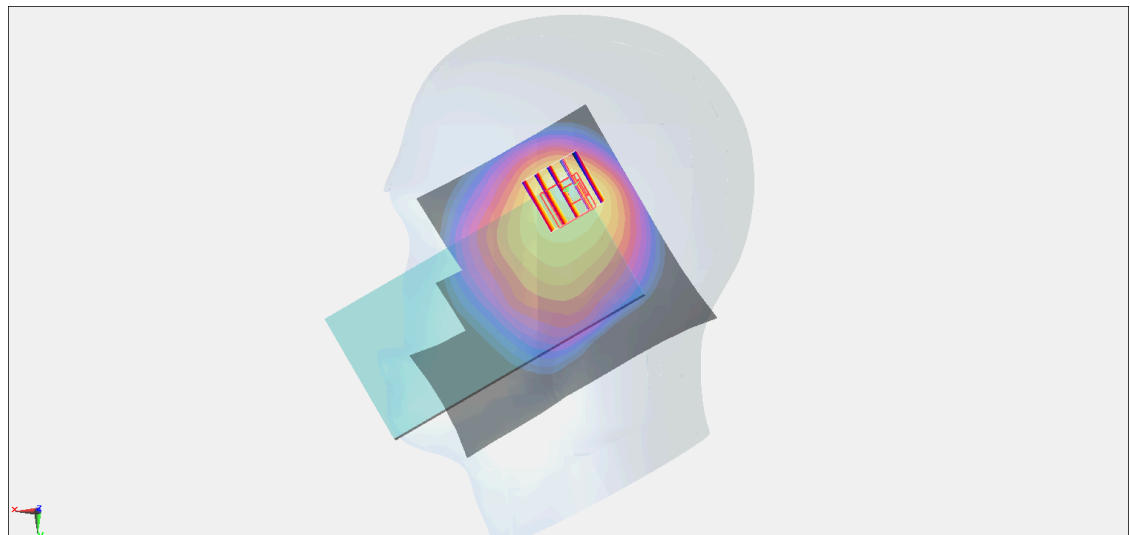

0 dB = 1.45 W/kg = 0.97 dBW/kg

#02_GSM1900_GPRS 2 Tx slots_Right Cheek_0mm_Ch810

Communication System: UID 10024 - DAC, GPRS-FDD; Frequency: 1909.8 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 42.318$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1909.8 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.468 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.45 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.169 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 0.493 W/kg

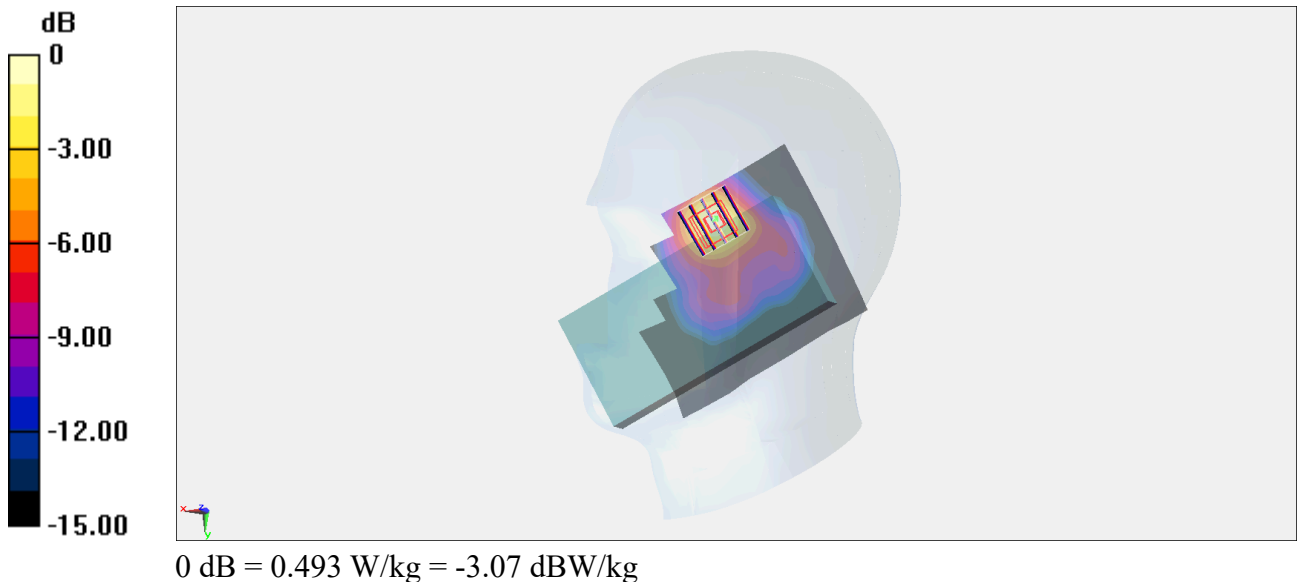

#03_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9262

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1852.4 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 42.54$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1852.4 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.91 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.513 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 1.56 W/kg

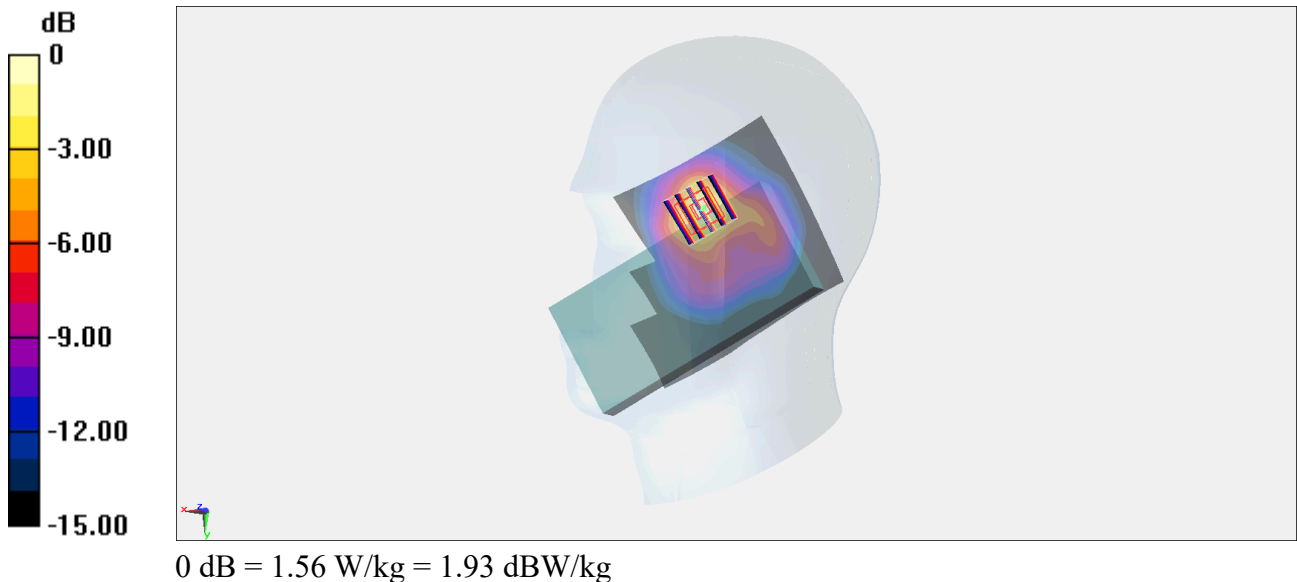

#04_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1413

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1732.6 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 42.711$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1732.6 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.78 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.377 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 1.07 W/kg

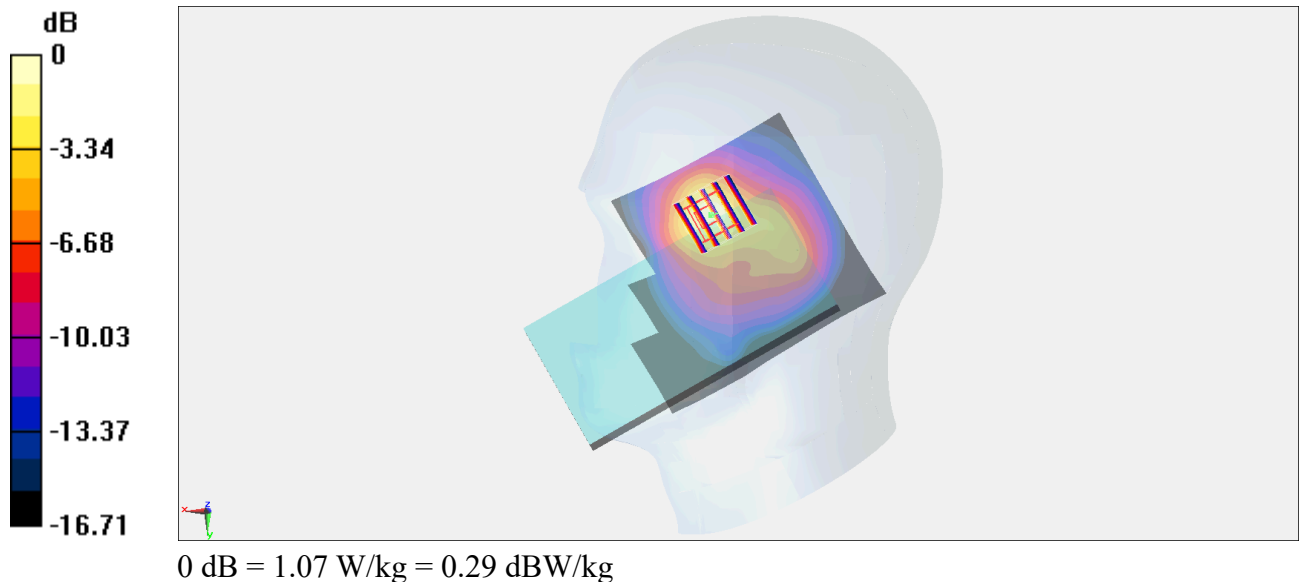

#05_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4132

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 826.4 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 45.092$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 826.4 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.76 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.549 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.36 W/kg

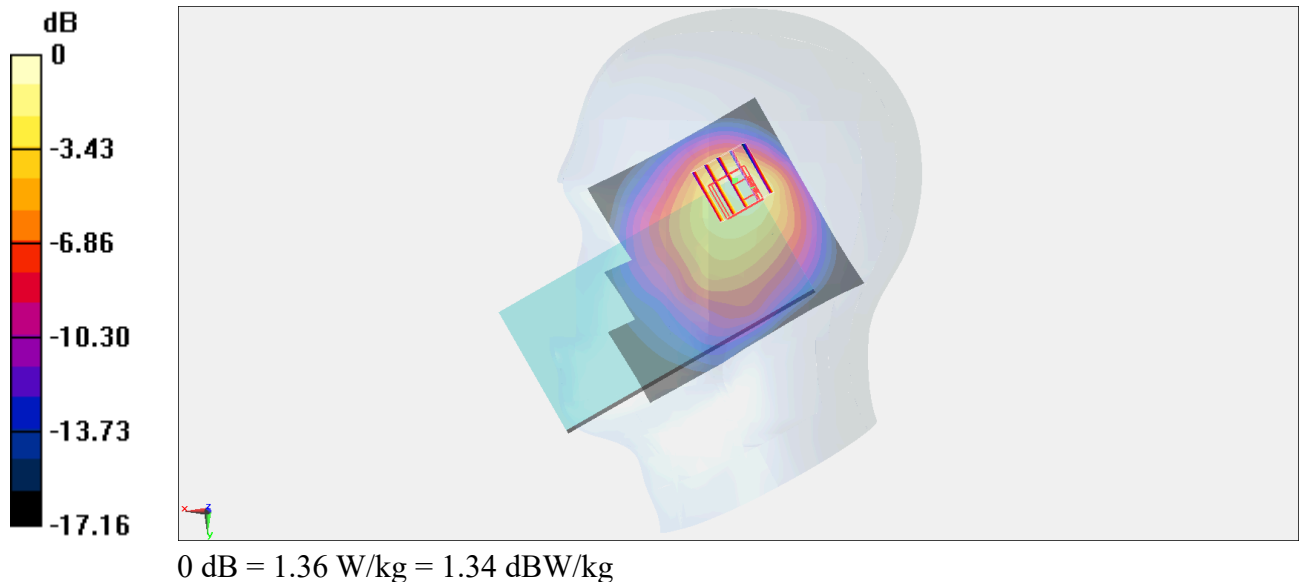

#06_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch21100

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2535 MHz

Medium: HSL_600-7200_260210 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 40.108$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2535 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.76 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.884 W/kg; SAR(10 g) = 0.398 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 1.26 W/kg

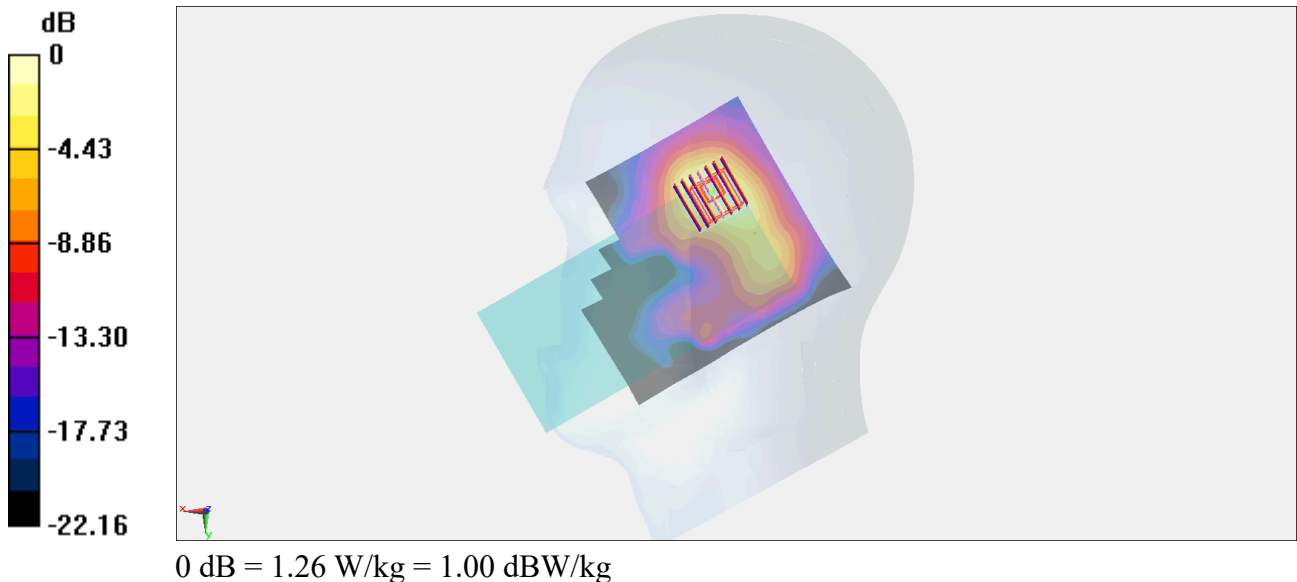

#07_LTE Band 12_10M_QPSK_1_0_Right Cheek_0mm_Ch23095

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 707.5 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 43.469$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 707.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.917 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.72 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.386 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.1%

Maximum value of SAR (measured) = 1.04 W/kg

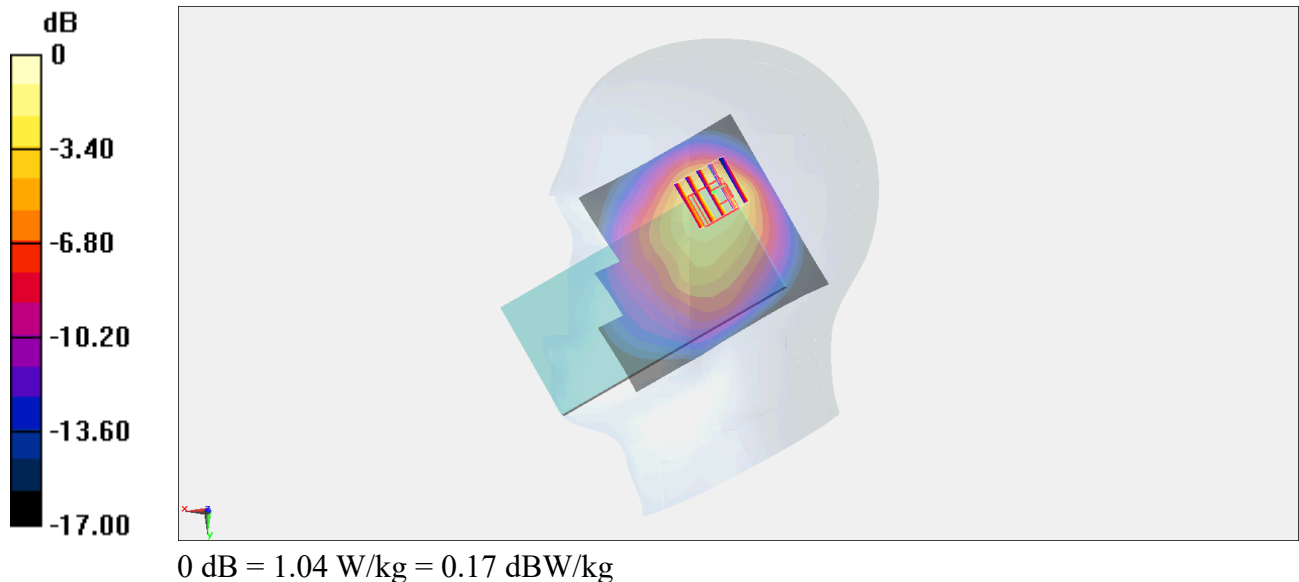

#08_LTE Band 13_10M_QPSK_1_0_Right Cheek_0mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 782 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 782$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.257$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 782 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.76 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.703 W/kg; SAR(10 g) = 0.428 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.2%

Maximum value of SAR (measured) = 1.11 W/kg

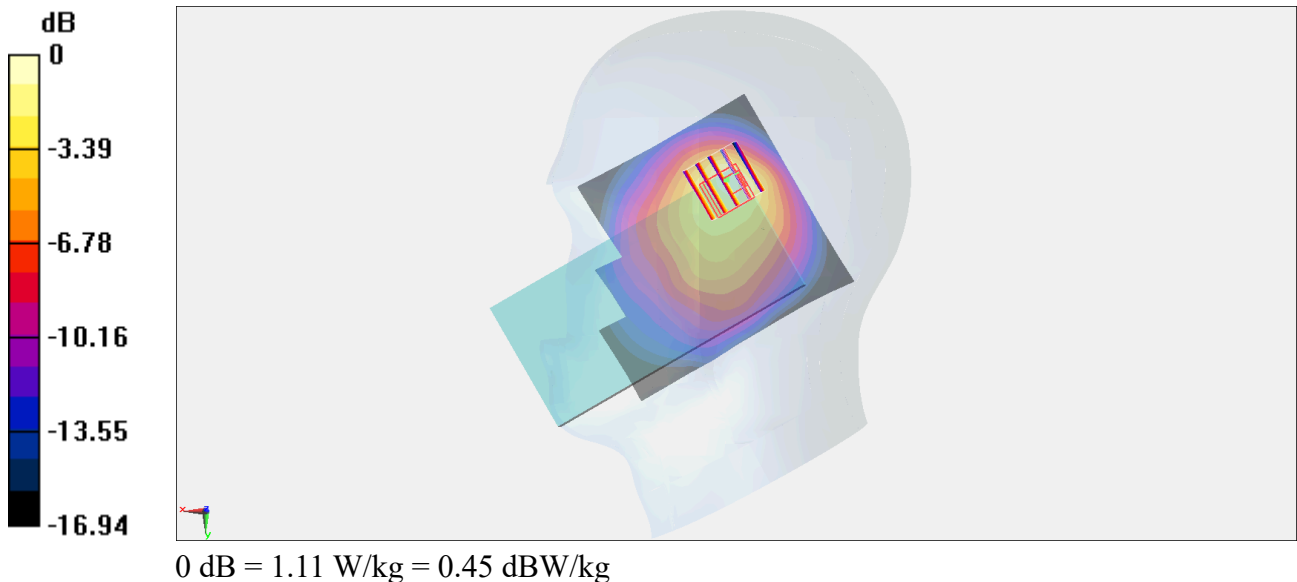

#09_LTE Band 14_10M_QPSK_1_0_Right Cheek_0mm_Ch23330

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 793 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 793$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 43.229$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 793 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 34.51 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.434 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 1.15 W/kg

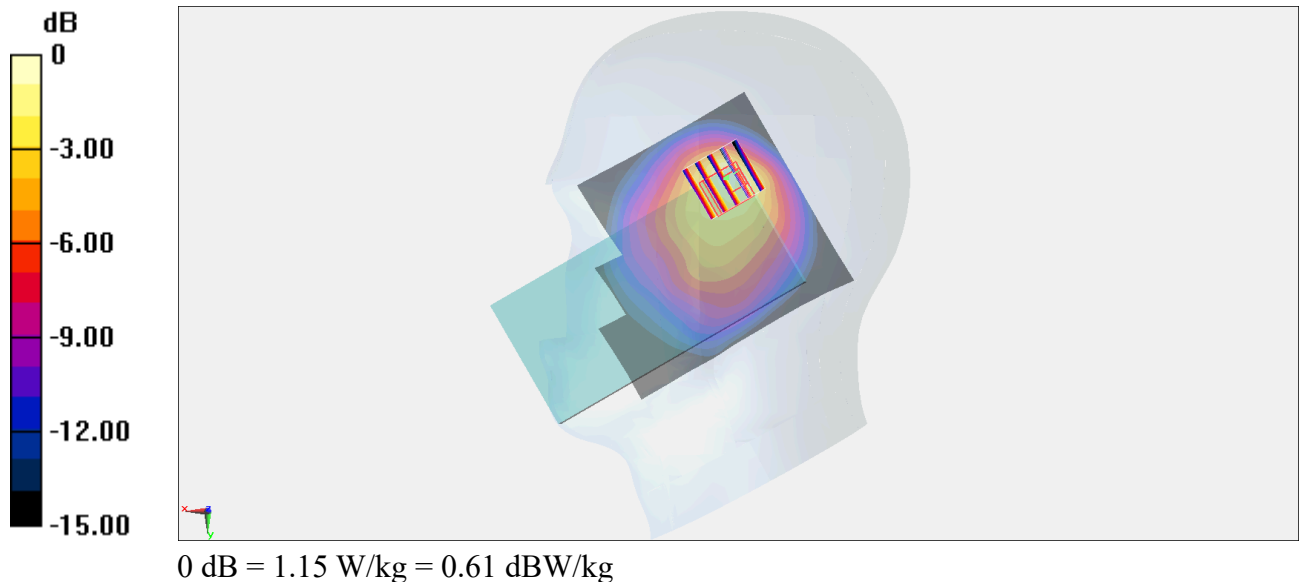

#10_LTE Band 25_20M_QPSK_1_0_Right Cheek_0mm_Ch26340

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1880 MHz

Medium: HSL_600-7200_260212 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 41.034$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1880 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.71 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.85 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.541 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 1.62 W/kg

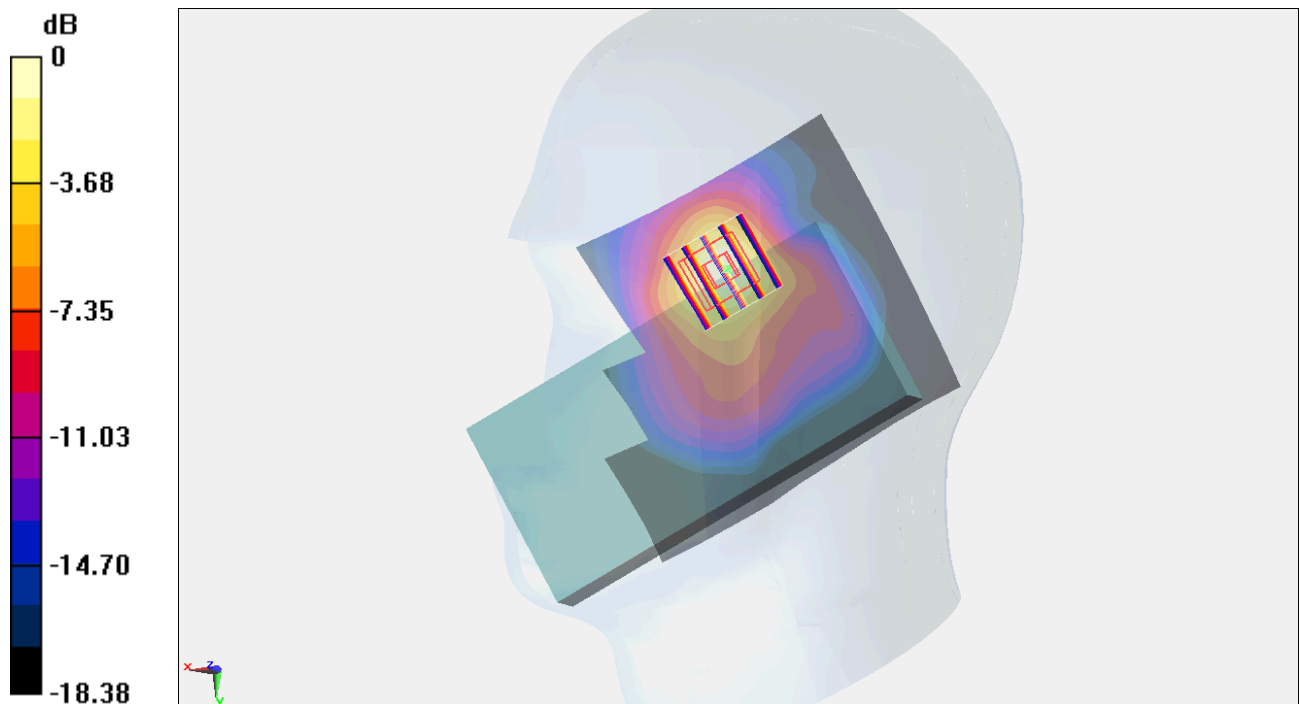

0 dB = 1.62 W/kg = 2.10 dBW/kg

#11_LTE Band 26_15M_QPSK_1_0_Right Cheek_0mm_Ch26865

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 831.5 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.053$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 831.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.944 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.52 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.657 W/kg; SAR(10 g) = 0.396 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.1%

Maximum value of SAR (measured) = 1.03 W/kg

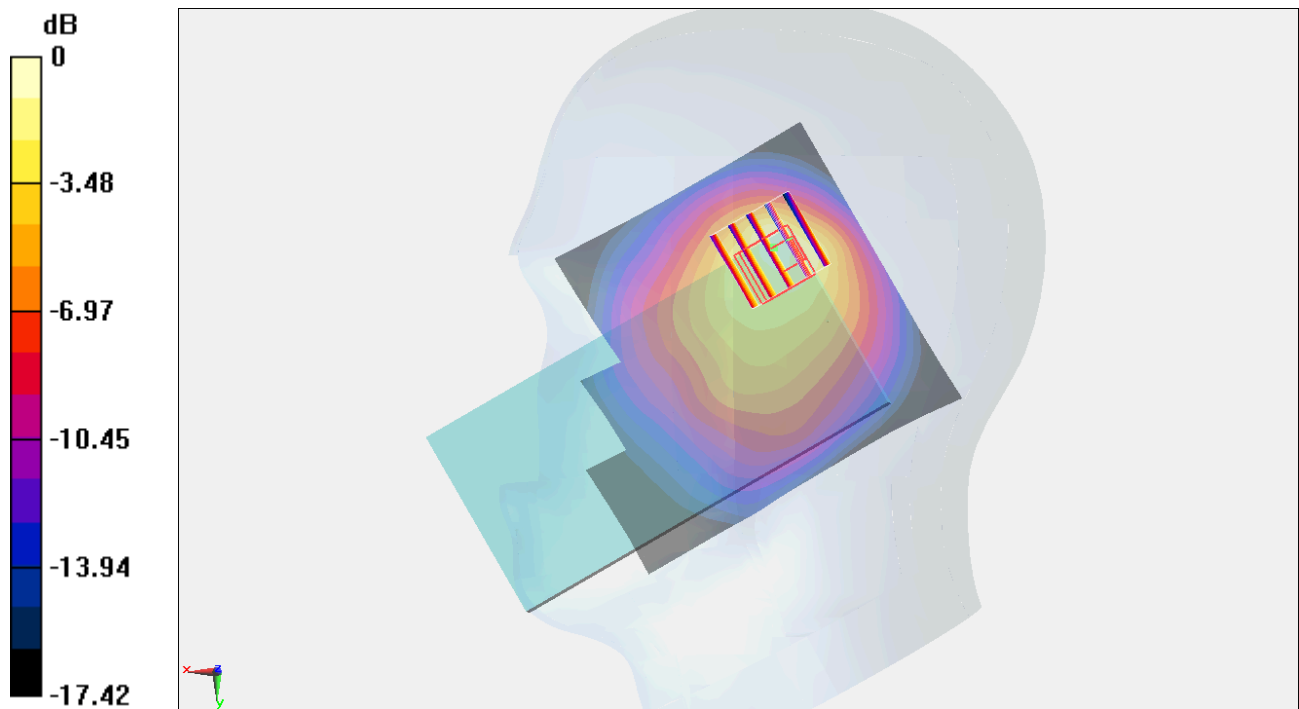

0 dB = 1.03 W/kg = 0.13 dBW/kg

#12_LTE Band 30_10M_QPSK_1_0_Right Cheek_0mm_Ch27710

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2310 MHz

Medium: HSL_600-7200_260216 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.686$ S/m; $\epsilon_r = 40.411$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.15, 6.94, 7.32) @ 2310 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 28.88 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.442 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 1.25 W/kg

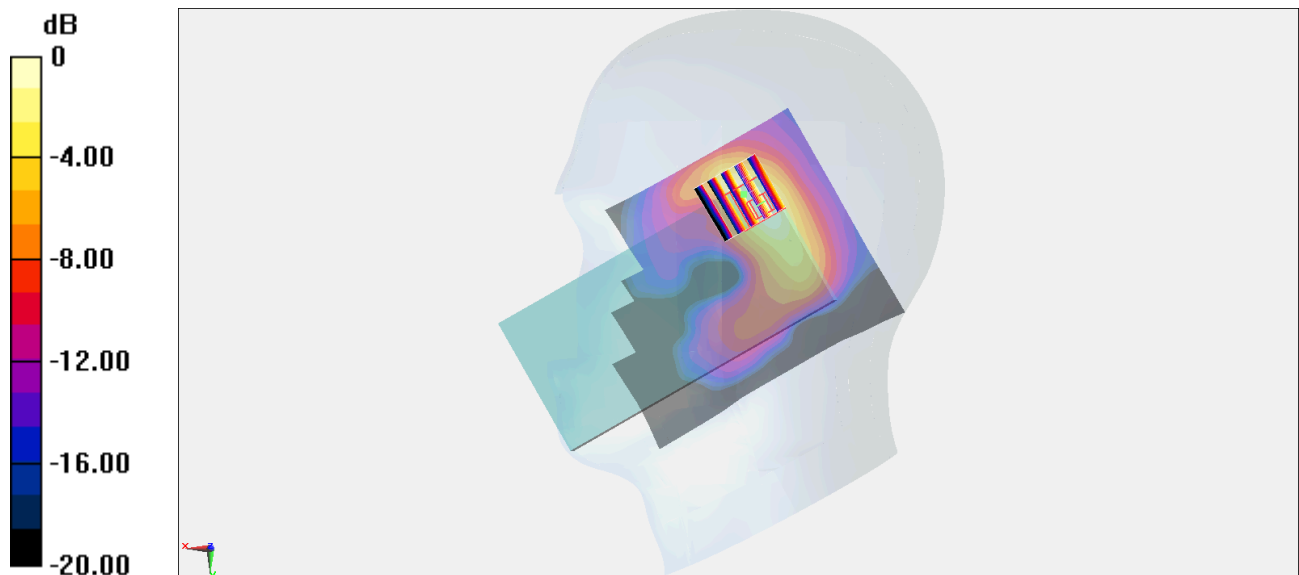

0 dB = 1.25 W/kg = 0.97 dBW/kg

#13_LTE Band 66_20M_QPSK_1_0_Right Cheek_0mm_Ch132322

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1745 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 41.211$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1745 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.55 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.349 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 1.06 W/kg

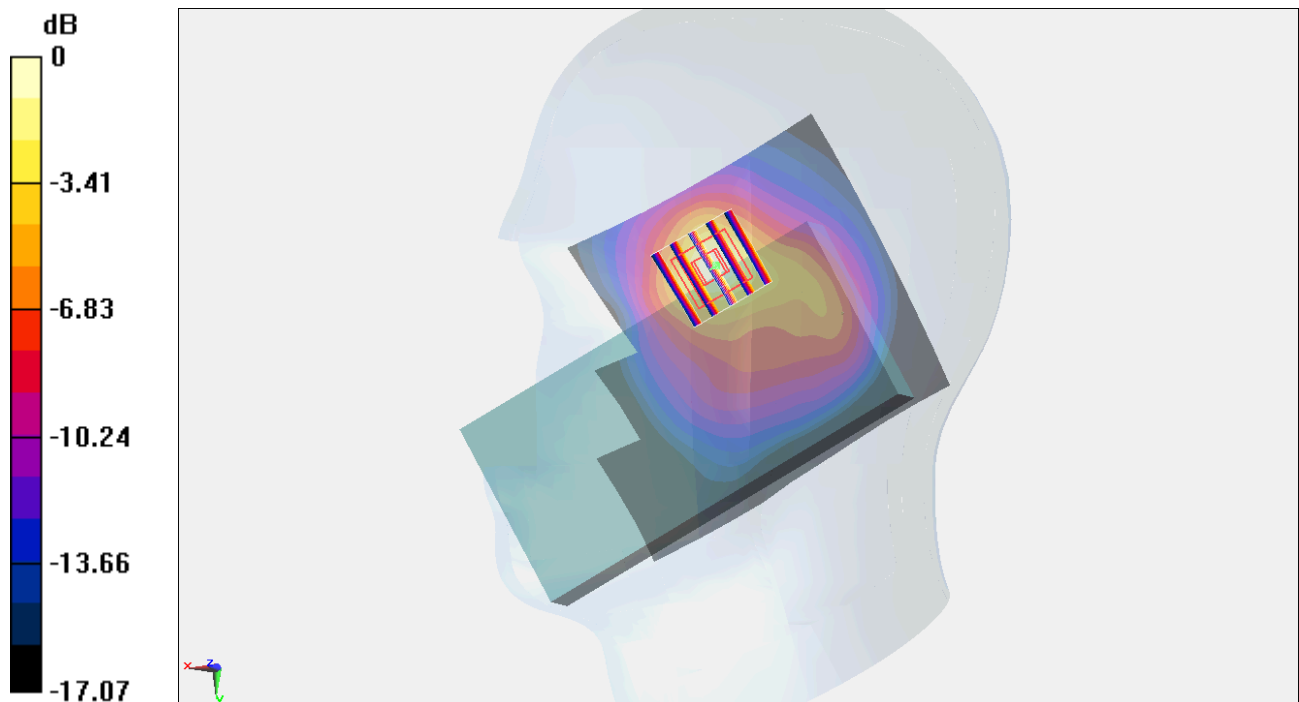

0 dB = 1.06 W/kg = 0.25 dBW/kg

#14_LTE Band 71_20M_QPSK_1_0_Right Cheek_0mm_Ch133297

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 680.5 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.860$ S/m; $\epsilon_r = 43.604$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 680.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.317 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.71 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.138 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 34.8%

Maximum value of SAR (measured) = 0.392 W/kg

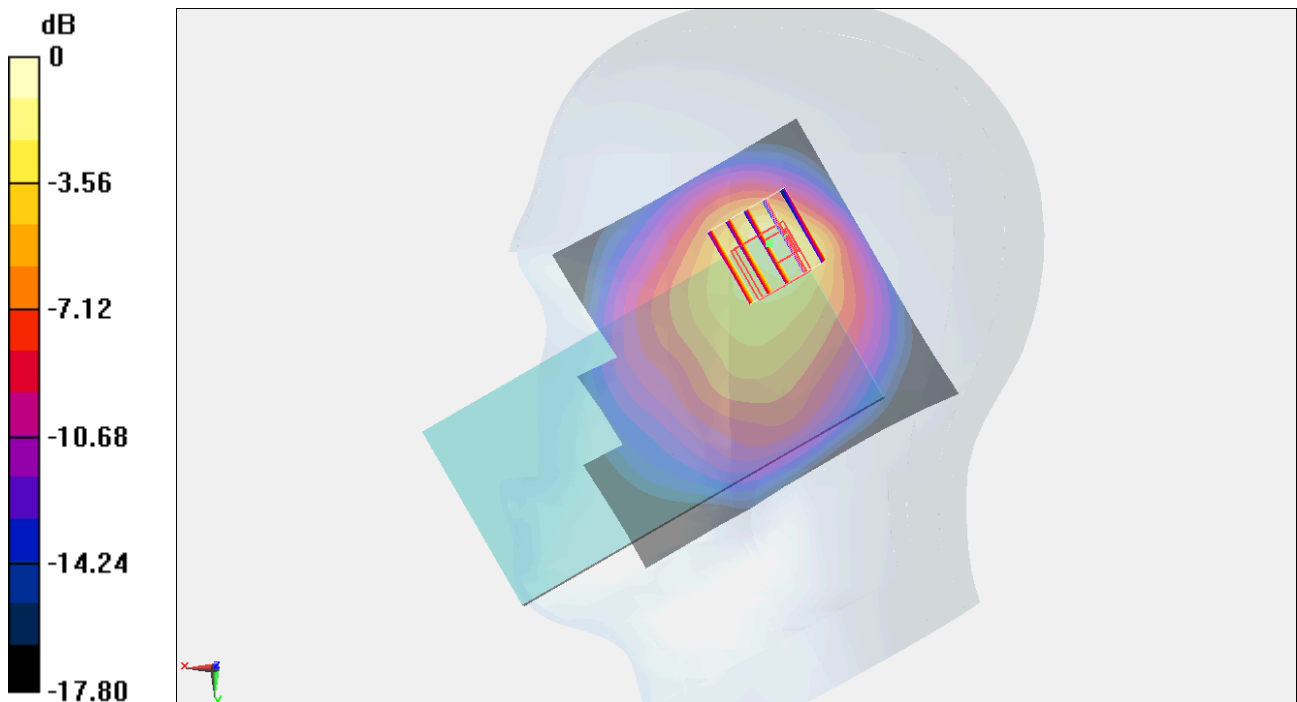

0 dB = 0.392 W/kg = -4.07 dBW/kg

#15_LTE Band 106_3M_QPSK_1_0_Right Cheek_0mm_Ch134322

Communication System: UID 10184 - CAF, LTE-FDD; Frequency: 899 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 899$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.998$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.2, 8.93, 9.41) @ 899 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.65 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 41.90 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.586 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.6%

Maximum value of SAR (measured) = 1.65 W/kg

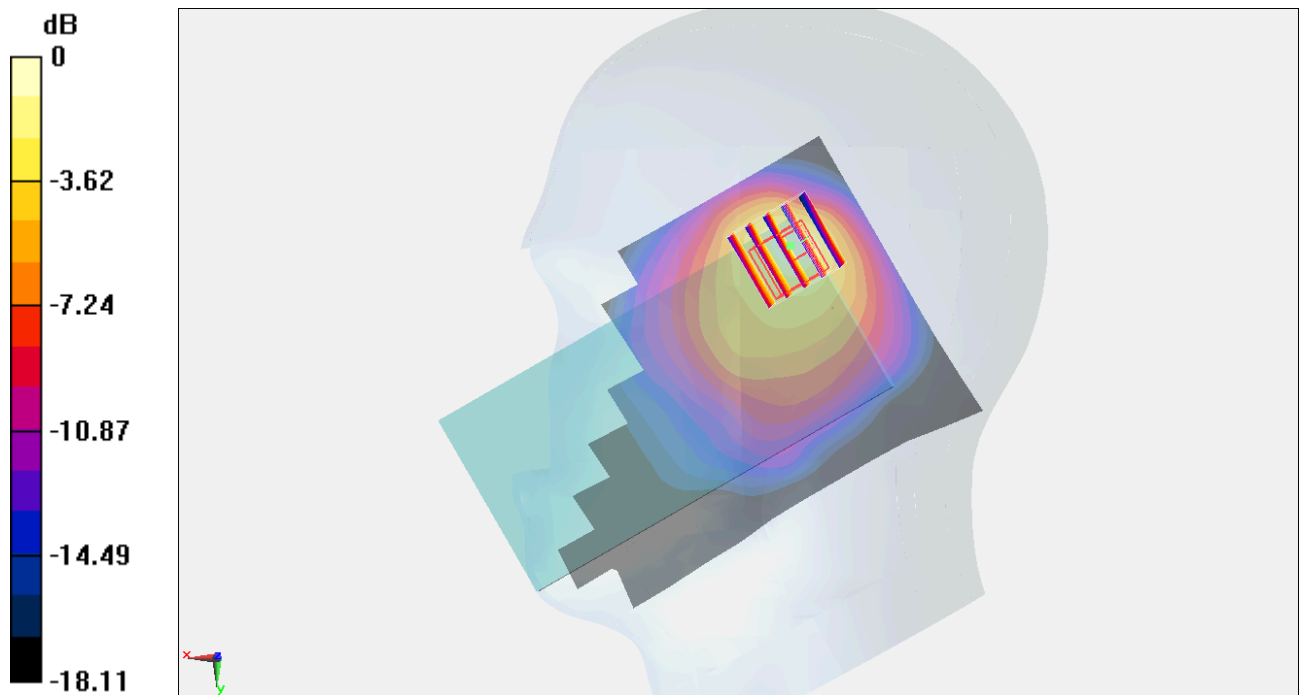

0 dB = 1.65 W/kg = 2.17 dBW/kg

#16_LTE Band 70_15M_QPSK_1_0_Right Cheek_0mm_Ch133047

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 1702.5 MHz

Medium: HSL_600-7200_260209 Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 41.496$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1702.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.25 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.404 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 1.23 W/kg

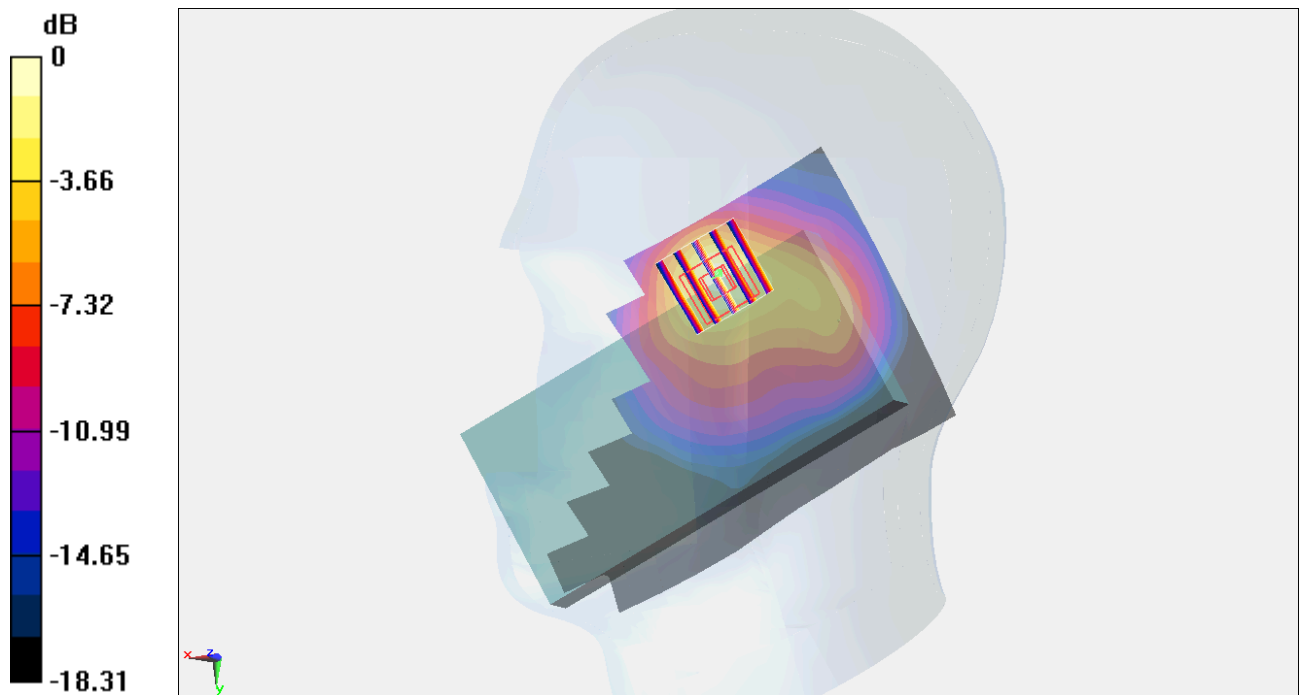

0 dB = 1.23 W/kg = 0.90 dBW/kg

#17_LTE Band 41_20M_QPSK_1_0_Right Cheek_0mm_Ch41490

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2680 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 2680$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 40.769$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2680 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.26 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.29 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.423 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 1.24 W/kg

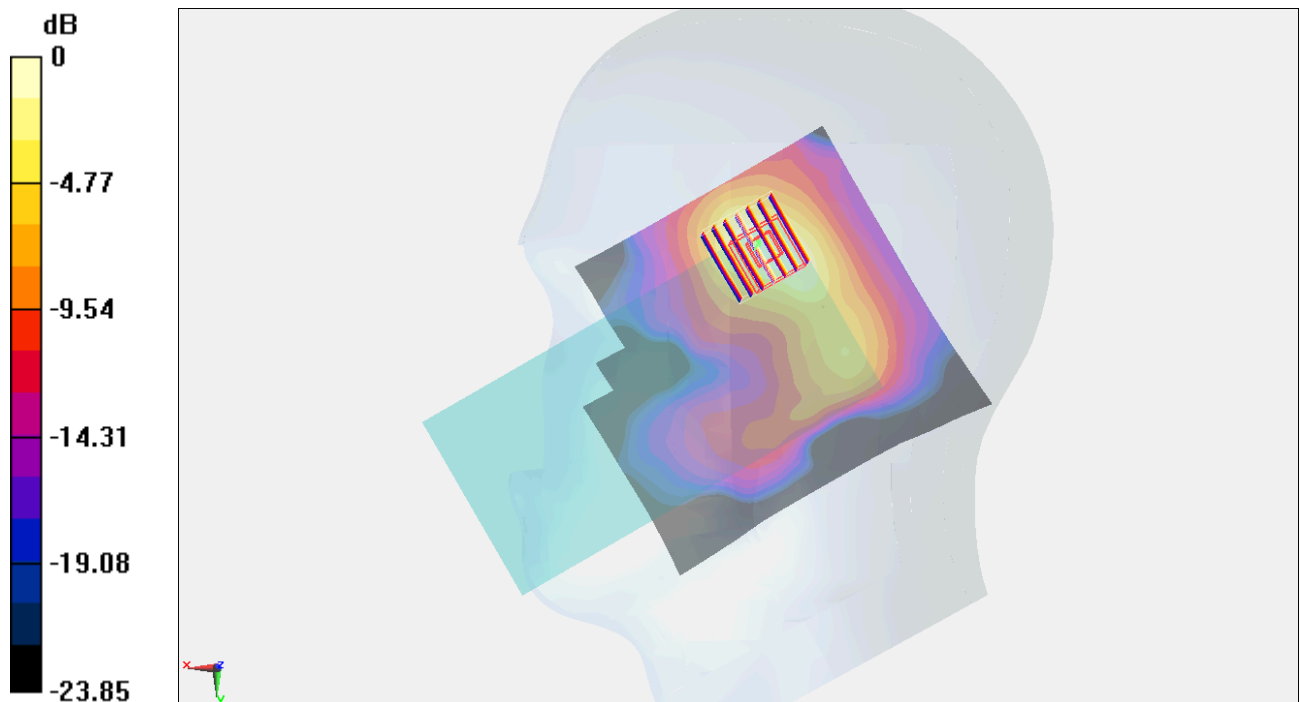

0 dB = 1.24 W/kg = 0.93 dBW/kg

#18_LTE Band 48_20M_QPSK_1_0_Left Cheek_0mm_Ch55830

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 3609 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 3609$ MHz; $\sigma = 2.842$ S/m; $\epsilon_r = 38.891$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.36, 6.17, 6.51) @ 3609 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 25.25 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.458 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.9%

Maximum value of SAR (measured) = 1.81 W/kg

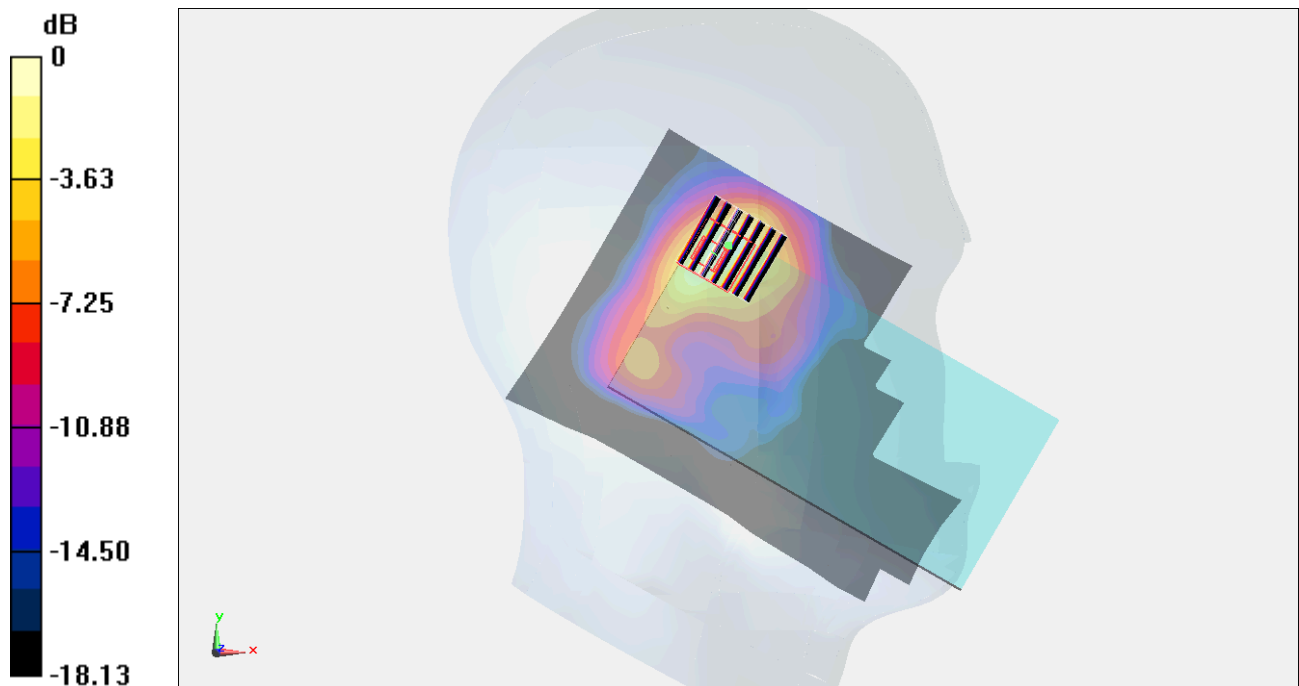

0 dB = 1.81 W/kg = 2.58 dBW/kg

#19_FR1 n7_50M_BPSK_1_1_Right Cheek_0mm_Ch507000

Communication System: UID 10935 - AAD, 5G NR; Frequency: 2535 MHz

Medium: HSL_600-7200_260215 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.854$ S/m; $\epsilon_r = 40.078$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2535 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.80 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.18 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.585 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 1.68 W/kg

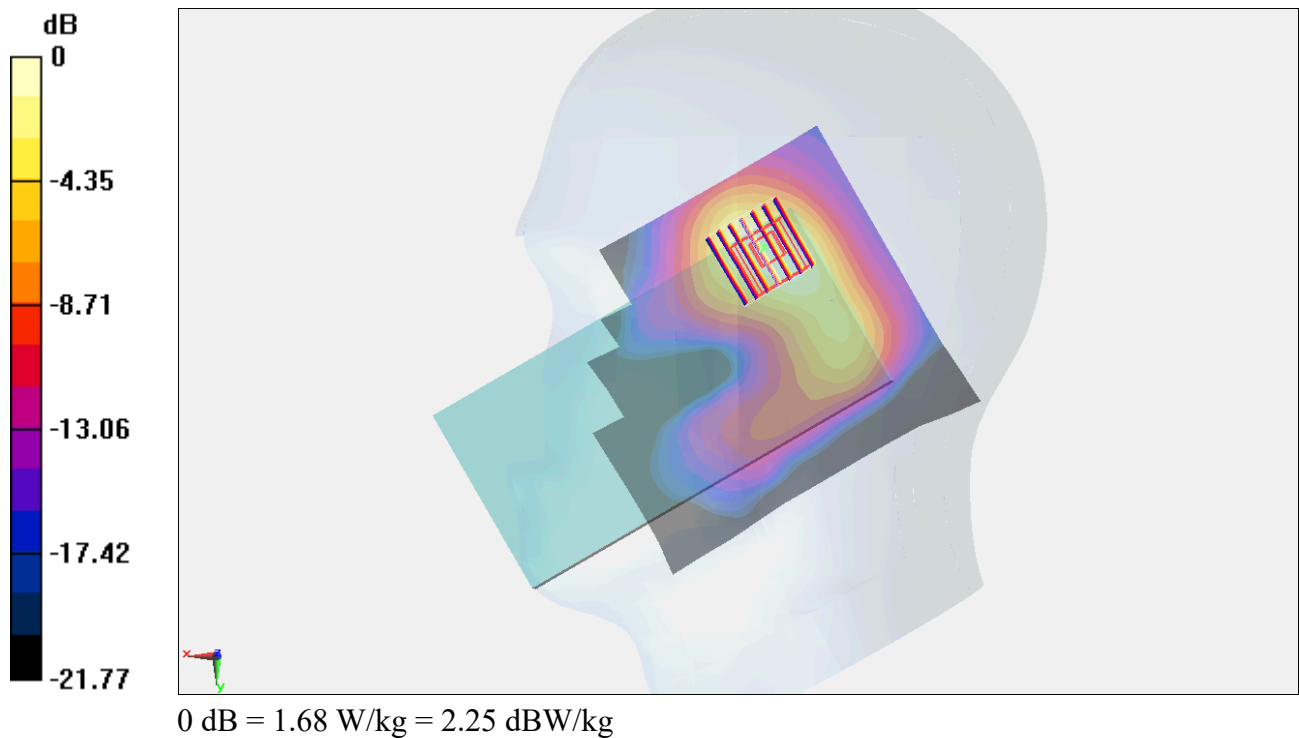

#20_FR1 n12_15M_BPSK_1_1_Right Cheek_0mm_Ch141500

Communication System: UID 10930 - AAC, 5G NR; Frequency: 707.5 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 43.439$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 707.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.08 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.723 W/kg; SAR(10 g) = 0.418 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 1.25 W/kg

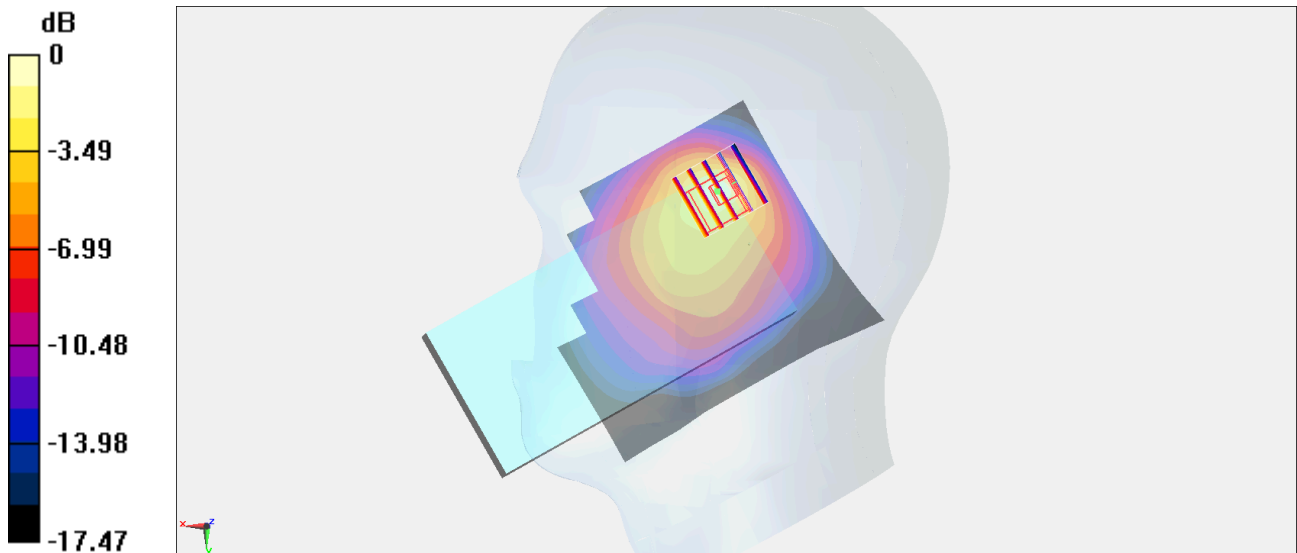

0 dB = 1.25 W/kg = 0.97 dBW/kg

#21_FR1 n13_10M_BPSK_1_1_Right Cheek_0mm_Ch156400

Communication System: UID 10929 - AAD, 5G NR; Frequency: 782 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 782$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.227$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 782 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.45 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.410 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 42.3%

Maximum value of SAR (measured) = 1.17 W/kg

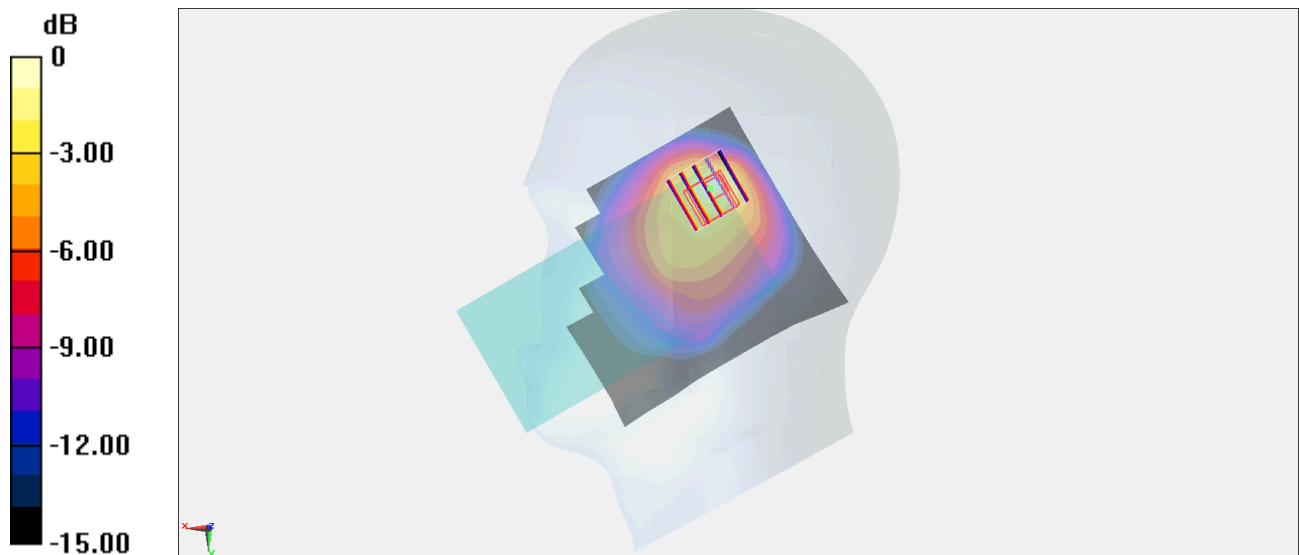

0 dB = 1.17 W/kg = 0.68 dBW/kg

#22_FR1 n14_10M_BPSK_1_1_Right Cheek_0mm_Ch158600

Communication System: UID 10929 - AAD, 5G NR; Frequency: 793 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 793$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 43.199$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 793 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 34.61 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.443 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 1.29 W/kg

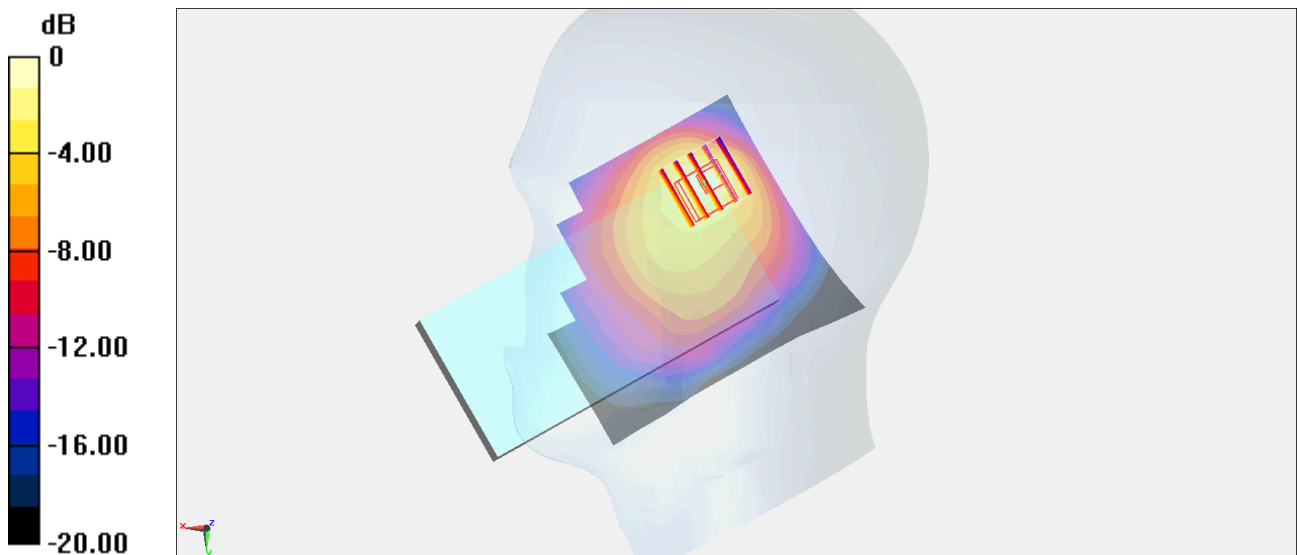

0 dB = 1.29 W/kg = 1.11 dBW/kg

#23_FR1 n25_40M_BPSK_1_1_Right Cheek_0mm_Ch376500

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1882.5 MHz

Medium: HSL_600-7200_260212 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 41.04$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1882.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.59 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.72 V/m; Power Drift = -0.05 dB



Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.568 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 1.69 W/kg

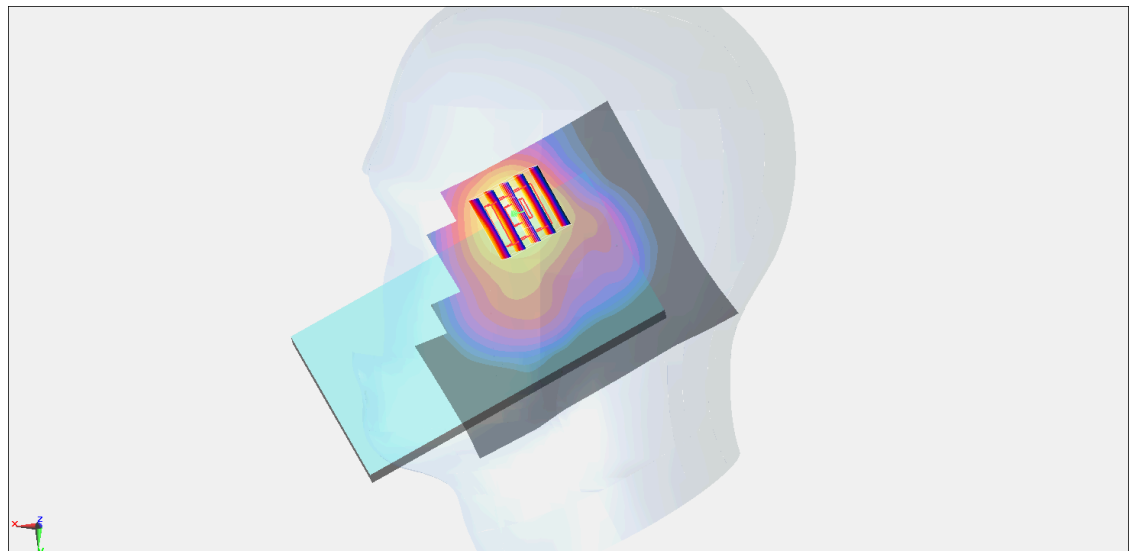

0 dB = 1.69 W/kg = 2.28 dBW/kg

#24_FR1 n26_20M_BPSK_1_1_Right Cheek_0mm_Ch166300

Communication System: UID 10931 - AAC, 5G NR; Frequency: 831.5 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.053$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 831.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 39.17 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.515 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.9%

Maximum value of SAR (measured) = 1.36 W/kg

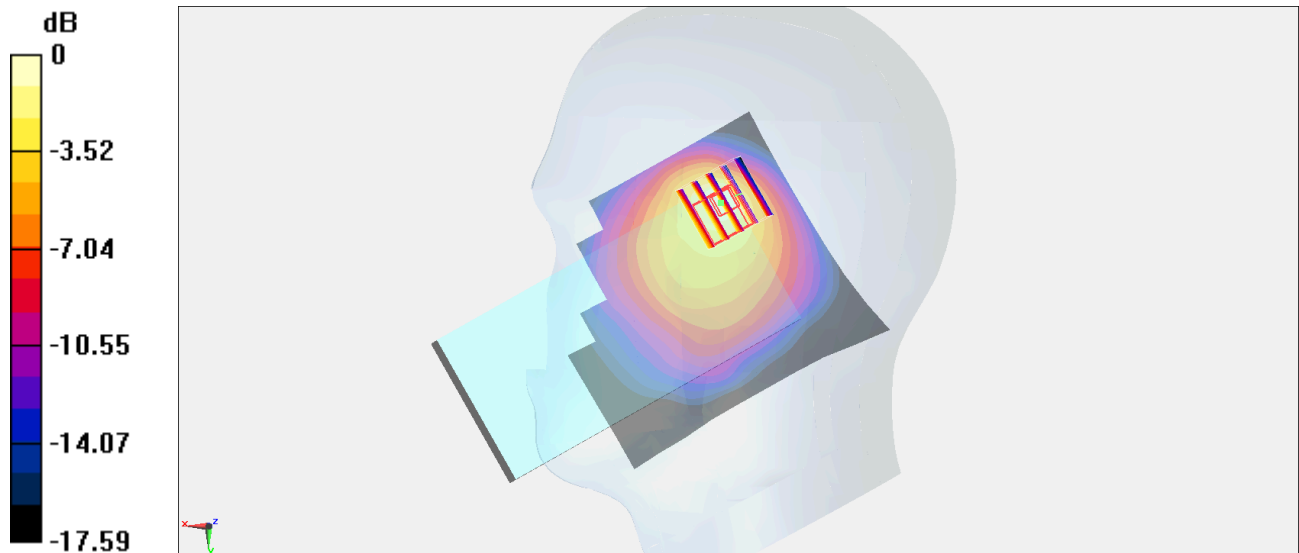

0 dB = 1.36 W/kg = 1.34 dBW/kg

#25_FR1 n30_10M_BPSK_1_1_Right Cheek_0mm_Ch462000

Communication System: UID 10929 - AAD, 5G NR; Frequency: 2310 MHz

Medium: HSL_600-7200_260216 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.686$ S/m; $\epsilon_r = 40.411$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.15, 6.94, 7.32) @ 2310 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.50 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.28 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.513 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 1.46 W/kg

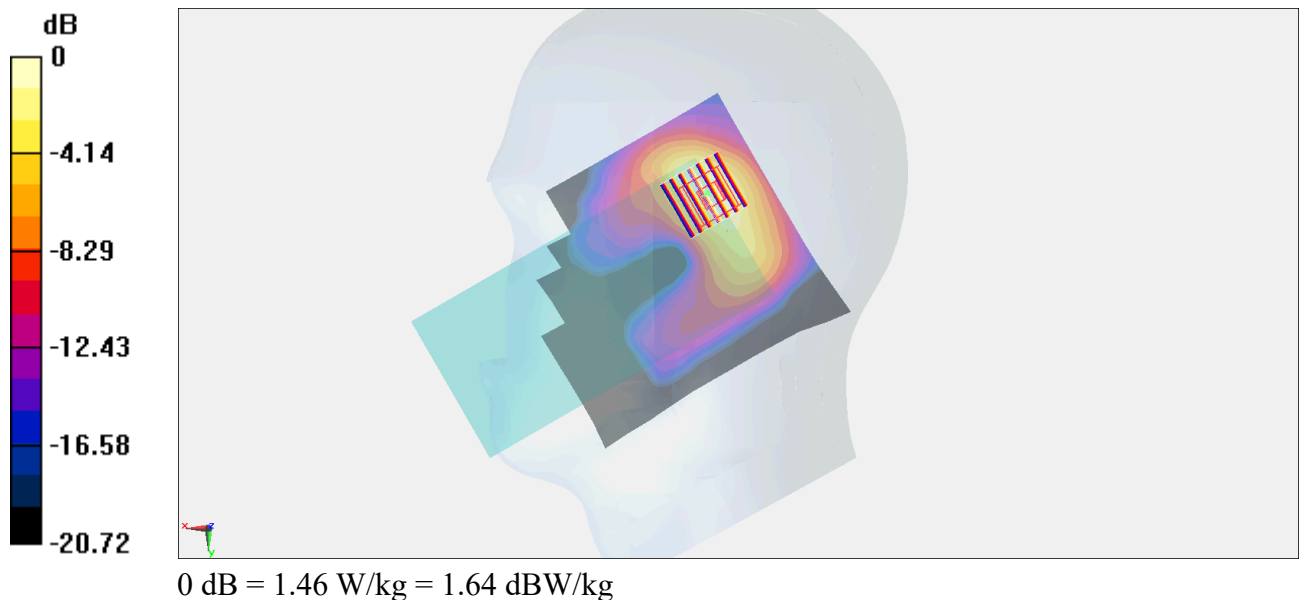

#26_FR1 n66_40M_BPSK_1_1_Right Cheek_0mm_Ch349000

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1745 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 41.211$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1745 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.956 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.33 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.354 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 1.03 W/kg

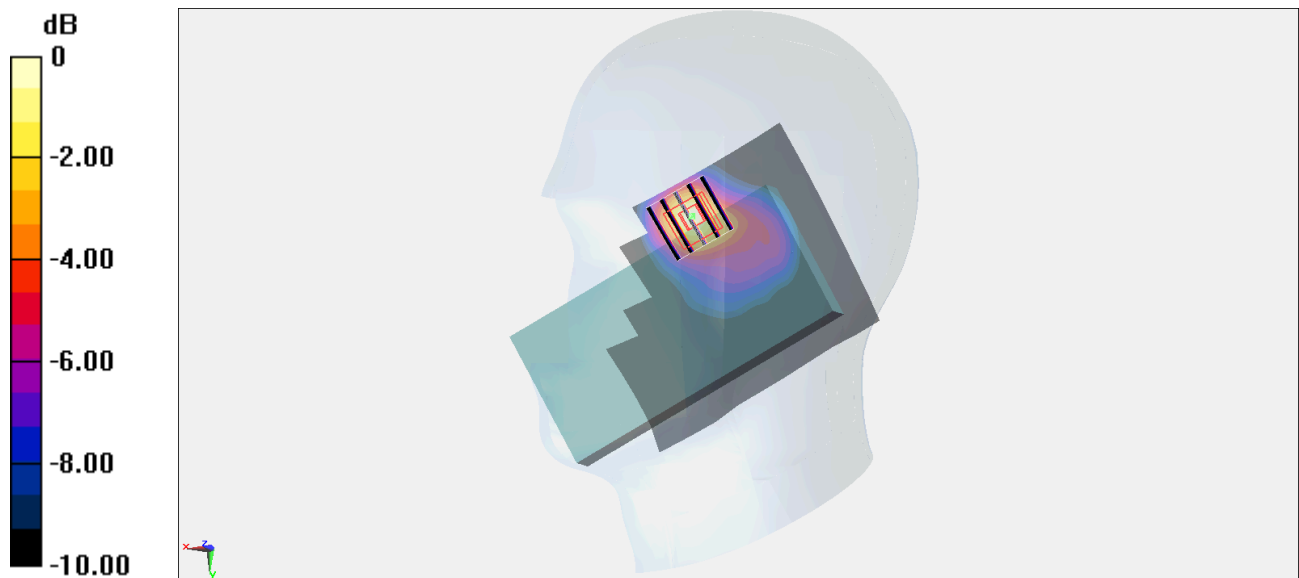

0 dB = 1.03 W/kg = 0.13 dBW/kg

#27_FR1 n70_15M_BPSK_1_1_Right Cheek_0mm_Ch340500

Communication System: UID 10930 - AAC, 5G NR; Frequency: 1702.5 MHz

Medium: HSL_600-7200_260209 Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.325$ S/m; $\epsilon_r = 41.496$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1702.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.00 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 31.38 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.396 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 1.15 W/kg

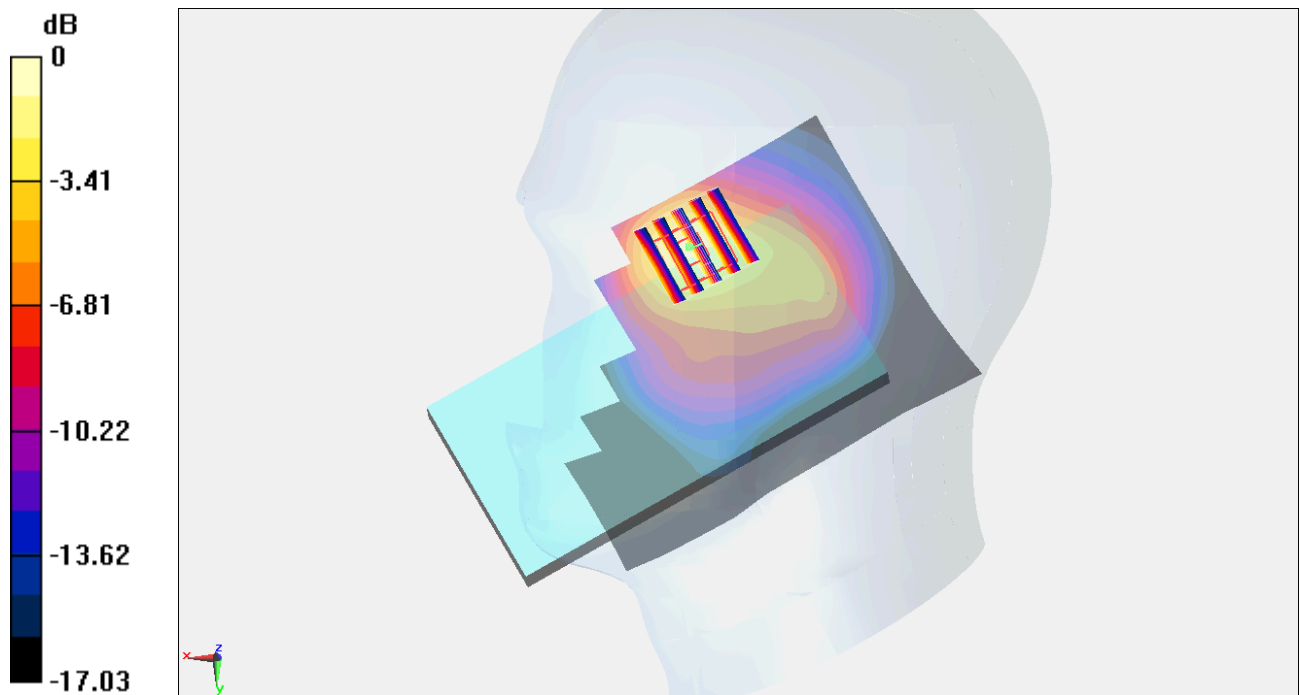

#28_FR1 n71_20M_BPSK_1_1_Right Cheek_0mm_Ch136100

Communication System: UID 10931 - AAC, 5G NR; Frequency: 680.5 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.845$ S/m; $\epsilon_r = 43.574$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85) @ 680.5 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.329 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.44 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.131 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 0.292 W/kg

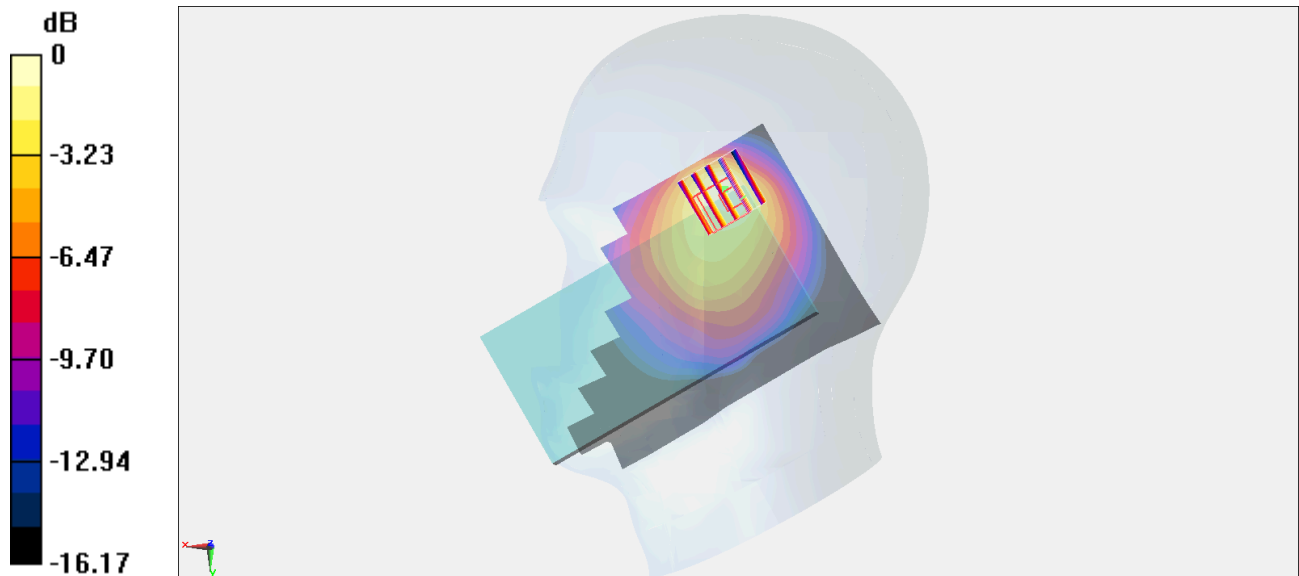

#29_FR1_n41_100M_BPSK_1_1_Right Cheek_0mm_Ch518598

Communication System: UID 10866 - AAF, 5G NR; Frequency: 2592.99 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 42.406$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2592.99 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.68 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.35 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.549 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 1.59 W/kg

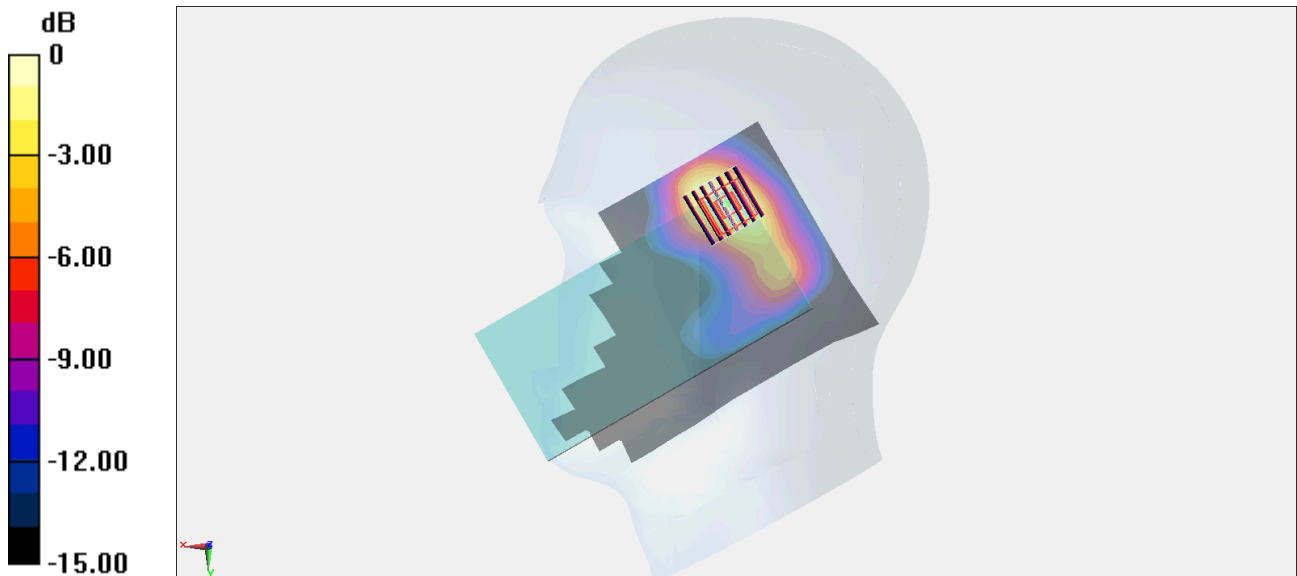

0 dB = 1.59 W/kg = 2.01 dBW/kg

#30_FR1_n48_40M_BPSK_1_1_Right Cheek_0mm_Ch638000

Communication System: UID 10903 - AAD, 5G NR; Frequency: 3570 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 3570$ MHz; $\sigma = 2.764$ S/m; $\epsilon_r = 40.847$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3570 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.72 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 26.76 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.940 W/kg; SAR(10 g) = 0.371 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 1.74 W/kg

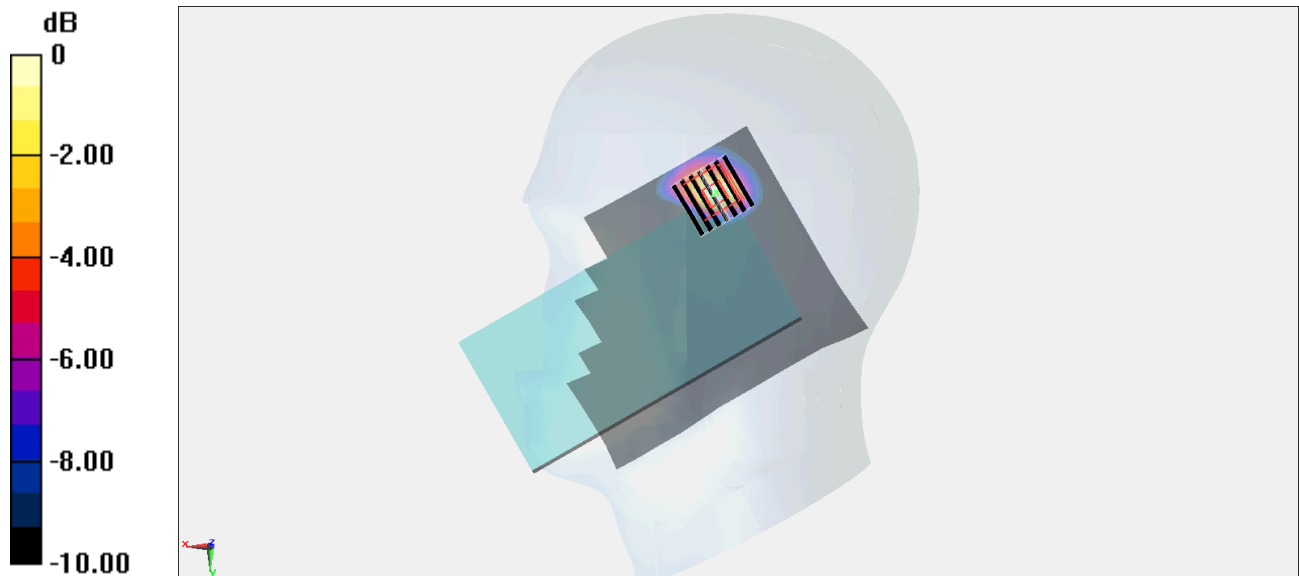

0 dB = 1.74 W/kg = 2.41 dBW/kg

#31_FR1 n77_100M_BPSK_1_1_Left Cheek_0mm_Ch633332

Communication System: UID 10866 - AAF, 5G NR; Frequency: 3499.98 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.717$ S/m; $\epsilon_r = 37.827$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.42, 6.23, 6.57) @ 3499.98 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.58 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 25.61 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.465 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 1.61 W/kg

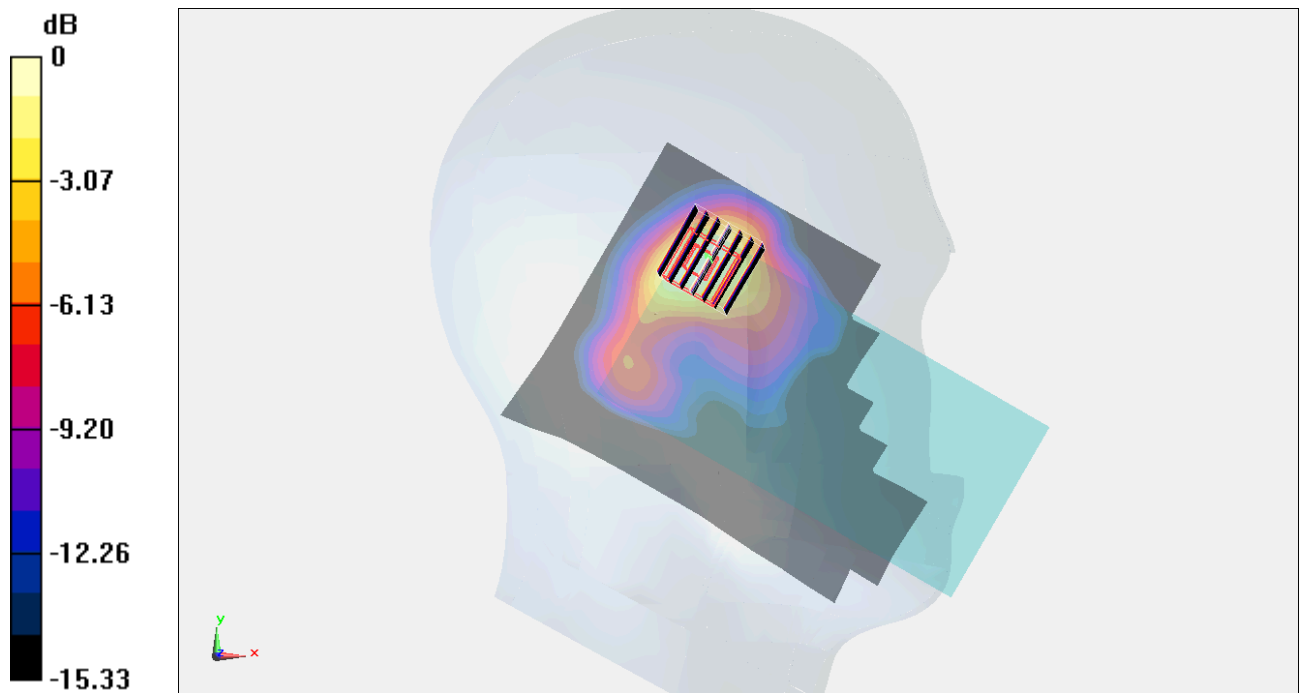

0 dB = 1.61 W/kg = 2.07 dBW/kg

#32_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: UID 10415 - AAA, 802.11b; Frequency: 2462 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 40.339$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.33, 7.12, 7.22) @ 2462 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.39 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.35 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.454 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 1.29 W/kg

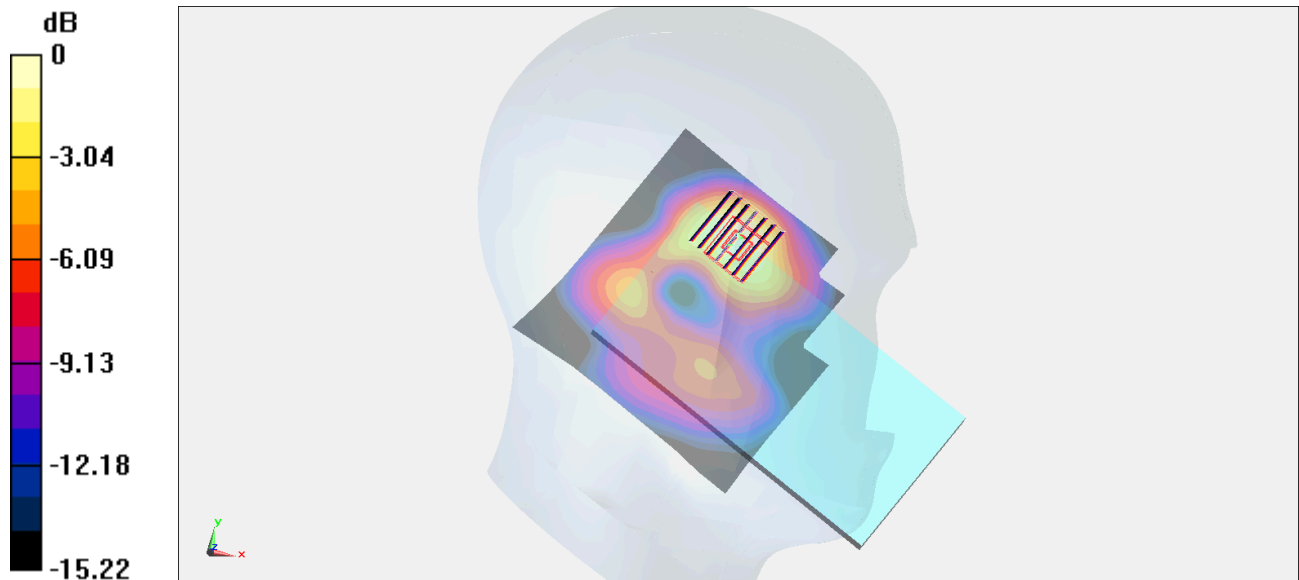

0 dB = 1.29 W/kg = 1.11 dBW/kg

#33_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch52

Communication System: UID 10417 - AAD, 802.11a; Frequency: 5260 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.502$ S/m; $\epsilon_r = 35.139$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.82, 5.65, 5.73) @ 5260 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.940 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 14.51 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.123 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

Maximum value of SAR (measured) = 0.919 W/kg

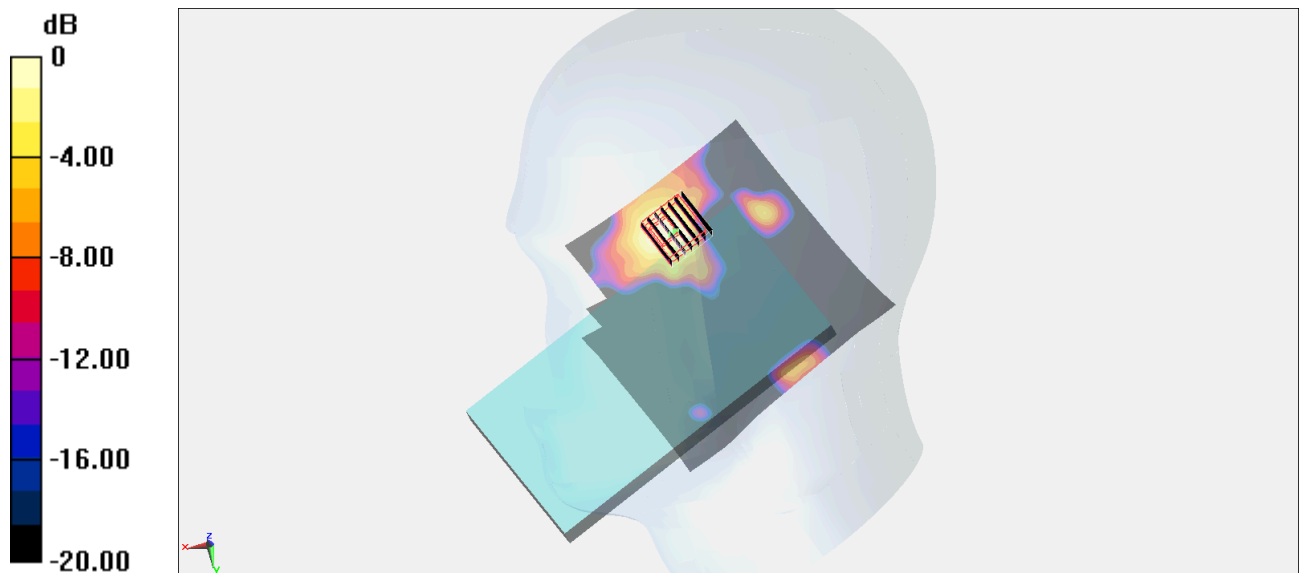

0 dB = 0.919 W/kg = -0.37 dBW/kg

#34_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch144

Communication System: UID 10417 - AAD, 802.11a; Frequency: 5720 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 5720$ MHz; $\sigma = 5.001$ S/m; $\epsilon_r = 34.255$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.31, 5.16, 5.23) @ 5720 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (131x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.81 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 19.79 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.266 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 1.97 W/kg

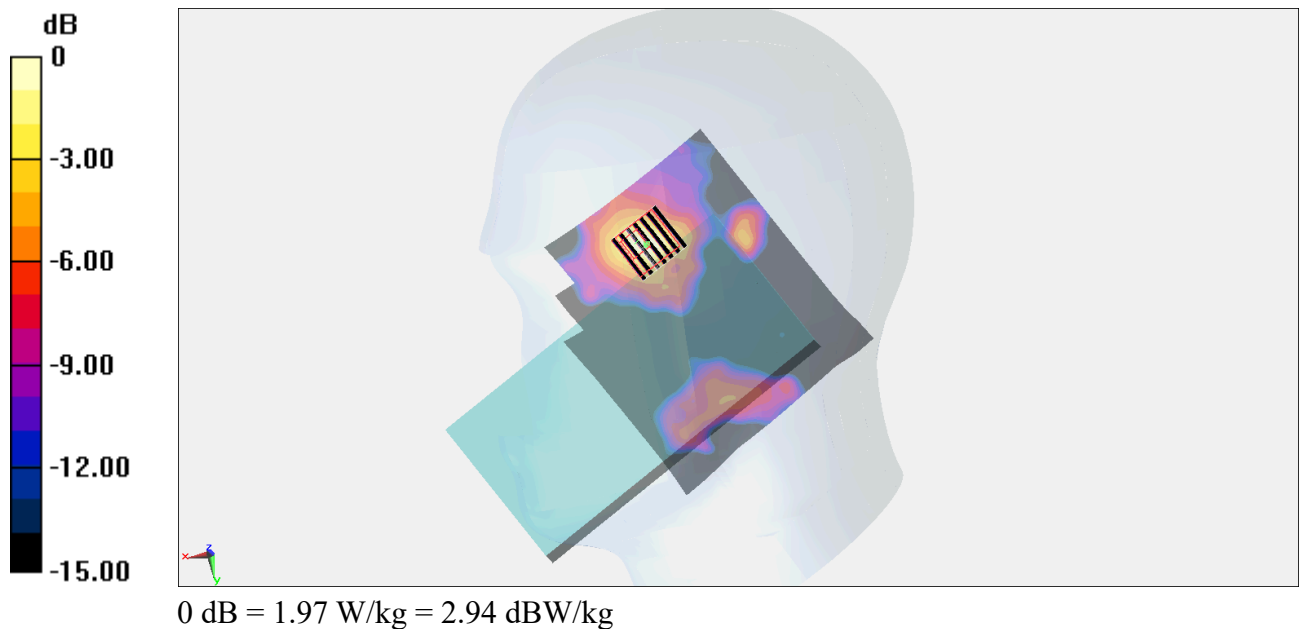

#35_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch165

Communication System: UID 10417 - AAD, 802.11a; Frequency: 5825 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.113$ S/m; $\epsilon_r = 34.084$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.31, 5.16, 5.23) @ 5825 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (131x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.20 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 22.96 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 4.60 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.354 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 2.58 W/kg

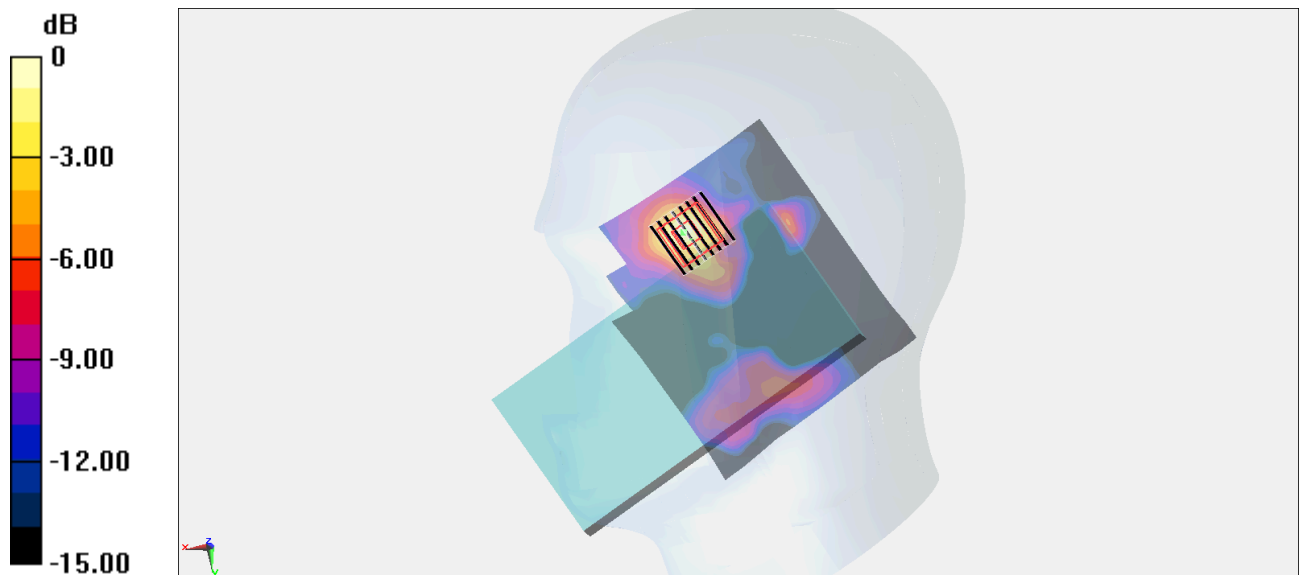

0 dB = 2.58 W/kg = 4.12 dBW/kg

#36_WLAN6GHz_802.11be-EHT320 MCS0_Right Cheek_0mm_Ch63

Communication System: 802.11be; Frequency: 6265.000 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 6265.000$ MHz; $\sigma = 5.90$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(4.96, 4.88, 5.04); Calibrated: 2025-09-11
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2025-09-09
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.675 W/kg; SAR (10g) = 0.241 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.15 dB


SAR (1g) = 0.731 W/kg; SAR (8g) = 0.275 W/kg; SAR (10g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.0 %

psAPD (1.0cm², sq) = 7.31 [W/m²]; psAPD (4.0cm², sq) = 5.50 [W/m²]

TSL Correction: Positive only

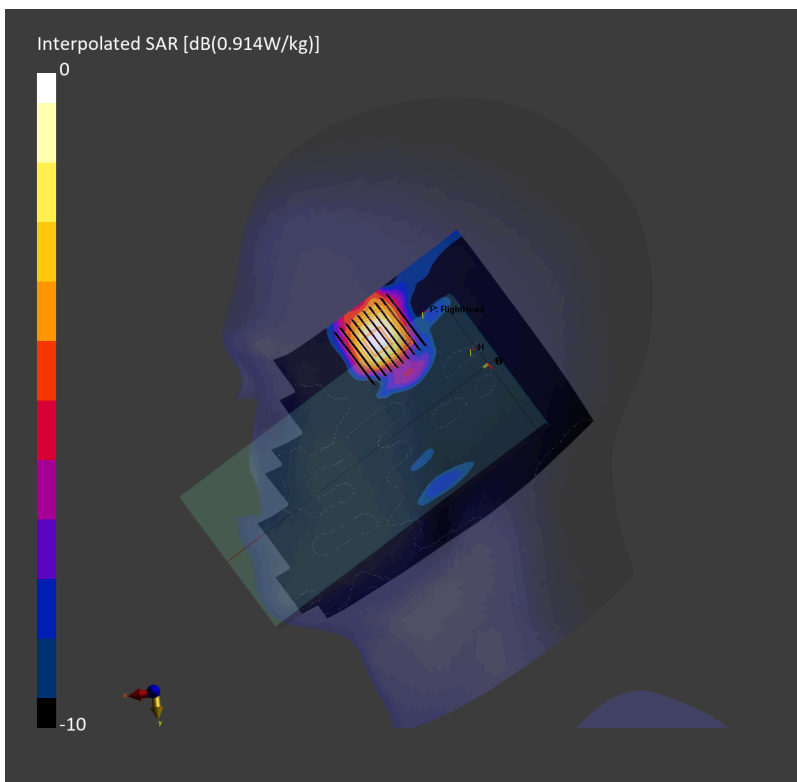

#37_Bluetooth_1Mbps_Left Cheek_0mm_Ch78

Communication System: UID 10032 - CAA, Bluetooth; Frequency: 2480 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.835$ S/m; $\epsilon_r = 40.336$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.33, 7.12, 7.22) @ 2480 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0665 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.713 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.018 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 0.0608 W/kg

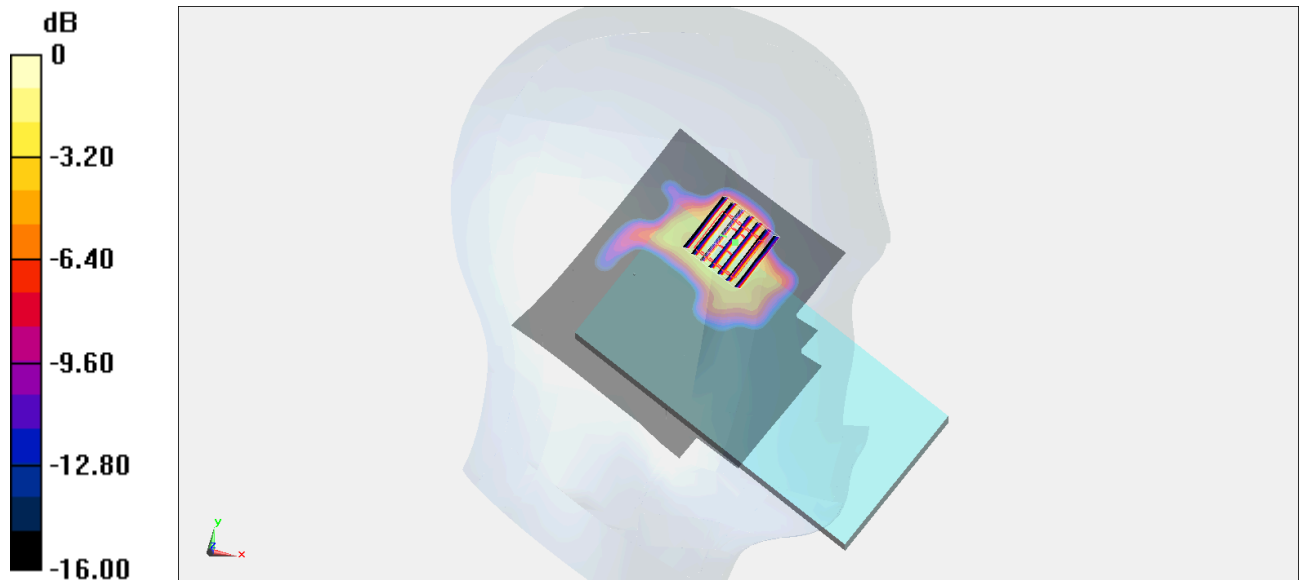

0 dB = 0.0608 W/kg = -12.16 dBW/kg

#38_GSM850_GPRS 4 Tx slots_Back_10mm_Ch128

Communication System: UID 10028 - DAC, GPRS-FDD; Frequency: 824.2 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 825$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 44.176$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17) @ 824.2 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.473 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.32 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.214 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.439 W/kg

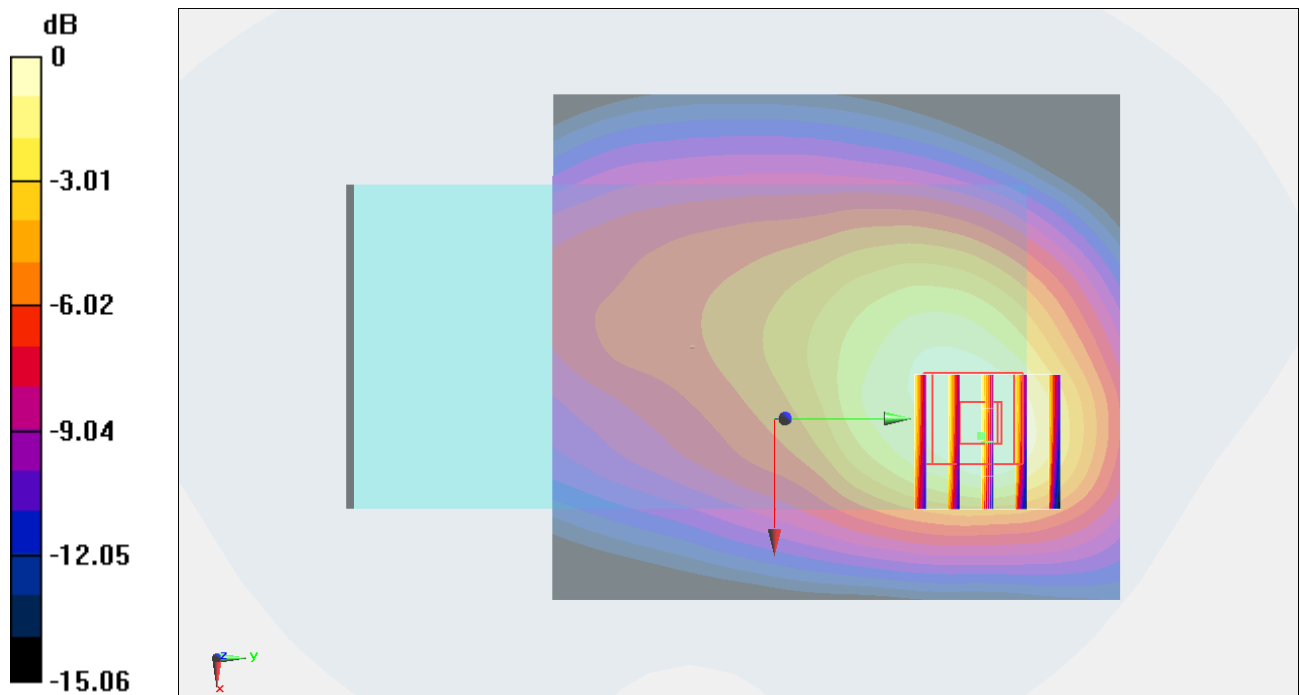

0 dB = 0.439 W/kg = -3.58 dBW/kg

#39_GSM1900_GPRS 2 Tx slots_Back_10mm_Ch810

Communication System: UID 10024 - DAC, GPRS-FDD; Frequency: 1909.8 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 42.327$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35) @ 1909.8 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.261 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.58 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.118 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.265 W/kg

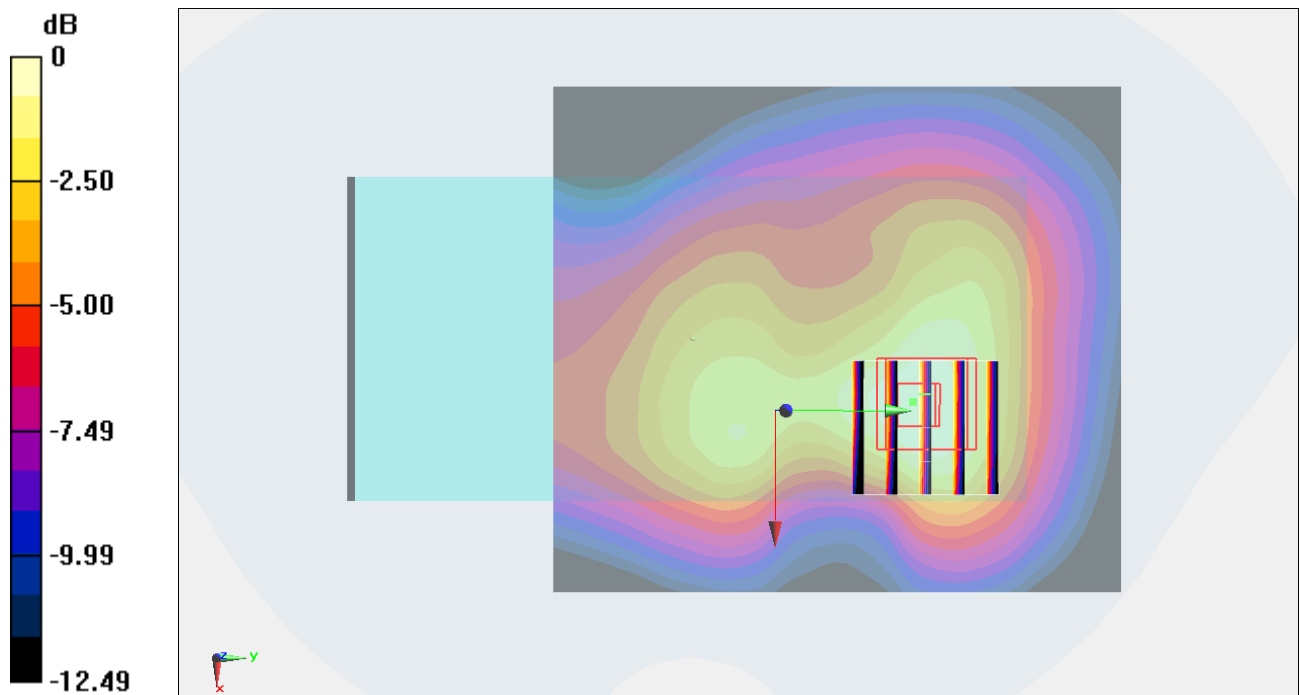

0 dB = 0.265 W/kg = -5.77 dBW/kg

#40_WCDMA II_RMC 12.2Kbps_Back_10mm_Ch9400

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1880 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 42.362$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35) @ 1880 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.496 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.71 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.217 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 0.478 W/kg

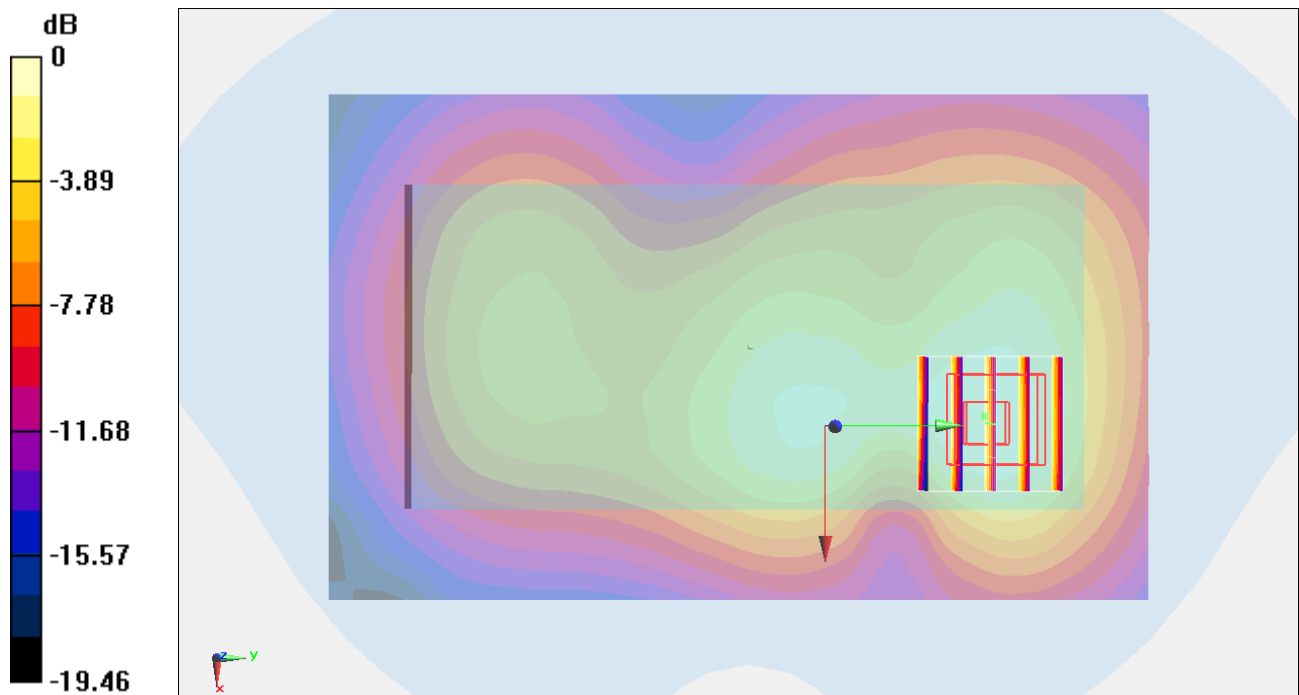

#41_WCDMA IV_RMC 12.2Kbps_Back Slant_10mm_Ch1413

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1732.6 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.587$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1732.6 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.596 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.04 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.248 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 0.567 W/kg

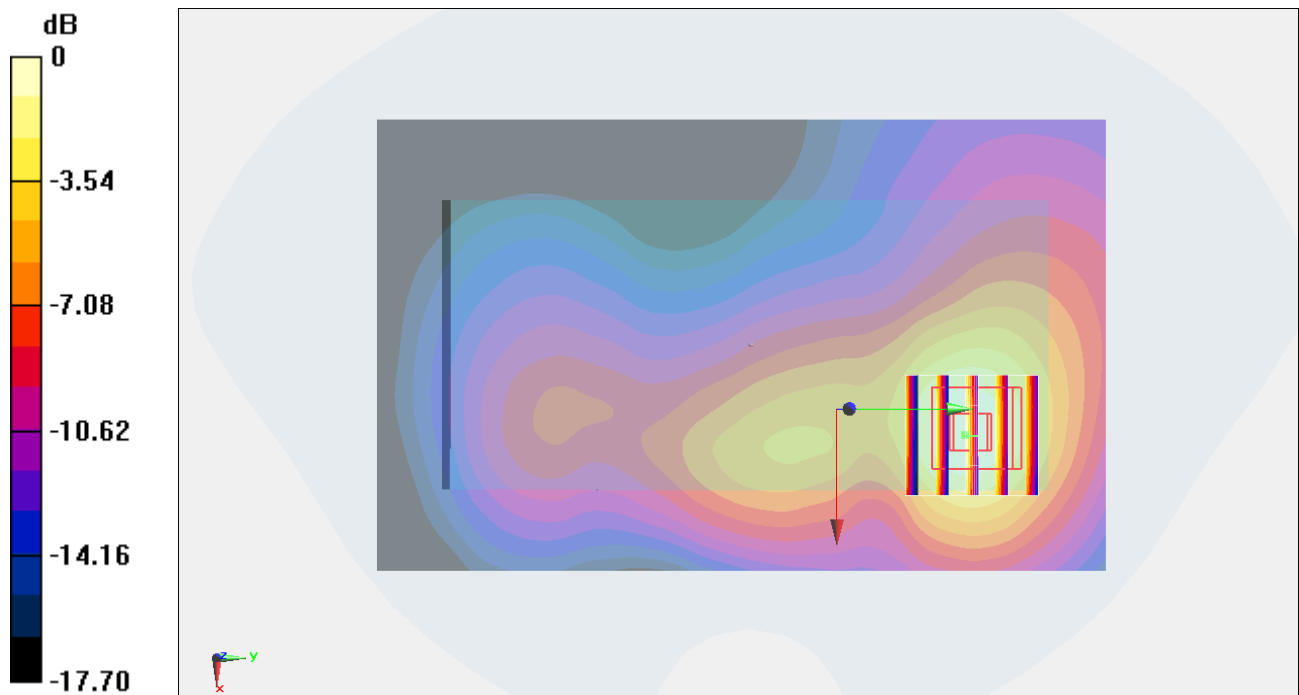

#42_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4233

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 846.6 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 44.122$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17) @ 846.6 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.354 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.99 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.185 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 0.388 W/kg

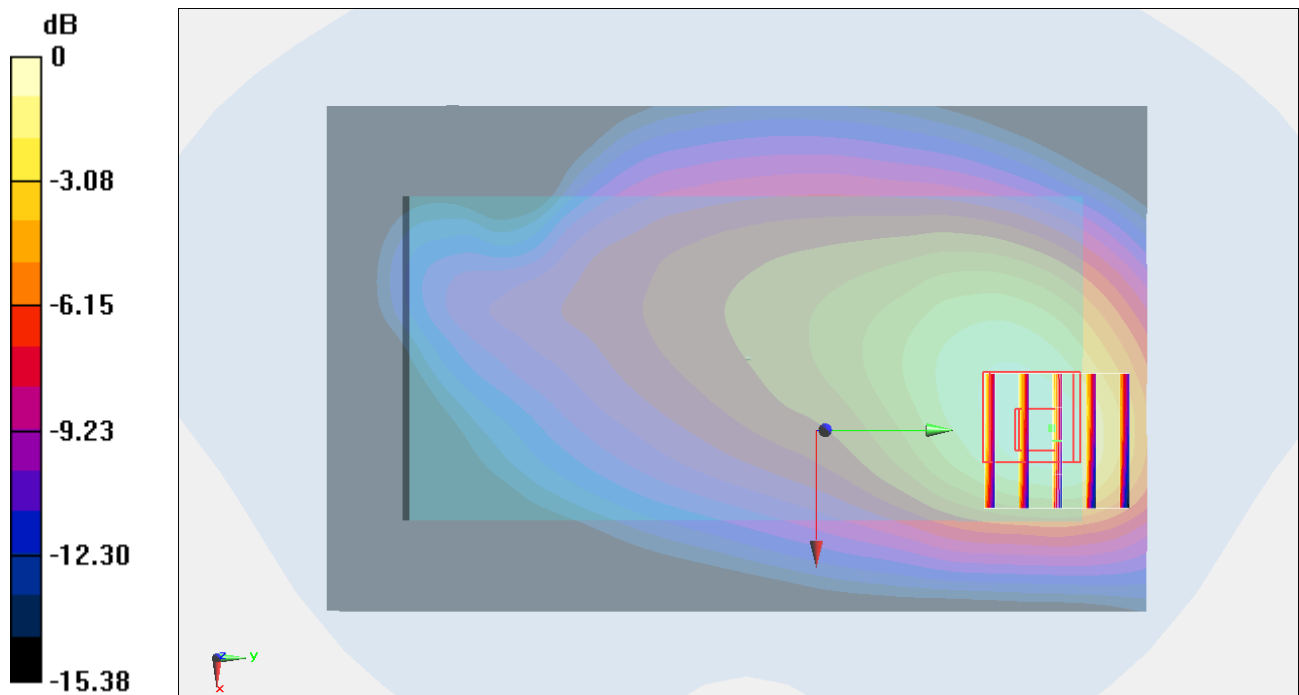

0 dB = 0.388 W/kg = -4.11 dBW/kg

#43_LTE Band 7_20M_QPSK_1_0_Back_10mm_Ch21350

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2560 MHz

Medium: HSL_600-7200_260210 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 41.374$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2560 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.664 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.42 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.225 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.638 W/kg

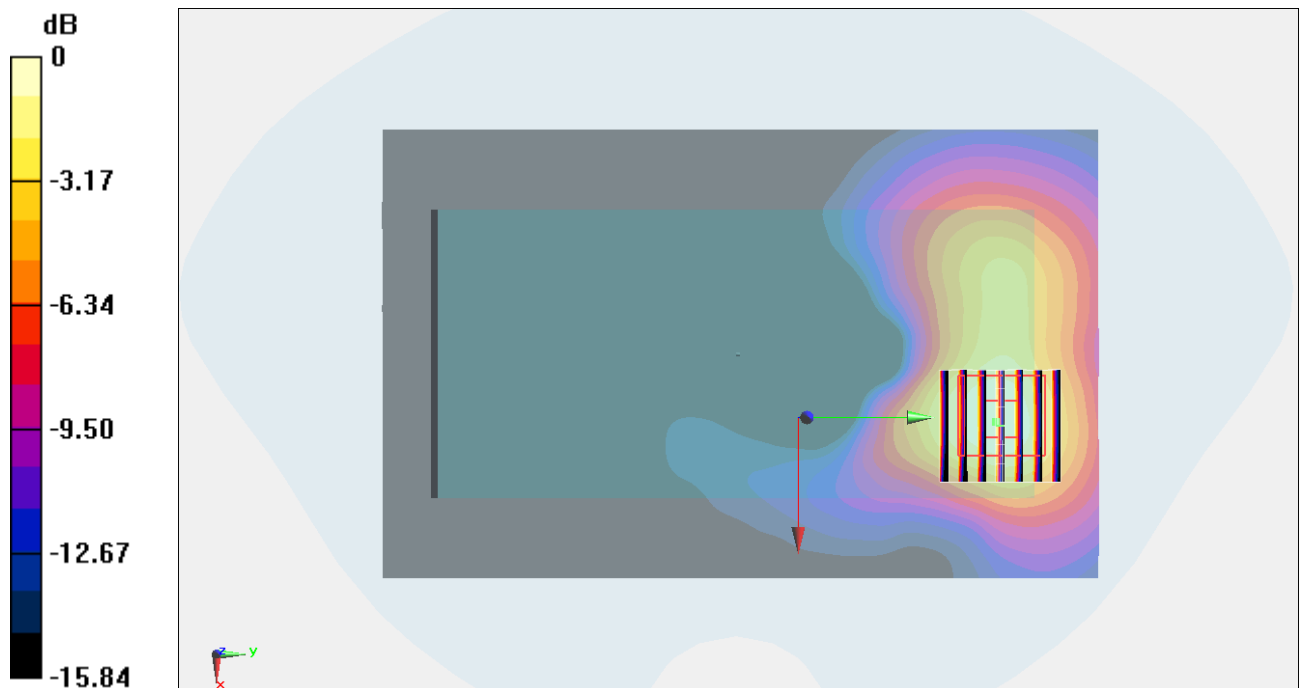

0 dB = 0.638 W/kg = -1.95 dBW/kg

#44_LTE Band 12_10M_QPSK_1_0_Back_10mm_Ch23095

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 707.5 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 44.341$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 707.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.262 W/kg

Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.57 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.142 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 0.278 W/kg

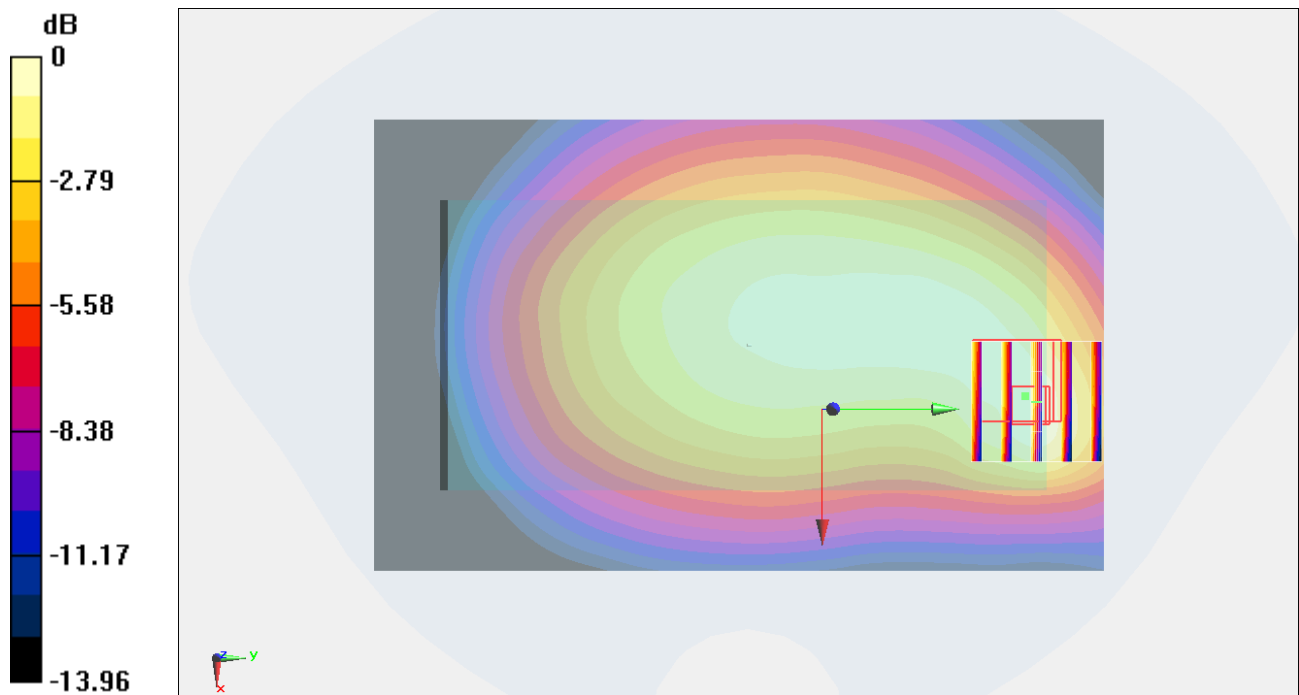

#45_LTE Band 13_10M_QPSK_1_0_Back_10mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 782 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 782$ MHz; $\sigma = 0.846$ S/m; $\epsilon_r = 44.161$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 782 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.289 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.83 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.144 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 0.293 W/kg

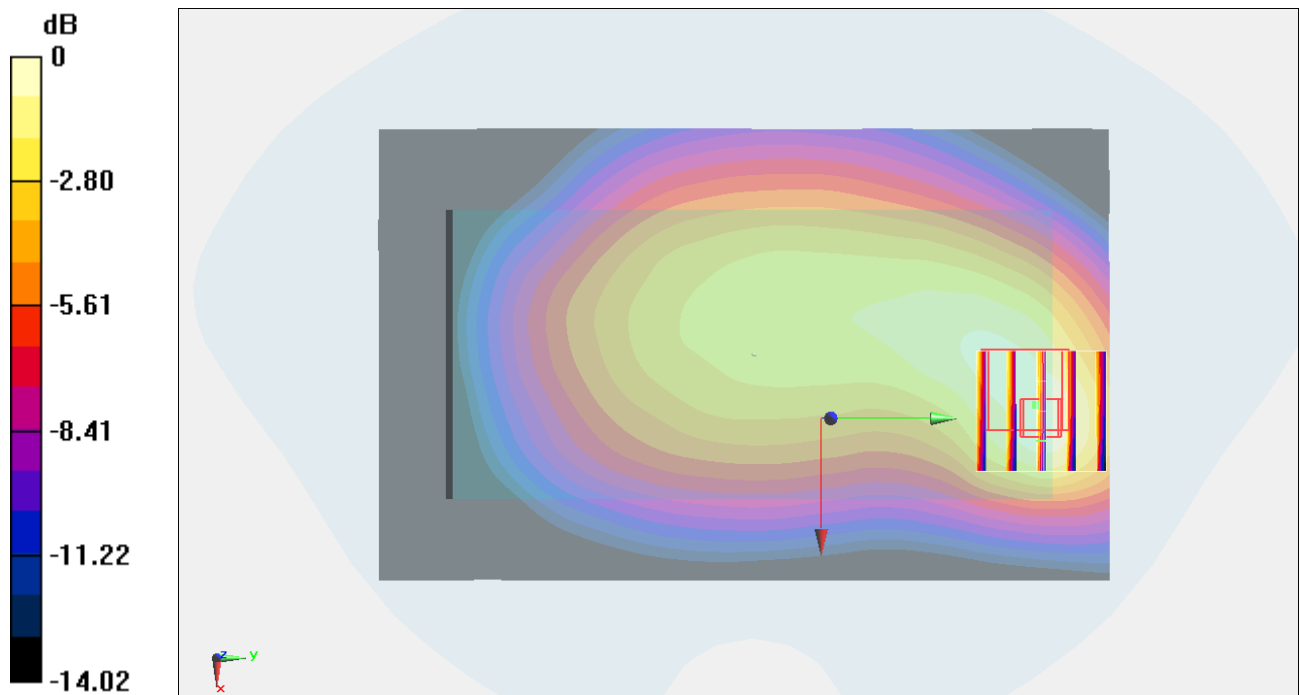

#46_LTE Band 14_10M_QPSK_1_0_Back_10mm_Ch23330

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 793 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 793$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 44.134$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 793 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.337 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.83 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.163 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 0.344 W/kg

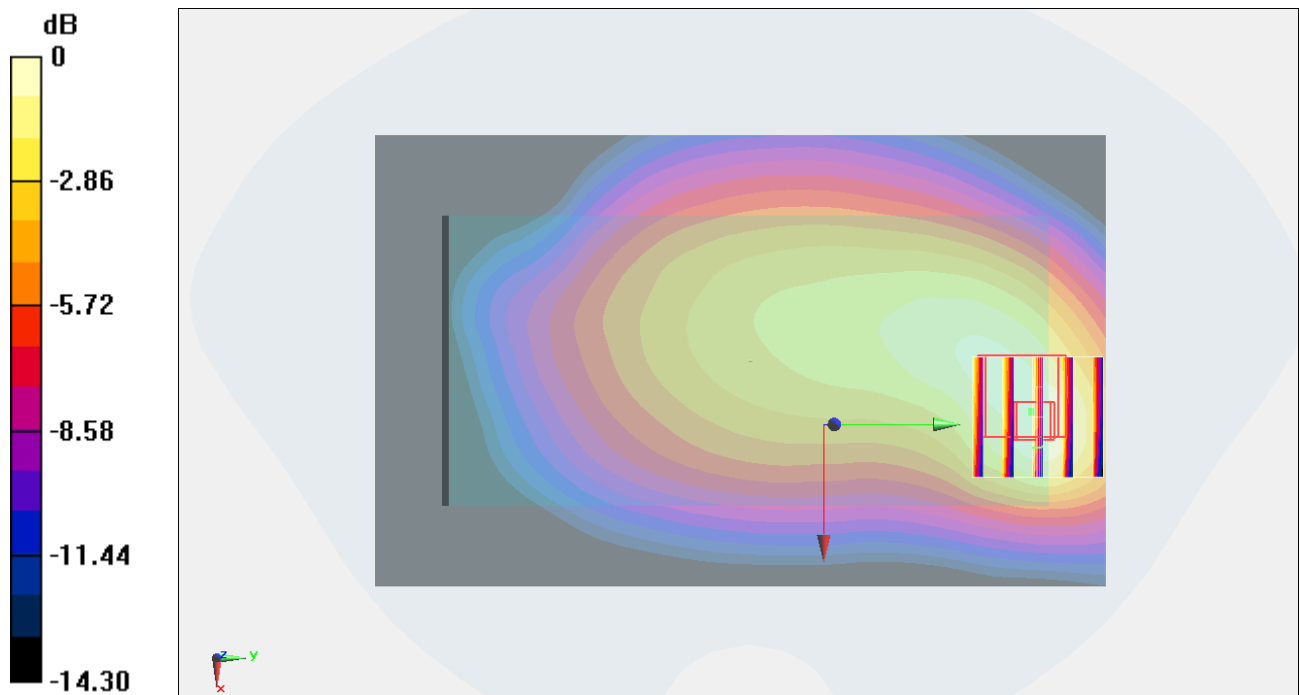

#47_LTE Band 25_20M_QPSK_1_0_Back_10mm_Ch26340

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1880 MHz

Medium: HSL_600-7200_260212 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 42.239$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35) @ 1880 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.477 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.39 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.214 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Maximum value of SAR (measured) = 0.477 W/kg

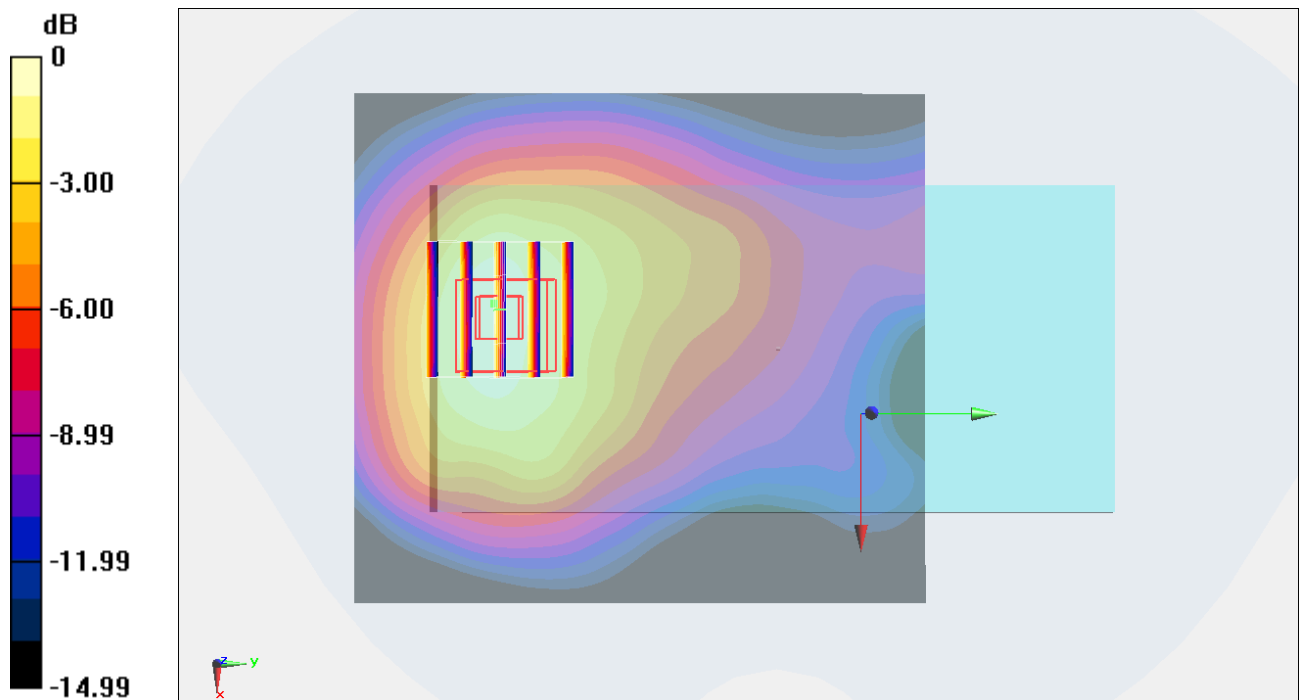

#48_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 831.5 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 44.056$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17) @ 831.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.338 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.54 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.169 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.344 W/kg

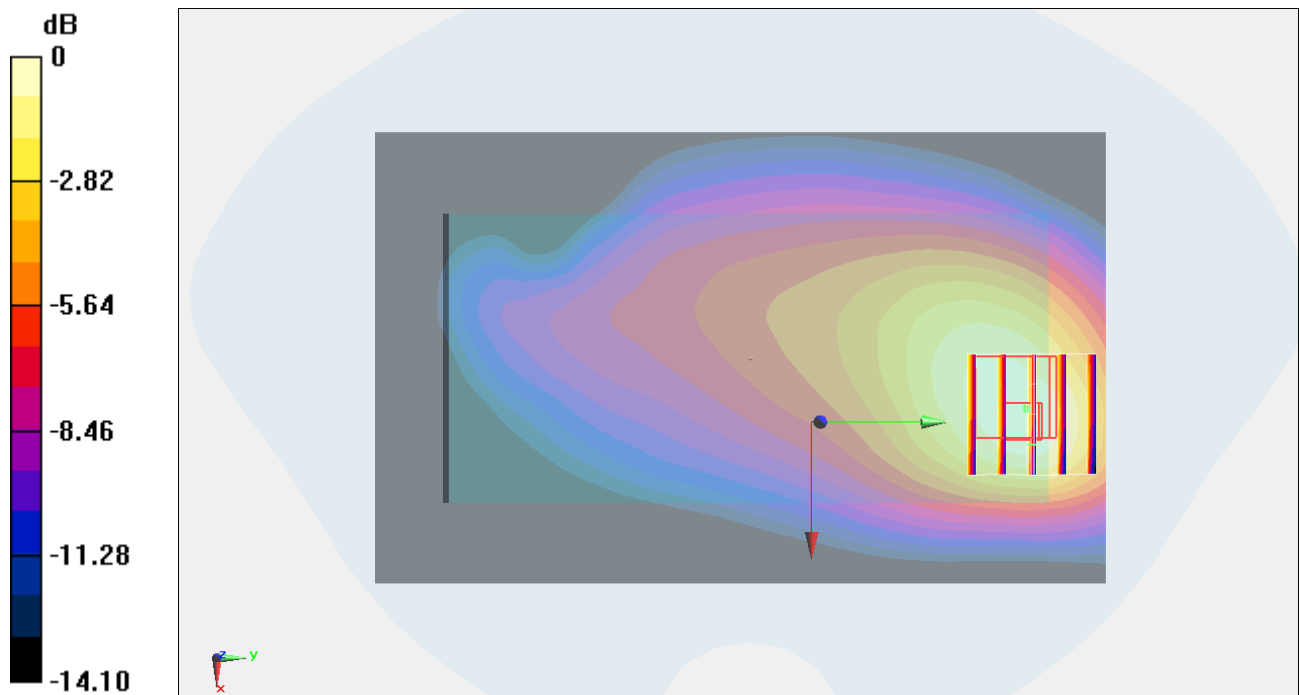

0 dB = 0.344 W/kg = -4.63 dBW/kg

#49_LTE Band 30_10M_QPSK_1_0_Back_10mm_Ch27710

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2310 MHz

Medium: HSL_600-7200_260216 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 41.716$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.82, 6.71, 6.93) @ 2310 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.499 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.06 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.182 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.498 W/kg

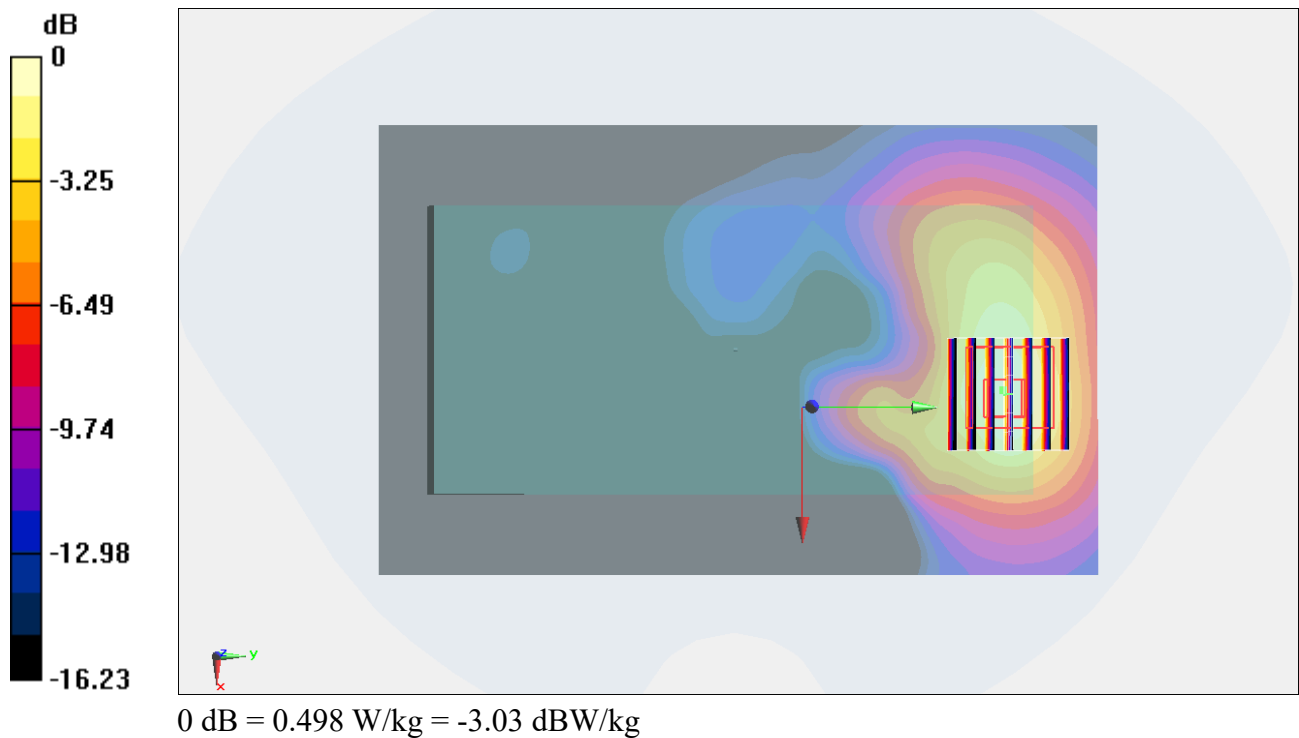

#50_LTE Band 66_20M_QPSK_1_0_Back Slant_10mm_Ch132322

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1745 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 42.471$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1745 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.812 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.59 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.878 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.326 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 0.780 W/kg

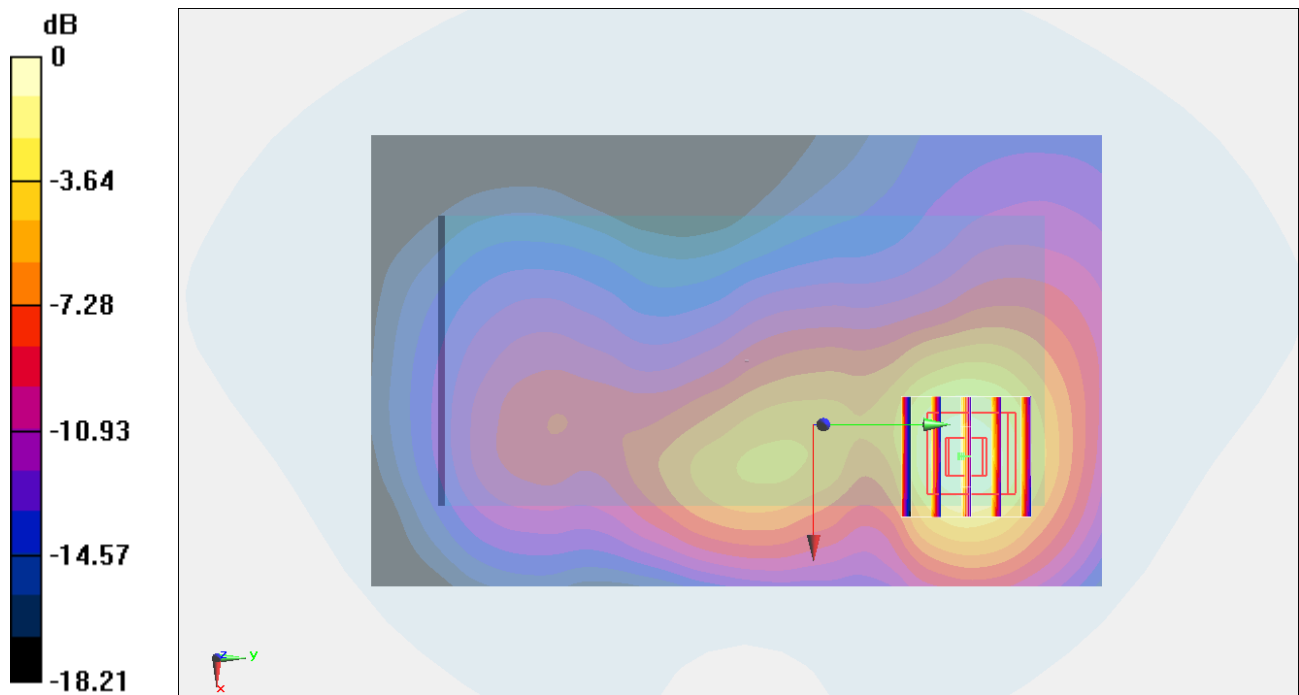

0 dB = 0.780 W/kg = -1.08 dBW/kg

#51_LTE Band 71_20M_QPSK_1_0_Back_10mm_Ch133297

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 680.5 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.846$ S/m; $\epsilon_r = 44.43$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 680.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.22 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.057 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 0.130 W/kg

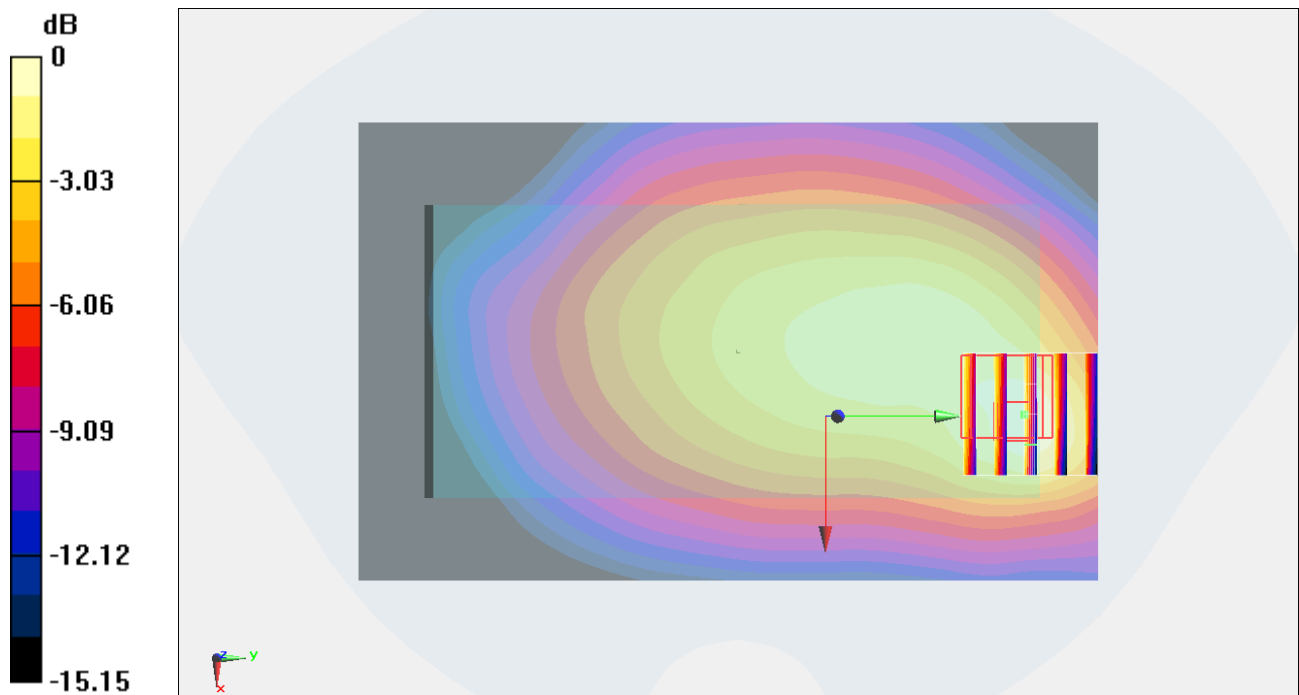

#52_LTE Band 106_3M_QPSK_1_0_Back_10mm_Ch134322

Communication System: UID 10184 - CAF, LTE-FDD; Frequency: 899 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 899$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 43.866$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(8.76, 8.61, 8.9) @ 899 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.391 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.71 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.189 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.4%

Maximum value of SAR (measured) = 0.386 W/kg

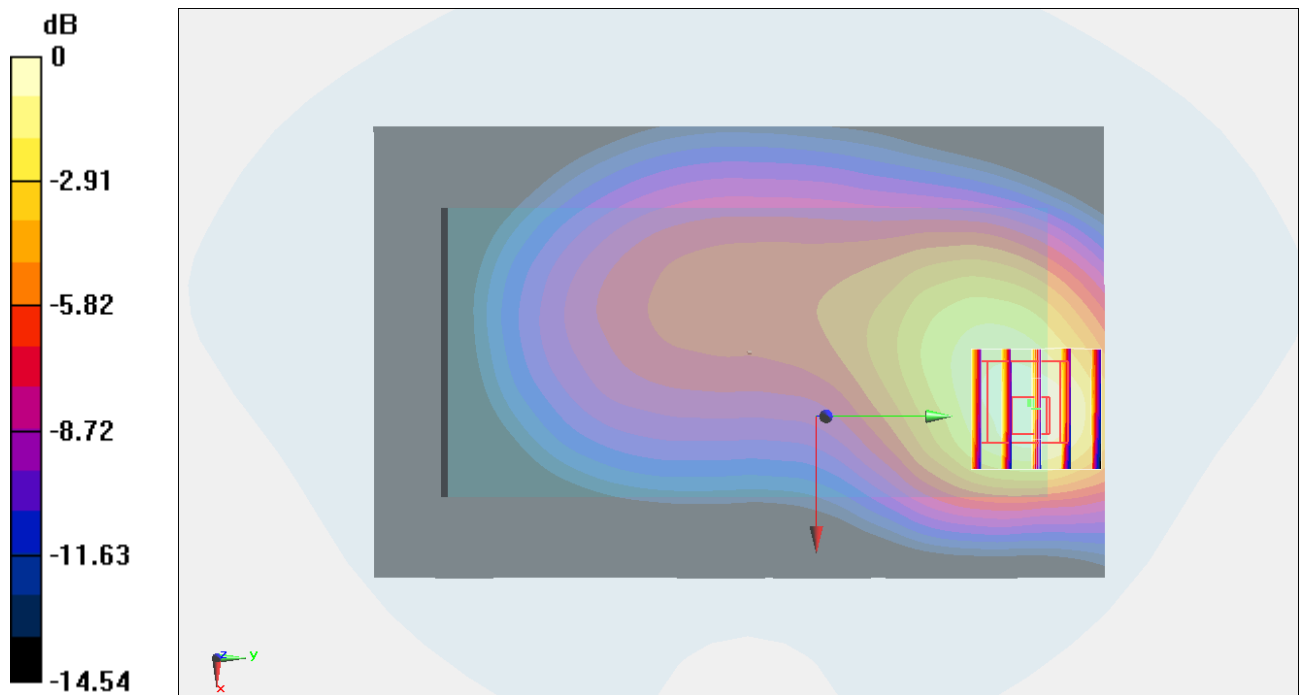

0 dB = 0.386 W/kg = -4.13 dBW/kg

#53_LTE Band 70_15M_QPSK_1_0_Back Slant_10mm_Ch133047

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 1702.5 MHz

Medium: HSL_600-7200_260209 Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.315$ S/m; $\epsilon_r = 42.471$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1702.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.455 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.655 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.190 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 0.447 W/kg

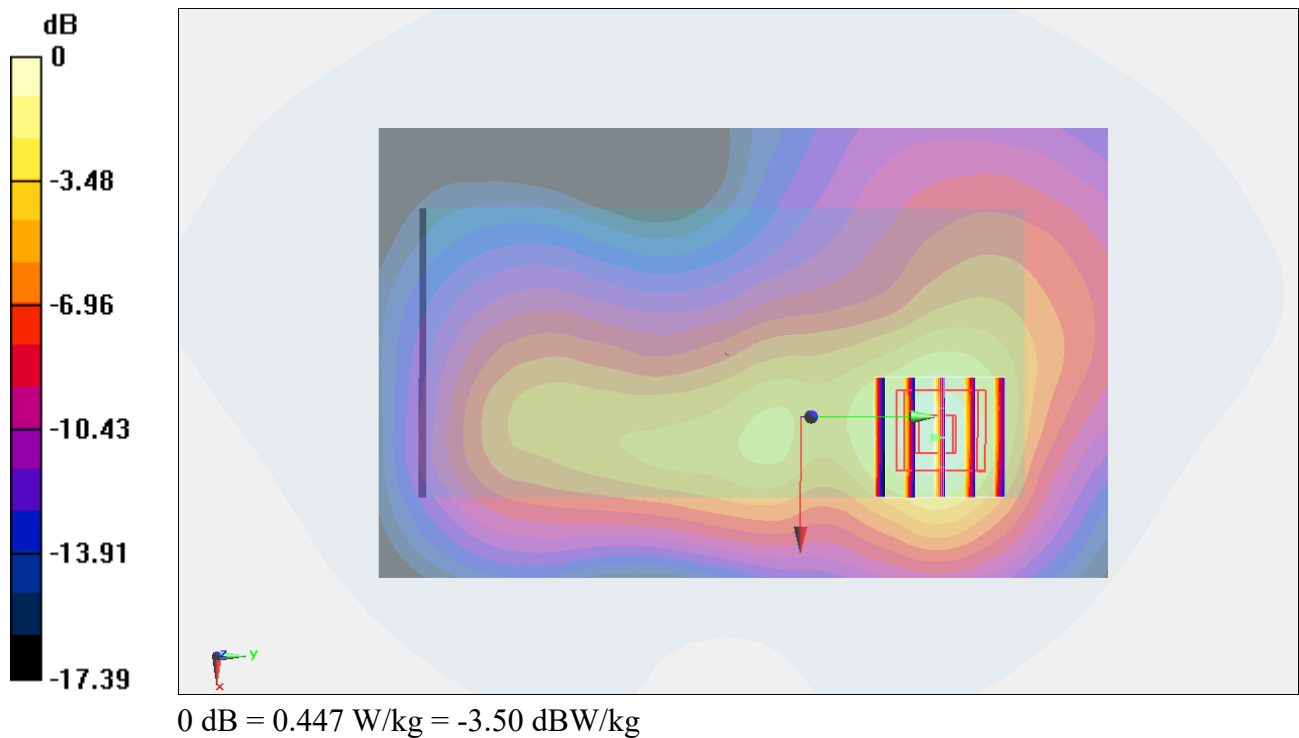

#54_LTE Band 41_20M_QPSK_1_0_Back_10mm_Ch40620

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2593 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 41.435$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2593 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.594 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.13 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.192 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 0.566 W/kg

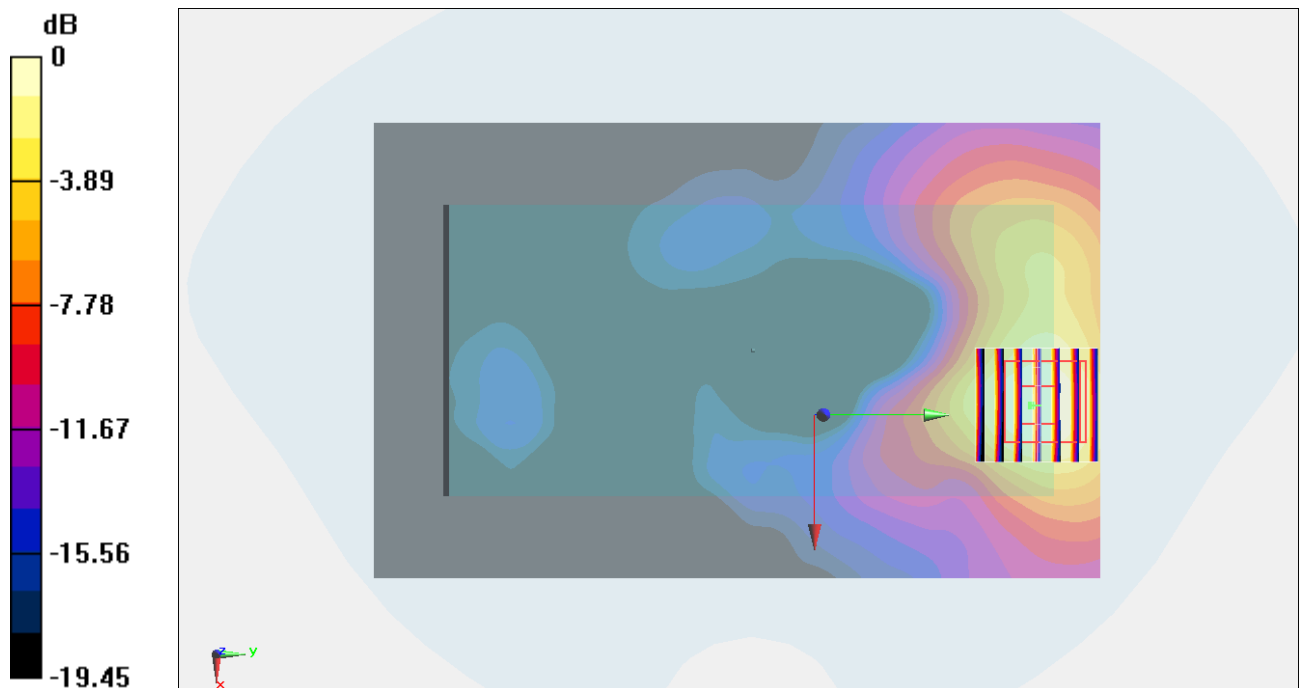

0 dB = 0.566 W/kg = -2.47 dBW/kg

#55_LTE Band 48_20M_QPSK_1_0_Back_10mm_Ch55340

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 3560 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 3560$ MHz; $\sigma = 2.788$ S/m; $\epsilon_r = 39.832$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3560 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.477 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 13.74 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.162 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.3%

Maximum value of SAR (measured) = 0.488 W/kg

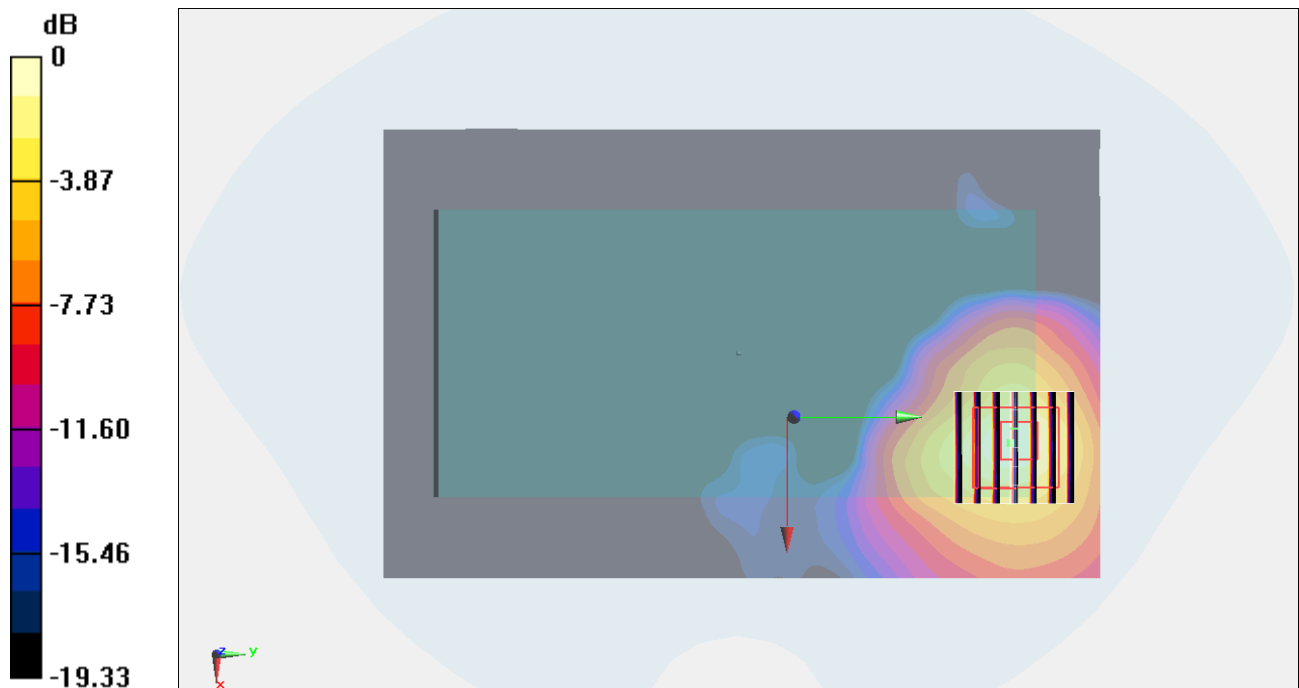

0 dB = 0.488 W/kg = -3.12 dBW/kg

#56_FR1 n7_50M_BPSK_1_1_Back_10mm_Ch507000

Communication System: UID 10935 - AAD, 5G NR; Frequency: 2535 MHz

Medium: HSL_600-7200_260215 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 41.436$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2535 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.733 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.97 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.894 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.249 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.747 W/kg

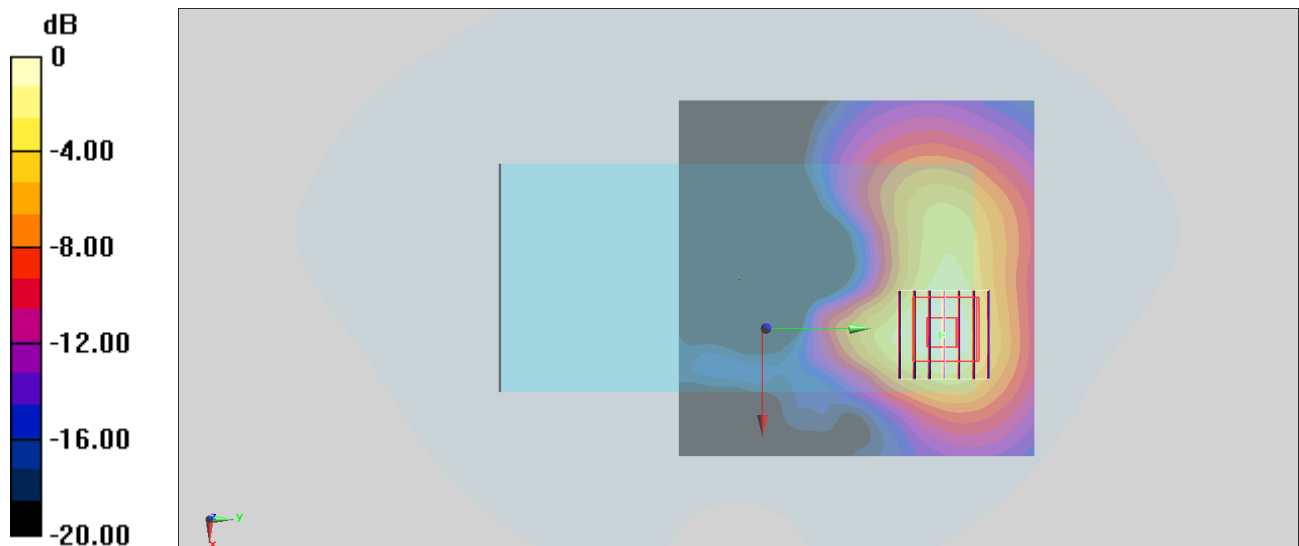

0 dB = 0.747 W/kg = -1.27 dBW/kg

#57_FR1 n12_15M_BPSK_1_1_Back_10mm_Ch141500

Communication System: UID 10930 - AAC, 5G NR; Frequency: 707.5 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.843$ S/m; $\epsilon_r = 44.362$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 707.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.276 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.29 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.185 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 78.5%

Maximum value of SAR (measured) = 0.273 W/kg

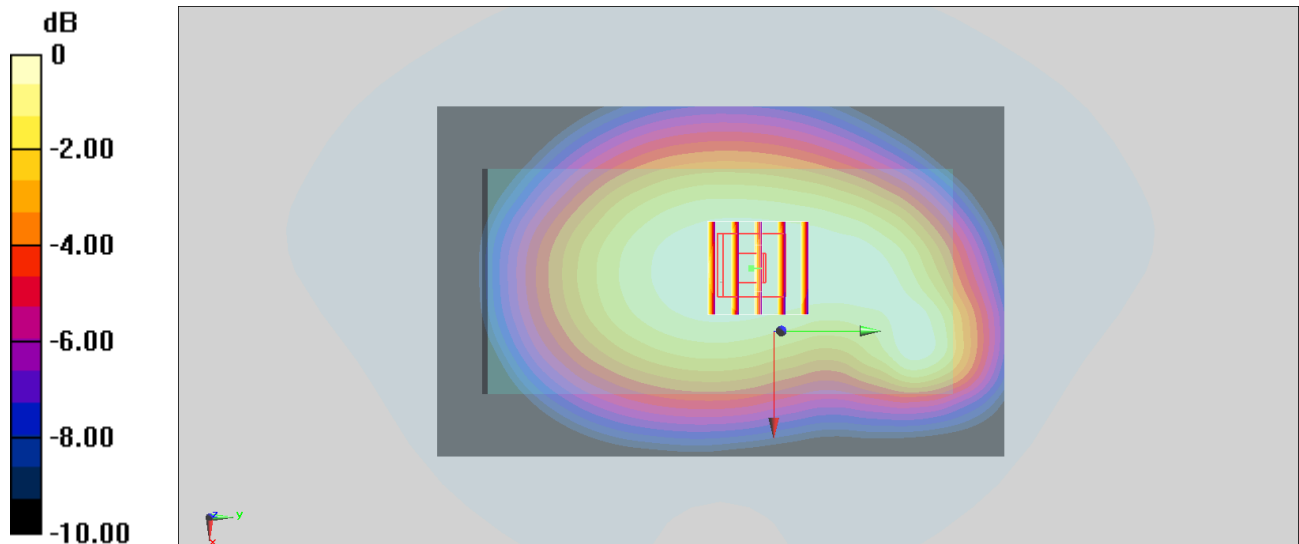

0 dB = 0.273 W/kg = -5.64 dBW/kg

#58_FR1 n13_10M_BPSK_1_1_Back_10mm_Ch156400

Communication System: UID 10929 - AAD, 5G NR; Frequency: 782 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 782$ MHz; $\sigma = 0.845$ S/m; $\epsilon_r = 44.182$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 782 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.343 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.64 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.159 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.385 W/kg

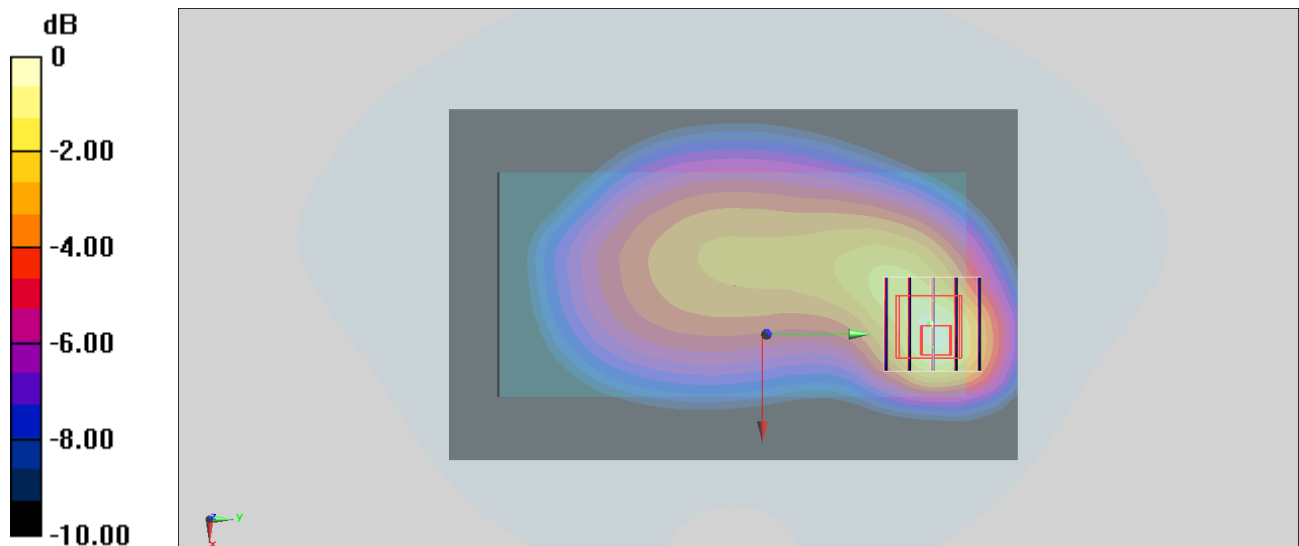

0 dB = 0.385 W/kg = -4.15 dBW/kg

#59_FR1 n14_10M_BPSK_1_1_Back_10mm_Ch158600

Communication System: UID 10929 - AAD, 5G NR; Frequency: 793 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 793$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 44.155$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 793 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.350 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.52 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.168 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.397 W/kg

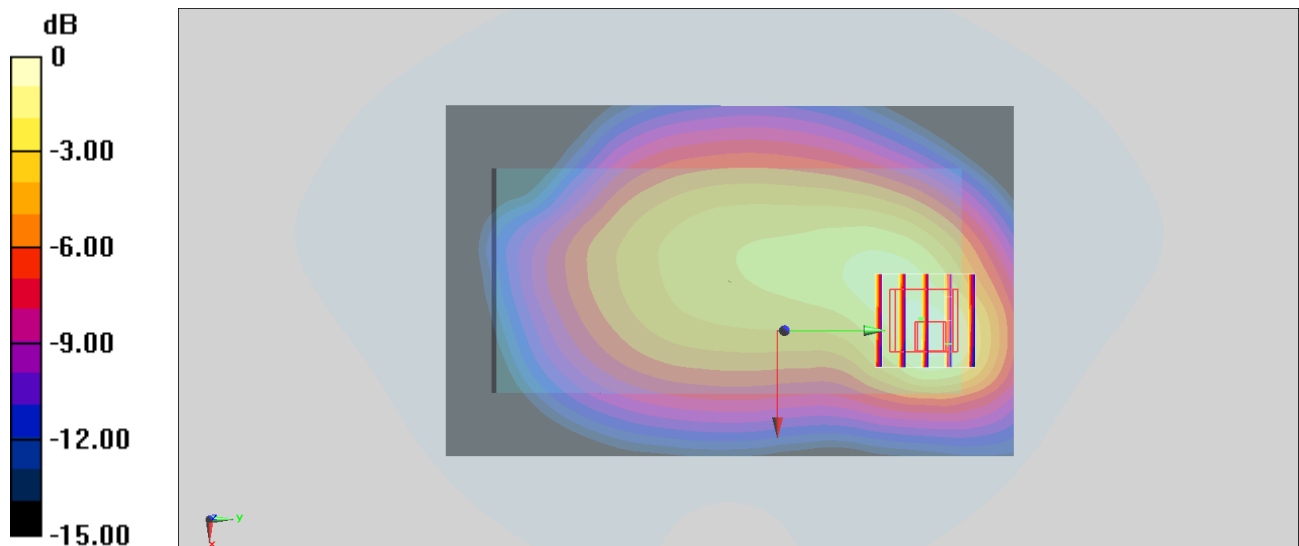

0 dB = 0.397 W/kg = -4.01 dBW/kg

#60_FR1 n25_40M_BPSK_1_1_Back Slant_10mm_Ch376500

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1882.5 MHz

Medium: HSL_600-7200_260212 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 42.236$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.24, 7.11, 7.35) @ 1882.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.659 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.11 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.268 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 0.661 W/kg

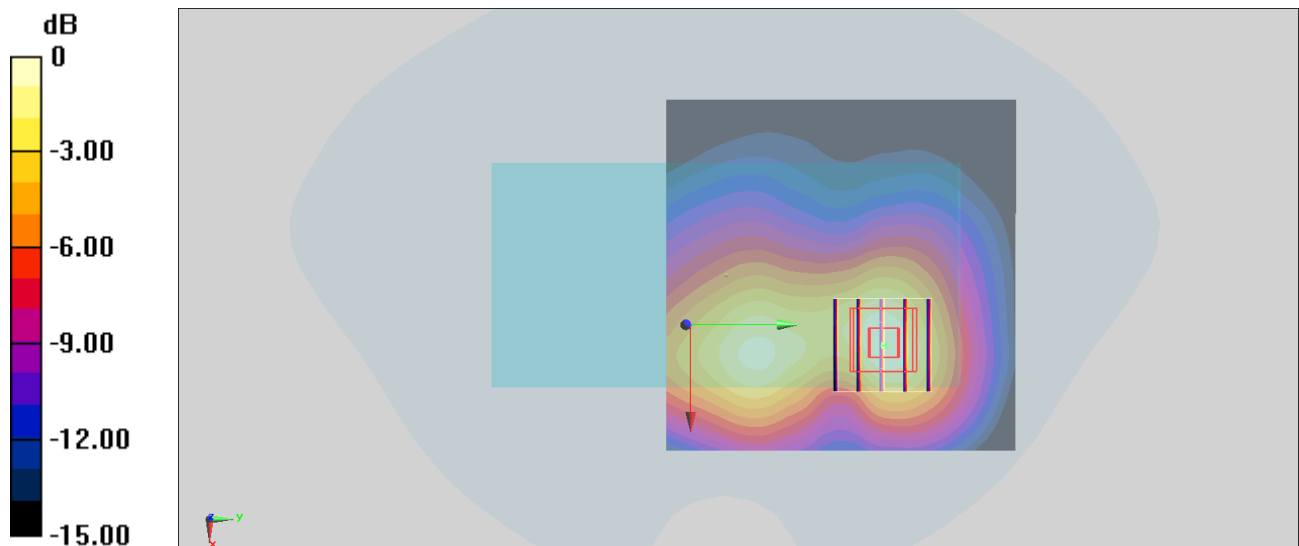

0 dB = 0.661 W/kg = -1.80 dBW/kg

#61_FR1 n26_20M_BPSK_1_1_Back Slant_10mm_Ch166300

Communication System: UID 10931 - AAC, 5G NR; Frequency: 831.5 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 44.056$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.03, 8.87, 9.17) @ 831.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.385 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.99 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.160 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 0.415 W/kg

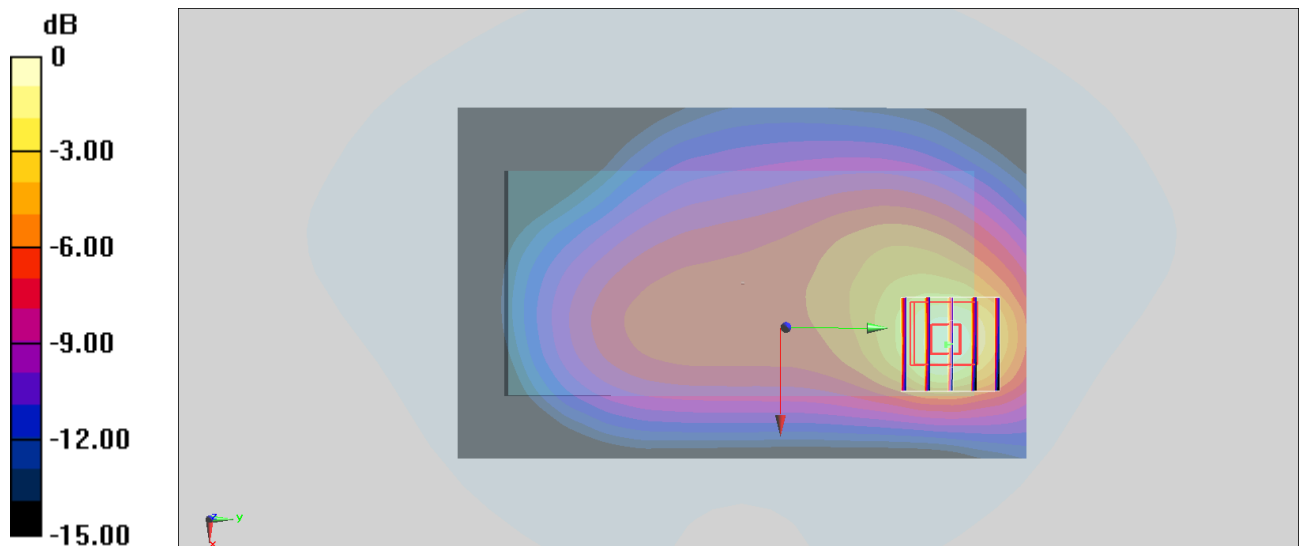

0 dB = 0.415 W/kg = -3.82 dBW/kg

#62_FR1 n30_10M_BPSK_1_1_Back_10mm_Ch462000

Communication System: UID 10929 - AAD, 5G NR; Frequency: 2310 MHz

Medium: HSL_600-7200_260216 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 41.716$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.82, 6.71, 6.93) @ 2310 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.732 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.06 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.258 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.740 W/kg

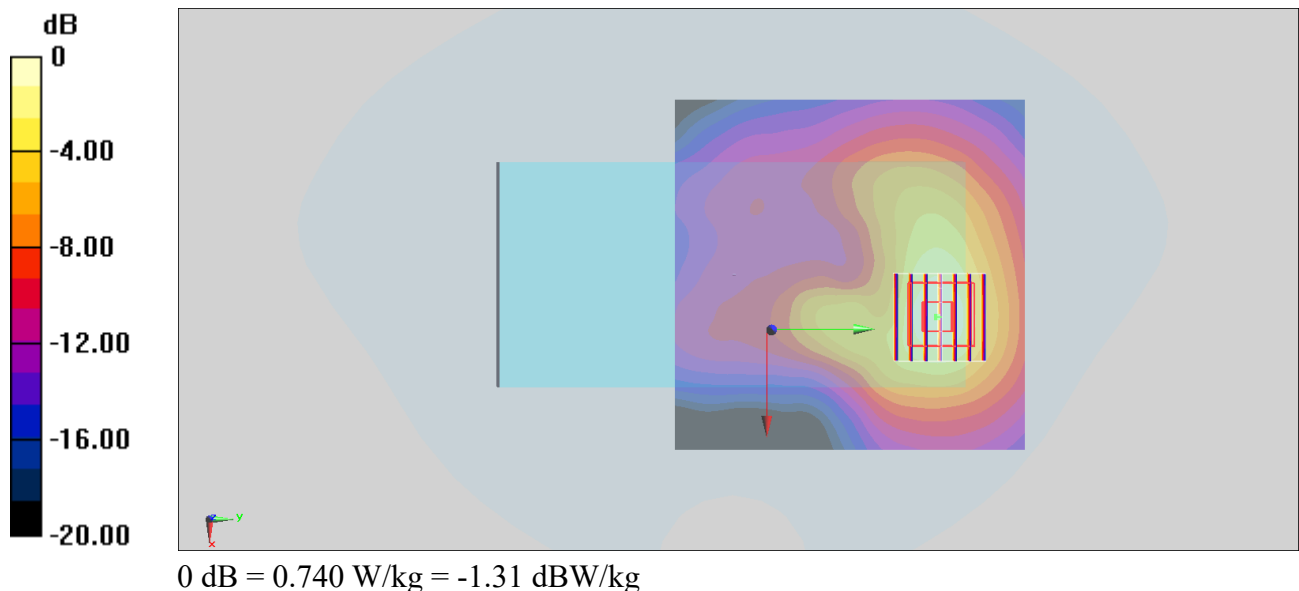

#63_FR1 n66_40M_BPSK_1_1_Back Slant_10mm_Ch349000

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1745 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 42.471$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1745 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.599 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.52 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.691 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.251 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 0.602 W/kg

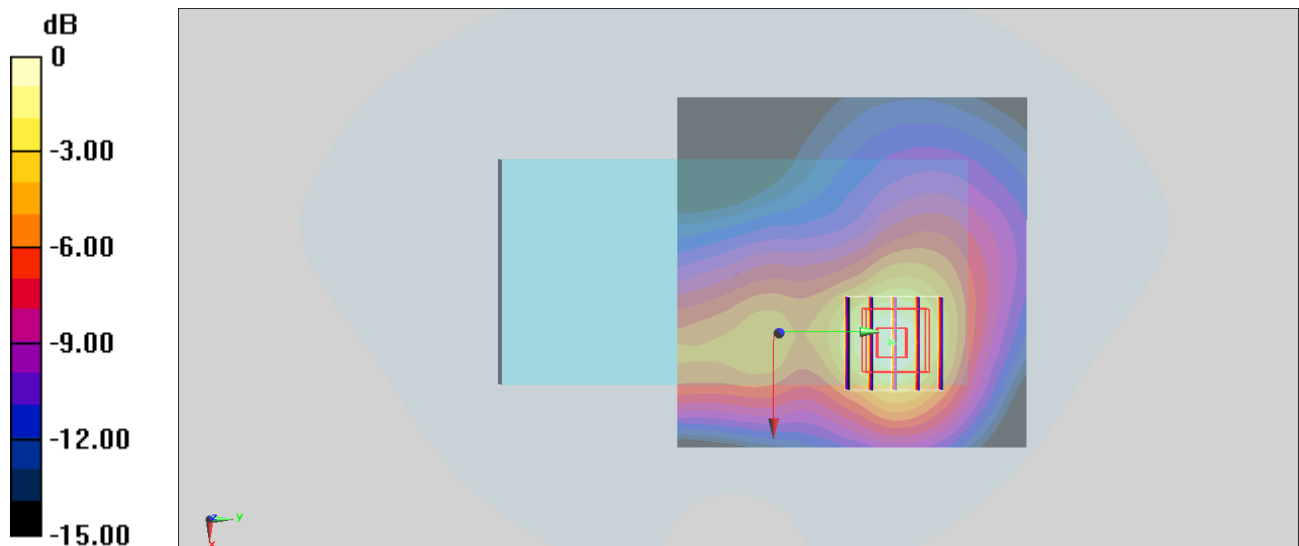

0 dB = 0.602 W/kg = -2.20 dBW/kg

#64_FR1 n70_15M_BPSK_1_1_Back_10mm_Ch340500

Communication System: UID 10930 - AAC, 5G NR; Frequency: 1702.5 MHz

Medium: HSL_600-7200_260209 Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.315$ S/m; $\epsilon_r = 42.471$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(7.41, 7.28, 7.53) @ 1702.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.580 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.55 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.256 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.582 W/kg

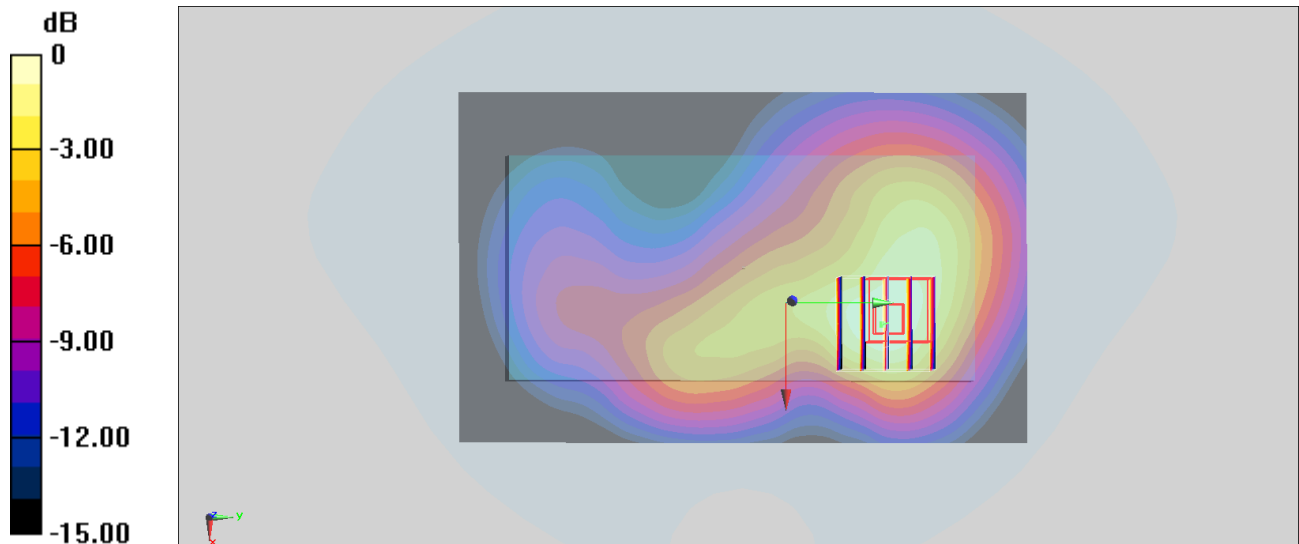

0 dB = 0.582 W/kg = -2.35 dBW/kg

#65_FR1 n71_20M_BPSK_1_1_Back_10mm_Ch136100

Communication System: UID 10931 - AAC, 5G NR; Frequency: 680.5 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.846$ S/m; $\epsilon_r = 44.451$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(9.16, 9.01, 9.31) @ 680.5 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.161 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.97 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.072 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 44.9%

Maximum value of SAR (measured) = 0.171 W/kg

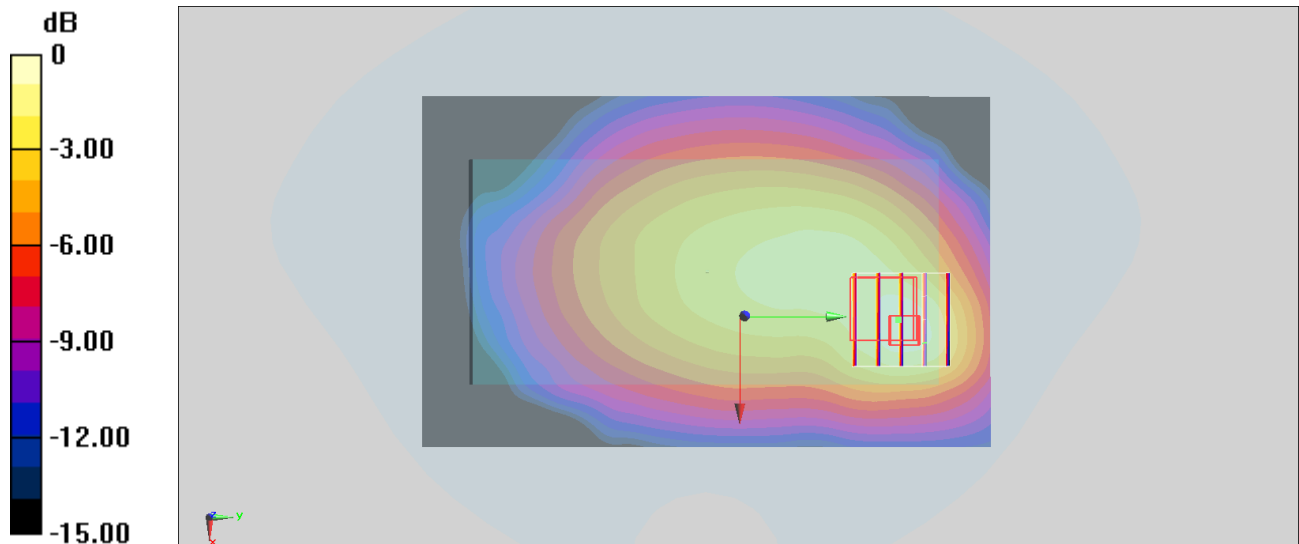

0 dB = 0.171 W/kg = -7.67 dBW/kg

#66_FR1 n41_100M_BPSK_1_1_Back_10mm_Ch518598

Communication System: UID 10866 - AAF, 5G NR; Frequency: 2592.99 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 41.496$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.46, 6.35, 6.56) @ 2592.99 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.606 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.03 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.211 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.628 W/kg

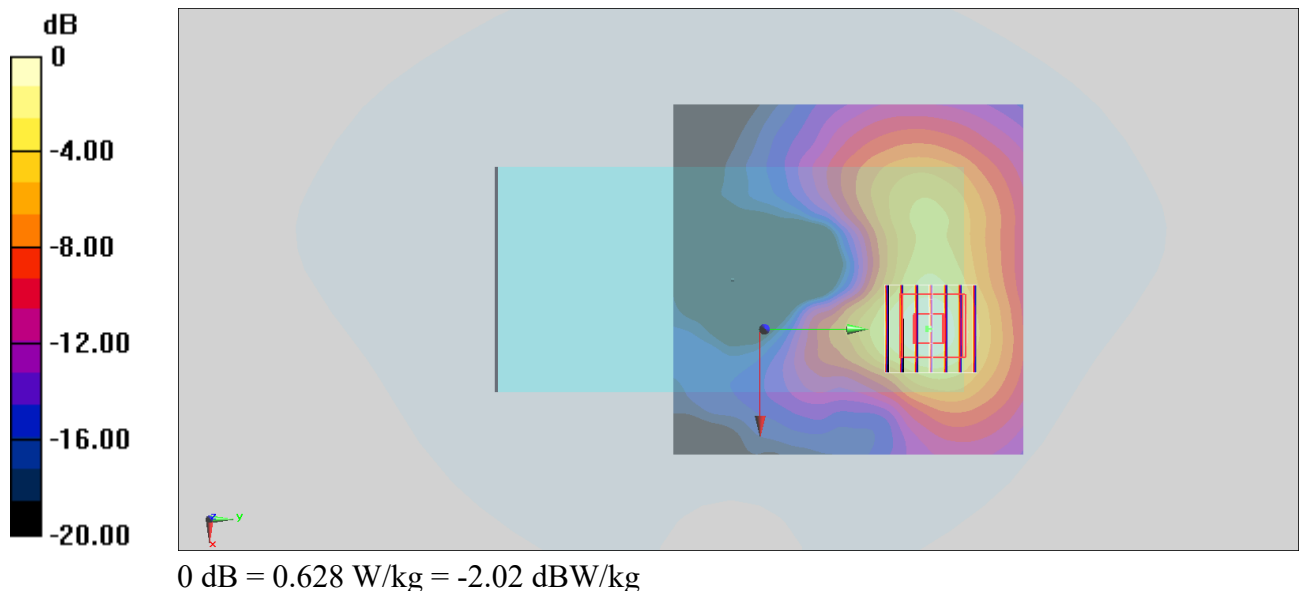

#67_FR1 n48_40M_BPSK_1_1_Back_25mm_Ch638000

Communication System: UID 10903 - AAD, 5G NR; Frequency: 3570 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 3570$ MHz; $\sigma = 2.786$ S/m; $\epsilon_r = 39.877$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3570 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.971 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 19.57 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.287 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 0.943 W/kg

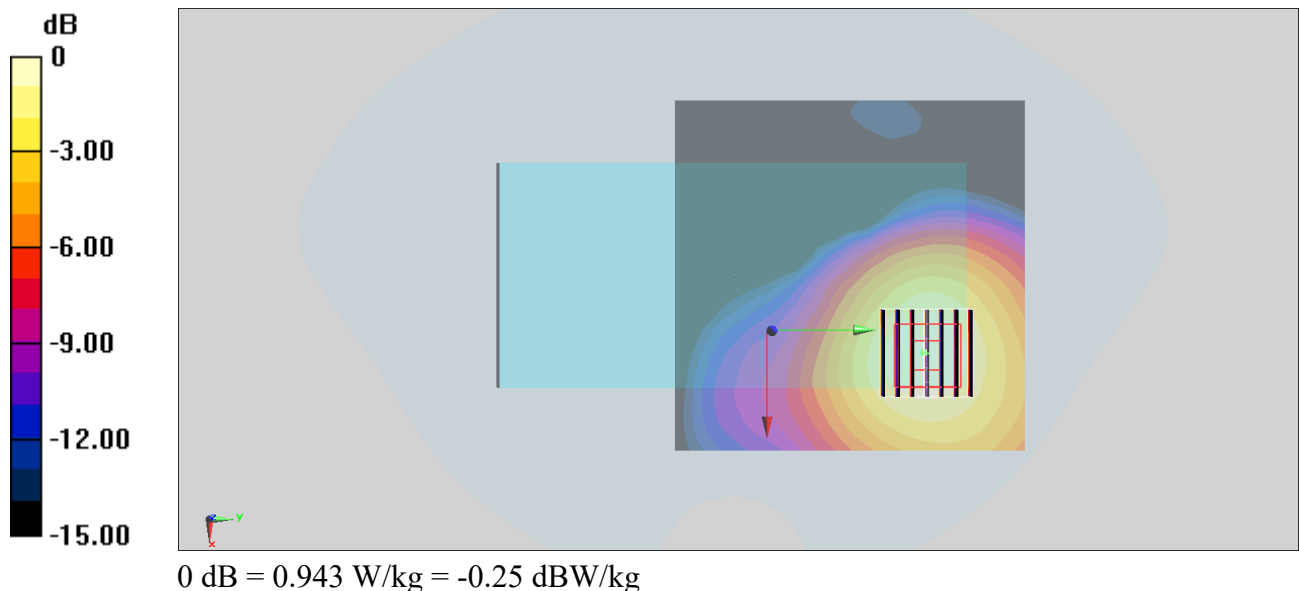

#68_FR1 n77_100M_BPSK_1_1_Back_25mm_Ch633332

Communication System: UID 10866 - AAF, 5G NR; Frequency: 3499.98 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.773$ S/m; $\epsilon_r = 40.251$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7822; ConvF(6.07, 5.97, 6.17) @ 3499.98 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2025/9/9
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1719
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 22.80 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.409 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 1.32 W/kg

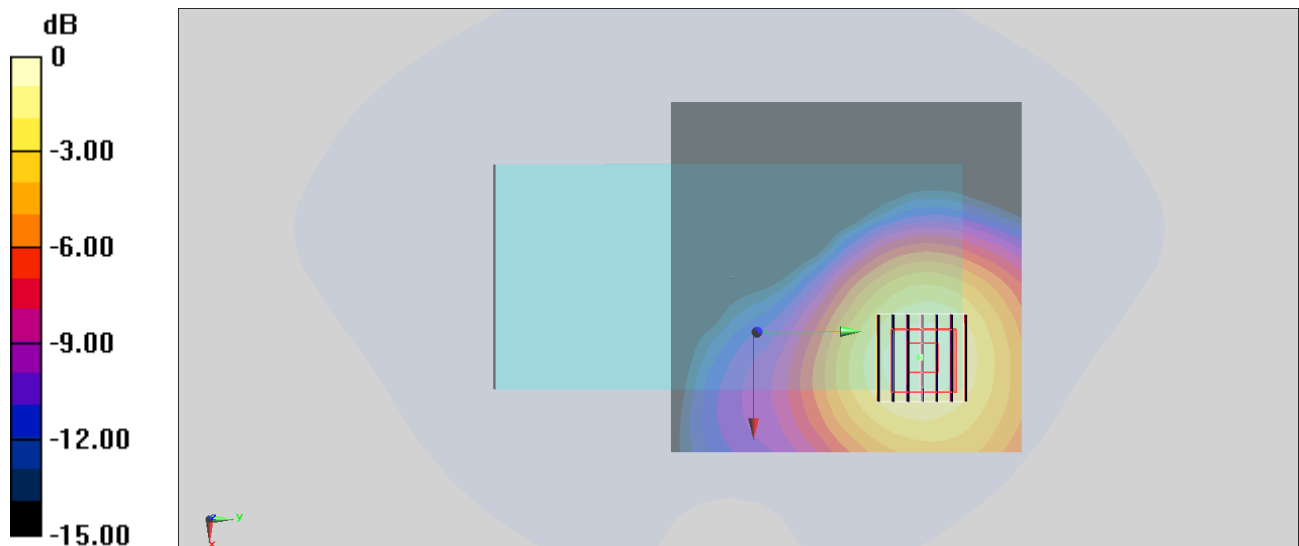

0 dB = 1.32 W/kg = 1.21 dBW/kg

#69_WLAN2.4GHz_802.11b 1Mbps_Back Slnat_10mm_Ch11

Communication System: UID 10415 - AAA, 802.11b; Frequency: 2462 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 40.186$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.33, 7.12, 7.22) @ 2462 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.559 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.79 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.171 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 0.575 W/kg

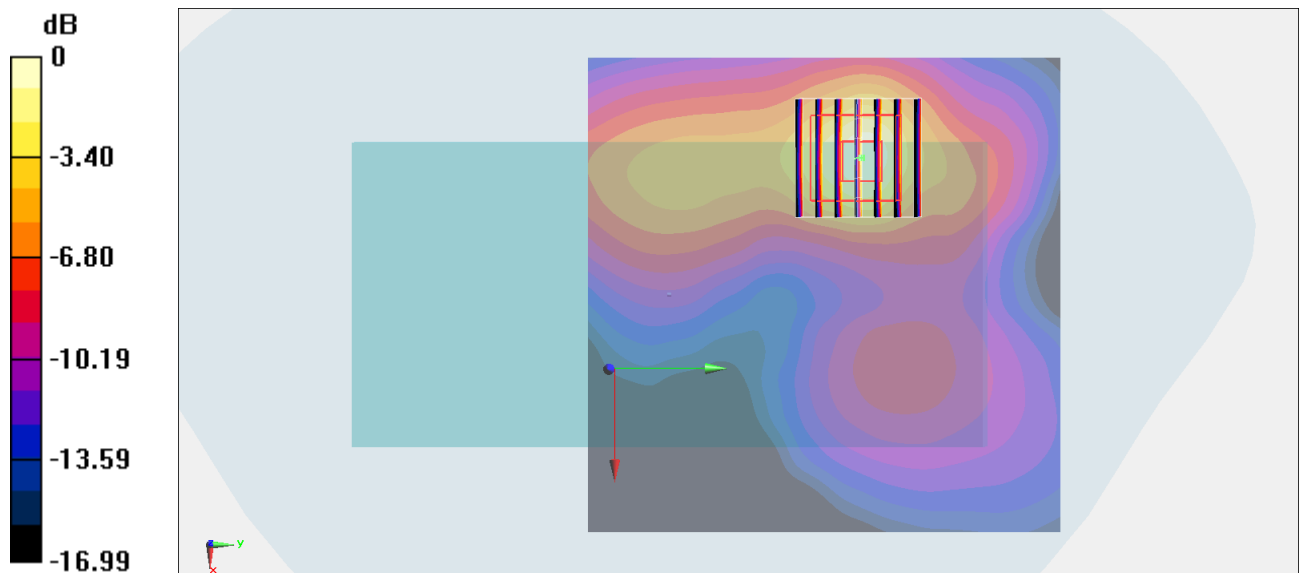

0 dB = 0.575 W/kg = -2.40 dBW/kg

#70_WLAN5GHz_802.11a 6Mbps_Back Slant_25mm_Ch52

Communication System: UID 10417 - AAD, 802.11a; Frequency: 5260 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.687$ S/m; $\epsilon_r = 38.462$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.82, 5.65, 5.73) @ 5260 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.70 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 19.55 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.347 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 1.58 W/kg

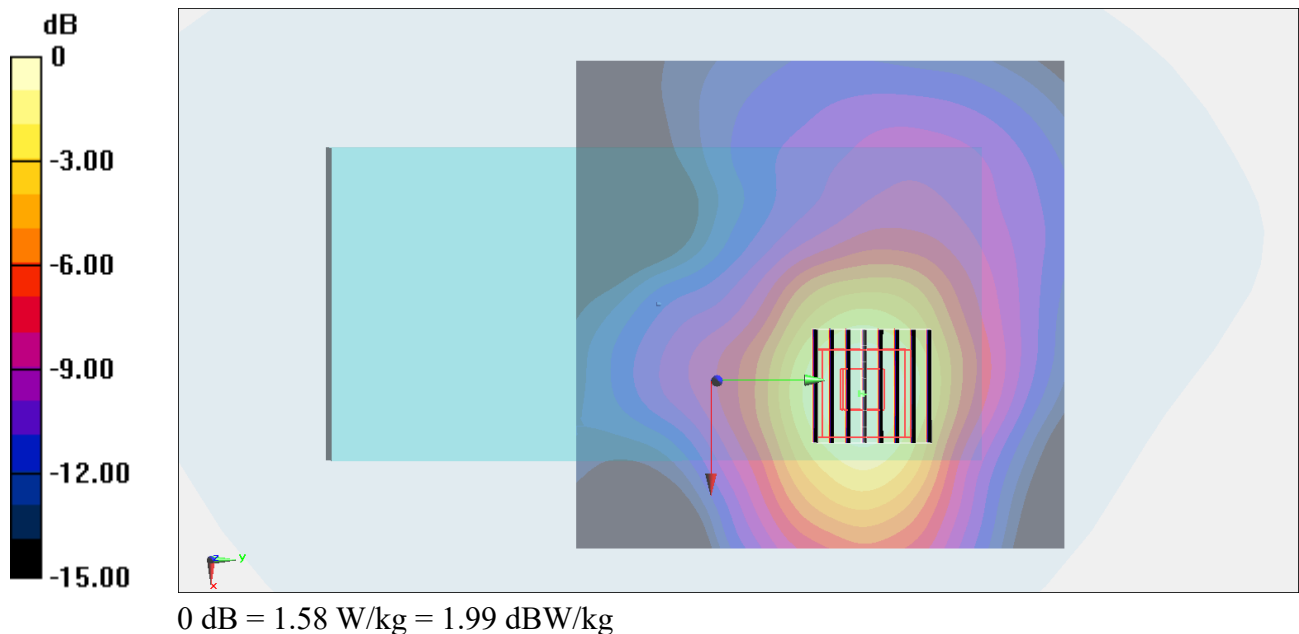

#71_WLAN5GHz_802.11a 6Mbps_Left Edge_25mm_Ch165

Communication System: UID 10417 - AAD, 802.11a; Frequency: 5825 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.301$ S/m; $\epsilon_r = 37.356$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(5.31, 5.16, 5.23) @ 5825 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.74 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.15 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.346 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 12 mm)

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 1.80 W/kg

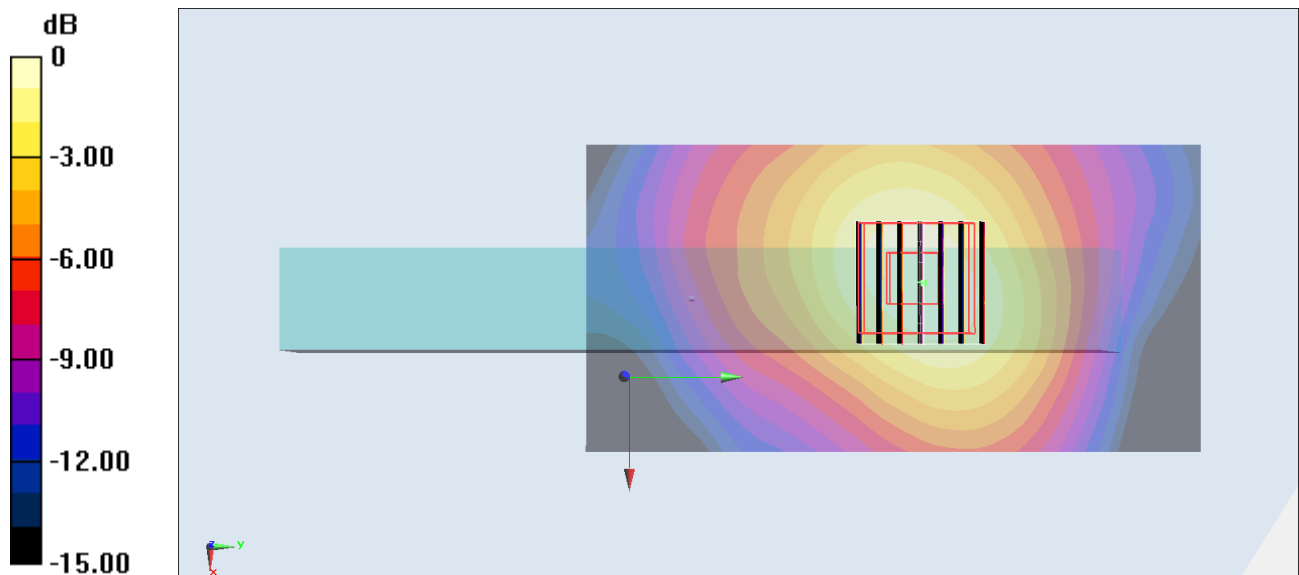

0 dB = 1.80 W/kg = 2.55 dBW/kg

#72_WLAN6GHz_802.11be-EHT320 MCS0_Left Edge_10mm_Ch31

Communication System: 802.11be; Frequency: 6105.000 MHz

Medium: HSL_600-7200_260330 Medium parameters used: $f = 6105.000$ MHz; $\sigma = 5.65$ S/m; $\epsilon_r = 36.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.36, 5.21, 5.21); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (68.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.204 W/kg; SAR (10g) = 0.074 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.14 dB


SAR (1g) = 0.208 W/kg; SAR (8g) = 0.086 W/kg; SAR (10g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 55.5 %

psAPD (1.0cm², sq) = 2.08 [W/m²]; psAPD (4.0cm², sq) = 1.71 [W/m²]

TSL Correction: Positive only

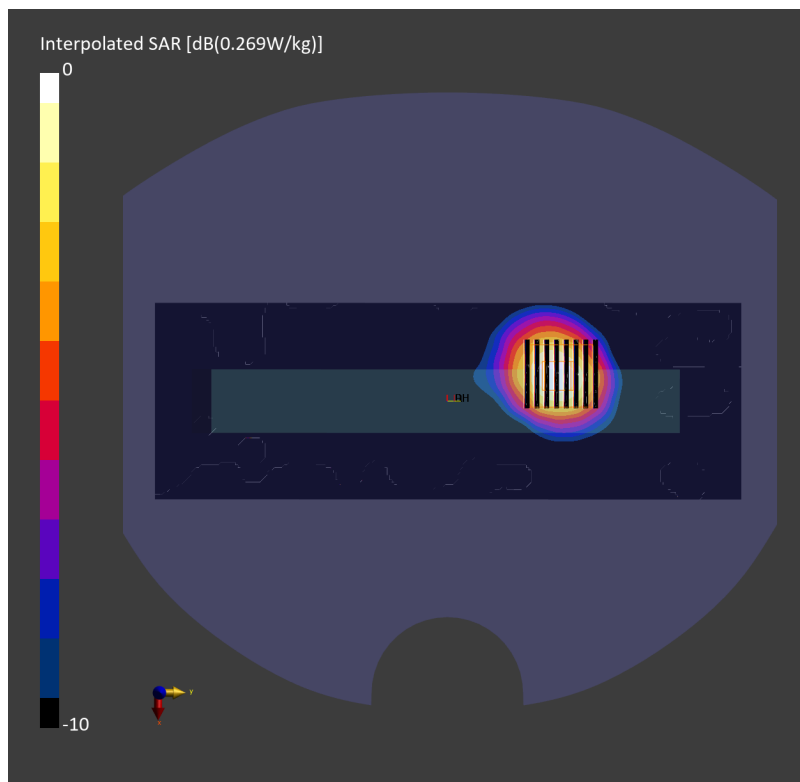

#73_Bluetooth_1Mbps_Back_10mm_Ch78

Communication System: UID 10032 - CAA, Bluetooth; Frequency: 2480 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.862$ S/m; $\epsilon_r = 40.528$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.33, 7.12, 7.22) @ 2480 MHz; Calibrated: 2025/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0300 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.730 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00609 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.0249 W/kg

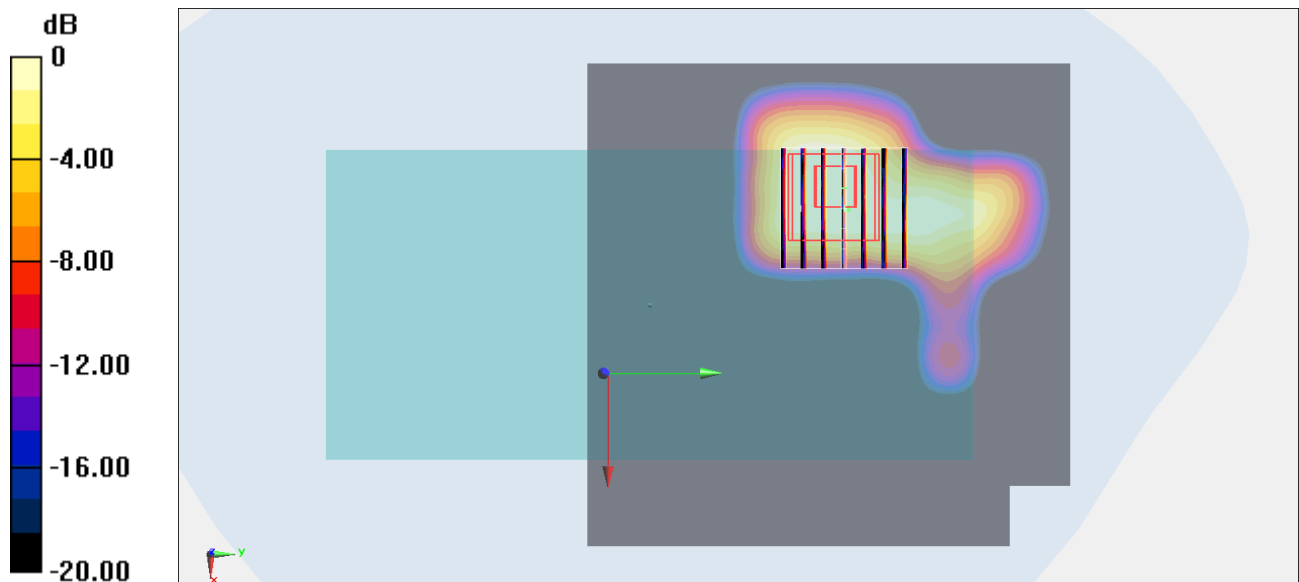

0 dB = 0.0249 W/kg = -16.04 dBW/kg

#74_GSM850_GPRS 4 Tx slots_Back_5mm_Ch251

Communication System: UID 10028 - DAC, GPRS-FDD; Frequency: 848.8 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 44.615$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 848.8 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.32 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 41.67 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.476 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 1.39 W/kg

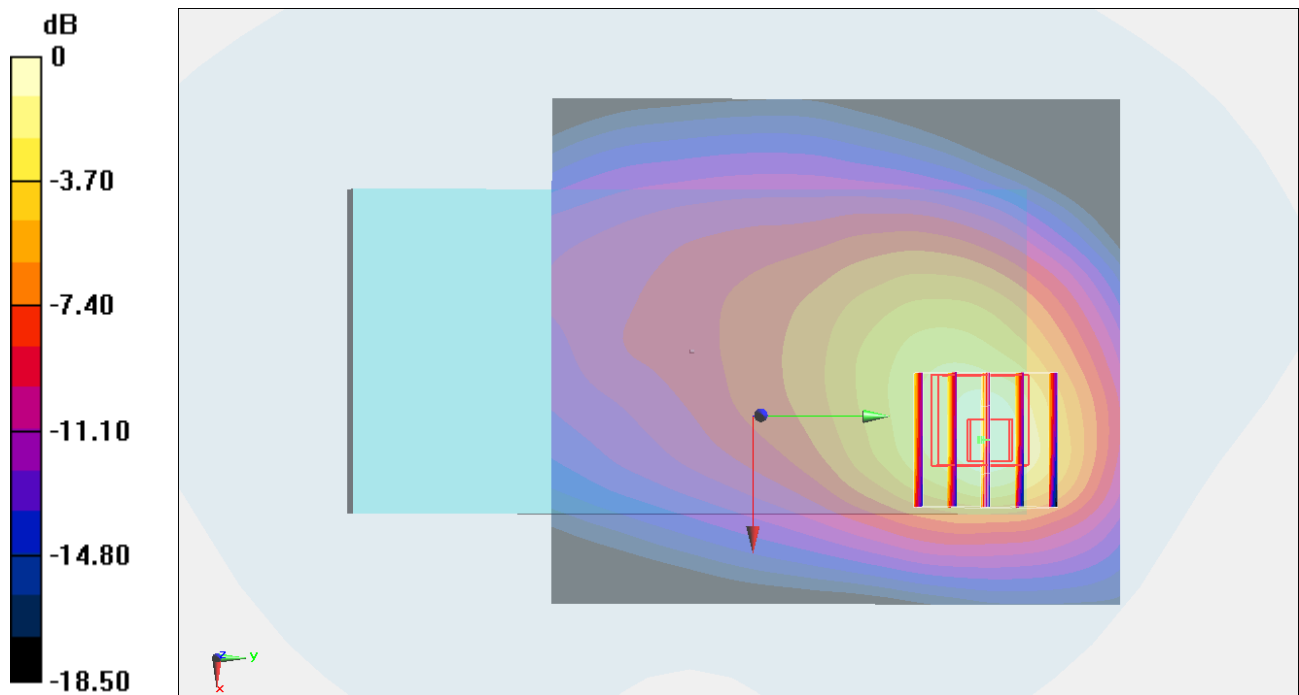

#75_GSM1900_GPRS 2 Tx slots_Back_5mm_Ch810

Communication System: UID 10024 - DAC, GPRS-FDD; Frequency: 1909.8 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 42.571$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1909.8 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.783 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.97 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.342 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.1%

Maximum value of SAR (measured) = 0.809 W/kg

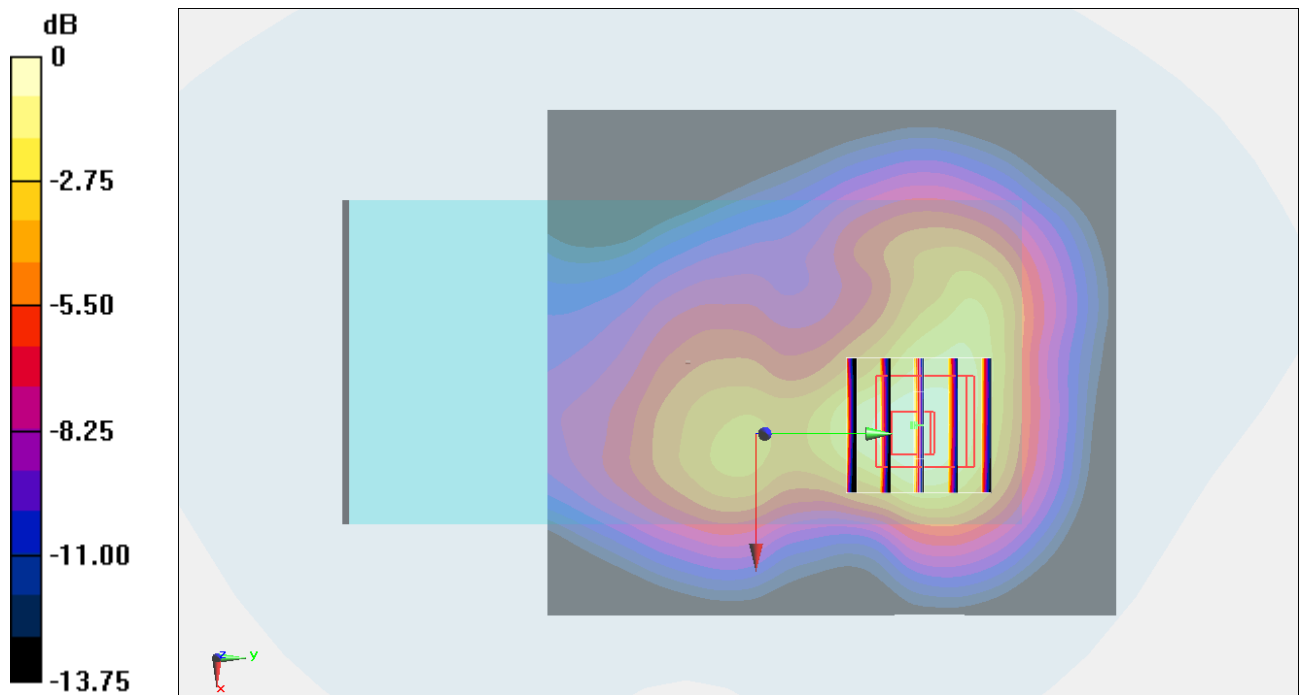

0 dB = 0.809 W/kg = -0.92 dBW/kg

#76_WCDMA II_RMC 12.2Kbps_Back Slant_5mm_Ch9262

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1852.4 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 42.622$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76) @ 1852.4 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.74 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.67 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.641 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 1.68 W/kg

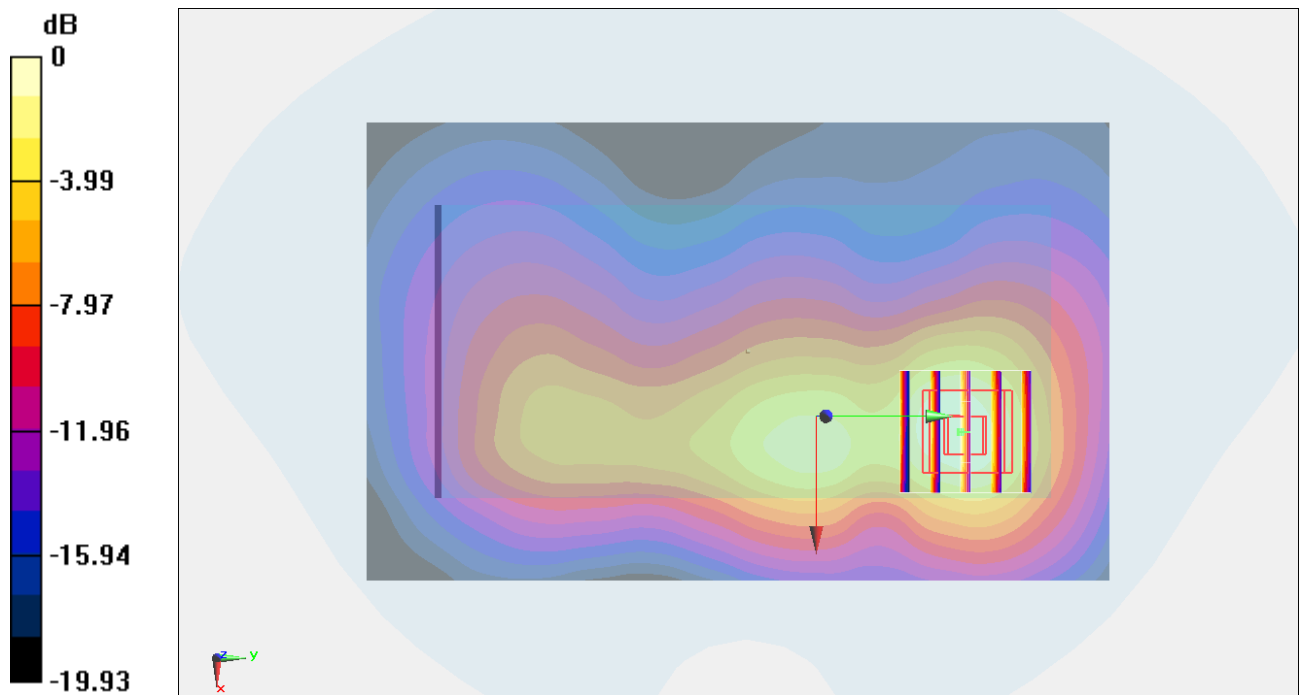

0 dB = 1.68 W/kg = 2.25 dBW/kg

#77_WCDMA IV_RMC 12.2Kbps_Back Slant_5mm_Ch1513

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1752.6 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 42.846$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93) @ 1752.6 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.77 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.35 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.592 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 1.51 W/kg

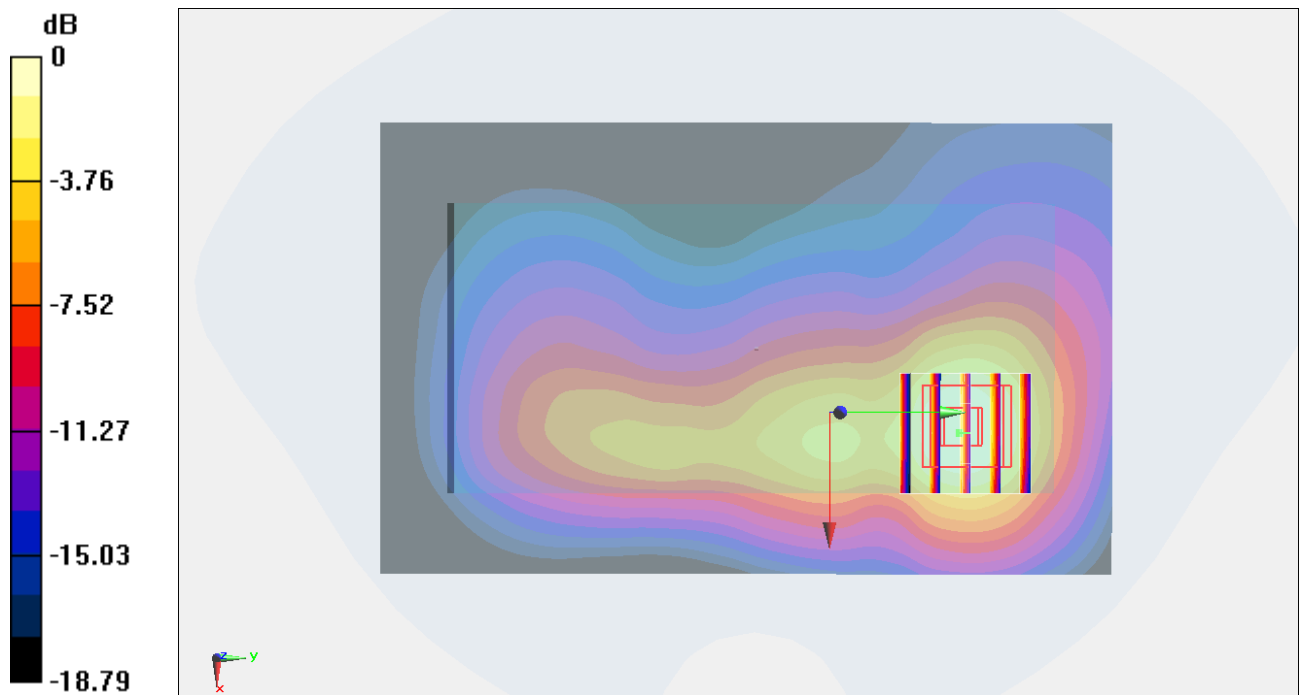

#78_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 836.4 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 44.653$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66) @ 836.4 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.49 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.548 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 1.76 W/kg

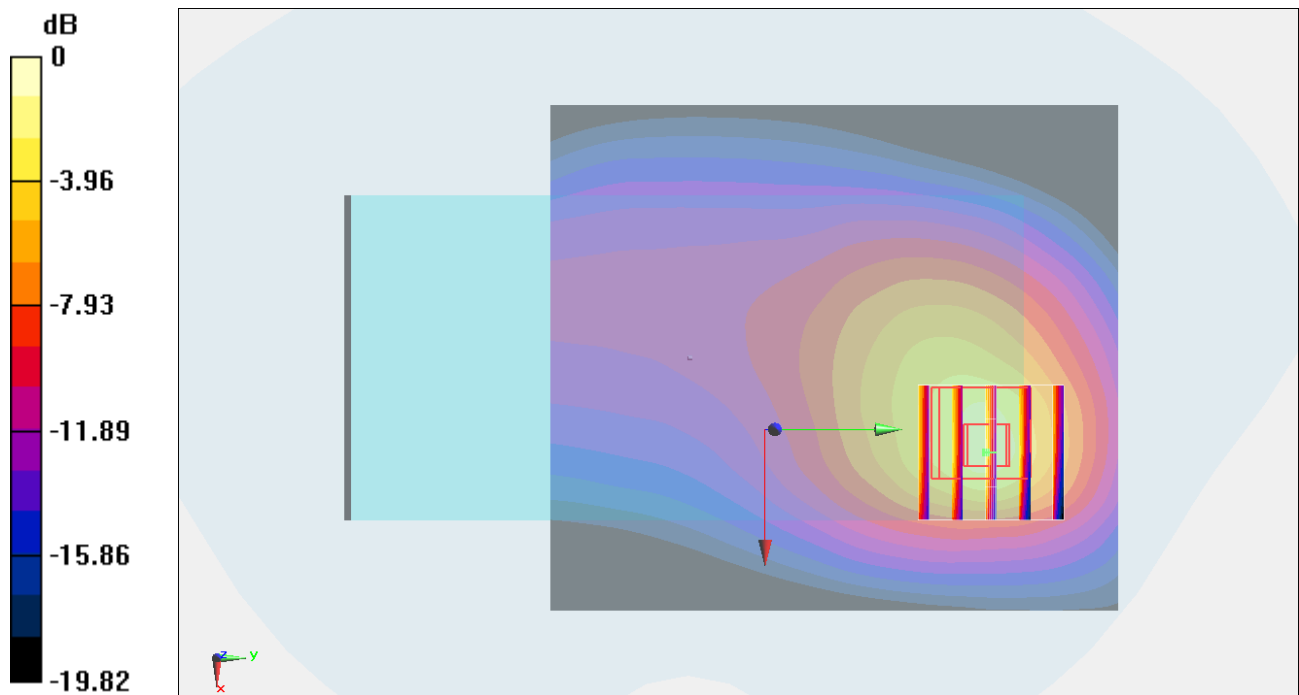

#79_LTE Band 7_20M_QPSK_1_0_Back with Clip_0mm_Ch21350

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2560 MHz

Medium: HSL_600-7200_260115 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 41.575$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02) @ 2560 MHz; Calibrated: 2025/7/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2025/3/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 30.82 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.392 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 1.63 W/kg

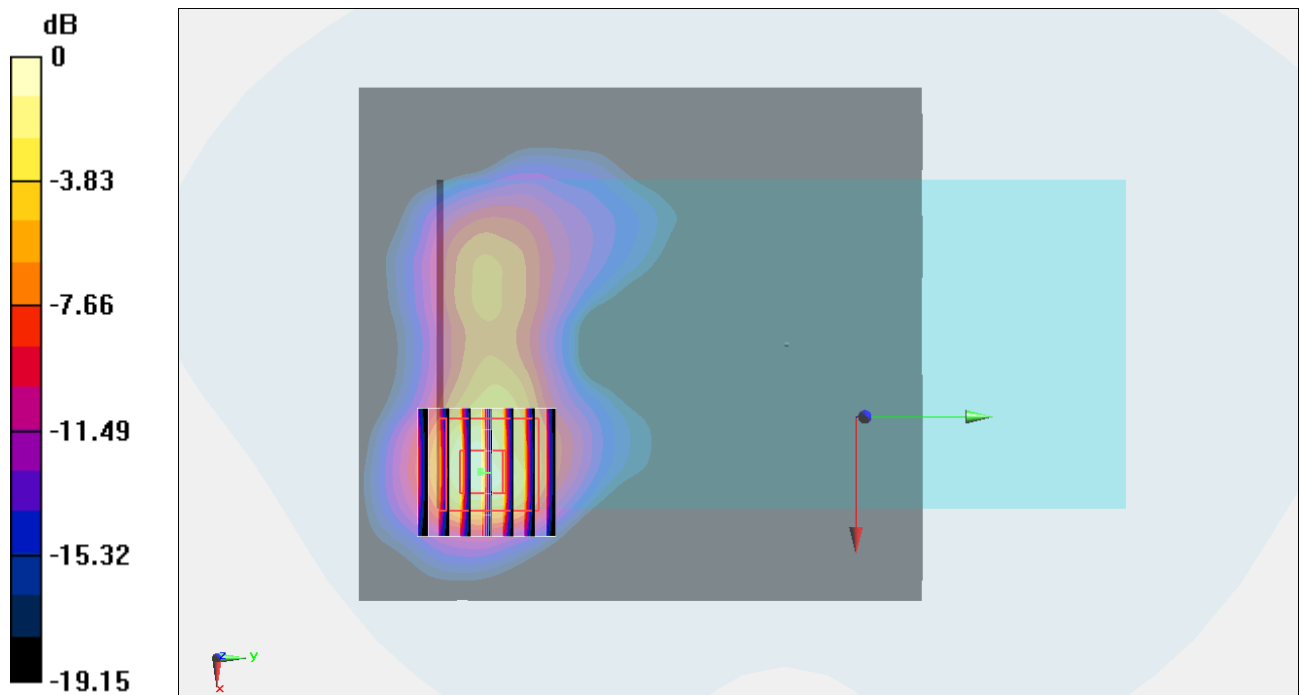

0 dB = 1.63 W/kg = 2.12 dBW/kg