

#01_GSM850_GPRS 3 Tx slots_Right Cheek_0mm_Ch251

Communication System: UID 10027 - DAC, GPRS-FDD; Frequency: 848.8 MHz

Medium: HSL_600-7200_260813 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 43.301$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 848.8 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.44 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 41.55 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.648 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.9 mm

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 1.35 W/kg

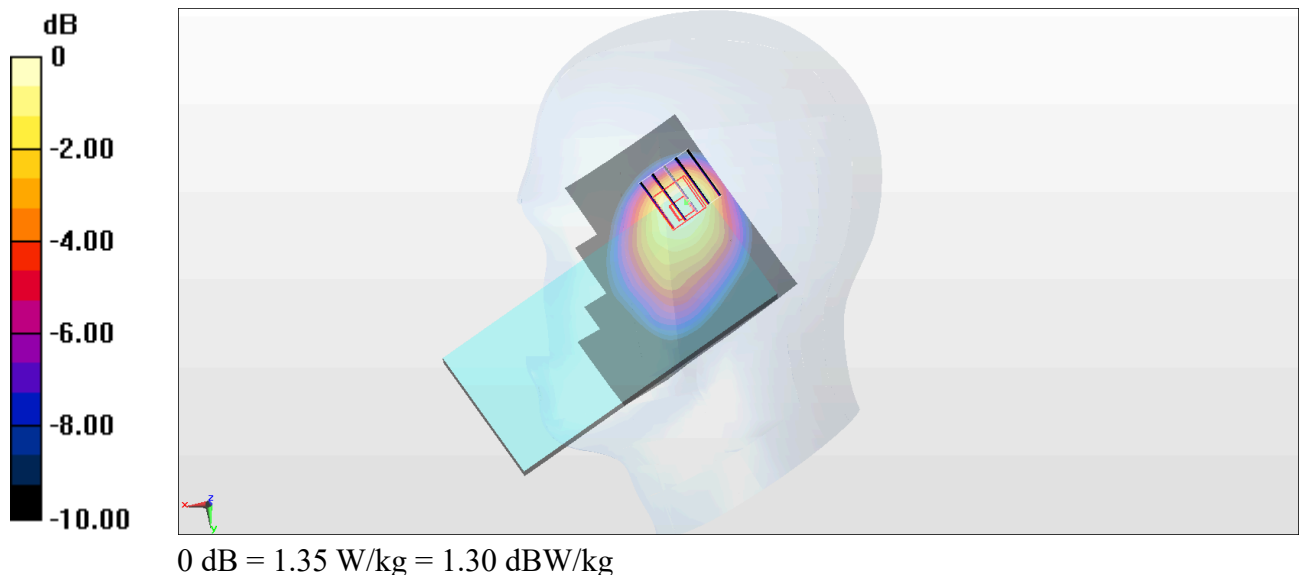

#02_GSM1900_GPRS 3 Tx slots_Left Cheek_0mm_Ch661

Communication System: UID 10027 - DAC, GPRS-FDD; Frequency: 1880 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61) @ 1880 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.451 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.90 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.654 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.193 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 0.540 W/kg

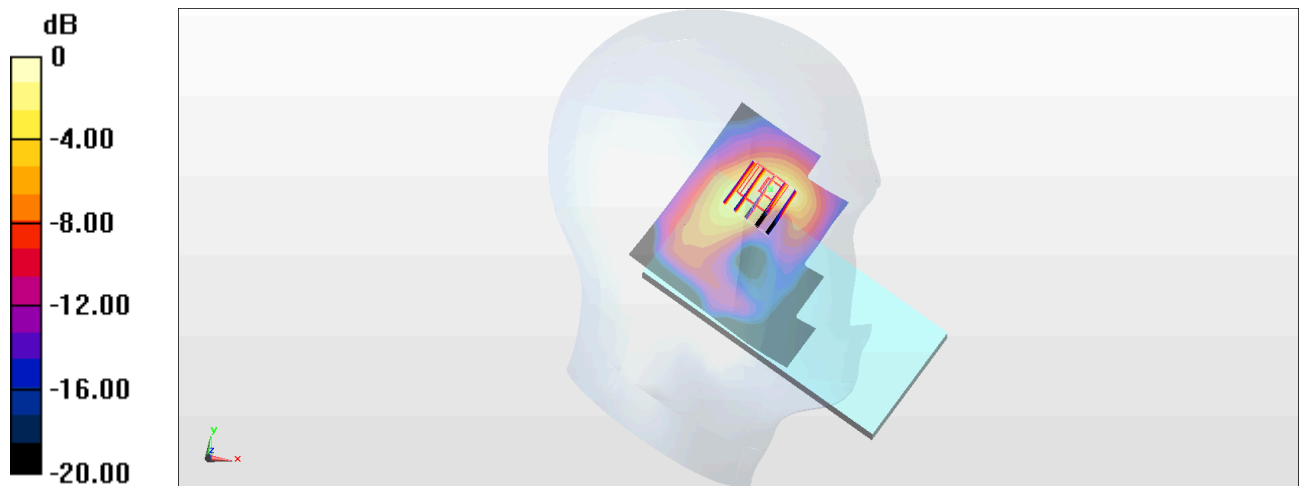

0 dB = 0.540 W/kg = -2.68 dBW/kg

#03_WCDMA II_RMC 12.2Kbps_Left Cheek_0mm_Ch9400

Communication System: UID 10011 - CAC, UMTS-FDD ; Frequency: 1880 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61) @ 1880 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.721 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.46 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.339 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.3%

Maximum value of SAR (measured) = 0.861 W/kg



0 dB = 0.861 W/kg = -0.65 dBW/kg

#04_WCDMA IV_RMC 12.2Kbps_Left Cheek_0mm_Ch1312

Communication System: UID 10011 - CAC, UMTS-FDD ; Frequency: 1712.4 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.314$ S/m; $\epsilon_r = 41.935$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05) @ 1712.4 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.47 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.18 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.534 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 1.33 W/kg

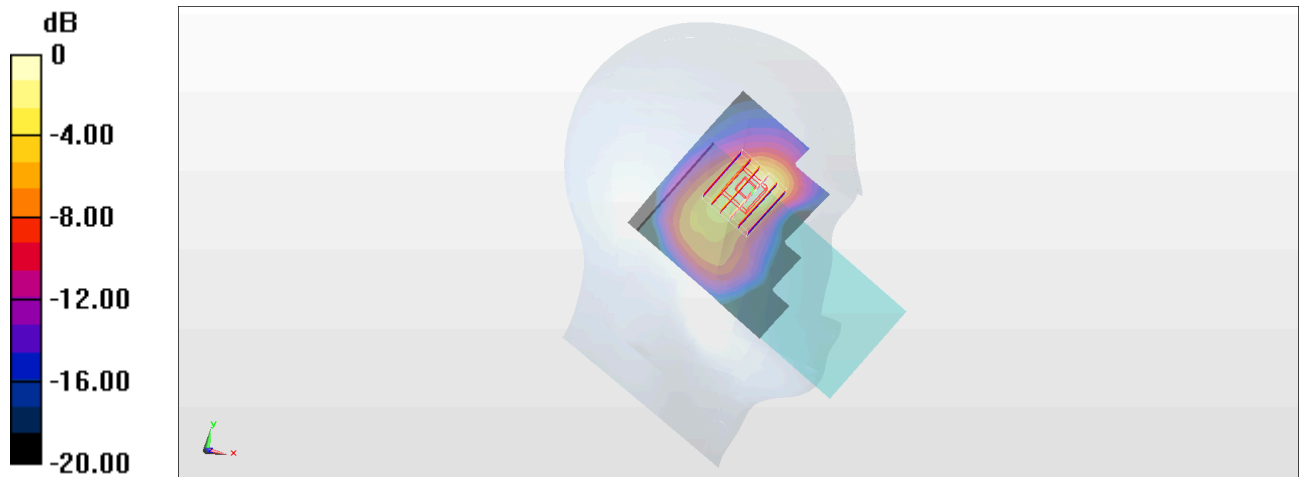

0 dB = 1.33 W/kg = 1.24 dBW/kg

#05_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4182

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 836.4 MHz

Medium: HSL_600-7200_260813 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 43.319$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 836.4 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 38.06 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.569 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 69.2%

Maximum value of SAR (measured) = 1.09 W/kg

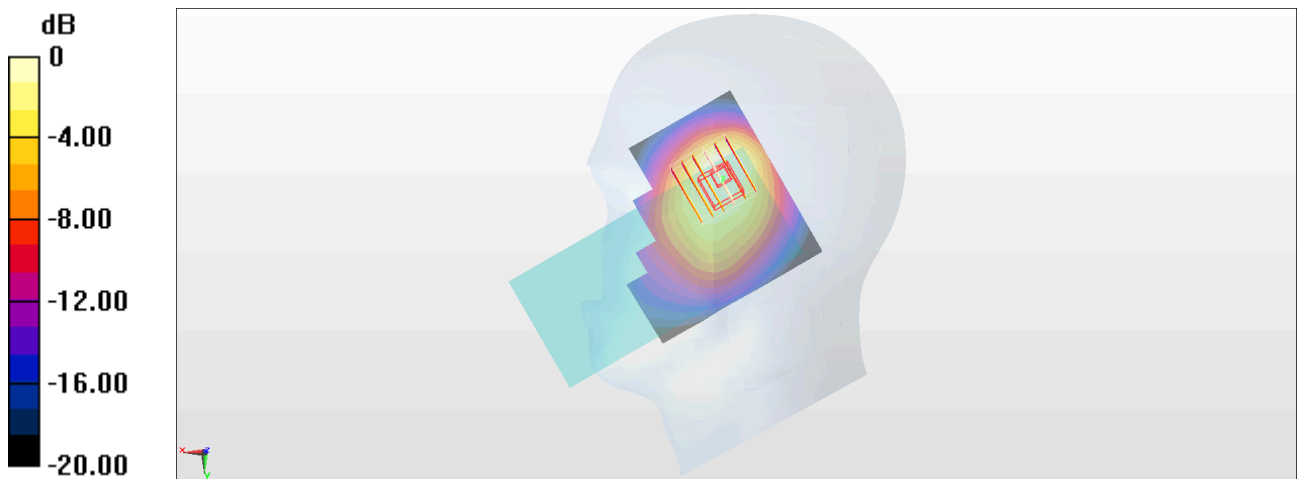

0 dB = 1.09 W/kg = 0.37 dBW/kg

#06_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch21100

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2535 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 39.049$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2535 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.72 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.452 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 1.34 W/kg

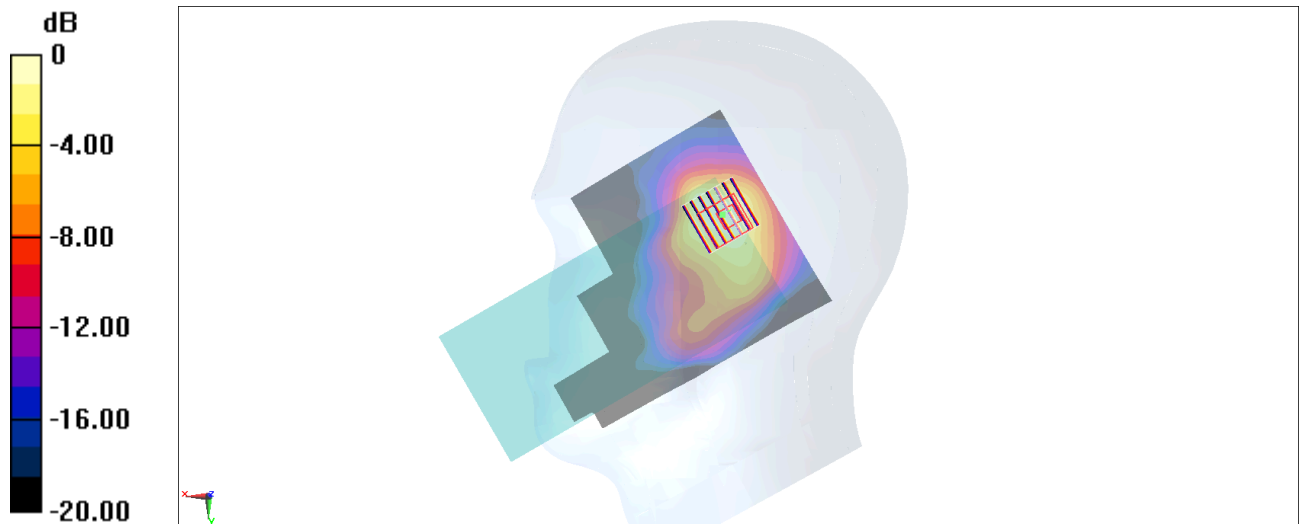

0 dB = 1.34 W/kg = 1.27 dBW/kg

#07_LTE Band 12_10M_QPSK_1_0_Right Cheek_0mm_Ch23095

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 707.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.85$ S/m; $\epsilon_r = 43.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 707.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.914 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.35 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.465 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.6%

Maximum value of SAR (measured) = 0.886 W/kg

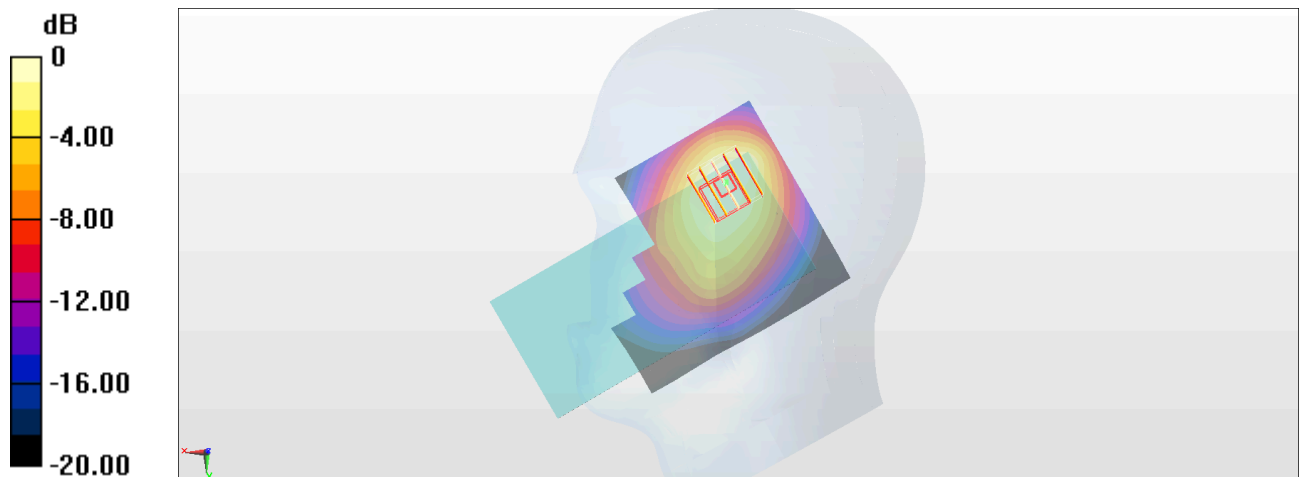

0 dB = 0.886 W/kg = -0.53 dBW/kg

#08_LTE Band 13_10M_QPSK_1_0_Right Cheek_0mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 782 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 782$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 43.506$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 782 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.55 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.785 W/kg; SAR(10 g) = 0.516 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.9 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 1.01 W/kg

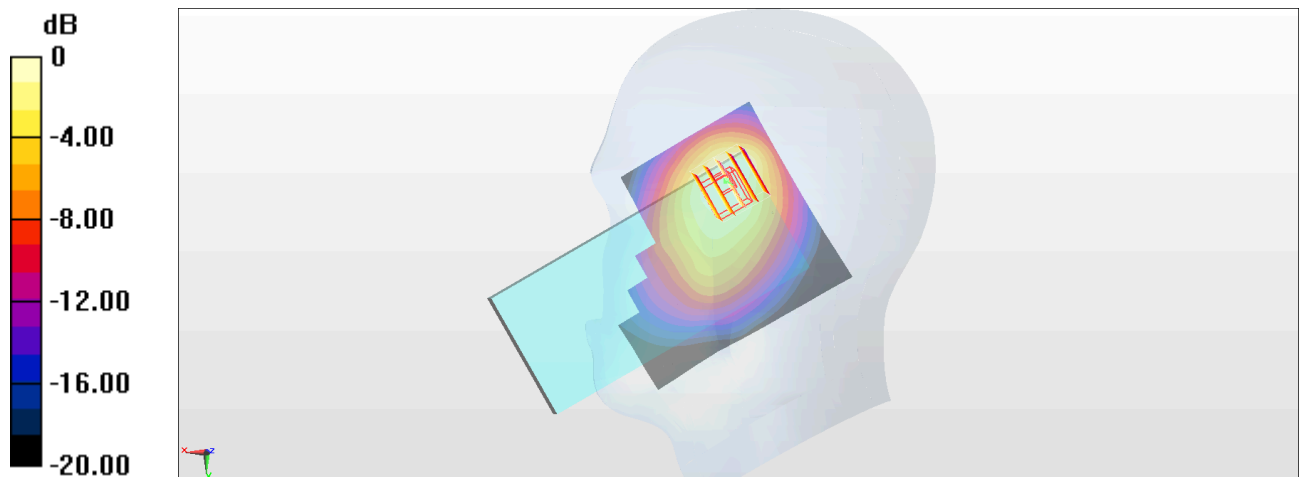

0 dB = 1.01 W/kg = 0.04 dBW/kg

#09_LTE Band 14_10M_QPSK_1_0_Right Cheek_0mm_Ch23330

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 793 MHz

Medium: HSL_600~7200_260813 Medium parameters used : $f = 793$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 43.478$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 793 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.967 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.54 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.472 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.2 mm

Ratio of SAR at M2 to SAR at M1 = 67.7%

Maximum value of SAR (measured) = 0.915 W/kg

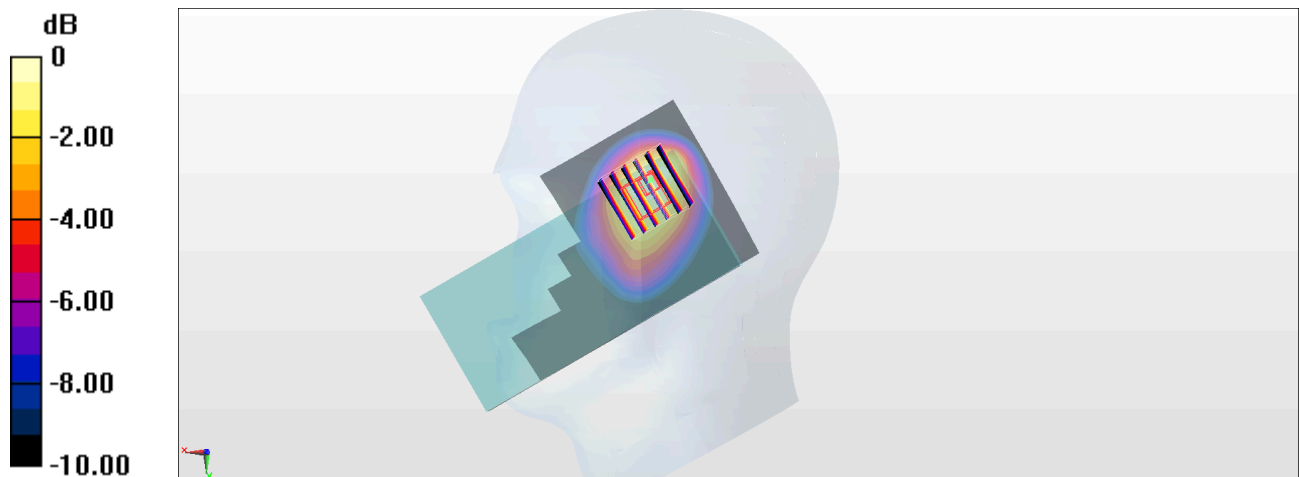

0 dB = 0.915 W/kg = -0.39 dBW/kg

#10_LTE Band 25_20M_QPSK_1_0_Left Cheek_0mm_Ch26140

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1860 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 41.541$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61) @ 1860 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.847 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.51 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.970 W/kg

SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.326 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 0.848 W/kg

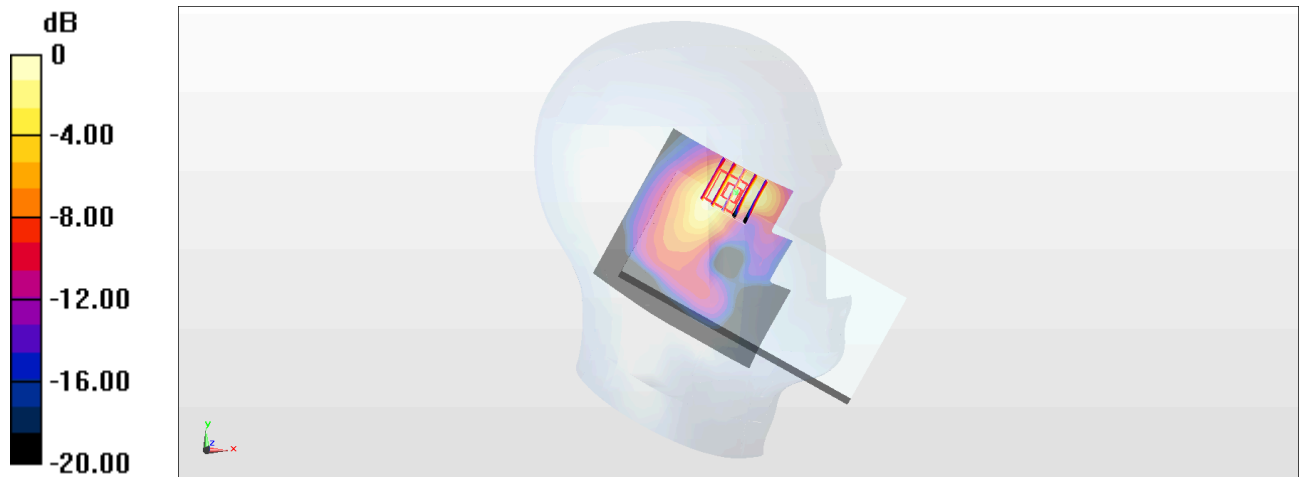

0 dB = 0.848 W/kg = -0.72 dBW/kg

#11_LTE Band 26_15M_QPSK_1_0_Right Cheek_0mm_Ch26865

Communication System: UID 10181 - CAF, LTE-FDD ; Frequency: 831.5 MHz

Medium: HSL_600-7200_260813 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.332$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 831.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.19 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.944 W/kg; SAR(10 g) = 0.621 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 69.6%

Maximum value of SAR (measured) = 1.19 W/kg

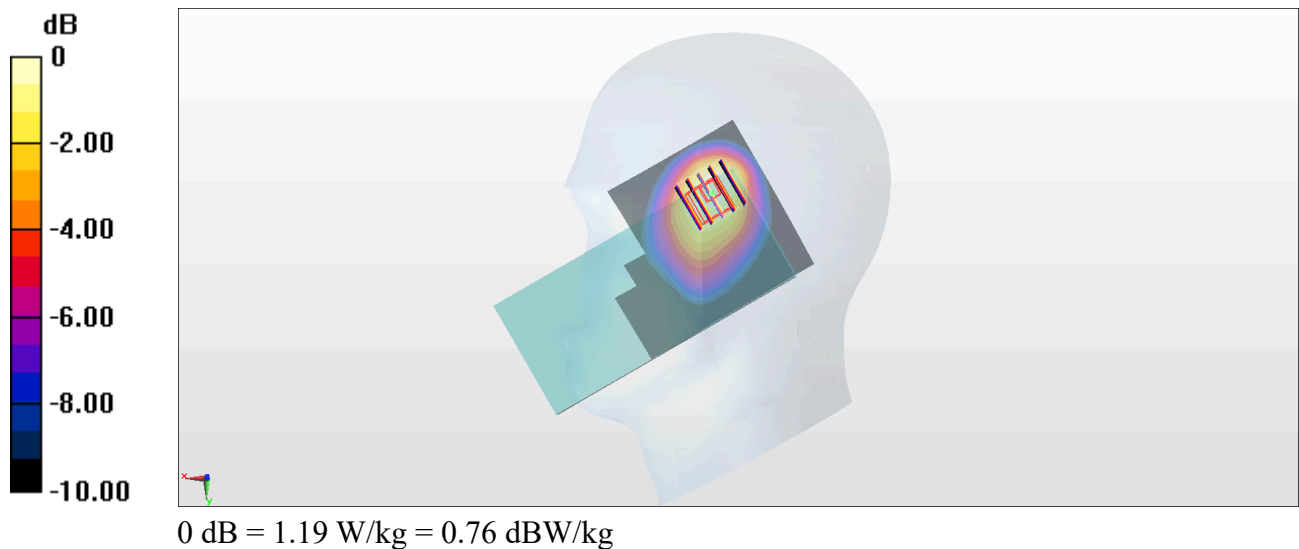

#12_LTE Band 30_10M_QPSK_1_0_Right Cheek_0mm_Ch27710

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2310 MHz

Medium: HSL_600-7200_260812 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 40.872$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.72, 6.71, 6.41) @ 2310 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.949 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.38 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.276 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 0.957 W/kg

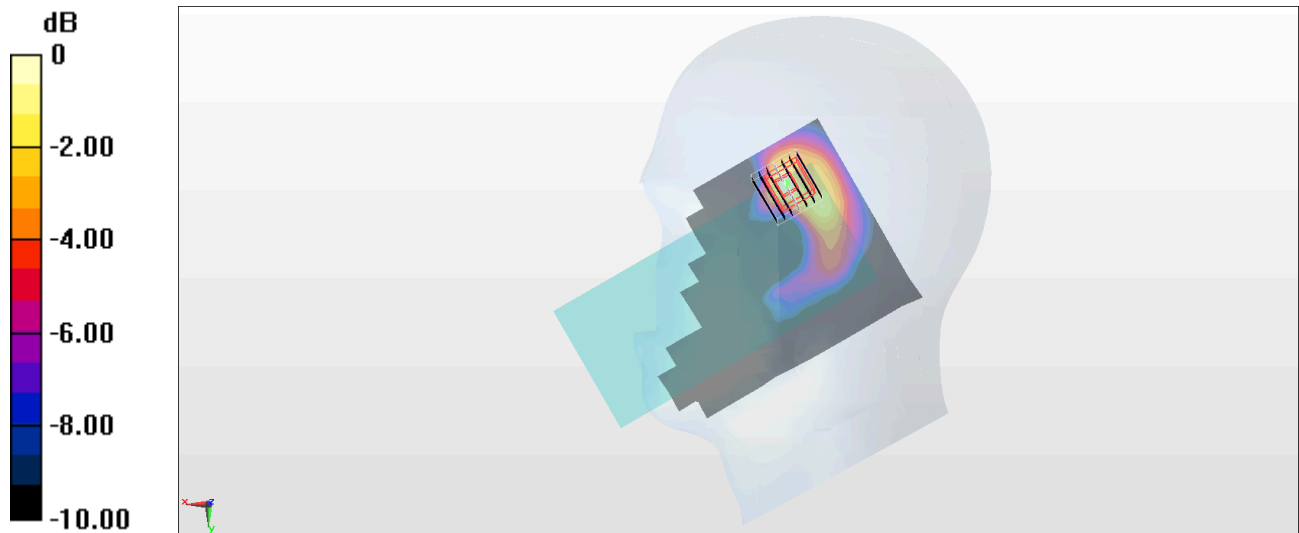

0 dB = 0.957 W/kg = -0.19 dBW/kg

#13_LTE Band 66_20M_QPSK_1_0_Left Cheek_0mm_Ch132072

Communication System: UID 10169 - CAF, LTE-FDD ; Frequency: 1720 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 41.883$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05) @ 1720 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 32.66 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.492 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 62.4%

Maximum value of SAR (measured) = 1.22 W/kg

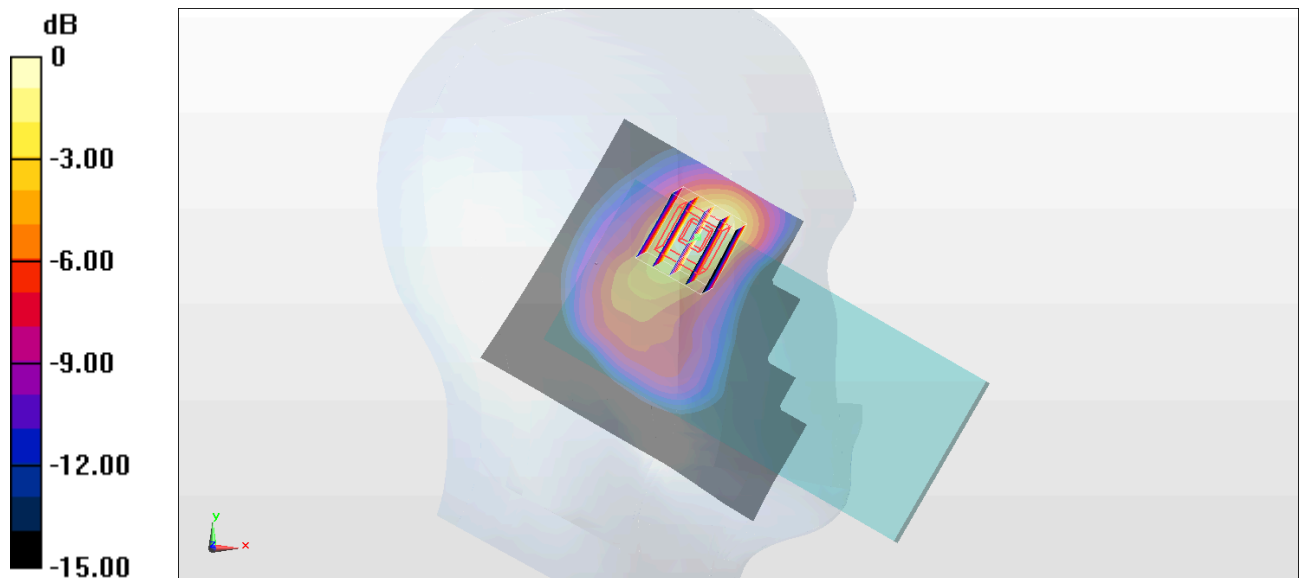

0 dB = 1.22 W/kg = 0.86 dBW/kg

#14_LTE Band 71_20M_QPSK_1_0_Right Cheek_0mm_Ch133297

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 680.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 43.848$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 680.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.697 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 30.44 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.768 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.363 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 68%

Maximum value of SAR (measured) = 0.676 W/kg

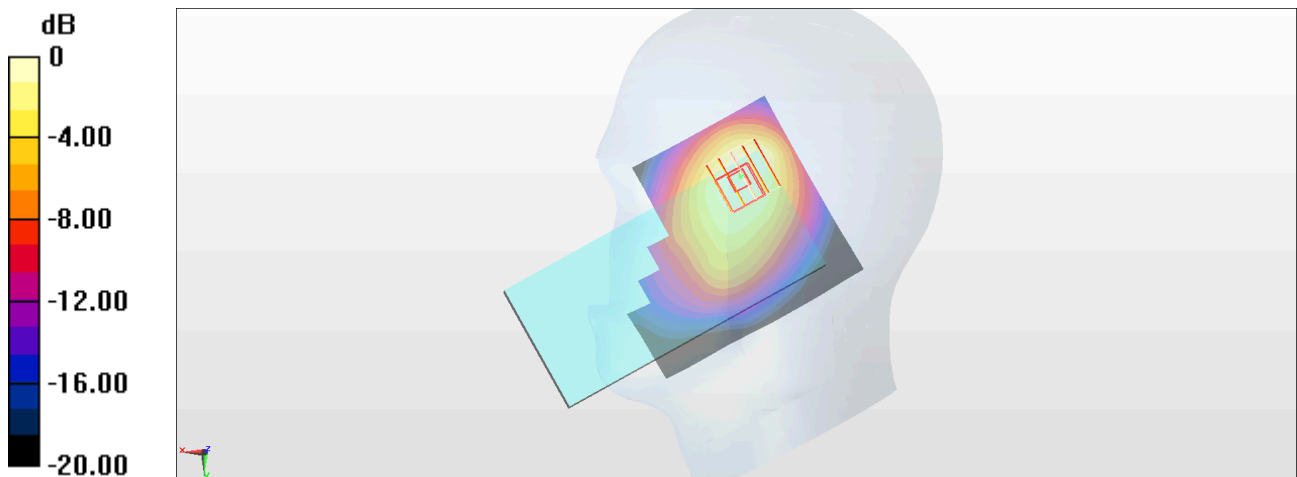

0 dB = 0.676 W/kg = -1.70 dBW/kg

#15_LTE Band 106_3M_QPSK_1_0_Right Cheek_0mm_Ch134322

Communication System: UID 10184 - CAF, LTE-FDD; Frequency: 899 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 899$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 43.284$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.57, 8.56, 8.18) @ 899 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.346 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.15 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.154 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 0.320 W/kg

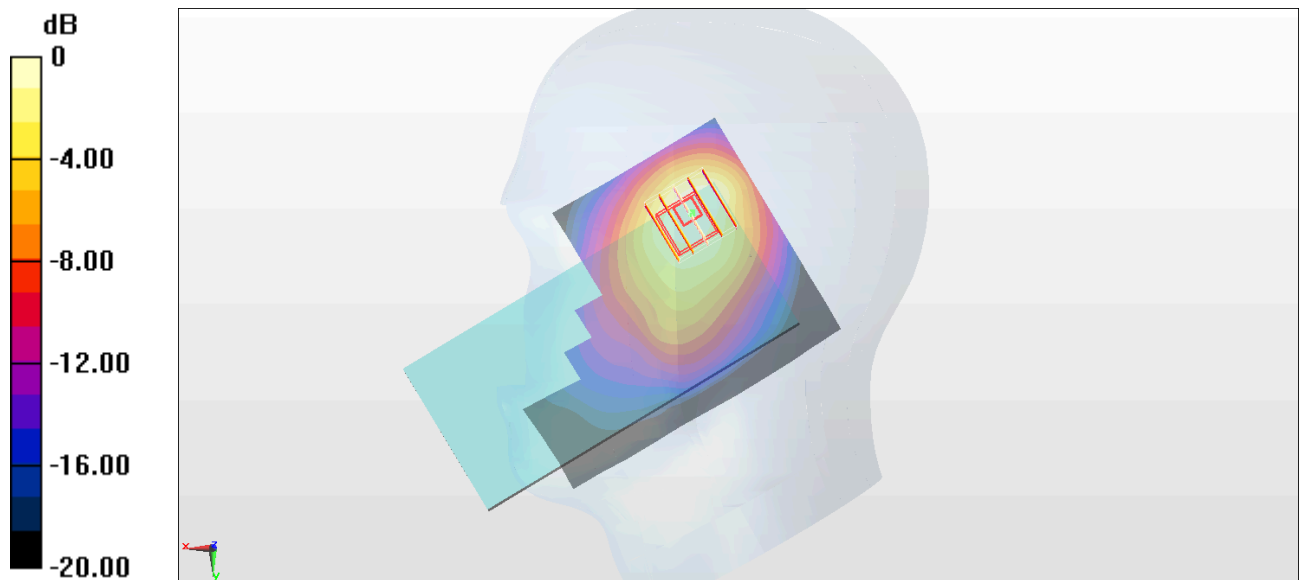

0 dB = 0.320 W/kg = -4.95 dBW/kg

#16_LTE Band 70_15M_QPSK_1_0_Left Cheek_0mm_Ch133047

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 1702.5 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.277$ S/m; $\epsilon_r = 43.715$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(8.13, 7.93, 8.02) @ 1702.5 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.15 V/m; Power Drift = -0.15 dB



Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.433 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 1.08 W/kg

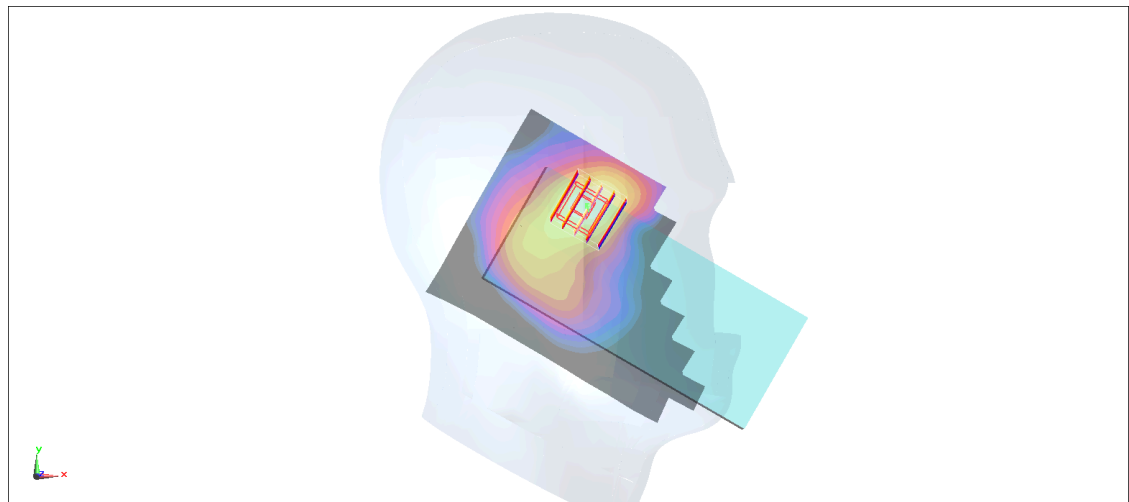

0 dB = 1.08 W/kg = 0.33 dBW/kg

#17_LTE Band 41_20M_QPSK_1_0_Right Tilted_0mm_Ch40185

Communication System: UID 10172 - CAH, LTE-TDD; Frequency: 2549.5 MHz

Medium: HSL_600-7200_260812 Medium parameters used: $f = 2550$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 40.52$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43) @ 2549.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.843 W/kg

Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.93 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.305 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.950 W/kg

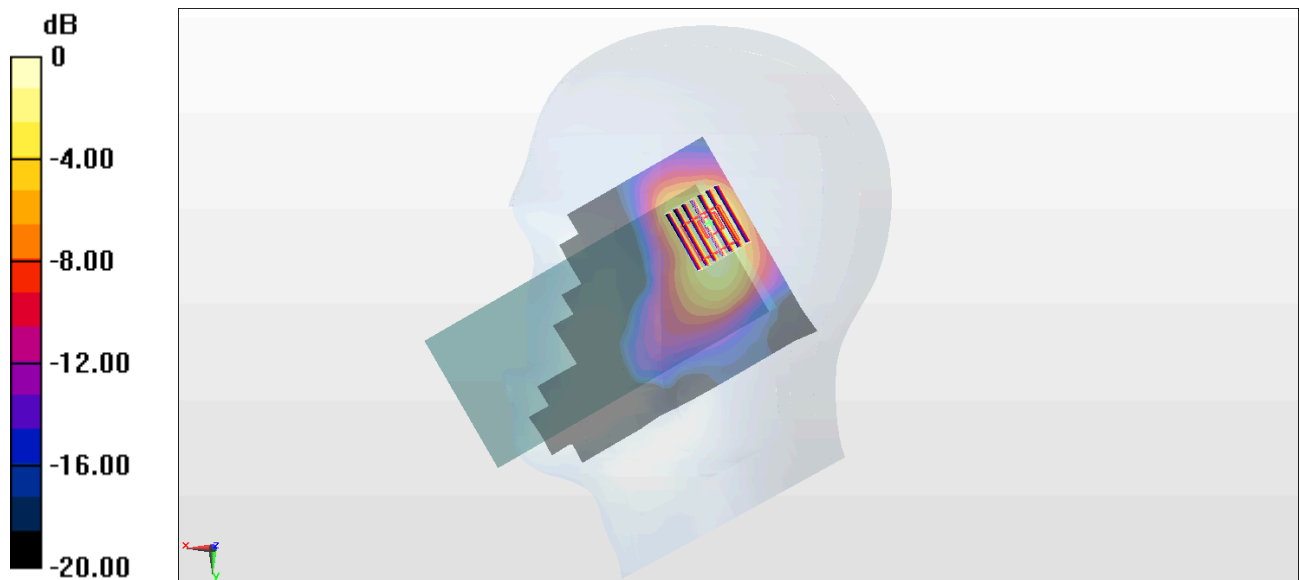

0 dB = 0.950 W/kg = -0.22 dBW/kg

#18_LTE Band 48_20M_QPSK_1_0_Right Cheek_0mm_Ch55990

Communication System: UID 10435 - AAG, LTE-TDD ; Frequency: 3625 MHz

Medium: HSL_600~7200_260815 Medium parameters used : $f = 3625$ MHz; $\sigma = 2.863$ S/m; $\epsilon_r = 37.662$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3625 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.65 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 25.87 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 0.887 W/kg; SAR(10 g) = 0.348 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 75.7%

Maximum value of SAR (measured) = 1.69 W/kg



0 dB = 1.69 W/kg = 2.28 dBW/kg

#19_LTE Band 53_10M_QPSK_1_0_Right Cheek_0mm_Ch60198

Communication System: UID 10470 - AAG, LTE-TDD; Frequency: 2489.3 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 2490$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 42.699$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.17, 6.99, 7.07) @ 2489.3 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.729 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.51 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.894 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.206 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.724 W/kg

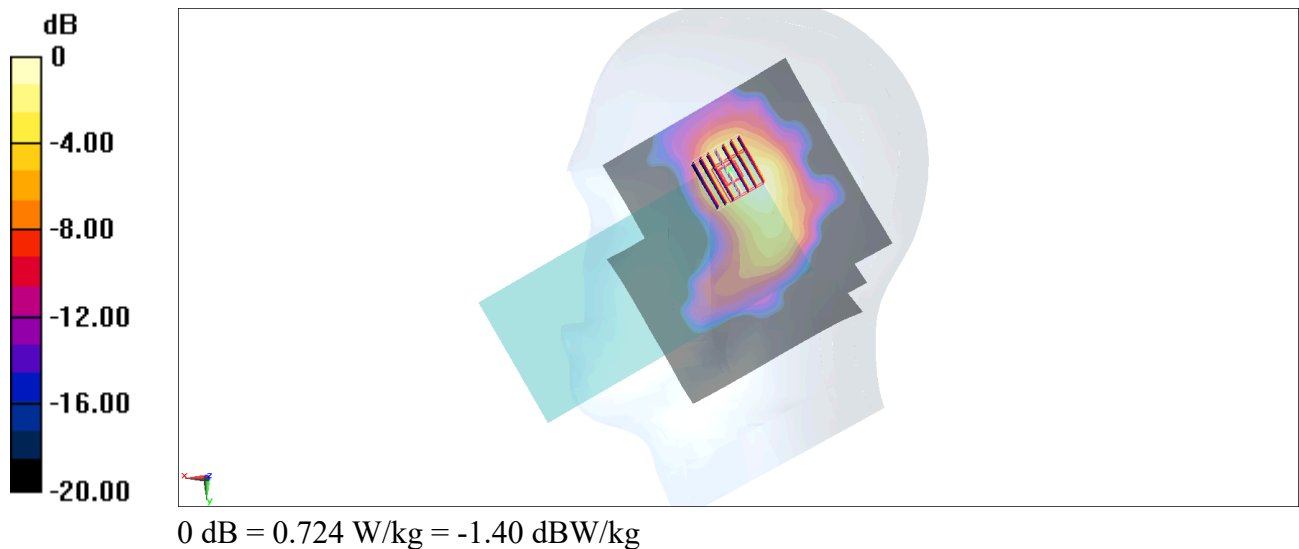

#20_FR1 n7_50M_BPSK_1_1_Right Cheek_0mm_Ch507000

Communication System: UID 10930 - AAC, 5G NR ; Frequency: 2535 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.09$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2535 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.78 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.52 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.539 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 1.71 W/kg

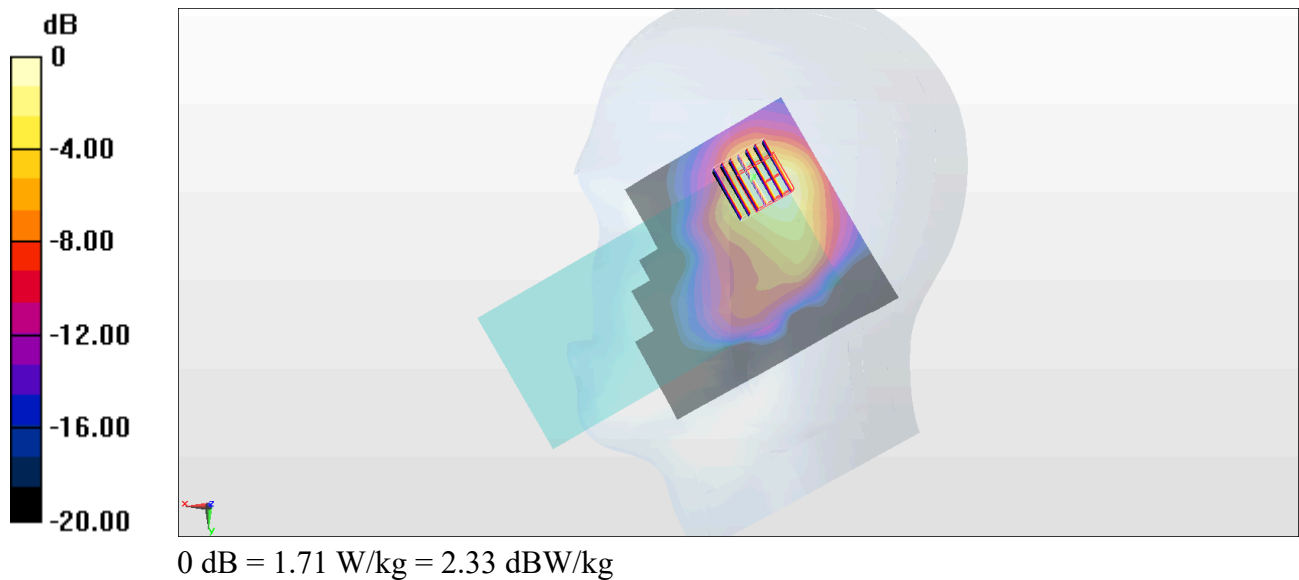

#21_FR1 n12_15M_BPSK_1_1_Right Cheek_0mm_Ch141500

Communication System: UID 10929 - AAD, 5G NR; Frequency: 707.5 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.932$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 707.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.20 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.502 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.9%

Maximum value of SAR (measured) = 1.04 W/kg

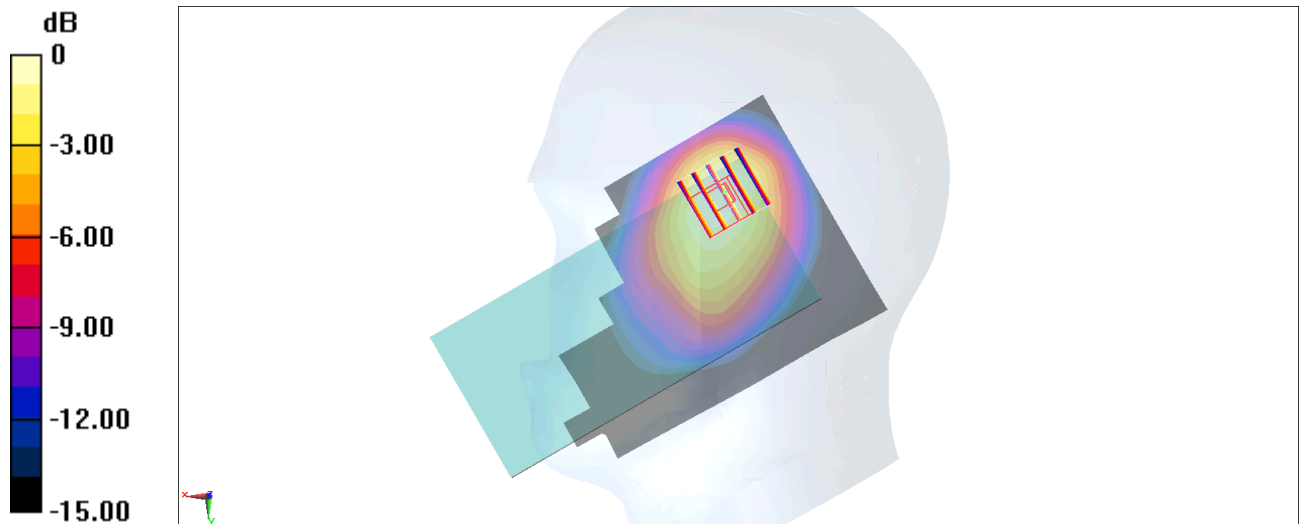

0 dB = 1.04 W/kg = 0.17 dBW/kg

#22_FR1 n13_10M_BPSK_1_1_Right Cheek_0mm_Ch156400

Communication System: UID 10929 - AAD, 5G NR ; Frequency: 782 MHz

Medium: HSL_600~7200_260811 Medium parameters used : $f = 782$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 42.704$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 782 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 37.23 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.531 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

Maximum value of SAR (measured) = 1.12 W/kg

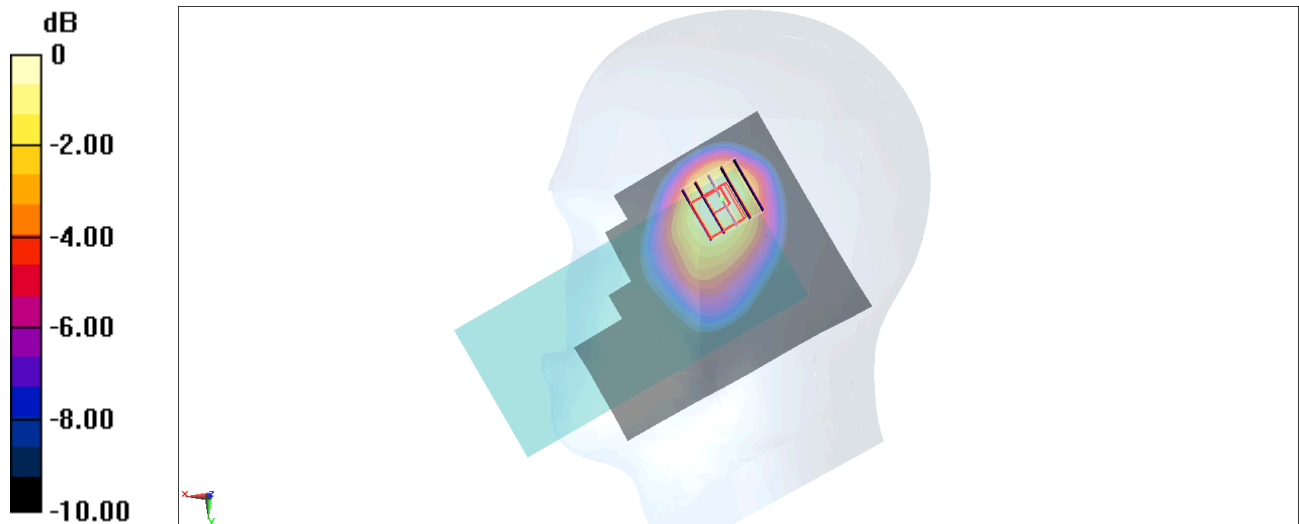

0 dB = 1.12 W/kg = 0.48 dBW/kg

#23_FR1 n14_10M_BPSK_1_1_Right Cheek_0mm_Ch158600

Communication System: UID 10929 - AAD, 5G NR; Frequency: 793 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 793$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.666$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 793 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.38 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.62 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.635 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 1.29 W/kg

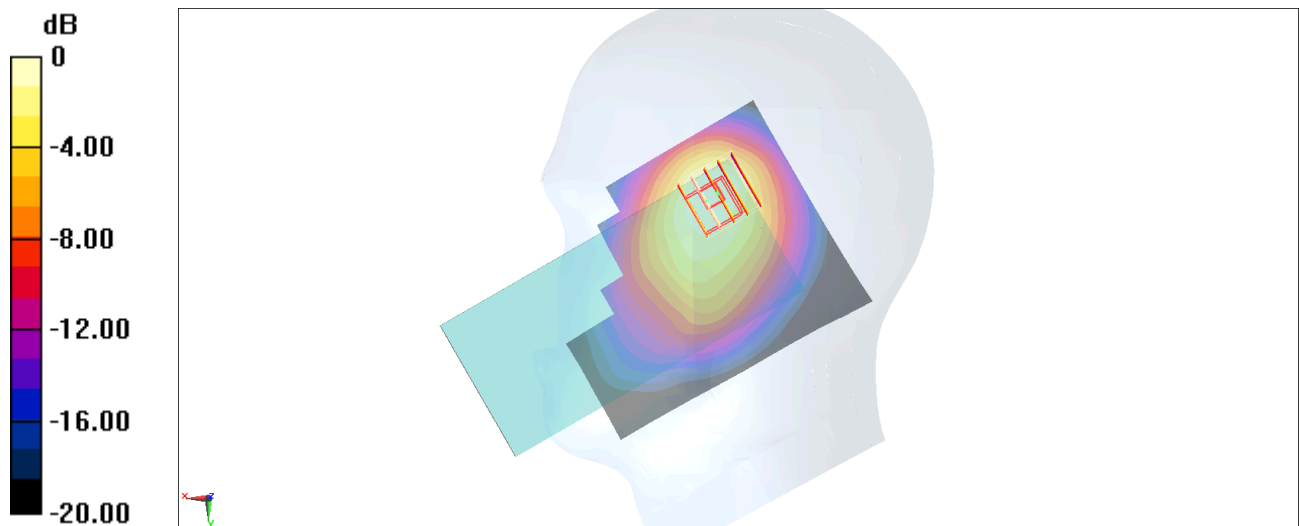

0 dB = 1.29 W/kg = 1.11 dBW/kg

#24_FR1 n25_40M_BPSK_1_1_Left Cheek_0mm_Ch376500

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1882.5 MHz

Medium: HSL_600~7200_260812 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 40.76$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1882.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.983 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.71 V/m; Power Drift = -0.12 dB



Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.326 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 0.966 W/kg

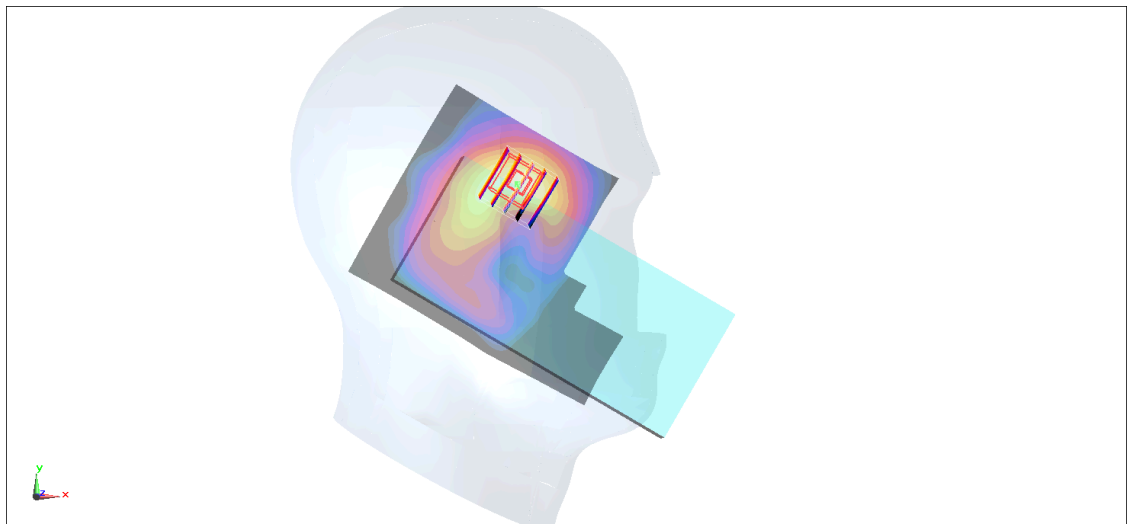

0 dB = 0.966 W/kg = -0.15 dBW/kg

#25_FR1 n26_20M_BPSK_1_1_Right Cheek_0mm_Ch166300

Communication System: UID 10931 - AAC, 5G NR; Frequency: 831.5 MHz

Medium: HSL_600-7200_260813 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 45.141$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.15, 8.92, 9.02) @ 831.5 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.32 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.70 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.691 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.9 mm

Ratio of SAR at M2 to SAR at M1 = 71.1%

Maximum value of SAR (measured) = 1.30 W/kg

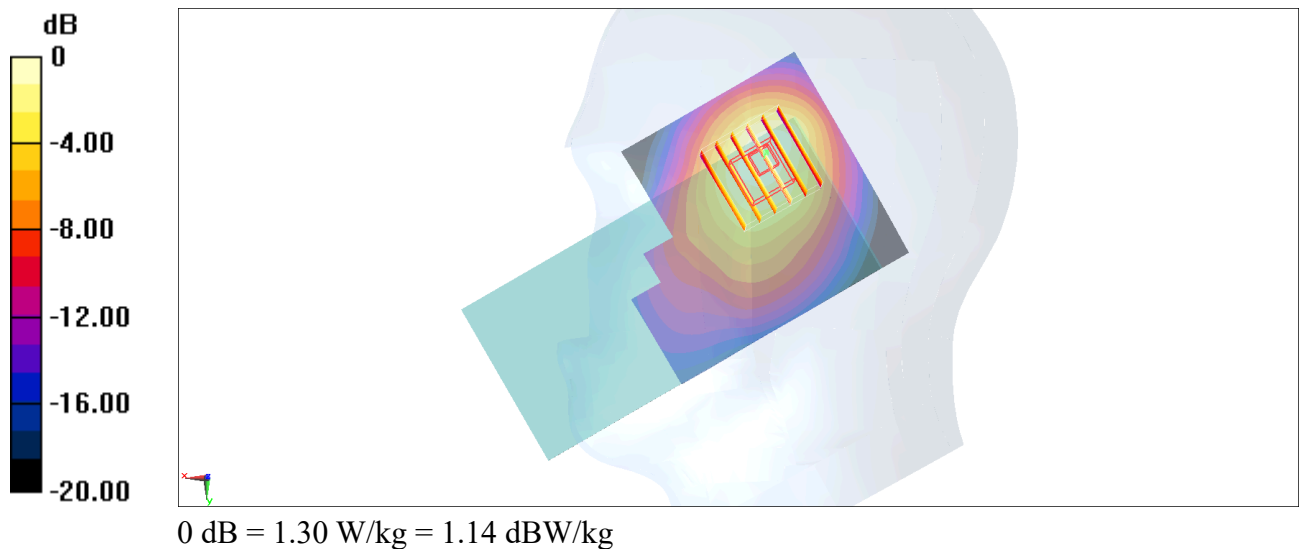

#26_FR1 n30_10M_BPSK_1_1_Right Cheek_0mm_Ch462000

Communication System: UID 10929 - AAD, 5G NR ; Frequency: 2310 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.659$ S/m; $\epsilon_r = 42.959$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.78, 7.59, 7.67) @ 2310 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.886 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.65 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.283 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.902 W/kg

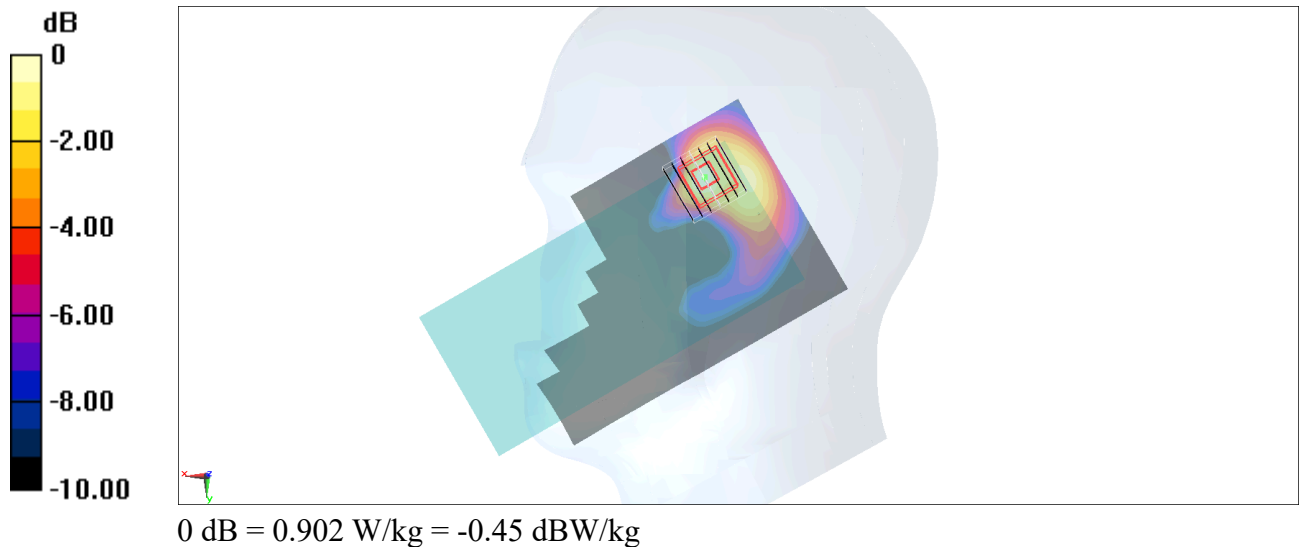

#27_FR1 n66_40M_BPSK_1_1_Left Cheek_0mm_Ch349000

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1745 MHz

Medium: HSL_600~7200_260812 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.972$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1745 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.20 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.566 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 1.59 W/kg

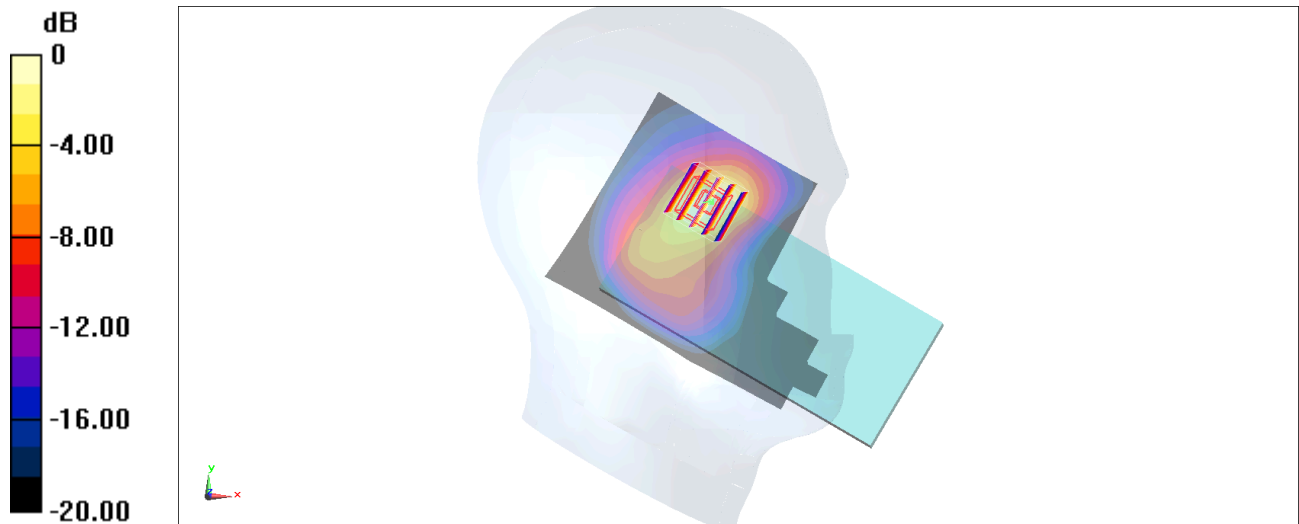

0 dB = 1.59 W/kg = 2.01 dBW/kg

#28_FR1 n70_15M_BPSK_1_1_Left Cheek_0mm_Ch340500

Communication System: UID 10930 - AAC, 5G NR ; Frequency: 1702.5 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1702.5$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.893$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1702.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.981 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.24 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.379 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.08 W/kg

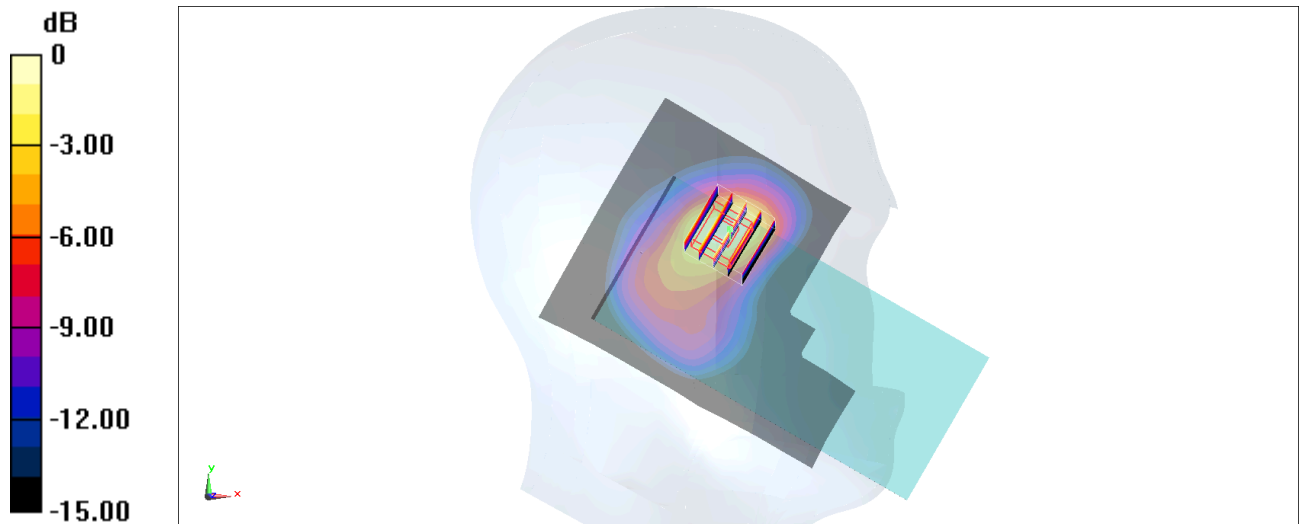

0 dB = 1.08 W/kg = 0.33 dBW/kg

#29_FR1 n71_20M_BPSK_1_1_Right Cheek_0mm_Ch136100

Communication System: UID 10931 - AAC, 5G NR; Frequency: 680.5 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 43.042$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 680.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.795 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.02 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.907 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.367 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.3%

Maximum value of SAR (measured) = 0.754 W/kg

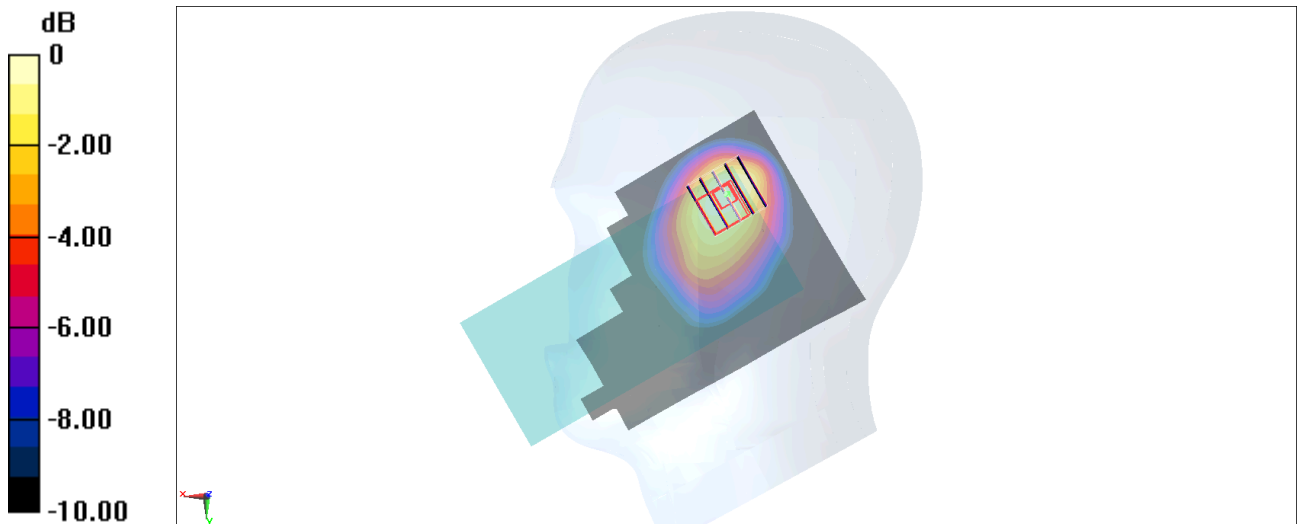

0 dB = 0.754 W/kg = -1.23 dBW/kg

#30_FR1 n41_100M_BPSK_1_1_Right Cheek_0mm_Ch518598

Communication System: UID 10866 - AAF, 5G NR; Frequency: 2592.99 MHz

Medium: HSL_600-7200_260812 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 40.492$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43) @ 2592.99 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.31 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.965 W/kg; SAR(10 g) = 0.467 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 1.43 W/kg

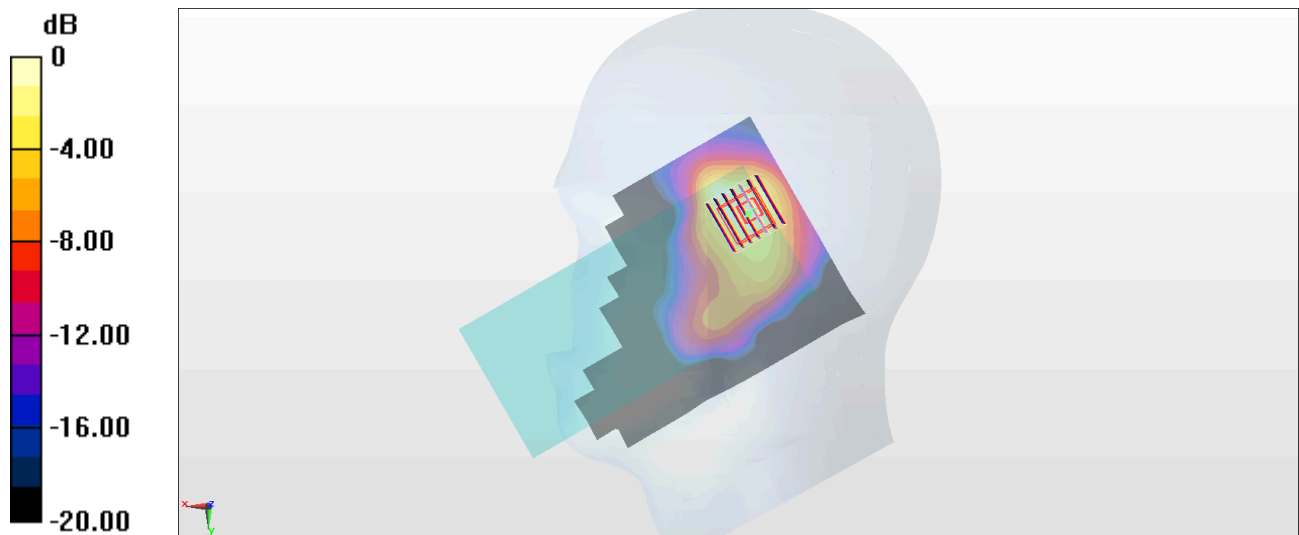

0 dB = 1.43 W/kg = 1.55 dBW/kg

#31_FR1 n48_40M_BPSK_1_1_Right Cheek_0mm_Ch638000

Communication System: UID 10903 - AAD, 5G NR; Frequency: 3570 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 3570$ MHz; $\sigma = 2.813$ S/m; $\epsilon_r = 37.758$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3570 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.38 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 30.31 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.509 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 75.7%

Maximum value of SAR (measured) = 2.31 W/kg

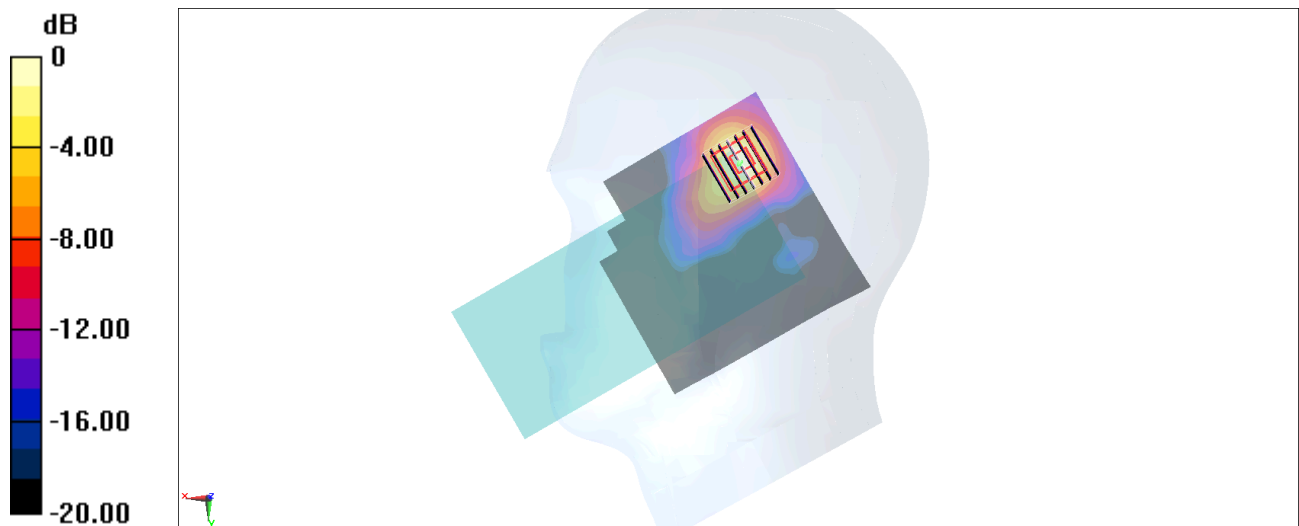

0 dB = 2.31 W/kg = 3.64 dBW/kg

#32_FR1 n77_100M_BPSK_1_1_Right Cheek_0mm_Ch633332

Communication System: UID 10866 - AAF, 5G NR ; Frequency: 3499.98 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.753$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3499.98 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.89 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 26.51 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.407 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 75.7%

Maximum value of SAR (measured) = 1.71 W/kg

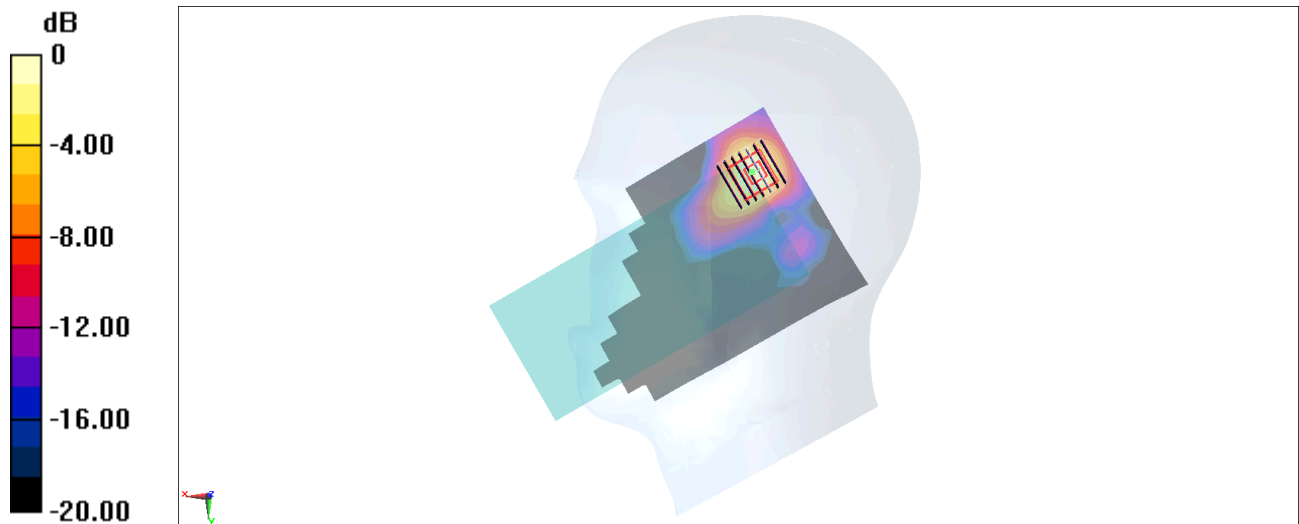

0 dB = 1.71 W/kg = 2.33 dBW/kg

#33_FR1 n53_10M_BPSK_1_22_Right Cheek_0mm_Ch497860

Communication System: UID 10898 - AAC, 5G NR; Frequency: 2489.3 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2490$ MHz; $\sigma = 1.884$ S/m; $\epsilon_r = 39.158$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.86, 7.06, 7.03) @ 2489.3 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.11 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.390 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 1.40 W/kg

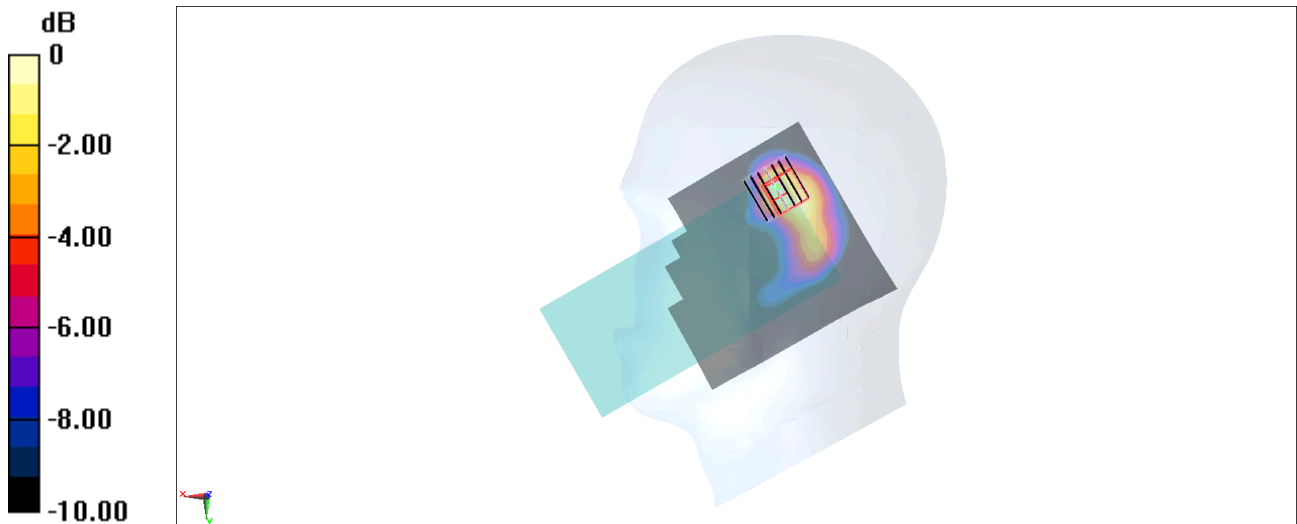

0 dB = 1.40 W/kg = 1.46 dBW/kg

#34_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10571-AAA

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.702 W/kg; SAR (10g) = 0.366 W/kg;

TSL Correction: Positive only

Zoom Scan (55.0 mm x 50.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.13 dB

SAR (1g) = 0.688 W/kg; SAR (8g) = 0.391 W/kg; SAR (10g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.4 %

TSL Correction: Positive only

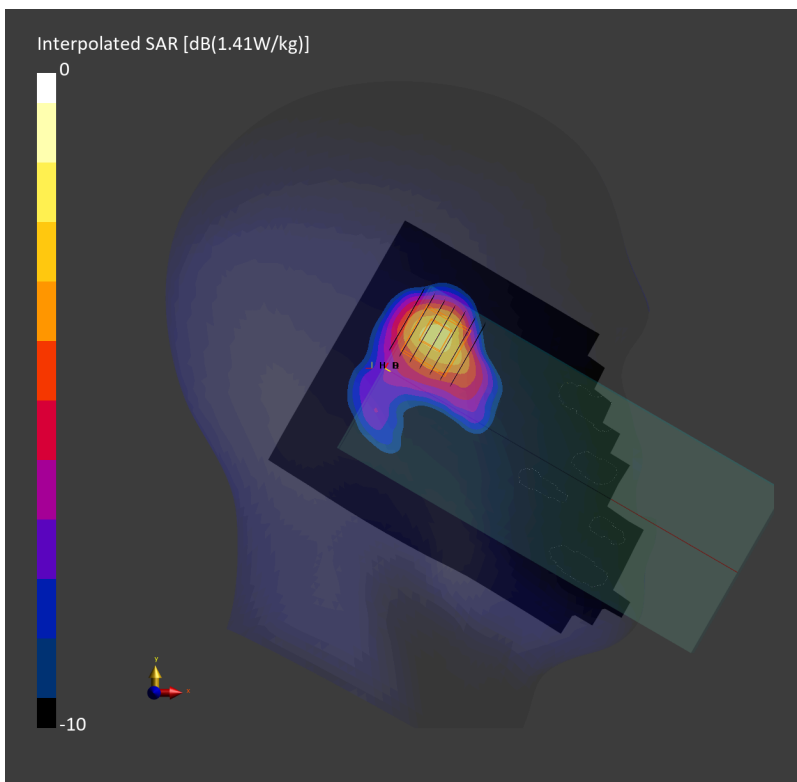

#35_WLAN5GHz_802.11a 6Mbps_Left Cheek_0mm_Ch56

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5280.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f=5280.000$ MHz; $\sigma=4.50$ S/m; $\epsilon_r=34.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.52, 5.62, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10583-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.540 W/kg; SAR (10g) = 0.185 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 36.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.09 dB

SAR (1g) = 0.627 W/kg; SAR (8g) = 0.243 W/kg; SAR (10g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 67.9 %

TSL Correction: Positive only

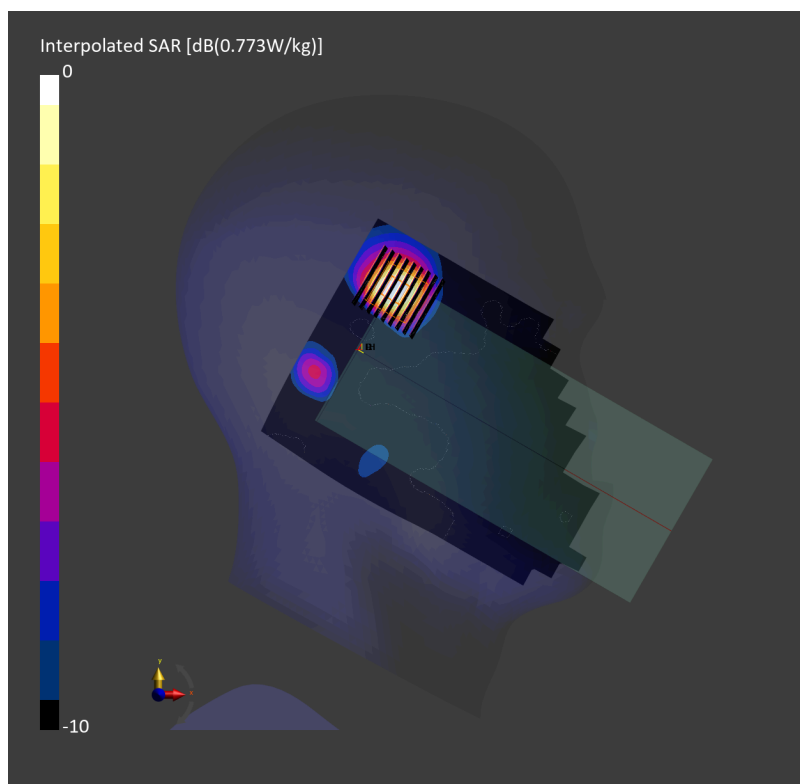

#36_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch138

Communication System: IEEE 802.11ac WiFi; Frequency: 5690.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 4.95$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.15, 5.24, 5.01); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10626-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.645 W/kg; SAR (10g) = 0.231 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.08 dB

SAR (1g) = 0.702 W/kg; SAR (8g) = 0.284 W/kg; SAR (10g) = 0.252 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.5 %

TSL Correction: Positive only

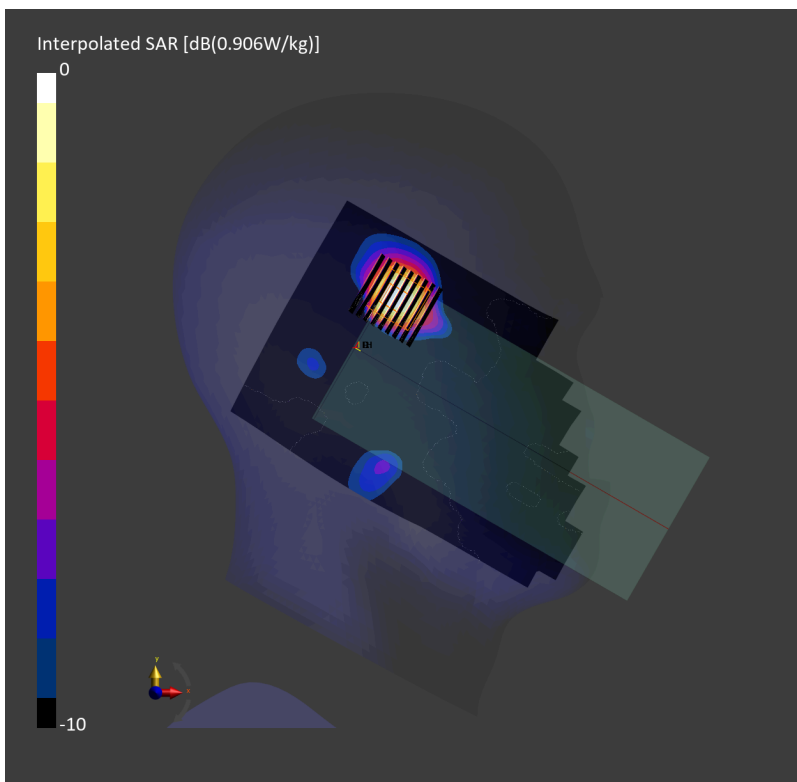

#37_WLAN5GHz_802.11n-HT40 MCS0_Left Cheek_0mm_Ch151

Communication System: IEEE 802.11n; Frequency: 5755.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f=5755.000$ MHz; $\sigma=5.01$ S/m; $\epsilon_r=34.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.627 W/kg; SAR (10g) = 0.221 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.642 W/kg; SAR (8g) = 0.274 W/kg; SAR (10g) = 0.244 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.8 %

TSL Correction: Positive only

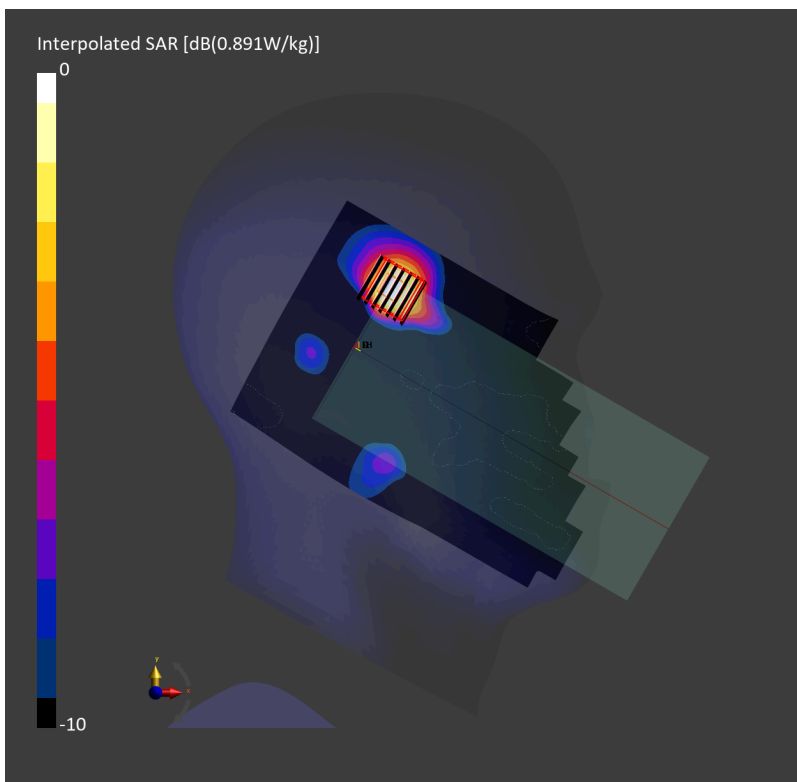

#38_WLAN 6GHz_802.11be-EHT320 MCS0_Left Cheek_0mm_Ch63

Communication System: WiFi; Frequency: 6265.000 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f=6265.000$ MHz; $\sigma=5.91$ S/m; $\epsilon_r=33.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.49, 5.1, 5.45); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026-

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.435 W/kg; SAR (10g) = 0.160 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.19 dB


SAR (1g) = 0.403 W/kg; SAR (8g) = 0.155 W/kg; SAR (10g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.9 %

psAPD (1.0cm², sq) = 4.03 [W/m²]; psAPD (4.0cm², sq) = 3.096 [W/m²]

TSL Correction: Positive only

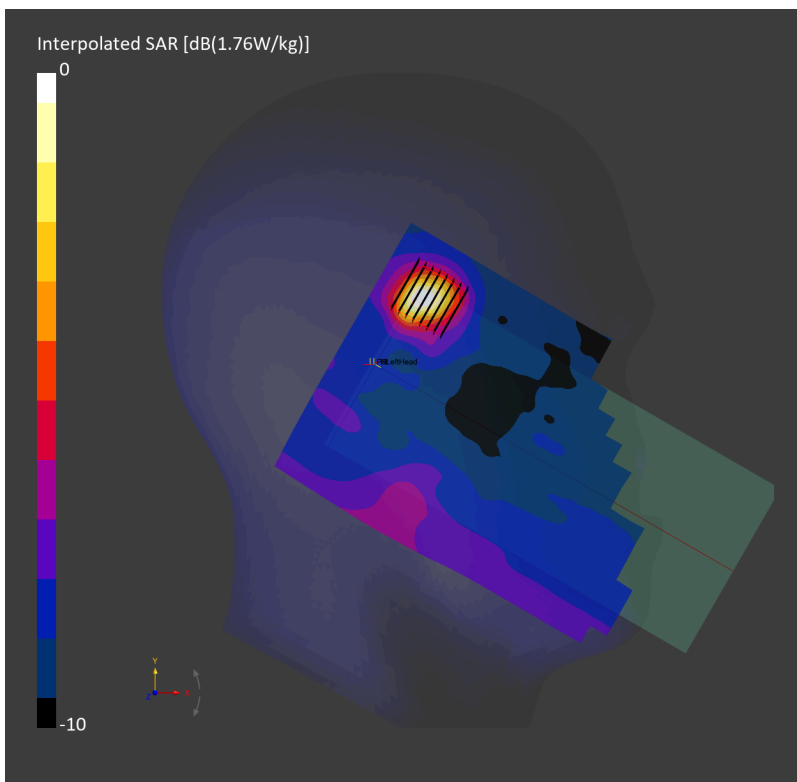

#39_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2441 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 39.748$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.54, 6.53, 6.24) @ 2441 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.373 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.38 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.113 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 0.374 W/kg

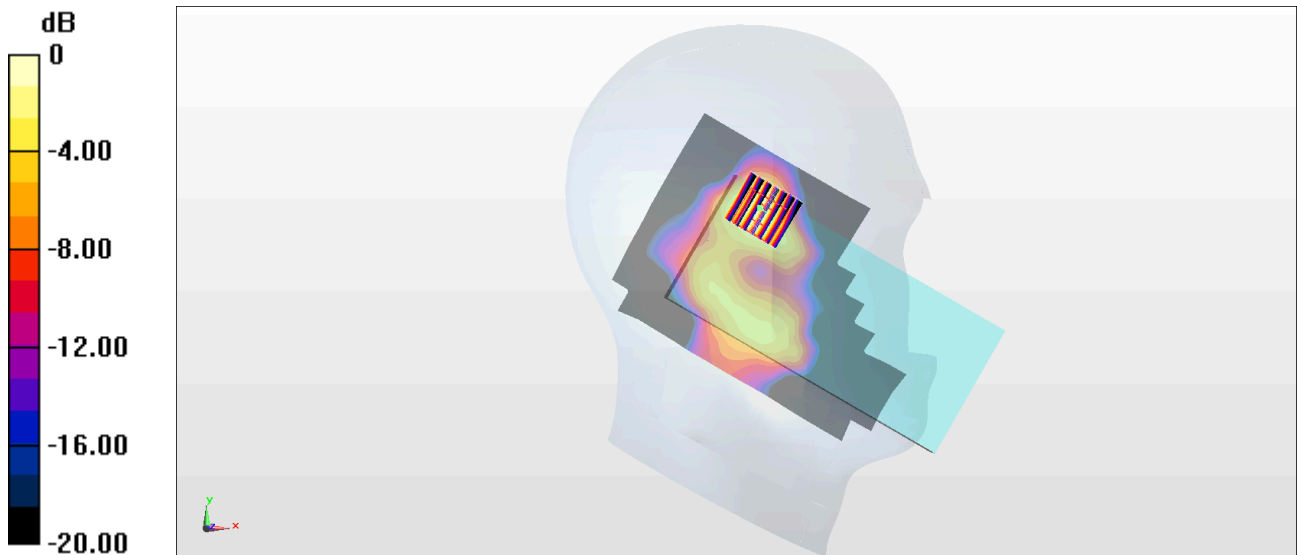

0 dB = 0.374 W/kg = -4.27 dBW/kg

#40_GSM850_GPRS 3 Tx slots_Back_10mm_Ch189

Communication System: UID 10027 - DAC, GPRS-FDD; Frequency: 836.6 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 43.318$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 836.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.72 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.11 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.720 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 1.66 W/kg

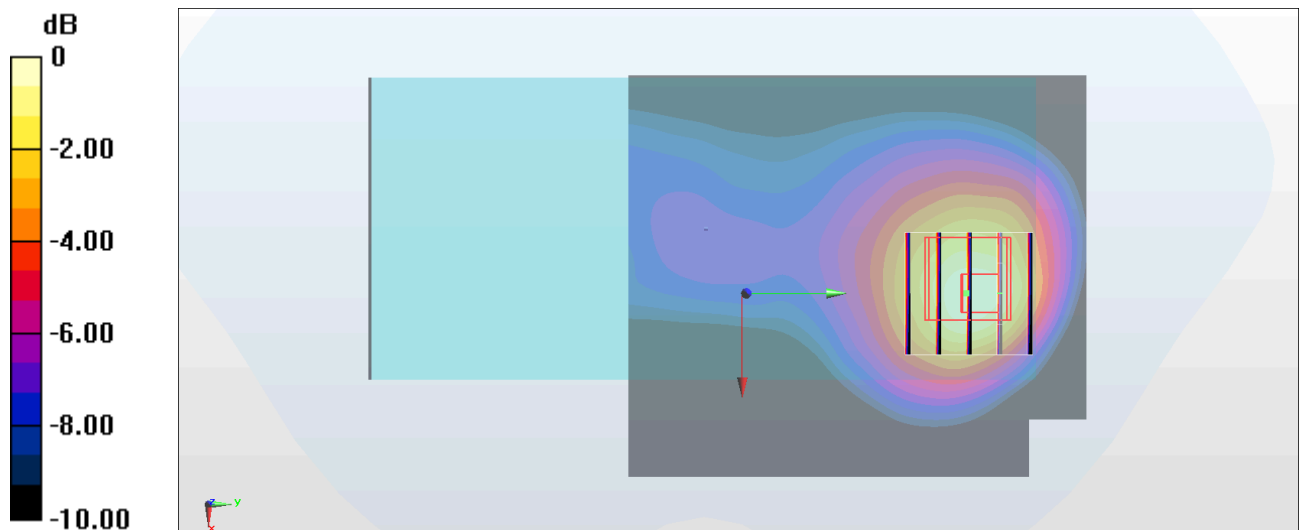

0 dB = 1.66 W/kg = 2.20 dBW/kg

#41_GSM1900_GPRS 3 Tx slots_Right Edge_10mm_Ch810

Communication System: UID 10027 - DAC, GPRS-FDD; Frequency: 1909.8 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 41.626$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61) @ 1909.8 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.798 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.71 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.279 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 0.771 W/kg

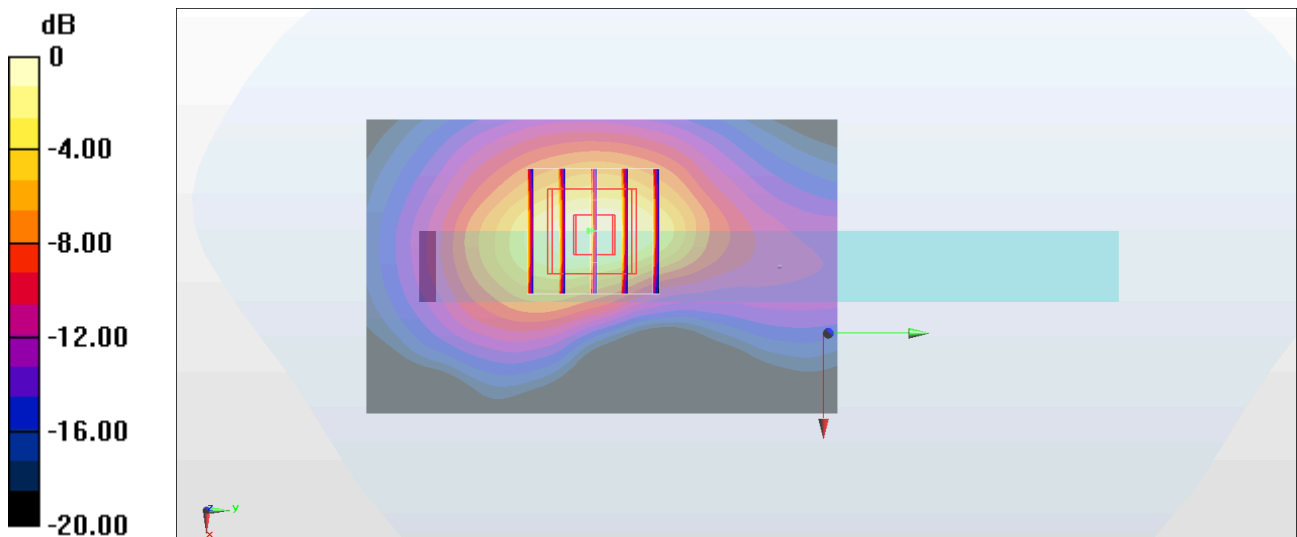

0 dB = 0.771 W/kg = -1.13 dBW/kg

#42_WCDMA II_RMC 12.2Kbps_Right Edge_10mm_Ch9400

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1880 MHz

Medium: HSL_600~7200_260812 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 40.77$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1880 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.949 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.73 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.318 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.917 W/kg

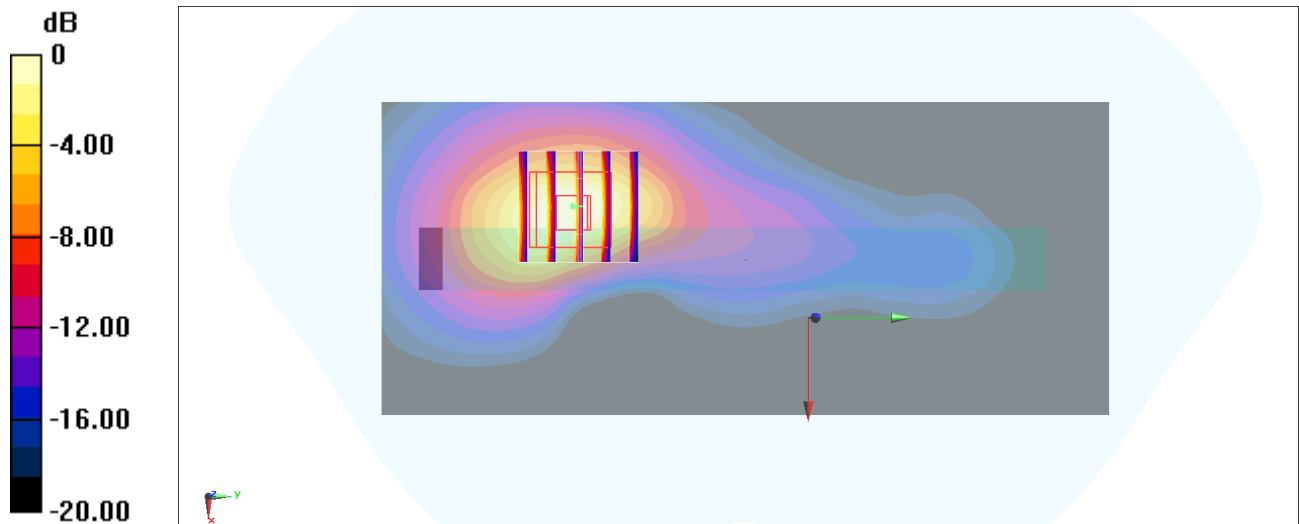

0 dB = 0.917 W/kg = -0.38 dBW/kg

#43_WCDMA IV_RMC 12.2Kbps_Right Edge_10mm_Ch1513

Communication System: UID 10011 - CAC, UMTS-FDD ; Frequency: 1752.6 MHz

Medium: HSL_600-7200_260814 Medium parameters used : $f = 1752.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 41.714$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05) @ 1752.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.42 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.69 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.526 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 1.32 W/kg

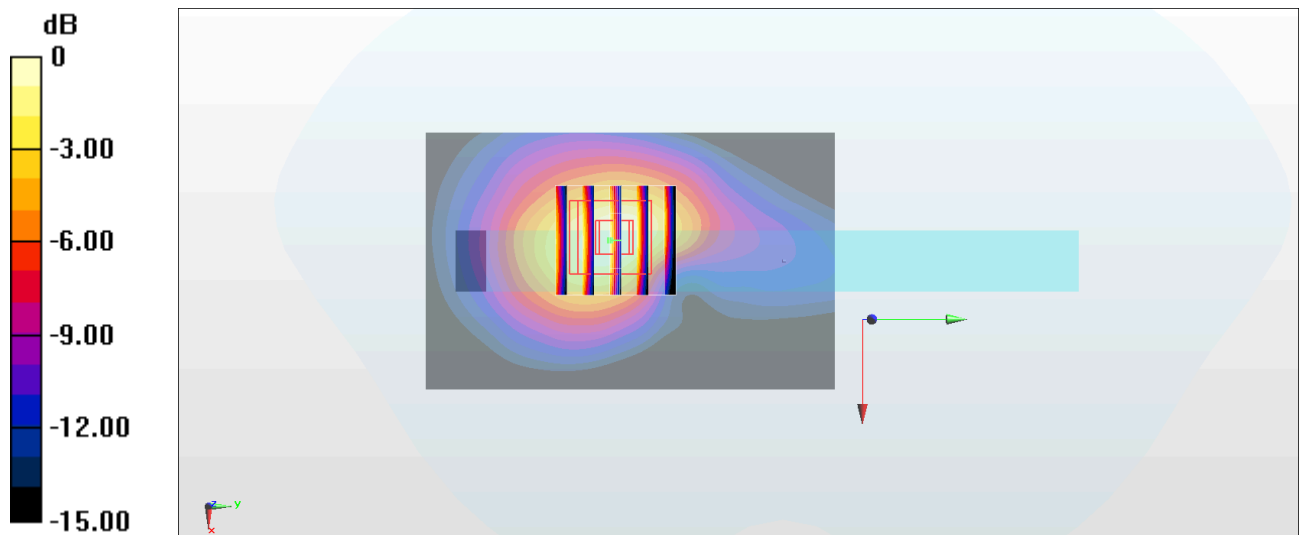

#44_WCDMA V_RMC12.2 Kbps_Back_10mm_Ch4132

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 826.4 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 43.349$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 826.4 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.573 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.35 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.281 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.4%

Maximum value of SAR (measured) = 0.539 W/kg

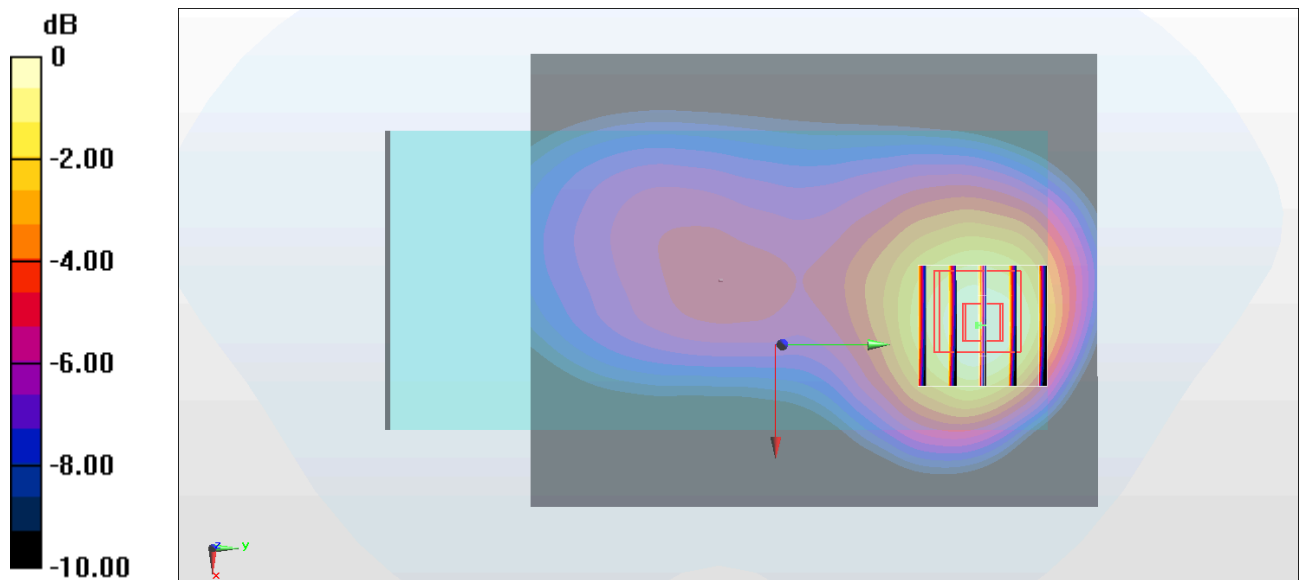

0 dB = 0.539 W/kg = -2.68 dBW/kg

#45_LTE Band 7_20M_QPSK_1_0_Back_10mm_Ch21350

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2560 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 39.049$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2560 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.50 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.509 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 1.66 W/kg

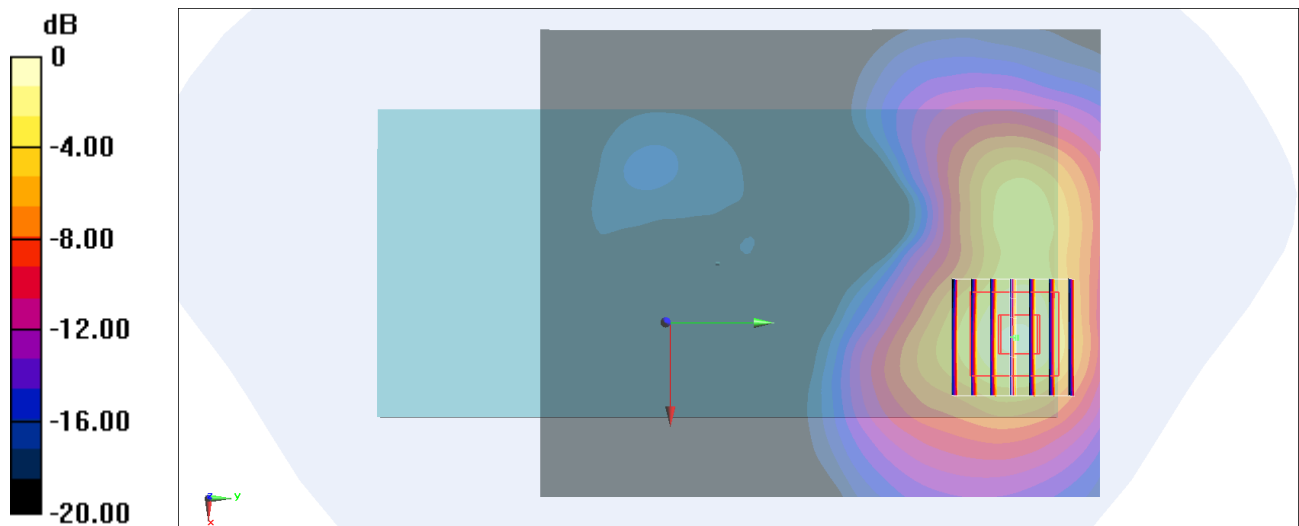

0 dB = 1.66 W/kg = 2.20 dBW/kg

#46_LTE Band 12_10M_QPSK_1_0_Back_10mm_Ch23095

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 707.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.85$ S/m; $\epsilon_r = 43.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 707.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.716 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.76 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.274 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.696 W/kg

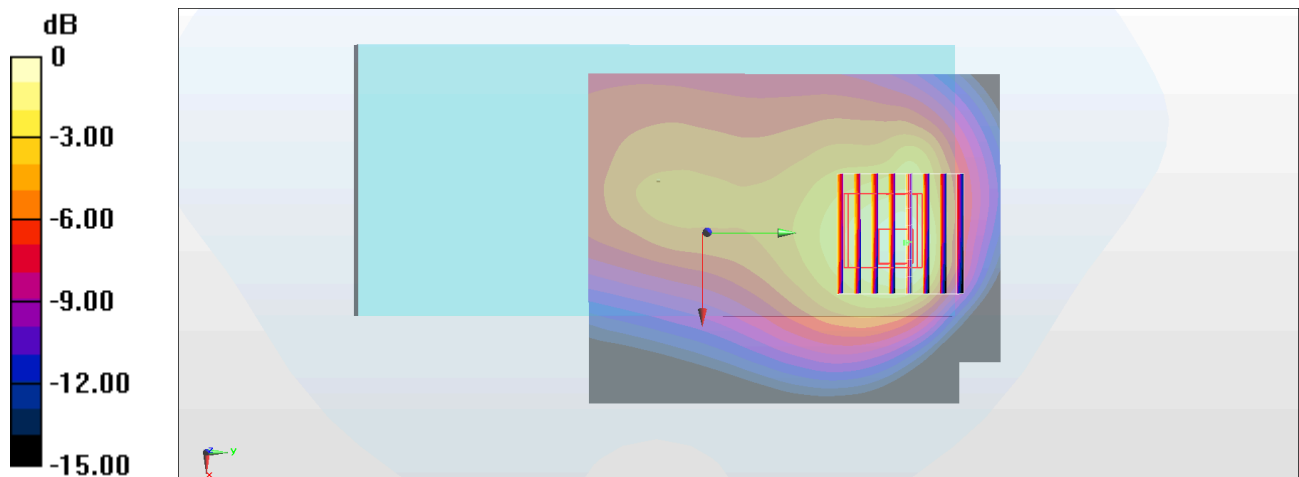

0 dB = 0.696 W/kg = -1.57 dBW/kg

#47_LTE Band 13_10M_QPSK_1_0_Back_10mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 782 MHz

Medium: HSL_600~7200_260813 Medium parameters used : $f = 782$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 43.506$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 782 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.878 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.90 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.338 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.770 W/kg

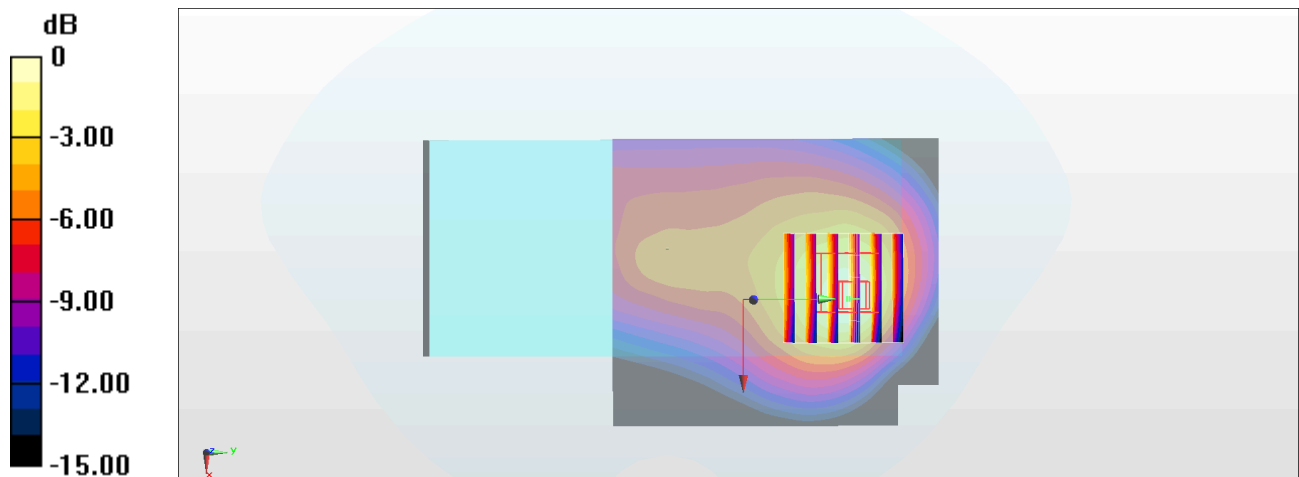

0 dB = 0.770 W/kg = -1.14 dBW/kg

#48_LTE Band 14_10M_QPSK_1_0_Back_10mm_Ch23330

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 793 MHz

Medium: HSL_600~7200_260813 Medium parameters used : $f = 793$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 43.478$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 793 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.85 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.696 W/kg; SAR(10 g) = 0.431 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 0.970 W/kg

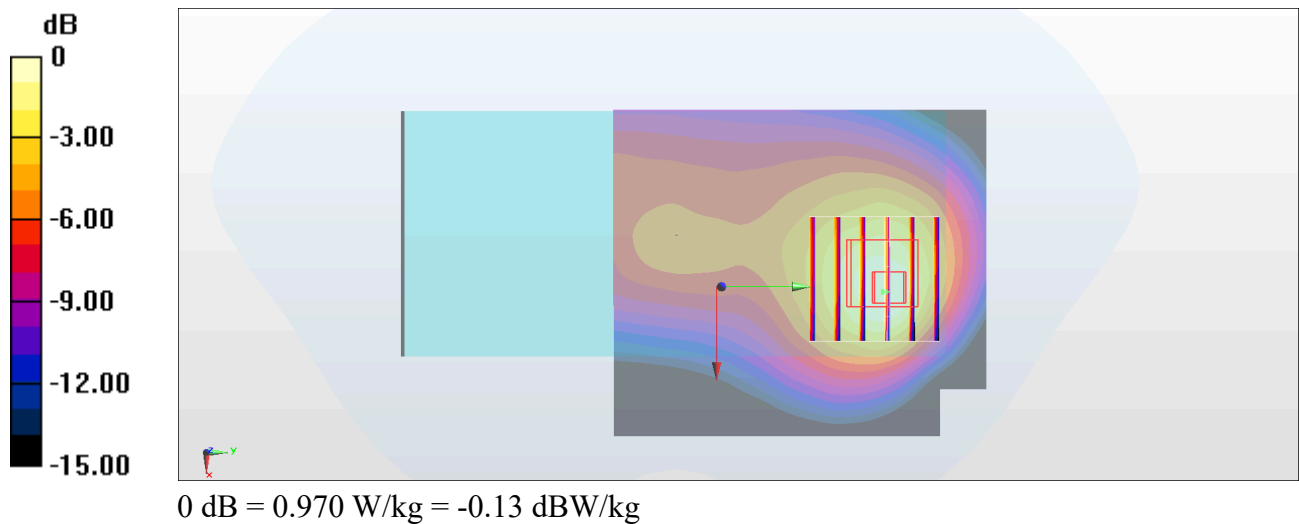

#49_LTE Band 25_20M_QPSK_1_0_Right Edge_10mm_Ch26340

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1880 MHz

Medium: HSL_600~7200_260812 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 40.77$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1880 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 31.37 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.419 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 1.25 W/kg

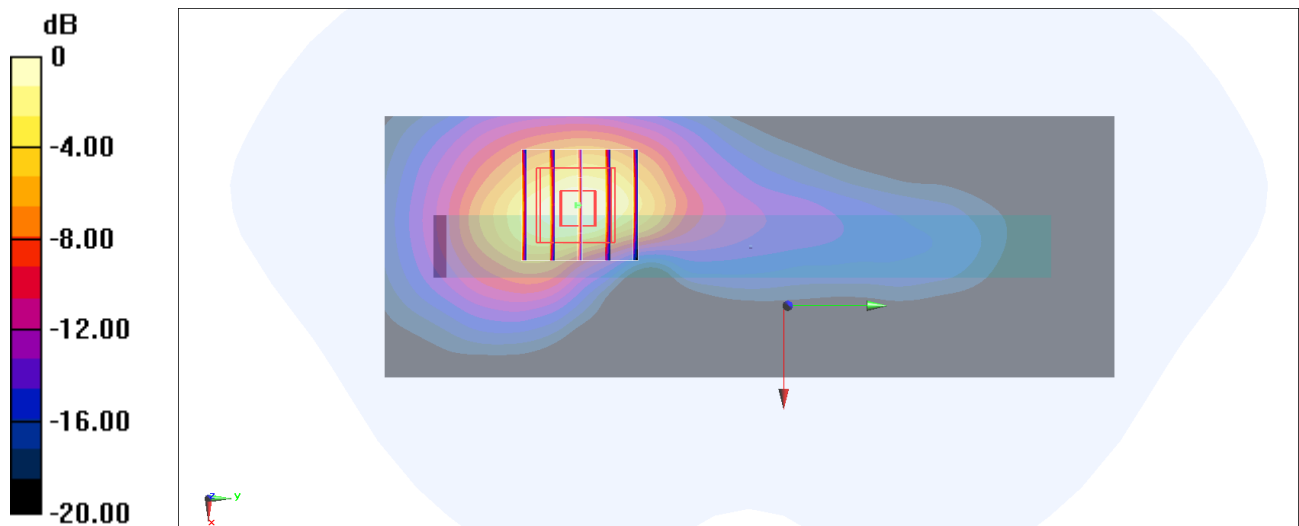

0 dB = 1.25 W/kg = 0.97 dBW/kg

#50_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: UID 10181 - CAF, LTE-FDD ; Frequency: 831.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.332$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 831.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.40 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 41.34 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.913 W/kg; SAR(10 g) = 0.567 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 1.29 W/kg

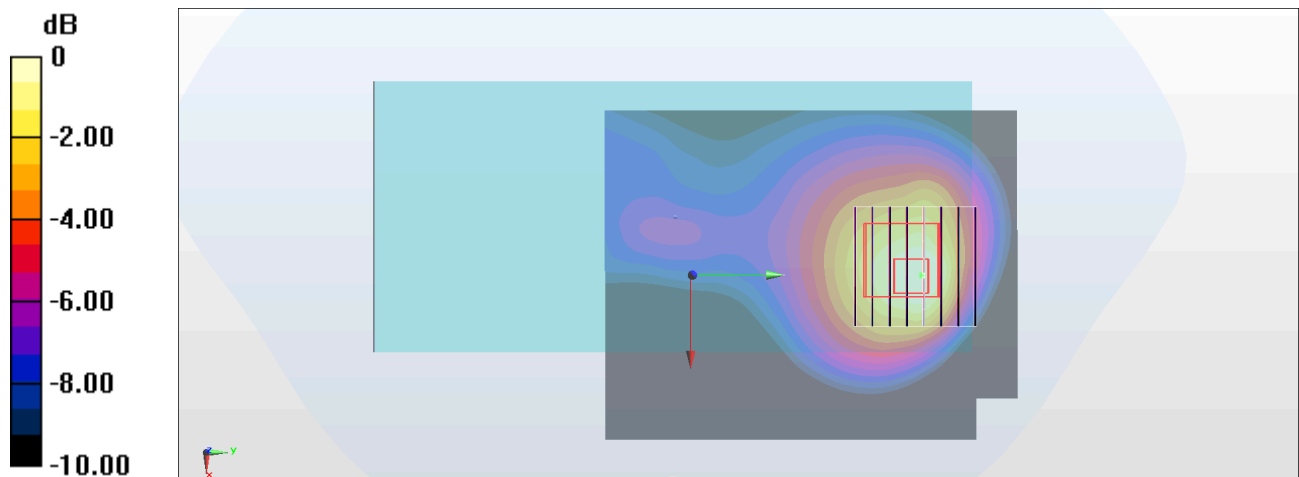

0 dB = 1.29 W/kg = 1.11 dBW/kg

#51_LTE Band 30_10M_QPSK_1_0_Back_10mm_Ch27710

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2310 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.417$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.11, 7.32, 7.29) @ 2310 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.88 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.96 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.472 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 1.38 W/kg

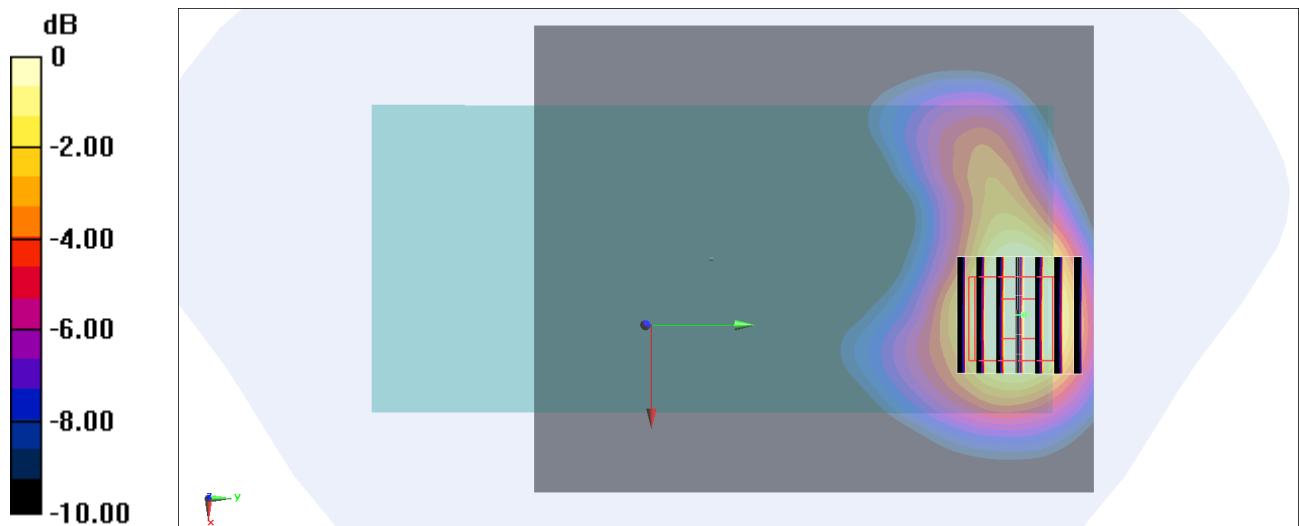

0 dB = 1.38 W/kg = 1.40 dBW/kg

#52_LTE Band 66_20M_QPSK_1_0_Right Edge_10mm_Ch132572

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1770 MHz

Medium: HSL_600~7200_260812 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.892$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1770 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.51 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.580 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 1.60 W/kg

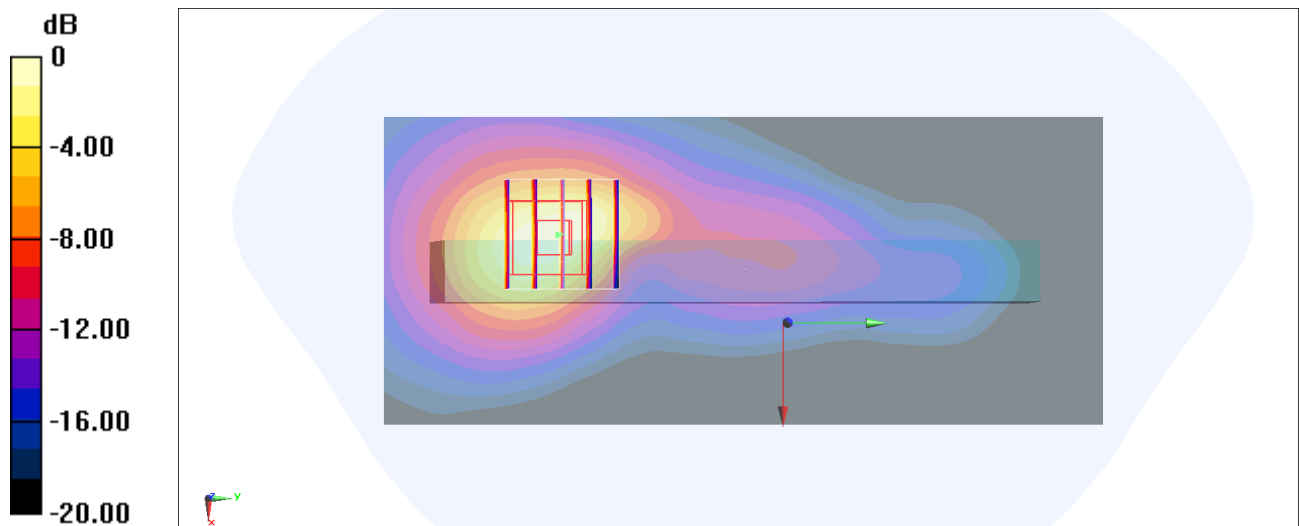

0 dB = 1.60 W/kg = 2.04 dBW/kg