

#53_LTE Band 71_20M_QPSK_1_0_Back_10mm_Ch133297

Communication System: UID 10169 - CAF, LTE-FDD ; Frequency: 680.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used : $f = 680.5$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 43.848$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 680.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.634 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.97 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.224 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.576 W/kg

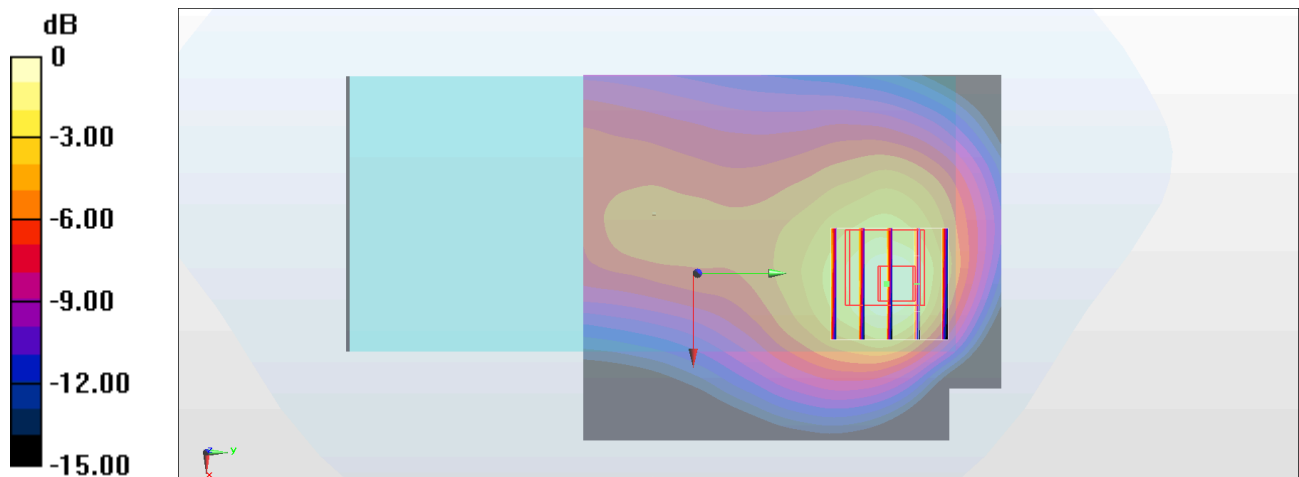

#54_LTE Band 106_3M_QPSK_1_0_Back_10mm_Ch134322

Communication System: UID 10184 - CAF, LTE-FDD; Frequency: 899 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 899$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 43.284$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.57, 8.56, 8.18) @ 899 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.202 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.87 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.102 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 0.228 W/kg

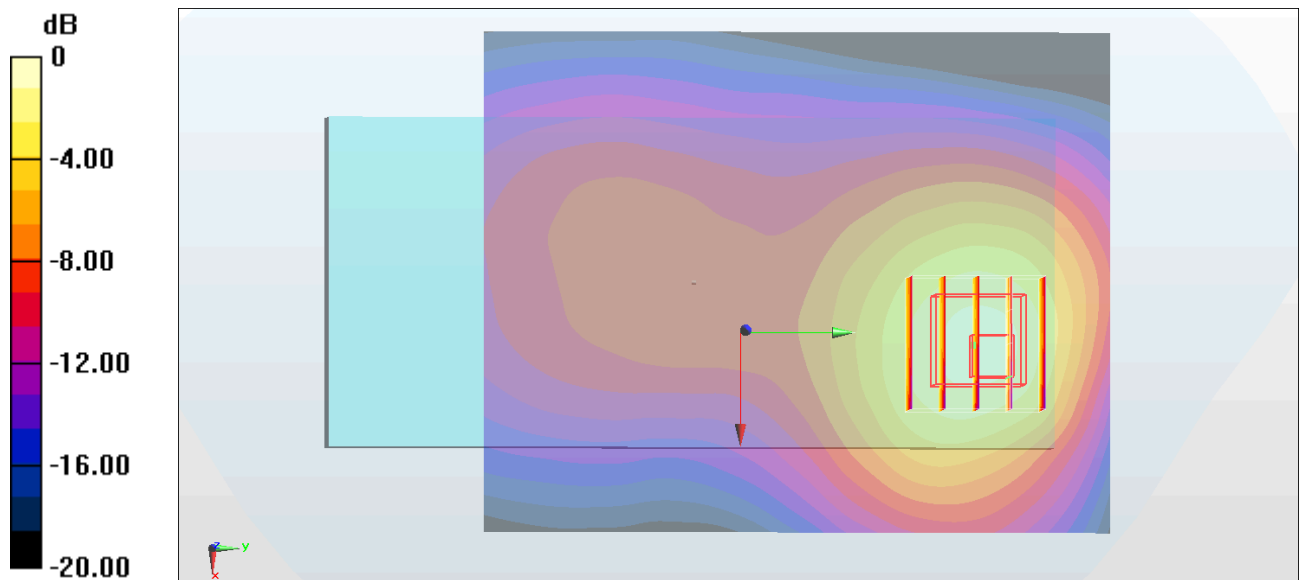

0 dB = 0.228 W/kg = -6.42 dBW/kg

#55_LTE Band 70_15M_QPSK_1_0_Back_10mm_Ch133047

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1702.5 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1702.5$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 41.987$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05) @ 1702.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.07 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 30.30 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.487 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.9%

Maximum value of SAR (measured) = 1.03 W/kg

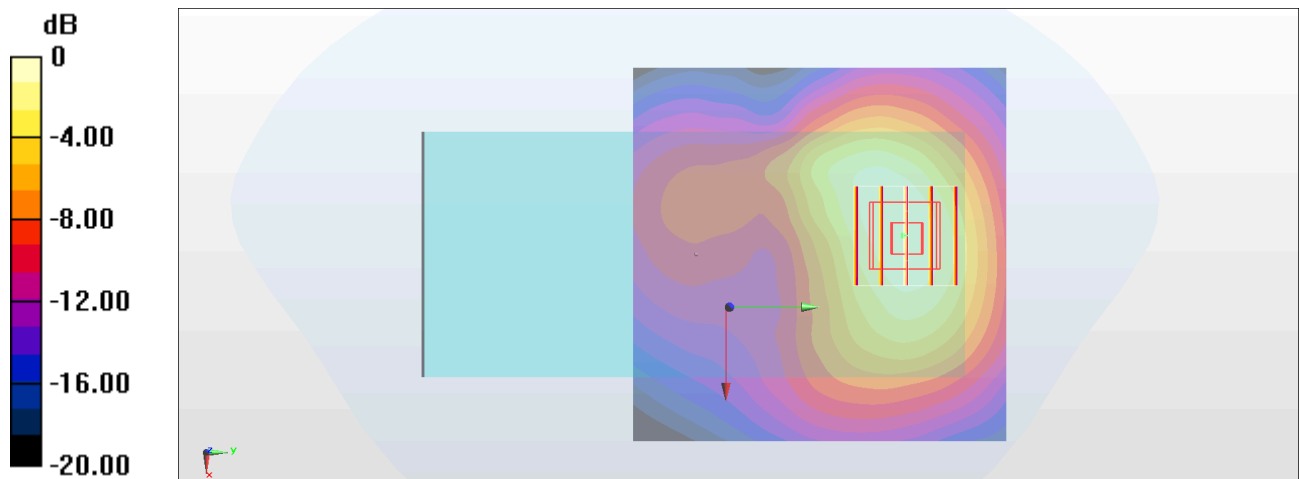

0 dB = 1.03 W/kg = 0.13 dBW/kg

#56_LTE Band 41_20M_QPSK_1_0_Back_10mm_Ch41055

Communication System: UID 10172 - CAH, LTE-TDD; Frequency: 2636.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 38.92$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2636.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.52 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.40 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.521 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.63 W/kg

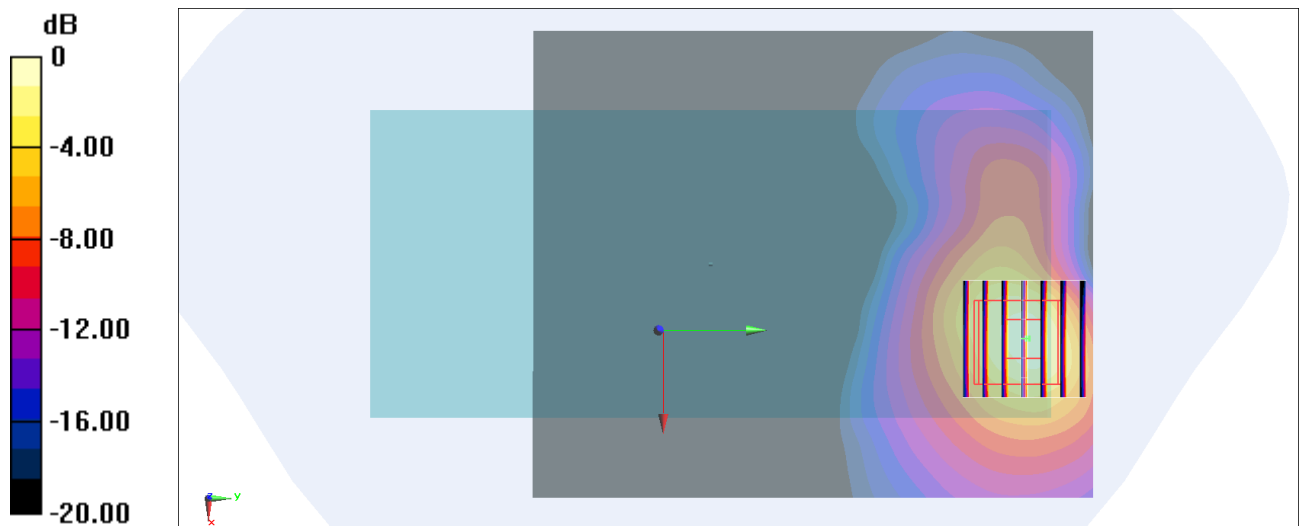

0 dB = 1.63 W/kg = 2.12 dBW/kg

#57_LTE Band 48_20M_QPSK_1_0_Back_10mm_Ch56640

Communication System: UID 10435 - AAG, LTE-TDD ; Frequency: 3690 MHz

Medium: HSL_600-7200_260812 Medium parameters used : $f = 3690$ MHz; $\sigma = 2.915$ S/m; $\epsilon_r = 38.493$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63) @ 3690 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.38 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 28.66 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.539 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 2.14 W/kg

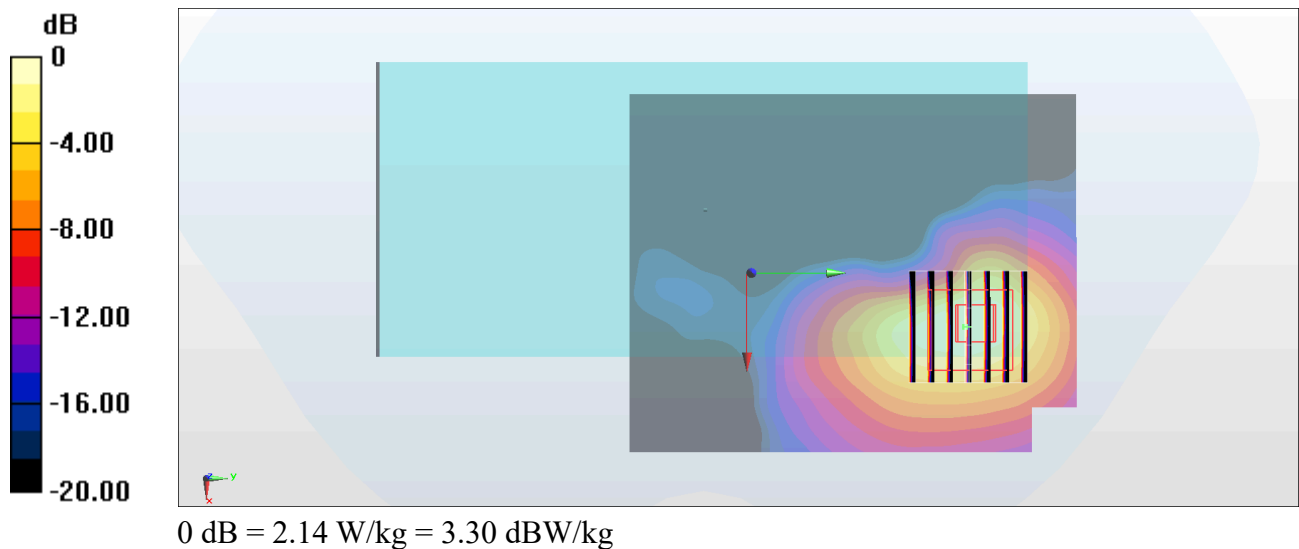

#58_LTE Band 53_10M_QPSK_1_0_Back_10mm_Ch60198

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2489.3 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2490$ MHz; $\sigma = 1.884$ S/m; $\epsilon_r = 39.158$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.86, 7.06, 7.03) @ 2489.3 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.64 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.411 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 1.28 W/kg

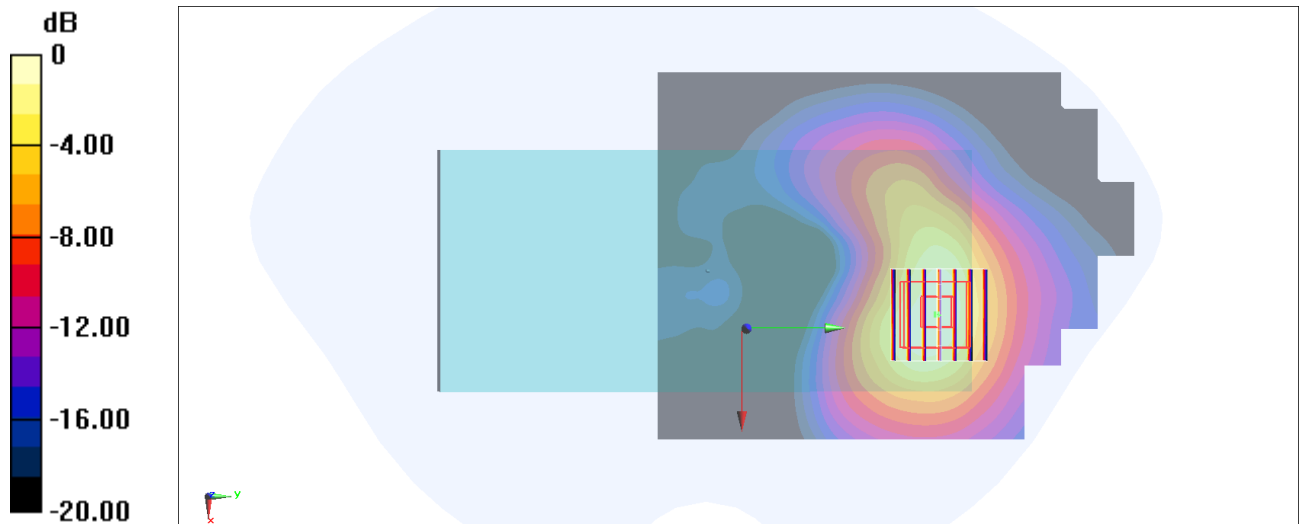

0 dB = 1.28 W/kg = 1.07 dBW/kg

#59_FR1 n7_50M_BPSK_1_1_Back_10mm_Ch507000

Communication System: UID 10935 - AAD, 5G NR; Frequency: 2535 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.09$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.54, 6.8, 6.94) @ 2535 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.52 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.86 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.526 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 1.54 W/kg

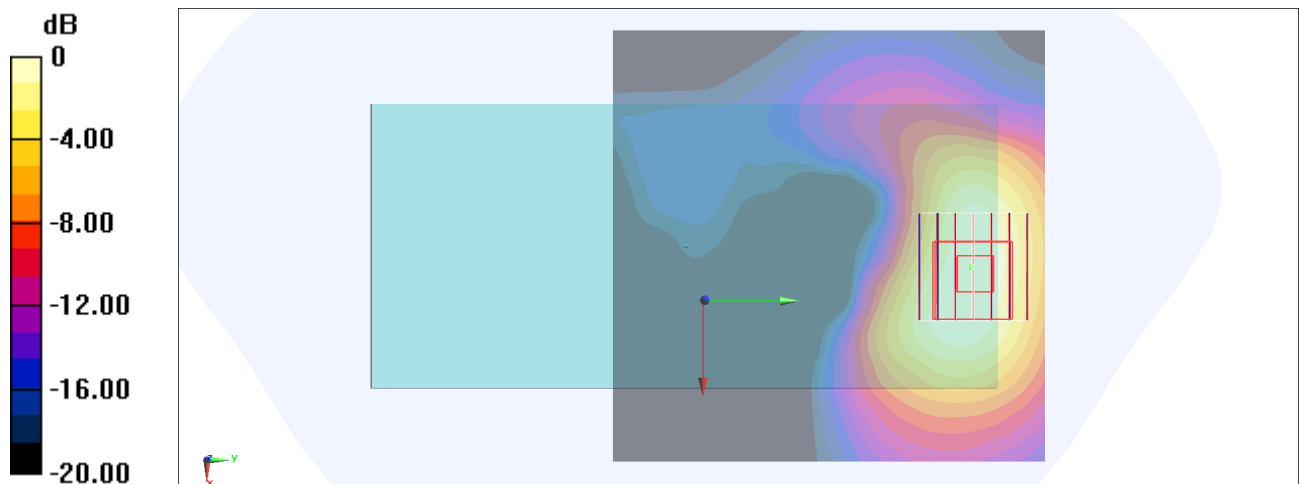

0 dB = 1.54 W/kg = 1.88 dBW/kg

#60_FR1 n12_15M_BPSK_1_1_Back_10mm_Ch141500

Communication System: UID 10930 - AAC, 5G NR; Frequency: 707.5 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.932$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 707.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.374 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.69 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.167 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 0.344 W/kg

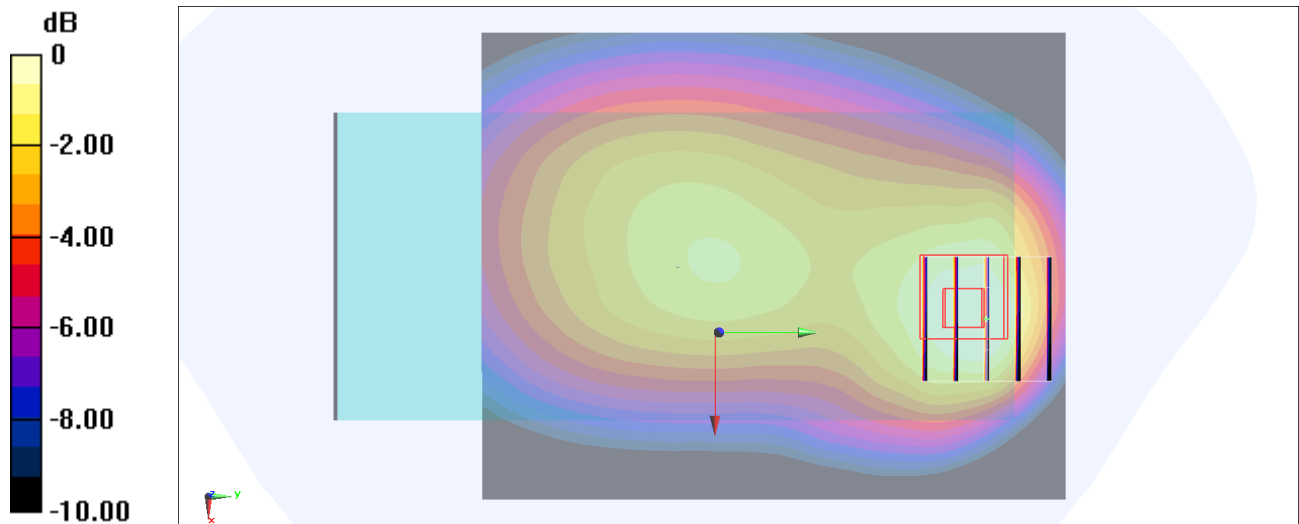

0 dB = 0.344 W/kg = -4.63 dBW/kg

#61_FR1 n13_10M_BPSK_1_1_Back_10mm_Ch156400

Communication System: UID 10929 - AAD, 5G NR; Frequency: 782 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 782$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 42.704$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 782 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.446 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.30 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.240 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 0.515 W/kg

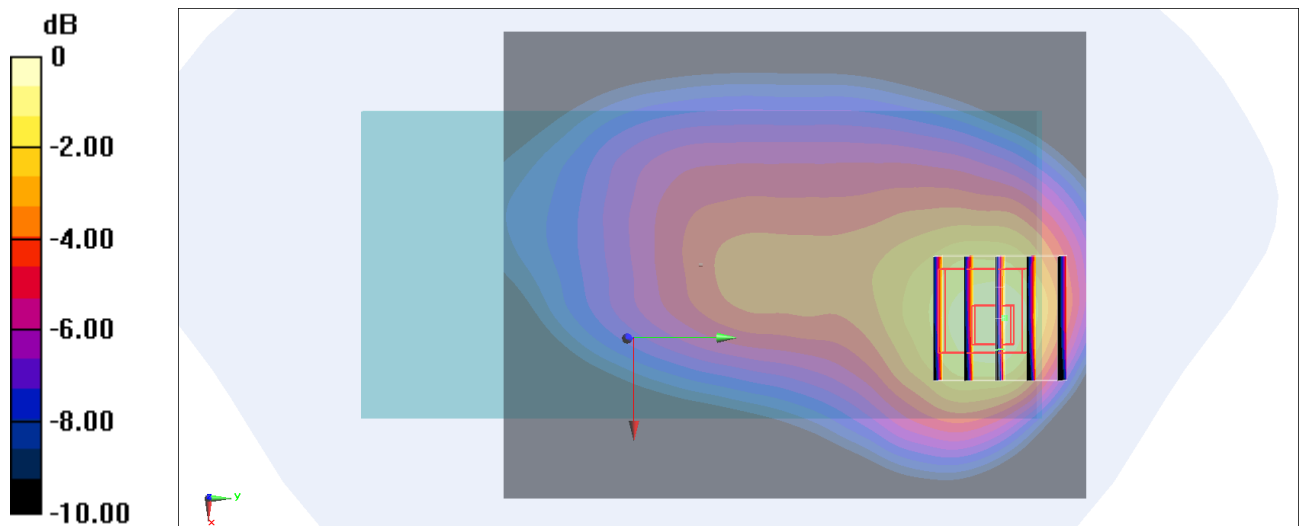

0 dB = 0.515 W/kg = -2.88 dBW/kg

#62_FR1 n14_10M_BPSK_1_1_Back_10mm_Ch158600

Communication System: UID 10929 - AAD, 5G NR; Frequency: 793 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 793$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.666$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 793 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.560 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.03 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.264 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 0.507 W/kg

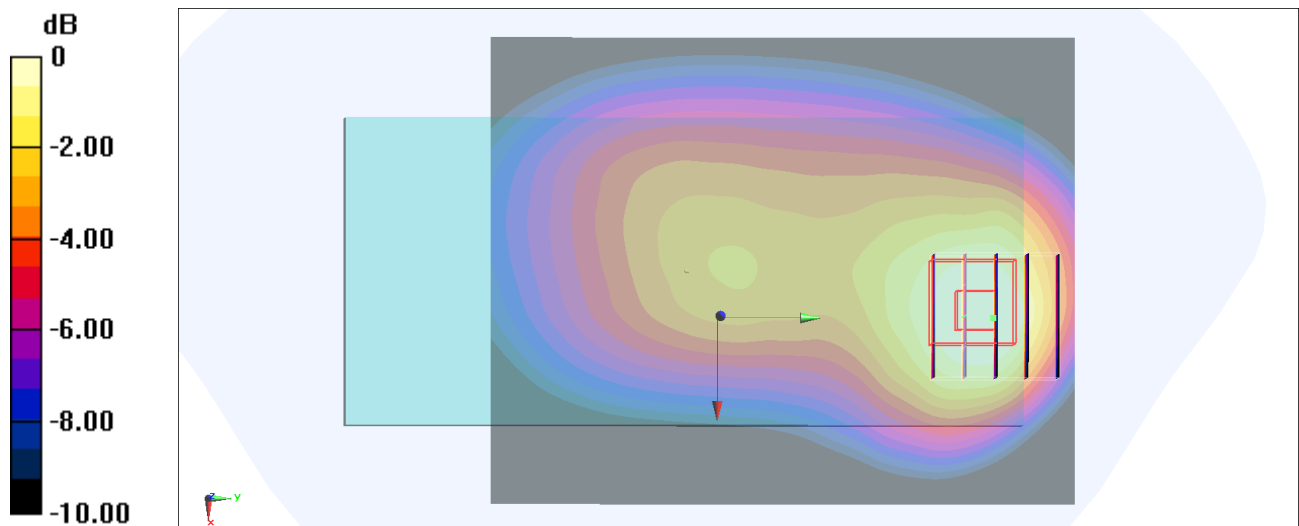

0 dB = 0.507 W/kg = -2.95 dBW/kg

#63_FR1 n25_40M_BPSK_1_1_Right Edge_10mm_Ch376500

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1882.5 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1882.5$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 40.76$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1882.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.48 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.424 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 1.26 W/kg

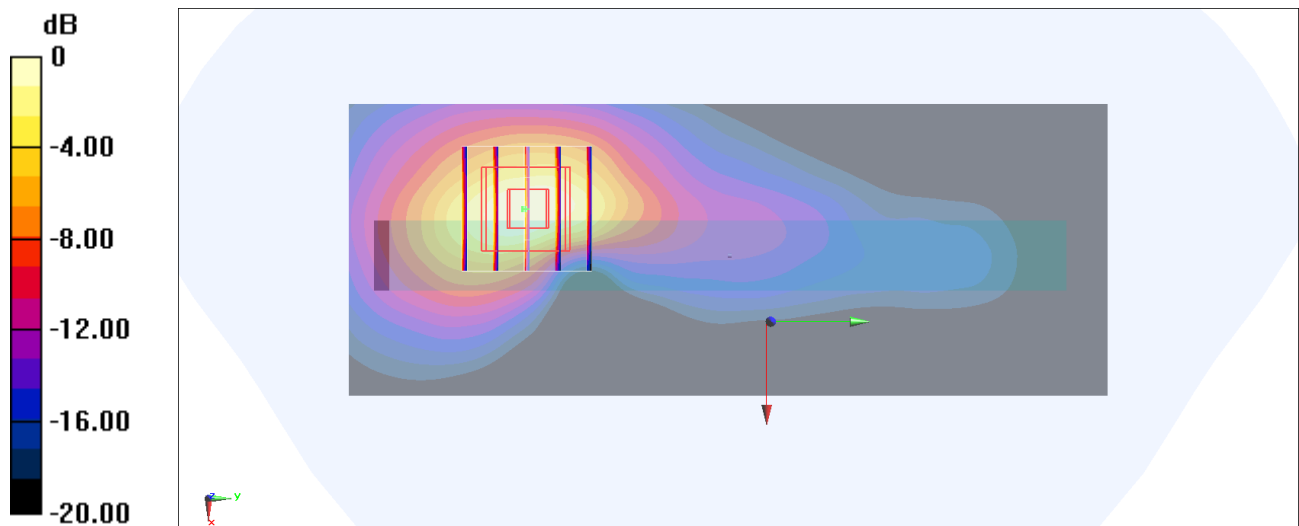

0 dB = 1.26 W/kg = 1.00 dBW/kg

#64_FR1 n26_20M_BPSK_1_1_Back_10mm_Ch166300

Communication System: UID 10931 - AAC, 5G NR; Frequency: 831.5 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 42.567$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.13, 9.4, 9.35) @ 831.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.21 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.425 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 0.924 W/kg

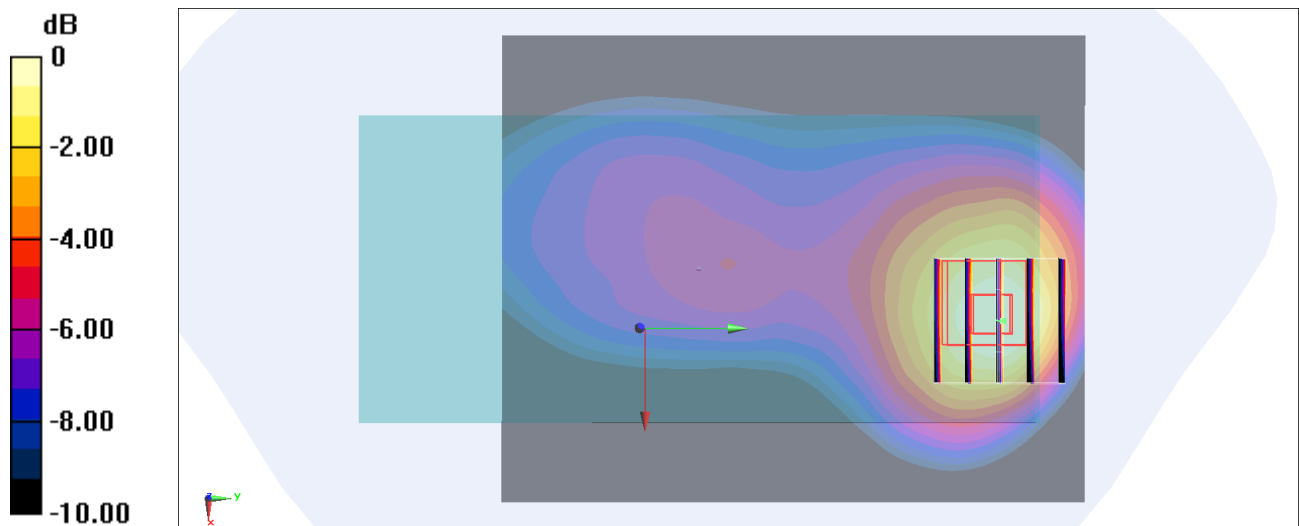

0 dB = 0.924 W/kg = -0.34 dBW/kg

#65_FR1 n30_10M_BPSK_1_1_Back_10mm_Ch462000

Communication System: UID 10929 - AAD, 5G NR; Frequency: 2310 MHz

Medium: HSL_600-7200_260812 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 40.872$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.72, 6.71, 6.41) @ 2310 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.64 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 33.18 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.576 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 1.47 W/kg

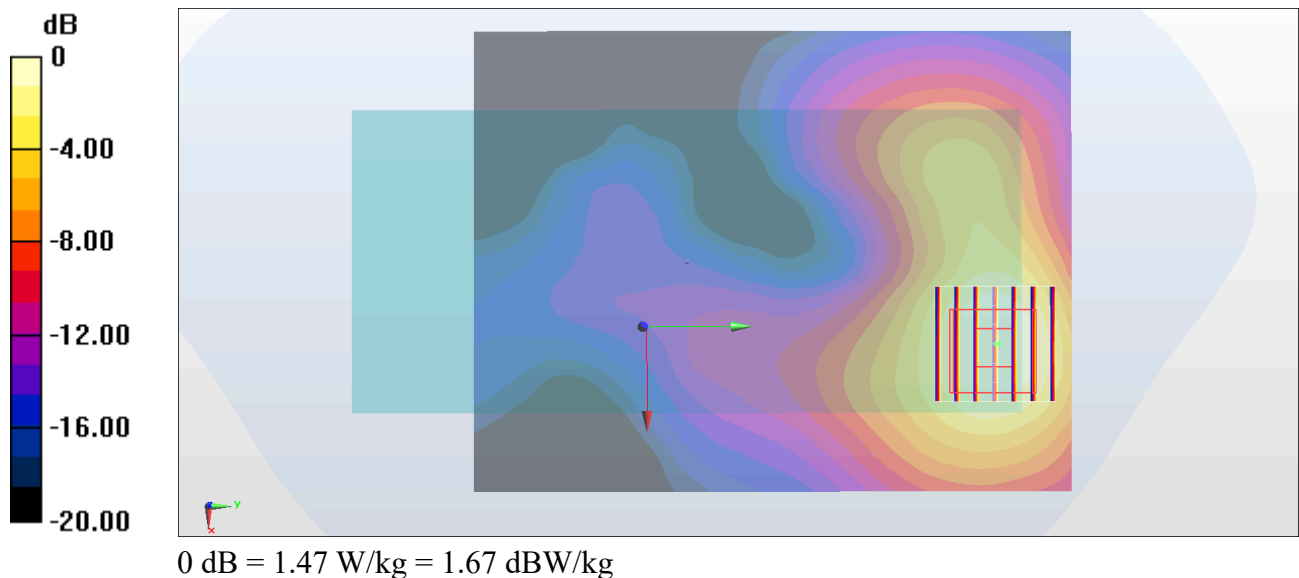

#66_FR1 n66_40M_BPSK_1_1_Right Edge_10mm_Ch349000

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1745 MHz

Medium: HSL_600~7200_260812 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; ϵ_r

$= 40.972$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1745 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.07 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 29.17 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.404 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 1.03 W/kg

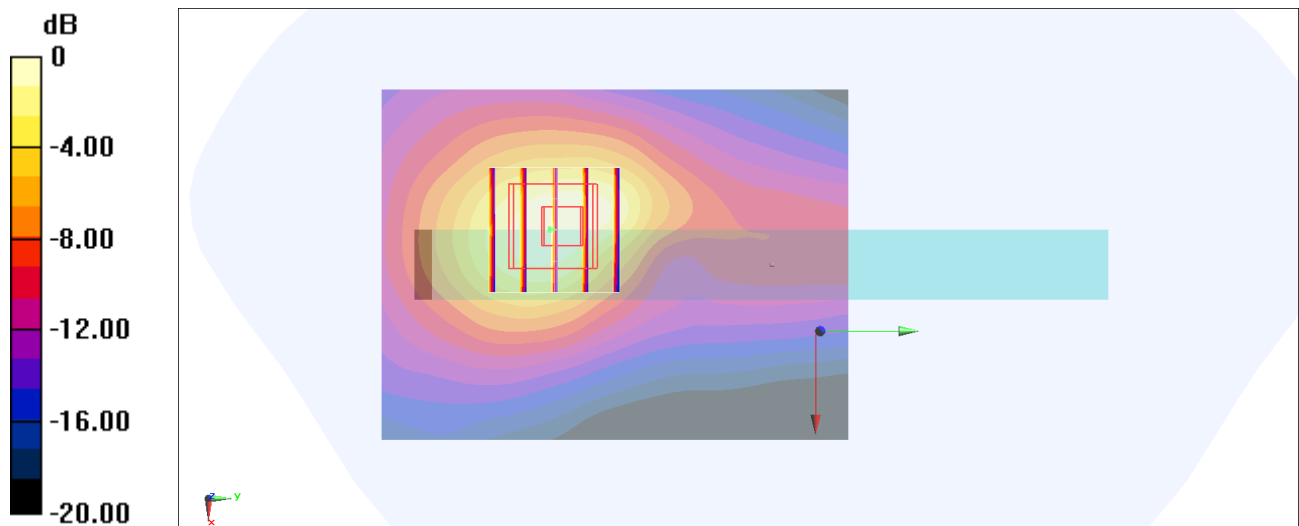

0 dB = 1.03 W/kg = 0.13 dBW/kg

#67_FR1 n70_15M_BPSK_1_1_Back_10mm_Ch340500

Communication System: UID 10930 - AAC, 5G NR ; Frequency: 1702.5 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1702.5$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.893$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1702.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.27 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.495 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 1.16 W/kg

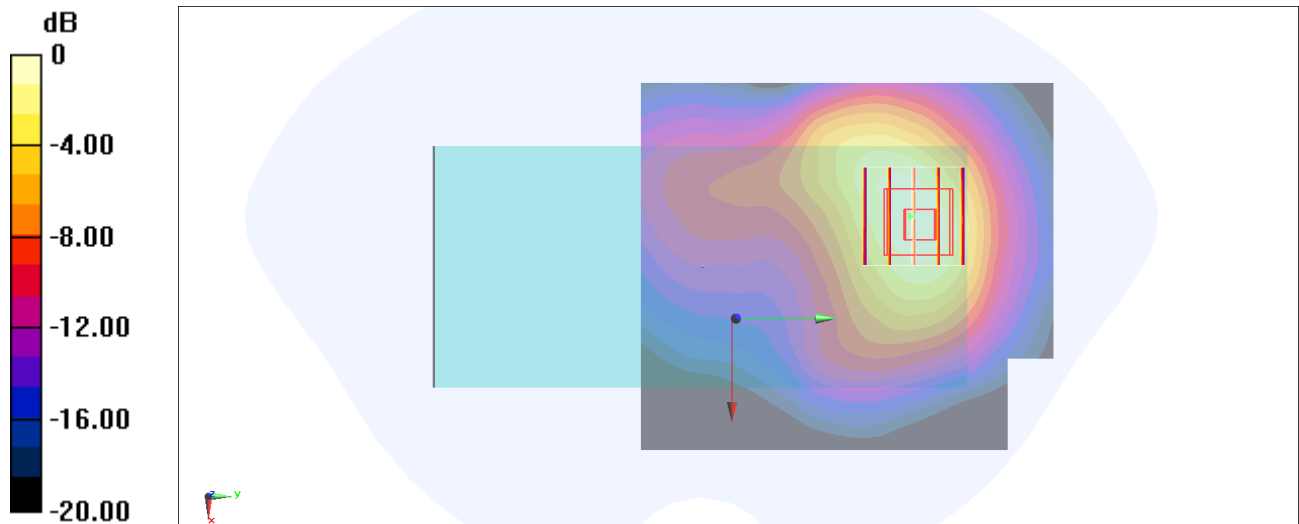

0 dB = 1.16 W/kg = 0.64 dBW/kg

#68_FR1 n71_20M_BPSK_1_1_Back_10mm_Ch136100

Communication System: UID 10931 - AAC, 5G NR; Frequency: 680.5 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 43.042$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 680.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.270 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.16 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.122 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.265 W/kg

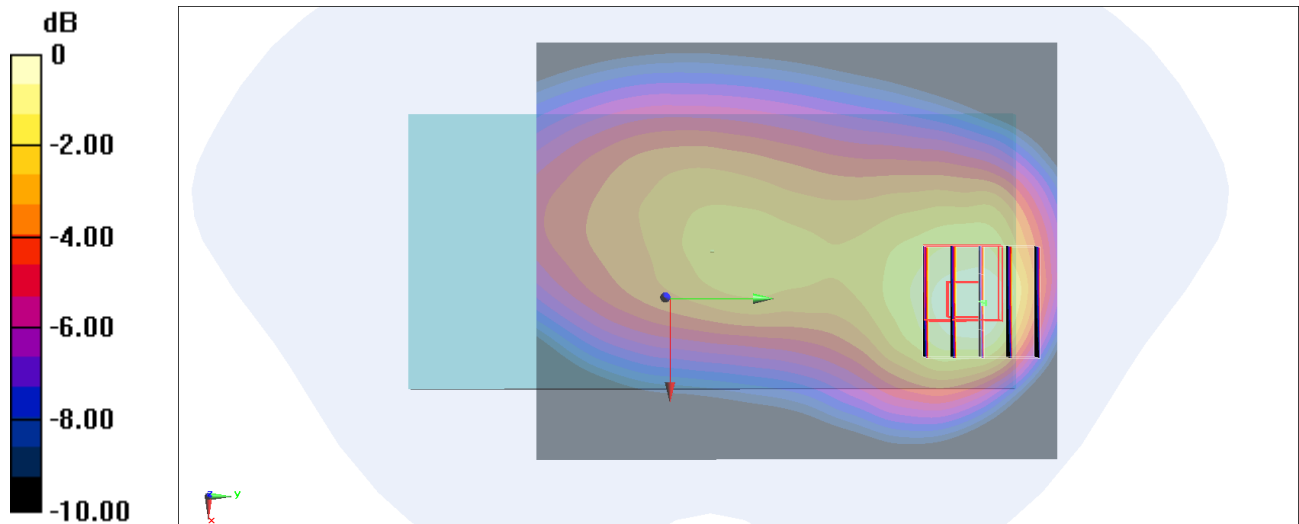

0 dB = 0.265 W/kg = -5.77 dBW/kg

#69_FR1 n41_100M_BPSK_1_1_Back_10mm_Ch518598

Communication System: UID 10866 - AAF, 5G NR; Frequency: 2592.99 MHz

Medium: HSL_600-7200_260812 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 40.492$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43) @ 2592.99 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.15 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.991 W/kg; SAR(10 g) = 0.546 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 1.36 W/kg

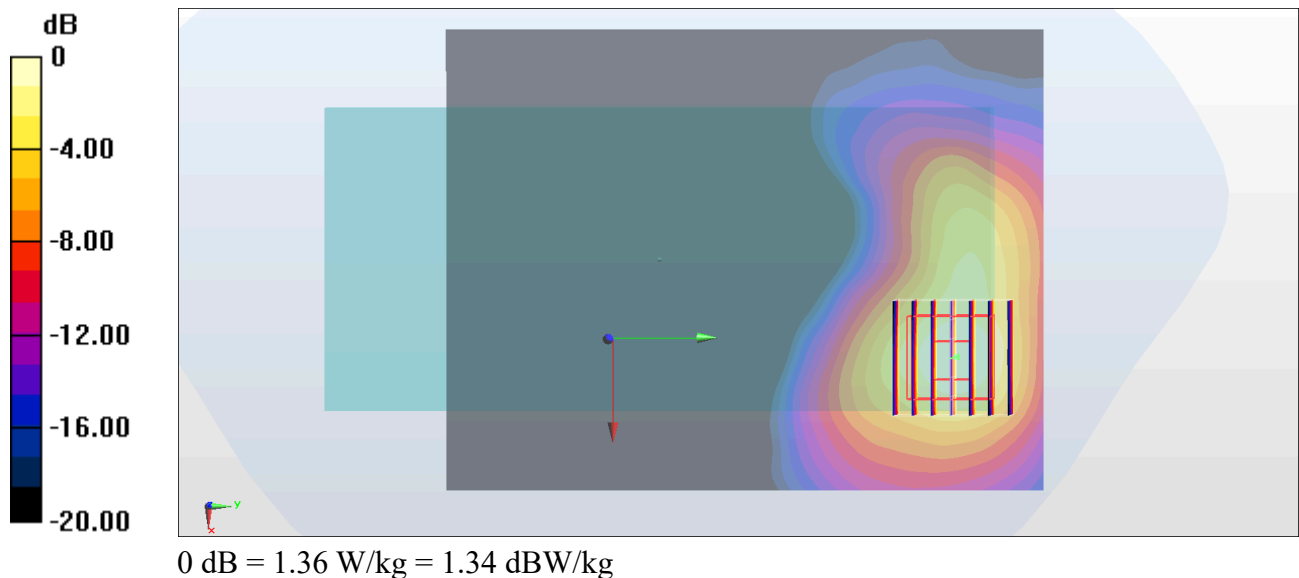

#70_FR1 n48_40M_BPSK_1_1_Back_10mm_Ch645332

Communication System: UID 10903 - AAD, 5G NR ; Frequency: 3679.98 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 3680$ MHz; $\sigma = 2.907$ S/m; $\epsilon_r = 37.561$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3679.98 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.22 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 29.90 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 0.9 W/kg; SAR(10 g) = 0.393 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.6%

Maximum value of SAR (measured) = 2.28 W/kg

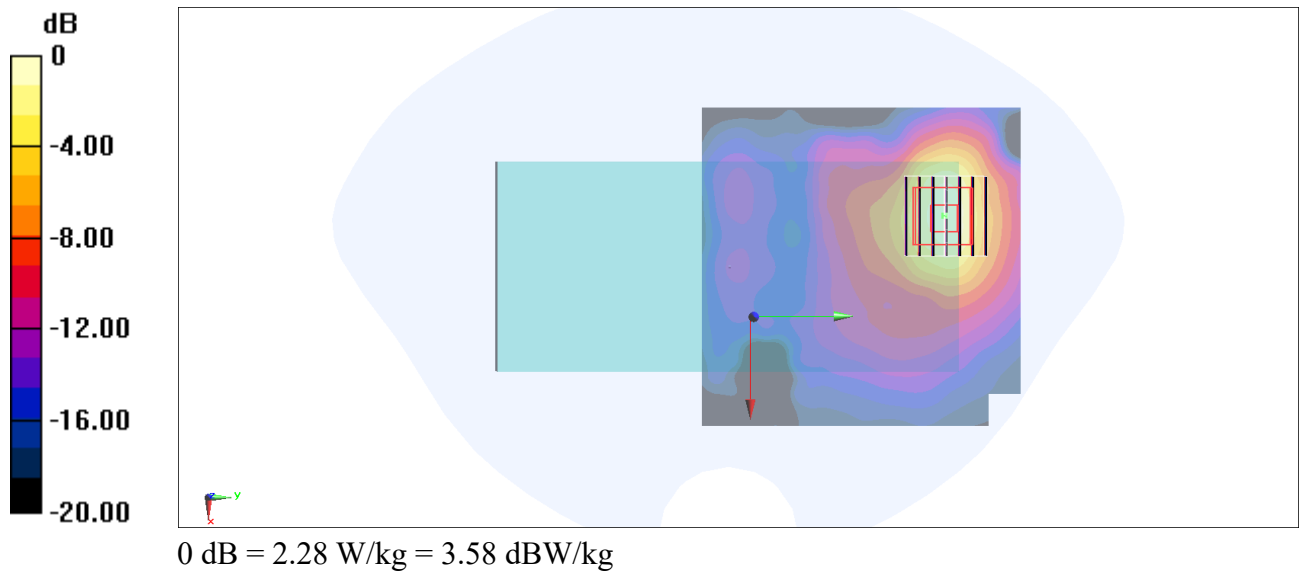

#71_FR1 n77_100M_BPSK_1_1_Back_10mm_Ch633332

Communication System: UID 10866 - AAF, 5G NR ; Frequency: 3499.98 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.753$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3499.98 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.01 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 28.69 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.446 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 73.5%

Maximum value of SAR (measured) = 2.02 W/kg

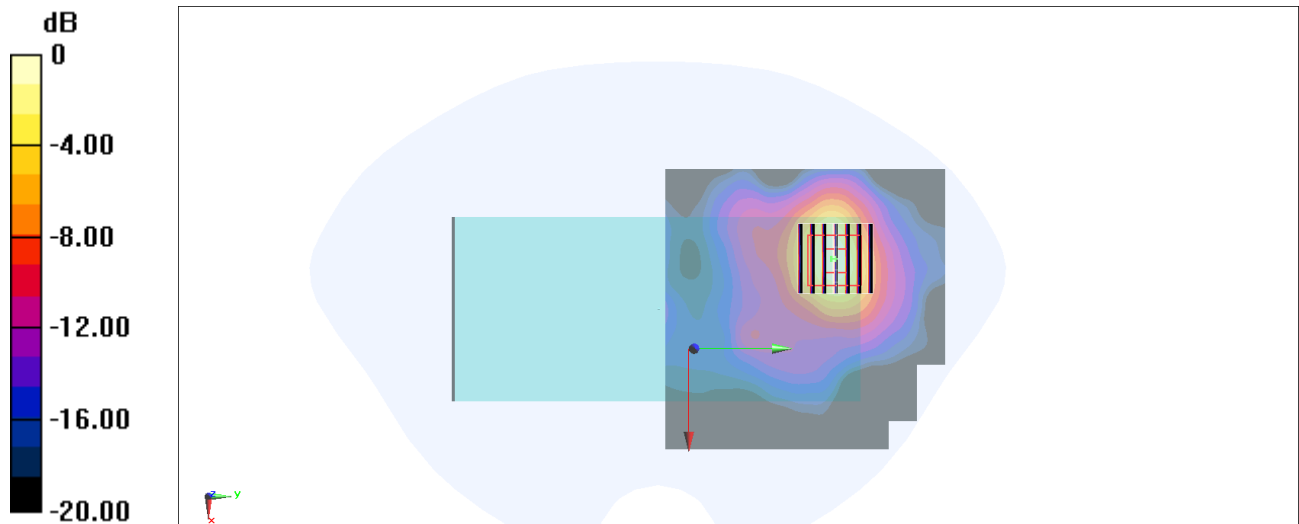

0 dB = 2.02 W/kg = 3.05 dBW/kg

#72_FR1 n53_10M_BPSK_1_22_Back_10mm_Ch497860

Communication System: UID 10898 - AAC, 5G NR; Frequency: 2489.3 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2490$ MHz; $\sigma = 1.884$ S/m; $\epsilon_r = 39.158$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.86, 7.06, 7.03) @ 2489.3 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.42 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.39 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.476 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 14 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 1.42 W/kg

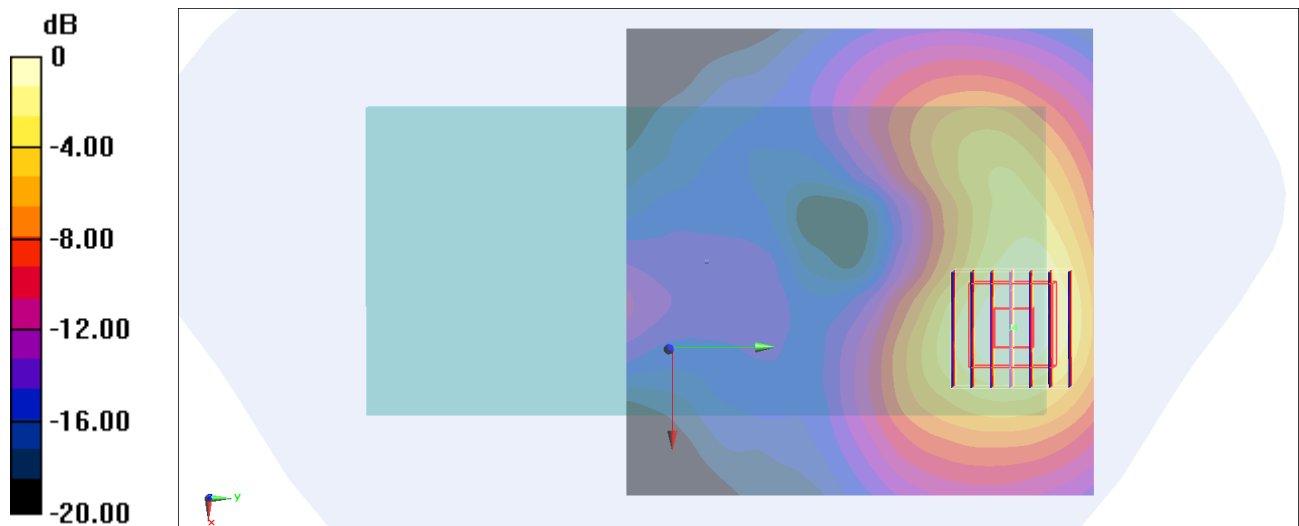

0 dB = 1.42 W/kg = 1.52 dBW/kg

#73_WLAN 2.4GHz_802.11b 1Mbps_Back_10mm_Ch11

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz ; Frequency: 2462 MHz

Medium: HSL_600~7200_260820 Medium parameters used : $f = 2462$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.54, 6.53, 6.24) @ 2462 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 3.78 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.92 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.234 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 0.860 W/kg

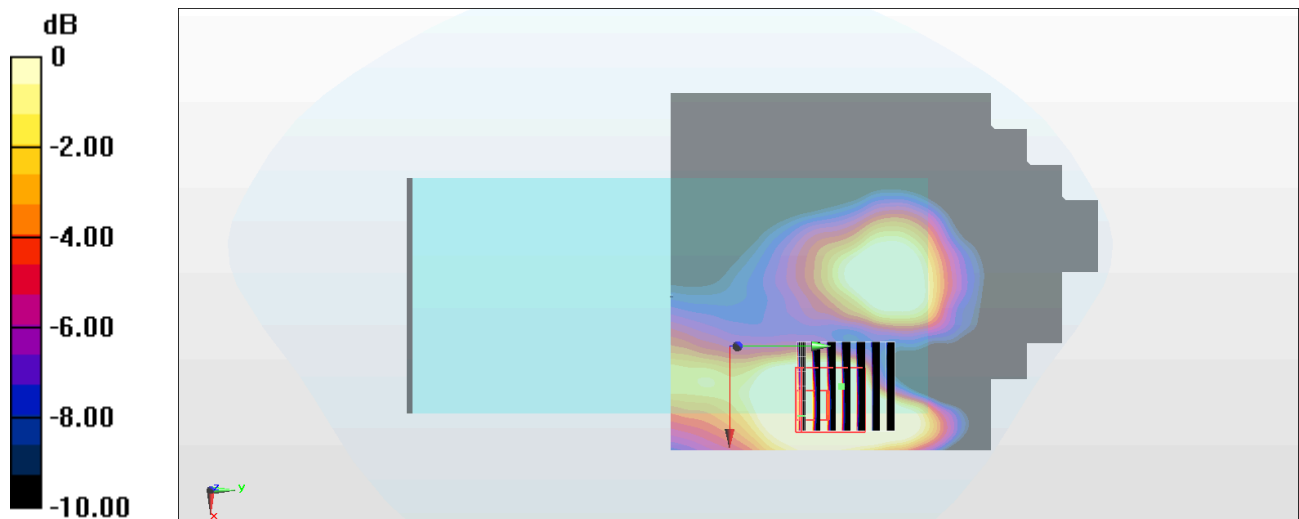

0 dB = 0.860 W/kg = -0.66 dBW/kg

#74_WLAN 5GHz_802.11a 6Mbps_Right Edge_10mm_Ch44

Communication System: UID 10062 - CAE, IEEE 802.11a/h WiFi 5 GHz ; Frequency: 5220 MHz

Medium: HSL_600~7200_260820 Medium parameters used : $f = 5220$ MHz; $\sigma = 4.557$ S/m; $\epsilon_r = 34.867$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.98, 4.97, 4.75) @ 5220 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.36 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 18.01 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.246 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 1.36 W/kg

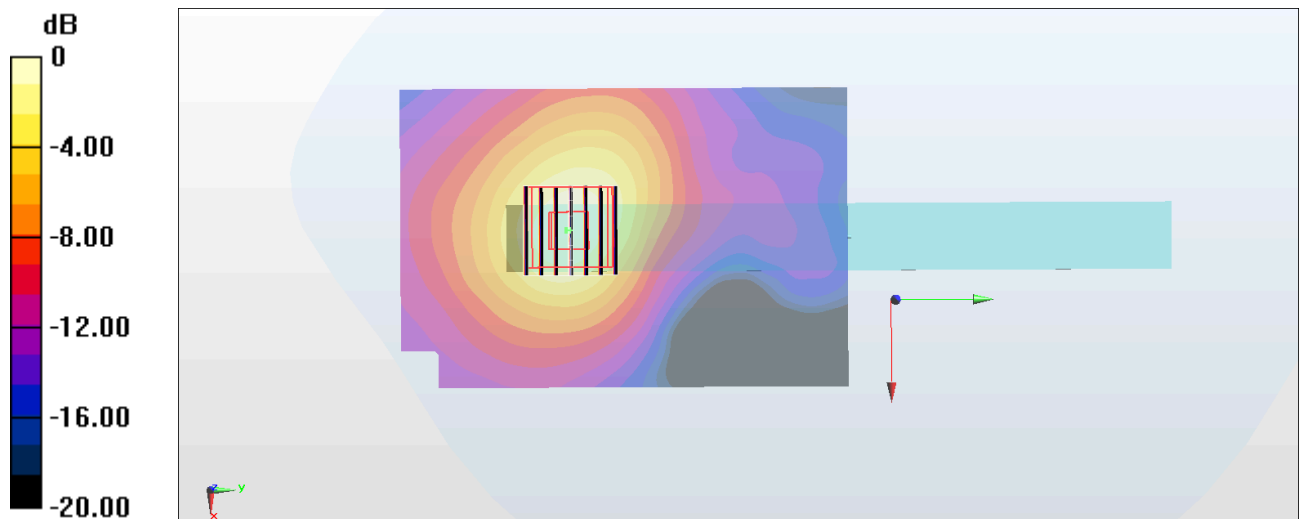

#75_WLAN 5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155

Communication System: UID 10626 - AAD, IEEE 802.11ac WiFi ; Frequency: 5775 MHz

Medium: HSL_600~7200_260820 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.194$ S/m; $\epsilon_r = 33.763$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.55, 4.54, 4.34) @ 5775 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.97 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.75 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.309 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 1.99 W/kg

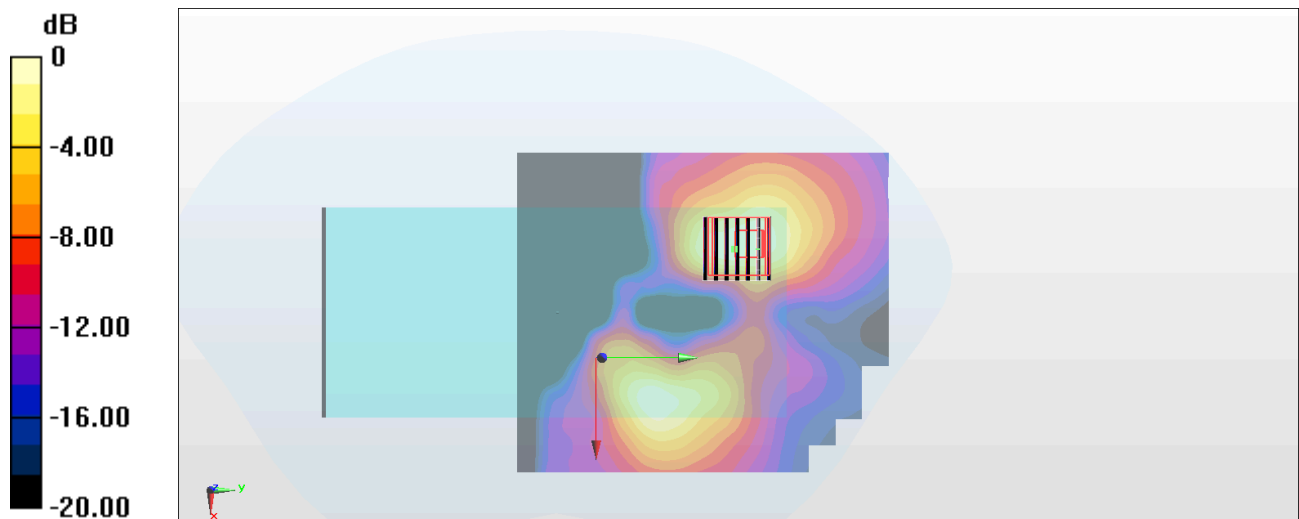

0 dB = 1.99 W/kg = 2.99 dBW/kg

#76_WLAN 6GHz_802.11be-EHT320 MCS0_Left Edge_10mm_Ch191

Communication System: WiFi; Frequency: 6905.000 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 6905.000$ MHz; $\sigma = 6.54$ S/m; $\epsilon_r = 32.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.49, 5.1, 5.45); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026-

Area Scan (51.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.103 W/kg; SAR (10g) = 0.038 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.13 dB


SAR (1g) = 0.094 W/kg; SAR (8g) = 0.037 W/kg; SAR (10g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.8 %

psAPD (1.0cm², sq) = 0.936 [W/m²]; psAPD (4.0cm², sq) = 0.750 [W/m²]

TSL Correction: Positive only

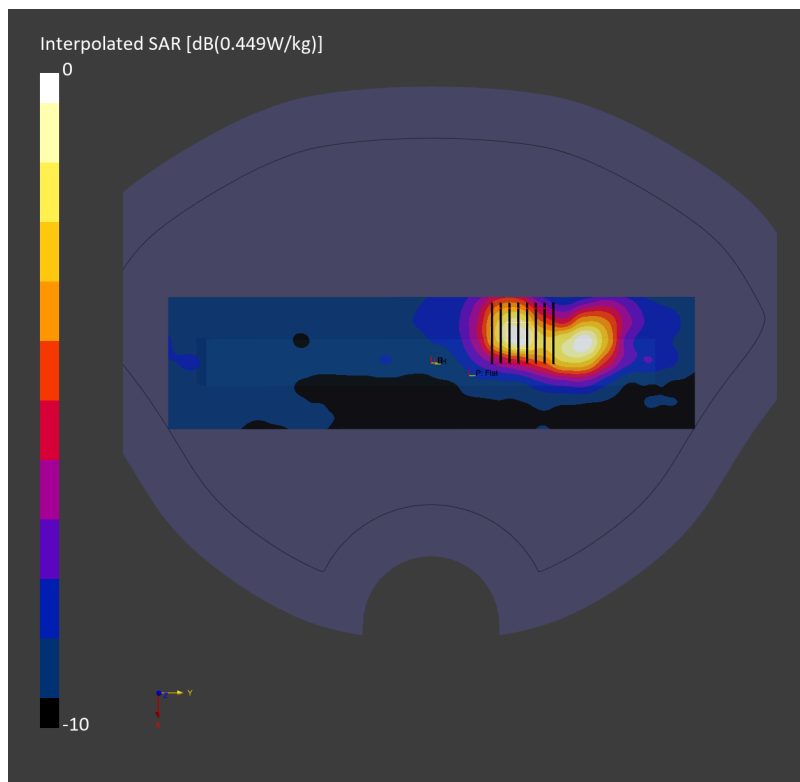

#77_Bluetooth_1Mbps_Back_10mm_Ch39

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2441 MHz

Medium: HSL_600-7200_260820 Medium parameters used : $f = 2441$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 39.748$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.54, 6.53, 6.24) @ 2441 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.446 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.80 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.153 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.453 W/kg

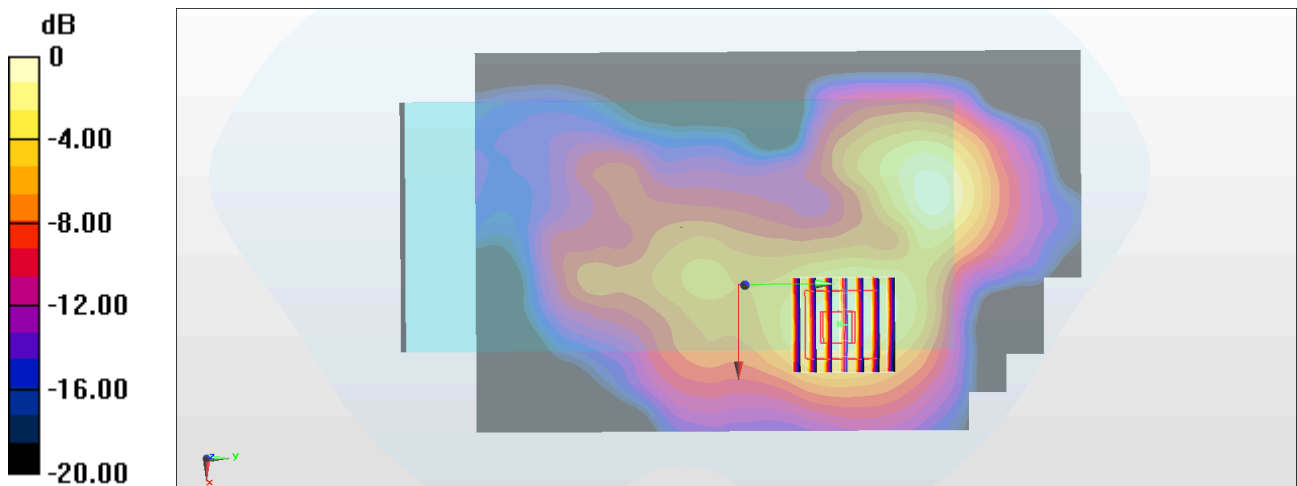

0 dB = 0.453 W/kg = -3.44 dBW/kg

#78_RFID_Back_10mm_Ch0

Communication System: UID 0, RFID ; Frequency: 914.75 MHz

Medium: HSL_600~7200_260811 Medium parameters used: $f = 915$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 42.392$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.01, 9.28, 9.23) @ 914.75 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 37.05 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.567 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.9%

Maximum value of SAR (measured) = 1.24 W/kg

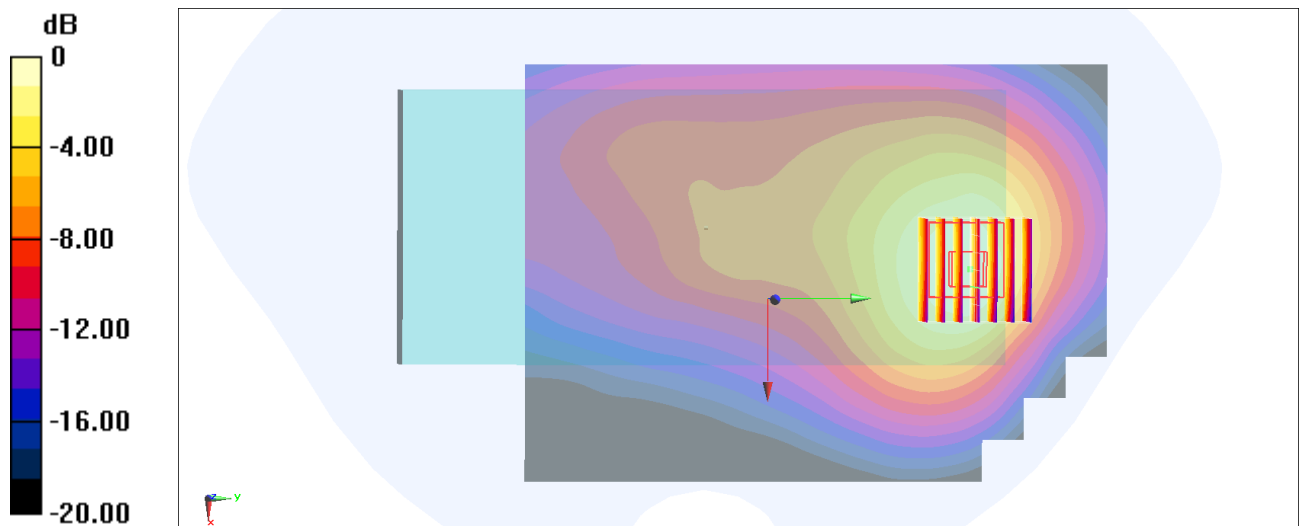

0 dB = 1.24 W/kg = 0.93 dBW/kg

#79_GSM850_GPRS 3 Tx slots_Back with Clip_15mm_Ch128

Communication System: UID 10027 - DAC, GPRS-FDD; Frequency: 824.2 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 825$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 43.354$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 824.2 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.479 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.28 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.252 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 20.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.7%

Maximum value of SAR (measured) = 0.456 W/kg

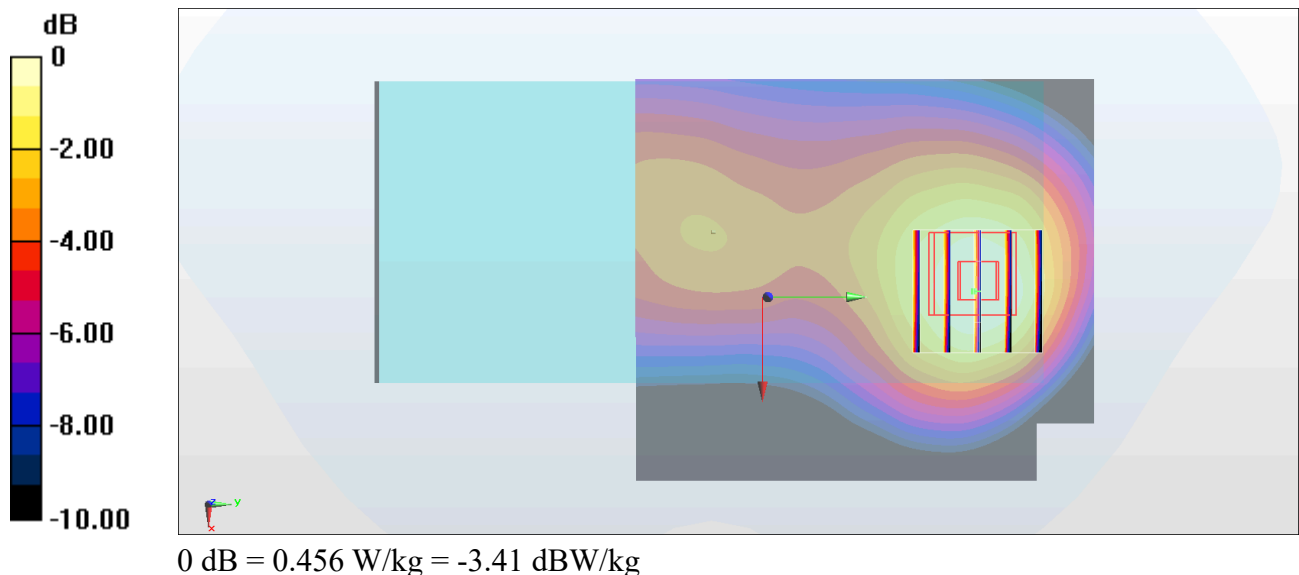

#80_GSM1900_GPRS 3 Tx slots_Back with Clip_15mm_Ch661

Communication System: UID 10027 - DAC, GPRS-FDD; Frequency: 1880 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61) @ 1880 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.340 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.37 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.133 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.332 W/kg

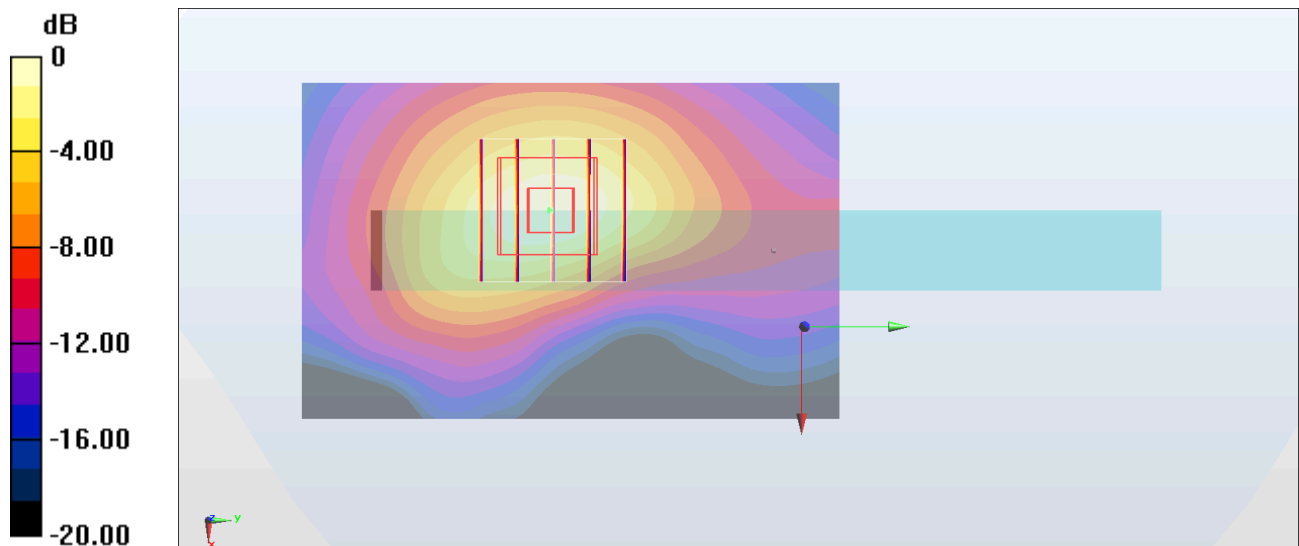

0 dB = 0.332 W/kg = -4.79 dBW/kg

#81_WCDMA II_RMC 12.2Kbps_Back with Clip_15mm_Ch9262

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1852.4 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 40.789$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1852.4 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.425 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.26 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.171 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.419 W/kg

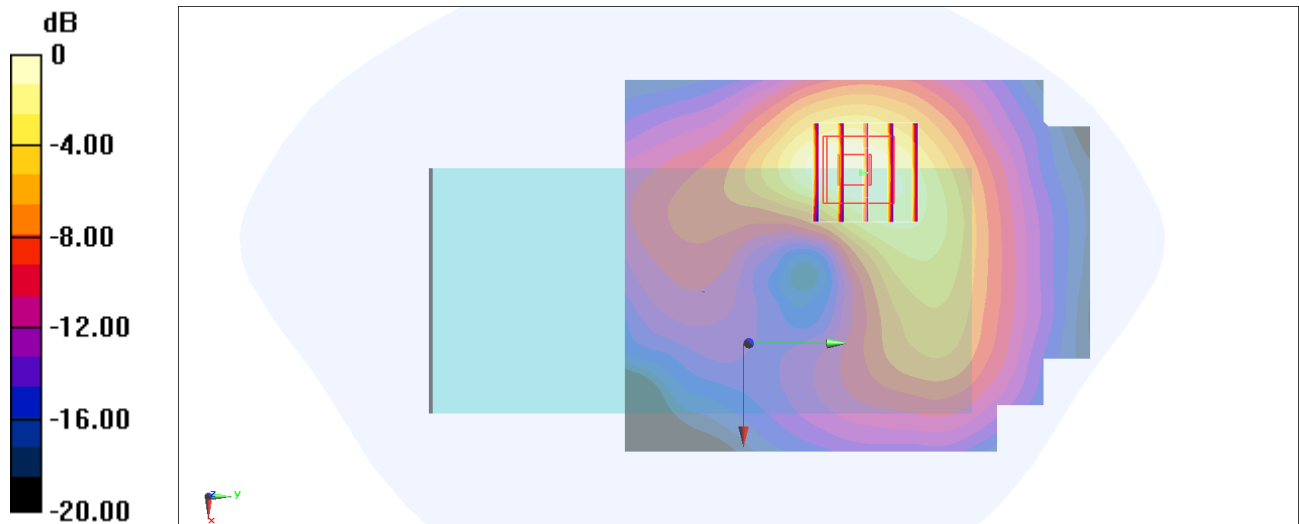

0 dB = 0.419 W/kg = -3.78 dBW/kg

#82_WCDMA IV_RMC 12.2Kbps_Back with Clip_15mm_Ch1513

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1752.6 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 41.714$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05) @ 1752.6 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.766 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.03 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.356 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 0.744 W/kg

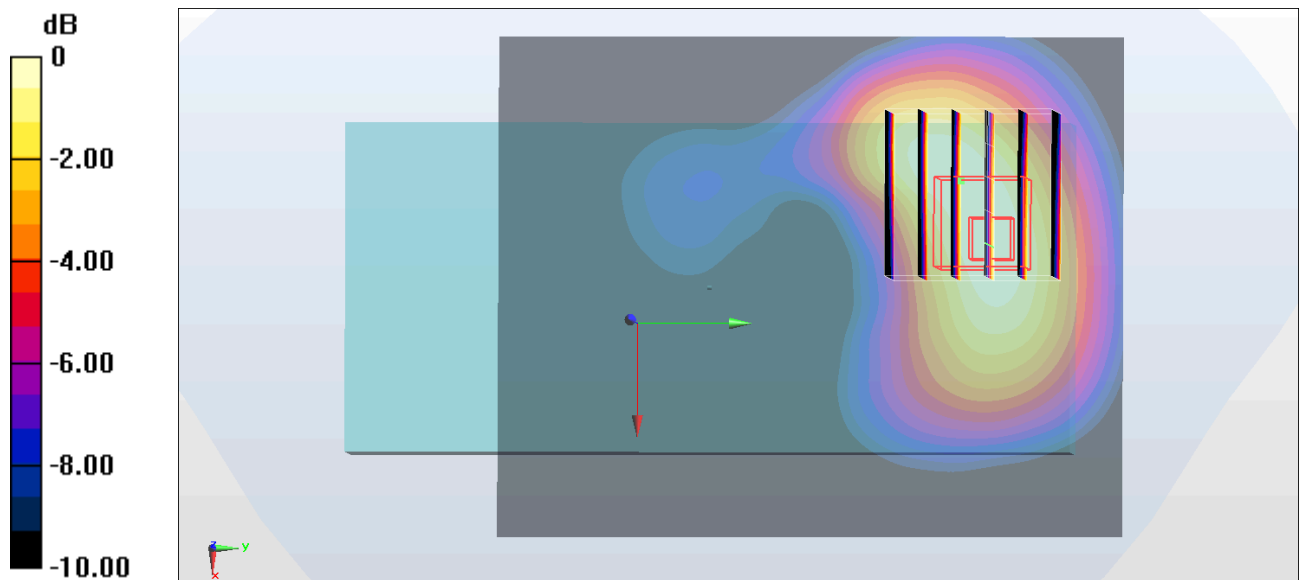

0 dB = 0.744 W/kg = -1.28 dBW/kg

#83_WCDMA V_RMC12.2 Kbps_Back with Holster_0mm_Ch4132

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 826.4 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 43.349$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 826.4 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.174 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.78 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.104 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.180 W/kg

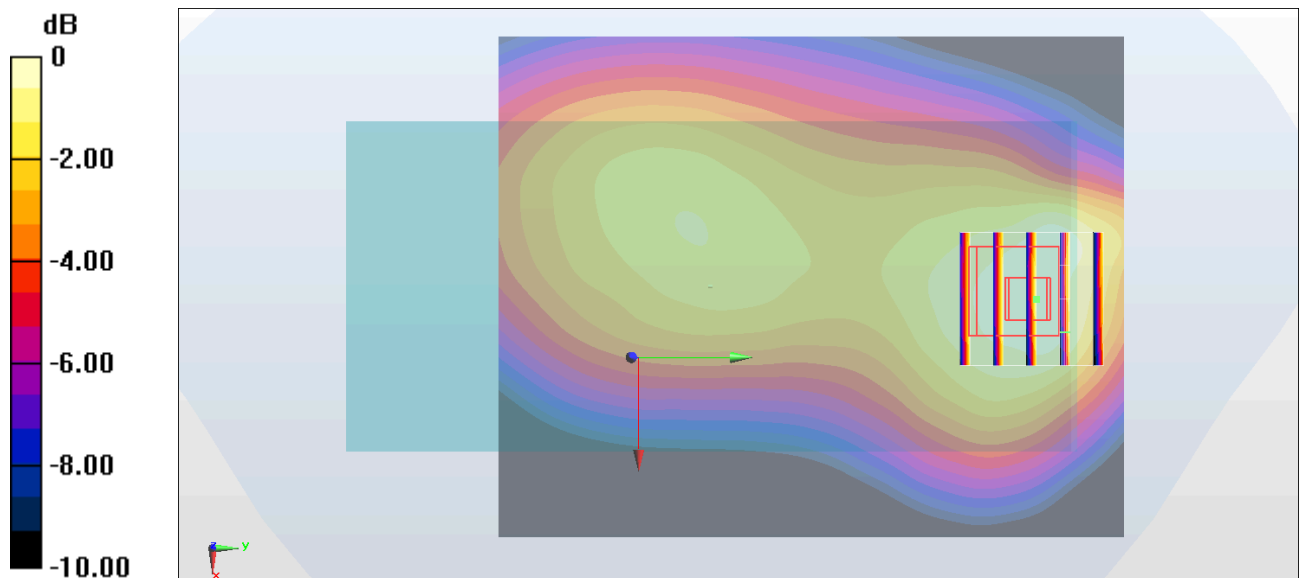

0 dB = 0.180 W/kg = -7.45 dBW/kg

#84_LTE Band 7_20M_QPSK_1_0_Back with Holsters_0mm_Ch20850

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2510 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.811$ S/m; $\epsilon_r = 42.663$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.44, 7.26, 7.34) @ 2510 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.59 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.70 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.528 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.62 W/kg

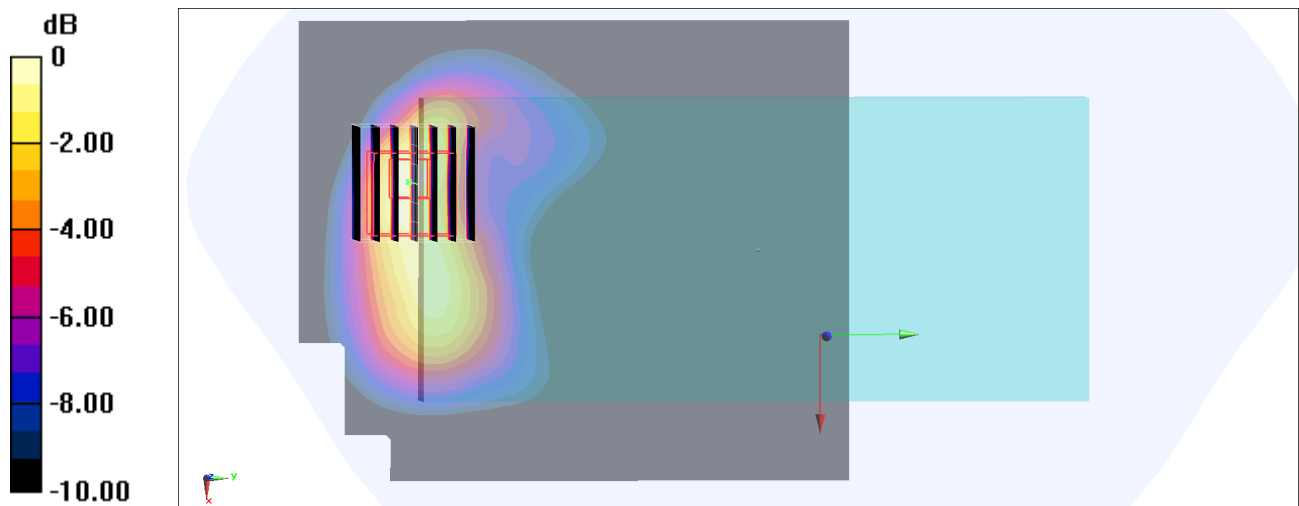

0 dB = 1.62 W/kg = 2.10 dBW/kg

#85_LTE Band 12_10M_QPSK_1_0_Back with Holster_0mm_Ch23095

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 707.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.85$ S/m; $\epsilon_r = 43.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 707.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.225 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.60 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.123 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 0.233 W/kg

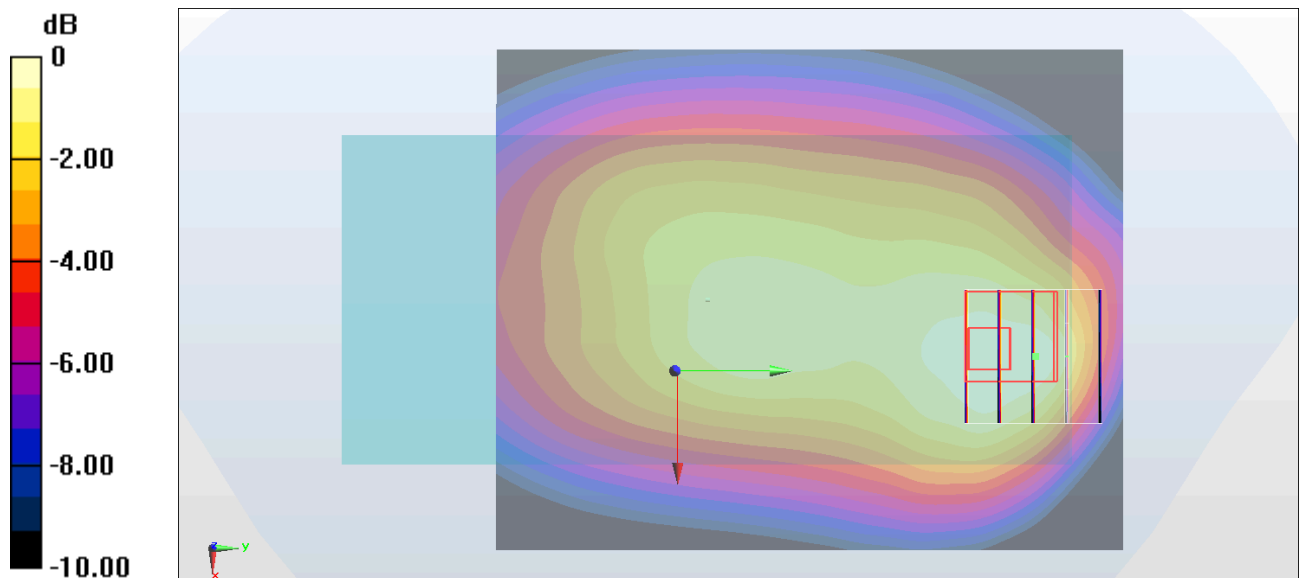

0 dB = 0.233 W/kg = -6.33 dBW/kg

#86_LTE Band 13_10M_QPSK_1_0_Back with Holster_0mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 782 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 782$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 43.506$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 782 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.247 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.26 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.114 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 37.2%

Maximum value of SAR (measured) = 0.318 W/kg

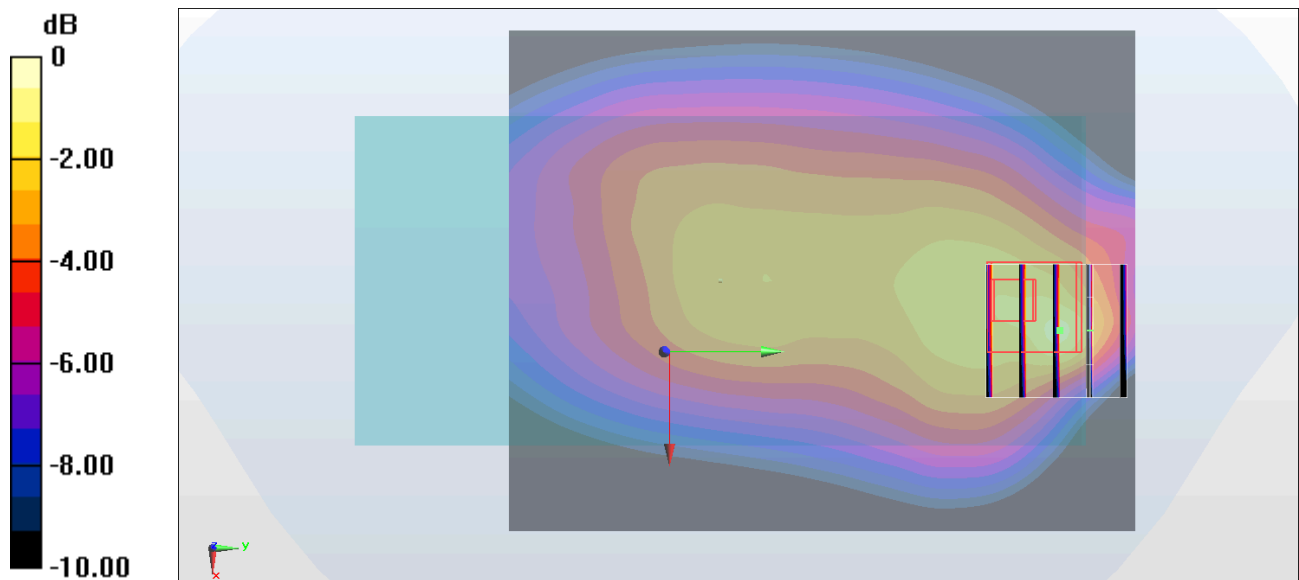

0 dB = 0.318 W/kg = -4.98 dBW/kg

#87_LTE Band 14_10M_QPSK_1_0_Back with Holster_0mm_Ch23330

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 793 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 793$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 43.478$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 793 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.270 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.31 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.133 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 40.5%

Maximum value of SAR (measured) = 0.348 W/kg

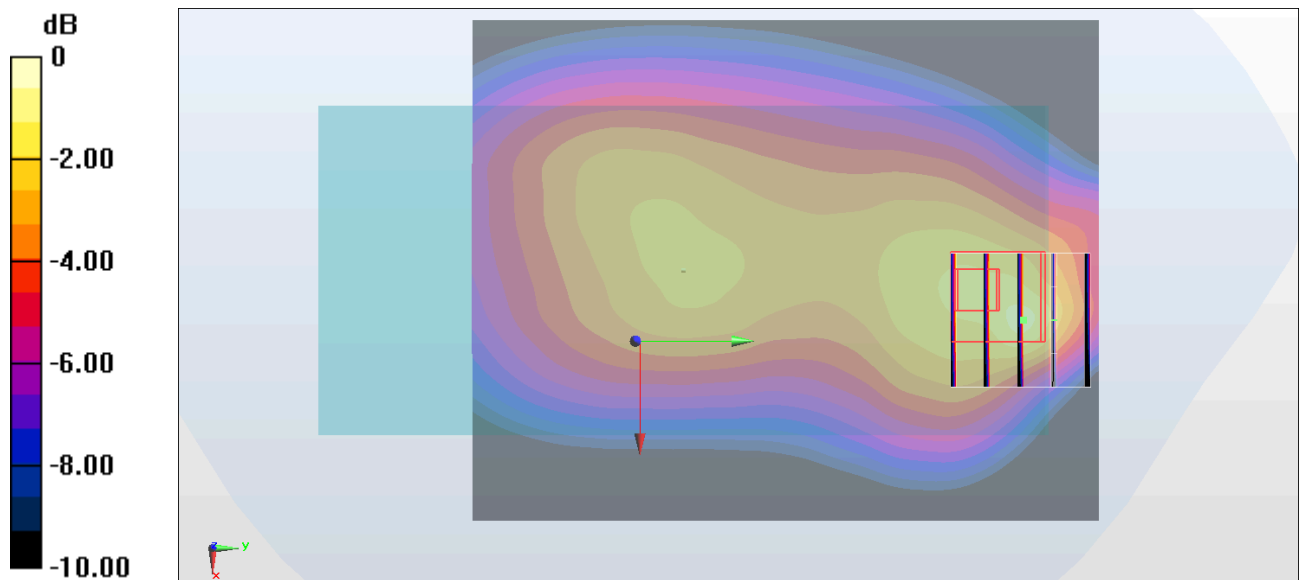

0 dB = 0.348 W/kg = -4.58 dBW/kg

#88_LTE Band 25_20M_QPSK_1_0_Back_15mm_Ch26140

Communication System: UID 10930 - AAC, 5G NR; Frequency: 1860 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1860$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.893$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1860 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.918 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.53 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.403 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 18.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.883 W/kg

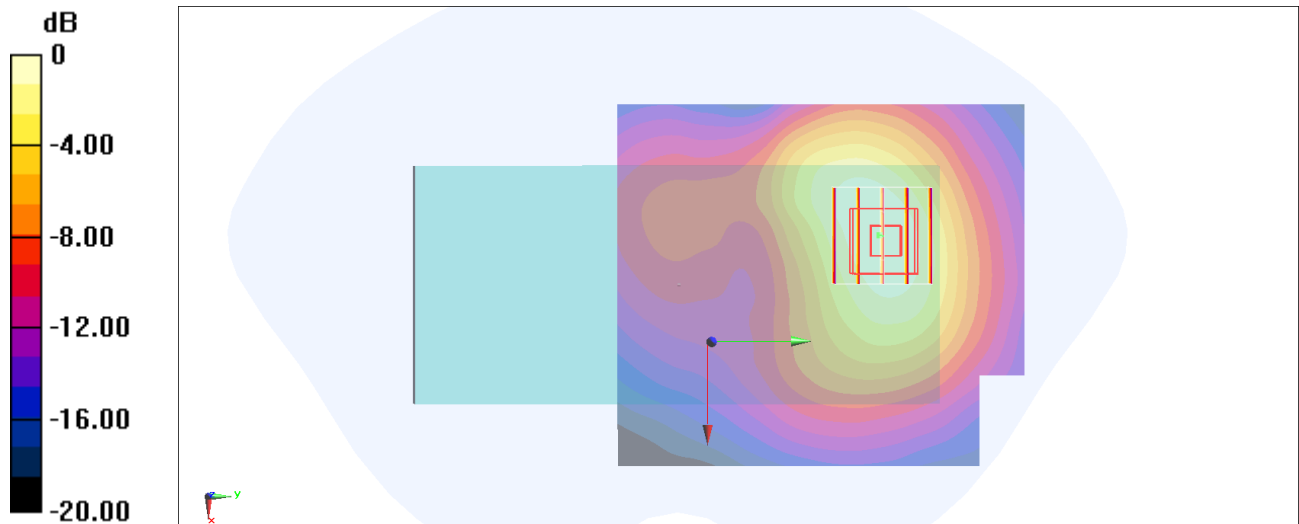

0 dB = 0.883 W/kg = -0.54 dBW/kg

#89_LTE Band 26_15M_QPSK_1_0_Back with Holster_0mm_Ch26865

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 831.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.332$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 831.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.485 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.30 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.189 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 35.7%

Maximum value of SAR (measured) = 0.536 W/kg

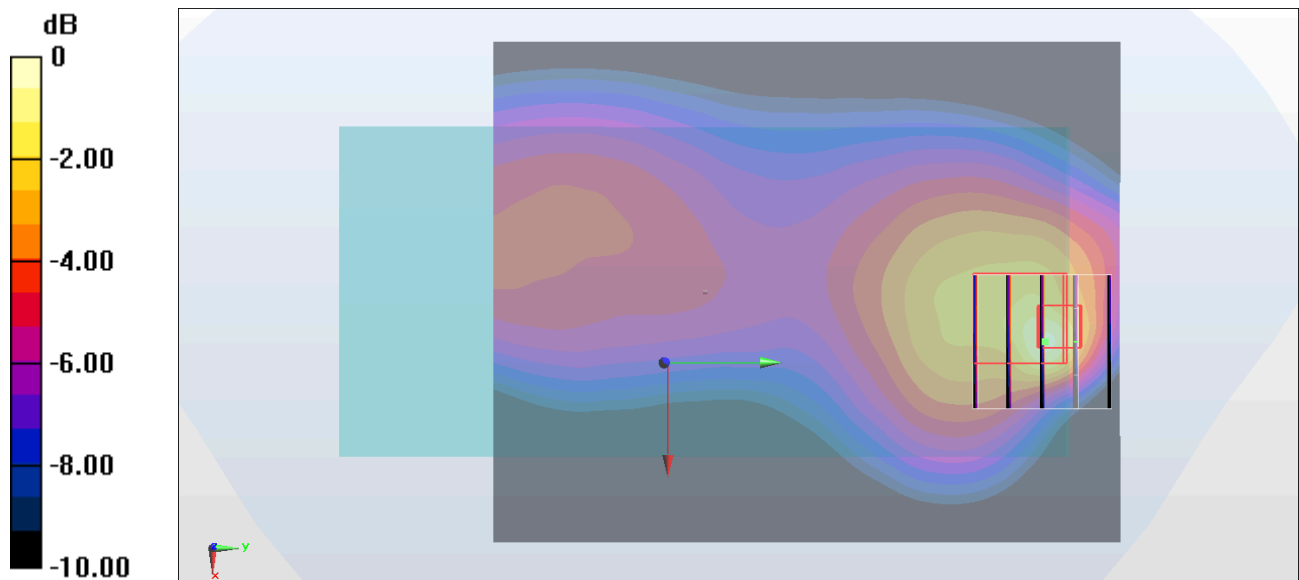

0 dB = 0.536 W/kg = -2.71 dBW/kg

#90_LTE Band 30_10M_QPSK_1_0_Back With Clip_15mm_Ch27710

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2310 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.417$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.68, 6.93, 7.08) @ 2310 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.05 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.422 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.13 W/kg

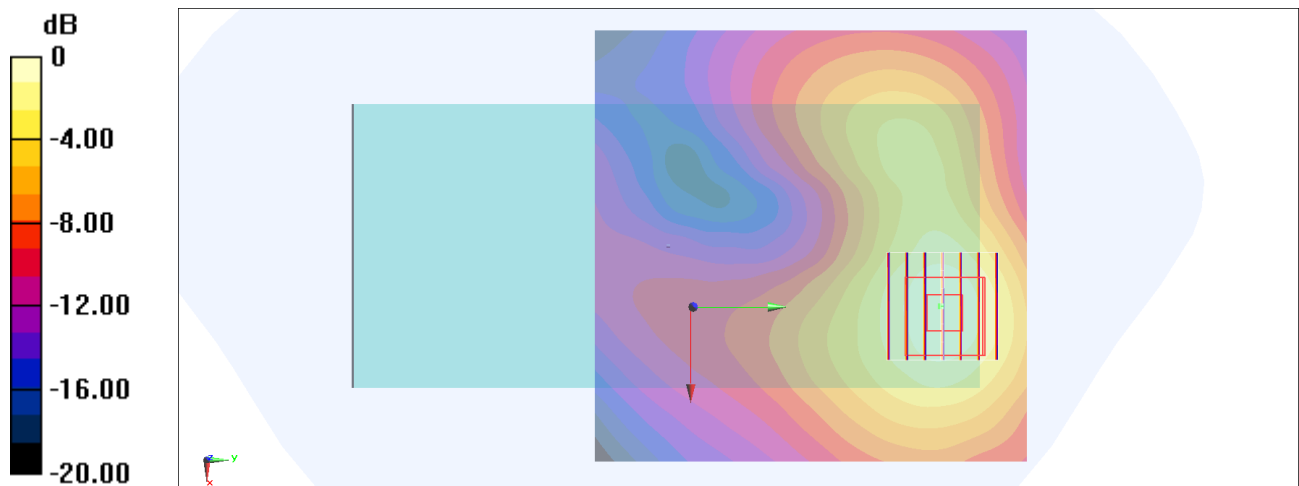

0 dB = 1.13 W/kg = 0.53 dBW/kg

#91_LTE Band 66_20M_QPSK_1_0_Back with Holster_0mm_Ch132572

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1770 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 43.618$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(8.13, 7.93, 8.02) @ 1770 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.892 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.68 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.696 W/kg; SAR(10 g) = 0.408 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.7%

Maximum value of SAR (measured) = 0.899 W/kg

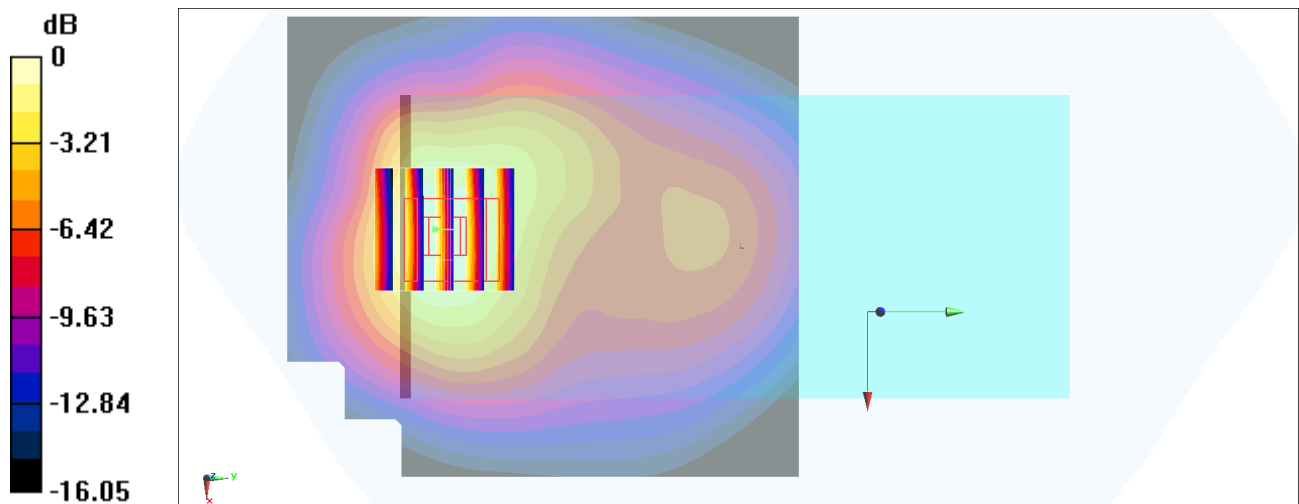

0 dB = 0.899 W/kg = -0.46 dBW/kg

#92_LTE Band 71_20M_QPSK_1_0_Back with Holster_0mm_Ch133297

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 680.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 43.848$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 680.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.206 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.33 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.065 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 31.7%

Maximum value of SAR (measured) = 0.212 W/kg

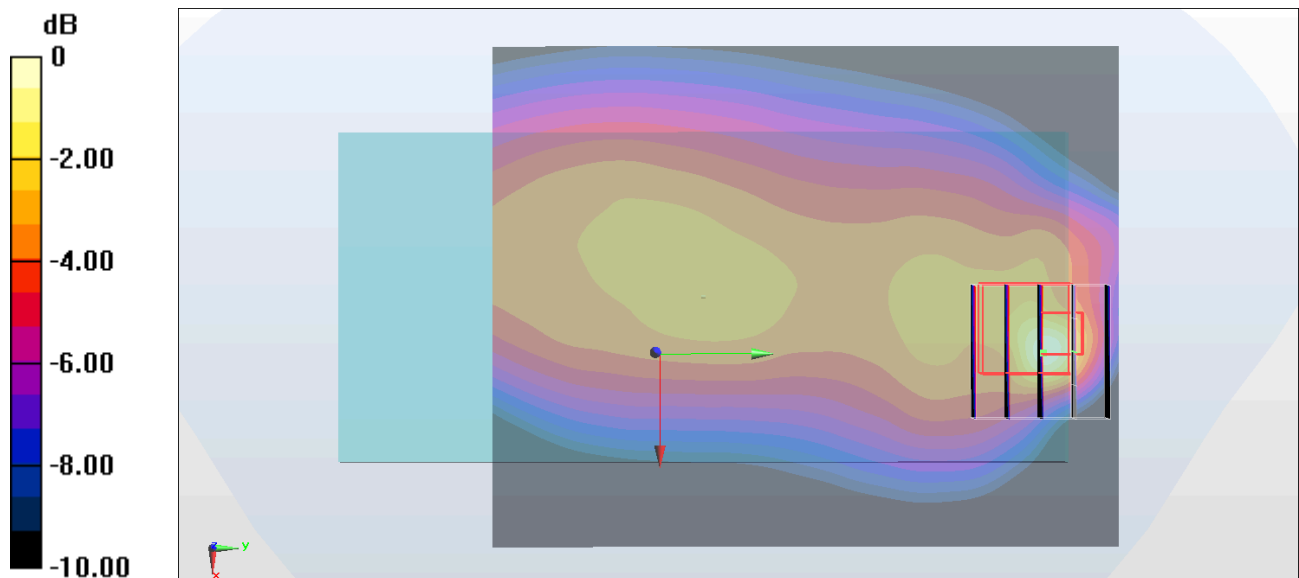

0 dB = 0.212 W/kg = -6.74 dBW/kg

#93_LTE Band 106_3M_QPSK_1_0_Back with Clip_15mm_Ch134322

Communication System: UID 10184 - CAF, LTE-FDD; Frequency: 899 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 899$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 43.284$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.57, 8.56, 8.18) @ 899 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.111 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.62 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.059 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 20 mm

Ratio of SAR at M2 to SAR at M1 = 69.5%

Maximum value of SAR (measured) = 0.108 W/kg

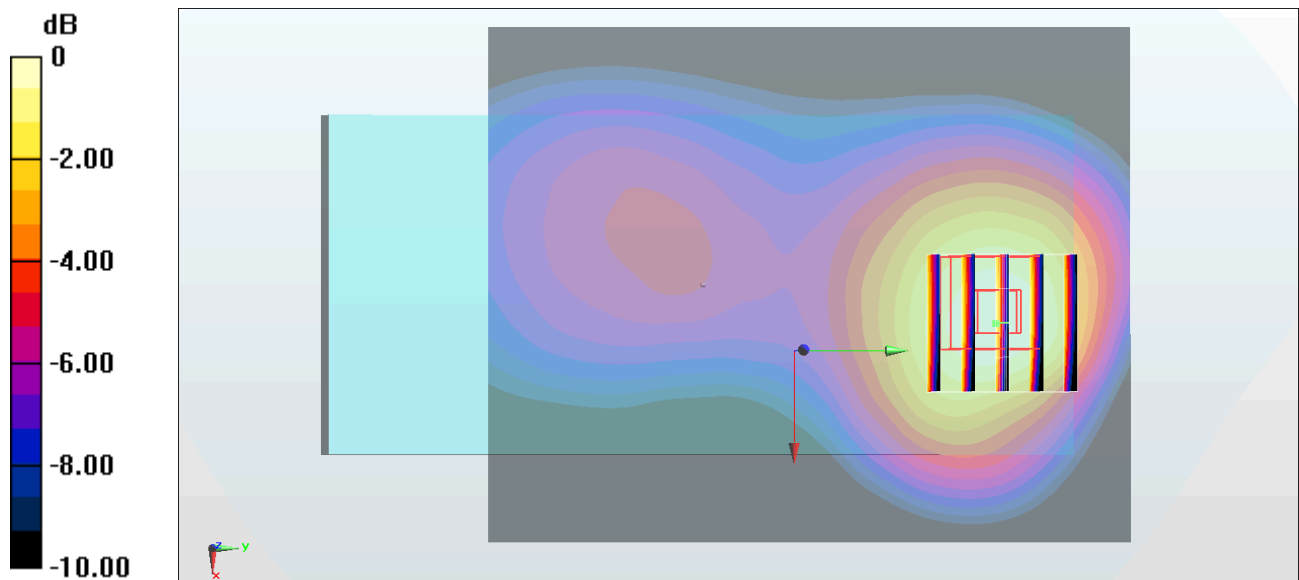

0 dB = 0.108 W/kg = -9.67 dBW/kg

#94_LTE Band 70_15M_QPSK_1_0_Back with Clip_15mm_Ch133047

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 1702.5 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1702.5$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.893$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1702.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.886 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.06 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.397 W/kg (SAR corrected for target medium)Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 63.5%

Maximum value of SAR (measured) = 0.874 W/kg

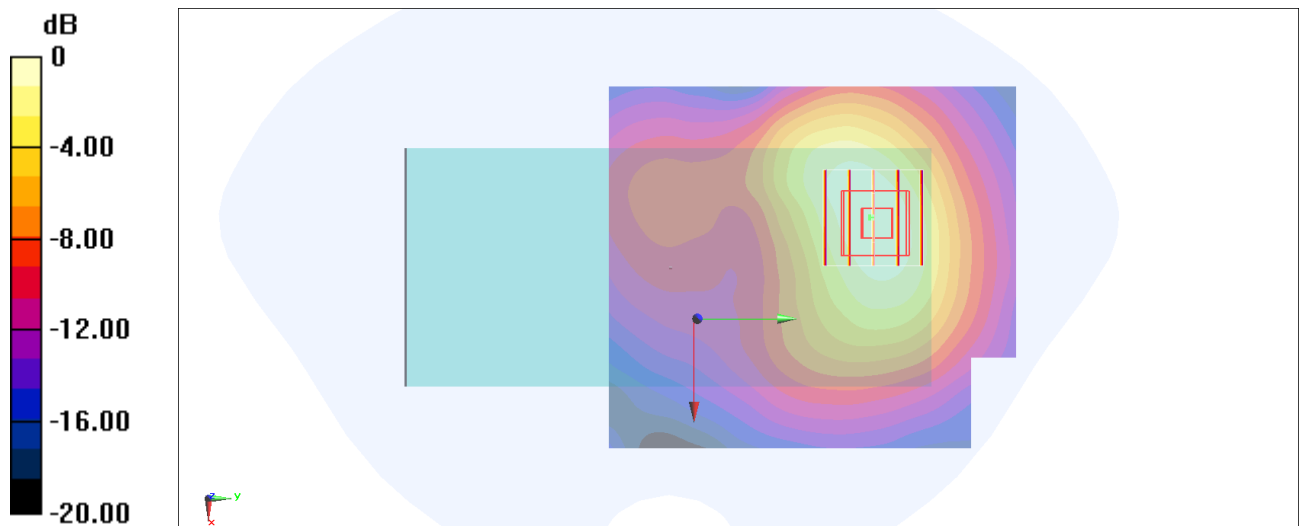

#95_LTE Band 41_20M_QPSK_1_0_Back with Clip_15mm_Ch40185

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2549.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2550$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 39.066$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2549.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.692 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.92 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.231 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.674 W/kg

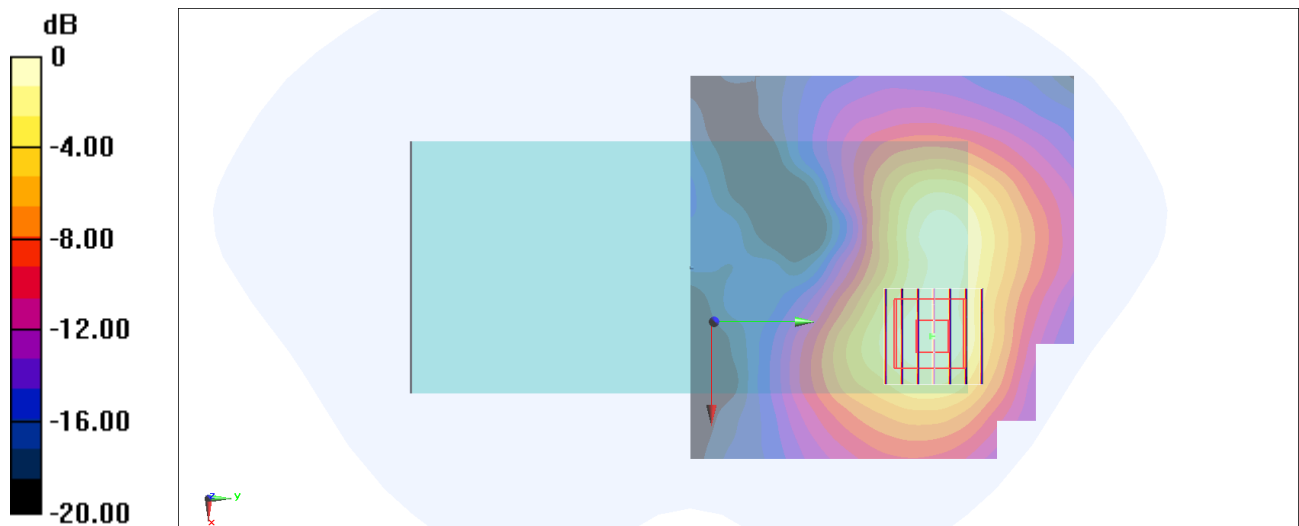

0 dB = 0.674 W/kg = -1.71 dBW/kg

#96_LTE Band 48_20M_QPSK_1_0_Back with Holster_0mm_Ch56640

Communication System: UID 10435 - AAG, LTE-TDD ; Frequency: 3690 MHz

Medium: HSL_600-7200_260812 Medium parameters used: $f = 3690$ MHz; $\sigma = 2.915$ S/m; $\epsilon_r = 38.493$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63) @ 3690 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.26 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 30.33 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.43 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.425 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.6%

Maximum value of SAR (measured) = 2.39 W/kg

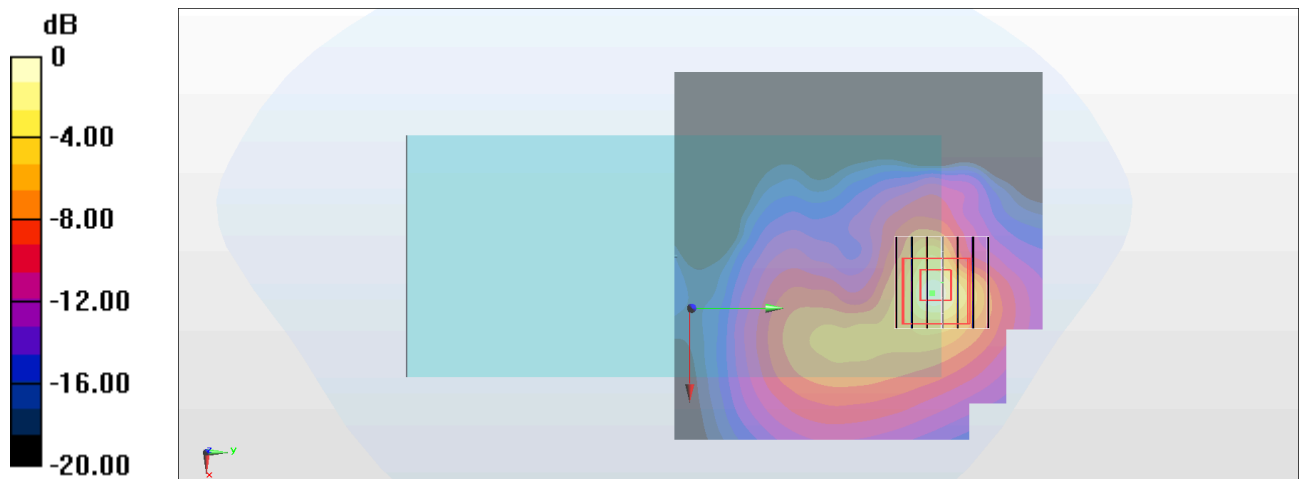

0 dB = 2.39 W/kg = 3.78 dBW/kg

#97_LTE Band 53_10M_QPSK_1_0_Back with Holster_0mm_Ch60198

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2489.3 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2490$ MHz; $\sigma = 1.884$ S/m; $\epsilon_r = 39.158$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.86, 7.06, 7.03) @ 2489.3 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.484 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.63 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.158 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 38.3%

Maximum value of SAR (measured) = 0.570 W/kg

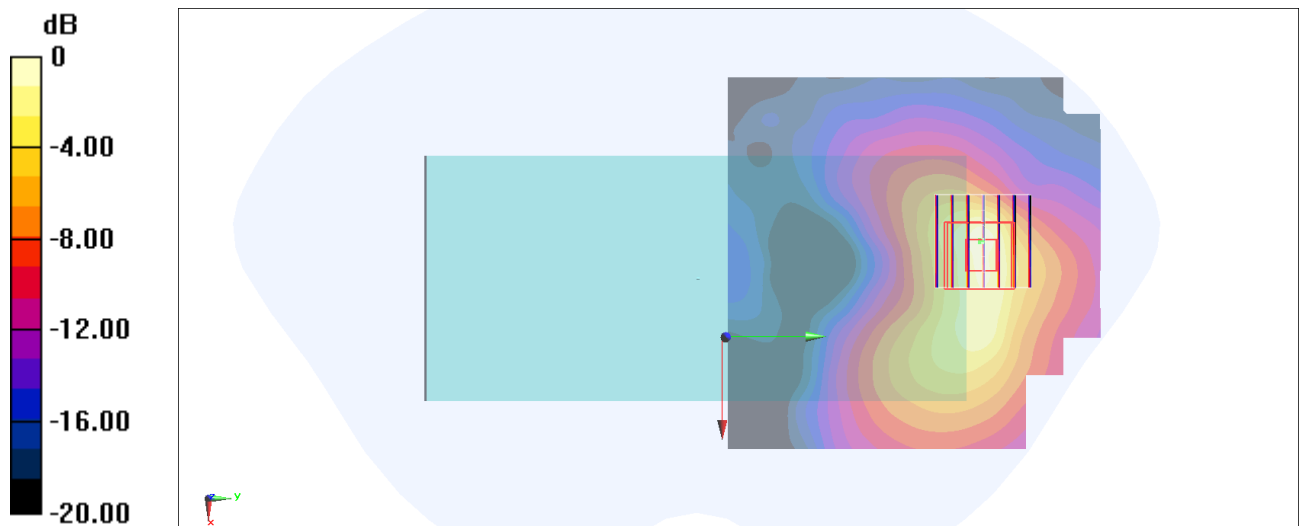

0 dB = 0.570 W/kg = -2.44 dBW/kg

#98_FR1 n7_50M_BPSK_1_1_Back with Holster_0mm_Ch507000

Communication System: UID 10935 - AAD, 5G NR ; Frequency: 2535 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.09$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2535 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 32.73 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.508 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 1.83 W/kg

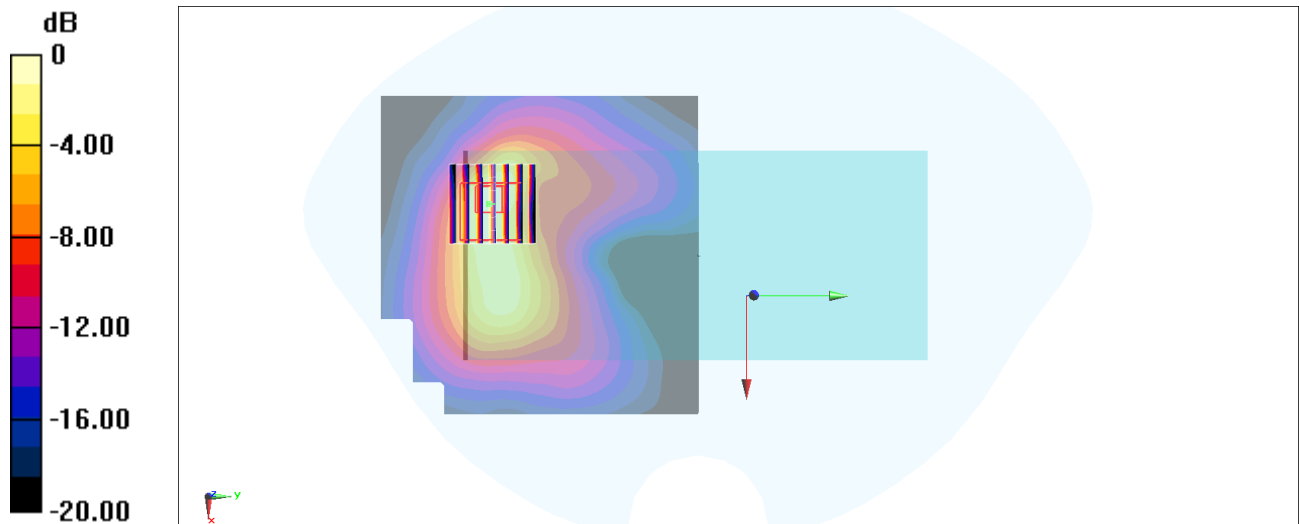

0 dB = 1.86 W/kg = 2.70 dBW/kg

#99_FR1 n12_15M_BPSK_1_1_Back with Holster_0mm_Ch141500

Communication System: UID 10930 - AAC, 5G NR ; Frequency: 707.5 MHz

Medium: HSL_600~7200_260811 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.932$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 707.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.195 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.067 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.7%

Maximum value of SAR (measured) = 0.166 W/kg

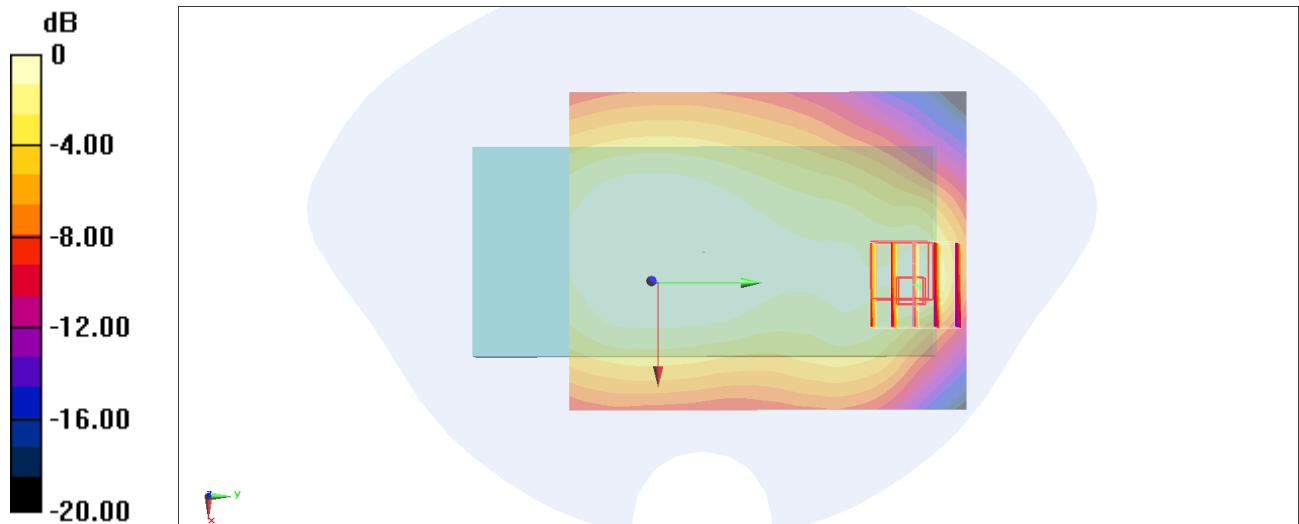

0 dB = 0.166 W/kg = -7.80 dBW/kg

#100_FR1 n13_10M_BPSK_1_1_Back with Holster_0mm_Ch156400

Communication System: UID 10929 - AAD, 5G NR ; Frequency: 782 MHz

Medium: HSL_600~7200_260811 Medium parameters used : $f = 782$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 42.704$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 782 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.155 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.81 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.097 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.3%

Maximum value of SAR (measured) = 0.156 W/kg

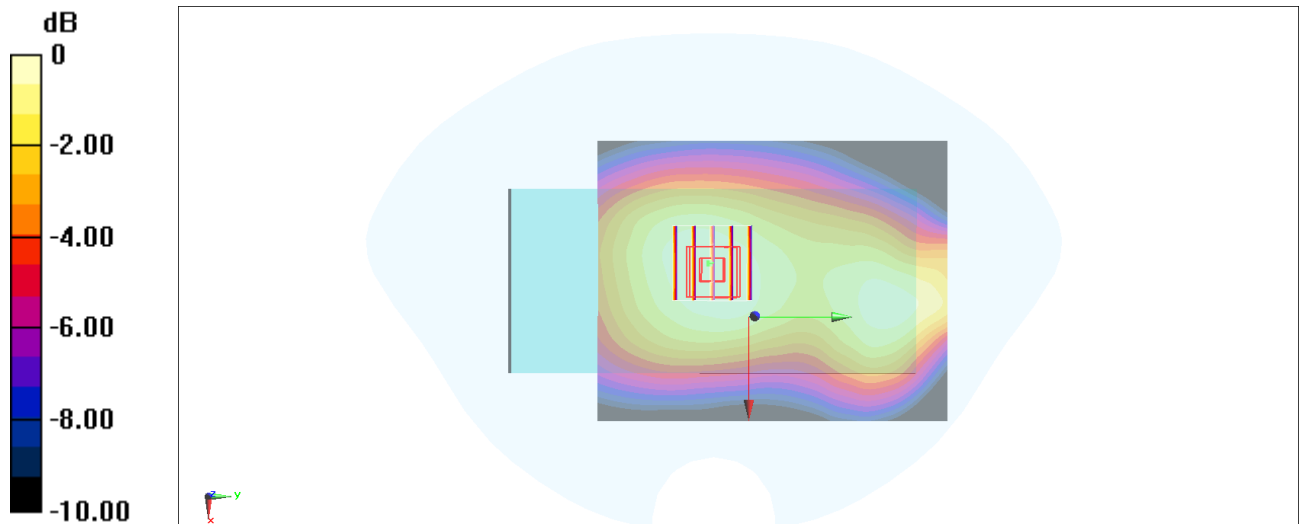

0 dB = 0.156 W/kg = -8.07 dBW/kg

#101_FR1 n14_10M_BPSK_1_1_Back with Holster_0mm_Ch158600

Communication System: UID 10929 - AAD, 5G NR ; Frequency: 793 MHz

Medium: HSL_600~7200_260811 Medium parameters used : $f = 793$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.666$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 793 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.04 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.124 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 32.9%

Maximum value of SAR (measured) = 0.353 W/kg

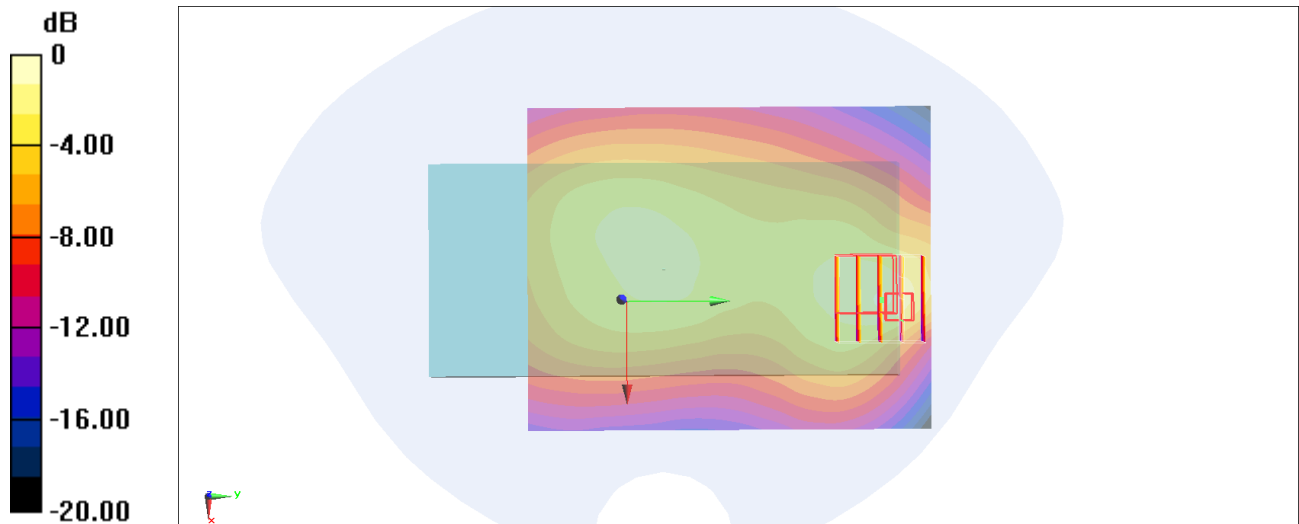

0 dB = 0.353 W/kg = -4.52 dBW/kg

#102_FR1 n25_40M_BPSK_1_1_Back with Holster_0mm_Ch376500

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1882.5 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 41.534$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61) @ 1882.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.86 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.433 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 1.00 W/kg

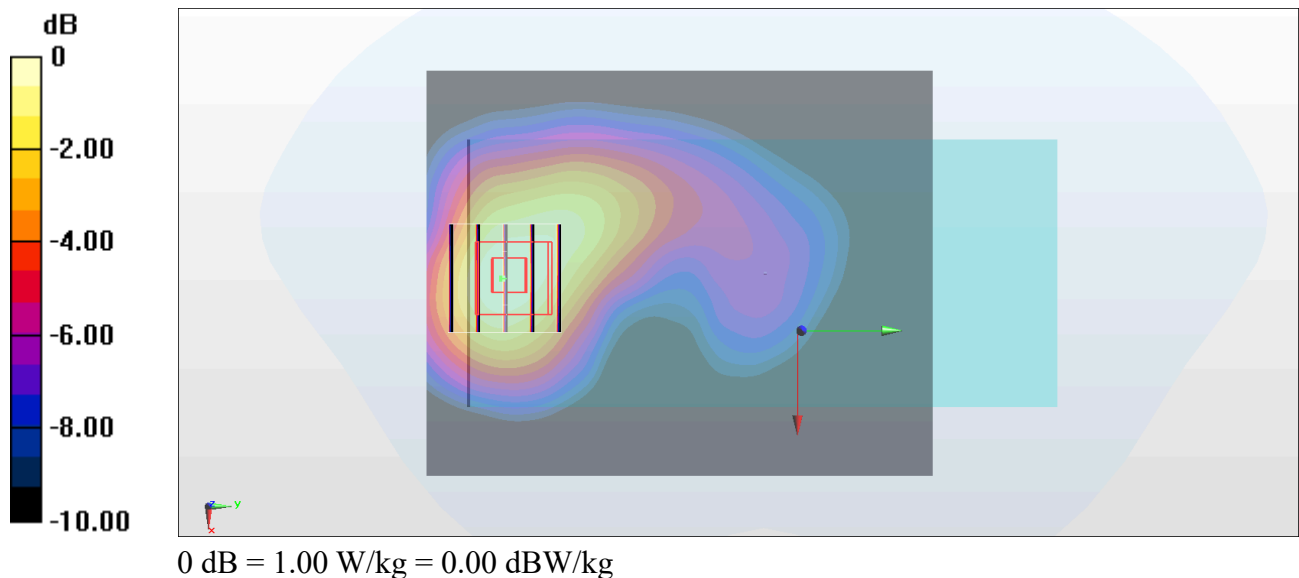

#103_FR1 n26_20M_BPSK_1_1_Back with Holster_0mm_Ch166300

Communication System: UID 10931 - AAC, 5G NR; Frequency: 831.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.332$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4) @ 831.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.45 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.160 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 0.265 W/kg

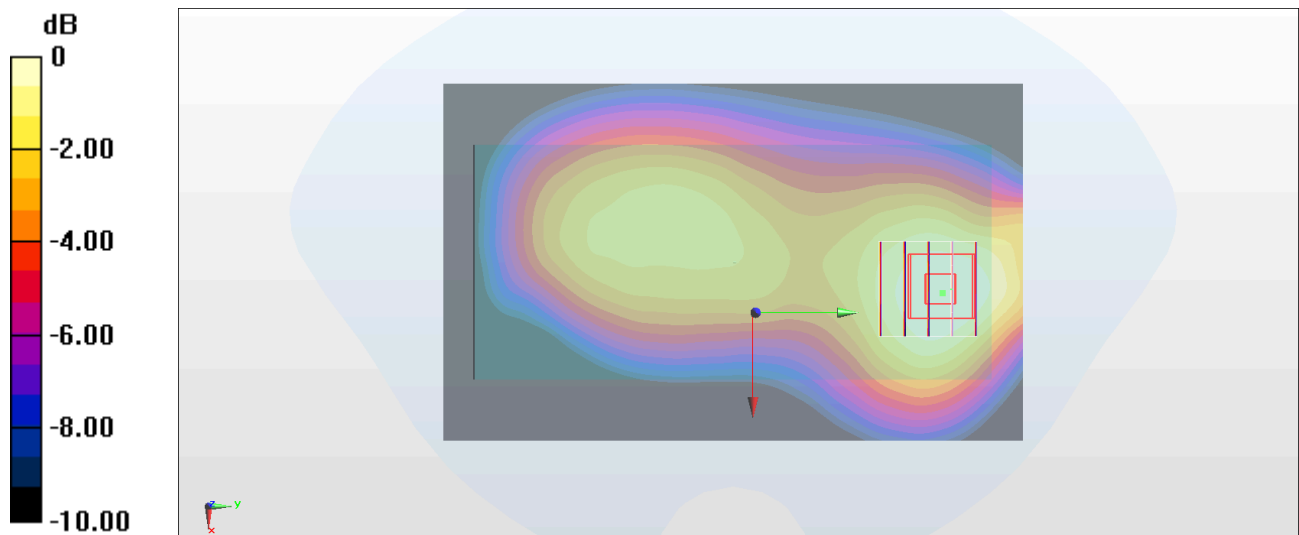

0 dB = 0.265 W/kg = -5.77 dBW/kg

#104_FR1 n30_10M_BPSK_1_1_Back With Clip_15mm_Ch462000

Communication System: UID 10929 - AAD, 5G NR; Frequency: 2310 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.417$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.68, 6.93, 7.08) @ 2310 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.74 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.417 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 16.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 1.12 W/kg

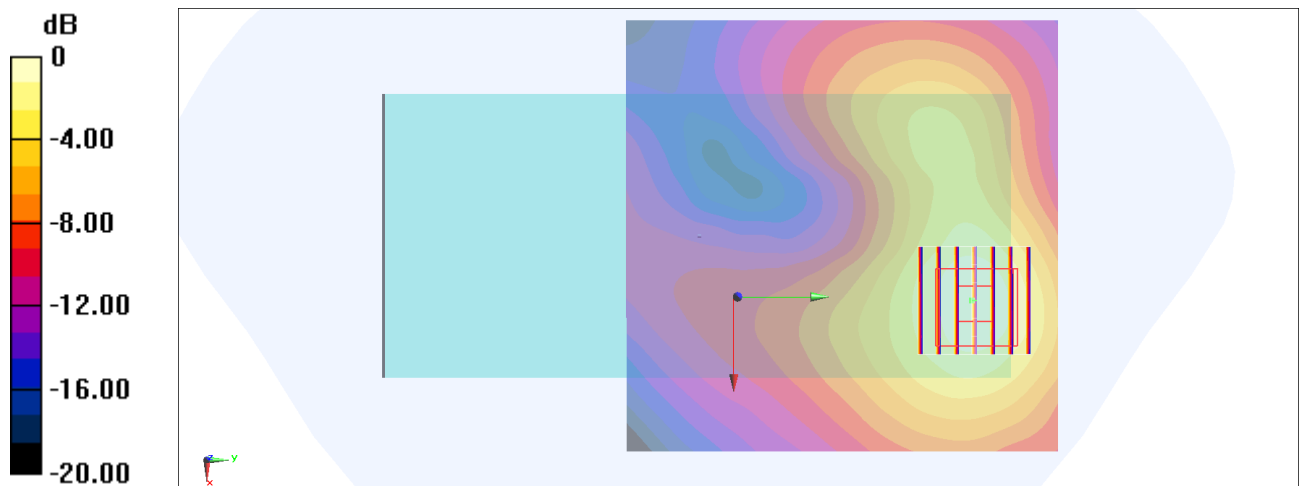

0 dB = 1.12 W/kg = 0.49 dBW/kg

#105_FR1 n66_40M_BPSK_1_1_Back with Holster_0mm_Ch349000

Communication System: UID 10934 - AAC, 5G NR ; Frequency: 1745 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.972$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1745 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.55 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.619 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.4%

Maximum value of SAR (measured) = 1.44 W/kg

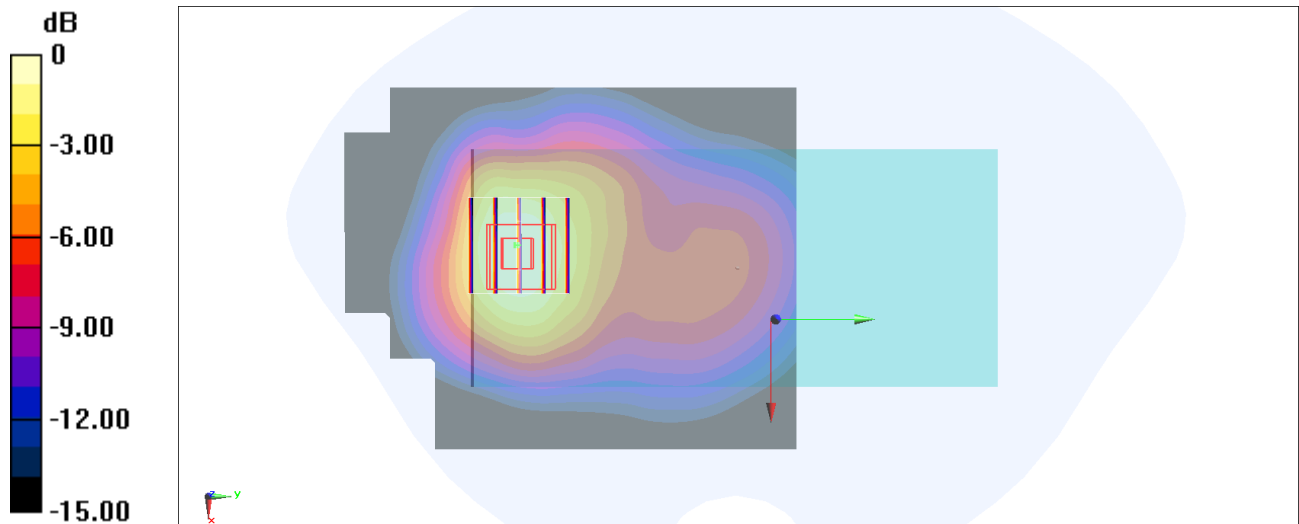

0 dB = 1.44 W/kg = 1.58 dBW/kg

#106_FR1 n70_15M_BPSK_1_1_Back with Clip_15mm_Ch340500

Communication System: UID 10930 - AAC, 5G NR ; Frequency: 1702.5 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1702.5$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 40.893$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1702.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.595 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.33 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.663 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.265 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.582 W/kg

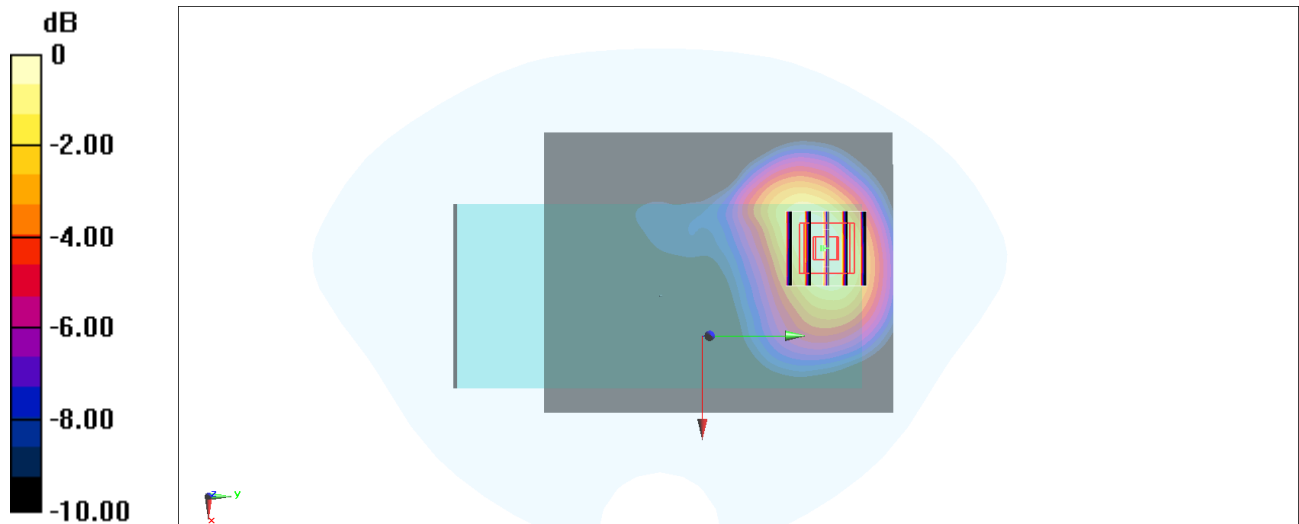

0 dB = 0.595 W/kg = -2.25 dBW/kg

#107_FR1 n71_20M_BPSK_1_1_Back with Clip_15mm_Ch136100

Communication System: UID 10931 - AAC, 5G NR; Frequency: 680.5 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 43.848$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55) @ 680.5 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.274 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.06 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.055 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 0.222 W/kg

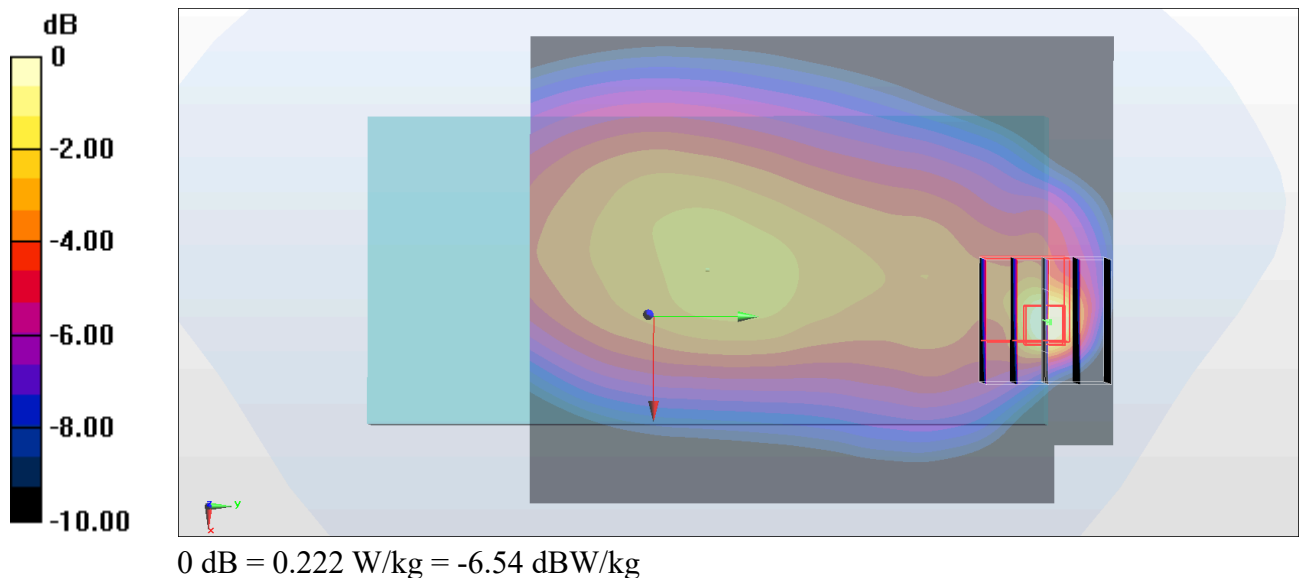

#108_FR1 n41_100M_BPSK_1_1_Back with Holster_0mm_Ch518598

Communication System: UID 10866 - AAF, 5G NR; Frequency: 2592.99 MHz

Medium: HSL_600~7200_260813 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 38.984$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2592.99 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.80 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.78 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.581 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 1.79 W/kg

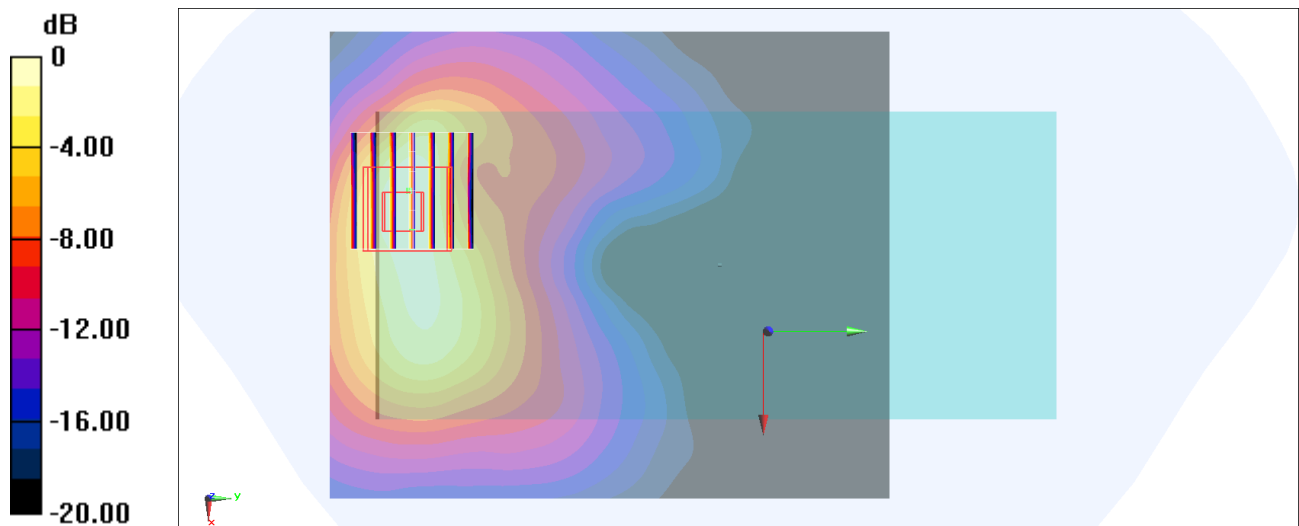

0 dB = 1.79 W/kg = 2.53 dBW/kg

#109_FR1 n48_40M_BPSK_1_1_Back with Holster_0mm_Ch641666

Communication System: UID 10903 - AAD, 5G NR; Frequency: 3624.99 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 3625$ MHz; $\sigma = 2.867$ S/m; $\epsilon_r = 37.682$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3624.99 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.13 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 28.59 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.416 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 72%

Maximum value of SAR (measured) = 2.15 W/kg

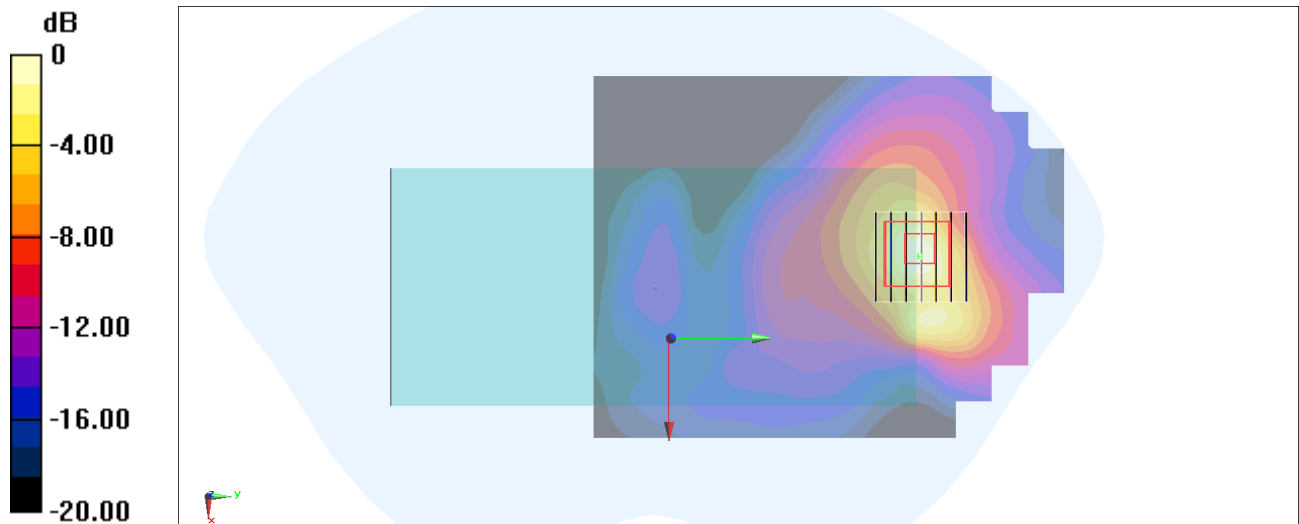

0 dB = 2.15 W/kg = 3.32 dBW/kg

#110_FR1 n77_100M_BPSK_1_1_Back with Holster_0mm_Ch641666

Communication System: UID 10866 - AAF, 5G NR ; Frequency: 3624.99 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 3625$ MHz; $\sigma = 2.867$ S/m; $\epsilon_r = 37.682$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3624.99 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.63 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 28.63 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.368 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.4%

Maximum value of SAR (measured) = 2.06 W/kg

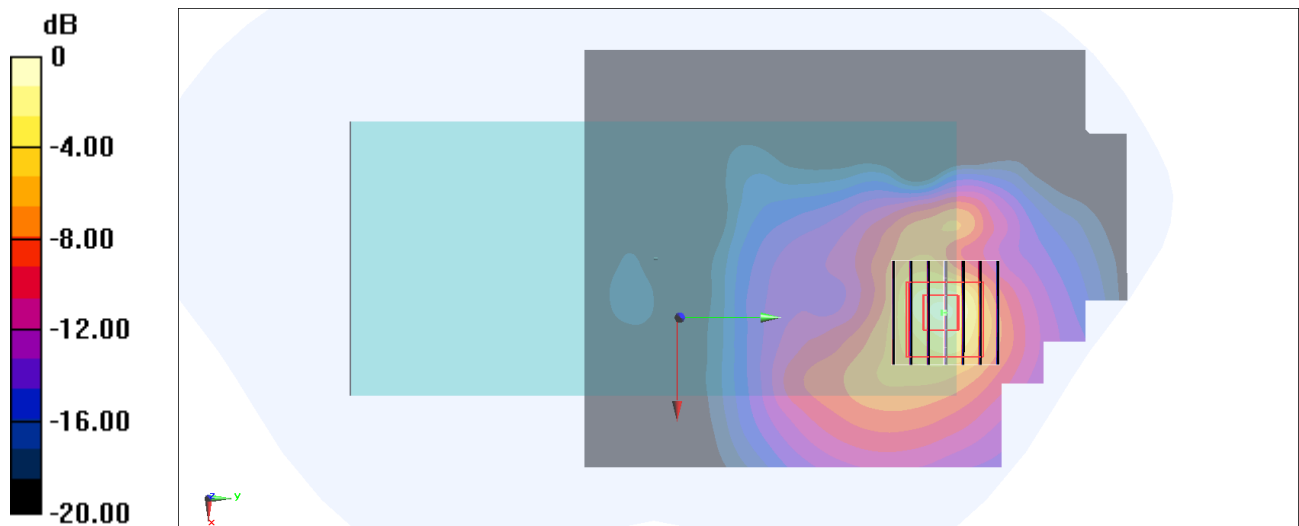

0 dB = 2.06 W/kg = 3.14 dBW/kg

#111_FR1 n53_10M_BPSK_1_22_Back with Clip_15mm_Ch497860

Communication System: UID 10898 - AAC, 5G NR; Frequency: 2489.3 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2490$ MHz; $\sigma = 1.881$ S/m; $\epsilon_r = 39.656$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.54, 6.53, 6.24) @ 2489.3 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.07 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.487 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 1.37 W/kg

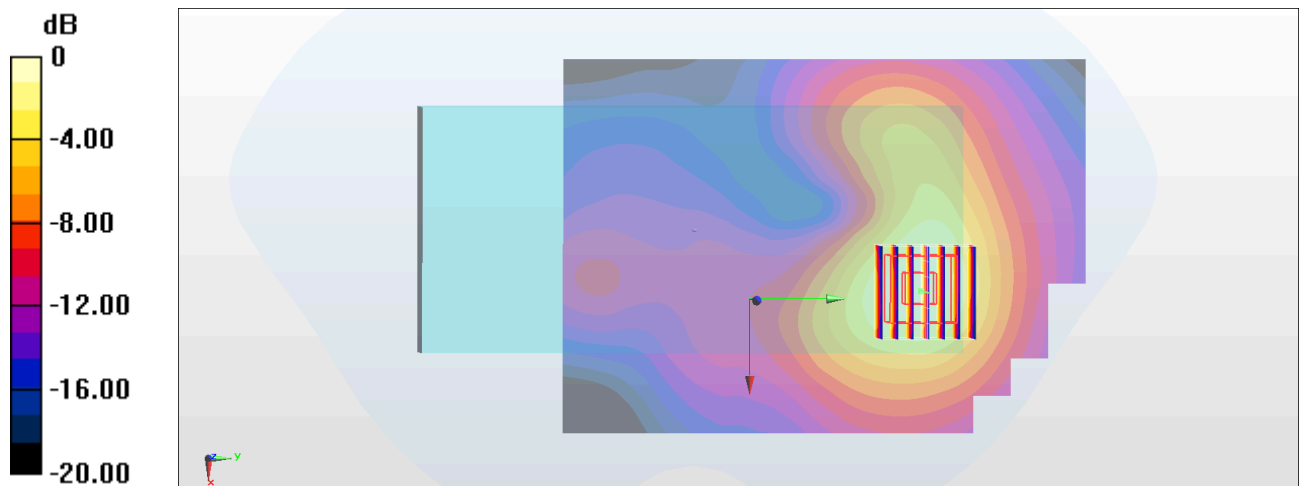

0 dB = 1.37 W/kg = 1.37 dBW/kg

#112_WLAN 2.4GHz_802.11b 1Mbps_Back with Holster_0mm_Ch11

Communication System: UID 10571 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz

Medium: HSL_600~7200_260820 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.54, 6.53, 6.24) @ 2462 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (111x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.367 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.01 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.118 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 0.624 W/kg

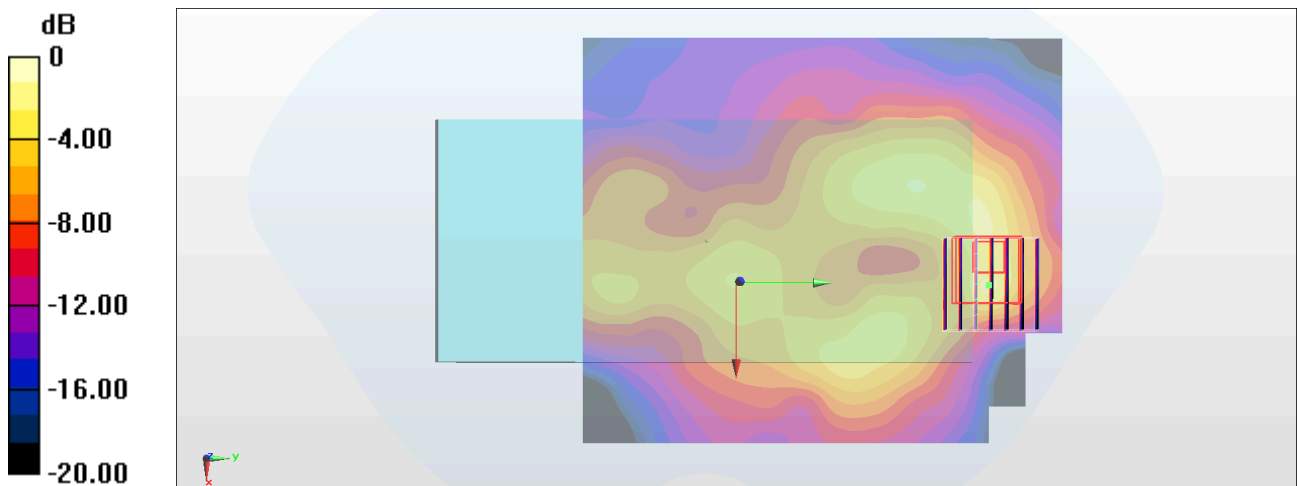

0 dB = 0.624 W/kg = -2.05 dBW/kg

#113_WLAN 5GHz_802.11a 6Mbps_Back with Holster_0mm_Ch56

Communication System: UID 10062 - CAE, IEEE 802.11a/h WiFi 5 GHz ; Frequency: 5280 MHz

Medium: HSL_600~7200_260820 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 34.648$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.98, 4.97, 4.75) @ 5280 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.17 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 22.67 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 3.87 W/kg

SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.389 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 2.07 W/kg

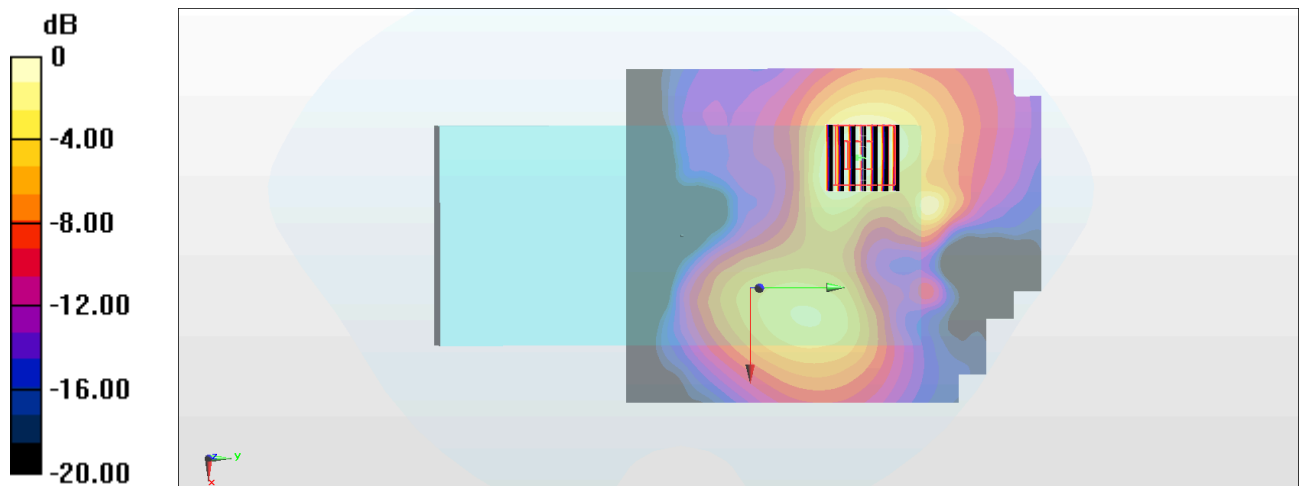

0 dB = 2.07 W/kg = 3.16 dBW/kg

#114_WLAN 5GHz_802.11a 6Mbps_Back with Holster_0mm_Ch124

Communication System: UID 10062 - CAE, IEEE 802.11a/h WiFi 5 GHz ; Frequency: 5620 MHz

Medium: HSL_600~7200_260820 Medium parameters used : $f = 5620$ MHz; $\sigma = 4.988$ S/m; $\epsilon_r = 33.981$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.61, 4.6, 4.4) @ 5620 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.01 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 20.83 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.352 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 1.95 W/kg

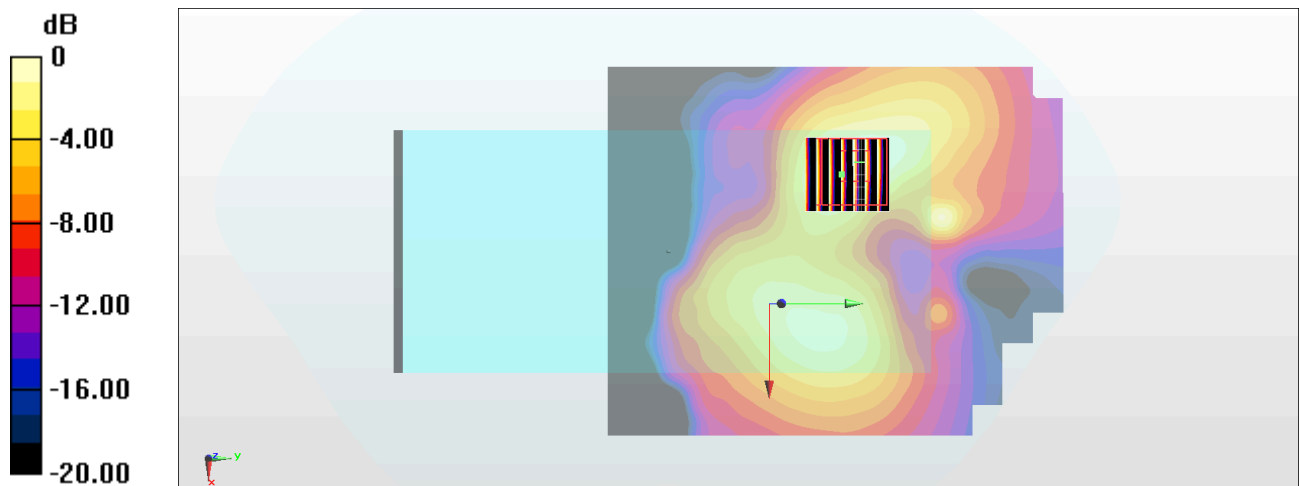

0 dB = 1.95 W/kg = 2.90 dBW/kg

#115_WLAN5GHz_802.11a 6Mbps_Back with Holster_0mm_Ch149

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5745.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.01$ S/m; $\epsilon_r = 34.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.661 W/kg; SAR (10g) = 0.297 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.17 dB

SAR (1g) = 0.920 W/kg; SAR (8g) = 0.258 W/kg; SAR (10g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = > 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 64.3 %

TSL Correction: Positive only

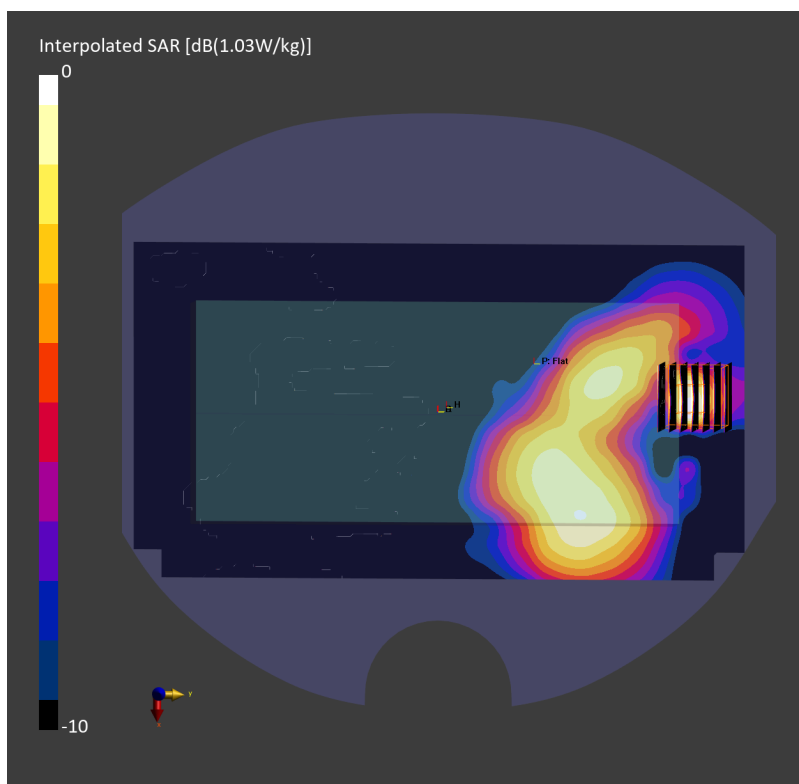

#116_WLAN 6GHz_802.11be-EHT320 MCS0_Back with Holster_0mm_Ch63

Communication System: WiFi; Frequency: 6265.000 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 6265.000$ MHz; $\sigma = 5.91$ S/m; $\epsilon_r = 33.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.49, 5.1, 5.45); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026-

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.333 W/kg; SAR (10g) = 0.085 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.11 dB


SAR (1g) = 0.392 W/kg; SAR (8g) = 0.097 W/kg; SAR (10g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

psAPD (1.0cm², sq) = 3.92 [W/m²]; psAPD (4.0cm², sq) = 1.95 [W/m²]

TSL Correction: Positive only

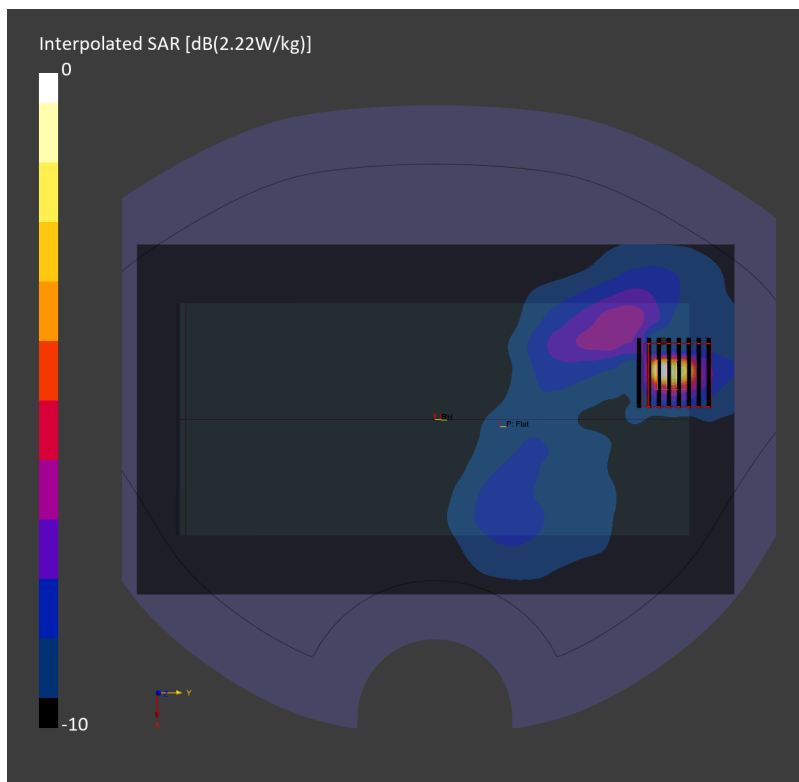

#117_Bluetooth_1Mbps_Back with Holster_0mm_Ch39

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2441 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 39.748$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.54, 6.53, 6.24) @ 2441 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x141x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.204 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.73 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.069 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 0.325 W/kg

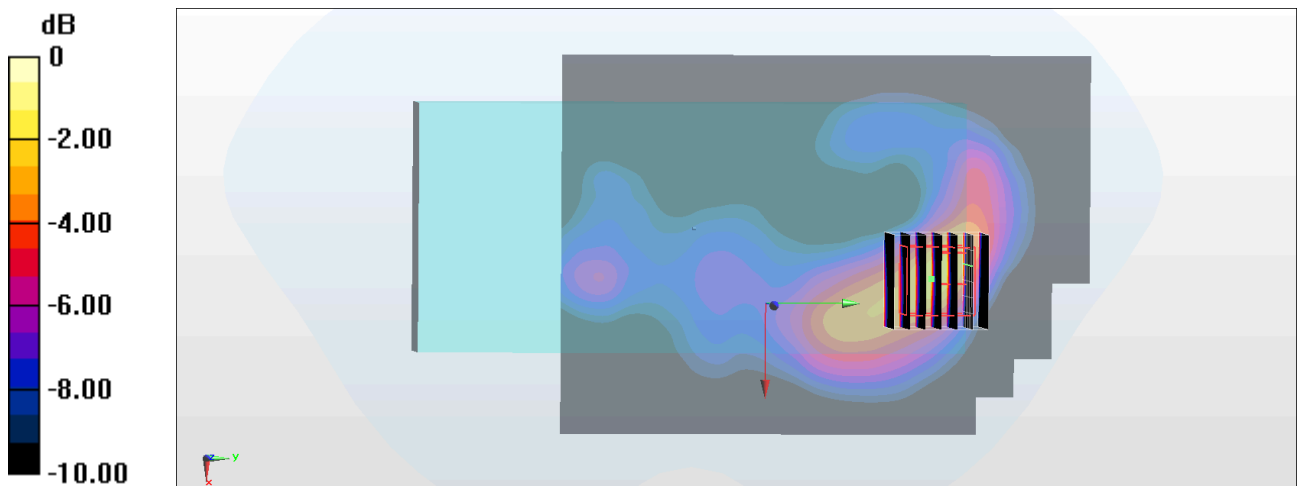

0 dB = 0.325 W/kg = -4.88 dBW/kg

#118_RFID_Back with Clip_15mm_Ch0

Communication System: UID 0, RFID; Frequency: 927.25 MHz

Medium: HSL_600~7200_260811 Medium parameters used : $f = 927.25$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 42.37$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.01, 9.28, 9.23) @ 927.25 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.846 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.03 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.937 W/kg

SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.435 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 20.4 mm

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.832 W/kg

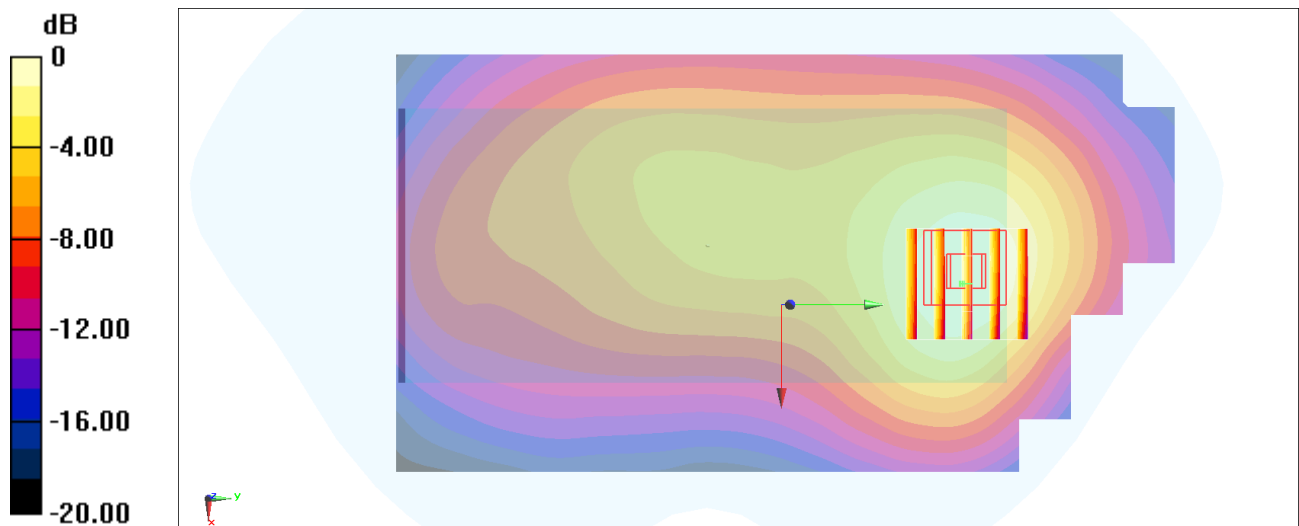

0 dB = 0.832 W/kg = -0.80 dBW/kg

#119_GSM1900_GPRS 3 Tx slots_Right Edge_0mm_Ch810

Communication System: UID 10027 - DAC, GPRS-FDD; Frequency: 1909.8 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 41.626$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61) @ 1909.8 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.94 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.72 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 5.98 W/kg

SAR(1 g) = 3 W/kg; SAR(10 g) = 1.31 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 4.90 W/kg

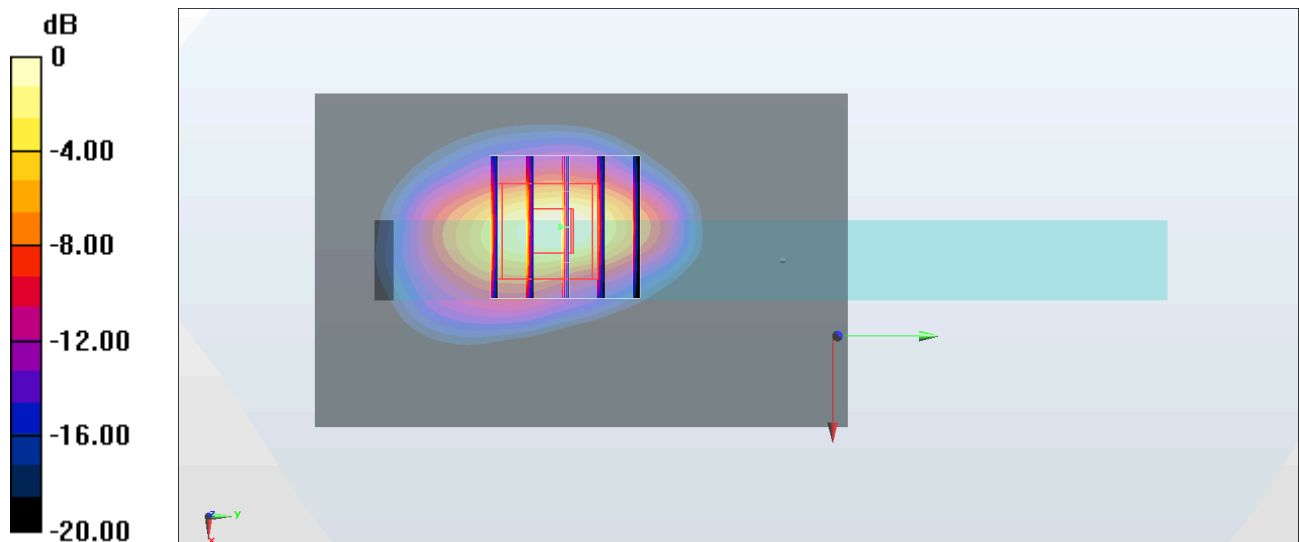

0 dB = 4.90 W/kg = 6.90 dBW/kg

#120_WCDMA II_RMC 12.2Kbps_Right Edge_0mm_Ch9400

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1880 MHz

Medium: HSL_600~7200_260812 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 40.77$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1880 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.42 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 71.91 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 7.88 W/kg

SAR(1 g) = 3.83 W/kg; SAR(10 g) = 1.67 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 6.51 W/kg

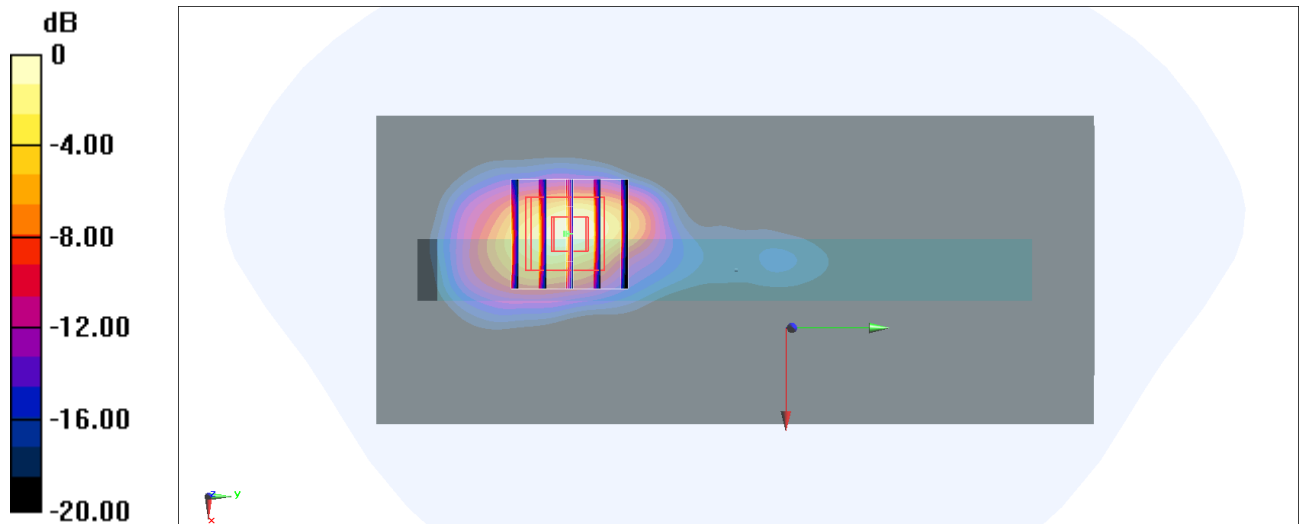

0 dB = 6.51 W/kg = 8.14 dBW/kg

#121_LTE Band 7_20M_QPSK_1_0_Back_0mm_Ch21350

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2560 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.849$ S/m; $\epsilon_r = 42.584$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.44, 7.26, 7.34) @ 2560 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.09 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.60 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.623 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 1.96 W/kg

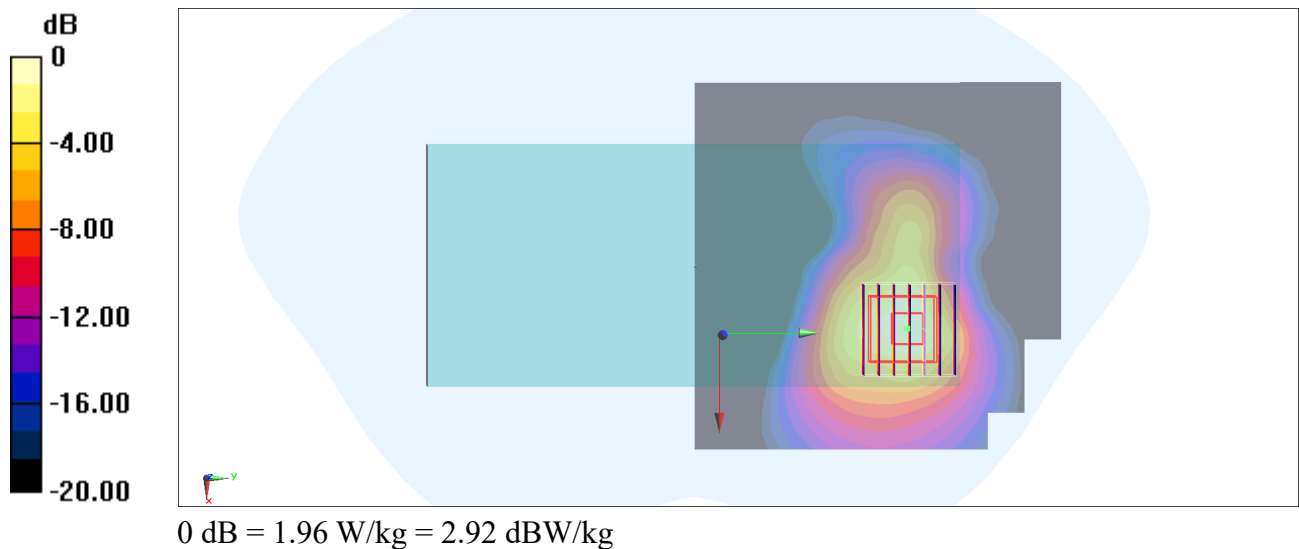

#122_LTE Band 25_20M_QPSK_1_0_Right Edge_0mm_Ch26340

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1880 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 43.457$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(8.04, 7.85, 7.93) @ 1880 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 4.82 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 65.94 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 6.35 W/kg

SAR(1 g) = 3.27 W/kg; SAR(10 g) = 1.43 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 5.24 W/kg

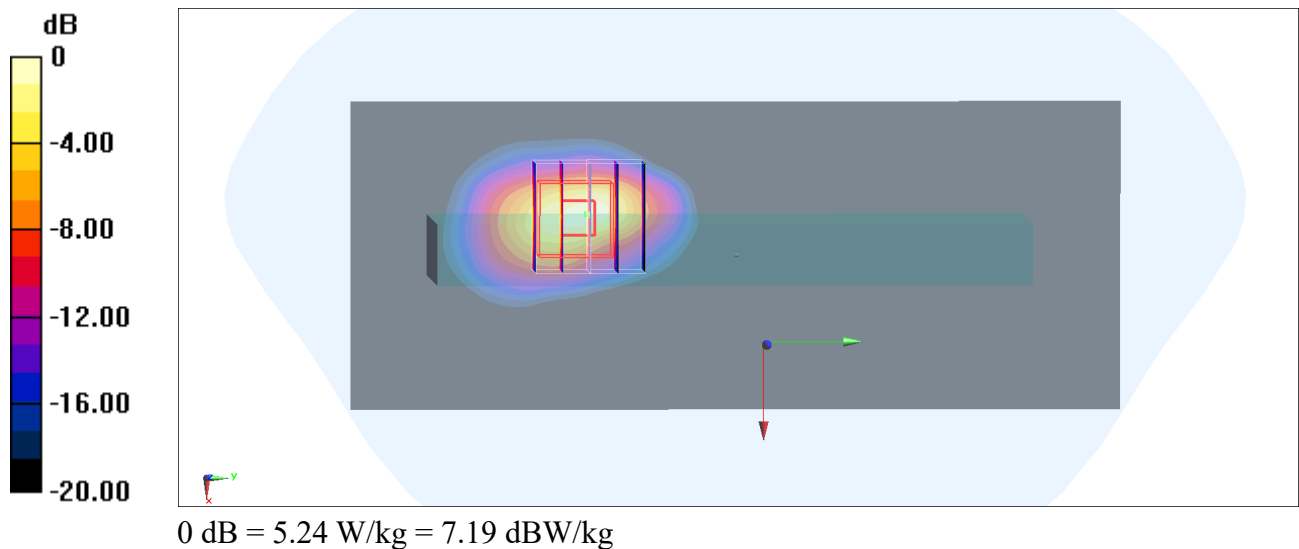

#123_LTE Band 30_10M_QPSK_1_0_Back_0mm_Ch27710

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 2310 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.659$ S/m; $\epsilon_r = 42.959$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.78, 7.59, 7.67) @ 2310 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.89 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 43.84 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 1.91 W/kg; SAR(10 g) = 0.956 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 2.85 W/kg

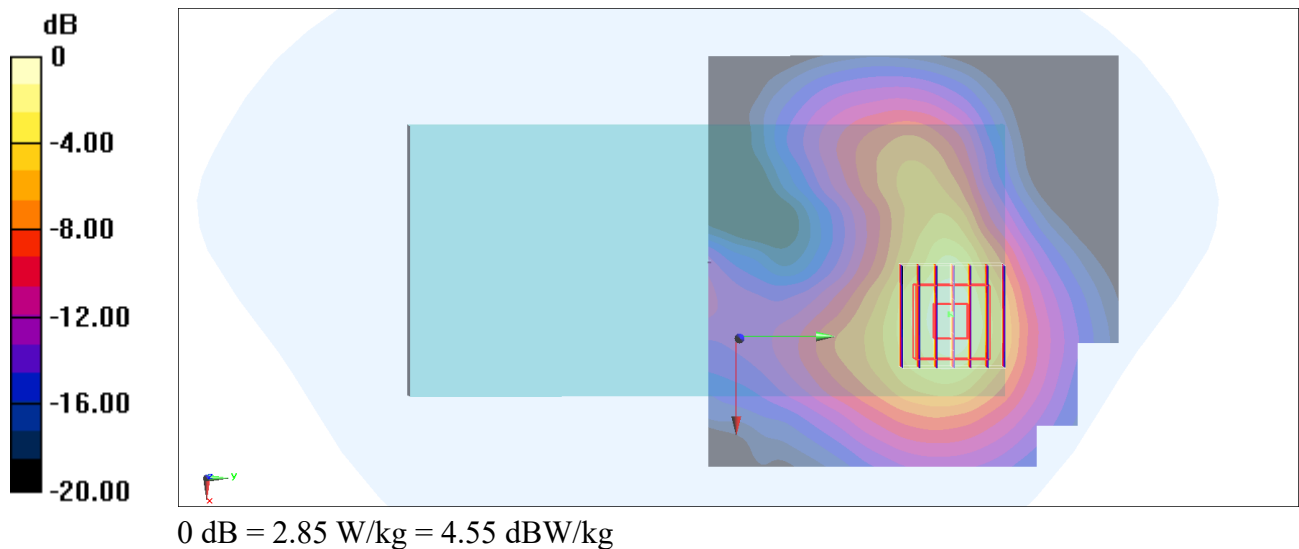

#124_LTE Band 66_20M_QPSK_1_0_Bottom Edge_0mm_Ch132572

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1770 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 43.618$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(8.13, 7.93, 8.02) @ 1770 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.05 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 49.18 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.13 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 2.82 W/kg

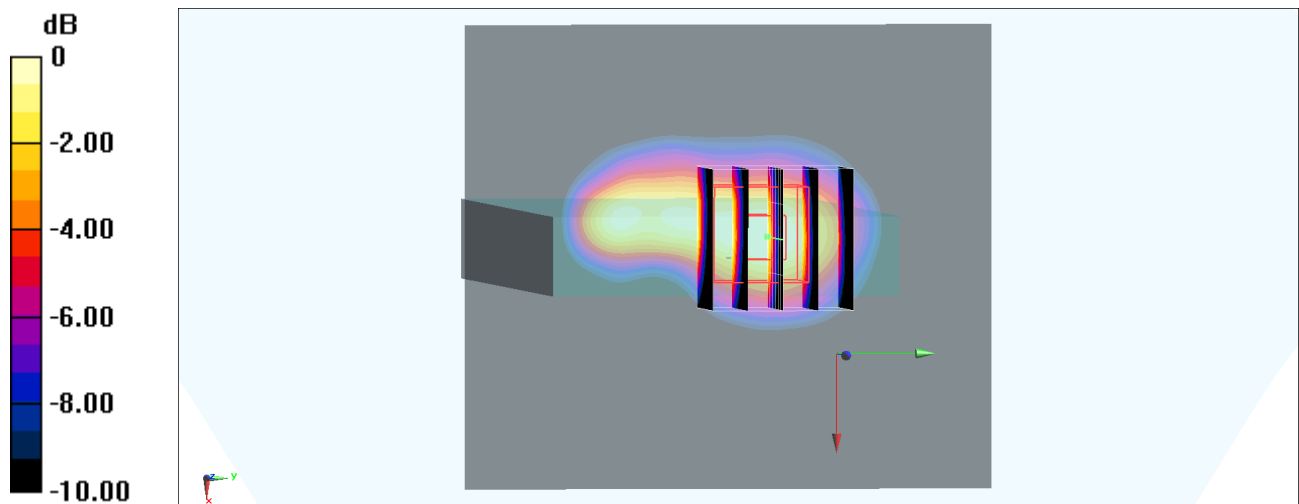

0 dB = 2.82 W/kg = 4.50 dBW/kg

#125_FR1 n7_50M_BPSK_1_1_Back_0mm_Ch507000

Communication System: UID 10935 - AAD, 5G NR; Frequency: 2535 MHz

Medium: HSL_600~7200_260816 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2535 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.88 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 41.35 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 1.92 W/kg; SAR(10 g) = 0.959 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 2.95 W/kg

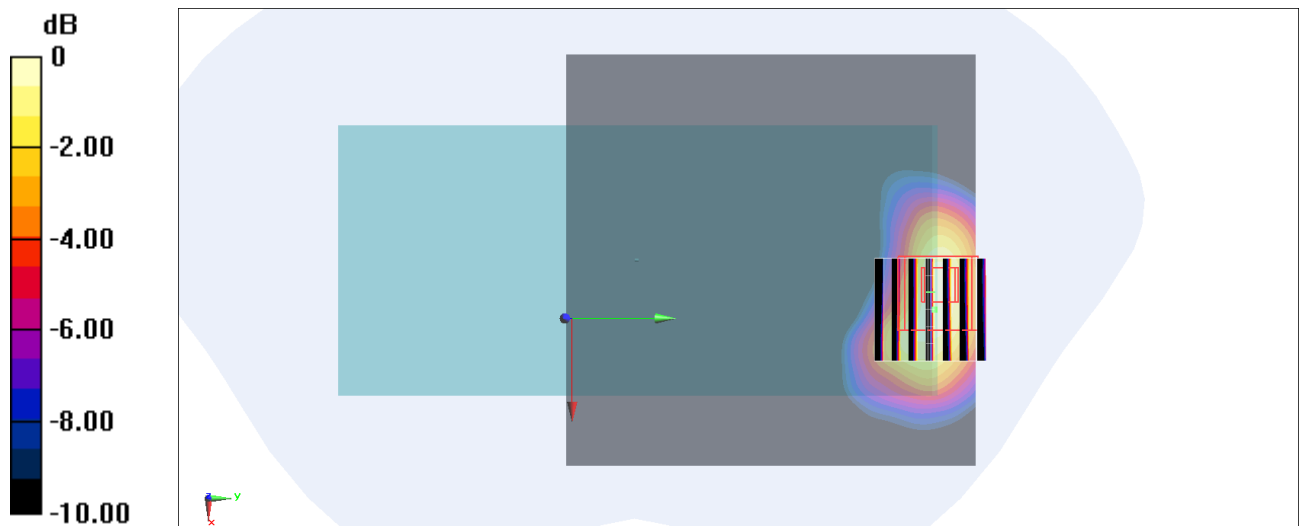

0 dB = 2.95 W/kg = 4.70 dBW/kg

#126_FR1 n25_40M_BPSK_1_1_Right Edge_0mm_Ch376500

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1882.5 MHz

Medium: HSL_600~7200_260812 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 40.76$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1882.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 7.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 78.26 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 9.26 W/kg

SAR(1 g) = 4.43 W/kg; SAR(10 g) = 1.9 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 7.82 W/kg

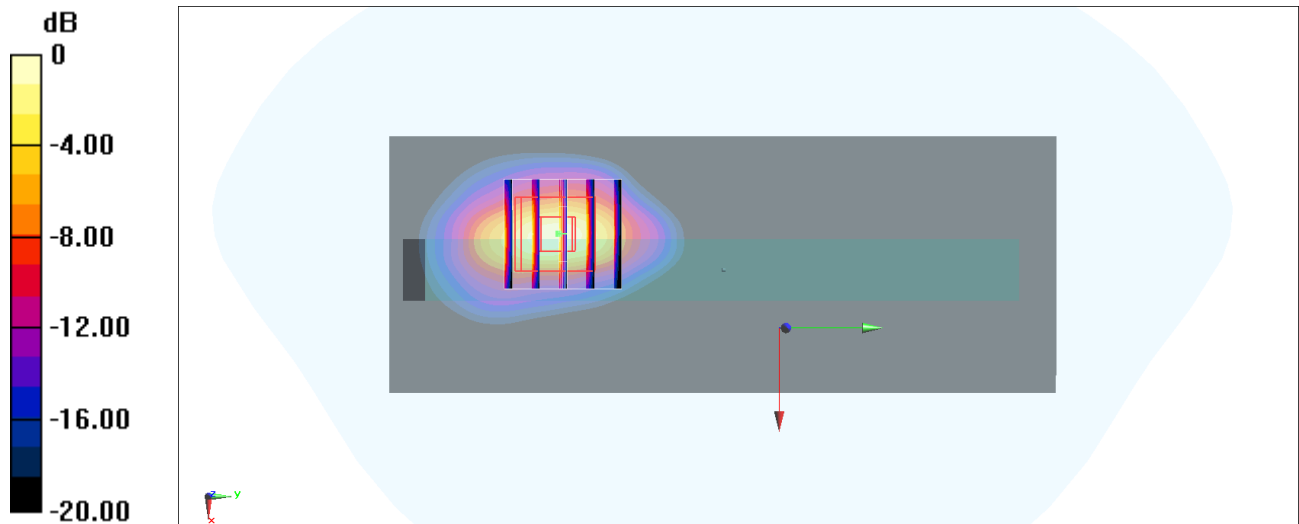

0 dB = 7.82 W/kg = 8.93 dBW/kg

#127_FR1 n30_10M_BPSK_1_1_Back_0mm_Ch462000

Communication System: UID 10929 - AAD, 5G NR ; Frequency: 2310 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.659$ S/m; $\epsilon_r = 42.959$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.78, 7.59, 7.67) @ 2310 MHz; Calibrated: 2026/6/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 4.08 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 53.09 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 4.90 W/kg

SAR(1 g) = 2.78 W/kg; SAR(10 g) = 1.38 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 4.16 W/kg

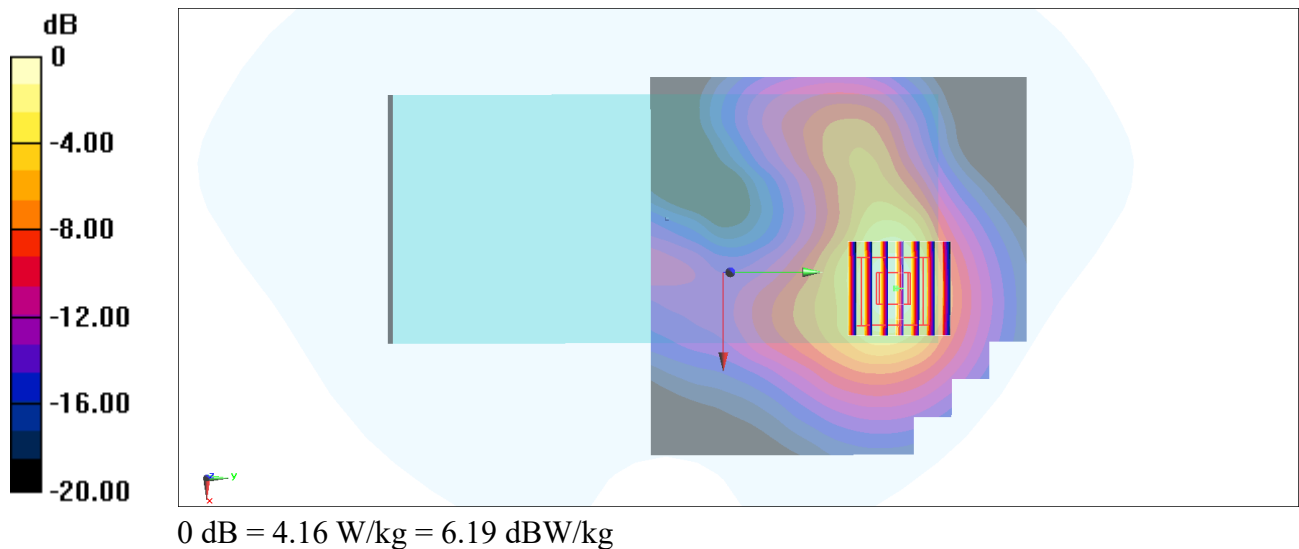

#128_FR1 n66_40M_BPSK_1_1_Bottom Edge_0mm_Ch349000

Communication System: UID 10934 - AAC, 5G NR ; Frequency: 1745 MHz

Medium: HSL_600~7200_260812 Medium parameters used : $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.972$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1745 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.55 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.52 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 5.85 W/kg

SAR(1 g) = 3.06 W/kg; SAR(10 g) = 1.66 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 4.60 W/kg

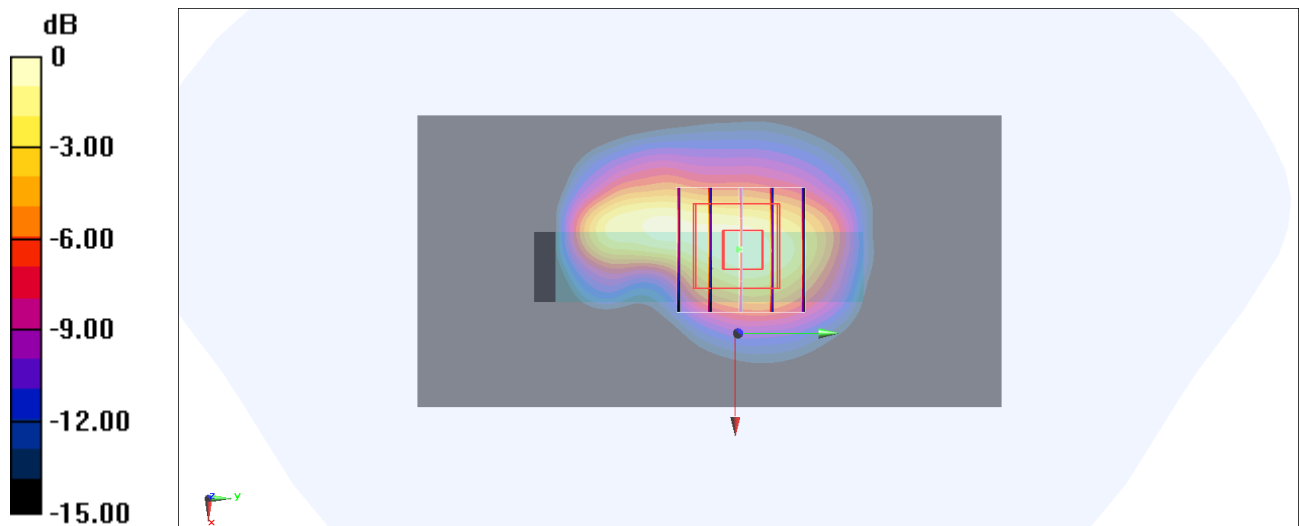

0 dB = 4.60 W/kg = 6.63 dBW/kg

#129_FR1 n41_100M_BPSK_1_1_Front_0mm_Ch518598

Communication System: UID 10866 - AAF, 5G NR ; Frequency: 2592.99 MHz

Medium: HSL_600~7200_260816 Medium parameters used : $f = 2592.99$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 39.452$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2592.99 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan 2 (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.92 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.16 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 6.71 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.501 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 5.17 W/kg

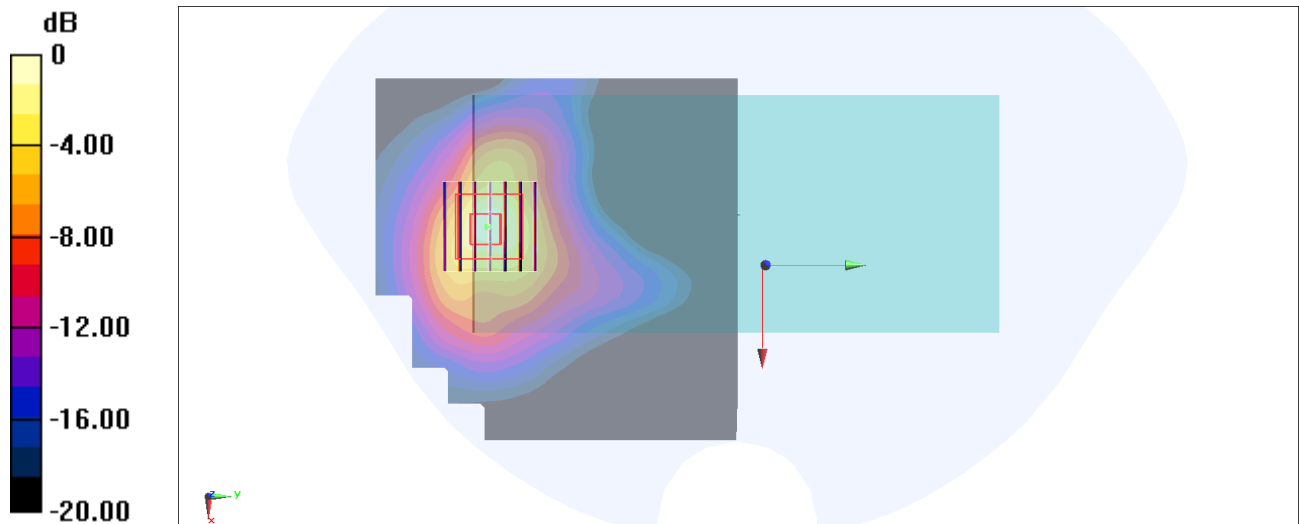

0 dB = 5.17 W/kg = 7.13 dBW/kg

#130_FR1 n48_40M_BPSK_1_1_Back_0mm_Ch645332

Communication System: UID 10903 - AAD, 5G NR; Frequency: 3679.98 MHz

Medium: HSL_600~7200_260815 Medium parameters used: $f = 3680$ MHz; $\sigma = 2.903$ S/m; $\epsilon_r = 37.541$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.32, 6.5, 6.47) @ 3679.98 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.86 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 33.47 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 1.64 W/kg; SAR(10 g) = 0.722 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 2.89 W/kg

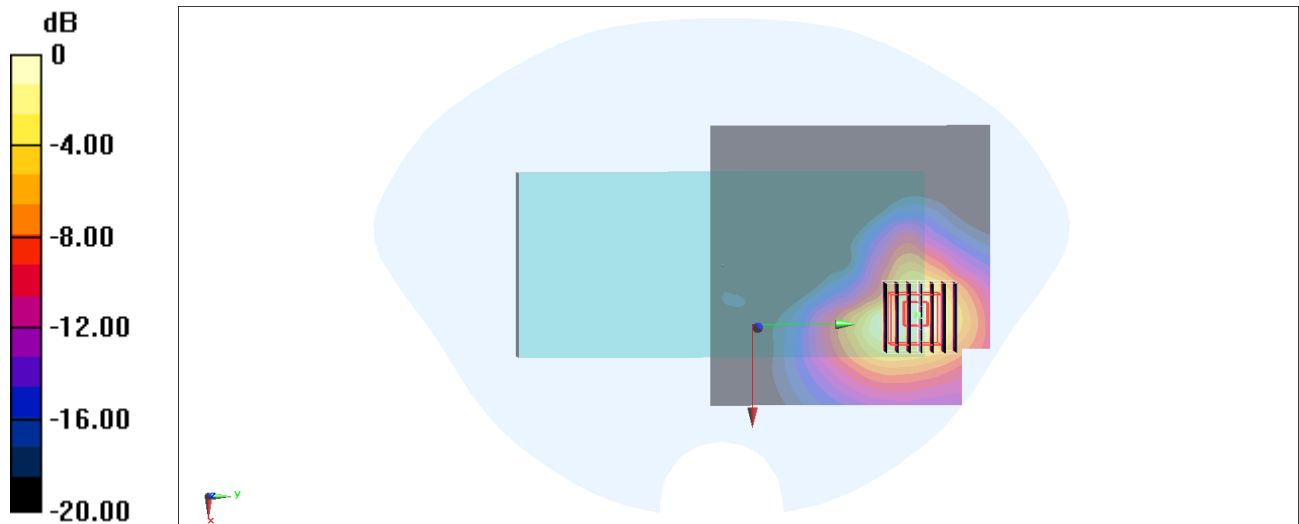

0 dB = 2.89 W/kg = 4.61 dBW/kg

#131_FR1 n77_100M_BPSK_1_1_Left Edge_0mm_Ch633332

Communication System: UID 10866 - AAF, 5G NR; Frequency: 3499.98 MHz

Medium: HSL_600~7200_260814 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.753$ S/m; $\epsilon_r = 37.864$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3499.98 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 17.4 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 104.5 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 38.3 W/kg

SAR(1 g) = 11.7 W/kg; SAR(10 g) = 3.26 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 26.2 W/kg

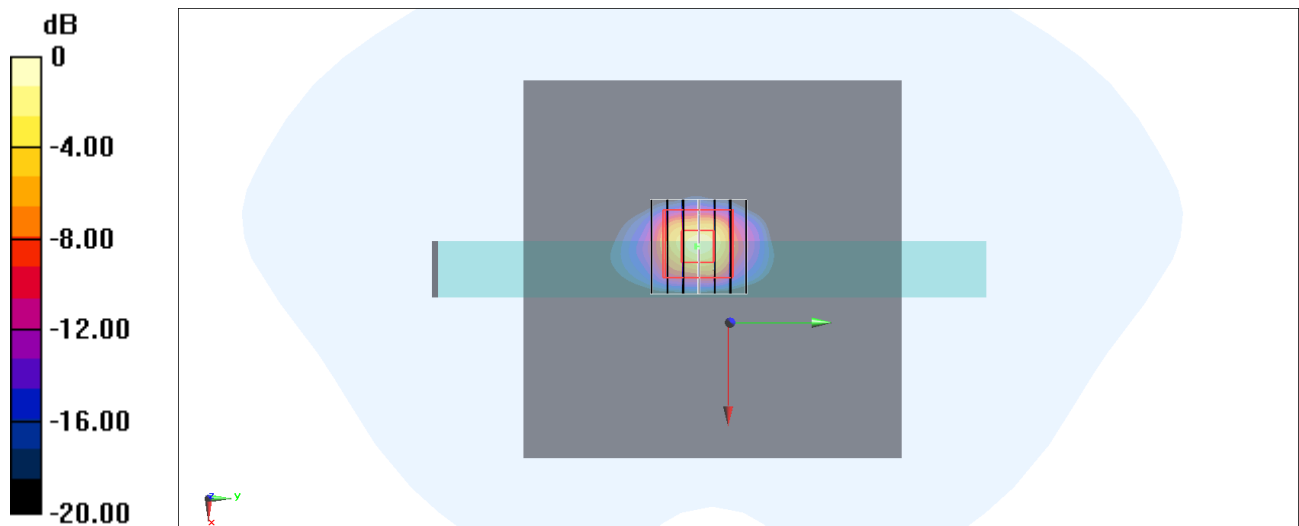

0 dB = 26.2 W/kg = 14.18 dBW/kg

#132_WLAN 2.4GHz_802.11b 1Mbps_Back_0mm_Ch11

Communication System: UID 10571 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz

Medium: HSL_600~7200_260820 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 39.698$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.54, 6.53, 6.24) @ 2462 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 35.69 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.653 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 2.12 W/kg

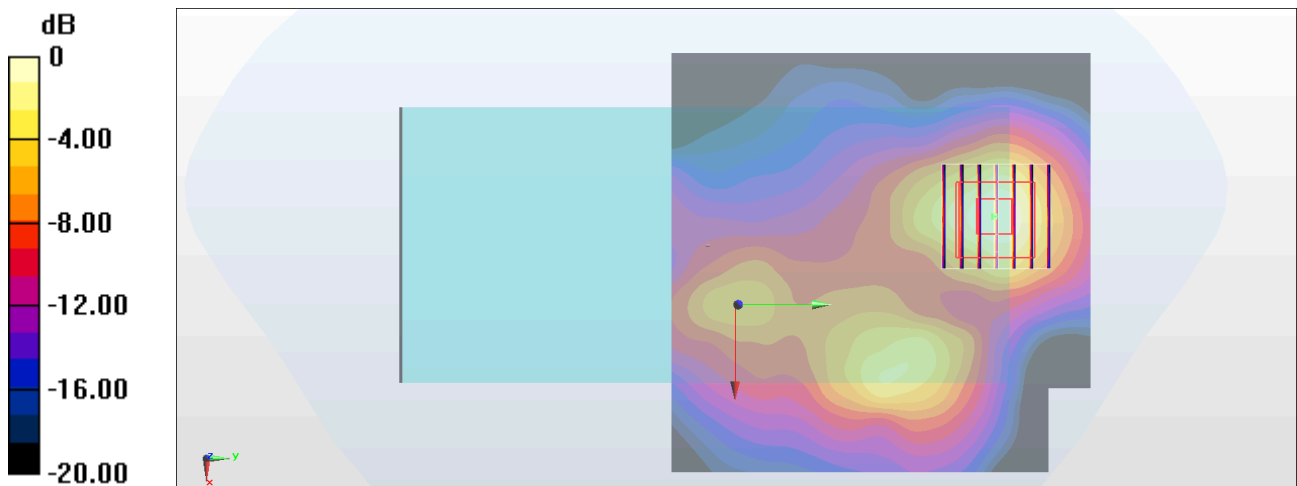

0 dB = 2.12 W/kg = 3.26 dBW/kg

#133_WLAN5GHz_802.11ac-VHT20 MCS0_Left Edge_0mm_Ch52

Communication System: UID 10607 - AAD, IEEE 802.11ac WiFi; Frequency: 5260 MHz

Medium: HSL_600~7200_260820 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.583$ S/m; $\epsilon_r = 34.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.98, 4.97, 4.75) @ 5260 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.23 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.62 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 13.3 W/kg

SAR(1 g) = 3.1 W/kg; SAR(10 g) = 0.907 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 7.78 W/kg

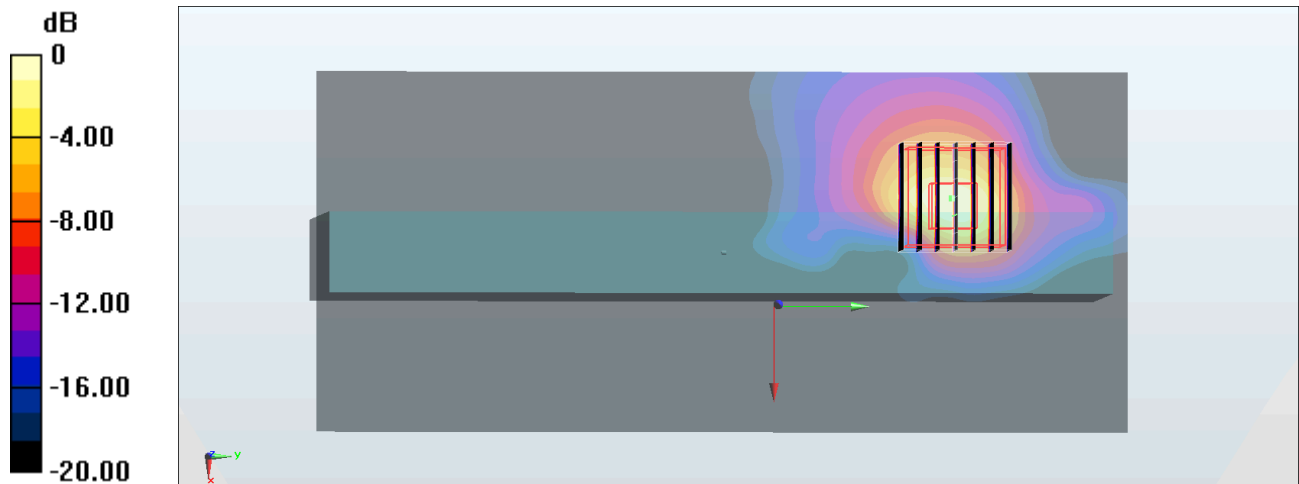

#134_WLAN5GHz_802.11a 6Mbps_Right Edge_0mm_Ch124

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5620 MHz

Medium: HSL_600~7200_260820 Medium parameters used: $f = 5620$ MHz; $\sigma = 4.988$ S/m; $\epsilon_r = 33.981$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.61, 4.6, 4.4) @ 5620 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.33 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.95 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 3.55 W/kg; SAR(10 g) = 0.951 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 9.53 W/kg

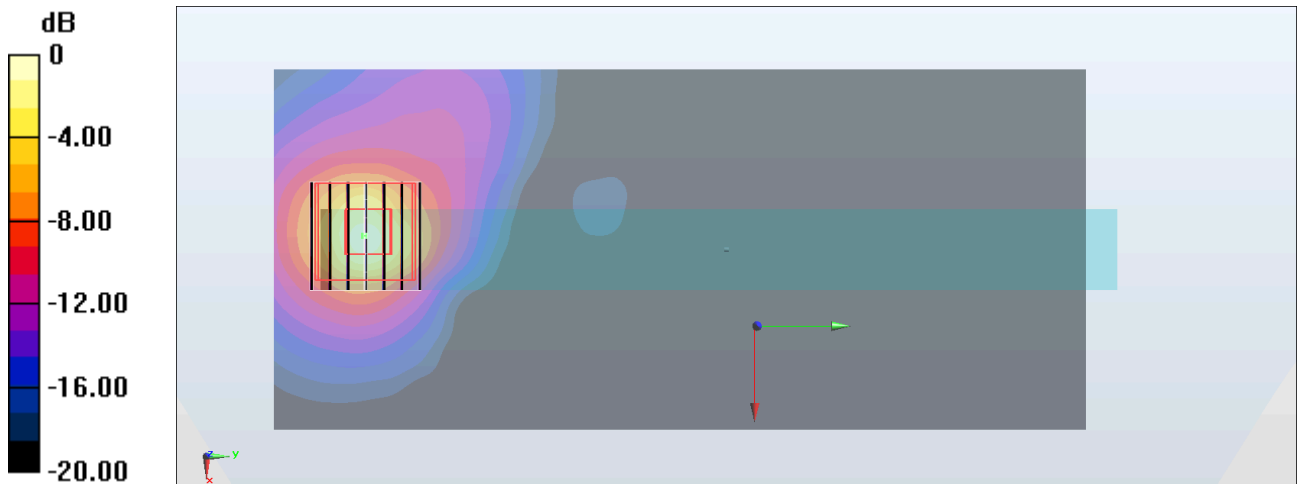

0 dB = 9.53 W/kg = 9.79 dBW/kg

#135_WLAN 5GHz_802.11a 6Mbps_Right Edge_0mm_Ch149

Communication System: UID 10062 - CAE, IEEE 802.11a/h WiFi 5 GHz ; Frequency: 5745 MHz

Medium: HSL_600~7200_260820 Medium parameters used : $f = 5745$ MHz; $\sigma = 5.144$ S/m; $\epsilon_r = 33.747$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.55, 4.54, 4.34) @ 5745 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2025/10/15
- Phantom: SAM-Middle; Type: QD OOO P40 CD; Serial: TP-1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 12.7 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 51.71 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 24.5 W/kg

SAR(1 g) = 4.42 W/kg; SAR(10 g) = 1.16 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 12.5 W/kg

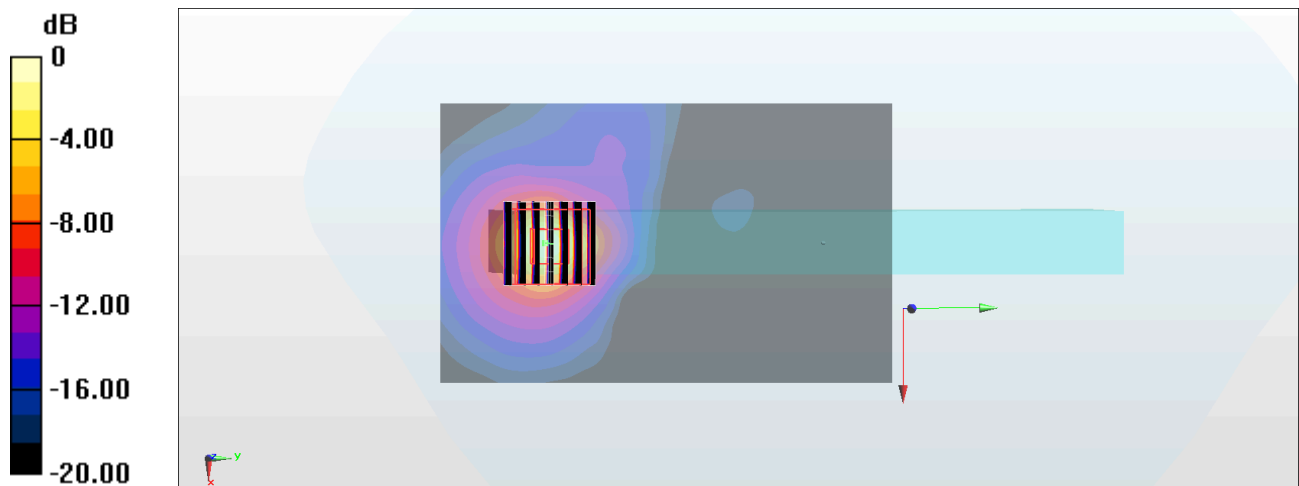

0 dB = 12.5 W/kg = 10.97 dBW/kg