

Test Report

22-1-0076802T12a



Deutsche
Akkreditierungsstelle
D-PL-12047-01-01
D-PL-12047-01-03
D-PL-12047-01-04

Number of pages: 26 **Date of Report:** 2022-Nov-07

Testing company: CETECOM GmbH
Im Teelbruch 116
45219 Essen Germany
Tel. + 49 (0) 20 54 / 95 19-0
Fax: + 49 (0) 20 54 / 95 19-150

Applicant: WITTE-Velbert GmbH & Co.KG

Product: Automotive NFC Outer Door Handle
Model: INTTAGEBTP

FCC ID: V2T-INTTAGEBTP **IC:** 7575A-INTTAGEBTP

Testing has been carried out in accordance with:

FCC Regulations
Title 47 CFR, Chapter I, Subchapter A, Part 15, Subpart C
§15.225

ISED Regulations
RSS-Gen, Issue 5 + Amendment 2
RSS-210, Issue 10

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".each section under "Test method and limit".

Tested Technology: SRD

Test Results: ☒ The EUT complies with the requirements in respect of selected parameters subject to the test.
The test results relate only to devices specified in this document

Signatures:


Dipl.-Ing. Ninovic Perez
Test Lab Manager
Authorization of test report


Timo Franke
Test Manager
Responsible of test report

Table of Contents

Table of Annex.....	3
1 General information	4
1.1 Disclaimer and Notes.....	4
1.2 Attestation.....	4
1.3 Summary of Test Results	5
1.4 Summary of Test Methods	5
2 Administrative Data	6
2.1 Identification of the Testing Laboratory	6
2.2 General limits for environmental conditions	6
2.3 Test Laboratories sub-contracted.....	6
2.4 Organizational Items	6
2.5 Applicant's details	6
2.6 Manufacturer's details	6
2.7 Equipment under Test (EUT)	7
2.8 Untested Variant (VAR)	7
2.9 Auxiliary Equipment (AE)	7
2.10 Connected cables (CAB).....	7
2.11 Software (SW).....	7
2.12 EUT set-ups.....	7
2.13 EUT operation modes	8
3 Equipment under test (EUT)	9
3.1 General Data of Main EUT as Declared by Applicant.....	9
3.2 Detailed Technical data of Main EUT as Declared by Applicant	10
3.3 Modifications on Test sample.....	10
4 Measurements.....	11
4.1 Radiated field strength emissions and emission mask	11
4.2 Radiated field strength emissions below 30 MHz	13
4.3 Radiated field strength emissions 30 MHz – 1 GHz	17
4.4 Occupied Channel Bandwidth 99%.....	19
4.5 Frequency stability	20
4.6 Equipment lists	23
5 Results from external laboratory.....	24
6 Opinions and interpretations.....	24
7 List of abbreviations	24
8 Measurement Uncertainty valid for conducted/radiated measurements	25
9 Versions of test reports (change history)	26

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	CETECOM_TR22-1-0076802T12a_A1	80
Annex 2	Internal photographs of EUT	Provided by applicant	
Annex 3	External photographs of EUT	CETECOM_TR22-1-0076802T12a_A3	6
Annex 4	Test set-up photographs	CETECOM_TR22-1-0076802T12a_A4	6
The listed attachments are separate documents.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.2 Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All of the above requirements are met in accordance with enumerated standards.

1.3 Summary of Test Results

The EUT integrates **RFID** technology. Other implemented wireless technologies were not considered within this test report.

Test case	Reference Clause FCC ☒	Reference Clause ISED ☒	Page	Remark	Result
Radiated field strength emissions and emission mask	§15.225(a)(b)(c)(d)	RSS-210, Issue 10, Annex B.6 (a)	11	--	PASSED
Radiated field strength emissions below 30 MHz	§15.209(a)	RSS-Gen: Issue 5 §8.9 Table 6	13	--	PASSED
Radiated field strength emissions 30 MHz – 1 GHz	§15.209(a)	RSS-Gen: Issue 5 §8.9 Table 5	17	--	PASSED
Occupied Channel Bandwidth 99%	§2.202(a) §2.1049(h)	RSS-Gen, Issue 5, §6.6	19	--	PASSED
Frequency stability	§2.1055 §15.225(e)	RSS-210, Issue 10, Annex B.6 (b)	20	--	PASSED
AC-Power Lines Conducted Emissions	§15.207	RSS-Gen Issue 5: §8.8, Table 4	--	--	N/A

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

N/A

Test case does not apply to the test object.

NP

The test was not performed by the CETECOM Laboratory.

Decision Rule: CETECOM GmbH follows [ILAC G8:2019 chapter 4.2.1 \(Simple Acceptance Rule\)](#).

1.4 Summary of Test Methods

Test case	Test method
Occupied Channel Bandwidth 99%	ANSI C63.10:2013, §6.9
Radiated field strength emissions below 30 MHz	ANSI C63.10-2013 §6.3, §6.4
Radiated field strength emissions 30 MHz- 1 GHz	ANSI C63.4-2014 §8.2.3, ANSI C63.10-2013 §6.3, § 6.5
Frequency stability tests	ANSI C63.10-2013; §6.8
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 §7, ANSI C63.10-2013 § 6.2

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Ninovic Perez
Accreditation scope:	DAkkS Webpage: FCC ISED
IC Lab company No. / CAB ID:	3462D / DE0005
Test location:	CETECOM GmbH; Im Teelbruch 116; 45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:	--
---------------	----

2.4 Organizational Items

Responsible test manager:	Dipl.-Ing. Christian Lorenz
Receipt of EUT:	2022-Aug-09
Date(s) of test:	2022-Sep-22 to 2022-Sep-30
Version of template:	22.0901

2.5 Applicant's details

Applicant's name:	WITTE-Velbert GmbH & Co.KG
Address:	Höferstr. 3 - 15 42551 Velbert North Rhine-Westphalia Germany
Contact Person:	Kay Lackmann
Contact Person's Email:	kay.lackmann@witte-automotive.de

2.6 Manufacturer's details

Manufacturer's name:	WITTE-Velbert GmbH & Co.KG
Address:	Höferstr. 3 - 15 42551 Velbert Deutschland

2.7 Equipment under Test (EUT)

EUT No. *)	Sample No.	Product	Model	Type	SN	HW	SW
EUT 1	22-1-00768S16_C01	Automotive NFC Outer Door Handle	INTTAGEBTP	INTTAGEBTP LH	n/a	03.10	06.10
EUT 2	22-1-00768S17_C01	Automotive NFC Outer Door Handle	INTTAGEBTP	INTTAGEBTP LH	n/a	03.10	06.10

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Untested Variant (VAR)

VAR No. *)	Sample No.	Product	Model	Type	SN	HW	SW
------------	------------	---------	-------	------	----	----	----

*) If the table above does not show any other line than the headline, no untested variants are available.

2.9 Auxiliary Equipment (AE)

AE No. *)	Sample No.	Auxiliary Equipment	Model	SN	HW	SW
AE 1	22-1-00768S15_C01	NFC Card	NFC Card	5A3B6B9-01	n/a	n/a
AE 2	22-1-00768S22_C01	Handle Holder	Handle Holder	n/a	n/a	n/a
AE 3	22-1-00768S30_C01	Control Box	n/a	n/a	n/a	n/a

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report. If the table above does not show any other line than the headline, no AE was used during testing nor was taken into account for evaluation

2.10 Connected cables (CAB)

CAB No. *)	Sample No.	Cable Type	Connectors / Details	Length
CAB 1	22-1-00768S28_C01	Power Cable	n/a	100 cm

*) CAB short description is used to simplify the identification of the connected cables in this test report. If the table above does not show any other line than the headline, no cable was used during testing nor was taken into account for evaluation

2.11 Software (SW)

SW No. *)	Sample No.	SW Name	Description	SW Status
-----------	------------	---------	-------------	-----------

*) SW short description is used to simplify the identification of the used software in this test report. If the table above does not show any other line than the headline, no SW was used during testing nor was taken into account for evaluation.

2.12 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
Set. 1	EUT 1 + AE 2 + CAB 1	Used for Radiated measurements, TX-Mode without NFC card
Set. 2	EUT 2 + AE 1 + AE 2 + AE 3	Used for Radiated measurements, TX-Mode with NFC card. Distance NFC Card to EUT: 3.7cm as typical distance.

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.13 EUT operation modes

EUT operating mode no.*1)	Operating modes	Additional information
Op. 1	TX	Continuous transmission without NFC card
Op. 2	TXRX	Continuous communication with NFC card

*1) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Firmware	☐ for normal use	☒ Special version for test execution	
Power supply	☐ AC Mains	-	
	☐ DC Mains	-	
	☒ Battery	Lead-Acid 12 V DC via banana Connector	
Operational conditions	T _{nom} =21 °C	T _{min} = -40 °C	T _{max} = 85 °C
EUT sample type	Pre-Production		
Weight	0.100 kg		
Size [LxWxH]	23.5 cm x 3.5 cm x 5.0 cm		
Interfaces/Ports	DC port		
For further details refer Applicants Declaration & following technical documents			
For further details regarding radio parameters, please refer to Bluetooth Core Specification			

3.2 Detailed Technical data of Main EUT as Declared by Applicant

Frequency Band	13.110 MHz – 14.010 MHz		
Number of Channels (USA/Canada -bands)	1 nominal at 13.56 MHz		
Nominal Channel Bandwidth	n/a		
Type of Modulation Data Rate	n/a		
Other installed options	None		
Antenna Type	Loop antenna		
Antenna Gain	n/a for loop antennas		
FCC label attached	No		
Test firmware / software and storage location	EUT		
For further details refer Applicants Declaration & following technical documents			
Description of Reference Document (supplied by applicant)		Version	Total Pages
--		--	--

3.3 Modifications on Test sample

Additions/deviations or exclusions	--
------------------------------------	----

4 Measurements


4.1 Radiated field strength emissions and emission mask

4.1.1 Description of the general conducted test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

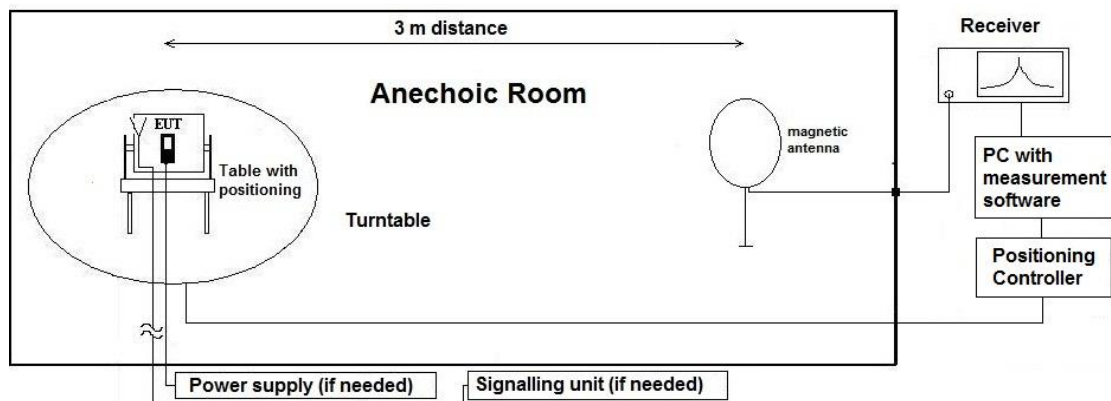

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5 **Fehler! Textmarke nicht definiert.**)

4.1.2 Measurement Location

Test site	120901 - SAC - Radiated Emission <1GHz
-----------	--

4.1.3 Limit

Frequency Range [MHz]	Limit [$\mu\text{V/m}$]	Limit [$\text{dB}\mu\text{V/m}$]	Detector	RBW [kHz]	Remark
13.553 – 13.567	15.848	84	PEAK	10	PEAK, TRACE max-hold mode, repetitive scan for exploratory measurements Quasi-Peak, for final measurement on critical frequencies ($f < 1\text{GHz}$)
13.410 – 13.553 and 13.567 – 13.710	334	50.47			
13.110 – 13.410 and 13.710 – 14.010	106	40.5			
$f \leq 13.110 - 14.010 \geq f$	30	29.5			

4.1.4 Result

Diagram	Channel	Mode	Maximum Level PK [dB μ V/m]	Result
2.01a	1	Op. 1	40.449 (PK)	PASSED
2.02a	1	Op. 2	39.655 (PK)	PASSED

Remark 1: for more information and graphical plot see annex A1 **CETECOM_TR22-1-0076802T12a_A1**

Remark 2: during pre-tests worst case position is determined to be the standing position, therefore further tests are only performed on EUT in standing position


4.2 Radiated field strength emissions below 30 MHz

4.2.1 Description of the general test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

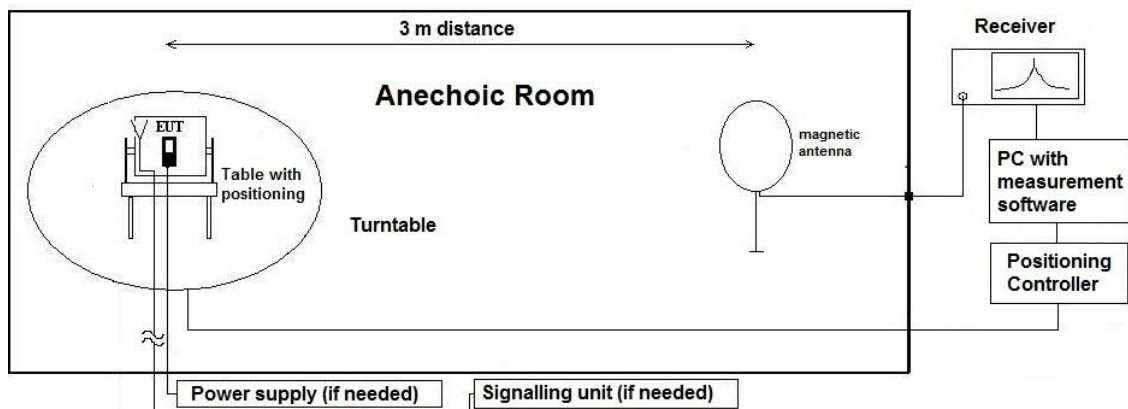

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5 **Fehler! Textmarke nicht definiert.**)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.2.2 Measurement Location

Test site	120901 - SAC - Radiated Emission <1GHz
-----------	--

4.2.3 Correction factors due to reduced meas. distance ($f < 30$ MHz):

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of $0.625 \times \text{Lambda}$. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

Frequency Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas < Dnear-field)	2nd Condition (Limit distance bigger dnear-field)	Distance Correction accord. Formula
kHz	9	33333.33	5305.17	300	fulfilled	not fulfilled	-80.00
	10	30000.00	4774.65		fulfilled	not fulfilled	-80.00
	20	15000.00	2387.33		fulfilled	not fulfilled	-80.00
	30	10000.00	1591.55		fulfilled	not fulfilled	-80.00
	40	7500.00	1193.66		fulfilled	not fulfilled	-80.00
	50	6000.00	954.93		fulfilled	not fulfilled	-80.00
	60	5000.00	795.78		fulfilled	not fulfilled	-80.00
	70	4285.71	682.09		fulfilled	not fulfilled	-80.00
	80	3750.00	596.83		fulfilled	not fulfilled	-80.00
	90	3333.33	530.52		fulfilled	not fulfilled	-80.00
	100	3000.00	477.47		fulfilled	not fulfilled	-80.00
	125	2400.00	381.97		fulfilled	not fulfilled	-80.00
	200	1500.00	238.73		fulfilled	fulfilled	-78.02
	300	1000.00	159.16		fulfilled	fulfilled	-74.49
	400	750.00	119.37		fulfilled	fulfilled	-72.00
	490	612.24	97.44		fulfilled	fulfilled	-70.23
	500	600.00	95.49		fulfilled	not fulfilled	-40.00
	600	500.00	79.58		fulfilled	not fulfilled	-40.00
	700	428.57	68.21		fulfilled	not fulfilled	-40.00
	800	375.00	59.68		fulfilled	not fulfilled	-40.00
	900	333.33	53.05		fulfilled	not fulfilled	-40.00
MHz	1.00	300.00	47.75	30	fulfilled	not fulfilled	-40.00
	1.59	188.50	30.00		fulfilled	not fulfilled	-40.00
	2.00	150.00	23.87		fulfilled	fulfilled	-38.02
	3.00	100.00	15.92		fulfilled	fulfilled	-34.49
	4.00	75.00	11.94		fulfilled	fulfilled	-32.00
	5.00	60.00	9.55		fulfilled	fulfilled	-30.06
	6.00	50.00	7.96		fulfilled	fulfilled	-28.47
	7.00	42.86	6.82		fulfilled	fulfilled	-27.13
	8.00	37.50	5.97		fulfilled	fulfilled	-25.97
	9.00	33.33	5.31		fulfilled	fulfilled	-24.95
	10.00	30.00	4.77		fulfilled	fulfilled	-24.04
	10.60	28.30	4.50		fulfilled	fulfilled	-23.53
	11.00	27.27	4.34		fulfilled	fulfilled	-23.21
	12.00	25.00	3.98		fulfilled	fulfilled	-22.45
	13.56	22.12	3.52		fulfilled	fulfilled	-21.39
	15.00	20.00	3.18		fulfilled	fulfilled	-20.51
	15.92	18.85	3.00		fulfilled	fulfilled	-20.00
	17.00	17.65	2.81		not fulfilled	fulfilled	-20.00
	18.00	16.67	2.65		not fulfilled	fulfilled	-20.00
	20.00	15.00	2.39		not fulfilled	fulfilled	-20.00
	21.00	14.29	2.27		not fulfilled	fulfilled	-20.00
	23.00	13.04	2.08		not fulfilled	fulfilled	-20.00
	25.00	12.00	1.91		not fulfilled	fulfilled	-20.00
	27.00	11.11	1.77		not fulfilled	fulfilled	-20.00
	29.00	10.34	1.65		not fulfilled	fulfilled	-20.00
	30.00	10.00	1.59		not fulfilled	fulfilled	-20.00

4.2.4 Limit

Radiated emissions limits, (3 meters)					
Frequency Range [MHz]	Limit [$\mu\text{V}/\text{m}$]	Limit [$\text{dB}\mu\text{V}/\text{m}$]	Distance [m]	Detector	RBW [kHz]
0.009 – 0.09	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.09 – 0.11	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Quasi peak	0.2
0.11 – 0.15	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.15 – 0.49	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	9
0.49 – 1.705	24000 / f [kHz]	87.6 – 20Log(f) (kHz)	30	Quasi peak	9
1.705 - 30	30	29.5	30	Quasi peak	9

*Remark: In Canada same limits apply, just unit reference is different

4.2.5 Result

Diagram	Channel	Mode	Maximum Level [$\text{dB}\mu\text{V}/\text{m}$] Frequency Range 0.009 – 30 MHz	Result
2.03a	1	Op. 1 / standing	No peaks found	PASSED
2.03b	1	Op. 1 / laying	No peaks found	PASSED
2.04a	1	Op. 2 / standing	No peaks found	PASSED
2.04b	1	Op. 2 / laying	No peaks found	PASSED


Remark 1: for more information and graphical plot see annex A1 **CETECOM_TR22-1-0076802T12a_A1**

4.3 Radiated field strength emissions 30 MHz – 1 GHz

4.3.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant semi anechoic room (SAR) and fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

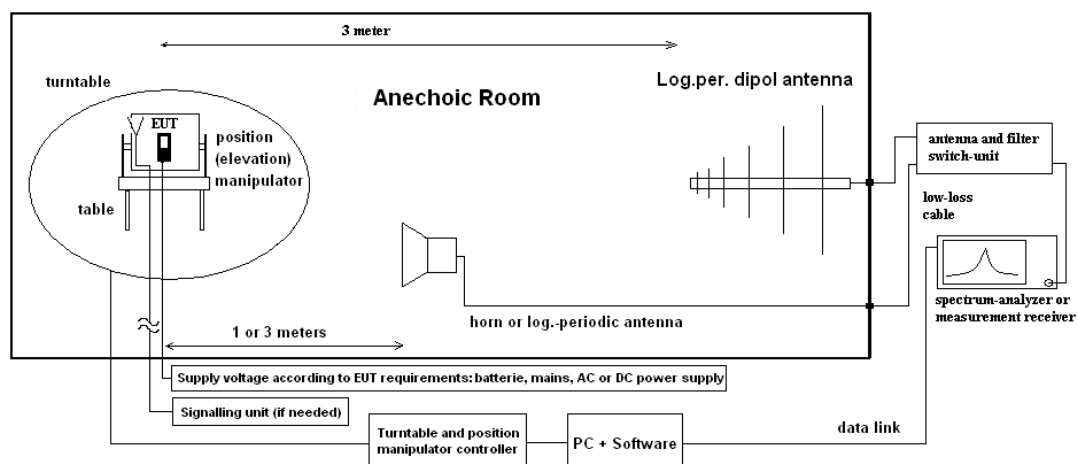

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.3.2 Measurement Location

Test site	120901 - SAC - Radiated Emission <1GHz
-----------	--

4.3.3 Limit

Radiated emissions limits, (3 meters)				
Frequency Range [MHz]	Limit [$\mu\text{V}/\text{m}$]	Limit [$\text{dB}\mu\text{V}/\text{m}$]	Detector	RBW / VBW [kHz]
30 - 88	100	40.0	Quasi peak	100 / 300
88 - 216	150	43.5	Quasi peak	100 / 300
216 - 960	200	46.0	Quasi peak	100 / 300
960 - 1000	500	54.0	Quasi peak	100 / 300

4.3.4 Result

Diagram	Channel	Mode	Maximum Level [$\text{dB}\mu\text{V}/\text{m}$] Frequency Range 30 – 1000 MHz	Result
3.01a	1	Op. 1	31.79 (QP) ²⁾	PASSED
3.02a	1	Op. 2	36.10 (QP) ²⁾	PASSED

Remark 1: for more information and graphical plot see annex A1 **CETECOM_TR22-1-0076802T12a_A1**

Remark 2: level which in respect to the limit is most critical


4.4 Occupied Channel Bandwidth 99%

4.4.1 Description of the general test setup and methodology, see below example:

The EUT’s RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is then directly connected to the spectrum – analyzer (4) for specific RF-measurements. The specific attenuation losses for both signal paths/branches are determined prior to the measurement within a set-up calibration. These are then taken into account by correcting the measurement readings on the spectrum-analyzer.

In case an external connector is not available, the coupling unit consists of a near-field antenna which is directly connected to the spectrum analyser. The power level calibration of the spectrum analyser is related to the power levels (field strengths) of the carrier determined in the anechoic-chamber.

Schematic:

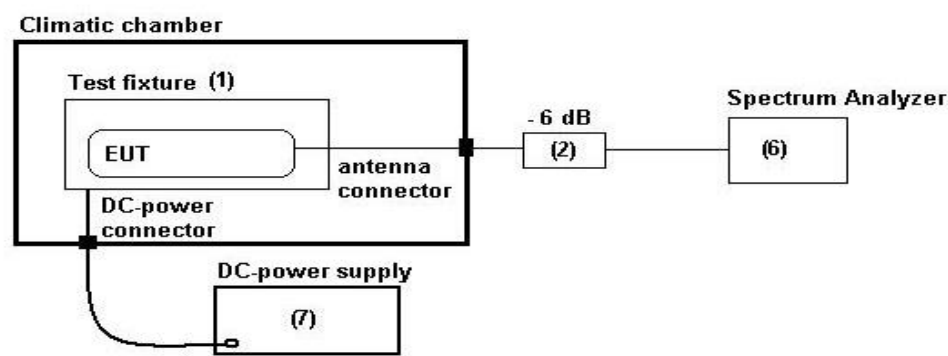

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page Fehler! Textmarke nicht definiert.)

4.4.2 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
-----------	---------------------------------------

4.4.3 Limit

When the occupied bandwidth limit is not stated in the applicable reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

4.4.4 Result

Diagram	Channel	Mode	Frequency [MHz]	99% Occupied bandwidth [Hz]
1.4.2	1	Op. 1	13.5594	120.2
1.4.4	1	Op. 2	13.5595	709.8

Remark: for more information and graphical plot see annex A1CETECOM_TR22-1-0076802T12a_A1

4.5 Frequency stability

4.5.1 Description of the general test setup and methodology, see below example:


A sniffer antenna acts like a coupling antenna for measuring the fundamental frequency. This is placed at about 20cm away from the equipment. Also connecting cables at the equipment are avoided on the extent possible in order not to degrade the resonance frequency of the equipment and integral antenna.

If the equipment is capable of producing an un-modulated carrier then a trace with max-hold function was recorded. The maximum peak within the span was found, then the frequency deviation was recorded with the build-in frequency counter within the spectrum-analyze. The maximum resolution was chosen on the settings.

The frequency deviation was recorded at switching on point of the equipment and on 2 minutes, 5 minutes and 10 minutes after at in accordance with ANSI 63.10: 2013, Chapter 6.8

All measurements data are enclosed in annex measurements. Here only maximum frequency error is reported.

Schematic:

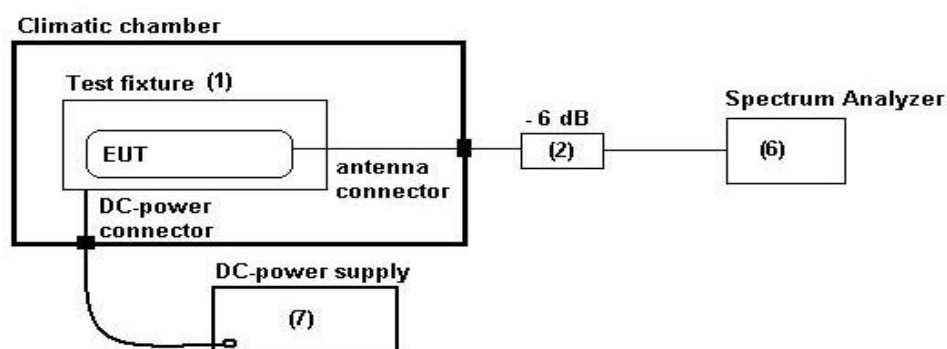

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

4.5.2 Measurement Location

Test site	120911 - Radio Laboratory 2
-----------	-----------------------------

4.5.3 Limit

Frequency Range [MHz]	Frequency tolerance			Remarks
	%	[ppm]	[Hz]	
13.553 – 13.567	±0.01	±100	±1355.99207	For voltage variation
13.553 – 13.567	±0.01	±100	±1355.99743	For temperature variation

Remark: for more information and graphical plot see annex A1 **CETECOM_TR22-1-0076802T12a_A1**

4.5.4 Results

4.5.4.1 Results for voltage variation

FreqError §15.225						
Nominal conditions						
Vnom = 4.1 V (full battery)	12	13.5594794		Limit-> 100ppm:	1355.94794	Hz
Extreme conditions						
Voltage		Frequency measured	Values for Frequency Error			
				[Hz]	[%]	[ppm]
Vmax	13.8	13.5594630		16.4000000	0.000121	1.21
	13.5	13.5594665		12.9000000	0.000095	0.95
	13.2	13.5594689		10.5000000	0.000077	0.77
	12.9	13.5594714		8.0000000	0.000059	0.59
	12.6	13.5594745		4.9000000	0.000036	0.36
	12.3	13.5594830		-3.6000000	-0.000027	-0.27
	12					
	11.7	13.5594612		18.2000000	0.000134	1.34
	11.4	13.5594593		20.1000000	0.000148	1.48
	11.1	13.5594575		21.9000000	0.000162	1.62
	10.8	13.5594731		6.3000000	0.000046	0.46
	10.5	13.5594628		16.6000000	0.000122	1.22
Vmin	10.2	13.5594601		19.3000000	0.000142	1.42

Remark: for more information and graphical plot see annex A1 CETECOM_TR22-1-0076802T12a_A1

Verdict: PASSED

4.5.4.2 Results for temperature variation

FreqError §15.225							
Nominal conditions							
Supply) Tnom = 21°C	Reference frequency [MHz]	13.5594794	Limit-> 100ppm:	1355.94794	Hz		
		in dieser Spalte hier Werte eingeben					
Extreme conditions							
Temperature	Measurement period after power-up the EUT	Frequency measured	Values for Frequency Error			Abs. Maximum Value	Absolute Maximum value
			[Hz]	[%]	[ppm]		
Tmax=85°C	on StartUp	13.5592147	-264.7000000	-0.001952	-19.52	19.52	27.04
	2 Minutes	13.5592373	-242.1000000	-0.001785	-17.85		
	5 Minutes	13.5592544	-225.0000000	-0.001659	-16.59		
	10 Minutes	13.559275	-204.4000000	-0.001507	-15.07		
Tmax=80°C	on StartUp	13.5592088	-270.6000000	-0.001996	-19.96	19.96	
	2 Minutes	13.5592231	-256.3000000	-0.001890	-18.90		
	5 Minutes	13.5592333	-246.1000000	-0.001815	-18.15		
	10 Minutes	13.5592446	-234.8000000	-0.001732	-17.32		
Tmax=70°C	on StartUp	13.5592082	-271.2000000	-0.002000	-20.00	20.86	
	2 Minutes	13.5591983	-281.1000000	-0.002073	-20.73		
	5 Minutes	13.5591965	-282.9000000	-0.002086	-20.86		
	10 Minutes	13.5591983	-281.1000000	-0.002073	-20.73		
Tmax=60°C	on StartUp	13.5592605	-218.9000000	-0.001614	-16.14	19.70	
	2 Minutes	13.5592302	-249.2000000	-0.001838	-18.38		
	5 Minutes	13.5592214	-258.0000000	-0.001903	-19.03		
	10 Minutes	13.5592123	-267.1000000	-0.001970	-19.70		
Tmax=50°C	on StartUp	13.5593274	-152.0000000	-0.001121	-11.21	16.59	
	2 Minutes	13.5592914	-188.0000000	-0.001386	-13.86		
	5 Minutes	13.5592718	-207.6000000	-0.001531	-15.31		
	10 Minutes	13.5592544	-225.0000000	-0.001659	-16.59		
T=40°C	on StartUp	13.5593305	-148.9000000	-0.001098	-10.98	13.94	
	2 Minutes	13.5593120	-167.4000000	-0.001235	-12.35		
	5 Minutes	13.5593030	-176.4000000	-0.001301	-13.01		
	10 Minutes	13.5592904	-189.0000000	-0.001394	-13.94		
T=30°C	on StartUp	13.5594937	14.3000000	0.000105	1.05	5.36	
	2 Minutes	13.5594527	-26.7000000	-0.000197	-1.97		
	5 Minutes	13.5594293	-50.1000000	-0.000369	-3.69		
	10 Minutes	13.5594067	-72.7000000	-0.000536	-5.36		
T=10°C	on StartUp	13.5593220	-157.4000000	-0.001161	-11.61	15.19	
	2 Minutes	13.5596854	206.0000000	0.001519	15.19		
	5 Minutes	13.5596589	179.5000000	0.001324	13.24		
	10 Minutes	13.5596329	153.5000000	0.001132	11.32		
T=0°C	StartUp	13.5597939	314.5000000	0.002319	23.19	23.19	
	2 Minutes	13.5597669	287.5000000	0.002120	21.20		
	5 Minutes	13.5597478	268.4000000	0.001979	19.79		
	10 Minutes	13.5597280	248.6000000	0.001833	18.33		
T=-10°C	StartUp	13.5597598	280.4000000	0.002068	20.68	20.68	
	2 Minutes	13.5597584	279.0000000	0.002058	20.58		
	5 Minutes	13.5597583	278.9000000	0.002057	20.57		
	10 Minutes	13.5597587	279.3000000	0.002060	20.60		
T=-20°C	StartUp	13.5598346	355.2000000	0.002620	26.19	26.19	
	2 Minutes	13.5598273	347.9000000	0.002566	25.66		
	5 Minutes	13.5598264	347.0000000	0.002559	25.59		
	10 Minutes	13.5598257	346.3000000	0.002554	25.54		
T=-30°C	StartUp	13.5598461	366.7000000	0.002704	27.04	27.04	
	2 Minutes	13.5598604	381.0000000	0.002810	28.10		
	5 Minutes	13.5598647	385.3000000	0.002842	28.41		
	10 Minutes	13.5598656	386.2000000	0.002848	28.48		
T=-40°C	StartUp	13.5598203	340.9000000	0.002514	25.14	25.14	
	2 Minutes	13.5598406	361.2000000	0.002664	26.64		
	5 Minutes	13.5598476	368.2000000	0.002715	27.15		
	10 Minutes	13.5598535	374.1000000	0.002759	27.59		

Remark: for more information and graphical plot see annex A1CETECOM_TR22-1-0076802T12a_A1

Verdict: PASSED

4.6 Equipment lists

ID	Description	Manufacturer	SerNo	CheckType	Last Check	Interval	Next Check
	120901 - SAC - Radiated Emission <1GHz			calchk	cal: 07-21-2015 chk: 07-27-2021	cal: 10Y chk: 12M	cal: July 2025 chk: July 2022
20574	Biconilog Hybrid Antenna BTA-L	Frankonia GmbH / Heideck	980026L	cal	cal: 06-15-2022	cal: 36M	cal: June 2025
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH / Glottertal	81650455	cal	cal: 05-18-2022	cal: 24M	cal: May 2024
20482	filter matrix Filter matrix SAR 1	CETECOM GmbH	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
25038	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH / Memmingen	879824/13	cal	cal: 07-04-2022	cal: 24M	cal: July 2024
20885	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20442	Semi Anechoic Chamber	ETS-Lindgren GmbH / Taufkirchen	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20620	Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100362	cal	cal: 06-08-2022	cal: 12M	cal: June 2023
20869	Climatic Chamber VT4002	Vötsch Industrietechnik GmbH, a schunk company / Balingen-Frommern	521/79152	chk	chk: 12-29-2021	chk: 12M	chk: December 2022
20468	Digital Multimeter Fluke 112	Fluke Deutschland GmbH	90090455	cal	cal: 06-01-2021	cal: 36M	cal: June 2024
20431	Near-Field Probe Set Model 7405	EMCO Elektronik GmbH	9305-2457	cpu			
20457	Power Supply EA-3013 S	EA Elektro-Automatik GmbH & Co. KG	9624680	cpu			
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	cal	cal: 05-20-2021	cal: 24M	cal: May 2023

Tools used in 'P1M1'

4.6.1 Legend

Note / remarks	Interval of calibration & Verification
12M	12 months
24M	24 months
36M	36 months
10Y	10 Years

Abbreviation Check Type	Description
cnn	Calibration and verification not necessary
cal	Calibration
calchk	Calibration plus intermediate Verification
chk	Verification
cpu	Verification before usage

5 Results from external laboratory

None

-

6 Opinions and interpretations

None

-

7 List of abbreviations

None

-

8 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor k , such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

Issue No.	Measurement type	Reference	Frequency range of measurement		Calculated Uncertainty based on confidence level of 95.54%	Remarks
			Start [MHz]	Stop [MHz]		
1	Magnetic field strength	FCC15/18/22/24/27/90, ISED	0.009	30	4.86	Magnetic loop antenna, Pre-amp on
2	RF-Output power (eirp) Unwanted emissions (eirp) [dB]	FCC15/18 / ISED	30	100	4.57	without Pre-Amp
			30	100	4.91	with PreAmp
			100	1000	4.02	without Pre-Amp
			100	1000	4.26	with PreAmp
			1000	18000	4.36	without Pre-Amp
			1000	18000	5.23	with PreAmp
			18000	33000	4.92	Schwarzbeck BBHA9170 (#20302) Antenna set-up non-waveguide antenna)
			33000	50000	4.17	Set-up for Q-Band (WR-22), non-wave guide antenna
			40000	60000	4.69	Set-up U-Band (WR-19), non-waveguide antenna
			50000	75000	4.06	External Mixer set-up V-Band (WR-15)
			75000	110000	4.17	External Mixer set-up W-Band (WR-6)
			90000	140000	5.49	External Mixer set-up F-Band (WR-8)
			140000	225000	6.22	External Mixer set-up G-Band (WR-5)
			225000	325000	7.04	External Mixer set-up (WR-3)
			325000	500000	8.84	External Mixer set-up (WR-2.2)
3	Radiated Blocking [dB]	EN303883	1000	18000	2.85	Typical set-up with microwave generator and antenna, value for 7GHz calculated
			18000	33000	4.66	Typical set-up with microwave generator and antenna
			33000	50000	3.48	WR-22 set-up
			50000	75000	3.73	WR-15 set-up
			75000	110000	4.26	WR-6 set-up
4	Frequency Error / UWB+FCW [kHz]	EN303883 FCC 15	40000	77000	276.19	calculated for 77 GHz (FCW) carrier
	Frequency Error / NFC [Hz]	FCC 15	6000	7000	33.92	calculated for 6.5GHz UWB Ch.5
			11.00	14.00	20.76	calculated for 13.56MHz NFC carrier
5	TS 8997 conducted Parameters	FCC15/18 / ISED	30	6000	1.11	1. Power measurement with Fast-sampling-detector
			30	6000	1.20	2. Power measurement with Spectrum-Analyzer
			30	6000	1.20	3. Power Spectrum-Density measurement
			30	7500	1.20	4. Conducted Spurious emissions:
			0.009	30	2.56	5. Conducted Spurious emissions:
			2.4	2.48	1.95 ppm	6a. Bandwidth / 2-Marker Method for 2.4GHz ISM
			5.18	5.825	7.180 ppm	6b. Bandwidth / 2-Marker Method for 5GHz WLAN
			5.18	5.825	1.099 ppm	7 Frequency (Marker method) for 5GHz WLAN
			30	6000	0.11561µs	8 Medium-Utilization factor / Timing
			30	6000	1.85	9 Blocking-Level of companion device
			30	6000	1.62	9 Blocking Generator level
6	Conducted emissions	EN303883 FCC 15	0.009	30	3.57	

9 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2022-Nov-08
--	--	--
--	--	--

End Of Test Report