TEST REPORT

DT&C Co., Ltd.
42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2105-0043

2. Customer

- Name (FCC) : Point Mobile Co., LTD. / Name (IC) : POINTMOBILE CO.,LTD
- Address (FCC) : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
  Address (IC) : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Mobile Computer / PM30
   FCC ID : V2X-PM30
   IC : 10664A-PM30

5. FCC Regulation(s): Part 15.247
   IC Standard(s): RSS-247 Issue 2
   Test Method used: KDB558074 D01v05r02, ANSI C63.10-2013

6. Date of Test : 2021.02.05 ~ 2021.03.16

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by Name : JaeHyeok Bang (Signature)	Reviewed by Name : JaeJin Lee (Signature)

2021 . 05 . 18 .

DT&C Co., Ltd.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2105-0043	May, 18. 2021	Initial issue	JaeHyeok Bang	JaeJin Lee

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

Table of Contents

1. General Information 4
1.1. Testing Laboratory 4
1.2. Testing Environment 4
1.3. Measurement Uncertainty 4
1.4. Details of Applicant 5
1.5. Description of EUT 5
1.6. Declaration by the applicant / manufacturer 5
1.7. Test Equipment List 6
1.8. Summary of Test Results 7
2. Test Methodology 8
2.1. EUT Configuration 8
2.2. EUT Exercise 8
2.3. General Test Procedures 8
2.4. Instrument Calibration 8
2.5. Description of Test Modes 9
3. Test Result 10
3.1. Maximum Peak Conducted Output Power 10
3.1.1. Test Setup 10
3.1.2. Test Procedures 10
3.1.3. Test Results 10
3.2. 6 dB Bandwidth 12
3.2.1. Test Setup 12
3.2.2. Test Procedures 12
3.2.3. Test Results 12
3.3. Power Spectral Density 21
3.3.1. Test Setup 21
3.3.2. Test Procedures 21
3.3.3. Test Results 21
3.4. Unwanted Emissions (Conducted) 30
3.4.1. Test Setup 30
3.4.2. Test Procedures 30
3.4.3. Test Results 31
3.5. Unwanted Emissions (Radiated) 63
3.5.1. Test Setup 65
3.5.2. Test Procedures 65
3.5.3. Test Results 66
3.6. AC Power-Line Conducted Emissions 68
3.6.1. Test Setup 68
3.6.2. Test Procedures 68
3.6.3. Test Results 68
3.7. Occupied Bandwidth 71
3.7.1. Test Setup 71
3.7.2. Test Procedures 71
3.7.3. Test Results 71
4. Antenna Requirements 80
APPENDIX I 81
APPENDIX II 82
APPENDIX III 85

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

1. General Information

1.1. Testing Laboratory

DT&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014. **- FCC & IC MRA Designation No. : KR0034** **- ISED#: 5740A**		
www.dtnc.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.2. Testing Environment

Ambient Condition	
▪ Temperature	+22 ℃ ~ +26 ℃
▪ Relative Humidity	+35 % ~ +44 %

1.3. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of *k* = 2 to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	1.0 dB (The confidence level is about 95 %, k = 2)
AC power-line conducted emission	3.6 dB (The confidence level is about 95 %, k = 2)
Radiated emission (1 GHz Below)	4.9 dB (The confidence level is about 95 %, k = 2)
Radiated emission (1 GHz ~ 18 GHz)	5.1 dB (The confidence level is about 95 %, k = 2)
Radiated emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, k = 2)

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

1.4. Details of Applicant

Applicant Name(FCC)	Point Mobile Co., LTD
Applicant Name(IC)	POINTMOBILE CO.,LTD
Address (FCC)	B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
Address (IC)	B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)

1.5. Description of EUT

Equipment Class	Digital Transmission System (DTS)
Product Name	Mobile Computer
Model Name	PM30
Add Model Name	-
Firmware Version Identification Number	30.00xx
EUT Serial Number	Conducted : 2034310066, Radiated: 2033910156
Power Supply	DC 3.85 V
Frequency Range	▪ 802.11b/g/n(20 MHz) : 2 412 MHz ~ 2 462 MHz ▪ 802.11n(40 MHz) : 2 422 MHz ~ 2 452 MHz
Max. RF Output Power	2.4 GHz Band ▪ 802.11b : 22.05 dBm ▪ 802.11g : 24.67 dBm ▪ 802.11n (HT20) : 24.56 dBm ▪ 802.11n (HT40) : 24.69 dBm
Modulation Technique	▪ 802.11b: CCK, DSSS ▪ 802.11g/n: OFDM
Antenna Specification	Antenna Type: LDS Antenna Gain: 1.49 dBi (PK)

1.6. Declaration by the applicant / manufacturer

N/A

1.7. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	20/12/16	21/12/16	MY50410357
Spectrum Analyzer	Agilent Technologies	N9020A	20/12/16	21/12/16	MY48011700
Spectrum Analyzer	Agilent Technologies	N9020A `	20/12/16	21/12/16	MY48010133
DC Power Supply	Agilent Technologies	66332A	20/06/24	21/06/24	MY43000211
Multimeter	FLUKE	17B	20/12/16	21/12/16	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	20/12/16	21/12/16	255571
Signal Generator	ANRITSU	MG3695C	20/12/16	21/12/16	173501
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-1
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-2
Thermohygrometer	BODYCOM	BJ5478	20/07/01	21/07/01	N/A
Loop Antenna	ETS-Lindgren	6502	21/01/28	23/01/28	00226186
BILOG ANTENNA	Schwarzbeck	VULB 9160	20/12/16	21/12/16	3362
Horn Antenna	ETS-Lindgren	3117	20/10/23	21/10/23	00143278
Horn Antenna	A.H.Systems Inc.	SAS-574	20/06/24	21/06/24	155
PreAmplifier	tsj	MLA-0118-B01-40	20/12/16	21/12/16	1852267
PreAmplifier	tsj	MLA-1840-J02-45	20/06/24	21/06/24	16966-10728
PreAmplifier	H.P	8447D	20/12/16	21/12/16	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	20/06/24	21/06/24	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	20/06/24	21/06/24	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	20/06/24	21/06/24	3
Attenuator	Hefei Shunze	SS5T2.92-10-40	20/06/24	21/06/24	16012202
Attenuator	SRTechnology	F01-B0606-01	20/06/24	21/06/24	13092403
Attenuator	Aeroflex/Weinschel	20515	20/06/24	21/06/24	Y2370
Attenuator	SMAJK	SMAJK-2-3	20/06/24	21/06/24	2
Attenuator	SMAJK	SMAJK-50-10	20/06/24	21/06/24	15081901
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2488B MA2491A	20/12/16	21/12/16	0910025 0845333
Power Meter Wide Bandwidth Sensor	Agilent Technologies	N1911A N1921A	20/06/24	21/06/24	MY53360016 MY53360018
EMI Receiver	ROHDE&SCHWARZ	ESW44	20/11/16	21/11/16	101645
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	20/08/25	21/08/25	101333
LISN	SCHWARZBECK	NSLK 8128 RC	20/10/23	21/10/23	8128 RC-387
HYGROMETER	TESTO	608-H1	21/01/19	22/01/19	34862883
Cable	DT&C	Cable	21/01/08	22/01/08	G-1
Cable	DT&C	Cable	21/01/08	22/01/08	G-2
Cable	HUBER+SUHNER	SUCOFLEX 100	21/01/08	22/01/08	G-3
Cable	DT&C	Cable	21/01/08	22/01/08	G-4
Cable	Junkosha	MWX241	21/01/08	22/01/08	mmW-1
Cable	Junkosha	MWX241	21/01/08	22/01/08	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-01
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-02
Cable	JUNFLON	MWX241	21/01/08	22/01/08	M-03
Cable	JUNFLON	J12J101757-00	21/01/08	22/01/08	M-07
Cable	HUBER+SUHNER	SUCOFLEX106	21/01/08	22/01/08	M-09
Cable	DT&C	Cable	21/01/05	22/01/05	RFC-69
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0177
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0170

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.
Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

1.8. Summary of Test Results

FCC part section(s)	RSS section(s)	Test Description	Limit	Test Condition	Status Note 1
15.247(a)	RSS-247[5.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-247[5.4]	Maximum Peak Conducted Output Power	< 1 Watt		C
15.247(d)	RSS-247[5.5]	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		C
15.247(e)	RSS-247[5.2]	Power Spectral Density	< 8 dBm/3 kHz		C
-	RSS-Gen[6.7]	Occupied Bandwidth (99 %)	NA		C
15.247(d) 15.205 15.209	RSS-247[5.5] RSS-Gen[8.9] RSS-Gen[8.10]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	FCC Part 15.209 limits (Reference to section 3.5)	Radiated	C Note 3, 4
15.207	RSS-Gen[8.8]	AC Power-Line Conducted Emissions	FCC Part 15.207 limits (Reference to section 3.6)	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC Part 15.203 (Reference to section 4)	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable
Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.
Note 3: This test item was performed in three orthogonal EUT positions and the worst case data was reported.
Note 4: This device supports wireless charging.
So per KDB648474 D03v01r0, the radiated test items were performed all not charging, charging, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

2. Test Methodology

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB558074 D01v05r02 were used in measurement of the EUT.
The EUT was tested per the guidance of KDB558074 D01v05r02. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB558074 D01v05r02.
So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.
The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB558074 D01v05r02. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on section 12.1 of the KDB558074 D01v05r02.
The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

2.4. Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

2.5. Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting.

Transmitting Configuration of EUT

Mode	Data rate
802.11b	1 Mbps ~ 11 Mbps
802.11g	6 Mbps ~ 54 Mbps
802.11n(HT20)	MCS 0 ~ MCS 7
802.11n(HT40)	MCS 0 ~ MCS 7

EUT Operation test setup

- Test Software: QRCT / V3.0-00277
- Power setting:

Mode	Frequency (MHz)	Power Setting		
802.11b	Data Rate	1 ~ 11	-	-
	2 412	19	-	
	2 437	19	-	-
	2 462	19	-	-
802.11g	Data Rate	6 ~ 12	18 ~ 24	36 ~ 54
	2 412	20	18	17
	2 437	20	18	17
	2 462	19	17	16
802.11n (HT20)	Data Rate	mcs0 ~ mcs2	mcs3 ~ mcs5	mcs6 ~ mcs7
	2 412	19	17	16
	2 437	20	18	17
	2 462	19	17	16
802.11n (HT40)	Data Rate	mcs0 ~ mcs2	mcs3 ~ mcs5	mcs6 ~ mcs7
	2 422	16	14	12
	2 437	19	17	15
	2 452	15	12	10

Test Mode

Test mode	Worst case data rate	Tested Frequency (MHz)		
TM 1	802.11b 1 Mbps	2 412	2 437	2 462
TM 2	802.11g 54 Mbps	2 412	2 437	2 462
TM 3	802.11n(HT20) MCS 7	2 412	2 437	2 462
TM 4	802.11n(HT40) MCS 5	2 422	2 437	2 452

Note1: The worst case data rate was determined according to the power measurements.
Note2: The power measurement results for all modes and data rate were reported.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3. Test Result

3.1. Maximum Peak Conducted Output Power

▣ Test Requirements and limit, Part 15.247(b) & RSS-247 [5.4]

The maximum permissible conducted output power is **1 Watt.**

3.1.1. Test Setup

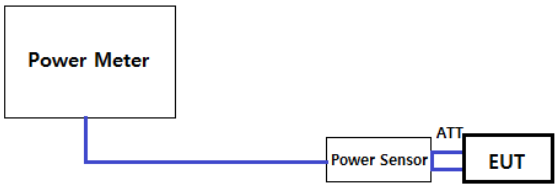

3.1.2. Test Procedures

- **KDB558074 D01v05r02 - Section 8.3.1.3**
- **ANSI C63.10-2013 – Section 11.9.1.3**

RBW ≥ DTSPKPM1 Peak-reading power meter method

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

- **KDB558074 D01v05r02 - Section 8.3.2.3**
- **ANSI C63.10-2013 – Section 11.9.2.3**

Method AVGPM-G

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

3.1.3. Test Results

- Refer to the next page

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			1	2	5.5	11	-	-	-	-
802.11b	2 412	PK	21.79	21.51	21.65	21.74	-	-	-	-
		AV	19.67	19.56	19.57	19.65	-	-	-	-
	2 437	PK	**22.05**	21.77	21.92	22.03	-	-	-	-
		AV	19.85	19.78	19.79	19.89	-	-	-	-
	2 462	PK	21.96	21.68	21.82	21.92	-	-	-	-
		AV	19.84	19.74	19.76	19.86	-	-	-	-

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps]							
			1	2	5.5	11	-	-	-	-
802.11g	2 412	PK	22.14	22.27	22.07	22.51	22.50	23.84	23.69	23.94
		AV	18.24	18.19	18.13	17.26	17.25	16.43	16.61	16.64
	2 437	PK	22.42	22.59	22.39	22.86	22.85	24.21	24.06	**24.67**
		AV	18.43	18.39	18.34	17.43	17.42	16.58	16.80	16.46
	2 462	PK	21.55	21.44	21.28	21.71	21.69	23.71	23.64	23.94
		AV	17.63	17.51	17.50	16.58	16.71	16.04	15.94	15.96

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			0	1	2	3	4	5	6	7
802.11n (HT20)	2 412	PK	21.75	21.77	23.01	21.97	23.07	23.11	22.91	23.16
		AV	17.60	17.15	17.34	16.14	16.18	16.15	15.89	15.99
	2 437	PK	22.55	22.45	23.80	22.78	24.34	24.39	24.41	**24.56**
		AV	18.46	18.12	18.38	17.15	17.22	17.28	16.54	16.57
	2 462	PK	21.74	21.54	22.81	22.04	23.19	21.94	23.24	23.41
		AV	17.68	17.34	17.53	16.43	16.59	16.47	15.97	16.21

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			0	1	2	3	4	5	6	7
802.11n (HT40)	2 422	PK	21.69	21.57	22.07	20.73	22.84	23.09	21.37	21.46
		AV	16.35	16.54	16.50	15.28	15.19	15.31	14.04	14.15
	2 437	PK	23.28	23.11	23.91	22.31	24.35	**24.69**	22.91	23.38
		AV	18.47	18.63	18.59	17.25	17.58	17.73	16.01	16.19
	2 452	PK	20.97	20.73	21.48	19.74	21.30	21.41	20.13	20.61
		AV	15.45	15.57	15.61	13.38	13.11	12.94	11.28	11.71

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.2. 6 dB Bandwidth

▣ Test Requirements and limit, Part 15.247(a) & RSS-247 [5.2]

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the EUT's antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

3.2.1. Test Setup

Refer to the APPENDIX I.

3.2.2. Test Procedures

- **KDB558074 D01v05r02 - Section 8.2**
- **ANSI C63.10-2013 – Section 11.8.2**

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Option 1 - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

   Option 2 - The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 × RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

3.2.3. Test Results

Test Mode	Frequency	Test Results (MHz)
TM 1	2 412	8.08
	2 437	8.56
	2 462	9.04
TM 2	2 412	16.46
	2 437	16.45
	2 462	16.48
TM 3	2 412	17.68
	2 437	17.68
	2 462	17.70
TM 4	2 422	35.91
	2 437	36.15
	2 452	36.43

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

6 dB Bandwidth

TM 1 & 2 412

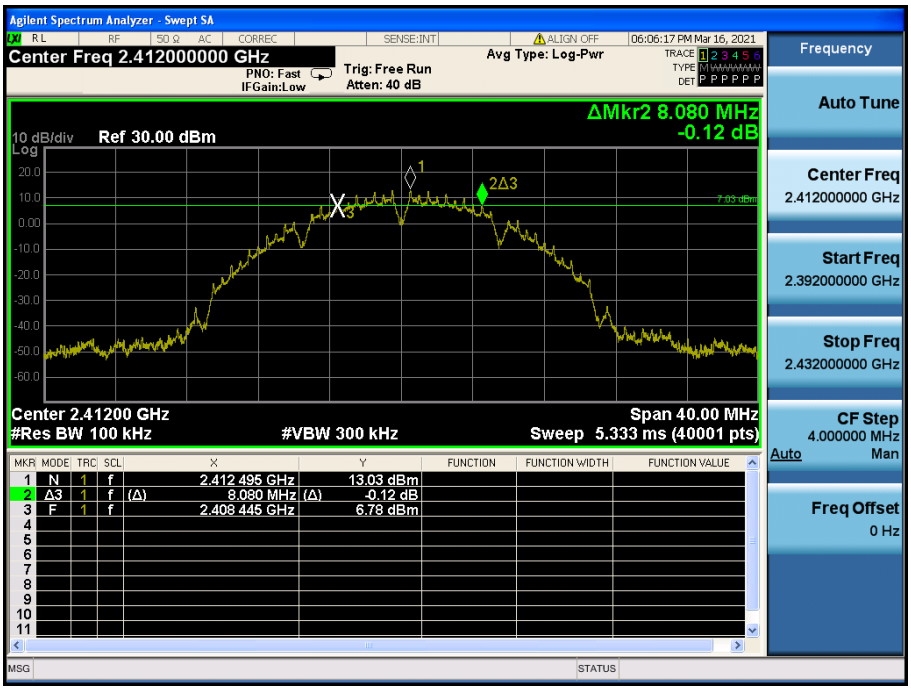

6 dB Bandwidth

TM 1 & 2 437

6 dB Bandwidth

TM 1 & 2 462

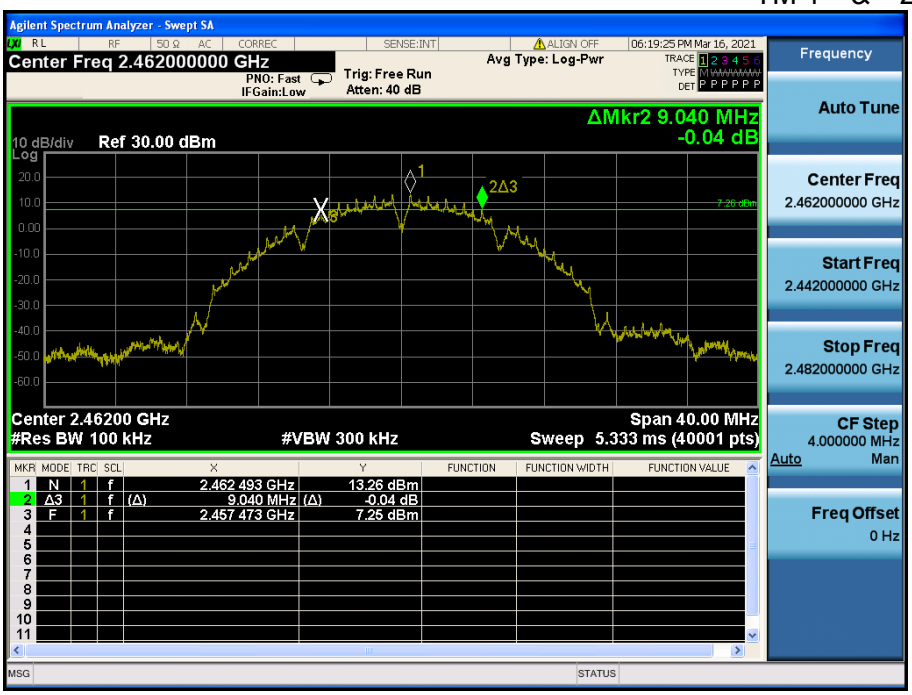

6 dB Bandwidth

TM 2 & 2 412

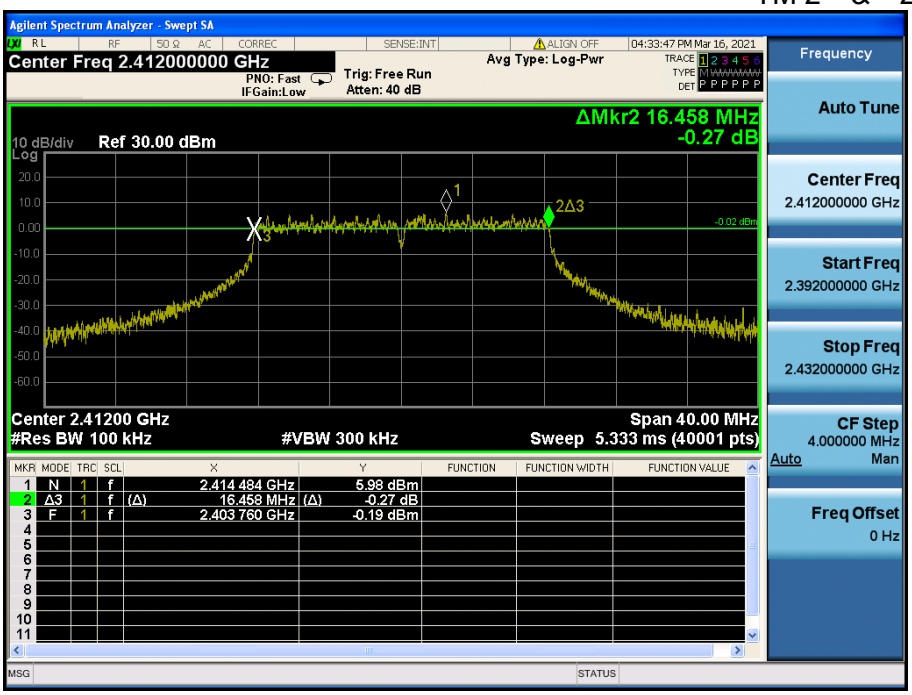

6 dB Bandwidth

TM 2 & 2 437

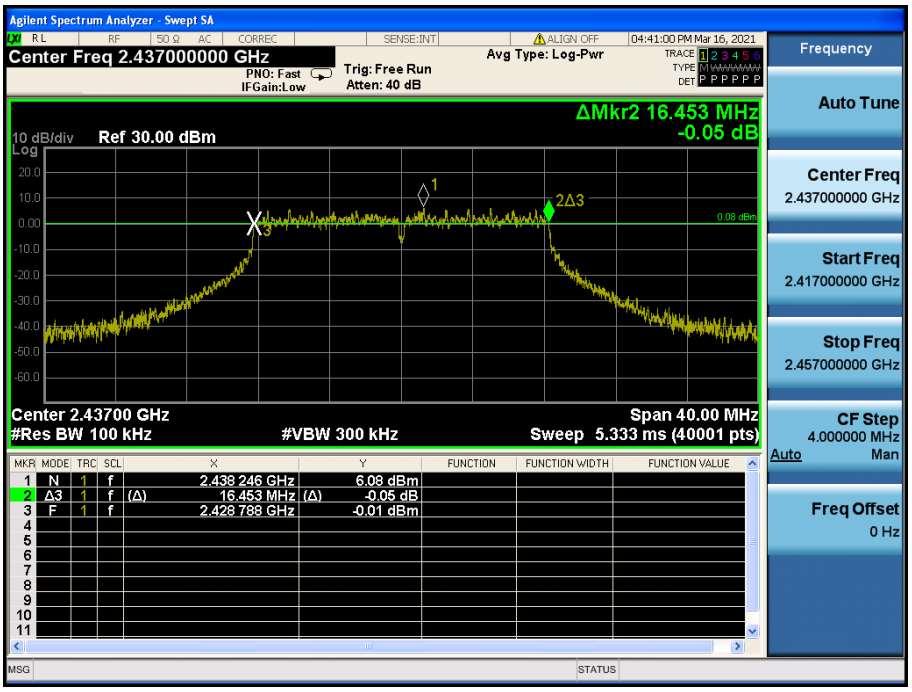

6 dB Bandwidth

TM 2 & 2 462

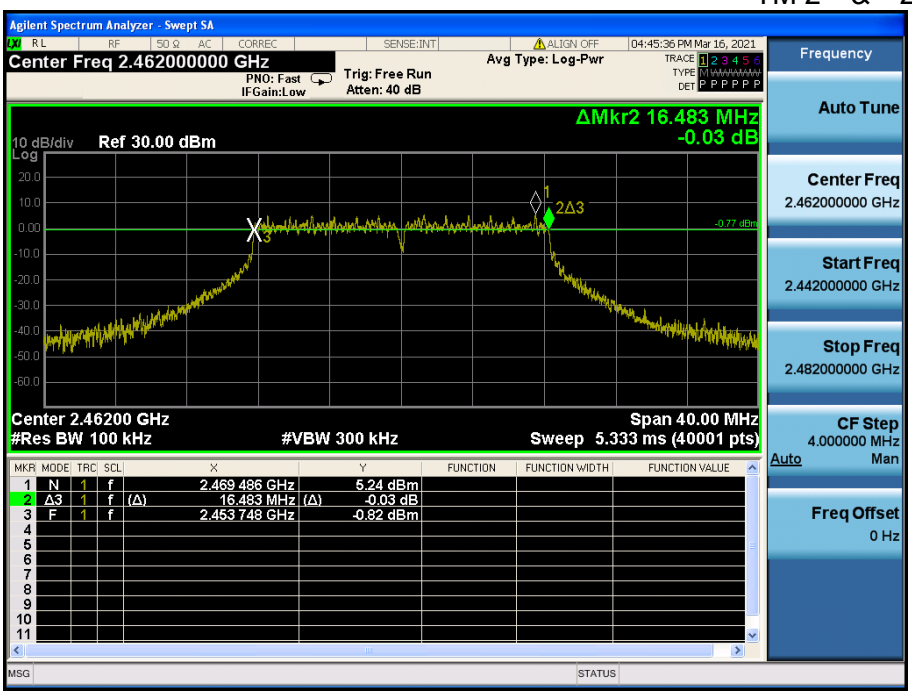

6 dB Bandwidth

TM 3 & 2 412

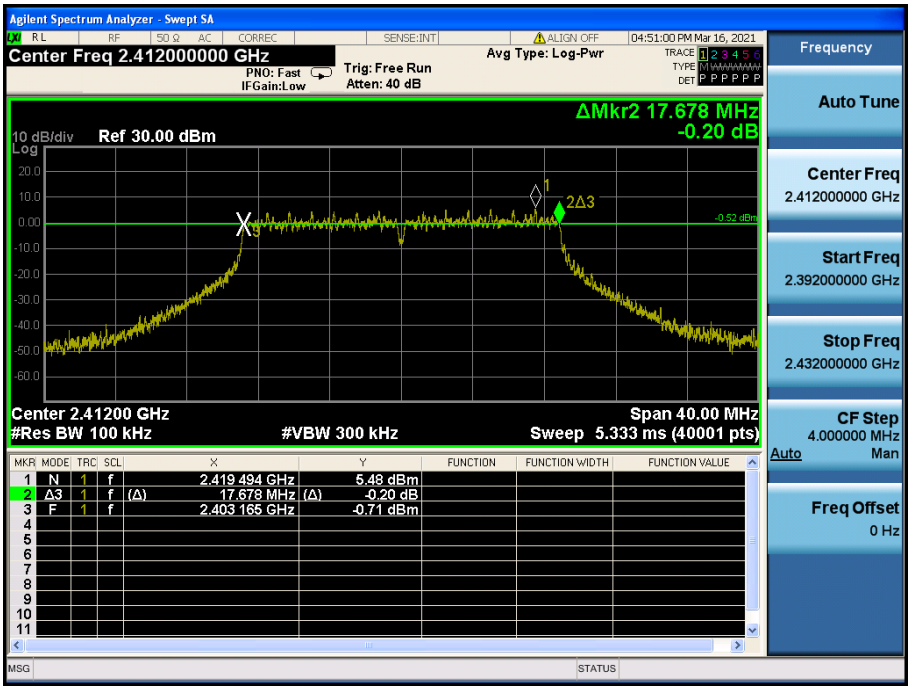

6 dB Bandwidth

TM 3 & 2 437

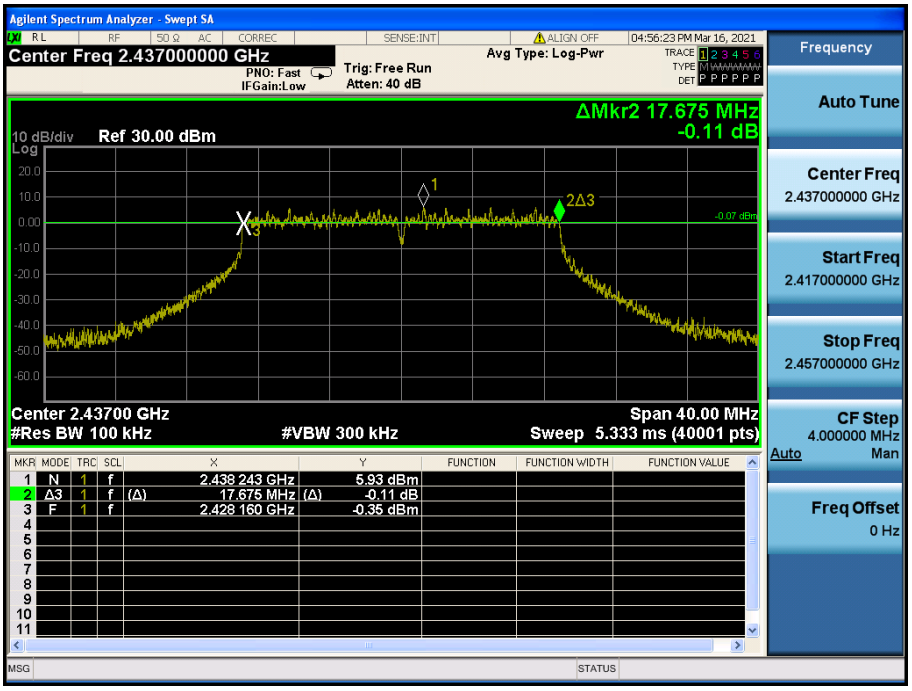

6 dB Bandwidth

TM 3 & 2 462

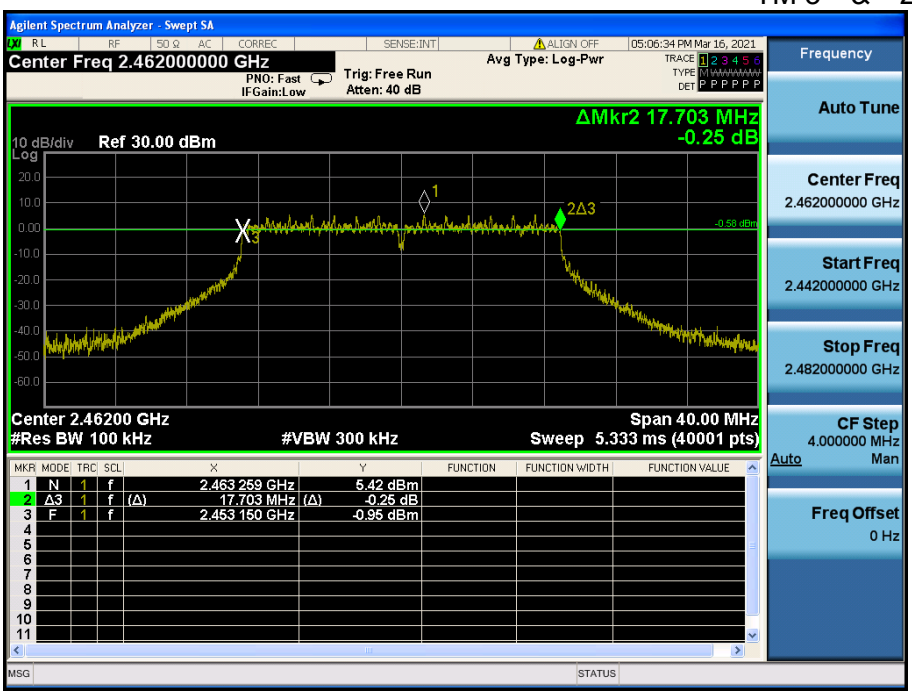

6 dB Bandwidth

TM 4 & 2 422

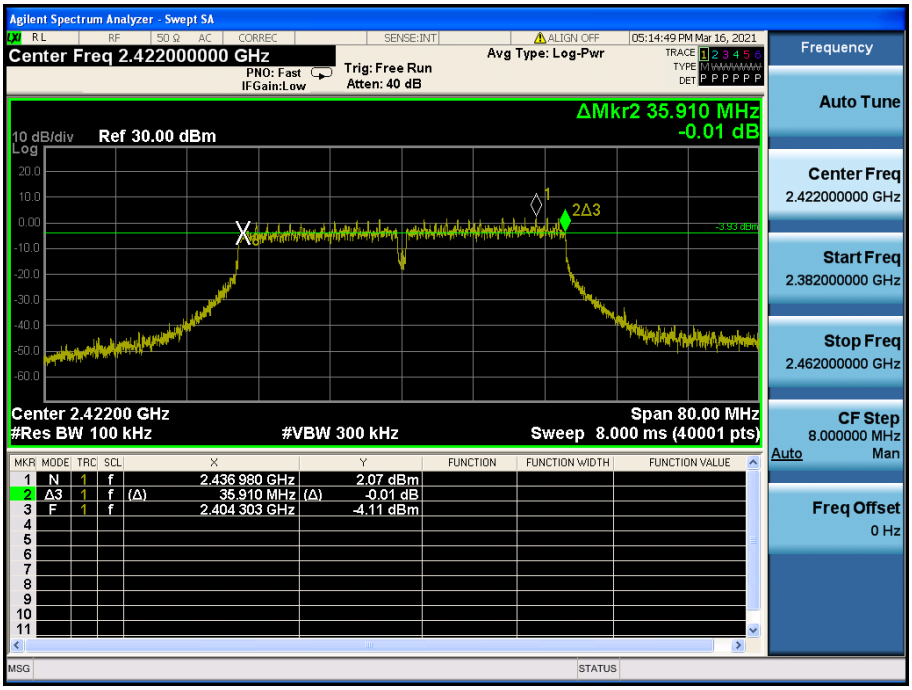

6 dB Bandwidth

TM 4 & 2 437

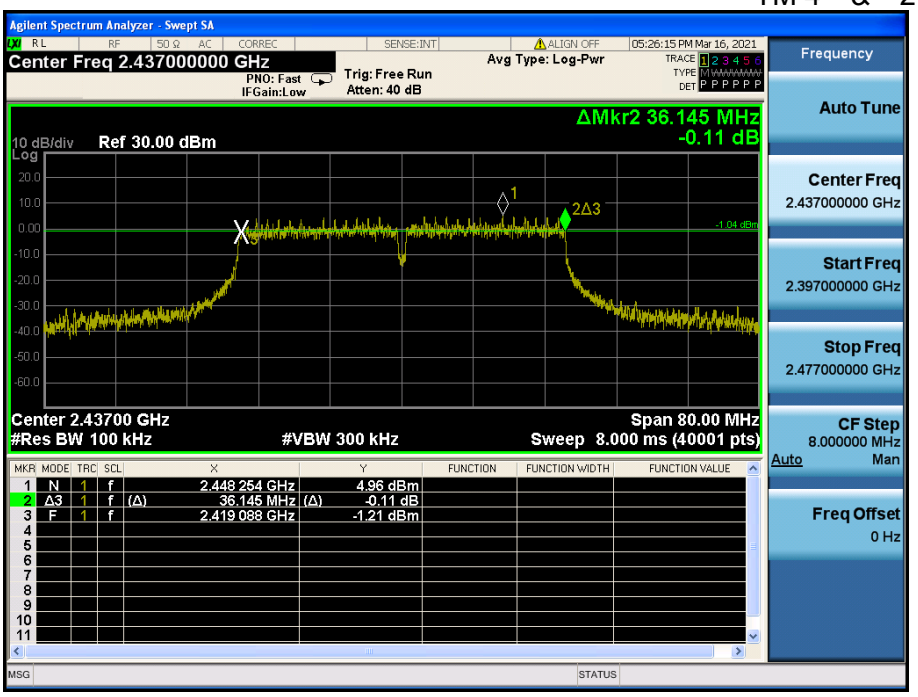

6 dB Bandwidth

TM 4 & 2 452

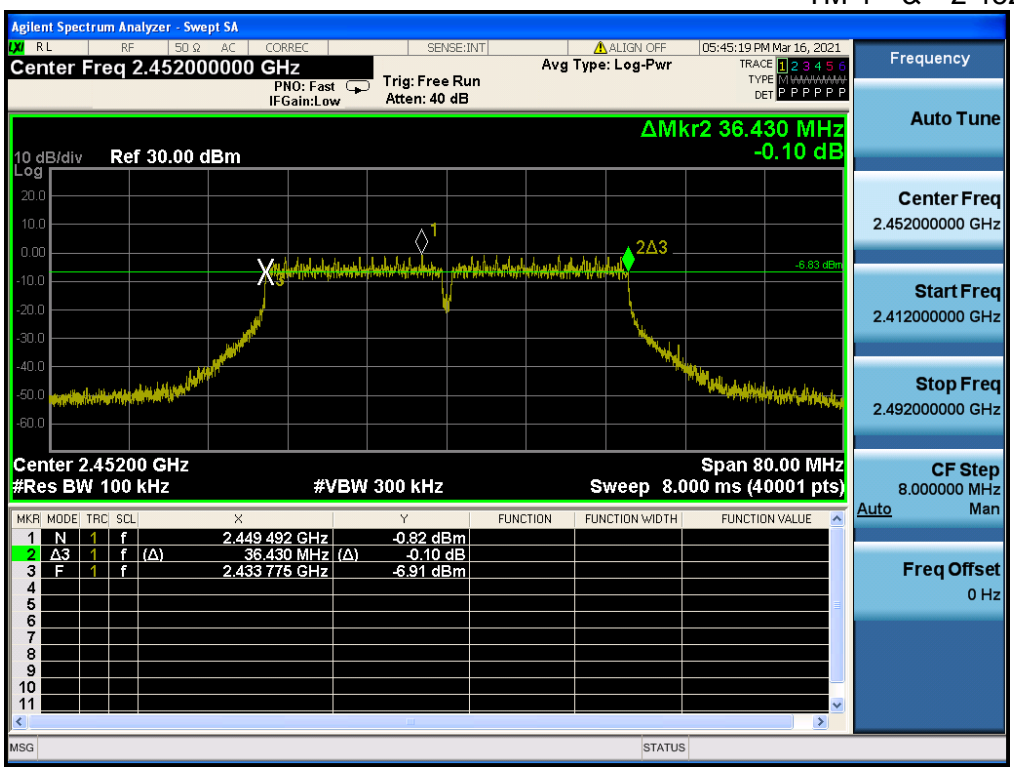

3.3. Power Spectral Density

▣ Test requirements and limit, Part 15.247(e) & RSS-247 [5.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

3.3.1. Test Setup

Refer to the APPENDIX I.

3.3.2. Test Procedures

- **KDB558074 D01v05r02 - Section 8.4**
- **ANSI C63.10-2013 – Section 11.10.2**

Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW : **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW.**
5. Detector = **peak.**
6. Sweep time = **auto couple.**
7. Trace mode = **max hold.**
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

3.3.3. Test Results

Test Mode	Frequency	RBW	PKPSD (dBm)	Limit (dBm)
TM 1	2 412	3 kHz	-3.18	8.00
	2 437	3 kHz	-3.64	8.00
	2 462	3 kHz	-4.11	8.00
TM 2	2 412	3 kHz	-8.46	8.00
	2 437	3 kHz	-7.08	8.00
	2 462	3 kHz	-9.04	8.00
TM 3	2 412	3 kHz	-8.55	8.00
	2 437	3 kHz	-7.16	8.00
	2 462	3 kHz	-8.03	8.00
TM 4	2 422	3 kHz	-12.42	8.00
	2 437	3 kHz	-10.21	8.00
	2 452	3 kHz	-15.73	8.00

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

Power Spectral Density

TM 1 & 2 412

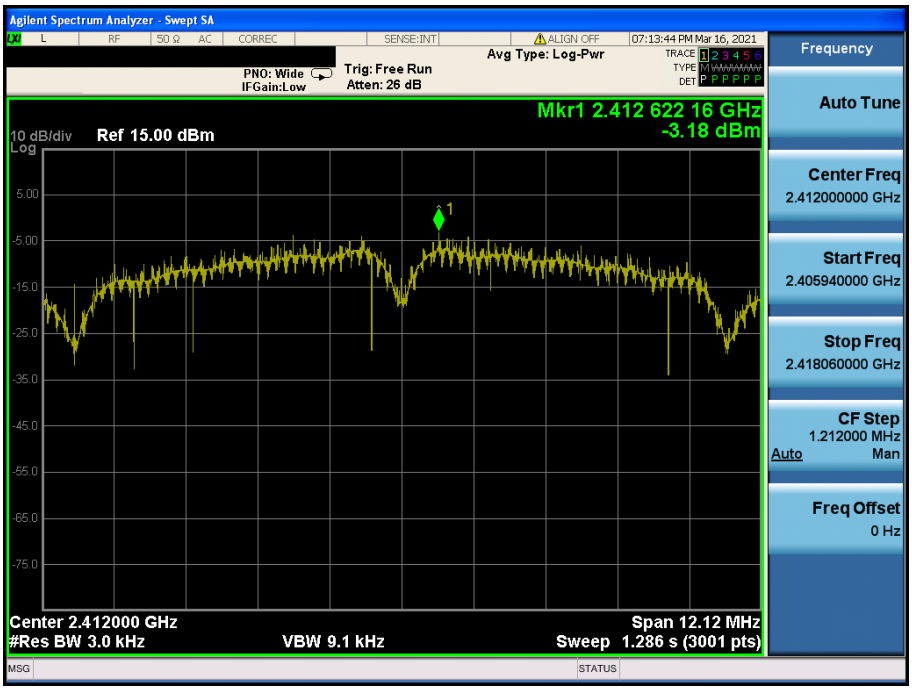

Power Spectral Density

TM 1 & 2 437

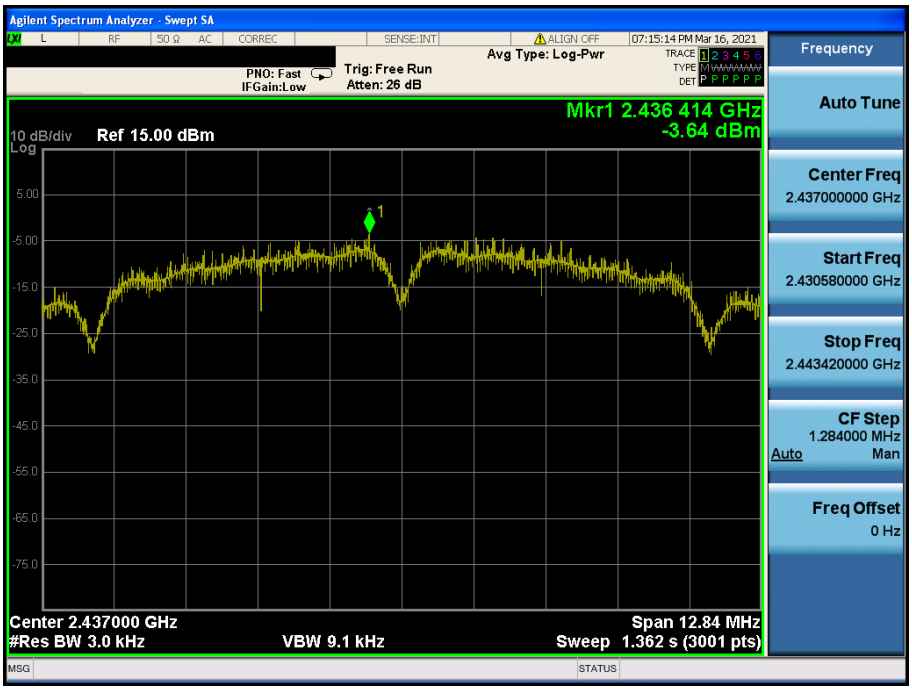

Power Spectral Density TM 1 & 2 462

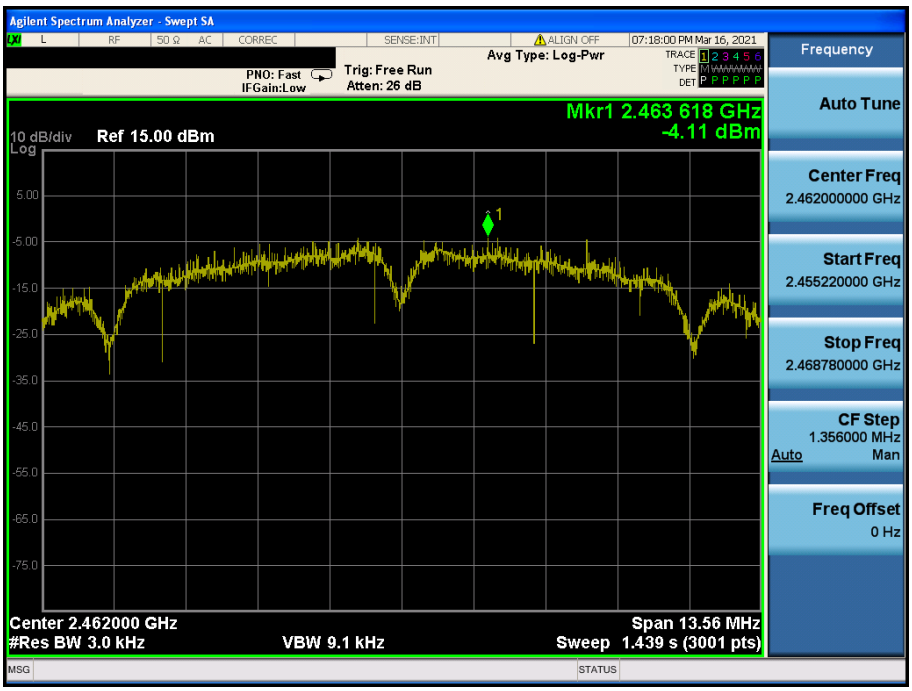

Power Spectral Density TM 2 & 2 412

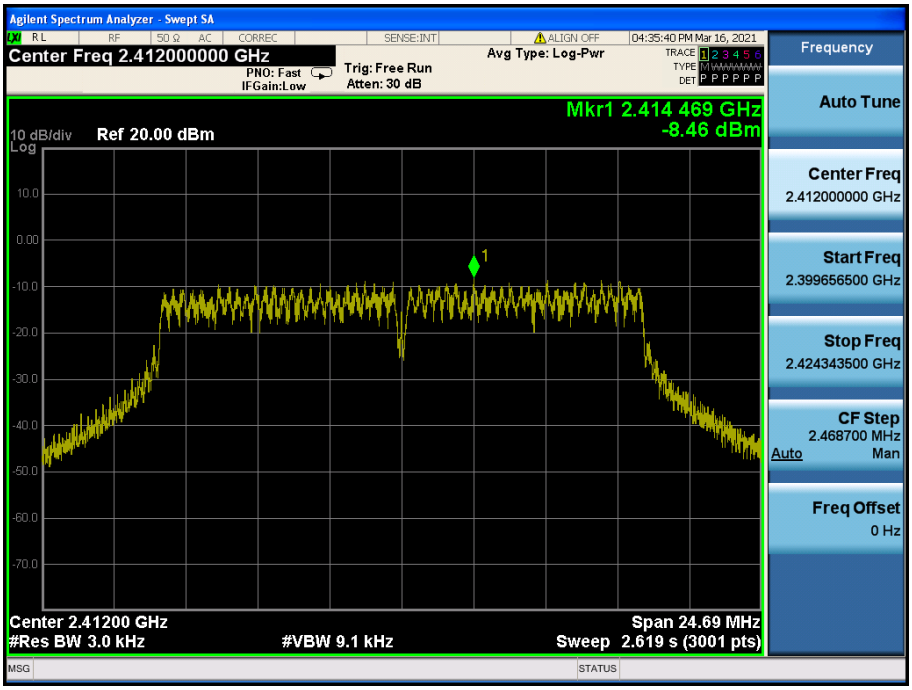

Power Spectral Density TM 2 & 2 437

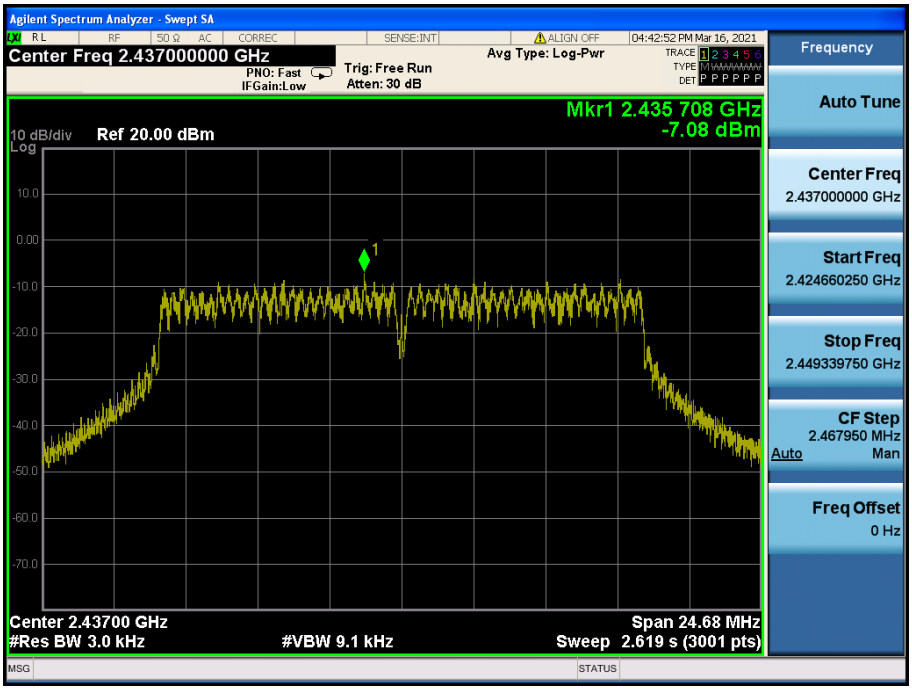

Power Spectral Density TM 2 & 2 462

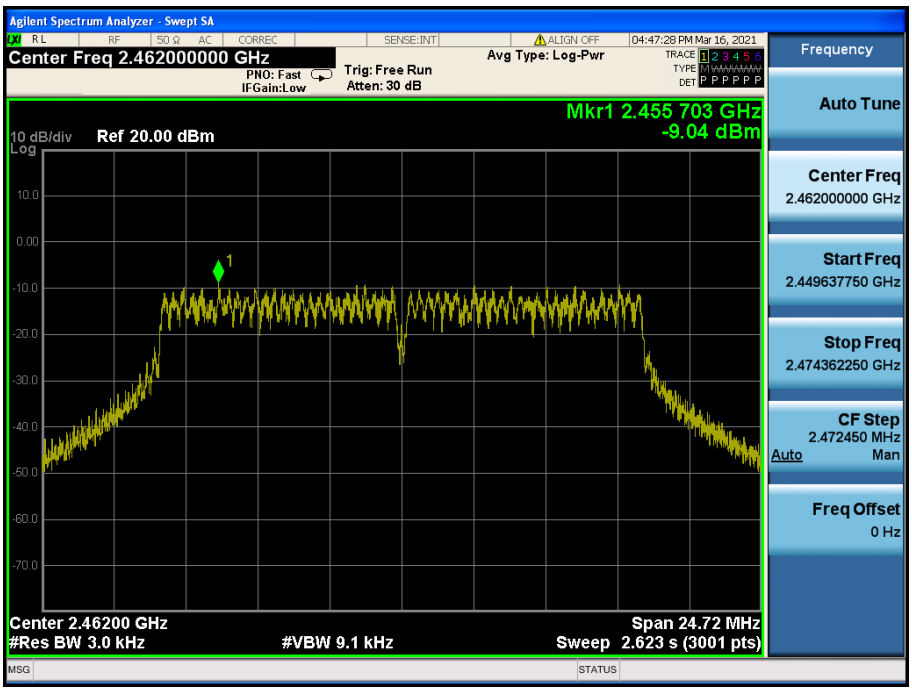

Power Spectral Density TM 3 & 2 412

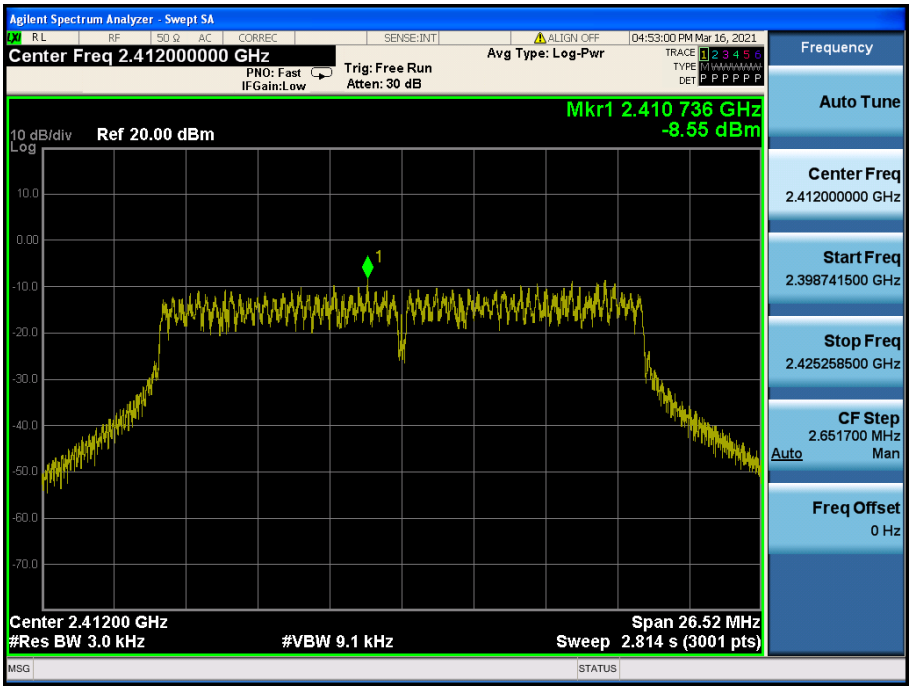

Power Spectral Density TM 3 & 2 437

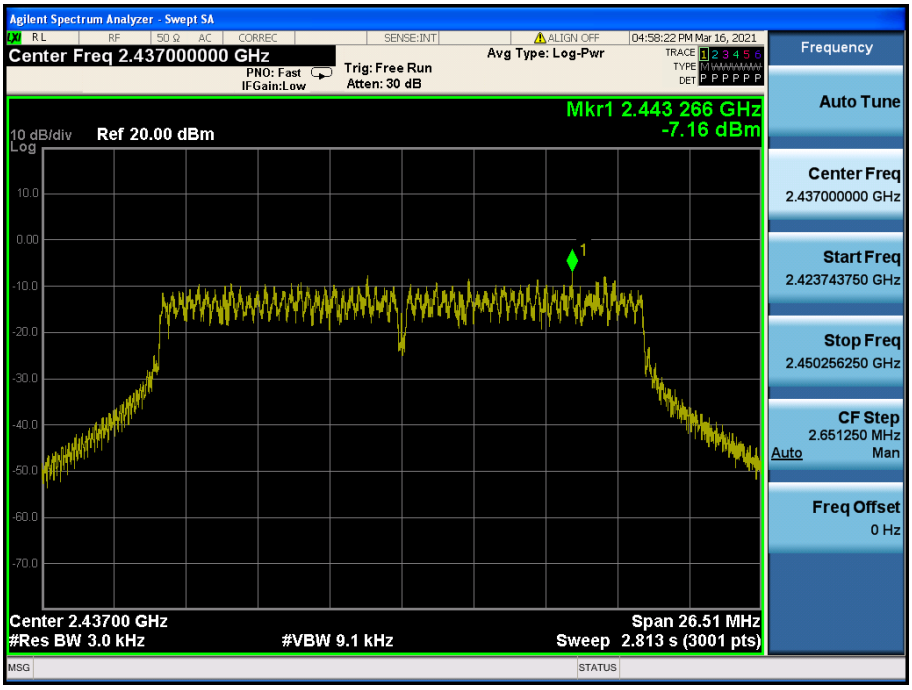

Power Spectral Density TM 3 & 2 462

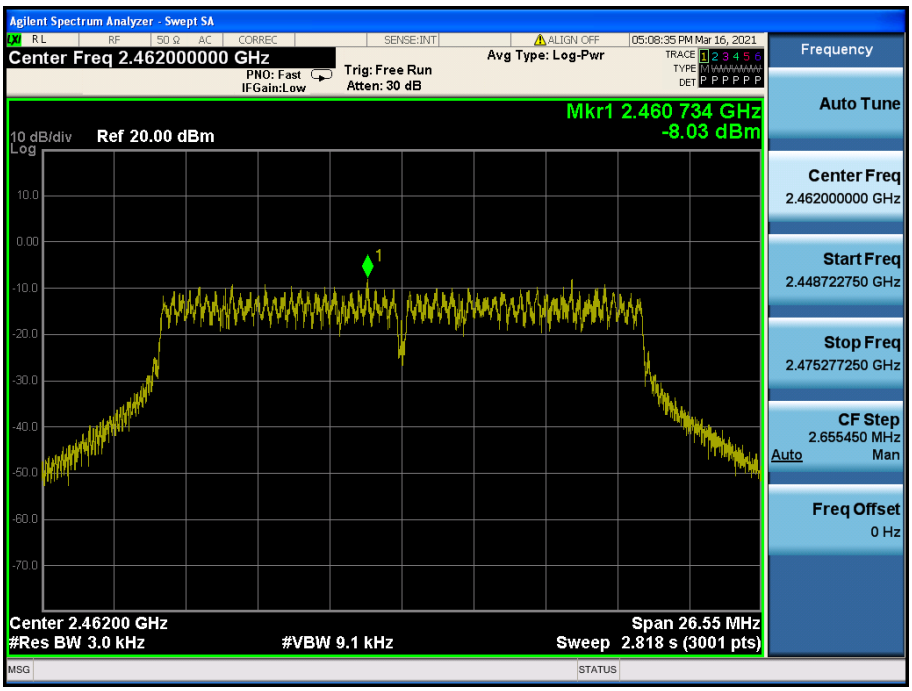

Power Spectral Density TM 4 & 2 422

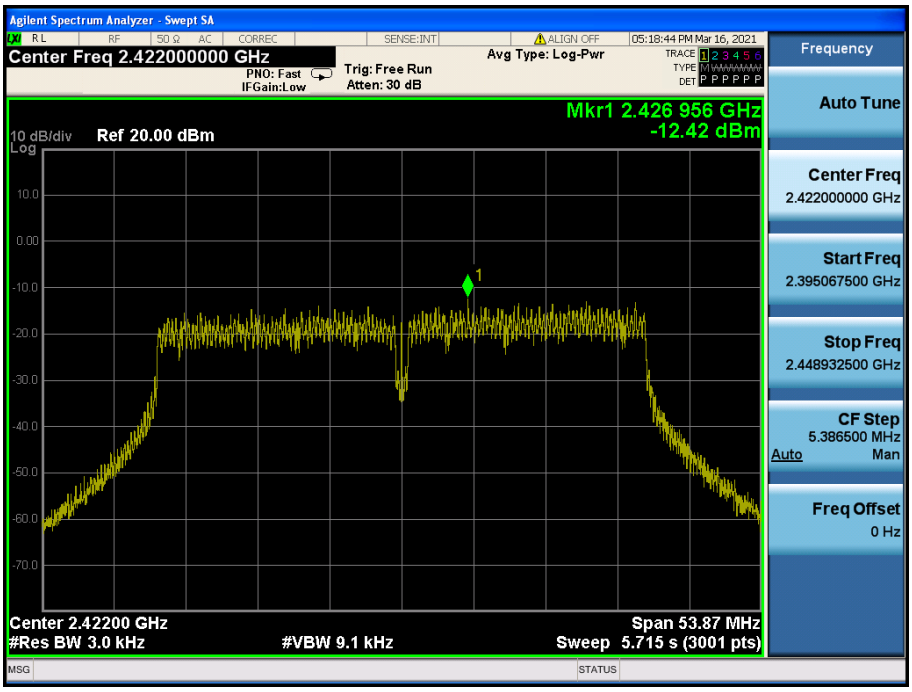

Power Spectral Density TM 4 & 2 437

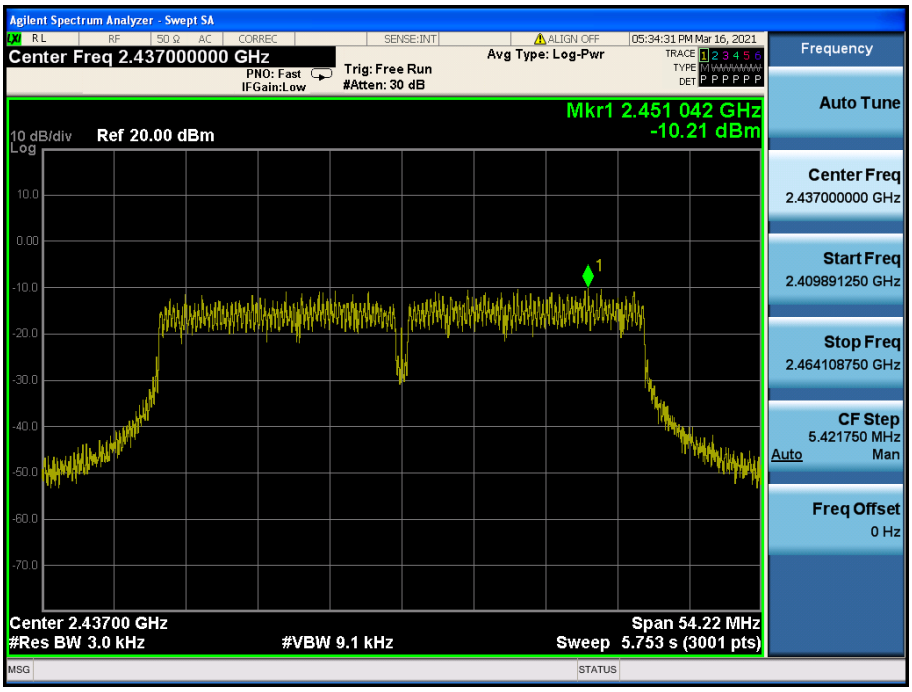

Power Spectral Density

TM 4 & 2 452

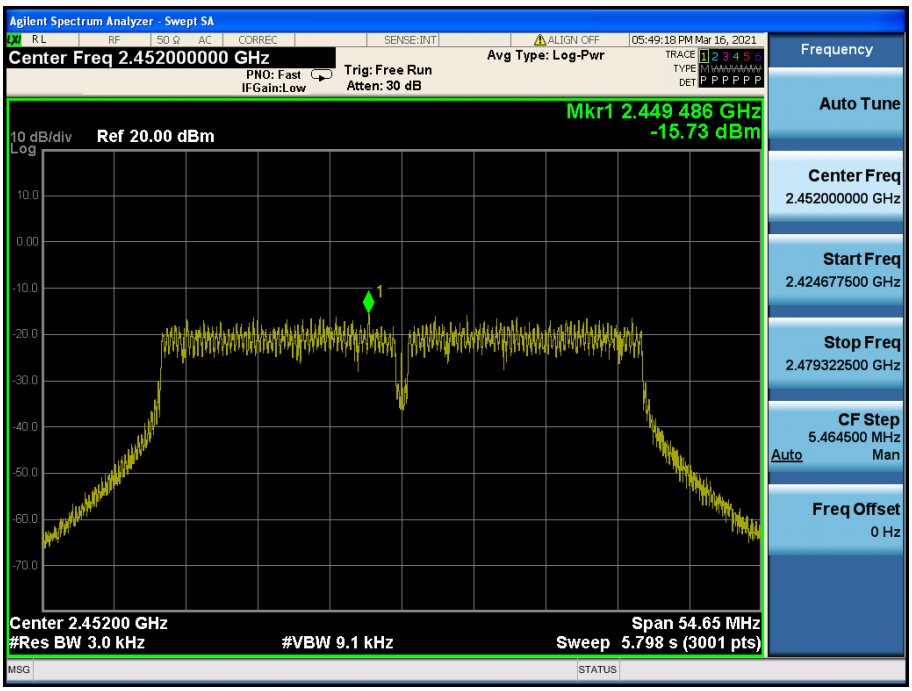

3.4. Unwanted Emissions (Conducted)

▣ **Test requirements and limit, Part 15.247(d) & RSS-247 [5.5]**

In any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions :

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in §15.209(a) is not required.

3.4.1. Test Setup

Refer to the APPENDIX I including path loss

3.4.2. Test Procedures

- **KDB558074 D01v05r02 - Section 8.5**
- **ANSI C63.10-2013 – Section 11.11**

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level

   LIMIT LINE = 20 dB below of the reference level.

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.(Actual 1 MHz , See below note)
3. Set the VBW ≥ 3 x RBW.(Actual 3 MHz, See below note)
4. Detector = peak.
5. Ensure that the number of measurement points ≥ span / RBW
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

Note: The conducted spurious emission was tested with below settings.

Frequency range	RBW	VBW	Detector	Trace	Sweep Point
9 kHz ~ 30 MHz	100 kHz	300 kHz	Peak	Max Hold	40 001
30 MHz ~ 10 GHz	1 MHz	3 MHz			
10 GHz ~ 25 GHz	1 MHz	3 MHz			

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.4.3. Test Results

TM 1 & 2 412

Reference

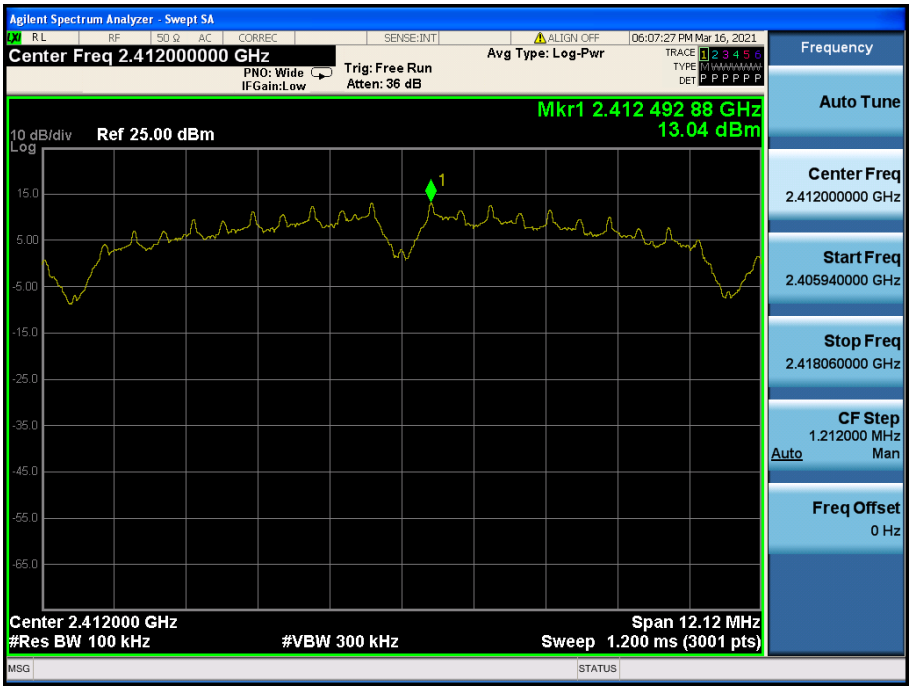

Low Band-edge

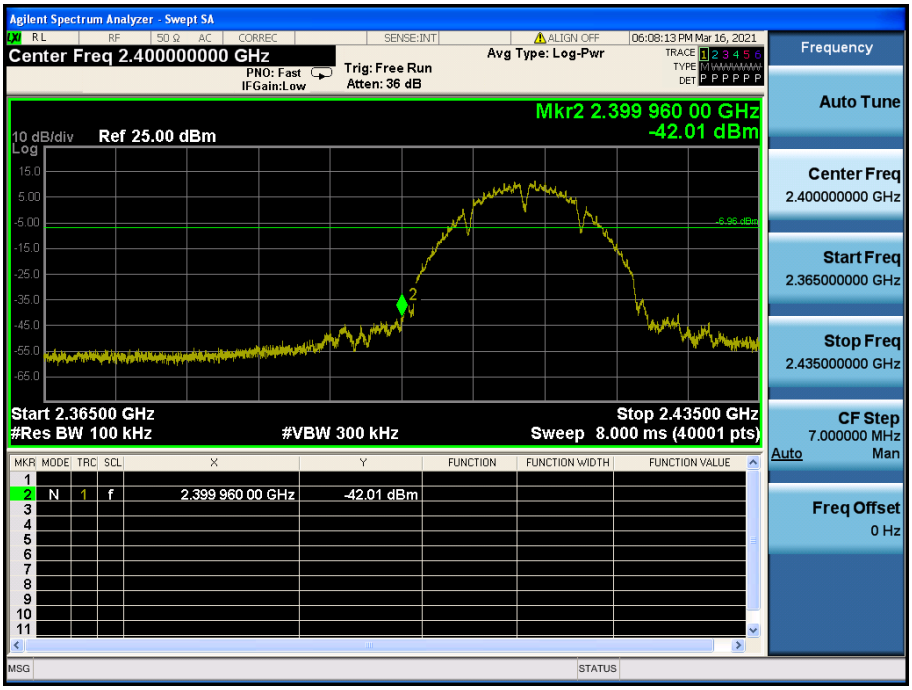

Conducted Spurious Emissions

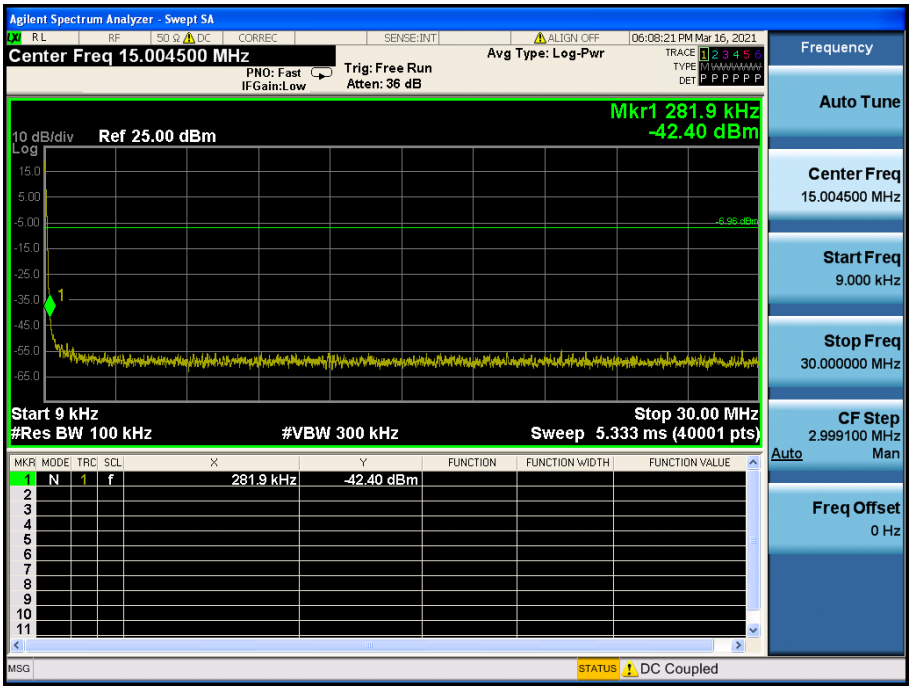

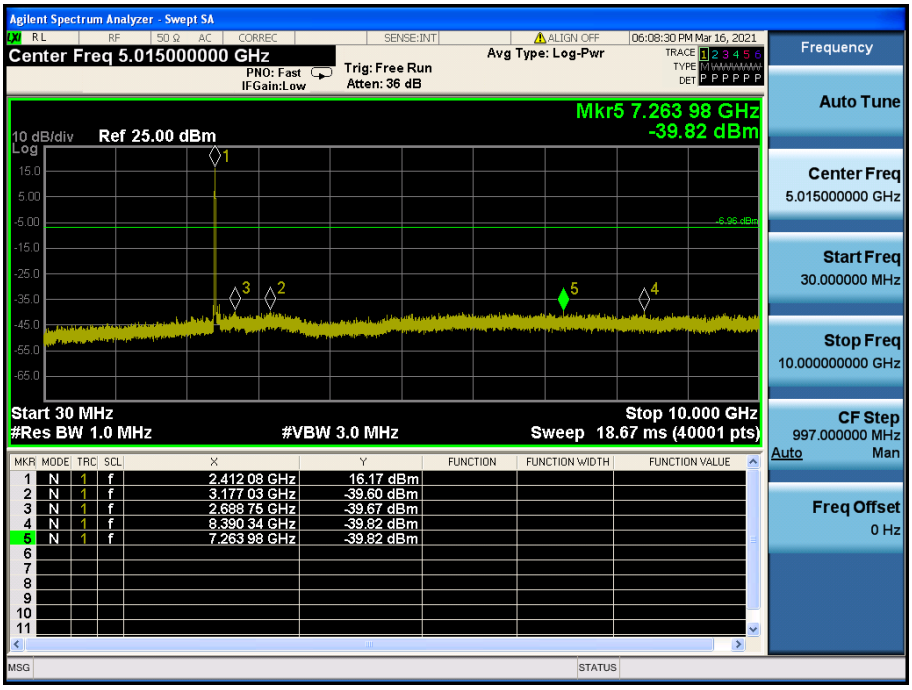

Conducted Spurious Emissions

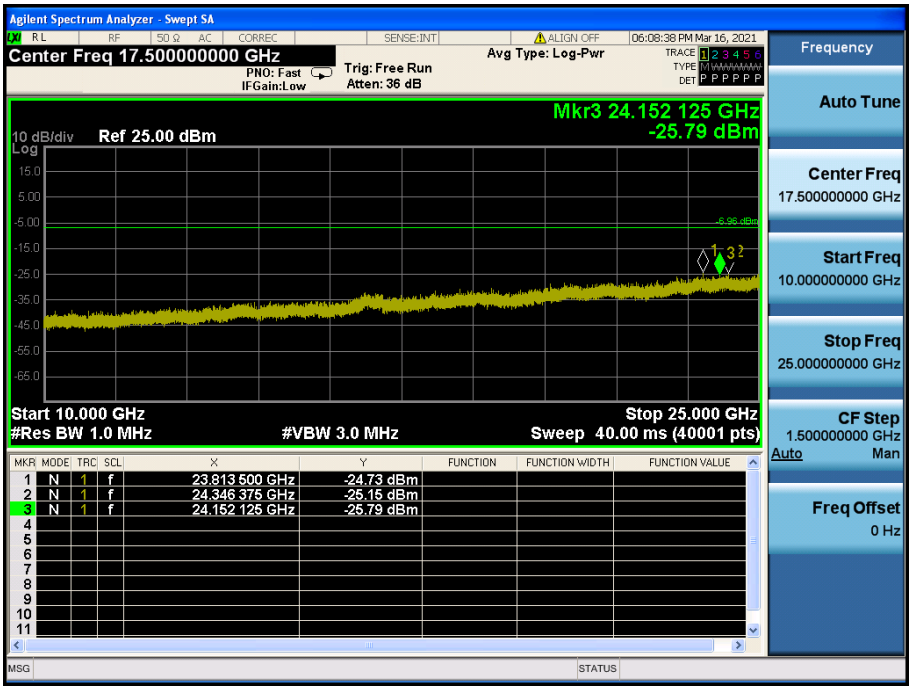

TM 1 & 2 437

Reference

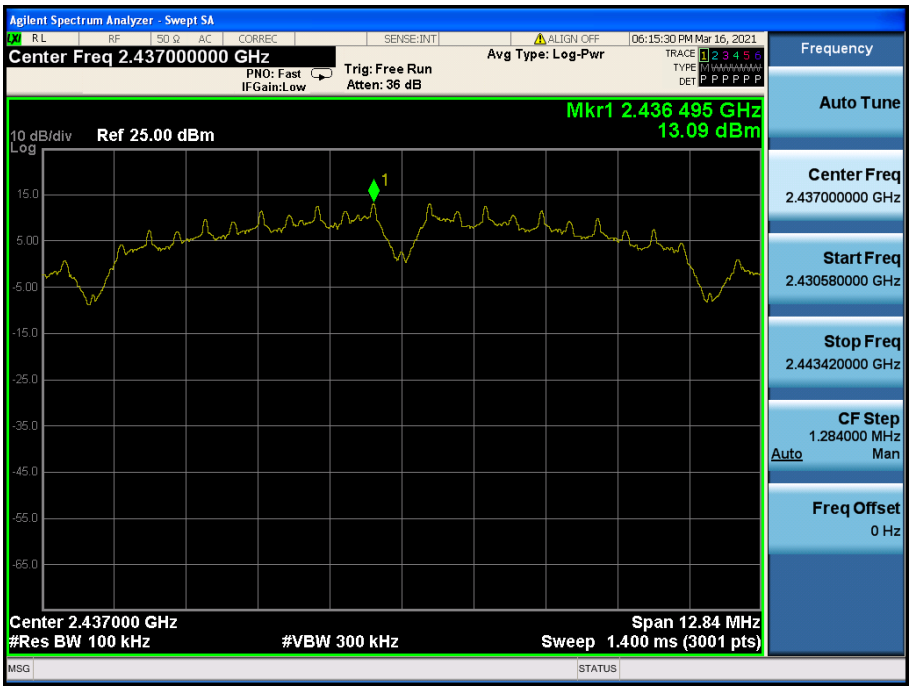

Conducted Spurious Emissions

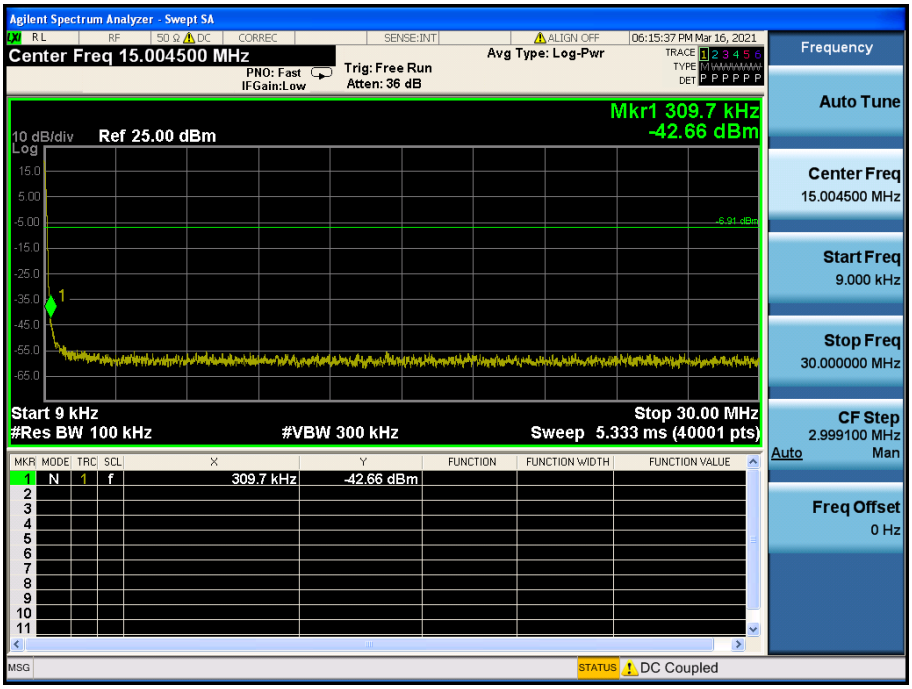

Conducted Spurious Emissions

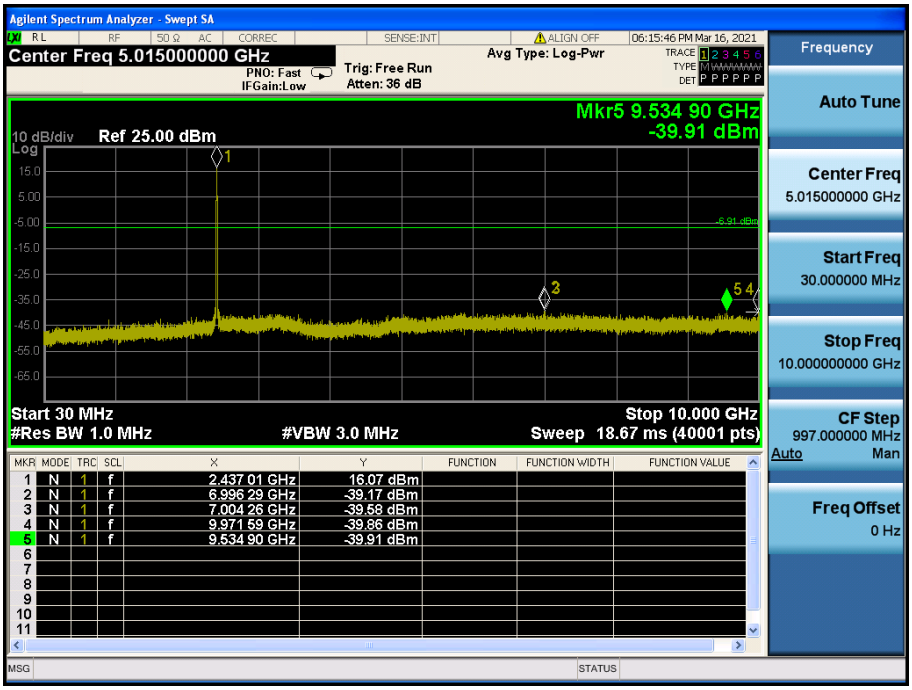

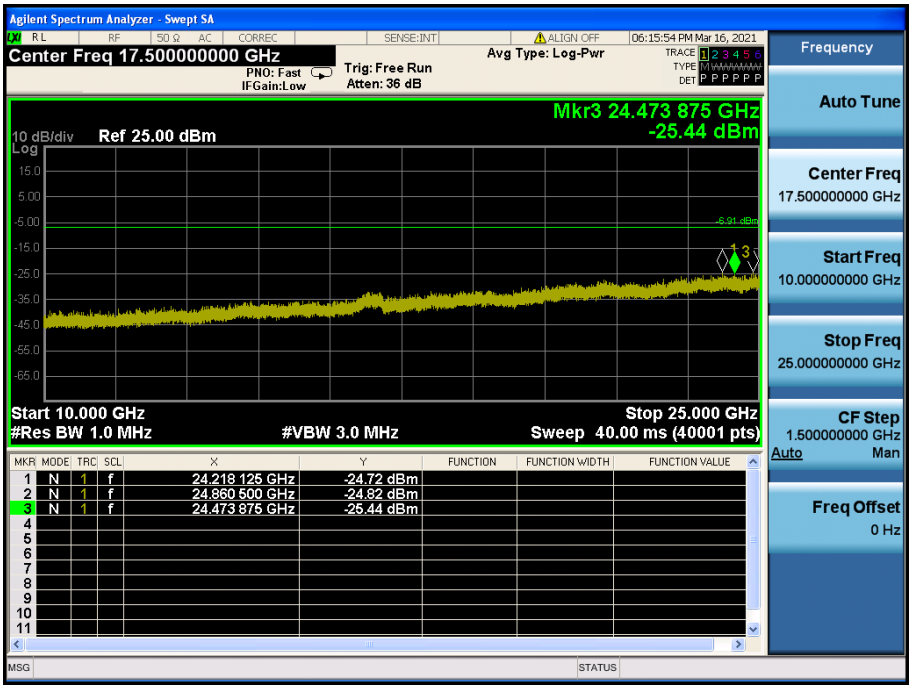

TM 1 & 2 462

Reference

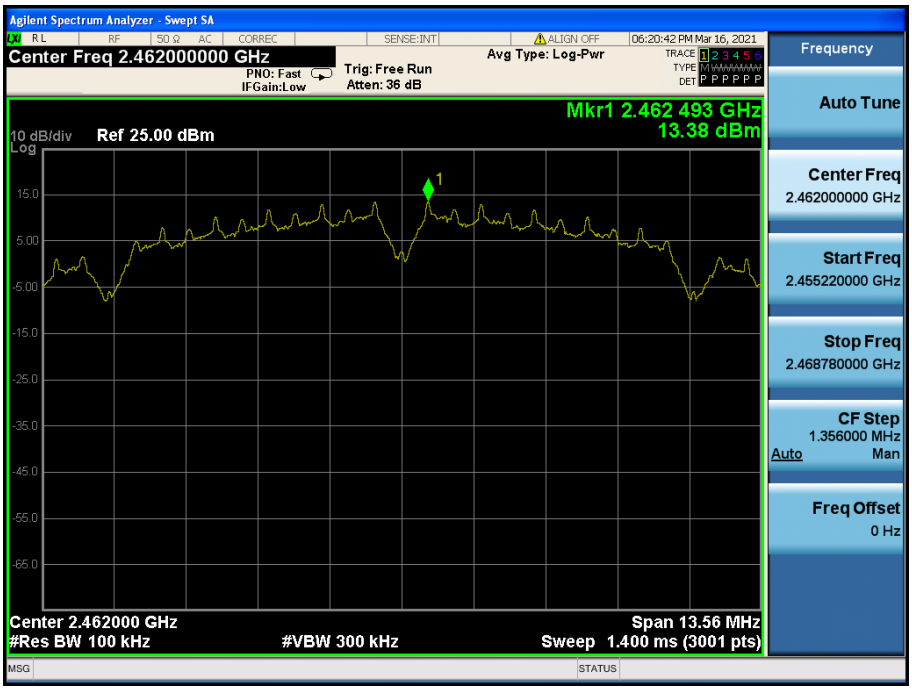

High Band-edge

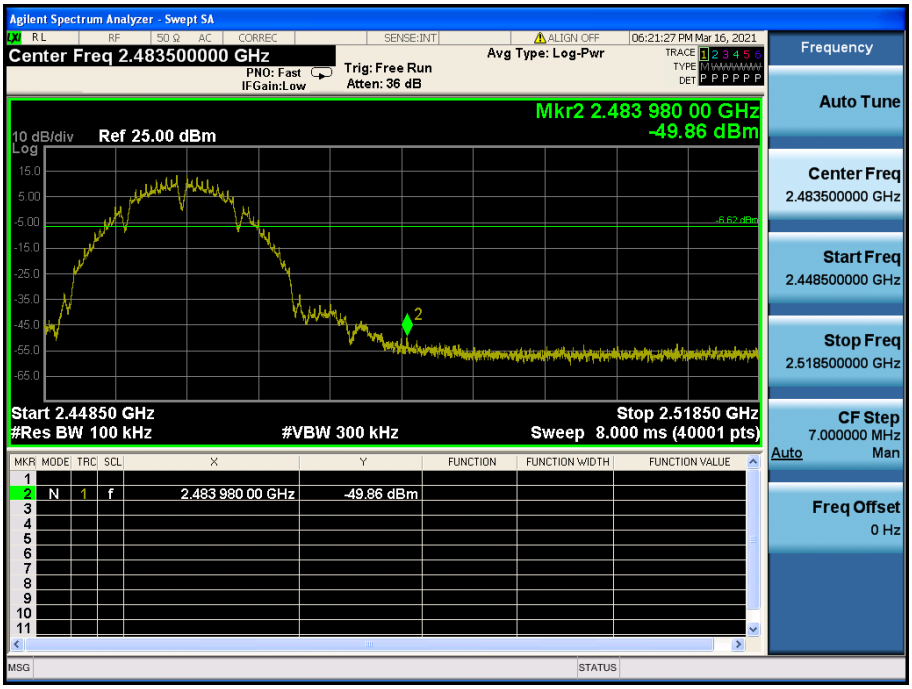

Conducted Spurious Emissions

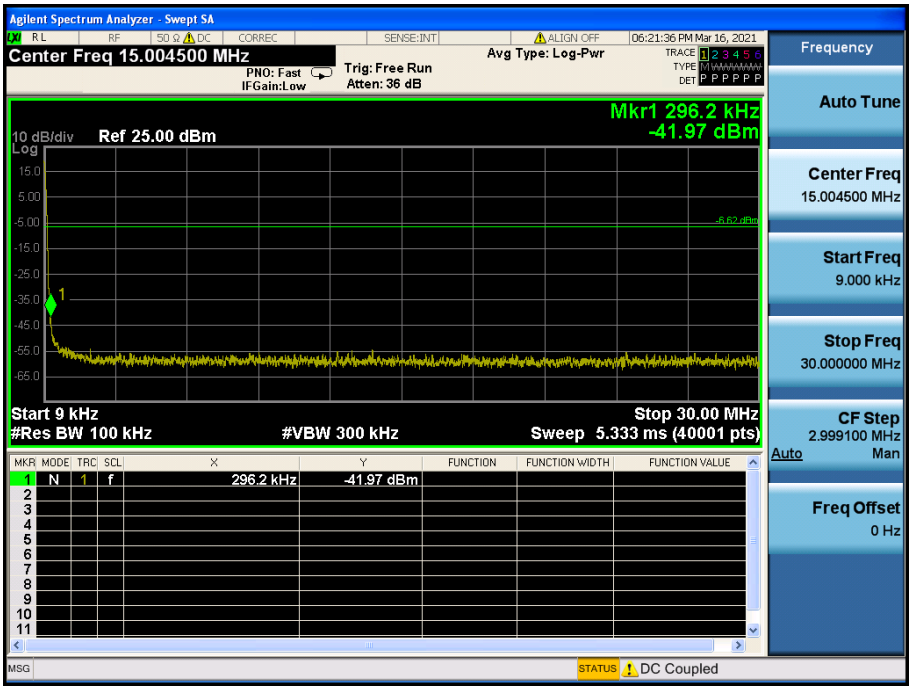

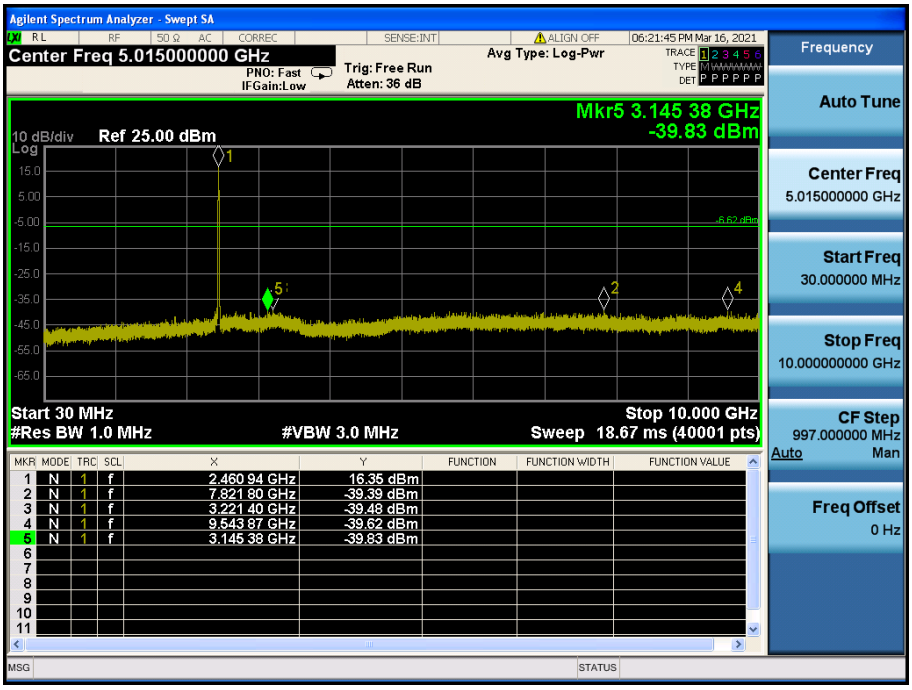

Conducted Spurious Emissions

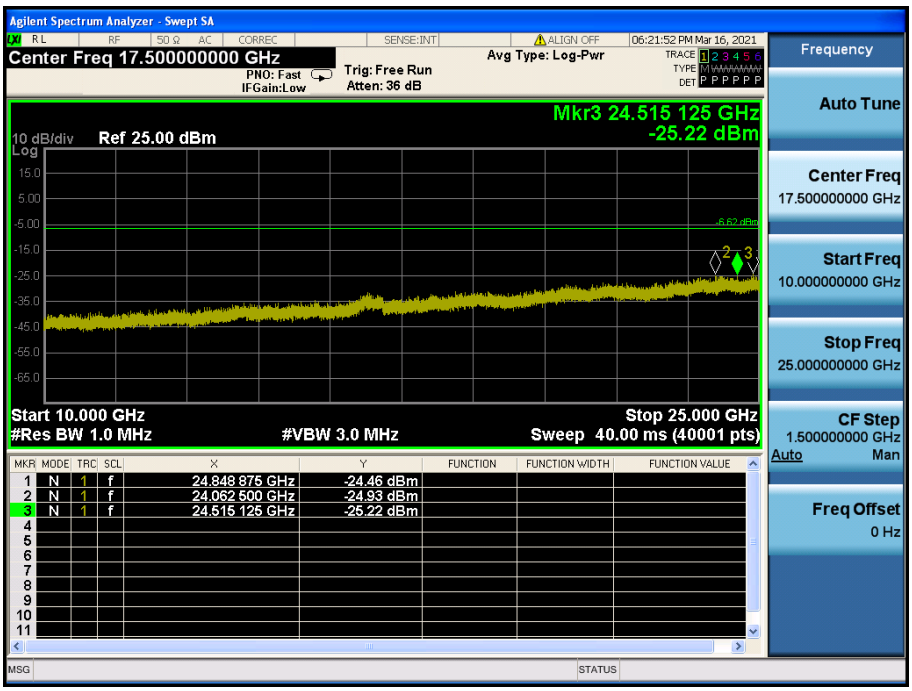

TM 2 & 2 412

Reference

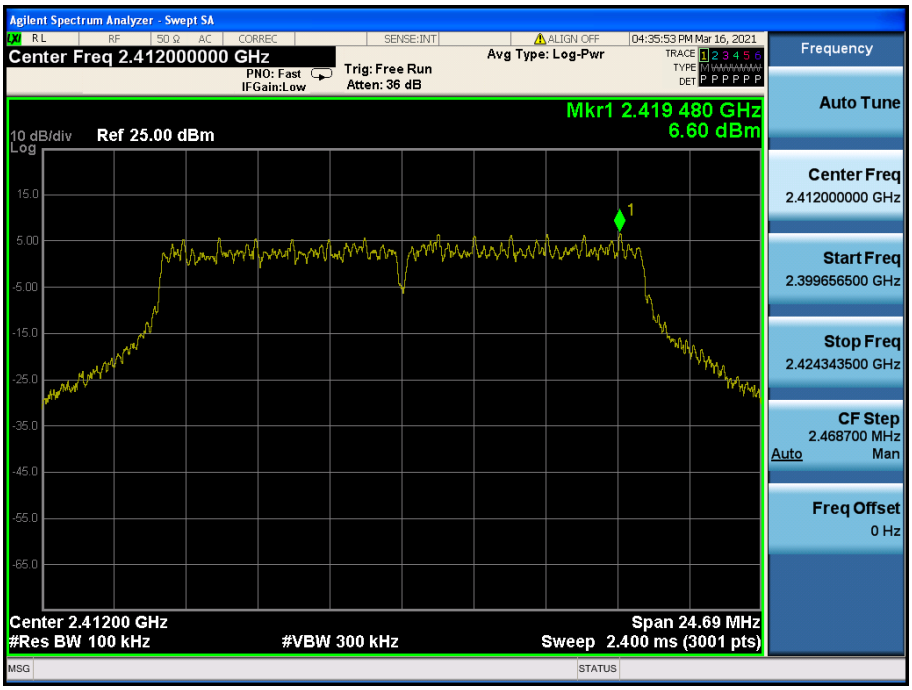

Low Band-edge

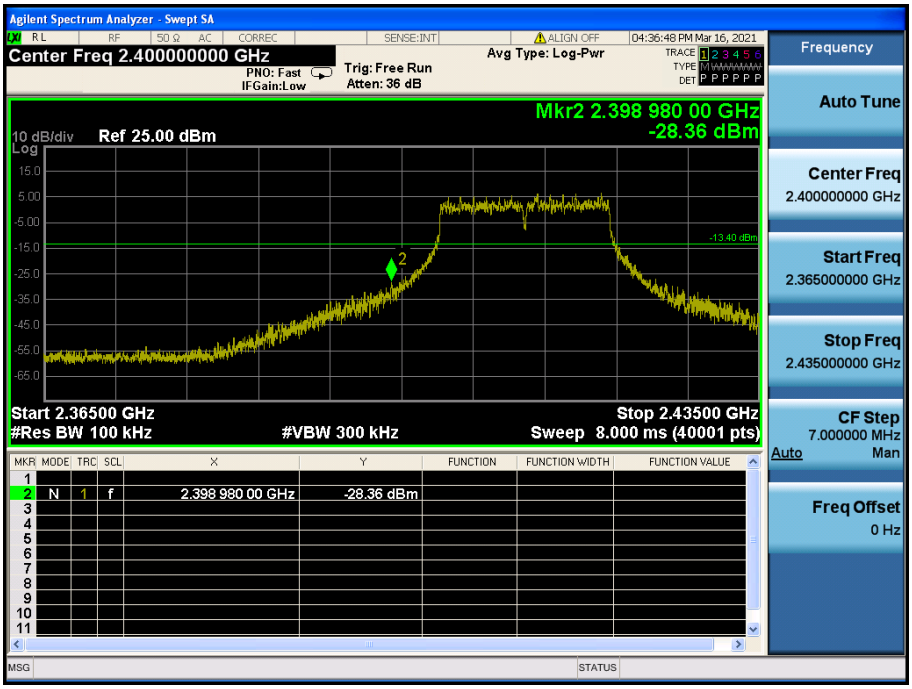

Conducted Spurious Emissions

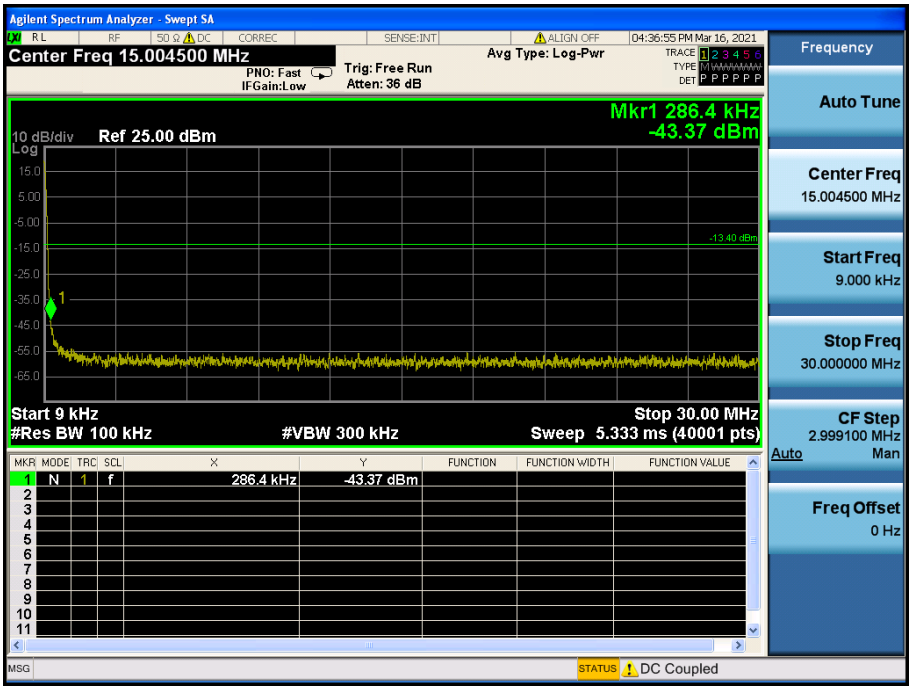

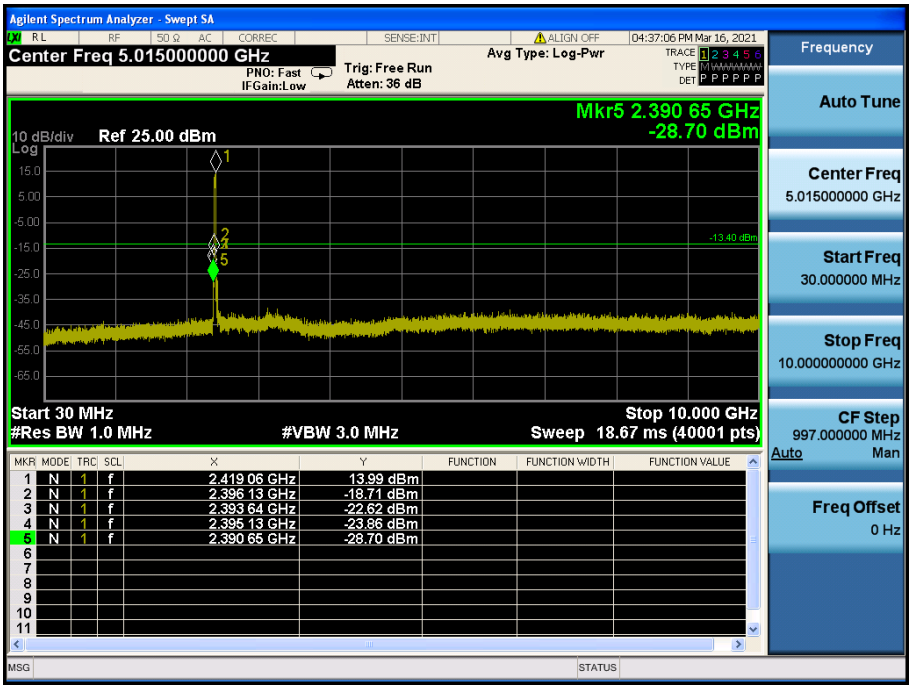

Conducted Spurious Emissions

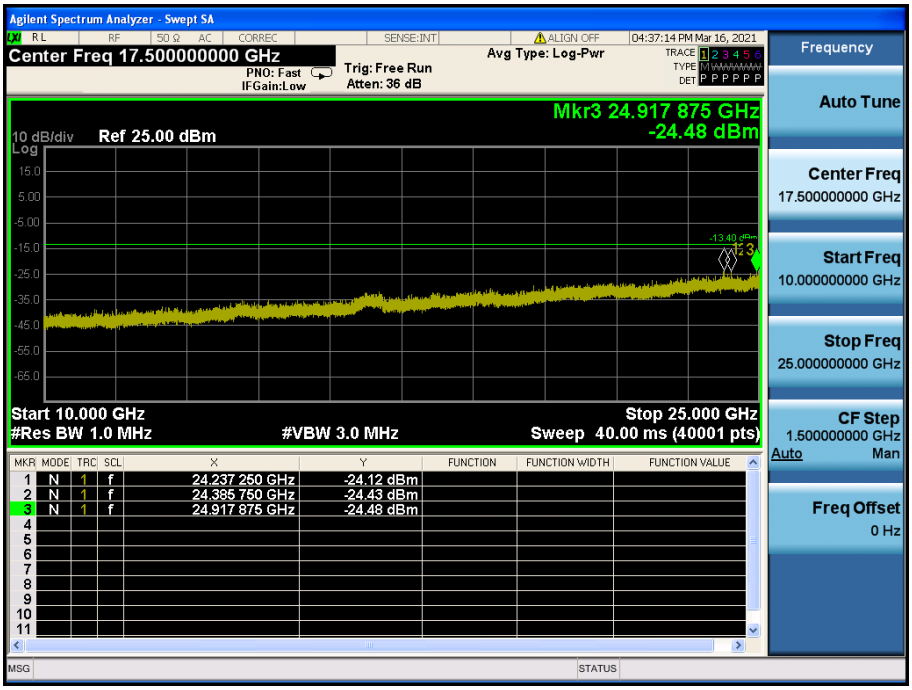

TM 2 & 2 437

Reference

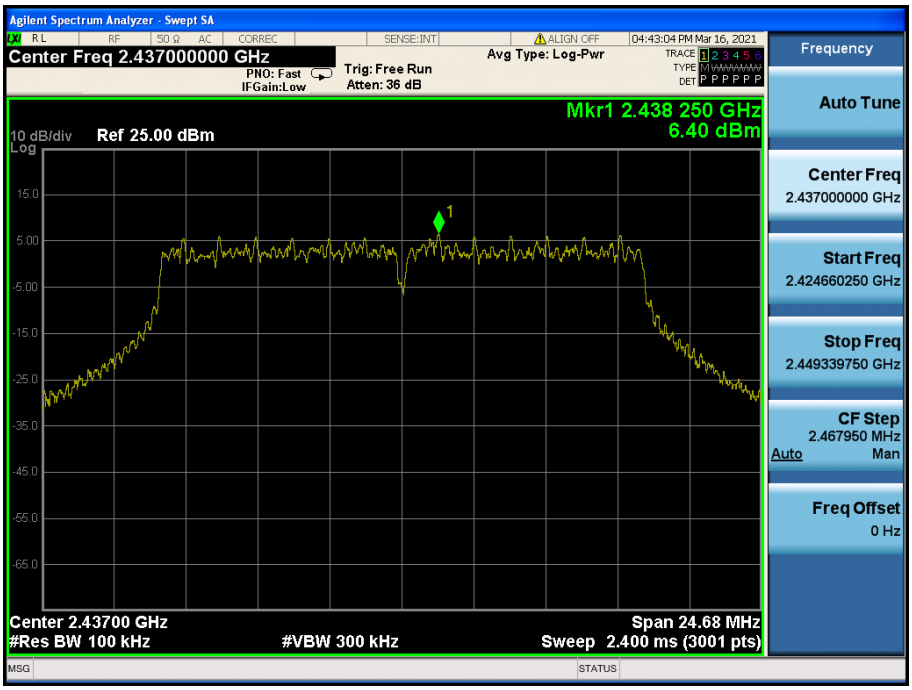

Conducted Spurious Emissions

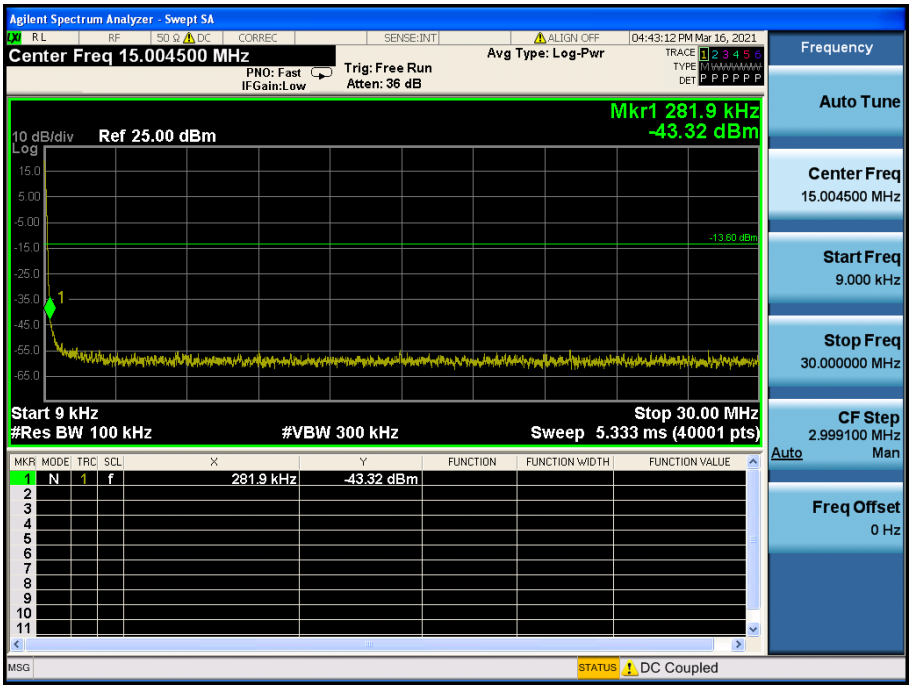

Conducted Spurious Emissions

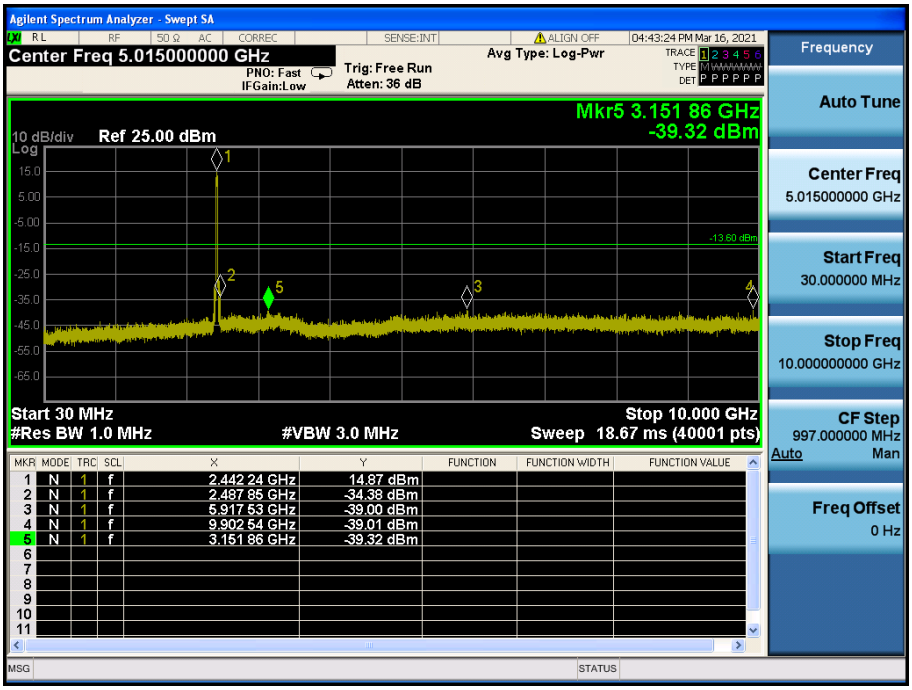

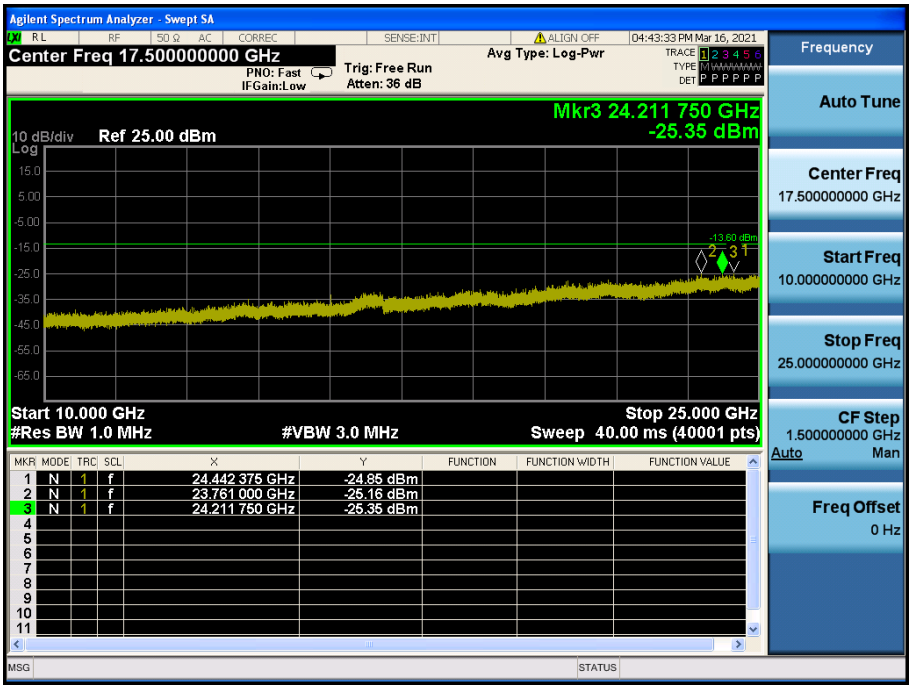

TM 2 & 2 462

Reference

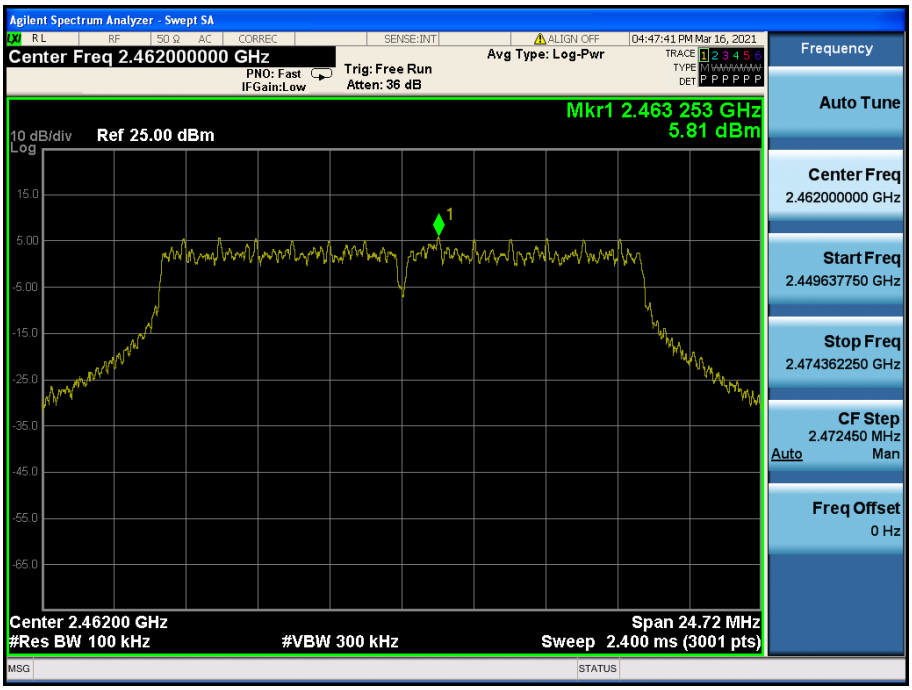

High Band-edge

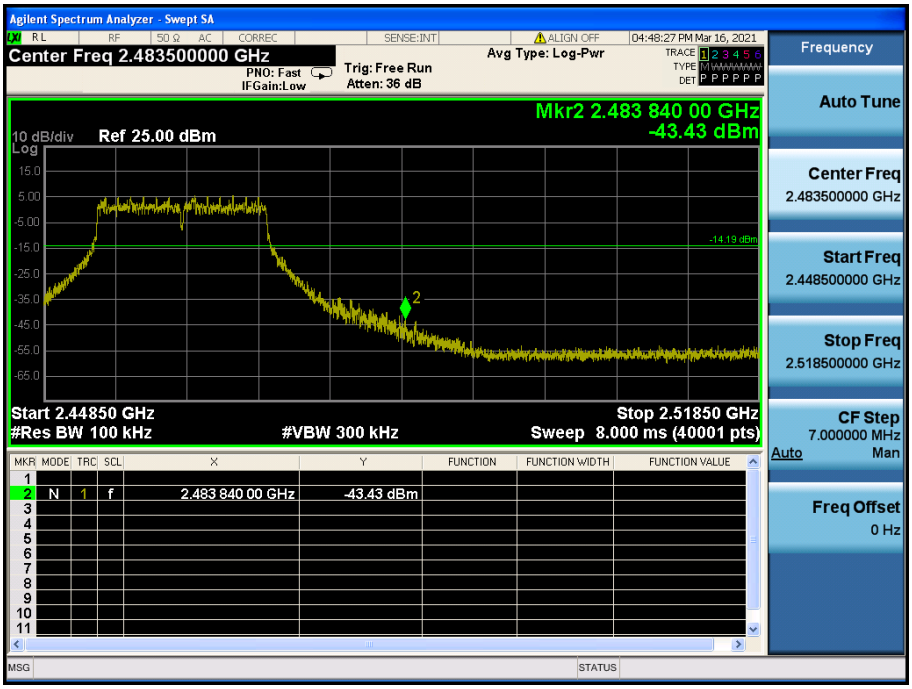

Conducted Spurious Emissions

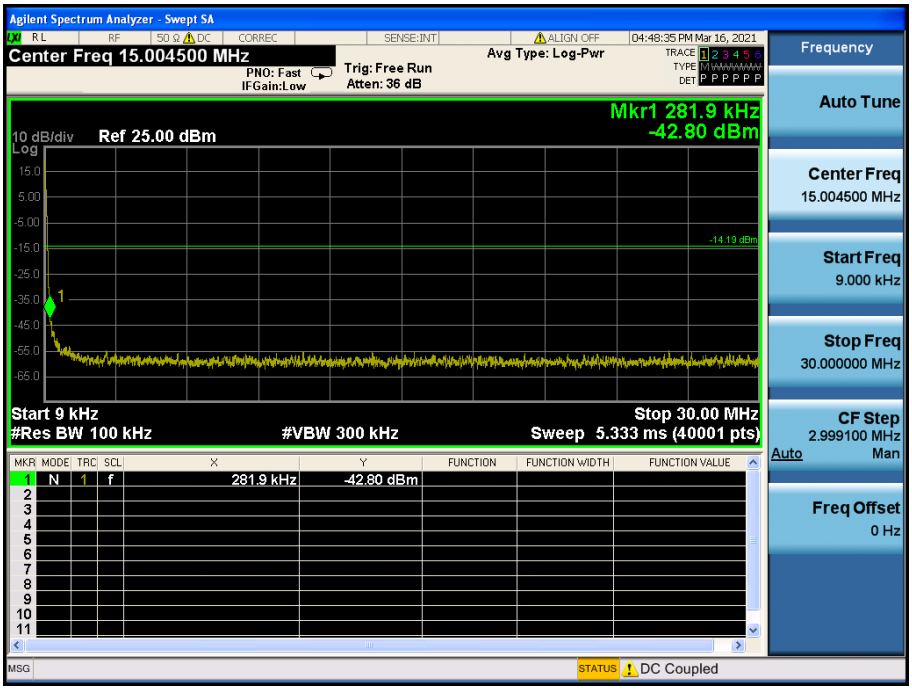

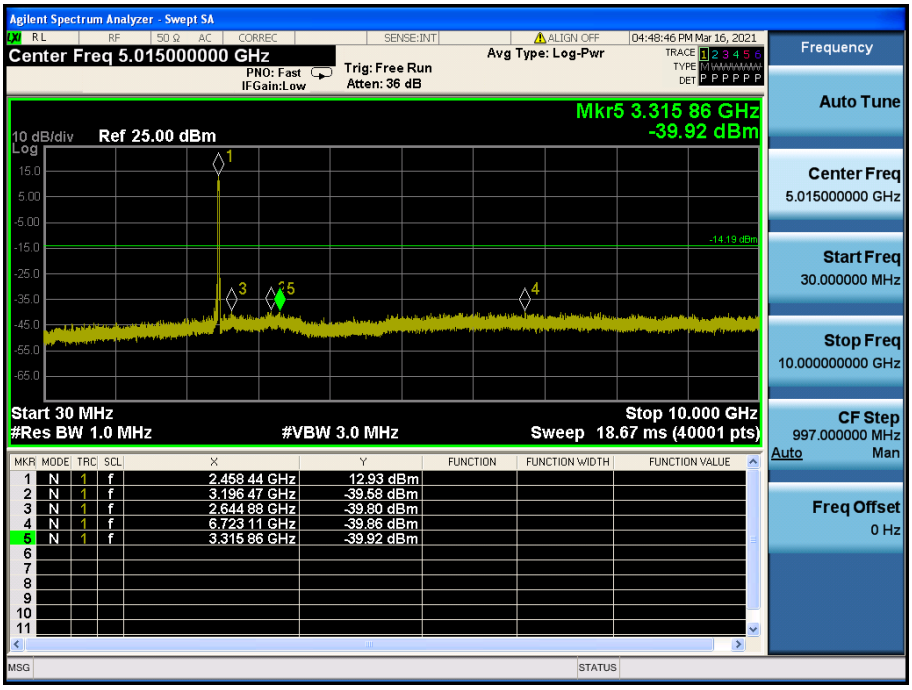

Conducted Spurious Emissions

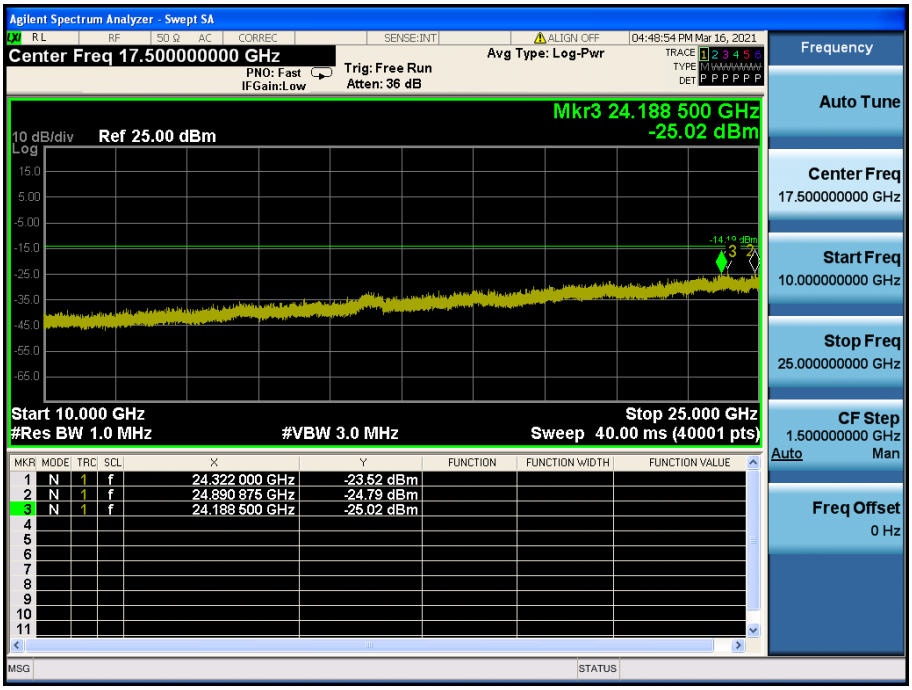

TM 3 & 2 412

Reference

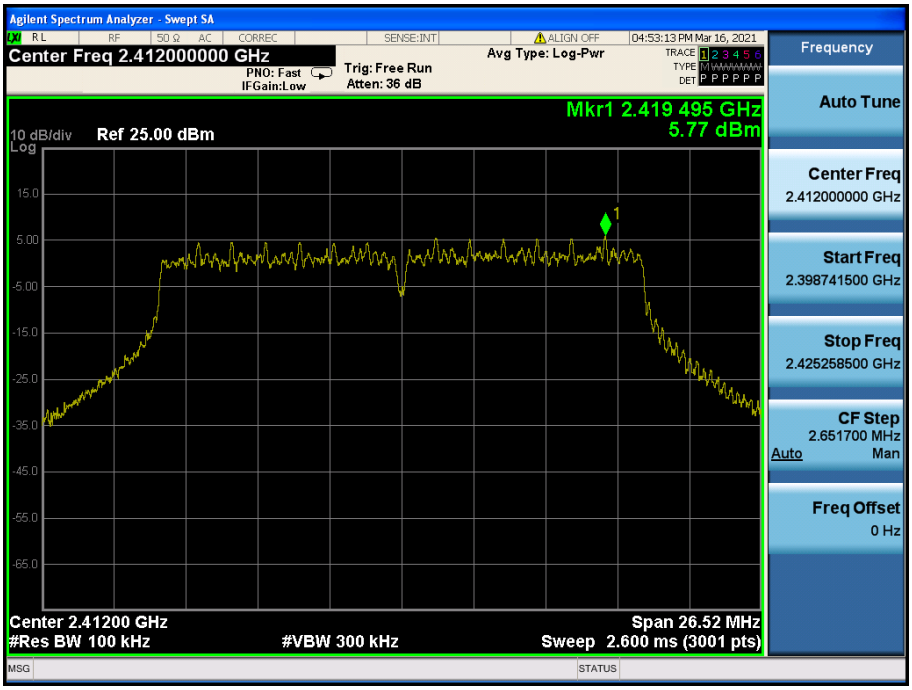

Low Band-edge

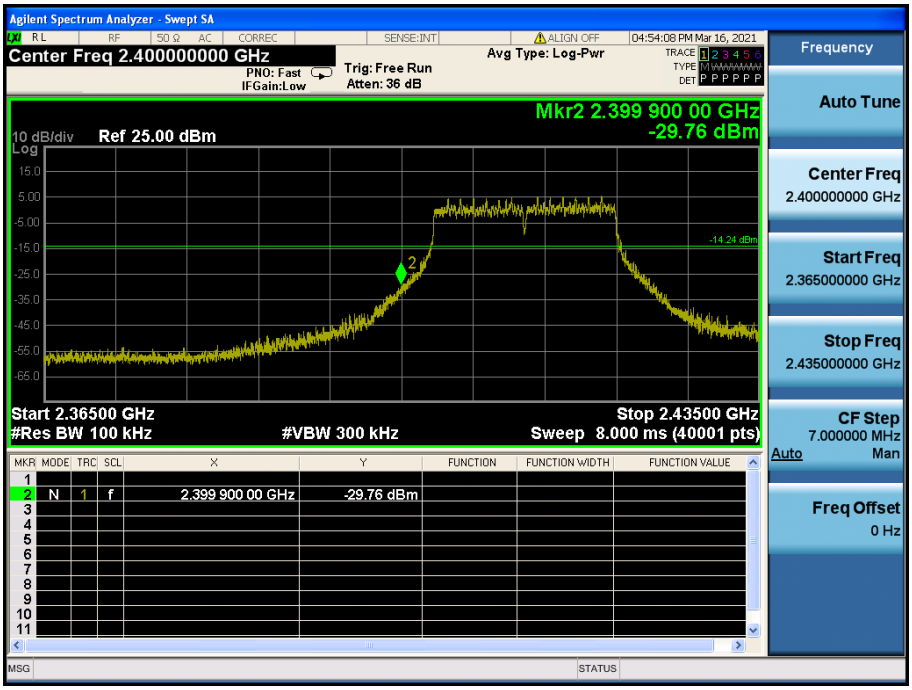

Conducted Spurious Emissions

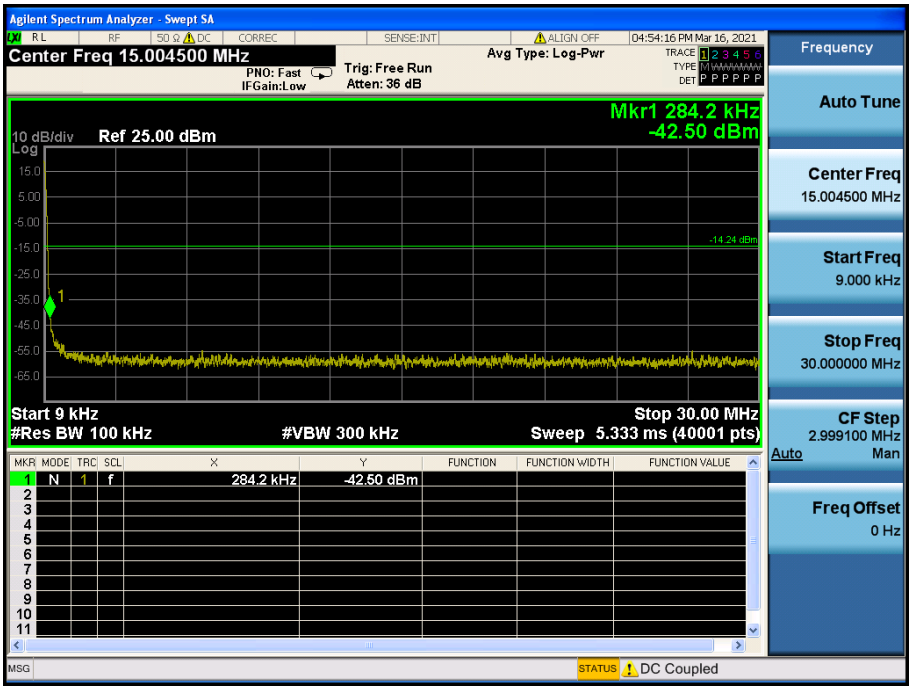

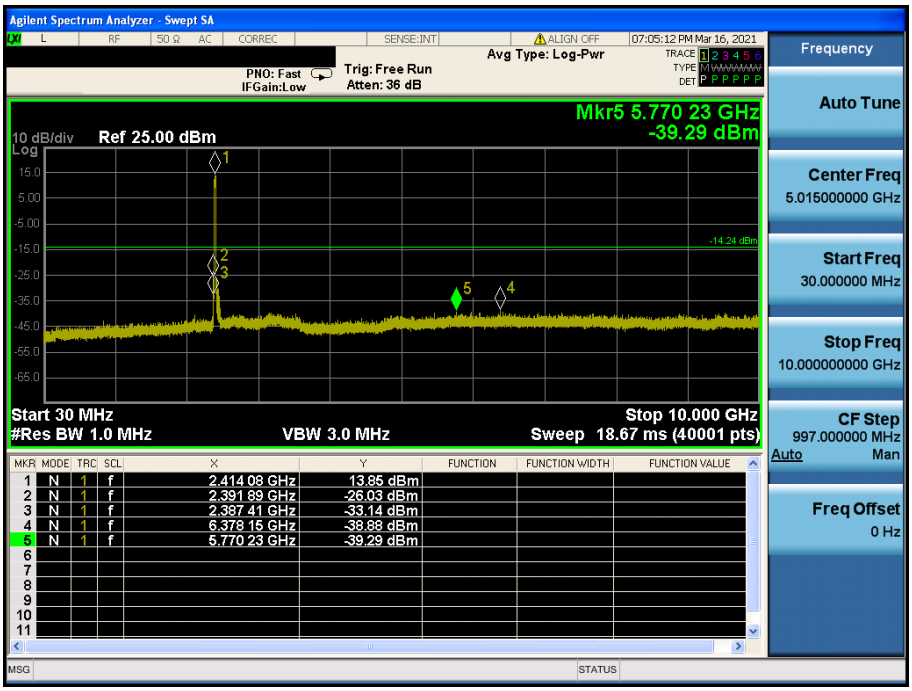

Conducted Spurious Emissions

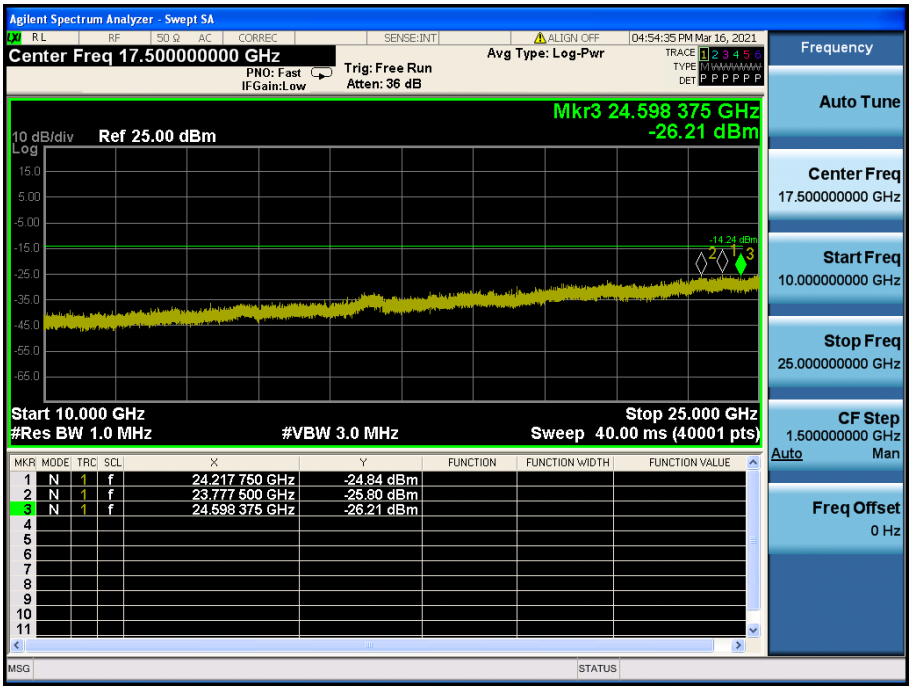

TM 3 & 2 437

Reference

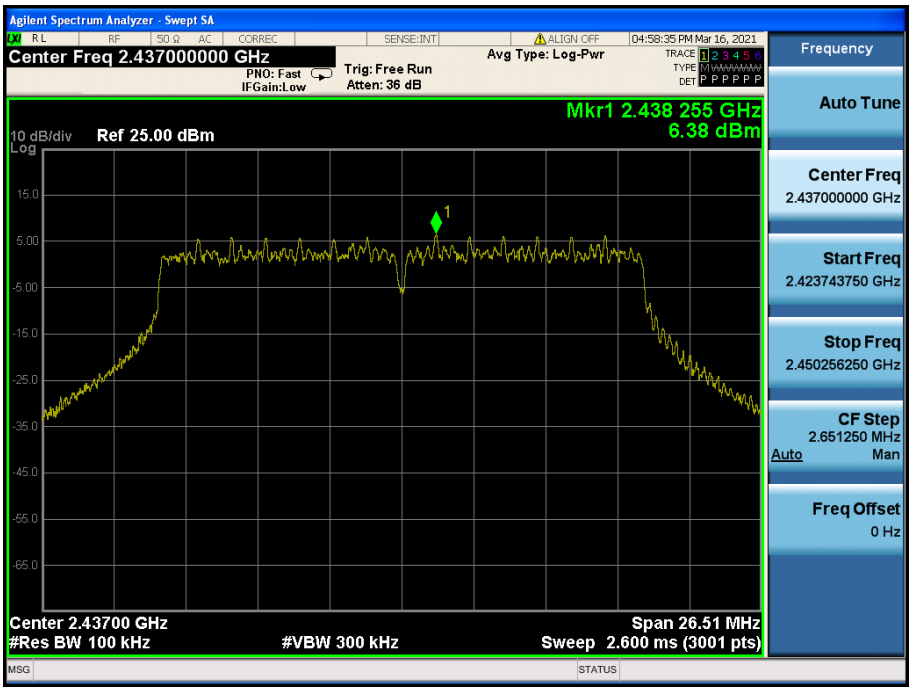

Conducted Spurious Emissions

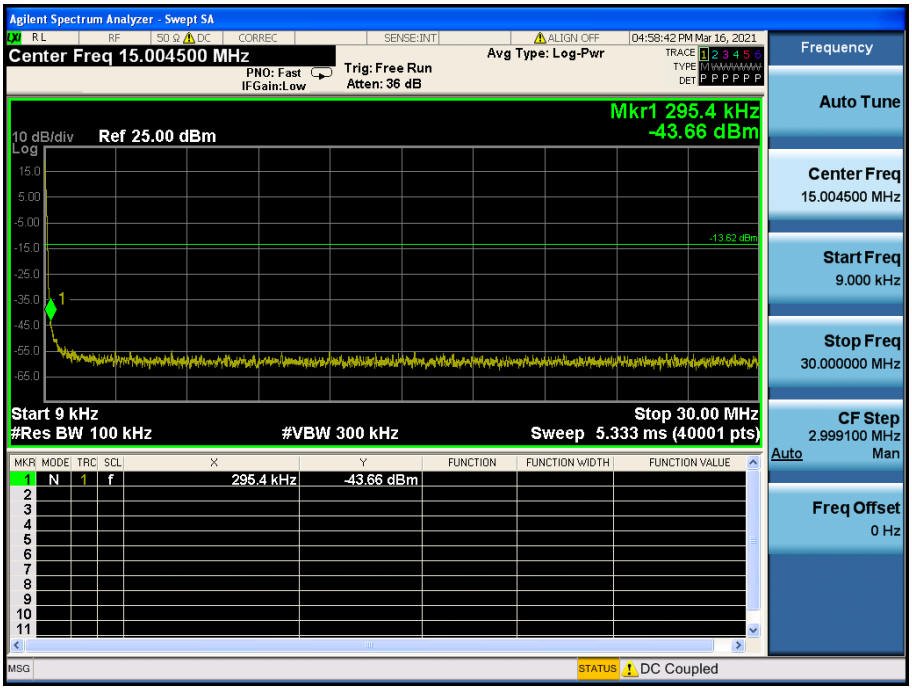

Conducted Spurious Emissions

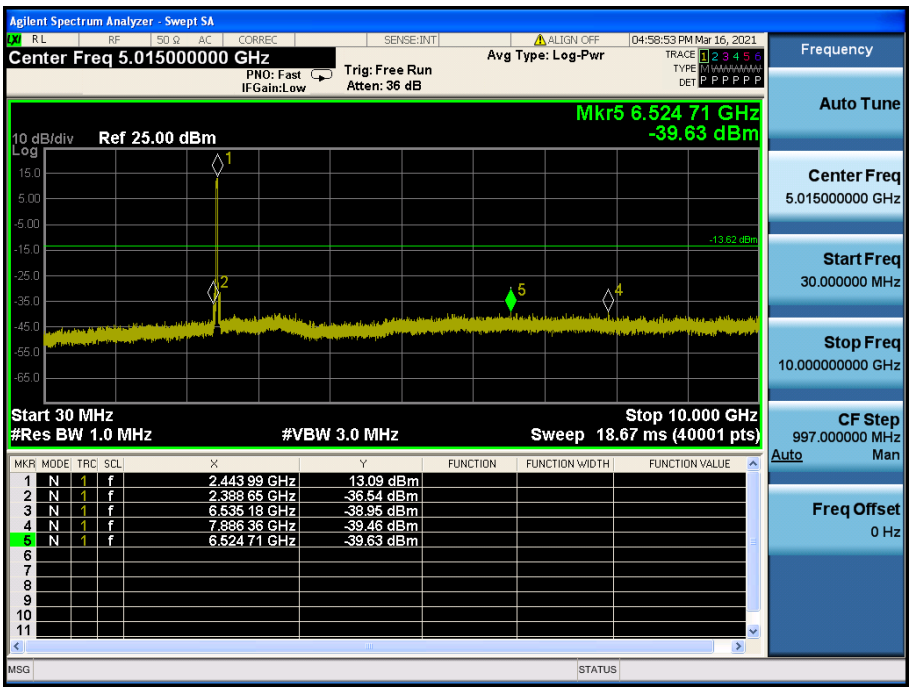

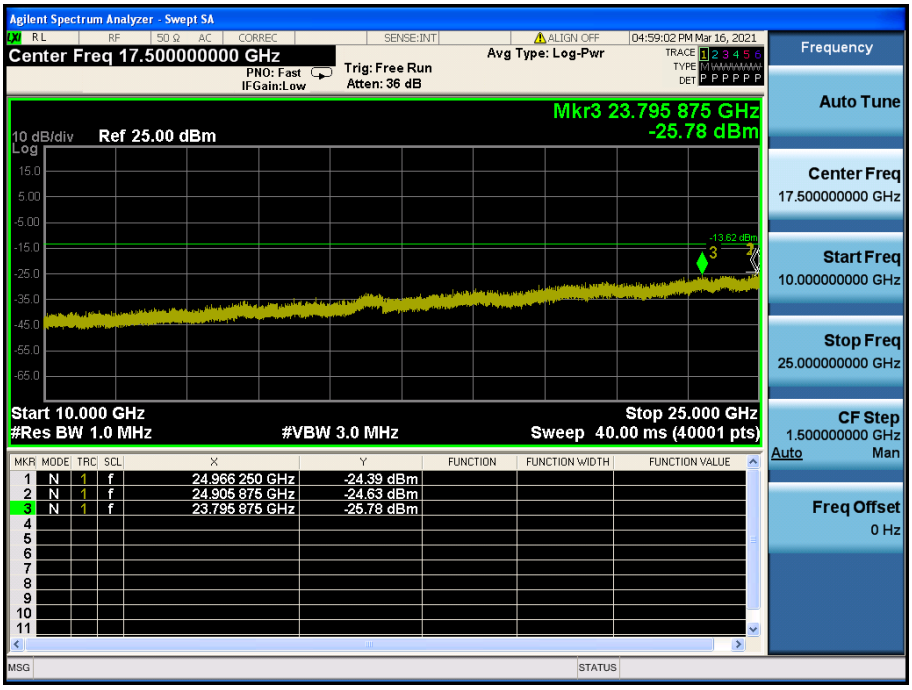

TM 3 & 2 462

Reference

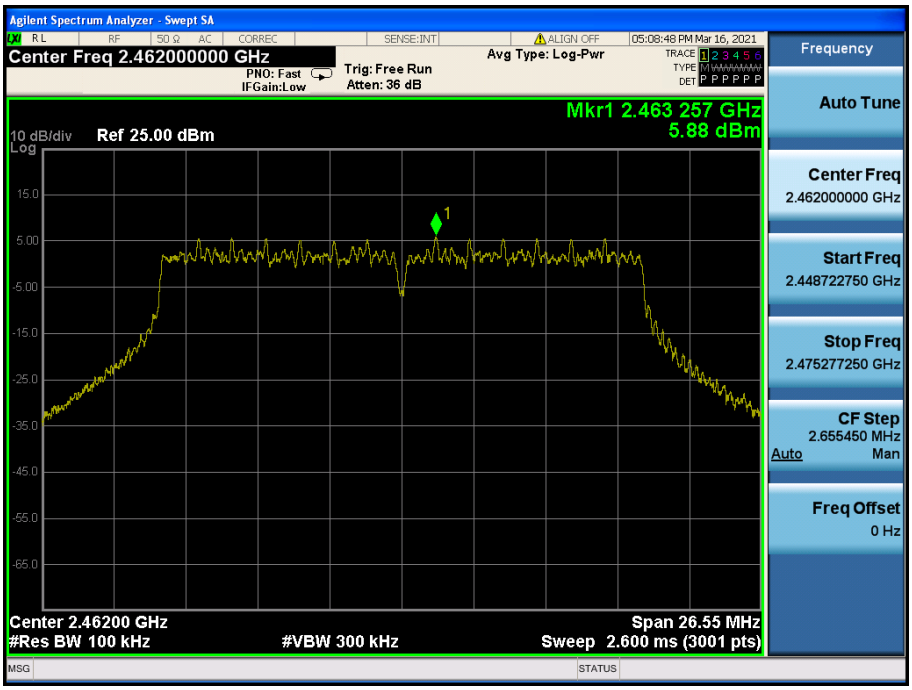

High Band-edge

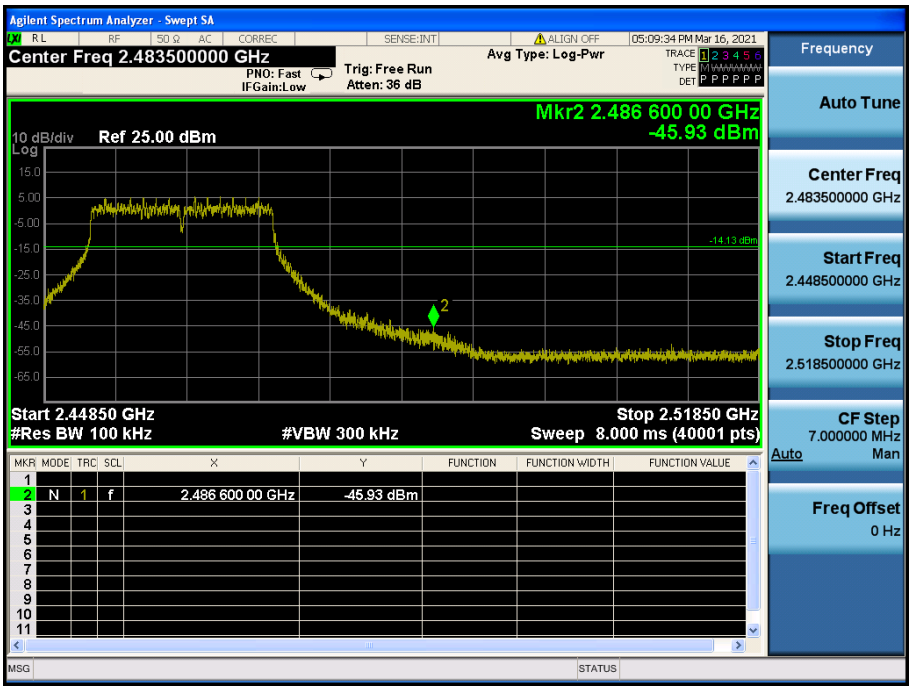

Conducted Spurious Emissions

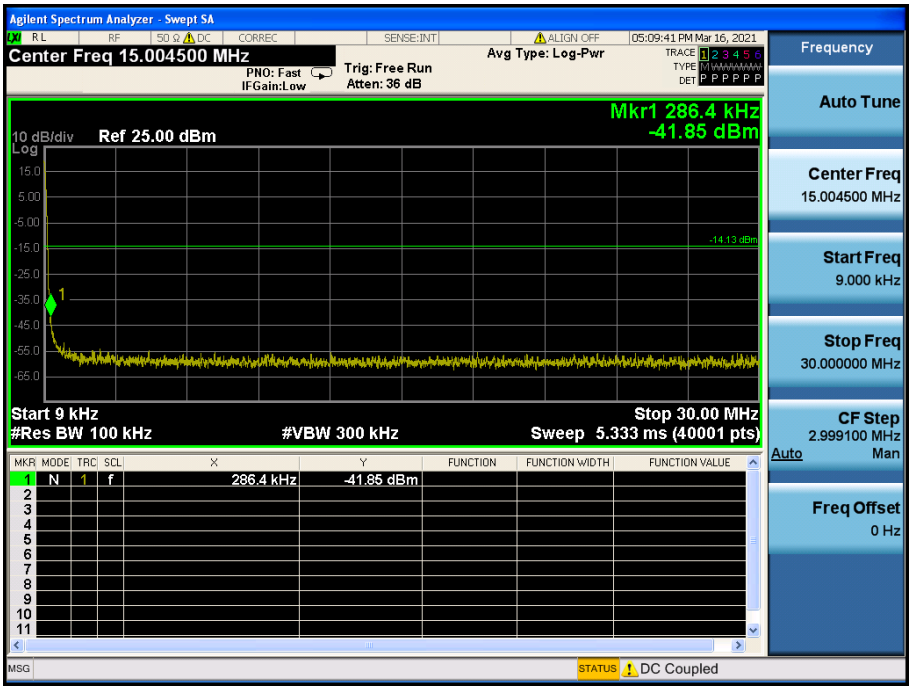

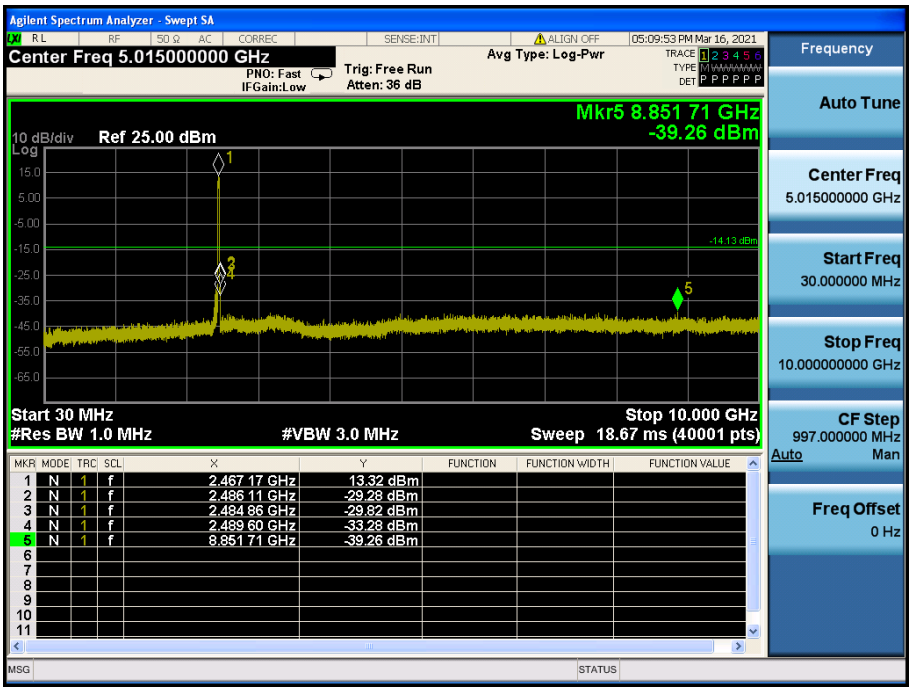

Conducted Spurious Emissions

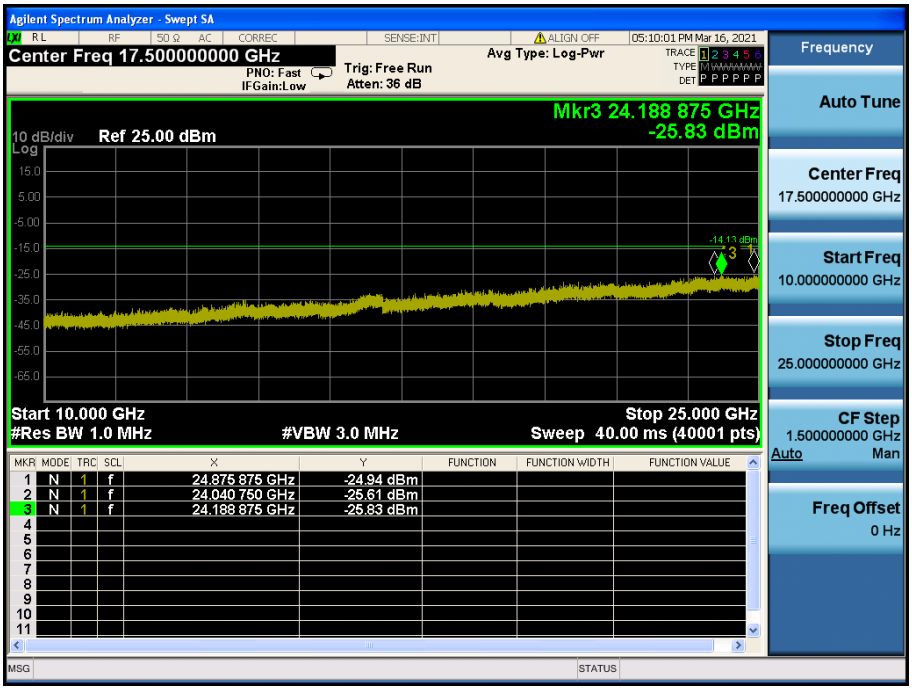

TM 4 & 2 422

Reference

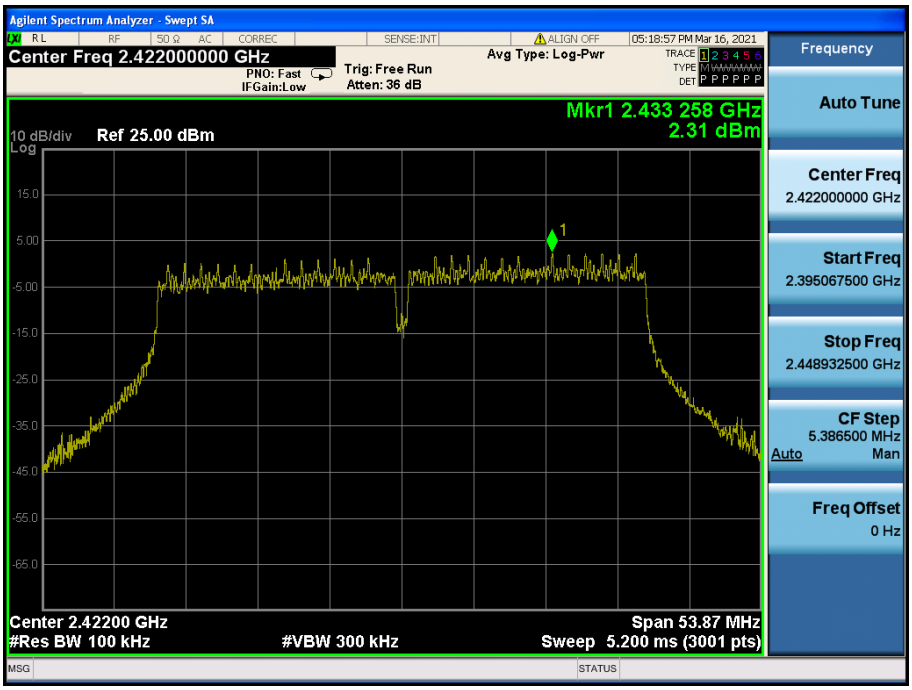

Low Band-edge

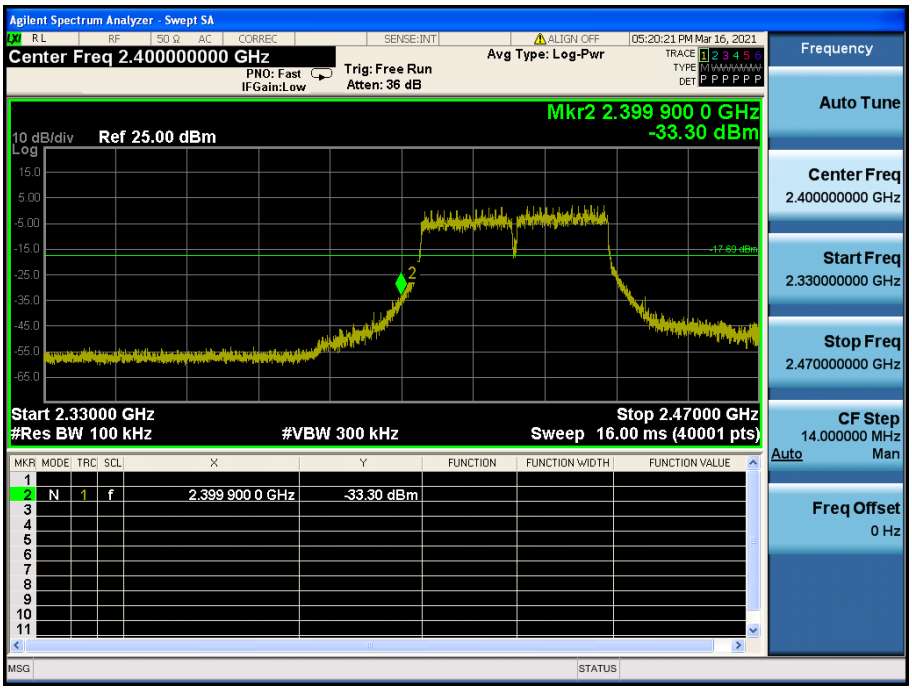

Conducted Spurious Emissions

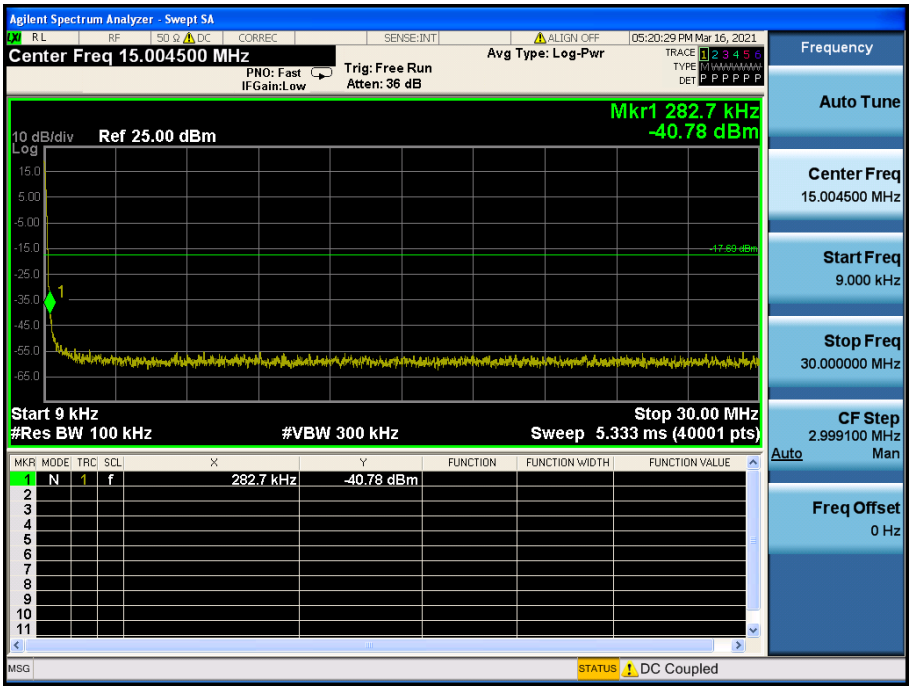

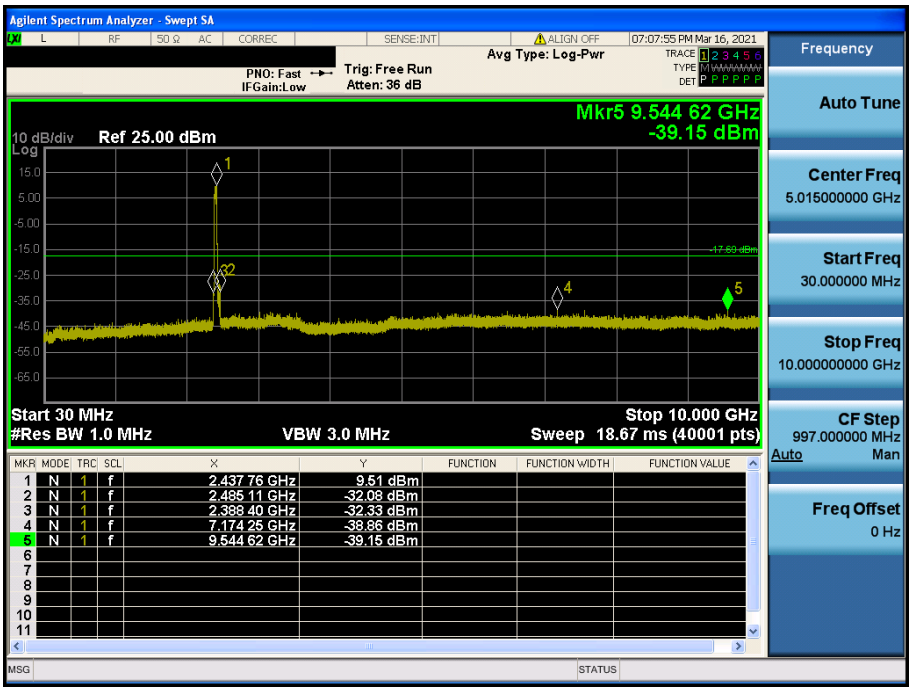

Conducted Spurious Emissions

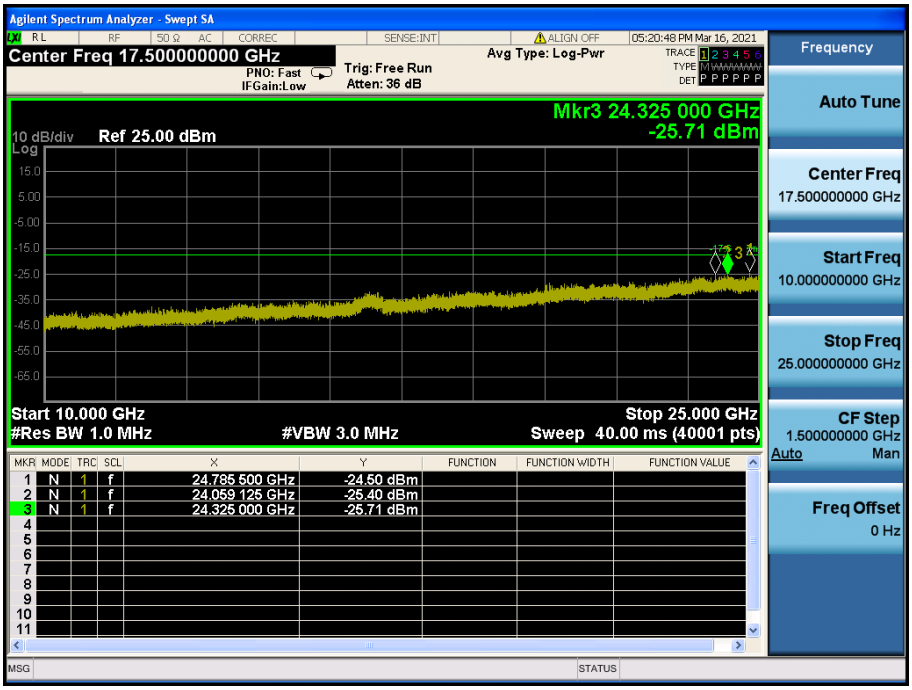

TM 4 & 2 437

Reference

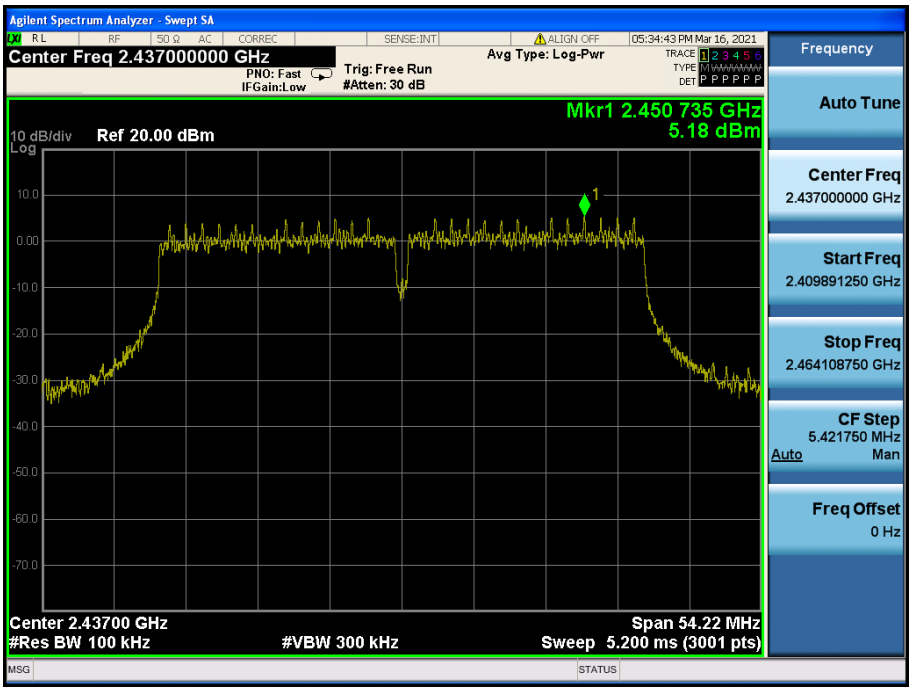

Conducted Spurious Emissions

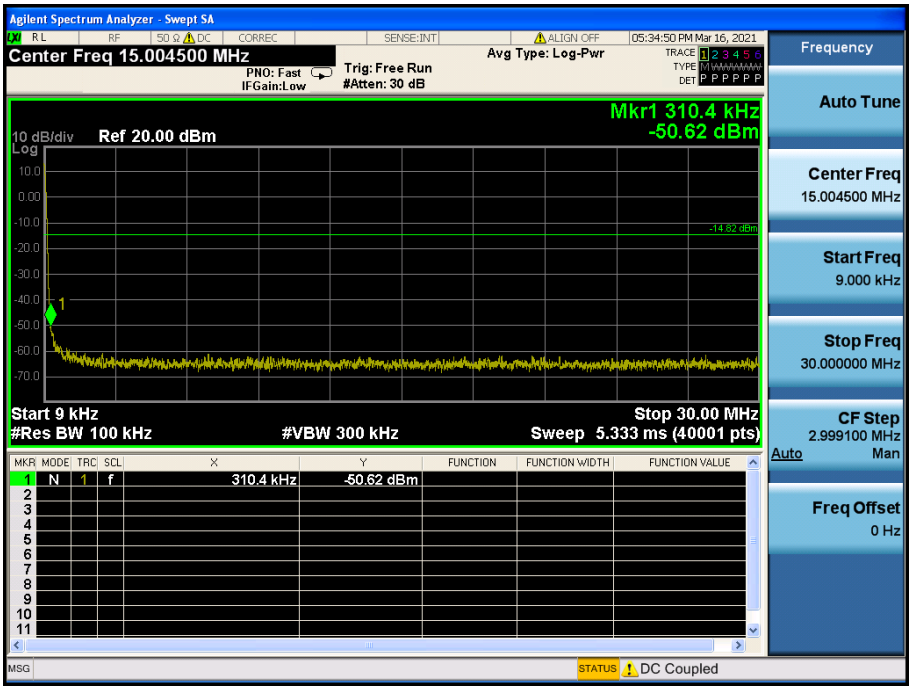

Conducted Spurious Emissions

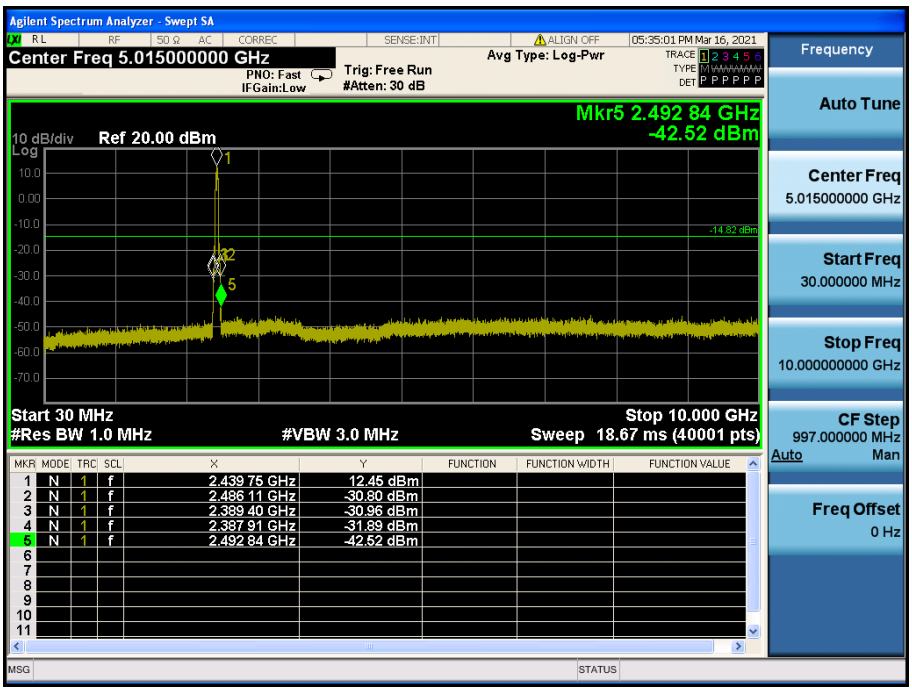

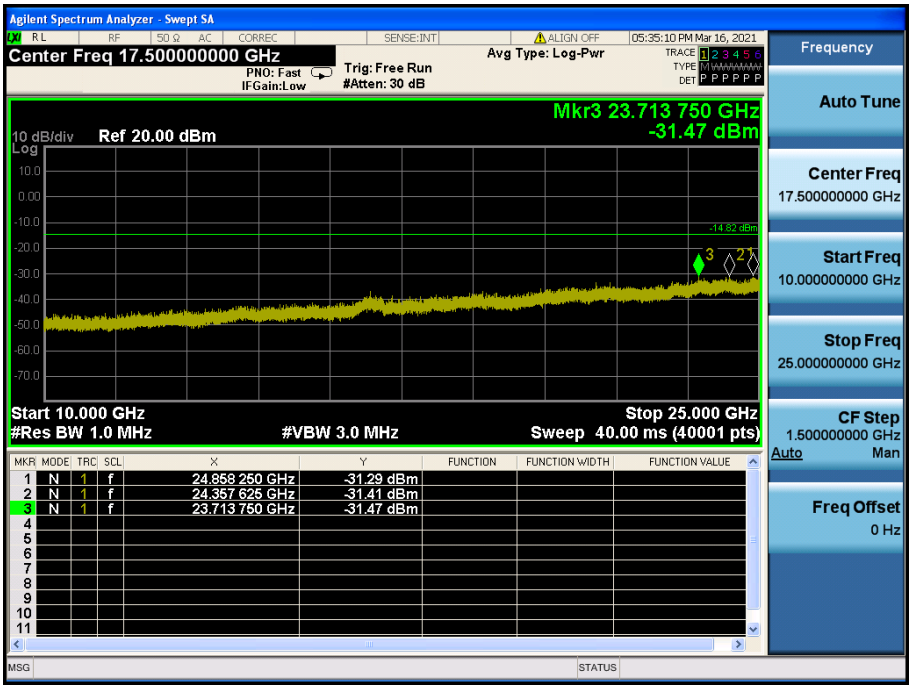

TM 4 & 2 452

Reference

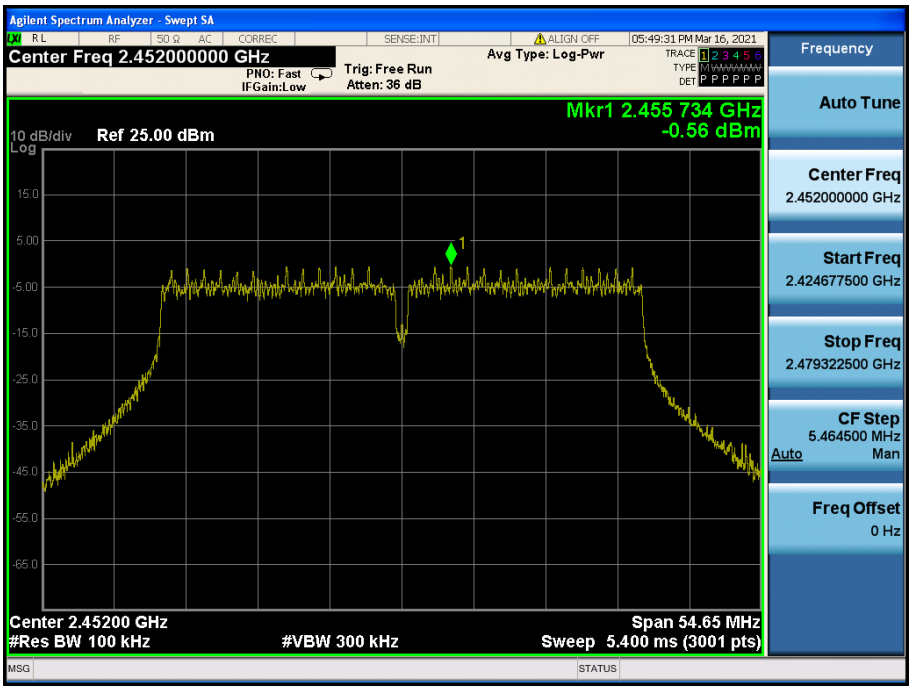

High Band-edge

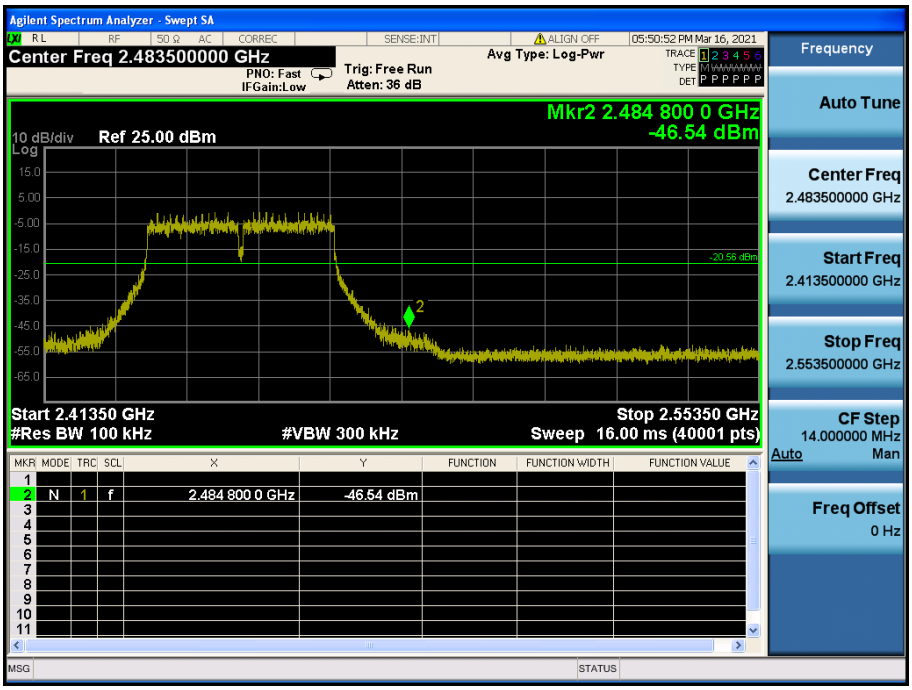

Conducted Spurious Emissions

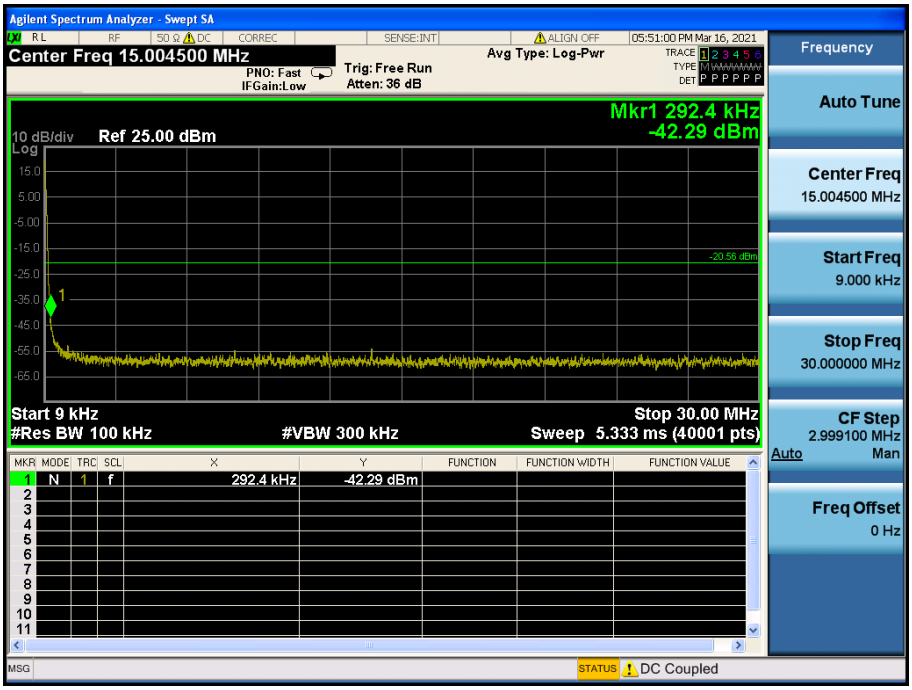

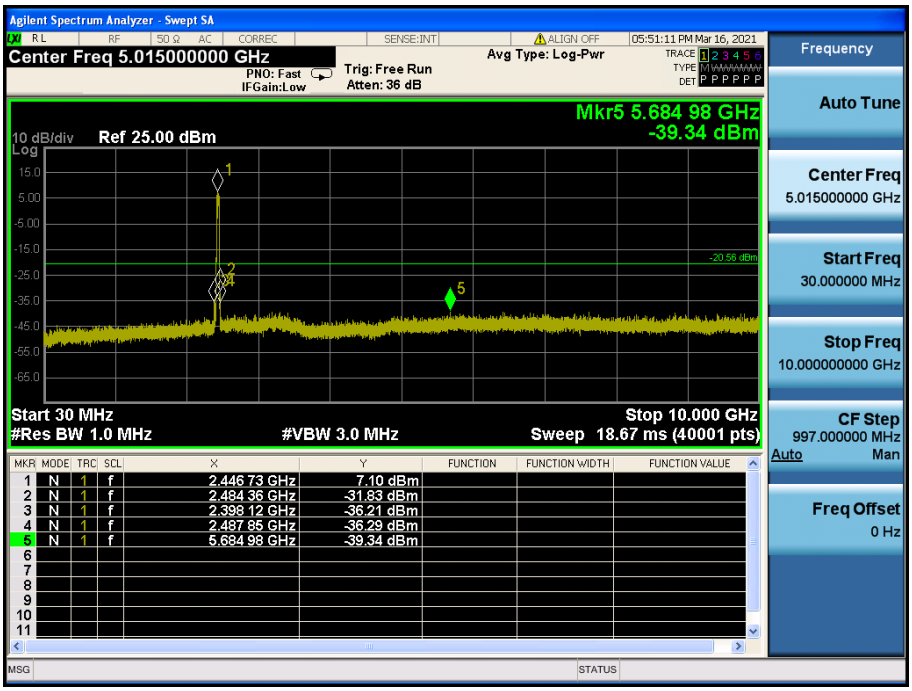

Conducted Spurious Emissions

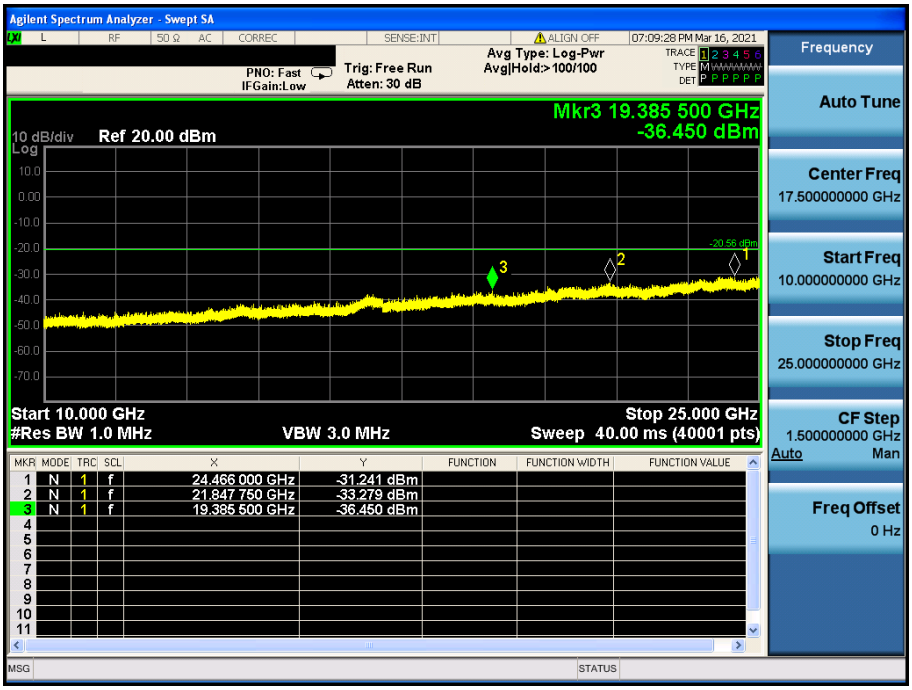

3.5. Unwanted Emissions (Radiated)

▣ **Test Requirements and limit,**

Part 15.247(d), Part 15.205, Part 15.209 & RSS-247 [5.5], RSS-Gen [8.9], RSS-Gen [8.10]

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247 the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

- Part 15.209 & RSS-247[8.9]

Frequency (MHz)	FCC Limit (uV/m)	IC Limit (μA/m)	Measurement Distance (m)
0.009 – 0.490	2 400 / F (kHz)	6.37/F (F in kHz)	300
0.490 – 1.705	2 4000 / F (kHz)	63.7/F (F in kHz)	30
1.705 – 30.0	30	0.08	30

Frequency (MHz)	FCC Limit (uV/m)	IC Limit (uV/m)	Measurement Distance (m)
30 ~ 88	100 **	100	3
88 ~ 216	150 **	150	3
216 ~ 960	200 **	200	3
Above 960	500	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

- Part 15.205(a): Restricted band of operation

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	608 ~ 614	3345.8 ~ 3358		
		960 ~ 1240	3600 ~ 4400		

- RSS-Gen[8.10]: Restricted frequency bands

MHz	MHz	MHz	MHz	GHz	GHz
0.090 ~ 0.110	8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3345.8 ~ 3358	9.0 ~ 9.2
0.495 ~ 0.505	8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1427	3500 ~ 4400	9.3 ~ 9.5
2.1735 ~ 2.1905	8.41425 ~ 8.41475	108 ~ 138	1435 ~ 1626.5	4500 ~ 5150	10.6 ~ 12.7
3.020 ~ 3.026	12.29 ~ 12.293	149.9 ~ 150.05	1645.5 ~ 1646.5	5350 ~ 5460	13.25 ~ 13.4
4.125 ~ 4.128	12.51975 ~ 12.52025	156.52475 ~	1660 ~ 1710	7250 ~ 7750	14.47 ~ 14.5
4.17725 ~ 4.17775	12.57675 ~ 12.57725	156.52525	1718.8 ~ 1722.2	8025 ~ 8500	15.35 ~ 16.2
4.20725 ~ 4.20775	13.36 ~ 13.41	156.7 ~ 156.9	2200 ~ 2300		17.7 ~ 21.4
5.677 ~ 5.683	16.42 ~ 16.423	162.0125 ~ 167.17	2310 ~ 2390		22.01 ~ 23.12
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2483.5 ~ 2500		23.6 ~ 24.0
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2655 ~ 2900		31.2 ~ 31.8
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	3260 ~ 3267		36.43 ~ 36.5
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3332 ~ 3339		Above 38.6

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.5.1. Test Setup

Refer to the APPENDIX I.

3.5.2. Test Procedures

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note: Measurement Instrument Setting for Radiated Emission Measurements.

- **KDB558074 D01v05r02 - Section 8.6**
- **ANSI C63.10-2013 – Section 11.12**

1. Frequency Range Below 1 GHz

RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak

2. Frequency Range > 1 GHz

Peak Measurement > 1 GHz

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

Average Measurement > 1 GHz

1. RBW = 1 MHz (unless otherwise specified).
2. VBW ≥ 3 x RBW.
3. Detector = RMS (Number of points ≥ 2 x Span / RBW)
4. Averaging type = power (i.e., RMS).
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.
7. A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
   1) If power averaging (RMS) mode was used in step 4, then the applicable correction factor is 10 log(1 / D), where D is the duty cycle.
   2) If linear voltage averaging mode was used in step 4, then the applicable correction factor is 20 log(1 / D), where D is the duty cycle.
   3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Duty Cycle Correction factor

Test Mode	Date rate	T_{on}(ms)	T_{on+off} (ms)	D = T_{on} / (T_{on+off})	DCCF = 10 log(1/D) (dB)
TM 1	1 Mbps	12.430	12.550	0.990 4	NA
TM 2	54 Mbps	0.248	0.284	0.873 2	0.59
TM 3	MCS 7	0.228	0.264	0.862 7	0.64
TM 4	MCS 5	0.152	0.203	0.747 8	1.26

Note1: Where, T= Transmission duration / D= Duty cycle

Note2: Please refer to the appendix II for duty cycle plots.

3.5.3. Test Results

- **Test Notes**

1. The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found below listed frequencies.
2. Information of Distance Correction Factor
   For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.
   In this case, the distance factor is applied to the result.
   - Calculation of distance correction factor
   At frequencies below 30 MHz = 40 log(tested distance / specified distance)
   At frequencies at or above 30 MHz = 20 log(tested distance / specified distance)
   When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.
3. Sample Calculation.
   Margin = Limit – Result / Result = Reading + TF+ DCCF + DCF / TF = AF + CL + HL + AL – AG
   Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss, AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Radiated Emissions data(9 kHz ~ 25 GHz) : TM 1

Tested Frequency (MHz)	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
2 412	2 386.33	H	X	PK	51.22	4.77	N/A	N/A	55.99	74.00	18.01
	2 386.50	H	X	AV	41.44	4.77	N/A	N/A	46.21	54.00	7.79
	4 823.75	H	X	PK	49.85	1.95	N/A	N/A	51.80	74.00	22.20
	4 824.15	H	X	AV	39.38	1.96	N/A	N/A	41.34	54.00	12.66
2 437	4 873.39	H	X	PK	50.25	2.06	N/A	N/A	52.31	74.00	21.69
	4 873.60	H	X	AV	39.60	2.06	N/A	N/A	41.66	54.00	12.34
2 462	2 485.21	H	X	PK	51.70	5.74	N/A	N/A	57.44	74.00	16.56
	2 486.16	H	X	AV	42.18	5.74	N/A	N/A	47.92	54.00	6.08
	4 924.10	H	X	PK	49.45	2.10	N/A	N/A	51.55	74.00	22.45
	4 923.59	H	X	AV	39.06	2.10	N/A	N/A	41.16	54.00	12.84

Radiated Emissions data(9 kHz ~ 25 GHz) : TM 2

Tested Frequency (MHz)	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
2 412	2 389.34	H	X	PK	59.60	4.79	N/A	N/A	64.39	74.00	9.61
	2 389.94	H	X	AV	43.91	4.79	0.59	N/A	49.29	54.00	4.71
	4 824.06	H	X	PK	50.05	1.96	N/A	N/A	52.01	74.00	21.99
	4 823.91	H	X	AV	39.47	1.96	0.59	N/A	42.02	54.00	11.98
2 437	4 873.55	H	X	PK	50.39	2.06	N/A	N/A	52.45	74.00	21.55
	4 874.10	H	X	AV	39.73	2.06	0.59	N/A	42.38	54.00	11.62
2 462	2 484.51	H	X	PK	62.35	5.74	N/A	N/A	68.09	74.00	5.91
	2 484.42	H	X	AV	43.19	5.74	0.59	N/A	49.52	54.00	4.48
	4 923.74	H	X	PK	50.20	2.10	N/A	N/A	52.30	74.00	21.70
	4 924.58	H	X	AV	39.26	2.10	0.59	N/A	41.95	54.00	12.05

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

Radiated Emissions data(9 kHz ~ 25 GHz) : TM 3

Tested Frequency (MHz)	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
2 412	2 389.69	H	X	PK	58.19	4.79	N/A	N/A	62.98	74.00	11.02
	2 389.79	H	X	AV	43.50	4.79	0.64	N/A	48.93	54.00	5.07
	4 823.88	H	X	PK	49.82	1.96	N/A	N/A	51.78	74.00	22.22
	4 823.33	H	X	AV	39.35	1.95	0.64	N/A	41.94	54.00	12.06
2 437	4 875.22	H	X	PK	50.09	2.07	N/A	N/A	52.16	74.00	21.84
	4 875.03	H	X	AV	39.48	2.07	0.64	N/A	42.19	54.00	11.81
2 462	2 484.40	H	X	PK	59.88	5.74	N/A	N/A	65.62	74.00	8.38
	2 483.78	H	X	AV	44.91	5.74	0.64	N/A	51.29	54.00	2.71
	4 923.89	H	X	PK	49.48	2.10	N/A	N/A	51.58	74.00	22.42
	4 923.81	H	X	AV	39.12	2.10	0.64	N/A	41.86	54.00	12.14

Radiated Emissions data(9 kHz ~ 25 GHz) : TM 4

Tested Frequency (MHz)	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
2 422	2 388.35	H	X	PK	56.23	4.78	N/A	N/A	61.01	74.00	12.99
	2 388.71	H	X	AV	44.27	4.78	1.26	N/A	50.31	54.00	3.69
	4 843.49	H	X	PK	50.24	2.05	N/A	N/A	52.29	74.00	21.71
	4 843.48	H	X	AV	39.19	2.05	1.26	N/A	42.50	54.00	11.50
2 437	4 873.60	H	X	PK	50.12	2.06	N/A	N/A	52.18	74.00	21.82
	4 873.59	H	X	AV	39.77	2.06	1.26	N/A	43.09	54.00	10.91
2 452	2 483.61	H	X	PK	55.66	5.74	N/A	N/A	61.40	74.00	12.60
	2 483.61	H	X	AV	43.10	5.74	1.26	N/A	50.10	54.00	3.90
	4 904.08	H	X	PK	50.20	2.08	N/A	N/A	52.28	74.00	21.72
	4 904.01	H	X	AV	39.32	2.08	1.26	N/A	42.66	54.00	11.34

Radiated Emissions data(9 kHz ~ 25 GHz) : TM 3 & Wireless Charging

Tested Frequency (MHz)	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
2 462	2 484.89	H	X	PK	60.40	5.74	N/A	N/A	66.14	74.00	7.86
	2 483.77	H	X	AV	44.27	5.74	N/A	N/A	50.01	54.00	3.99
	4 922.37	H	X	PK	49.73	2.09	N/A	N/A	51.82	74.00	22.18
	4 922.94	H	X	AV	38.99	2.09	N/A	N/A	41.08	54.00	12.92

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.6. AC Power-Line Conducted Emissions

▣ **Test Requirements and limit, Part 15.207 & RSS-Gen [8.8]**

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5.0	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

3.6.1. Test Setup

See test photographs for the actual connections between EUT and support equipment.

3.6.2. Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10-2013.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

3.6.3. Test Results

Refer to the next page. (The worst case data was reported. The worst data is TM 4 & Highest)

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

AC Power-Line Conducted Emissions (Graph)

Results of Conducted Emission

DTNC

Date 2021-02-19

Order No.		Referrence No.	
Model No.	PM30	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 'C / 35 %
Test Condition	2.4G WLAN	Operator	J.W.Kim

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

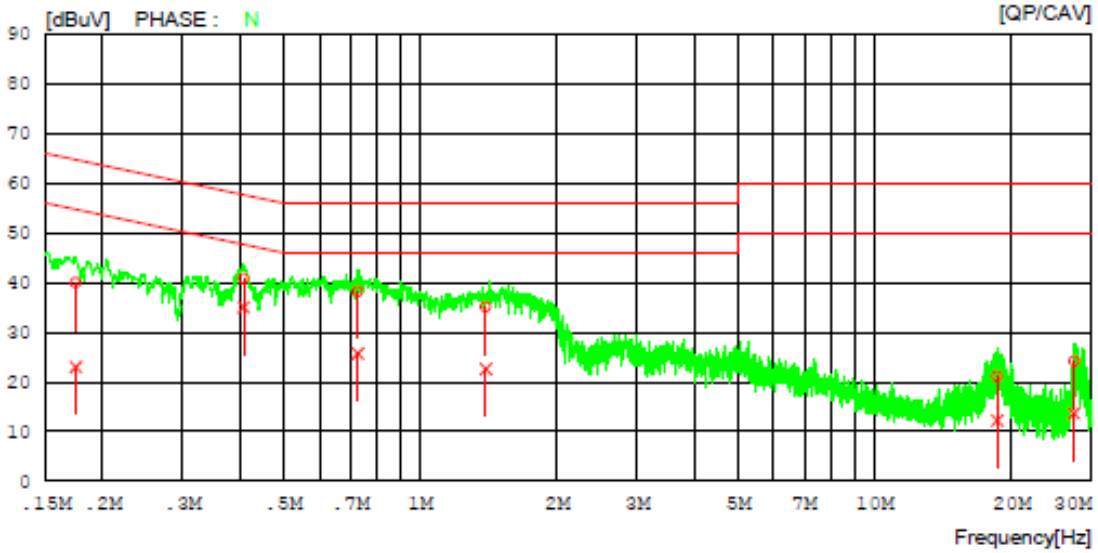

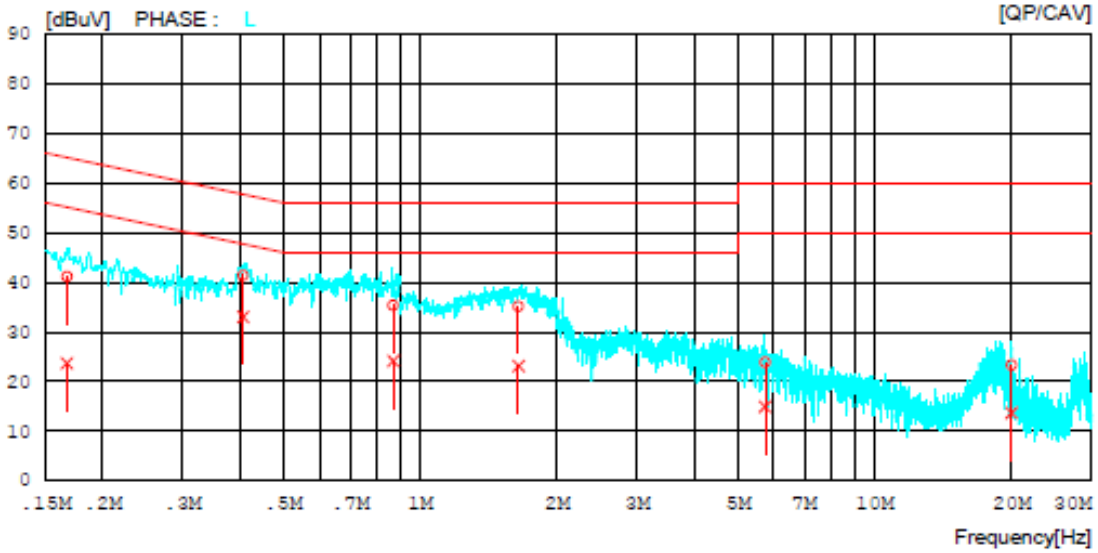

AC Power-Line Conducted Emissions (List)

Results of Conducted Emission

DTNC

Date 2021-02-19

Order No.		Referrence No.	
Model No.	PM30	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 'C / 35 %
Test Condition	2.4G WLAN	Operator	J.W.Kim

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING QP [dBuV]	READING CAV [dBuV]	C.FACTOR [dB]	RESULT QP [dBuV]	RESULT CAV [dBuV]	LIMIT QP [dBuV]	LIMIT CAV [dBuV]	MARGIN QP [dBuV]	MARGIN CAV [dBuV]	PHASE
1	0.17464	30.03	13.07	9.95	39.98	23.02	64.74	54.74	24.76	31.72	N
2	0.40882	30.88	25.04	9.98	40.86	35.02	57.67	47.67	16.81	12.65	N
3	0.72878	28.23	15.78	9.97	38.20	25.75	56.00	46.00	17.80	20.25	N
4	1.39308	25.19	12.55	9.99	35.18	22.54	56.00	46.00	20.82	23.46	N
5	18.58641	10.64	1.70	10.52	21.16	12.22	60.00	50.00	38.84	37.78	N
6	27.43891	13.53	3.07	10.63	24.16	13.70	60.00	50.00	35.84	36.30	N
7	0.16701	31.15	13.69	9.94	41.09	23.63	65.11	55.11	24.02	31.48	L
8	0.40773	31.37	23.00	9.96	41.33	32.96	57.69	47.69	16.36	14.73	L
9	0.87150	25.31	14.12	9.97	35.28	24.09	56.00	46.00	20.72	21.91	L
10	1.64381	25.11	13.05	10.01	35.12	23.06	56.00	46.00	20.88	22.94	L
11	5.73583	13.67	4.73	10.17	23.84	14.90	60.00	50.00	36.16	35.10	L
12	19.97515	12.75	3.13	10.52	23.27	13.65	60.00	50.00	36.73	36.35	L

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.7. Occupied Bandwidth

▣ **Test Requirements, RSS-Gen [6.7]**

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 % emission bandwidth, as calculated or measured.

3.7.1. Test Setup

Refer to the APPENDIX I.

3.7.2. Test Procedures

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 × RBW.

3.7.3. Test Results

Test Mode	Frequency	Test Results (MHz)
TM 1	2 412	13.79
	2 437	13.66
	2 462	13.89
TM 2	2 412	17.02
	2 437	16.95
	2 462	17.00
TM 3	2 412	18.14
	2 437	18.09
	2 462	18.12
TM 4	2 422	36.81
	2 437	36.86
	2 452	36.88

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

Occupied Bandwidth

TM 1 & 2 412

Occupied Bandwidth
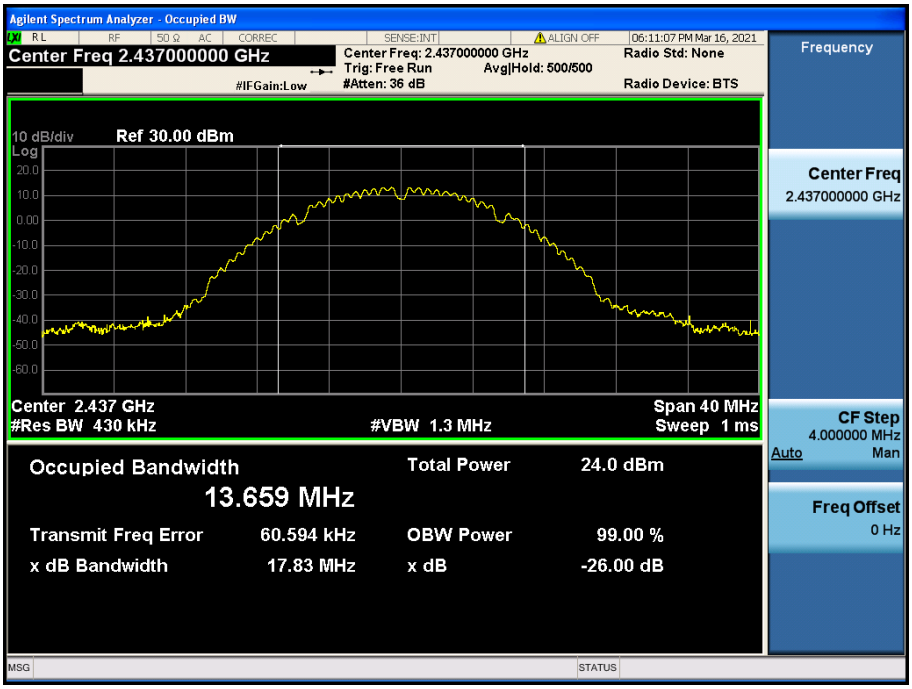
TM 1 & 2 437