

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC2304-0031

2. Customer

• Name : Point Mobile Co., LTD..

• Address : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Mobile Computer / PM560

FCC ID: V2X-PM560

5. FCC Regulation(s) : CFR 47 Part 2 subpart 2.1093

Test Method Used : IEEE 1528-2013, IEC/IEEE 62209-1528,

IEC 62209-2 2010, IEC 62209-2 2010/AMD1 2019,

FCC SAR KDB Publications (Details in test report)

6. Date of Test : 2023.03.20 ~ 2023.03.29

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

8. Testing Environment : Refer to appended test report.

9. Test Result : Refer to attached test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Reviewed by
	Name : DuHee Lee 	Name : HakMin Kim  (Signature)

2023 . 04 . 06 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd.
TRF-RF-601(03)161101

Pages: 1 / 99

Test Report Version

Test Report No.	Date	Description	Tested by	Reviewed by
DRRFCC2304-0031	Apr. 06, 2023	Initial issue	DuHee Lee	HakMin Kim

Table of Contents

1. DESCRIPTION OF DEVICE.....	4
1.1 General Information	4
1.2 Power Reduction for SAR	5
1.3 Nominal and Maximum Output Power Specifications	5
1.4 Simultaneous Transmission Capabilities	5
1.5 SAR Test Configurations and Exclusions	5
1.6 Guidance Applied	8
1.7 Device Serial Numbers	8
1.8 FCC & ISED MRA test lab designation no. : KR0034	8
2. INTROCUCTION.....	9
3. DOSIMETRIC ASSESSMENT	10
3.1 Measurement Procedure	10
4. RF EXPOSURE LIMITS	12
5. FCC MEASUREMENT PROCEDURES	13
5.1 Measured and Reported SAR	13
5.2 Procedures Used to Establish RF Signal for SAR	13
5.3 SAR Testing with 802.11 Transmitters	13
5.3.1 General Device Setup	13
5.3.2 U-NII and U-NII-2A	14
5.3.3 U-NII-2C and U-NII-3	14
5.3.4 Initial Test Position Procedure	14
5.3.5 2.4 GHz SAR Test Requirements	14
5.3.6 OFDM Transmission Mode and SAR Test Channel Selection	15
5.3.7 Initial Test Configuration Procedure	15
5.3.8 Subsequent Test Configuration Procedures	15
5.3.9 MIMO SAR Considerations	15
5.4 Body Configurations	16
5.5 Extremity Exposure Configurations	16
5.6 Handheld Devices Test Solutions (May 2017 TCB Workshop Notes)	17
6. RF CONDUCTED POWERS	18
6.1 WLAN Nominal and Maximum Output Power Spec and Conducted Powers	18
6.2 Bluetooth Conducted Powers	23
7. SYSTEM VERIFICATION.....	27
7.1 Tissue Verification	27
7.2 Test System Verification	28
8. SAR TEST RESULTS	29
8.1 Standalone Body SAR Results	29
8.2 Standalone Extremity SAR Results	31
8.3 SAR Test Notes	33
9. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	34
9.1 Introduction	34
9.2 Simultaneous Transmission Procedures	34
9.3 Simultaneous Transmission Capabilities	34
9.4 Body SAR Simultaneous Transmission Analysis	35
9.5 Extremity SAR Simultaneous Transmission Analysis	36
10. SAR MEASUREMENT VARIABILITY	37
10.1 Measurement Variability	37
10.2 Measurement Uncertainty	37
11. EQUIPMENT LIST	38
12. MEASUREMENT UNCERTAINTIES	39
13. CONCLUSION	41
14. REFERENCES.....	42
APPENDIX A. – Probe Calibration Data	44
APPENDIX B. – Dipole Calibration Data	63
APPENDIX C. – SAR Tissue Specifications	88
APPENDIX D. – SAR SYSTEM VALIDATION	90
APPENDIX E. – Description of Test Equipment.....	92

1. DESCRIPTION OF DEVICE

1.1 General Information

EUT type	Mobile Computer				
FCC ID	V2X-PM560				
Equipment model name	PM560				
Equipment add model name	N/A				
Equipment serial no.	Identical prototype				
Firmware Version Identification Number	56.00xx				
FCC & ISSED MRA Designation No.	KR0034				
ISED#	5740A				
Mode(s) of Operation	2.4 GHz W-LAN (802.11b/g/n-HT20/ax-HE20), 5 GHz W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/ac-VHT80/ax-HE20/ax-HE40/ax-HE80), Bluetooth				
TX Frequency Range	Band	Mode	Operating Modes	Bandwidth	Frequency
	2.4 GHz W-LAN	802.11b/g/n/ax	Data	20MHz	2 412 MHz ~ 2 462 MHz
	5.2 GHz W-LAN	802.11a/n/ac/ax	Data	20MHz	5 180 MHz ~ 5 240 MHz
		802.11n/ac/ax	Data	40MHz	5 190 MHz ~ 5 230 MHz
		802.11ac/ax	Data	80MHz	5 210 MHz
	5.3 GHz W-LAN	802.11a/n/ac/ax	Data	20MHz	5 260 MHz ~ 5 320 MHz
		802.11n/ac/ax	Data	40MHz	5 270 MHz ~ 5 310 MHz
		802.11ac/ax	Data	80MHz	5 290 MHz
	5.6 GHz W-LAN	802.11a/n/ac/ax	Data	20MHz	5 500 MHz ~ 5 720 MHz
		802.11n/ac/ax	Data	40MHz	5 510 MHz ~ 5 710 MHz
		802.11ac/ax	Data	80MHz	5 530 MHz ~ 5 690 MHz
		5.8 GHz W-LAN	802.11a/n/ac/ax	Data	20MHz
	802.11n/ac/ax		Data	40MHz	5 755 MHz ~ 5 795 MHz
802.11ac/ax	Data		80MHz	5 775 MHz	
Bluetooth	-	Data	-	2 402 MHz ~ 2 480 MHz	
RX Frequency Range	2.4 GHz W-LAN	802.11b/g/n/ax	Data	20MHz	2 412 MHz ~ 2 462 MHz
	5.2 GHz W-LAN	802.11a/n/ac/ax	Data	20MHz	5 180 MHz ~ 5 240 MHz
		802.11n/ac/ax	Data	40MHz	5 190 MHz ~ 5 230 MHz
		802.11ac/ax	Data	80MHz	5 210 MHz
	5.3 GHz W-LAN	802.11a/n/ac/ax	Data	20MHz	5 260 MHz ~ 5 320 MHz
		802.11n/ac/ax	Data	40MHz	5 270 MHz ~ 5 310 MHz
		802.11ac/ax	Data	80MHz	5 290 MHz
	5.6 GHz W-LAN	802.11a/n/ac/ax	Data	20MHz	5 500 MHz ~ 5 720 MHz
		802.11n/ac/ax	Data	40MHz	5 510 MHz ~ 5 710 MHz
		802.11ac/ax	Data	80MHz	5 530 MHz ~ 5 690 MHz
	5.8 GHz W-LAN	802.11a/n/ac/ax	Data	20MHz	5 745 MHz ~ 5 825 MHz
		802.11n/ac/ax	Data	40MHz	5 755 MHz ~ 5 795 MHz
		802.11ac/ax	Data	80MHz	5 775 MHz
Bluetooth	-	Data	-	2 402 MHz ~ 2 480 MHz	

Equipment Class	Band	Reported SAR	
		1 g SAR (W/kg)	10 g SAR (W/kg)
		Body	Extremity
DTS(SISO)	2.4 GHz W-LAN	0.743	0.056
DTS(MIMO)	2.4 GHz W-LAN	1.017	0.101
U-NII-1(SISO)	5.2 GHz W-LAN	-	-
U-NII-1(MIMO)	5.2 GHz W-LAN	-	-
U-NII-2A(SISO)	5.3 GHz W-LAN	0.992	0.289
U-NII-2A(MIMO)	5.3 GHz W-LAN	0.996	0.324
U-NII-2C(SISO)	5.6 GHz W-LAN	1.007	0.240
U-NII-2C(MIMO)	5.6 GHz W-LAN	1.242	0.260
U-NII-3(SISO)	5.8 GHz W-LAN	0.626	0.202
U-NII-3(MIMO)	5.8 GHz W-LAN	0.575	0.224
DSS	Bluetooth	0.021	0.003
Simultaneous SAR per KDB 690783 D01v01r03		1.355	0.369
FCC Equipment Class	Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)		
Date(s) of Tests	2023.03.20 ~ 2023.03.29		
Antenna Type	Internal Antenna		
Note	The EUT Has two BLE transmitters. The Module 1 is operated by the main battery and the module 2 is operated by the backup battery		

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 6 of this test report.

1.4 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 9 of this test report.

1.5 SAR Test Configurations and Exclusions

(A) WIFI & BT for Body SAR configuration

Per FCC KDB 447498 D01v06, the 1 g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Table 1.1 SAR exclusion threshold for distances < 50 mm

Band	Mode	Equation	Result	SAR exclusion threshold	Required SAR
DSS	Bluetooth LE (Module 1)	$[(7/5)^* \sqrt{2.402}]$	2.1	3.0	X
DSS	Bluetooth LE (Module 2)	$[(3/5)^* \sqrt{2.480}]$	0.8	3.0	X

Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

(B) Tested sides for body SAR configuration

1) Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Table 1.2 SAR Test Exclusion for Edges (Antennas < 50 mm)

Ant.1

Band	Mode/ Band	Service	Tune up Max Power [mW]	Separation Distance [mm]				Calculated Threshold Power [mW]			
				Top	Bottom	Right	Left	Top	Bottom	Right	Left
DTS	802.11b	DSSS	39.81	2	180	2	59	31.2 (O)	> 50mm	31.2 (O)	> 50mm
U-NII-1	802.11a	OFDM	8.91	2	180	2	59	10.2 (O)	> 50mm	10.2 (O)	> 50mm
U-NII-2A	802.11a	OFDM	19.05	2	180	2	59	21.9 (O)	> 50mm	21.9 (O)	> 50mm
U-NII-2C	802.11a	OFDM	22.91	2	180	2	59	27.1 (O)	> 50mm	27.1 (O)	> 50mm
U-NII-3	802.11a	OFDM	17.78	2	180	2	59	21.4 (O)	> 50mm	21.4 (O)	> 50mm

Ant.2

Band	Mode/ Band	Service	Tune up Max Power [mW]	Separation Distance [mm]				Calculated Threshold Power [mW]			
				Top	Bottom	Right	Left	Top	Bottom	Right	Left
DTS	802.11b	DSSS	39.81	2	180	2	59	31.2 (O)	> 50mm	> 50mm	31.2 (O)
U-NII-1	802.11a	OFDM	11.22	2	180	59	2	12.8 (O)	> 50mm	> 50mm	12.8 (O)
U-NII-2A	802.11a	OFDM	20.42	2	180	59	2	23.5 (O)	> 50mm	> 50mm	23.5 (O)
U-NII-2C	802.11a	OFDM	20.42	2	180	59	2	24.3 (O)	> 50mm	> 50mm	24.3 (O)
U-NII-3	802.11a	OFDM	17.78	2	180	59	2	21.4 (O)	> 50mm	> 50mm	21.4 (O)

MIMO

Band	Mode/ Band	Service	Tune up Max Power [mW]	Separation Distance [mm]				Calculated Threshold Power [mW]			
				Top	Bottom	Right	Left	Top	Bottom	Right	Left
DTS	802.11g	DSSS	63.1	2	180	2	2	49.3 (O)	> 50mm	49.3 (O)	49.3 (O)
U-NII-1	802.11a	OFDM	19.95	2	180	2	2	22.8 (O)	> 50mm	22.8 (O)	22.8 (O)
U-NII-2A	802.11a	OFDM	39.81	2	180	2	2	45.8 (O)	> 50mm	45.8 (O)	45.8 (O)
U-NII-2C	802.11a	OFDM	44.67	2	180	2	2	53.1 (O)	> 50mm	53.1 (O)	53.1 (O)
U-NII-3	802.11a	OFDM	35.48	2	180	2	2	42.7 (O)	> 50mm	42.7 (O)	42.7 (O)

Note 1: See Table 1.3

2) Per FCC KDB 447498 D01v06, the SAR exclusion threshold for distances > 50 mm is defined by the following equation:
(the SAR test exclusion threshold is determined according to the following, and as illustrated in KDB 447498 Appendix B.)

$$2) \{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\} \text{ mW, for } > 1500 \text{ MHz and } \leq 6 \text{ GHz}$$

Table 1.3 SAR Test Exclusion for Edges (Antennas > 50 mm)

Ant.1

Band	Mode/ Band	Service	Tune up Max Power [mW]	Separation Distance [mm]				Calculated Threshold Power [mW]			
				Top	Bottom	Right	Left	Top	Bottom	Right	Left
DTS	802.11b	DSSS	39.81	2	180	2	59	< 50mm	2229.6 (X)	< 50mm	243.5 (X)
U-NII-1	802.11a	OFDM	8.91	2	180	2	59	< 50mm	4607.1 (X)	< 50mm	380.2 (X)
U-NII-2A	802.11a	OFDM	19.05	2	180	2	59	< 50mm	4658.8 (X)	< 50mm	383.5 (X)
U-NII-2C	802.11a	OFDM	22.91	2	180	2	59	< 50mm	4836.0 (X)	< 50mm	334.8 (X)
U-NII-3	802.11a	OFDM	17.78	2	180	2	59	< 50mm	5013.7 (X)	< 50mm	347.1 (X)

Ant.2

Band	Mode/ Band	Service	Tune up Max Power [mW]	Separation Distance [mm]				Calculated Threshold Power [mW]			
				Top	Bottom	Right	Left	Top	Bottom	Right	Left
DTS	802.11b	DSSS	39.81	2	180	59	2	< 50mm	2133.7 (X)	147.7 (X)	< 50mm
U-NII-1	802.11a	OFDM	11.22	2	180	59	2	< 50mm	4541.3 (X)	314.4 (X)	< 50mm
U-NII-2A	802.11a	OFDM	20.42	2	180	59	2	< 50mm	4593.3 (X)	318.0 (X)	< 50mm
U-NII-2C	802.11a	OFDM	20.42	2	180	59	2	< 50mm	4905.3 (X)	339.6 (X)	< 50mm
U-NII-3	802.11a	OFDM	17.78	2	180	59	2	< 50mm	5013.7 (X)	347.1 (X)	< 50mm

MIMO

Band	Mode/ Band	Service	Tune up Max Power [mW]	Separation Distance [mm]				Calculated Threshold Power [mW]			
				Top	Bottom	Right	Left	Top	Bottom	Right	Left
DTS	802.11b	DSSS	63.1	2	180	2	2	< 50mm	2208.4 (X)	< 50mm	< 50mm
U-NII-1	802.11a	OFDM	19.95	2	180	2	2	< 50mm	4607.1 (X)	< 50mm	< 50mm
U-NII-2A	802.11a	OFDM	39.81	2	180	2	2	< 50mm	4658.8 (X)	< 50mm	< 50mm
U-NII-2C	802.11a	OFDM	44.67	2	180	2	2	< 50mm	4905.3 (X)	< 50mm	< 50mm
U-NII-3	802.11a	OFDM	35.48	2	180	2	2	< 50mm	5013.7 (X)	< 50mm	< 50mm

Note 1: See Table 1.2

Table 1.4 Determined EUT sides for SAR Testing

Mode	EUT Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
2.4 GHz W-LAN Ant.1	O	X	O	O	O	X
2.4 GHz W-LAN Ant.2	O	X	O	O	X	O
2.4 GHz W-LAN MIMO	O	X	O	O	O	O
5 GHz W-LAN Ant.1	O	X	O	O	O	X
5 GHz W-LAN Ant.2	O	X	O	O	X	O
5 GHz W-LAN MIMO	O	X	O	O	O	O

Note: Particular DUT edges were not required to be evaluated for SAR based on the SAR exclusion threshold in KDB 447498 D01v06.

1.6 Guidance Applied

- IEEE 1528-2013
- IEC/IEEE 62209-1528
- IEC 62209-2 2010
- IEC 62209-2 2010 AMD1 2019
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- May 2017 TCB Workshop Notes (Handheld Devices Test Solutions)
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)

1.7 Device Serial Numbers

The serial numbers used for each test are indicated alongside the results in Section 8.

Band & Mode	Body Serial Number	Extremity Serial Number
2.4 GHz W-LAN	FCC #1	FCC #1
5 GHz W-LAN	FCC #1	FCC #1
Bluetooth	FCC #1	FCC #1

1.8 FCC & ISED MRA test lab designation no. : KR0034

2. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

3. DOSIMETRIC ASSESSMENT

3.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 3.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 3.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1 g or 10 g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5 %, the SAR test and drift measurements were repeated.




Figure 3.1
Sample SAR Area Scan

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Table 3.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

4. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 4.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

5. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

5.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

5.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5 %, the SAR test and drift measurements were repeated.

5.3 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

5.3.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96 % is typically achievable in most test mode configurations. A minimum transmission duty factor of 85 % is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100 % transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

5.3.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

5.3.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

5.3.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

5.3.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

5.3.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

5.3.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

5.3.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

5.3.9 MIMO SAR Considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

5.4 Body Configurations

For a device that cannot be categorized as any of the other specific device types in 6.1.4.1, it shall be considered to be a generic device; i.e. represented by a closed box incorporating at least one internal RF transmitter and antenna.

The SAR evaluation shall be performed for all surfaces of the DUT that are accessible during intended use, as indicated in Figure 5. The separation distance in testing shall correspond to the intended use distance as specified in the user instructions provided by the manufacturer.

If the intended use is not specified, all surfaces of the DUT shall be tested directly against the flat phantom.

The surface of the generic device (or the surface of the carry accessory holding the DUT) pointing towards the flat phantom shall be parallel to the surface of the phantom.

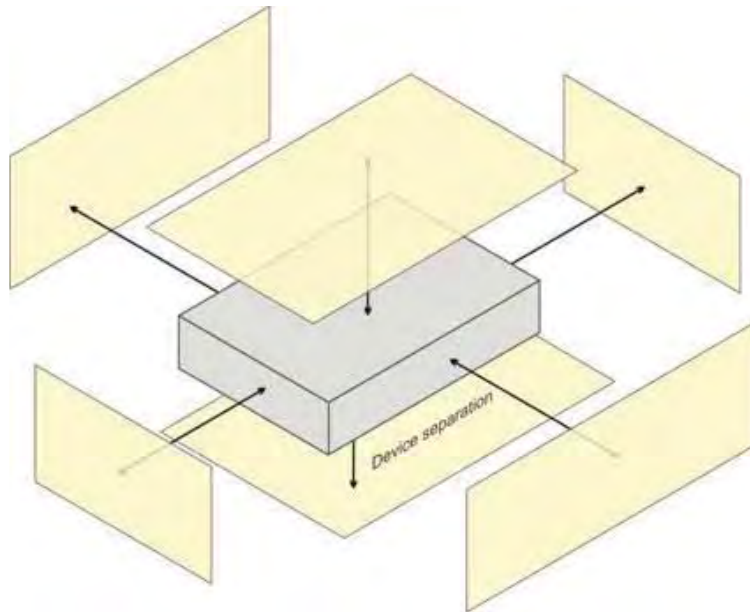


Figure 5 – Test positions for a generic device


The generic device principle may be applied to all devices. Where a transmitter is added to the host device so that the host and transmitter operate as a single device it should be addressed according to sub clauses 6.1.4.4 to 6.1.4.11 as applicable. Where the antenna or the attached RF transmitter is external to the host and the positioning of the antenna or attached RF transmitter is independent of positioning of the host, e.g. transmitter is attached by a cable, it shall be assessed using the generic device procedures.

5.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

5.6 Handheld Devices Test Solutions (May 2017 TCB Workshop Notes)

Invert the barcode scanner so the pistol grip is facing upwards but outside the front of the flat phantom (near the spigot).

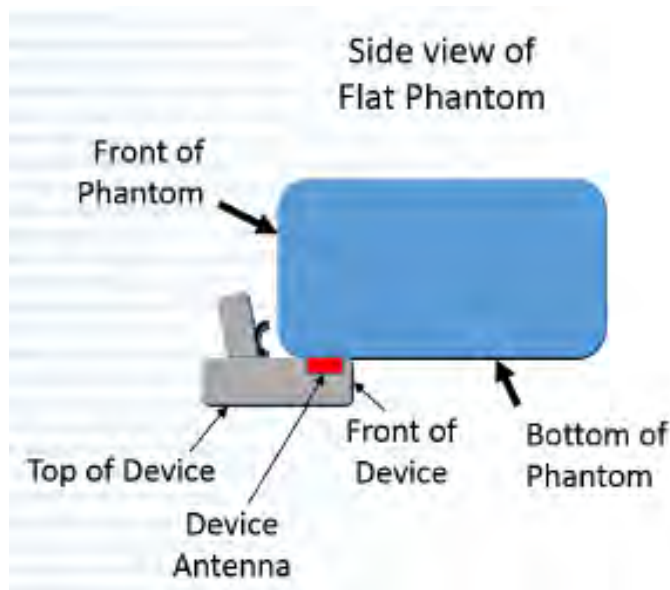

6. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

6.1 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
2.4	802.11b	1	14.00	13.00	14.00	13.00	-	-
		6	16.00	15.00	16.00	15.00	-	-
		11	16.00	15.00	16.00	15.00	-	-
	802.11g	1	14.00	13.00	14.00	13.00	17.00	16.00
		6	16.00	15.00	16.00	15.00	19.00	18.00
		11	11.00	10.00	10.00	9.00	14.00	13.00
	802.11n	1	14.00	13.00	12.00	11.00	16.00	15.00
		6	16.00	15.00	15.00	14.00	18.00	17.00
		11	11.00	10.00	10.00	9.00	14.00	13.00
	802.11ac	1	14.00	13.00	12.00	11.00	16.00	15.00
		6	16.00	15.00	15.00	14.00	18.00	17.00
		11	11.00	10.00	10.00	9.00	14.00	13.00
	802.11ax OFDM	1	16.00	15.00	16.00	15.00	19.00	18.00
		6	16.00	15.00	15.00	14.00	19.00	18.00
		11	15.00	14.00	15.00	14.00	18.00	17.00

Table 6.1.1 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11 (2.4 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11b	2412	1	13.37	13.41	-	-
	2437	6	15.14	15.18	-	-
	2462	11	15.40	15.22	-	-
802.11g	2412	1	13.58	13.15	16.38	-
	2437	6	15.89	15.09	18.52	-
	2462	11	10.64	9.65	13.18	-
802.11n (HT-20)	2412	1	12.45	11.97	15.23	15.12
	2437	6	14.96	14.06	17.54	17.45
	2462	11	10.50	9.50	13.04	12.93
802.11ac (VHT-20)	2412	1	12.53	11.93	15.25	15.17
	2437	6	14.84	14.26	17.57	17.51
	2462	11	10.46	9.55	13.04	13.00
802.11ax OFDM	2412	1	15.70	15.70	18.66	18.76
	2437	6	15.35	14.98	18.35	18.42
	2462	11	14.32	13.88	17.11	17.18

Table 6.1.2 IEEE 802.11 Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]						
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	-
802.11a	5 180	36	9.50	8.50	10.50	9.50	13.00	12.00	-
	5 200	40	9.50	8.50	10.50	9.50	13.00	12.00	-
	5 220	44	9.50	8.50	10.50	9.50	13.00	12.00	-
	5 240	48	9.50	8.50	10.50	9.50	13.00	12.00	-
	5 260	52	12.80	11.50	13.10	12.10	16.00	15.00	-
	5 280	56	12.80	11.50	13.10	12.10	16.00	15.00	-
	5 300	60	12.80	11.50	13.10	12.10	16.00	15.00	-
	5 320	64	11.00	10.00	11.00	10.00	14.00	13.00	-
	5 500	100	11.50	10.50	11.50	10.50	15.50	14.50	-
	5 580	116	13.60	12.60	13.10	12.10	16.50	15.50	-
	5 660	132	13.00	12.00	13.10	12.10	16.00	15.00	-
	5 720	144	13.00	12.00	12.00	11.00	16.00	15.00	-
	5 745	149	12.00	11.00	12.00	11.00	15.00	14.00	-
	5 785	157	12.50	11.50	12.50	11.50	15.50	14.50	-
	5 825	165	11.00	10.00	11.00	10.00	14.00	13.00	-

Table 6.1.3 Nominal and Maximum Output Power Spec

Mode	Freq.	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]			
	(MHz)		Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11a	5 180	36	9.11	10.04	12.61	-
	5 200	40	9.15	10.01	12.61	-
	5 220	44	9.29	10.10	12.72	-
	5 240	48	9.38	10.18	12.81	-
	5 260	52	12.07	12.36	15.23	-
	5 280	56	11.95	12.64	15.32	-
	5 300	60	12.15	12.63	15.41	-
	5 320	64	10.35	10.69	13.53	-
	5 500	100	11.09	11.06	14.09	-
	5 580	116	13.02	12.54	15.80	-
	5 660	132	12.66	12.13	15.41	-
	5 720	144	12.58	11.84	15.24	-
	5 745	149	11.44	11.41	14.44	-
	5 785	157	12.19	12.01	15.11	-
	5 825	165	10.97	10.81	13.90	-

Table 6.1.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]							
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
802.11n (HT-20)	5 180	36	9.50	8.50	10.50	9.50	13.00	12.00	13.00	12.00
	5 200	40	9.50	8.50	10.50	9.50	13.00	12.00	13.00	12.00
	5 220	44	9.50	8.50	10.50	9.50	13.00	12.00	13.00	12.00
	5 240	48	9.50	8.50	10.50	9.50	13.00	12.00	13.00	12.00
	5 260	52	11.00	10.00	12.00	11.00	14.50	13.50	14.50	13.50
	5 280	56	11.00	10.00	12.00	11.00	14.50	13.50	14.50	13.50
	5 300	60	11.00	10.00	12.00	11.00	14.50	13.50	14.50	13.50
	5 320	64	11.00	10.00	11.00	10.00	14.00	13.00	14.00	13.00
	5 500	100	11.50	10.50	11.50	10.50	15.00	14.00	15.00	14.00
	5 580	116	12.50	11.50	12.00	11.00	15.00	14.00	15.00	14.00
	5 660	132	12.00	11.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 720	144	12.00	11.00	11.00	10.00	15.00	14.00	15.00	14.00
	5 745	149	11.50	10.50	11.50	10.50	14.50	13.50	14.50	13.50
	5 785	157	11.50	10.50	11.50	10.50	14.50	13.50	14.50	13.50
	5 825	165	11.00	10.00	11.00	10.00	14.00	13.00	14.00	13.00

Table 6.1.5 Nominal and Maximum Output Power Spec

Mode	Freq.	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]			
	(MHz)		Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11n (HT-20)	5 180	36	8.92	10.03	12.52	12.49
	5 200	40	8.99	10.05	12.56	12.52
	5 220	44	9.30	10.04	12.70	12.65
	5 240	48	9.42	10.22	12.85	12.81
	5 260	52	10.71	11.43	14.10	14.07
	5 280	56	10.83	11.28	14.07	14.04
	5 300	60	10.89	11.24	14.08	14.04
	5 320	64	10.23	10.33	13.29	13.26
	5 500	100	11.06	11.05	14.07	14.02
	5 580	116	12.13	11.56	14.86	14.82
	5 660	132	11.63	11.26	14.46	14.43
	5 720	144	11.47	10.76	14.14	14.09
	5 745	149	11.20	11.35	14.29	14.25
	5 785	157	11.03	11.28	14.17	14.13
	5 825	165	10.95	10.78	13.88	13.84

Table 6.1.6 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]							
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
802.11ac (VHT-20)	5 180	36	9.50	8.50	10.50	9.50	13.00	12.00	13.00	12.00
	5 200	40	9.50	8.50	10.50	9.50	13.00	12.00	13.00	12.00
	5 220	44	9.50	8.50	10.50	9.50	13.00	12.00	13.00	12.00
	5 240	48	9.50	8.50	10.50	9.50	13.00	12.00	13.00	12.00
	5 260	52	11.00	10.00	12.00	11.00	14.50	13.50	14.50	13.50
	5 280	56	11.00	10.00	12.00	11.00	14.50	13.50	14.50	13.50
	5 300	60	11.00	10.00	12.00	11.00	14.50	13.50	14.50	13.50
	5 320	64	11.00	10.00	12.00	11.00	14.50	13.50	14.50	13.50
	5 500	100	12.00	11.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 580	116	12.50	11.50	12.00	11.00	15.00	14.00	15.00	14.00
	5 660	132	12.00	11.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 720	144	12.00	11.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 745	149	11.50	10.50	11.50	10.50	14.50	13.50	14.50	13.50
	5 785	157	11.50	10.50	11.50	10.50	14.50	13.50	14.50	13.50
	5 825	165	11.00	10.00	11.00	10.00	14.00	13.00	14.00	13.00

Table 6.1.7 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-20)	5 180	36	9.03	9.98	12.54	12.50
	5 200	40	9.18	10.15	12.70	12.67
	5 220	44	9.30	9.91	12.63	12.58
	5 240	48	9.40	10.18	12.82	12.78
	5 260	52	10.74	11.14	13.95	13.92
	5 280	56	10.80	11.28	14.06	14.01
	5 300	60	10.83	11.23	14.04	14.00
	5 320	64	10.93	11.26	14.11	14.07
	5 500	100	11.86	11.68	14.78	14.75
	5 580	116	12.07	11.52	14.81	14.78
	5 660	132	11.57	11.42	14.51	14.47
	5 720	144	11.37	11.01	14.20	14.17
	5 745	149	11.35	11.46	14.42	14.38
	5 785	157	11.12	10.98	14.06	14.02
	5 825	165	10.94	10.74	13.85	13.81

Table 6.1.8 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]							
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
802.11ax (HE-20)	5 180	36	10.50	9.50	11.50	10.50	14.00	13.00	14.00	13.00
	5 200	40	10.50	9.50	11.50	10.50	14.00	13.00	14.00	13.00
	5 220	44	10.50	9.50	11.50	10.50	14.00	13.00	14.00	13.00
	5 240	48	10.50	9.50	11.50	10.50	14.00	13.00	14.00	13.00
	5 260	52	11.50	10.50	12.00	11.00	14.50	13.50	14.50	13.50
	5 280	56	11.50	10.50	12.00	11.00	14.50	13.50	14.50	13.50
	5 300	60	11.50	10.50	12.00	11.00	14.50	13.50	14.50	13.50
	5 320	64	11.50	10.50	12.00	11.00	14.50	13.50	14.50	13.50
	5 500	100	12.50	11.50	12.50	11.50	15.50	14.50	15.50	14.50
	5 580	116	12.50	11.50	12.00	11.00	15.50	14.50	15.50	14.50
	5 660	132	12.50	11.50	12.00	11.00	15.00	14.00	15.00	14.00
	5 720	144	12.50	11.50	12.00	11.00	15.00	14.00	15.00	14.00
	5 745	149	12.00	11.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 785	157	12.00	11.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 825	165	12.00	11.00	12.00	11.00	15.00	14.00	15.00	14.00

Table 6.1.9 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11ax HE20 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ax (HE-20)	5 180	36	10.16	11.09	13.66	13.73
	5 200	40	10.13	11.14	13.67	13.76
	5 220	44	10.33	11.23	13.81	13.87
	5 240	48	10.31	11.18	13.78	13.96
	5 260	52	10.96	11.46	14.23	14.38
	5 280	56	11.14	11.42	14.29	14.38
	5 300	60	11.10	11.51	14.32	14.40
	5 320	64	11.23	11.39	14.32	14.44
	5 500	100	12.49	12.00	15.26	15.41
	5 580	116	12.26	11.80	15.05	15.24
	5 660	132	11.87	11.63	14.76	14.92
	5 720	144	11.76	11.10	14.45	14.56
	5 745	149	11.69	11.71	14.67	14.83
	5 785	157	11.43	11.36	14.47	14.50
	5 825	165	11.26	11.47	14.28	14.36

Table 6.1.10 IEEE 802.11ax HE20 Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]							
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
802.11n (HT-40)	5 190	38	8.00	7.00	8.00	7.00	11.00	10.00	11.00	10.00
	5 230	46	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 270	54	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 310	62	8.00	7.00	8.00	7.00	11.00	10.00	11.00	10.00
	5 510	102	7.00	6.00	7.00	6.00	10.00	9.00	10.00	9.00
	5 550	110	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 670	134	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 710	142	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 755	151	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 795	159	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00

Table 6.1.11 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11n (HT-40)	5 190	38	7.38	7.50	10.45	10.40
	5 230	46	10.97	11.73	14.38	14.34
	5 270	54	10.89	11.75	14.35	14.31
	5 310	62	7.56	7.36	10.47	10.43
	5 510	102	6.36	6.18	9.28	9.25
	5 550	110	10.93	11.71	14.35	14.32
	5 670	134	10.91	11.72	14.34	14.30
	5 710	142	10.92	11.77	14.38	14.32
	5 755	151	10.86	11.72	14.32	14.29
	5 795	159	10.88	11.74	14.34	14.29

Table 6.1.12 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]							
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
802.11ac (VHT-40)	5 190	38	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 230	46	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 270	54	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 310	62	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 510	102	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 550	110	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 670	134	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 710	142	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 755	151	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 795	159	11.00	10.00	12.00	11.00	15.00	14.00	15.00	14.00

Table 6.1.11 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-40)	5 190	38	10.91	11.69	14.33	14.29
	5 230	46	10.92	11.75	14.37	14.32
	5 270	54	10.87	11.68	14.30	14.26
	5 310	62	10.92	11.71	14.34	14.32
	5 510	102	10.96	11.66	14.33	14.30
	5 550	110	10.87	11.72	14.33	14.30
	5 670	134	10.95	11.69	14.35	14.33
	5 710	142	10.90	11.68	14.32	14.28
	5 755	151	10.92	11.66	14.32	14.28
	5 795	159	10.92	11.66	14.32	14.28

Table 6.1.12 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]							
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
802.11ax (HE-40)	5 190	38	8.00	7.00	8.00	7.00	11.00	10.00	11.00	10.00
	5 230	46	12.00	11.00	12.50	11.50	15.50	14.50	15.50	14.50
	5 270	54	12.40	11.40	13.00	12.00	15.80	14.80	15.80	14.80
	5 310	62	12.70	11.70	13.00	12.00	15.80	14.80	15.80	14.80
	5 510	102	12.00	11.00	12.00	11.00	15.00	14.00	15.00	14.00
	5 550	110	13.50	12.50	13.00	12.00	16.50	15.50	16.30	15.30
	5 670	134	13.00	12.00	13.00	12.00	16.00	15.00	16.00	15.00
	5 710	142	12.50	11.50	12.50	11.50	16.00	15.00	16.00	15.00
	5 755	151	12.20	11.20	12.20	11.20	15.20	14.20	15.20	14.20
	5 795	159	12.20	11.20	12.20	11.20	15.20	14.20	15.20	14.20

Table 6.1.11 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11ax HE40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ax (HE-40)	5 190	38	7.50	7.63	10.58	10.70
	5 230	46	11.66	12.12	14.91	15.01
	5 270	54	12.16	12.99	15.46	15.75
	5 310	62	12.64	12.35	15.66	15.32
	5 510	102	11.44	11.48	14.47	14.54
	5 550	110	13.36	12.91	16.15	16.24
	5 670	134	12.81	12.84	15.84	15.95
	5 710	142	12.42	12.46	15.45	15.61
	5 755	151	12.01	11.89	14.91	15.06
	5 795	159	11.99	11.84	14.86	14.95

Table 6.1.12 IEEE 802.11ax HE40 Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]							
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
802.11ac (VHT-80)	5 210	42	9.00	8.00	9.00	8.00	12.00	11.00	12.00	11.00
	5 290	58	9.00	8.00	9.00	8.00	12.00	11.00	12.00	11.00
	5 530	106	9.00	8.00	9.50	8.50	12.00	11.00	12.00	11.00
	5 690	138	11.00	10.00	11.00	10.00	14.00	13.00	14.00	13.00
	5 775	155	11.00	10.00	11.00	10.00	14.00	13.00	14.00	13.00

Table 6.1.13 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-80)	5 210	42	8.43	8.93	11.70	11.67
	5 290	58	8.13	8.11	11.13	11.10
	5 530	106	8.64	9.21	11.94	11.91
	5 690	138	10.42	10.77	13.61	13.57
	5 775	155	10.41	10.93	13.69	13.65

Table 6.1.14 IEEE 802.11ac VHT80 Average RF Power

Mode	Freq. (MHz)	Channel	Modulated Average[dBm]							
			Ant.1		Ant.2		MIMO(CDD)		MIMO(SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
802.11ax (HE-80)	5 210	42	11.00	10.00	11.50	10.50	14.50	13.50	14.50	13.50
	5 290	58	11.00	10.00	11.50	10.50	14.50	13.50	14.50	13.50
	5 530	106	11.50	10.50	11.50	10.50	14.50	13.50	14.50	13.50
	5 690	138	11.50	10.50	11.50	10.50	14.50	13.50	14.50	13.50
	5 775	155	11.50	10.50	11.50	10.50	14.50	13.50	14.50	13.50

Table 6.1.13 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11ax HE80 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ax (HE-80)	5 210	42	10.53	11.21	13.89	14.06
	5 290	58	10.50	10.94	13.74	13.81
	5 530	106	11.37	11.29	14.34	14.43
	5 690	138	11.14	10.70	13.94	14.04
	5 775	155	11.06	10.67	13.88	13.98

Table 6.1.14 IEEE 802.11ax HE80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 a, g, n HT20/HT40, ac VHT20/VHT40/VHT80, ax HE20/HE40/HE80 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.



Figure 6.1 Power Measurement Setup

6.2 Bluetooth Conducted Powers

- Module 1

Burst Modulated Average[dBm]				
	Freq. (MHz)	Channel	Maximum	Nominal
Bluetooth 1 Mbps	2 402	0	9.00	8.00
	2 441	39	9.00	8.00
	2 480	78	7.00	6.00
Bluetooth 2 Mbps	2 402	0	8.50	7.50
	2 441	39	7.50	6.50
	2 480	78	6.00	5.00
Bluetooth 3 Mbps	2 402	0	8.50	7.50
	2 441	39	7.50	6.50
	2 480	78	6.00	5.00
Bluetooth (LE / 1 Mbps)	2 402	0	9.00	8.00
	2 441	39	8.00	7.00
	2 480	78	7.00	6.00
Bluetooth (LE / 2 Mbps)	2 402	0	8.50	7.50
	2 441	39	8.00	7.00
	2 480	78	7.00	6.00

Table 6.2.1 Nominal and Maximum Output Power Spec (Burst)

Frame Modulated Average[dBm]				
	Freq. (MHz)	Channel	Maximum	Nominal
Bluetooth 1 Mbps	2 402	0	7.85	6.85
	2 441	39	7.85	6.85
	2 480	78	5.85	4.85
Bluetooth 2 Mbps	2 402	0	7.35	6.35
	2 441	39	6.35	5.35
	2 480	78	4.85	3.85
Bluetooth 3 Mbps	2 402	0	7.35	6.35
	2 441	39	6.35	5.35
	2 480	78	4.85	3.85
Bluetooth (LE / 1 Mbps)	2 402	0	6.83	5.83
	2 441	39	5.83	4.83
	2 480	78	4.83	3.83
Bluetooth (LE / 2 Mbps)	2 402	0	3.38	2.38
	2 441	39	2.88	1.88
	2 480	78	1.88	0.88

Table 6.2.2 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Burst AVG Output Power (1 Mbps)	Frame AVG Output Power (1 Mbps)	Burst AVG Output Power (2 Mbps)	Frame AVG Output Power (2 Mbps)	Burst AVG Output Power (3 Mbps)	Frame AVG Output Power (3 Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2 402	8.97	7.82	8.28	7.13	8.28	7.13
Mid	2 441	8.25	7.10	7.08	5.93	7.09	5.94
High	2 480	6.71	5.56	5.70	4.55	5.70	4.55

Table 6.2.3 Bluetooth Burst and Frame Average RF Power

Channel	Frequency	Burst AVG Output Power (LE / 1 Mbps)	Frame AVG Output Power (LE / 1 Mbps)	Burst AVG Output Power (LE / 2 Mbps)	Frame AVG Output Power (LE / 2 Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2 402	8.42	6.25	8.41	3.29
Mid	2 440	7.92	5.75	7.91	2.79
High	2 480	6.67	4.50	6.60	1.48

Table 6.2.4 Bluetooth LE Burst and Frame Average RF Power

- Module 2

Burst Modulated Average[dBm]				
	Freq. (MHz)	Channel	Maximum	Nominal
Bluetooth (LE / 1 Mbps)	2 402	0	5.00	4.00
	2 441	39	5.00	4.00
	2 480	78	5.00	4.00
Bluetooth (LE / 2 Mbps)	2 402	0	5.00	4.00
	2 441	39	5.00	4.00
	2 480	78	5.00	4.00

Table 6.2.5 Nominal and Maximum Output Power Spec (Burst)

Frame Modulated Average[dBm]				
	Freq. (MHz)	Channel	Maximum	Nominal
Bluetooth (LE / 1 Mbps)	2 402	0	4.30	3.30
	2 441	39	4.30	3.30
	2 480	78	4.30	3.30
Bluetooth (LE / 2 Mbps)	2 402	0	2.59	1.59
	2 441	39	2.59	1.59
	2 480	78	2.59	1.59

Table 6.2.6 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Burst AVG Output Power (LE / 1 Mbps)	Frame AVG Output Power (LE / 1 Mbps)	Burst AVG Output Power (LE / 2 Mbps)	Frame AVG Output Power (LE / 2 Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2 402	4.59	3.89	4.59	2.18
Mid	2 440	4.63	3.93	4.62	2.21
High	2 480	4.39	3.69	4.39	1.98

Table 6.2.7 Bluetooth LE Burst and Frame Average RF Power

Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

1) Enter DUT mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 6.2.1(A).

3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.

4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

1) Enter LE mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 6.2.1(B).

3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.

4) Power levels were measured by a Power Meter.

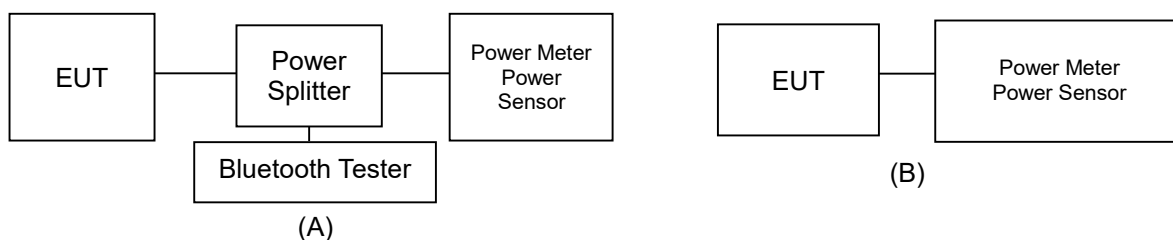


Figure 6.2.1 Average Power Measurement Setup

The average conducted output powers of Bluetooth were measured using above test setup and a wideband gated RF power meter when the EUT is transmitting at its maximum power level.

- Bluetooth Transmission Plot

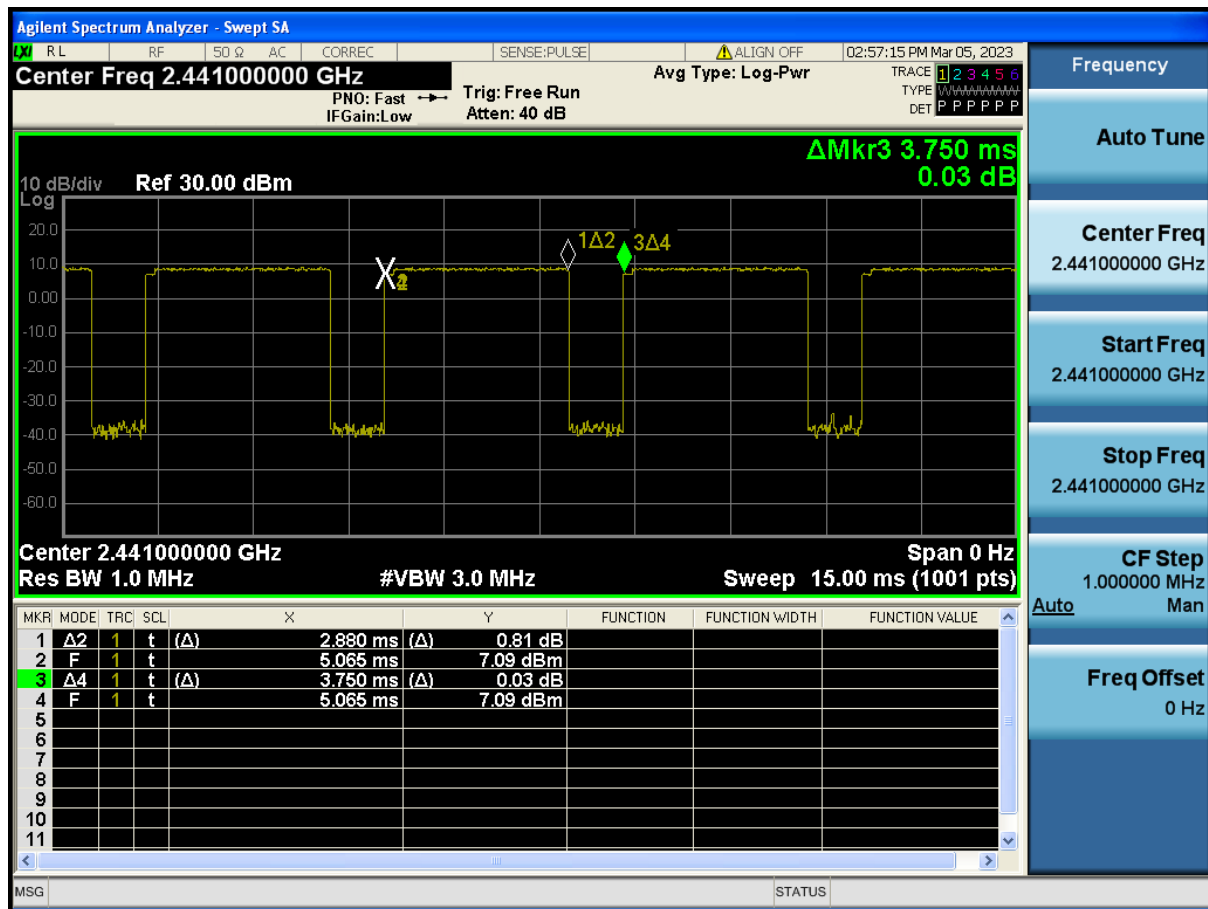


Figure 9.5.2 Bluetooth Transmission Plot

- Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100 \% = (2.880/3.750) * 100 = 76.8 \%$$

7. SYSTEM VERIFICATION

7.1 Tissue Verification

Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	MEASURED TISSUE PARAMETERS						
				Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Mar. 20. 2023	2 450 Head	22.5	23.0	2 402	39.282	1.757	38.307	1.725	-2.48	-1.82
				2 412	39.265	1.766	38.284	1.734	-2.50	-1.81
				2 437	39.222	1.788	38.218	1.758	-2.56	-1.68
				2 441	39.215	1.792	38.206	1.763	-2.57	-1.62
				2 450	39.200	1.800	38.174	1.774	-2.62	-1.44
				2 462	39.184	1.813	38.139	1.790	-2.67	-1.27
				2 480	39.160	1.832	38.077	1.813	-2.77	-1.04
Mar. 27. 2023	5 300 Head	21.6	21.8	5 260	35.940	4.720	35.935	4.713	-0.01	-0.15
				5 280	35.920	4.740	35.913	4.739	-0.02	-0.02
				5 300	35.900	4.760	35.886	4.755	-0.04	-0.11
				5 320	35.880	4.780	35.845	4.777	-0.10	-0.06
				5 500	35.650	4.965	35.181	4.932	-1.32	-0.66
Mar. 28. 2023	5 600 Head	21.3	21.5	5 580	35.530	5.049	35.032	5.024	-1.40	-0.50
				5 600	35.500	5.070	34.997	5.062	-1.42	-0.36
				5 660	35.440	5.130	34.912	5.117	-1.49	-0.25
				5 720	35.380	5.190	34.806	5.182	-1.62	-0.15
				5 800	35.300	5.270	34.648	5.267	-1.85	-0.06
				5 745	35.355	5.215	34.776	5.217	-1.64	0.04
Mar. 29. 2023	5 800 Head	21.7	22.0	5 785	35.315	5.255	34.714	5.256	-1.70	0.02
				5 800	35.300	5.270	34.676	5.274	-1.77	0.08
				5 825	35.275	5.296	34.650	5.304	-1.77	0.15

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ_r for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_0^b \int_0^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

7.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 7.2.1 System Verification Results (1 g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
B	2 450	D2450V2, SN: 920	Mar. 20. 2023	Head	22.5	23.0	3916	100	52.9	5.21	52.10	-1.51
F	5 300	D5GHzV2, SN:1103	Mar. 27. 2023	Head	21.6	21.8	3933	100	83.8	7.94	79.40	-5.25
F	5 500	D5GHzV2, SN:1103	Mar. 28. 2023	Head	21.3	21.5	3933	100	86.8	8.58	85.80	-1.15
F	5 600	D5GHzV2, SN:1103	Mar. 28. 2023	Head	21.3	21.5	3933	100	84.8	8.51	85.10	0.35
F	5 800	D5GHzV2, SN:1103	Mar. 28. 2023	Head	21.3	21.5	3933	100	81.6	8.25	82.50	1.10
F	5 800	D5GHzV2, SN:1103	Mar. 29. 2023	Head	21.7	22.0	3933	100	81.6	7.98	79.80	-2.21

Table 7.2.2 System Verification Results (10 g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
B	2 450	D2450V2, SN: 920	Mar. 20. 2023	Head	22.5	23.0	3916	100	24.7	2.37	23.70	-4.05
F	5 300	D5GHzV2, SN:1103	Mar. 27. 2023	Head	21.6	21.8	3933	100	23.8	2.27	22.70	-4.62
F	5 500	D5GHzV2, SN:1103	Mar. 28. 2023	Head	21.3	21.5	3933	100	24.5	2.46	24.60	0.41
F	5 600	D5GHzV2, SN:1103	Mar. 28. 2023	Head	21.3	21.5	3933	100	23.9	2.43	24.30	1.67
F	5 800	D5GHzV2, SN:1103	Mar. 28. 2023	Head	21.3	21.5	3933	100	22.9	2.34	23.40	2.18
F	5 800	D5GHzV2, SN:1103	Mar. 29. 2023	Head	21.7	22.0	3933	100	22.9	2.29	22.90	0.00

Note1 : System Verification was measured with input 100 mW and normalized to 1 W.

Note2 : Full system validation status and results can be found in Appendix D.




Figure 7.1 Dipole Verification Test Setup Diagram & Photo

8. SAR TEST RESULTS

8.1 Standalone Body SAR Results

Table 8.1.1 DTS Body SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1 g Scaled SAR (W/kg)	Plots #
MHz	Ch														
2 462	11	802.11b (Ant.1)	16.00	15.40	-0.010	0 mm [Top]	FCC #1	0.200	1	98.2	0.201	1.148	1.019	0.235	A1
2 462	11	802.11b (Ant.1)	16.00	15.40	0.070	0 mm [Front]	FCC #1	0.084	1	98.2	0.077	1.148	1.019	0.090	
2 462	11	802.11b (Ant.1)	16.00	15.40	0.070	0 mm [Rear]	FCC #1	0.054	1	98.2	0.051	1.148	1.019	0.060	
2 412	1	802.11b (Ant.1)	14.00	13.37	-0.060	0 mm [Right]	FCC #1	0.357	1	98.2	0.327	1.156	1.019	0.385	
2 437	6	802.11b (Ant.1)	16.00	15.14	-0.010	0 mm [Right]	FCC #1	0.389	1	98.2	0.354	1.219	1.019	0.440	
2 462	11	802.11b (Ant.1)	16.00	15.40	0.140	0 mm [Right]	FCC #1	0.436	1	98.2	0.436	1.148	1.019	0.510	
2 462	11	802.11b (Ant.2)	16.00	15.22	0.080	0 mm [Top]	FCC #1	0.337	1	98.2	0.371	1.197	1.019	0.453	
2 462	11	802.11b (Ant.2)	16.00	15.22	0.050	0 mm [Front]	FCC #1	0.096	1	98.2	0.093	1.197	1.019	0.113	
2 462	11	802.11b (Ant.2)	16.00	15.22	0.030	0 mm [Rear]	FCC #1	0.112	1	98.2	0.108	1.197	1.019	0.132	
2 412	1	802.11b (Ant.2)	14.00	13.41	0.040	0 mm [Left]	FCC #1	0.452	1	98.2	0.437	1.146	1.019	0.510	
2 437	6	802.11b (Ant.2)	16.00	15.18	0.040	0 mm [Left]	FCC #1	0.503	1	98.2	0.476	1.208	1.019	0.586	
2 462	11	802.11b (Ant.2)	16.00	15.22	0.010	0 mm [Left]	FCC #1	0.623	1	98.2	0.609	1.197	1.019	0.743	
2 412	1	802.11g (MIMO)	17.00	16.38	-0.090	0 mm [Top]	FCC #1	0.618	6	92.2	0.618	1.153	1.085	0.773	A3
2 437	6	802.11g (MIMO)	19.00	18.52	0.040	0 mm [Top]	FCC #1	0.685	6	92.2	0.743	1.117	1.085	0.900	
2 462	11	802.11g (MIMO)	14.00	13.18	0.020	0 mm [Top]	FCC #1	0.692	6	92.2	0.776	1.208	1.085	1.017	
2 462	6	802.11g (MIMO)	19.00	18.52	-0.090	0 mm [Front]	FCC #1	0.152	6	92.2	0.151	1.117	1.085	0.183	
2 462	6	802.11g (MIMO)	19.00	18.52	0.100	0 mm [Rear]	FCC #1	0.105	6	92.2	0.106	1.117	1.085	0.128	
2 462	6	802.11g (MIMO)	19.00	18.52	-0.010	0 mm [Right]	FCC #1	0.364	6	92.2	0.364	1.117	1.085	0.441	
2 462	6	802.11g (MIMO)	19.00	18.52	-0.020	0 mm [Left]	FCC #1	0.345	6	92.2	0.339	1.117	1.085	0.411	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/Antenna	Service	Maximum Allowed Power [dBm]	1 g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1 g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 462	11	802.11b (Ant.1)	DSSS	16.0	0.510	2 437	802.11g	OFDM	16.0	1.000	0.510	X
2 462	11	802.11b (Ant.1)	DSSS	16.0	0.510	2 437	802.11n	OFDM	16.0	1.000	0.510	X
2 462	11	802.11b (Ant.1)	DSSS	16.0	0.510	2 437	802.11ac	OFDM	16.0	1.000	0.510	X
2 462	11	802.11b (Ant.1)	DSSS	16.0	0.510	2 437	802.11ax	OFDM	16.0	1.000	0.510	X
2 462	11	802.11b (Ant.2)	DSSS	16.0	0.743	2 437	802.11g	OFDM	16.0	1.000	0.743	X
2 462	11	802.11b (Ant.2)	DSSS	16.0	0.743	2 437	802.11n	OFDM	15.0	0.891	0.662	X
2 462	11	802.11b (Ant.2)	DSSS	16.0	0.743	2 437	802.11ac	OFDM	15.0	0.891	0.662	X
2 462	11	802.11b (Ant.2)	DSSS	16.0	0.743	2 462	802.11ax	OFDM	15.0	0.891	0.662	X
2 437	6	802.11g (MIMO)	OFDM	19.0	1.017	2 437	802.11n	OFDM	18.0	0.891	0.807	X
2 437	6	802.11g (MIMO)	OFDM	19.0	1.017	2 437	802.11ac	OFDM	18.0	0.891	0.807	X
2 437	6	802.11g (MIMO)	OFDM	19.0	1.017	2 437	802.11ax	OFDM	19.0	1.000	1.017	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 8.1.2 UNII Body SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1 g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 300	60	802.11a (Ant.1)	12.80	12.15	0.020	0 mm [Top]	FCC #1	0.475	6	93.2	0.467	1.161	1.073	0.582	A4
5 300	60	802.11a (Ant.1)	12.80	12.15	-0.010	0 mm [Front]	FCC #1	0.058	6	93.2	0.033	1.161	1.073	0.041	
5 300	60	802.11a (Ant.1)	12.80	12.15	-0.140	0 mm [Rear]	FCC #1	0.352	6	93.2	0.342	1.161	1.073	0.426	
5 260	52	802.11a (Ant.1)	12.80	12.07	-0.130	0 mm [Right]	FCC #1	0.709	6	93.2	0.758	1.183	1.073	0.962	
5 280	56	802.11a (Ant.1)	12.80	11.95	-0.190	0 mm [Right]	FCC #1	0.646	6	93.2	0.736	1.216	1.073	0.960	
5 300	60	802.11a (Ant.1)	12.80	12.15	0.080	0 mm [Right]	FCC #1	0.709	6	93.2	0.796	1.161	1.073	0.992	
5 320	64	802.11a (Ant.1)	11.00	10.35	0.050	0 mm [Right]	FCC #1	0.495	6	93.2	0.553	1.161	1.073	0.689	A5
5 280	56	802.11a (Ant.2)	13.10	12.64	0.030	0 mm [Top]	FCC #1	0.264	6	93.2	0.264	1.112	1.073	0.315	
5 280	56	802.11a (Ant.2)	13.10	12.64	-0.010	0 mm [Front]	FCC #1	0.034	6	93.2	0.013	1.112	1.073	0.016	
5 280	56	802.11a (Ant.2)	13.10	12.64	-0.030	0 mm [Rear]	FCC #1	0.316	6	93.2	0.275	1.112	1.073	0.328	
5 260	52	802.11a (Ant.2)	13.10	12.36	-0.050	0 mm [Left]	FCC #1	0.433	6	93.2	0.408	1.186	1.073	0.519	
5 280	56	802.11a (Ant.2)	13.10	12.64	-0.070	0 mm [Left]	FCC #1	0.485	6	93.2	0.483	1.112	1.073	0.576	
5 300	60	802.11a (Ant.2)	13.10	12.63	-0.010	0 mm [Left]	FCC #1	0.469	6	93.2	0.461	1.114	1.073	0.551	A6
5 320	64	802.11a (Ant.2)	11.00	10.69	0.010	0 mm [Left]	FCC #1	0.373	6	93.2	0.369	1.074	1.073	0.425	
5 300	60	802.11a (MIMO)	16.00	15.41	0.130	0 mm [Top]	FCC #1	0.451	6	93.2	0.429	1.146	1.073	0.528	
5 300	60	802.11a (MIMO)	16.00	15.41	-0.150	0 mm [Front]	FCC #1	0.067	6	93.2	0.042	1.146	1.073	0.052	
5 300	60	802.11a (MIMO)	16.00	15.41	-0.000	0 mm [Rear]	FCC #1	0.339	6	93.2	0.322	1.146	1.073	0.396	
5 260	52	802.11a (MIMO)	16.00	15.23	0.050	0 mm [Right]	FCC #1	0.688	6	93.2	0.756	1.194	1.073	0.969	
5 280	56	802.11a (MIMO)	16.00	15.32	-0.090	0 mm [Right]	FCC #1	0.713	6	93.2	0.794	1.169	1.073	0.996	A6
5 300	60	802.11a (MIMO)	16.00	15.41	-0.050	0 mm [Right]	FCC #1	0.686	6	93.2	0.659	1.146	1.073	0.810	
5 320	64	802.11a (MIMO)	14.00	13.53	0.010	0 mm [Right]	FCC #1	0.532	6	93.2	0.558	1.114	1.073	0.667	
5 300	60	802.11a (MIMO)	16.00	15.41	-0.030	0 mm [Left]	FCC #1	0.579	6	93.2	0.532	1.146	1.073	0.654	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Power [dBm]	1 g Scaled SAR [W/kg]	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR [W/kg]	SAR for the band with lower maximum output power
MHz	Ch											
5 300	60	802.11a (Ant.1)	OFDM	12.8	0.992	5 240	802.11a	OFDM	9.5	0.468	0.464	X
5 280	56	802.11a (Ant.2)	OFDM	13.1	0.576	5 240	802.11a	OFDM	10.5	0.550	0.317	X
5 300	60	802.11a (MIMO)	OFDM	16.0	0.996	5 240	802.11a	OFDM	13.0	0.501	0.499	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 8.1.3 UNII Body SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1 g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 580	116	802.11a (Ant.1)	13.60	13.02	-0.010	0 mm [Top]	FCC #1	0.464	6	93.2	0.451	1.143	1.073	0.553	A7
5 580	116	802.11a (Ant.1)	13.60	13.02	-0.030	0 mm [Front]	FCC #1	0.062	6	93.2	0.035	1.143	1.073	0.043	
5 580	116	802.11a (Ant.1)	13.60	13.02	0.120	0 mm [Rear]	FCC #1	0.288	6	93.2	0.315	1.143	1.073	0.386	
5 500	100	802.11a (Ant.1)	11.50	11.09	0.050	0 mm [Right]	FCC #1	0.552	6	93.2	0.562	1.099	1.073	0.663	
5 580	116	802.11a (Ant.1)	13.60	13.02	-0.190	0 mm [Right]	FCC #1	0.834	6	93.2	0.821	1.143	1.073	1.007	
5 660	132	802.11a (Ant.1)	13.00	12.66	0.190	0 mm [Right]	FCC #1	0.857	6	93.2	0.746	1.081	1.073	0.865	
5 720	144	802.11a (Ant.1)	13.00	12.58	-0.030	0 mm [Right]	FCC #1	0.574	6	93.2	0.569	1.102	1.073	0.673	
5 580	116	802.11a (Ant.2)	13.60	13.02	-0.190	0 mm [Right]	FCC #1	0.856	6	93.2	0.816	1.143	1.073	1.001	A8
5 580	116	802.11a (Ant.2)	13.10	12.54	0.090	0 mm [Top]	FCC #1	0.293	6	93.2	0.264	1.138	1.073	0.322	
5 580	116	802.11a (Ant.2)	13.10	12.54	-0.040	0 mm [Front]	FCC #1	0.005	6	93.2	0.017	1.138	1.073	0.021	
5 580	116	802.11a (Ant.2)	13.10	12.54	0.000	0 mm [Rear]	FCC #1	0.204	6	93.2	0.174	1.138	1.073	0.212	
5 500	100	802.11a (Ant.2)	11.50	11.06	-0.060	0 mm [Left]	FCC #1	0.202	6	93.2	0.153	1.107	1.073	0.182	
5 580	116	802.11a (Ant.2)	13.10	12.54	-0.030	0 mm [Left]	FCC #1	0.358	6	93.2	0.300	1.138	1.073	0.366	
5 660	132	802.11a (Ant.2)	13.10	12.13	-0.070	0 mm [Left]	FCC #1	0.255	6	93.2	0.212	1.250	1.073	0.284	
5 720	144	802.11a (Ant.2)	12.00	11.84	-0.010	0 mm [Left]	FCC #1	0.199	6	93.2	0.144	1.038	1.073	0.160	A9
5 580	116	802.11a (MIMO)	16.50	15.80	-0.130	0 mm [Top]	FCC #1	0.663	6	93.2	0.610	1.175	1.073	0.769	
5 580	116	802.11a (MIMO)	16.50	15.80	-0.150	0 mm [Front]	FCC #1	0.051	6	93.2	0.022	1.175	1.073	0.028	
5 580	116	802.11a (MIMO)	16.50	15.80	-0.100	0 mm [Rear]	FCC #1	0.378	6	93.2	0.401	1.175	1.073	0.506	
5 500	100	802.11a (MIMO)	15.50	14.09	0.070	0 mm [Right]	FCC #1	0.404	6	93.2	0.388	1.384	1.073	0.576	
5 580	116	802.11a (MIMO)	16.50	15.80	-0.040	0 mm [Right]	FCC #1	1.120	6	93.2	0.985	1.175	1.073	1.242	
5 660	132	802.11a (MIMO)	16.00	15.41	-0.060	0 mm [Right]	FCC #1	0.930	6	93.2	0.723	1.146	1.073	0.889	
5 720	144	802.11a (MIMO)	16.00	15.24	0.070	0 mm [Right]	FCC #1	0.650	6	93.2	0.551	1.191	1.073	0.704	A10
5 580	116	802.11a (MIMO)	16.50	15.80	0.040	0 mm [Left]	FCC #1	0.522	6	93.2	0.498	1.175	1.073	0.628	
5 580	116	802.11a (MIMO)	16.50	15.80	0.010	0 mm [Right]	FCC #1	1.100	6	93.2	0.976	1.175	1.073	1.231	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):
1. Yellow entries represent variability measurements.

Table 8.1.4 UNII Body SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1 g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 785	157	802.11a (Ant.1)	12.50	12.19	0.120	0 mm [Top]	FCC #1	0.415	6	93.2	0.399	1.074	1.073	0.460	A10
5 785	157	802.11a (Ant.1)	12.50	12.19	-0.070	0 mm [Front]	FCC #1	0.047	6	93.2	0.030	1.074	1.073	0.035	
5 785	157	802.11a (Ant.1)	12.50	12.19	-0.040	0 mm [Rear]	FCC #1	0.276	6	93.2	0.266	1.074	1.073	0.307	
5 745	149	802.11a (Ant.1)	12.00	11.44	0.050	0 mm [Right]	FCC #1	0.534	6	93.2	0.513	1.138	1.073	0.626	
5 785	157	802.11a (Ant.1)	12.50	12.19	-0.020	0 mm [Right]	FCC #1	0.602	6	93.2	0.529	1.074	1.073	0.610	
5 825	165	802.11a (Ant.1)	11.00	10.97	0.020	0 mm [Right]	FCC #1	0.482	6	93.2	0.466	1.007	1.073	0.504	
5 785	157	802.11a (Ant.2)	12.50	12.01	-0.040	0 mm [Top]	FCC #1	0.094	6	93.2	0.092	1.119	1.073	0.110	A11
5 785	157	802.11a (Ant.2)	12.50	12.01	-0.160	0 mm [Front]	FCC #1	0.039	6	93.2	0.004	1.119	1.073	0.005	
5 785	157	802.11a (Ant.2)	12.50	12.01	-0.000	0 mm [Rear]	FCC #1	0.113	6	93.2	0.081	1.119	1.073	0.097	
5 745	149	802.11a (Ant.2)	12.00	11.41	-0.080	0 mm [Left]	FCC #1	0.185	6	93.2	0.154	1.146	1.073	0.189	
5 785	157	802.11a (Ant.2)	12.50	12.01	0.010	0 mm [Left]	FCC #1	0.193	6	93.2	0.164	1.119	1.073	0.197	
5 825	165	802.11a (Ant.2)	11.00	10.81	-0.150	0 mm [Left]	FCC #1	0.173	6	93.2	0.151	1.045	1.073	0.169	
5 785	157	802.11a (MIMO)	15.50	15.11	-0.100	0 mm [Top]	FCC #1	0.461	6	93.2	0.395	1.094	1.073	0.464	A12
5 785	157	802.11a (MIMO)	15.50	15.11	-0.090	0 mm [Front]	FCC #1	0.040	6	93.2	0.028	1.094	1.073	0.033	
5 785	157	802.11a (MIMO)	15.50	15.11	0.000	0 mm [Rear]	FCC #1	0.271	6	93.2	0.296	1.094	1.073	0.347	
5 745	149	802.11a (MIMO)	15.00	14.44	-0.090	0 mm [Right]	FCC #1	0.480	6	93.2	0.465	1.138	1.073	0.568	
5 785	157	802.11a (MIMO)	15.50	15.11	-0.130	0 mm [Right]	FCC #1	0.530	6	93.2	0.490	1.094	1.073	0.575	
5 825	165	802.11a (MIMO)	14.00	13.90	-0.020	0 mm [Right]	FCC #1	0.477	6	93.2	0.460	1.023	1.073	0.505	
5 785	157	802.11a (MIMO)	15.50	15.11	-0.080	0 mm [Left]	FCC #1	0.203	6	93.2	0.162	1.094	1.073	0.190	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 8.1.5 Bluetooth Body SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1 g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441	39	Bluetooth	7.85	7.10	0.000	0 mm [Top]	FCC #1	1	76.8	0.007	1.189	1.302	0.011	A13
2 441	39	Bluetooth	7.85	7.10	0.000	0 mm [Front]	FCC #1	1	76.8	0.008	1.189	1.302	0.012	
2 441	39	Bluetooth	7.85	7.10	0.000	0 mm [Rear]	FCC #1	1	76.8	0.004	1.189	1.302	0.006	
2 402	0	Bluetooth	7.85	7.82	0.190	0 mm [Right]	FCC #1	1	76.8	0.016	1.007	1.302	0.021	
2 441	39	Bluetooth	7.85	7.10	0.060	0 mm [Right]	FCC #1	1	76.8	0.010	1.189	1.302	0.015	
2 480	78	Bluetooth	5.85	5.56	0.000	0 mm [Right]	FCC #1	1	76.8	0.009	1.189	1.302	0.011	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram					

8.2 Standalone Extremity SAR Results

Table 8.2.1 DTS Extremity SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10 g Scaled SAR (W/kg)	Plots #
MHz	Ch														
2 412	1	802.11b (Ant.1)	14.00	13.37	0.020	0 mm [Rear]	FCC #1	0.028	1	98.2	0.027	1.156	1.019	0.032	A14
2 437	6	802.11b (Ant.1)	16.00	15.14	-0.110	0 mm [Rear]	FCC #1	0.030	1	98.2	0.029	1.219	1.019	0.036	
2 462	11	802.11b (Ant.1)	16.00	15.40	0.020	0 mm [Rear]	FCC #1	0.033	1	98.2	0.032	1.148	1.019	0.037	
2 412	1	802.11b (Ant.2)	14.00	13.41	0.090	0 mm [Rear]	FCC #1	0.048	1	98.2	0.040	1.146	1.019	0.047	
2 437	6	802.11b (Ant.2)	16.00	15.18	0.150	0 mm [Rear]	FCC #1	0.043	1	98.2	0.043	1.208	1.019	0.053	A15
2 462	11	802.11b (Ant.2)	16.00	15.22	-0.020	0 mm [Rear]	FCC #1	0.055	1	98.2	0.046	1.197	1.019	0.056	
2 412	1	802.11g (MIMO)	17.00	16.38	-0.110	0 mm [Rear]	FCC #1	0.081	6	92.2	0.063	1.153	1.085	0.079	
2 437	6	802.11g (MIMO)	19.00	18.52	-0.100	0 mm [Rear]	FCC #1	0.095	6	92.2	0.074	1.117	1.085	0.090	
2 462	11	802.11g (MIMO)	14.00	13.18	-0.050	0 mm [Rear]	FCC #1	0.099	6	92.2	0.077	1.208	1.085	0.101	A16
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Extremity 4.0 W/kg (mW/g) averaged over 10 gram						

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	10 g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	10 g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 462	11	802.11b (Ant.1)	DSSS	16.0	0.037	2 437	802.11g	OFDM	16.0	1.000	0.037	X
2 462	11	802.11b (Ant.1)	DSSS	16.0	0.037	2 437	802.11n	OFDM	16.0	1.000	0.037	X
2 462	11	802.11b (Ant.1)	DSSS	16.0	0.037	2 437	802.11ac	OFDM	16.0	1.000	0.037	X
2 462	11	802.11b (Ant.1)	DSSS	16.0	0.037	2 437	802.11ax	OFDM	16.0	1.000	0.037	X
2 462	11	802.11b (Ant.2)	DSSS	16.0	0.056	2 437	802.11g	OFDM	16.0	1.000	0.056	X
2 462	11	802.11b (Ant.2)	DSSS	16.0	0.056	2 437	802.11n	OFDM	15.0	0.891	0.050	X
2 462	11	802.11b (Ant.2)	DSSS	16.0	0.056	2 437	802.11ac	OFDM	15.0	0.891	0.050	X
2 462	11	802.11b (Ant.2)	DSSS	16.0	0.056	2 462	802.11ax	OFDM	15.0	0.891	0.050	X
2 437	6	802.11g (MIMO)	OFDM	19.0	0.101	2 437	802.11n	OFDM	18.0	0.891	0.090	X
2 437	6	802.11g (MIMO)	OFDM	19.0	0.101	2 437	802.11ac	OFDM	18.0	0.891	0.090	X
2 437	6	802.11g (MIMO)	OFDM	19.0	0.101	2 437	802.11ax	OFDM	19.0	1.000	0.101	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Extremity 4.0 W/kg (mW/g) averaged over 1 gram			

Table 8.2.2 UNII Extremity SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10 g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 260	52	802.11a (Ant.1)	12.80	12.07	0.050	0 mm [Rear]	FCC #1	0.184	6	93.2	0.182	1.183	1.073	0.231	A17
5 280	56	802.11a (Ant.1)	12.80	11.95	-0.020	0 mm [Rear]	FCC #1	0.220	6	93.2	0.188	1.216	1.073	0.245	
5 300	60	802.11a (Ant.1)	12.80	12.15	-0.010	0 mm [Rear]	FCC #1	0.203	6	93.2	0.196	1.161	1.073	0.244	
5 320	64	802.11a (Ant.1)	11.00	10.35	-0.020	0 mm [Rear]	FCC #1	0.122	6	93.2	0.118	1.161	1.073	0.147	
5 260	52	802.11a (Ant.2)	13.10	12.36	-0.070	0 mm [Rear]	FCC #1	0.204	6	93.2	0.202	1.186	1.073	0.257	A18
5 280	56	802.11a (Ant.2)	13.10	12.64	0.020	0 mm [Rear]	FCC #1	0.247	6	93.2	0.242	1.112	1.073	0.289	
5 300	60	802.11a (Ant.2)	13.10	12.63	0.070	0 mm [Rear]	FCC #1	0.244	6	93.2	0.236	1.114	1.073	0.282	
5 320	64	802.11a (Ant.2)	11.00	10.69	-0.020	0 mm [Rear]	FCC #1	0.090	6	93.2	0.092	1.074	1.073	0.106	
5 260	52	802.11a (MIMO)	16.00	15.23	-0.040	0 mm [Rear]	FCC #1	0.254	6	93.2	0.231	1.194	1.073	0.296	A19
5 280	56	802.11a (MIMO)	16.00	15.32	-0.110	0 mm [Rear]	FCC #1	0.280	6	93.2	0.258	1.169	1.073	0.324	
5 300	60	802.11a (MIMO)	16.00	15.41	0.040	0 mm [Rear]	FCC #1	0.272	6	93.2	0.247	1.146	1.073	0.304	
5 320	64	802.11a (MIMO)	14.00	13.53	-0.050	0 mm [Rear]	FCC #1	0.093	6	93.2	0.100	1.114	1.073	0.120	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Extremity 4.0 W/kg (mW/g) averaged over 10 gram						

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	10 g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	10 g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5 300	60	802.11a (Ant.1)	OFDM	12.8	0.245	5 240	802.11a	OFDM	9.5	0.468	0.115	X
5 280	56	802.11a (Ant.2)	OFDM	13.1	0.289	5 240	802.11a	OFDM	10.5	0.550	0.159	X
5 300	60	802.11a (MIMO)	OFDM	16.0	0.324	5 240	802.11a	OFDM	13.0	0.501	0.162	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Extremity 4.0 W/kg (mW/g) averaged over 10 gram			

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 8.2.3 UNII Extremity SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10 g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 500	100	802.11a (Ant.1)	11.50	11.09	0.090	0 mm [Rear]	FCC #1	0.141	6	93.2	0.140	1.099	1.073	0.165	A20
5 580	116	802.11a (Ant.1)	13.60	13.02	0.080	0 mm [Rear]	FCC #1	0.198	6	93.2	0.196	1.143	1.073	0.240	
5 660	132	802.11a (Ant.1)	13.00	12.66	-0.120	0 mm [Rear]	FCC #1	0.202	6	93.2	0.178	1.081	1.073	0.206	
5 720	144	802.11a (Ant.1)	13.00	12.58	-0.170	0 mm [Rear]	FCC #1	0.149	6	93.2	0.141	1.102	1.073	0.167	A21
5 500	100	802.11a (Ant.2)	11.50	11.06	-0.190	0 mm [Rear]	FCC #1	0.114	6	93.2	0.091	1.107	1.073	0.108	
5 580	116	802.11a (Ant.2)	13.10	12.54	-0.100	0 mm [Rear]	FCC #1	0.138	6	93.2	0.135	1.138	1.073	0.165	
5 660	132	802.11a (Ant.2)	13.10	12.13	0.040	0 mm [Rear]	FCC #1	0.138	6	93.2	0.113	1.250	1.073	0.152	A22
5 720	144	802.11a (Ant.2)	12.00	11.84	0.090	0 mm [Rear]	FCC #1	0.094	6	93.2	0.061	1.038	1.073	0.068	
5 500	100	802.11a (MIMO)	15.50	14.09	0.000	0 mm [Rear]	FCC #1	0.110	6	93.2	0.107	1.384	1.073	0.159	
5 580	116	802.11a (MIMO)	16.50	15.80	-0.110	0 mm [Rear]	FCC #1	0.211	6	93.2	0.206	1.175	1.073	0.260	A22
5 660	132	802.11a (MIMO)	16.00	15.41	-0.050	0 mm [Rear]	FCC #1	0.213	6	93.2	0.158	1.146	1.073	0.194	
5 720	144	802.11a (MIMO)	16.00	15.24	0.020	0 mm [Rear]	FCC #1	0.158	6	93.2	0.122	1.191	1.073	0.156	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Extremity 4.0 W/kg (mW/g) averaged over 10 gram						

Table 8.2.4 UNII Extremity SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10 g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 745	149	802.11a (Ant.1)	12.00	11.44	0.000	0 mm [Rear]	FCC #1	0.139	6	93.2	0.143	1.138	1.073	0.175	A23
5 785	157	802.11a (Ant.1)	12.50	12.19	0.010	0 mm [Rear]	FCC #1	0.173	6	93.2	0.175	1.074	1.073	0.202	
5 825	165	802.11a (Ant.1)	11.00	10.97	-0.010	0 mm [Rear]	FCC #1	0.141	6	93.2	0.149	1.007	1.073	0.161	
5 745	149	802.11a (Ant.2)	12.00	11.41	-0.180	0 mm [Rear]	FCC #1	0.076	6	93.2	0.066	1.146	1.073	0.081	A24
5 785	157	802.11a (Ant.2)	12.50	12.01	-0.140	0 mm [Rear]	FCC #1	0.085	6	93.2	0.077	1.119	1.073	0.092	
5 825	165	802.11a (Ant.2)	11.00	10.81	0.040	0 mm [Rear]	FCC #1	0.070	6	93.2	0.058	1.045	1.073	0.065	
5 745	149	802.11a (MIMO)	15.00	14.44	-0.000	0 mm [Rear]	FCC #1	0.142	6	93.2	0.154	1.138	1.073	0.188	A25
5 785	157	802.11a (MIMO)	15.50	15.11	-0.080	0 mm [Rear]	FCC #1	0.196	6	93.2	0.191	1.094	1.073	0.224	
5 825	165	802.11a (MIMO)	14.00	13.90	-0.070	0 mm [Rear]	FCC #1	0.154	6	93.2	0.153	1.023	1.073	0.168	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Extremity 4.0 W/kg (mW/g) averaged over 10 gram						

Table 8.2.5 Bluetooth Extremity SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	10 g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10 g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
2 402	0	Bluetooth	7.85	7.82	0.000	0 mm [Rear]	FCC #1	1	76.8	0.002	1.007	1.302	0.003	A26	
2 441	39	Bluetooth	7.85	7.10	0.000	0 mm [Rear]	FCC #1	1	76.8	0.001	1.189	1.302	0.002		
2 480	78	Bluetooth	5.85	5.56	0.000	0 mm [Rear]	FCC #1	1	76.8	0.001	1.189	1.302	0.002		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Extremity 4.0 W/kg (mW/g) averaged over 10 gram							

8.3 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.
6. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by making a SAR measurement with both antennas transmitting simultaneously.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation and Tx test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100 % transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT tethering applications.

9. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

9.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

9.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

Table 9.2.1 Estimated SAR (Body)

Mode	Frequency	Maximum Allowed Power		Separation Distance	Estimated SAR (Body)
	[MHz]	[dBm]	[mW]	[mm]	[W/kg]
Bluetooth LE (Module2)	2 480	4.3	3.0	5	0.113

Table 9.2.2 Estimated SAR (Extremity)

Mode	Frequency	Maximum Allowed Power		Separation Distance	Estimated SAR (Extremity)
	[MHz]	[dBm]	[mW]	[mm]	[W/kg]
Bluetooth LE (Module2)	2 480	4.3	3.0	5	0.045

9.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 9.3.1 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Body	Extremity
1	W-LAN 2.4 GHz (Module 1) + BLE 2.4 GHz (Module 2)	Yes	Yes
2	W-LAN 5 GHz (Module 1) + BLE 2.4 GHz (Module 2)	Yes	Yes
3	Bluetooth 2.4 GHz (Module 1) + BLE 2.4 GHz (Module 2)	Yes	Yes

9.4 Body SAR Simultaneous Transmission Analysis

Table 12.4.1 Simultaneous Transmission Scenario : W-LAN 2.4 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	2.4 G W-LAN Ant.1 SAR (Module1) (W/kg)	2.4 G W-LAN Ant.2 SAR (Module1) (W/kg)	2.4 G W-LAN MIMO SAR (Module1) (W/kg)	ΣSAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Top	0.113	0.235	0.453	1.017	0.348	0.566	1.130
	Front	0.113	0.090	0.113	0.183	0.203	0.226	0.296
	Rear	0.113	0.060	0.132	0.128	0.173	0.245	0.241
	Right	0.113	0.510	-	0.441	0.623	0.113	0.554
	Left	0.113	-	0.743	0.411	0.113	0.856	0.524

Table 12.4.2 Simultaneous Transmission Scenario : W-LAN 5.3 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	5.3 G W-LAN Ant.1 SAR (Module1) (W/kg)	5.3 G W-LAN Ant.2 SAR (Module1) (W/kg)	5.3 G W-LAN MIMO SAR (Module1) (W/kg)	ΣSAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Top	0.113	0.582	0.315	0.528	0.695	0.428	0.641
	Front	0.113	0.041	0.016	0.052	0.154	0.129	0.165
	Rear	0.113	0.426	0.328	0.396	0.539	0.441	0.509
	Right	0.113	0.992	-	0.996	1.105	0.113	1.109
	Left	0.113	-	0.576	0.654	0.113	0.689	0.767

Table 12.4.3 Simultaneous Transmission Scenario : W-LAN 5.6 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	BLE 2.4 GHz (Module2) (W/kg)	5.6 G W-LAN Ant.1 SAR (Module1) (W/kg)	5.6 G W-LAN Ant.2 SAR (Module1) (W/kg)	ΣSAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Top	0.113	0.553	0.322	0.769	0.666	0.435	0.882
	Front	0.113	0.043	0.021	0.028	0.156	0.134	0.141
	Rear	0.113	0.386	0.212	0.506	0.499	0.325	0.619
	Right	0.113	1.007	-	1.242	1.120	0.113	1.355
	Left	0.113	-	0.366	0.628	0.113	0.479	0.741

Table 12.4.4 Simultaneous Transmission Scenario : W-LAN 5.8 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	5.8 G W-LAN Ant.1 SAR (Module1) (W/kg)	5.8 G W-LAN Ant.2 SAR (Module1) (W/kg)	5.8 G W-LAN MIMO SAR (Module1) (W/kg)	ΣSAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Top	0.113	0.460	0.110	0.464	0.573	0.223	0.577
	Front	0.113	0.035	0.005	0.033	0.148	0.118	0.146
	Rear	0.113	0.307	0.097	0.347	0.420	0.210	0.460
	Right	0.113	0.626	-	0.575	0.739	0.113	0.688
	Left	0.113	-	0.197	0.190	0.113	0.310	0.303

Table 12.4.5 Simultaneous Transmission Scenario : Bluetooth 2.4 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	Bluetooth 2.4 GHz SAR (Module1) (W/kg)	ΣSAR (W/kg)
		1	2	1+2
Body SAR	Top	0.113	0.011	0.124
	Front	0.113	0.012	0.125
	Rear	0.113	0.006	0.119
	Right	0.113	0.021	0.134

9.5 Extremity SAR Simultaneous Transmission Analysis

Table 12.4.1 Simultaneous Transmission Scenario : W-LAN 2.4 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	2.4 G W-LAN Ant.1 SAR (Module1) (W/kg)	2.4 G W-LAN Ant.2 SAR (Module1) (W/kg)	2.4 G W-LAN MIMO SAR (Module1) (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Extremity SAR	Rear	0.045	0.037	0.056	0.101	0.082	0.101	0.146

Table 12.4.2 Simultaneous Transmission Scenario : W-LAN 5.3 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	5.3 G W-LAN Ant.1 SAR (Module1) (W/kg)	5.3 G W-LAN Ant.2 SAR (Module1) (W/kg)	5.3 G W-LAN MIMO SAR (Module1) (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Extremity SAR	Rear	0.045	0.245	0.289	0.324	0.290	0.334	0.369

Table 12.4.3 Simultaneous Transmission Scenario : W-LAN 5.6 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	5.6 G W-LAN Ant.1 SAR (Module1) (W/kg)	5.6 G W-LAN Ant.2 SAR (Module1) (W/kg)	5.6 G W-LAN MIMO SAR (Module1) (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Extremity SAR	Rear	0.045	0.240	0.165	0.260	0.285	0.210	0.305

Table 12.4.4 Simultaneous Transmission Scenario : W-LAN 5.8 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	5.8 G W-LAN Ant.1 SAR (Module1) (W/kg)	5.8 G W-LAN Ant.2 SAR (Module1) (W/kg)	5.8 G W-LAN MIMO SAR (Module1) (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Extremity SAR	Rear	0.045	0.202	0.092	0.224	0.247	0.137	0.269

Table 12.4.5 Simultaneous Transmission Scenario : Bluetooth 2.4 GHz (Module 1) + BLE 2.4 GHz(Module 2)

Exposure Condition	Configuration	BLE 2.4 GHz (Module2) (W/kg)	Bluetooth 2.4 GHz SAR (Module1) (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Extremity SAR	Top	0.113	0.003	0.116

10. SAR MEASUREMENT VARIABILITY

10.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10 % from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

Table 9.1 Body SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1 g)	1st Repeated SAR (1 g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
5 580	116	802.11a (Ant.1)	OFDM	-	0 mm [Right]	0.821	0.816	1.01	-	-	-	-
5 580	116	802.11a (MIMO)	OFDM	-	0 mm [Right]	0.985	0.976	1.01	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

10.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10 g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

11. EQUIPMENT LIST

Table 10.1.1 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	Robot	SPEAG	TX60L	N/A	N/A	F14/5VR2A1/A/01
☒	Robot	SPEAG	TX60L	N/A	N/A	F14/5WV5D1/A/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F14/5VR2A1/C/01
☒	Robot Controller	SPEAG	CS8C	N/A	N/A	F14/5WV5D1/C/01
☒	Joystick	SPEAG	N/A	N/A	N/A	D21142605A
☒	Joystick	SPEAG	P21142605A	N/A	N/A	005695
☒	Intel Core i7-4 770 3.40 GHz Window 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	Intel Core i7-4 770 3.40 GHz Window 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
☒	Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1220
☒	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1837
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2022-08-19	2023-08-19	1396
☒	Data Acquisition Electronics	SPEAG	DAE4V1	2022-07-18	2023-07-18	1335
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2022-03-30	2023-03-30	3916
☒	Dosimetric E-Field Probe	SPEAG	EX3DV4	2022-09-27	2023-09-27	3933
☒	2 450 MHz SAR Validation Dipole	SPEAG	D2450V2	2022-08-18	2024-08-18	920
☒	5 GHz SAR Validation Dipole	SPEAG	D5GHzV2	2023-01-25	2025-01-25	1103
☒	Network Analyzer	Agilent	E5071C	2022-06-24	2023-06-24	MY46106970
☒	Signal Generator	Agilent	E4438C	2022-06-24	2023-06-24	US41461520
☒	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2022-06-24	2023-06-24	1005
☒	Power Meter	HP	EPM-442A	2022-12-16	2023-12-16	GB37170267
☒	Power Meter	Anritsu	ML2488B	2022-12-16	2023-12-16	0846003
☒	Power Sensor	Anritsu	MA2472D	2022-12-16	2023-12-16	0845419
☒	Power Sensor	HP	8481A	2022-12-16	2023-12-16	2702A65976
☒	Power Sensor	HP	8481A	2022-12-16	2023-12-16	2702A61707
☒	Directional Coupler	HP	772D	2022-06-24	2023-06-24	2889A01064
☒	Low Pass Filter 3.0 GHz	MICROLAB	LA-30N	2022-06-24	2023-06-24	2
☒	Low Pass Filter 6.0 GHz	MICROLAB	LA-60N	2022-12-16	2023-12-16	03942
☒	Attenuators(10 dB)	WEINSCHEL	23-10-34	2022-12-16	2023-12-16	BP4387
☒	Attenuators	Saluki	3.5TS2-3dB-26.5G	2022-06-24	2023-06-24	21090703
☒	Dielectric Probe kit	SPEAG	DAKS-3.5	2022-11-08	2023-11-08	1040
☒			R140	2022-11-28	2023-11-28	22323001
☒	Bluetooth Tester	TESCOM	TC-3000C	2022-12-16	2023-12-16	3000C000678

NOTE(S):

- The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by Dt&C before each test. The brain and muscle simulating material are calibrated by Dt&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.
- CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

12. MEASUREMENT UNCERTAINTIES

2 450 MHz Head (S/N: 3916)

Error Description	Uncertainty value %	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (%)	Standard 10 g (%)	Ci x U_i 1 g	Ci x U_i 10 g	vi 2 or Veff
Measurement System										
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	1.7	1.7	∞
Spatial x-y-Resolution	3.0	Rectangular	√3	1	1	5.8	5.8	5.8	5.8	∞
Fast SAR z-Approximation	3.0	Rectangular	√3	1	1	4.0	4.0	4.0	4.0	∞
Test Sample Related										
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	1.2	1.2	∞
Physical Parameters										
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	1.2	0.5	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	2.4	2.0	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	1.0	0.7	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.87	1.0	0.20	0.26	10
Temp. unc. - Conductivity	2.0	Rectangular	√3	0.78	0.71	0.90	0.82	0.70	0.58	∞
Temp. unc. - Permittivity	2.0	Rectangular	√3	0.23	0.26	0.27	0.30	0.06	0.08	∞
Combined Standard Uncertainty						13	13			330
Expanded Uncertainty (k=2)						26	26			

$$U(1\text{ g}) = k \times u_c$$

$$= 2 \times 13\%$$

$$= 26\% \text{ (The confidence level is about } 95\% \text{ } k=2)$$

$$U(10\text{ g}) = k \times u_c$$

$$= 2 \times 13\%$$

$$= 26\% \text{ (The confidence level is about } 95\% \text{ } k=2)$$

Note. Refer to "DTNC-UP-TS02-2022"

5 200 ~ 5 800 MHz Head (S/N: 3933)

Error Description	Uncertainty value %	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (%)	Standard 10 g (%)	Ci x U _i 1 g	Ci x U _i 10 g	vi 2 or Veff
Measurement System										
Probe calibration	6.6	Normal	1	1	1	6.6	6.6	6.6	6.6	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	1.7	1.7	∞
Spatial x-y-Resolution	3.0	Rectangular	√3	1	1	5.8	5.8	5.8	5.8	∞
Fast SAR z-Approximation	3.0	Rectangular	√3	1	1	4.0	4.0	4.0	4.0	∞
Test Sample Related										
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	1.2	1.2	∞
Physical Parameters										
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	1.2	0.5	∞
Liquid conductivity (Meas.)	3.8	Normal	1	0.78	0.71	3.0	2.7	2.3	1.9	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	1.0	0.7	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.90	1.0	0.21	0.26	10
Temp. unc. - Conductivity	2.0	Rectangular	√3	0.78	0.71	0.90	0.82	0.70	0.58	∞
Temp. unc. - Permittivity	1.8	Rectangular	√3	0.23	0.26	0.24	0.27	0.05	0.07	∞
Combined Standard Uncertainty						14	13			330
Expanded Uncertainty (k=2)						28	26			

$$U(1\text{ g}) = k \times u_c$$

$$= 2 \times 14\%$$

= 28 % (The confidence level is about 95 % $k = 2$)

$$U(10\text{ g}) = k \times u_c$$

$$= 2 \times 13\%$$

= 26 % (The confidence level is about 95 % $k = 2$)

Note. Refer to "DTNC-UP-TS07-2022"

13. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

14. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.