# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5310MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

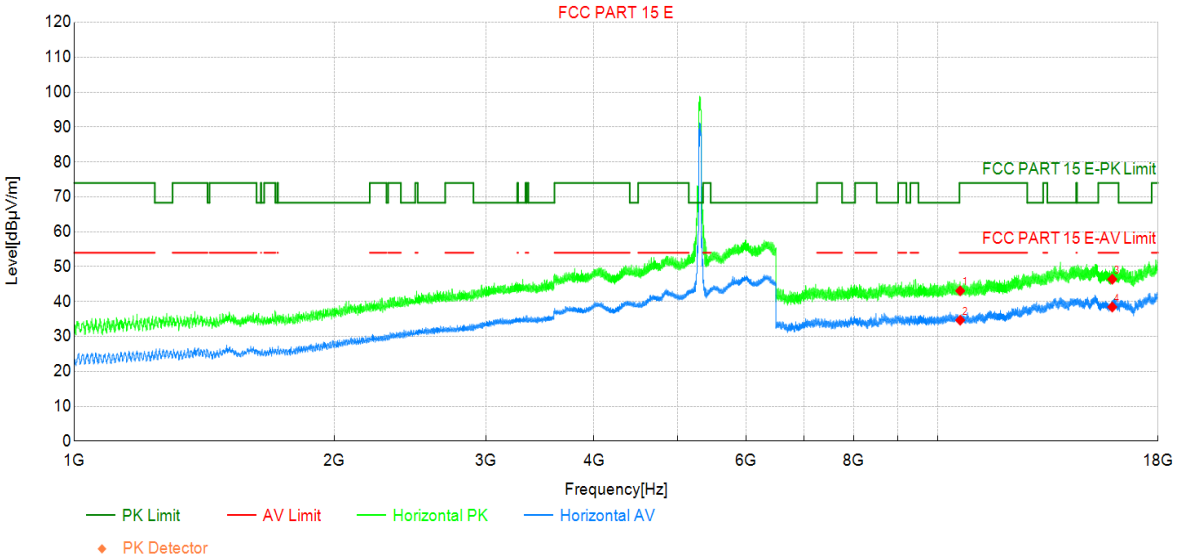


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10620.00 | 36.29 | 43.08 | 6.79 | 74.00 | 30.92 | PK | Horizo | PASS |
| 2 | 10620.00 | 27.87 | 34.66 | 6.79 | 54.00 | 19.34 | AV | Horizo | PASS |
| 3 | 15930.00 | 32.03 | 46.40 | 14.37 | 74.00 | 27.60 | PK | Horizo | PASS |
| 4 | 15930.00 | 24.07 | 38.44 | 14.37 | 54.00 | 15.56 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5310MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

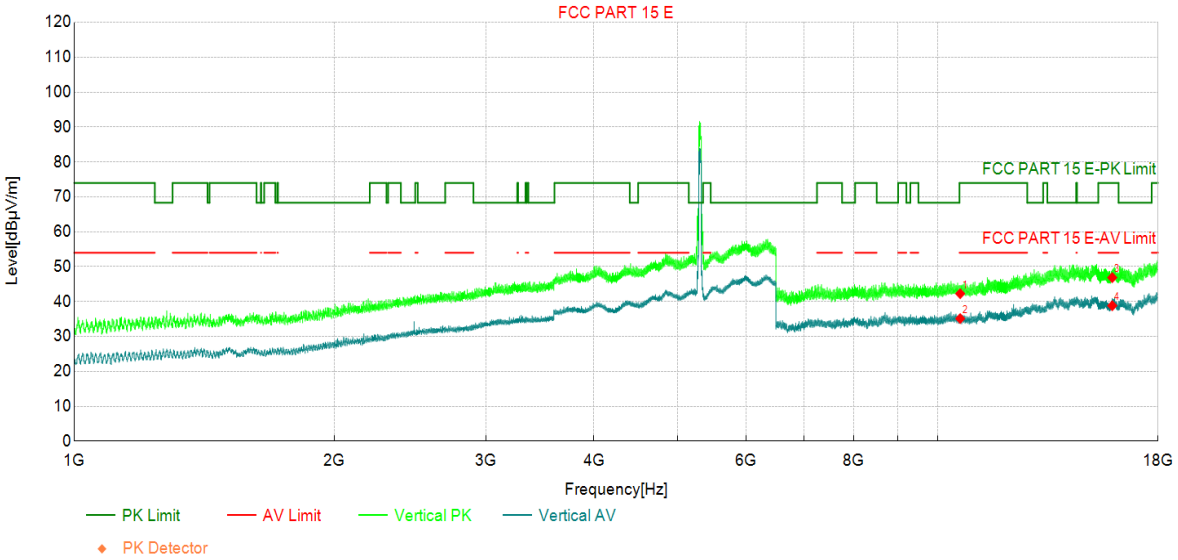


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10620.00 | 35.47 | 42.26 | 6.79 | 74.00 | 31.74 | PK | Vertic | PASS |
| 2 | 10620.00 | 28.34 | 35.13 | 6.79 | 54.00 | 18.87 | AV | Vertic | PASS |
| 3 | 15930.00 | 32.50 | 46.87 | 14.37 | 74.00 | 27.13 | PK | Vertic | PASS |
| 4 | 15930.00 | 24.45 | 38.82 | 14.37 | 54.00 | 15.18 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5510MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

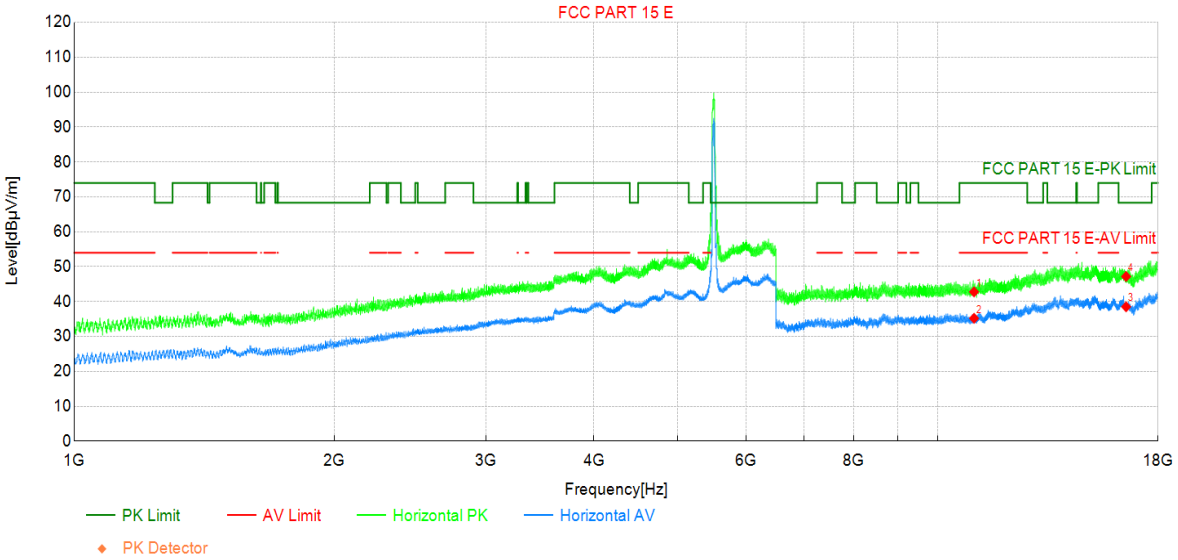


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11020.00 | 35.53 | 42.78 | 7.25 | 74.00 | 31.22 | PK | Horizo | PASS |
| 2 | 11020.00 | 27.95 | 35.20 | 7.25 | 54.00 | 18.80 | AV | Horizo | PASS |
| 3 | 16530.00 | 23.50 | 38.51 | 15.01 | - | - | AV | Horizo | NA |
| 4 | 16530.00 | 32.17 | 47.18 | 15.01 | 68.30 | 21.12 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5510MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

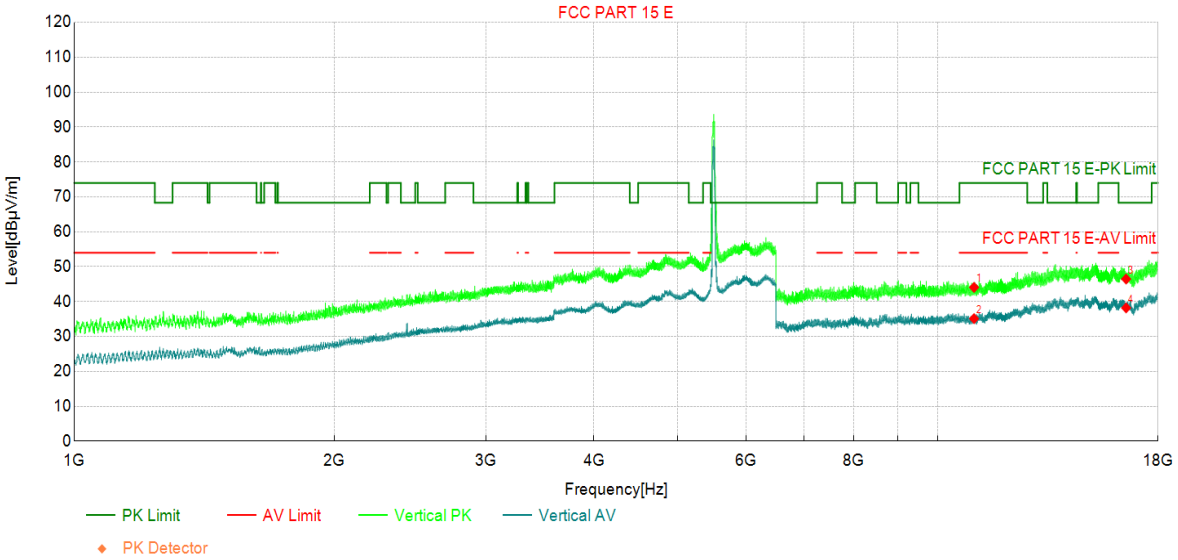


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11020.00 | 36.82 | 44.07 | 7.25 | 74.00 | 29.93 | PK | Vertic | PASS |
| 2 | 11020.00 | 27.86 | 35.11 | 7.25 | 54.00 | 18.89 | AV | Vertic | PASS |
| 3 | 16530.00 | 31.44 | 46.45 | 15.01 | 68.30 | 21.85 | PK | Vertic | PASS |
| 4 | 16530.00 | 23.18 | 38.19 | 15.01 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5550MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

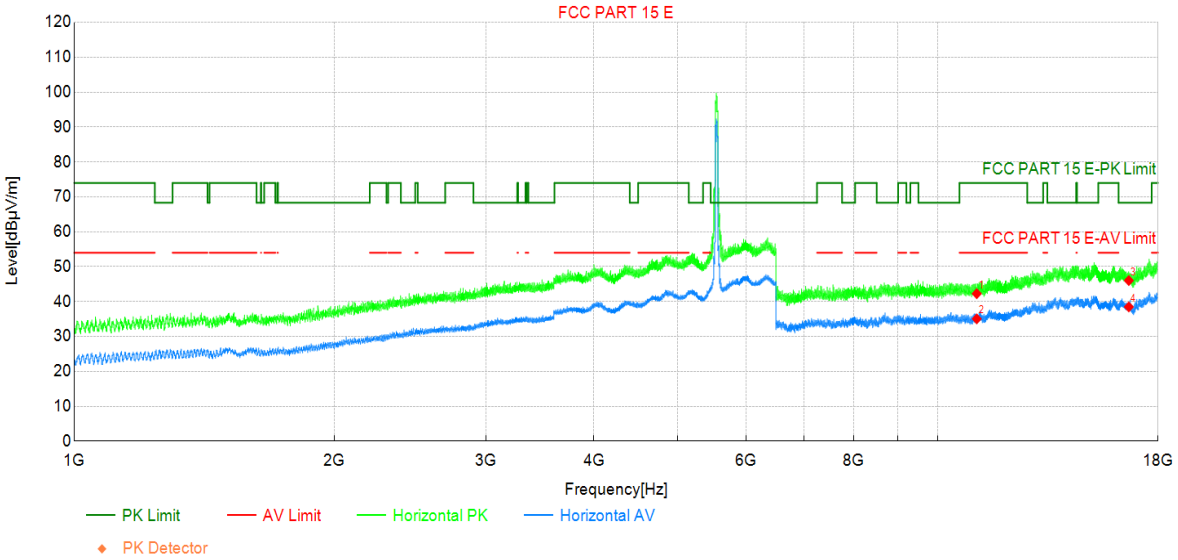


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11100.00 | 35.60 | 42.26 | 6.66 | 74.00 | 31.74 | PK | Horizo | PASS |
| 2 | 11100.00 | 28.39 | 35.05 | 6.66 | 54.00 | 18.95 | AV | Horizo | PASS |
| 3 | 16650.00 | 31.32 | 46.01 | 14.69 | 68.30 | 22.29 | PK | Horizo | PASS |
| 4 | 16650.00 | 23.78 | 38.47 | 14.69 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5550MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

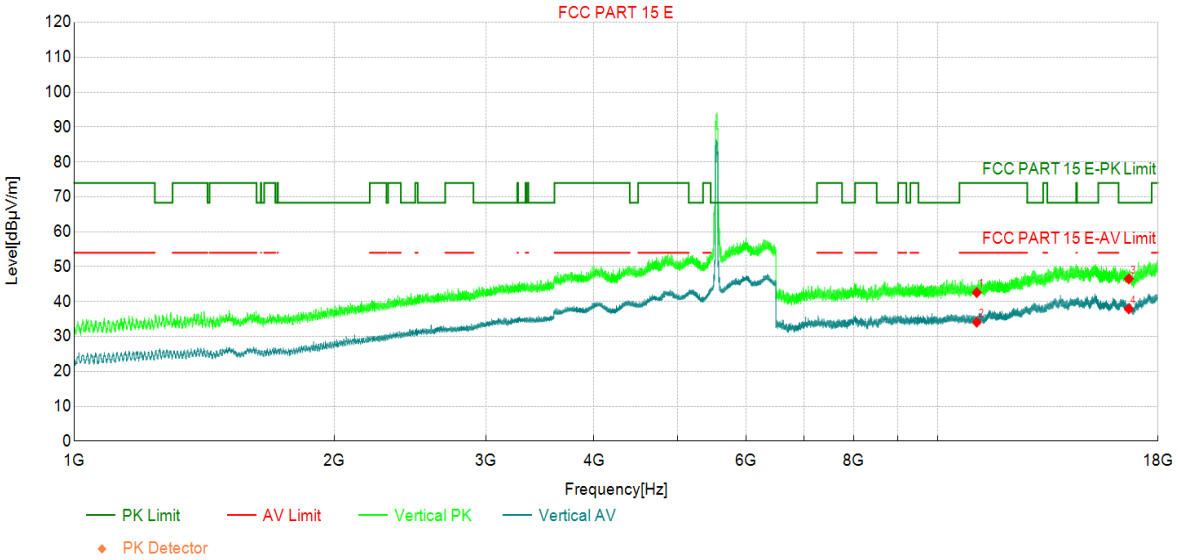


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11100.00 | 35.92 | 42.58 | 6.66 | 74.00 | 31.42 | PK | Vertic | PASS |
| 2 | 11100.00 | 27.41 | 34.07 | 6.66 | 54.00 | 19.93 | AV | Vertic | PASS |
| 3 | 16650.00 | 31.81 | 46.50 | 14.69 | 68.30 | 21.80 | PK | Vertic | PASS |
| 4 | 16650.00 | 23.20 | 37.89 | 14.69 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5670MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

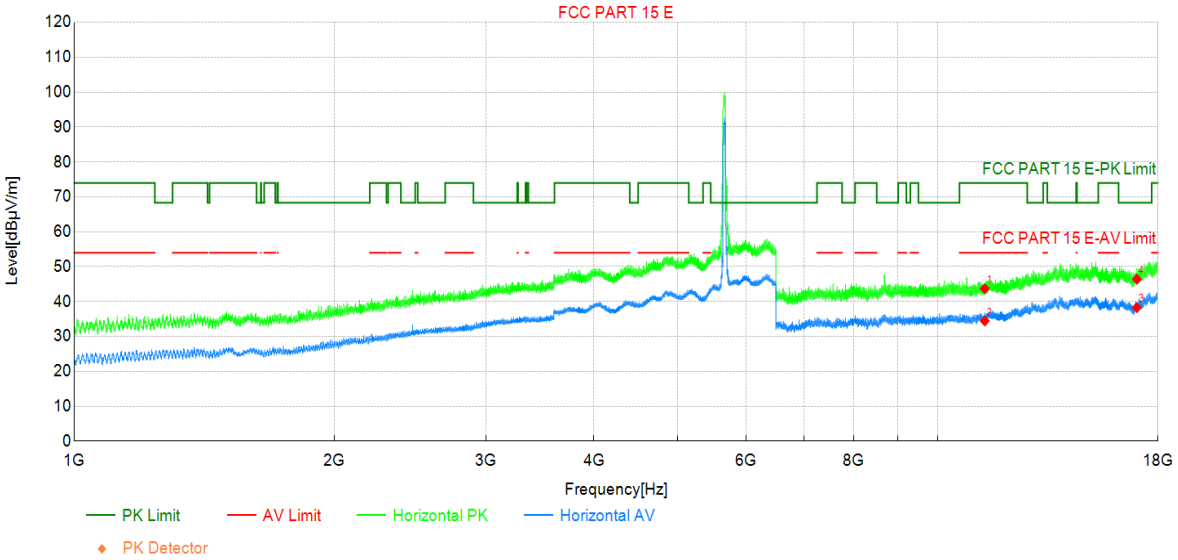


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11340.00 | 35.84 | 43.70 | 7.86 | 74.00 | 30.30 | PK | Horizo | PASS |
| 2 | 11340.00 | 26.59 | 34.45 | 7.86 | 54.00 | 19.55 | AV | Horizo | PASS |
| 3 | 17010.00 | 22.22 | 38.26 | 16.04 | - | - | AV | Horizo | NA |
| 4 | 17010.00 | 30.37 | 46.41 | 16.04 | 68.30 | 21.89 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5670MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

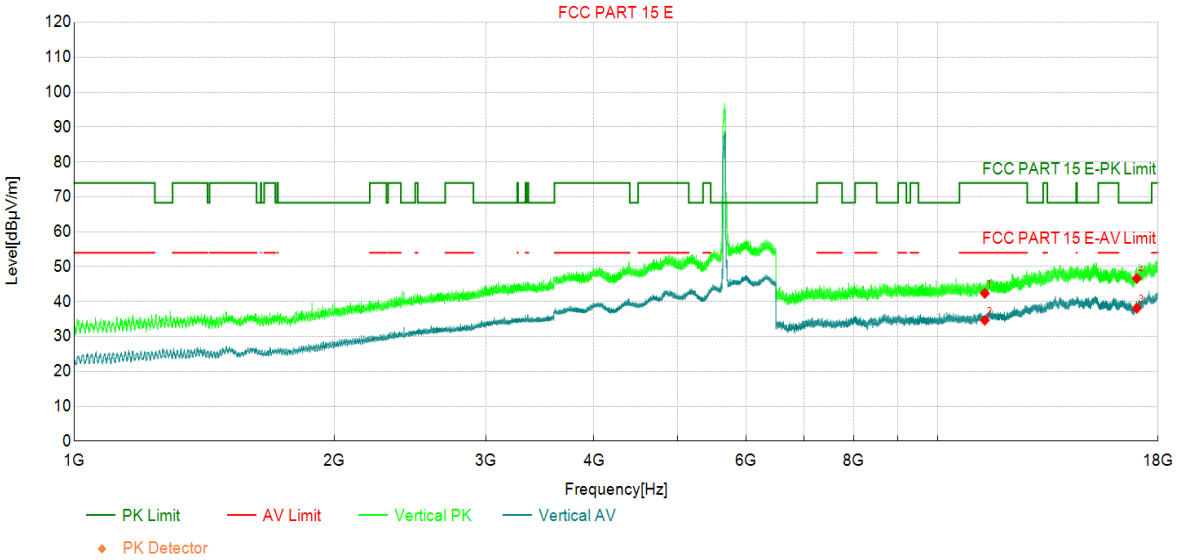


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11340.00 | 34.49 | 42.35 | 7.86 | 74.00 | 31.65 | PK | Vertic | PASS |
| 2 | 11340.00 | 26.79 | 34.65 | 7.86 | 54.00 | 19.35 | AV | Vertic | PASS |
| 3 | 17010.00 | 22.03 | 38.07 | 16.04 | - | - | AV | Vertic | NA |
| 4 | 17010.00 | 30.56 | 46.60 | 16.04 | 68.30 | 21.70 | PK | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5755MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

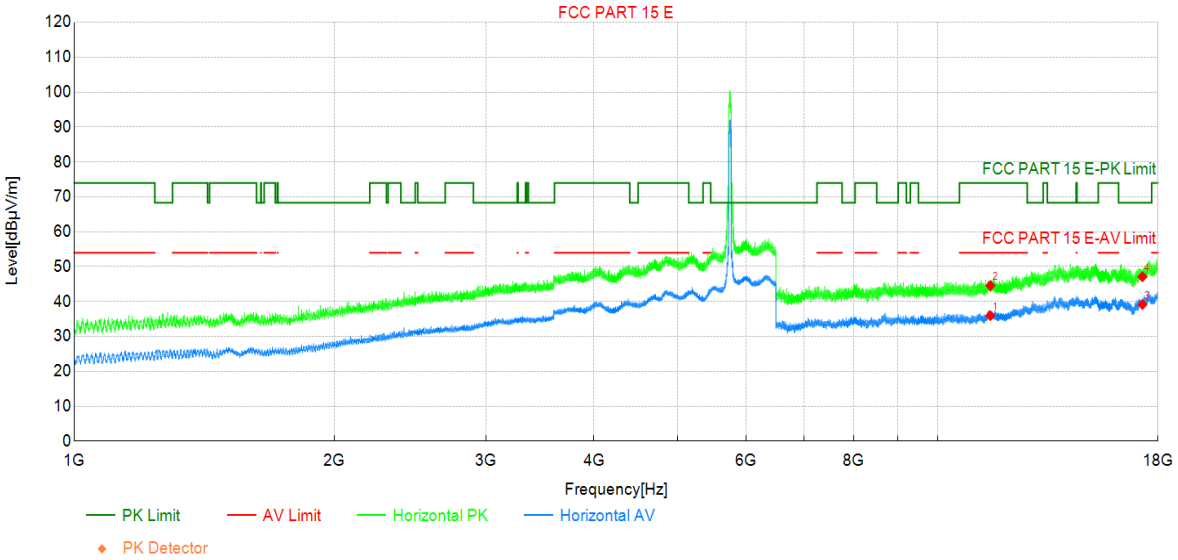


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11510.00 | 27.50 | 35.98 | 8.48 | 54.00 | 18.02 | AV | Horizo | PASS |
| 2 | 11510.00 | 36.09 | 44.57 | 8.48 | 74.00 | 29.43 | PK | Horizo | PASS |
| 3 | 17265.00 | 23.65 | 39.16 | 15.51 | - | - | AV | Horizo | NA |
| 4 | 17265.00 | 31.61 | 47.12 | 15.51 | 68.30 | 21.18 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5755MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

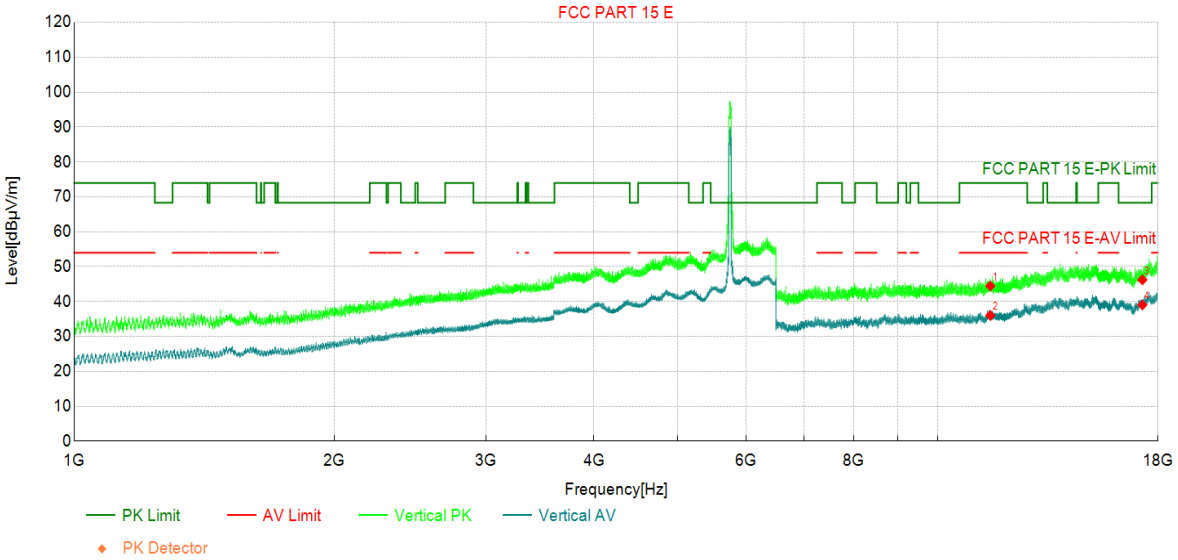


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11510.00 | 35.98 | 44.46 | 8.48 | 74.00 | 29.54 | PK | Vertic | PASS |
| 2 | 11510.00 | 27.53 | 36.01 | 8.48 | 54.00 | 17.99 | AV | Vertic | PASS |
| 3 | 17265.00 | 30.72 | 46.23 | 15.51 | 68.30 | 22.07 | PK | Vertic | PASS |
| 4 | 17265.00 | 23.53 | 39.04 | 15.51 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5795MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

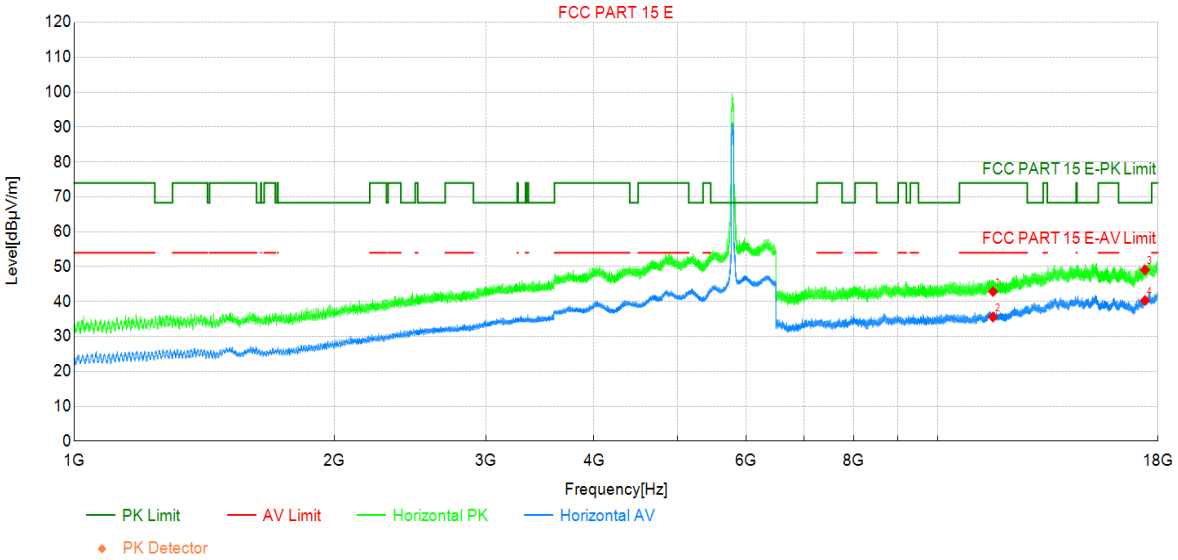


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11590.00 | 34.13 | 42.87 | 8.74 | 74.00 | 31.13 | PK | Horizo | PASS |
| 2 | 11590.00 | 26.83 | 35.57 | 8.74 | 54.00 | 18.43 | AV | Horizo | PASS |
| 3 | 17385.00 | 32.51 | 49.09 | 16.58 | 68.30 | 19.21 | PK | Horizo | PASS |
| 4 | 17385.00 | 23.72 | 40.30 | 16.58 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode3:Transmit at 5795MHz by 802.11n(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

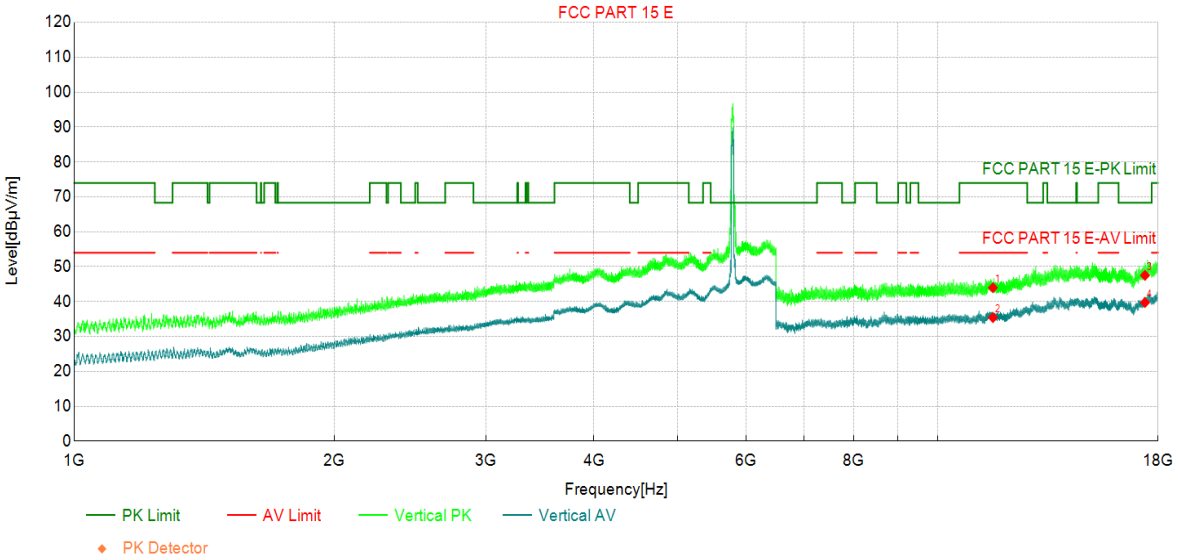


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11590.00 | 35.23 | 43.97 | 8.74 | 74.00 | 30.03 | PK | Vertic | PASS |
| 2 | 11590.00 | 26.66 | 35.40 | 8.74 | 54.00 | 18.60 | AV | Vertic | PASS |
| 3 | 17385.00 | 30.92 | 47.50 | 16.58 | 68.30 | 20.80 | PK | Vertic | PASS |
| 4 | 17385.00 | 23.15 | 39.73 | 16.58 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5180MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

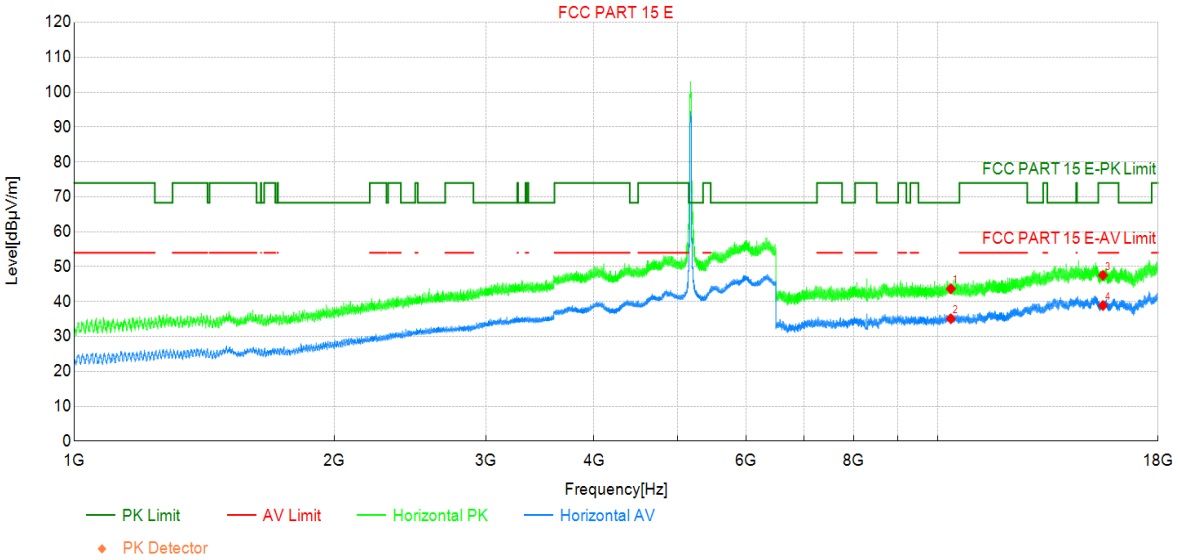


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10360.00 | 37.08 | 43.66 | 6.58 | 68.30 | 24.64 | PK | Horizo | PASS |
| 2 | 10360.00 | 28.49 | 35.07 | 6.58 | - | - | AV | Horizo | NA |
| 3 | 15540.00 | 33.62 | 47.52 | 13.90 | 74.00 | 26.48 | PK | Horizo | PASS |
| 4 | 15540.00 | 24.96 | 38.86 | 13.90 | 54.00 | 15.14 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5180MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

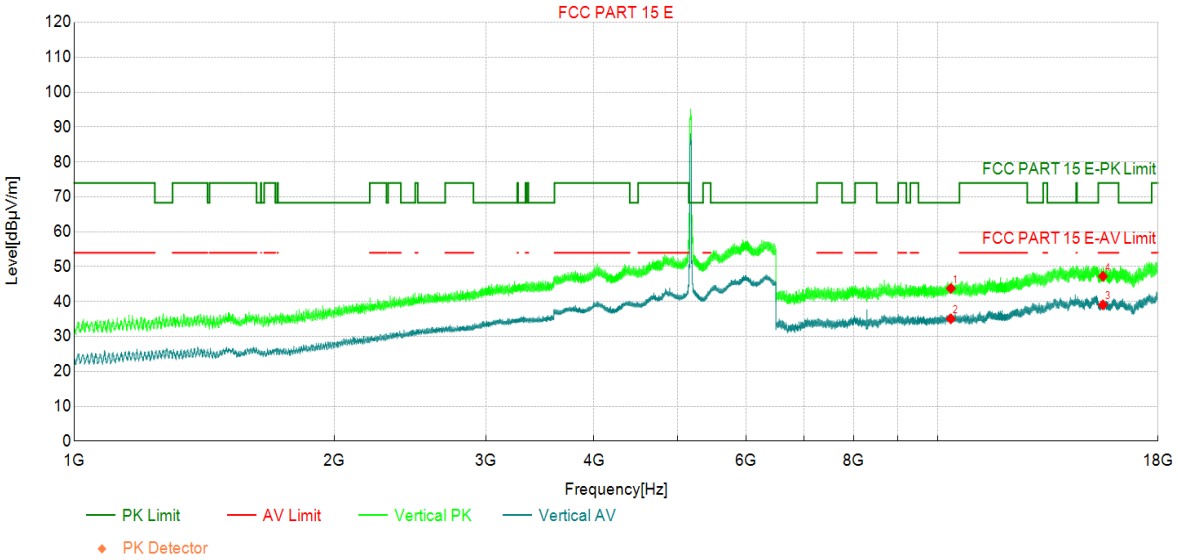


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10360.00 | 37.20 | 43.78 | 6.58 | 68.30 | 24.52 | PK | Vertic | PASS |
| 2 | 10360.00 | 28.48 | 35.06 | 6.58 | - | - | AV | Vertic | NA |
| 3 | 15540.00 | 25.16 | 39.06 | 13.90 | 54.00 | 14.94 | AV | Vertic | PASS |
| 4 | 15540.00 | 33.34 | 47.24 | 13.90 | 74.00 | 26.76 | PK | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5220MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

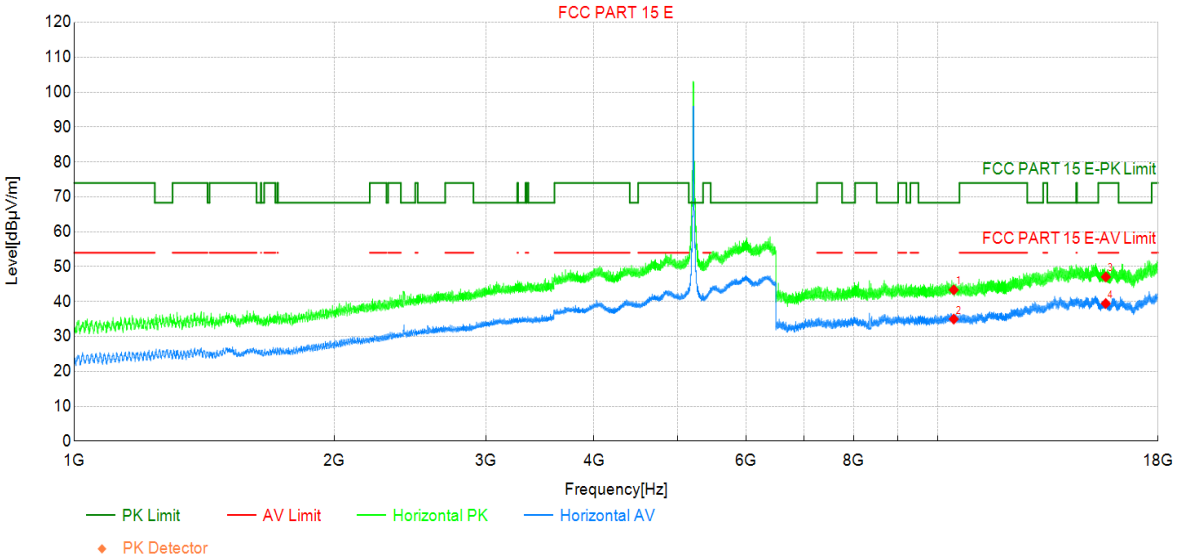


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10440.00 | 36.71 | 43.35 | 6.64 | 68.30 | 24.95 | PK | Horizo | PASS |
| 2 | 10440.00 | 28.34 | 34.98 | 6.64 | - | - | AV | Horizo | NA |
| 3 | 15660.00 | 32.97 | 47.06 | 14.09 | 74.00 | 26.94 | PK | Horizo | PASS |
| 4 | 15660.00 | 25.34 | 39.43 | 14.09 | 54.00 | 14.57 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5220MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

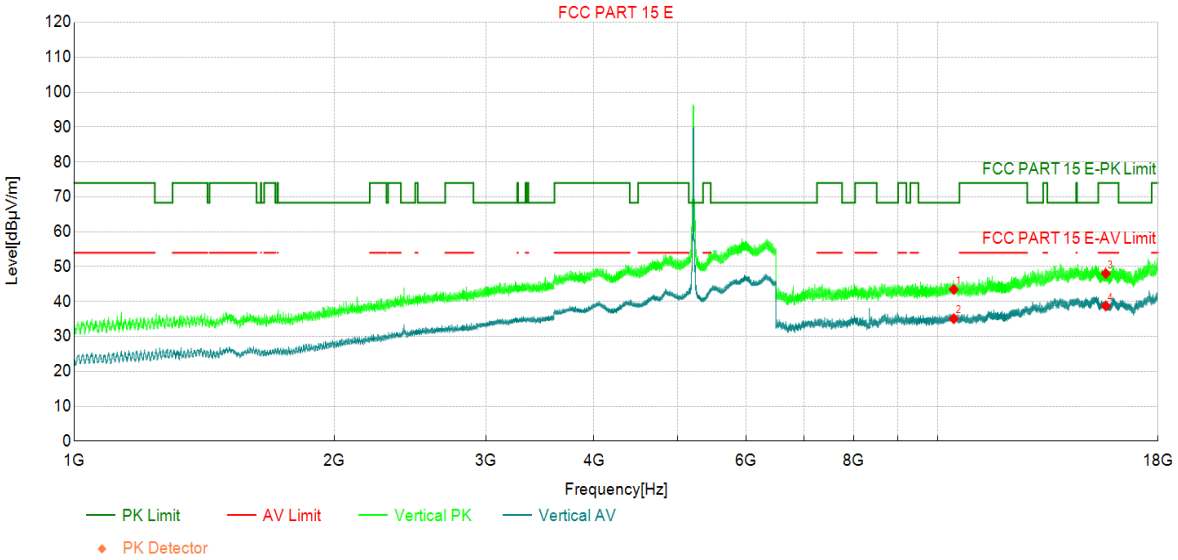


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10440.00 | 36.83 | 43.47 | 6.64 | 68.30 | 24.83 | PK | Vertic | PASS |
| 2 | 10440.00 | 28.43 | 35.07 | 6.64 | - | - | AV | Vertic | NA |
| 3 | 15660.00 | 33.93 | 48.02 | 14.09 | 74.00 | 25.98 | PK | Vertic | PASS |
| 4 | 15660.00 | 24.63 | 38.72 | 14.09 | 54.00 | 15.28 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5240MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

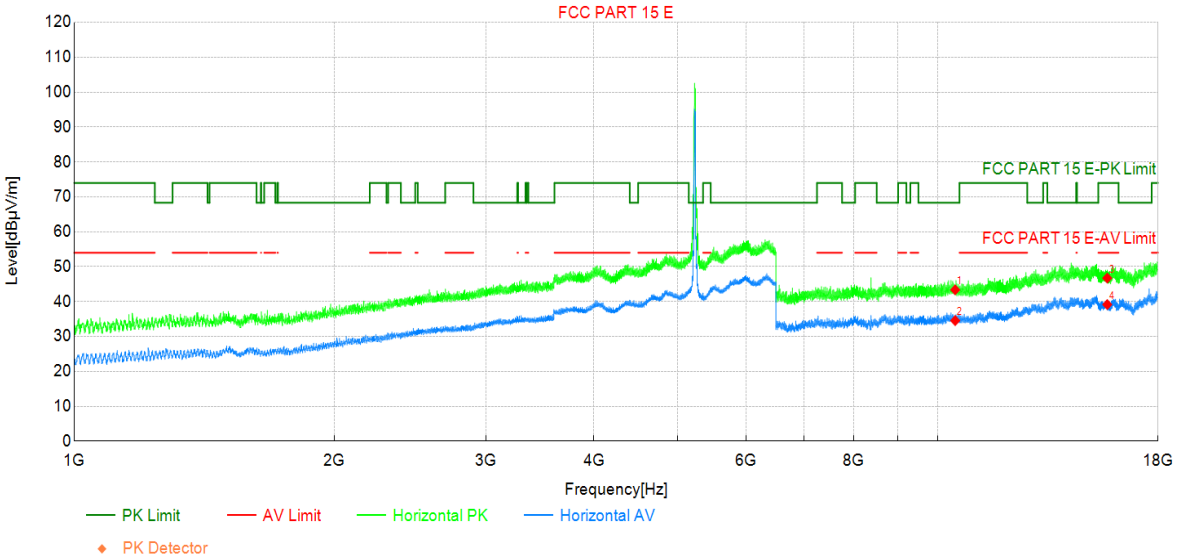


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10480.00 | 36.65 | 43.36 | 6.71 | 68.30 | 24.94 | PK | Horizo | PASS |
| 2 | 10480.00 | 27.84 | 34.55 | 6.71 | - | - | AV | Horizo | NA |
| 3 | 15720.00 | 32.31 | 46.72 | 14.41 | 74.00 | 27.28 | PK | Horizo | PASS |
| 4 | 15720.00 | 24.73 | 39.14 | 14.41 | 54.00 | 14.86 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5240MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

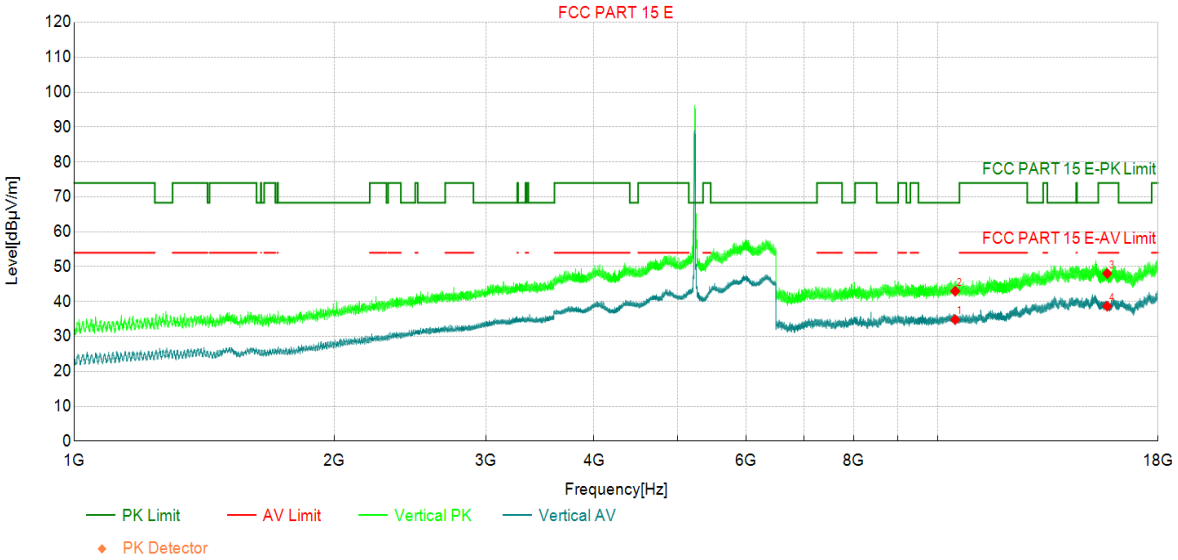


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10480.00 | 28.10 | 34.81 | 6.71 | - | - | AV | Vertic | NA |
| 2 | 10480.00 | 36.25 | 42.96 | 6.71 | 68.30 | 25.34 | PK | Vertic | PASS |
| 3 | 15720.00 | 33.64 | 48.05 | 14.41 | 74.00 | 25.95 | PK | Vertic | PASS |
| 4 | 15720.00 | 24.25 | 38.66 | 14.41 | 54.00 | 15.34 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5260MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

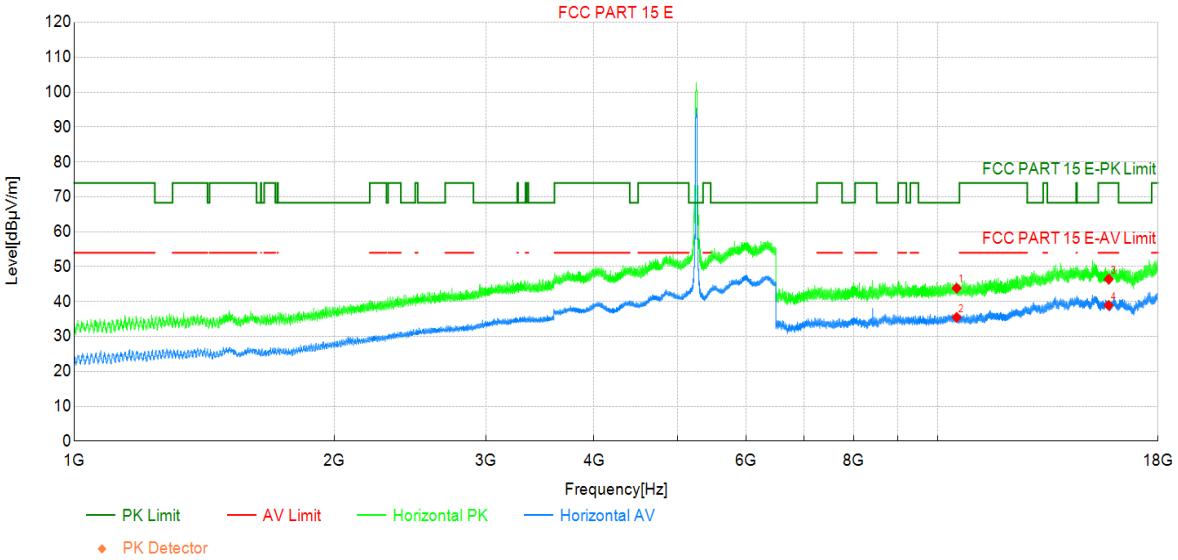


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10520.00 | 37.07 | 43.83 | 6.76 | 68.30 | 24.47 | PK | Horizo | PASS |
| 2 | 10520.00 | 28.71 | 35.47 | 6.76 | - | - | AV | Horizo | NA |
| 3 | 15780.00 | 32.34 | 46.43 | 14.09 | 74.00 | 27.57 | PK | Horizo | PASS |
| 4 | 15780.00 | 24.83 | 38.92 | 14.09 | 54.00 | 15.08 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5260MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

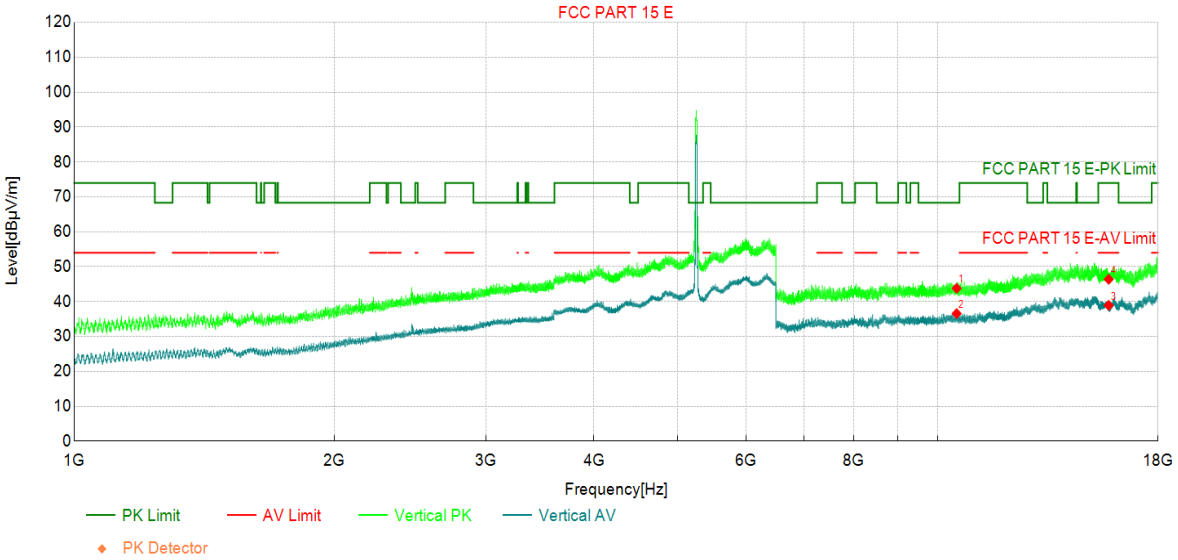


| Suspected Data List | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10520.00 | 37.03 | 43.79 | 6.76 | 68.30 | 24.51 | PK | Vertic | PASS |
| 2 | 10520.00 | 29.80 | 36.56 | 6.76 | - | - | AV | Vertic | NA |
| 3 | 15780.00 | 24.82 | 38.91 | 14.09 | 54.00 | 15.09 | AV | Vertic | PASS |
| 4 | 15780.00 | 32.30 | 46.39 | 14.09 | 74.00 | 27.61 | PK | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5300MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

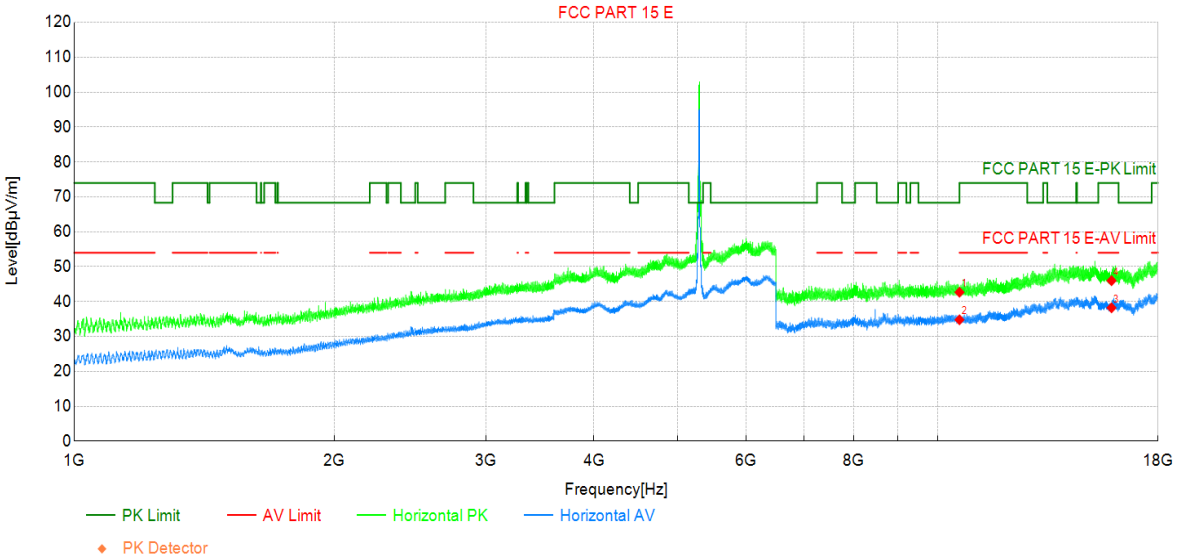


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10600.00 | 35.89 | 42.67 | 6.78 | 68.30 | 25.63 | PK | Horizo | PASS |
| 2 | 10600.00 | 28.00 | 34.78 | 6.78 | 54.00 | 19.22 | AV | Horizo | PASS |
| 3 | 15900.00 | 24.09 | 38.21 | 14.12 | 54.00 | 15.79 | AV | Horizo | PASS |
| 4 | 15900.00 | 31.87 | 45.99 | 14.12 | 74.00 | 28.01 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5300MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

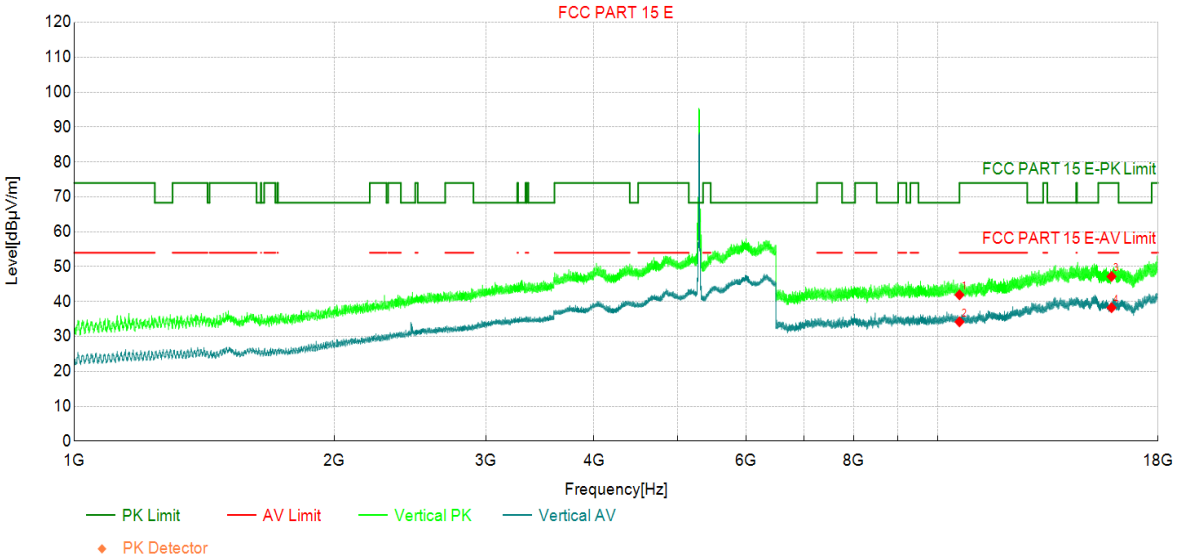


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10600.00 | 35.14 | 41.92 | 6.78 | 68.30 | 26.38 | PK | Vertic | PASS |
| 2 | 10600.00 | 27.42 | 34.20 | 6.78 | 54.00 | 19.80 | AV | Vertic | PASS |
| 3 | 15900.00 | 33.07 | 47.19 | 14.12 | 74.00 | 26.81 | PK | Vertic | PASS |
| 4 | 15900.00 | 24.13 | 38.25 | 14.12 | 54.00 | 15.75 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5320MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

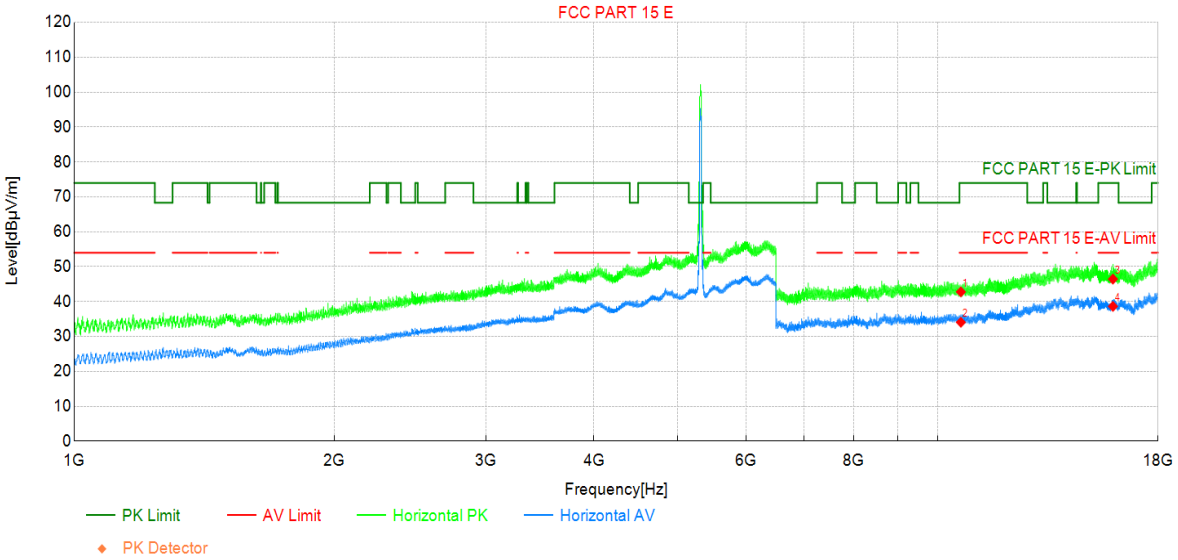


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10640.00 | 35.97 | 42.77 | 6.80 | 74.00 | 31.23 | PK | Horizo | PASS |
| 2 | 10640.00 | 27.26 | 34.06 | 6.80 | 54.00 | 19.94 | AV | Horizo | PASS |
| 3 | 15960.00 | 31.80 | 46.43 | 14.63 | 74.00 | 27.57 | PK | Horizo | PASS |
| 4 | 15960.00 | 23.99 | 38.62 | 14.63 | 54.00 | 15.38 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5320MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

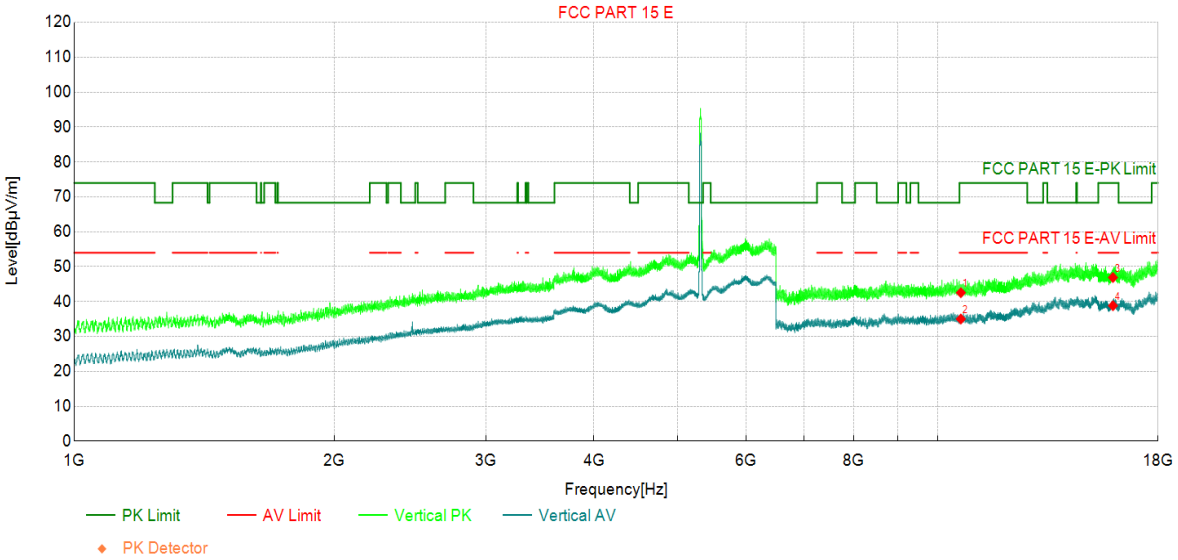


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10640.00 | 35.74 | 42.54 | 6.80 | 74.00 | 31.46 | PK | Vertic | PASS |
| 2 | 10640.00 | 28.20 | 35.00 | 6.80 | 54.00 | 19.00 | AV | Vertic | PASS |
| 3 | 15960.00 | 32.26 | 46.89 | 14.63 | 74.00 | 27.11 | PK | Vertic | PASS |
| 4 | 15960.00 | 24.18 | 38.81 | 14.63 | 54.00 | 15.19 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5500MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

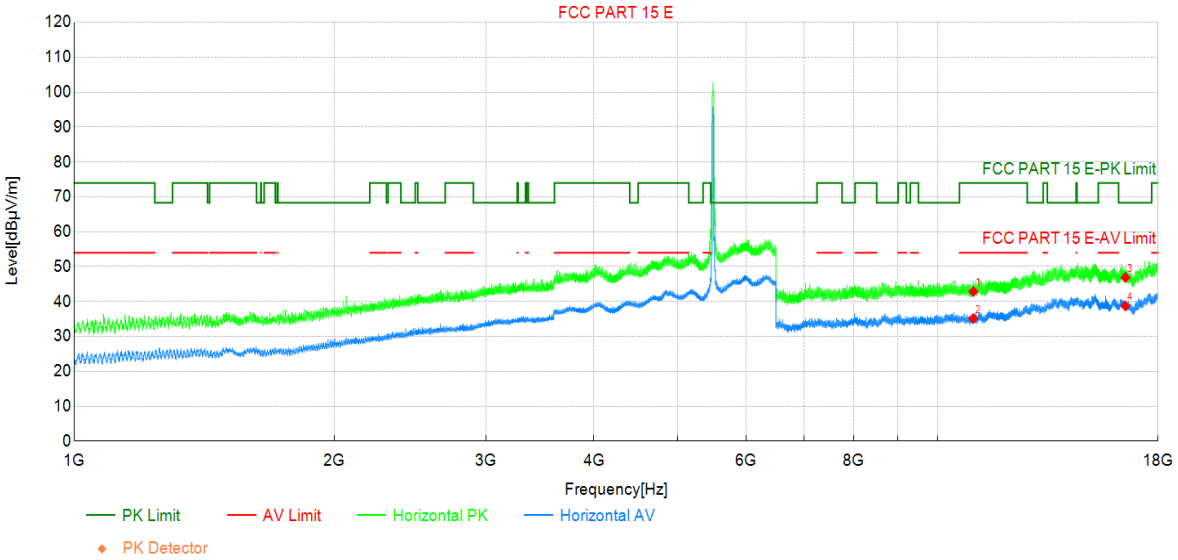


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11000.00 | 35.48 | 42.88 | 7.40 | 74.00 | 31.12 | PK | Horizo | PASS |
| 2 | 11000.00 | 27.74 | 35.14 | 7.40 | 54.00 | 18.86 | AV | Horizo | PASS |
| 3 | 16500.00 | 31.77 | 46.88 | 15.11 | 68.30 | 21.42 | PK | Horizo | PASS |
| 4 | 16500.00 | 23.65 | 38.76 | 15.11 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5500MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

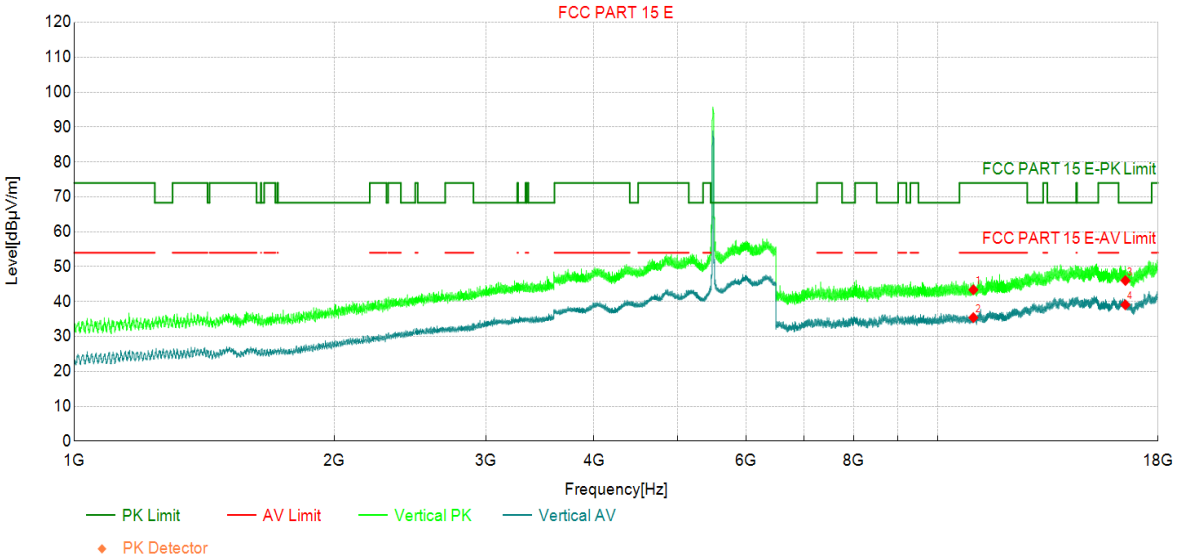


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11000.00 | 35.97 | 43.37 | 7.40 | 74.00 | 30.63 | PK | Vertic | PASS |
| 2 | 11000.00 | 28.00 | 35.40 | 7.40 | 54.00 | 18.60 | AV | Vertic | PASS |
| 3 | 16500.00 | 30.91 | 46.02 | 15.11 | 68.30 | 22.28 | PK | Vertic | PASS |
| 4 | 16500.00 | 23.96 | 39.07 | 15.11 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5580MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

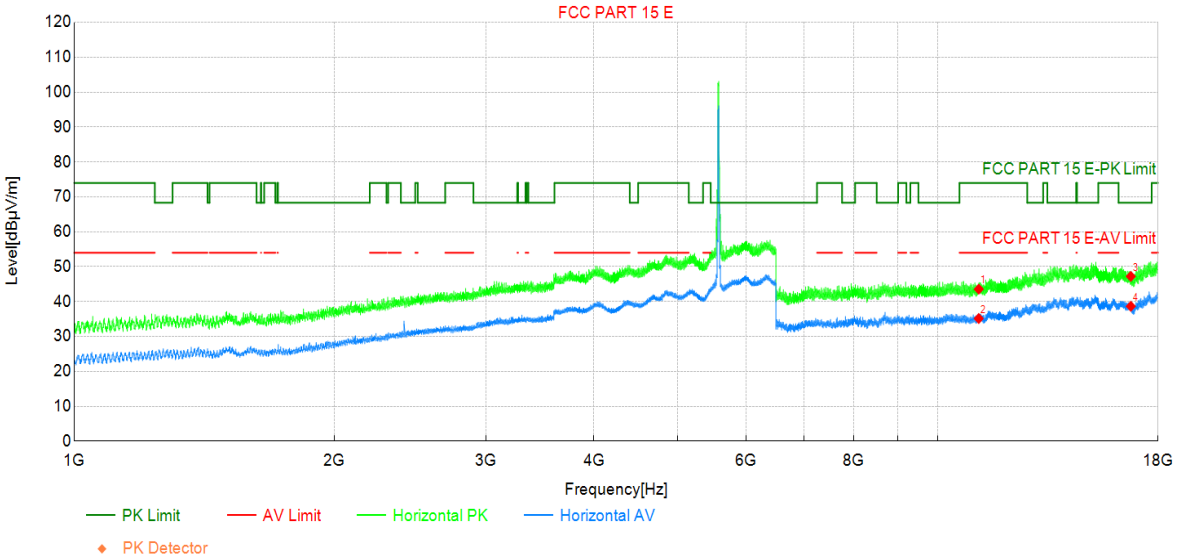


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11160.00 | 36.27 | 43.56 | 7.29 | 74.00 | 30.44 | PK | Horizo | PASS |
| 2 | 11160.00 | 27.85 | 35.14 | 7.29 | 54.00 | 18.86 | AV | Horizo | PASS |
| 3 | 16740.00 | 32.59 | 47.21 | 14.62 | 68.30 | 21.09 | PK | Horizo | PASS |
| 4 | 16740.00 | 24.03 | 38.65 | 14.62 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5580MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

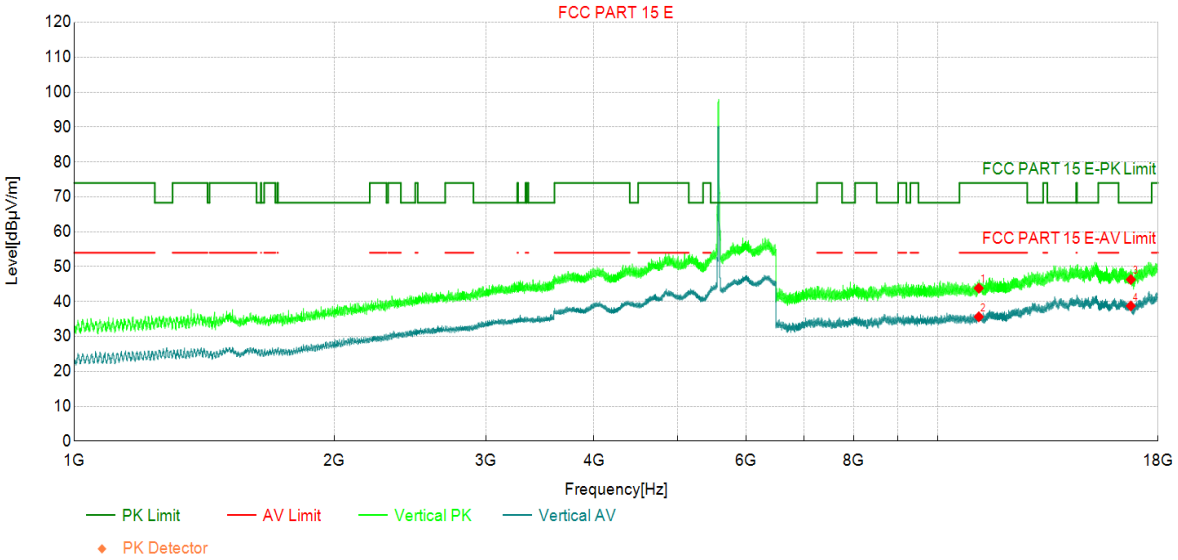


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11160.00 | 36.53 | 43.82 | 7.29 | 74.00 | 30.18 | PK | Vertic | PASS |
| 2 | 11160.00 | 28.33 | 35.62 | 7.29 | 54.00 | 18.38 | AV | Vertic | PASS |
| 3 | 16740.00 | 31.69 | 46.31 | 14.62 | 68.30 | 21.99 | PK | Vertic | PASS |
| 4 | 16740.00 | 24.13 | 38.75 | 14.62 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5700MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

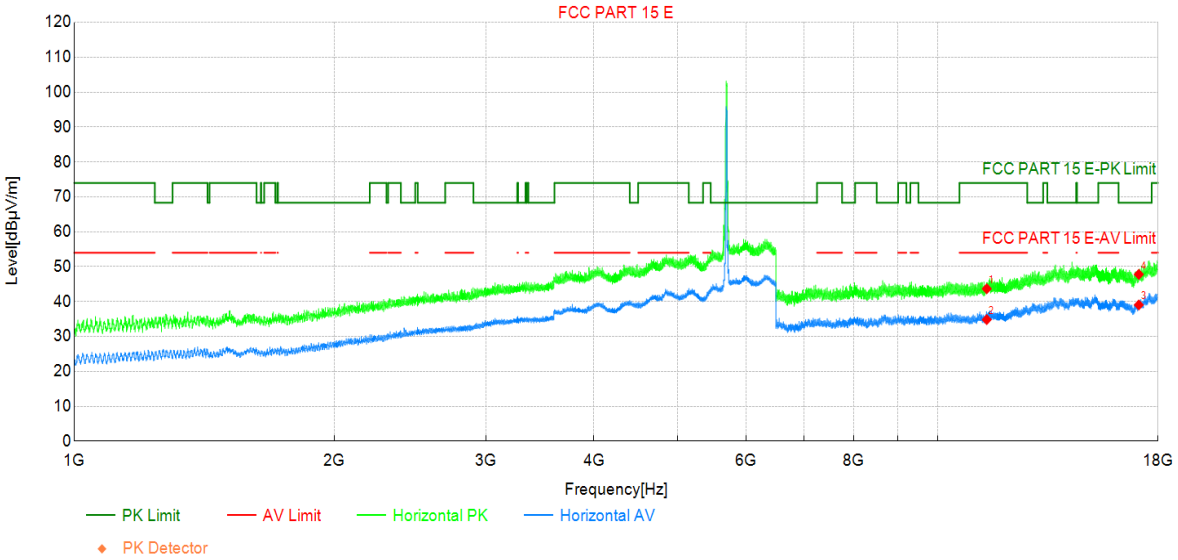


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11400.00 | 35.84 | 43.67 | 7.83 | 74.00 | 30.33 | PK | Horizo | PASS |
| 2 | 11400.00 | 27.00 | 34.83 | 7.83 | 54.00 | 19.17 | AV | Horizo | PASS |
| 3 | 17100.00 | 23.22 | 39.04 | 15.82 | - | - | AV | Horizo | NA |
| 4 | 17100.00 | 31.97 | 47.79 | 15.82 | 68.30 | 20.51 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5700MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

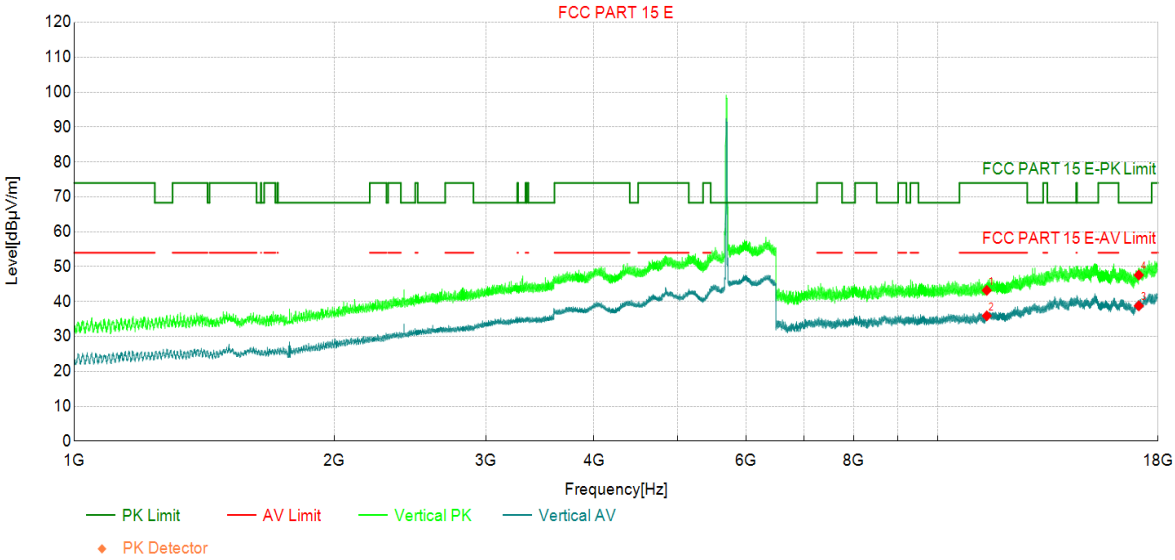


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11400.00 | 35.38 | 43.21 | 7.83 | 74.00 | 30.79 | PK | Vertic | PASS |
| 2 | 11400.00 | 28.07 | 35.90 | 7.83 | 54.00 | 18.10 | AV | Vertic | PASS |
| 3 | 17100.00 | 22.95 | 38.77 | 15.82 | - | - | AV | Vertic | NA |
| 4 | 17100.00 | 31.79 | 47.61 | 15.82 | 68.30 | 20.69 | PK | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5745MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

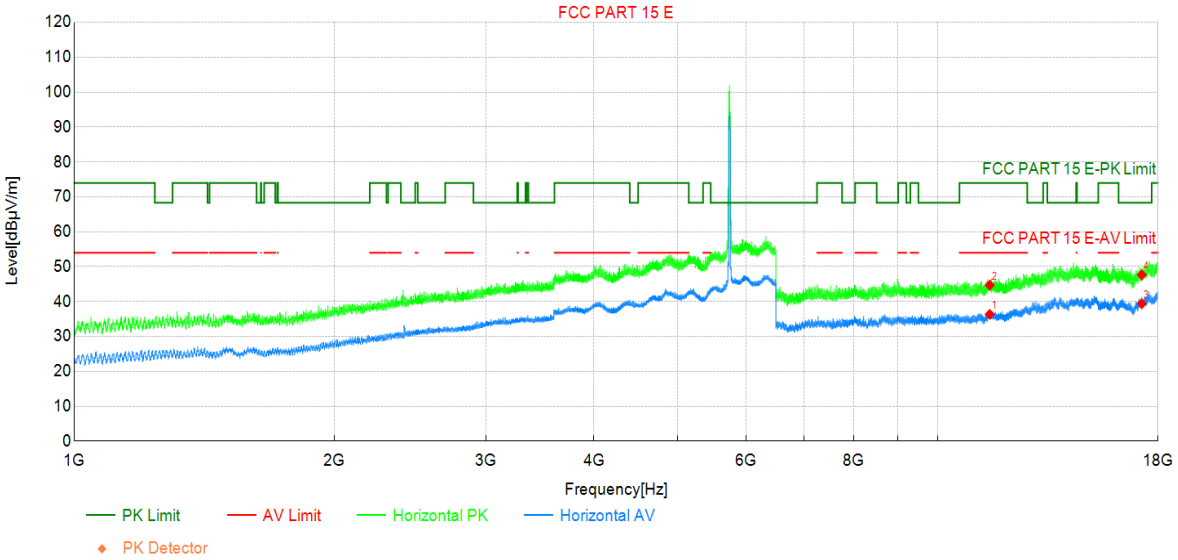


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11490.00 | 27.95 | 36.33 | 8.38 | 54.00 | 17.67 | AV | Horizo | PASS |
| 2 | 11490.00 | 36.33 | 44.71 | 8.38 | 74.00 | 29.29 | PK | Horizo | PASS |
| 3 | 17235.00 | 23.94 | 39.40 | 15.46 | - | - | AV | Horizo | NA |
| 4 | 17235.00 | 32.20 | 47.66 | 15.46 | 68.30 | 20.64 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5745MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

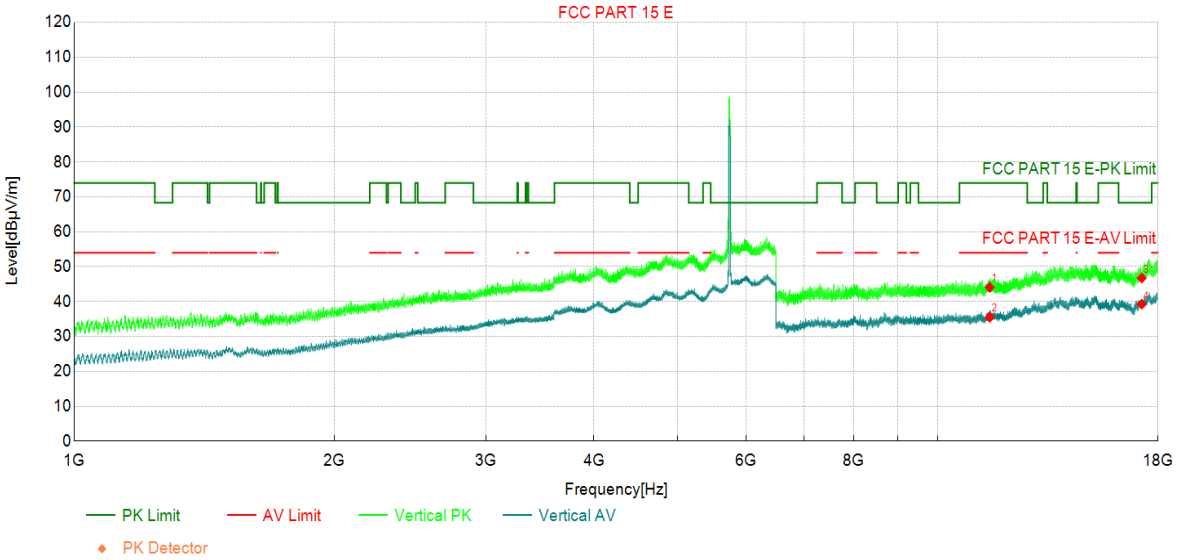


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11490.00 | 35.70 | 44.08 | 8.38 | 74.00 | 29.92 | PK | Vertic | PASS |
| 2 | 11490.00 | 27.11 | 35.49 | 8.38 | 54.00 | 18.51 | AV | Vertic | PASS |
| 3 | 17235.00 | 31.28 | 46.74 | 15.46 | 68.30 | 21.56 | PK | Vertic | PASS |
| 4 | 17235.00 | 23.79 | 39.25 | 15.46 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5785MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

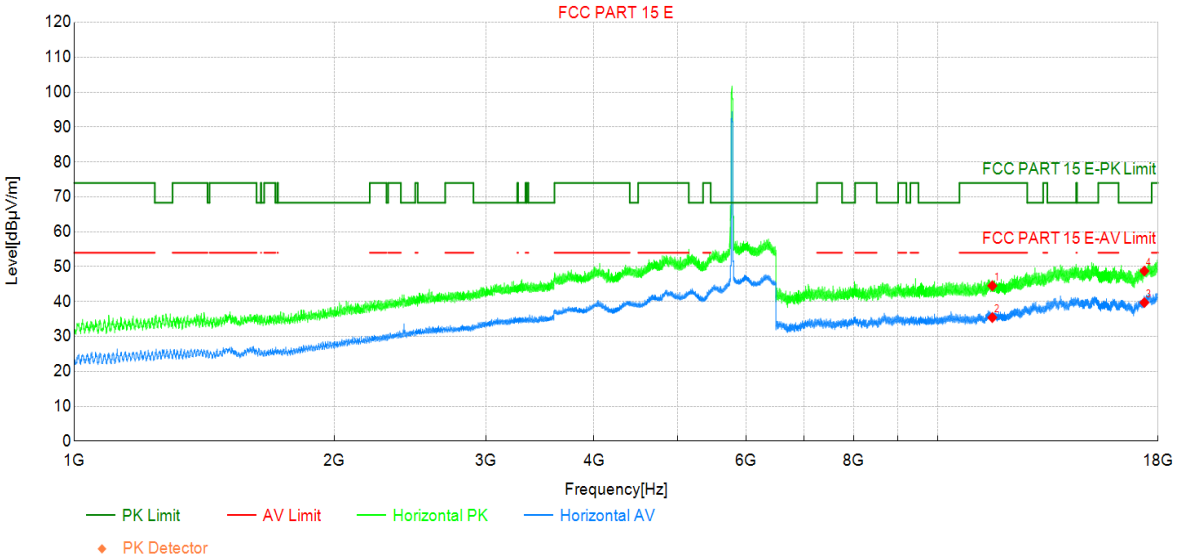


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11570.00 | 35.84 | 44.52 | 8.68 | 74.00 | 29.48 | PK | Horizo | PASS |
| 2 | 11570.00 | 26.73 | 35.41 | 8.68 | 54.00 | 18.59 | AV | Horizo | PASS |
| 3 | 17355.00 | 23.49 | 39.71 | 16.22 | - | - | AV | Horizo | NA |
| 4 | 17355.00 | 32.54 | 48.76 | 16.22 | 68.30 | 19.54 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5785MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

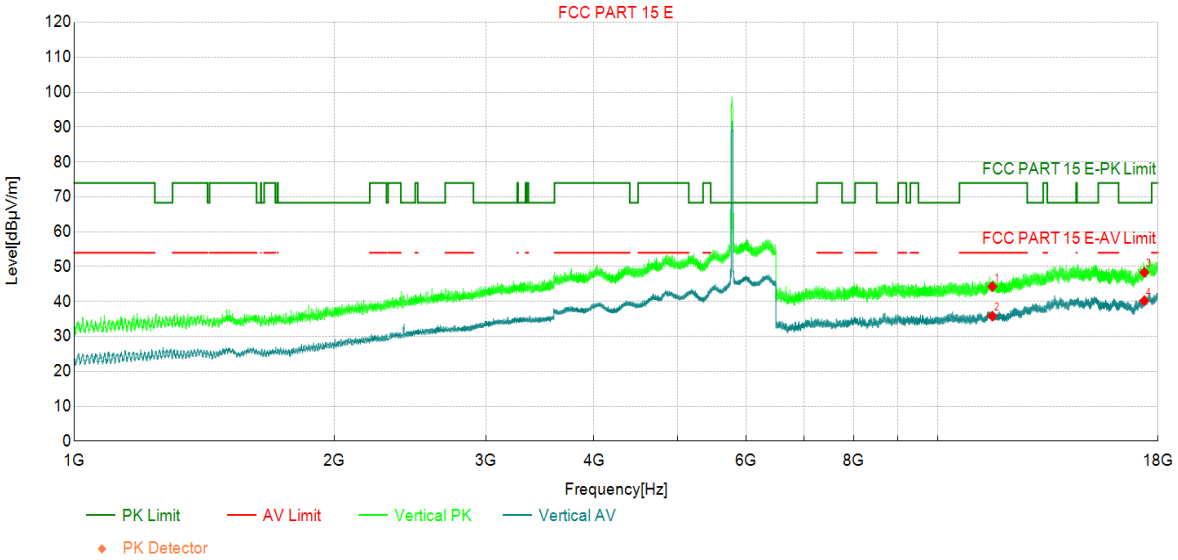


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11570.00 | 35.61 | 44.29 | 8.68 | 74.00 | 29.71 | PK | Vertic | PASS |
| 2 | 11570.00 | 27.13 | 35.81 | 8.68 | 54.00 | 18.19 | AV | Vertic | PASS |
| 3 | 17355.00 | 32.14 | 48.36 | 16.22 | 68.30 | 19.94 | PK | Vertic | PASS |
| 4 | 17355.00 | 24.02 | 40.24 | 16.22 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5825MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

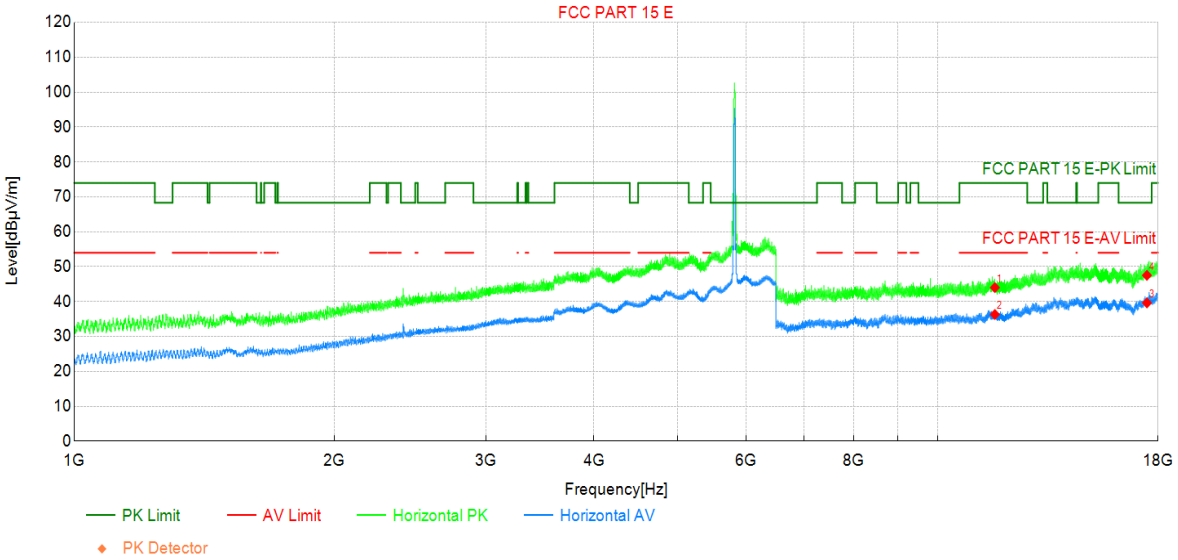


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11650.00 | 35.27 | 44.01 | 8.74 | 74.00 | 29.99 | PK | Horizo | PASS |
| 2 | 11650.00 | 27.57 | 36.31 | 8.74 | 54.00 | 17.69 | AV | Horizo | PASS |
| 3 | 17475.00 | 22.55 | 39.62 | 17.07 | - | - | AV | Horizo | NA |
| 4 | 17475.00 | 30.45 | 47.52 | 17.07 | 68.30 | 20.78 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode4:Transmit at 5825MHz by 802.11ac(20Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

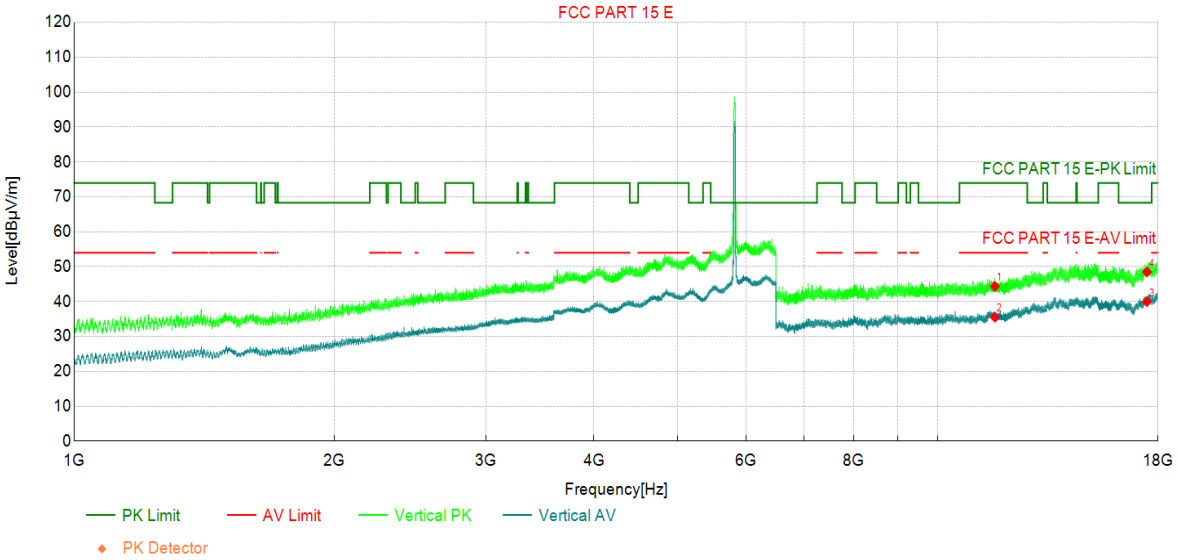


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11650.00 | 35.60 | 44.34 | 8.74 | 74.00 | 29.66 | PK | Vertic | PASS |
| 2 | 11650.00 | 26.80 | 35.54 | 8.74 | 54.00 | 18.46 | AV | Vertic | PASS |
| 3 | 17475.00 | 22.91 | 39.98 | 17.07 | - | - | AV | Vertic | NA |
| 4 | 17475.00 | 31.42 | 48.49 | 17.07 | 68.30 | 19.81 | PK | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5190MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

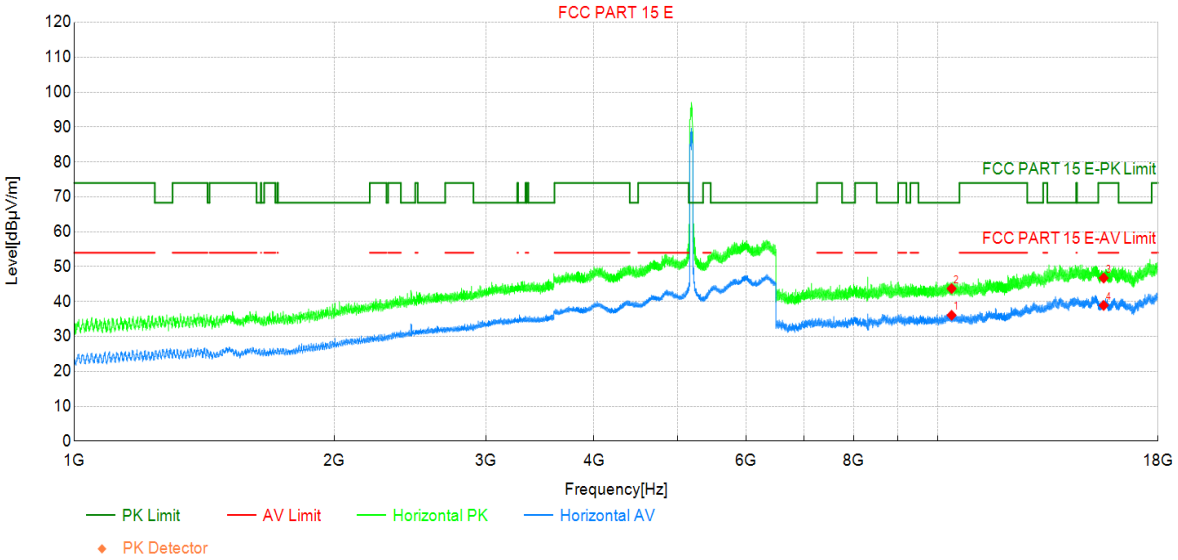


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10380.00 | 29.50 | 36.07 | 6.57 | - | - | AV | Horizo | NA |
| 2 | 10380.00 | 37.15 | 43.72 | 6.57 | 68.30 | 24.58 | PK | Horizo | PASS |
| 3 | 15570.00 | 33.05 | 46.74 | 13.69 | 74.00 | 27.26 | PK | Horizo | PASS |
| 4 | 15570.00 | 25.20 | 38.89 | 13.69 | 54.00 | 15.11 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5190MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

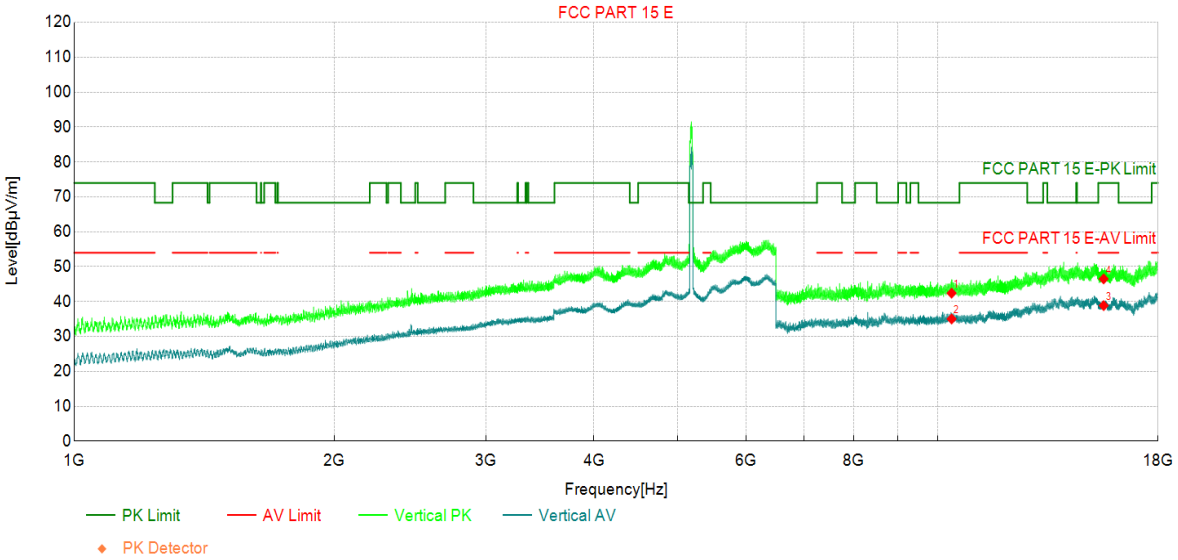


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10380.00 | 35.84 | 42.41 | 6.57 | 68.30 | 25.89 | PK | Vertic | PASS |
| 2 | 10380.00 | 28.45 | 35.02 | 6.57 | - | - | AV | Vertic | NA |
| 3 | 15570.00 | 25.15 | 38.84 | 13.69 | 54.00 | 15.16 | AV | Vertic | PASS |
| 4 | 15570.00 | 32.80 | 46.49 | 13.69 | 74.00 | 27.51 | PK | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5230MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

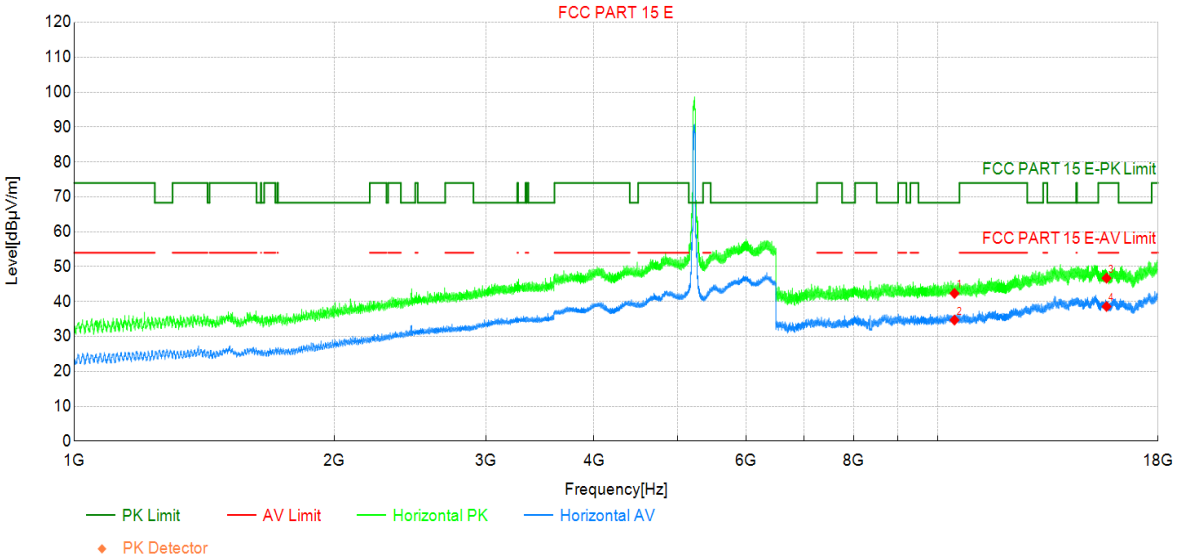


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10460.00 | 35.67 | 42.34 | 6.67 | 68.30 | 25.96 | PK | Horizo | PASS |
| 2 | 10460.00 | 28.03 | 34.70 | 6.67 | - | - | AV | Horizo | NA |
| 3 | 15690.00 | 32.30 | 46.71 | 14.41 | 74.00 | 27.29 | PK | Horizo | PASS |
| 4 | 15690.00 | 24.17 | 38.58 | 14.41 | 54.00 | 15.42 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5230MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

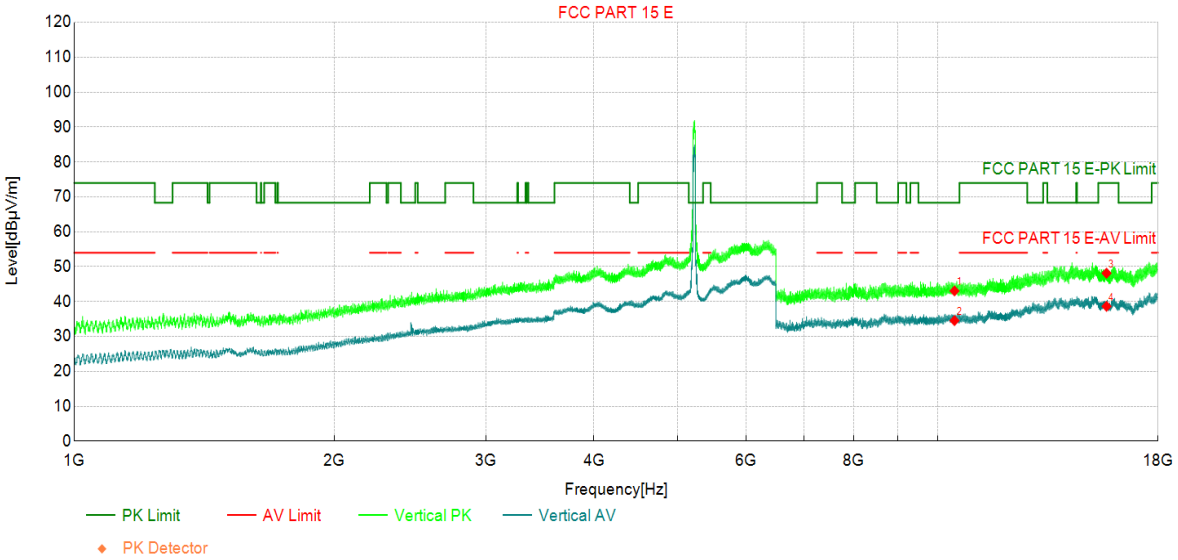


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10460.00 | 36.38 | 43.05 | 6.67 | 68.30 | 25.25 | PK | Vertic | PASS |
| 2 | 10460.00 | 27.87 | 34.54 | 6.67 | - | - | AV | Vertic | NA |
| 3 | 15690.00 | 33.72 | 48.13 | 14.41 | 74.00 | 25.87 | PK | Vertic | PASS |
| 4 | 15690.00 | 24.22 | 38.63 | 14.41 | 54.00 | 15.37 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5270MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

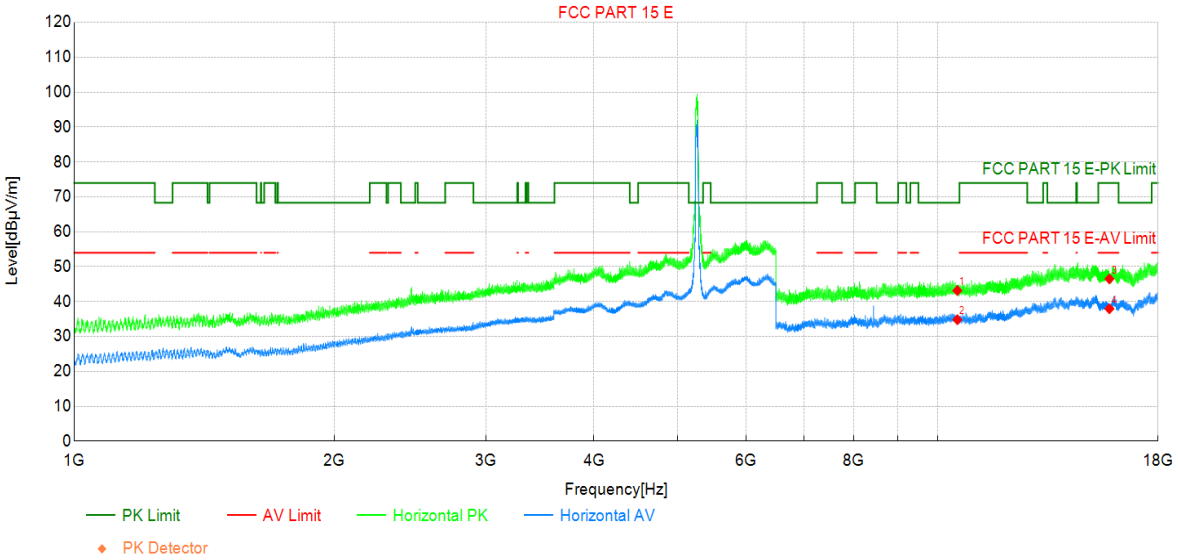


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10540.00 | 36.39 | 43.15 | 6.76 | 68.30 | 25.15 | PK | Horizo | PASS |
| 2 | 10540.00 | 28.04 | 34.80 | 6.76 | - | - | AV | Horizo | NA |
| 3 | 15810.00 | 32.49 | 46.50 | 14.01 | 74.00 | 27.50 | PK | Horizo | PASS |
| 4 | 15810.00 | 23.93 | 37.94 | 14.01 | 54.00 | 16.06 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5270MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

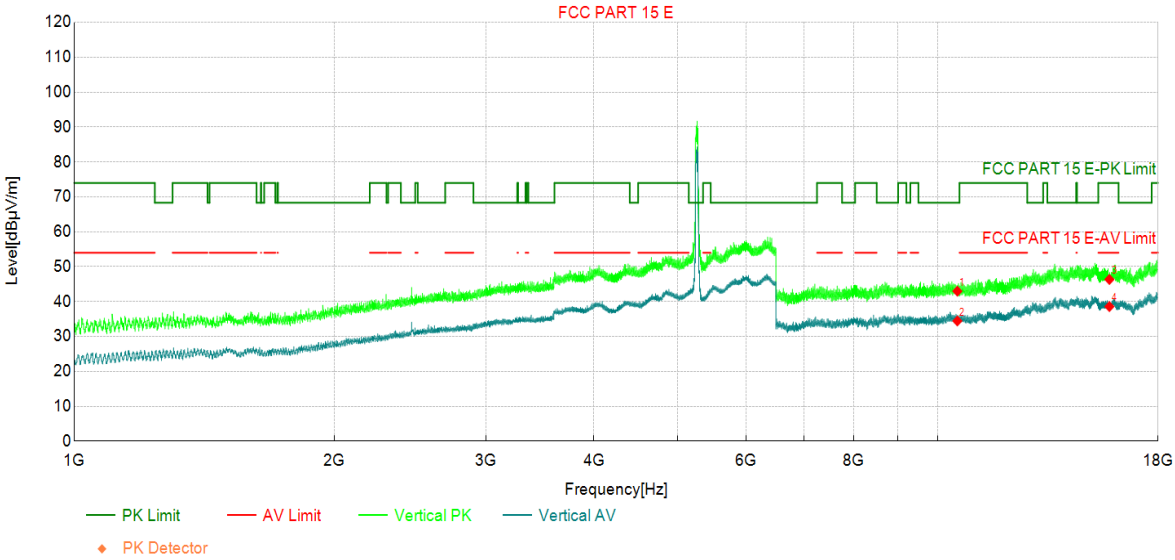


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10540.00 | 36.21 | 42.97 | 6.76 | 68.30 | 25.33 | PK | Vertic | PASS |
| 2 | 10540.00 | 27.68 | 34.44 | 6.76 | - | - | AV | Vertic | NA |
| 3 | 15810.00 | 32.32 | 46.33 | 14.01 | 74.00 | 27.67 | PK | Vertic | PASS |
| 4 | 15810.00 | 24.56 | 38.57 | 14.01 | 54.00 | 15.43 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5310MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

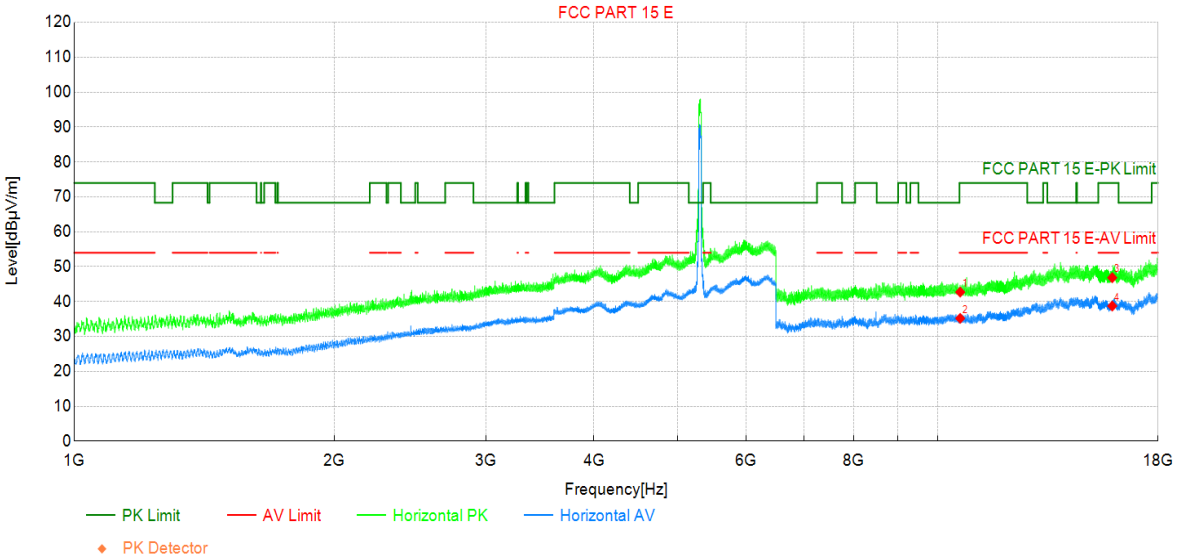


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10620.00 | 35.93 | 42.72 | 6.79 | 74.00 | 31.28 | PK | Horizo | PASS |
| 2 | 10620.00 | 28.40 | 35.19 | 6.79 | 54.00 | 18.81 | AV | Horizo | PASS |
| 3 | 15930.00 | 32.47 | 46.84 | 14.37 | 74.00 | 27.16 | PK | Horizo | PASS |
| 4 | 15930.00 | 24.35 | 38.72 | 14.37 | 54.00 | 15.28 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5310MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

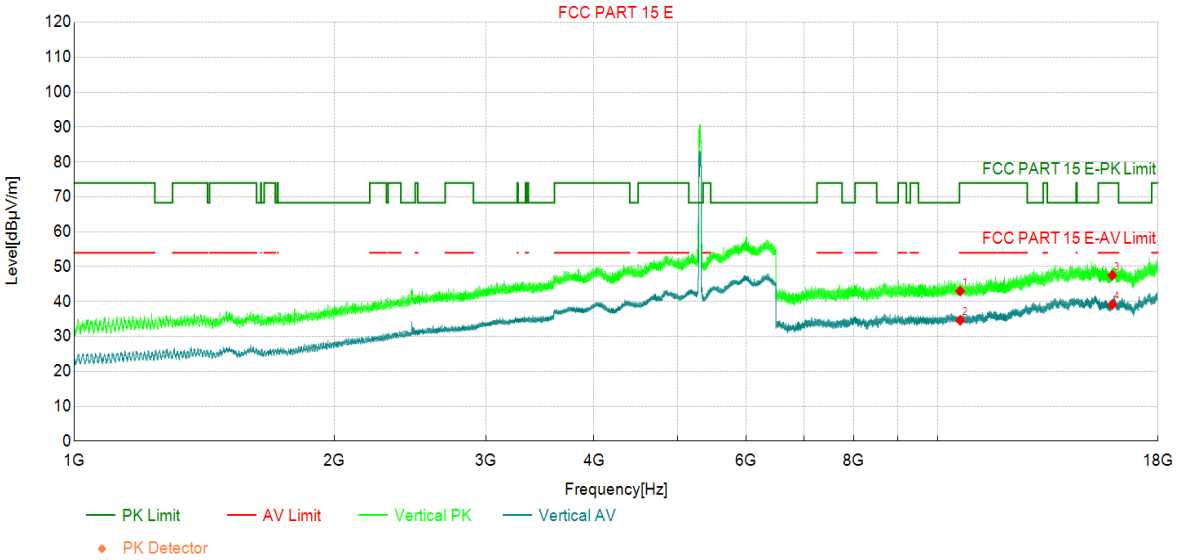


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10620.00 | 36.19 | 42.98 | 6.79 | 74.00 | 31.02 | PK | Vertic | PASS |
| 2 | 10620.00 | 27.83 | 34.62 | 6.79 | 54.00 | 19.38 | AV | Vertic | PASS |
| 3 | 15930.00 | 33.14 | 47.51 | 14.37 | 74.00 | 26.49 | PK | Vertic | PASS |
| 4 | 15930.00 | 24.77 | 39.14 | 14.37 | 54.00 | 14.86 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5510MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

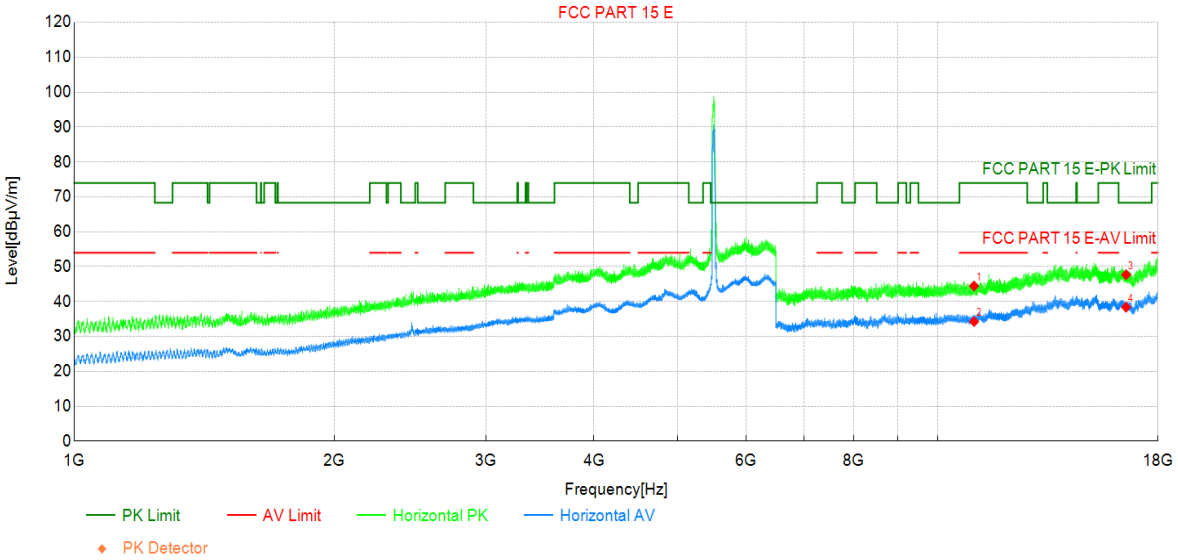


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11020.00 | 37.20 | 44.45 | 7.25 | 74.00 | 29.55 | PK | Horizo | PASS |
| 2 | 11020.00 | 27.03 | 34.28 | 7.25 | 54.00 | 19.72 | AV | Horizo | PASS |
| 3 | 16530.00 | 32.68 | 47.69 | 15.01 | 68.30 | 20.61 | PK | Horizo | PASS |
| 4 | 16530.00 | 23.38 | 38.39 | 15.01 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5510MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

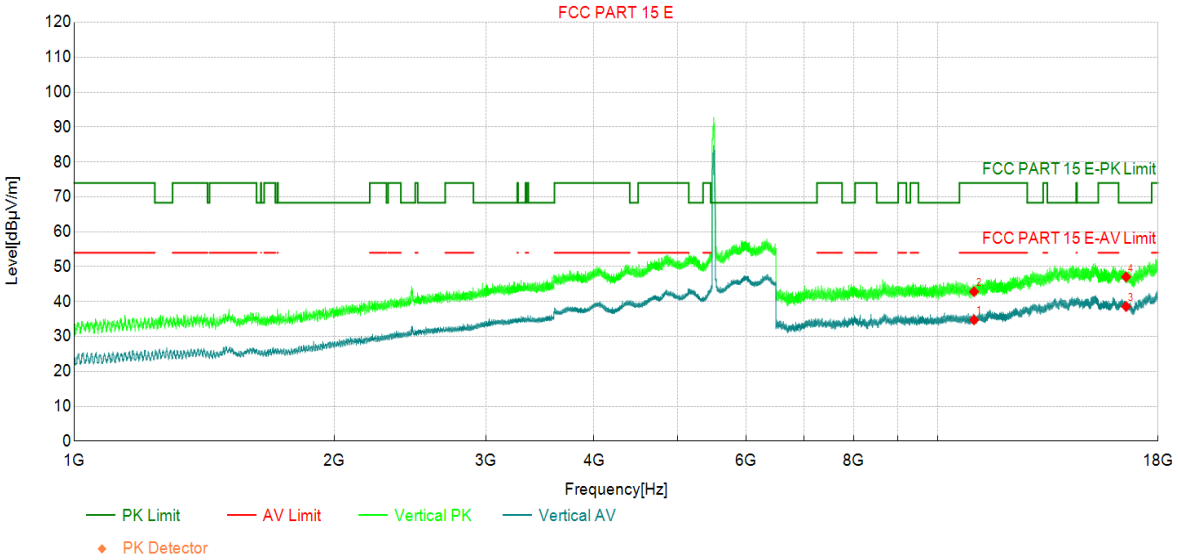


| Suspected Data List | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11020.00 | 27.49 | 34.74 | 7.25 | 54.00 | 19.26 | AV | Vertic | PASS |
| 2 | 11020.00 | 35.57 | 42.82 | 7.25 | 74.00 | 31.18 | PK | Vertic | PASS |
| 3 | 16530.00 | 23.55 | 38.56 | 15.01 | - | - | AV | Vertic | NA |
| 4 | 16530.00 | 32.04 | 47.05 | 15.01 | 68.30 | 21.25 | PK | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5550MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

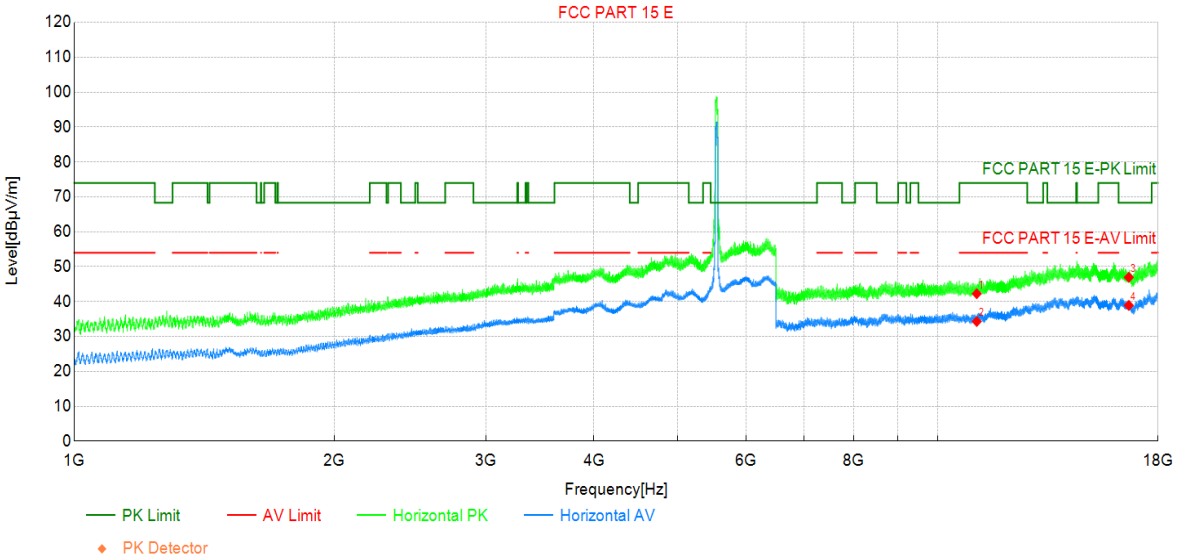


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11100.00 | 35.59 | 42.25 | 6.66 | 74.00 | 31.75 | PK | Horizo | PASS |
| 2 | 11100.00 | 27.63 | 34.29 | 6.66 | 54.00 | 19.71 | AV | Horizo | PASS |
| 3 | 16650.00 | 32.25 | 46.94 | 14.69 | 68.30 | 21.36 | PK | Horizo | PASS |
| 4 | 16650.00 | 24.20 | 38.89 | 14.69 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5550MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

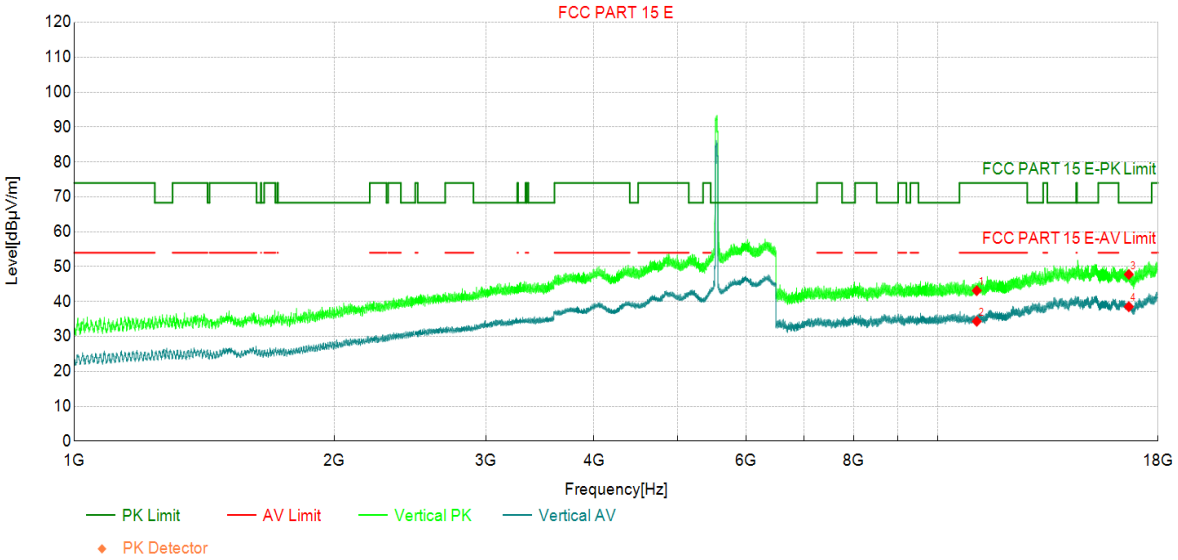


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11100.00 | 36.46 | 43.12 | 6.66 | 74.00 | 30.88 | PK | Vertic | PASS |
| 2 | 11100.00 | 27.67 | 34.33 | 6.66 | 54.00 | 19.67 | AV | Vertic | PASS |
| 3 | 16650.00 | 33.09 | 47.78 | 14.69 | 68.30 | 20.52 | PK | Vertic | PASS |
| 4 | 16650.00 | 23.83 | 38.52 | 14.69 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5670MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

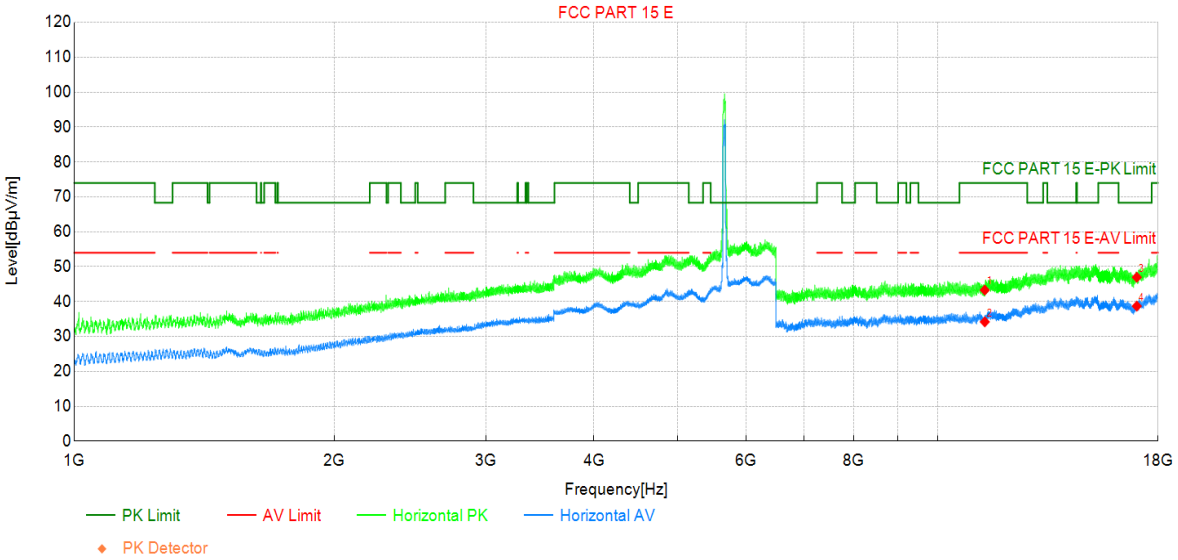


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11340.00 | 35.43 | 43.29 | 7.86 | 74.00 | 30.71 | PK | Horizo | PASS |
| 2 | 11340.00 | 26.32 | 34.18 | 7.86 | 54.00 | 19.82 | AV | Horizo | PASS |
| 3 | 17010.00 | 30.92 | 46.96 | 16.04 | 68.30 | 21.34 | PK | Horizo | PASS |
| 4 | 17010.00 | 22.65 | 38.69 | 16.04 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5670MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

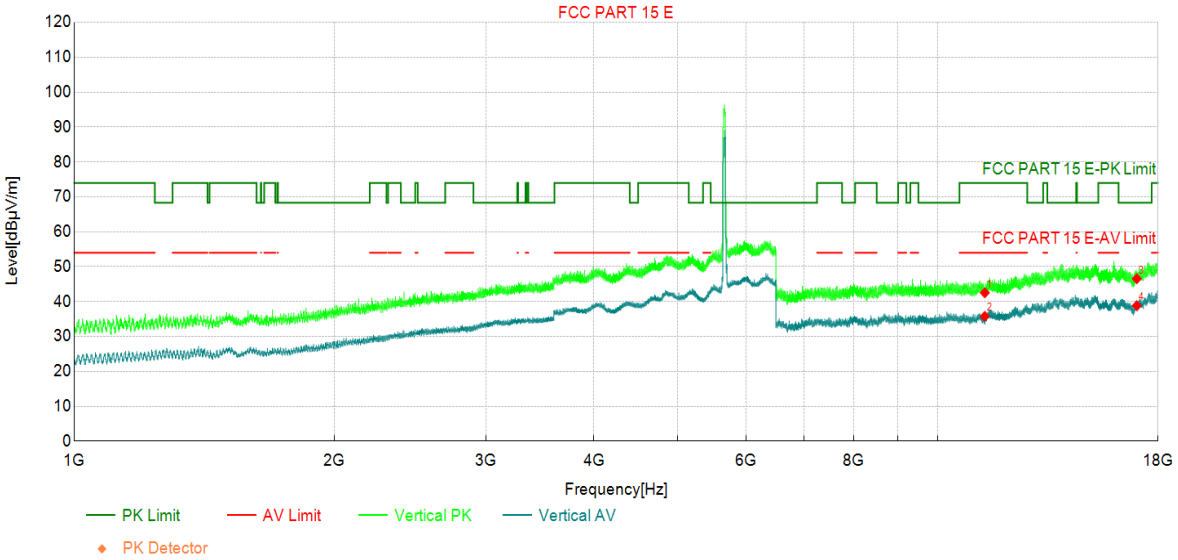


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11340.00 | 34.65 | 42.51 | 7.86 | 74.00 | 31.49 | PK | Vertic | PASS |
| 2 | 11340.00 | 27.90 | 35.76 | 7.86 | 54.00 | 18.24 | AV | Vertic | PASS |
| 3 | 17010.00 | 30.51 | 46.55 | 16.04 | 68.30 | 21.75 | PK | Vertic | PASS |
| 4 | 17010.00 | 22.78 | 38.82 | 16.04 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5755MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

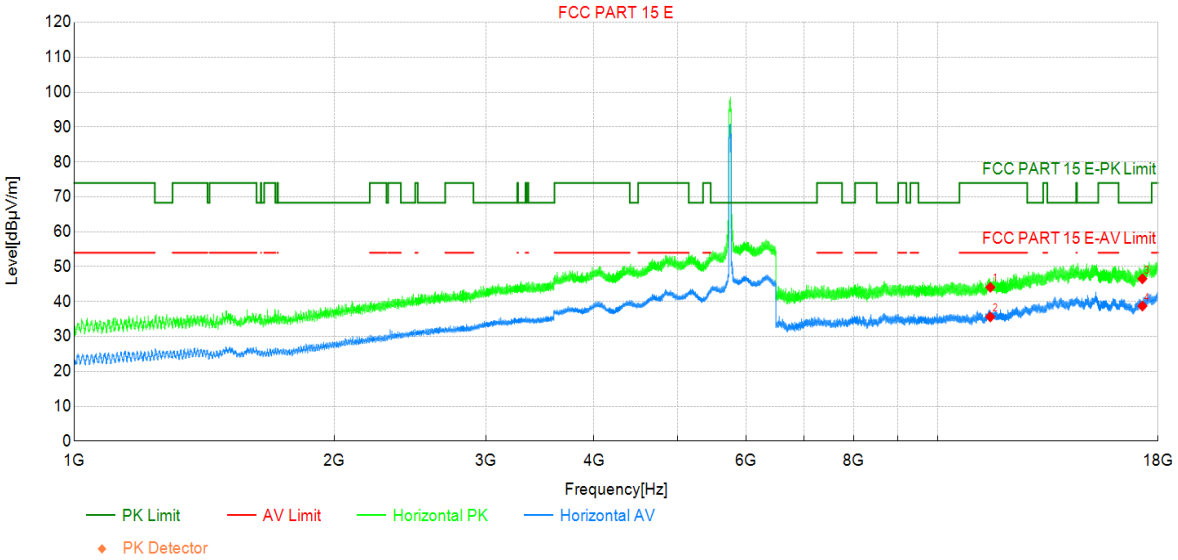


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11510.00 | 35.60 | 44.08 | 8.48 | 74.00 | 29.92 | PK | Horizo | PASS |
| 2 | 11510.00 | 27.13 | 35.61 | 8.48 | 54.00 | 18.39 | AV | Horizo | PASS |
| 3 | 17265.00 | 31.02 | 46.53 | 15.51 | 68.30 | 21.77 | PK | Horizo | PASS |
| 4 | 17265.00 | 23.21 | 38.72 | 15.51 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5755MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

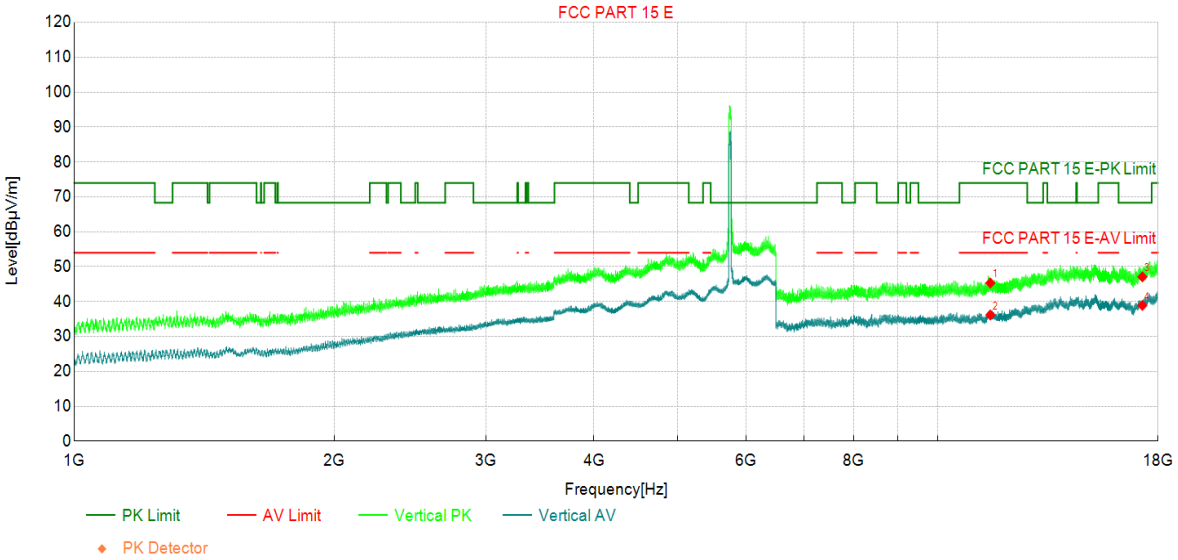


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11510.00 | 36.85 | 45.33 | 8.48 | 74.00 | 28.67 | PK | Vertic | PASS |
| 2 | 11510.00 | 27.67 | 36.15 | 8.48 | 54.00 | 17.85 | AV | Vertic | PASS |
| 3 | 17265.00 | 31.58 | 47.09 | 15.51 | 68.30 | 21.21 | PK | Vertic | PASS |
| 4 | 17265.00 | 23.38 | 38.89 | 15.51 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5795MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

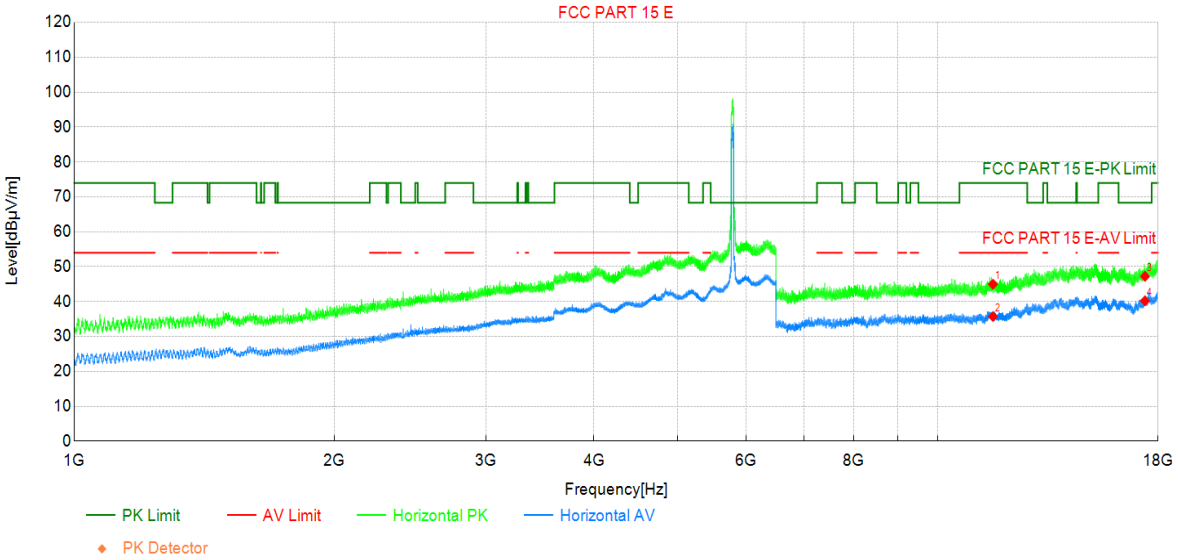


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11590.00 | 36.23 | 44.97 | 8.74 | 74.00 | 29.03 | PK | Horizo | PASS |
| 2 | 11590.00 | 26.97 | 35.71 | 8.74 | 54.00 | 18.29 | AV | Horizo | PASS |
| 3 | 17385.00 | 30.65 | 47.23 | 16.58 | 68.30 | 21.07 | PK | Horizo | PASS |
| 4 | 17385.00 | 23.64 | 40.22 | 16.58 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode5:Transmit at 5795MHz by 802.11ac(40Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

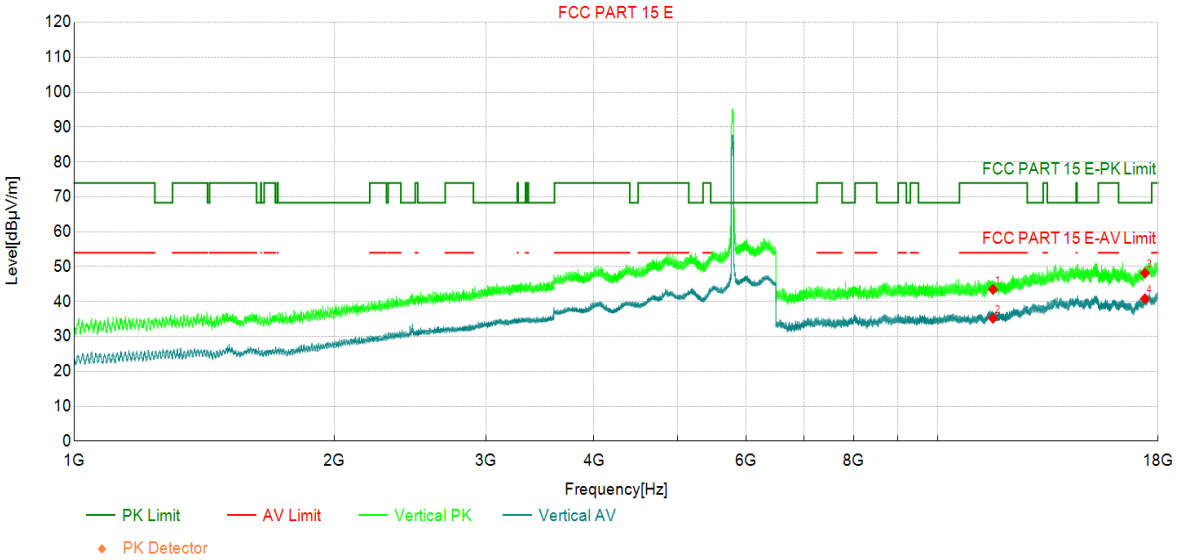


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11590.00 | 34.74 | 43.48 | 8.74 | 74.00 | 30.52 | PK | Vertic | PASS |
| 2 | 11590.00 | 26.47 | 35.21 | 8.74 | 54.00 | 18.79 | AV | Vertic | PASS |
| 3 | 17385.00 | 31.60 | 48.18 | 16.58 | 68.30 | 20.12 | PK | Vertic | PASS |
| 4 | 17385.00 | 24.24 | 40.82 | 16.58 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5210MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

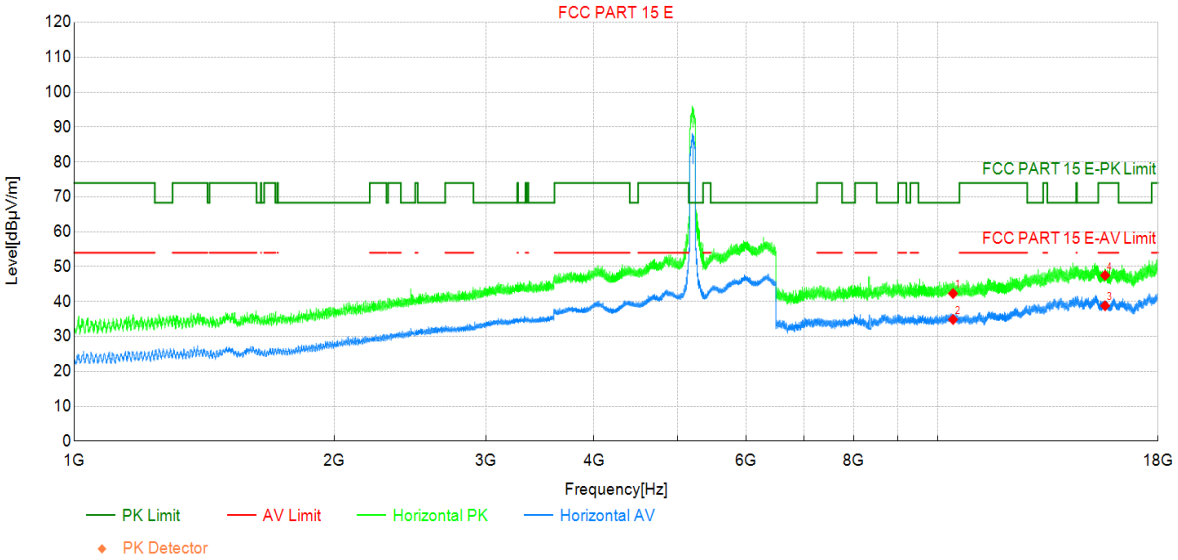


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10420.00 | 35.71 | 42.31 | 6.60 | 68.30 | 25.99 | PK | Horizo | PASS |
| 2 | 10420.00 | 28.26 | 34.86 | 6.60 | - | - | AV | Horizo | NA |
| 3 | 15630.00 | 25.01 | 38.79 | 13.78 | 54.00 | 15.21 | AV | Horizo | PASS |
| 4 | 15630.00 | 33.72 | 47.50 | 13.78 | 74.00 | 26.50 | PK | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5210MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

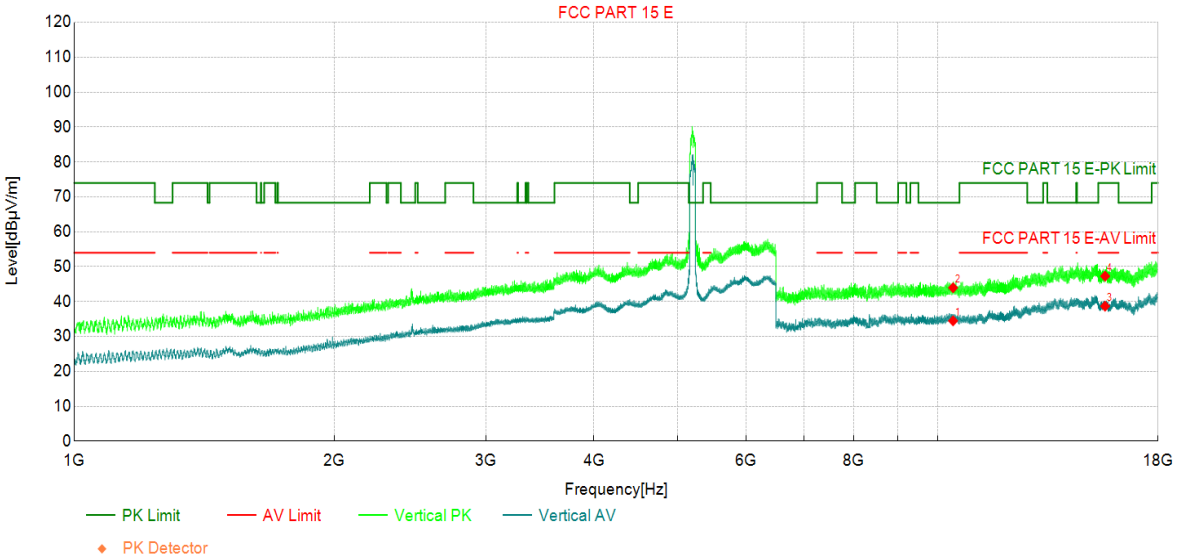


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10420.00 | 27.88 | 34.48 | 6.60 | - | - | AV | Vertic | NA |
| 2 | 10420.00 | 37.36 | 43.96 | 6.60 | 68.30 | 24.34 | PK | Vertic | PASS |
| 3 | 15630.00 | 24.89 | 38.67 | 13.78 | 54.00 | 15.33 | AV | Vertic | PASS |
| 4 | 15630.00 | 33.49 | 47.27 | 13.78 | 74.00 | 26.73 | PK | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5290MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

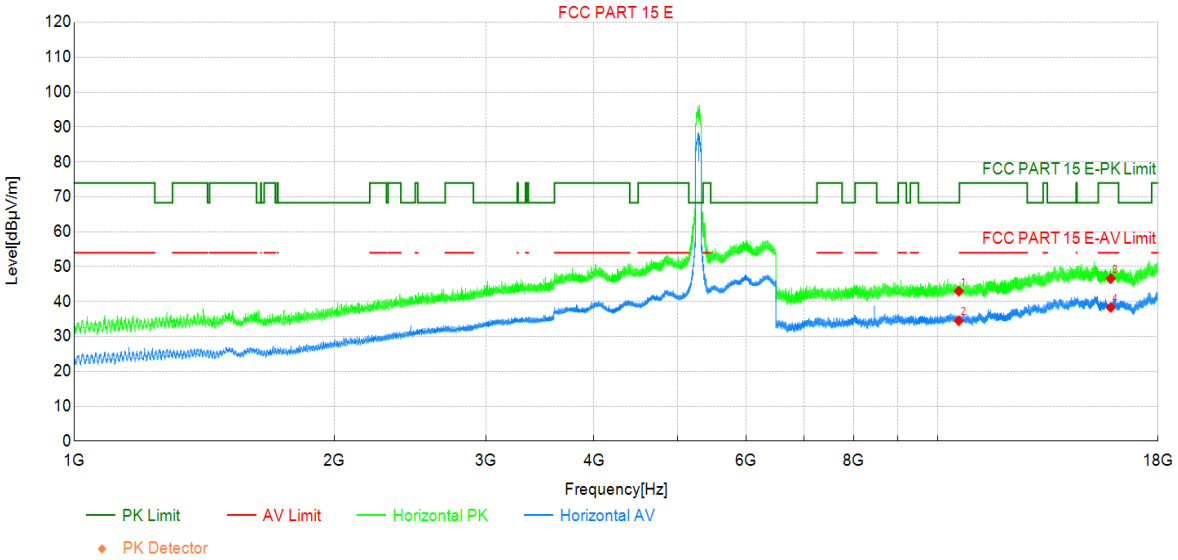


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10580.00 | 36.24 | 43.01 | 6.77 | 68.30 | 25.29 | PK | Horizo | PASS |
| 2 | 10580.00 | 27.73 | 34.50 | 6.77 | - | - | AV | Horizo | NA |
| 3 | 15870.00 | 32.53 | 46.62 | 14.09 | 74.00 | 27.38 | PK | Horizo | PASS |
| 4 | 15870.00 | 24.24 | 38.33 | 14.09 | 54.00 | 15.67 | AV | Horizo | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5290MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

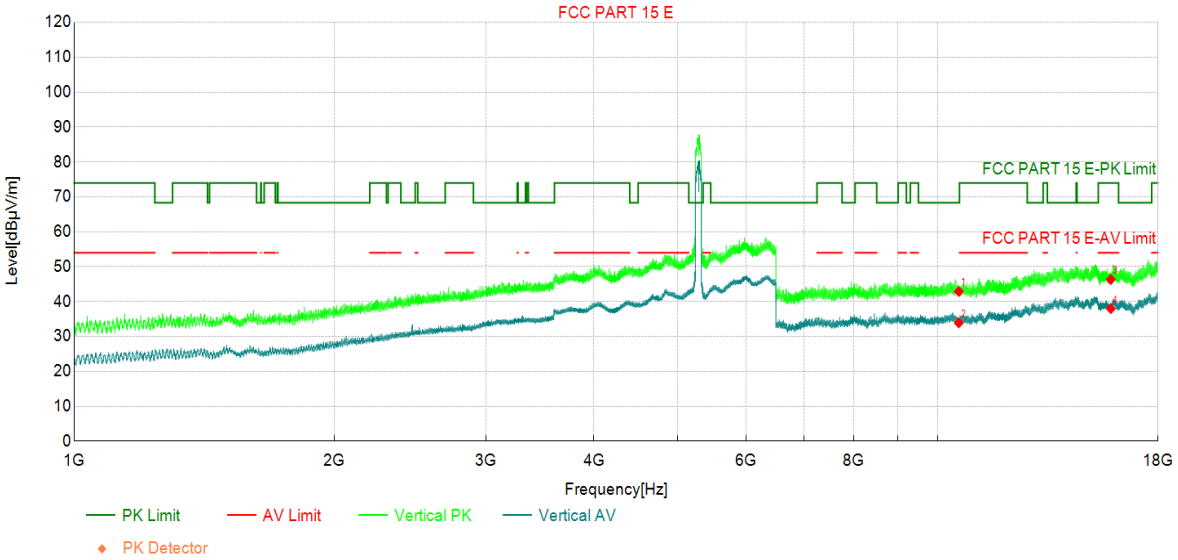


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 10580.00 | 36.14 | 42.91 | 6.77 | 68.30 | 25.39 | PK | Vertic | PASS |
| 2 | 10580.00 | 27.10 | 33.87 | 6.77 | - | - | AV | Vertic | NA |
| 3 | 15870.00 | 32.24 | 46.33 | 14.09 | 74.00 | 27.67 | PK | Vertic | PASS |
| 4 | 15870.00 | 23.87 | 37.96 | 14.09 | 54.00 | 16.04 | AV | Vertic | PASS |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5530MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

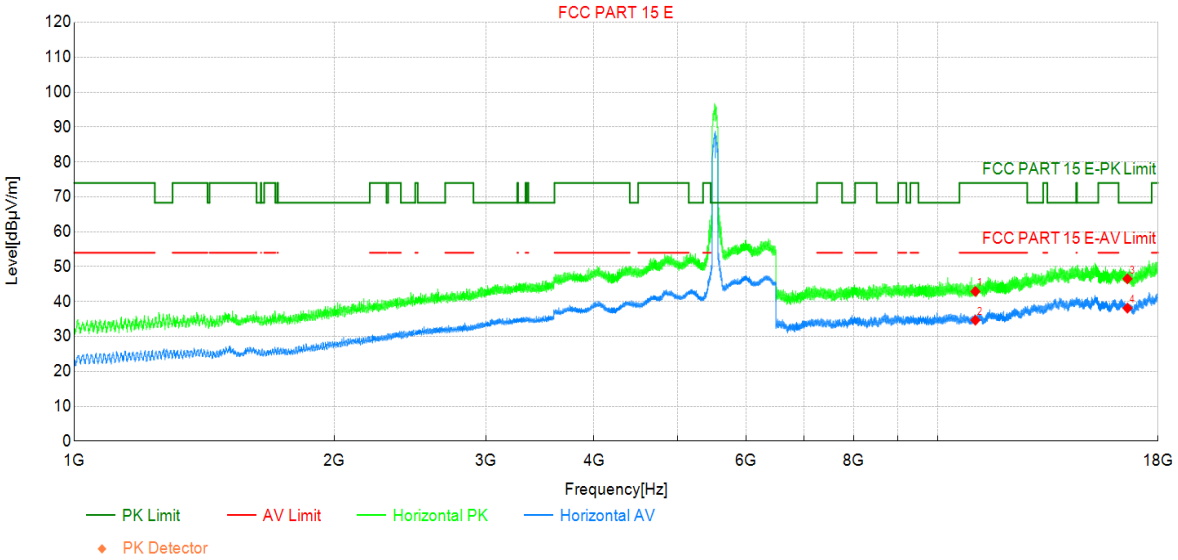


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11060.00 | 35.94 | 42.90 | 6.96 | 74.00 | 31.10 | PK | Horizo | PASS |
| 2 | 11060.00 | 27.71 | 34.67 | 6.96 | 54.00 | 19.33 | AV | Horizo | PASS |
| 3 | 16590.00 | 31.71 | 46.51 | 14.80 | 68.30 | 21.79 | PK | Horizo | PASS |
| 4 | 16590.00 | 23.32 | 38.12 | 14.80 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5530MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

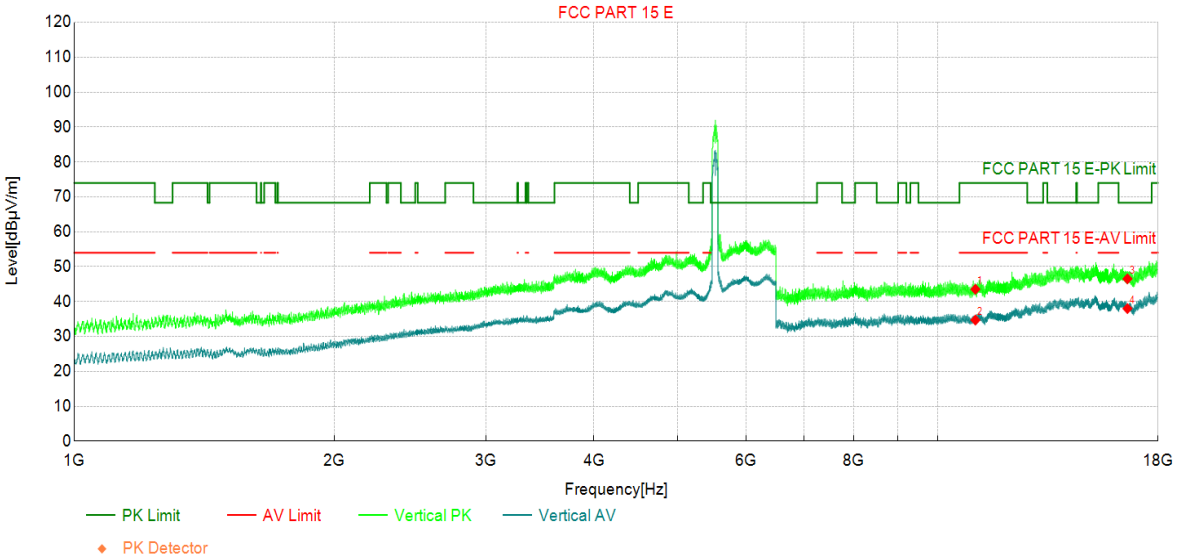


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11060.00 | 36.57 | 43.53 | 6.96 | 74.00 | 30.47 | PK | Vertic | PASS |
| 2 | 11060.00 | 27.74 | 34.70 | 6.96 | 54.00 | 19.30 | AV | Vertic | PASS |
| 3 | 16590.00 | 31.71 | 46.51 | 14.80 | 68.30 | 21.79 | PK | Vertic | PASS |
| 4 | 16590.00 | 23.19 | 37.99 | 14.80 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5610MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

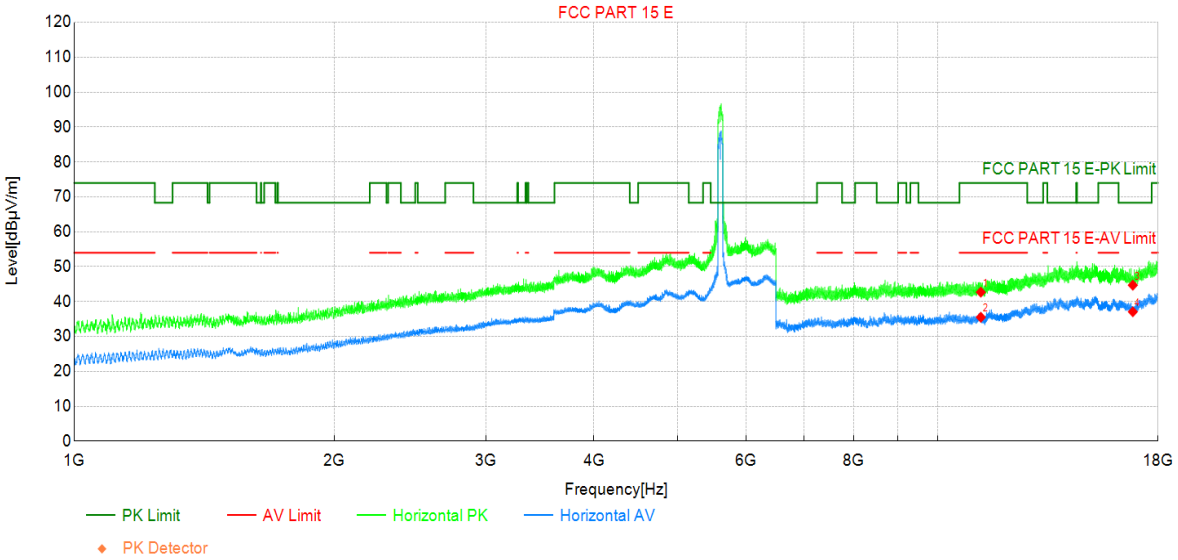


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11220.00 | 34.96 | 42.69 | 7.73 | 74.00 | 31.31 | PK | Horizo | PASS |
| 2 | 11220.00 | 27.77 | 35.50 | 7.73 | 54.00 | 18.50 | AV | Horizo | PASS |
| 3 | 16830.00 | 29.78 | 44.70 | 14.92 | 68.30 | 23.60 | PK | Horizo | PASS |
| 4 | 16830.00 | 22.16 | 37.08 | 14.92 | - | - | AV | Horizo | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5610MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

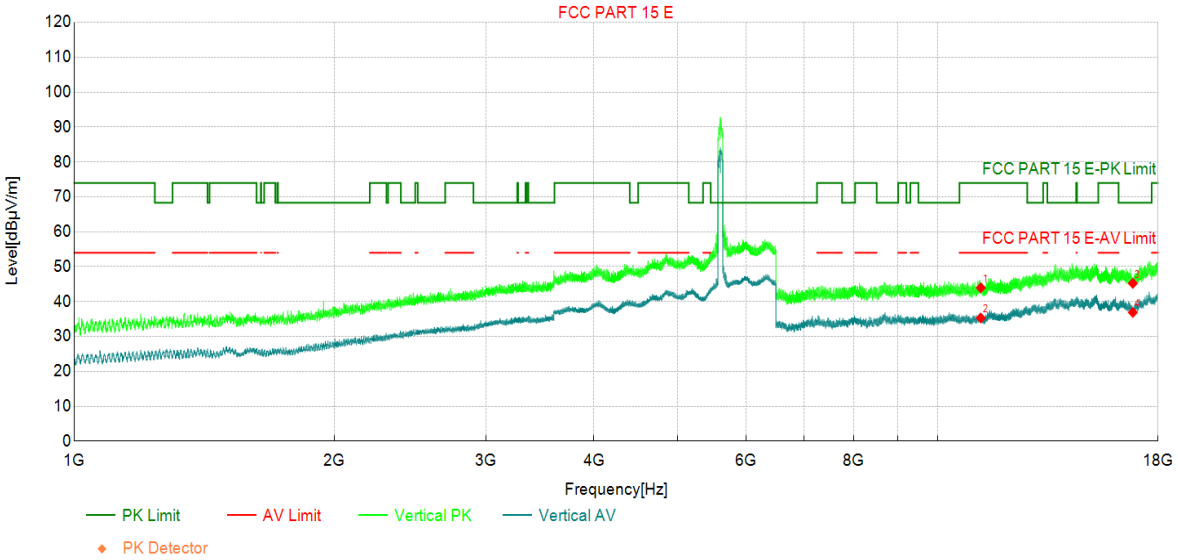


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11220.00 | 36.20 | 43.93 | 7.73 | 74.00 | 30.07 | PK | Vertic | PASS |
| 2 | 11220.00 | 27.54 | 35.27 | 7.73 | 54.00 | 18.73 | AV | Vertic | PASS |
| 3 | 16830.00 | 30.31 | 45.23 | 14.92 | 68.30 | 23.07 | PK | Vertic | PASS |
| 4 | 16830.00 | 21.96 | 36.88 | 14.92 | - | - | AV | Vertic | NA |

# Test Report

| Project Information | | | |
|---|---|---|---|
| Profile: | 24C0966R | EUT: | Mobile Computer |
| Mode: | Mode6:Transmit at 5775MHz by 802.11ac(80Mhz) | Voltage: | By Battery |
| Environment: | Temp: 25℃; Humi:60% | Enginee | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

*Test Graph*

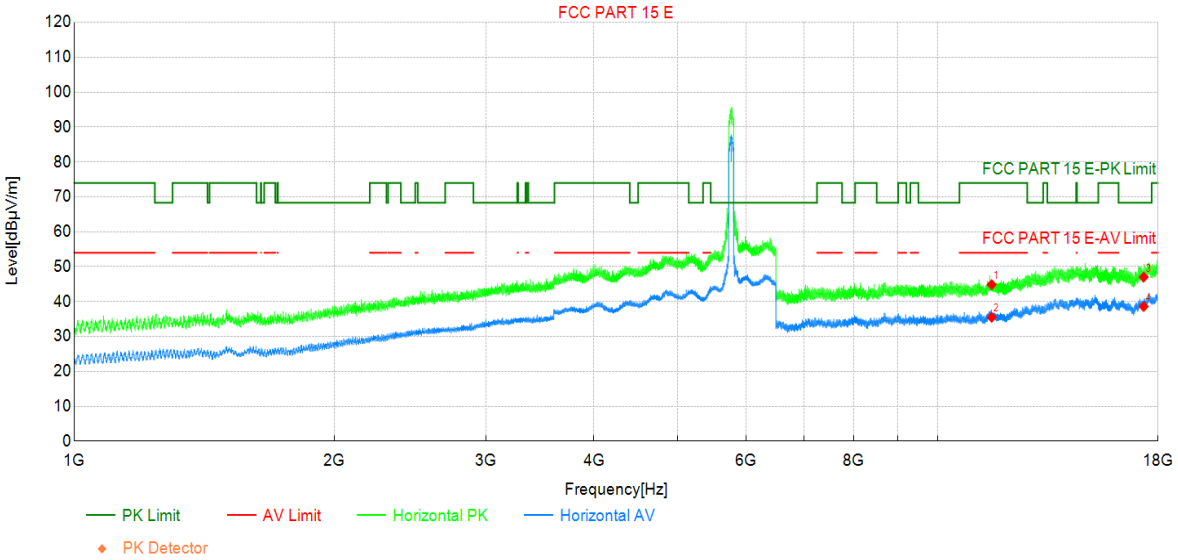


**Suspected Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 11550.00 | 36.25 | 44.86 | 8.61 | 74.00 | 29.14 | PK | Horizo | PASS |
| 2 | 11550.00 | 26.88 | 35.49 | 8.61 | 54.00 | 18.51 | AV | Horizo | PASS |
| 3 | 17325.00 | 31.13 | 47.00 | 15.87 | 68.30 | 21.30 | PK | Horizo | PASS |
| 4 | 17325.00 | 22.70 | 38.57 | 15.87 | - | - | AV | Horizo | NA |