TEST REPORT

DT&C Co., Ltd.
42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2111-0138
2. Customer
   - Name : Point Mobile Co., LTD.
   - Address : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Computer / PM75
   FCC ID : V2X-PM75
5. FCC Regulation(s): Part 2, 22, 90
   Test Method Used : KDB971168 D01v03r01, ANSI C63.26-2015, ANSI/TIA-603-E-2016
6. Date of Test : 2021.09.06 ~ 2021.10.27
7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing
8. Testing Environment : See appended test report.
9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test report is not related to KOLAS accreditation.

Affirmation	Tested by Name : JaeHyeok Bang (Signature)	Reviewed by Name : JaeJin Lee (Signature)

2021 . 11 . 17 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2111-0138	Nov. 17, 2021	Initial issue	JaeHyeok Bang	JaeJin Lee

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

Table of Contents

1. GENERAL INFORMATION 4
2. INTRODUCTION 5
   2.1. EUT DESCRIPTION 5
   2.2. TESTING ENVIRONMENT 5
   2.3. MEASURING INSTRUMENT CALIBRATION 5
   2.4. MEASUREMENT UNCERTAINTY 5
   2.5. TEST FACILITY 5
3. DESCRIPTION OF TESTS 6
   3.1. ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power) 6
   3.2. OCCUPIED BANDWIDTH. 8
   3.3. BAND EDGE EMISSIONS AT ANTENNA TERMINAL 9
   3.4. SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL 10
   3.5. EMISSION MASK 11
   3.6. UNDESIRABLE EMISSIONS 12
   3.7. FREQUENCY STABILITY 13
4. LIST OF TEST EQUIPMENT 14
5. SUMMARY OF TEST RESULTS 15
6. EMISSION DESIGNATOR AND SAMPLE CALCULATION 16
7. TEST DATA 17
   7.1. CONDUCTED OUTPUT POWER 17
   7.2. OCCUPIED BANDWIDTH 18
   7.3. BAND EDEG EMISSIONS (Conducted) 18
   7.4. SPURIOUS AND HARMONICS EMISSIONS (Conducted) 18
   7.6. ERP 19
   7.7. UNDESIRABLE EMISSIONS (Radiated) 20
   7.8. FREQUENCY STABILITY 21
8. TEST PLOTS 22
   8.1. OCCUPIED BANDWIDTH 22
   8.2. BAND EDGE EMISSIONS(Conducted) 27
   8.3. SPURIOUS AND HARMONICS EMISSIONS(Conducted) 32

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

1. GENERAL INFORMATION

FCC Classification	PCS Licensed Transmitter held to ear (PCE)
FCC ID	V2X-PM75
Product Name	Mobile Computer
Model Name	PM75
Add Model Name	-
FVIN(Firmware Version Identification Number)	75.00
EUT Serial Number	21196A0010(Radiated), 21196A0013(Conducted)
Supplying power	DC 3.85 V
Antenna Information	Antenna Type: LDS Antenna Gain: -2.67 dBi (PK)

Mode	TX Frequency (MHz)	Emission Designator	Modulation	Conducted output power		ERP	
				Max power (dBm)	Max power (W)	Max power (dBm)	Max power (W)
LTE Band 26	821.5	13M4G7D	QPSK	23.92	0.247	18.17	0.066
LTE Band 26	821.5	13M4W7D	16QAM	22.93	0.196	16.93	0.049
LTE Band 26	819.0	8M92G7D	QPSK	23.94	0.248	18.08	0.064
LTE Band 26	819.0	8M93W7D	16QAM	22.87	0.194	16.81	0.048
LTE Band 26	816.5 ~ 821.5	4M47G7D	QPSK	23.99	0.251	18.91	0.078
LTE Band 26	816.5 ~ 821.5	4M47W7D	16QAM	22.87	0.194	17.59	0.057
LTE Band 26	815.5 ~ 822.5	2M69G7D	QPSK	23.94	0.248	19.06	0.081
LTE Band 26	815.5 ~ 822.5	2M68W7D	16QAM	22.82	0.191	17.61	0.058
LTE Band 26	814.7 ~ 823.3	1M08G7D	QPSK	23.91	0.246	19.02	0.080
LTE Band 26	814.7 ~ 823.3	1M08W7D	16QAM	23.04	0.201	17.46	0.056

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment Under Test (EUT) supports 850/1900 GSM, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n/ac WLAN(2.4GHz), 802.11a/n/ac WLAN(5GHz), Bluetooth(BDR, EDR, LE) and NFC.

2.2. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+21 ℃ ~ +25 ℃
▪ Relative Humidity	42 % ~ 45 %

2.3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.4. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of *k* = 2 to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	4.9 dB (The confidence level is about 95 %, k = 2)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, k = 2)
Radiated Disturbance (Above 18 GHz)	5.3 dB (The confidence level is about 95 %, k = 2)

2.5. TEST FACILITY

DT&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014. **- FCC & IC MRA Designation No. : KR0034** **- ISED#: 5740A**		
www.dtnc.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

3. DESCRIPTION OF TESTS

3.1. ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

Below 1GHz	Above 1GHz
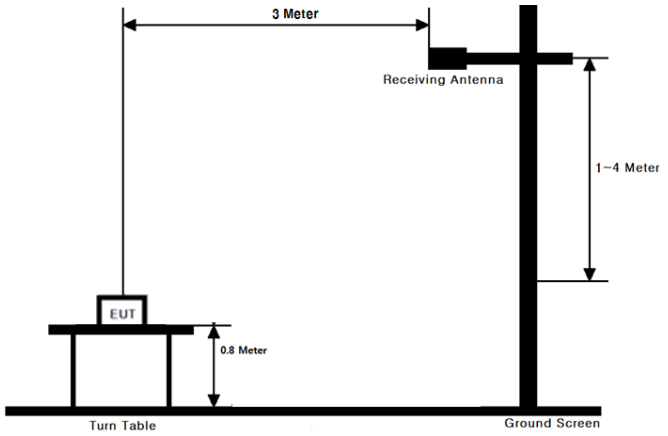	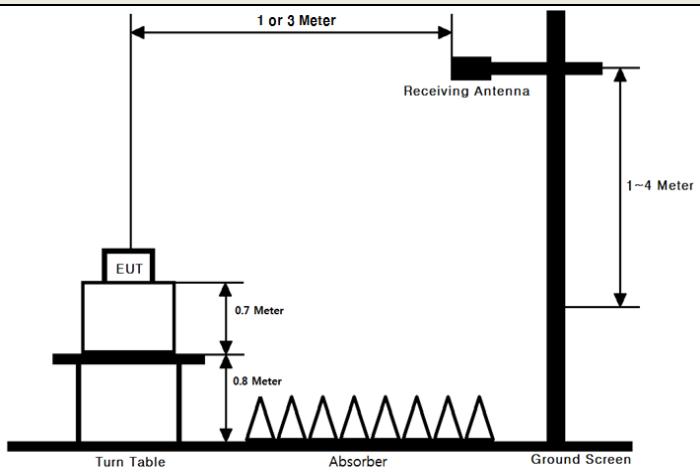

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- **ANSI/TIA-603-E-2016 - Section 2.2.17**
- **KDB971168 D01v03 - Section 5.2.2**
- **ANSI C63.26-2015 – Section 5.2.4.4.1**

<u>Test setting</u>

1. Set span to 2 x to 3 x the OBW.
2. Set RBW = 1 % to 5 % of the OBW.
3. Set VBW ≥ 3 x RBW.
4. Set number of points in sweep ≥ 2 × span / RBW.
5. Sweep time:
   1) Set = auto-couple, or
   2) Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.

The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna`s terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference
Between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2. OCCUPIED BANDWIDTH.

Test set-up

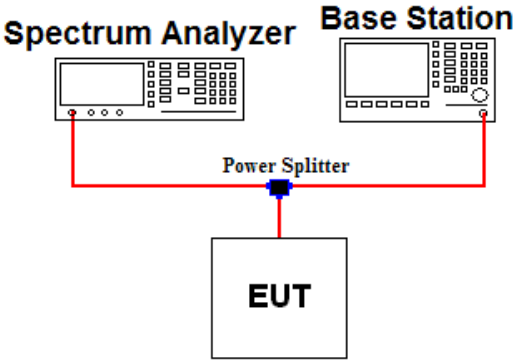

Test Procedure

- **KDB971168 D01v03 - Section 4.3**
- **ANSI C63.26-2015 – Section 5.4.4**

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer`s automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 % ~ 5 % of the expected OBW & VBW ≥ 3 X RBW
3. Detector = Peak
4. Trance mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within 1 % ~ 5 % of the 99 % occupied bandwidth observed in step 6.

3.3. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

Test set-up

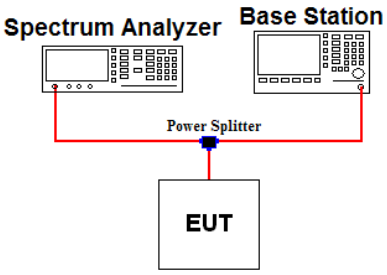

Test Procedure

- **KDB971168 D01v03 - Section 6, KDB971168D02v02 - Section 8**
- **ANSI C63.26-2015 – Section 5.7**

All out of band emissions are measured by means of a calibrated spectrum analyzer. Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The EUT was setup to maximum output power at its lowest and highest channel with all bandwidths, modulations and RB configurations.

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50 + 10 Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

Section 90.691(a) compliance testing, use RBW = 300 Hz for offsets less than 37.5 kHz from a channel edge; RBW = 100 kHz for offsets greater than 37.5 kHz is allowed.

<u>Test setting</u>

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 300 Hz & VBW ≥ 3 X RBW (less than 37.5 kHz from a channel edge)
   RBW = 100 KHz & VBW ≥ 3 X RBW (greater than 37.5 kHz from a channel edge)
3. Detector = RMS & Trace mode = Average
4. Sweep time = Auto couple
5. The trace was allowed to stabilize

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.4. SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

Test set-up

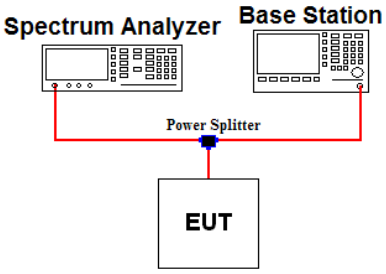

Test Procedure

- **KDB971168 D01v03 - Section 6**
- **ANSI C63.26-2015 – Section 5.7**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations. The spectrum is scanned from 9 kHz up to a frequency including its 10th harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB.

Test setting

1. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW ≥ 3 X RBW (Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point ≥ 2 X span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1GHz and 1MHz or greater for frequencies greater than 1 GHz.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.5. EMISSION MASK

Test set-up

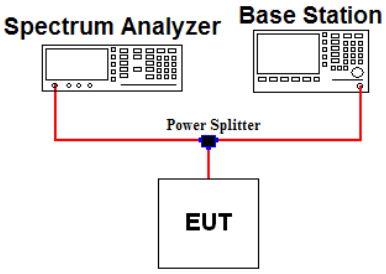

Test Procedure

- **KDB971168 D01v03 - Section 6**
- **ANSI C63.26-2015 – Section 5.7**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations.

Transmitters used in the radio services by Part 90 must comply with the emission masks.

Test setting

6. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW ≥ 3 X RBW (Refer to Note 1)
7. Detector = RMS & Trace mode = Max hold
8. Sweep time = Auto couple
9. Number of sweep point ≥ 2 X span / RBW
10. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1GHz and 1MHz or greater for frequencies greater than 1 GHz.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.6. UNDESIRABLE EMISSIONS

Test Set-up

Below 1GHz	Above 1GHz
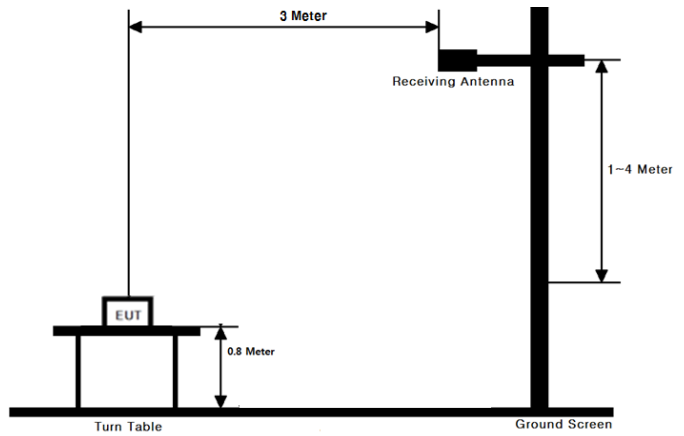	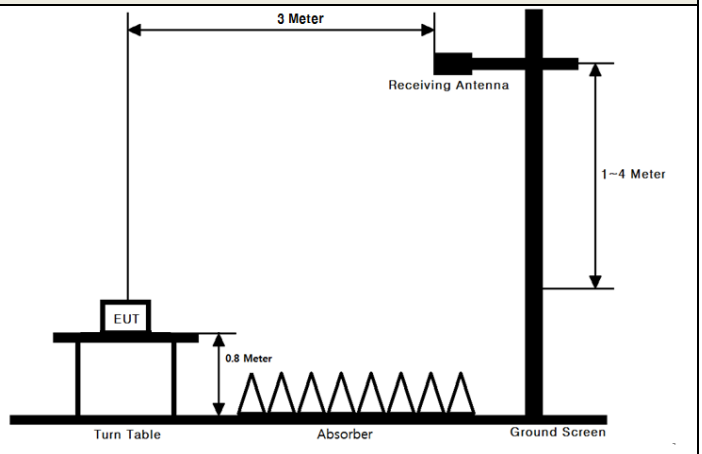

These measurements were performed at 3 test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- **ANSI/TIA-603-E-2016 - Section 2.2.12**
- **KDB971168 D01v03 - Section 5.8**
- **ANSI C63.26-2015 – Section 5.5**

<u>Test setting</u>

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW ≥ 3 X RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point ≥ 2 X span / RBW
5. The trace was allowed to stabilize

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

3.7. FREQUENCY STABILITY

Test Set-up

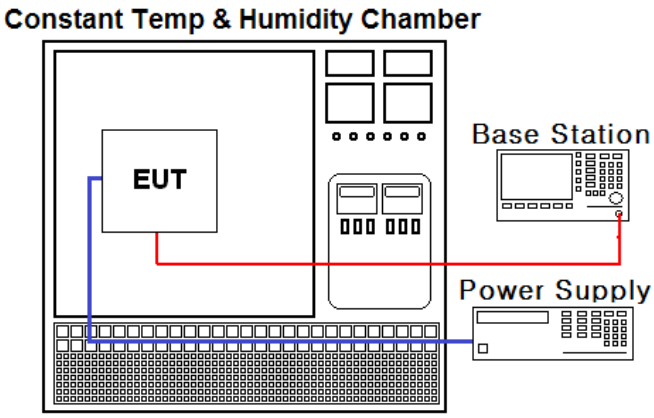

Test Procedure

- **ANSI/TIA-603-E-2016**
- **KDB971168 D01v03 – Section 9**

The frequency stability of the transmitter is measured by:

a.) **Temperature:**
The temperature is varied from – 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:**
The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification:

The frequency stability of the transmitter shall be maintained within ±0.000 25 % (±2.5 ppm) of the center frequency for Part 90.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(20 °C to provide a reference)

2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	21/06/24	22/06/24	US47360812
Spectrum Analyzer	Agilent Technologies	N9020A	20/12/16	21/12/16	MY50410399
DC power supply	Agilent Technologies	66332A	21/06/24	22/06/24	US37474125
Multimeter	FLUKE	17B+	20/12/16	21/12/16	36390701WS
Power Splitter	Anritsu	K241B	21/06/24	22/06/24	1701102
Temp & Humi	SJ Science	SJ-TH-S50	20/12/14	21/12/14	U5542113
Radio Communication Analyzer	Anritsu	MT8820C	21/06/24	22/06/24	6200951873
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-2
Thermohygrometer	XIAOMI	MHO-C201	20/12/16	21/12/16	00089675
Signal Generator	Rohde Schwarz	SMBV100A	20/12/16	21/12/16	255571
Signal Generator	ANRITSU	MG3695C	20/12/16	21/12/16	173501
Loop Antenna	ETS-Lindgren	6502	21/01/28	23/01/28	00226186
Bilog Antenna	Schwarzbeck	VULB 9160	20/12/16	21/12/16	3362
Dipole Antenna	A.H.Systems Inc.	FCC-4	20/12/16	22/12/16	710A
Dipole Antenna	Schwarzbeck	UHA9105	20/04/10	22/04/10	2262
HORN ANT	ETS	3117	20/12/16	21/12/16	00140394
HORN ANT	ETS	3117	21/06/24	22/06/24	00143278
HORN ANT	A.H.Systems	SAS-574	21/06/24	22/06/24	154
HORN ANT	A.H.Systems	SAS-574	21/06/24	22/06/24	155
Amplifier	EMPOWER	BBS3Q7ELU	21/06/24	22/06/24	1020
PreAmplifier	H.P	8447D	20/12/16	21/12/16	2944A07774
PreAmplifier	Agilent	8449B	21/06/24	22/06/24	3008A02108
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	21/06/24	22/06/24	7
High-pass filter	Wainwright	WHKX10-2838-3300-18000-60SS	21/06/24	22/06/24	2
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-2
Cable	JUNFLON	MWX241/B	21/01/08	22/01/08	M-3
Cable	JUNFLON	MWX221	21/01/08	22/01/08	M-4
Cable	JUNFLON	MWX221	21/01/08	22/01/08	M-5
Cable	DTNC	Cable	21/01/08	22/01/08	M-6
Cable	JUNFLON	J12J101757-00	21/01/08	22/01/08	M-7
Cable	HUBER+SUHNER	SUCOFLEX104	21/01/08	22/01/08	M-8
Cable	HUBER+SUHNER	SUCOFLEX106	21/01/08	22/01/08	M-9

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.
Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Status Note 1
2.1046 90.635	Conducted Output Power	< 100 Watts	Conducted	C
2.1049	Occupied Bandwidth	N/A		C
2.1051 90.691	Band Edge / Conducted Spurious Emissions	> 43 + 10log$_{10}$(P) dB for all out-of-band emissions except > 50 + 10log$_{10}$(P) dB at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		C
2.1055 90.213	Frequency Stability	< 2.5 ppm		C
22.913(a.5)	Radiated Output Power	< 7 Watts max. ERP	Radiated	C Note2
2.1053 90.691	Undesirable Emissions	> 43 + 10log$_{10}$(P) dB for all out-of-band emissions except > 50 + 10log$_{10}$(P) dB at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		C Note2

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable
Note 2: This test item was performed in three orthogonal EUT positions and the worst case data was reported.

6. EMISSION DESIGNATOR AND SAMPLE CALCULATION

A. Emission Designator

LTE Band 26(QPSK)

Emission Designator = **13M4G7D**
LTE OBW = 13.440 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 26(16QAM)

Emission Designator = **13M4W7D**
LTE OBW = 13.382 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

B. For substitution method

1) The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1 GHz respectively above ground.
2) The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3) During the test, the turn table is rotated until the maximum signal is found.
4) Record the field strength meter's level. (ex. Spectrum reading level is -8.5 dBm)
5) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
6) Increase the signal generator output till the field strength meter's level is equal to the item (4). (ex. Signal generator level is -18.04 dBm)
7) The gain of the cable and amplifier between the signal generator and terminals of substituted antenna is 46.92 dB at test frequency.
8) Record the level at substituted antenna terminal. (ex. 28.88dBm)
9) The result is calculated as below;

EIRP(dBm) = LEVLE@ANTENNA TERMINAL + TX Antenna Gain (dBi)
ERP(dBm) = LEVLE@ANTENNA TERMINAL + TX Antenna Gain (dBd)
Where, TX Antenna Gain (dBd) = TX Antenna Gain (dBi) - 2.15 dB

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

7. TEST DATA

7.1. CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

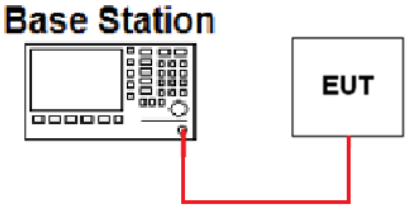

Note 1: The conducted output power was measured using the Anritsu MT8820C.

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	Conducted Output power (dBm)	Conducted Output power (W)
15	821.5	QPSK	23.92	0.247
		16QAM	22.93	0.196
10	819	QPSK	23.94	0.248
		16QAM	22.87	0.194
5	816.5	QPSK	23.91	0.246
		16QAM	22.87	0.194
	821.5	QPSK	23.99	0.251
		16QAM	22.76	0.189
3	815.5	QPSK	23.88	0.244
		16QAM	22.75	0.188
	819	QPSK	23.87	0.244
		16QAM	22.82	0.191
	822.5	QPSK	23.94	0.248
		16QAM	22.67	0.185
1.4	814.7	QPSK	23.88	0.244
		16QAM	22.83	0.192
	819	QPSK	23.86	0.243
		16QAM	23.04	0.201
	823.3	QPSK	23.91	0.246
		16QAM	22.93	0.196

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

7.2. OCCUPIED BANDWIDTH

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.1

7.3. BAND EDEG EMISSIONS (Conducted)

- Plots of the EUT's Band Edge Emissions are shown in Clause 8.2

7.4. SPURIOUS AND HARMONICS EMISSIONS (Conducted)

- Plots of the EUT's Spurious Emissions are shown in Clause 8.3

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

7.6. ERP

- Test Notes

This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

- Measurement data:

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
15	821.5	QPSK	1/0	H	18.91	-0.74	18.17	0.066
		16QAM	1/0	H	17.67	-0.74	16.93	0.049
10	819	QPSK	1/0	H	18.80	-0.72	18.08	0.064
		16QAM	1/0	H	17.53	-0.72	16.81	0.048
5	816.5	QPSK	1/12	H	18.85	-0.70	18.15	0.065
		16QAM	1/12	H	17.31	-0.70	16.61	0.046
	821.5	QPSK	1/12	H	19.65	-0.74	18.91	0.078
		16QAM	1/12	H	18.33	-0.74	17.59	0.057
3	815.5	QPSK	1/7	H	19.20	-0.69	18.51	0.071
		16QAM	1/7	H	17.30	-0.69	16.61	0.046
	819	QPSK	1/14	H	19.34	-0.72	18.62	0.073
		16QAM	1/14	H	17.77	-0.72	17.05	0.051
	822.5	QPSK	1/0	H	19.81	-0.75	19.06	0.081
		16QAM	1/0	H	18.36	-0.75	17.61	0.058
1.4	814.7	QPSK	1/2	H	18.76	-0.69	18.07	0.064
		16QAM	1/2	H	17.47	-0.69	16.78	0.048
	819	QPSK	1/2	H	19.26	-0.72	18.54	0.071
		16QAM	1/2	H	18.00	-0.72	17.28	0.053
	823.3	QPSK	1/5	H	19.77	-0.75	19.02	0.080
		16QAM	1/5	H	18.21	-0.75	17.46	0.056

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

7.7. UNDESIRABLE EMISSIONS (Radiated)

- Test Notes

1. This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported.
2. Limit Calculation = 43 + $10\log_{10}$ (P[Watts])
3. This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.
4. The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

- Measurement data:

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)
								(dBm)	(dBc)	
15	821.5	1/0	QPSK	1 637.65	H	-58.82	3.78	-55.04	73.21	31.17
				2 444.48	V	-51.31	3.94	-47.37	65.54	
			16QAM	1 609.76	H	-58.91	3.68	-55.23	72.16	29.93
				2 444.48	V	-53.28	3.94	-49.34	66.27	
3	822.5	1/0	QPSK	1 642.29	H	-58.00	3.79	-54.21	73.27	32.06
				2 463.80	V	-51.06	3.84	-47.22	66.28	
			16QAM	1 639.08	H	-57.42	3.78	-53.64	71.25	30.61
				2 463.84	V	-51.64	3.84	-47.80	65.41	

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

7.8. FREQUENCY STABILITY

- Test Notes

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING FREQUENCY : 819 MHz
REFERENCE VOLTAGE : 3.85 VDC
LIMIT : 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (℃)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.85	+20(Ref)	819,000,010	+10	0.012 2	+0.000 001 221
100 %		-30	818,999,998	-2	-0.002 4	-0.000 000 244
100 %		-20	818,999,993	-7	-0.008 5	-0.000 000 855
100 %		-10	819,000,006	+6	0.007 3	+0.000 000 733
100 %		0	818,999,988	-12	-0.014 7	-0.000 001 465
100 %		+10	819,000,002	+2	0.002 4	+0.000 000 244
100 %		+20	819,000,010	+10	0.012 2	+0.000 001 221
100 %		+30	819,000,006	+6	0.007 3	+0.000 000 733
100 %		+40	818,999,997	-3	-0.003 7	-0.000 000 366
100 %		+50	818,999,993	-7	-0.008 5	-0.000 000 855
115 %	4.43	+20	819,000,007	+7	0.008 5	+0.000 000 855
BATT.ENDPOINT	3.10	+20	818,999,989	-11	-0.013 4	-0.000 001 343

.

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

8. TEST PLOTS

8.1. OCCUPIED BANDWIDTH

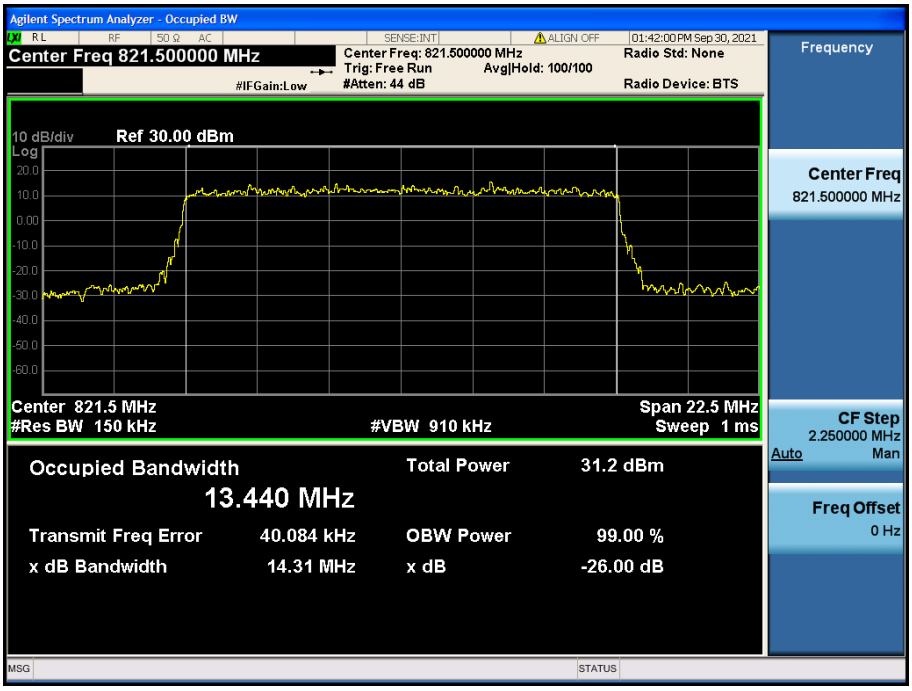

LTE Band 26 / 15 MHz / QPSK - RB Size 75

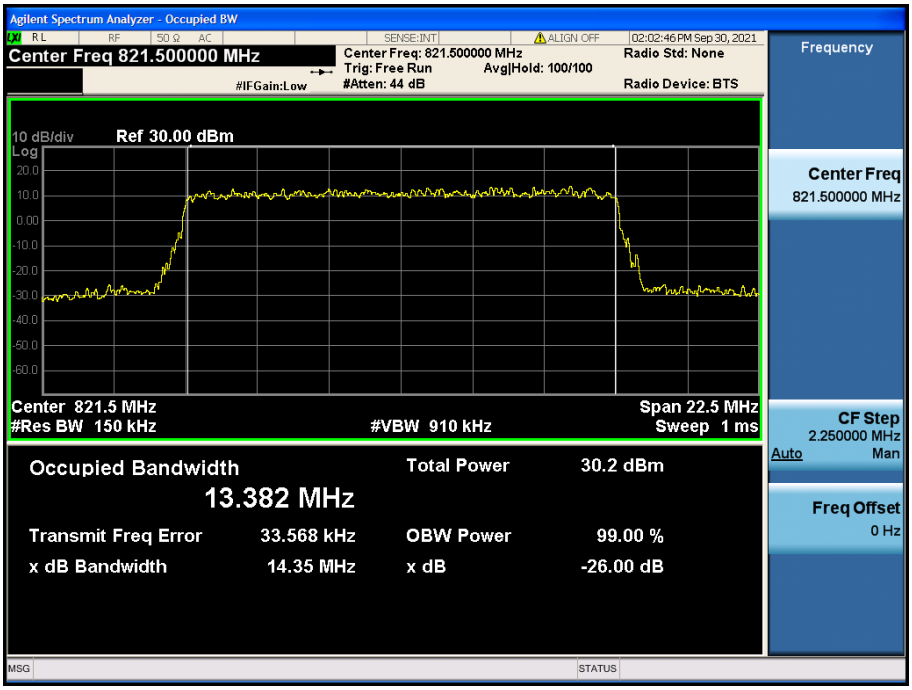

LTE Band 26 / 15 MHz / 16QAM - RB Size 75

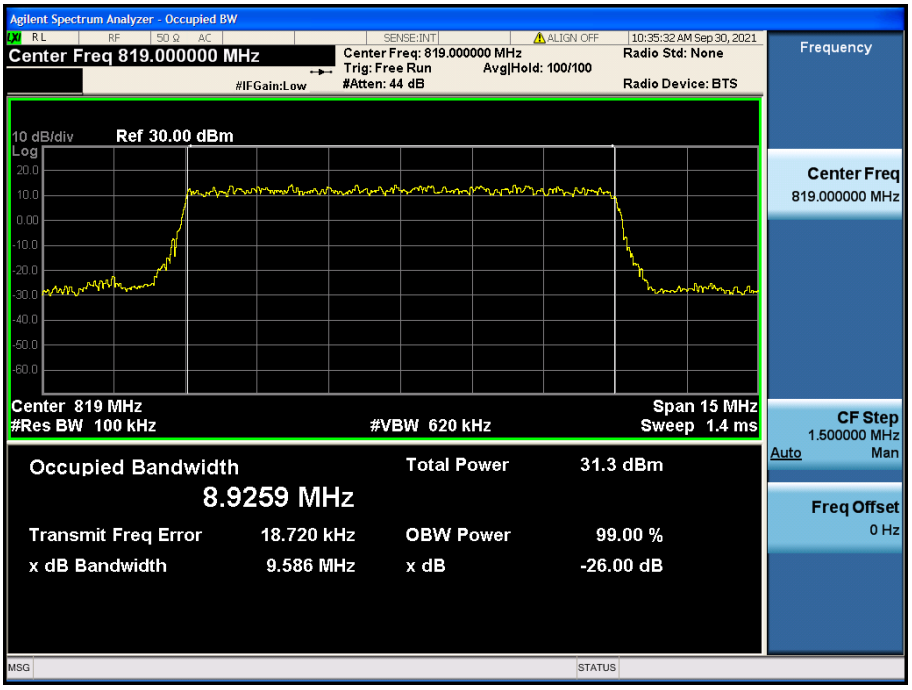

LTE Band 26 / 10 MHz / QPSK - RB Size 50

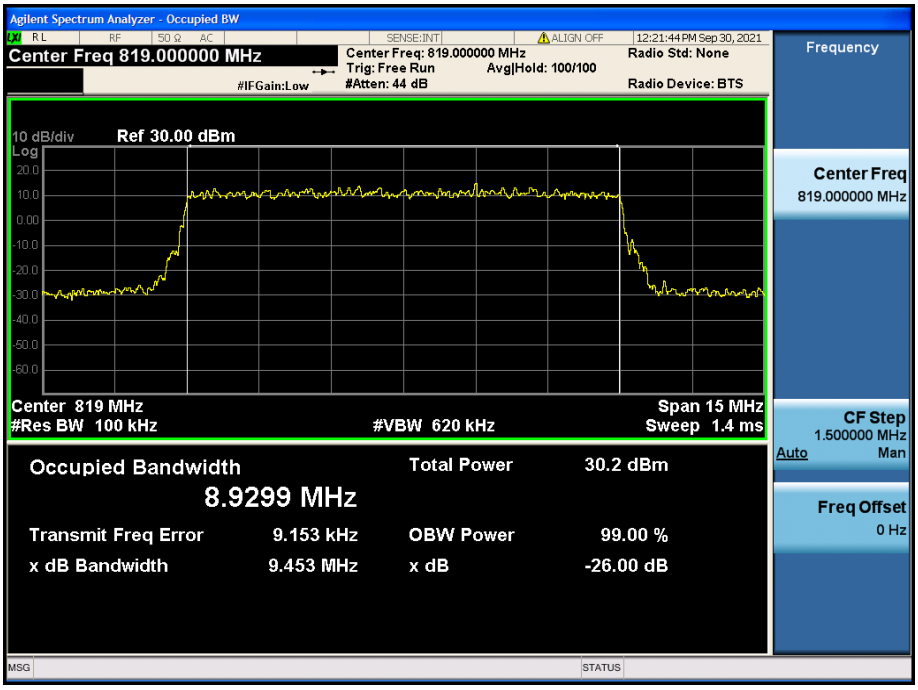

LTE Band 26 / 10 MHz / 16QAM - RB Size 50

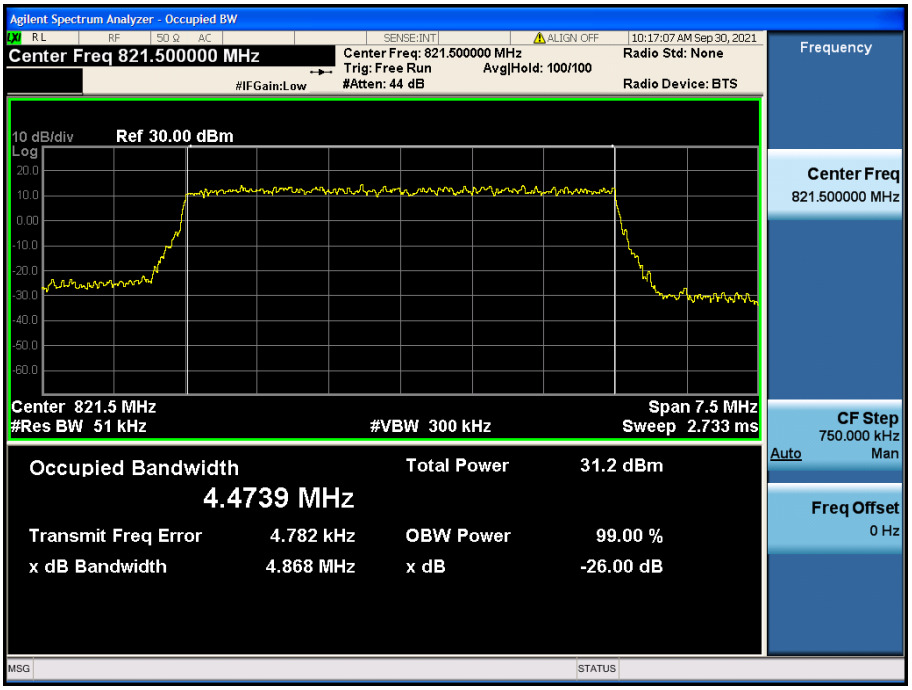

LTE Band 26 / 5 MHz / QPSK - RB Size 25

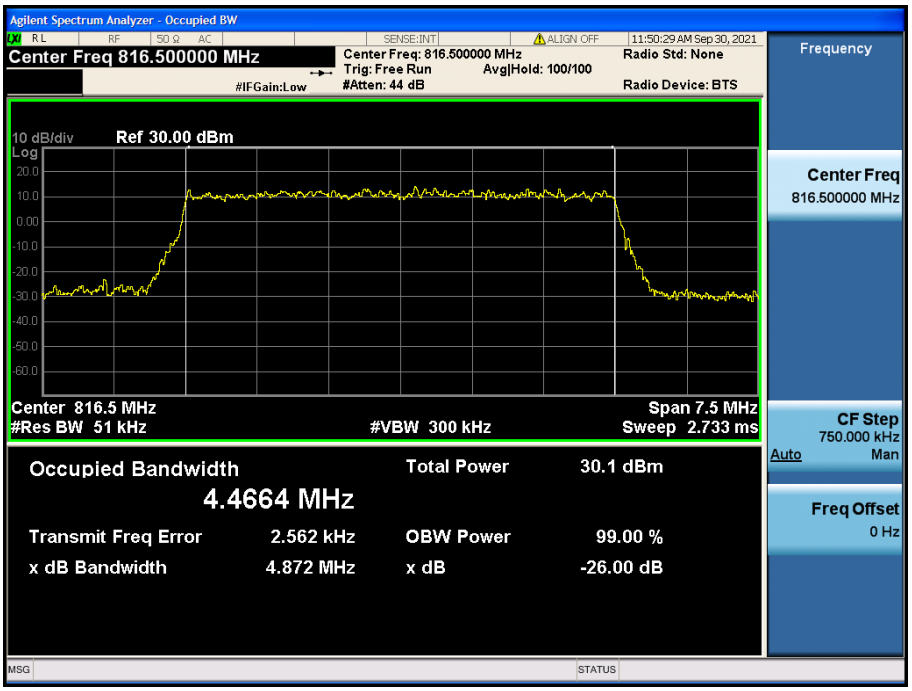

LTE Band 26 / 5 MHz / 16QAM - RB Size 25

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

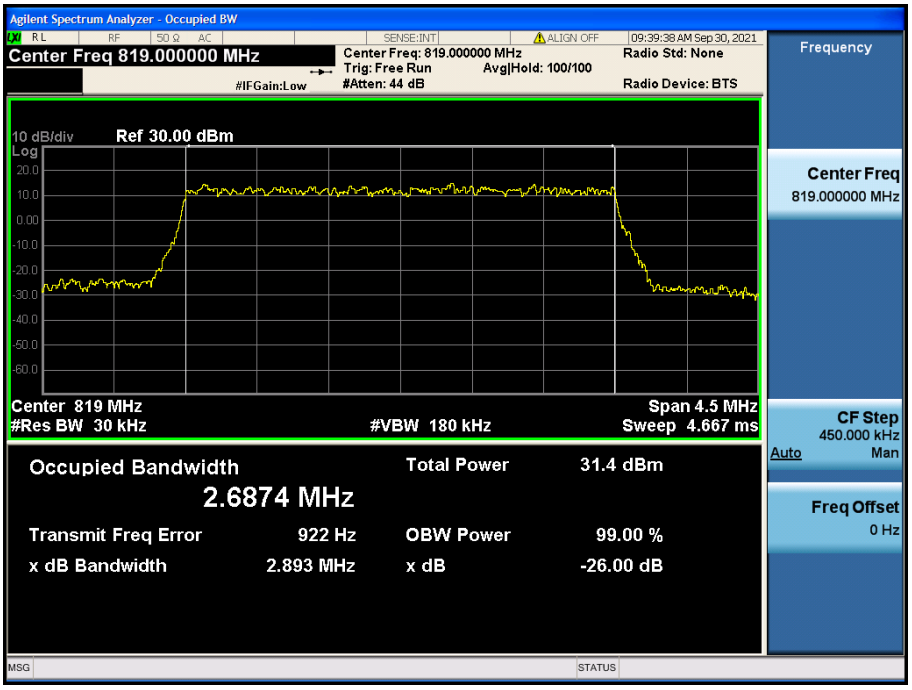

LTE Band 26 / 3 MHz / QPSK - RB Size 15

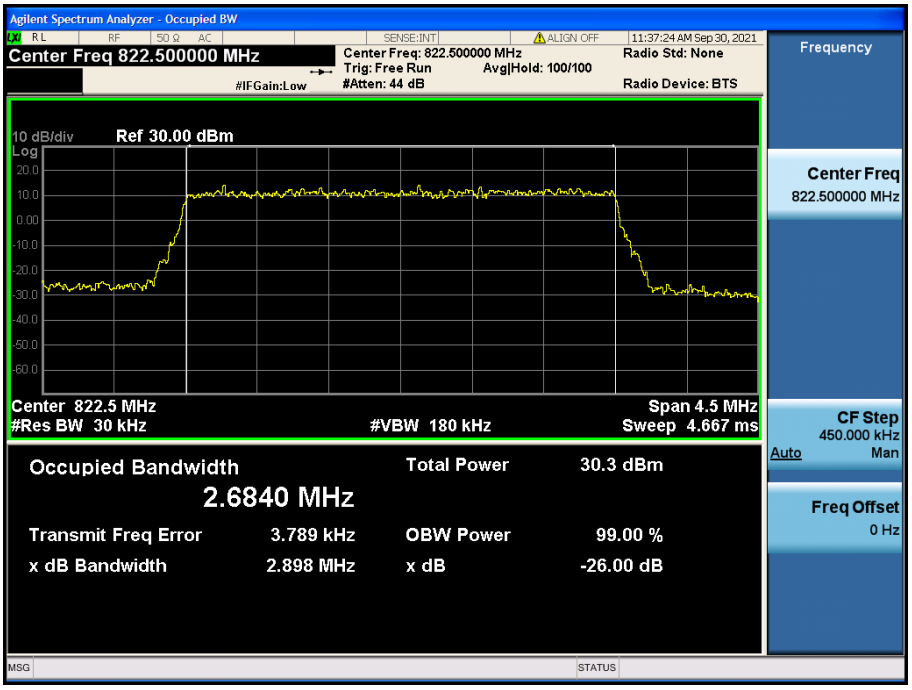

LTE Band 26 / 3 MHz / 16QAM - RB Size 15

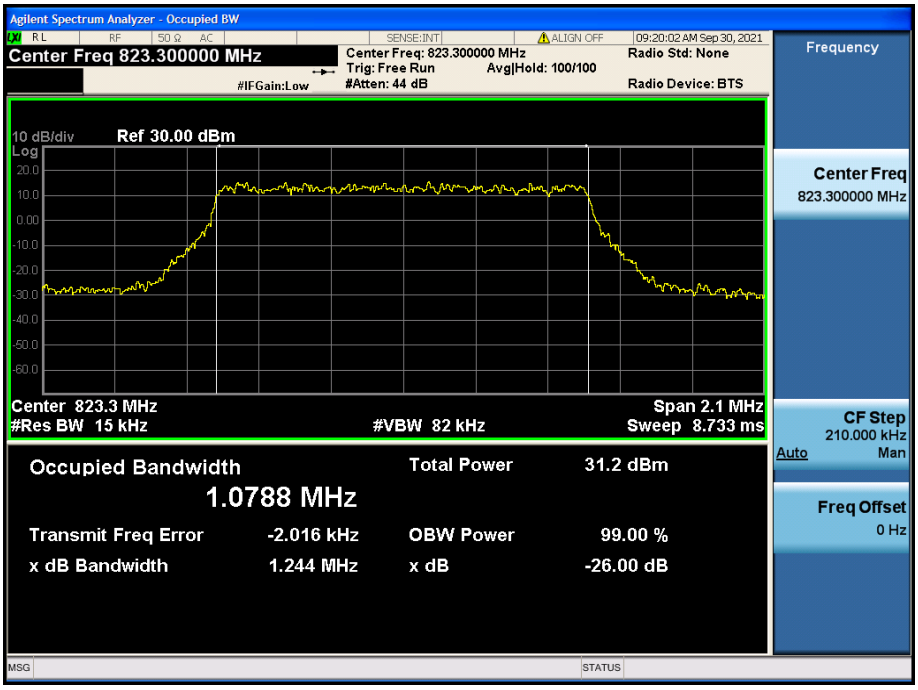

LTE Band 26 / 1.4 MHz / QPSK - RB Size 6

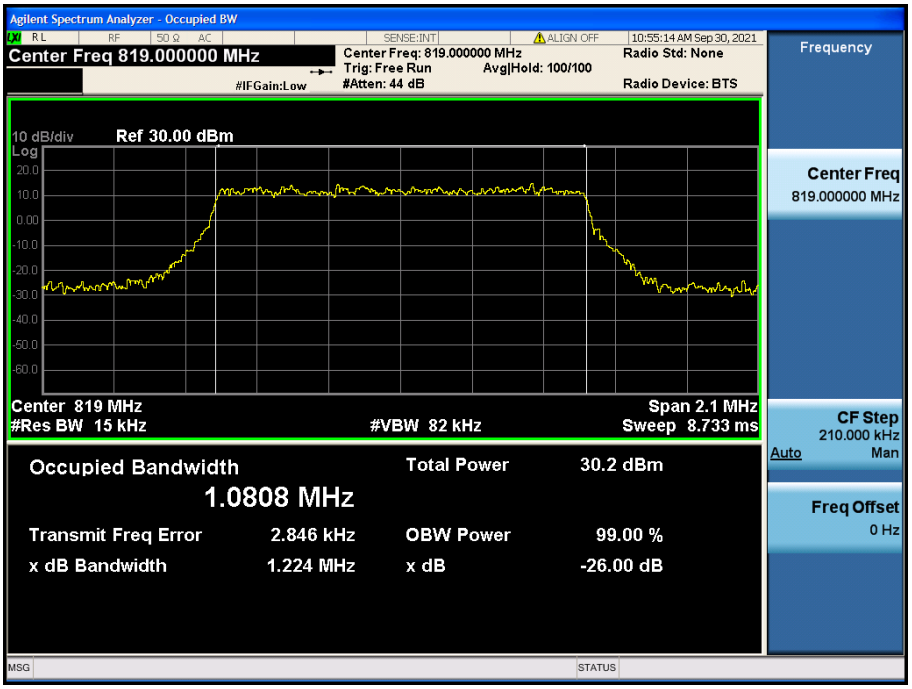

LTE Band 26 / 1.4 MHz / 16QAM - RB Size 6

8.2. BAND EDGE EMISSIONS(Conducted)

- Band Edge & Extended Band Edge

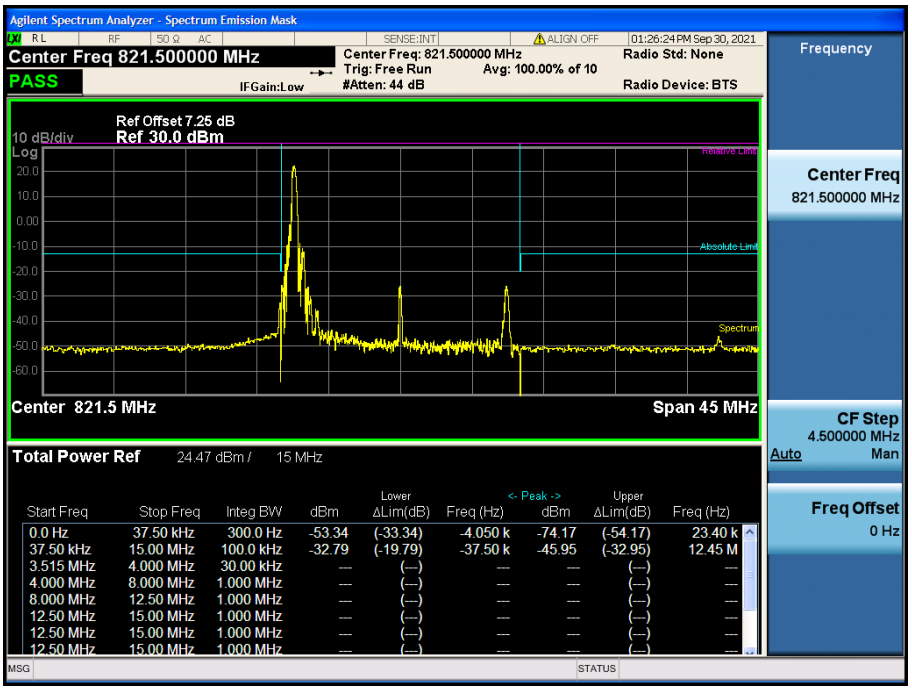

LTE Band 26 / 15MHz / QPSK - RB Size/Offset (1/0)

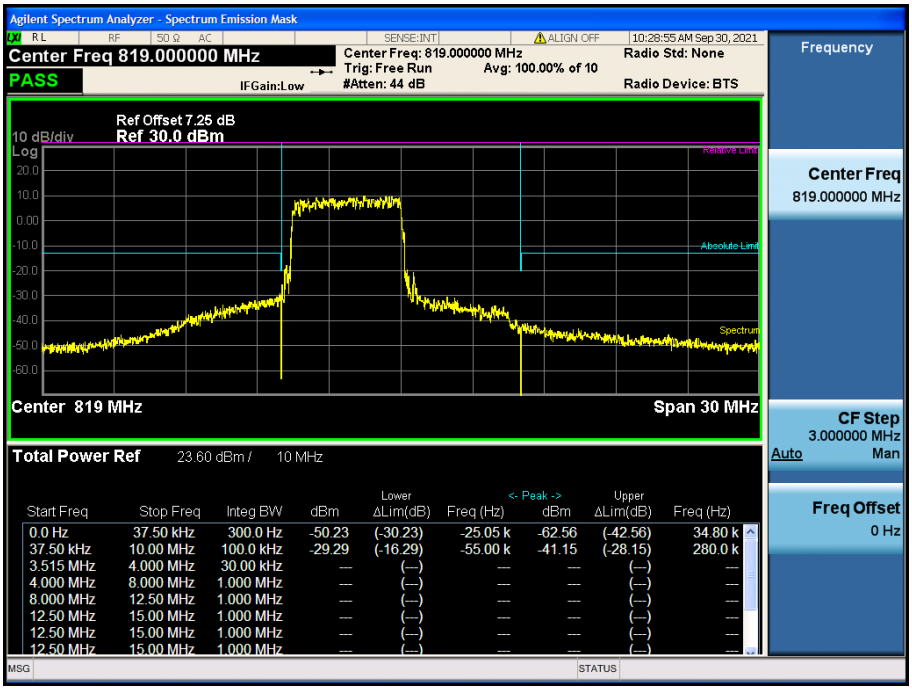

LTE Band 26 / 10MHz / QPSK - RB Size/Offset (25/0)

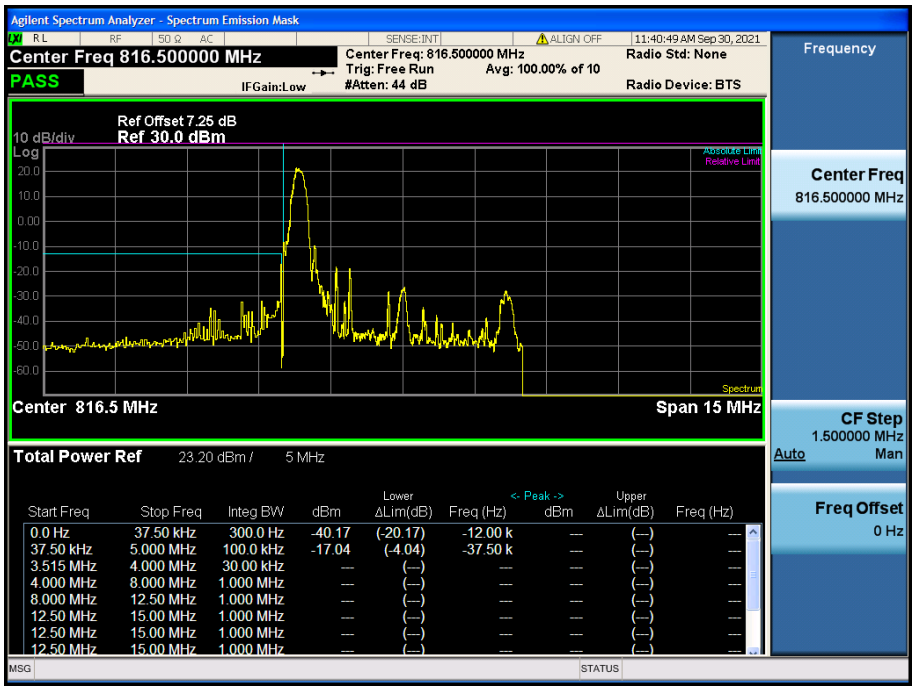

LTE Band 26 / 5MHz / 16QAM - RB Size/Offset (1/0)

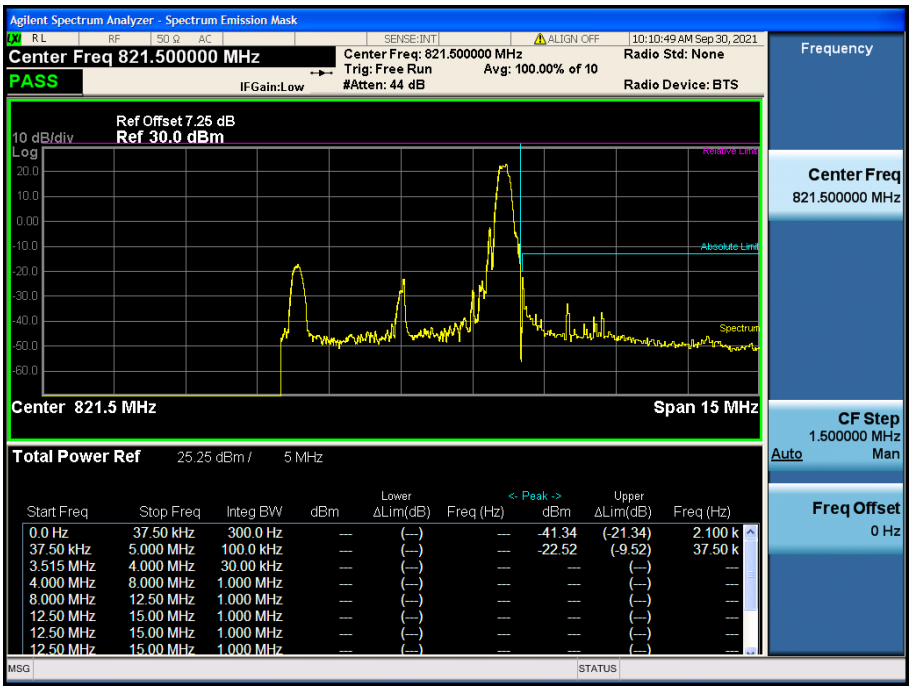

LTE Band 26 / 5MHz / QPSK - RB Size/Offset (1/24)

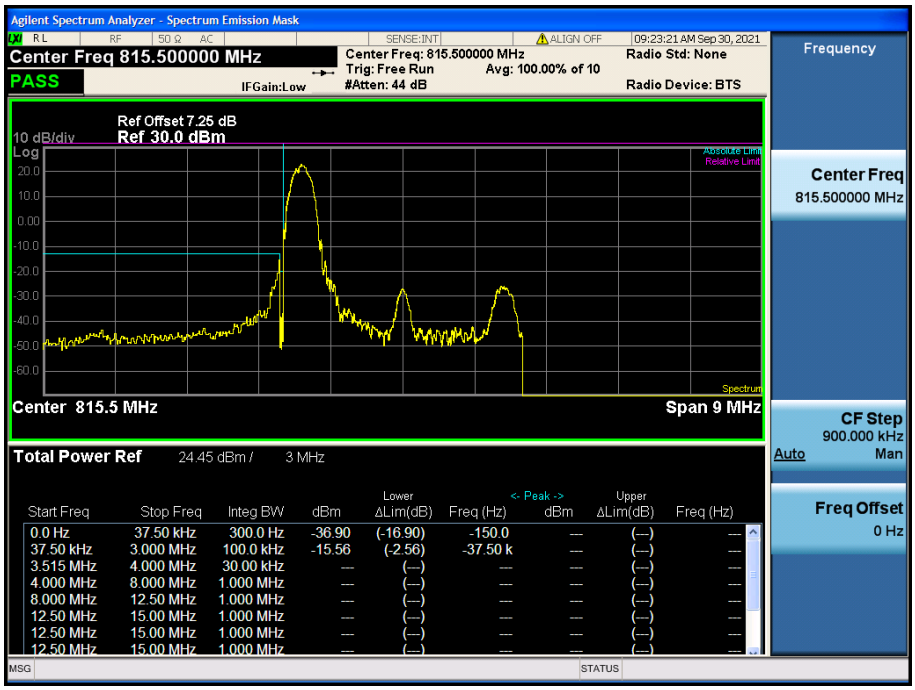

LTE Band 26 / 3MHz / QPSK - RB Size/Offset (1/0)

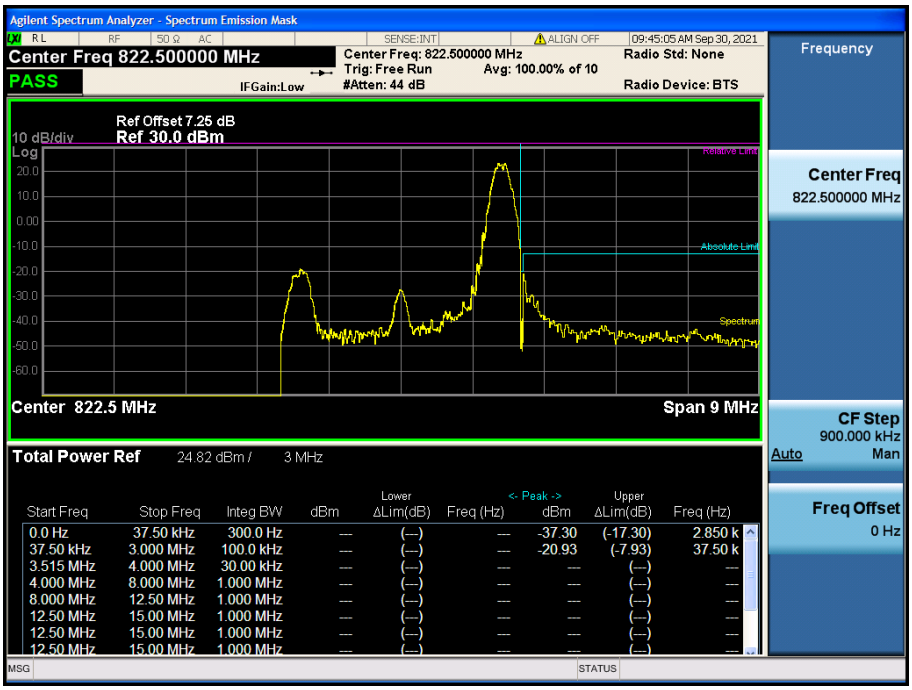

LTE Band 26 / 3MHz / QPSK - RB Size/Offset (1/14)

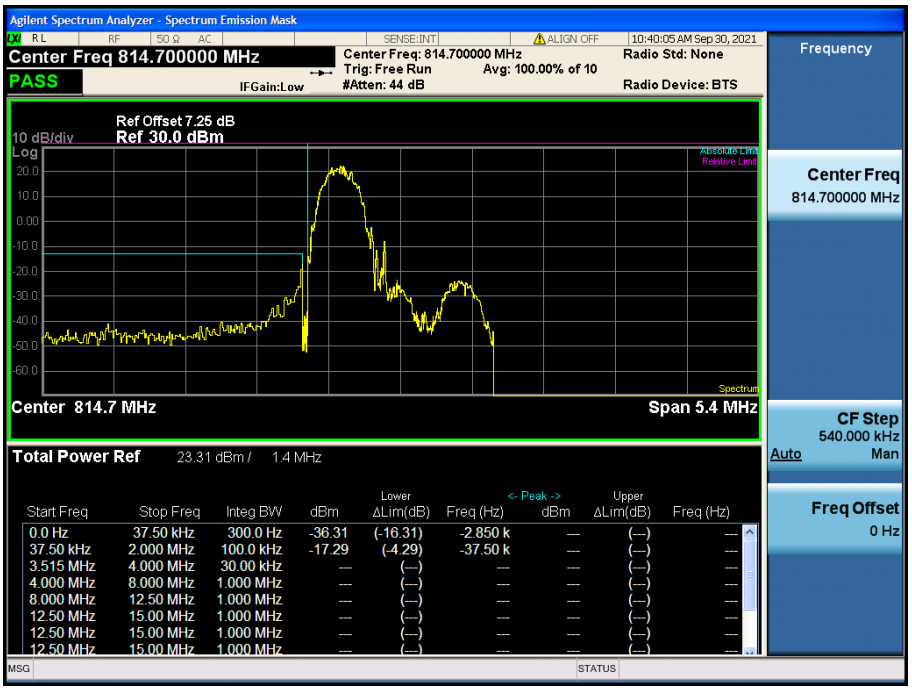

LTE Band 26 / 1.4MHz / 16QAM - RB Size/Offset (1/0)

LTE Band 26 / 1.4MHz / QPSK - RB Size/Offset (3/3)

8.3. SPURIOUS AND HARMONICS EMISSIONS(Conducted)

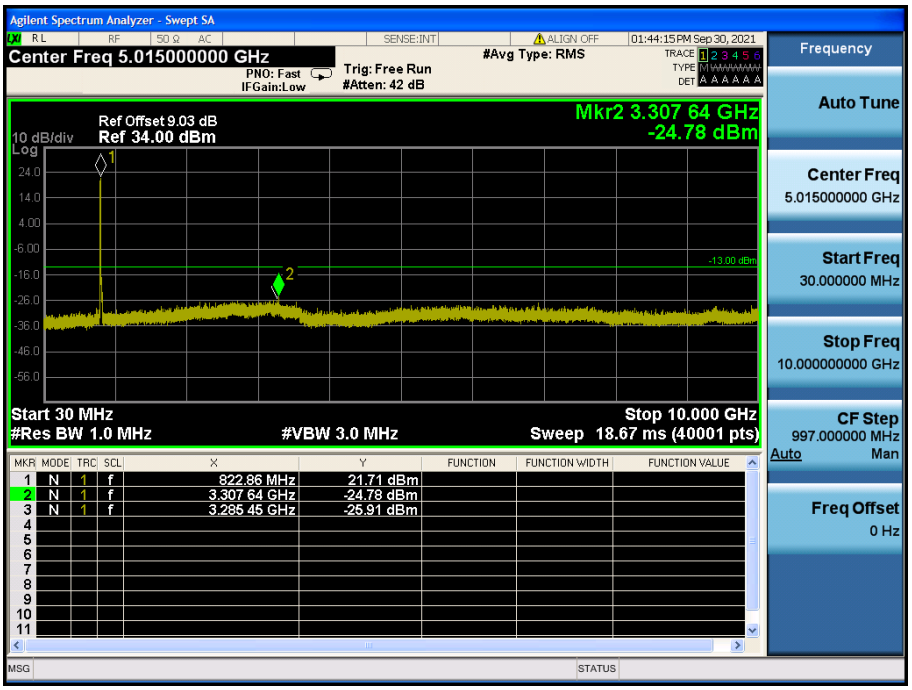

LTE Band 26 / 15MHz / QPSK - RB Size/Offset (75/0) - Low Channel

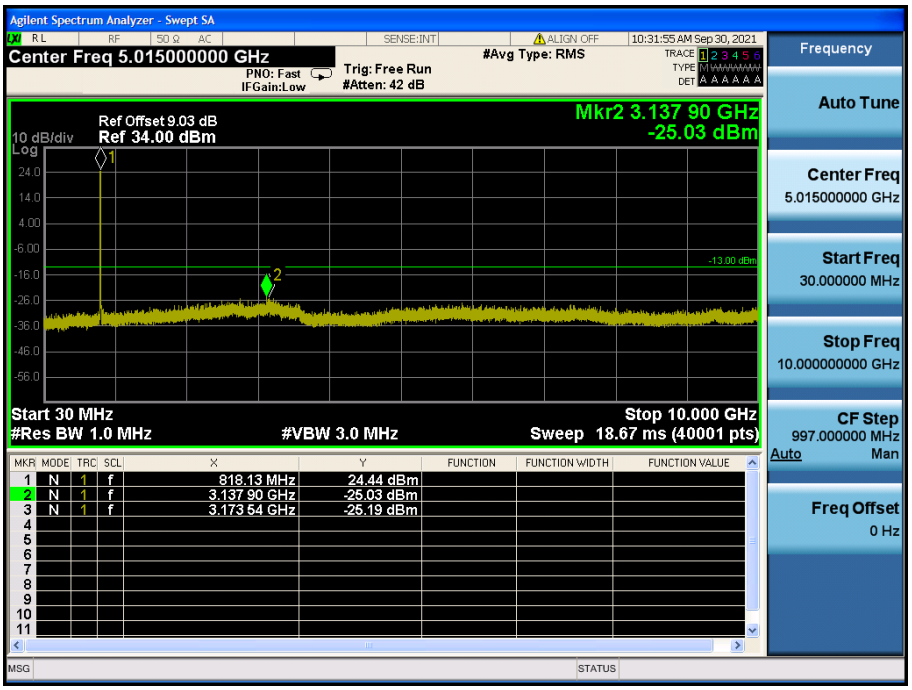

LTE Band 26 / 10MHz / QPSK - RB Size/Offset (25/12) - Low Channel

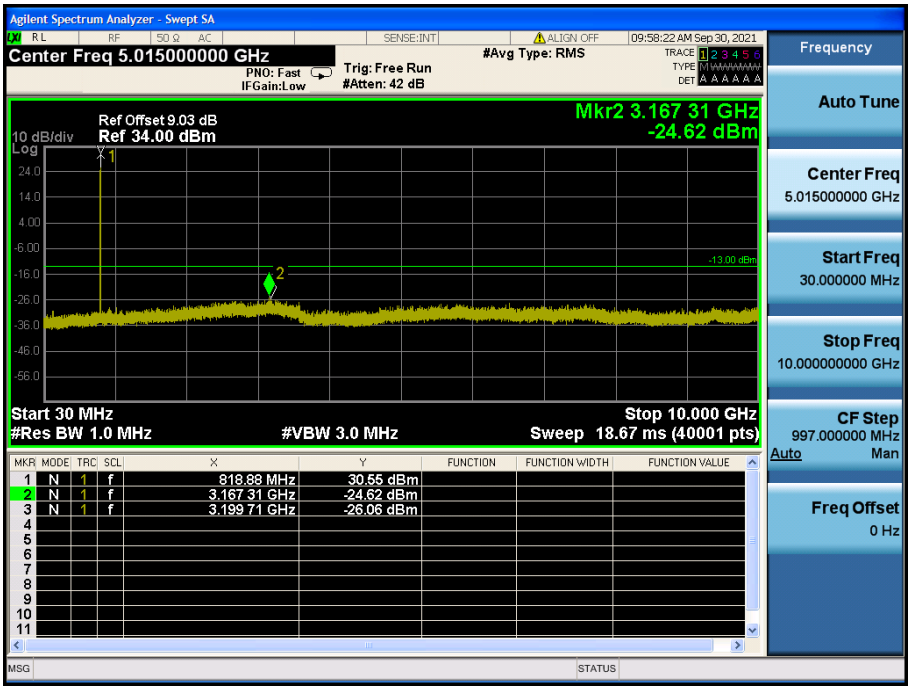

LTE Band 26 / 5MHz / QPSK - RB Size/Offset (1/24) - Low Channel

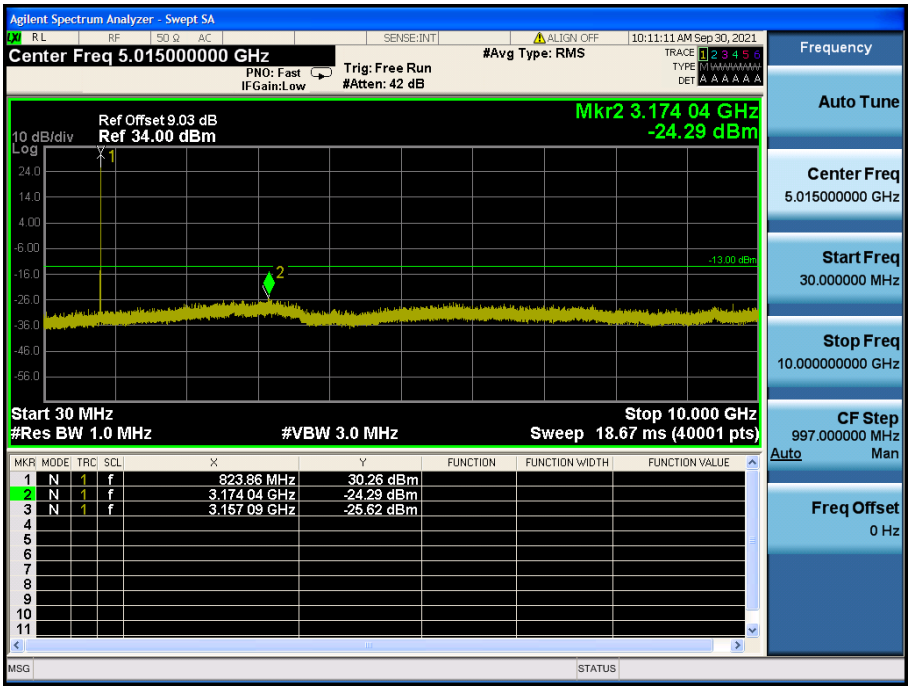

LTE Band 26 / 5MHz / QPSK - RB Size/Offset (1/24) - High Channel

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

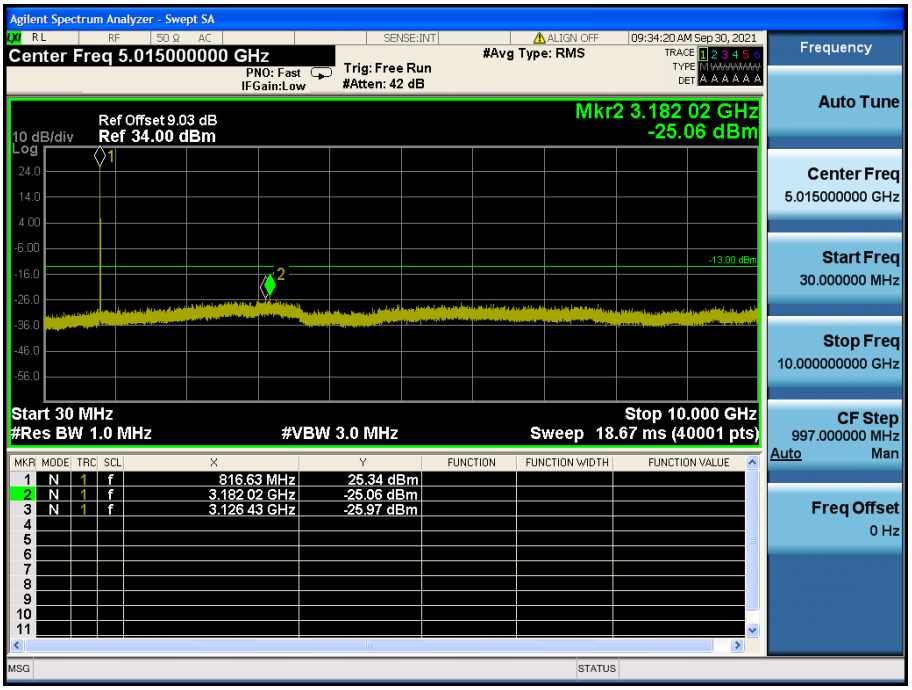

LTE Band 26 / 3MHz / QPSK - RB Size/Offset (15/0) - Low Channel

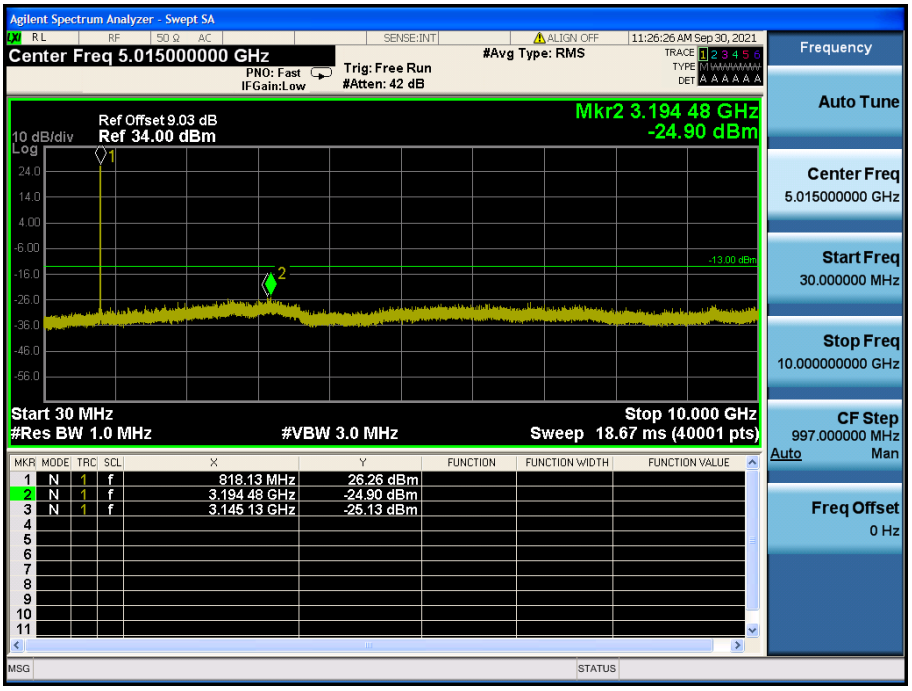

LTE Band 26 / 3MHz / 16QAM - RB Size/Offset (15/0) - Mid Channel

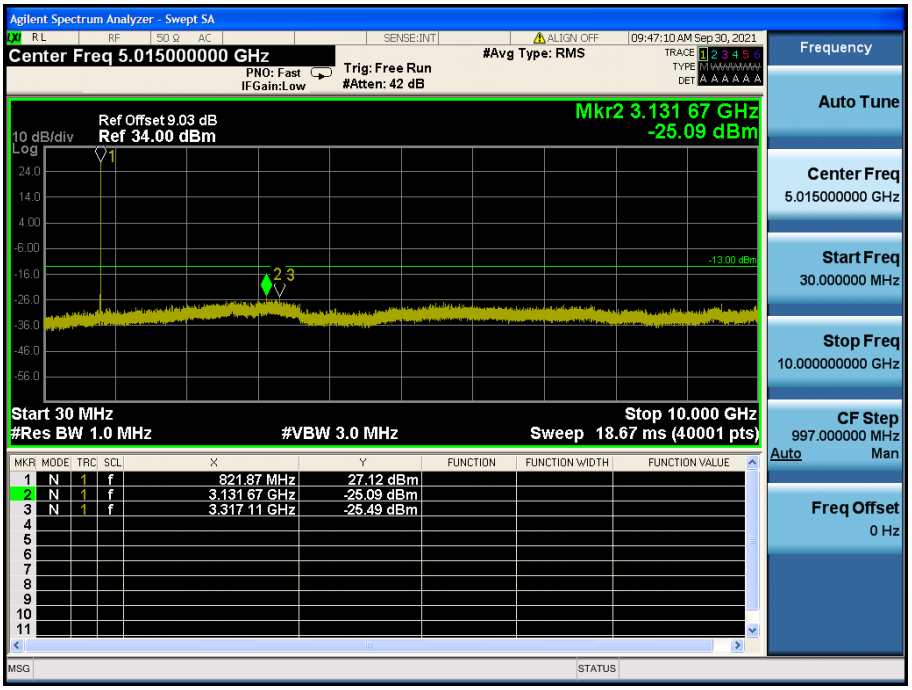

LTE Band 26 / 3MHz / QPSK - RB Size/Offset (8/0) - High Channel

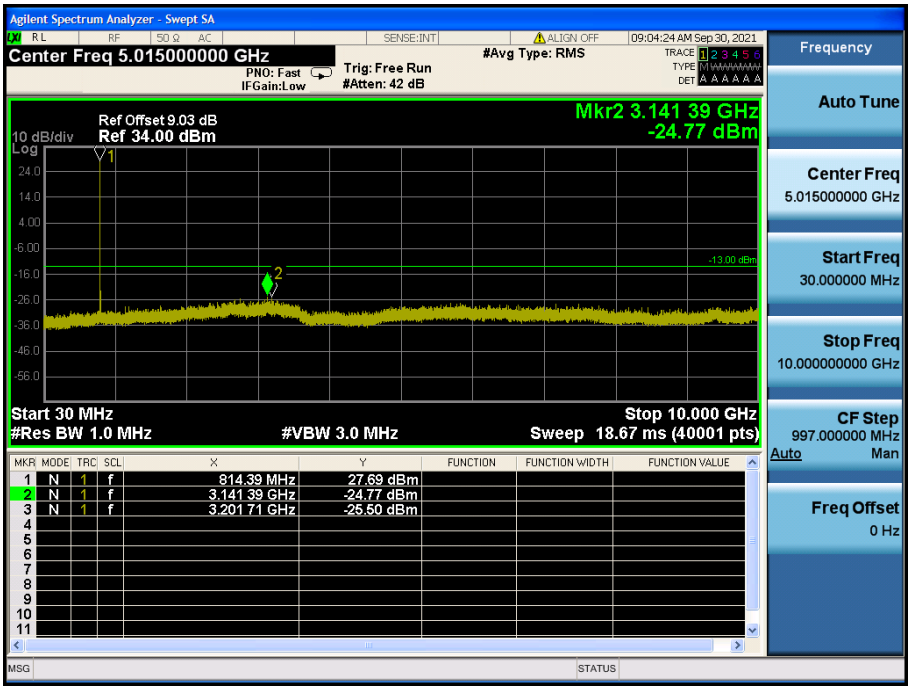

LTE Band 26 / 1.4MHz / QPSK - RB Size/Offset (6/0) – Low Channel

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.

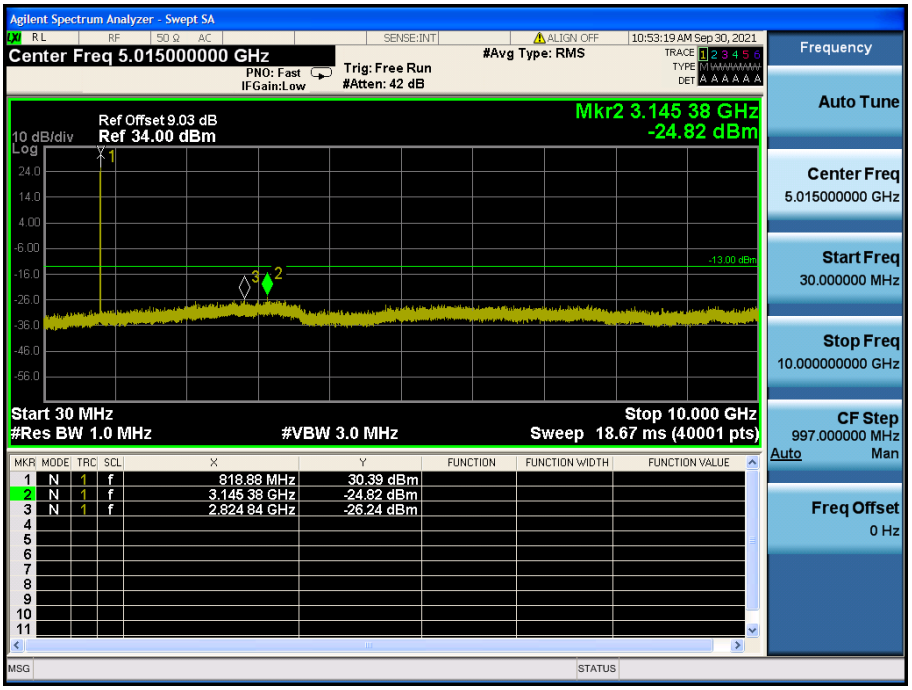

LTE Band 26 / 1.4MHz / 16QAM - RB Size/Offset (3/0) – Mid Channel

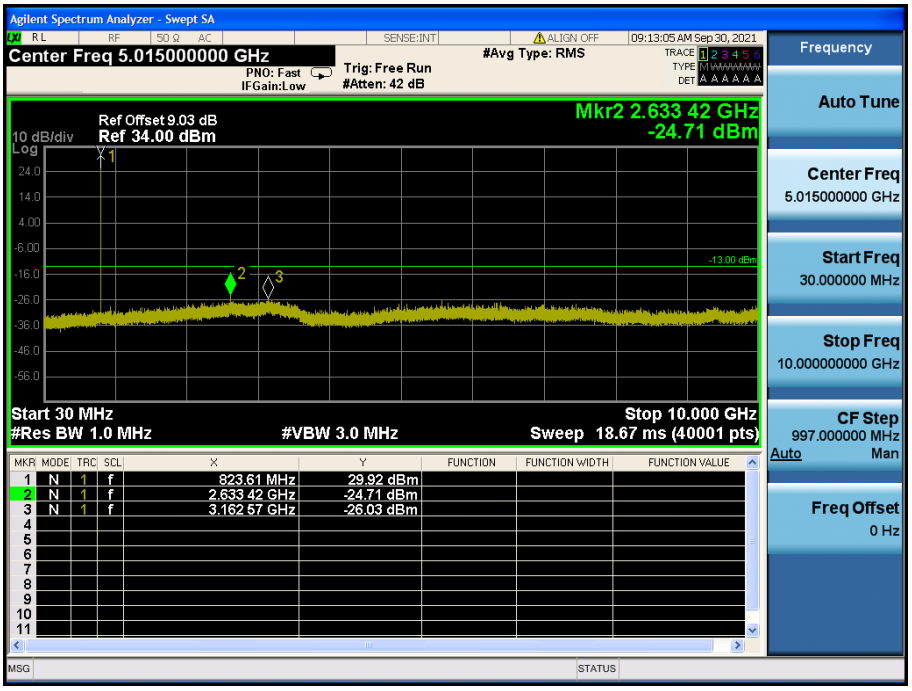

LTE Band 26 / 1.4MHz / QPSK - RB Size/Offset (1/2) – High Channel

This test report is prohibited to copy or reissue in whole or in part without the approval of DT&C Co., Ltd.