

Test report No:  
2570577R.704B

## FCC TEST REPORT

|                                             |                                                                                                                        |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Product Name                                | Mobile Computer                                                                                                        |
| Model and /or type reference                | PM84P                                                                                                                  |
| Trademark                                   | N/A                                                                                                                    |
| FCC ID                                      | V2X-PM84P                                                                                                              |
| Applicant's name / address                  | POINT MOBILE Co., Ltd.<br>A-26F, Building Gasan Publik 178, Digital-ro, Geumcheon-gu<br>Seoul, 08513 Republic of Korea |
| Test method requested, standard             | 47 CFR FCC Part 15 (Section 15.407)<br>ANSI C63.10: 2020                                                               |
| Verdict Summary                             | IN COMPLIANCE                                                                                                          |
| Documented by (name / position & signature) | Jun Xu/ Project Engineer<br>        |
| Approved by (name / position & signature)   | Frank He/Technical Manager<br>      |
| Date of issue                               | 2025-12-05                                                                                                             |
| Report Version                              | V1.0                                                                                                                   |
| Report template No                          | Template_FCC Part 15E-RF-V1.0                                                                                          |

## INDEX

|                                                                      | page |
|----------------------------------------------------------------------|------|
| General conditions .....                                             | 4    |
| Environmental conditions .....                                       | 4    |
| Possible test case verdicts .....                                    | 5    |
| Abbreviations.....                                                   | 5    |
| Document History.....                                                | 6    |
| Remarks and Comments .....                                           | 6    |
| Used Equipment.....                                                  | 7    |
| Uncertainty .....                                                    | 10   |
| 1 General Information .....                                          | 11   |
| 1.1 General Description of the Item(s).....                          | 11   |
| 1.2 Channel List.....                                                | 12   |
| 2 Description of Test Setup.....                                     | 13   |
| 2.1 Auxiliary equipment /Accessories/Test software for the EUT ..... | 13   |
| 2.2 Worst-case configuration and mode.....                           | 14   |
| 2.3 Power setting in test .....                                      | 15   |
| 3 Verdict summary section.....                                       | 18   |
| 3.1 Standards .....                                                  | 18   |
| 3.2 Deviation(s) from the Standard(s) / Test Specification(s).....   | 18   |
| 3.3 Overview of results .....                                        | 19   |
| 3.4 Test Facility.....                                               | 20   |
| 4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE .....                          | 21   |
| 4.1 AC Power Line Conducted Emission.....                            | 21   |
| 4.1.1 Limit .....                                                    | 21   |
| 4.1.2 Test Setup .....                                               | 21   |
| 4.1.3 Test Procedure .....                                           | 21   |
| 4.2 Radiated Emissions .....                                         | 22   |
| 4.2.1 Limit .....                                                    | 22   |
| 4.2.2 Test Setup .....                                               | 24   |
| 4.2.3 Test Procedure .....                                           | 25   |
| 4.3 Emission bandwidth.....                                          | 26   |
| 4.3.1 Limit .....                                                    | 26   |
| 4.3.2 Test Setup .....                                               | 26   |
| 4.3.3 Test Procedure .....                                           | 26   |
| Test Method.....                                                     | 26   |

|        |                                                             |     |
|--------|-------------------------------------------------------------|-----|
| 4.4    | 6dB bandwidth .....                                         | 27  |
| 4.4.1  | Limit .....                                                 | 27  |
| 4.4.2  | Test Setup .....                                            | 27  |
| 4.4.3  | Test Procedure .....                                        | 27  |
| 4.5    | Duty cycle .....                                            | 28  |
| 4.5.1  | Limit .....                                                 | 28  |
| 4.5.2  | Test Setup .....                                            | 28  |
| 4.5.3  | Test Procedure .....                                        | 28  |
| 4.6    | Power Output.....                                           | 29  |
| 4.6.1  | Limit .....                                                 | 29  |
| 4.6.2  | Test Setup .....                                            | 30  |
| 4.6.3  | Test Procedure .....                                        | 30  |
| 4.7    | Maximum Power Spectral Density.....                         | 32  |
| 4.7.1  | Limit .....                                                 | 32  |
| 4.7.2  | Test Setup .....                                            | 32  |
| 4.7.3  | Test Procedure .....                                        | 33  |
| 4.8    | Radiated Emission Band Edge .....                           | 34  |
| 4.8.1  | Limit .....                                                 | 34  |
| 4.8.2  | Test Setup .....                                            | 36  |
| 4.8.3  | Test Procedure .....                                        | 36  |
| 4.9    | Frequency Stability .....                                   | 38  |
| 4.9.1  | Limit: .....                                                | 38  |
| 4.9.2  | Test Setup .....                                            | 38  |
| 4.9.3  | Test Procedure .....                                        | 38  |
| 4.10   | Antenna Requirement.....                                    | 39  |
| 4.10.1 | Limit: .....                                                | 39  |
| 4.10.2 | Antenna Connector Construction: .....                       | 39  |
| 5      | Test setup photo and EUT Photo .....                        | 40  |
| 6      | Test Result .....                                           | 41  |
|        | Appendix A: Conducted Emission .....                        | 41  |
|        | Appendix B: Radiated Emission .....                         | 43  |
|        | Appendix C: Emission bandwidth and occupied bandwidth ..... | 251 |
|        | Appendix D: 6dB Emission Bandwidth .....                    | 341 |
|        | Appendix E: Duty cycle .....                                | 352 |
|        | Appendix F: Power Output.....                               | 397 |
|        | Appendix G: Maximum Power Spectral Density .....            | 402 |
|        | Appendix H: Radiated Emission Band Edge .....               | 485 |

## COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

## GENERAL CONDITIONS

|                                                                                                                                               |                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Test Location A                                                                                                                               | No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China     |
| Test Location B                                                                                                                               | No. 8213, Fanhua Avenue, Baohe District, Hefei City, Anhui Province, China |
| Date(receive sample)                                                                                                                          | Aug. 04, 2025                                                              |
| Date (start test)                                                                                                                             | Aug. 09, 2025                                                              |
| Date (finish test)                                                                                                                            | Nov. 04, 2025                                                              |
| Note: Radiated Emission and Radiated Emission Band Edge were completed at Test Location B, and other tests were completed at Test Location A. |                                                                            |

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

## ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

|                       |               |
|-----------------------|---------------|
| Ambient temperature   | 15 °C – 35 °C |
| Relative Humidity air | 30% - 60%     |

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

## POSSIBLE TEST CASE VERDICTS

|                                         |                 |
|-----------------------------------------|-----------------|
| Test case does not apply to test object | N/A             |
| Test object does meet requirement       | P (Pass) / PASS |
| Test object does not meet requirement   | F (Fail) / FAIL |
| Not measured                            | N/M             |

## ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

|       |                               |
|-------|-------------------------------|
| EUT   | : Equipment Under Test        |
| QP    | : Quasi-Peak                  |
| CAV   | : CISPR Average               |
| AV    | : Average                     |
| CDN   | : Coupling Decoupling Network |
| SAC   | : Semi-Anechoic Chamber       |
| OATS  | : Open Area Test Site         |
| BW    | : Bandwidth                   |
| AM    | : Amplitude Modulation        |
| PM    | : Pulse Modulation            |
| HCP   | : Horizontal Coupling Plane   |
| VCP   | : Vertical Coupling Plane     |
| $U_N$ | : Nominal voltage             |
| Tx    | : Transmitter                 |
| Rx    | : Receiver                    |
| N/A   | : Not Applicable              |
| N/M   | : Not Measured                |

## DOCUMENT HISTORY

| Report No.    | Version | Description              | Issued Date |
|---------------|---------|--------------------------|-------------|
| 2570577R.704B | V1.0    | Initial issue of report. | 2025-12-05  |
|               |         |                          |             |
|               |         |                          |             |
|               |         |                          |             |
|               |         |                          |             |
|               |         |                          |             |
|               |         |                          |             |
|               |         |                          |             |

## REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with 47 CFR FCC Part 15 (Section 15.407).
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
  - Chapter 1.1 General Description of the Item(s);
  - Chapter 1.2 Channel List;

## USED EQUIPMENT

### Test Location A :Conducted Test/ TR8

| Instrument                                                    | Manufacturer | Model No.     | Serial No. | Cal. Date  | Next Cal. Date | Firmware Versiom | Software version |
|---------------------------------------------------------------|--------------|---------------|------------|------------|----------------|------------------|------------------|
| Wireless Connectivity Tester                                  | R&S          | CMW 270       | 102593     | 2025.05.10 | 2026.05.09     | V 4.0.60         | N/A              |
| Coaxial Cable                                                 | N/A          | N/A           | 2477       | 2025.06.10 | 2026.06.09     | N/A              | N/A              |
| Coaxial Cable                                                 | N/A          | N/A           | 2478       | 2025.06.10 | 2026.06.09     | N/A              | N/A              |
| High and low temperature and fast temperature change test box | ASTUOD       | ASTD-FBT-225K | N/A        | 2025.03.16 | 2026.03.15     | N/A              | N/A              |
| Temperature/Humidity Meter                                    | RTS          | RTS-8S        | RF07       | 2025.06.17 | 2026.06.16     | N/A              | N/A              |
| Test system                                                   |              |               |            |            |                |                  |                  |
| Instrument                                                    | Manufacturer | Model No.     | Serial No. | Cal. Date  | Next Cal. Date | Firmware Versiom | Software version |
| MAX Signal Analyzer                                           | Keysight     | N9010A        | MY48030494 | 2024.10.26 | 2025.10.25     | A.14.03          | N/A              |
| MAX Signal Analyzer                                           | Keysight     | N9010A        | MY48030494 | 2025.09.20 | 2026.09.19     | A.14.03          | N/A              |
| RF Control Unit                                               | Tonscend     | JS0806-2      | 22G8060594 | 2025.01.26 | 2026.01.25     | N/A              | N/A              |
| MXG-B RF Vector Signal Generator                              | Keysight     | N5182B        | MY61252529 | 2025.03.23 | 2026.03.22     | B.01.96          | N/A              |
| Frequency extender for EXG or MXG                             | Keysight     | N5182BX07     | MY59362500 | 2025.03.23 | 2026.03.22     | N/A              | N/A              |
| EXG-B MW Analog Signal Generator                              | Keysight     | N5173B        | MY61252566 | 2025.05.10 | 2026.05.09     | B.01.95          | N/A              |
| Test Software                                                 | Tonscend     | TS1120        | JS1120-3   | N/A        | N/A            | N/A              | V3.0.22          |

### Test Location A :AC Power Line Conducted Emission / TR1

| Instrument                      | Manufacturer | Model No.  | Serial No. | Cal. Date  | Next Cal. Date | Firmware Versiom | Software version |
|---------------------------------|--------------|------------|------------|------------|----------------|------------------|------------------|
| EMI Test Receiver               | R&S          | ESCI       | 100726     | 2025.05.18 | 2026.05.17     | 4.42 SP1         | N/A              |
| Two-Line V-Network              | R&S          | ENV 216    | 101044     | 2024.10.26 | 2025.10.25     | N/A              | N/A              |
| Two-Line V-Network              | R&S          | ENV 216    | 101044     | 2025.09.20 | 2026.09.19     | N/A              | N/A              |
| Two-Line V-Network              | R&S          | ENV 216    | 101189     | 2025.05.10 | 2026.05.09     | N/A              | N/A              |
| 50ohm Coaxial Switch            | Anritsu      | MP59B      | 6200464462 | 2025.03.16 | 2026.03.15     | N/A              | N/A              |
| Coaxial Cable                   | Huber+Suhner | RG 223     | TR1-C1     | 2025.03.16 | 2026.03.15     | N/A              | N/A              |
| Impedance Stabilization Network | Teseq GmbH   | ISN T800   | 57318      | 2025.02.25 | 2026.02.24     | N/A              | N/A              |
| Temperature/Humidity Meter      | RTS          | RTS-8S     | EMC01      | 2025.06.17 | 2026.06.16     | N/A              | N/A              |
| Shielding room                  | Quietek      | 4.9m*4m*3m | TR1        | 2023.03.04 | 2028.03.03     | N/A              | N/A              |
| Dekra test software             | Dekra        | N/A        | N/A        | N/A        | N/A            | N/A              | N/A              |

## Test Location A :Radiated Emission(9KHz-1GHz) / AC2

| Instrument                 | Manufacturer | Model No. | Serial No. | Cal. Date  | Next Cal. Date | Firmware Versiom | Software version |
|----------------------------|--------------|-----------|------------|------------|----------------|------------------|------------------|
| EMI Test Receiver          | R&S          | ESCI      | 100573     | 2025.01.11 | 2026.01.10     | 4.42 SP3         | N/A              |
| Loop Antenna               | R&S          | HFH2-Z2E  | 101149     | 2025.04.16 | 2026.04.15     | N/A              | N/A              |
| Bilog Antenna              | Teseq GmbH   | CBL6112D  | 27611      | 2025.03.24 | 2026.03.23     | N/A              | N/A              |
| Temperature/Humidity Meter | RTS          | RTS-8S    | AC2-TH     | 2025.06.17 | 2026.06.16     | N/A              | N/A              |
| Coaxial Cable              | Huber+Suhner | RTS-1909  | THM-021    | 2025.04.30 | 2026.04.29     | N/A              | N/A              |
| Anechoic chamber           | Quietek      | 9m*6m*6m  | AC2        | 2024.07.07 | 2029.07.06     | N/A              | N/A              |
| Dekra test software        | Dekra        | N/A       | N/A        | N/A        | N/A            | N/A              | 3                |

## Test Location A: Radiated Emission (1GHz-40GHz) / AC6

| Instrument                     | Manufacturer    | Model No.    | Serial No.      | Cal. Date  | Next Cal. Date | Firmware Versiom | Software version |
|--------------------------------|-----------------|--------------|-----------------|------------|----------------|------------------|------------------|
| Signal analyzer                | Agilent         | N9020A       | MY49100159      | 2025.05.10 | 2026.05.09     | A 08.54          | N/A              |
| Power Amplifier                | MVE             | MPC1018.50   | C30002D         | 2025.05.17 | 2026.05.16     | N/A              | N/A              |
| DRG Horn Antenna               | RFSPIN          | DRH18-E      | CE2C07A18E<br>N | 2024.12.07 | 2025.12.06     | N/A              | N/A              |
| Broad-Band Horn Antenna        | SCHWARZBEC<br>K | BBHA 9170    | 750             | 2024.11.24 | 2025.11.23     | N/A              | N/A              |
| Pre-Amplifier                  | Schwarzbeck     | BBV 9721     | 00114           | 2025.05.17 | 2026.05.16     | N/A              | N/A              |
| TRILOG Broadband Antenna       | SCHWARZBEC<br>K | VULB 9168    | 1231            | 2025.05.28 | 2026.05.27     | N/A              | N/A              |
| Temperature/Humid<br>ity Meter | RTS             | RTS-8S       | RF04            | 2025.06.17 | 2026.06.16     | N/A              | N/A              |
| Temperature/Humid<br>ity Meter | RTS             | RTS-8S       | RF08            | 2025.06.17 | 2026.06.16     | N/A              | N/A              |
| Anechoic chamber               | Quietek         | 9m*5.5m*5.5m | AC6             | 2024.06.30 | 2029.06.29     | N/A              | N/A              |
| Test Software                  | Tonscend        | JS36         | JS36-RSE        | N/A        | N/A            | N/A              | 5.0.0            |

## Test Location B: Radiated Emission Band Edge / AC103

| Instrument                 | Manufacturer | Model No.    | Serial No.   | Cal. Date  | Next Cal. Date | Firmware Version | Software version |
|----------------------------|--------------|--------------|--------------|------------|----------------|------------------|------------------|
| Signal analyzer            | keysight     | N9020B       | MY63490118   | 2025.08.08 | 2026.08.07     | A 08.54          | N/A              |
| Bilog Antenna              | TESEQ        | CBL6112D     | 64164        | 2024.11.23 | 2025.11.22     | N/A              | N/A              |
| Horn Antenna               | RF SPIN      | DRH18-E      | KV2D11A18ES  | 2024.11.02 | 2025.11.01     | N/A              | N/A              |
| Horn Antenna               | RF SPIN      | DRH18-E      | KV2D11A18ES  | 2025.10.19 | 2026.10.18     | N/A              | N/A              |
| Broad-Band Horn Antenna    | Schwarzbeck  | BBHA9170     | 01312        | 2024.10.28 | 2025.10.27     | N/A              | N/A              |
| Broad-Band Horn Antenna    | Schwarzbeck  | BBHA9170     | 01312        | 2025.10.24 | 2026.10.23     | N/A              | N/A              |
| Amplifier                  | ESE          | LNA0118      | LNA23100009  | 2025.05.10 | 2026.05.09     | N/A              | N/A              |
| Amplifier                  | Tonscend     | TAP01018048S | AP23J8060307 | 2024.11.16 | 2025.11.15     | N/A              | N/A              |
| Band Reject Filter Group   | Tonscend     | JS0806-F     | 23G806F0701  | 2024.11.20 | 2025.11.19     | N/A              | N/A              |
| Temperature/Humidity Meter | RTS          | RTS-8S       | 026          | 2024.09.04 | 2025.09.03     | N/A              | N/A              |
| Temperature/Humidity Meter | RTS          | RTS-8S       | 026          | 2025.08.25 | 2026.08.24     | N/A              | N/A              |
| Test Software              | Tonscend     | JS36         | N/A          | N/A        | N/A            | N/A              | 5.0.0            |

## UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

| Test item Test Location A        | Uncertainty                                                                                                                            |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| AC Power Line Conducted Emission | $\pm 2.92$ dB                                                                                                                          |
| Peak Power Output                | $\pm 1.13$ dB                                                                                                                          |
| Radiated Emission(30MHz~1GHz)    | Horizontal: 30MHz~200MHz: 4.60 dB<br>200MHz~1GHz: 4.10 dB<br>Vertical: 30MHz~200MHz: 4.80 dB<br>200MHz~1GHz: 4.10 dB                   |
| Radiated Emission(1GHz~40GHz)    | Horizontal: 1GHz~18GHz: 5.00 dB<br>Vertical: 1GHz~18GHz: 4.80 dB<br>Horizontal: 18GHz~40GHz: 4.70 dB<br>Vertical: 18GHz~40GHz: 4.60 dB |
| RF antenna conducted test        | $\pm 1.13$ dB                                                                                                                          |
| Radiated Emission Band Edge      | $\pm 5.00$ dB                                                                                                                          |
| DTS Bandwidth                    | $\pm 279$ Hz                                                                                                                           |
| Occupied Bandwidth               | $\pm 279$ Hz                                                                                                                           |
| Power Density                    | $\pm 1.13$ dB                                                                                                                          |

| Test item Test Location B     | Uncertainty                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Radiated Emission(30MHz~1GHz) | Horizontal: 30MHz~200MHz: 4.86 dB<br>300MHz~1GHz: 4.86 dB<br>Vertical: 30MHz~200MHz: 4.92 dB<br>300MHz~1GHz: 4.92 dB                   |
| Radiated Emission(1GHz~40GHz) | Horizontal: 1GHz~18GHz: 5.99 dB<br>Vertical: 1GHz~18GHz: 5.76 dB<br>Horizontal: 18GHz~40GHz: 5.99 dB<br>Vertical: 18GHz~40GHz: 5.76 dB |
| Radiated Emission Band Edge   | $\pm 5.99$ dB                                                                                                                          |

## 1 GENERAL INFORMATION

### 1.1 General Description of the Item(s)

|                               |                                                                                                                                                                                                      |                                |                                      |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------------|
| Product Name:                 | Mobile Computer                                                                                                                                                                                      |                                |                                      |
| Model Name:                   | PM84P                                                                                                                                                                                                |                                |                                      |
| Trademark.:                   | N/A                                                                                                                                                                                                  |                                |                                      |
| FCC ID:                       | V2X-PM84P                                                                                                                                                                                            |                                |                                      |
| Power Supply:                 | 3.87Vdc, EUT is equipped with an adapter to power it via AC/DC.                                                                                                                                      |                                |                                      |
| Hardware Version:             | MP                                                                                                                                                                                                   |                                |                                      |
| Software Version:             | PM84PG15.00                                                                                                                                                                                          |                                |                                      |
| Manufacturer:                 | POINT MOBILE Co., Ltd.                                                                                                                                                                               |                                |                                      |
| Manufacturer Address:         | A-26F, Building Gasan Publik 178, Digital-ro, Geumcheon-gu Seoul, 08513 Republic of Korea                                                                                                            |                                |                                      |
| Test Matrix/ IMEI:            | RF Conducted                                                                                                                                                                                         | 352336370002521                |                                      |
|                               | RSE                                                                                                                                                                                                  | 352336370002315                |                                      |
| Wireless specification:       | 802.11a/n/ac/ax                                                                                                                                                                                      |                                |                                      |
| Operating frequency range(s): | 5.2GHz: 5150 ~ 5250MHz<br>5.3GHz: 5250 ~ 5350MHz<br>5.6GHz: 5470 ~ 5725MHz<br>5.8GHz: 5725 ~ 5850MHz                                                                                                 |                                |                                      |
| Type of Modulation:           | 802.11a:OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>802.11n:OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>802.11ac:OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)<br>802.11ax:OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) |                                |                                      |
| Smart System:                 | <input checked="" type="checkbox"/>                                                                                                                                                                  | SISO                           |                                      |
|                               | <input checked="" type="checkbox"/>                                                                                                                                                                  | MIMO-CDD                       |                                      |
|                               | <input type="checkbox"/>                                                                                                                                                                             | MIMO-Beamforming               |                                      |
| DFS Function:                 | <input type="checkbox"/>                                                                                                                                                                             | Master device                  |                                      |
|                               | <input type="checkbox"/>                                                                                                                                                                             | Slave with radar detection     |                                      |
|                               | <input checked="" type="checkbox"/>                                                                                                                                                                  | Slave without radar detection  |                                      |
| TPC Function:                 | <input checked="" type="checkbox"/>                                                                                                                                                                  | Support                        | <input type="checkbox"/> Not Support |
| Antenna Type:                 | PIFA Antenna                                                                                                                                                                                         |                                |                                      |
| Antenna Gain:                 | SISO:                                                                                                                                                                                                | 5150-5250MHz : Ant2: -2.20 dBi | Ant3: 0.40 dBi                       |
|                               |                                                                                                                                                                                                      | 5250-5350MHz : Ant2: -2.60 dBi | Ant3: -0.10 dBi                      |
|                               |                                                                                                                                                                                                      | 5475-5725MHz : Ant2: -0.40 dBi | Ant3: -1.10 dBi                      |
|                               |                                                                                                                                                                                                      | 5725-5850MHz : Ant2: 0.10 dBi  | Ant3: -0.70 dBi                      |
|                               | CDD:                                                                                                                                                                                                 | Power                          | 5150-5250MHz : 0.40 dBi              |
|                               |                                                                                                                                                                                                      |                                | 5250-5350MHz : -0.10 dBi             |
|                               |                                                                                                                                                                                                      |                                | 5475-5725MHz : -0.40 dBi             |
|                               |                                                                                                                                                                                                      |                                | 5725-5850MHz : 0.10 dBi              |
|                               |                                                                                                                                                                                                      | PSD                            | 5150-5250MHz : 2.21 dBi              |
|                               |                                                                                                                                                                                                      |                                | 5250-5350MHz : 1.75 dBi              |
|                               |                                                                                                                                                                                                      |                                | 5475-5725MHz : 2.27 dBi              |
|                               |                                                                                                                                                                                                      |                                | 5725-5850MHz : 2.72 dBi              |

Remark:

As above information is provided and confirmed by the applicant. DEKRA is not liable to the accuracy, suitability, reliability or/and integrity of the information.

## 1.2 Channel List

| 802.11a/n/ac/ax(20MHz) Working Frequency of Each Channel: |           |         |           |         |           |         |           |
|-----------------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                                   | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 36                                                        | 5180 MHz  | 40      | 5200 MHz  | 44      | 5220 MHz  | 48      | 5240 MHz  |
| 52                                                        | 5260 MHz  | 56      | 5280 MHz  | 60      | 5300 MHz  | 64      | 5320 MHz  |
| 100                                                       | 5500 MHz  | 104     | 5520 MHz  | 108     | 5540 MHz  | 112     | 5550 MHz  |
| 116                                                       | 5580 MHz  | 120     | 5600 MHz  | 124     | 5620 MHz  | 128     | 5640 MHz  |
| 132                                                       | 5660 MHz  | 136     | 5680 MHz  | 140     | 5700 MHz  | 149     | 5745 MHz  |
| 153                                                       | 5765 MHz  | 157     | 5785 MHz  | 161     | 5805 MHz  | 165     | 5825 MHz  |
| 802.11n/ac/ax(40MHz) Working Frequency of Each Channel:   |           |         |           |         |           |         |           |
| Channel                                                   | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 38                                                        | 5190 MHz  | 46      | 5230 MHz  | 54      | 5270 MHz  | 62      | 5310 MHz  |
| 102                                                       | 5510 MHz  | 110     | 5550 MHz  | 118     | 5590 MHz  | 126     | 5630 MHz  |
| 134                                                       | 5670 MHz  | 151     | 5755 MHz  | 159     | 5795 MHz  | N/A     | N/A       |
| 802.11ac/ax(80MHz) Working Frequency of Each Channel:     |           |         |           |         |           |         |           |
| Channel                                                   | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 42                                                        | 5210 MHz  | 58      | 5290 MHz  | 106     | 5530MHz   | 122     | 5610 MHz  |
| 155                                                       | 5775 MHz  | N/A     | N/A       | N/A     | N/A       | N/A     | N/A       |

Note: The General Description of the Item, Channel List in clause 1 are provided and confirmed by the client.

## 2 DESCRIPTION OF TEST SETUP

### 2.1 Auxiliary equipment /Accessories/Test software for the EUT

| Auxiliary equipment   | Type / Version    | Manufacturer | Supplied by |
|-----------------------|-------------------|--------------|-------------|
| (1) Notebook          | Think pad x220    | Lenovo       | Adapter     |
| (2) USB Control Cable | N/A               | N/A          | N/A         |
| (3) USB Control Cable | N/A               | N/A          | N/A         |
| software              | Type / Version    |              |             |
| ADB                   | V 10.0.26100.7171 |              |             |

| Accessories Information | Cable                          |                                     |                                     |
|-------------------------|--------------------------------|-------------------------------------|-------------------------------------|
|                         | Length used during test<br>[m] | Attached during<br>test             | Shielded                            |
| (2)USB Control Cable    | 1                              | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| (3)USB Control Cable    | 8                              | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

## 2.2 Worst-case configuration and mode

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. Following are the worst-case data rates set for test:

| Modulation Type | Data Rate       |
|-----------------|-----------------|
| 802.11a         | 6Mbps           |
| 802.11n20       | MCS0(6.5 Mbps)  |
| 802.11n40       | MCS0(13.5 Mbps) |
| 802.11ac20      | MCS0(6.5 Mbps)  |
| 802.11ac40      | MCS0(13.5 Mbps) |
| 802.11ac80      | MCS0(29.3 Mbps) |
| 802.11ax20      | MCS0(8.6 Mbps)  |
| 802.11ax40      | MCS0(17.2 Mbps) |
| 802.11ax80      | MCS0(36.0 Mbps) |

Note1.EUT supports SISO Ant 2 antenna mode, SISO Ant 3 mode and MIMO Ant 2+Ant 3 mode. What is shown in the report is the data of the worst antenna mode.

Note2: 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/RSE, the full RU power / PSD > partialRU, therefore the full RU perform full test and Partial RU verified power/PSD/RSE.

## 2.3 Power setting in test

| Mode            | Channel | Frequency (MHz) | Power setting |      |        |
|-----------------|---------|-----------------|---------------|------|--------|
|                 |         |                 | Ant2          | Ant3 | Ant2+3 |
| 802.11a         | 36      | 5180            | 16            | 16   | N/A    |
|                 | 44      | 5220            | 16            | 16   | N/A    |
|                 | 48      | 5240            | 16            | 16   | N/A    |
|                 | 52      | 5260            | 16            | 16   | N/A    |
|                 | 60      | 5300            | 16            | 16   | N/A    |
|                 | 64      | 5320            | 16            | 16   | N/A    |
|                 | 100     | 5500            | 16            | 16   | N/A    |
|                 | 116     | 5580            | 16            | 16   | N/A    |
|                 | 140     | 5700            | 16            | 16   | N/A    |
|                 | 149     | 5745            | 16            | 16   | N/A    |
|                 | 157     | 5785            | 16            | 16   | N/A    |
|                 | 165     | 5825            | 16            | 16   | N/A    |
| 802.11n(20MHz)  | 36      | 5180            | 16            | 16   | 16     |
|                 | 44      | 5220            | 16            | 16   | 16     |
|                 | 48      | 5240            | 16            | 16   | 16     |
|                 | 52      | 5260            | 16            | 16   | 16     |
|                 | 60      | 5300            | 16            | 16   | 16     |
|                 | 64      | 5320            | 16            | 16   | 16     |
|                 | 100     | 5500            | 16            | 16   | 16     |
|                 | 116     | 5580            | 16            | 16   | 16     |
|                 | 140     | 5700            | 15            | 15   | 15     |
|                 | 149     | 5745            | 16            | 16   | 16     |
|                 | 157     | 5785            | 16            | 16   | 16     |
|                 | 165     | 5825            | 16            | 16   | 16     |
| 802.11n(40MHz)  | 38      | 5190            | 16            | 16   | 16     |
|                 | 46      | 5230            | 16            | 16   | 16     |
|                 | 54      | 5270            | 16            | 16   | 16     |
|                 | 62      | 5310            | 16            | 16   | 16     |
|                 | 102     | 5510            | 15            | 15   | 15     |
|                 | 118     | 5590            | 16            | 16   | 16     |
|                 | 134     | 5670            | 16            | 16   | 16     |
|                 | 151     | 5755            | 16            | 16   | 16     |
|                 | 159     | 5795            | 16            | 16   | 16     |
| 802.11ac(20MHz) | 36      | 5180            | 16            | 16   | 16     |
|                 | 44      | 5220            | 16            | 16   | 16     |
|                 | 48      | 5240            | 16            | 16   | 16     |
|                 | 52      | 5260            | 16            | 16   | 16     |
|                 | 60      | 5300            | 16            | 16   | 16     |
|                 | 64      | 5320            | 16            | 16   | 16     |
|                 | 100     | 5500            | 16            | 16   | 16     |
|                 | 116     | 5580            | 16            | 16   | 16     |
|                 | 140     | 5700            | 15            | 15   | 15     |
|                 | 149     | 5745            | 16            | 16   | 16     |
|                 | 157     | 5785            | 16            | 16   | 16     |
|                 | 165     | 5825            | 16            | 16   | 16     |

|                 |     |      |    |    |    |
|-----------------|-----|------|----|----|----|
| 802.11ac(40MHz) | 38  | 5190 | 16 | 16 | 16 |
|                 | 46  | 5230 | 16 | 16 | 16 |
|                 | 54  | 5270 | 16 | 16 | 16 |
|                 | 62  | 5310 | 15 | 15 | 15 |
|                 | 102 | 5510 | 15 | 15 | 15 |
|                 | 118 | 5590 | 16 | 16 | 16 |
|                 | 134 | 5670 | 16 | 16 | 16 |
|                 | 151 | 5755 | 16 | 16 | 16 |
|                 | 159 | 5795 | 16 | 16 | 16 |
| 802.11ac(80MHz) | 42  | 5210 | 15 | 15 | 15 |
|                 | 58  | 5290 | 15 | 15 | 15 |
|                 | 106 | 5530 | 15 | 15 | 15 |
|                 | 122 | 5610 | 15 | 15 | 15 |
|                 | 155 | 5775 | 15 | 15 | 15 |
| 802.11ax(20MHz) | 36  | 5180 | 15 | 15 | 15 |
|                 | 44  | 5220 | 15 | 15 | 15 |
|                 | 48  | 5240 | 15 | 15 | 15 |
|                 | 52  | 5260 | 15 | 15 | 15 |
|                 | 60  | 5300 | 15 | 15 | 15 |
|                 | 64  | 5320 | 15 | 15 | 15 |
|                 | 100 | 5500 | 15 | 15 | 15 |
|                 | 116 | 5580 | 15 | 15 | 15 |
|                 | 140 | 5700 | 14 | 14 | 14 |
|                 | 149 | 5745 | 15 | 15 | 15 |
|                 | 157 | 5785 | 15 | 15 | 15 |
|                 | 165 | 5825 | 15 | 15 | 15 |
| 802.11ax(40MHz) | 38  | 5190 | 15 | 15 | 15 |
|                 | 46  | 5230 | 15 | 15 | 15 |
|                 | 54  | 5270 | 15 | 15 | 15 |
|                 | 62  | 5310 | 15 | 15 | 15 |
|                 | 102 | 5510 | 15 | 15 | 15 |
|                 | 118 | 5590 | 15 | 15 | 15 |
|                 | 134 | 5670 | 15 | 15 | 15 |
|                 | 151 | 5755 | 15 | 15 | 15 |
|                 | 159 | 5795 | 15 | 15 | 15 |
| 802.11ax(80MHz) | 42  | 5210 | 15 | 15 | 15 |
|                 | 58  | 5290 | 15 | 15 | 15 |
|                 | 106 | 5530 | 15 | 15 | 15 |
|                 | 122 | 5610 | 15 | 15 | 15 |
|                 | 155 | 5775 | 15 | 15 | 15 |

## &lt;Partial RU&gt;:

| Mode            | Channel | Frequency<br>(MHz) | Power setting |      |       |
|-----------------|---------|--------------------|---------------|------|-------|
|                 |         |                    | 26RU          | 52RU | 106RU |
| 802.11ax(20MHz) | 36      | 5180               | 46            | 40   | 32    |
|                 | 44      | 5220               | 46            | 40   | 32    |
|                 | 48      | 5240               | 44            | 38   | 32    |
|                 | 52      | 5260               | 44            | 38   | 30    |
|                 | 60      | 5300               | 44            | 38   | 30    |
|                 | 64      | 5320               | 44            | 38   | 30    |
|                 | 100     | 5500               | 48            | 40   | 32    |
|                 | 116     | 5580               | 48            | 42   | 34    |
|                 | 140     | 5700               | 50            | 44   | 38    |
|                 | 149     | 5745               | 50            | 44   | 38    |
|                 | 157     | 5785               | 52            | 46   | 38    |
|                 | 165     | 5825               | 50            | 44   | 38    |

### 3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

#### 3.1 Standards

| Standard                                                     | Year | Description                                                                                                                      |
|--------------------------------------------------------------|------|----------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.10                                                  | 2020 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                   |
| FCC CFR Title 47 Part 15 Subpart E                           | 2024 | FCC CFR Title 47 Part 15 Subpart E                                                                                               |
| KDB 789033 D02 General UNII Test Procedures New Rules v02r01 | 2017 | This document provides guidance for determining emissions compliance of U-NII devices under Part 15, Subpart E of the FCC rules. |

#### 3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

*(Please define the deviations from the standard(s) if applicable)*

### 3.3 Overview of results

| Requirement – Test case of FCC                                                                                                                                                                                                                                                                                                                                                    | Basic standard(s)                                                   | Verdict        | Remark                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|----------------|-----------------------------------------------------|
| Conducted Emission                                                                                                                                                                                                                                                                                                                                                                | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.207               | PASS           | Test data please refer to<br><b>Appendix A</b>      |
| Radiated Emission                                                                                                                                                                                                                                                                                                                                                                 | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.209               | PASS           | Test data please refer to<br><b>Appendix B</b>      |
| Emission bandwidth and occupied bandwidth                                                                                                                                                                                                                                                                                                                                         | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.407(a)            | PASS           | Test data please refer to<br><b>Appendix C</b>      |
| 6dB Emission Bandwidth                                                                                                                                                                                                                                                                                                                                                            | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.407(e)            | PASS           | Test data please refer to<br><b>Appendix D</b>      |
| Duty cycle                                                                                                                                                                                                                                                                                                                                                                        | ANSI C63.10:2020                                                    | PASS           | Test data please refer to<br><b>Appendix E</b>      |
| Power Output                                                                                                                                                                                                                                                                                                                                                                      | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.407(a)            | PASS           | Test data please refer to<br><b>Appendix F</b>      |
| Peak Power Spectral Density                                                                                                                                                                                                                                                                                                                                                       | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.407(a)            | PASS           | Test data please refer to<br><b>Appendix G</b>      |
| Radiated Emission Band Edge                                                                                                                                                                                                                                                                                                                                                       | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.205,<br>15.407(b) | PASS           | Test data please refer to<br><b>Appendix H</b>      |
| Frequency Stability                                                                                                                                                                                                                                                                                                                                                               | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.407(g)            | N/A(See Note1) | N/A(See Note1)                                      |
| Dynamic Frequency Selection (DFS)                                                                                                                                                                                                                                                                                                                                                 | FCC CFR Title 47 Part 15<br>Subpart E: Section 15.407(h)            | PASS           | Test report please refer to<br><b>2570577R.705B</b> |
| Antenna Requirement                                                                                                                                                                                                                                                                                                                                                               | FCC 15.203                                                          | PASS           | ---                                                 |
| <p>Note1: Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.</p> <p>Note2: The radiation measurement is pre tested under X, Y, and Z axis positioning to find the worst placement for final testing.</p> |                                                                     |                |                                                     |

### 3.4 Test Facility

**Tset Location A : FCC Designation Number: CN1199**

**Tset Location B : FCC Designation Number: CN1321**

## 4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE

### 4.1 AC Power Line Conducted Emission

**VERDICT: PASS**

#### 4.1.1 Limit

**Standard** FCC Part 15 Subpart C Paragraph 15.207;

| Frequency range [MHz] | Limit: QP [dB(μV) <sup>1)</sup> ] | Limit: AV [dB(μV) <sup>1)</sup> ] |
|-----------------------|-----------------------------------|-----------------------------------|
| 0,15 - 0,50           | 66 - 56 <sup>2)</sup>             | 56 - 46 <sup>2)</sup>             |
| 0,50 - 5,0            | 56                                | 46                                |
| 5,0 - 30              | 60                                | 50                                |


<sup>1)</sup> At the transition frequency, the lower limit applies.

<sup>2)</sup> The limit decreases linearly with the logarithm of the frequency.

**NOTE 1:** The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

**NOTE 2:** Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

#### 4.1.2 Test Setup

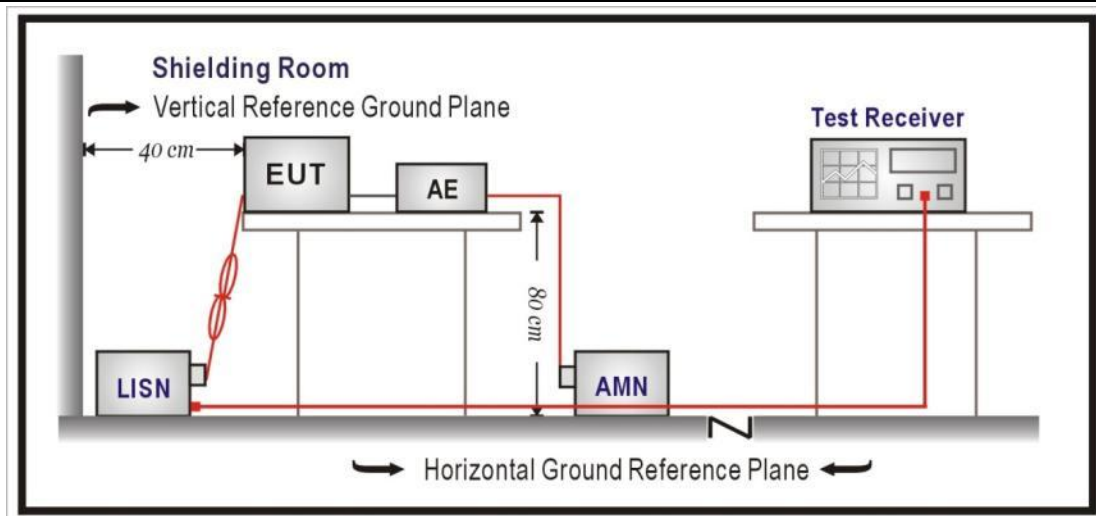

#### 4.1.3 Test Procedure

|                                     | References Rule | Chapter | Item                                                                                        |
|-------------------------------------|-----------------|---------|---------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | ANSI C63.10     | 6.2     | Standard test method for ac power-line conducted emissions from unlicensed wireless devices |

**4.2 Radiated Emissions****VERDICT: PASS****4.2.1 Limit**

| Standard                      |                       | FCC Part 15 Subpart C Paragraph 15.205, |                    |
|-------------------------------|-----------------------|-----------------------------------------|--------------------|
| Restricted Bands of operation |                       |                                         |                    |
| Frequency<br>(MHz)            | Frequency<br>(MHz)    | Frequency<br>(MHz)                      | Frequency<br>(GHz) |
| 0.090 – 0.110                 | 16.42 – 16.423        | 399.9 – 410                             | 4.5 – 5.15         |
| 0.495 – 0.505                 | 16.69475 – 16.69525   | 608 – 614                               | 5.35 – 5.46        |
| 2.1735 – 2.1905               | 16.80425 – 16.80475   | 960 – 1240                              | 7.25 – 7.75        |
| 4.125 – 4.128                 | 25.5 – 25.67          | 1300 – 1427                             | 8.025 – 8.5        |
| 4.17725 – 4.17775             | 37.5 – 38.25          | 1435 – 1626.5                           | 9.0 – 9.2          |
| 4.20725 – 4.20775             | 73 – 74.6             | 1645.5 – 1646.5                         | 9.3 – 9.5          |
| 6.215 – 6.218                 | 74.8 – 75.2           | 1660 – 1710                             | 10.6 – 12.7        |
| 6.26775 – 6.26825             | 108 – 121.94          | 1718.8 – 1722.2                         | 13.25 – 13.4       |
| 6.31175 – 6.31225             | 123 – 138             | 2200 – 2300                             | 14.47 – 14.5       |
| 8.291 – 8.294                 | 149.9 – 150.05        | 2310 – 2390                             | 15.35 – 16.2       |
| 8.362 – 8.366                 | 156.52475 – 156.52525 | 2483.5 – 2500                           | 17.7 – 21.4        |
| 8.37625 – 8.38675             | 156.7 – 156.9         | 2690 – 2900                             | 22.01 – 23.12      |
| 8.81425 – 8.81475             | 162.0125 – 167.17     | 3260 – 3267                             | 23.6 – 24.0        |
| 12.29 – 12.293                | 167.72 – 173.2        | 3332 – 3339                             | 31.2 – 31.8        |
| 12.51975–12.52025             | 240 – 285             | 3345.8 – 3358                           | 36.43 – 36.5       |
| 12.57675–12.57725             | 322 – 335.4           | 3600 – 4400                             |                    |
| 13.36 – 13.41                 |                       |                                         |                    |

## FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit )

| Frequency (MHz) | Field strength ( $\mu$ V/m) | Field strength (dB $\mu$ V/m) | Measurement distance (m) |
|-----------------|-----------------------------|-------------------------------|--------------------------|
| 0.009 - 0.49    | 2400/F(kHz)                 | 48.5 – 13.8                   | 300 <sub>(Note 1)</sub>  |
| 0.49 - 1.705    | 24000/F(kHz)                | 33.8 - 23                     | 30 <sub>(Note 1)</sub>   |
| 1.705 - 30      | 30                          | 29.5                          | 30 <sub>(Note 1)</sub>   |
| 30 - 88         | 100                         | 40                            | 3 <sub>(Note 2)</sub>    |
| 88 - 216        | 150                         | 43.5                          | 3 <sub>(Note 2)</sub>    |
| 216 - 960       | 200                         | 46                            | 3 <sub>(Note 2)</sub>    |
| Above 960       | 500                         | 54                            | 3 <sub>(Note 2)</sub>    |


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.

Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).


## FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit),

| Operating Frequency Band (MHz) | EIRP Limit (dBm/MHz) | Equivalent Field Strength at 3m (dB $\mu$ V/m) |
|--------------------------------|----------------------|------------------------------------------------|
| 5150 - 5250                    | -27                  | 68.3                                           |
| 5250 - 5350                    | -27                  | 68.3                                           |
| 5470 - 5725                    | -27                  | 68.3                                           |

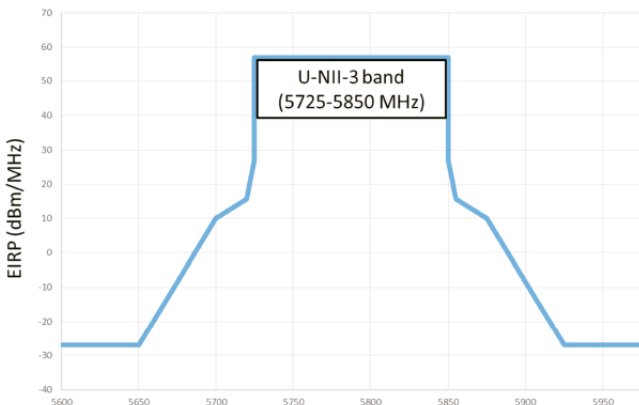
| Operating Frequency Band (MHz) | EIRP Limit (dBm/MHz)                                                                                                     |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| 5725 - 5850                    |  <p>U-NII-3 band (5725-5850 MHz)</p> |

## 4.2.2 Test Setup


Below 30MHz Test Setup:

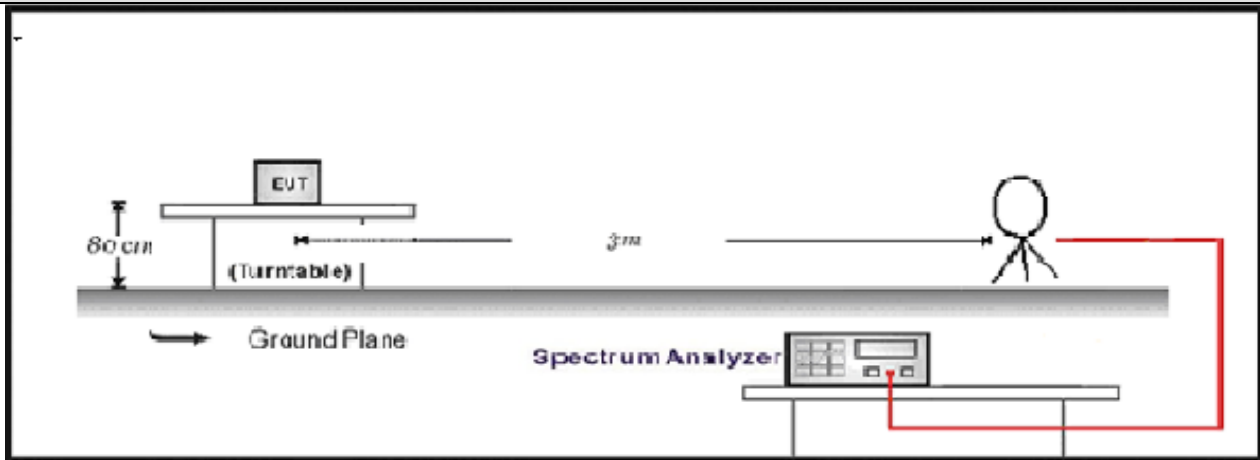

30MHz-1GHz Test Setup:

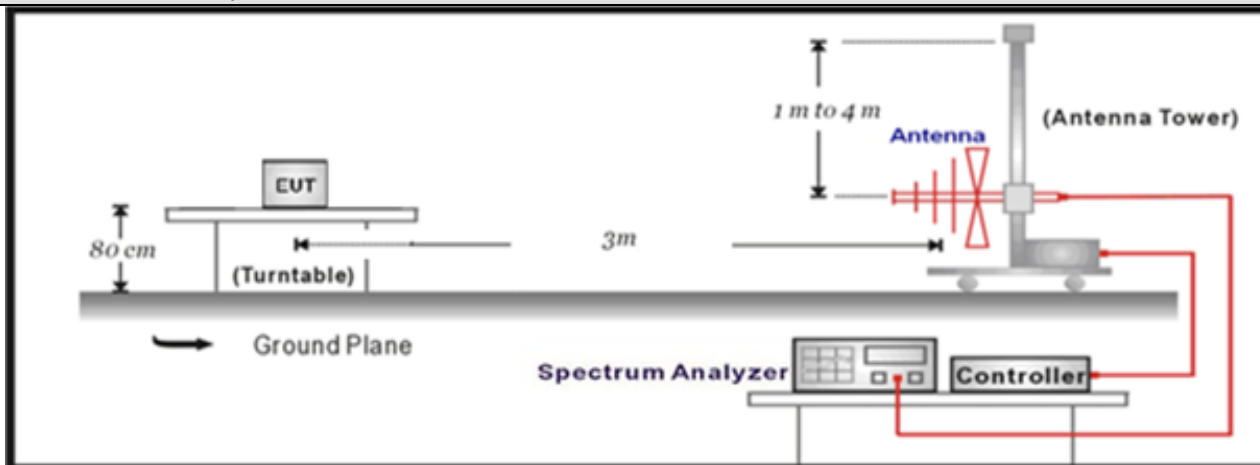

Above 1GHz Test Setup:

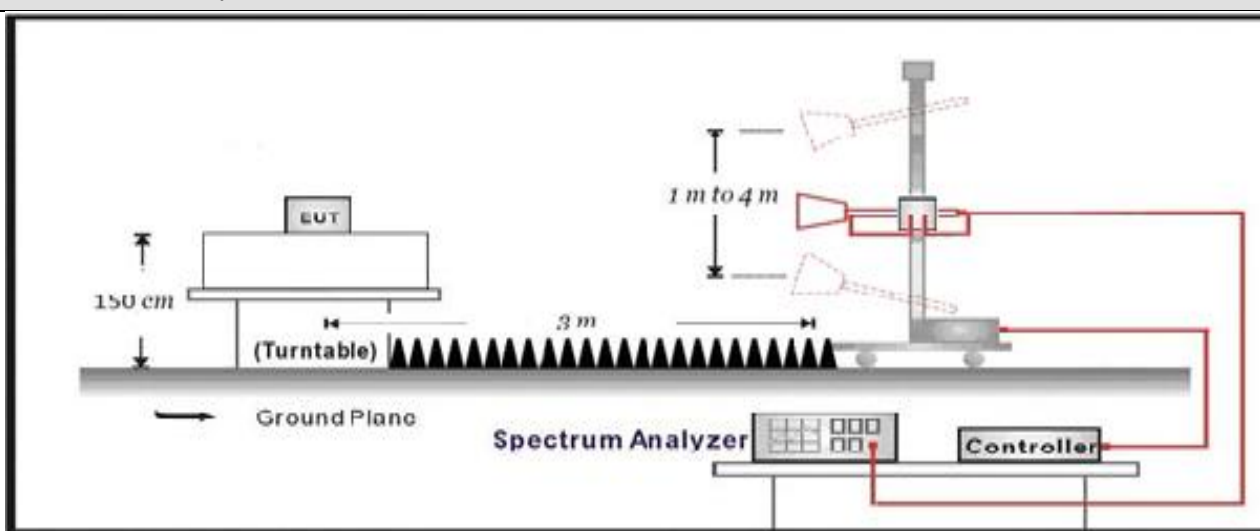


### 4.2.3 Test Procedure

| Test Method                         |                                     |             |                                                                                                      |
|-------------------------------------|-------------------------------------|-------------|------------------------------------------------------------------------------------------------------|
|                                     | References Rule                     | Chapter     | Description                                                                                          |
| <input type="checkbox"/>            | ANSI C63.10                         | 12.7.3      | Emissions in non-restricted frequency bands                                                          |
| <input checked="" type="checkbox"/> | ANSI C63.10                         | 12.7.2      | Emissions in restricted frequency bands                                                              |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.5 Radiated emission measurements                                                                |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.6 Procedure for peak unwanted emissions measurements above 1000 MHz                             |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.7 Procedures for average unwanted emissions measurements above 1000 MHz                         |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | 12.7.7.2 Method AD (average detection)—primary method                                                |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.7.3 Method VB-A (Alternative)                                                                   |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 6.4 Radiated emissions from unlicensed wireless devices below 30 MHz                                 |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 6.5 Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 6.6 Radiated emissions from unlicensed wireless devices above 1 GHz                                  |

**4.3 Emission bandwidth****VERDICT: PASS****4.3.1 Limit**

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Standard</b> | FCC CFR Title 47 Part 15 Subpart E: Section 15.407. |
|-----------------|-----------------------------------------------------|


|                            |
|----------------------------|
| Within the Frequency band. |
|----------------------------|

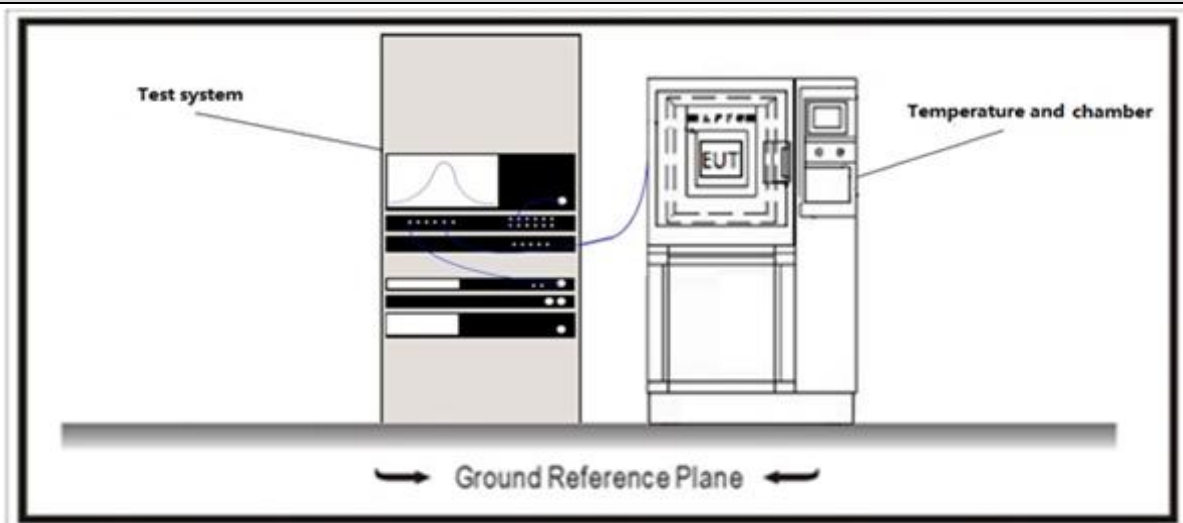**4.3.2 Test Setup****4.3.3 Test Procedure****Test Method**

|                                     | References Rule             | Chapter | Description                                                  |
|-------------------------------------|-----------------------------|---------|--------------------------------------------------------------|
| <input checked="" type="checkbox"/> | ANSI C63.10                 | 12.5    | Emission bandwidth and occupied bandwidth                    |
| <input type="checkbox"/>            | ANSI C63.10                 | 12.5.1  | Emission bandwidth for the band 5.725 GHz to 5.85 GHz        |
| <input checked="" type="checkbox"/> | ANSI C63.10                 | 12.5.2  | Emission bandwidth for all other bands                       |
| <input checked="" type="checkbox"/> | ANSI C63.10                 | 12.5.3  | Occupied bandwidth                                           |
| <input checked="" type="checkbox"/> | FCC KDB 789033<br>D02v02r01 | C       | Bandwidth Measurement                                        |
| <input checked="" type="checkbox"/> | FCC KDB 789033<br>D02v02r01 | C.1     | Emission Bandwidth (26dB)                                    |
| <input type="checkbox"/>            | FCC KDB 789033<br>D02v02r01 | C.2     | Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB) |
| <input checked="" type="checkbox"/> | FCC KDB 789033<br>D02v02r01 | D       | 99 Percent Occupied Bandwidth                                |

**4.4 6dB bandwidth****VERDICT: PASS****4.4.1 Limit****Standard**

FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e).

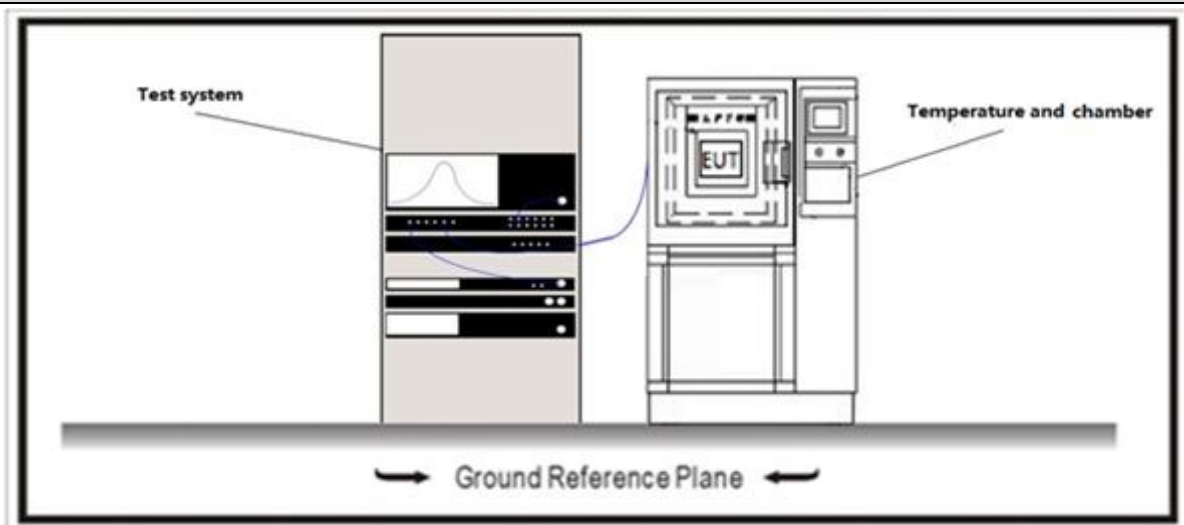6dB Bandwith  $\geq 500\text{KHz}$ **4.4.2 Test Setup****4.4.3 Test Procedure****Test Method**

|                                     | References Rule          | Chapter | Description                                                  |
|-------------------------------------|--------------------------|---------|--------------------------------------------------------------|
| <input checked="" type="checkbox"/> | ANSI C63.10              | 12.5    | Emission bandwidth and occupied bandwidth                    |
| <input checked="" type="checkbox"/> | ANSI C63.10              | 12.5.1  | Emission bandwidth for the band 5.725 GHz to 5.85 GHz        |
| <input type="checkbox"/>            | ANSI C63.10              | 12.5.2  | Emission bandwidth for all other bands                       |
| <input type="checkbox"/>            | ANSI C63.10              | 12.5.3  | Occupied bandwidth                                           |
| <input checked="" type="checkbox"/> | FCC KDB 789033 D02v02r01 | C       | Bandwidth Measurement                                        |
| <input type="checkbox"/>            | FCC KDB 789033 D02v02r01 | C.1     | Emission Bandwidth (26dB)                                    |
| <input checked="" type="checkbox"/> | FCC KDB 789033 D02v02r01 | C.2     | Minimum Emission Bandwidth for the band 5.725-5.85 GHz (6dB) |
| <input type="checkbox"/>            | FCC KDB 789033 D02v02r01 | D       | 99 Percent Occupied Bandwidth                                |


4.5 Duty cycle

VERDICT: PASS

4.5.1 Limit

N/A

4.5.2 Test Setup

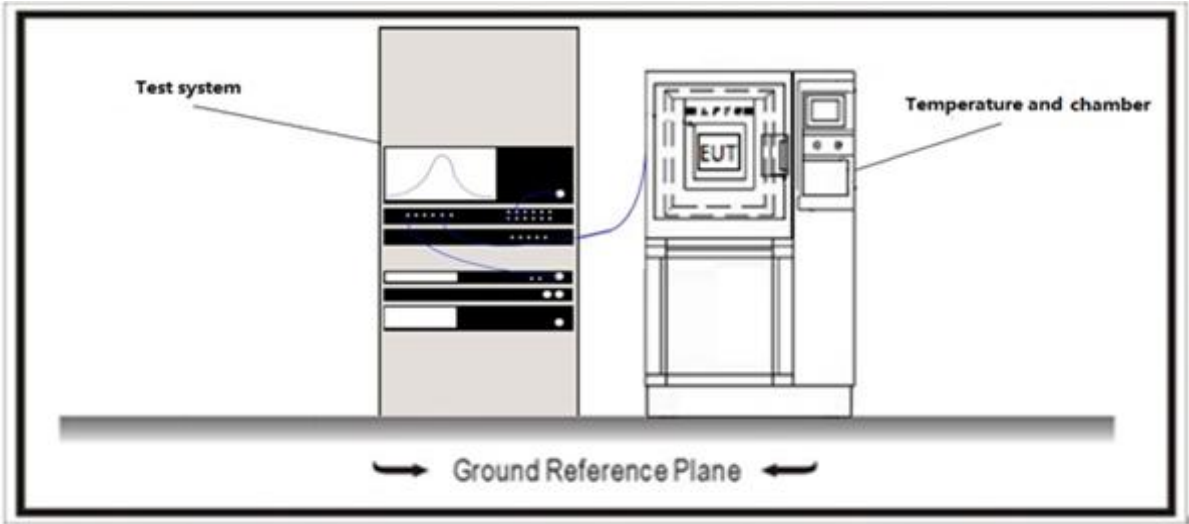

4.5.3 Test Procedure

| References Rule                     |             | Chapter | Description                                                                |
|-------------------------------------|-------------|---------|----------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.2    | Duty cycle (D), transmission duration (T), and maximum power control level |

**4.6 Power Output****VERDICT: PASS****4.6.1 Limit****Standard**


FCC Part 15 Subpart E Paragraph 15.407 (a)

|                                     |                                                                                                                                                                                                                                                                         |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | For the band 5.15-5.25 GHz                                                                                                                                                                                                                                              |
| <input type="checkbox"/>            | Outdoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 30 - (G_{TX} - 6)$ and $\leq 125\text{mW}$ at any angle above 30 degrees                                                                  |
| <input type="checkbox"/>            | Indoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 30 - (G_{TX} - 6)$                                                                                                                         |
| <input type="checkbox"/>            | Fixed point-to-point access points: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 23\text{dBi}$ , then $P_{out} \leq 30 - (G_{TX} - 23)$                                                                                                        |
| <input checked="" type="checkbox"/> | Mobile and portable client devices: the maximum conducted output power shall not exceed 250mW. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 24 - (G_{TX} - 6)$                                                                                                        |
| <input checked="" type="checkbox"/> | For the band 5.25-5.35 GHz:                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> | The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$ , where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$ |
| <input checked="" type="checkbox"/> | For the 5.47-5.725 GHz:                                                                                                                                                                                                                                                 |
| <input checked="" type="checkbox"/> | The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \log B$ , where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \log B) - (G_{TX} - 6)$ |
| <input checked="" type="checkbox"/> | For the band 5.725-5.85 GHz:                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/> | Point-to-multipoint systems (P2M): the maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 6 \text{ dBi}$ , then $P_{out} = 30 - (G_{TX} - 6)$                                                                                |
| <input type="checkbox"/>            | Point-to-point systems (P2P): the maximum conducted output power ( $P_{out}$ ) shall not exceed the lesser of 1 W                                                                                                                                                       |

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum conducted output power .

#### 4.6.2 Test Setup

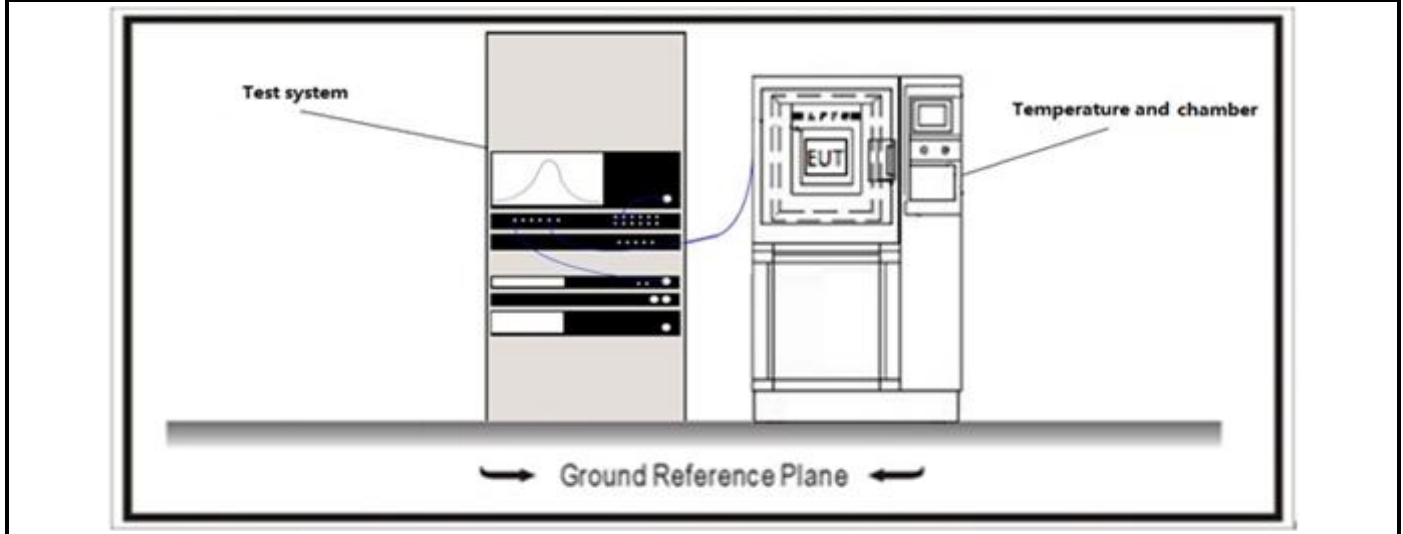

#### 4.6.3 Test Procedure

|                                     | References Rule                     |                                                 | Chapter  | Description                                                                               |
|-------------------------------------|-------------------------------------|-------------------------------------------------|----------|-------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | ANSI C63.10                         |                                                 | 12.4     | Maximum conducted output power                                                            |
|                                     | <input type="checkbox"/>            | ANSI C63.10                                     | 12.4.2   | Maximum conducted output power measurement using a spectrum analyzer (SA) or EMI receiver |
|                                     |                                     | <input type="checkbox"/> ANSI C63.10            | 12.4.2.2 | Method SA-1                                                                               |
|                                     |                                     | <input type="checkbox"/> ANSI C63.10            | 12.4.2.3 | Method SA-1A (alternative)                                                                |
|                                     |                                     | <input type="checkbox"/> ANSI C63.10            | 12.4.2.4 | Method SA-2                                                                               |
|                                     |                                     | <input type="checkbox"/> ANSI C63.10            | 12.4.2.5 | Method SA-2A (alternative)                                                                |
|                                     |                                     | <input type="checkbox"/> ANSI C63.10            | 12.4.2.6 | Method SA-3                                                                               |
|                                     |                                     | <input type="checkbox"/> ANSI C63.10            | 12.4.2.7 | Method SA-3A (alternative)                                                                |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                                     | 12.4.3   | Maximum conducted output power using a power meter                                        |
|                                     |                                     | <input type="checkbox"/> ANSI C63.10            | 12.4.3.1 | Method PM                                                                                 |
|                                     |                                     | <input checked="" type="checkbox"/> ANSI C63.10 | 12.4.3.2 | Method PM-G                                                                               |

## Directional Gain Calculations for In-Band test method


|                                     | References Rule                     |             | Chapter     | Description                                                       |
|-------------------------------------|-------------------------------------|-------------|-------------|-------------------------------------------------------------------|
| <input type="checkbox"/>            | KDB 662911                          |             | F2)a)       | Basic methodology                                                 |
|                                     | <input type="checkbox"/>            | KDB 662911  | F2)a) (i)   | transmit signals are correlated                                   |
|                                     | <input type="checkbox"/>            | KDB 662911  | F2)a) (ii)  | transmit signals are uncorrelated                                 |
| <input type="checkbox"/>            | KDB 662911                          |             | F2)b)       | Sectorized antenna systems.                                       |
| <input type="checkbox"/>            | KDB 662911                          |             | F2)c)       | Cross-polarized antennas                                          |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | F2)c) (i)   | Cross-polarized antennas                                          |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | F2)c) (ii)  | Multiple antennas                                                 |
| <input type="checkbox"/>            | KDB 662911                          |             | F2)e)       | Spatial stream                                                    |
|                                     | <input type="checkbox"/>            | KDB 662911  | F2)e) (i)   | Antennas have the same gain                                       |
|                                     | <input type="checkbox"/>            | KDB 662911  | F2)e) (ii)  | Antenna have the different gain with one spatial stream           |
|                                     | <input type="checkbox"/>            | KDB 662911  | F2)e) (iii) | Antenna have the different gain with more than one spatial stream |
| <input checked="" type="checkbox"/> | KDB 662911                          |             | F2)f)       | Cyclic Delay Diversity (CDD)                                      |
|                                     | <input type="checkbox"/>            | KDB 662911  | F2)f) (i)   | Antennas have the same gain                                       |
|                                     | <input type="checkbox"/>            | KDB 662911  | F2)f) (ii)  | Antenna have the different gain with one spatial stream           |
|                                     | <input checked="" type="checkbox"/> | KDB 662911  | F2)f) (iii) | Antenna have the different gain with more than one spatial stream |

**4.7 Maximum Power Spectral Density****VERDICT: PASS****4.7.1 Limit**

| Standard                            |                                                                                                                                                                         | FCC Part 15 Subpart E Paragraph 15.407 (a) |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| <input checked="" type="checkbox"/> | For the band 5.15-5.25 GHz                                                                                                                                              |                                            |
| <input type="checkbox"/>            | Outdoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 17 - (G_{TX} - 6)$                 |                                            |
| <input type="checkbox"/>            | Indoor access point: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 17 - (G_{TX} - 6)$                  |                                            |
| <input type="checkbox"/>            | Fixed point-to-point access points: the maximum power spectral density shall not exceed 17 dBm/MHz. If $G_{TX} > 23\text{dBi}$ , then $P_{out} \leq 17 - (G_{TX} - 23)$ |                                            |
| <input checked="" type="checkbox"/> | Mobile and portable client devices: the maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 11 - (G_{TX} - 6)$   |                                            |
| <input checked="" type="checkbox"/> | For the 5.25-5.35 GHz:                                                                                                                                                  |                                            |
| <input checked="" type="checkbox"/> | The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 11 - (G_{TX} - 6)$                                       |                                            |
| <input checked="" type="checkbox"/> | For the 5.47-5.725 GHz:                                                                                                                                                 |                                            |
| <input checked="" type="checkbox"/> | The maximum power spectral density shall not exceed 11 dBm/MHz. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 11 - (G_{TX} - 6)$                                       |                                            |
| <input checked="" type="checkbox"/> | For the band 5.725-5.85 GHz:                                                                                                                                            |                                            |
| <input checked="" type="checkbox"/> | The maximum power spectral density shall not exceed 30 dBm/500KHz. If $G_{TX} > 6\text{dBi}$ , then $P_{out} \leq 30 - (G_{TX} - 6)$                                    |                                            |

Note 1:  $G_{TX}$  directional gain of transmitting antennas.

Note 2:  $P_{out}$  is maximum power spectral density.

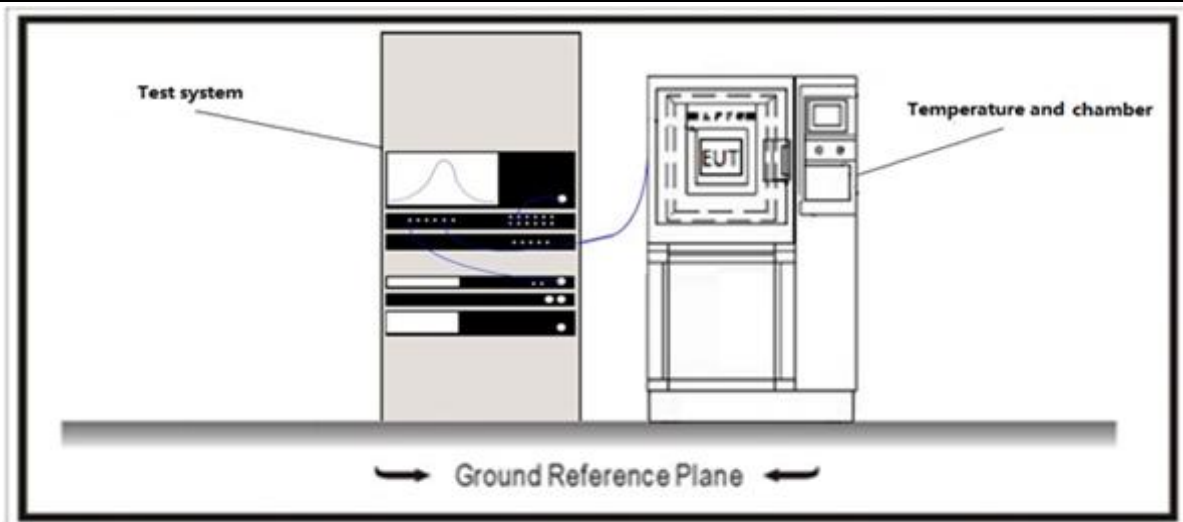**4.7.2 Test Setup**

**4.7.3 Test Procedure**

|                                     | References Rule          | Chapter | Description                          |
|-------------------------------------|--------------------------|---------|--------------------------------------|
| <input checked="" type="checkbox"/> | ANSI C63.10              | 12.6    | Peak power spectral density          |
| <input checked="" type="checkbox"/> | FCC KDB 789033 D02v02r01 | F       | Maximum Power Spectral Density (PSD) |

**Directional Gain Calculations for In-Band test method**

|                                     | References Rule                                | Chapter     | Description                                                           |
|-------------------------------------|------------------------------------------------|-------------|-----------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | KDB 662911                                     | E)2)        | In-Band Power Spectral Density (PSD) Measurements                     |
|                                     | <input type="checkbox"/> KDB 662911            | E)2)a)      | Measure and sum the spectra across the outputs.                       |
|                                     | <input type="checkbox"/> KDB 662911            | E)2)b)      | Measure and sum spectral maxima across the outputs.                   |
|                                     | <input checked="" type="checkbox"/> KDB 662911 | E)2)c)      | Measure and add 10 log(NANT) dB, where NANT is the number of outputs. |
| <input type="checkbox"/>            | KDB 662911                                     | F2)a)       | Basic methodology                                                     |
|                                     | <input type="checkbox"/> KDB 662911            | F2)a) (i)   | transmit signals are correlated                                       |
|                                     | <input type="checkbox"/> KDB 662911            | F2)a) (ii)  | transmit signals are uncorrelated                                     |
| <input type="checkbox"/>            | KDB 662911                                     | F2)b)       | Sectorized antenna systems.                                           |
| <input type="checkbox"/>            | KDB 662911                                     | F2)c)       | Cross-polarized antennas                                              |
|                                     | <input type="checkbox"/> ANSI C63.10           | F2)c) (i)   | Cross-polarized antennas                                              |
|                                     | <input type="checkbox"/> ANSI C63.10           | F2)c) (ii)  | Multiple antennas                                                     |
| <input type="checkbox"/>            | KDB 662911                                     | F2)e)       | Spatial stream                                                        |
|                                     | <input type="checkbox"/> KDB 662911            | F2)e) (i)   | Antennas have the same gain                                           |
|                                     | <input type="checkbox"/> KDB 662911            | F2)e) (ii)  | Antenna have the different gain with one spatial stream               |
|                                     | <input type="checkbox"/> KDB 662911            | F2)e) (iii) | Antenna have the different gain with more than one spatial stream     |
| <input checked="" type="checkbox"/> | KDB 662911                                     | F2)f)       | Cyclic Delay Diversity (CDD)                                          |
|                                     | <input type="checkbox"/> KDB 662911            | F2)f) (i)   | Antennas have the same gain                                           |
|                                     | <input type="checkbox"/> KDB 662911            | F2)f) (ii)  | Antenna have the different gain with one spatial stream               |
|                                     | <input checked="" type="checkbox"/> KDB 662911 | F2)f) (iii) | Antenna have the different gain with more than one spatial stream     |

**4.8 Radiated Emission Band Edge****VERDICT: PASS****4.8.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.205.

## Restricted Bands of operation

| Frequency<br>(MHz)  | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|---------------------|-----------------------|--------------------|--------------------|
| 0.090 – 0.110       | 16.42 – 16.423        | 399.9 – 410        | 4.5 – 5.15         |
| 0.495 – 0.505       | 16.69475 – 16.69525   | 608 – 614          | 5.35 – 5.46        |
| 2.1735 – 2.1905     | 16.80425 – 16.80475   | 960 – 1240         | 7.25 – 7.75        |
| 4.125 – 4.128       | 25.5 – 25.67          | 1300 – 1427        | 8.025 – 8.5        |
| 4.17725 – 4.17775   | 37.5 – 38.25          | 1435 – 1626.5      | 9.0 – 9.2          |
| 4.20725 – 4.20775   | 73 – 74.6             | 1645.5 – 1646.5    | 9.3 – 9.5          |
| 6.215 – 6.218       | 74.8 – 75.2           | 1660 – 1710        | 10.6 – 12.7        |
| 6.26775 – 6.26825   | 108 – 121.94          | 1718.8 – 1722.2    | 13.25 – 13.4       |
| 6.31175 – 6.31225   | 123 – 138             | 2200 – 2300        | 14.47 – 14.5       |
| 8.291 – 8.294       | 149.9 – 150.05        | 2310 – 2390        | 15.35 – 16.2       |
| 8.362 – 8.366       | 156.52475 – 156.52525 | 2483.5 – 2500      | 17.7 – 21.4        |
| 8.37625 – 8.38675   | 156.7 – 156.9         | 2690 – 2900        | 22.01 – 23.12      |
| 8.81425 – 8.81475   | 162.0125 – 167.17     | 3260 – 3267        | 23.6 – 24.0        |
| 12.29 – 12.293      | 167.72 – 173.2        | 3332 – 3339        | 31.2 – 31.8        |
| 12.51975 – 12.52025 | 240 – 285             | 3345.8 – 3358      | 36.43 – 36.5       |
| 12.57675 – 12.57725 | 322 – 335.4           | 3600 – 4400        |                    |
| 13.36 – 13.41       |                       |                    |                    |

## FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit ).

| Frequency (MHz) | Field strength ( $\mu$ V/m) | Field strength (dB $\mu$ V/m) | Measurement distance (m) |
|-----------------|-----------------------------|-------------------------------|--------------------------|
| 0.009 - 0.49    | 2400/F(kHz)                 | 48.5 – 13.8                   | 300 <sub>(Note 1)</sub>  |
| 0.49 - 1.705    | 24000/F(kHz)                | 33.8 - 23                     | 30 <sub>(Note 1)</sub>   |
| 1.705 - 30      | 30                          | 29.5                          | 30 <sub>(Note 1)</sub>   |
| 30 - 88         | 100                         | 40                            | 3 <sub>(Note 2)</sub>    |
| 88 - 216        | 150                         | 43.5                          | 3 <sub>(Note 2)</sub>    |
| 216 - 960       | 200                         | 46                            | 3 <sub>(Note 2)</sub>    |
| Above 960       | 500                         | 54                            | 3 <sub>(Note 2)</sub>    |


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.

Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).


## FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit).

| Operating Frequency Band (MHz) | EIRP Limit (dBm/MHz) | Equivalent Field Strength at 3m (dB $\mu$ V/m) |
|--------------------------------|----------------------|------------------------------------------------|
| 5150 - 5250                    | -27                  | 68.3                                           |
| 5250 - 5350                    | -27                  | 68.3                                           |
| 5470 - 5725                    | -27                  | 68.3                                           |
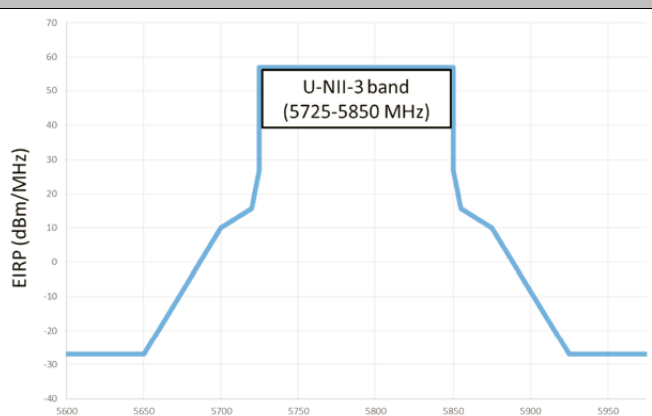
| Operating Frequency Band (MHz) | EIRP Limit (dBm/MHz)                                                                                                     |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| 5725 - 5850                    |  <p>U-NII-3 band (5725-5850 MHz)</p> |

#### 4.8.2 Test Setup

Above 1GHz Test Setup:

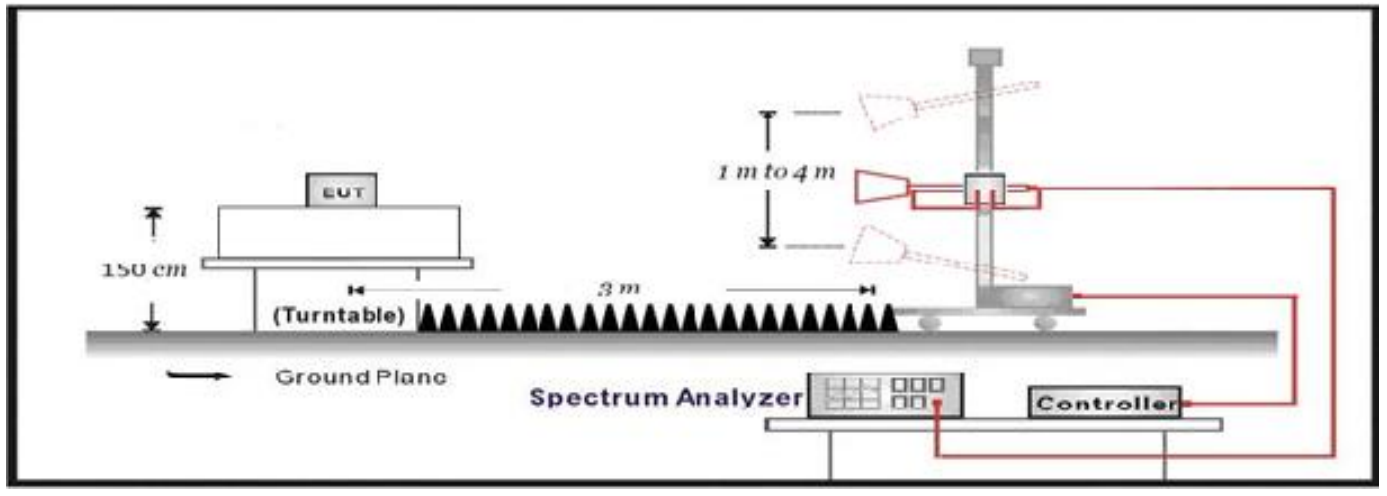

#### 4.8.3 Test Procedure

|                                     | References Rule          | Chapter  | Description                                                                                      |
|-------------------------------------|--------------------------|----------|--------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | ANSI C63.10              | 12.7.3   | Emissions in non-restricted frequency bands                                                      |
| <input checked="" type="checkbox"/> | ANSI C63.10              | 12.7.2   | Emissions in restricted frequency bands                                                          |
| <input type="checkbox"/>            | ANSI C63.10              | 12.7.5   | Radiated emission measurements                                                                   |
| <input checked="" type="checkbox"/> | ANSI C63.10              | 12.7.6   | Procedure for peak unwanted emissions measurements above 1000 MHz                                |
| <input checked="" type="checkbox"/> | ANSI C63.10              | 12.7.7   | Procedures for average unwanted emissions measurements above 1000 MHz                            |
| <input type="checkbox"/>            | ANSI C63.10              | 12.7.7.2 | Method AD (average detection)—primary method                                                     |
| <input checked="" type="checkbox"/> | ANSI C63.10              | 12.7.7.3 | Method VB-A (Alternative)                                                                        |
| <input type="checkbox"/>            | ANSI C63.10              | 6.4      | Radiated emissions from unlicensed wireless devices below 30 MHz                                 |
| <input type="checkbox"/>            | ANSI C63.10              | 6.5      | Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz |
| <input type="checkbox"/>            | ANSI C63.10              | 6.6      | Radiated emissions from unlicensed wireless devices above 1 GHz                                  |
| <input type="checkbox"/>            | FCC KDB 789033 D02v02r01 | G.2      | Unwanted Emissions that fall Outside of the Restricted Bands                                     |
| <input type="checkbox"/>            | FCC KDB 789033 D02v02r01 | G.1      | Unwanted Emissions in the Restricted Bands                                                       |
| <input type="checkbox"/>            | FCC KDB 789033 D02v02r01 | G.4      | Procedure for Unwanted Emissions Measurements below 1000 MHz                                     |
| <input type="checkbox"/>            | FCC KDB 789033 D02v02r01 | G.5      | Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz                             |
| <input type="checkbox"/>            | FCC KDB 789033 D02v02r01 | G.6      | Procedures for Average Unwanted Emissions Measurements above 1000 MHz                            |

|  |                          |                             |       |                                                                             |
|--|--------------------------|-----------------------------|-------|-----------------------------------------------------------------------------|
|  | <input type="checkbox"/> | FCC KDB 789033<br>D02v02r01 | G.6.c | Method AD (Average detection)—primary method                                |
|  | <input type="checkbox"/> | FCC KDB 789033<br>D02v02r01 | G.6.d | Method VB (Averaging using reduced video bandwidth):<br>Alternative method. |

## 4.9 Frequency Stability


**VERDICT: N/A**

### 4.9.1 Limit:

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band and  $\pm 25$  ppm maximum for the 2.4 GHz band.

### 4.9.2 Test Setup

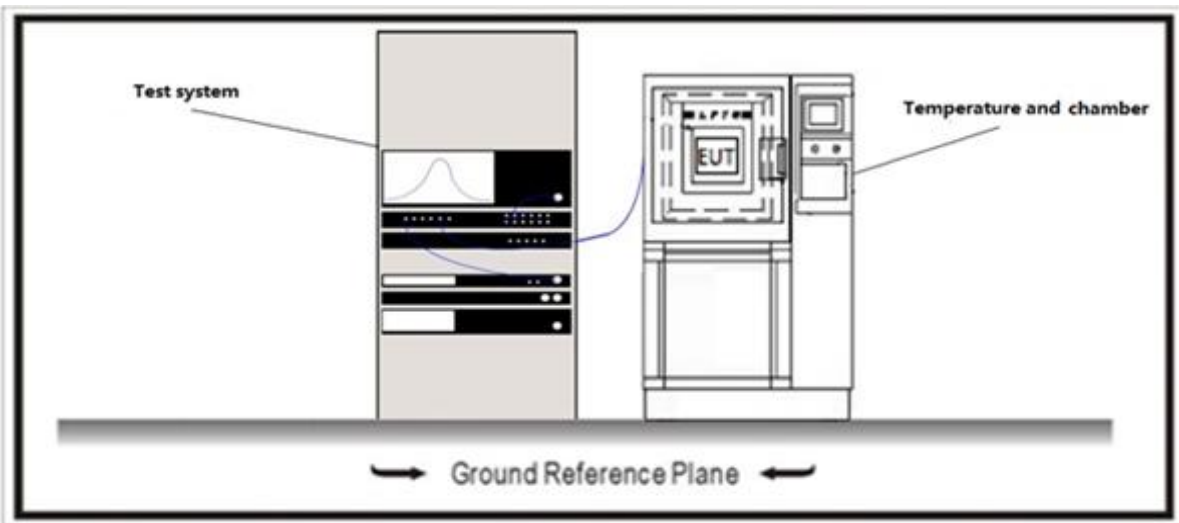

### 4.9.3 Test Procedure

|                          | References Rule          |             | Chapter | Description                                             |
|--------------------------|--------------------------|-------------|---------|---------------------------------------------------------|
| <input type="checkbox"/> | ANSI C63.10              |             | 6.8     | Frequency stability tests                               |
|                          | <input type="checkbox"/> | ANSI C63.10 | 6.8.1   | Frequency stability with respect to ambient temperature |
|                          | <input type="checkbox"/> | ANSI C63.10 | 6.8.2   | Frequency stability when varying supply voltage         |

**4.10 Antenna Requirement****VERDICT: PASS****4.10.1 Limit:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**4.10.2 Antenna Connector Construction:**

- |                                     |                                                                  |
|-------------------------------------|------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | The use of a permanently attached antenna                        |
| <input type="checkbox"/>            | The antenna use of a unique coupling to the intentional radiator |
| <input type="checkbox"/>            | The use of a nonstandard antenna jack or electrical connector    |

Please refer to the attached document "Internal Photograph" to show the antenna connector.


---

## 5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.


6 TEST RESULT  
Appendix A: Conducted Emission

|                                      |                          |
|--------------------------------------|--------------------------|
| Profile: 2570577R                    | Page No.: 7              |
| Engineer: Yu Liu                     |                          |
| Site: TR1                            | Time: 2025/09/27 - 09:41 |
| Limit: FCC_Part 15.207               | Margin: 0                |
| Probe: ENV216_101189(0.009-30MHz)    | Polarity: Line           |
| EUT: Mobile Computer                 | Power: AC 120V/60Hz      |
| Note: Transmit at 5180MHz by 802.11a |                          |

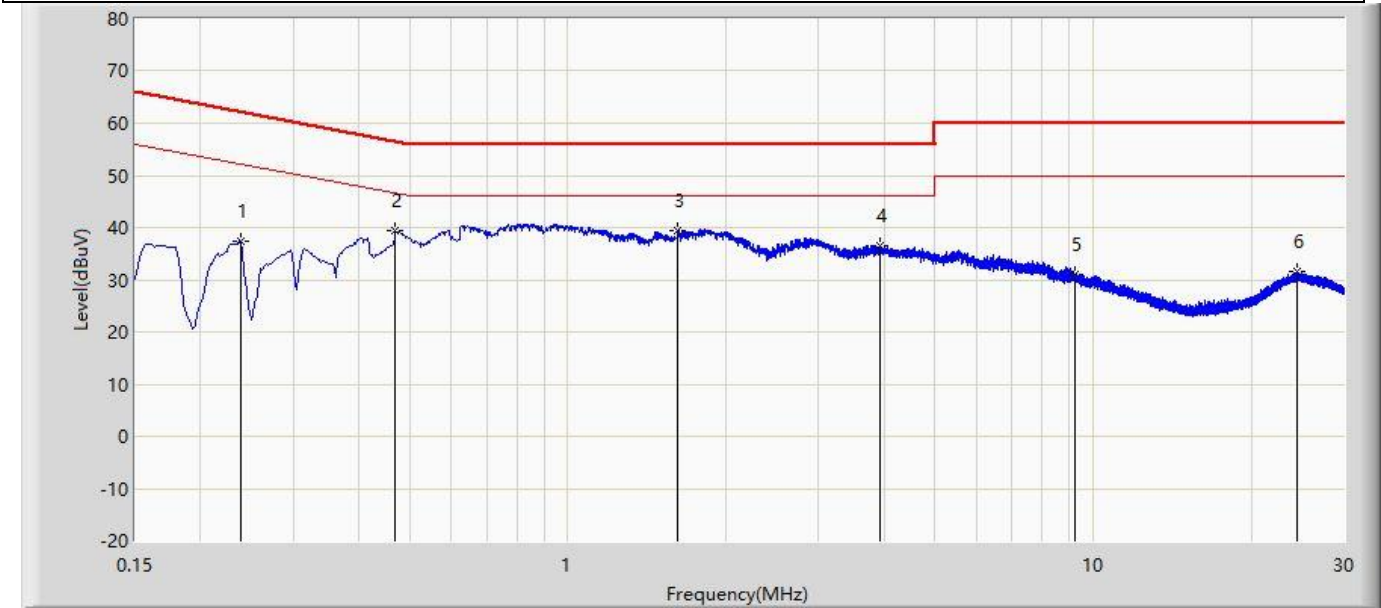

| No | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-----------------|--------------|-------------|------|
| 1  |      | 0.238           | 37.323               | 27.663               | -24.843         | 62.166       | 9.661       | QP   |
| 2  |      | 0.470           | 39.420               | 29.721               | -17.094         | 56.514       | 9.698       | QP   |
| 3  | *    | 1.617           | 39.512               | 29.772               | -16.488         | 56.000       | 9.741       | QP   |
| 4  |      | 3.928           | 36.400               | 26.597               | -19.600         | 56.000       | 9.803       | QP   |
| 5  |      | 9.206           | 31.132               | 21.176               | -28.868         | 60.000       | 9.956       | QP   |
| 6  |      | 24.412          | 31.466               | 20.737               | -28.534         | 60.000       | 10.729      | QP   |

|                                      |                          |
|--------------------------------------|--------------------------|
| Profile: 2570577R                    | Page No.: 8              |
| Engineer: Yu Liu                     |                          |
| Site: TR1                            | Time: 2025/09/27 - 09:41 |
| Limit: FCC_Part 15.207               | Margin: 0                |
| Probe: ENV216_101189(0.009-30MHz)    | Polarity: Neutral        |
| EUT: Mobile Computer                 | Power: AC 120V/60Hz      |
| Note: Transmit at 5180MHz by 802.11a |                          |

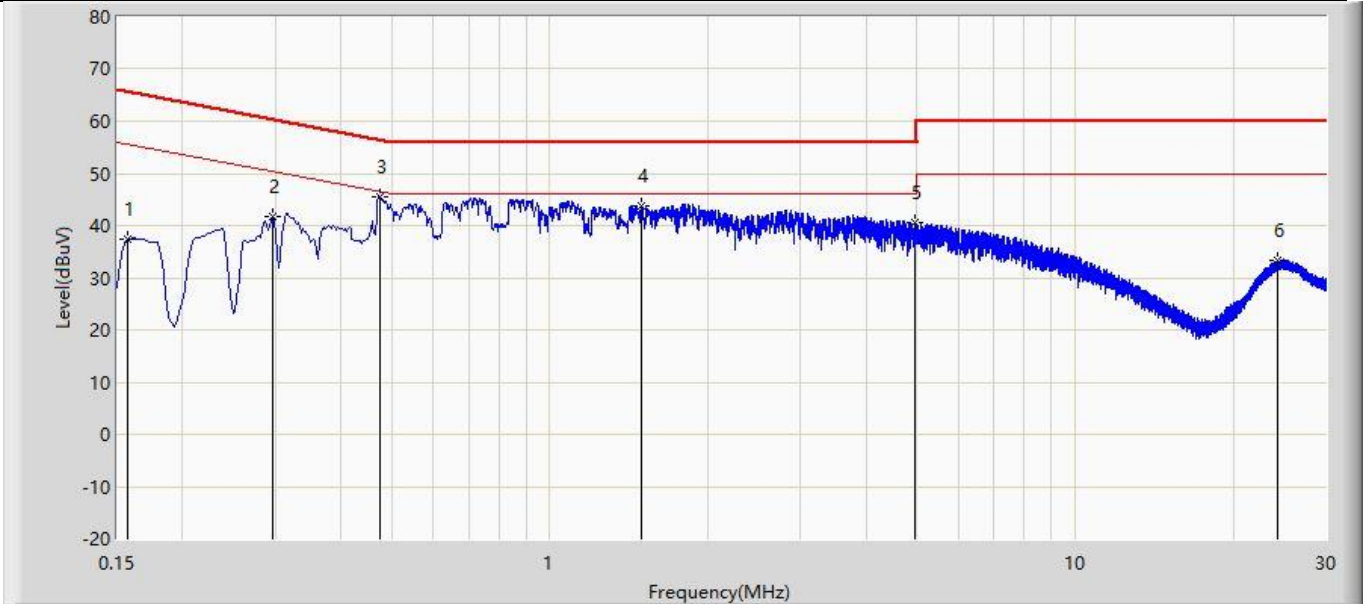


| No | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-----------------|--------------|-------------|------|
| 1  |      | 0.157           | 37.521               | 27.831               | -28.100         | 65.621       | 9.690       | QP   |
| 2  |      | 0.296           | 41.770               | 32.143               | -18.584         | 60.354       | 9.628       | QP   |
| 3  | *    | 0.474           | 45.429               | 35.832               | -11.014         | 56.444       | 9.597       | QP   |
| 4  |      | 1.489           | 43.693               | 34.006               | -12.307         | 56.000       | 9.687       | QP   |
| 5  |      | 4.949           | 40.632               | 30.833               | -15.368         | 56.000       | 9.799       | QP   |
| 6  |      | 24.326          | 33.363               | 22.551               | -26.637         | 60.000       | 10.812      | QP   |

Note:  
1. " \* ", means this data is the worst emission level.


Appendix B: Radiated Emission

Transmit at 5180MHz by 802.11a with Ant3

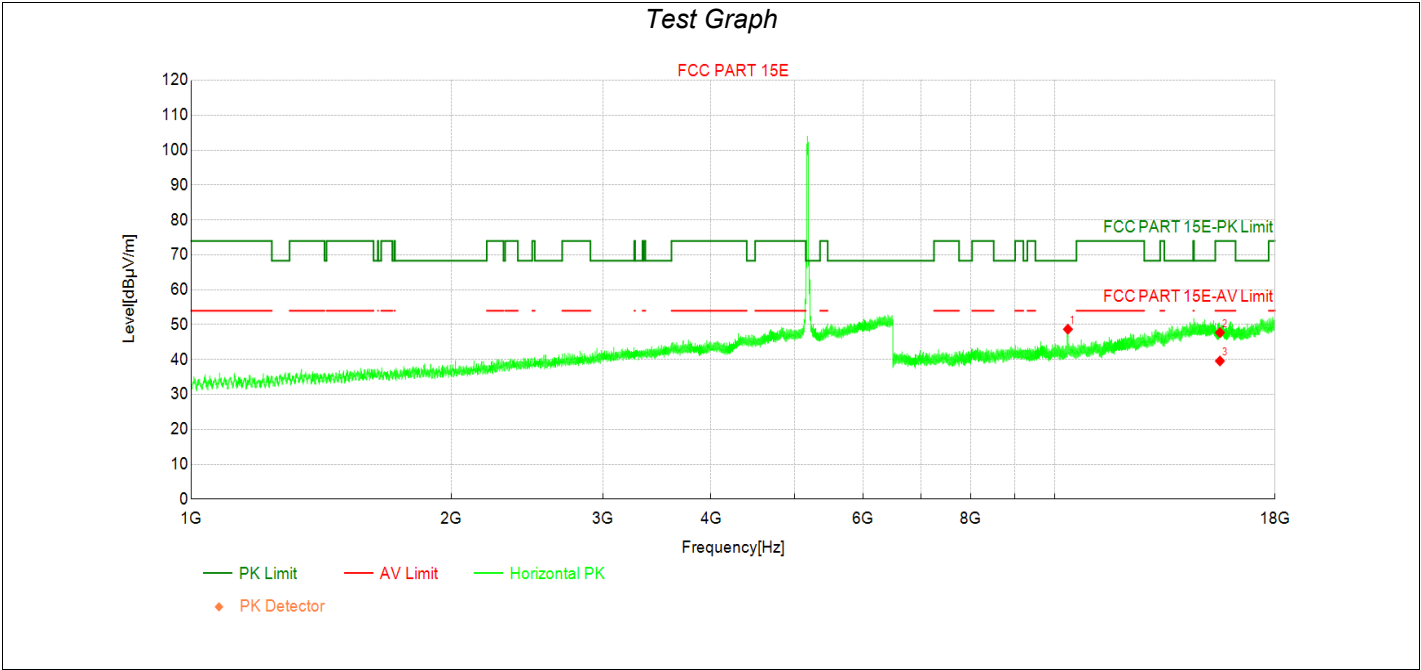


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10361.13        | 41.05          | 48.69          | 7.64          | 68.30          | 19.61       | PK  | Horizo | PASS    |
| 2         | 15540.00        | 31.20          | 47.73          | 16.53         | 74.00          | 26.27       | PK  | Horizo | PASS    |
| 3         | 15540.00        | 23.06          | 39.59          | 16.53         | 54.00          | 14.41       | AV  | Horizo | PASS    |

Transmit at 5180MHz by 802.11a with Ant3

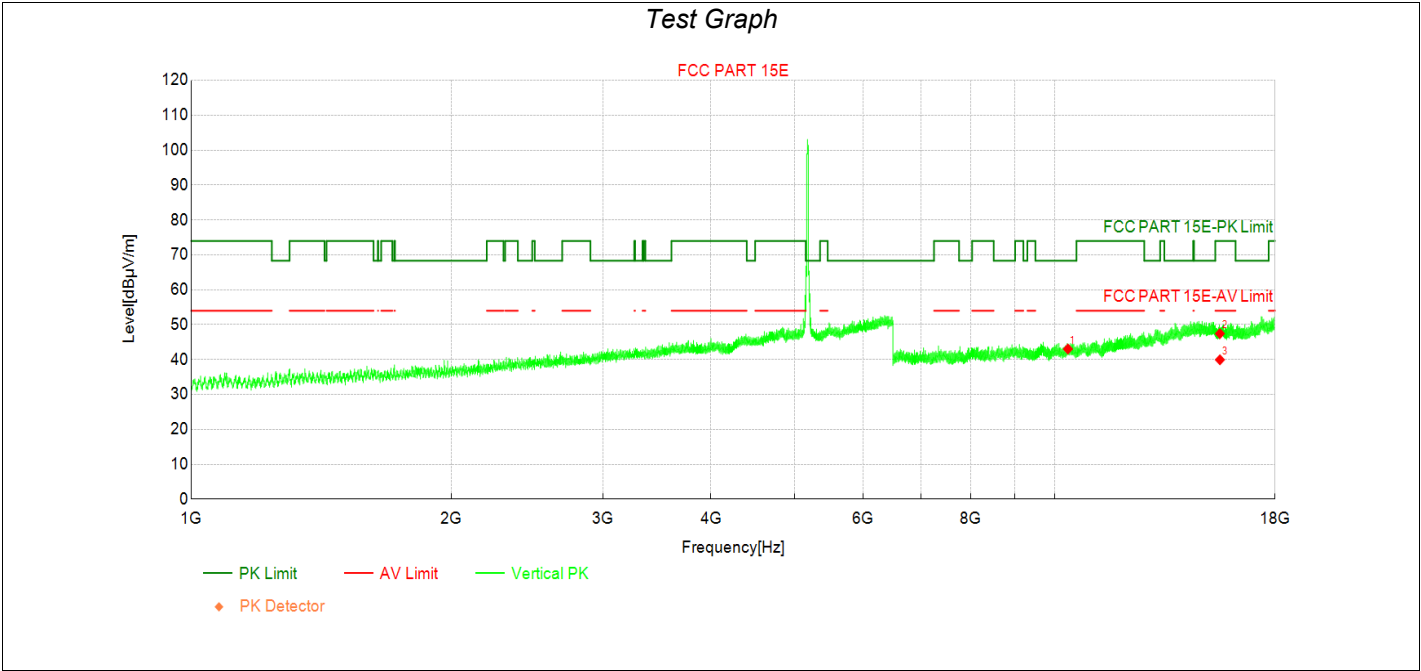


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10360.00        | 35.39          | 43.03          | 7.64          | 68.30          | 25.27       | PK  | Vertic | PASS    |
| 2         | 15540.00        | 30.90          | 47.43          | 16.53         | 74.00          | 26.57       | PK  | Vertic | PASS    |
| 3         | 15540.00        | 23.40          | 39.93          | 16.53         | 54.00          | 14.07       | AV  | Vertic | PASS    |

Transmit at 5200MHz by 802.11a with Ant3

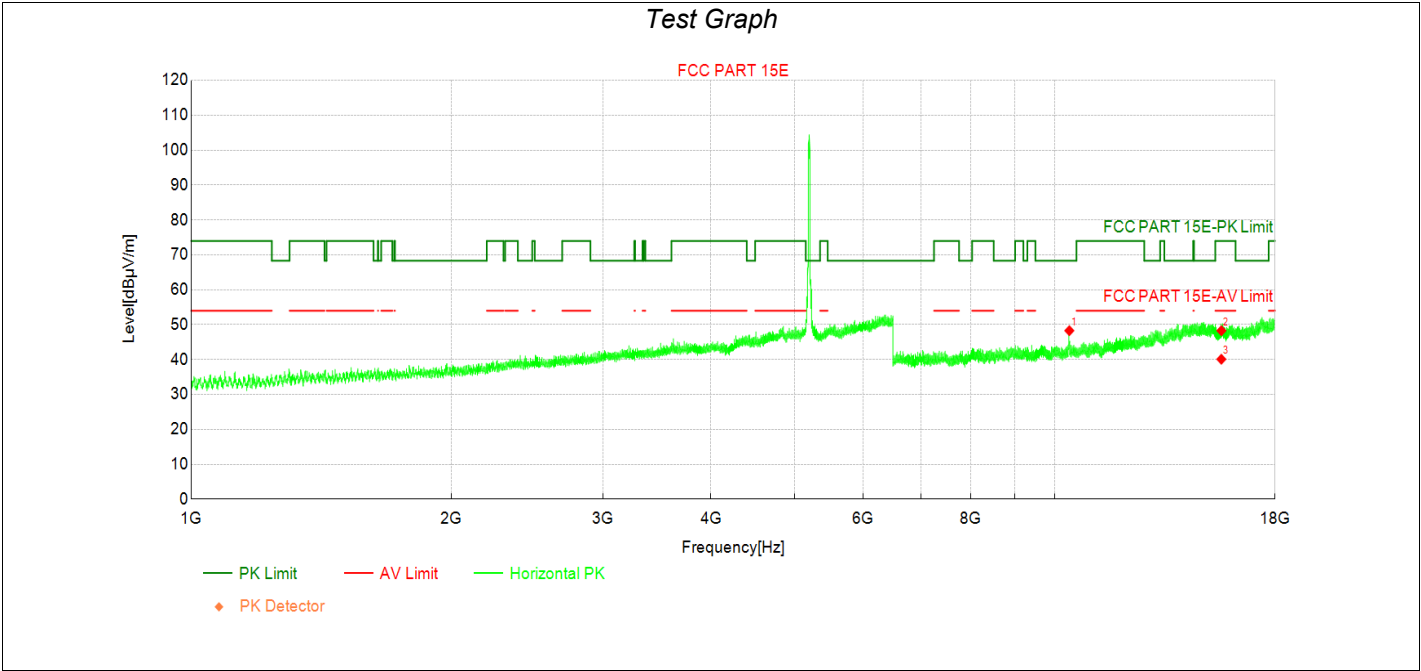

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10400.90        | 40.56          | 48.28          | 7.72          | 68.30          | 20.02       | PK  | Horizo | PASS    |
| 2         | 15600.00        | 31.80          | 48.28          | 16.48         | 74.00          | 25.72       | PK  | Horizo | PASS    |
| 3         | 15600.00        | 23.61          | 40.09          | 16.48         | 54.00          | 13.91       | AV  | Horizo | PASS    |


Transmit at 5200MHz by 802.11a with Ant3

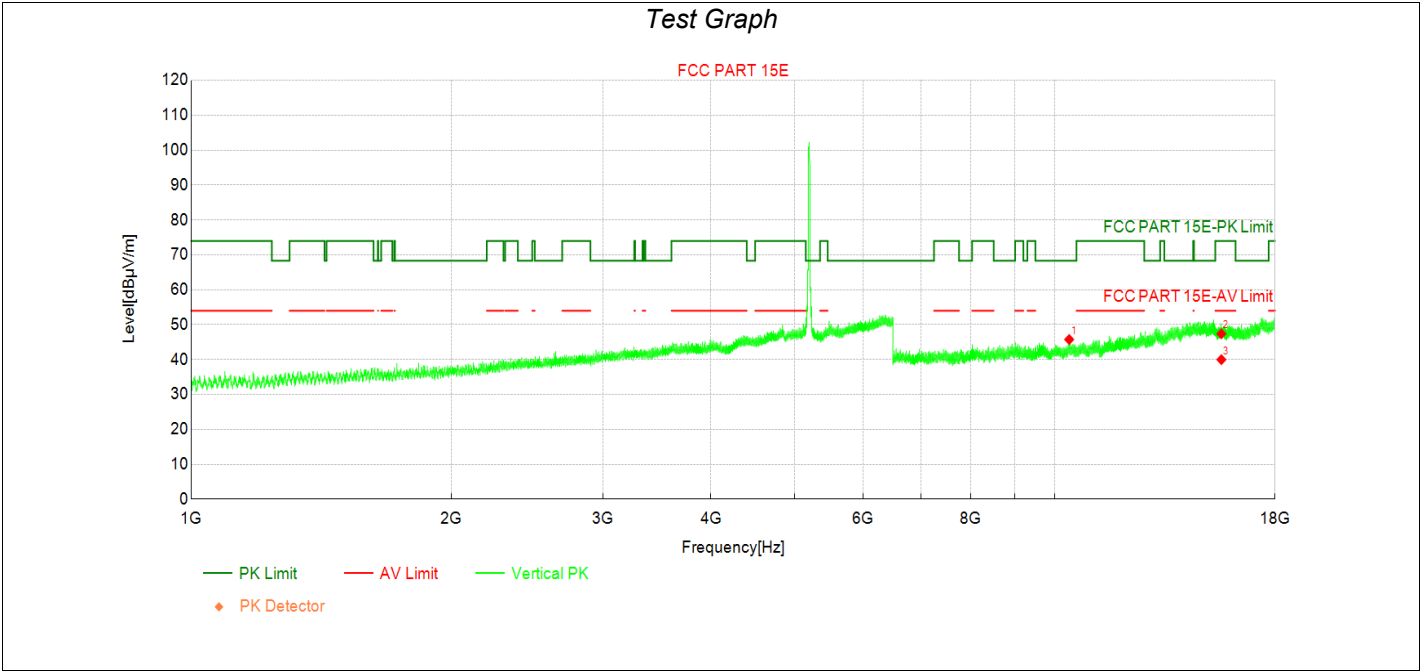

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10396.10        | 38.05          | 45.75          | 7.70          | 68.30          | 22.55       | PK  | Vertic | PASS    |
| 2  | 15600.00        | 30.89          | 47.37          | 16.48         | 74.00          | 26.63       | PK  | Vertic | PASS    |
| 3  | 15600.00        | 23.50          | 39.98          | 16.48         | 54.00          | 14.02       | AV  | Vertic | PASS    |


Transmit at 5240MHz by 802.11a with Ant3

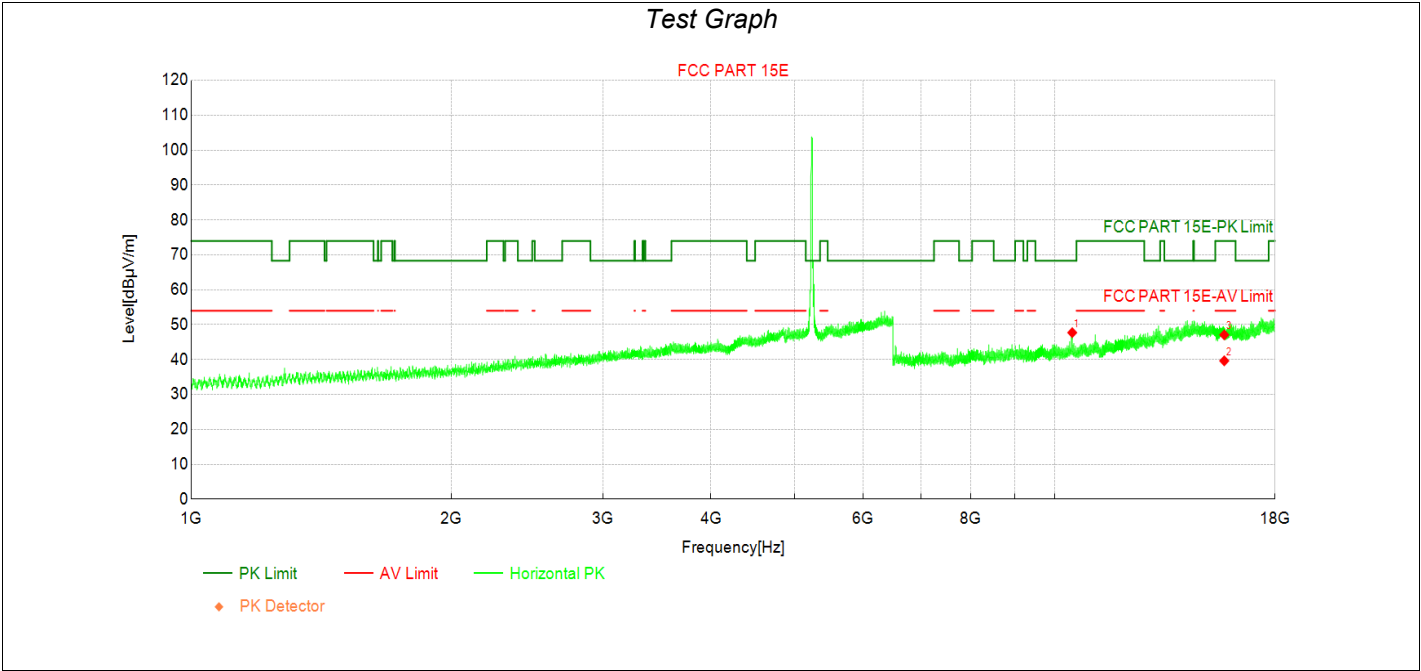

Data List


| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10480.92        | 39.55          | 47.71          | 8.16          | 68.30          | 20.59       | PK  | Horizo | PASS    |
| 2  | 15720.00        | 23.04          | 39.64          | 16.60         | 54.00          | 14.36       | AV  | Horizo | PASS    |
| 3  | 15720.00        | 30.47          | 47.07          | 16.60         | 74.00          | 26.93       | PK  | Horizo | PASS    |

Transmit at 5240MHz by 802.11a with Ant3

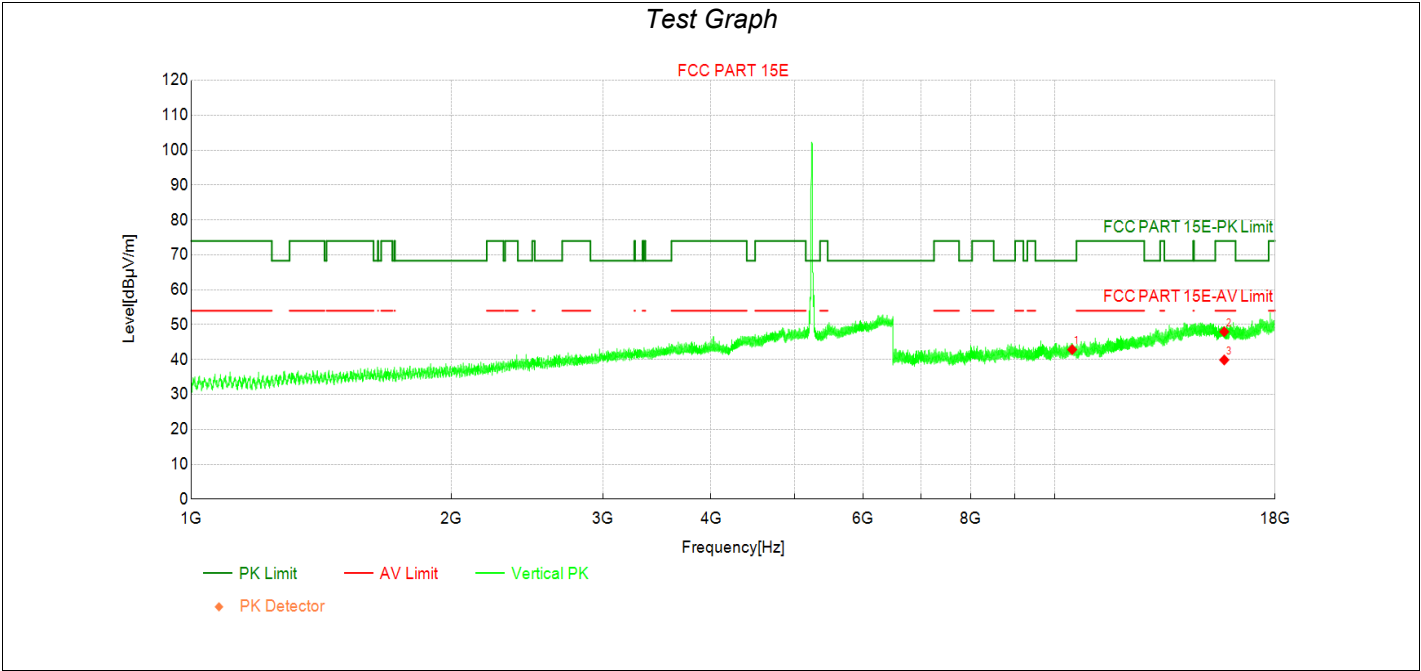


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10480.00        | 34.69          | 42.85          | 8.16          | 68.30          | 25.45       | PK  | Vertic | PASS    |
| 2         | 15720.00        | 31.38          | 47.98          | 16.60         | 74.00          | 26.02       | PK  | Vertic | PASS    |
| 3         | 15720.00        | 23.28          | 39.88          | 16.60         | 54.00          | 14.12       | AV  | Vertic | PASS    |

Transmit at 5260MHz by 802.11a with Ant3

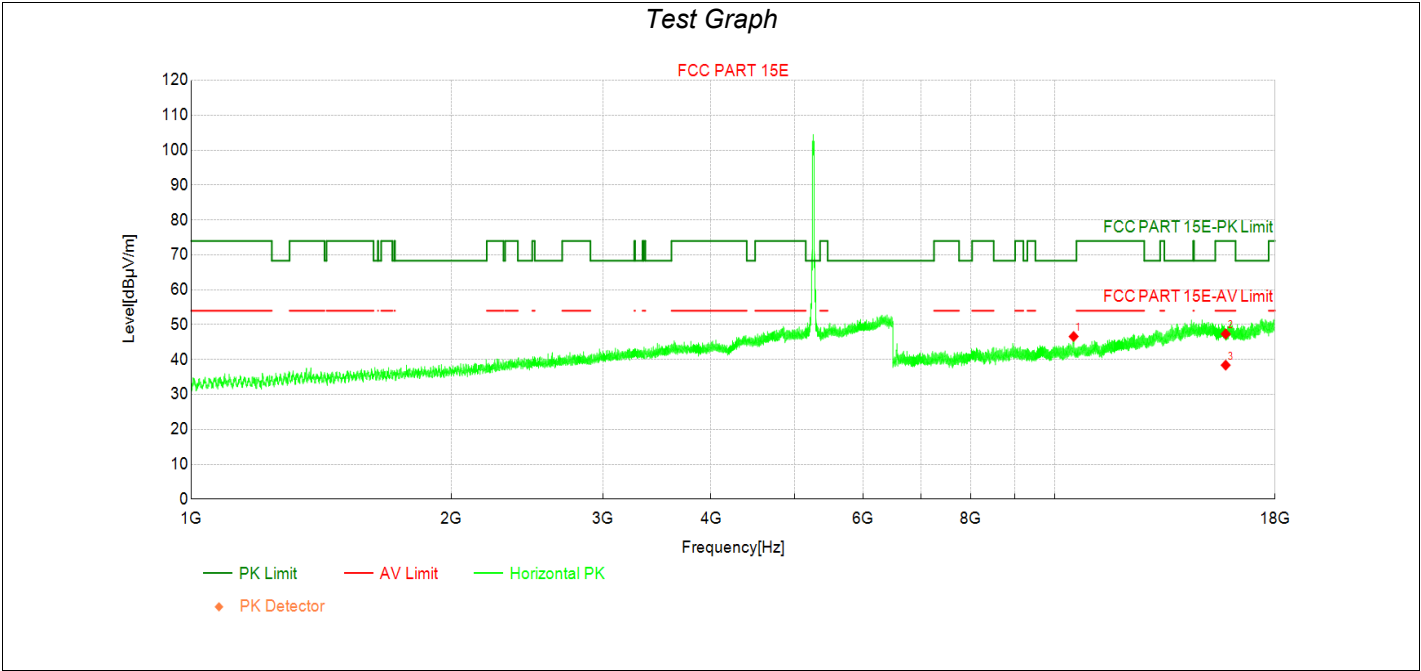


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10520.00        | 38.30          | 46.61          | 8.31          | 68.30          | 21.69       | PK  | Horizo | PASS    |
| 2         | 15780.00        | 30.64          | 47.34          | 16.70         | 74.00          | 26.66       | PK  | Horizo | PASS    |
| 3         | 15780.00        | 21.69          | 38.39          | 16.70         | 54.00          | 15.61       | AV  | Horizo | PASS    |

Transmit at 5260MHz by 802.11a with Ant3

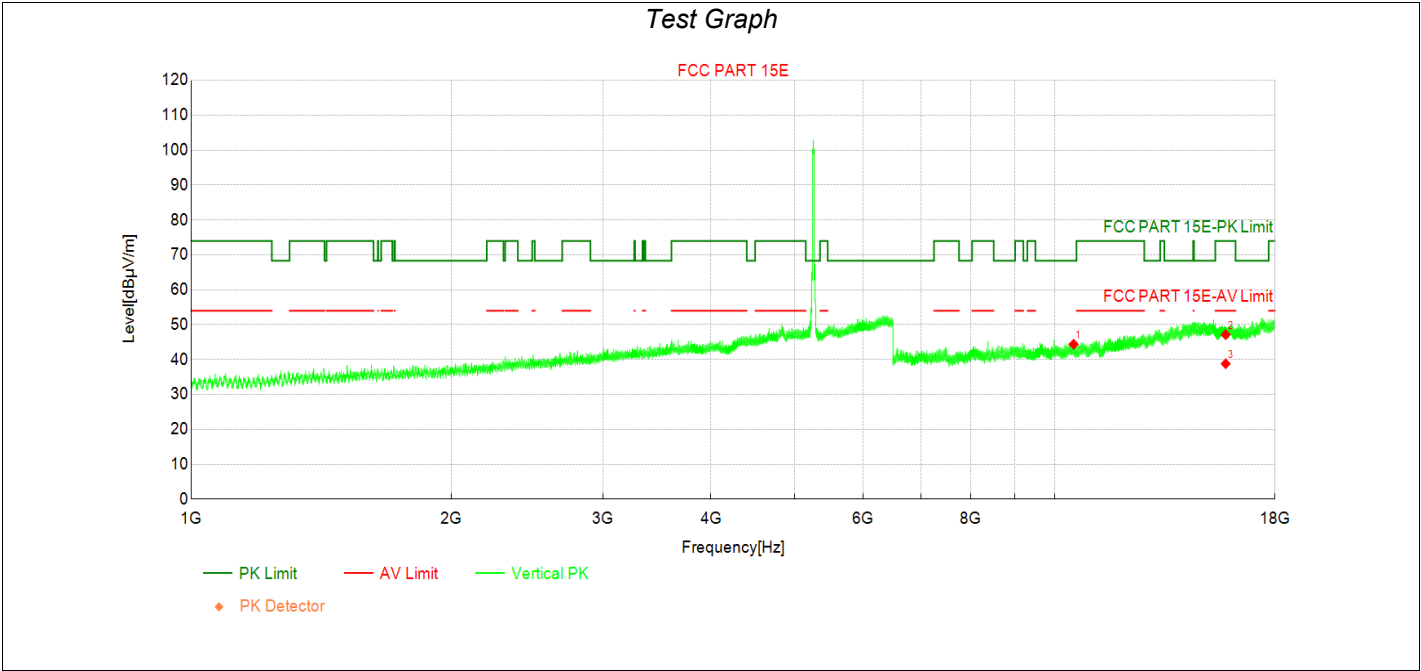

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10520.00        | 36.07          | 44.38          | 8.31          | 68.30          | 23.92       | PK  | Vertic | PASS    |
| 2         | 15780.00        | 30.44          | 47.14          | 16.70         | 74.00          | 26.86       | PK  | Vertic | PASS    |
| 3         | 15780.00        | 22.10          | 38.80          | 16.70         | 54.00          | 15.20       | AV  | Vertic | PASS    |


Transmit at 5280MHz by 802.11a with Ant3

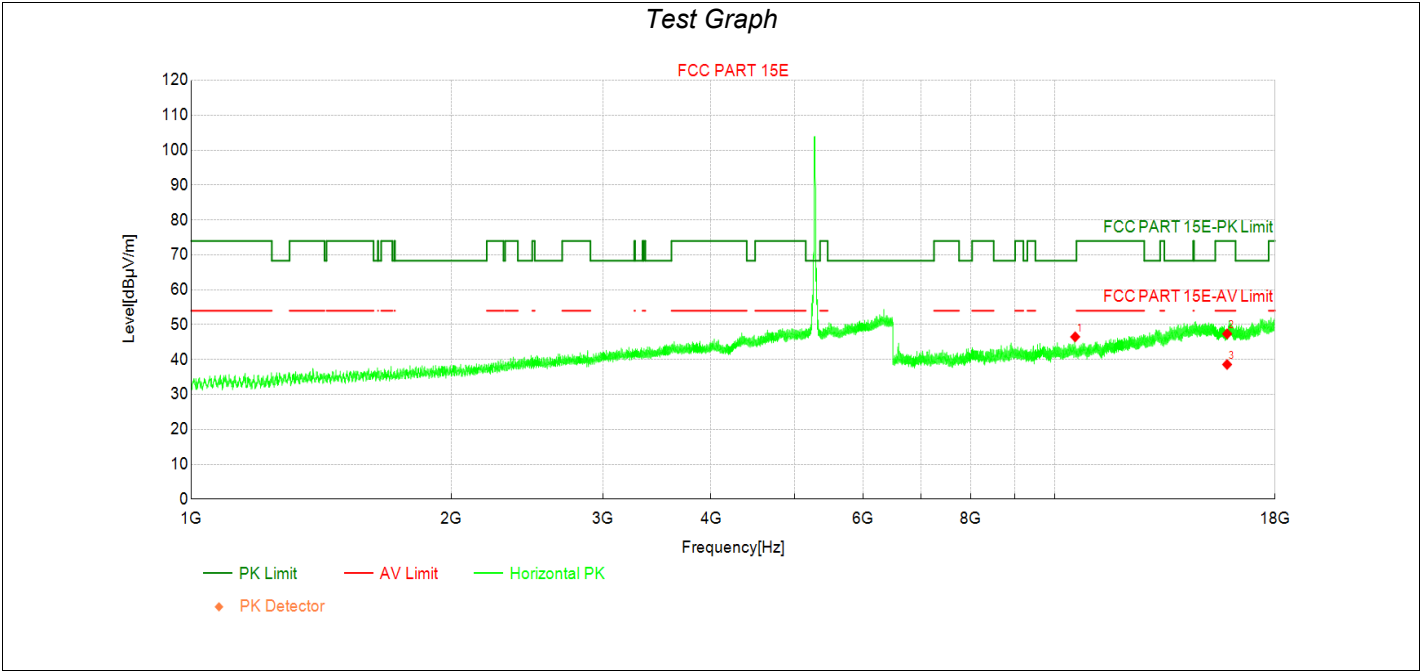

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10563.33        | 38.11          | 46.51          | 8.40          | 68.30          | 21.79       | PK  | Horizo | PASS    |
| 2  | 15840.00        | 30.53          | 47.37          | 16.84         | 74.00          | 26.63       | PK  | Horizo | PASS    |
| 3  | 15840.00        | 21.74          | 38.58          | 16.84         | 54.00          | 15.42       | AV  | Horizo | PASS    |

Transmit at 5280MHz by 802.11a with Ant3

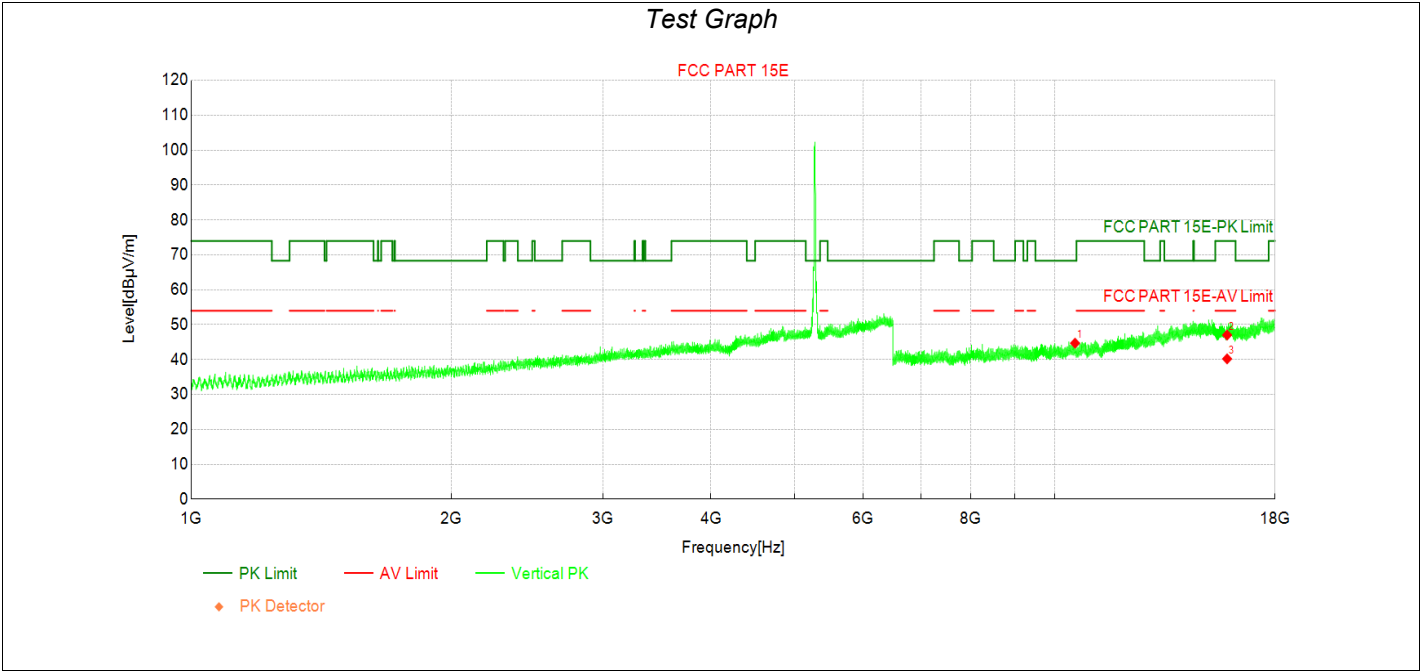

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10560.00        | 36.31          | 44.70          | 8.39          | 68.30          | 23.60       | PK  | Vertic | PASS    |
| 2         | 15840.00        | 30.18          | 47.02          | 16.84         | 74.00          | 26.98       | PK  | Vertic | PASS    |
| 3         | 15840.00        | 23.36          | 40.20          | 16.84         | 54.00          | 13.80       | AV  | Vertic | PASS    |


Transmit at 5320MHz by 802.11a with Ant3

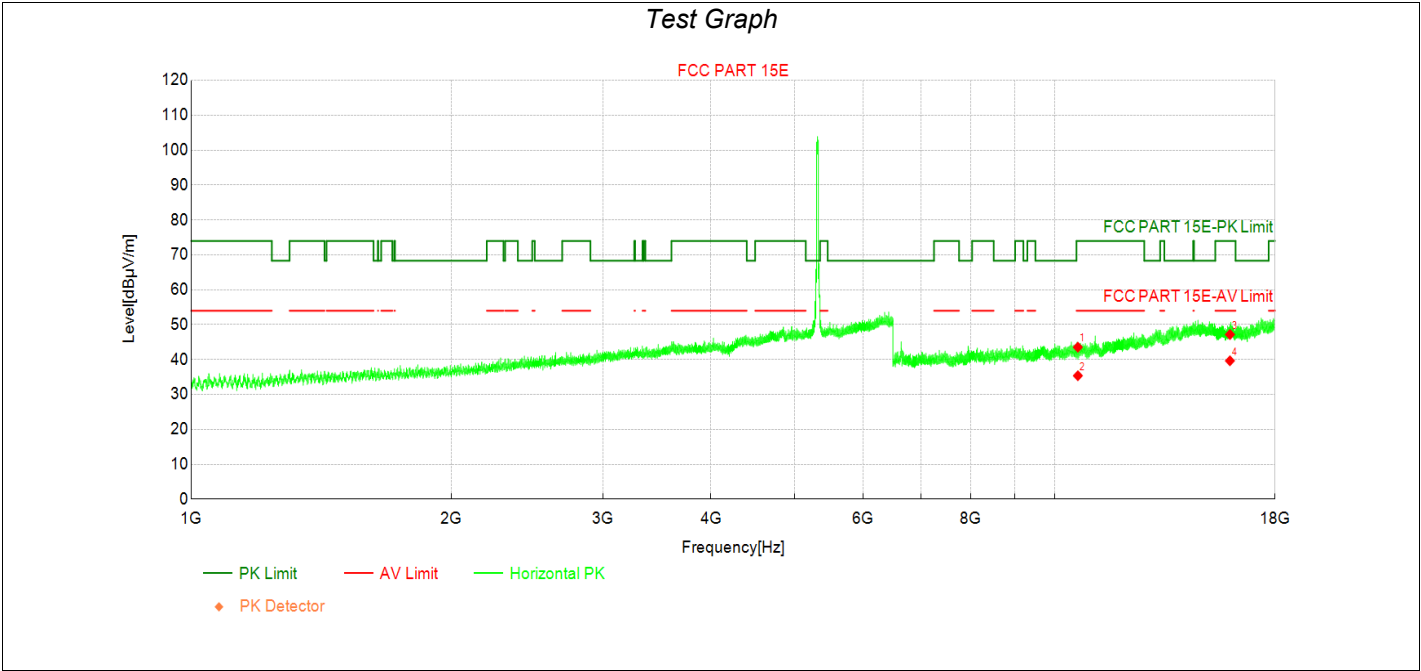

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10640.00        | 35.12          | 43.55          | 8.43          | 74.00          | 30.45       | PK  | Horizo | PASS    |
| 2  | 10640.00        | 26.94          | 35.37          | 8.43          | 54.00          | 18.63       | AV  | Horizo | PASS    |
| 3  | 15960.00        | 29.91          | 47.18          | 17.27         | 74.00          | 26.82       | PK  | Horizo | PASS    |
| 4  | 15960.00        | 22.37          | 39.64          | 17.27         | 54.00          | 14.36       | AV  | Horizo | PASS    |


Transmit at 5320MHz by 802.11a with Ant3

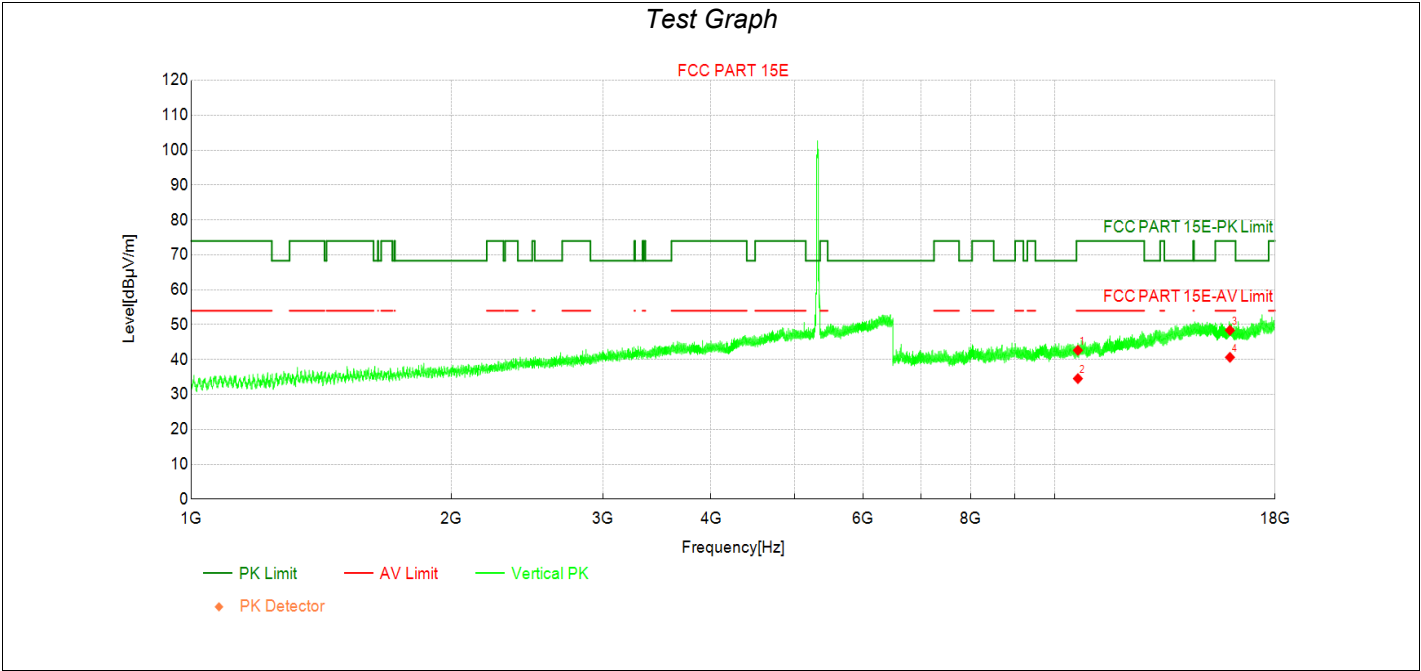

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10640.00        | 34.23          | 42.66          | 8.43          | 74.00          | 31.34       | PK  | Vertic | PASS    |
| 2  | 10640.00        | 26.12          | 34.55          | 8.43          | 54.00          | 19.45       | AV  | Vertic | PASS    |
| 3  | 15960.00        | 31.12          | 48.39          | 17.27         | 74.00          | 25.61       | PK  | Vertic | PASS    |
| 4  | 15960.00        | 23.37          | 40.64          | 17.27         | 54.00          | 13.36       | AV  | Vertic | PASS    |

Transmit at 5500MHz by 802.11a with Ant3

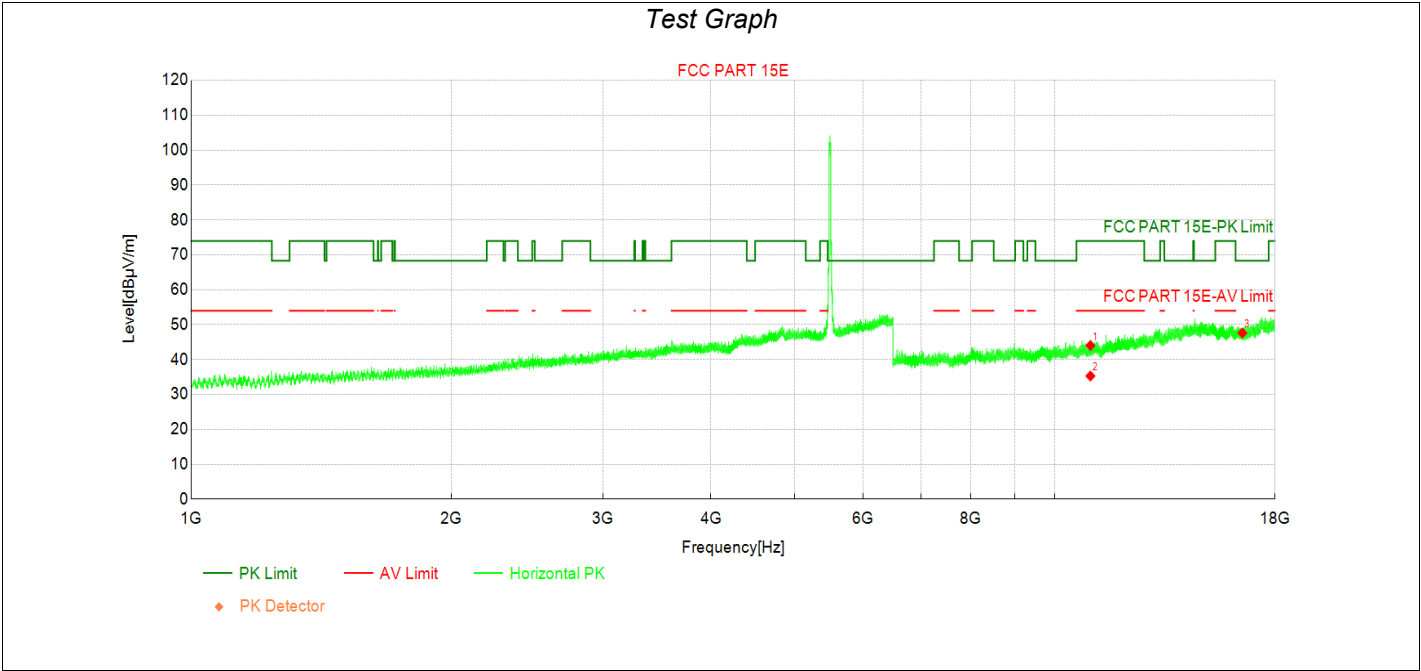


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11000.00        | 34.54          | 44.03          | 9.49          | 74.00          | 29.97       | PK  | Horizo | PASS    |
| 2         | 11000.00        | 25.79          | 35.28          | 9.49          | 54.00          | 18.72       | AV  | Horizo | PASS    |
| 3         | 16500.00        | 30.12          | 47.63          | 17.51         | 68.30          | 20.67       | PK  | Horizo | PASS    |

Transmit at 5500MHz by 802.11a with Ant3

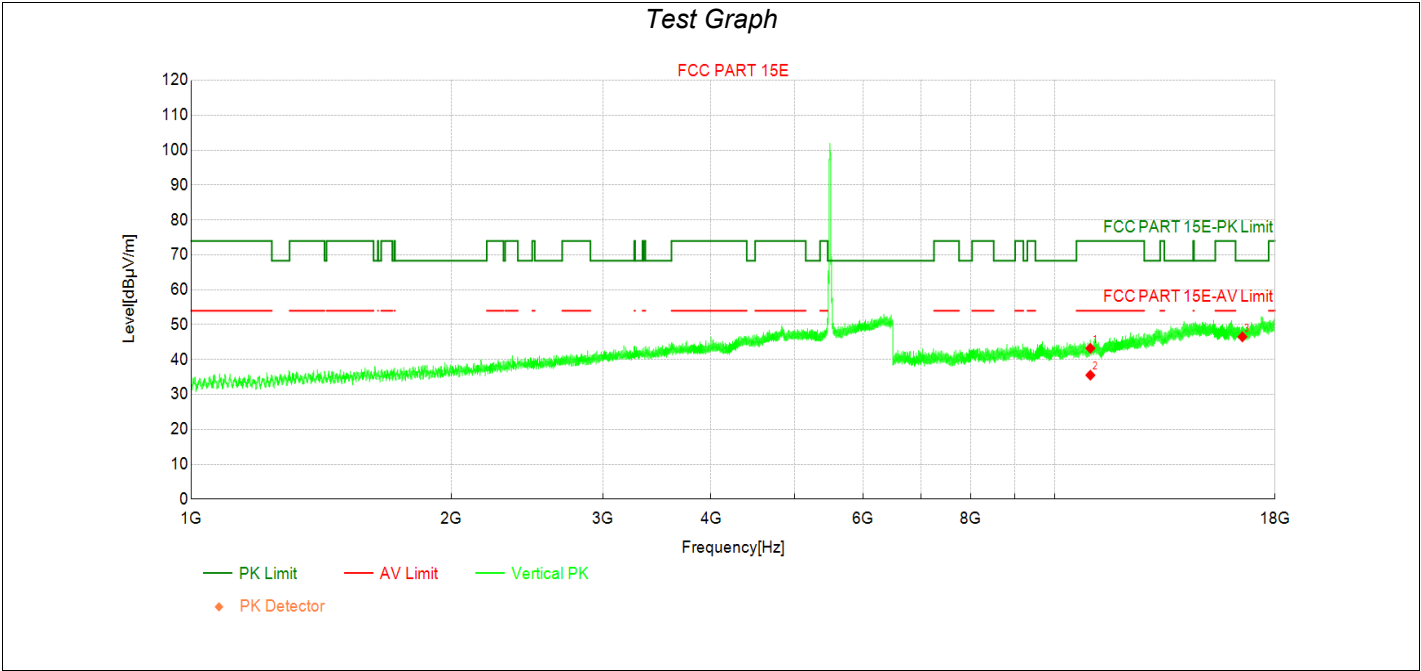


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11000.00        | 33.74          | 43.23          | 9.49          | 74.00          | 30.77       | PK  | Vertic | PASS    |
| 2         | 11000.00        | 26.04          | 35.53          | 9.49          | 54.00          | 18.47       | AV  | Vertic | PASS    |
| 3         | 16500.00        | 29.00          | 46.51          | 17.51         | 68.30          | 21.79       | PK  | Vertic | PASS    |

Transmit at 5580MHz by 802.11a with Ant3

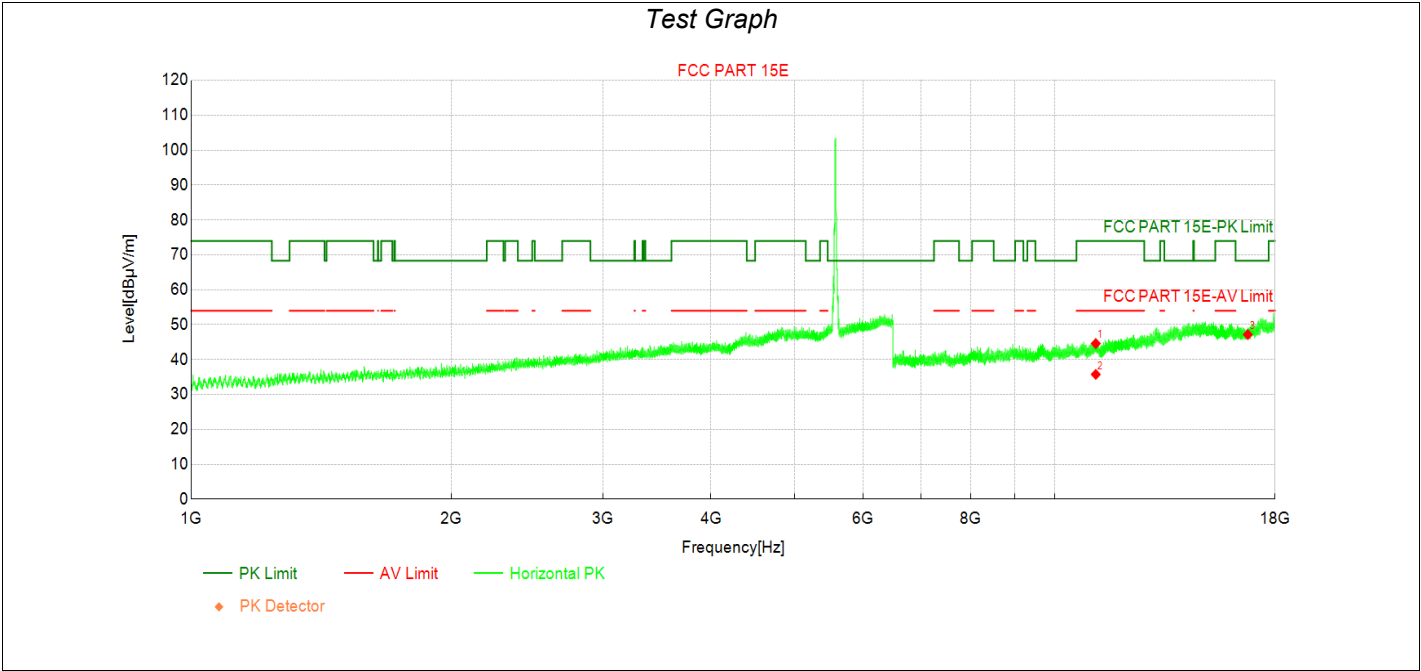


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11160.00        | 35.06          | 44.59          | 9.53          | 74.00          | 29.41       | PK  | Horizo | PASS    |
| 2         | 11160.00        | 26.21          | 35.74          | 9.53          | 54.00          | 18.26       | AV  | Horizo | PASS    |
| 3         | 16740.00        | 29.21          | 47.17          | 17.96         | 68.30          | 21.13       | PK  | Horizo | PASS    |

Transmit at 5580MHz by 802.11a with Ant3

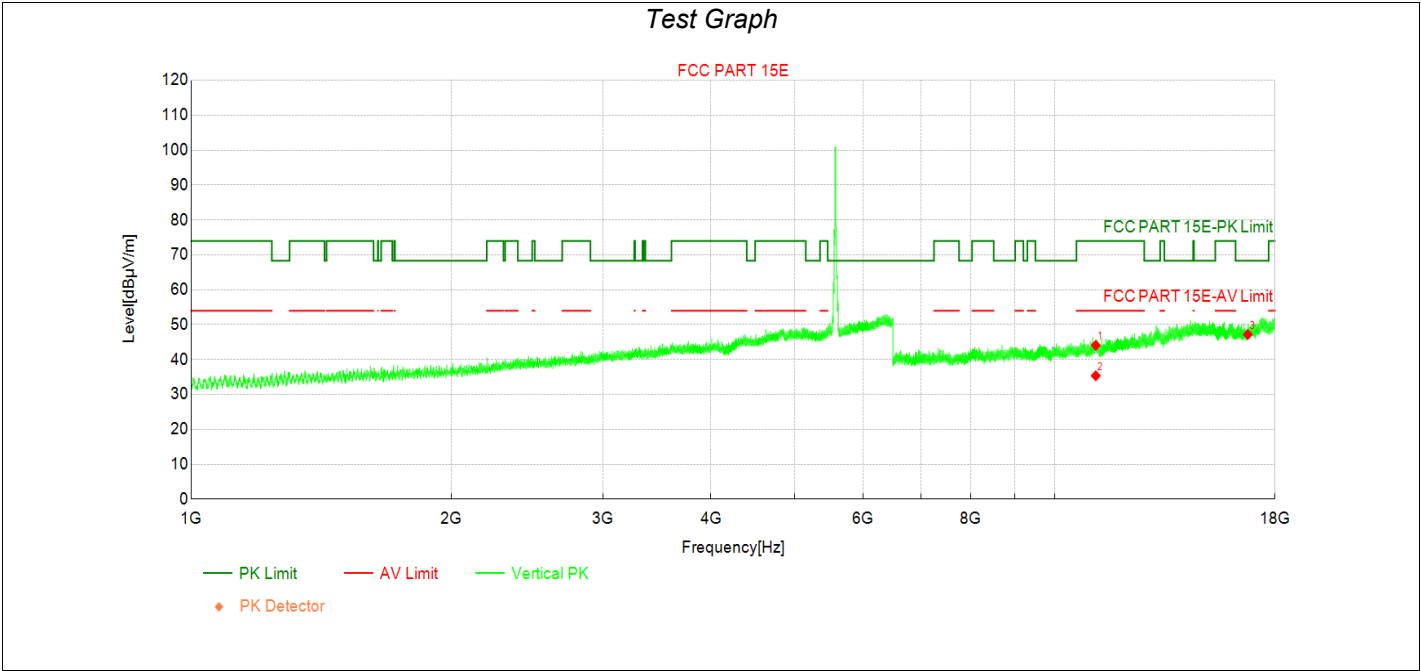


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11160.00        | 34.56          | 44.09          | 9.53          | 74.00          | 29.91       | PK  | Vertic | PASS    |
| 2         | 11160.00        | 25.83          | 35.36          | 9.53          | 54.00          | 18.64       | AV  | Vertic | PASS    |
| 3         | 16740.00        | 29.22          | 47.18          | 17.96         | 68.30          | 21.12       | PK  | Vertic | PASS    |

Transmit at 5700MHz by 802.11a with Ant3

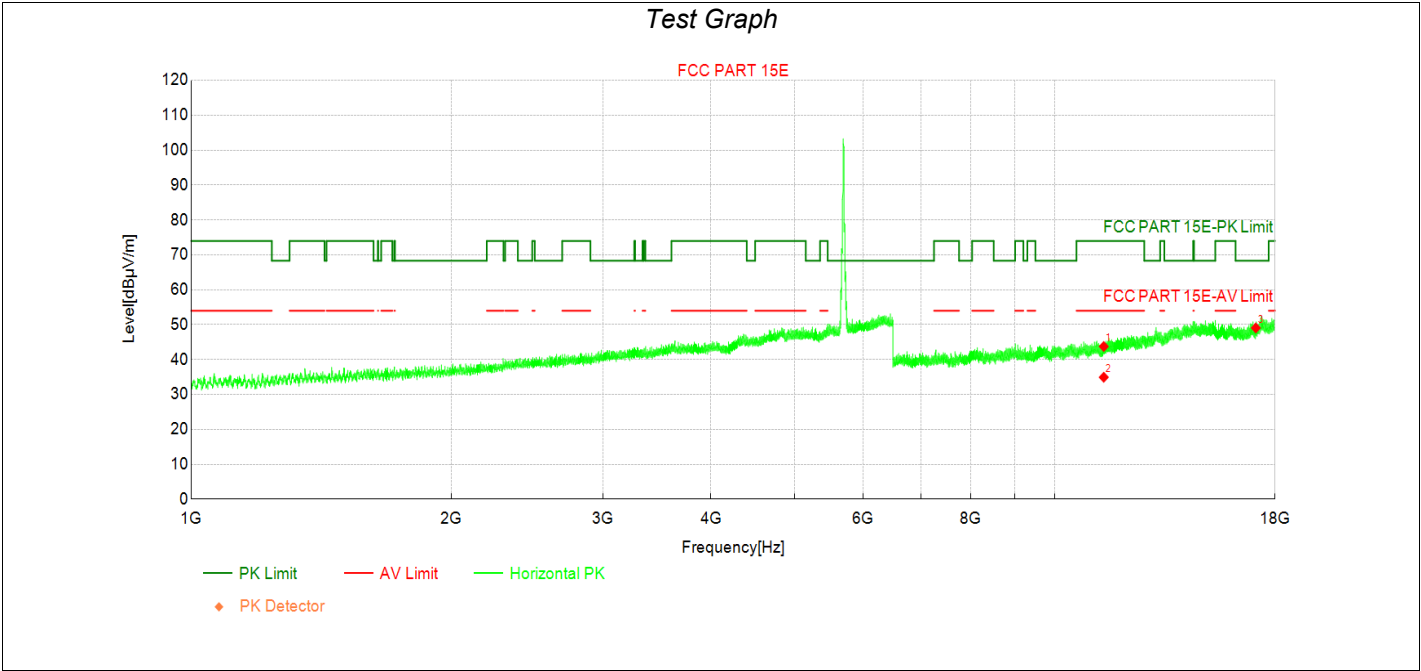


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11400.00        | 33.60          | 43.74          | 10.14         | 74.00          | 30.26       | PK  | Horizo | PASS    |
| 2         | 11400.00        | 24.79          | 34.93          | 10.14         | 54.00          | 19.07       | AV  | Horizo | PASS    |
| 3         | 17100.00        | 29.98          | 49.06          | 19.08         | 68.30          | 19.24       | PK  | Horizo | PASS    |

Transmit at 5700MHz by 802.11a with Ant3

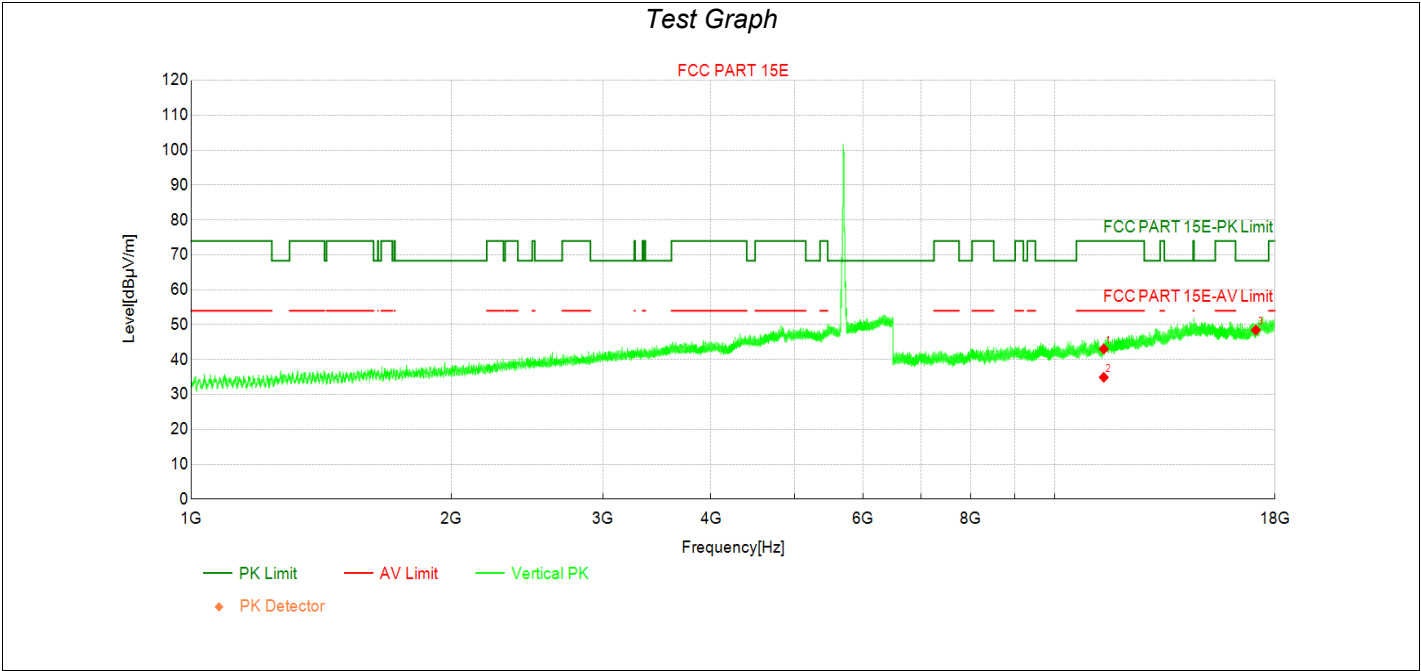


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11400.00        | 32.88          | 43.02          | 10.14         | 74.00          | 30.98       | PK  | Vertic | PASS    |
| 2         | 11400.00        | 24.77          | 34.91          | 10.14         | 54.00          | 19.09       | AV  | Vertic | PASS    |
| 3         | 17100.00        | 29.37          | 48.45          | 19.08         | 68.30          | 19.85       | PK  | Vertic | PASS    |

Transmit at 5745MHz by 802.11a with Ant3

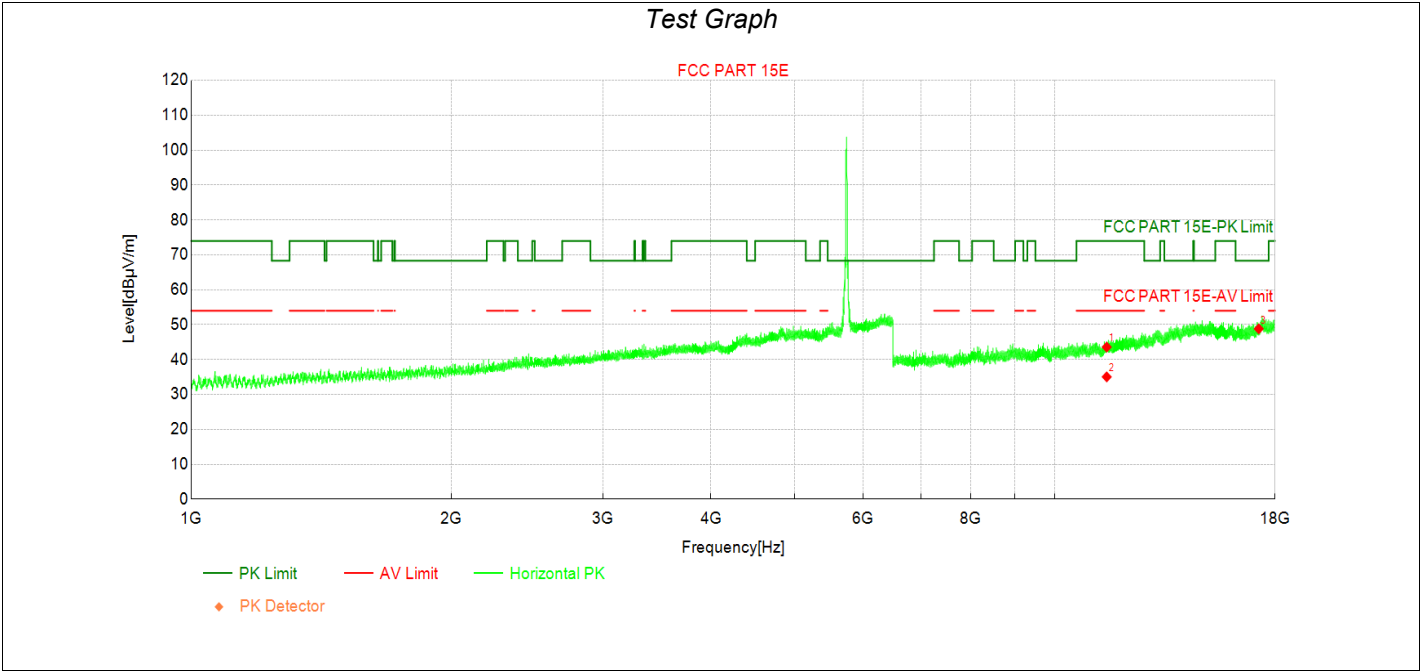


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11490.00        | 33.29          | 43.57          | 10.28         | 74.00          | 30.43       | PK  | Horizo | PASS    |
| 2         | 11490.00        | 24.76          | 35.04          | 10.28         | 54.00          | 18.96       | AV  | Horizo | PASS    |
| 3         | 17235.00        | 30.14          | 48.81          | 18.67         | 68.30          | 19.49       | PK  | Horizo | PASS    |

Transmit at 5745MHz by 802.11a with Ant3

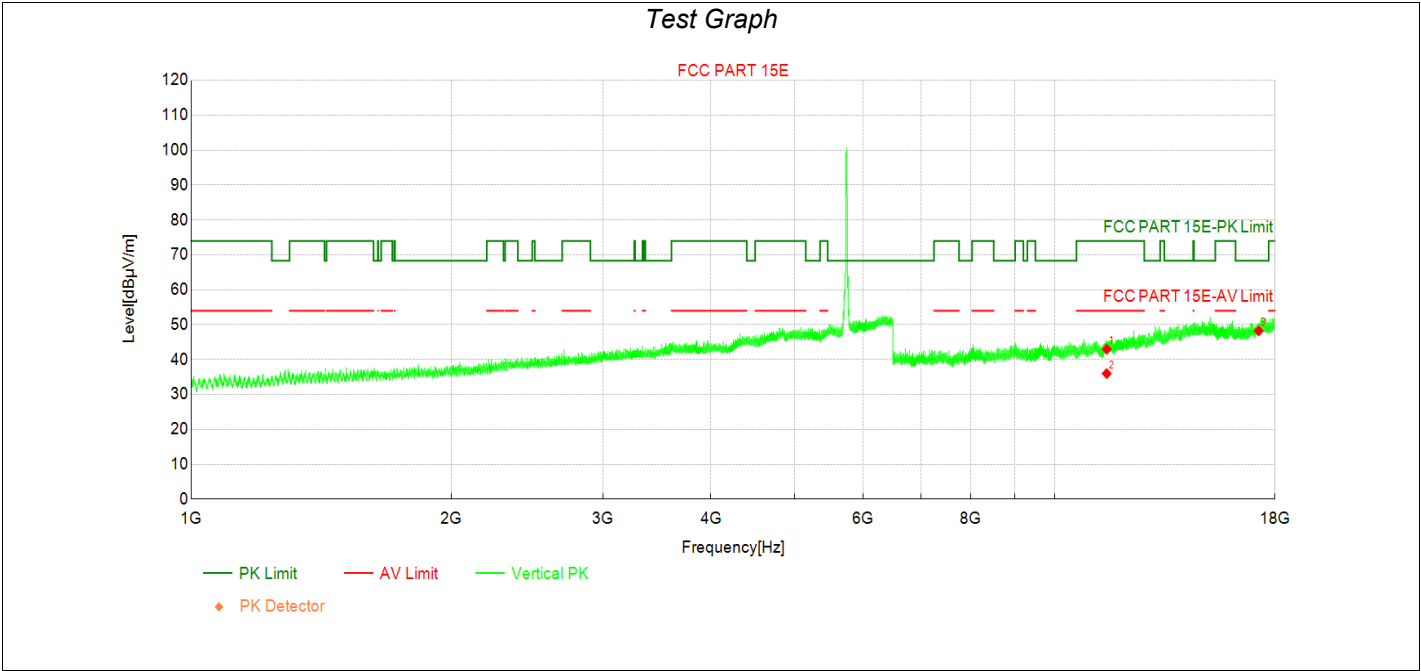


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11490.00        | 32.67          | 42.95          | 10.28         | 74.00          | 31.05       | PK  | Vertic | PASS    |
| 2         | 11490.00        | 25.70          | 35.98          | 10.28         | 54.00          | 18.02       | AV  | Vertic | PASS    |
| 3         | 17235.00        | 29.57          | 48.24          | 18.67         | 68.30          | 20.06       | PK  | Vertic | PASS    |

Transmit at 5785MHz by 802.11a with Ant3

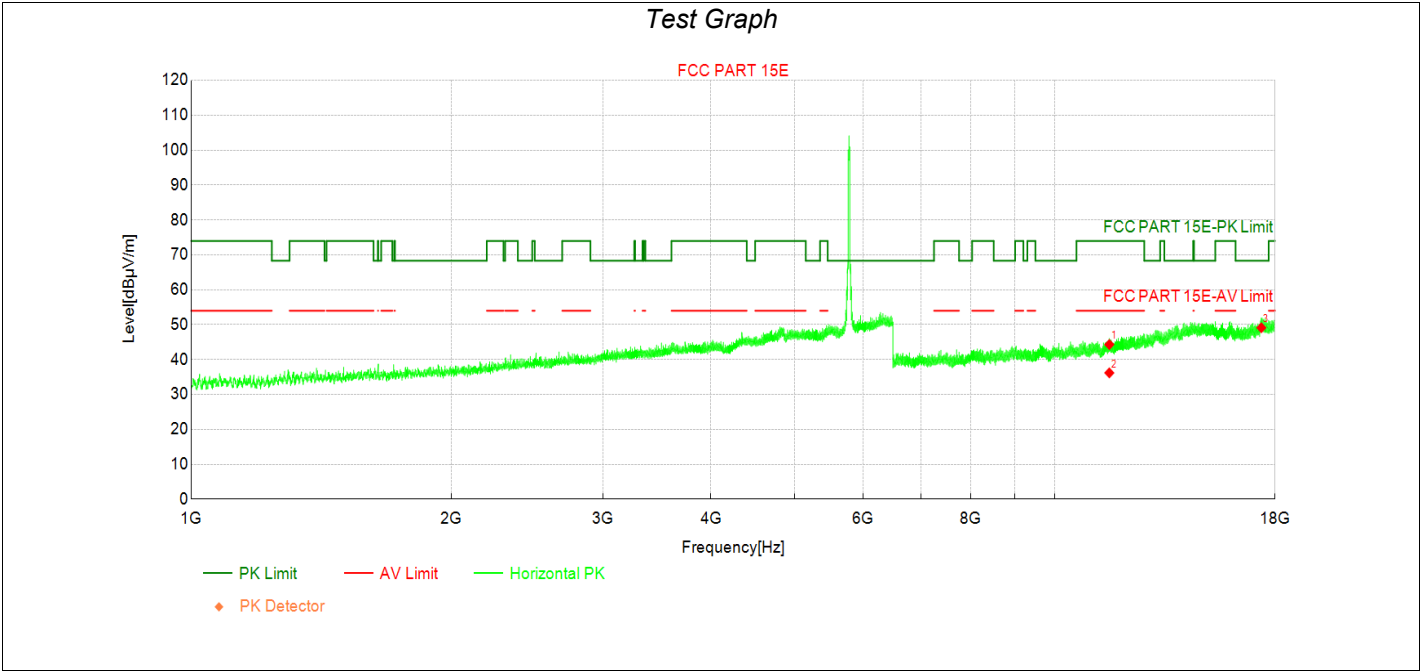

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11570.00        | 33.52          | 44.31          | 10.79         | 74.00          | 29.69       | PK  | Horizo | PASS    |
| 2         | 11570.00        | 25.39          | 36.18          | 10.79         | 54.00          | 17.82       | AV  | Horizo | PASS    |
| 3         | 17355.00        | 29.44          | 49.11          | 19.67         | 68.30          | 19.19       | PK  | Horizo | PASS    |


Transmit at 5785MHz by 802.11a with Ant3

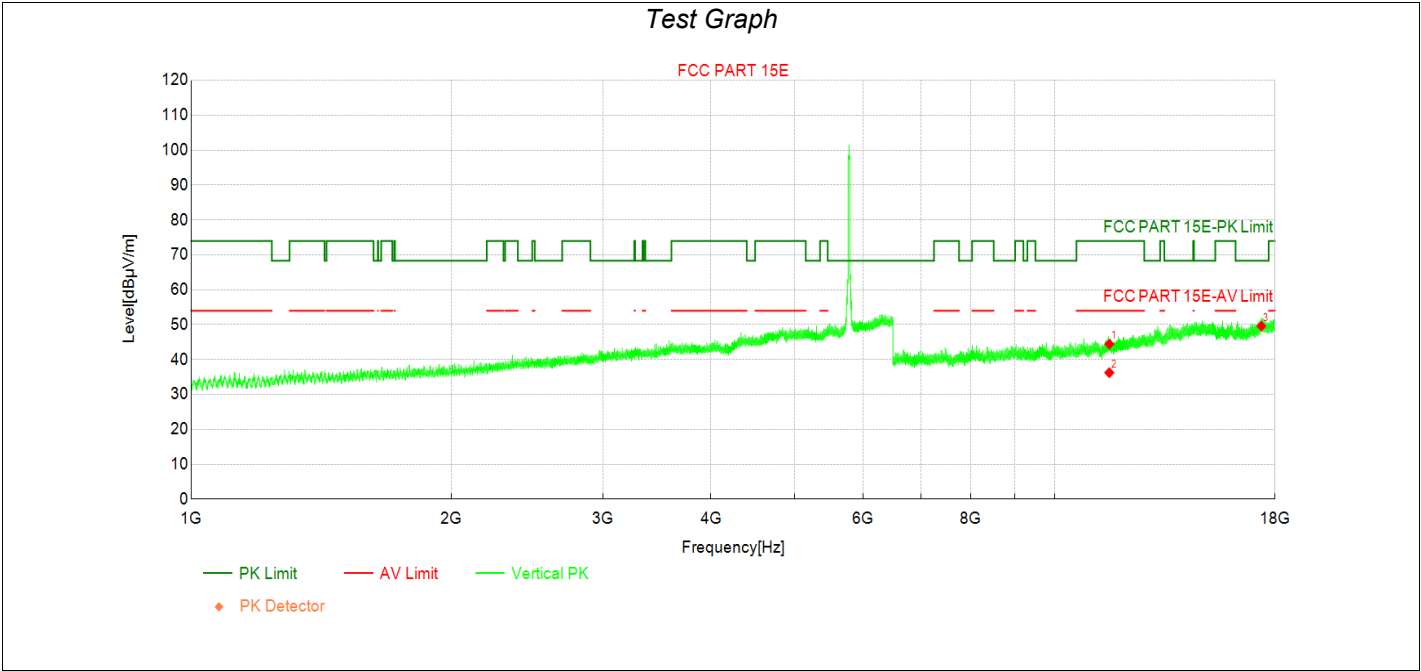

Data List


| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11570.00        | 33.63          | 44.42          | 10.79         | 74.00          | 29.58       | PK  | Vertic | PASS    |
| 2  | 11570.00        | 25.45          | 36.24          | 10.79         | 54.00          | 17.76       | AV  | Vertic | PASS    |
| 3  | 17355.00        | 29.90          | 49.57          | 19.67         | 68.30          | 18.73       | PK  | Vertic | PASS    |

Transmit at 5825MHz by 802.11a with Ant3

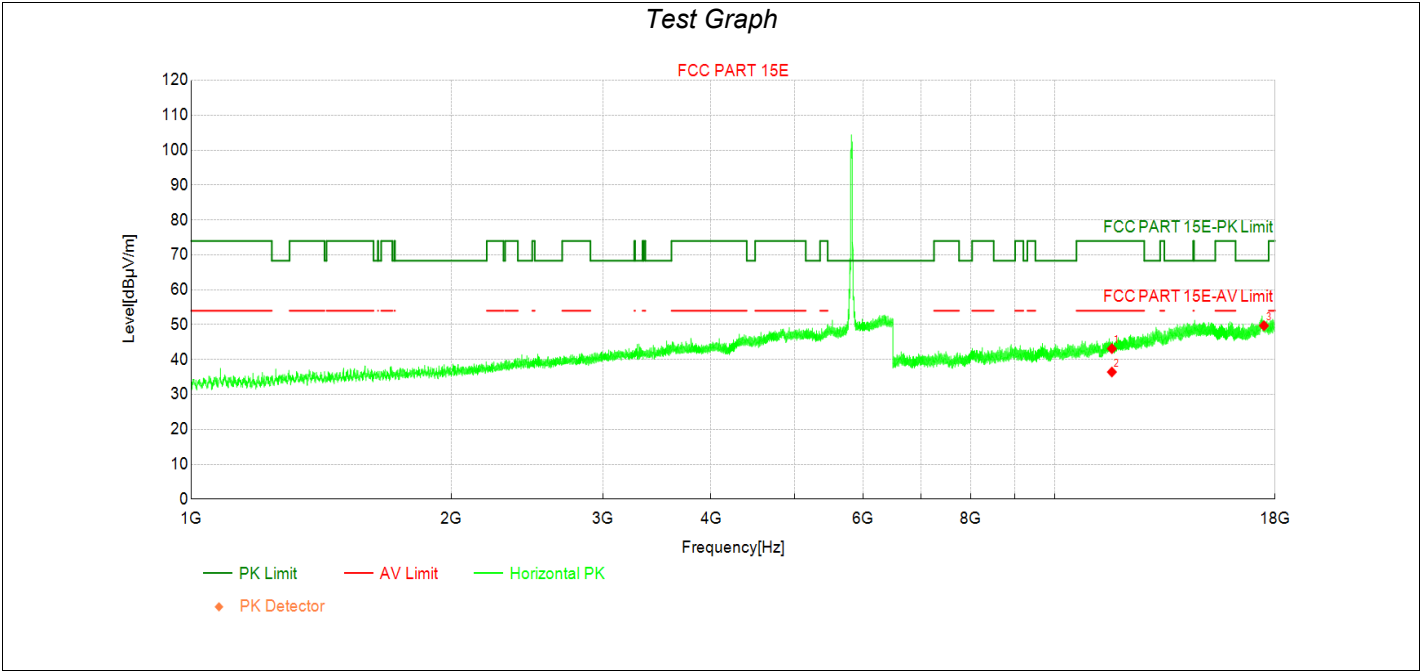


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11650.00        | 32.10          | 43.13          | 11.03         | 74.00          | 30.87       | PK  | Horizo | PASS    |
| 2         | 11650.00        | 25.40          | 36.43          | 11.03         | 54.00          | 17.57       | AV  | Horizo | PASS    |
| 3         | 17475.00        | 29.66          | 49.70          | 20.04         | 68.30          | 18.60       | PK  | Horizo | PASS    |

Transmit at 5825MHz by 802.11a with Ant3

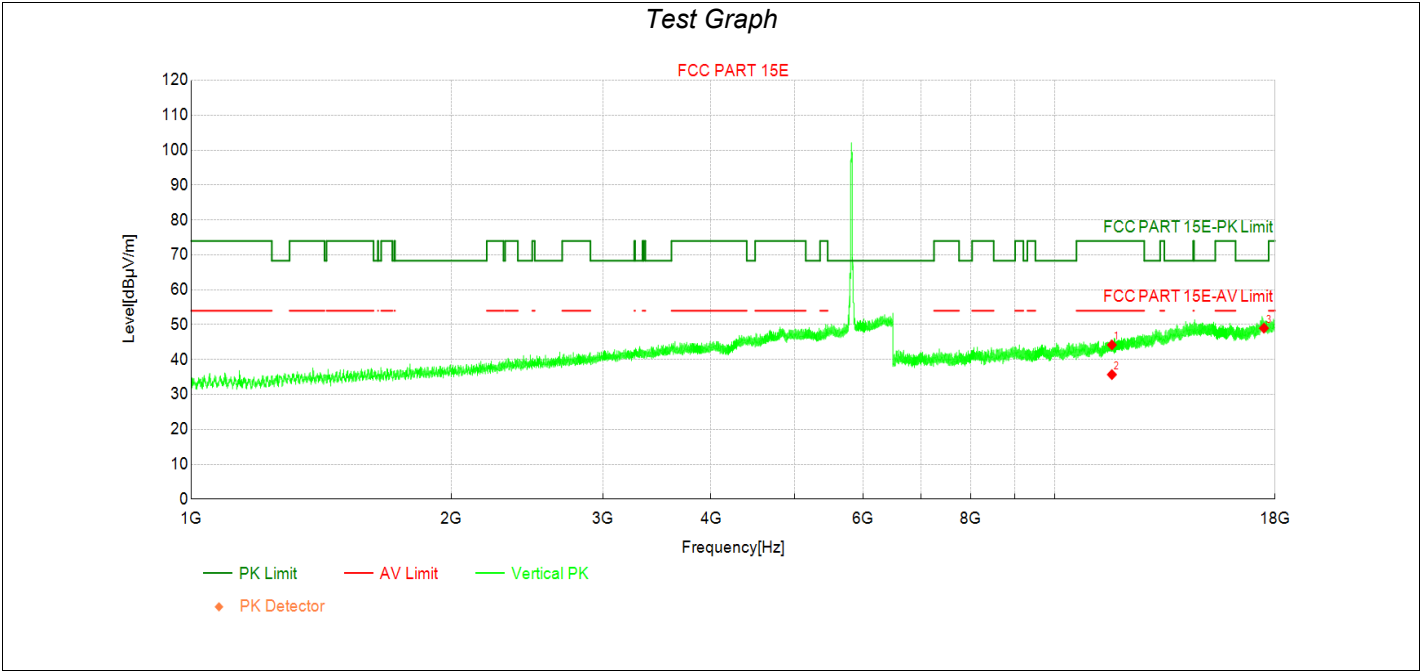

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11650.00        | 33.17          | 44.20          | 11.03         | 74.00          | 29.80       | PK  | Vertic | PASS    |
| 2         | 11650.00        | 24.66          | 35.69          | 11.03         | 54.00          | 18.31       | AV  | Vertic | PASS    |
| 3         | 17475.00        | 28.96          | 49.00          | 20.04         | 68.30          | 19.30       | PK  | Vertic | PASS    |


Transmit at 5180MHz by 802.11n(20MHz) with Ant2+3

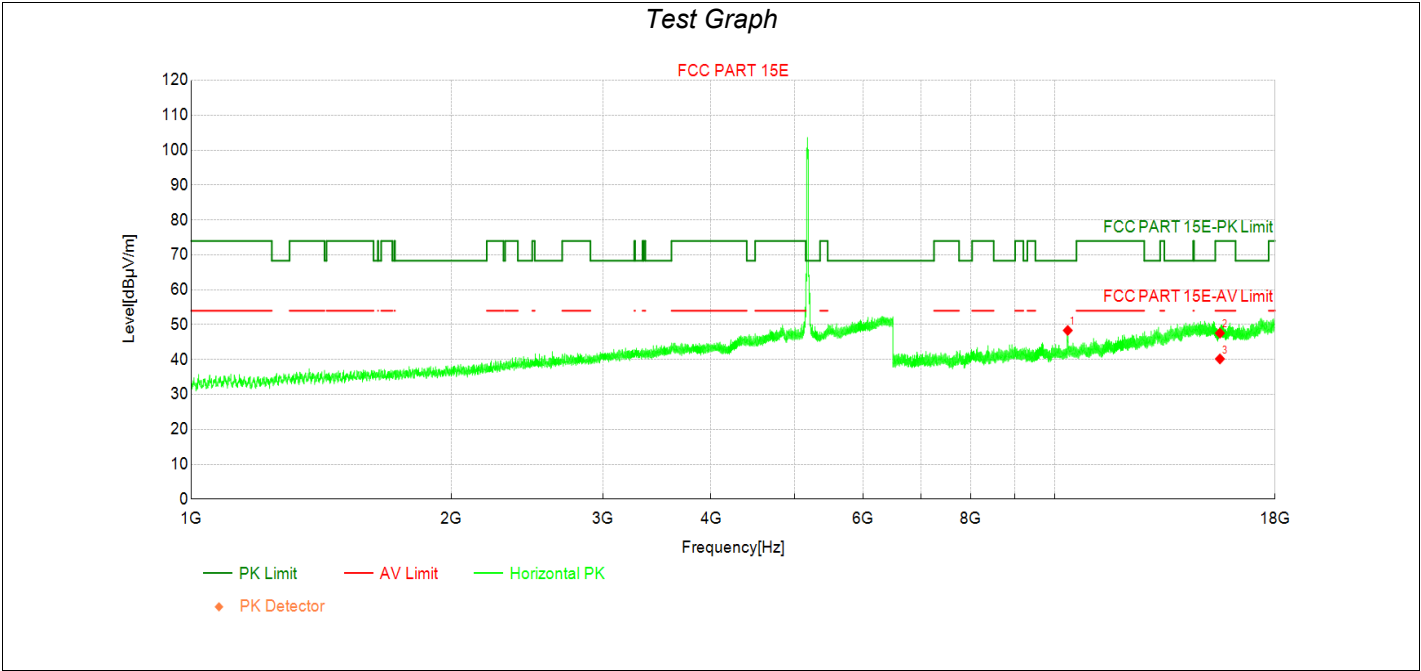

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10356.33        | 40.71          | 48.34          | 7.63          | 68.30          | 19.96       | PK  | Horizo | PASS    |
| 2  | 15540.00        | 31.04          | 47.57          | 16.53         | 74.00          | 26.43       | PK  | Horizo | PASS    |
| 3  | 15540.00        | 23.66          | 40.19          | 16.53         | 54.00          | 13.81       | AV  | Horizo | PASS    |


Transmit at 5180MHz by 802.11n(20MHz) with Ant2+3

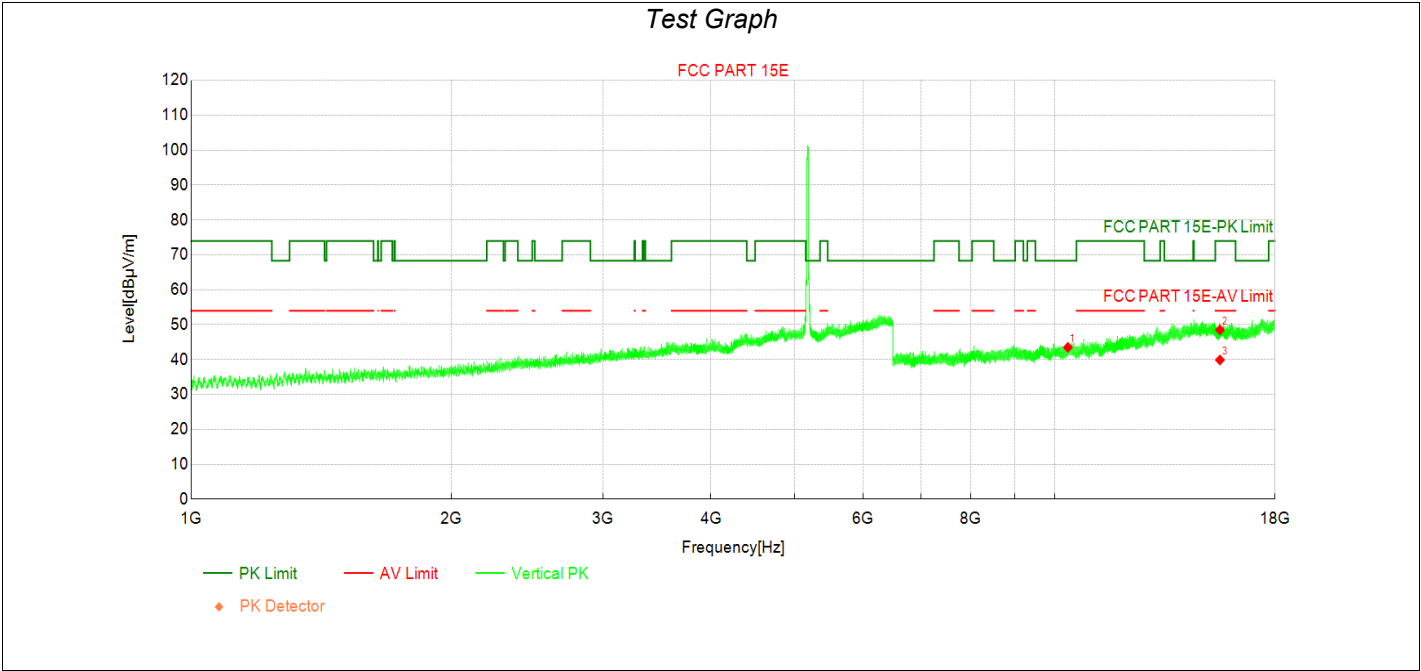

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10360.00        | 35.84          | 43.48          | 7.64          | 68.30          | 24.82       | PK  | Vertic | PASS    |
| 2  | 15540.00        | 31.97          | 48.50          | 16.53         | 74.00          | 25.50       | PK  | Vertic | PASS    |
| 3  | 15540.00        | 23.35          | 39.88          | 16.53         | 54.00          | 14.12       | AV  | Vertic | PASS    |

Transmit at 5200MHz by 802.11n(20MHz) with Ant2+3

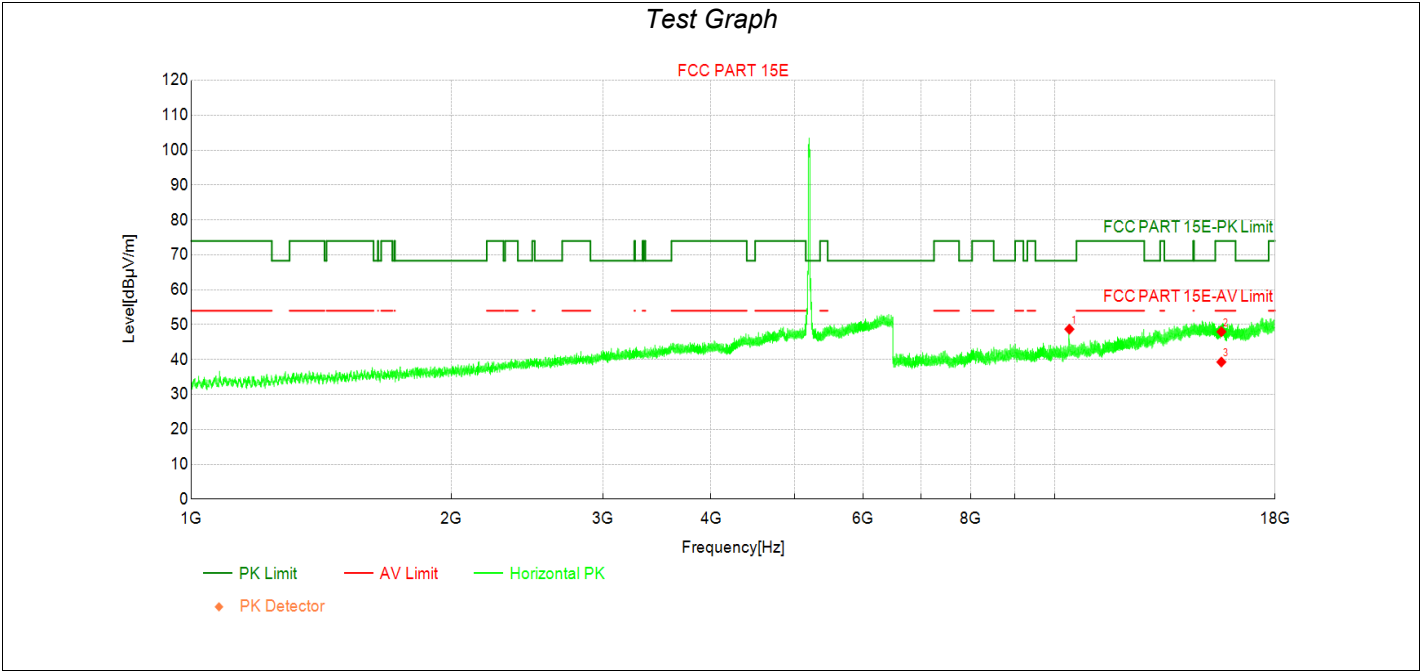


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10401.38        | 40.98          | 48.70          | 7.72          | 68.30          | 19.60       | PK  | Horizo | PASS    |
| 2         | 15600.00        | 31.49          | 47.97          | 16.48         | 74.00          | 26.03       | PK  | Horizo | PASS    |
| 3         | 15600.00        | 22.82          | 39.30          | 16.48         | 54.00          | 14.70       | AV  | Horizo | PASS    |

Transmit at 5200MHz by 802.11n(20MHz) with Ant2+3

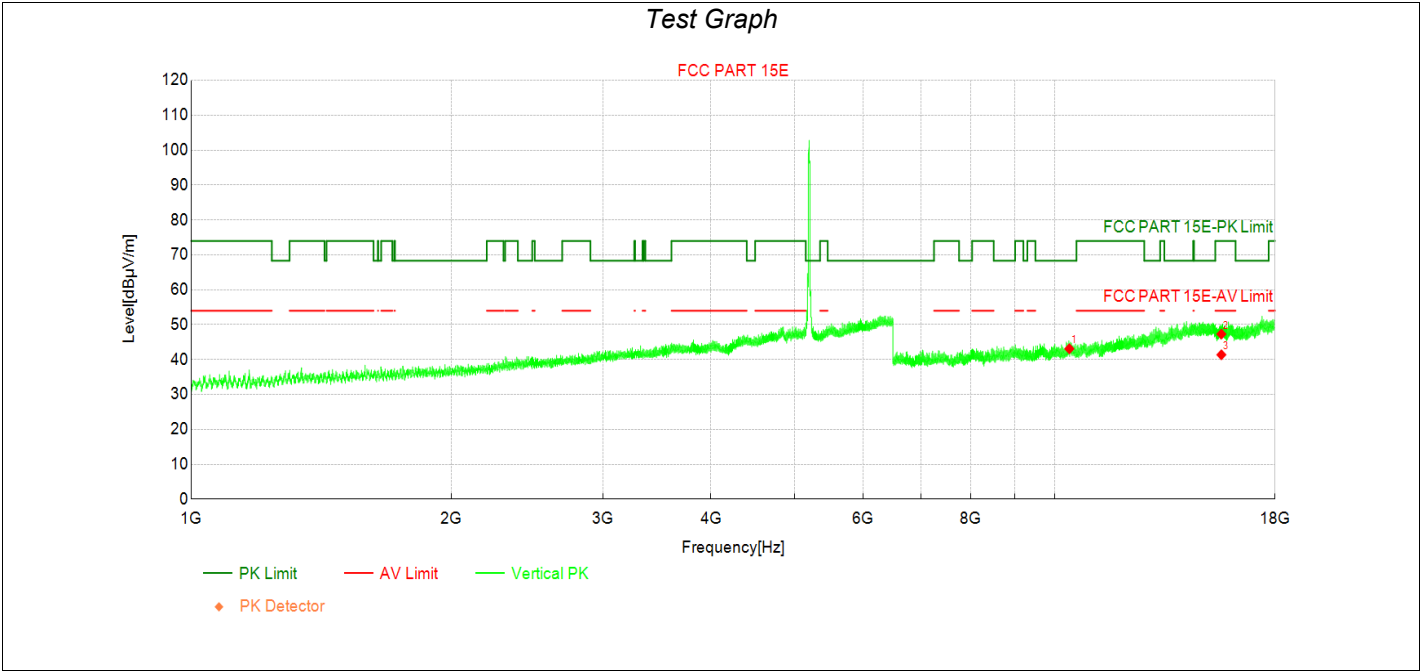

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10400.00        | 35.39          | 43.10          | 7.71          | 68.30          | 25.20       | PK  | Vertic | PASS    |
| 2         | 15600.00        | 30.82          | 47.30          | 16.48         | 74.00          | 26.70       | PK  | Vertic | PASS    |
| 3         | 15600.00        | 24.89          | 41.37          | 16.48         | 54.00          | 12.63       | AV  | Vertic | PASS    |


Transmit at 5240MHz by 802.11n(20MHz) with Ant2+3

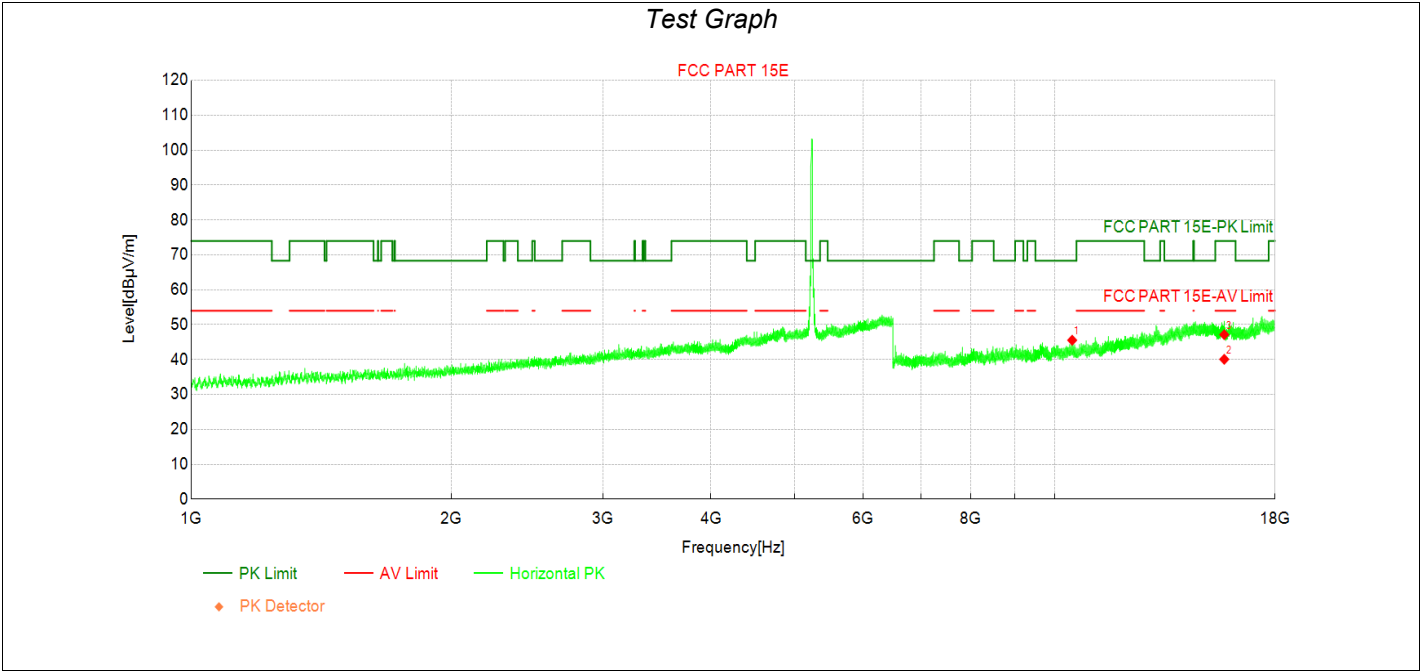

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10480.00        | 37.39          | 45.55          | 8.16          | 68.30          | 22.75       | PK  | Horizo | PASS    |
| 2  | 15720.00        | 23.48          | 40.08          | 16.60         | 54.00          | 13.92       | AV  | Horizo | PASS    |
| 3  | 15720.00        | 30.53          | 47.13          | 16.60         | 74.00          | 26.87       | PK  | Horizo | PASS    |


Transmit at 5240MHz by 802.11n(20MHz) with Ant2+3

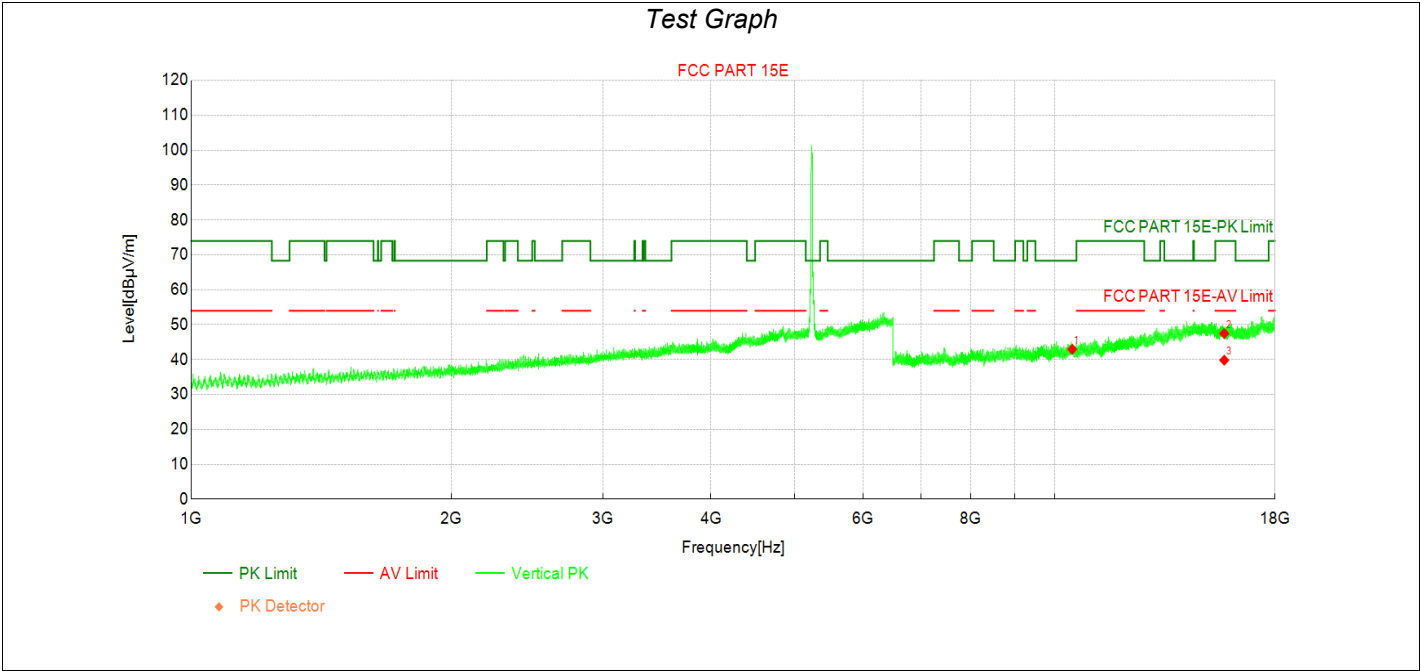

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10480.00        | 34.77          | 42.93          | 8.16          | 68.30          | 25.37       | PK  | Vertic | PASS    |
| 2  | 15720.00        | 30.86          | 47.46          | 16.60         | 74.00          | 26.54       | PK  | Vertic | PASS    |
| 3  | 15720.00        | 23.23          | 39.83          | 16.60         | 54.00          | 14.17       | AV  | Vertic | PASS    |

Transmit at 5260MHz by 802.11n(20MHz) with Ant2+3

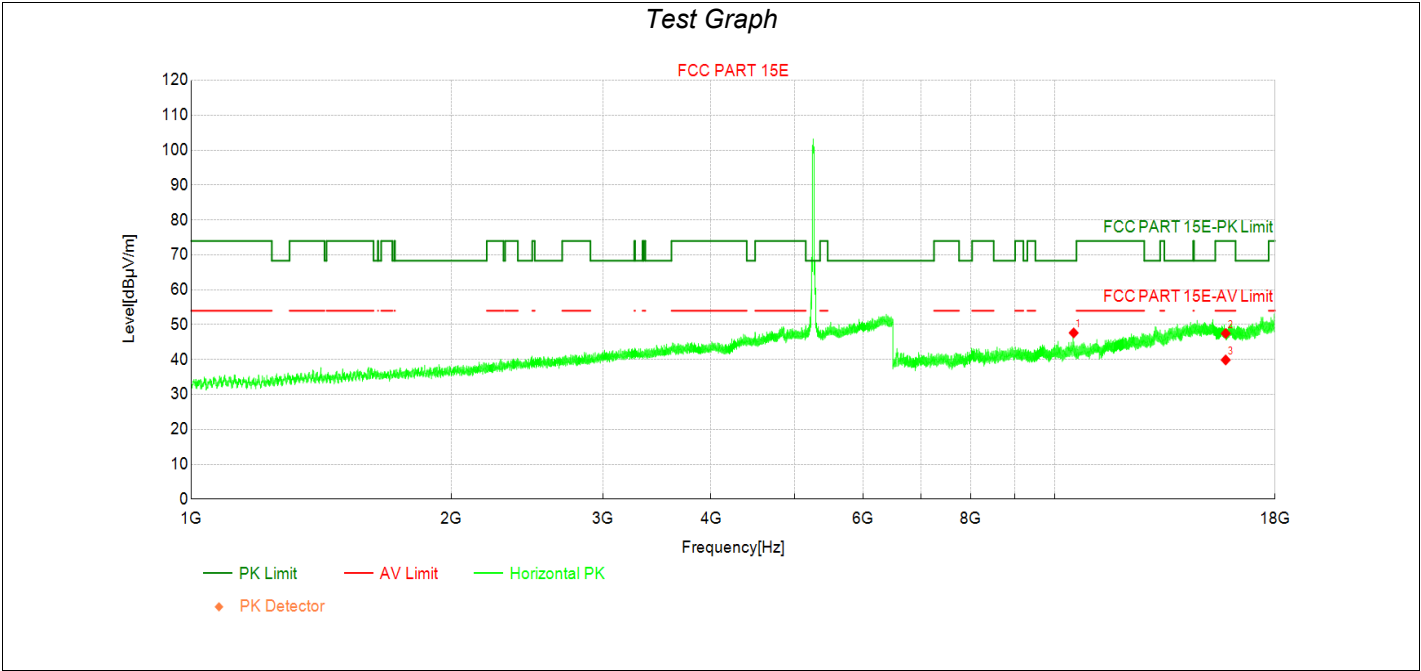


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10521.65        | 39.33          | 47.64          | 8.31          | 68.30          | 20.66       | PK  | Horizo | PASS    |
| 2         | 15780.00        | 30.78          | 47.48          | 16.70         | 74.00          | 26.52       | PK  | Horizo | PASS    |
| 3         | 15780.00        | 23.18          | 39.88          | 16.70         | 54.00          | 14.12       | AV  | Horizo | PASS    |

Transmit at 5260MHz by 802.11n(20MHz) with Ant2+3

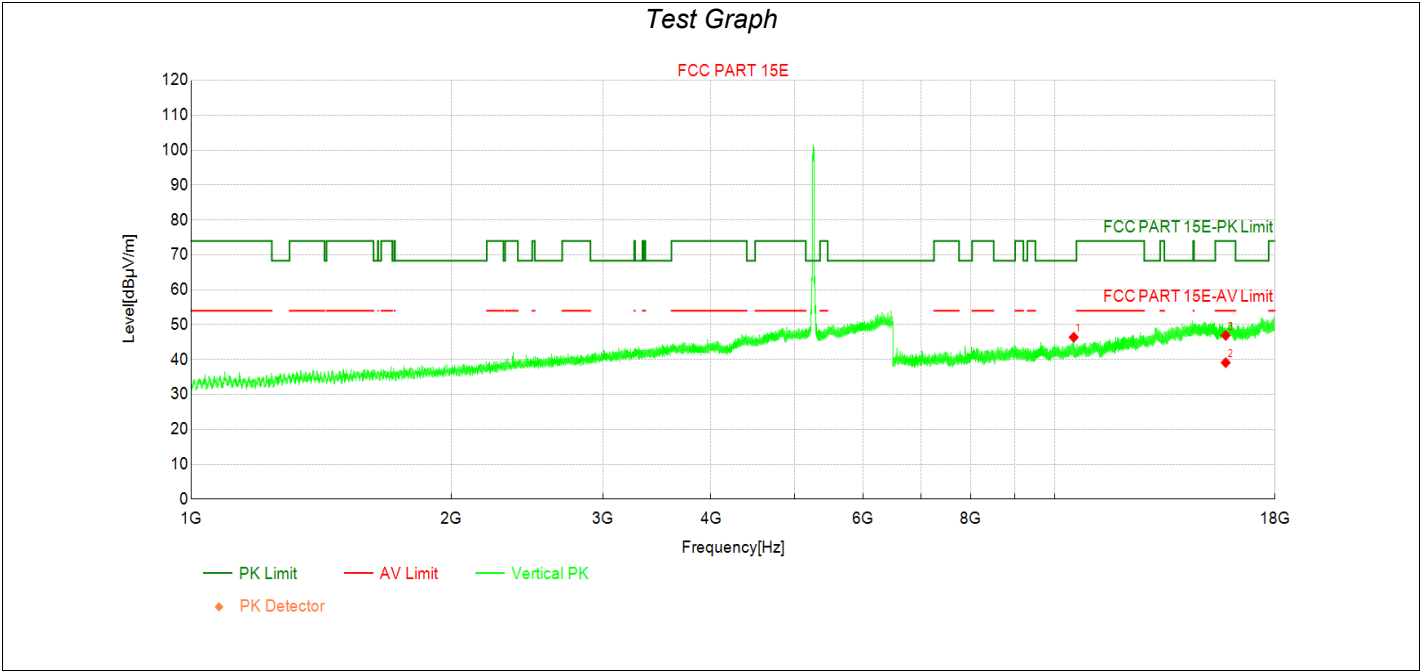

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10522.13        | 38.08          | 46.39          | 8.31          | 68.30          | 21.91       | PK  | Vertic | PASS    |
| 2         | 15780.00        | 22.42          | 39.12          | 16.70         | 54.00          | 14.88       | AV  | Vertic | PASS    |
| 3         | 15780.00        | 30.21          | 46.91          | 16.70         | 74.00          | 27.09       | PK  | Vertic | PASS    |


Transmit at 5280MHz by 802.11n(20MHz) with Ant2+3

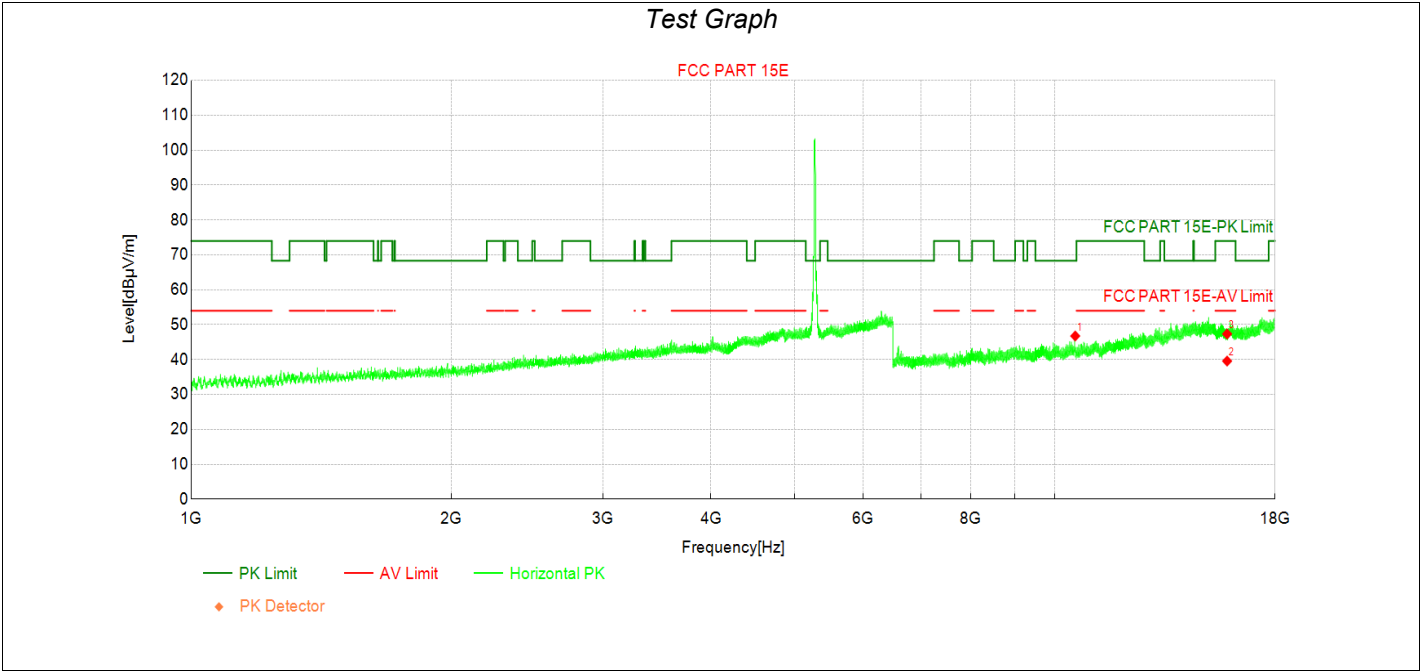

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10565.25        | 38.35          | 46.75          | 8.40          | 68.30          | 21.55       | PK  | Horizo | PASS    |
| 2  | 15840.00        | 22.73          | 39.57          | 16.84         | 54.00          | 14.43       | AV  | Horizo | PASS    |
| 3  | 15840.00        | 30.49          | 47.33          | 16.84         | 74.00          | 26.67       | PK  | Horizo | PASS    |


Transmit at 5280MHz by 802.11n(20MHz) with Ant2+3

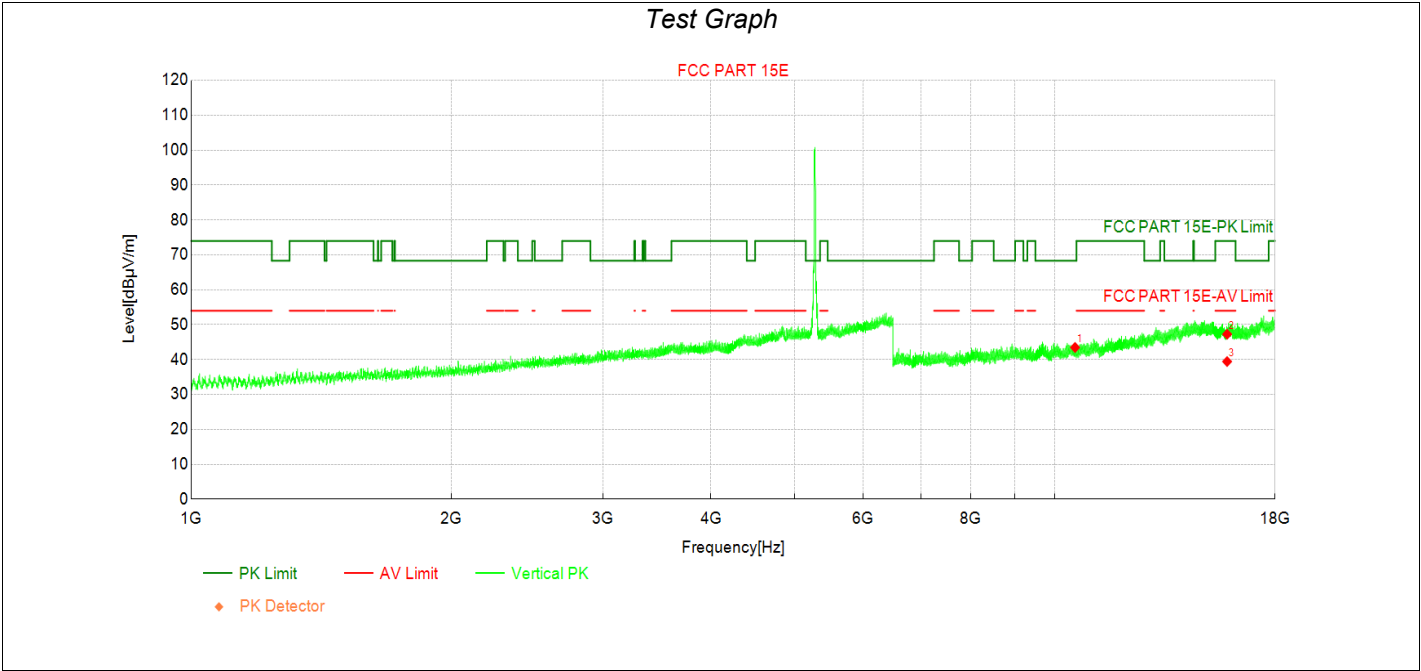

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10560.00        | 35.08          | 43.47          | 8.39          | 68.30          | 24.83       | PK  | Vertic | PASS    |
| 2  | 15840.00        | 30.42          | 47.26          | 16.84         | 74.00          | 26.74       | PK  | Vertic | PASS    |
| 3  | 15840.00        | 22.59          | 39.43          | 16.84         | 54.00          | 14.57       | AV  | Vertic | PASS    |


Transmit at 5320MHz by 802.11n(20MHz) with Ant2+3

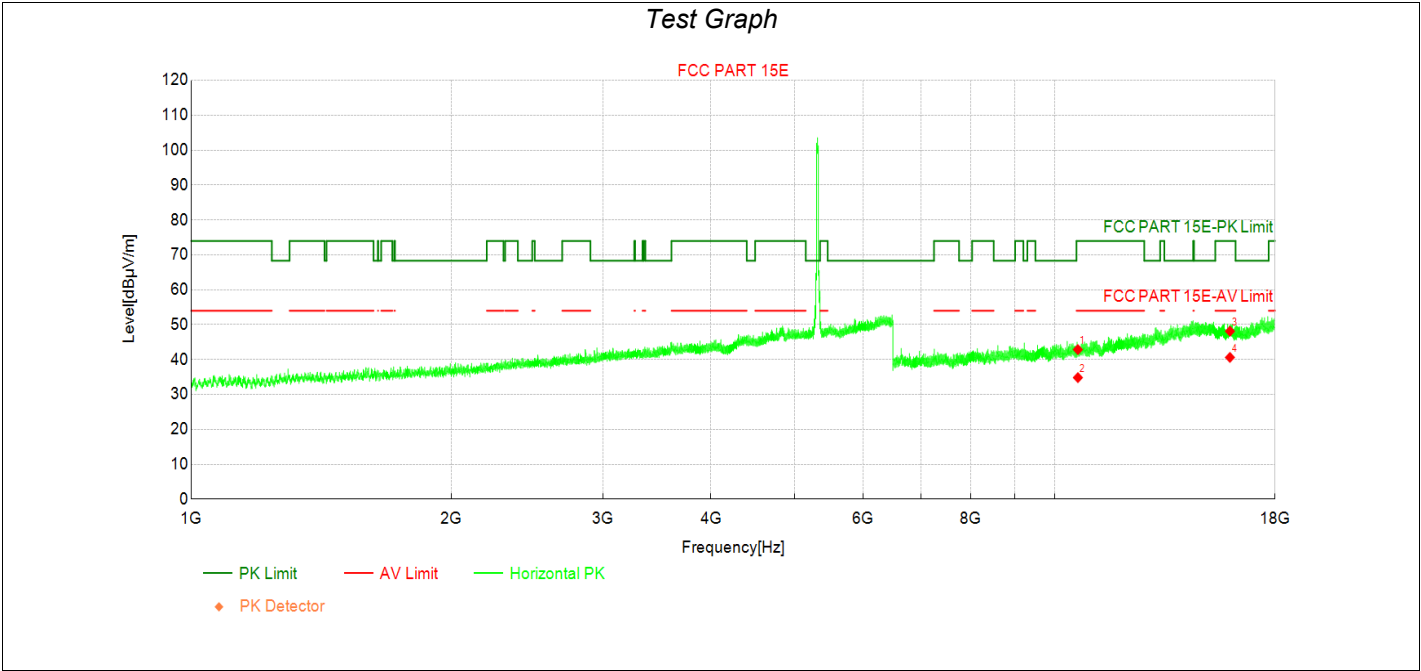

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10640.00        | 34.43          | 42.86          | 8.43          | 74.00          | 31.14       | PK  | Horizo | PASS    |
| 2  | 10640.00        | 26.39          | 34.82          | 8.43          | 54.00          | 19.18       | AV  | Horizo | PASS    |
| 3  | 15960.00        | 30.85          | 48.12          | 17.27         | 74.00          | 25.88       | PK  | Horizo | PASS    |
| 4  | 15960.00        | 23.35          | 40.62          | 17.27         | 54.00          | 13.38       | AV  | Horizo | PASS    |


Transmit at 5320MHz by 802.11n(20MHz) with Ant2+3

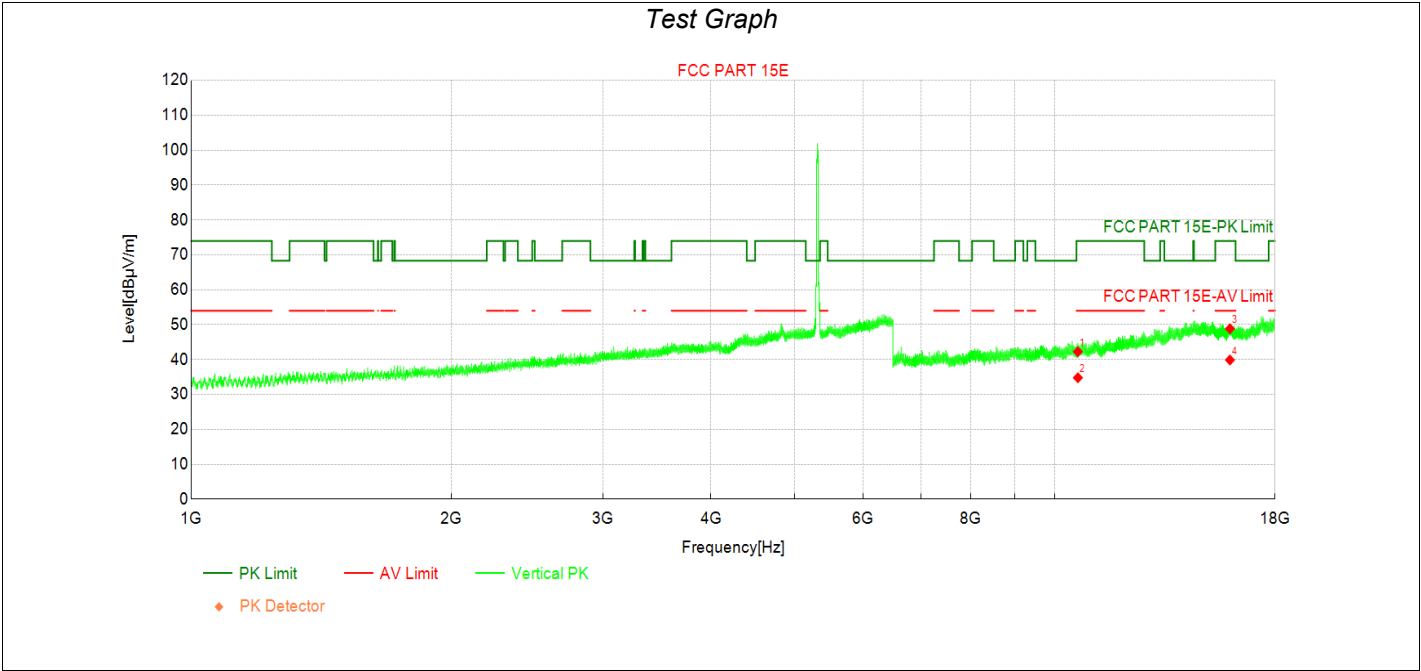

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10640.00        | 33.83          | 42.26          | 8.43          | 74.00          | 31.74       | PK  | Vertic | PASS    |
| 2  | 10640.00        | 26.36          | 34.79          | 8.43          | 54.00          | 19.21       | AV  | Vertic | PASS    |
| 3  | 15960.00        | 31.55          | 48.82          | 17.27         | 74.00          | 25.18       | PK  | Vertic | PASS    |
| 4  | 15960.00        | 22.61          | 39.88          | 17.27         | 54.00          | 14.12       | AV  | Vertic | PASS    |


Transmit at 5500MHz by 802.11n(20MHz) with Ant2+3

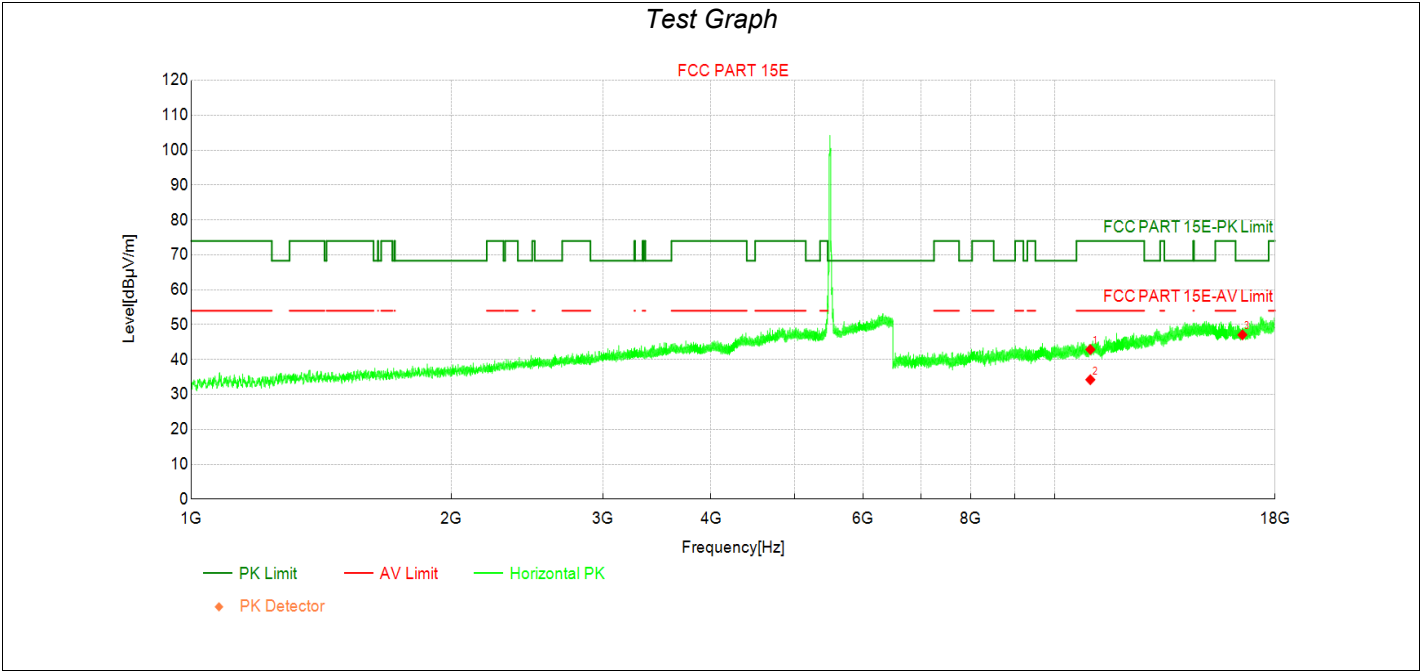

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11000.00        | 33.39          | 42.88          | 9.49          | 74.00          | 31.12       | PK  | Horizo | PASS    |
| 2  | 11000.00        | 24.74          | 34.23          | 9.49          | 54.00          | 19.77       | AV  | Horizo | PASS    |
| 3  | 16500.00        | 29.57          | 47.08          | 17.51         | 68.30          | 21.22       | PK  | Horizo | PASS    |

Transmit at 5500MHz by 802.11n(20MHz) with Ant2+3

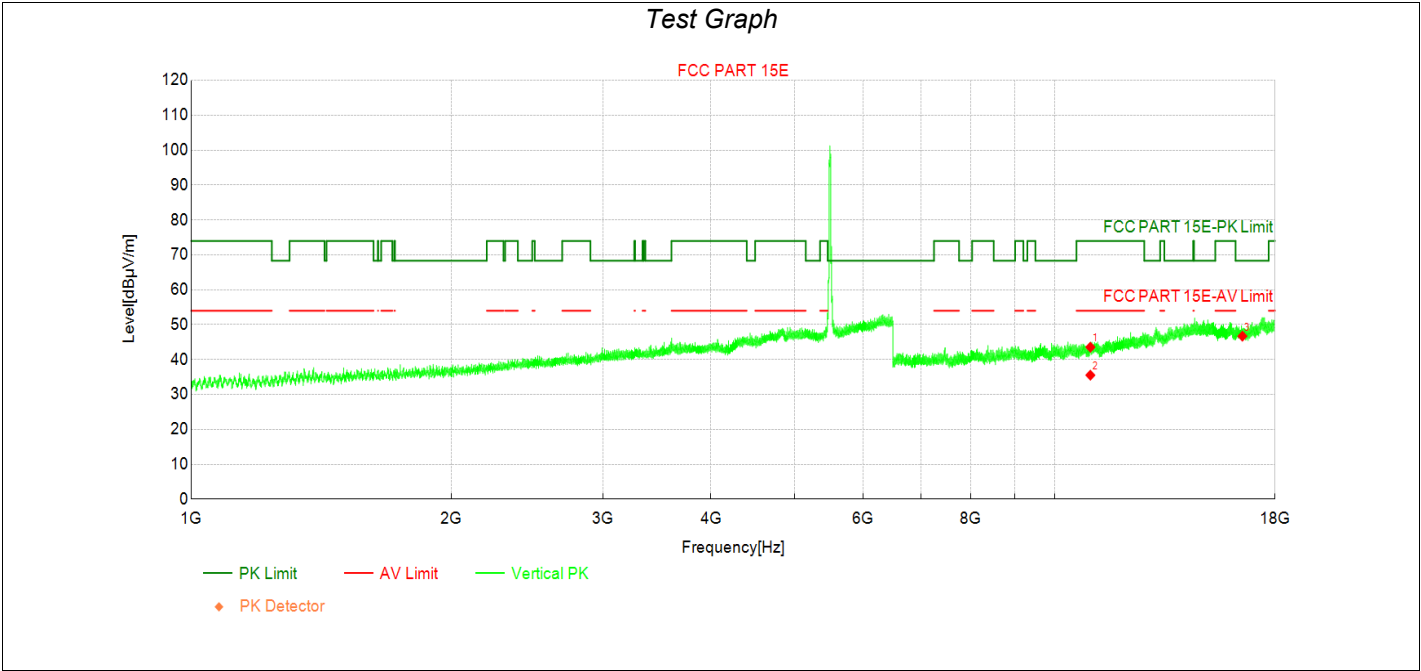


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11000.00        | 34.06          | 43.55          | 9.49          | 74.00          | 30.45       | PK  | Vertic | PASS    |
| 2         | 11000.00        | 26.04          | 35.53          | 9.49          | 54.00          | 18.47       | AV  | Vertic | PASS    |
| 3         | 16500.00        | 29.19          | 46.70          | 17.51         | 68.30          | 21.60       | PK  | Vertic | PASS    |

Transmit at 5580MHz by 802.11n(20MHz) with Ant2+3

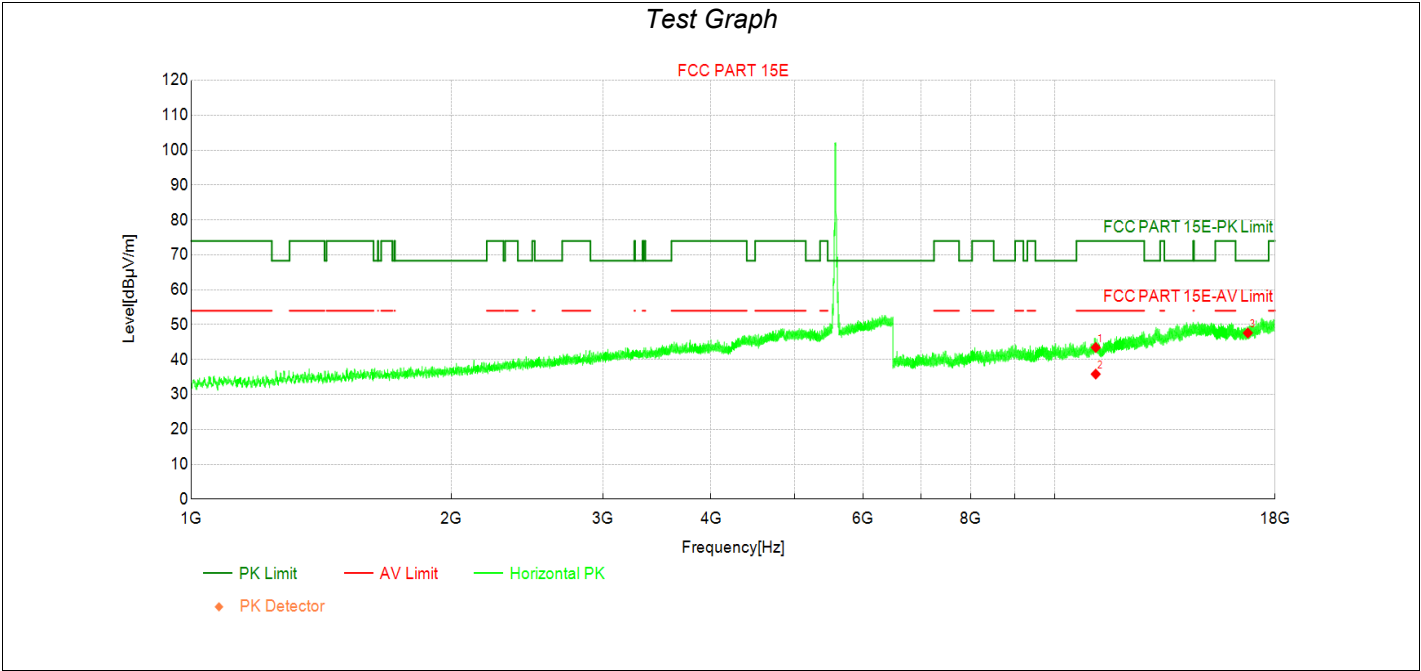


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11160.00        | 33.93          | 43.46          | 9.53          | 74.00          | 30.54       | PK  | Horizo | PASS    |
| 2         | 11160.00        | 26.30          | 35.83          | 9.53          | 54.00          | 18.17       | AV  | Horizo | PASS    |
| 3         | 16740.00        | 29.66          | 47.62          | 17.96         | 68.30          | 20.68       | PK  | Horizo | PASS    |

Transmit at 5580MHz by 802.11n(20MHz) with Ant2+3

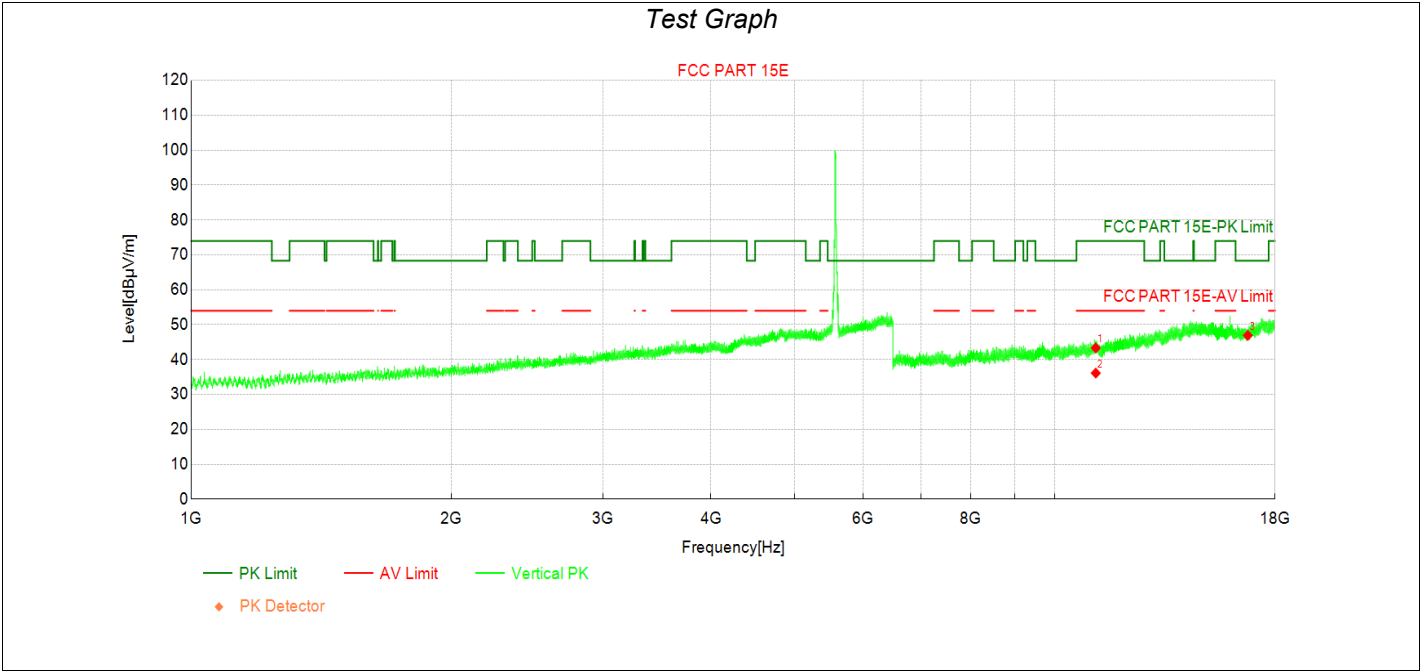

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11160.00        | 33.79          | 43.32          | 9.53          | 74.00          | 30.68       | PK  | Vertic | PASS    |
| 2         | 11160.00        | 26.59          | 36.12          | 9.53          | 54.00          | 17.88       | AV  | Vertic | PASS    |
| 3         | 16740.00        | 28.96          | 46.92          | 17.96         | 68.30          | 21.38       | PK  | Vertic | PASS    |


Transmit at 5700MHz by 802.11n(20MHz) with Ant2+3

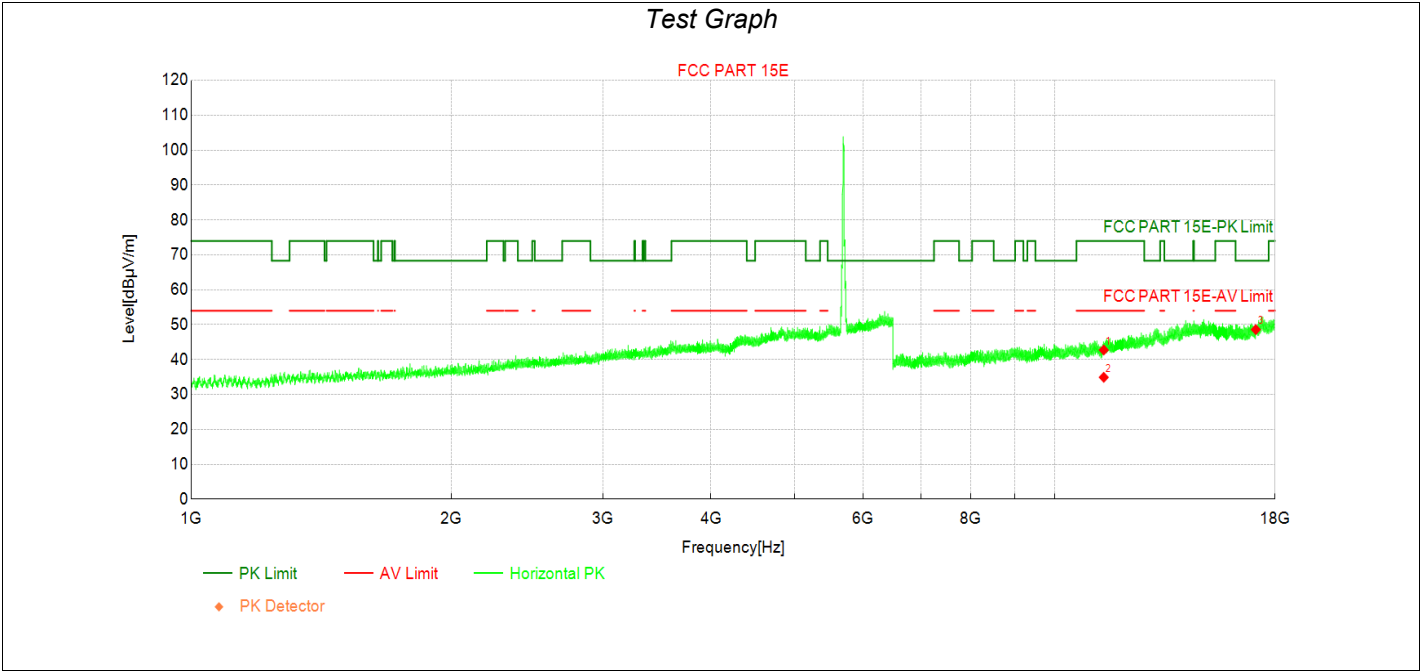

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11400.00        | 32.60          | 42.74          | 10.14         | 74.00          | 31.26       | PK  | Horizo | PASS    |
| 2  | 11400.00        | 24.77          | 34.91          | 10.14         | 54.00          | 19.09       | AV  | Horizo | PASS    |
| 3  | 17100.00        | 29.51          | 48.59          | 19.08         | 68.30          | 19.71       | PK  | Horizo | PASS    |

Transmit at 5700MHz by 802.11n(20MHz) with Ant2+3

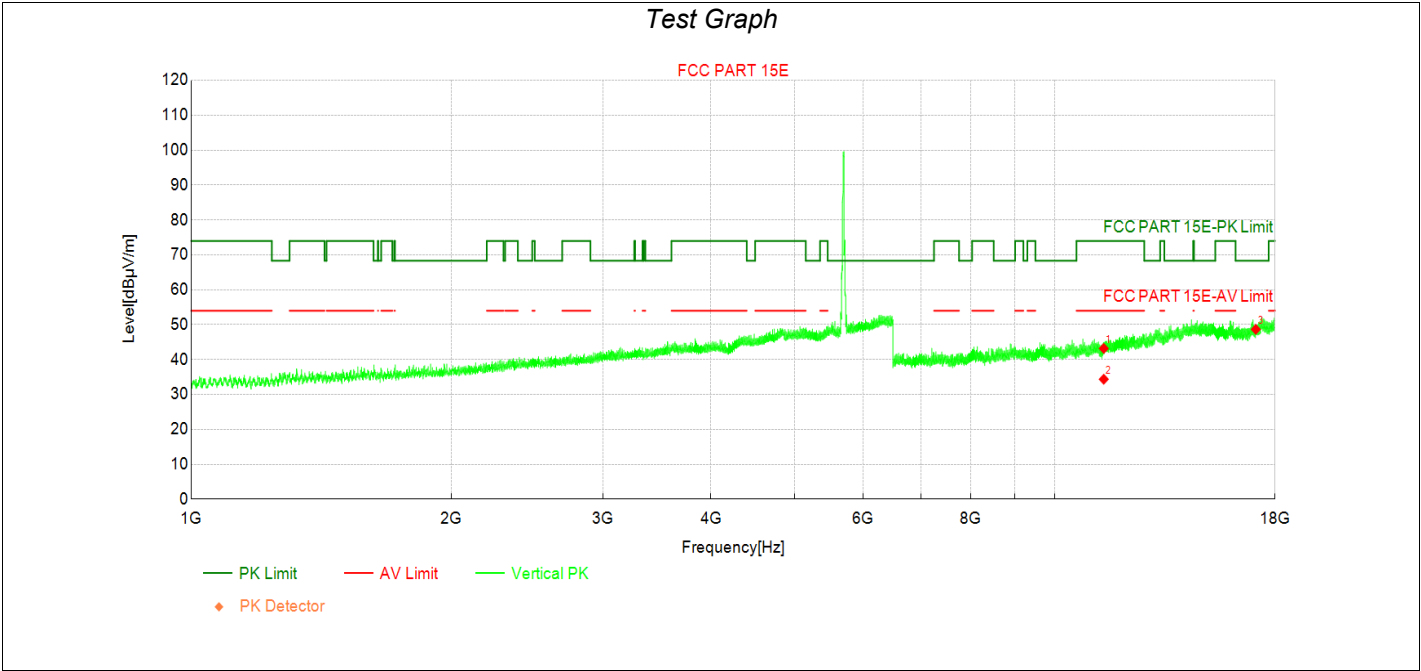


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11400.00        | 33.04          | 43.18          | 10.14         | 74.00          | 30.82       | PK  | Vertic | PASS    |
| 2         | 11400.00        | 24.22          | 34.36          | 10.14         | 54.00          | 19.64       | AV  | Vertic | PASS    |
| 3         | 17100.00        | 29.58          | 48.66          | 19.08         | 68.30          | 19.64       | PK  | Vertic | PASS    |

Transmit at 5745MHz by 802.11n(20MHz) with Ant2+3

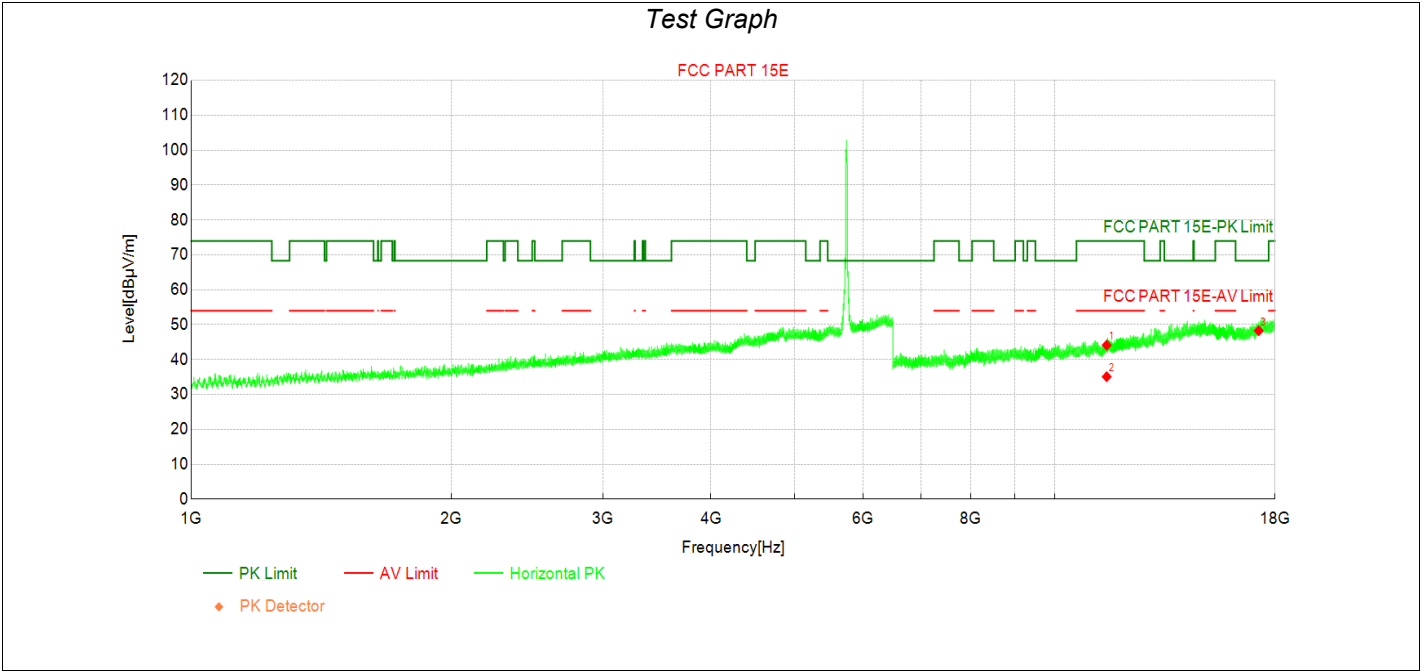

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11490.00        | 33.84          | 44.12          | 10.28         | 74.00          | 29.88       | PK  | Horizo | PASS    |
| 2         | 11490.00        | 24.81          | 35.09          | 10.28         | 54.00          | 18.91       | AV  | Horizo | PASS    |
| 3         | 17235.00        | 29.59          | 48.26          | 18.67         | 68.30          | 20.04       | PK  | Horizo | PASS    |


Transmit at 5745MHz by 802.11n(20MHz) with Ant2+3

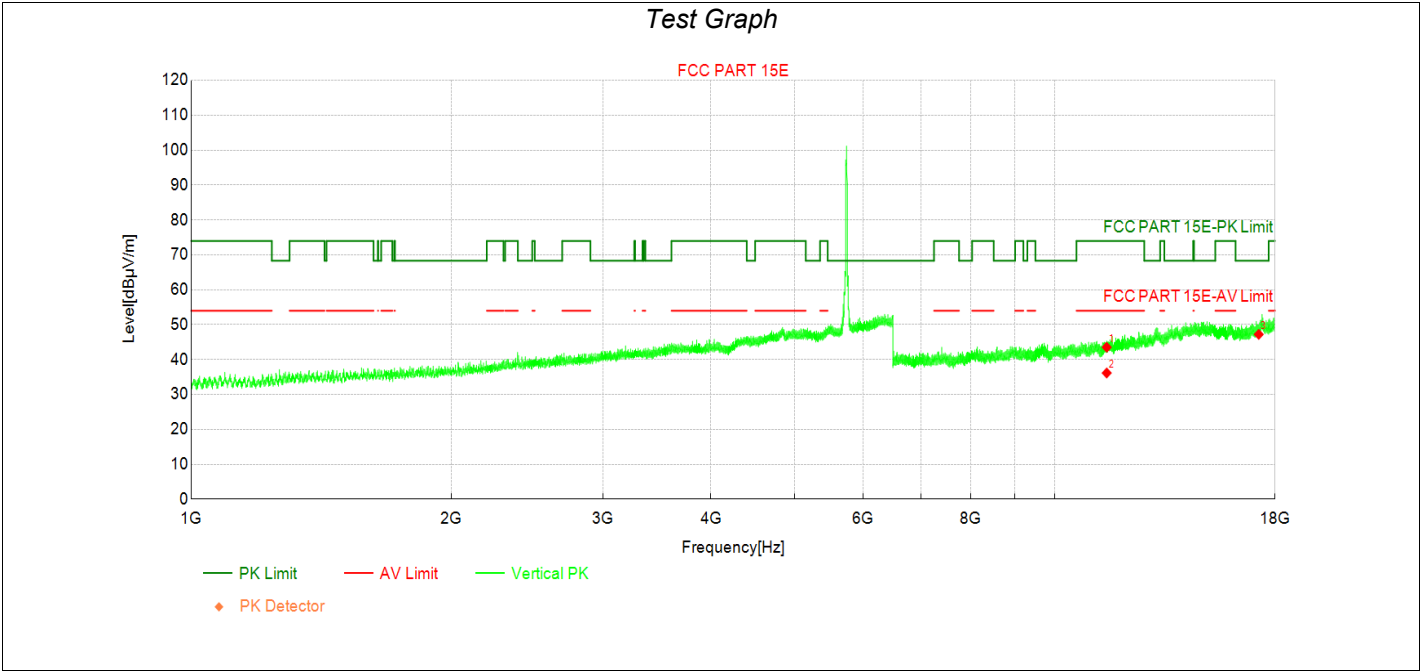

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11490.00        | 33.25          | 43.53          | 10.28         | 74.00          | 30.47       | PK  | Vertic | PASS    |
| 2  | 11490.00        | 25.87          | 36.15          | 10.28         | 54.00          | 17.85       | AV  | Vertic | PASS    |
| 3  | 17235.00        | 28.54          | 47.21          | 18.67         | 68.30          | 21.09       | PK  | Vertic | PASS    |

Transmit at 5785MHz by 802.11n(20MHz) with Ant2+3

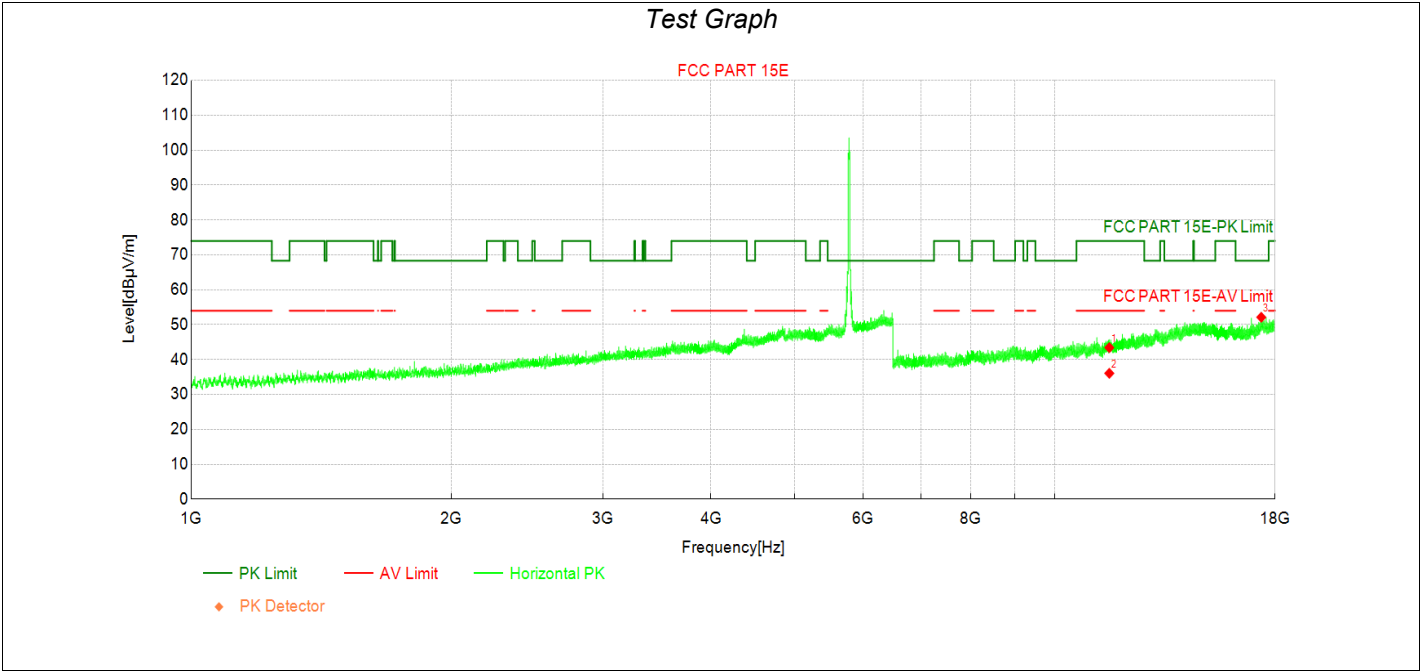

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11570.00        | 32.62          | 43.41          | 10.79         | 74.00          | 30.59       | PK  | Horizo | PASS    |
| 2         | 11570.00        | 25.27          | 36.06          | 10.79         | 54.00          | 17.94       | AV  | Horizo | PASS    |
| 3         | 17351.69        | 32.50          | 52.12          | 19.62         | 68.30          | 16.18       | PK  | Horizo | PASS    |


Transmit at 5785MHz by 802.11n(20MHz) with Ant2+3

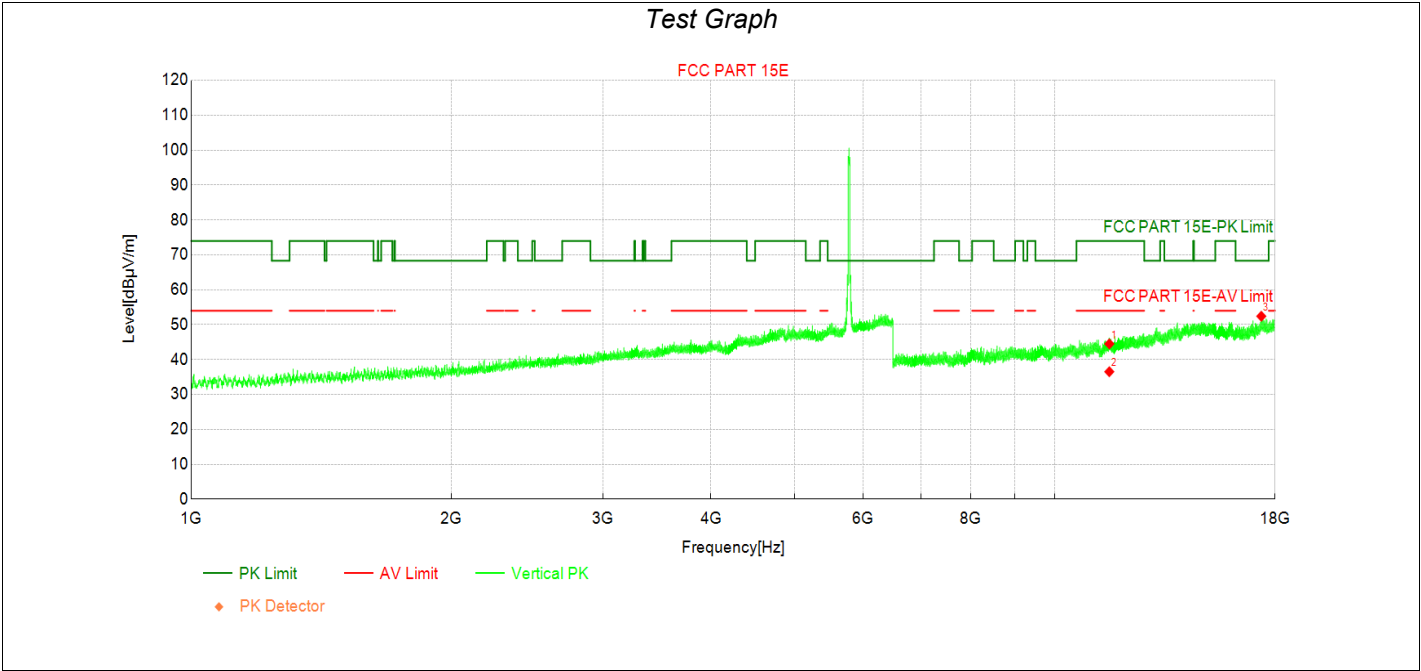

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11570.00        | 33.70          | 44.49          | 10.79         | 74.00          | 29.51       | PK  | Vertic | PASS    |
| 2  | 11570.00        | 25.73          | 36.52          | 10.79         | 54.00          | 17.48       | AV  | Vertic | PASS    |
| 3  | 17352.65        | 32.78          | 52.41          | 19.63         | 68.30          | 15.89       | PK  | Vertic | PASS    |

Transmit at 5825MHz by 802.11n(20MHz) with Ant2+3

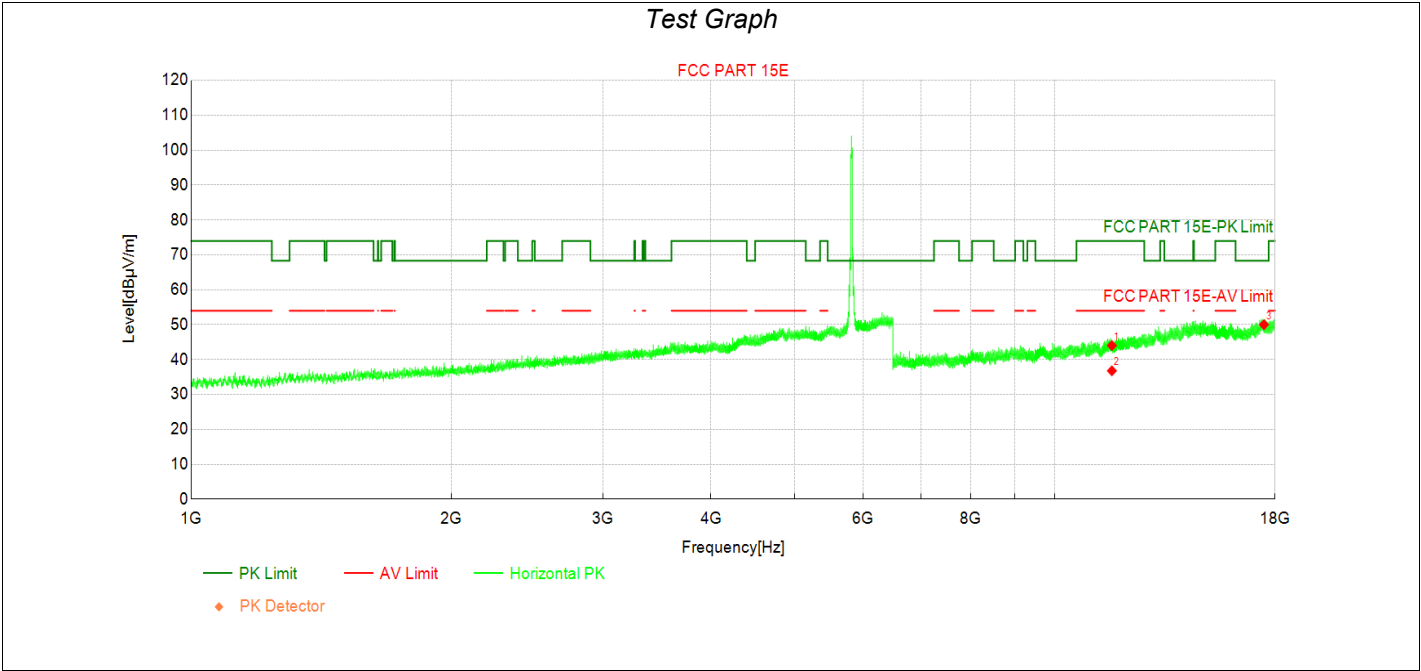


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11650.00        | 32.99          | 44.02          | 11.03         | 74.00          | 29.98       | PK  | Horizo | PASS    |
| 2         | 11650.00        | 25.74          | 36.77          | 11.03         | 54.00          | 17.23       | AV  | Horizo | PASS    |
| 3         | 17475.00        | 29.95          | 49.99          | 20.04         | 68.30          | 18.31       | PK  | Horizo | PASS    |

Transmit at 5825MHz by 802.11n(20MHz) with Ant2+3

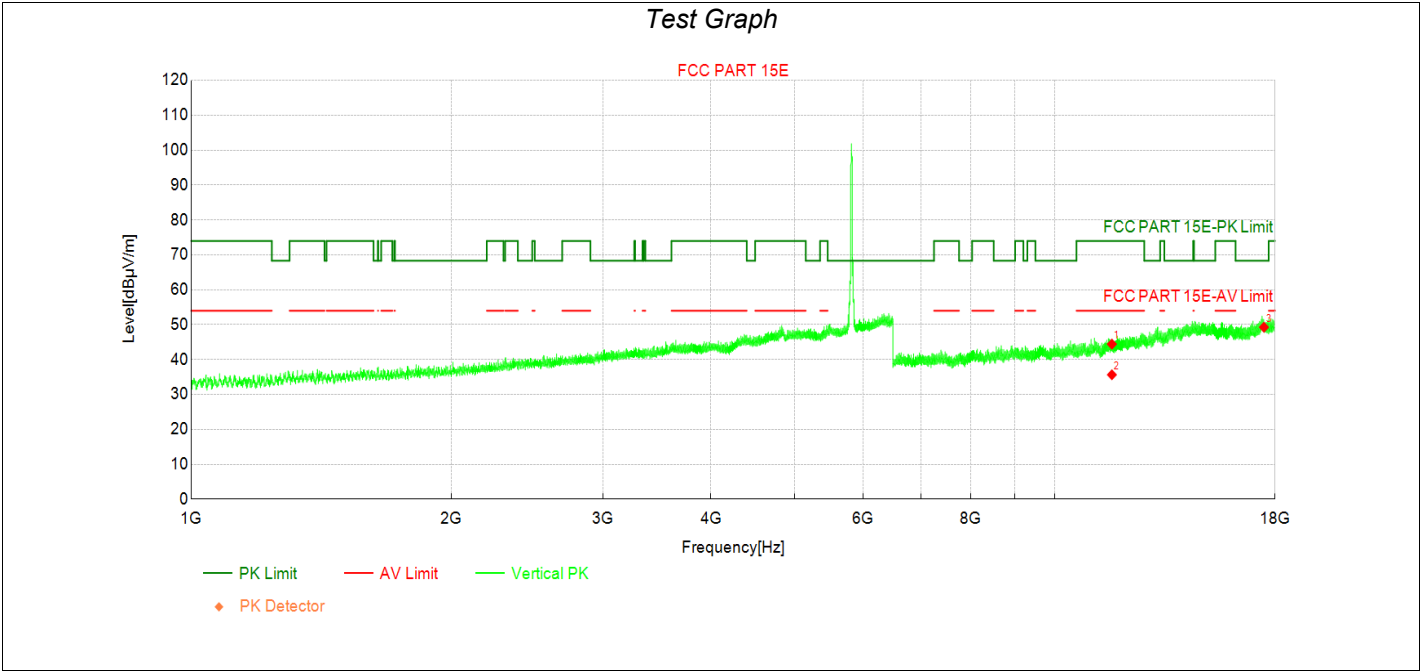


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11650.00        | 33.40          | 44.43          | 11.03         | 74.00          | 29.57       | PK  | Vertic | PASS    |
| 2         | 11650.00        | 24.61          | 35.64          | 11.03         | 54.00          | 18.36       | AV  | Vertic | PASS    |
| 3         | 17475.00        | 29.23          | 49.27          | 20.04         | 68.30          | 19.03       | PK  | Vertic | PASS    |

Transmit at 5190MHz by 802.11n(40MHz) with Ant2+3

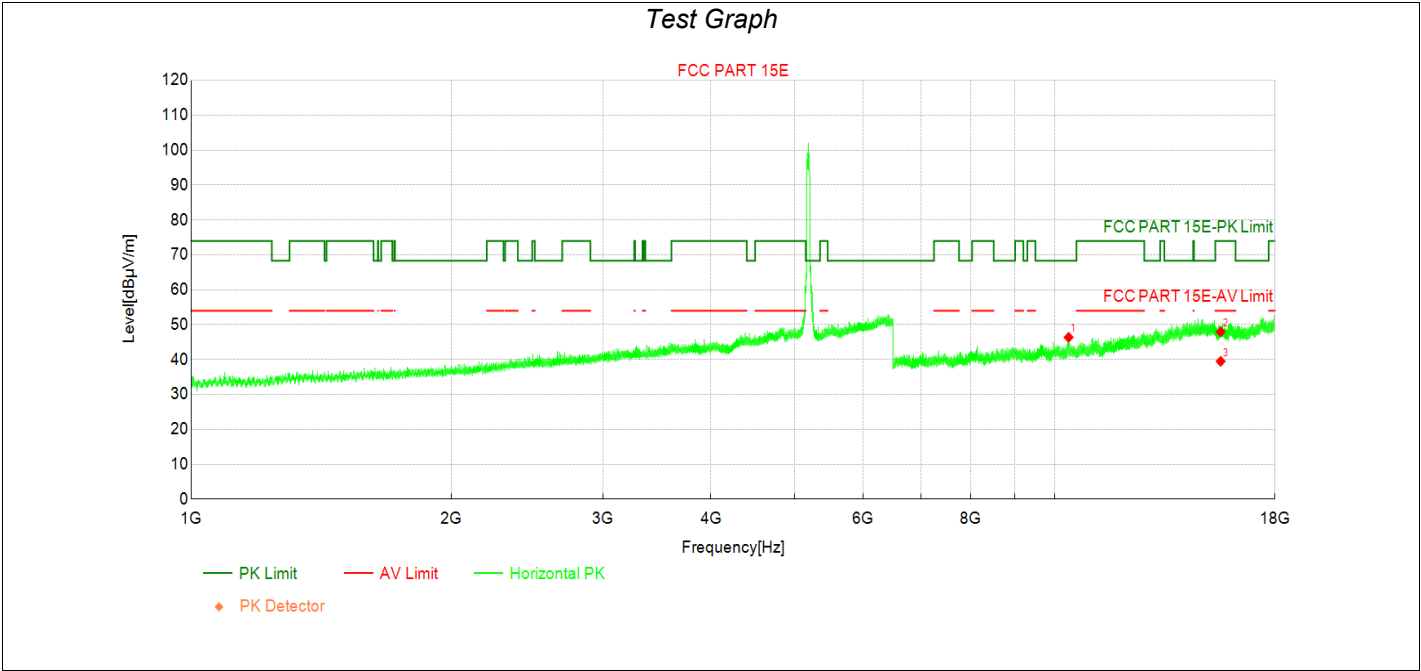

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10380.00        | 38.70          | 46.37          | 7.67          | 68.30          | 21.93       | PK  | Horizo | PASS    |
| 2         | 15570.00        | 31.43          | 47.94          | 16.51         | 74.00          | 26.06       | PK  | Horizo | PASS    |
| 3         | 15570.00        | 22.98          | 39.49          | 16.51         | 54.00          | 14.51       | AV  | Horizo | PASS    |


Transmit at 5190MHz by 802.11n(40MHz) with Ant2+3

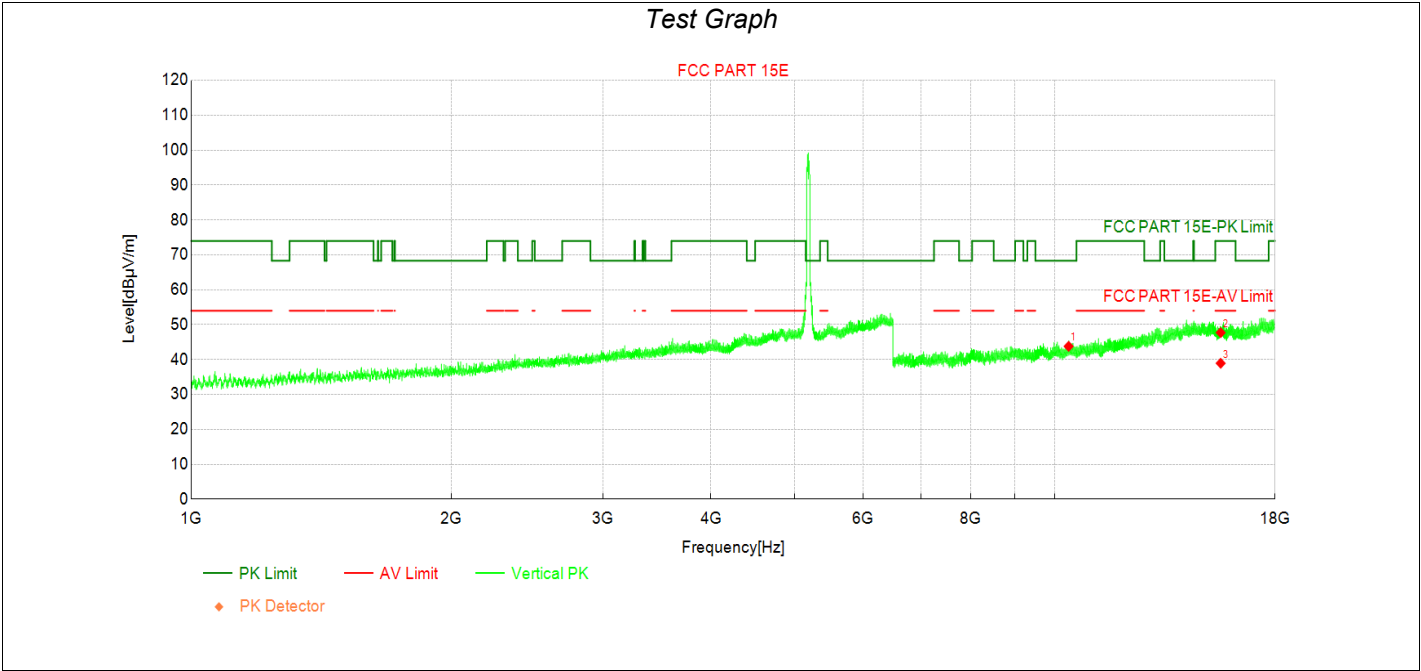

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10380.00        | 36.12          | 43.79          | 7.67          | 68.30          | 24.51       | PK  | Vertic | PASS    |
| 2  | 15570.00        | 31.19          | 47.70          | 16.51         | 74.00          | 26.30       | PK  | Vertic | PASS    |
| 3  | 15570.00        | 22.43          | 38.94          | 16.51         | 54.00          | 15.06       | AV  | Vertic | PASS    |

Transmit at 5230MHz by 802.11n(40MHz) with Ant2+3

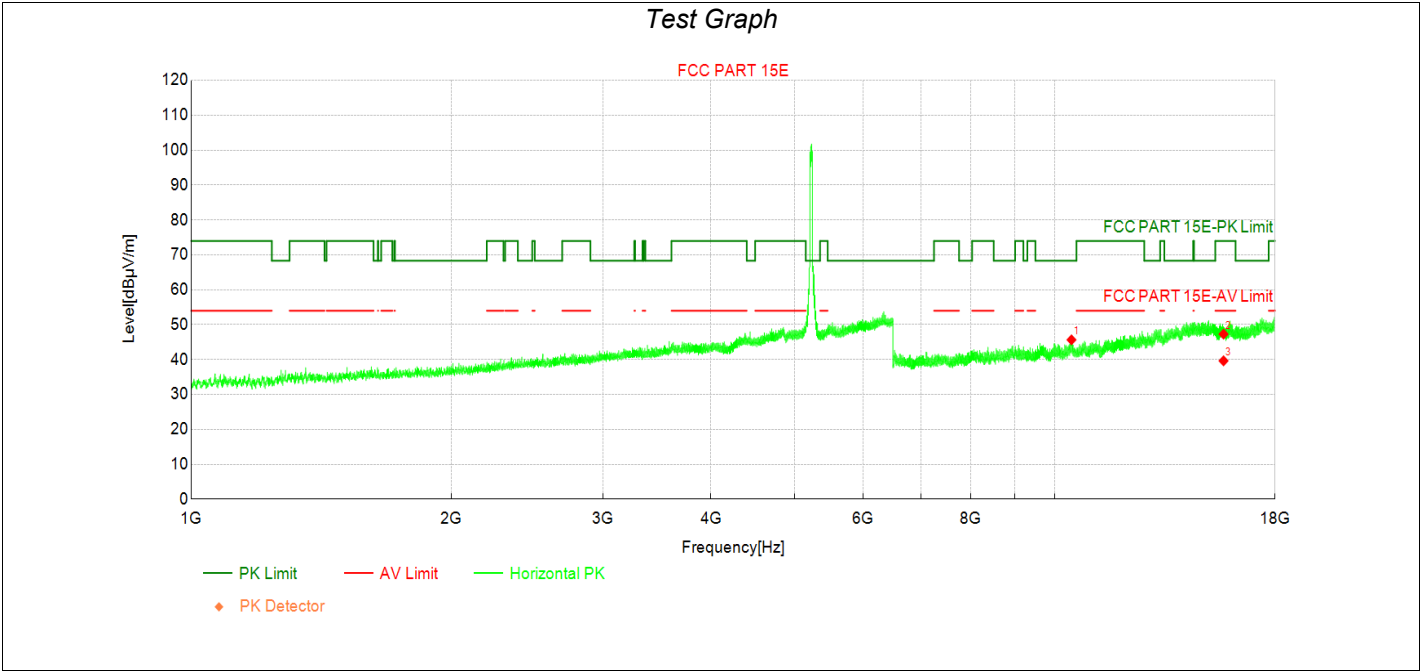


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10460.00        | 37.60          | 45.65          | 8.05          | 68.30          | 22.65       | PK  | Horizo | PASS    |
| 2         | 15690.00        | 30.73          | 47.29          | 16.56         | 74.00          | 26.71       | PK  | Horizo | PASS    |
| 3         | 15690.00        | 23.07          | 39.63          | 16.56         | 54.00          | 14.37       | AV  | Horizo | PASS    |

Transmit at 5230MHz by 802.11n(40MHz) with Ant2+3

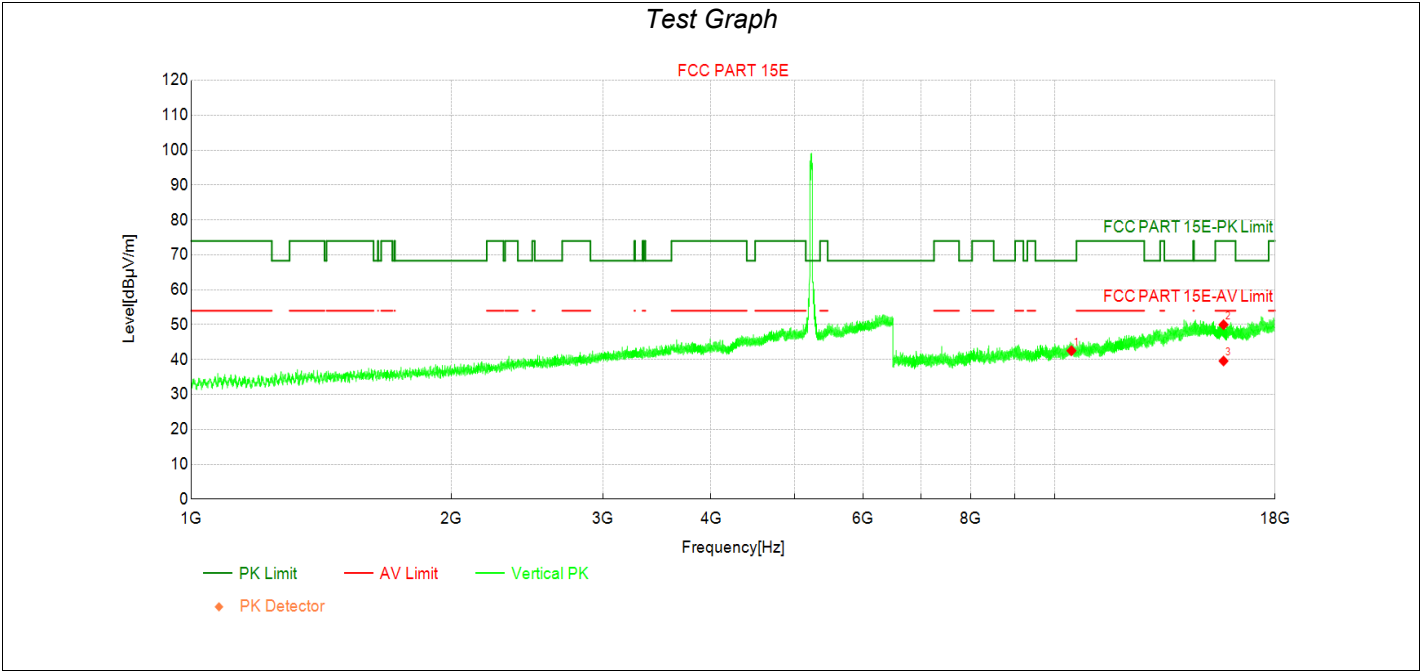


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10460.00        | 34.47          | 42.52          | 8.05          | 68.30          | 25.78       | PK  | Vertic | PASS    |
| 2         | 15690.00        | 33.42          | 49.98          | 16.56         | 74.00          | 24.02       | PK  | Vertic | PASS    |
| 3         | 15690.00        | 23.03          | 39.59          | 16.56         | 54.00          | 14.41       | AV  | Vertic | PASS    |

Transmit at 5270MHz by 802.11n(40MHz) with Ant2+3

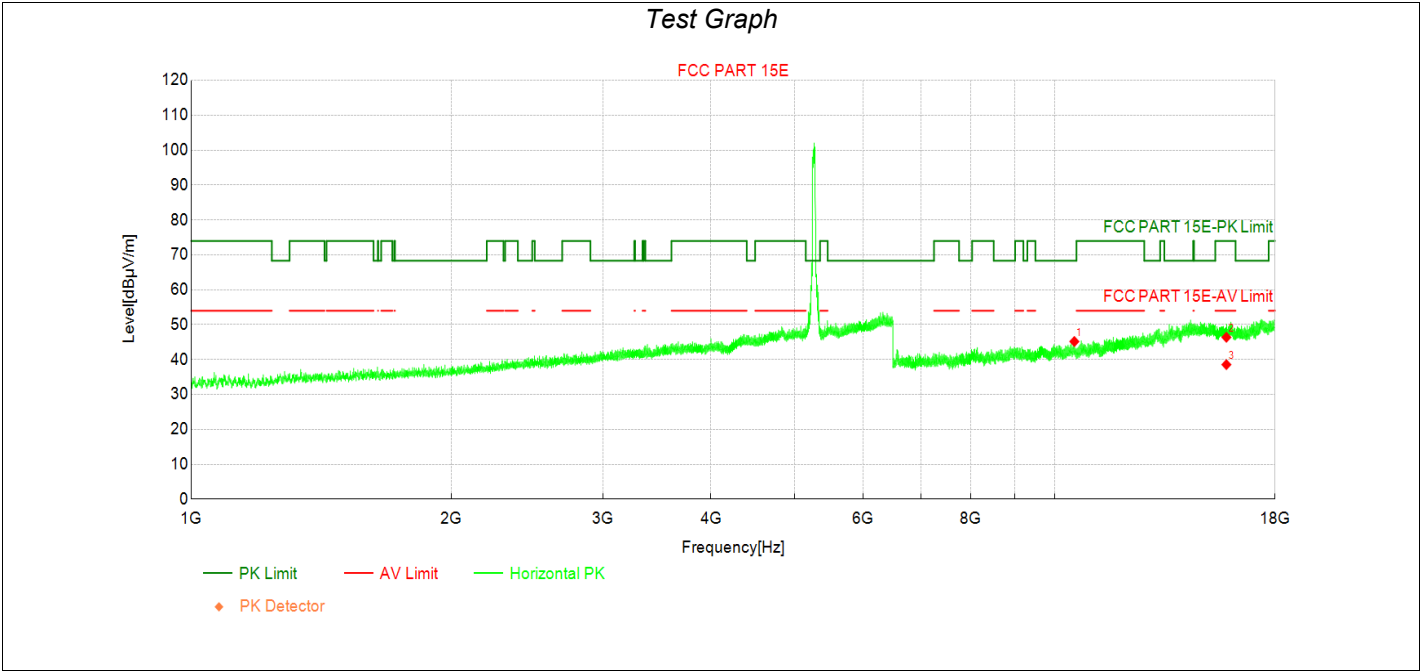


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10540.00        | 36.83          | 45.18          | 8.35          | 68.30          | 23.12       | PK  | Horizo | PASS    |
| 2         | 15810.00        | 29.62          | 46.38          | 16.76         | 74.00          | 27.62       | PK  | Horizo | PASS    |
| 3         | 15810.00        | 21.79          | 38.55          | 16.76         | 54.00          | 15.45       | AV  | Horizo | PASS    |

Transmit at 5270MHz by 802.11n(40MHz) with Ant2+3

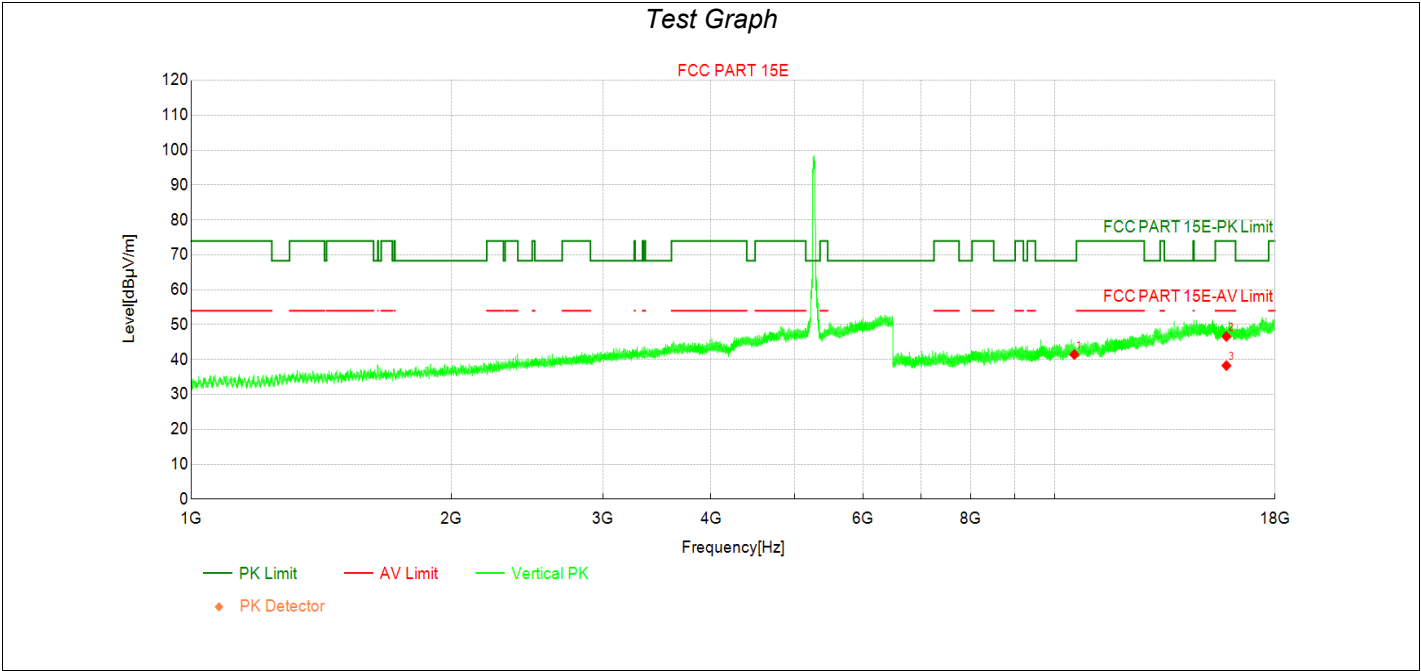


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10540.00        | 33.10          | 41.45          | 8.35          | 68.30          | 26.85       | PK  | Vertic | PASS    |
| 2         | 15810.00        | 29.84          | 46.60          | 16.76         | 74.00          | 27.40       | PK  | Vertic | PASS    |
| 3         | 15810.00        | 21.50          | 38.26          | 16.76         | 54.00          | 15.74       | AV  | Vertic | PASS    |

Transmit at 5310MHz by 802.11n(40MHz) with Ant2+3

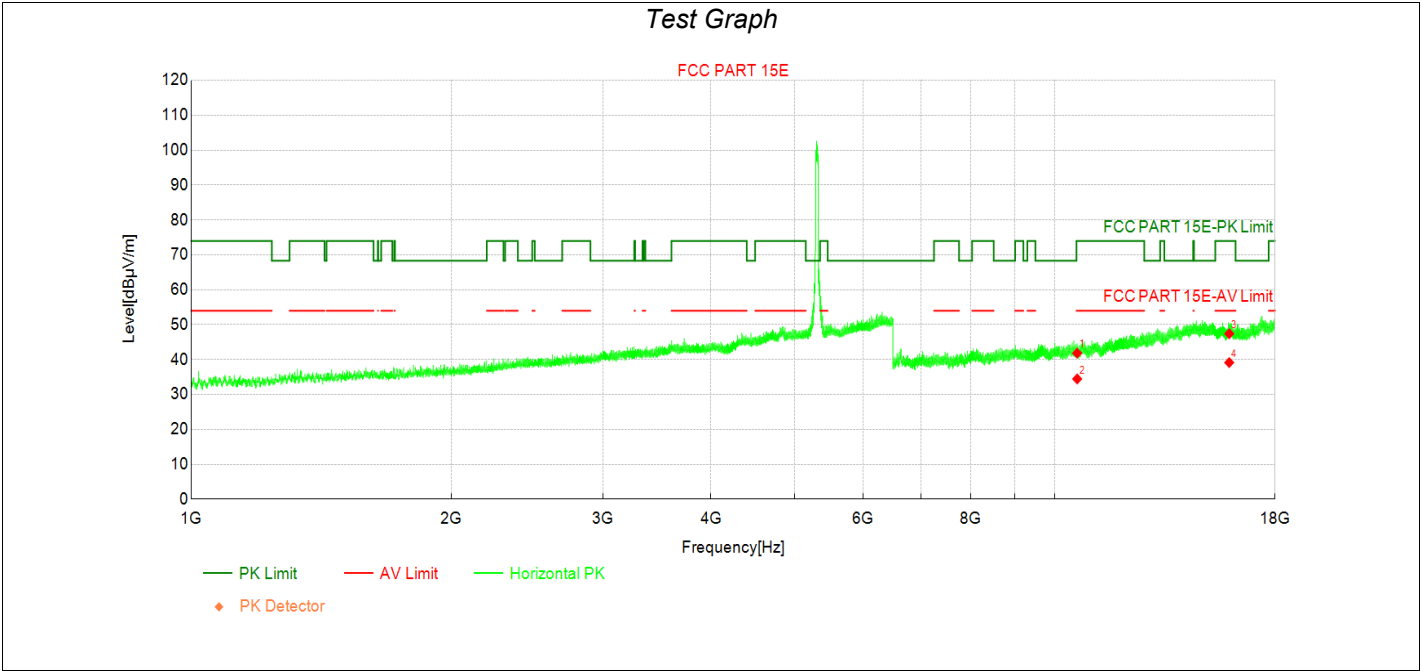


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10620.00        | 33.38          | 41.83          | 8.45          | 74.00          | 32.17       | PK  | Horizo | PASS    |
| 2         | 10620.00        | 26.00          | 34.45          | 8.45          | 54.00          | 19.55       | AV  | Horizo | PASS    |
| 3         | 15930.00        | 30.26          | 47.40          | 17.14         | 74.00          | 26.60       | PK  | Horizo | PASS    |
| 4         | 15930.00        | 22.00          | 39.14          | 17.14         | 54.00          | 14.86       | AV  | Horizo | PASS    |

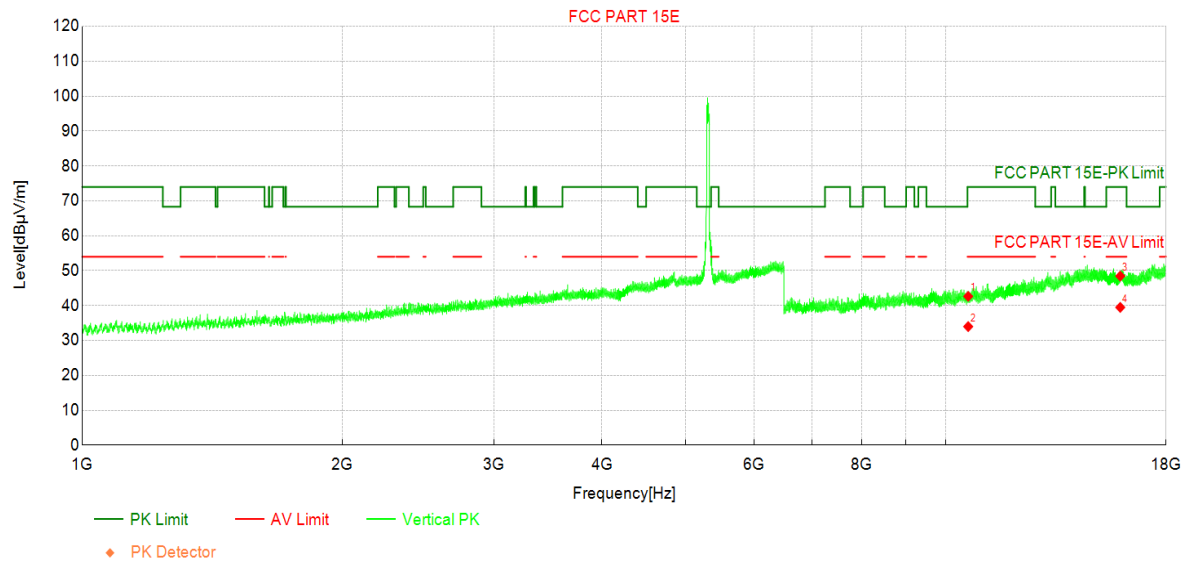**Transmit at 5310MHz by 802.11n(40MHz) with Ant2+3***Test Graph***Data List**

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10620.00        | 34.18          | 42.63          | 8.45          | 74.00          | 31.37       | PK  | Vertic | PASS    |
| 2  | 10620.00        | 25.53          | 33.98          | 8.45          | 54.00          | 20.02       | AV  | Vertic | PASS    |
| 3  | 15930.00        | 31.31          | 48.45          | 17.14         | 74.00          | 25.55       | PK  | Vertic | PASS    |
| 4  | 15930.00        | 22.34          | 39.48          | 17.14         | 54.00          | 14.52       | AV  | Vertic | PASS    |


Transmit at 5510MHz by 802.11n(40MHz) with Ant2+3

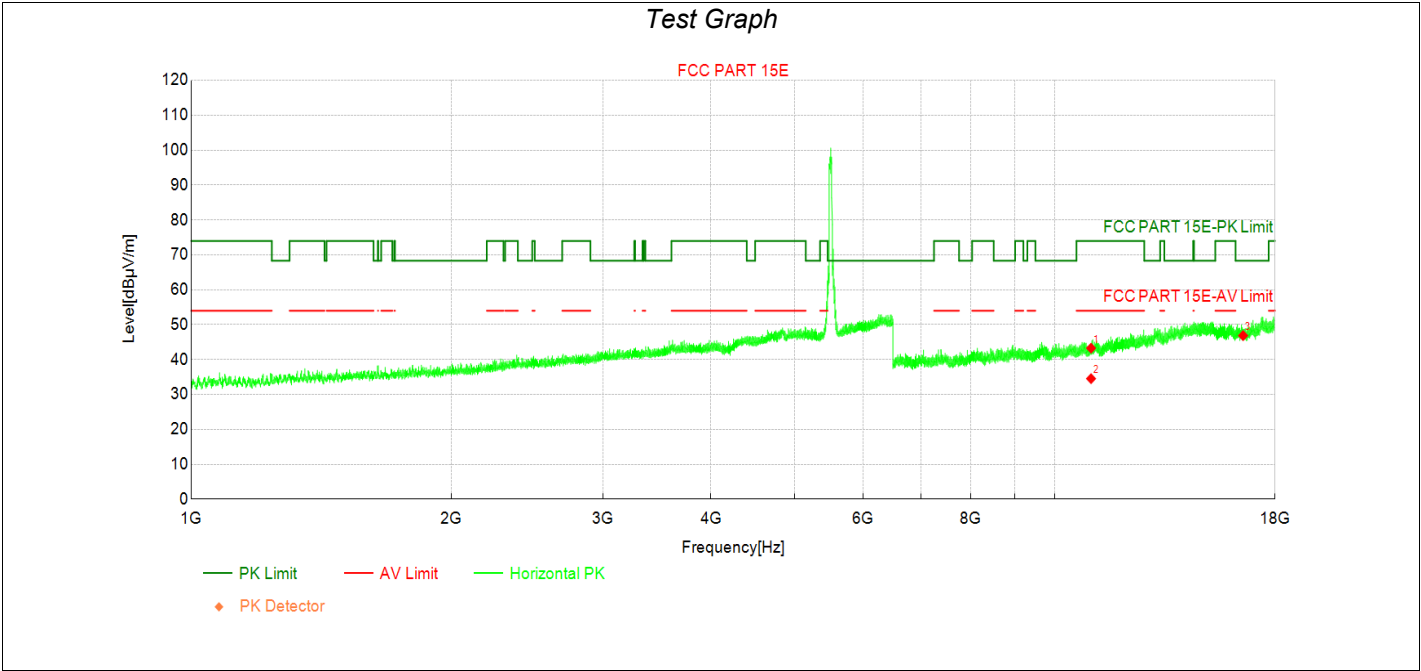

Data List

| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11020.00        | 33.80          | 43.26          | 9.46          | 74.00          | 30.74       | PK  | Horizo | PASS    |
| 2  | 11020.00        | 25.06          | 34.52          | 9.46          | 54.00          | 19.48       | AV  | Horizo | PASS    |
| 3  | 16530.00        | 29.22          | 46.87          | 17.65         | 68.30          | 21.43       | PK  | Horizo | PASS    |


Transmit at 5510MHz by 802.11n(40MHz) with Ant2+3

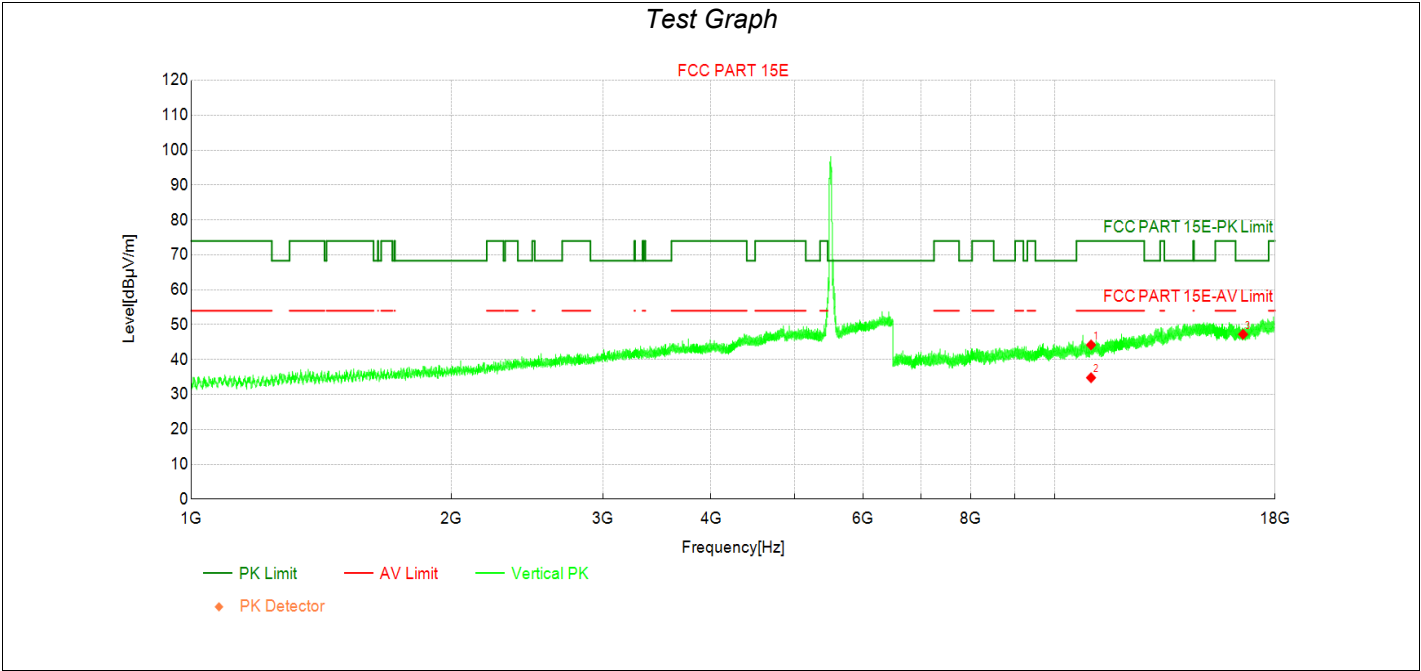

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11020.00        | 34.73          | 44.19          | 9.46          | 74.00          | 29.81       | PK  | Vertic | PASS    |
| 2  | 11020.00        | 25.34          | 34.80          | 9.46          | 54.00          | 19.20       | AV  | Vertic | PASS    |
| 3  | 16530.00        | 29.58          | 47.23          | 17.65         | 68.30          | 21.07       | PK  | Vertic | PASS    |


Transmit at 5590MHz by 802.11n(40MHz) with Ant2+3

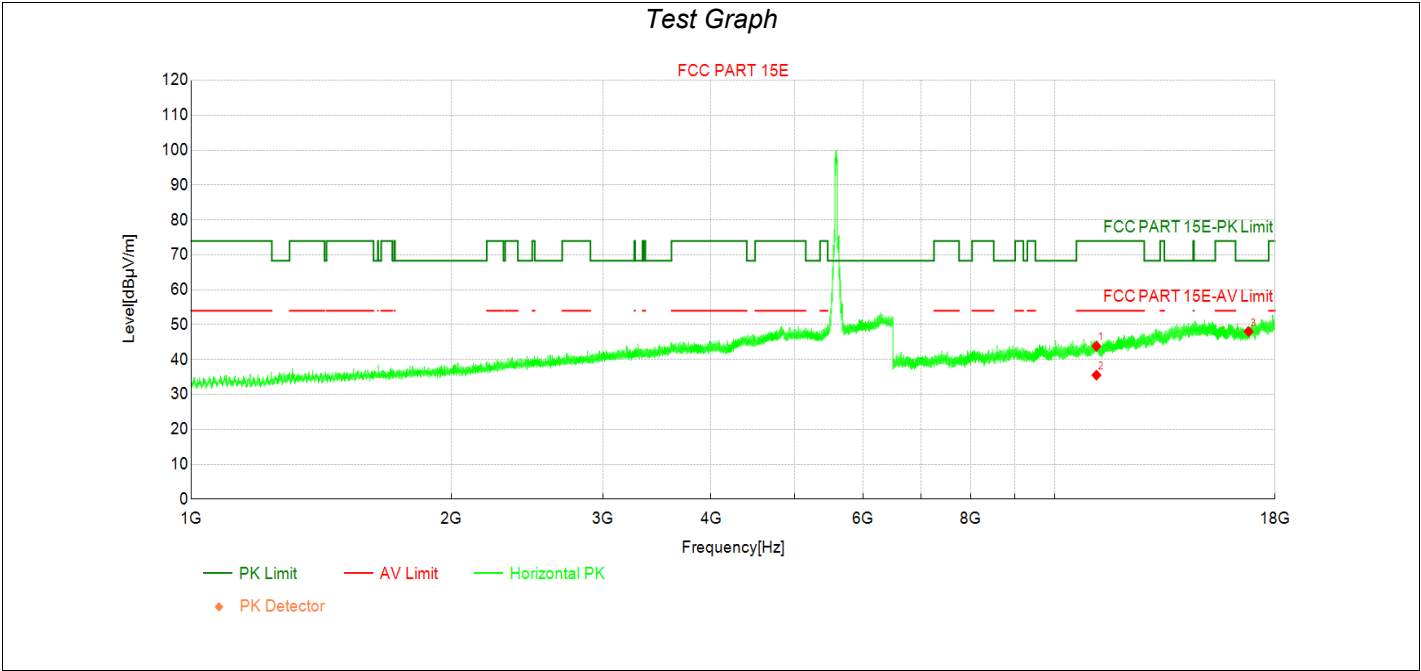

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11180.00        | 34.22          | 43.81          | 9.59          | 74.00          | 30.19       | PK  | Horizo | PASS    |
| 2  | 11180.00        | 25.94          | 35.53          | 9.59          | 54.00          | 18.47       | AV  | Horizo | PASS    |
| 3  | 16770.00        | 29.78          | 48.03          | 18.25         | 68.30          | 20.27       | PK  | Horizo | PASS    |


Transmit at 5590MHz by 802.11n(40MHz) with Ant2+3

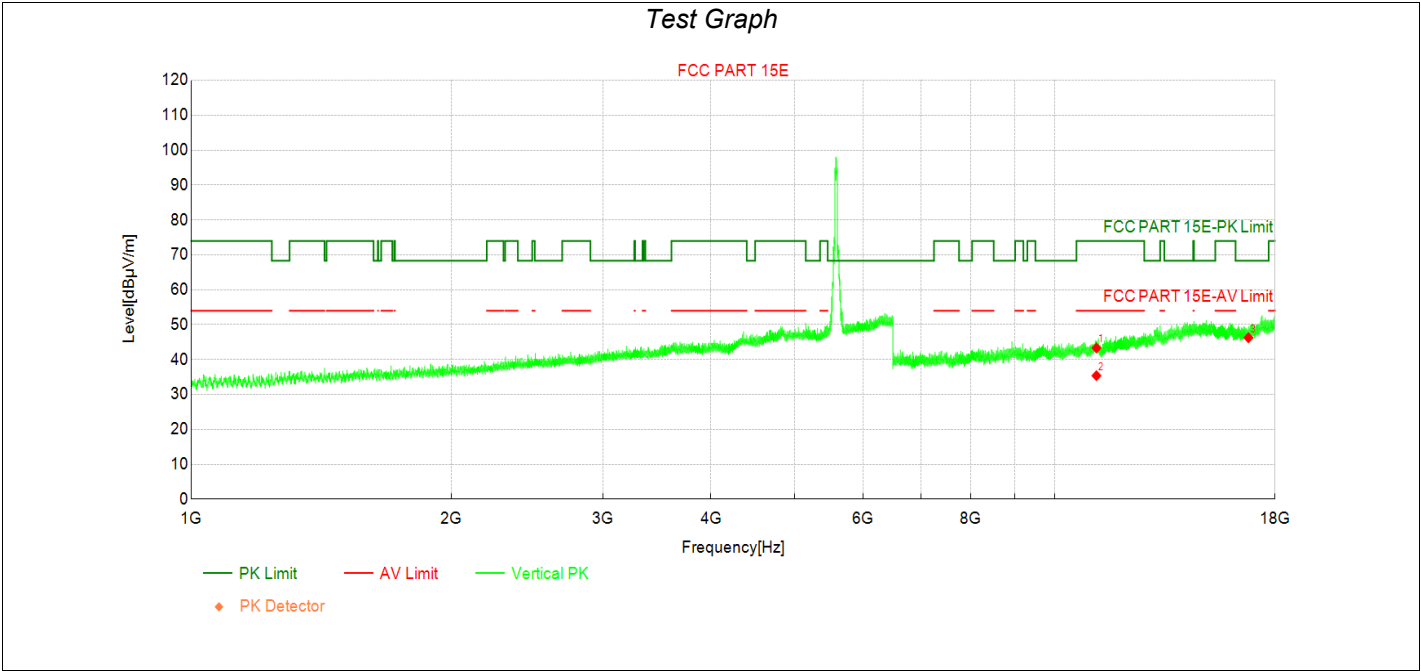

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11180.00        | 33.74          | 43.33          | 9.59          | 74.00          | 30.67       | PK  | Vertic | PASS    |
| 2  | 11180.00        | 25.78          | 35.37          | 9.59          | 54.00          | 18.63       | AV  | Vertic | PASS    |
| 3  | 16770.00        | 28.00          | 46.25          | 18.25         | 68.30          | 22.05       | PK  | Vertic | PASS    |

Transmit at 5670MHz by 802.11n(40MHz) with Ant2+3

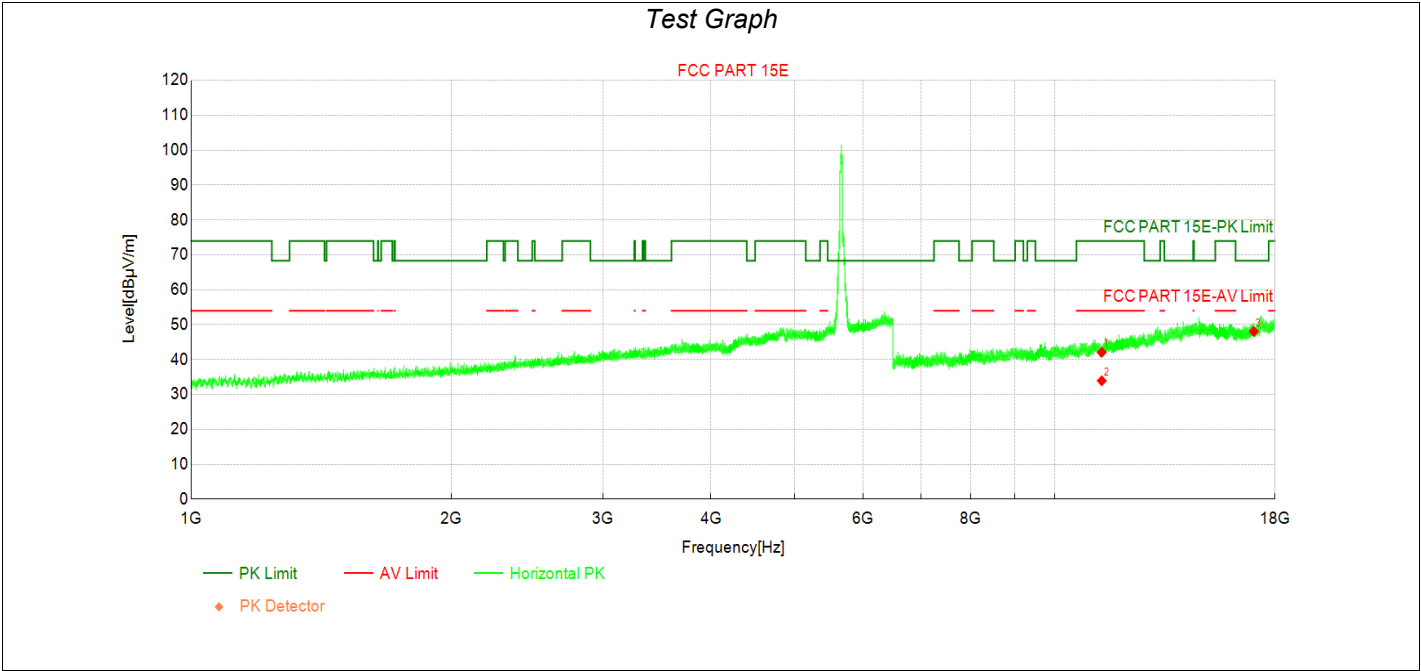


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11340.00        | 32.16          | 42.08          | 9.92          | 74.00          | 31.92       | PK  | Horizo | PASS    |
| 2         | 11340.00        | 24.00          | 33.92          | 9.92          | 54.00          | 20.08       | AV  | Horizo | PASS    |
| 3         | 17010.00        | 27.90          | 48.06          | 20.16         | 68.30          | 20.24       | PK  | Horizo | PASS    |

Transmit at 5670MHz by 802.11n(40MHz) with Ant2+3

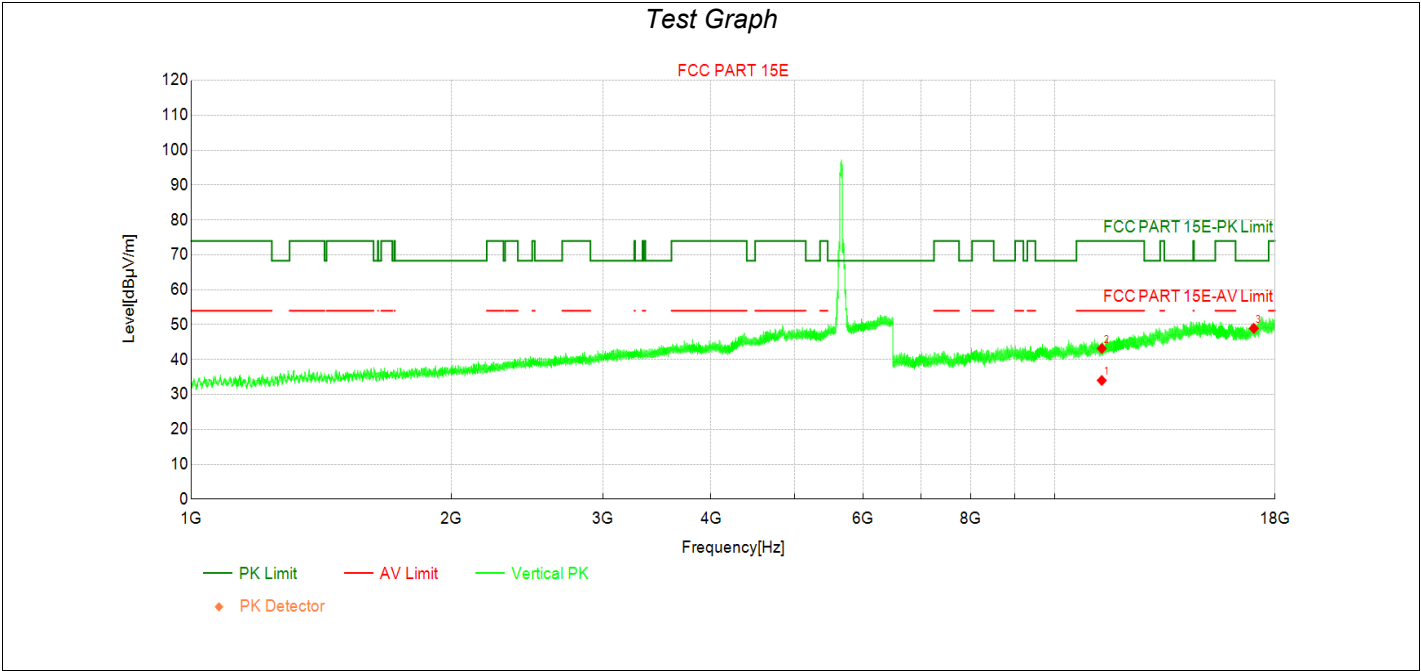


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11340.00        | 24.10          | 34.02          | 9.92          | 54.00          | 19.98       | AV  | Vertic | PASS    |
| 2         | 11340.00        | 33.26          | 43.18          | 9.92          | 74.00          | 30.82       | PK  | Vertic | PASS    |
| 3         | 17010.00        | 28.78          | 48.94          | 20.16         | 68.30          | 19.36       | PK  | Vertic | PASS    |

Transmit at 5755MHz by 802.11n(40MHz) with Ant2+3

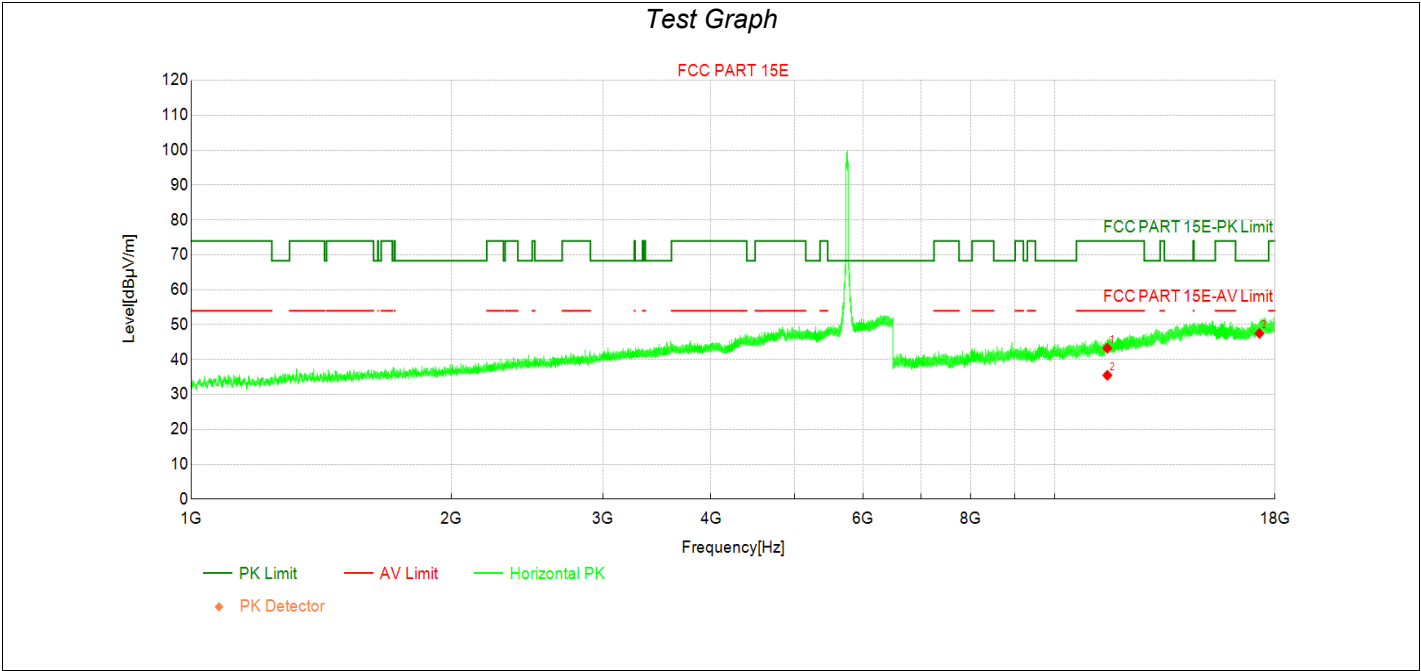


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11510.00        | 32.86          | 43.23          | 10.37         | 74.00          | 30.77       | PK  | Horizo | PASS    |
| 2         | 11510.00        | 25.11          | 35.48          | 10.37         | 54.00          | 18.52       | AV  | Horizo | PASS    |
| 3         | 17265.00        | 28.71          | 47.48          | 18.77         | 68.30          | 20.82       | PK  | Horizo | PASS    |

Transmit at 5755MHz by 802.11n(40MHz) with Ant2+3

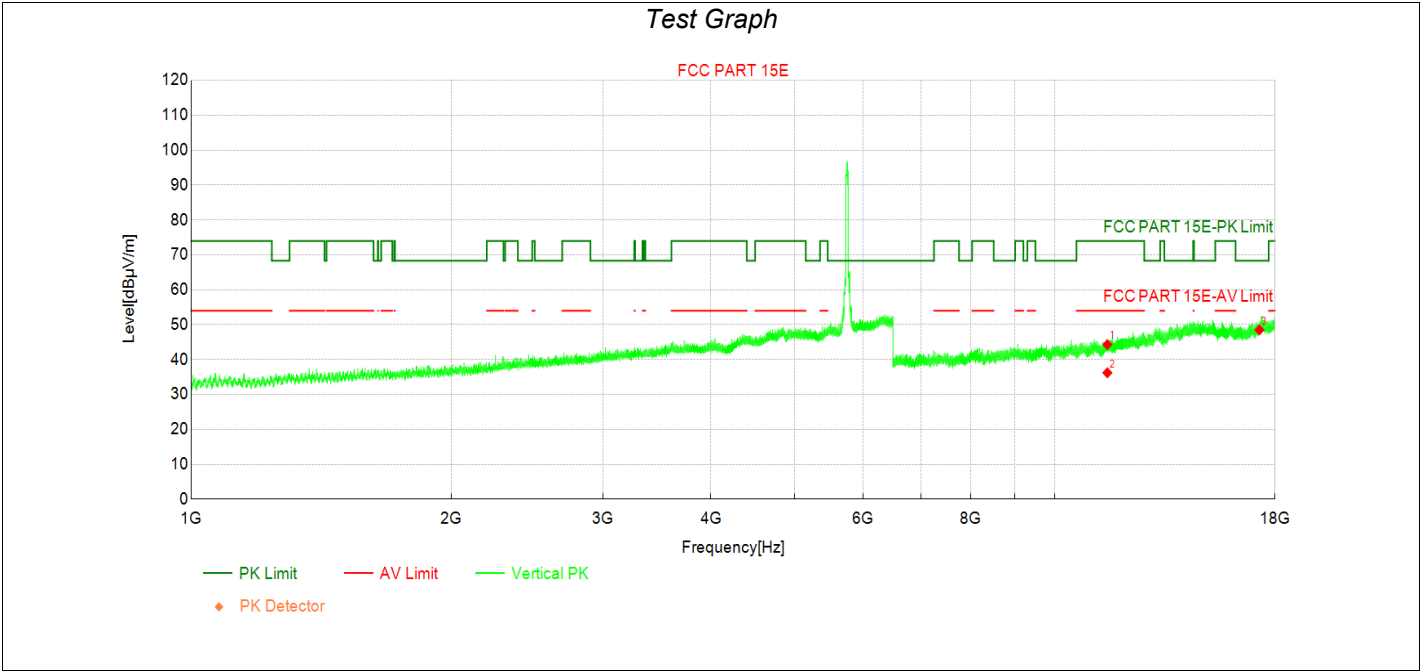


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11510.00        | 33.94          | 44.31          | 10.37         | 74.00          | 29.69       | PK  | Vertic | PASS    |
| 2         | 11510.00        | 25.84          | 36.21          | 10.37         | 54.00          | 17.79       | AV  | Vertic | PASS    |
| 3         | 17265.00        | 29.73          | 48.50          | 18.77         | 68.30          | 19.80       | PK  | Vertic | PASS    |

Transmit at 5795MHz by 802.11n(40MHz) with Ant2+3

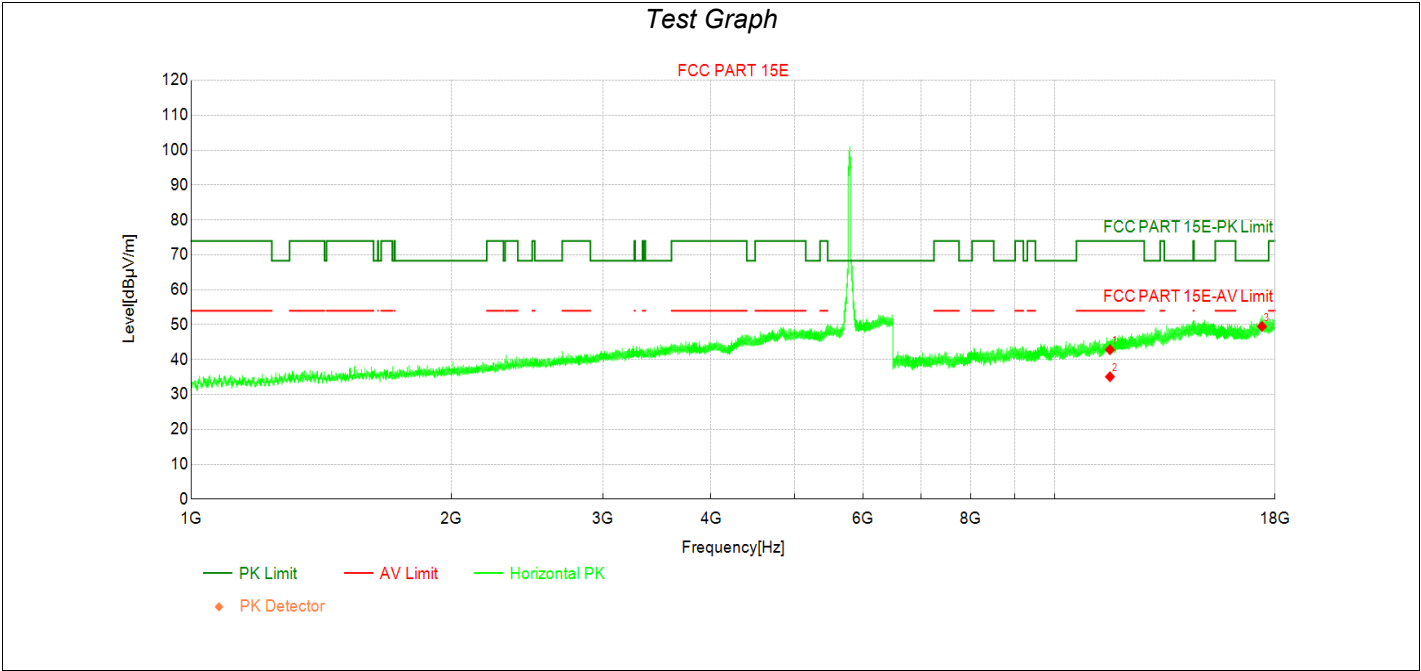

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11590.00        | 31.88          | 42.82          | 10.94         | 74.00          | 31.18       | PK  | Horizo | PASS    |
| 2         | 11590.00        | 24.14          | 35.08          | 10.94         | 54.00          | 18.92       | AV  | Horizo | PASS    |
| 3         | 17385.00        | 29.38          | 49.48          | 20.10         | 68.30          | 18.82       | PK  | Horizo | PASS    |


Transmit at 5795MHz by 802.11n(40MHz) with Ant2+3

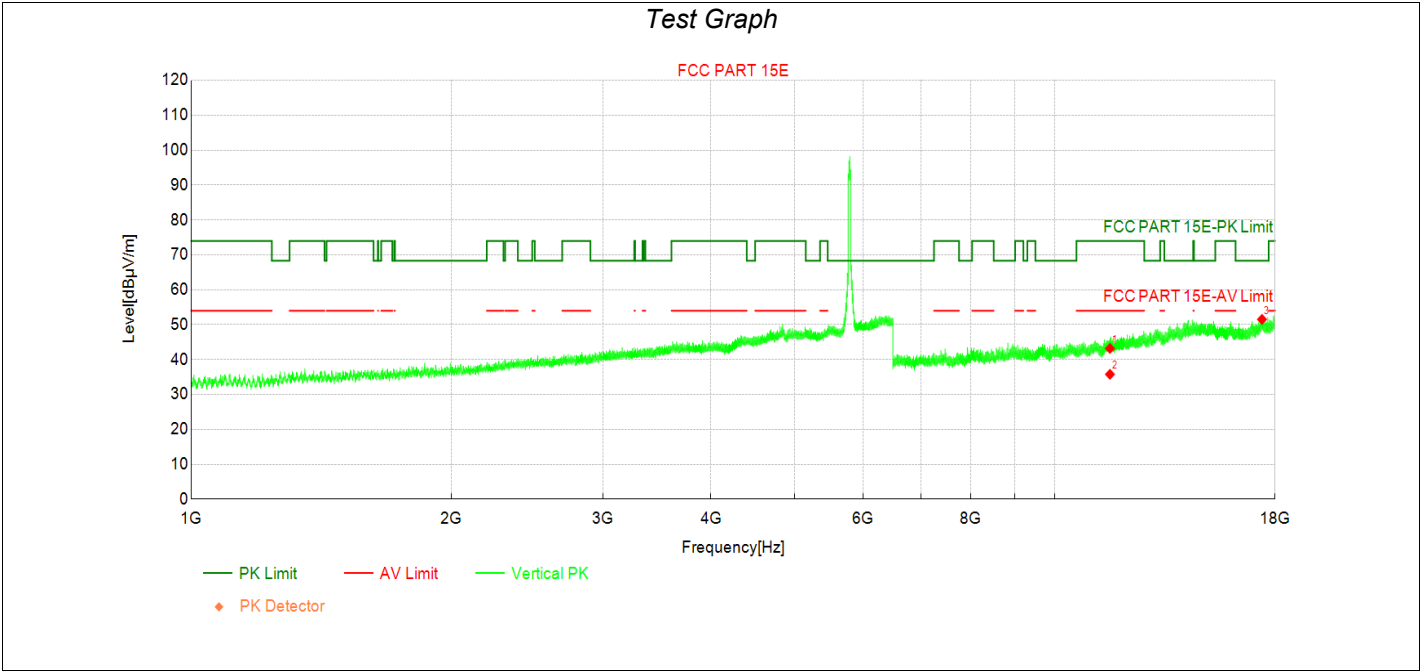

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 11590.00        | 32.24          | 43.18          | 10.94         | 74.00          | 30.82       | PK  | Vertic | PASS    |
| 2  | 11590.00        | 24.83          | 35.77          | 10.94         | 54.00          | 18.23       | AV  | Vertic | PASS    |
| 3  | 17385.00        | 31.41          | 51.51          | 20.10         | 68.30          | 16.79       | PK  | Vertic | PASS    |


Transmit at 5180MHz by 802.11ac(20MHz) with Ant2+3

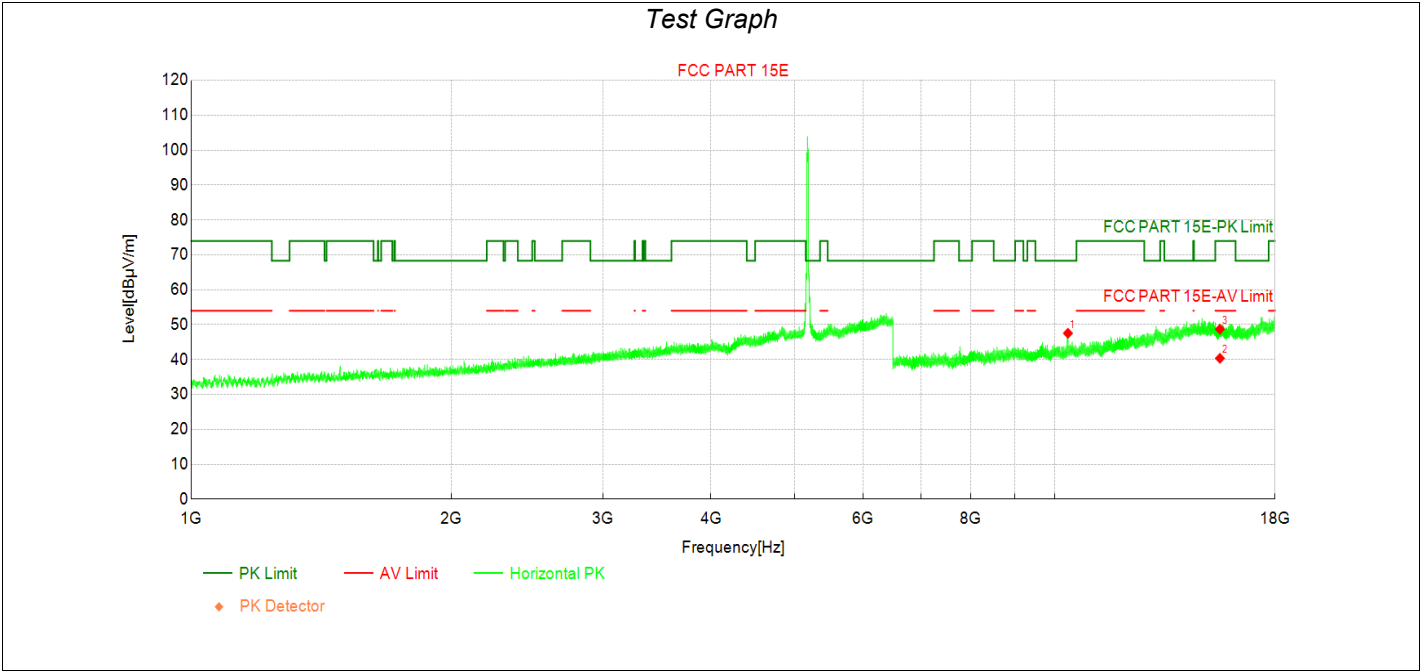

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10361.13        | 39.89          | 47.53          | 7.64          | 68.30          | 20.77       | PK  | Horizo | PASS    |
| 2  | 15540.00        | 23.83          | 40.36          | 16.53         | 54.00          | 13.64       | AV  | Horizo | PASS    |
| 3  | 15540.00        | 32.18          | 48.71          | 16.53         | 74.00          | 25.29       | PK  | Horizo | PASS    |


Transmit at 5180MHz by 802.11ac(20MHz) with Ant2+3

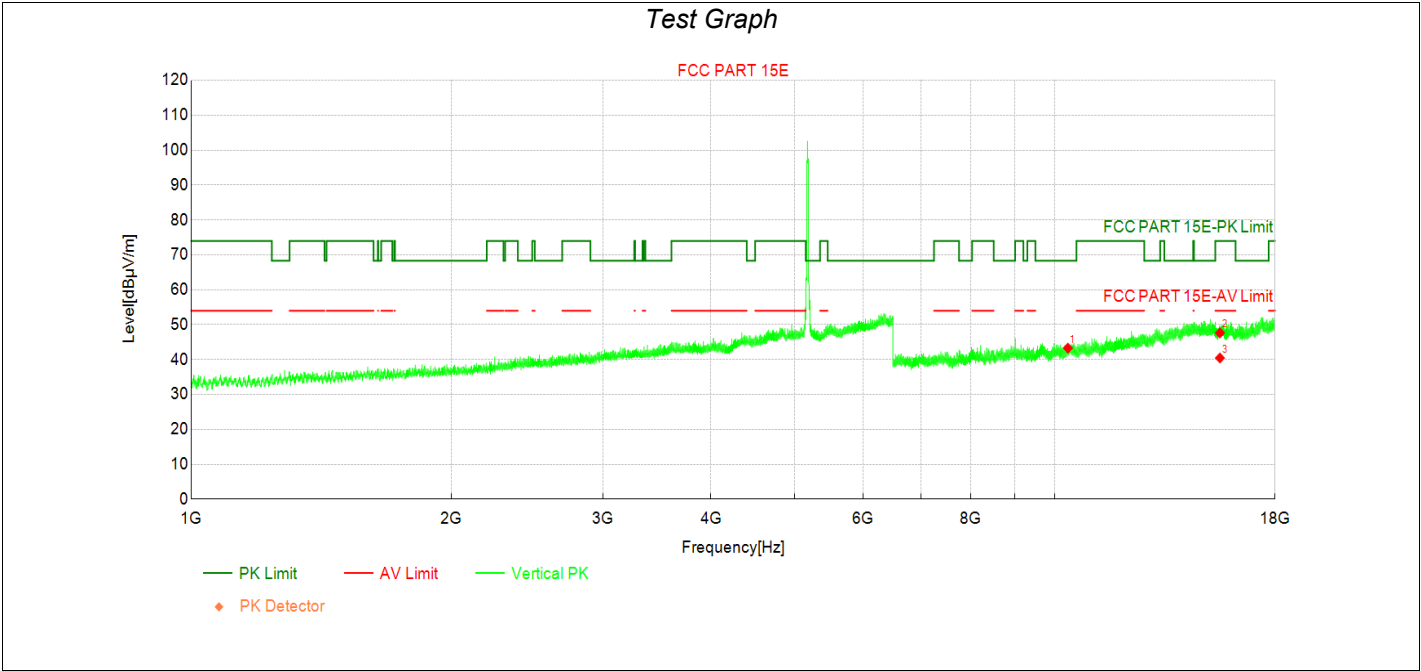

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10360.00        | 35.63          | 43.27          | 7.64          | 68.30          | 25.03       | PK  | Vertic | PASS    |
| 2  | 15540.00        | 31.11          | 47.64          | 16.53         | 74.00          | 26.36       | PK  | Vertic | PASS    |
| 3  | 15540.00        | 23.93          | 40.46          | 16.53         | 54.00          | 13.54       | AV  | Vertic | PASS    |

Transmit at 5200MHz by 802.11ac(20MHz) with Ant2+3

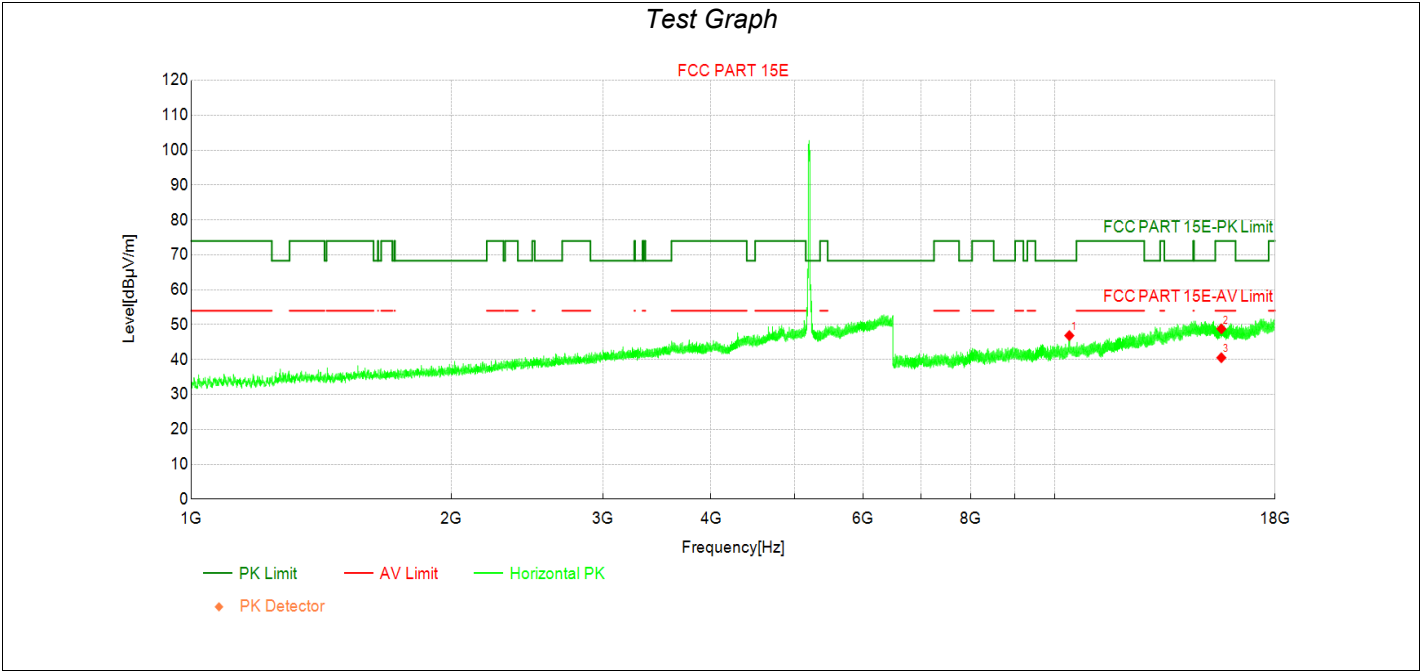


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10400.00        | 39.15          | 46.86          | 7.71          | 68.30          | 21.44       | PK  | Horizo | PASS    |
| 2         | 15600.00        | 32.33          | 48.81          | 16.48         | 74.00          | 25.19       | PK  | Horizo | PASS    |
| 3         | 15600.00        | 24.05          | 40.53          | 16.48         | 54.00          | 13.47       | AV  | Horizo | PASS    |

Transmit at 5200MHz by 802.11ac(20MHz) with Ant2+3

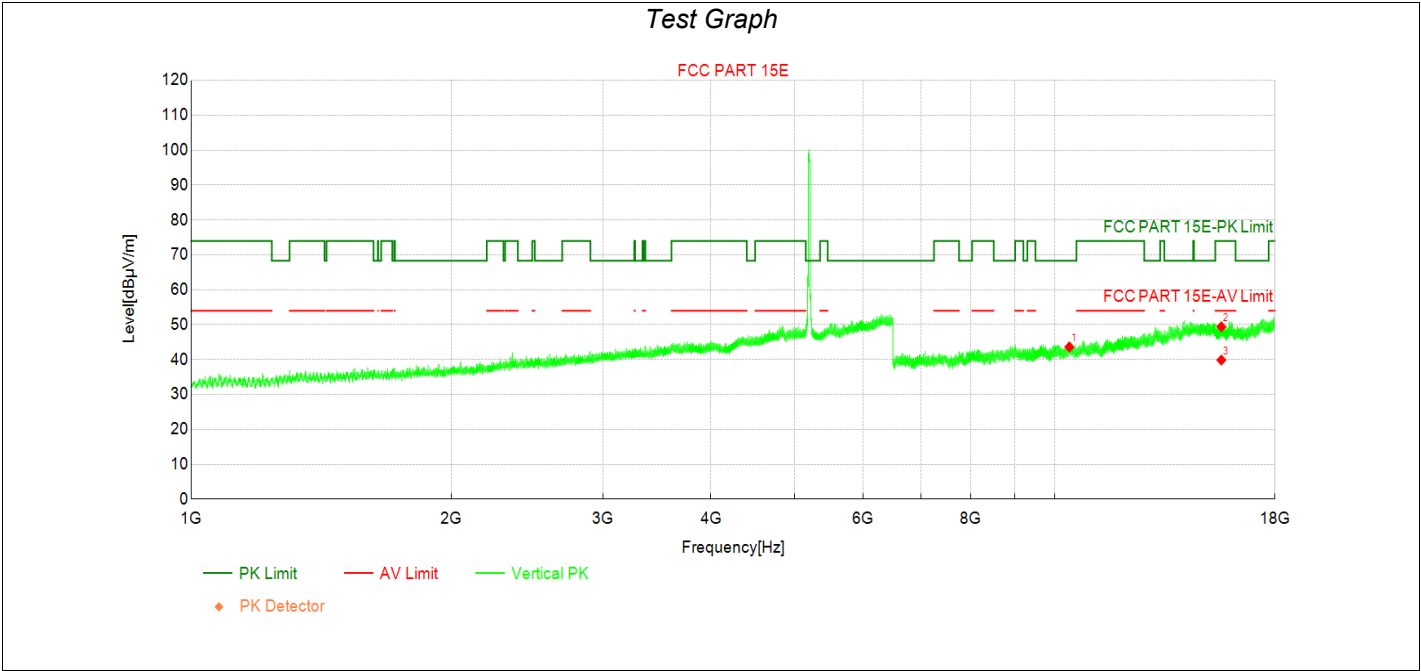


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10400.00        | 35.88          | 43.59          | 7.71          | 68.30          | 24.71       | PK  | Vertic | PASS    |
| 2         | 15600.00        | 32.92          | 49.40          | 16.48         | 74.00          | 24.60       | PK  | Vertic | PASS    |
| 3         | 15600.00        | 23.38          | 39.86          | 16.48         | 54.00          | 14.14       | AV  | Vertic | PASS    |

Transmit at 5240MHz by 802.11ac(20MHz) with Ant2+3

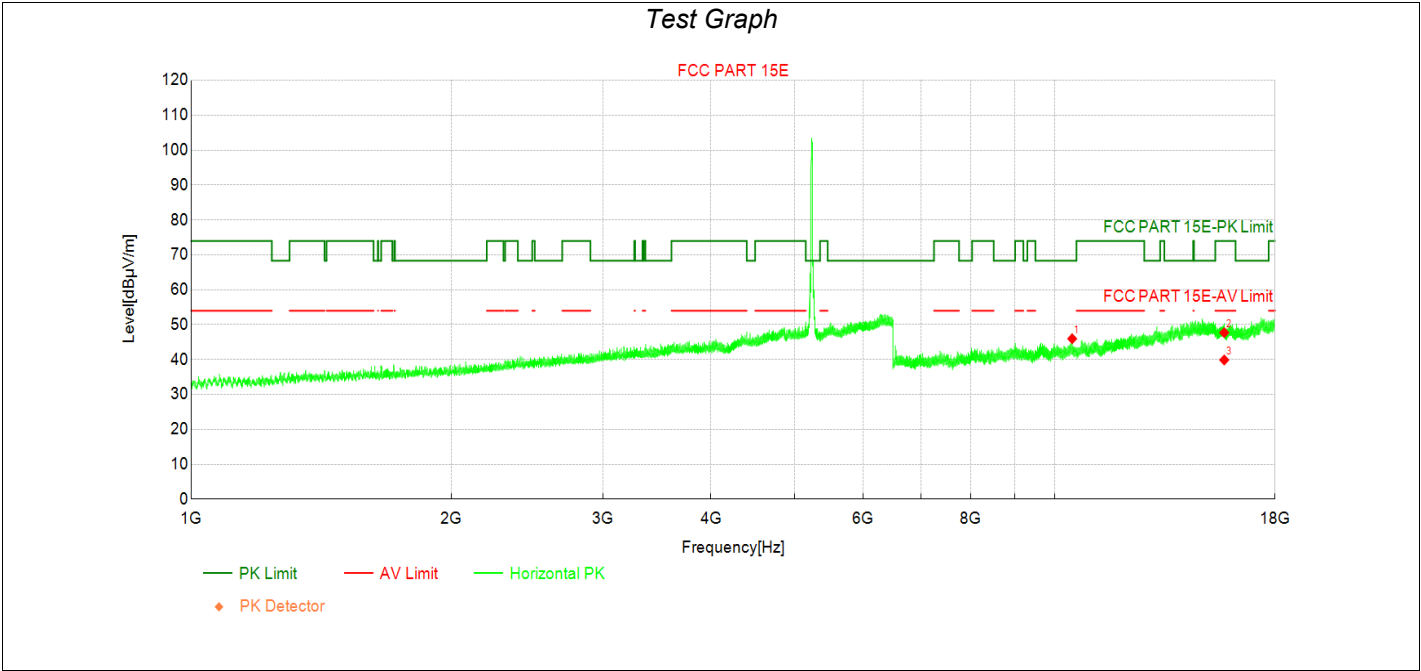


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10480.00        | 37.81          | 45.97          | 8.16          | 68.30          | 22.33       | PK  | Horizo | PASS    |
| 2         | 15720.00        | 31.11          | 47.71          | 16.60         | 74.00          | 26.29       | PK  | Horizo | PASS    |
| 3         | 15720.00        | 23.29          | 39.89          | 16.60         | 54.00          | 14.11       | AV  | Horizo | PASS    |

Transmit at 5240MHz by 802.11ac(20MHz) with Ant2+3

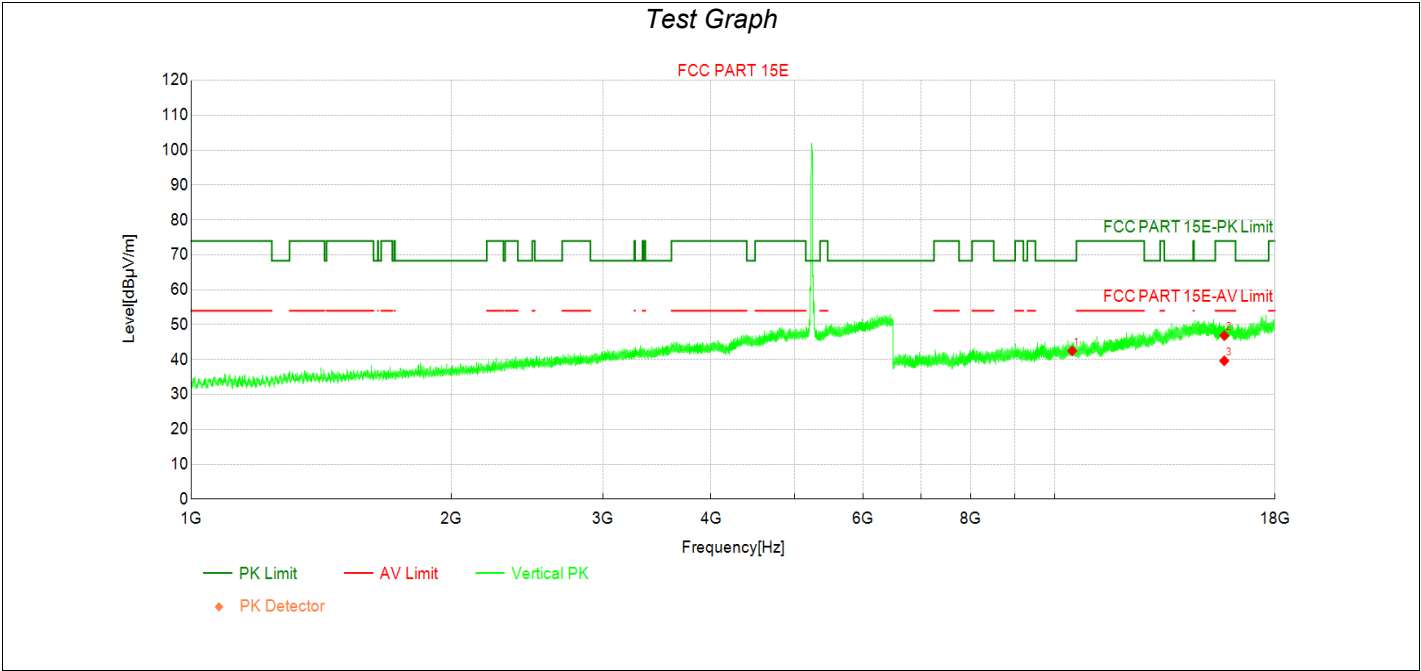

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10480.00        | 34.32          | 42.48          | 8.16          | 68.30          | 25.82       | PK  | Vertic | PASS    |
| 2         | 15720.00        | 30.25          | 46.85          | 16.60         | 74.00          | 27.15       | PK  | Vertic | PASS    |
| 3         | 15720.00        | 23.04          | 39.64          | 16.60         | 54.00          | 14.36       | AV  | Vertic | PASS    |


Transmit at 5260MHz by 802.11ac(20MHz) with Ant2+3

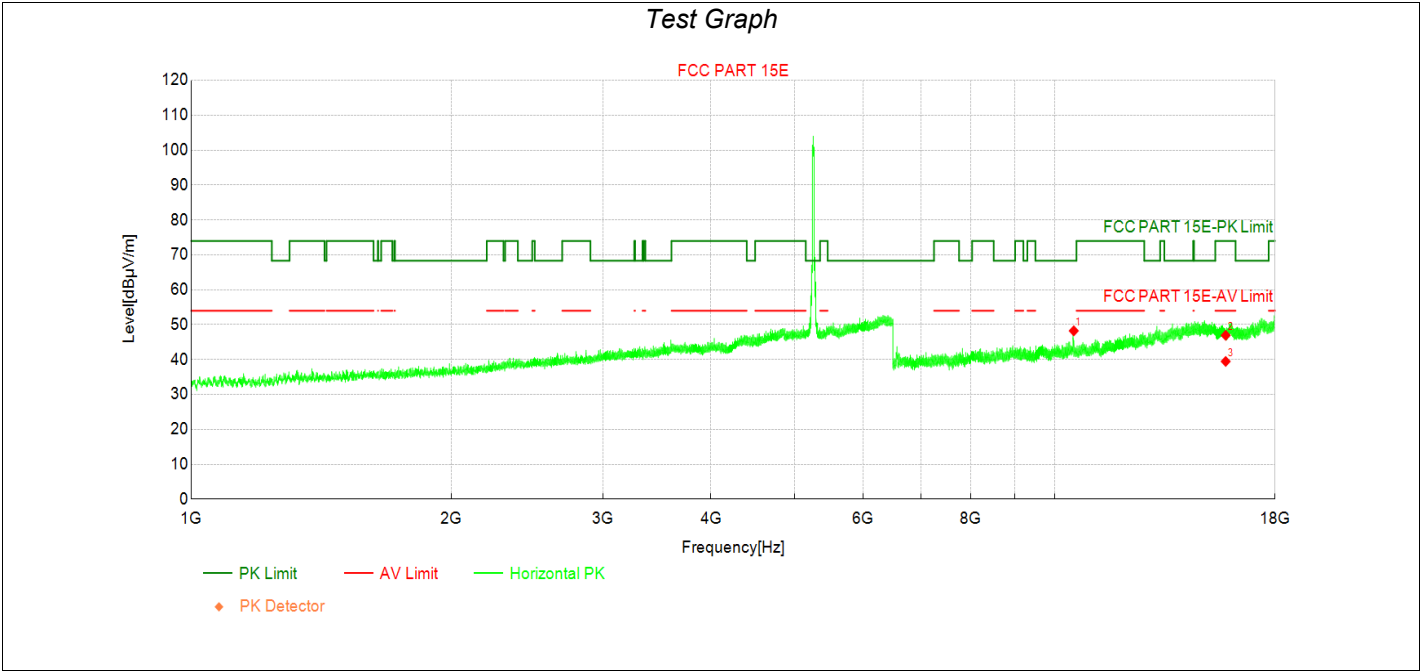

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10523.56        | 39.91          | 48.23          | 8.32          | 68.30          | 20.07       | PK  | Horizo | PASS    |
| 2  | 15780.00        | 30.25          | 46.95          | 16.70         | 74.00          | 27.05       | PK  | Horizo | PASS    |
| 3  | 15780.00        | 22.76          | 39.46          | 16.70         | 54.00          | 14.54       | AV  | Horizo | PASS    |

Transmit at 5260MHz by 802.11ac(20MHz) with Ant2+3

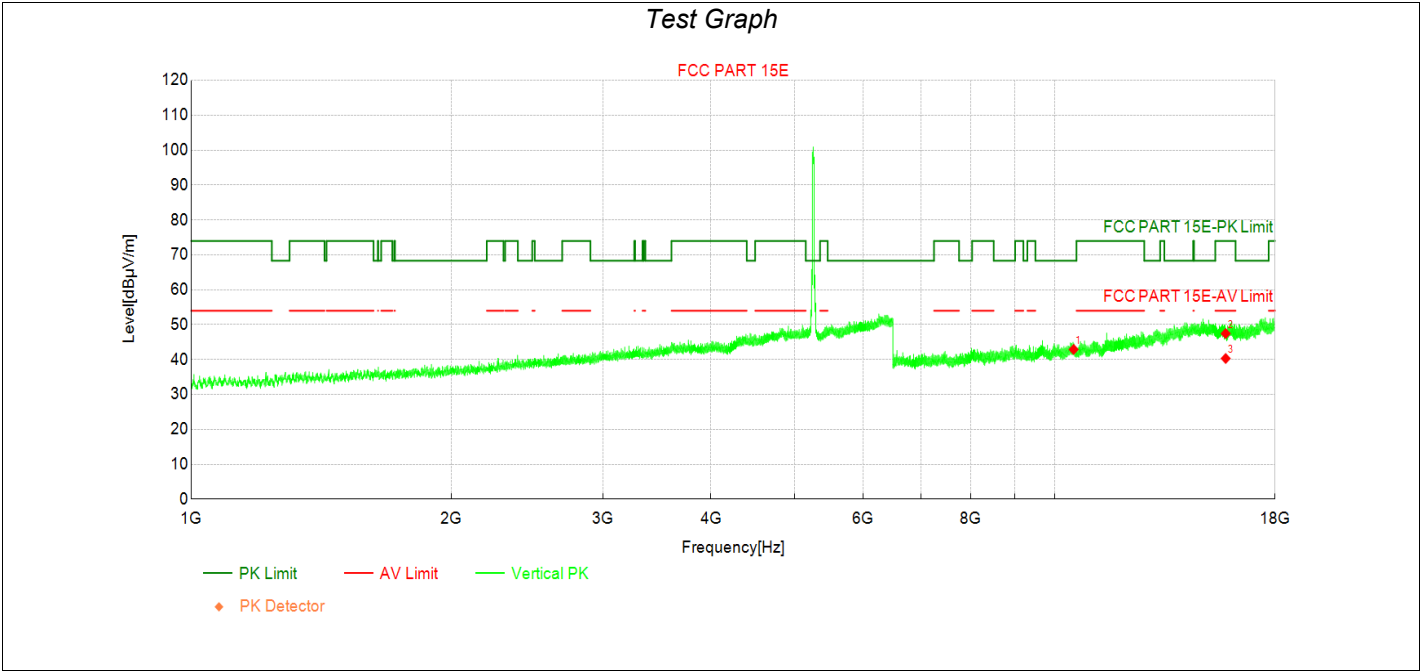


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10520.00        | 34.59          | 42.90          | 8.31          | 68.30          | 25.40       | PK  | Vertic | PASS    |
| 2         | 15780.00        | 30.74          | 47.44          | 16.70         | 74.00          | 26.56       | PK  | Vertic | PASS    |
| 3         | 15780.00        | 23.61          | 40.31          | 16.70         | 54.00          | 13.69       | AV  | Vertic | PASS    |

Transmit at 5280MHz by 802.11ac(20MHz) with Ant2+3

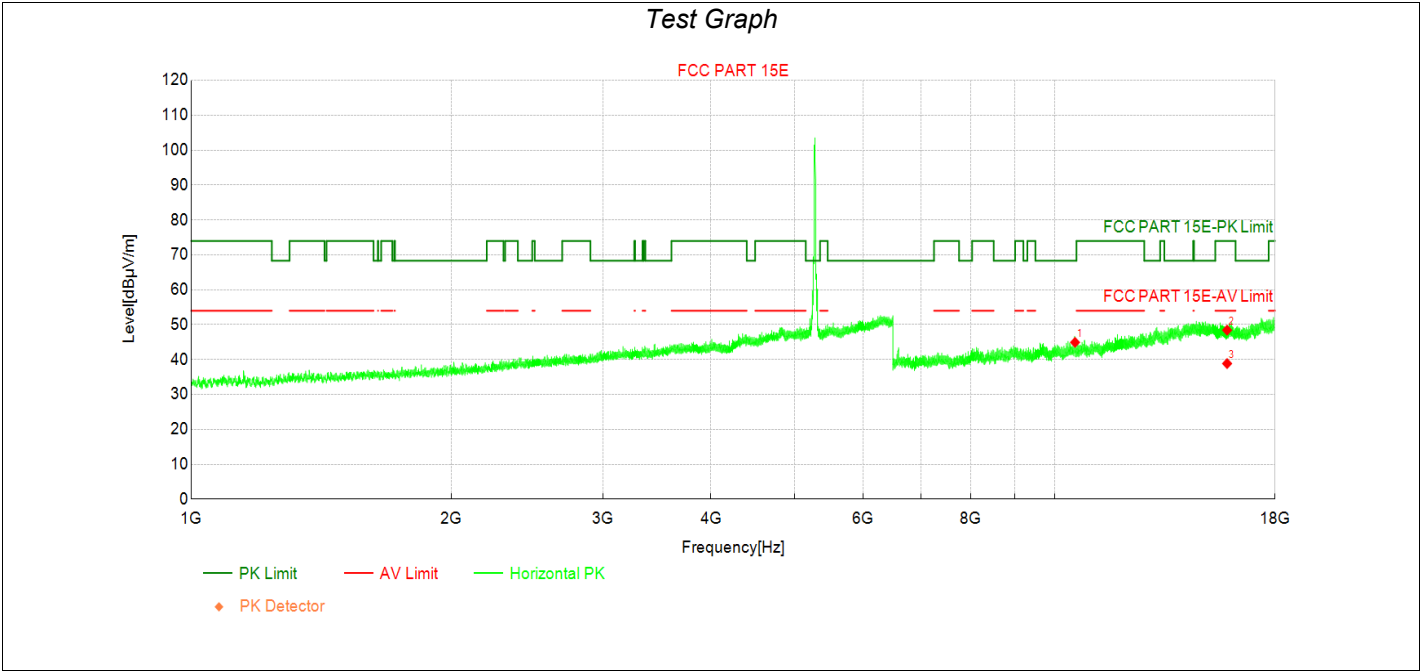


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10560.00        | 36.54          | 44.93          | 8.39          | 68.30          | 23.37       | PK  | Horizo | PASS    |
| 2         | 15840.00        | 31.60          | 48.44          | 16.84         | 74.00          | 25.56       | PK  | Horizo | PASS    |
| 3         | 15840.00        | 22.01          | 38.85          | 16.84         | 54.00          | 15.15       | AV  | Horizo | PASS    |

Transmit at 5280MHz by 802.11ac(20MHz) with Ant2+3

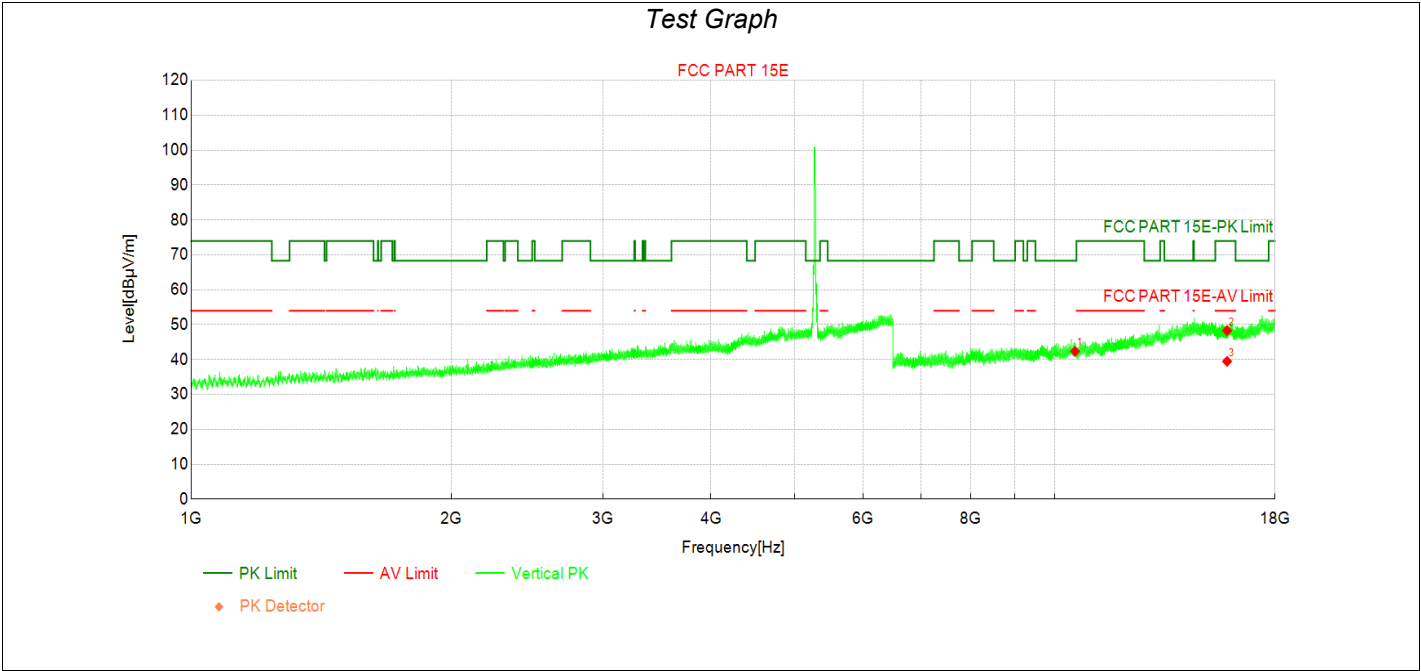

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 10560.00        | 33.97          | 42.36          | 8.39          | 68.30          | 25.94       | PK  | Vertic | PASS    |
| 2         | 15840.00        | 31.47          | 48.31          | 16.84         | 74.00          | 25.69       | PK  | Vertic | PASS    |
| 3         | 15840.00        | 22.64          | 39.48          | 16.84         | 54.00          | 14.52       | AV  | Vertic | PASS    |


Transmit at 5320MHz by 802.11ac(20MHz) with Ant2+3

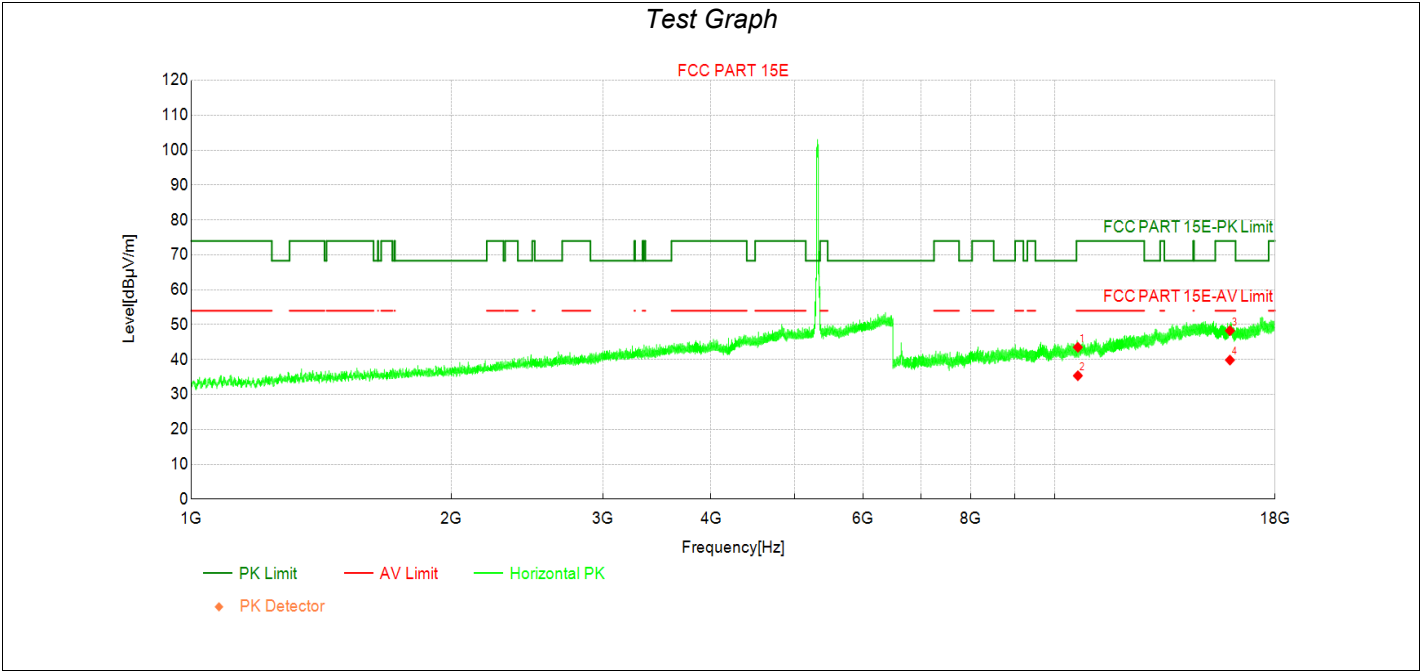

Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10640.00        | 35.09          | 43.52          | 8.43          | 74.00          | 30.48       | PK  | Horizo | PASS    |
| 2  | 10640.00        | 26.94          | 35.37          | 8.43          | 54.00          | 18.63       | AV  | Horizo | PASS    |
| 3  | 15960.00        | 31.00          | 48.27          | 17.27         | 74.00          | 25.73       | PK  | Horizo | PASS    |
| 4  | 15960.00        | 22.58          | 39.85          | 17.27         | 54.00          | 14.15       | AV  | Horizo | PASS    |


Transmit at 5320MHz by 802.11ac(20MHz) with Ant2+3

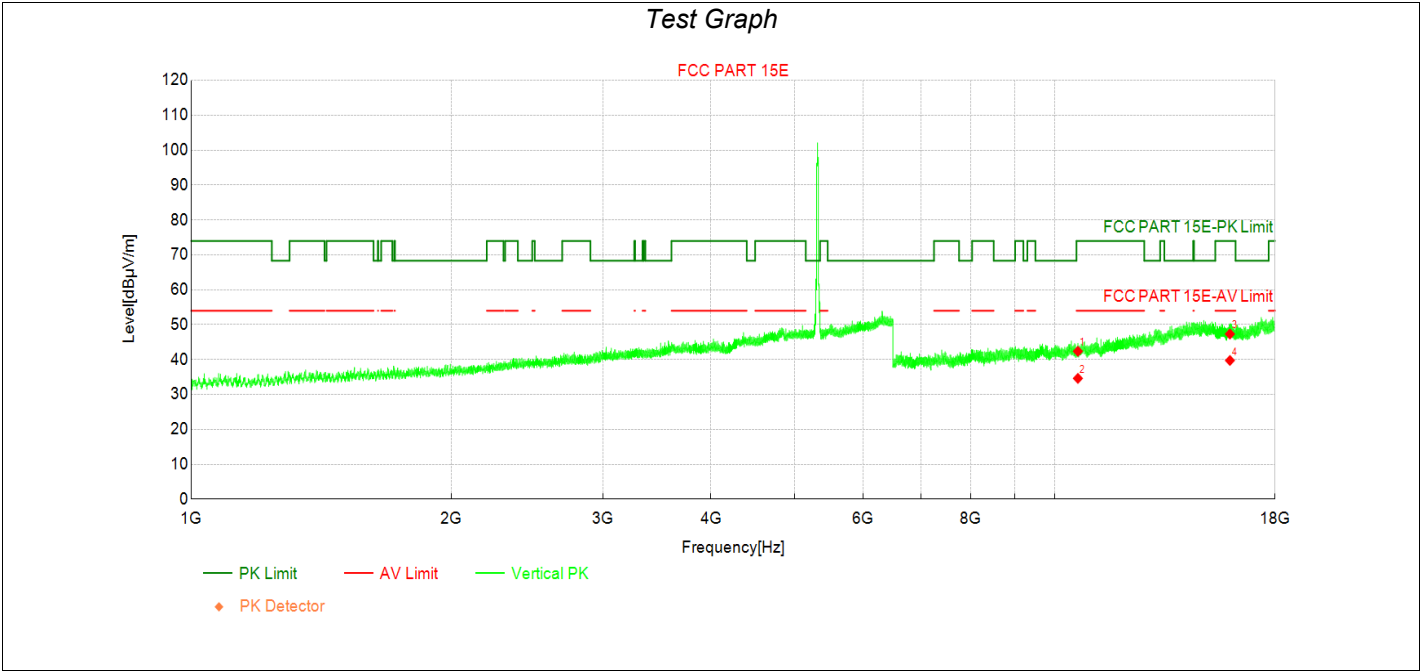

Data List


| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 10640.00        | 33.94          | 42.37          | 8.43          | 74.00          | 31.63       | PK  | Vertic | PASS    |
| 2  | 10640.00        | 26.17          | 34.60          | 8.43          | 54.00          | 19.40       | AV  | Vertic | PASS    |
| 3  | 15960.00        | 30.05          | 47.32          | 17.27         | 74.00          | 26.68       | PK  | Vertic | PASS    |
| 4  | 15960.00        | 22.47          | 39.74          | 17.27         | 54.00          | 14.26       | AV  | Vertic | PASS    |

Transmit at 5500MHz by 802.11ac(20MHz) with Ant2+3

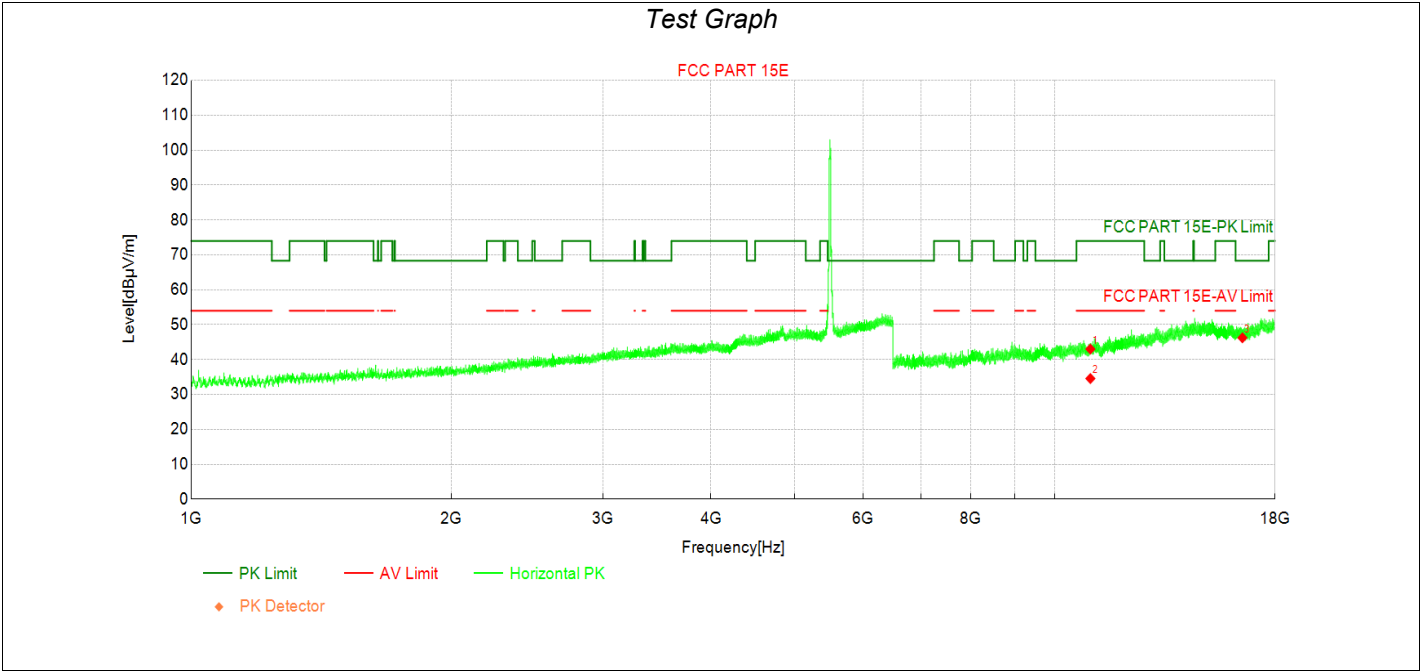


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11000.00        | 33.52          | 43.01          | 9.49          | 74.00          | 30.99       | PK  | Horizo | PASS    |
| 2         | 11000.00        | 25.07          | 34.56          | 9.49          | 54.00          | 19.44       | AV  | Horizo | PASS    |
| 3         | 16500.00        | 28.72          | 46.23          | 17.51         | 68.30          | 22.07       | PK  | Horizo | PASS    |

Transmit at 5500MHz by 802.11ac(20MHz) with Ant2+3

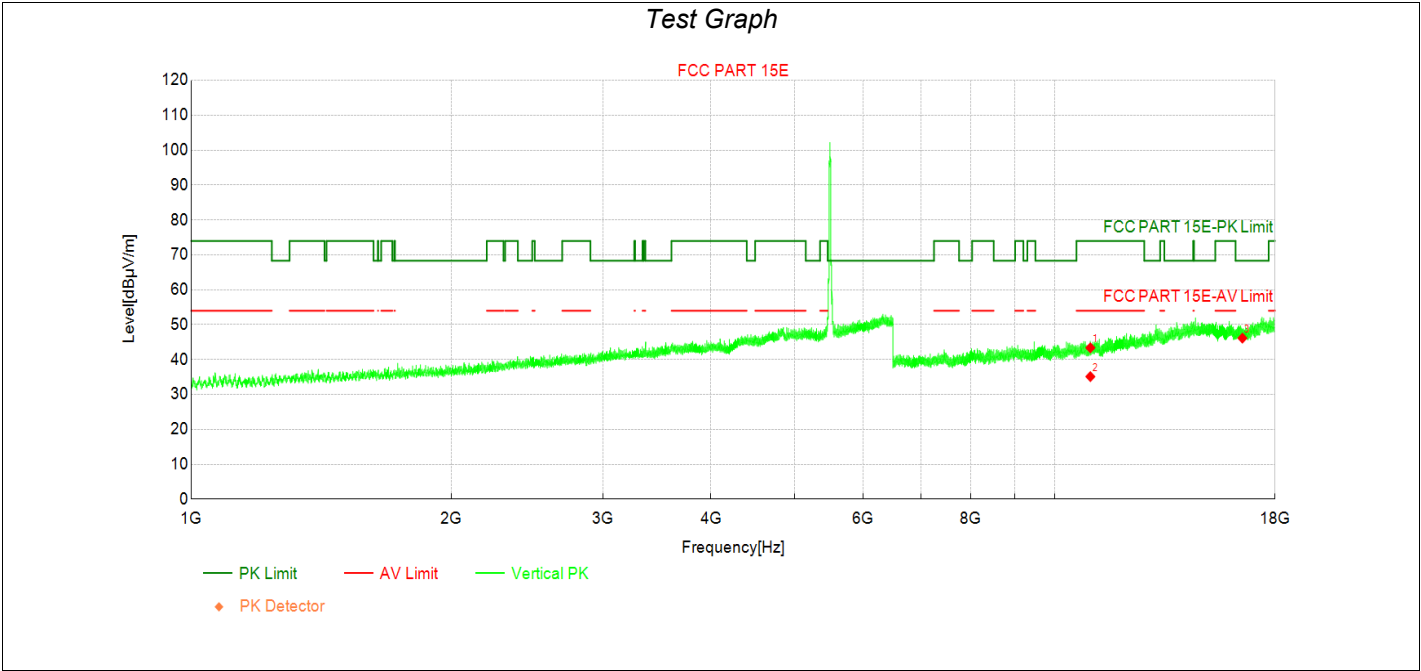


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11000.00        | 33.88          | 43.37          | 9.49          | 74.00          | 30.63       | PK  | Vertic | PASS    |
| 2         | 11000.00        | 25.63          | 35.12          | 9.49          | 54.00          | 18.88       | AV  | Vertic | PASS    |
| 3         | 16500.00        | 28.62          | 46.13          | 17.51         | 68.30          | 22.17       | PK  | Vertic | PASS    |

Transmit at 5580MHz by 802.11ac(20MHz) with Ant2+3

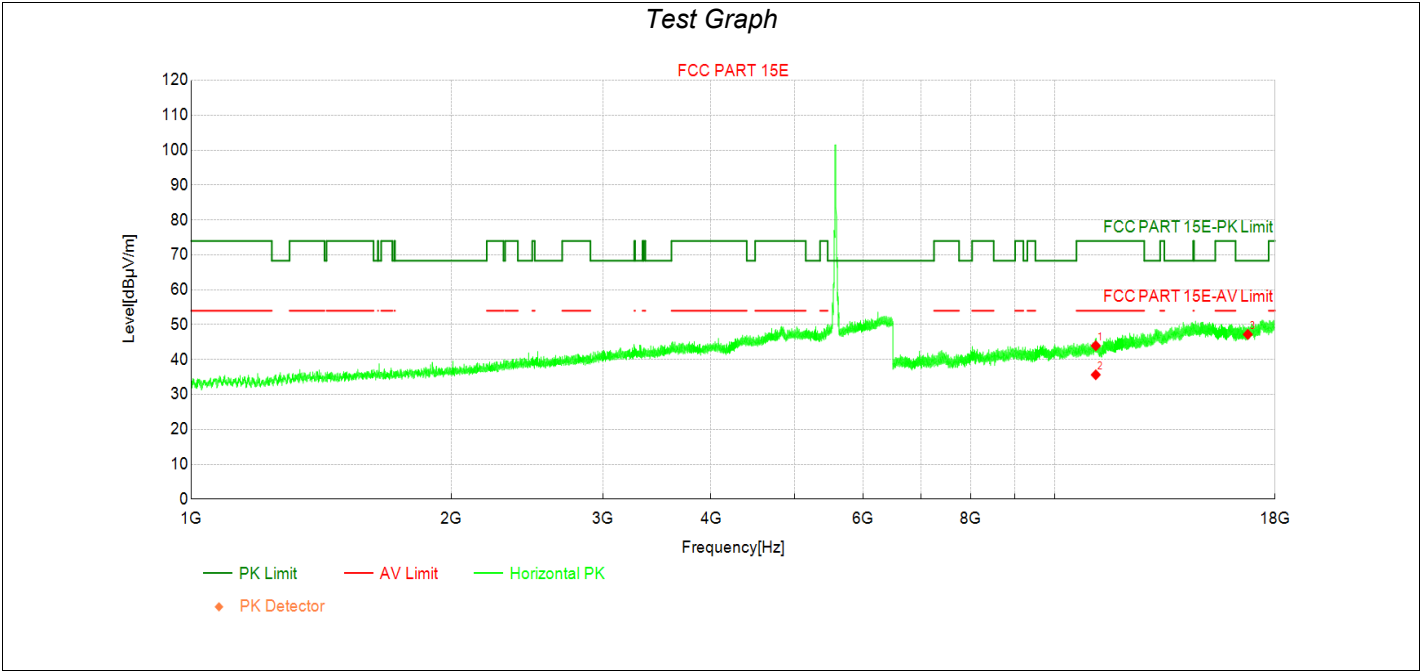


| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11160.00        | 34.42          | 43.95          | 9.53          | 74.00          | 30.05       | PK  | Horizo | PASS    |
| 2         | 11160.00        | 26.11          | 35.64          | 9.53          | 54.00          | 18.36       | AV  | Horizo | PASS    |
| 3         | 16740.00        | 29.25          | 47.21          | 17.96         | 68.30          | 21.09       | PK  | Horizo | PASS    |

Transmit at 5580MHz by 802.11ac(20MHz) with Ant2+3

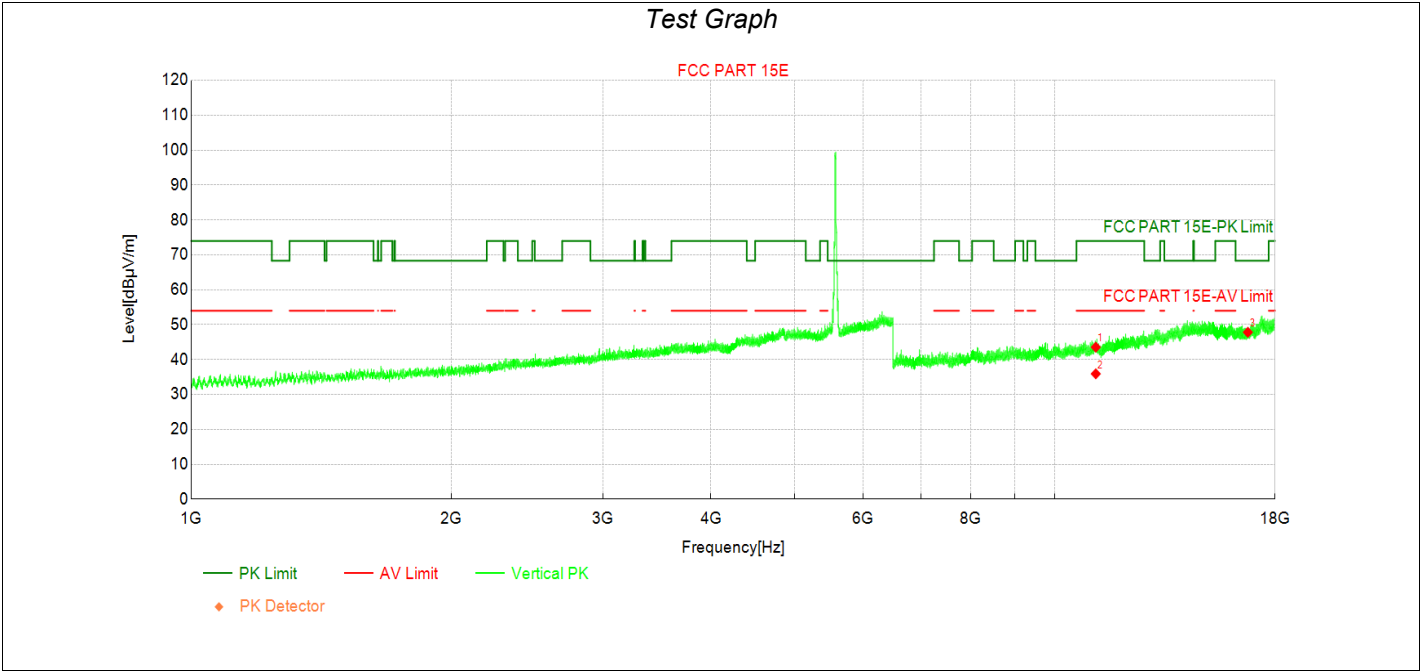

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11160.00        | 34.02          | 43.55          | 9.53          | 74.00          | 30.45       | PK  | Vertic | PASS    |
| 2         | 11160.00        | 26.38          | 35.91          | 9.53          | 54.00          | 18.09       | AV  | Vertic | PASS    |
| 3         | 16740.00        | 29.86          | 47.82          | 17.96         | 68.30          | 20.48       | PK  | Vertic | PASS    |

Transmit at 5700MHz by 802.11ac(20MHz) with Ant2+3

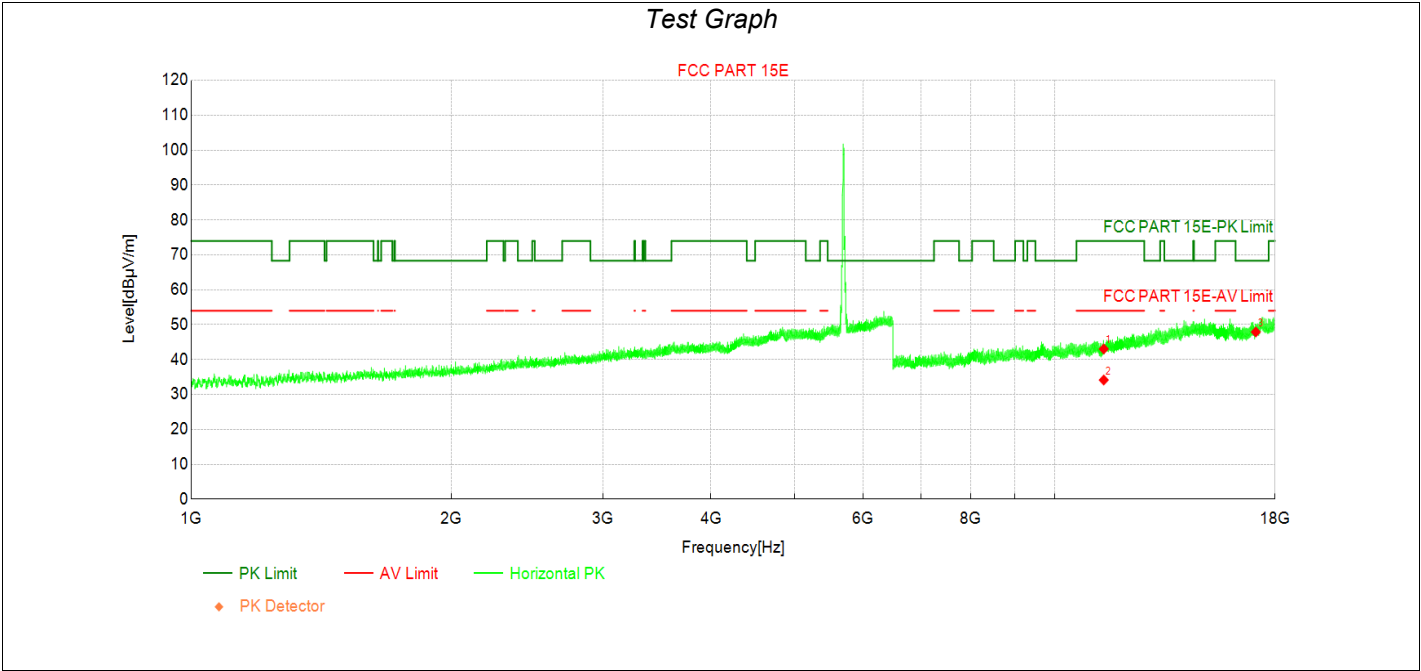

| Data List |                 |                |                |               |                |             |     |        |         |
|-----------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO        | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1         | 11400.00        | 32.90          | 43.04          | 10.14         | 74.00          | 30.96       | PK  | Horizo | PASS    |
| 2         | 11400.00        | 24.00          | 34.14          | 10.14         | 54.00          | 19.86       | AV  | Horizo | PASS    |
| 3         | 17100.00        | 28.82          | 47.90          | 19.08         | 68.30          | 20.40       | PK  | Horizo | PASS    |