

SAR Plots

- Verification Plots
- SAR Test Plots

DT&C Co., Ltd.

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:1d175

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.962 \text{ S/m}$; $\epsilon_r = 41.505$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.08, 6.08, 6.08); Calibrated: 1/27/2021 Electronics: DAE3 Sn520
Sensor-Surface: 3mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-04-09; Ambient Temp: 21.1; Tissue Temp: 21.0

900 MHz System Verification (250 mW)


Area Scan (5x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 2.63 W/kg; SAR(10 g) = 1.73 W/kg

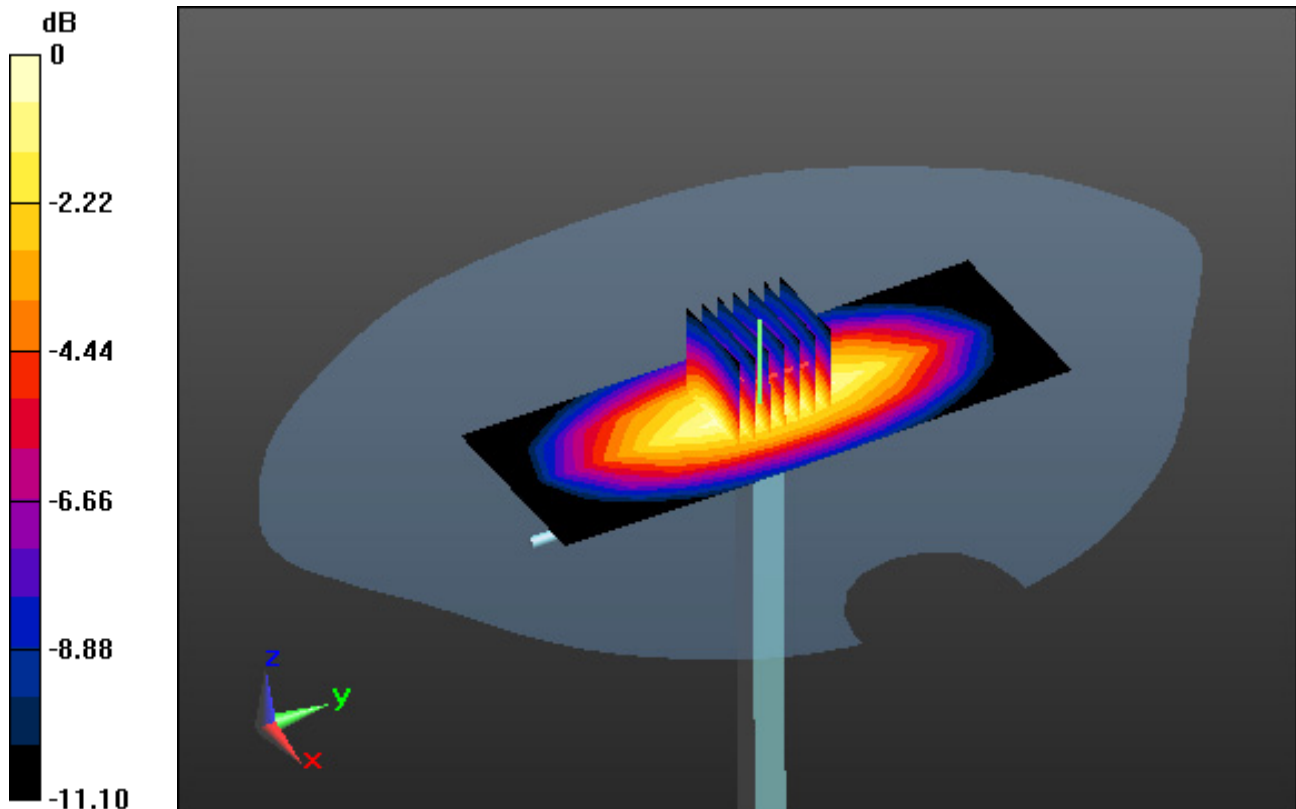

DT&C Co., Ltd.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:920

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 38.827$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.89, 7.89, 7.89); Calibrated: 11/27/2020 Electronics: DAE4 Sn1396
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-04-16; Ambient Temp: 20.7; Tissue Temp: 20.6

2450 MHz System Verification (100 mW)


Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.02 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.26 W/kg; SAR(10 g) = 2.47 W/kg

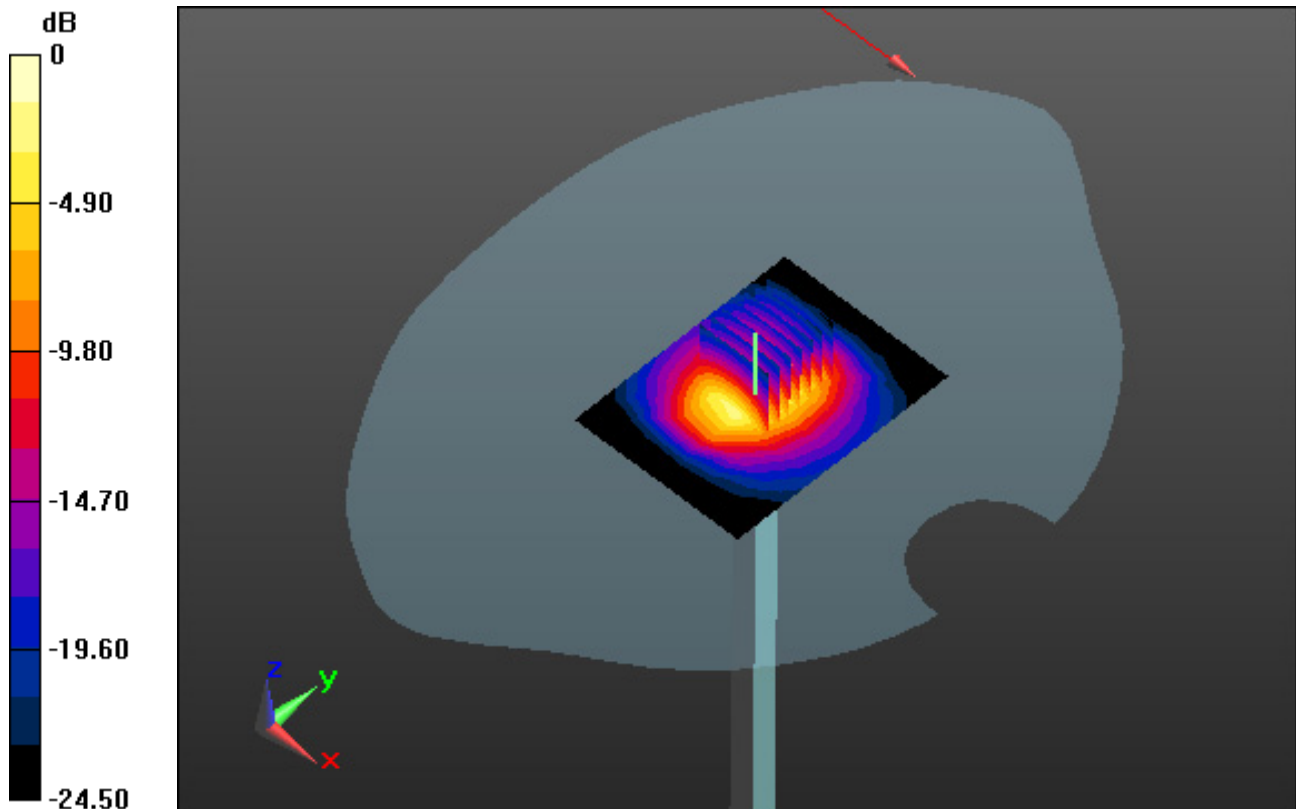

0 dB = 8.34 W/kg

DT&C Co., Ltd.

DUT: RF300; Type: Gun

Communication System: UID 0, RFID (0); Frequency: 915.25 MHz; Duty Cycle: 1:3.306

Medium parameters used: $f = 915.25$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 41.335$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(6.08, 6.08, 6.08); Calibrated: 1/27/2021 Electronics: DAE3 Sn520

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-04-09; Ambient Temp: 21.1; Tissue Temp: 21.0

Extremity SAR, Right, RFID Ch. 26, Ant Internal


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.691 W/kg

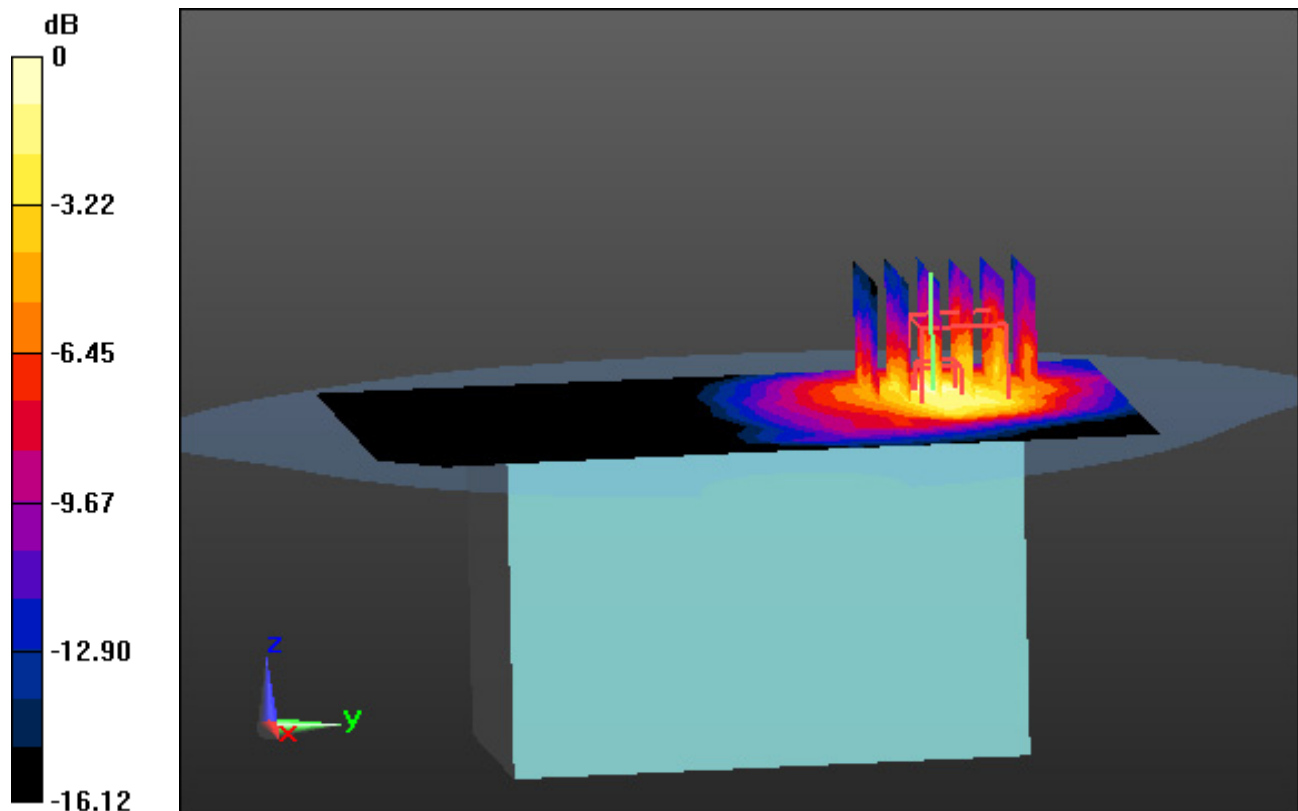

0 dB = 1.75 W/kg

DT&C Co., Ltd.

DUT: RF300; Type: Gun

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 38.854$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.89, 7.89, 7.89); Calibrated: 11/27/2020 Electronics: DAE4 Sn1396

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP_2013_10_08_right; Type: QD000P40CD; Serial: TP:1785

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-04-16; Ambient Temp: 20.7; Tissue Temp: 20.6

Extremity SAR, Top, Bluetooth 1 Mbps Ch. 39, Ant Internal


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.069 W/kg

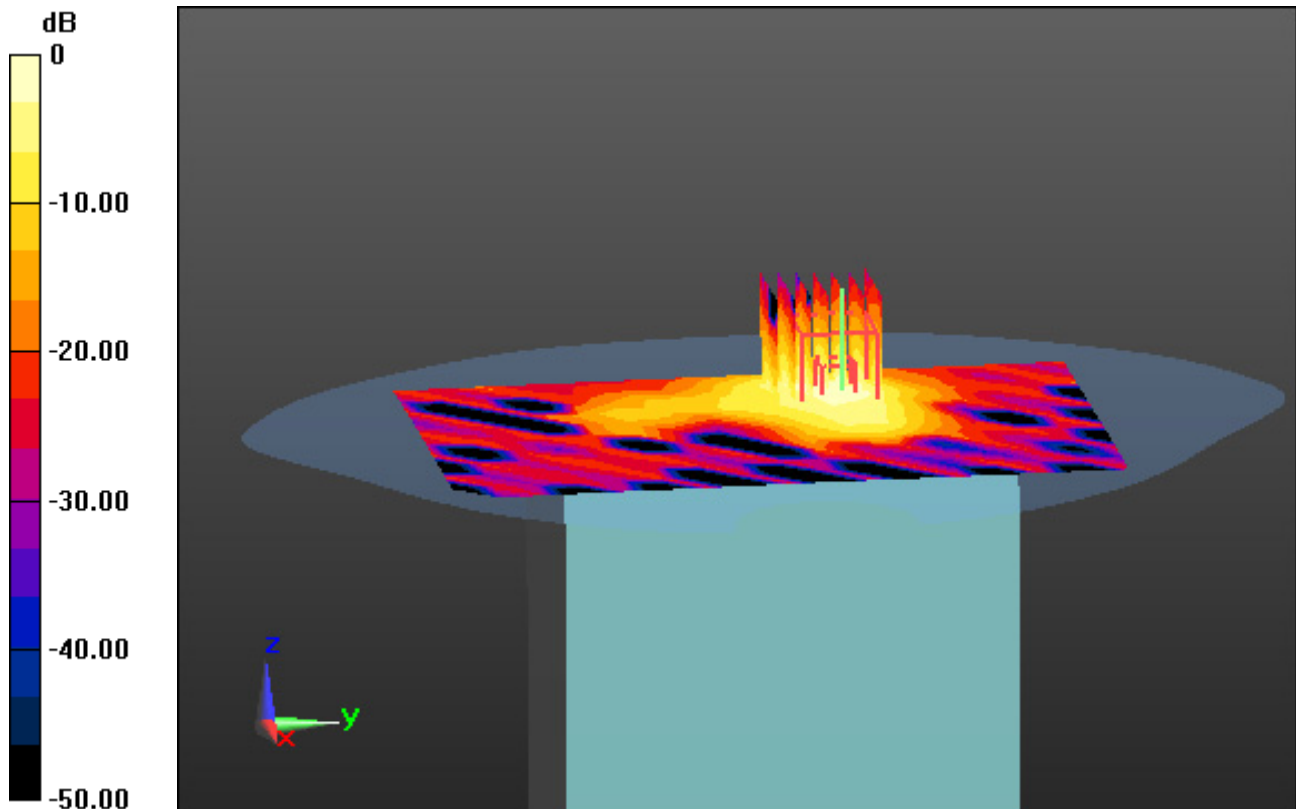

0 dB = 0.287 W/kg