

Date: 2025-8-11

01_LTE Band 12_10M_QPSK_1RB_25Offset_Bottom Side_0mm_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 41.1$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.66, 8.53, 8.82); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.163 W/kg; SAR (10g) = 0.099 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.217 W/kg; SAR (10g) = 0.10 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 68.6 %

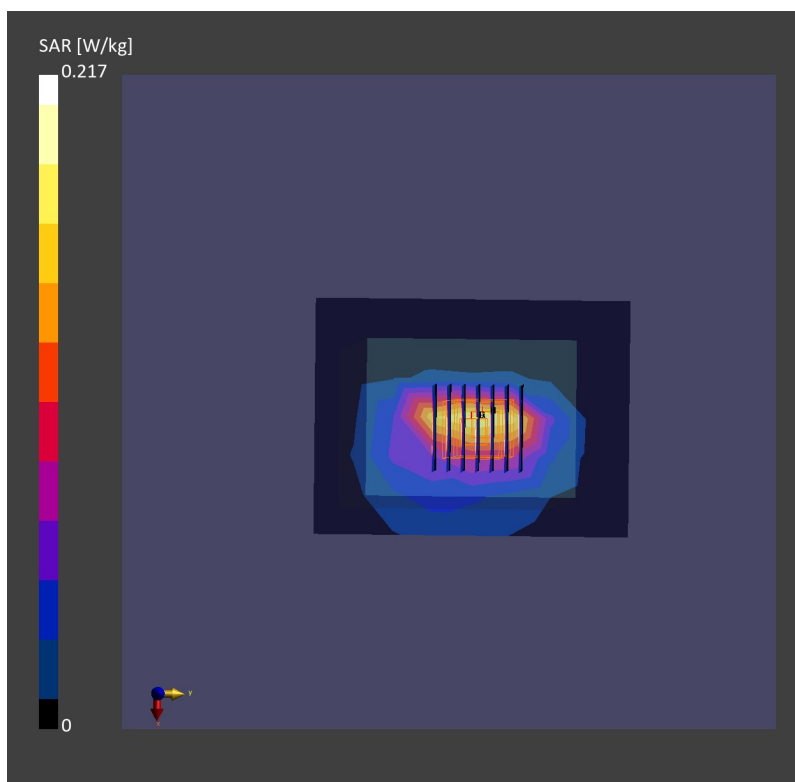

Date: 2025-8-11

02_LTE Band 13_10M_QPSK_1RB_25Offset_Bottom Side_0mm_Ch23230

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 782.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 782.0$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.0$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.66, 8.53, 8.82); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.149 W/kg; SAR (10g) = 0.089 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.201 W/kg; SAR (10g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 68.3 %

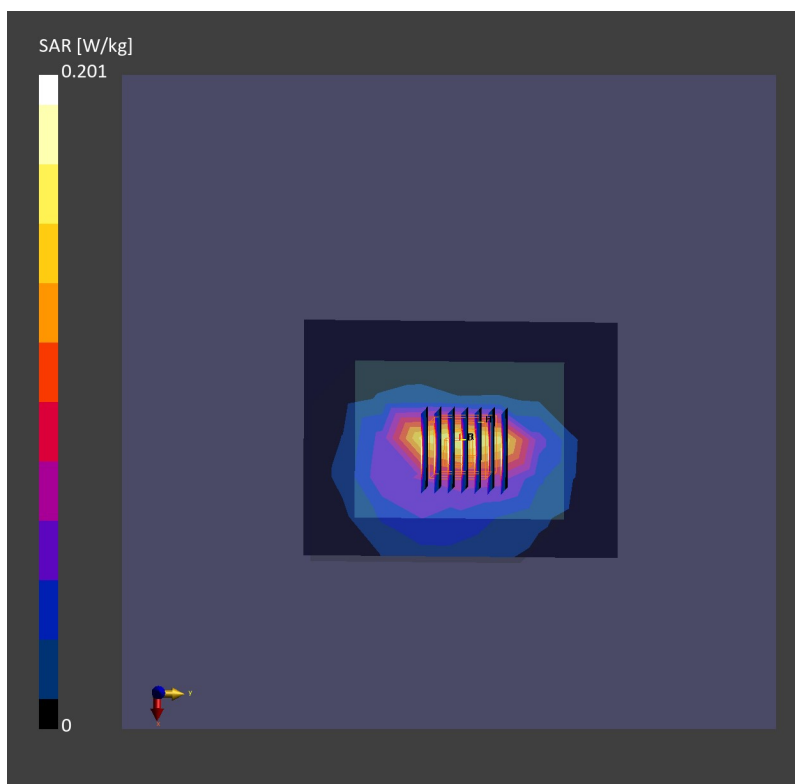

Date: 2025-8-12

03_WCDMA V_RMC 12.2Kbps_Bottom Side_0mm_Ch4132


Communication System: UMTS-FDD; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 40.8$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.55, 8.42, 8.7); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10460-AAB

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.256 W/kg; SAR (10g) = 0.142 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.256 W/kg; SAR (10g) = 0.114 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 77.7 %

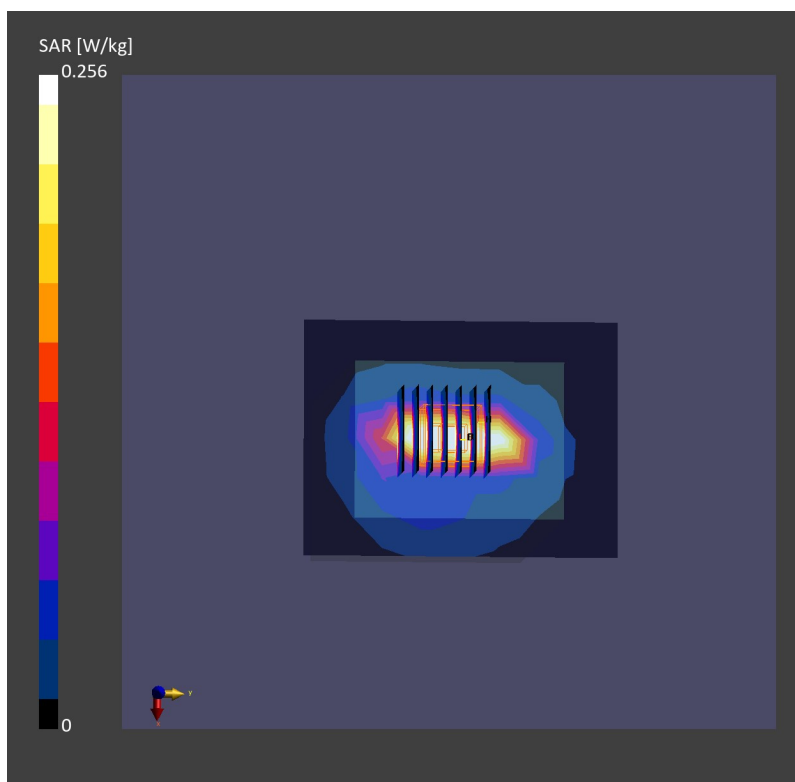

Date: 2025-8-12

04_LTE Band 5_10M_QPSK_1RB_25Offset_Bottom Side_0mm_Ch20525


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
AntennaCfg:SISO; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.940$ S/m; $\epsilon_r = 40.7$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.55, 8.42, 8.7); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.116 W/kg; SAR (10g) = 0.068 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.09 dB
SAR (1g) = 0.155 W/kg; SAR (10g) = 0.073 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 69.1 %

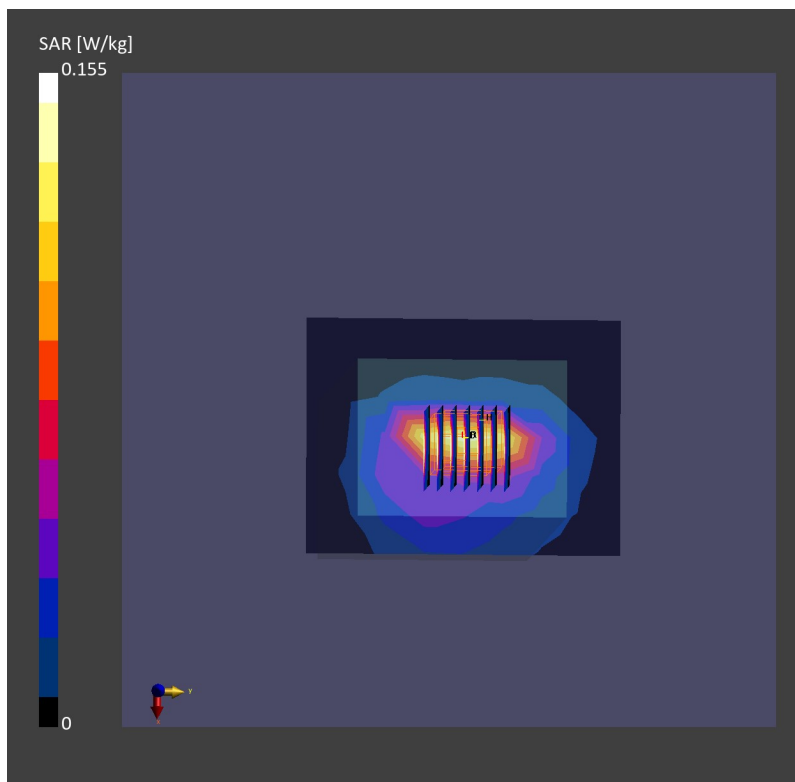

Date: 2025-8-14

05_WCDMA IV_RMC 12.2Kbps_Bottom Side_0mm_Ch1513


Communication System: UMTS-FDD; Frequency: 1752.6 MHz; Duty Cycle:1:1
 Medium: HSL Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 39.4$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.34, 7.23, 7.47); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10460-AAB

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.615 W/kg; SAR (10g) = 0.340 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.03 dB
 SAR (1g) = 0.841 W/kg; SAR (10g) = 0.411 W/kg
 Smallest distance from peaks to all points 3 dB below = 8.4 mm
 Ratio of SAR at M2 to SAR at M1 = 81.0 %

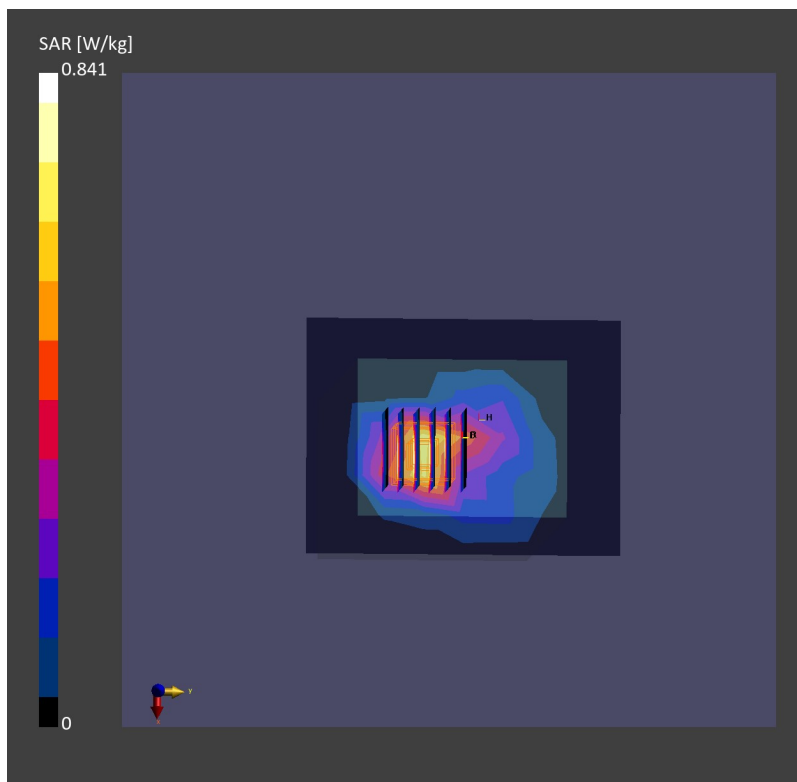

Date: 2025-8-14

06_LTE Band 4_20M_QPSK_1RB_49Offset_Bottom Side_0mm_Ch20175


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.34, 7.23, 7.47); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.504 W/kg; SAR (10g) = 0.282 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.09 dB
SAR (1g) = 0.668 W/kg; SAR (10g) = 0.331 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

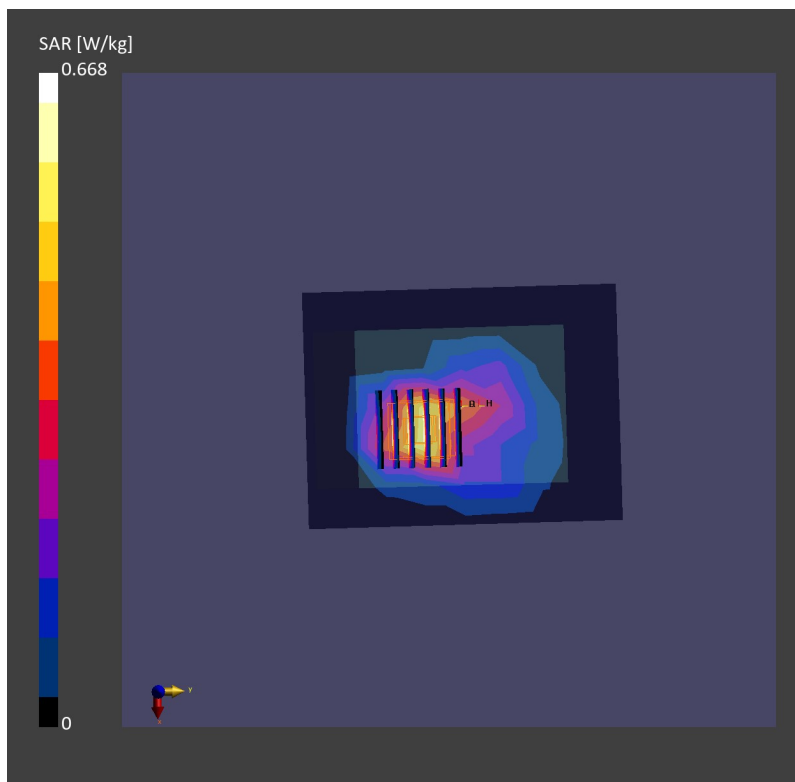

Date: 2025-8-13

07_WCDMA II_RMC 12.2Kbps_Bottom Side_0mm_Ch9262


Communication System: UMTS-FDD; Frequency: 1852.4 MHz; Duty Cycle:1:1
Medium: HSL Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 38.1$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.15, 7.04, 7.28); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10460-AAB

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.521 W/kg; SAR (10g) = 0.272 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.720 W/kg; SAR (10g) = 0.342 W/kg
Smallest distance from peaks to all points 3 dB below = 8.1 mm
Ratio of SAR at M2 to SAR at M1 = 85.0 %

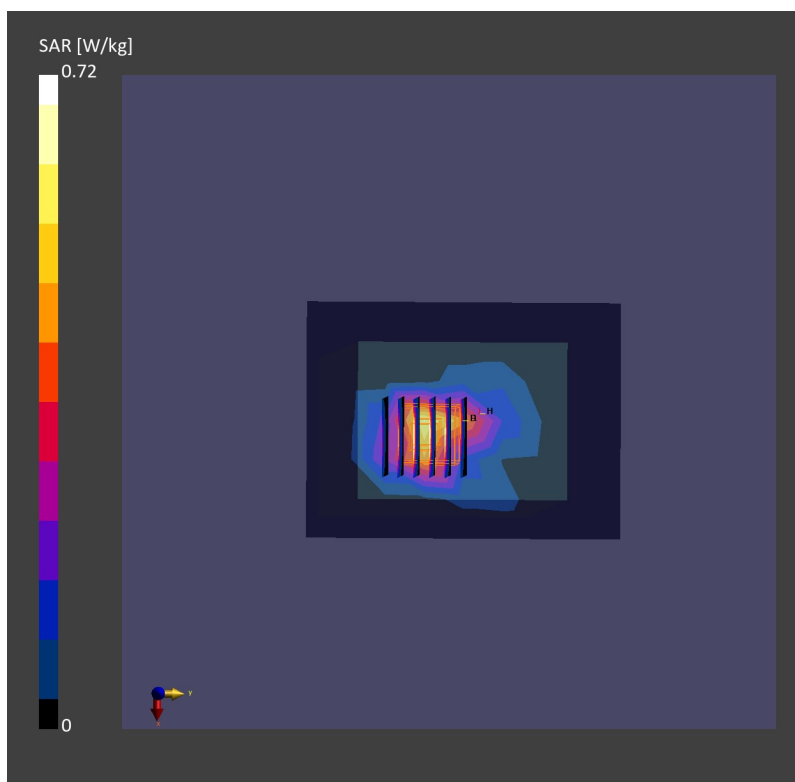

Date: 2025-8-13

08_LTE Band 2_20M_QPSK_1RB_49Offset_Bottom Side_0mm_Ch18700


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 1860.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1860.0$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 38.1$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.15, 7.04, 7.28); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.427 W/kg; SAR (10g) = 0.222 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.586 W/kg; SAR (10g) = 0.279 W/kg
Smallest distance from peaks to all points 3 dB below = 8.1 mm
Ratio of SAR at M2 to SAR at M1 = 85.1 %

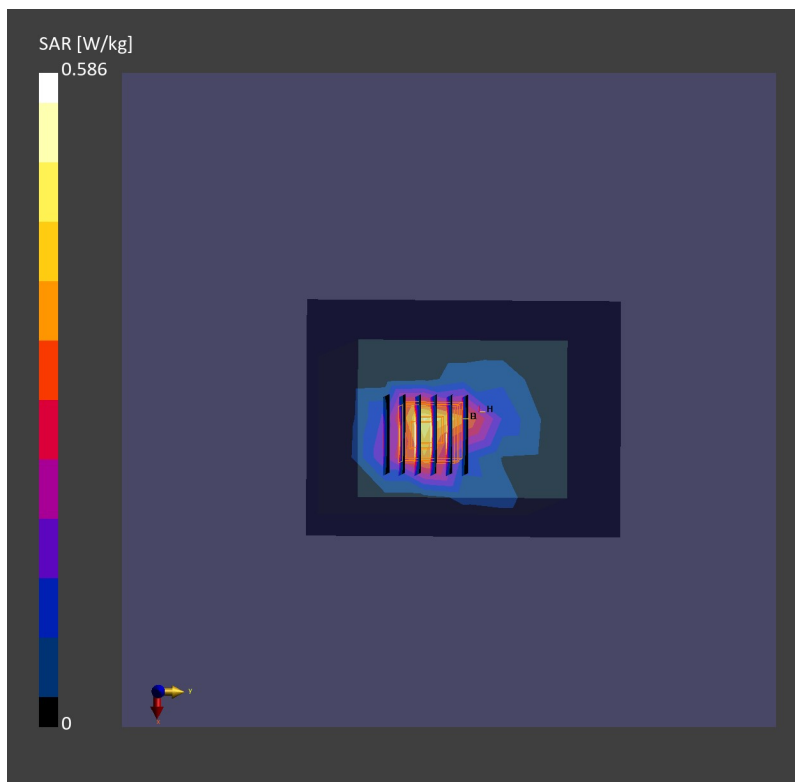

Date: 2025-8-15

09_Bluetooth_DH5 1Mbps_Left Side_0mm_Ch0


Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5);
Frequency: 2402.0 MHz; DutyCycle: 1:1.298
Medium: HSL Medium parameters used: $f = 2402.0$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 40.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.56, 6.78); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.025 W/kg; SAR (10g) = 0.011 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.027 W/kg; SAR (10g) = 0.013 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 95.1 %

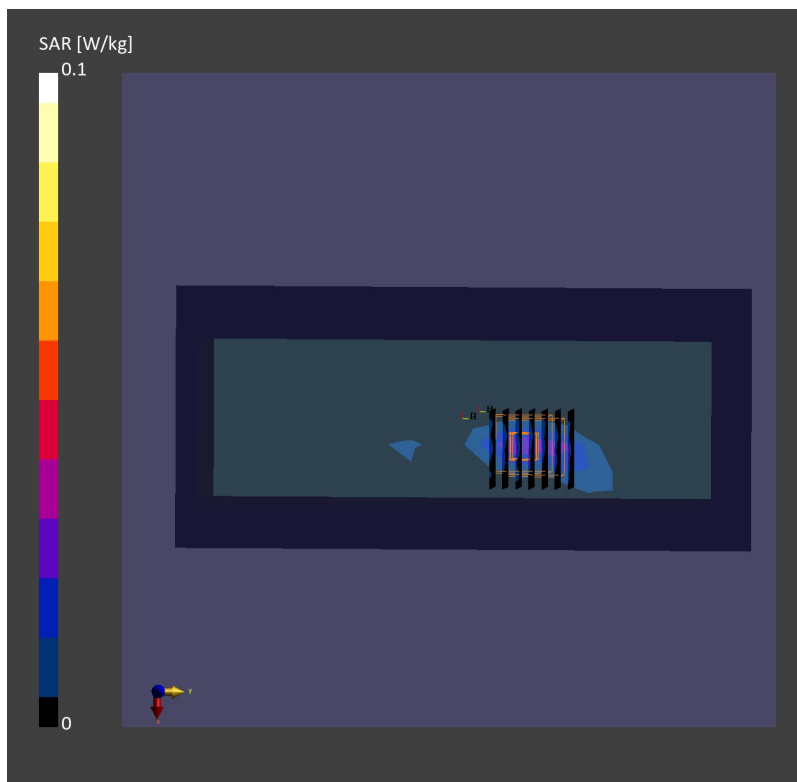

Date: 2025-10-24

10_WLAN2.4GHz_802.11b 1Mbps_Left Side_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2462.0 MHz;

Duty Cycle: 1:1.009

Medium: Medium parameters used: $f = 2462.0$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-6-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-7-11
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.043 W/kg; SAR (10g) = 0.018 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.046 W/kg; SAR (10g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.5 %

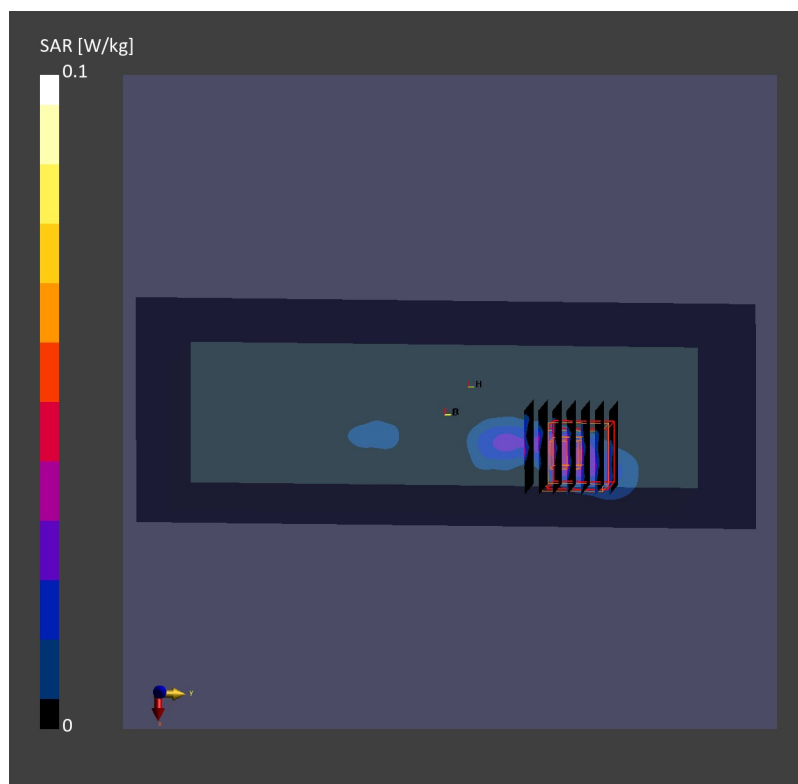

Date: 2025-10-25

11_WLAN5GHz_802.11n-HT40 MCS0_Left Side_0mm_Ch62

Communication System: IEEE 802.11n WiFi (40MHz, MCS0); Frequency: 5310.0 MHz;

Duty Cycle: 1:1.032

Medium: Medium parameters used: $f = 5310.0$ MHz; $\sigma = 4.58$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.00); Calibrated: 2025-6-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-7-11
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10114-CAD

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.444 W/kg; SAR (10g) = 0.119 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.563 W/kg; SAR (10g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.6 %

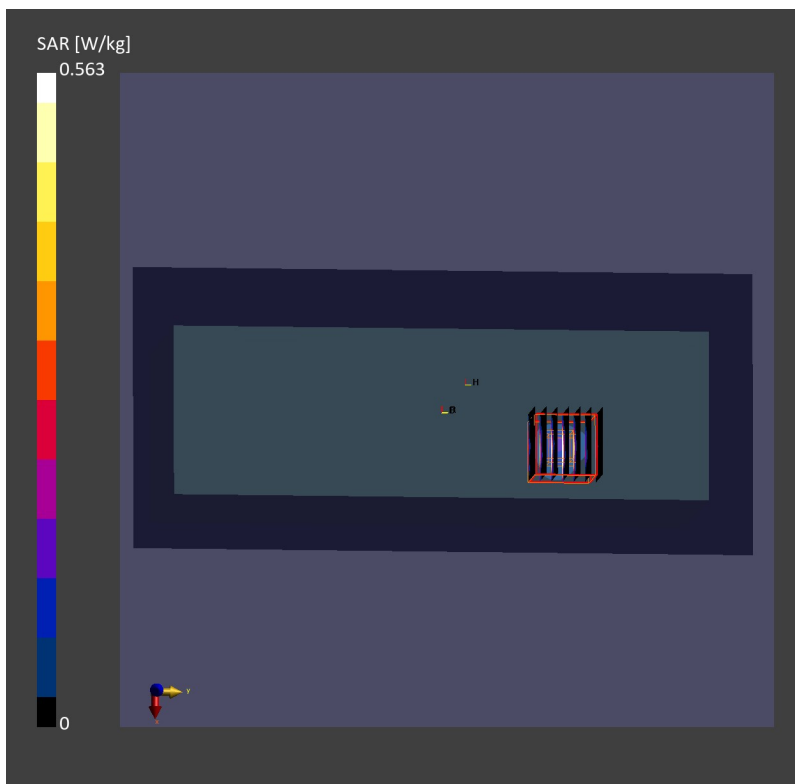

Date: 2025-10-25

12_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_0mm_Ch138


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5690.0 MHz; Duty Cycle: 1:1.087
Medium: Medium parameters used: $f = 5690.0$ MHz; $\sigma = 4.96$ S/m; $\epsilon_r = 34.9$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025-6-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-7-11
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.302 W/kg; SAR (10g) = 0.087 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.09 dB
SAR (1g) = 0.349 W/kg; SAR (10g) = 0.075 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 55.5 %

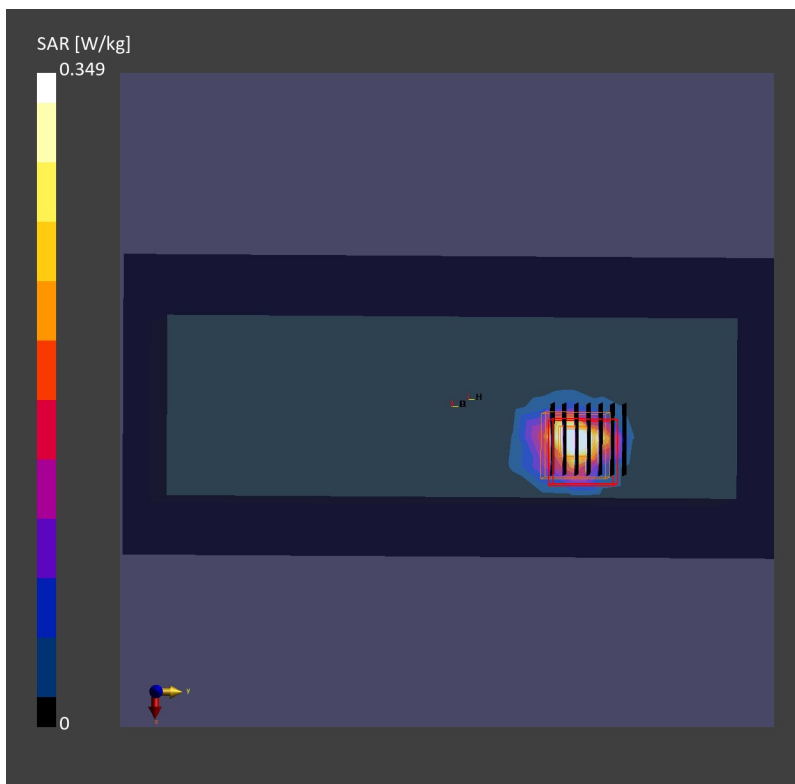

Date: 2025-8-16

13_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_0mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5775.0 MHz; Duty Cycle: 1:1.087
Medium: HSL Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35.2$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.86, 4.78, 4.94); Calibrated: 2025-3-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2024-12-17
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.446 W/kg; SAR (10g) = 0.141 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.08 dB
SAR (1g) = 0.493 W/kg; SAR (10g) = 0.140 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 56.9 %

