




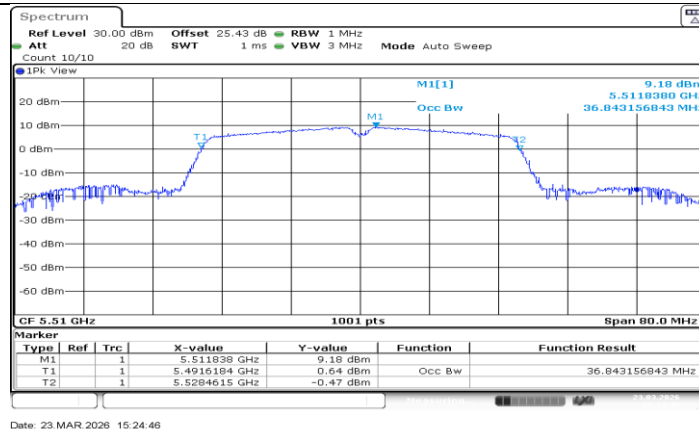


11N40SISO_Ant1_5510

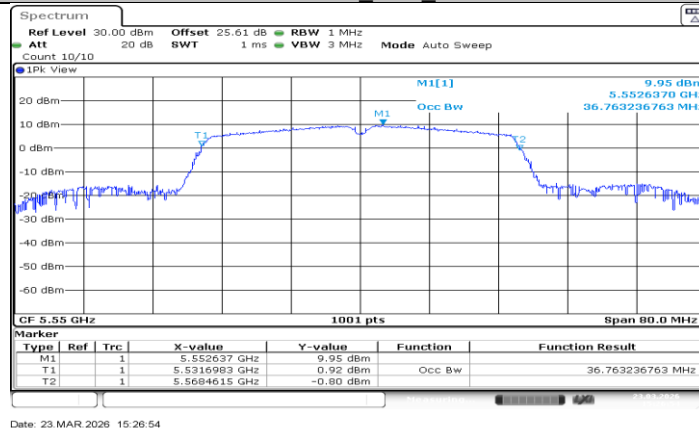


11N40SISO_Ant1_5550

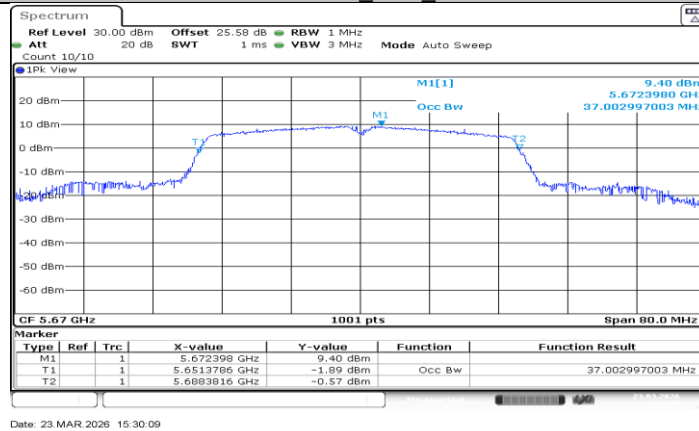


11N40SISO_Ant1_5670

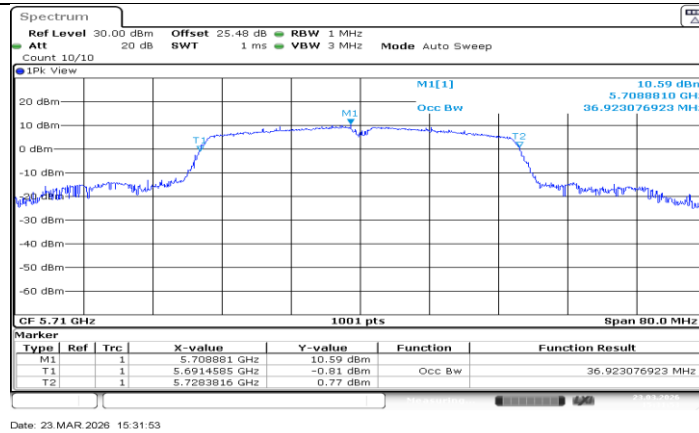


11N40SISO_Ant1_5710

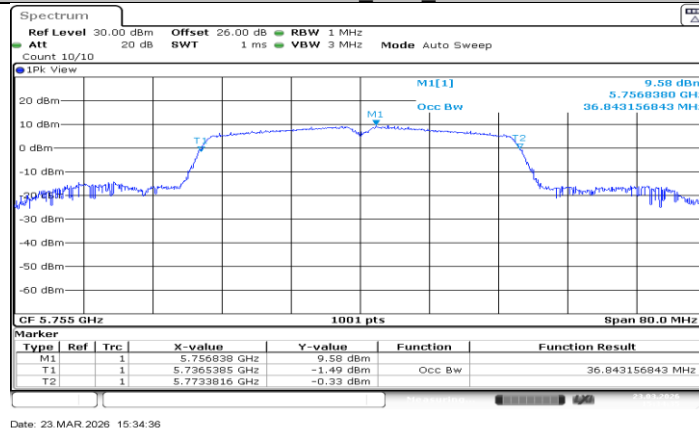


11N40SISO_Ant1_5755

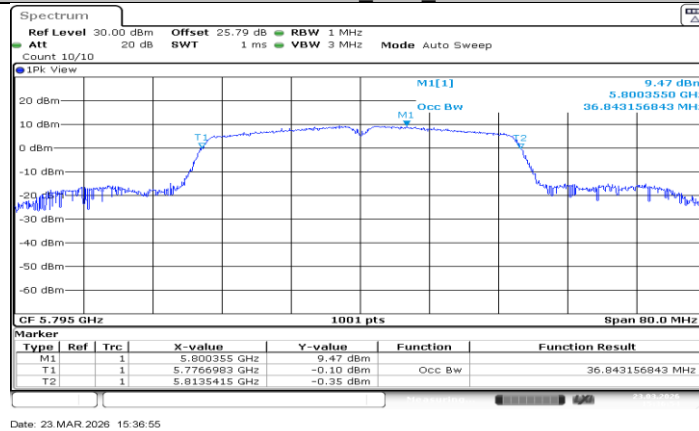


11N40SISO_Ant1_5795

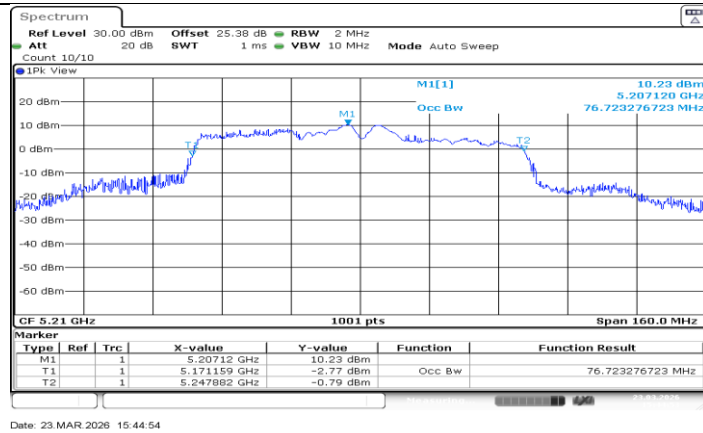


11AC80SISO_Ant1_5210

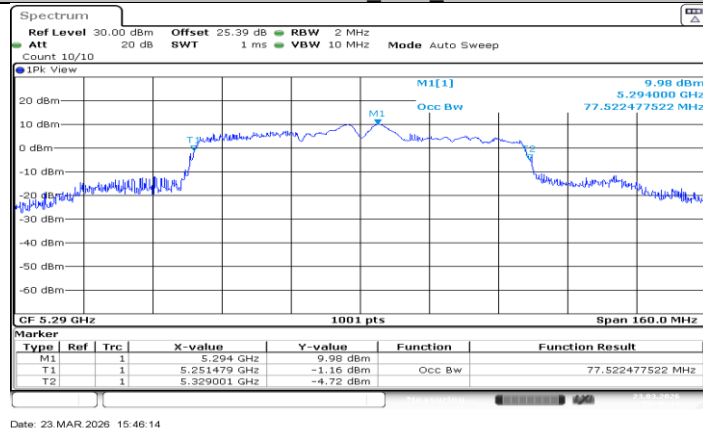


11AC80SISO_Ant1_5290

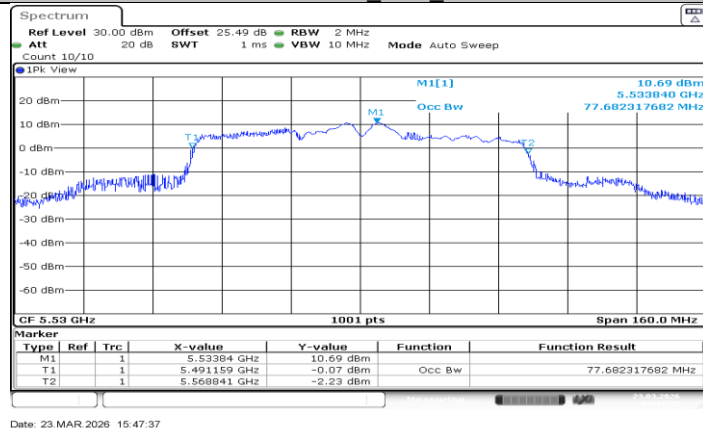


11AC80SISO_Ant1_5530

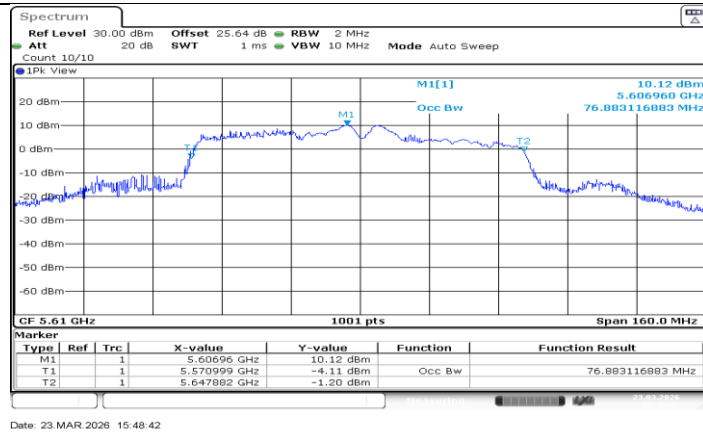

11AC80SISO_Ant1_5610

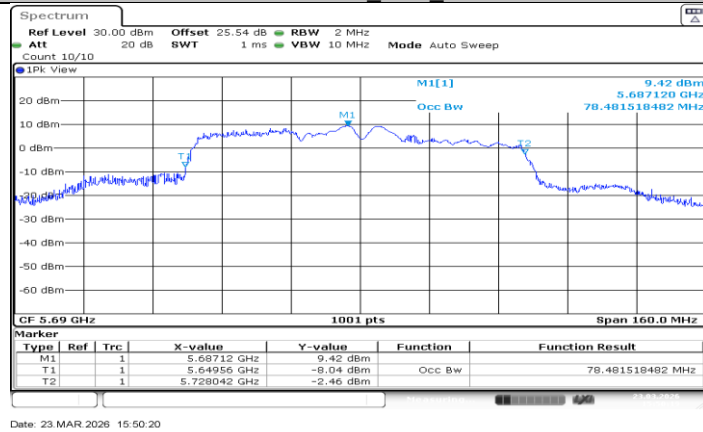

11AC80SISO_Ant1_5690

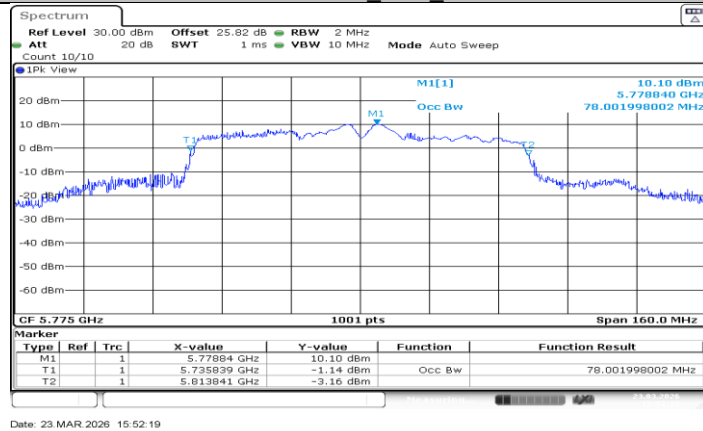


11AC80SISO_Ant1_5775


11.3. APPENDIX C: MIN EMISSION BANDWIDTH

11.3.1. Test Result


Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	15.12	5712.44	5727.56	---	---
		5720 UNII-2C	12.56	5712.44	5725	---	---
		5720 UNII-3	2.56	5725	5727.56	≥0.5	PASS
		5745	15.08	5737.44	5752.52	≥0.5	PASS
		5785	15.12	5777.44	5792.56	≥0.5	PASS
		5825	15.12	5817.44	5832.56	≥0.5	PASS
11N20SISO	Ant1	5720	15.12	5712.44	5727.56	---	---
		5720 UNII-2C	12.56	5712.44	5725	---	---
		5720 UNII-3	2.56	5725	5727.56	≥0.5	PASS
		5745	15.48	5737.40	5752.88	≥0.5	PASS
		5785	15.12	5777.44	5792.56	≥0.5	PASS
		5825	15.36	5817.40	5832.76	≥0.5	PASS
11N40SISO	Ant1	5710	35.20	5692.40	5727.60	---	---
		5710 UNII-2C	32.6	5692.40	5725	---	---
		5710 UNII-3	2.6	5725	5727.60	≥0.5	PASS
		5755	35.04	5737.48	5772.52	≥0.5	PASS
		5795	35.12	5777.48	5812.60	≥0.5	PASS
		5690	75.20	5652.40	5727.60	---	---
11AC80SISO	Ant1	5690 UNII-2C	72.6	5652.40	5725	---	---
		5690 UNII-3	2.6	5725	5727.60	≥0.5	PASS
		5775	75.20	5737.40	5812.60	≥0.5	PASS

11.3.2. Test Graphs

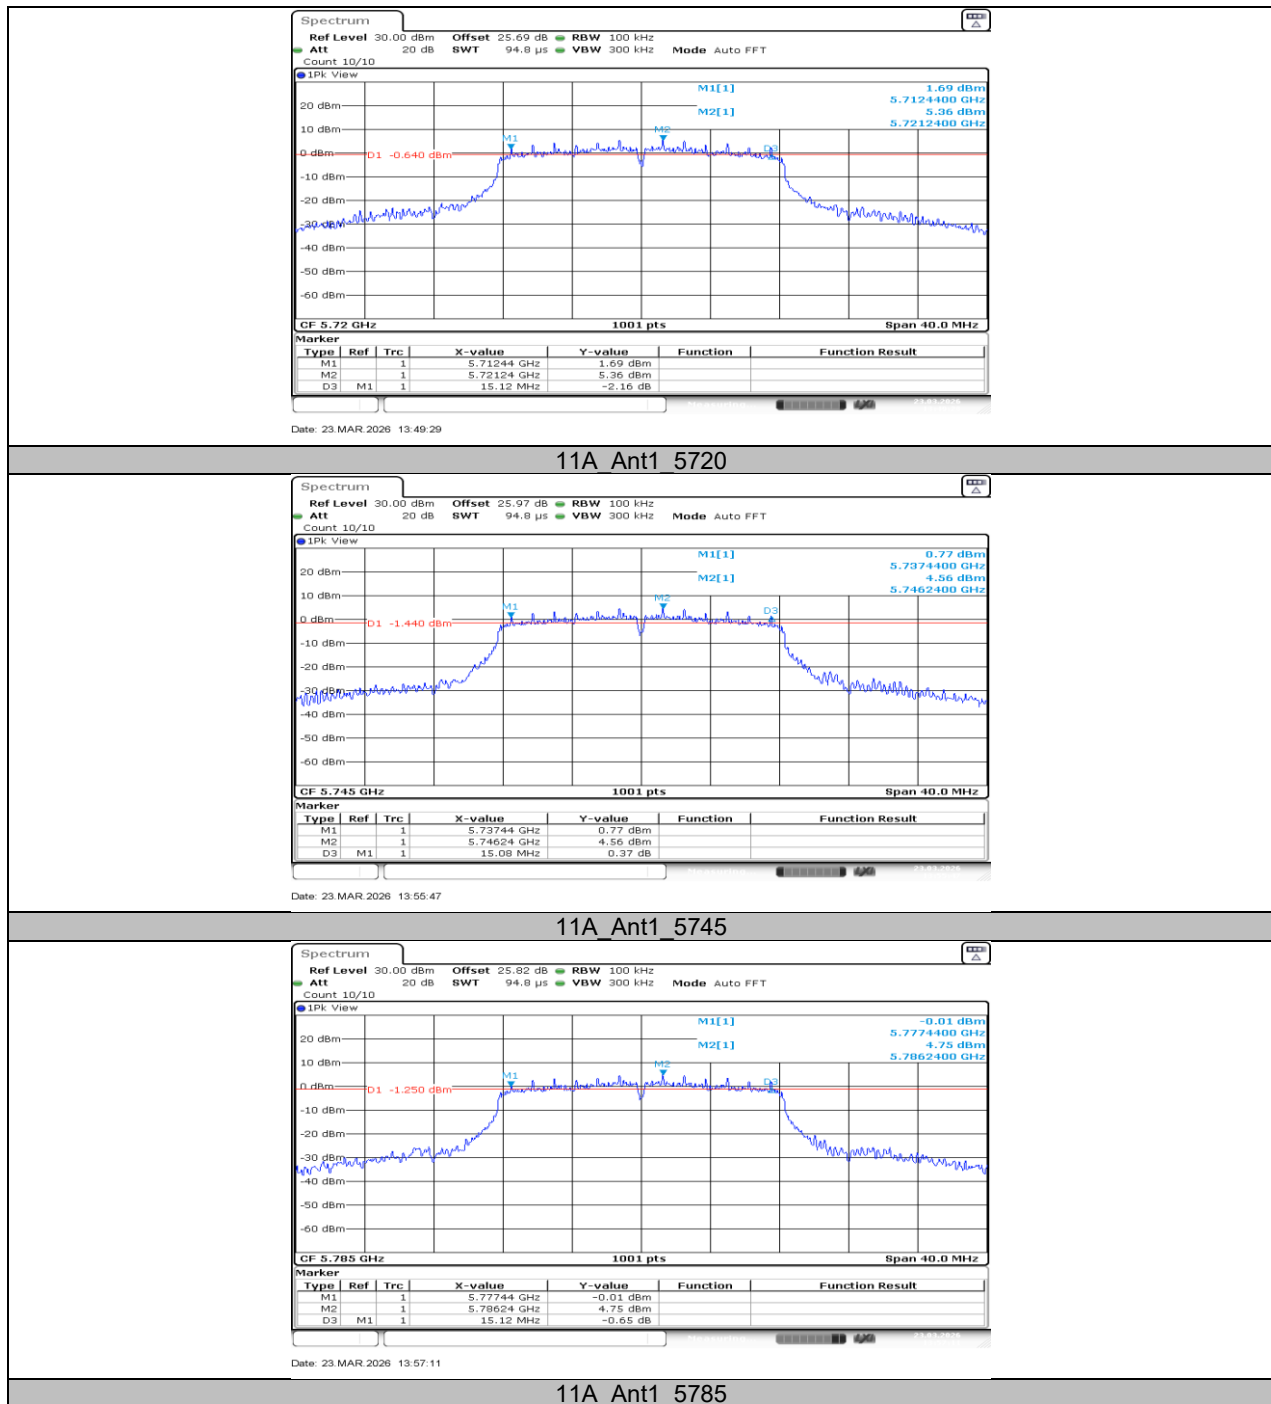


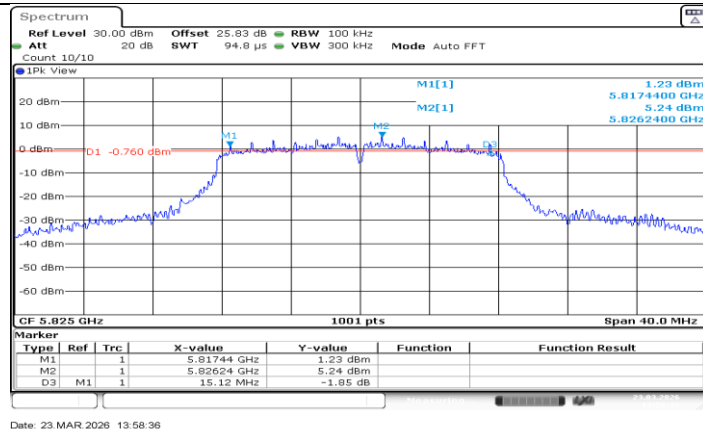


11A_Ant1_5825

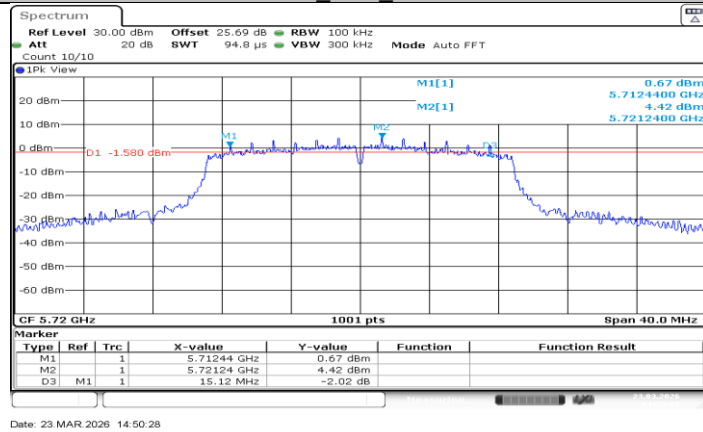


11N20SISO_Ant1_5720

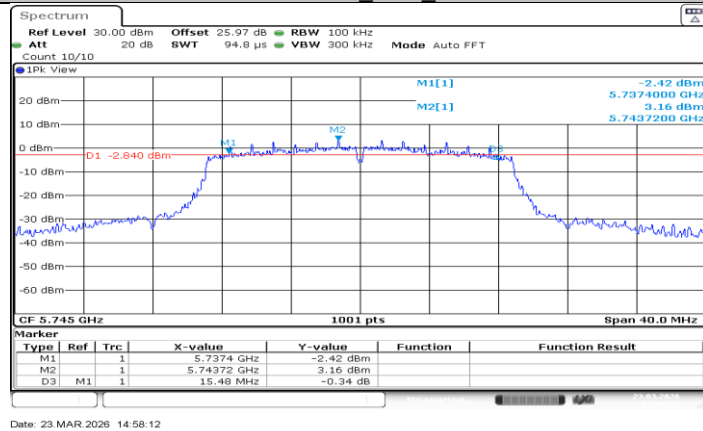


11N20SISO_Ant1_5745

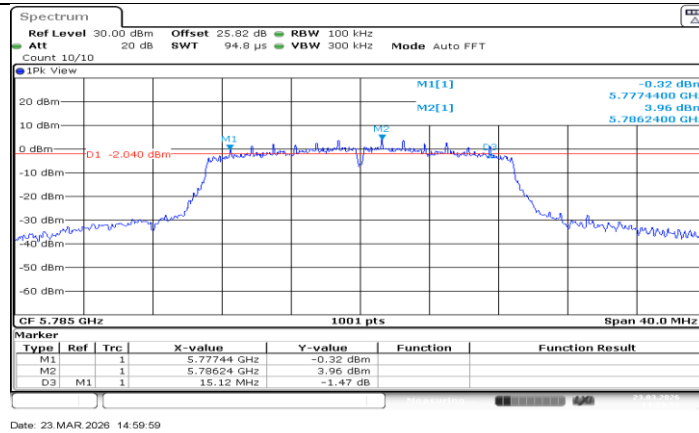


11N20SISO_Ant1_5785

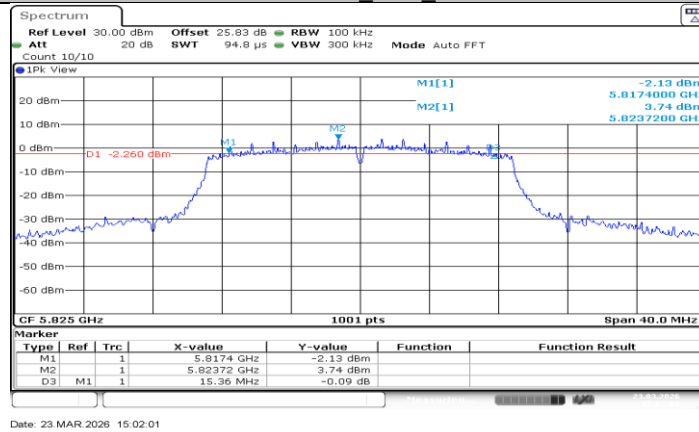


11N20SISO_Ant1_5825

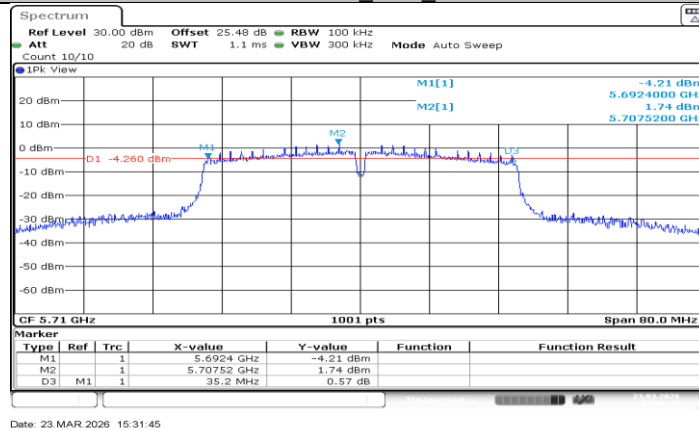


11N40SISO_Ant1_5710

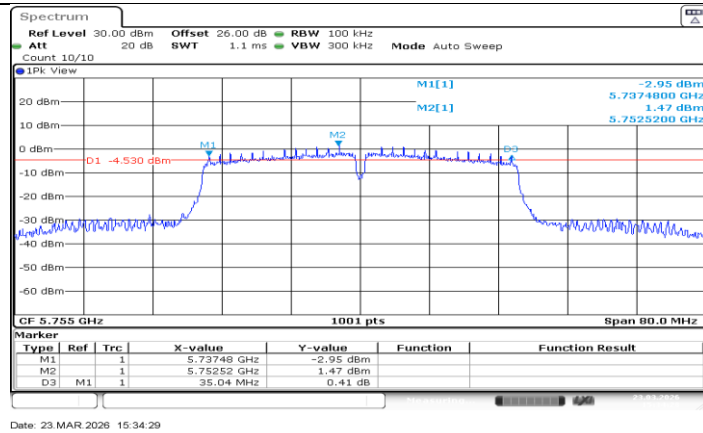


11N40SISO_Ant1_5755

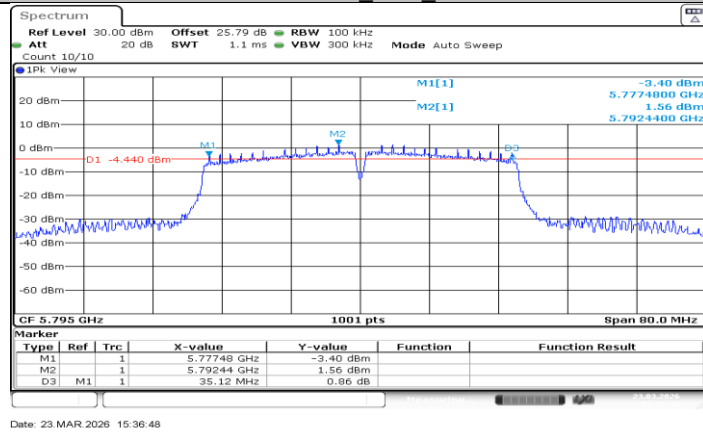

11N40SISO_Ant1_5795

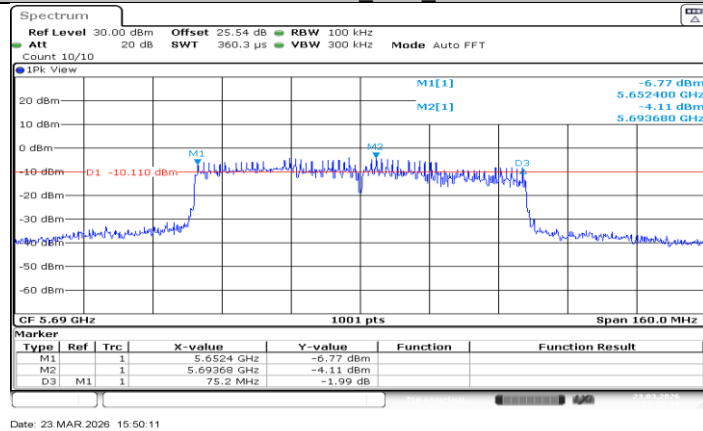

11AC80SISO_Ant1_5690

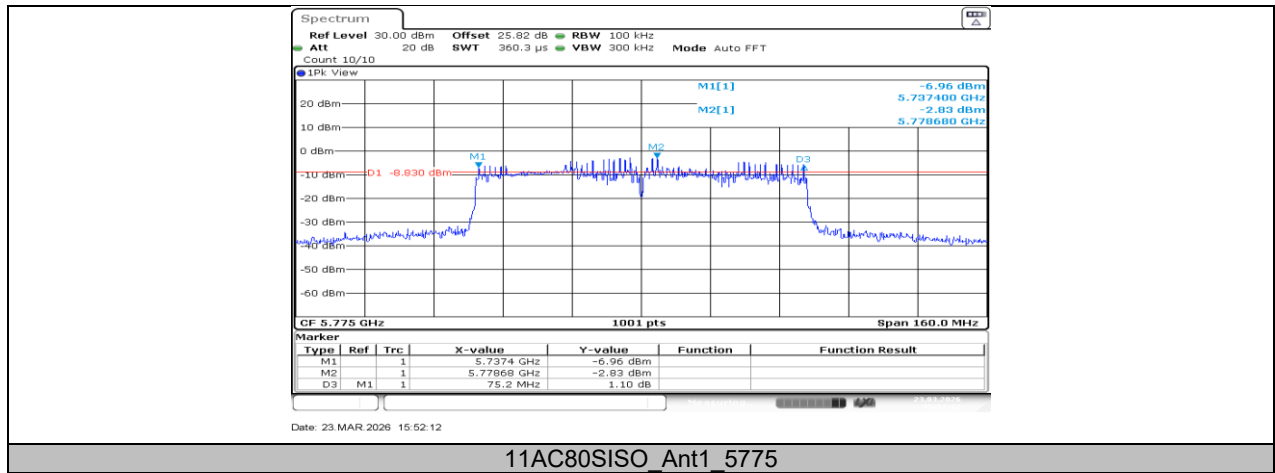

11.4. APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER


11.4.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Power [dBm]	FCC Limit [dBm]	Verdict
11A	Ant1	5180	14.40	≤23.98	PASS
		5200	14.60	≤23.98	PASS
		5240	14.05	≤23.98	PASS
		5260	15.79	≤23.98	PASS
		5280	15.09	≤23.98	PASS
		5320	15.19	≤23.98	PASS
		5500	13.62	≤23.95	PASS
		5580	14.24	≤23.98	PASS
		5700	13.57	≤23.97	PASS
		5720 UNII-2C	13.30	≤22.82	PASS
		5720 UNII-3	5.34	≤30.00	PASS
		5745	15.16	≤30.00	PASS
		5785	15.48	≤30.00	PASS
		5825	15.75	≤30.00	PASS
11N20SISO	Ant1	5180	14.58	≤23.98	PASS
		5200	14.64	≤23.98	PASS
		5240	13.92	≤23.98	PASS
		5260	14.96	≤23.98	PASS
		5280	14.03	≤23.98	PASS
		5320	14.27	≤23.98	PASS
		5500	13.62	≤23.98	PASS
		5580	14.32	≤23.98	PASS
		5700	13.62	≤23.98	PASS
		5720 UNII-2C	13.14	≤22.84	PASS
		5720 UNII-3	5.62	≤30.00	PASS
		5745	14.30	≤30.00	PASS
		5785	14.36	≤30.00	PASS
		5825	14.74	≤30.00	PASS
11N40SISO	Ant1	5190	14.59	≤23.98	PASS
		5230	14.18	≤23.98	PASS
		5270	13.98	≤23.98	PASS
		5310	14.20	≤23.98	PASS
		5510	11.23	≤23.98	PASS
		5550	12.35	≤23.98	PASS
		5670	11.36	≤23.98	PASS
		5710 UNII-2C	11.30	≤23.98	PASS
		5710 UNII-3	-1.78	≤30.00	PASS
		5755	14.38	≤30.00	PASS
		5795	14.59	≤30.00	PASS
11AC80SISO	Ant1	5210	13.66	≤23.98	PASS
		5290	13.21	≤23.98	PASS
		5530	11.63	≤23.98	PASS
		5610	12.20	≤23.98	PASS
		5690 UNII-2C	11.63	≤23.98	PASS
		5690 UNII-3	-5.41	≤30.00	PASS
		5775	13.54	≤30.00	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.

11.4.2. Test Graphs

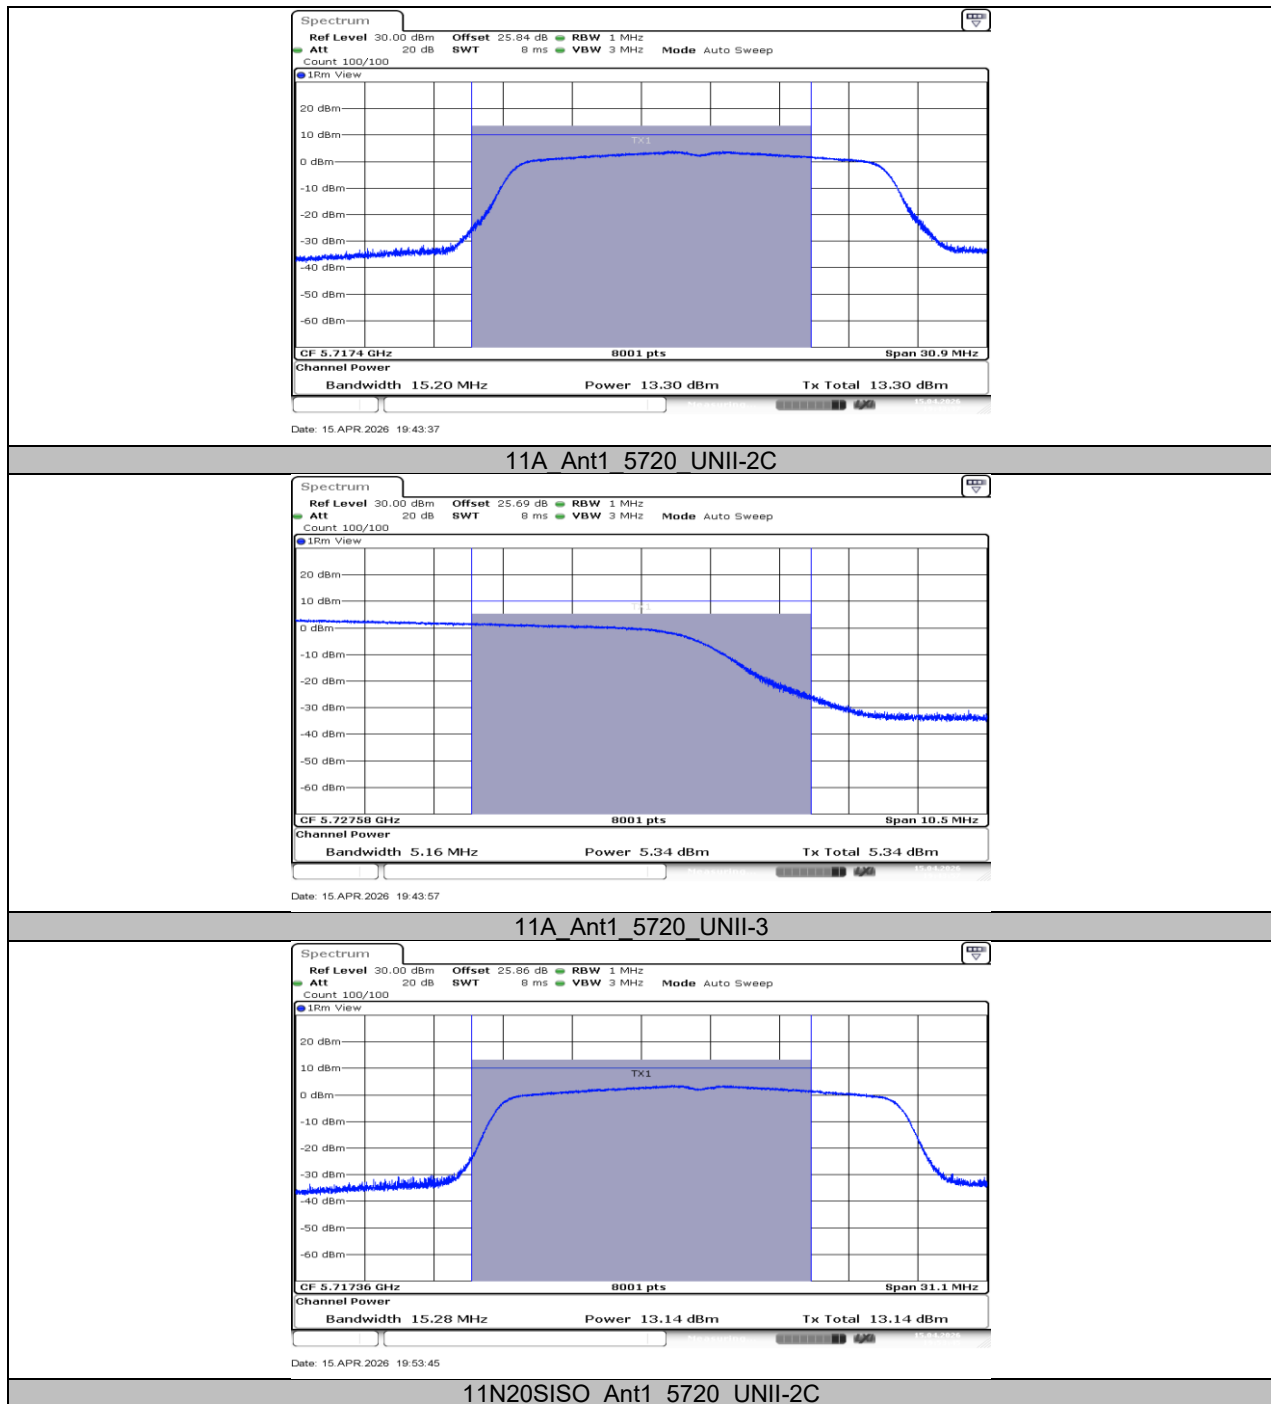


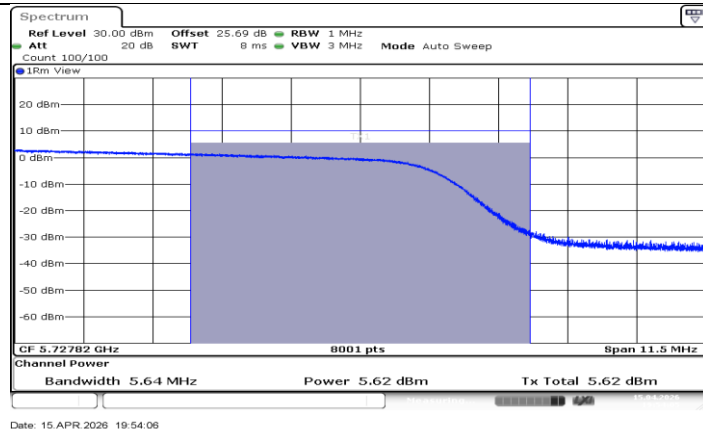


11N20SISO_Ant1_5720_UNII-3

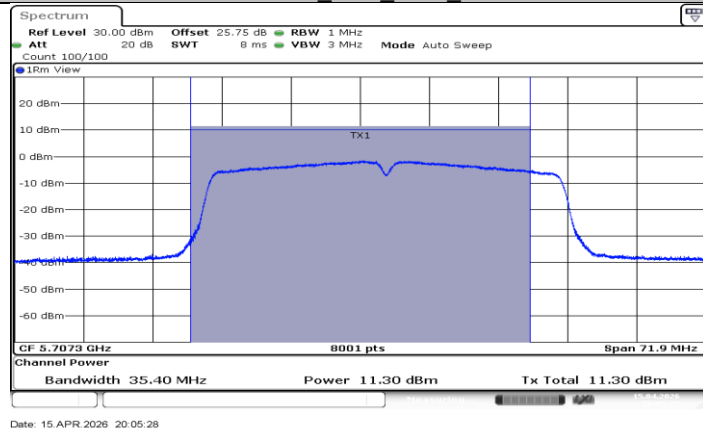

11N40SISO_Ant1_5710_UNII-2C

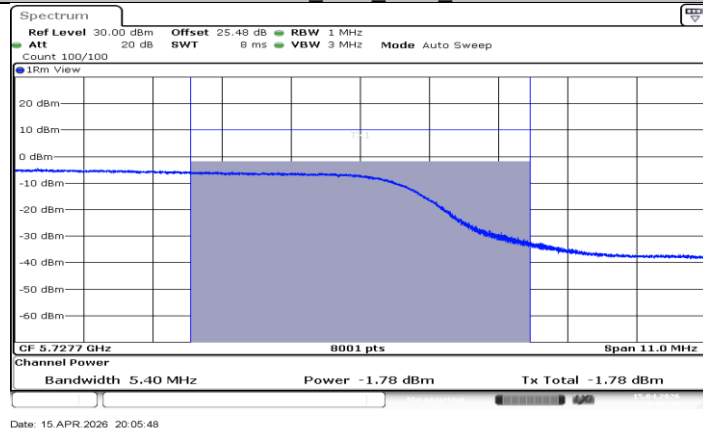

11N40SISO_Ant1_5710_UNII-3

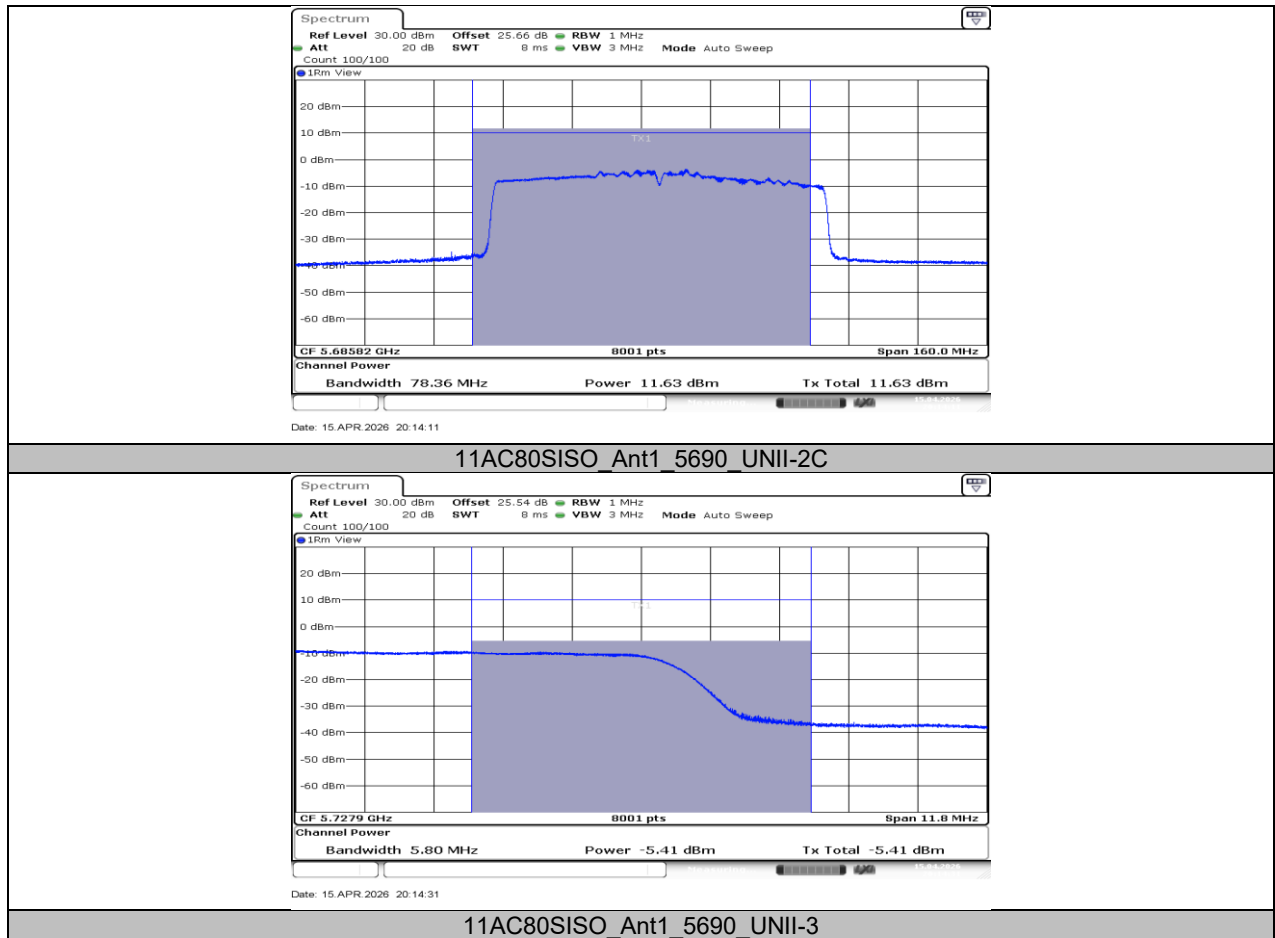

11.5. APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY


11.5.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Power [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	4.12	≤11.00	PASS
		5200	4.20	≤11.00	PASS
		5240	3.96	≤11.00	PASS
		5260	5.53	≤11.00	PASS
		5280	4.72	≤11.00	PASS
		5320	4.86	≤11.00	PASS
		5500	3.22	≤11.00	PASS
		5580	4.04	≤11.00	PASS
		5700	3.19	≤11.00	PASS
		5720 UNII-2C	3.56	≤11.00	PASS
		5720 UNII-3	-1.06	≤30.00	PASS
		5745	1.95	≤30.00	PASS
		5785	2.38	≤30.00	PASS
		5825	2.55	≤30.00	PASS
11N20SISO	Ant1	5180	4.10	≤11.00	PASS
		5200	4.08	≤11.00	PASS
		5240	3.44	≤11.00	PASS
		5260	4.41	≤11.00	PASS
		5280	3.49	≤11.00	PASS
		5320	3.62	≤11.00	PASS
		5500	3.06	≤11.00	PASS
		5580	3.83	≤11.00	PASS
		5700	3.13	≤11.00	PASS
		5720 UNII-2C	3.45	≤11.00	PASS
		5720 UNII-3	-1.48	≤30.00	PASS
		5745	1.04	≤30.00	PASS
		5785	0.90	≤30.00	PASS
		5825	1.45	≤30.00	PASS
11N40SISO	Ant1	5190	1.38	≤11.00	PASS
		5230	0.90	≤11.00	PASS
		5270	0.58	≤11.00	PASS
		5310	0.86	≤11.00	PASS
		5510	-1.95	≤11.00	PASS
		5550	-0.83	≤11.00	PASS
		5670	-1.97	≤11.00	PASS
		5710 UNII-2C	-1.88	≤11.00	PASS
		5710 UNII-3	-8.57	≤30.00	PASS
		5755	-2.03	≤30.00	PASS
		5795	-1.63	≤30.00	PASS
11AC80SISO	Ant1	5210	-2.20	≤11.00	PASS
		5290	-2.85	≤11.00	PASS
		5530	-3.85	≤11.00	PASS
		5610	-3.13	≤11.00	PASS
		5690 UNII-2C	-4.07	≤11.00	PASS
		5690 UNII-3	-12.35	≤30.00	PASS
		5775	-4.86	≤30.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

11.5.2. Test Graphs

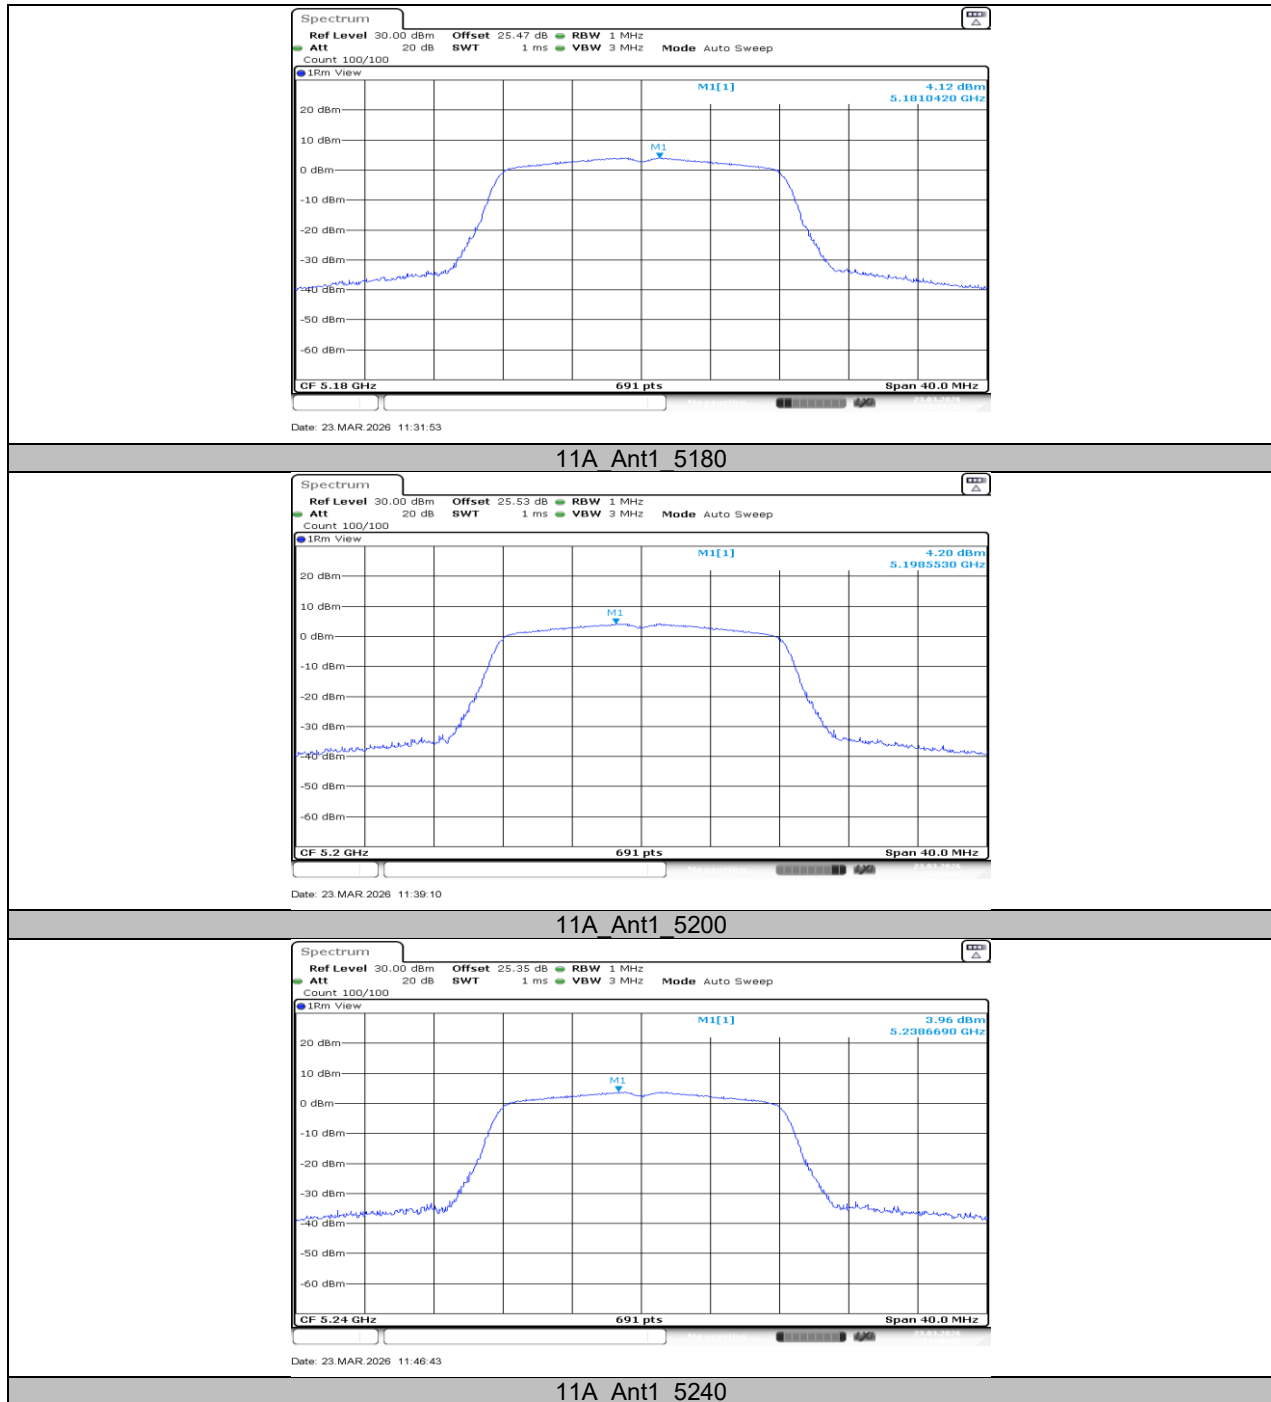

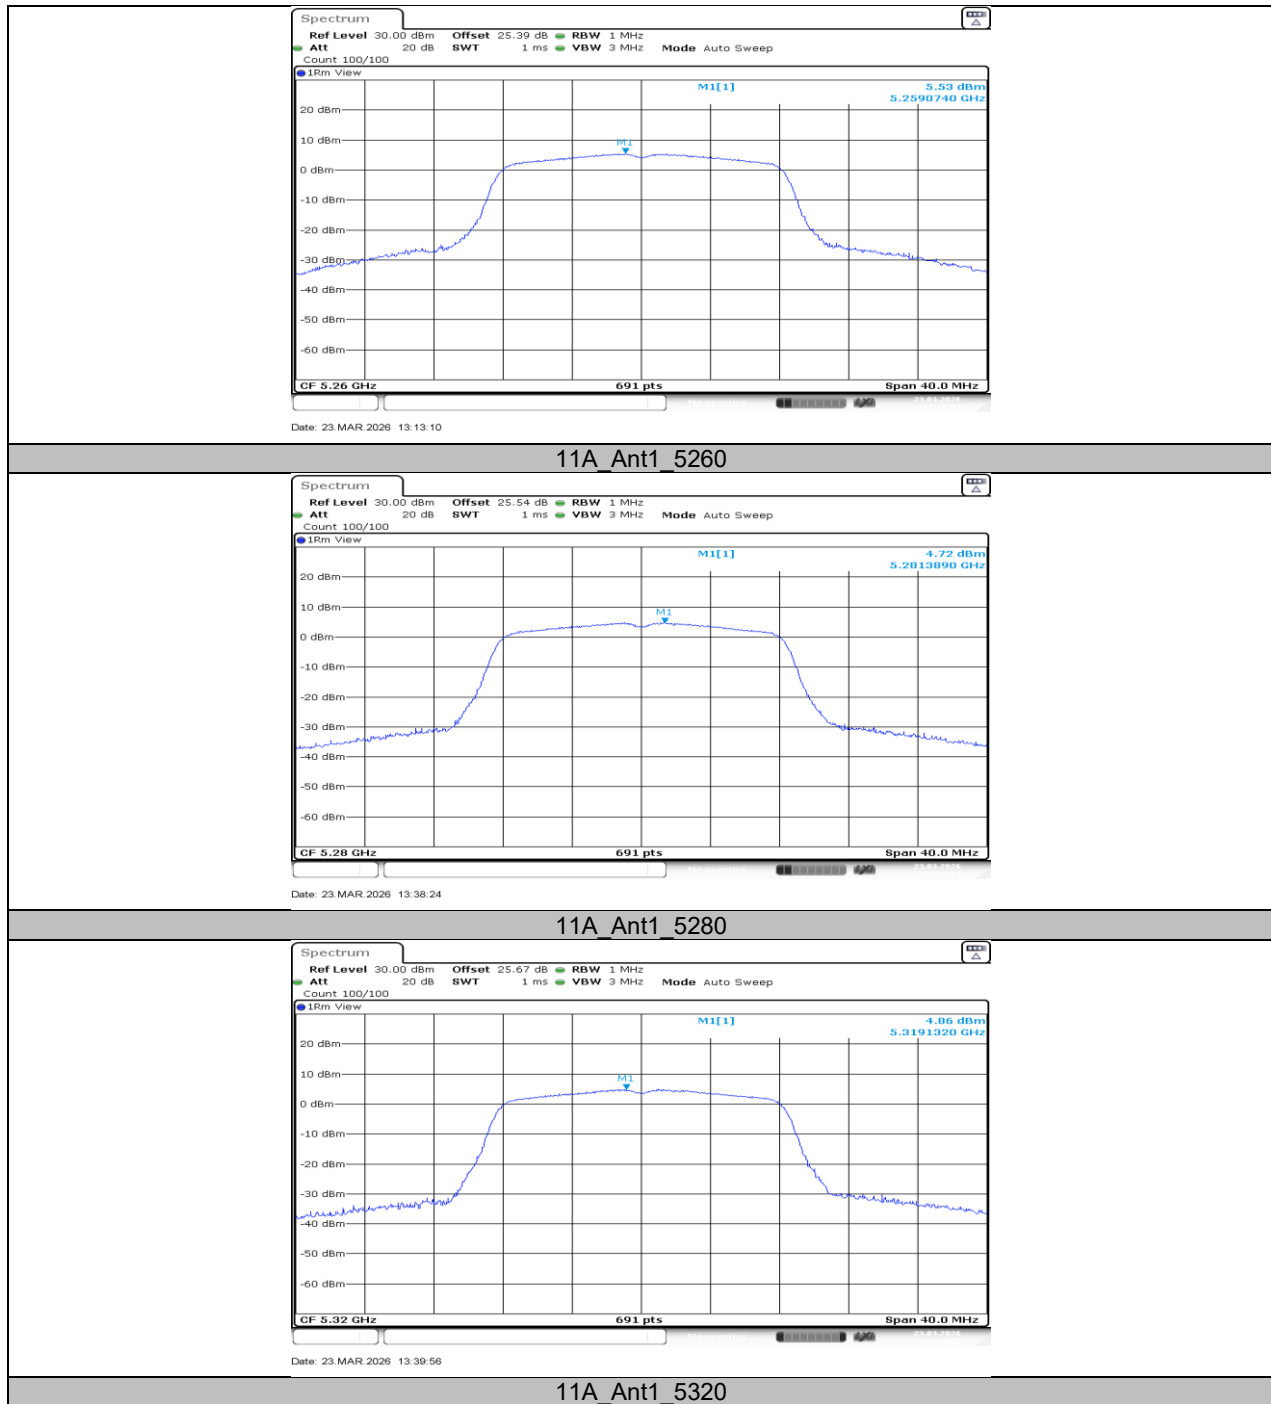


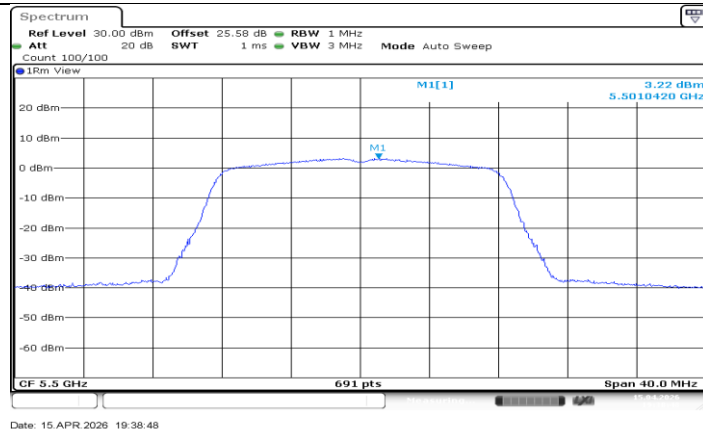


11A_Ant1_5500




11A_Ant1_5580

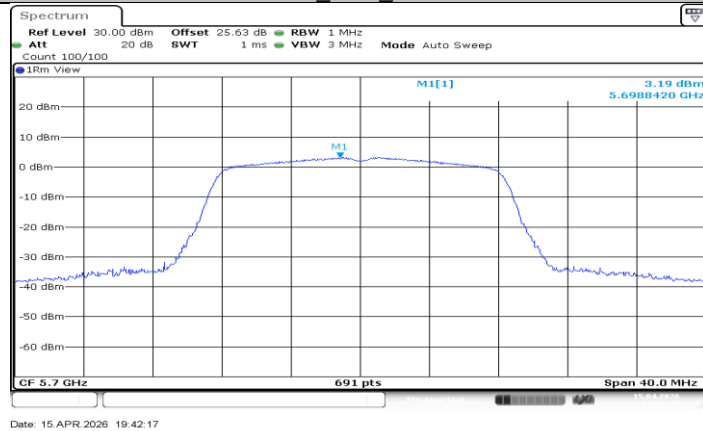


11A_Ant1_5700

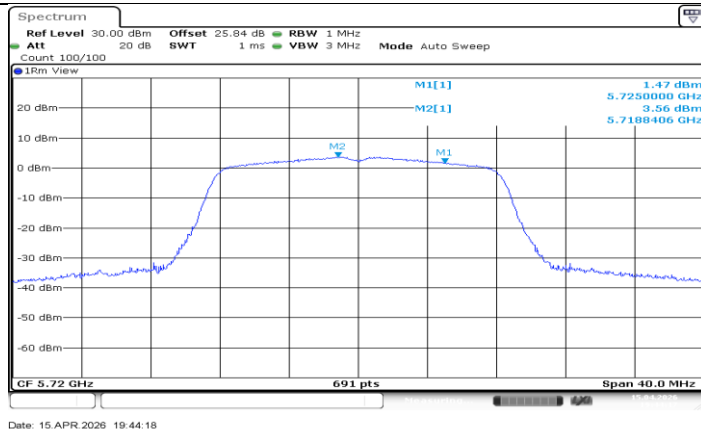


11A_Ant1_5720_UNII-2C

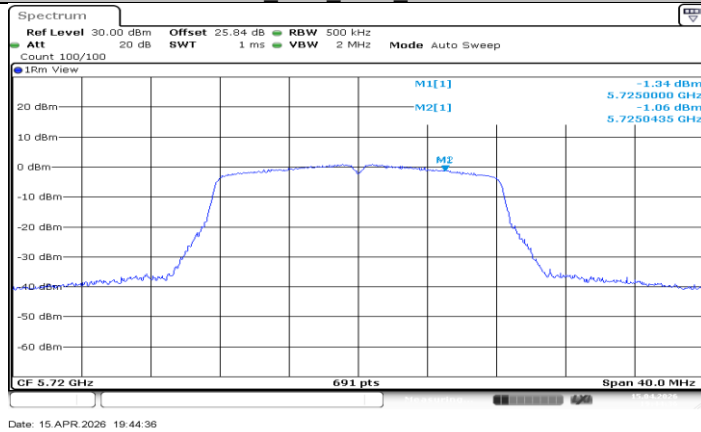


11A_Ant1_5720_UNII-3

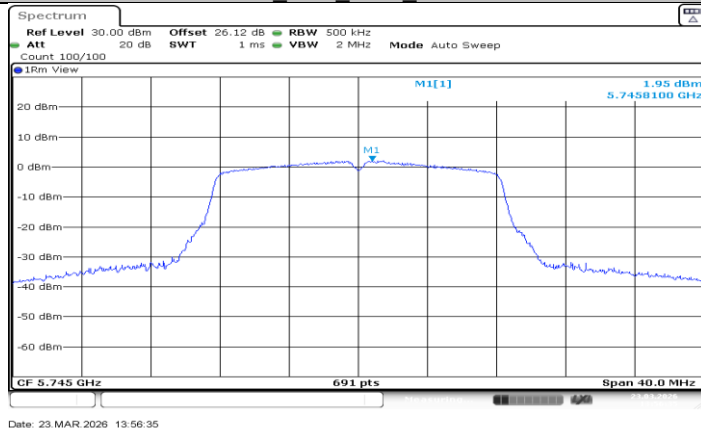


11A_Ant1_5745

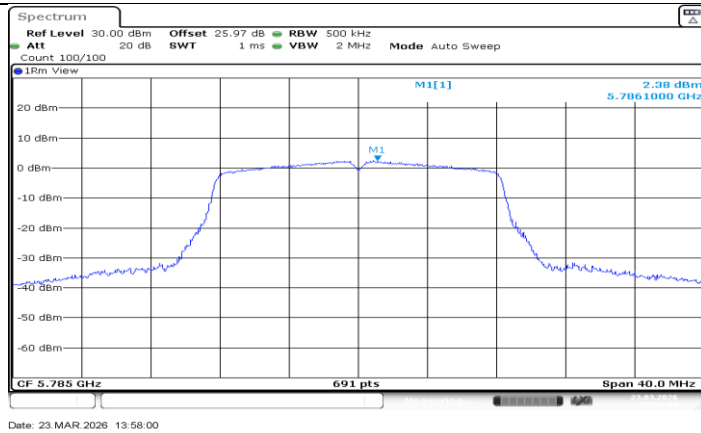


11A_Ant1_5785

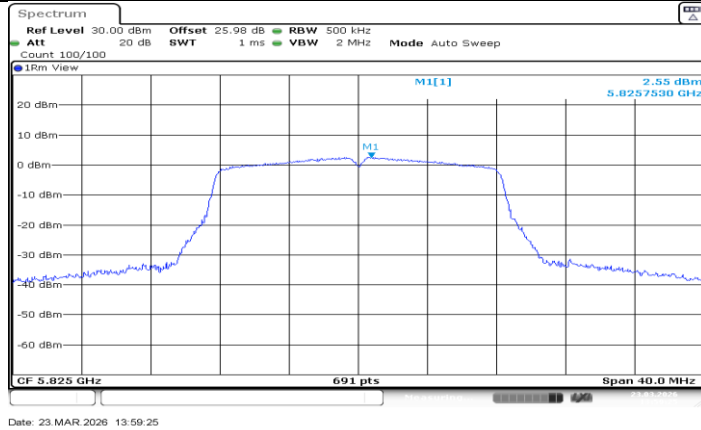


11A_Ant1_5825

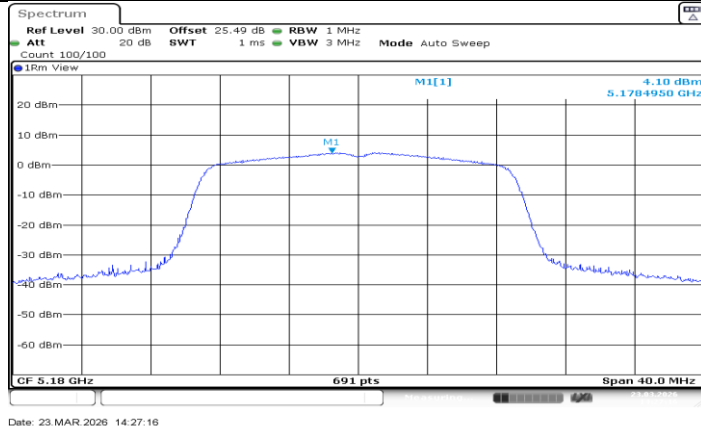


11N20SISO_Ant1_5180

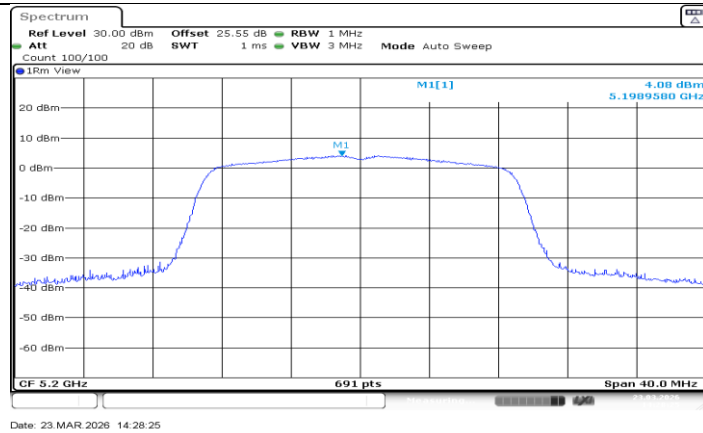


11N20SISO_Ant1_5200

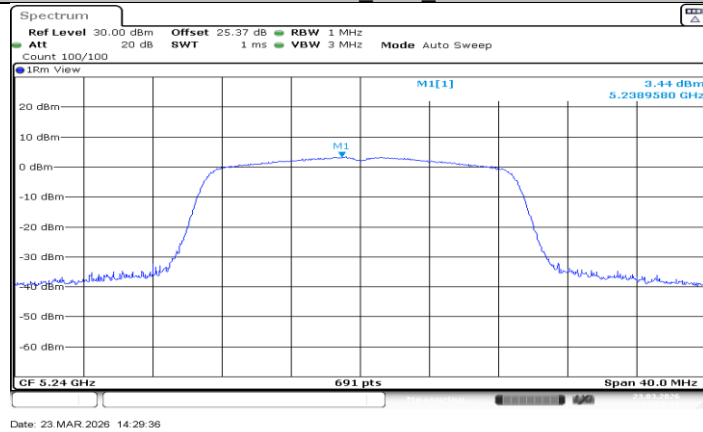


11N20SISO_Ant1_5240

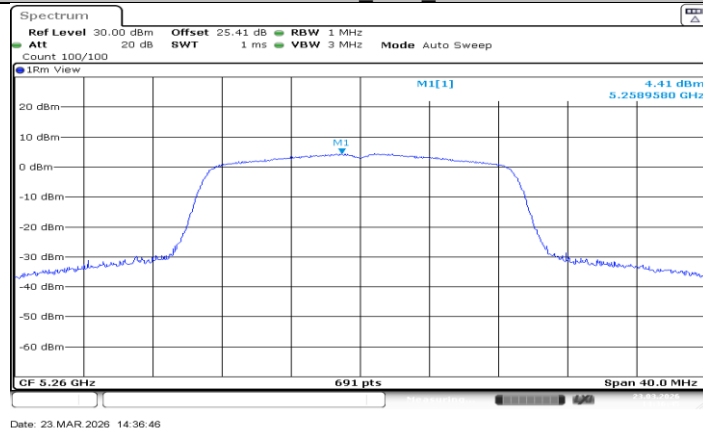


11N20SISO_Ant1_5260

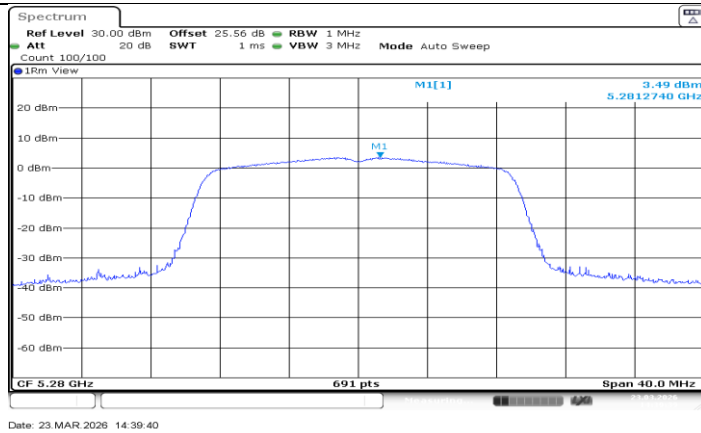


11N20SISO_Ant1_5280

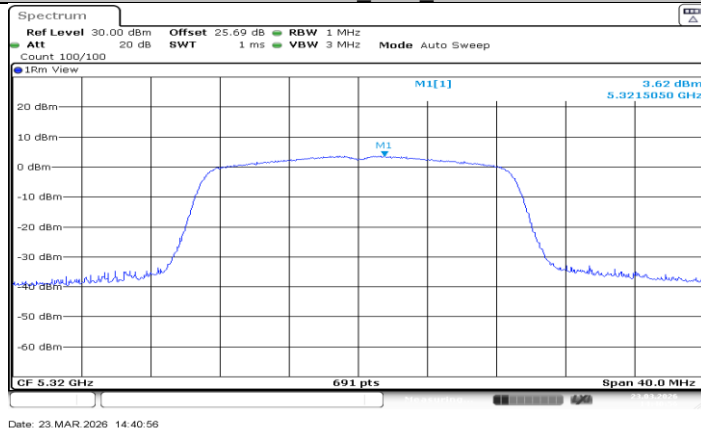

11N20SISO_Ant1_5320

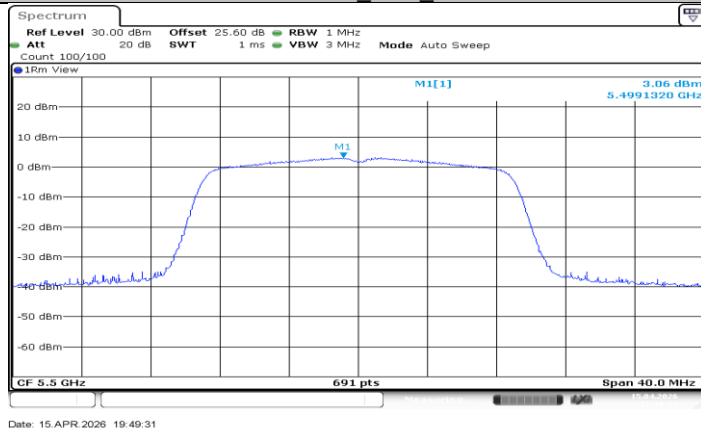


11N20SISO_Ant1_5500

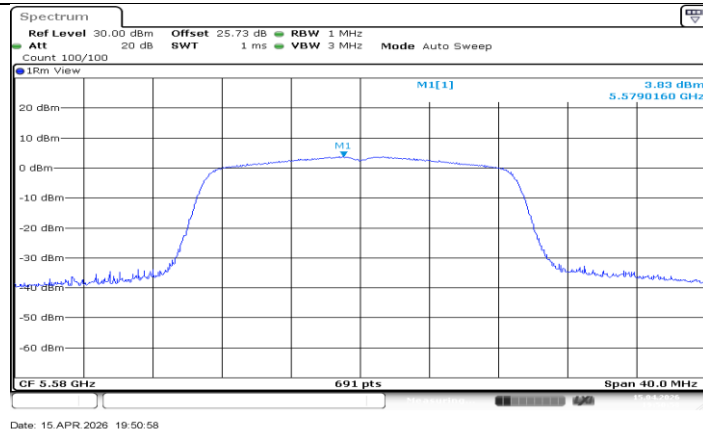


11N20SISO_Ant1_5580




11N20SISO_Ant1_5700

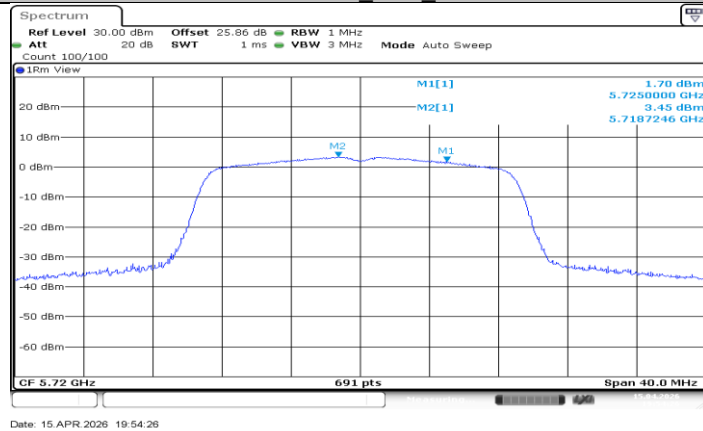


11N20SISO_Ant1_5720_UNII-2C

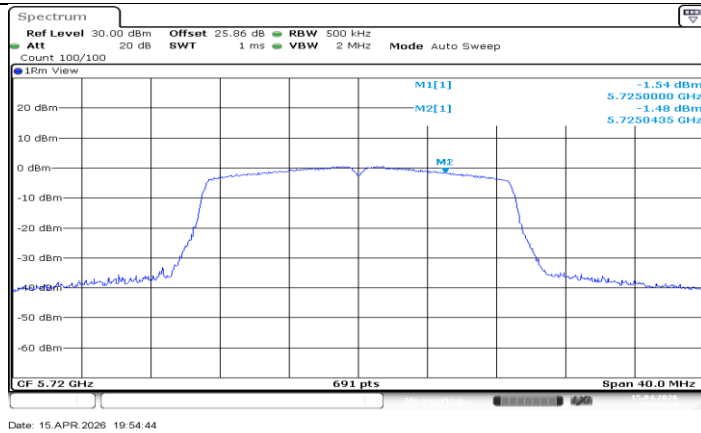


11N20SISO_Ant1_5720_UNII-3

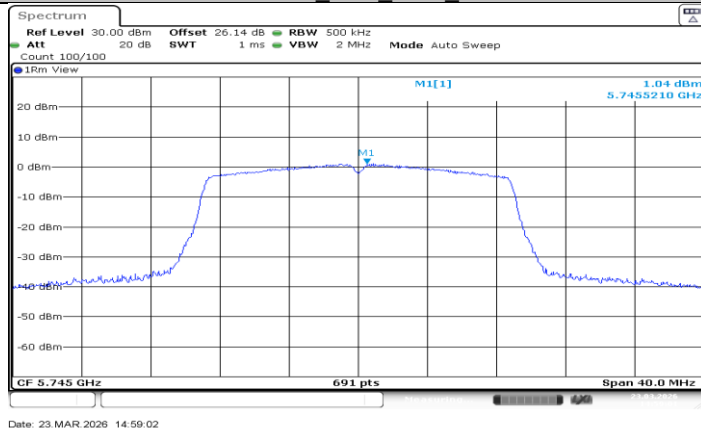


11N20SISO_Ant1_5745

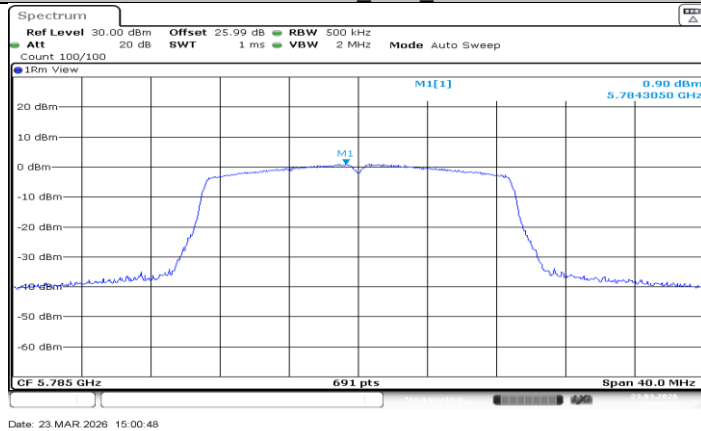


11N20SISO_Ant1_5785

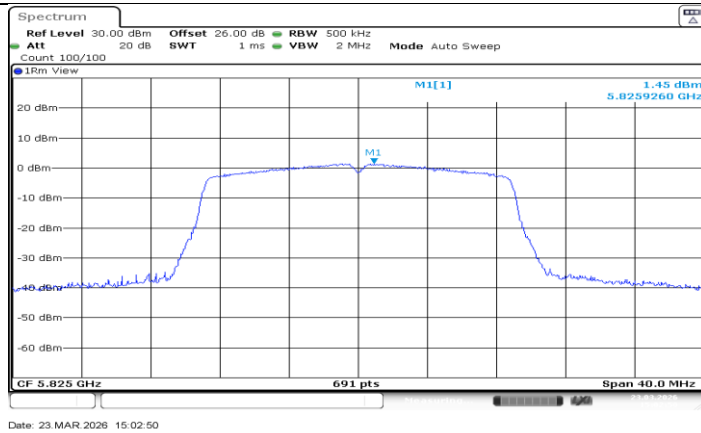


11N20SISO_Ant1_5825

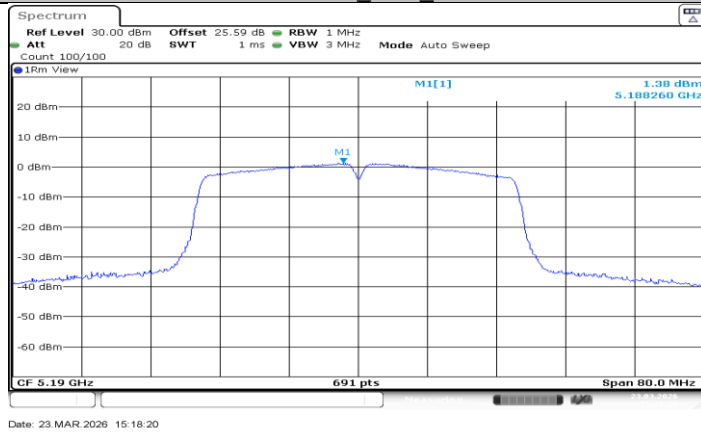


11N40SISO_Ant1_5190

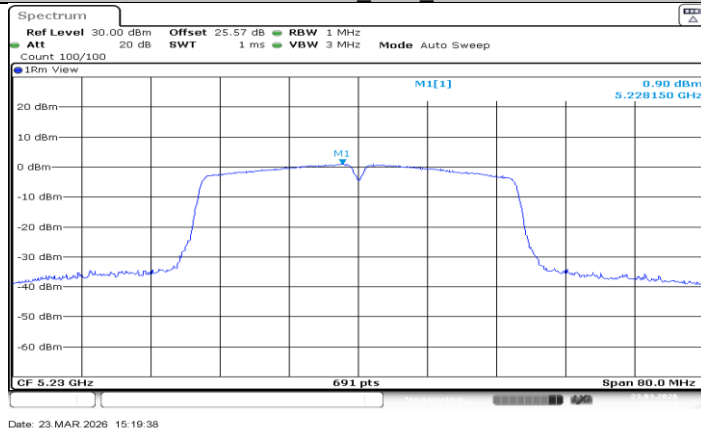


11N40SISO_Ant1_5230

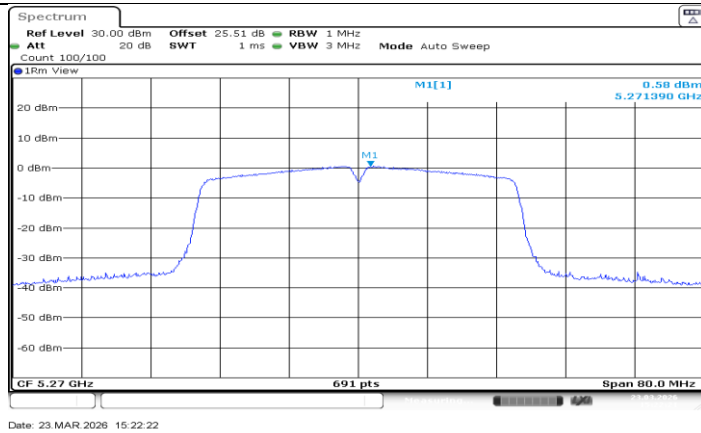


11N40SISO_Ant1_5270

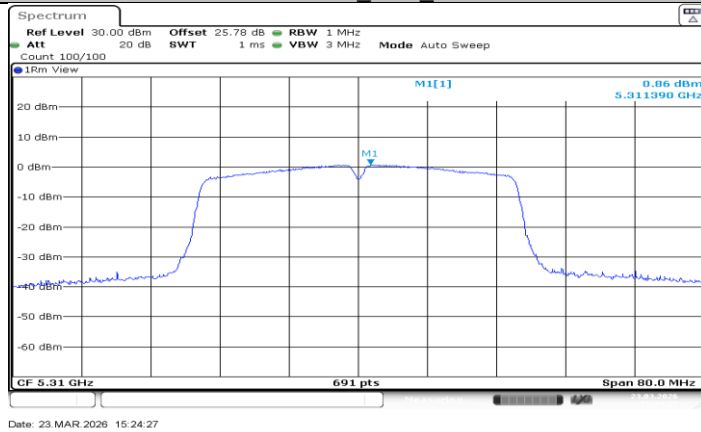


11N40SISO_Ant1_5310

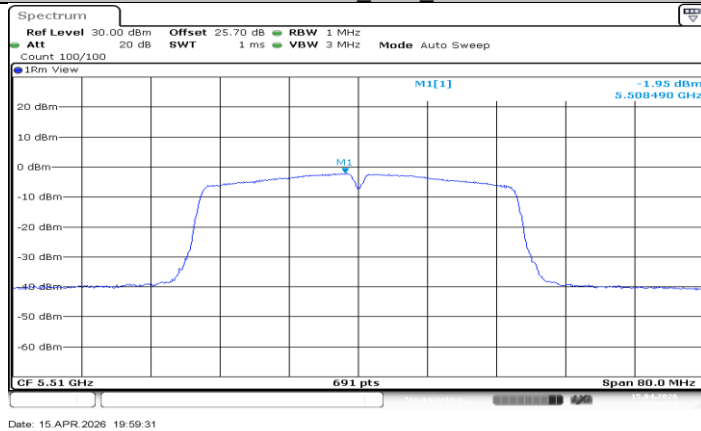


11N40SISO_Ant1_5510

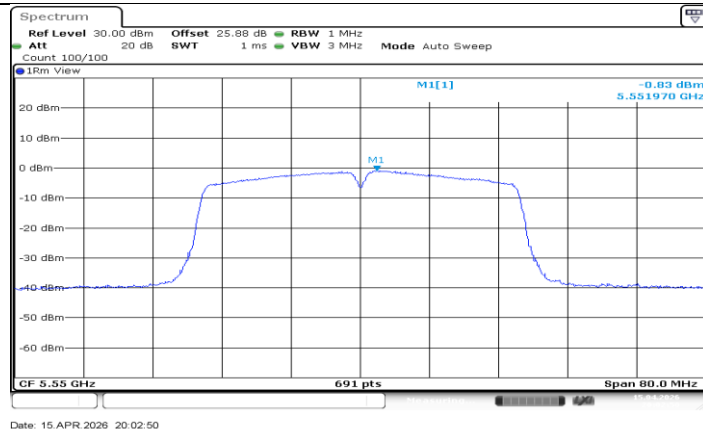


11N40SISO_Ant1_5550

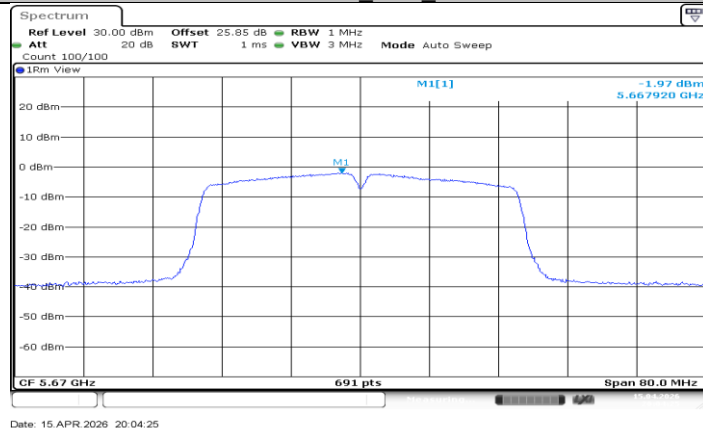


11N40SISO_Ant1_5670

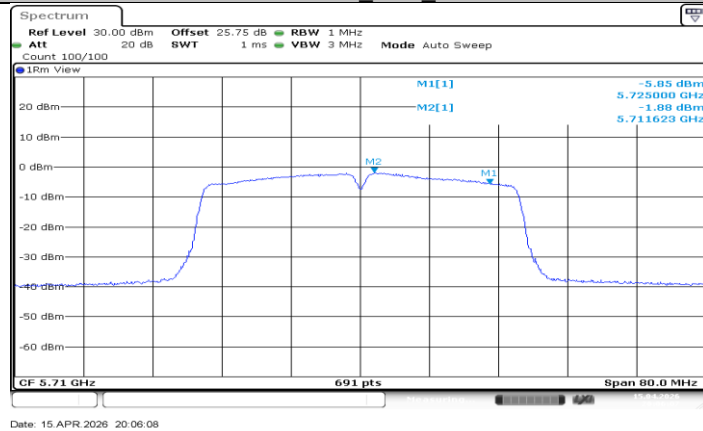


11N40SISO_Ant1_5710_UNII-2C

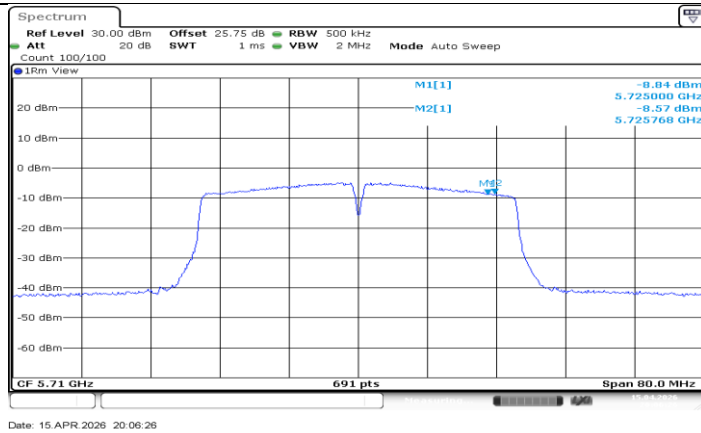


11N40SISO_Ant1_5710_UNII-3

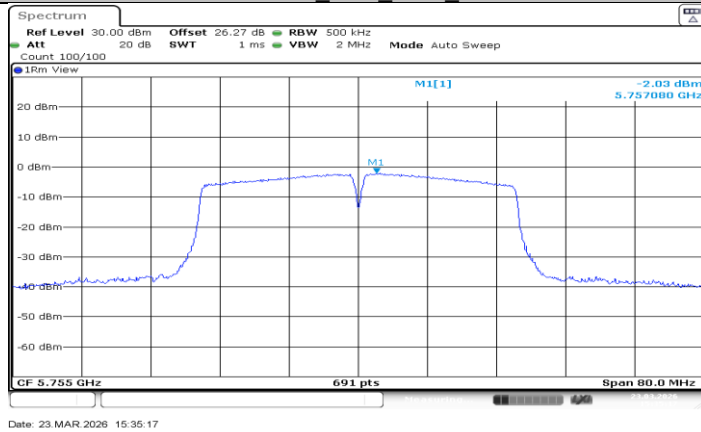


11N40SISO_Ant1_5755

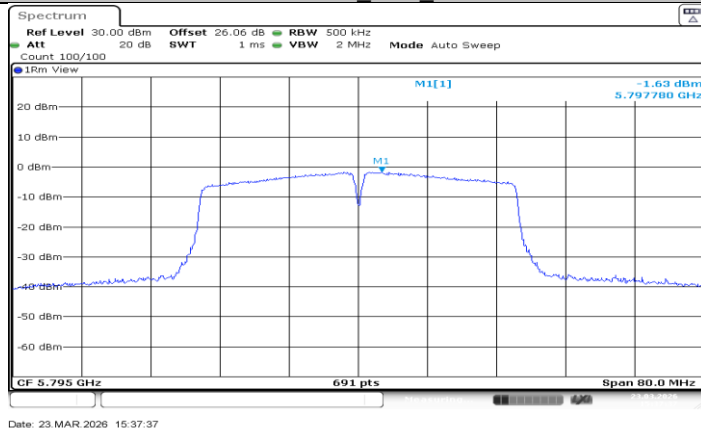


11N40SISO_Ant1_5795

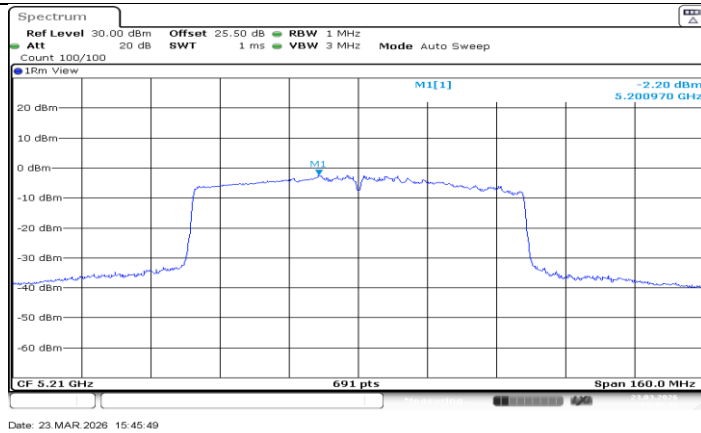


11AC80SISO_Ant1_5210

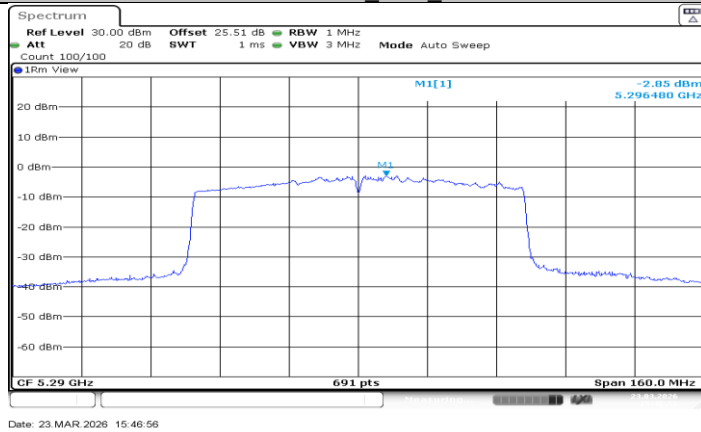


11AC80SISO_Ant1_5290

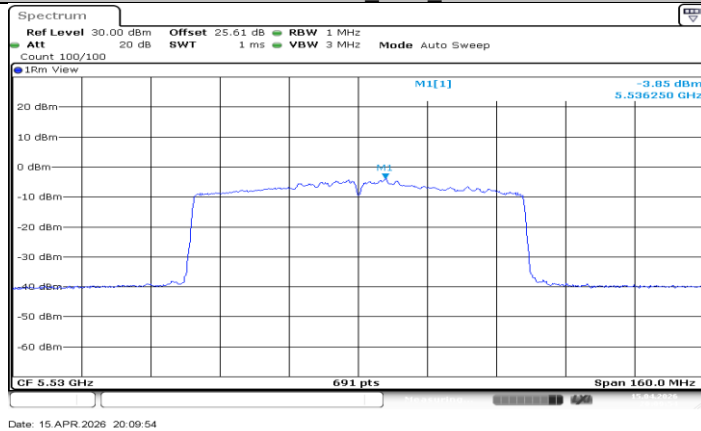


11AC80SISO_Ant1_5530

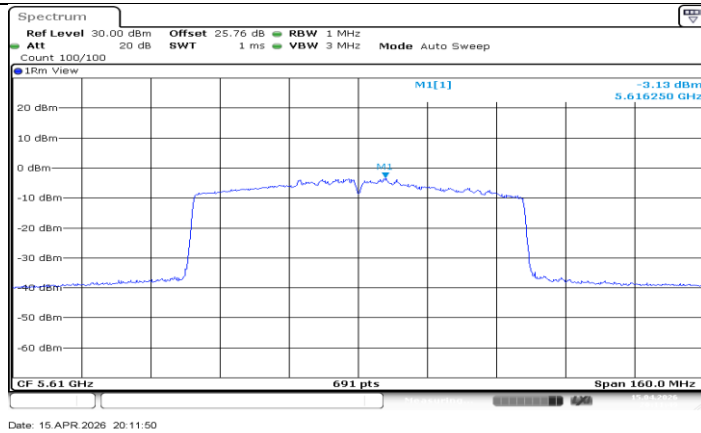


11AC80SISO_Ant1_5610

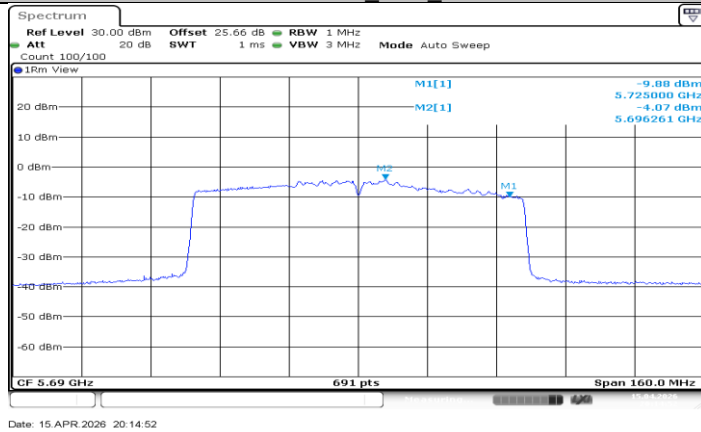

11AC80SISO_Ant1_5690_UNII-2C

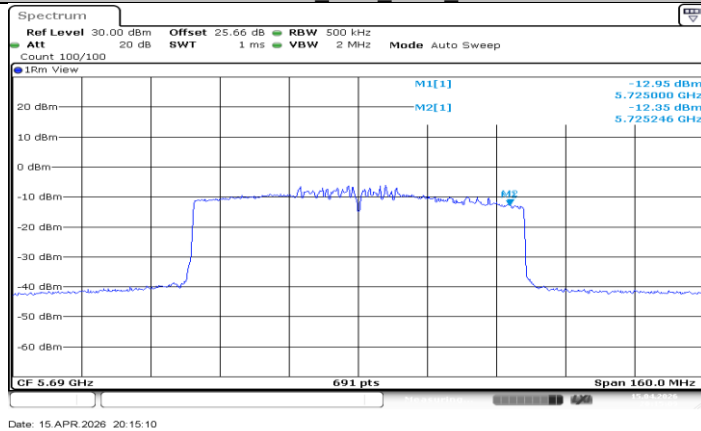

11AC80SISO_Ant1_5690_UNII-3

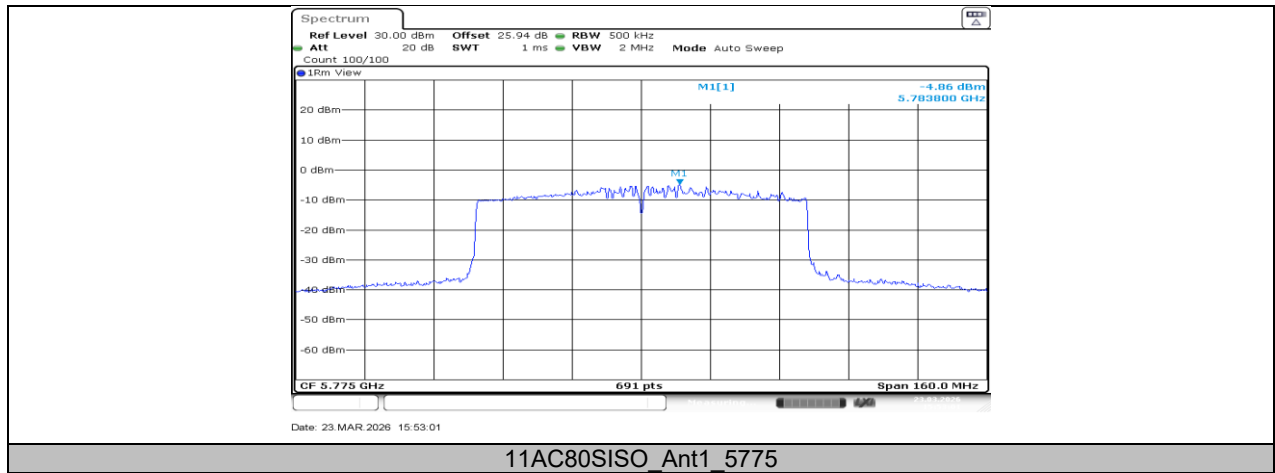

11.6. APPENDIX F: FREQUENCY STABILITY

11.6.1. Test Result

Frequency Error vs. Voltage									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5199.9998	-0.04	5199.9813	-3.59	5199.9752	-4.77	5200.0049	0.95
TN	VN	5199.9908	-1.76	5200.0026	0.50	5199.9965	-0.68	5199.9963	-0.72
TN	VH	5200.0181	3.47	5199.9972	-0.54	5199.9916	-1.62	5200.0021	0.41
Frequency Error vs. Temperature									
802.11a:5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
70	VN	5200.0053	1.02	5200.0124	2.39	5200.0206	3.96	5199.9791	-4.01
60	VN	5199.9774	-4.35	5199.9762	-4.57	5199.9804	-3.77	5199.9999	-0.02
50	VN	5200.0021	0.40	5200.0186	3.58	5199.9955	-0.86	5199.9963	-0.70
40	VN	5200.0225	4.33	5199.9959	-0.79	5199.9951	-0.94	5200.0065	1.25
30	VN	5200.0204	3.92	5199.9964	-0.68	5199.9932	-1.32	5199.9767	-4.48
20	VN	5200.0062	1.19	5199.9814	-3.58	5199.9822	-3.43	5199.9910	-1.74
10	VN	5200.0074	1.42	5200.0193	3.72	5200.0013	0.25	5200.0190	3.65
0	VN	5200.0215	4.13	5200.0074	1.43	5199.9917	-1.60	5199.9973	-0.51
-10	VN	5200.0196	3.77	5199.9853	-2.83	5199.9845	-2.99	5199.9877	-2.37
-20	VN	5200.0062	1.19	5200.0186	3.58	5199.9804	-3.77	5200.0021	0.41

Note:

1. All antennas, test modes and test channels have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5 TEST ENVIRONMENT.

11.7. APPENDIX G: DUTY CYCLE**11.7.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A	1.39	1.44	0.9653	96.53	0.15	0.72	1
11N20SISO	1.28	1.33	0.9624	96.24	0.17	0.78	1
11N40SISO	0.63	0.67	0.9403	94.03	0.27	1.59	2
11AC80SISO	1.04	1.07	0.9720	97.20	0.12	0.96	1

Note:

Duty Cycle Correction Factor= $10\log(1/x)$.


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs



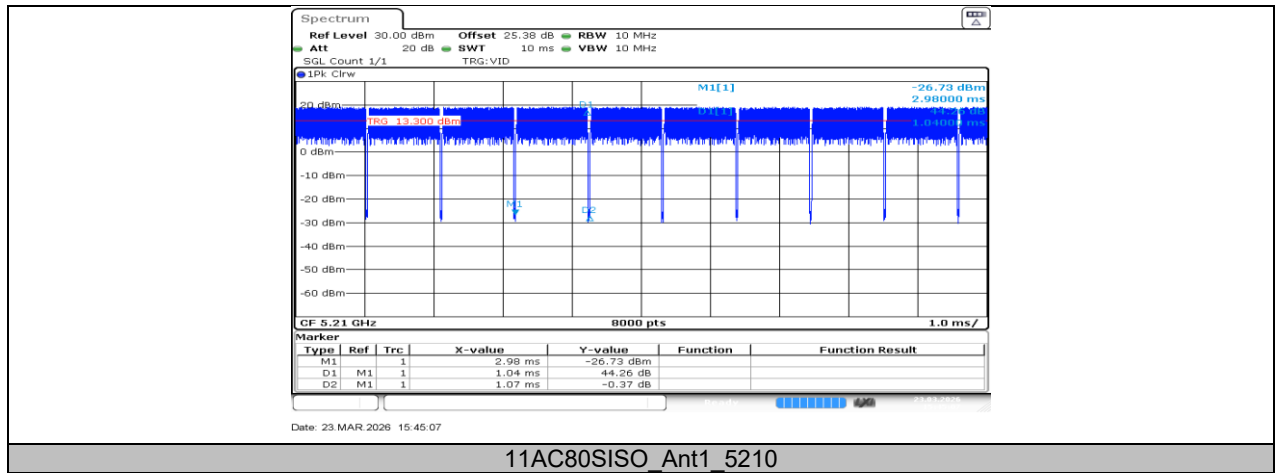


11.8. APPENDIX H: DFS DETECTION THRESHOLDS

11.8.1. Test Result

TestMode	Channel	Radar Type	Result	Limit[dbm]	Verdict
11AC80SISO	5530	Type0	-62.45	-62.00	PASS

11.8.2. Test Graphs

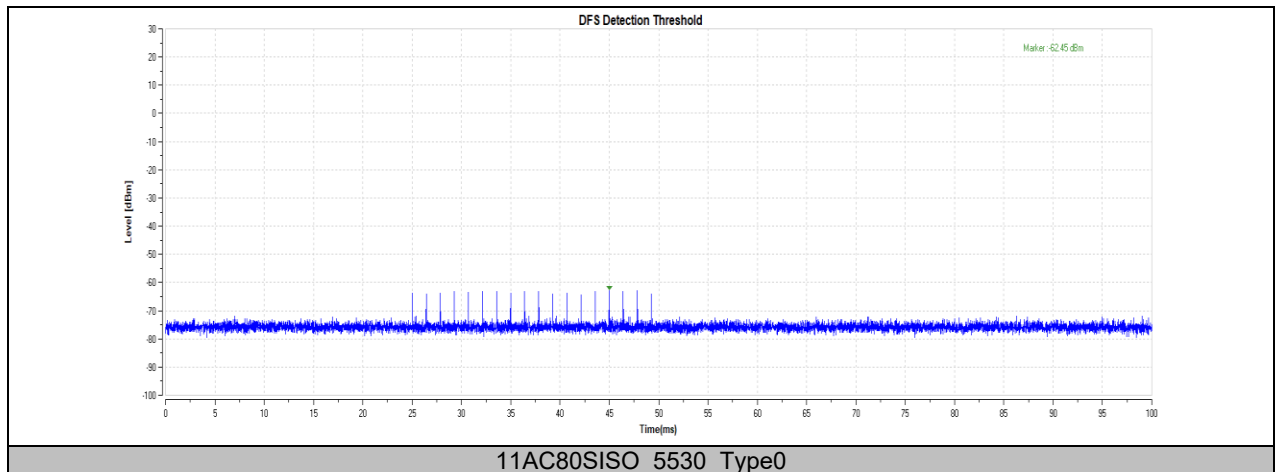


11.9. APPENDIX I: CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

11.9.1. Test Result

TestMode	Channel	CCT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AC80SISO	5530	200+5.2	200+60	487.5	10000	PASS

11.9.2. Test Graphs

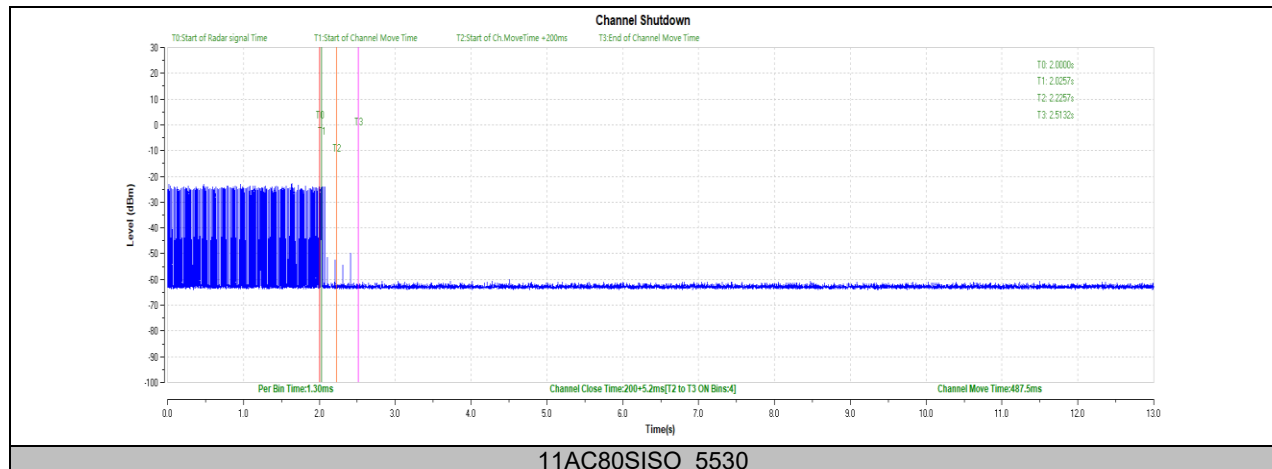


11.10. APPENDIX J: NON-OCCUPANCY PERIOD

11.10.1. Test Result

TestMode	Channel	Result	Limit[s]	Verdict
11AC80SISO	5530	see test graph	≥ 1800	PASS

11.10.2. Test Graphs

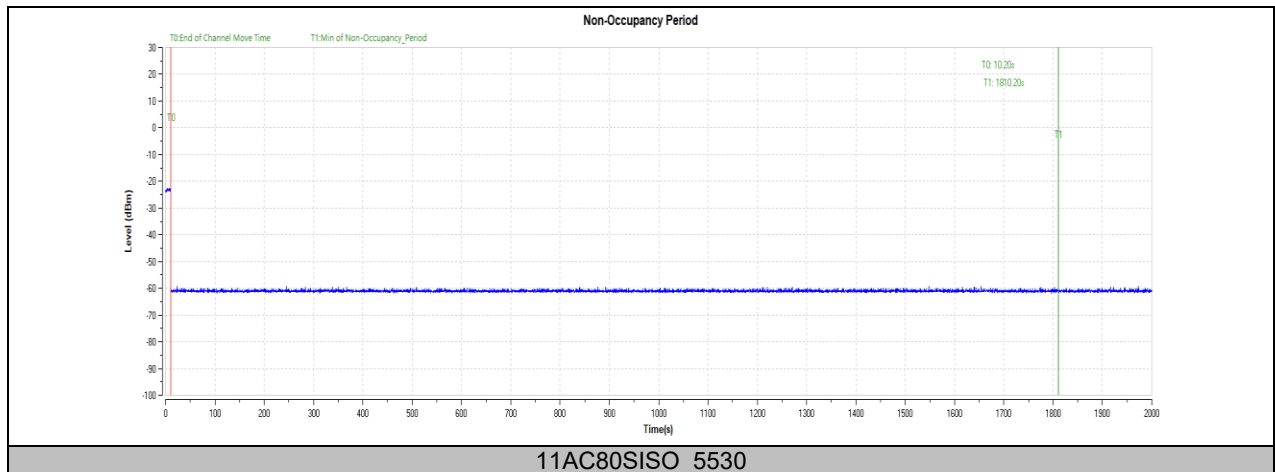

END OF REPORT