


Test_Mode	802.11 be(EHT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/7/23


Test Graph

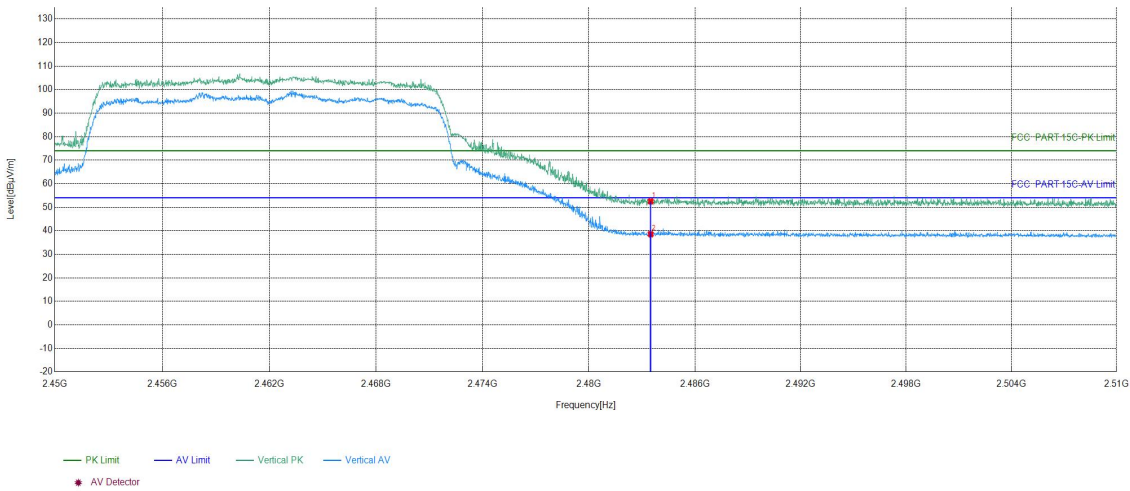

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.23	52.52	74.00	21.48	PASS	Vertical	PK
2	2483.5	16.29	22.25	38.54	54.00	15.46	PASS	Vertical	AV

Test_Mode	802.11 be(EHT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/7/23


Test Graph

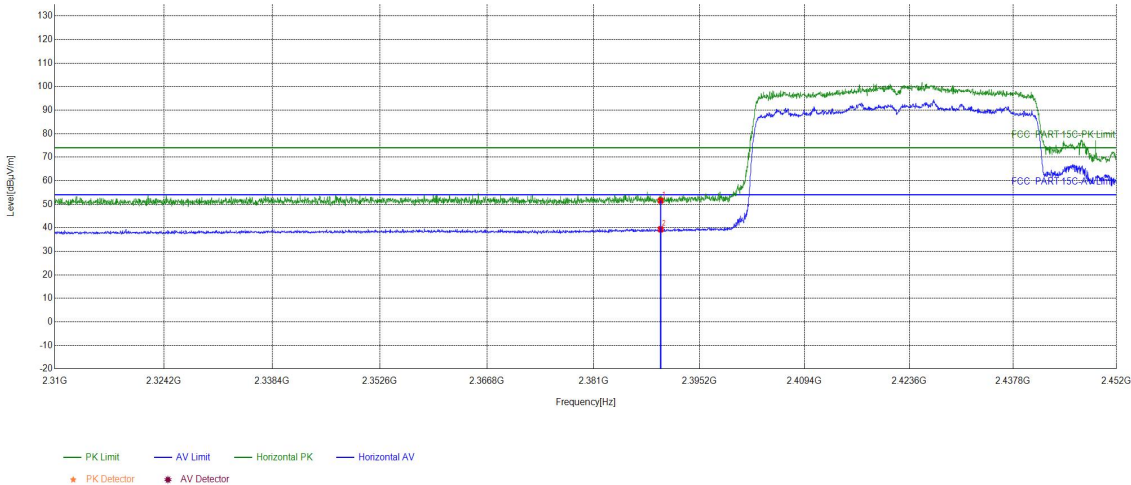

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.60	51.56	74.00	22.44	PASS	Horizontal	PK
2	2390	15.96	23.38	39.34	54.00	14.66	PASS	Horizontal	AV

Test_Mode	802.11 be(EHT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/7/23


Test Graph

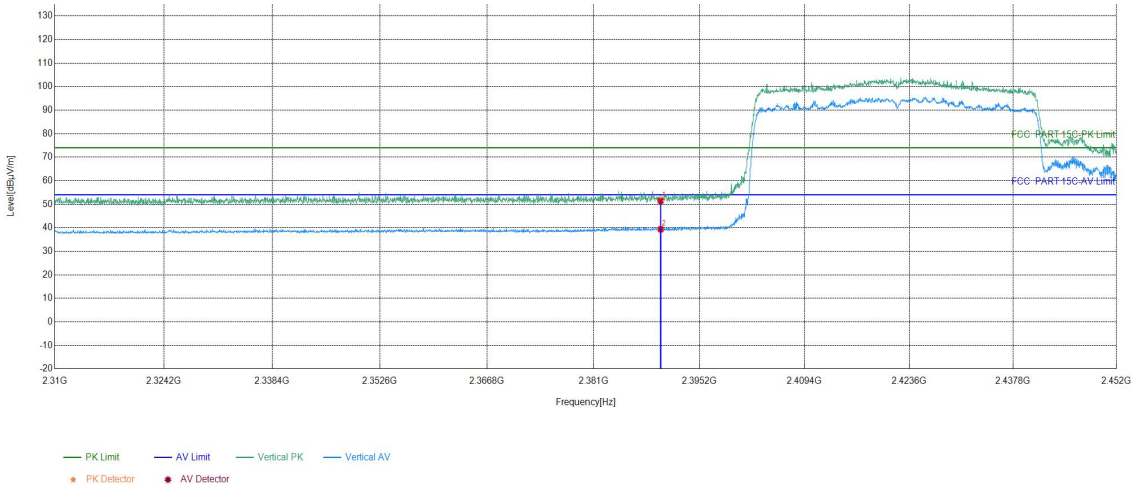

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.45	51.41	74.00	22.59	PASS	Vertical	PK
2	2390	15.96	23.40	39.36	54.00	14.64	PASS	Vertical	AV

Test_Mode	802.11 be(EHT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/7/23


Test Graph

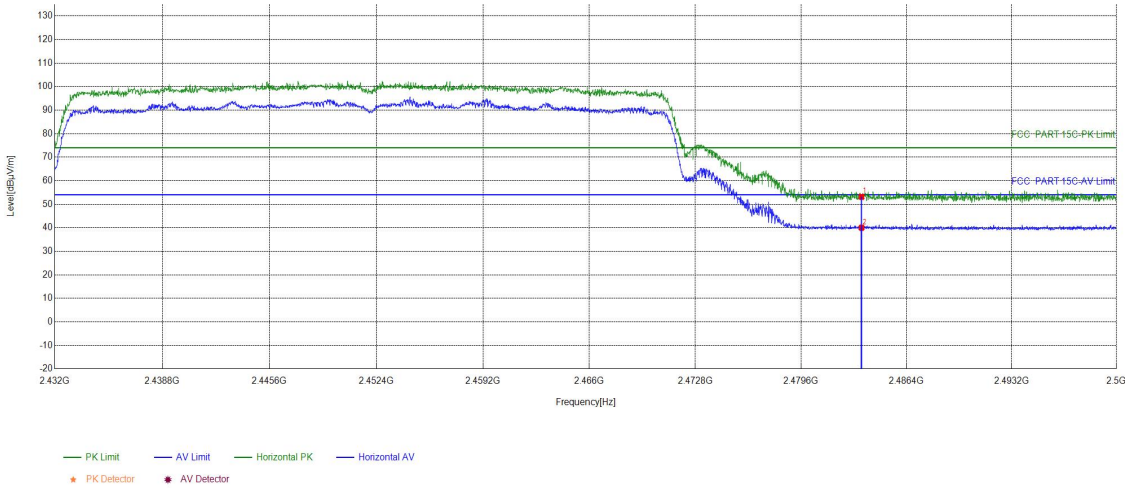

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.88	53.17	74.00	20.83	PASS	Horizontal	PK
2	2483.5	16.29	23.72	40.01	54.00	13.99	PASS	Horizontal	AV

Test_Mode	802.11 be(EHT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/7/23

Test Graph

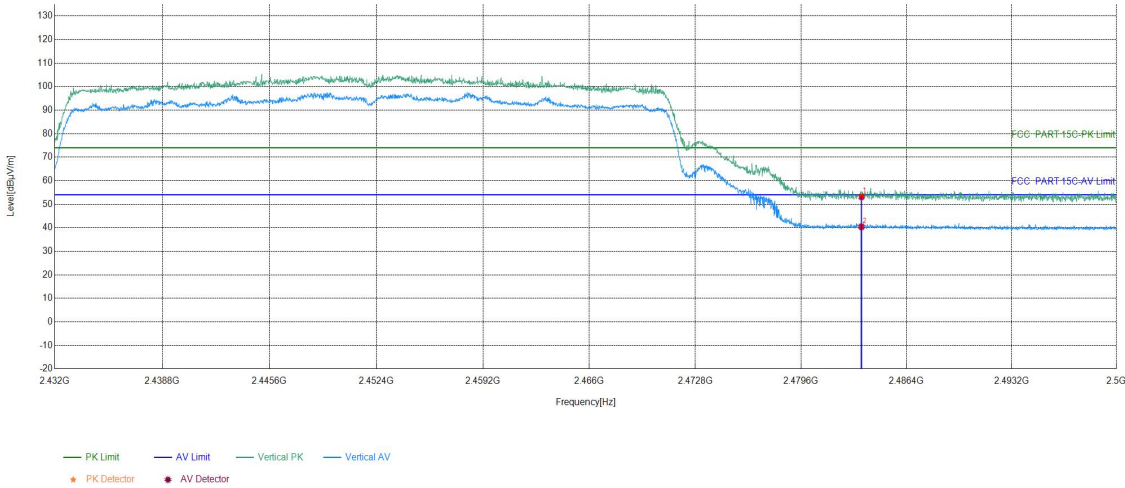

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.87	53.16	74.00	20.84	PASS	Vertical	PK
2	2483.5	16.29	24.12	40.41	54.00	13.59	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S814143

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S814143.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***