



Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	10.26	0.54	10.80	11.00	Pass
5300	10.26	0.54	10.80	11.00	Pass
5320	-4.25	0.54	-3.71	11.00	Pass

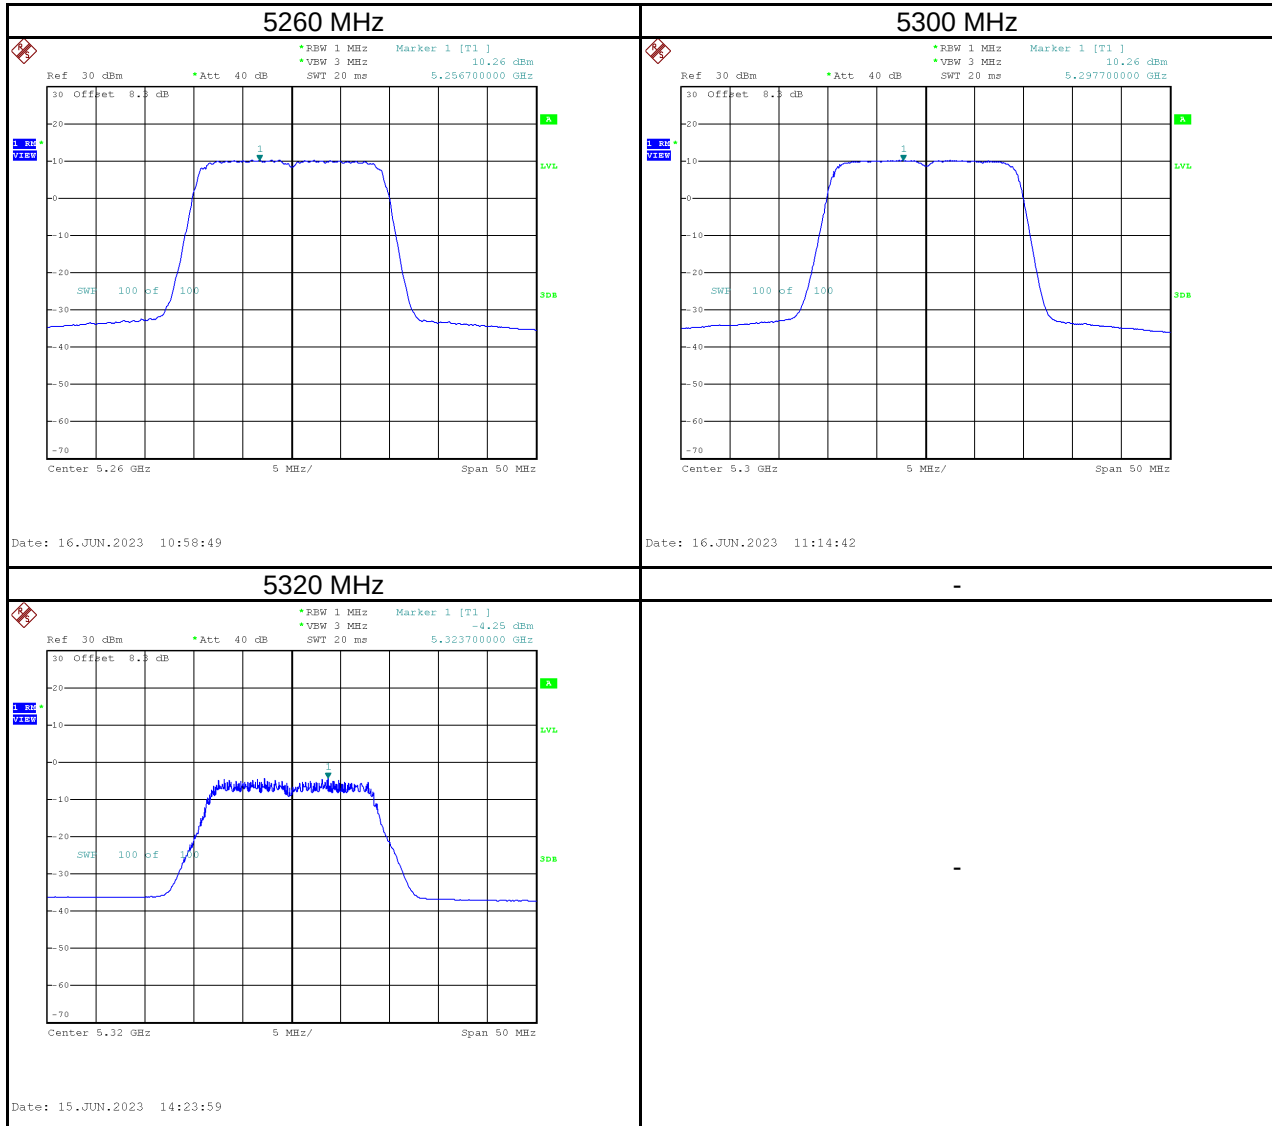


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	1.98	8.97	0.54	9.51	30.00	Pass
5785	1.47	8.46	0.54	9.00	30.00	Pass
5825	3.88	10.87	0.54	11.41	30.00	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

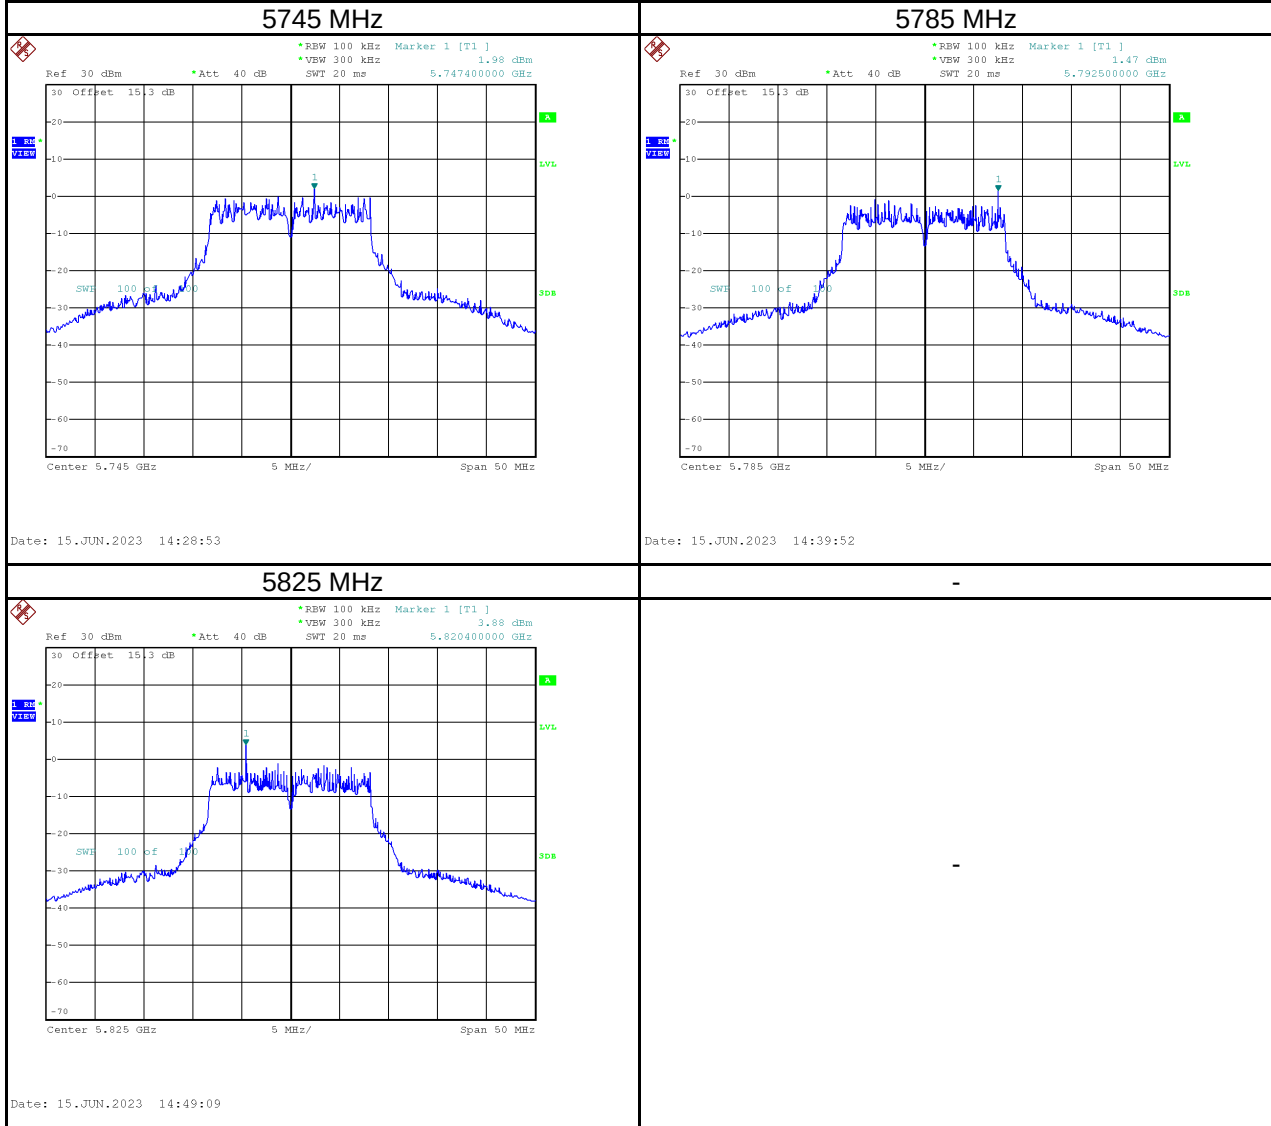


Test Mode	IEEE 802.11a_Ant 2
-----------	--------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	-0.21	0.54	0.33	17.00	Pass
5200	3.92	0.54	4.46	17.00	Pass
5240	3.29	0.54	3.83	17.00	Pass

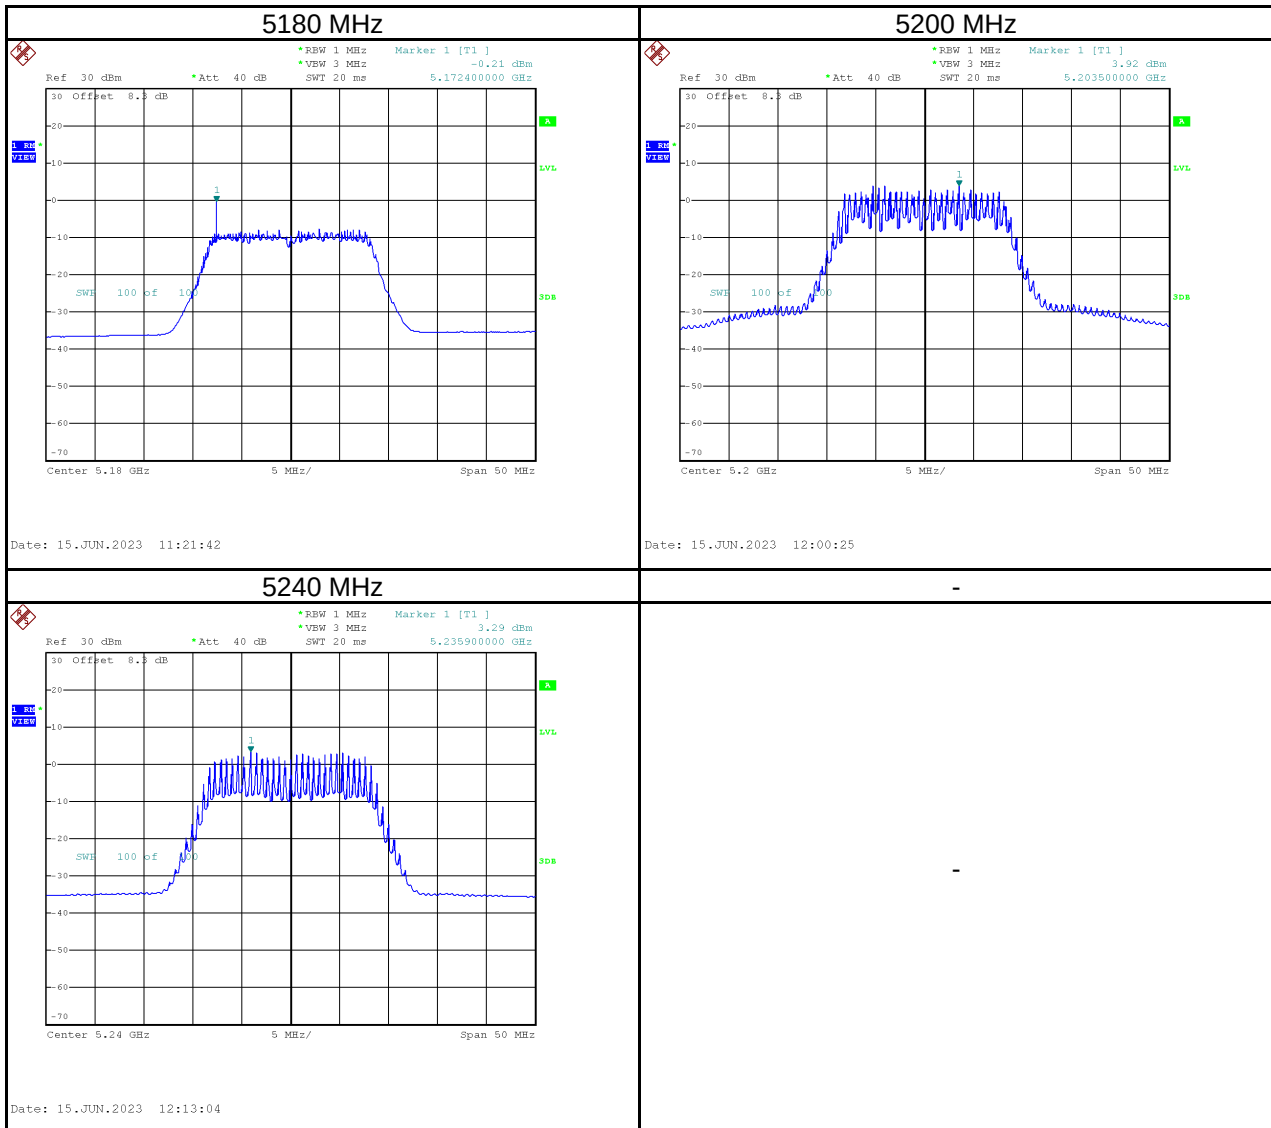


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	10.18	0.54	10.72	11.00	Pass
5300	10.21	0.54	10.75	11.00	Pass
5320	-5.01	0.54	-4.47	11.00	Pass

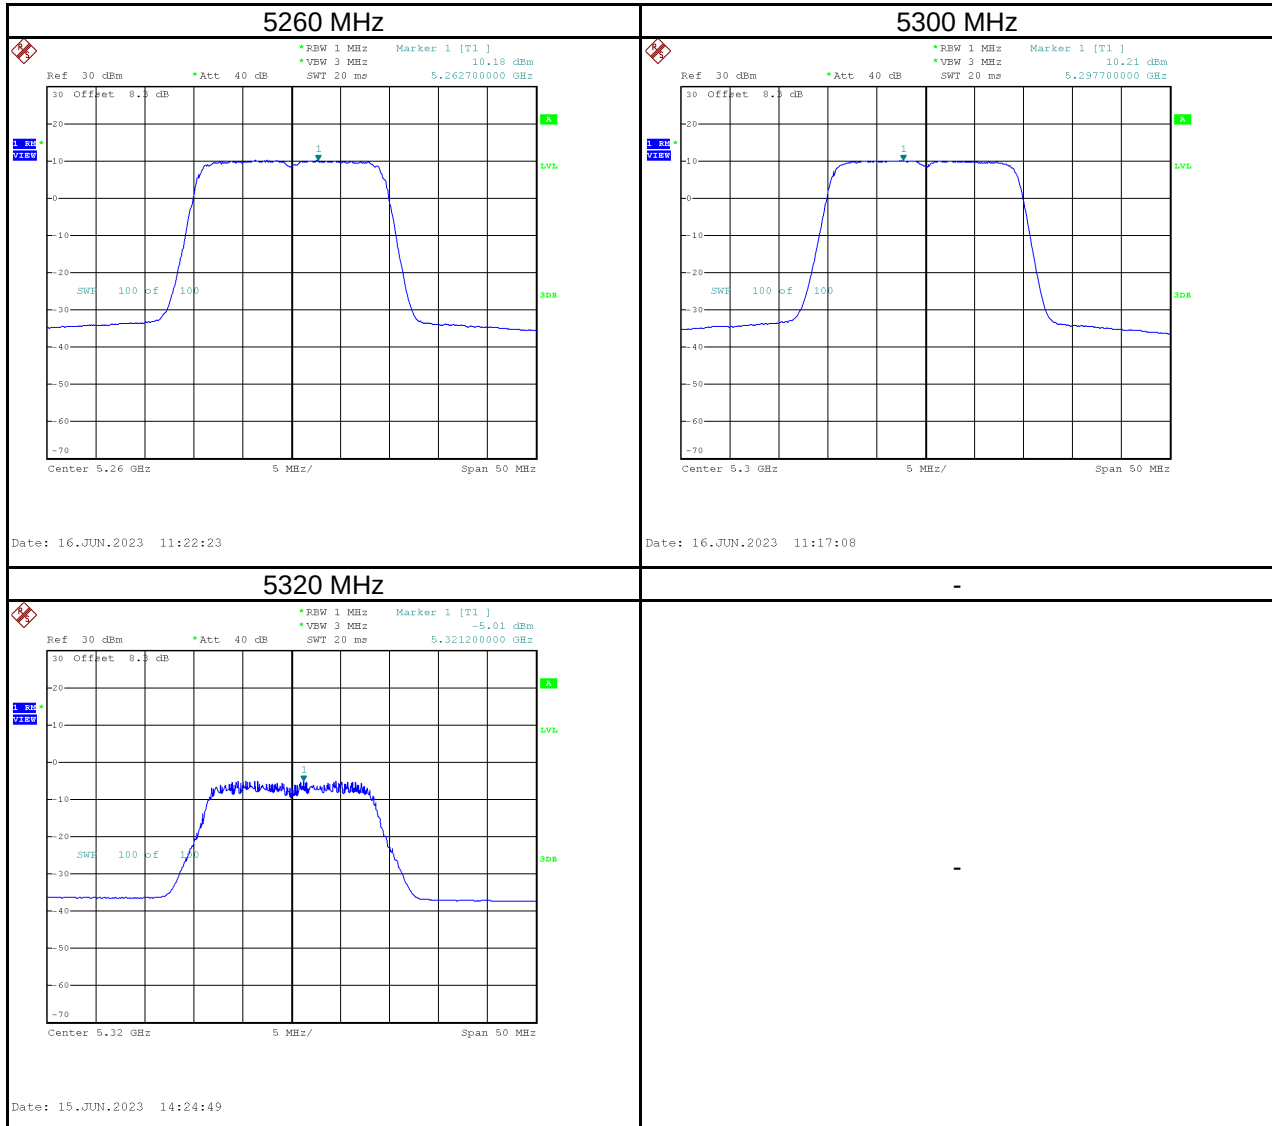


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	1.34	8.33	0.54	8.87	30.00	Pass
5785	-1.90	5.09	0.54	5.63	30.00	Pass
5825	1.91	8.90	0.54	9.44	30.00	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

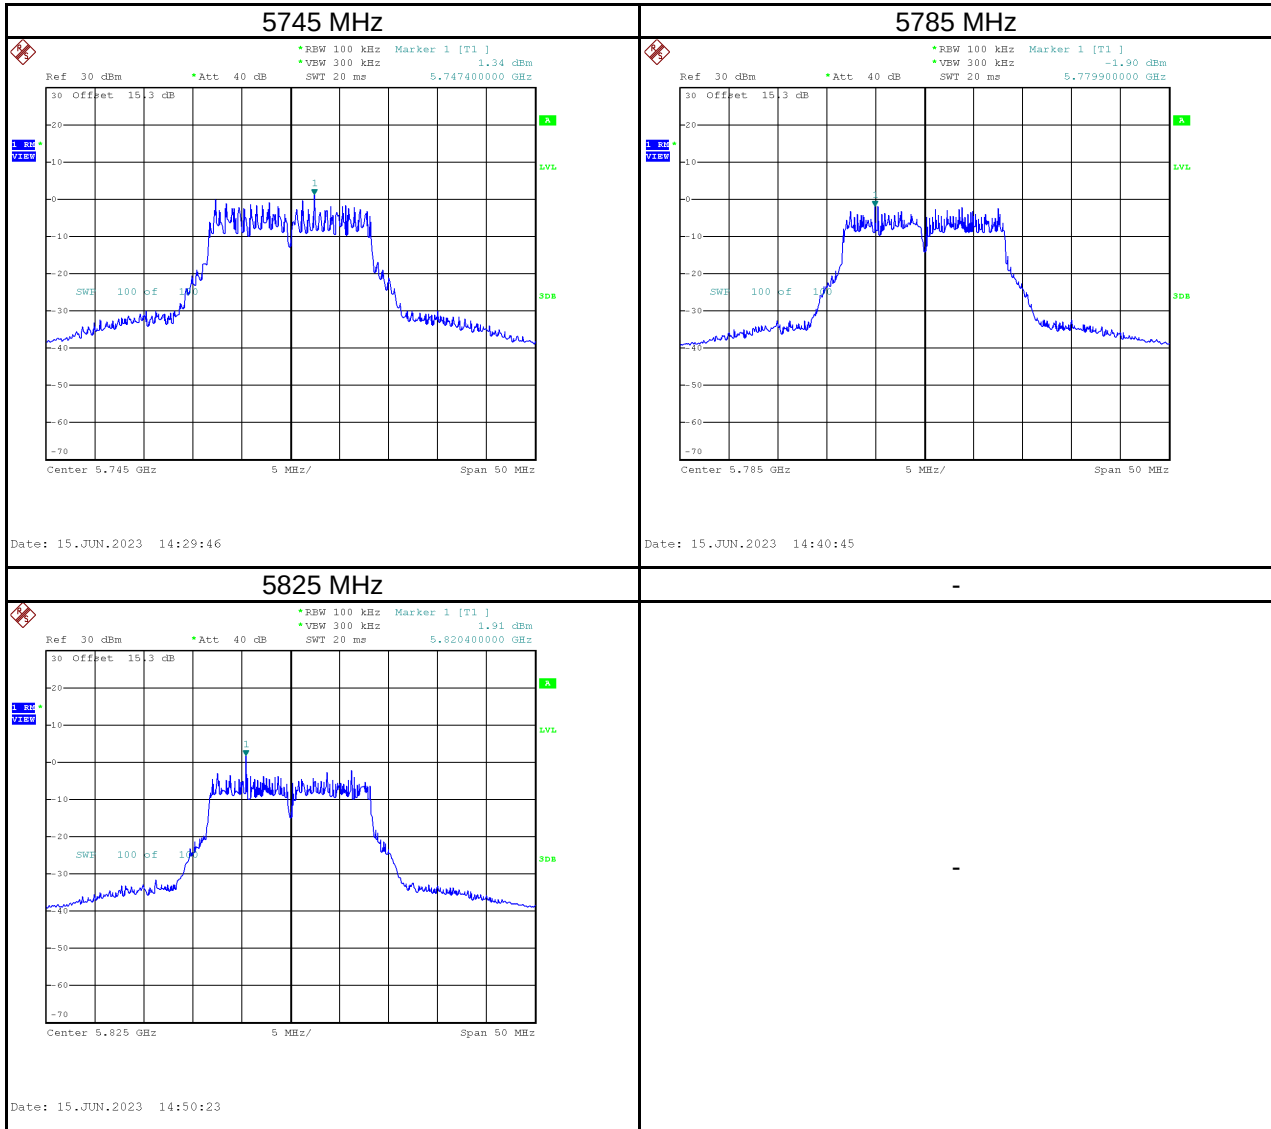


Test Mode	IEEE 802.11n (HT20)_Ant 1
-----------	---------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	-0.60	2.33	1.73	14.94	Pass
5200	1.86	2.33	4.19	14.94	Pass
5240	7.32	2.33	9.65	14.94	Pass

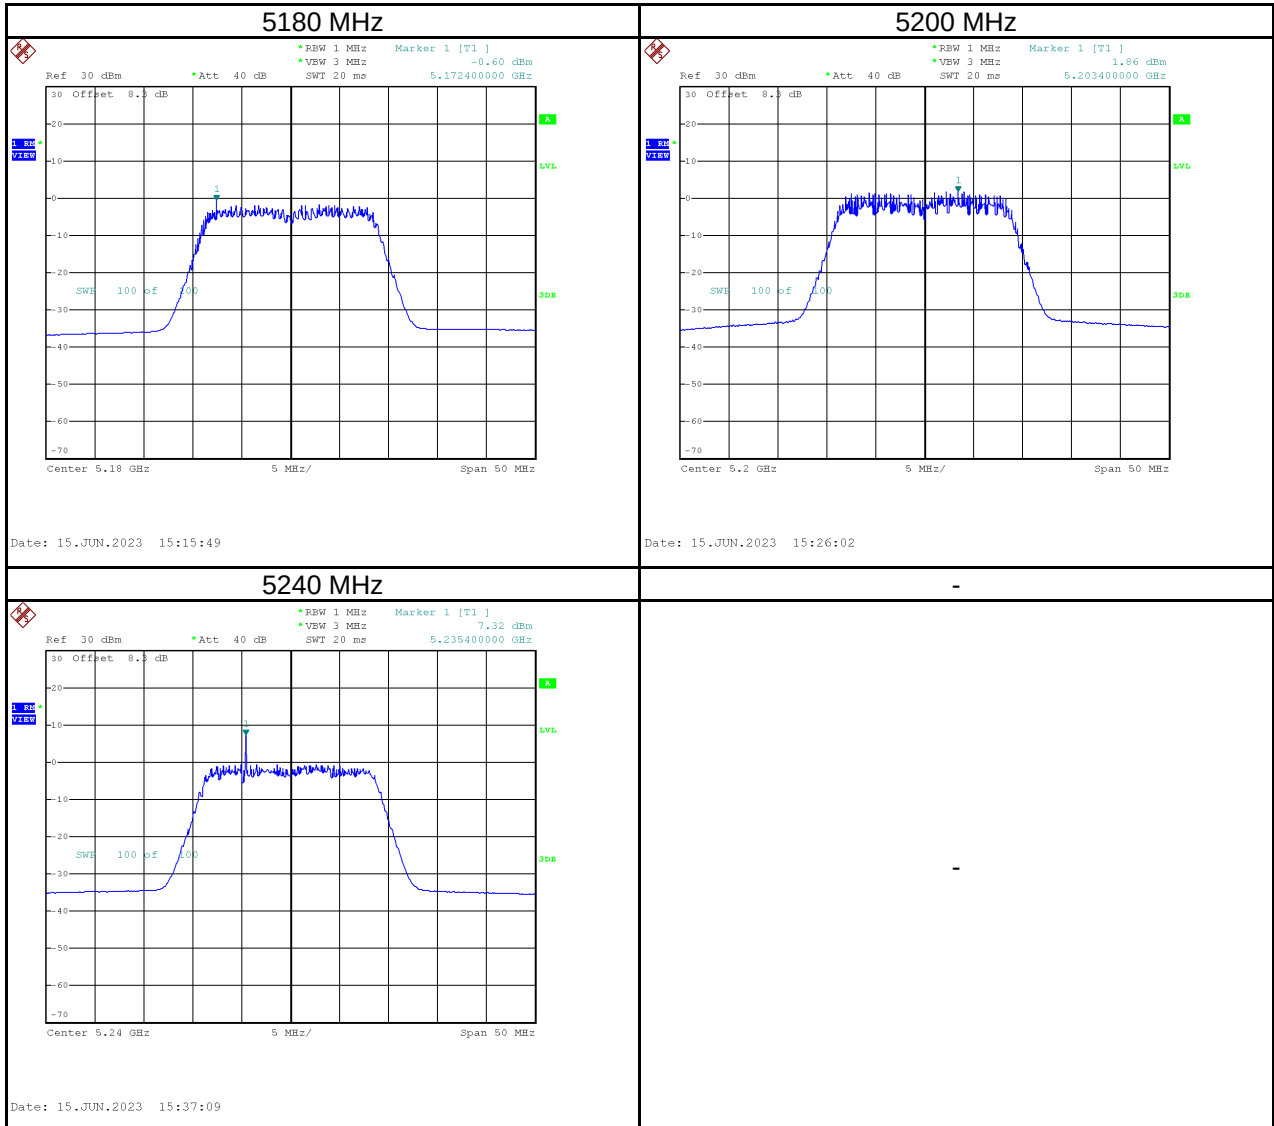


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	0.91	2.33	3.24	8.94	Pass
5300	1.25	2.33	3.58	8.94	Pass
5320	-3.37	2.33	-1.04	8.94	Pass

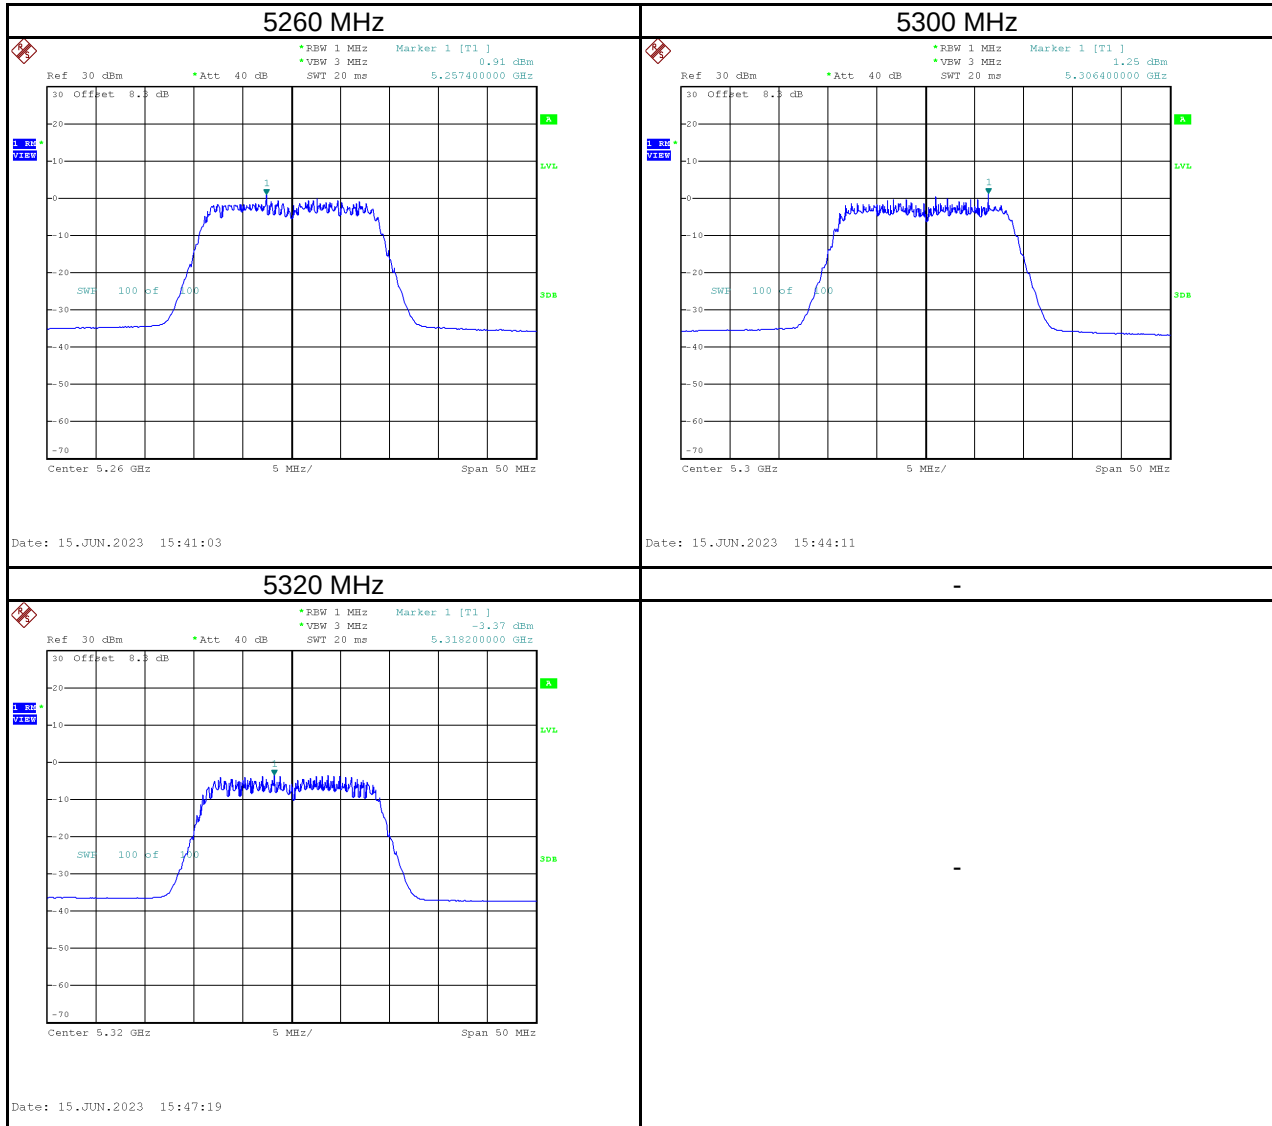


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	5.70	12.69	2.33	15.02	27.94	Pass
5785	1.57	8.56	2.33	10.89	27.94	Pass
5825	3.24	10.23	2.33	12.56	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

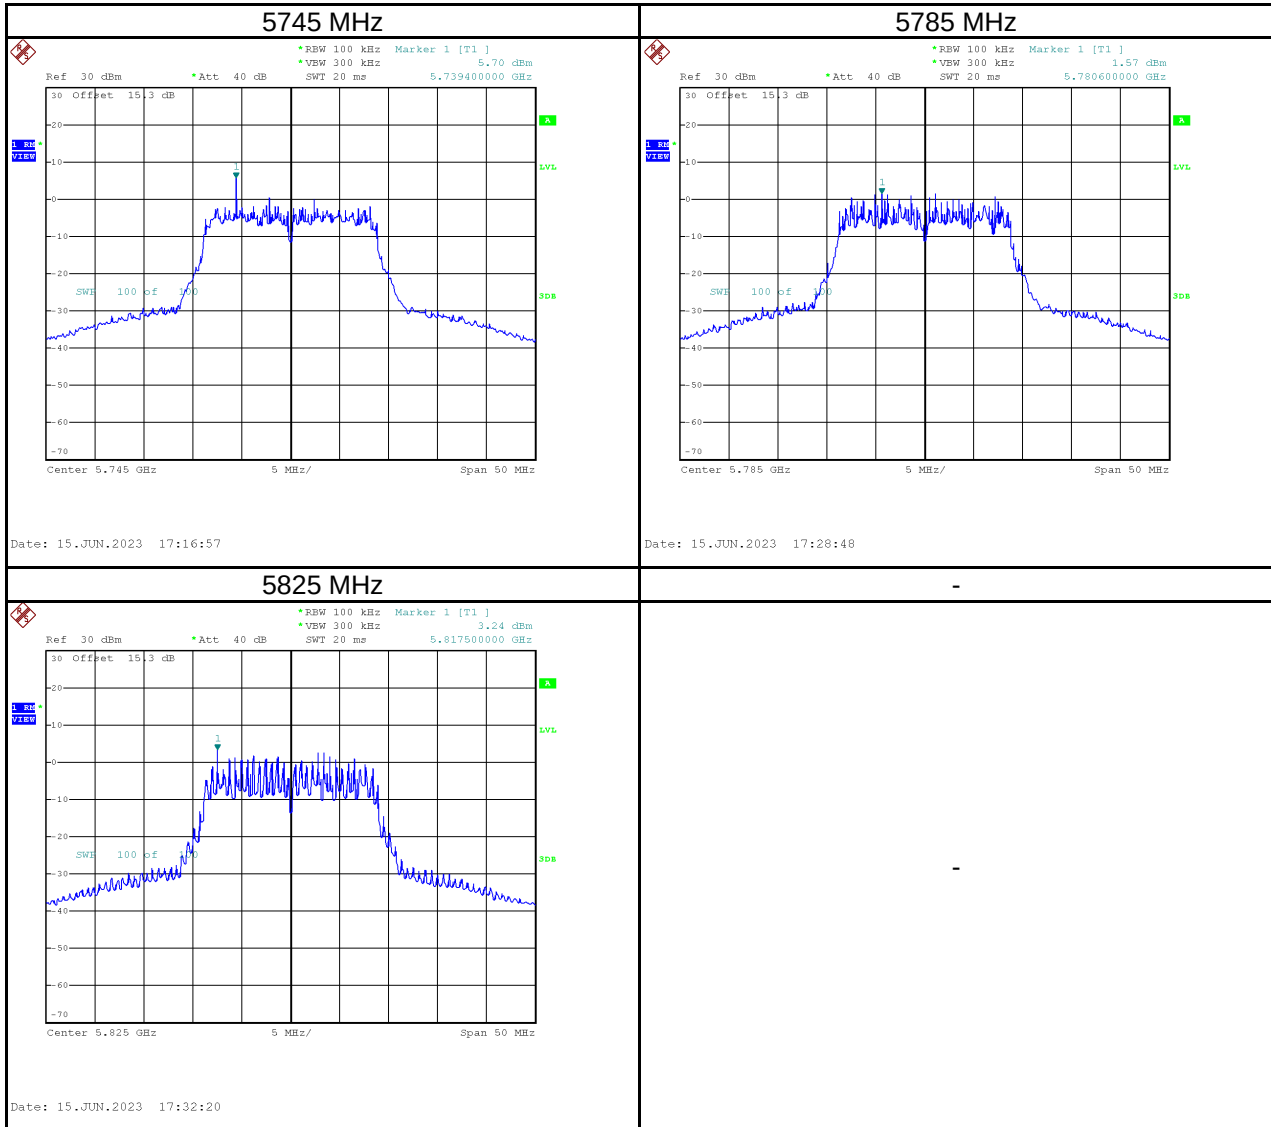


Test Mode	IEEE 802.11n (HT20)_Ant 2
-----------	---------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	1.43	2.33	3.76	14.94	Pass
5200	3.35	2.33	5.68	14.94	Pass
5240	7.66	2.33	9.99	14.94	Pass

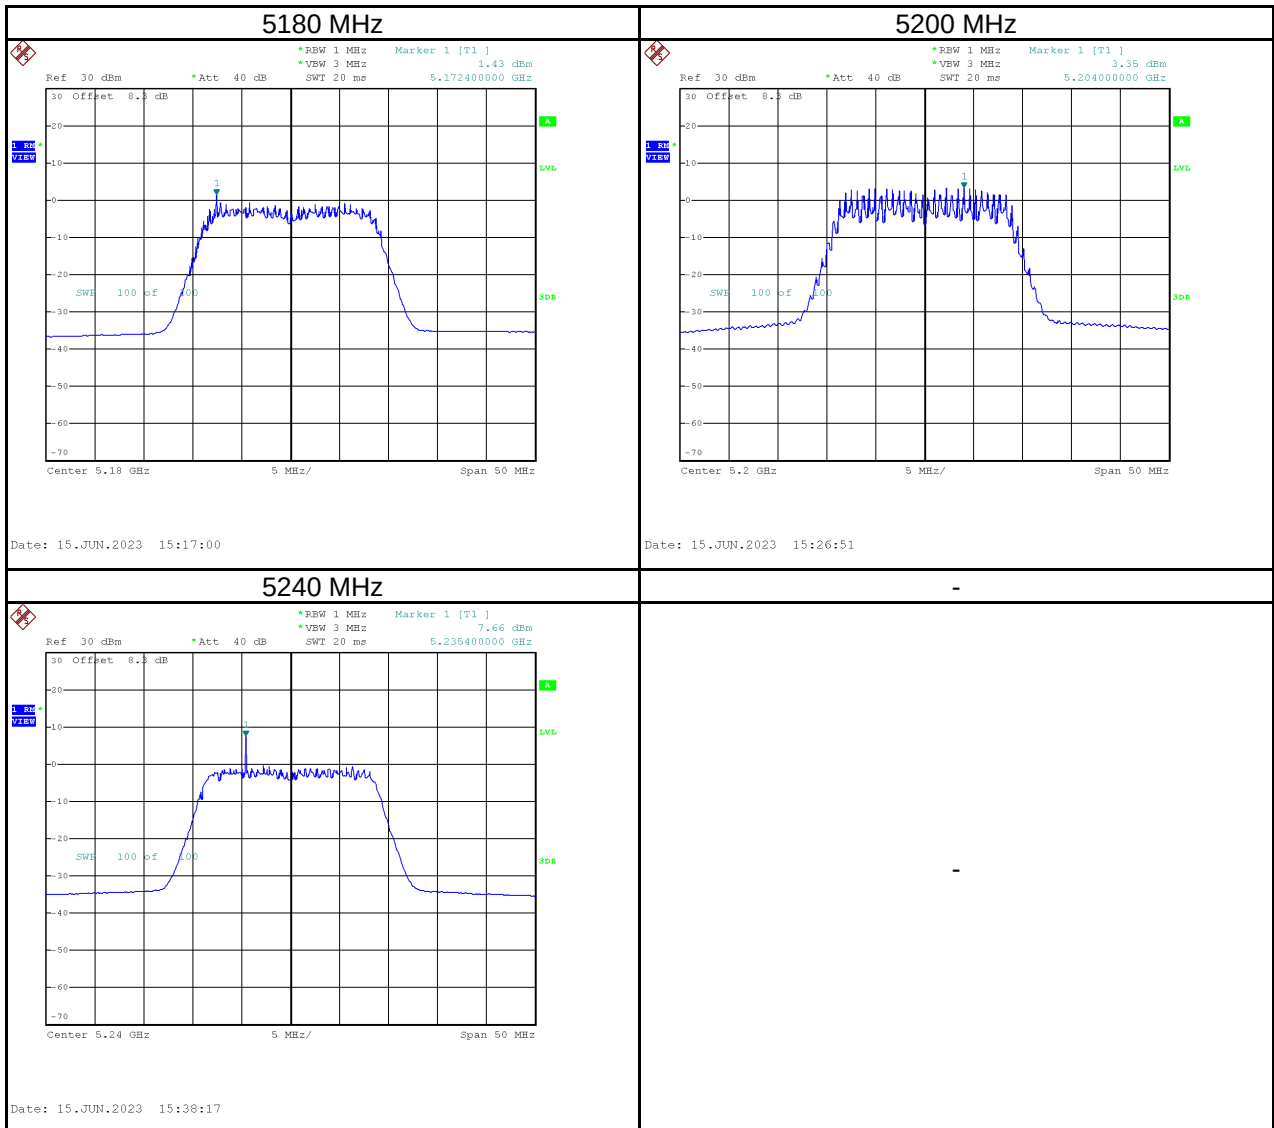


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	-0.09	2.33	2.24	8.94	Pass
5300	-0.30	2.33	2.03	8.94	Pass
5320	-3.42	2.33	-1.09	8.94	Pass

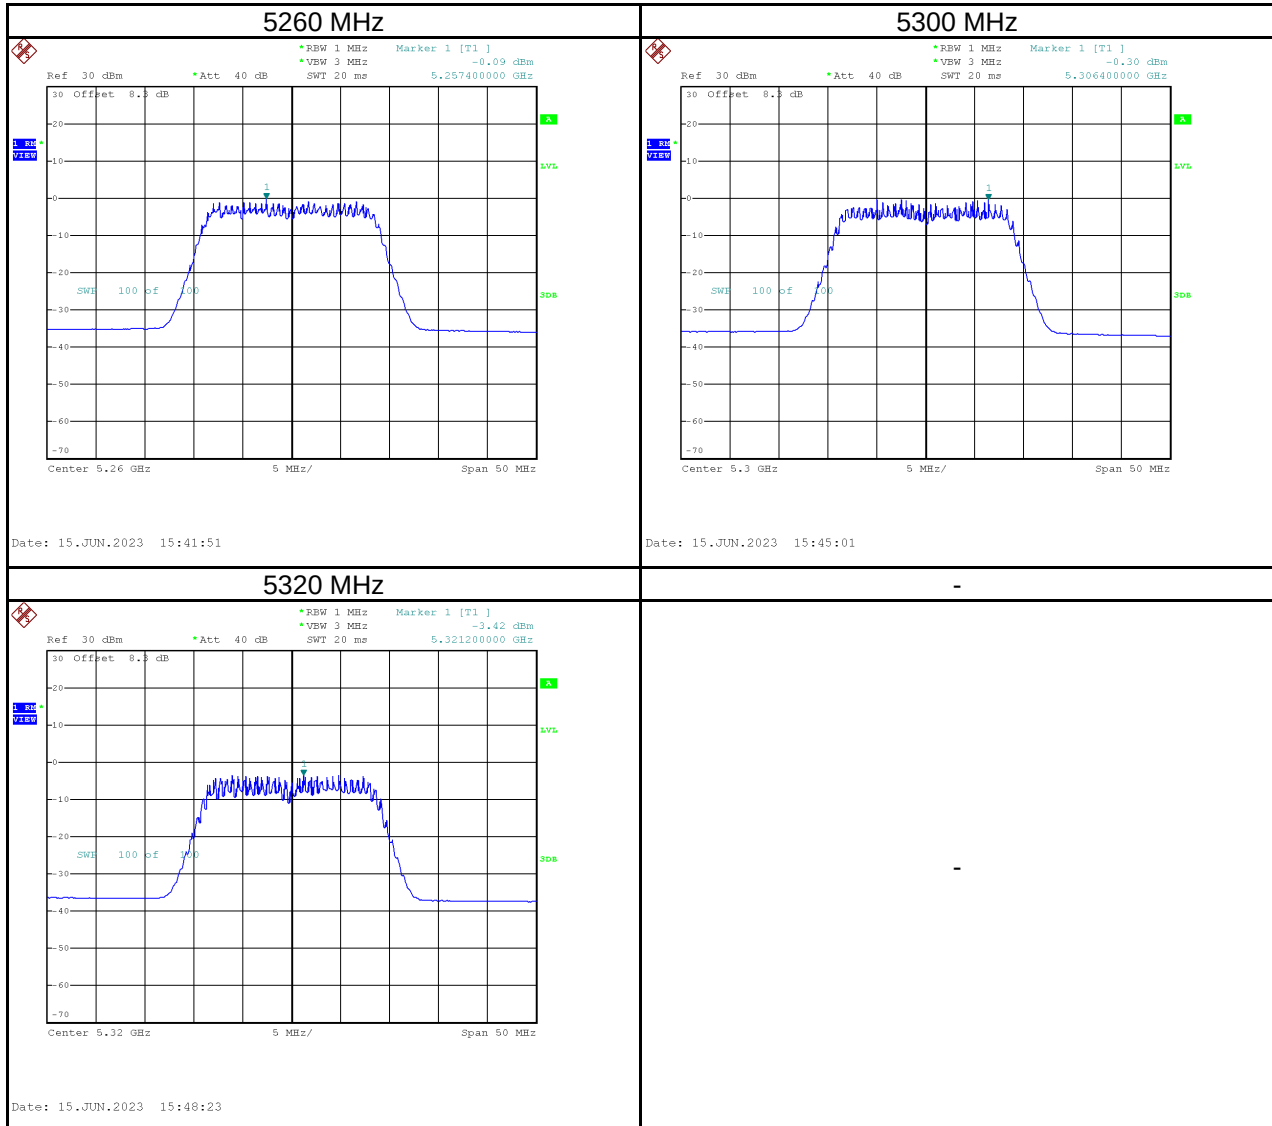

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	4.55	11.54	2.33	13.87	27.94	Pass
5785	2.12	9.11	2.33	11.44	27.94	Pass
5825	-0.03	6.96	2.33	9.29	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

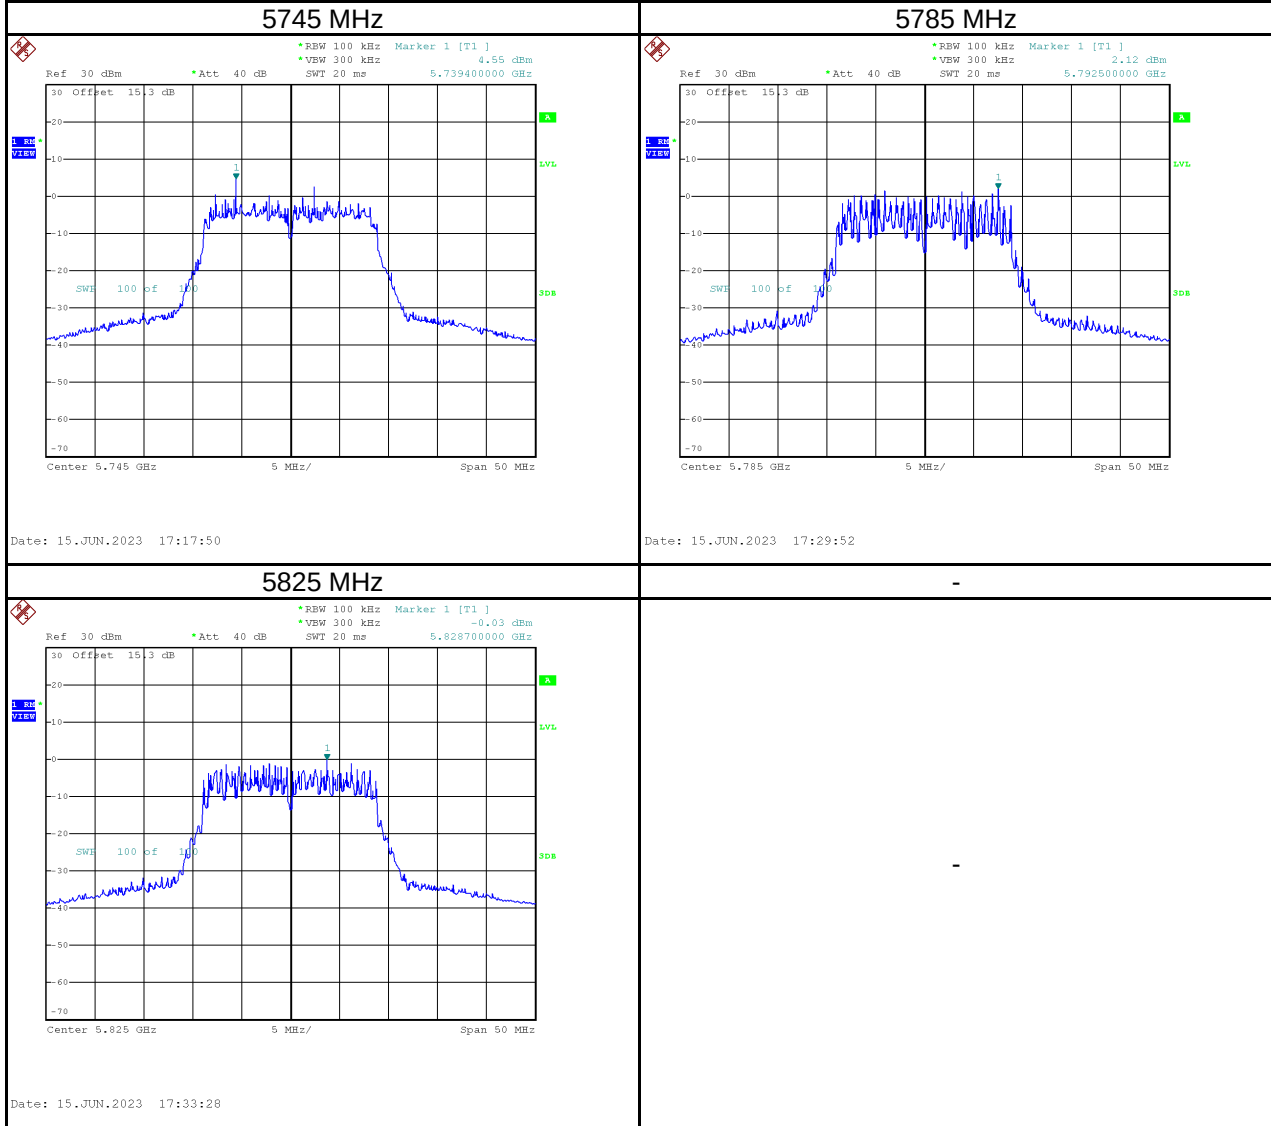

Test Mode	IEEE 802.11n (HT20)_Total
-----------	---------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	3.54	2.33	5.88	14.94	Pass
5200	5.68	2.33	8.01	14.94	Pass
5240	10.50	2.33	12.84	14.94	Pass
5260	3.45	2.33	5.78	8.94	Pass
5300	3.55	2.33	5.89	8.94	Pass
5320	-0.38	2.33	1.95	8.94	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	8.17	15.16	2.33	17.50	27.94	Pass
5785	4.86	11.85	2.33	14.19	27.94	Pass
5825	4.92	11.91	2.33	14.24	27.94	Pass


NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100KHz} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11n (HT40)_Ant 1
-----------	---------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	-7.16	2.74	-4.42	14.94	Pass
5230	-2.16	2.74	0.58	14.94	Pass

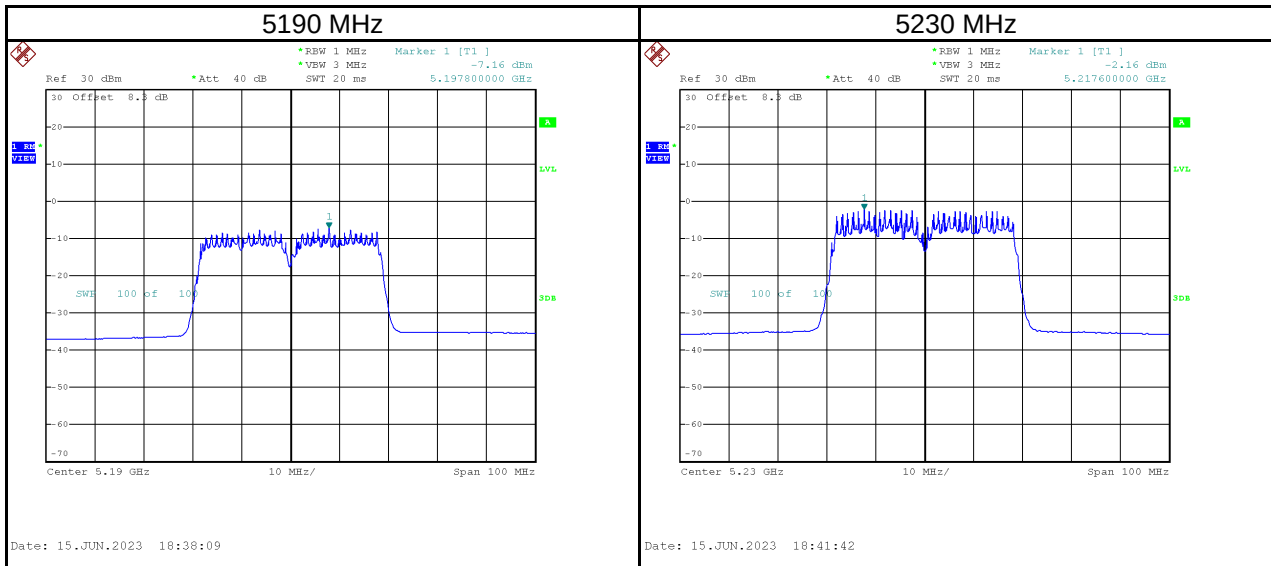


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	-5.11	2.74	-2.37	8.94	Pass
5310	-8.28	2.74	-5.54	8.94	Pass

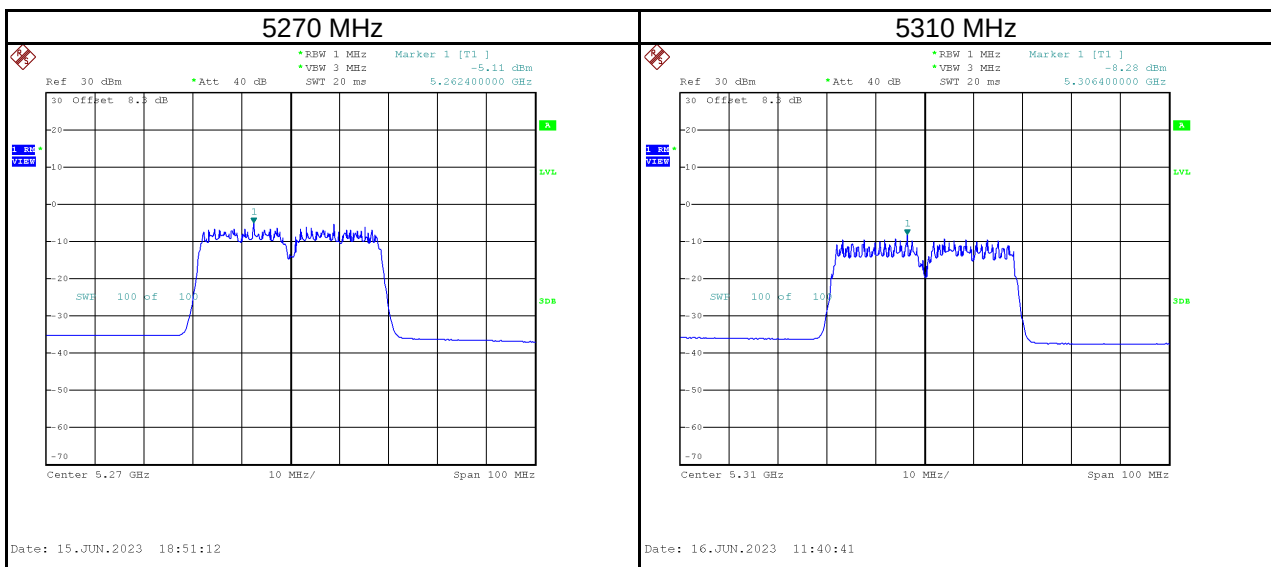


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	0.93	7.92	2.74	10.66	27.94	Pass
5795	-3.54	3.45	2.74	6.19	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

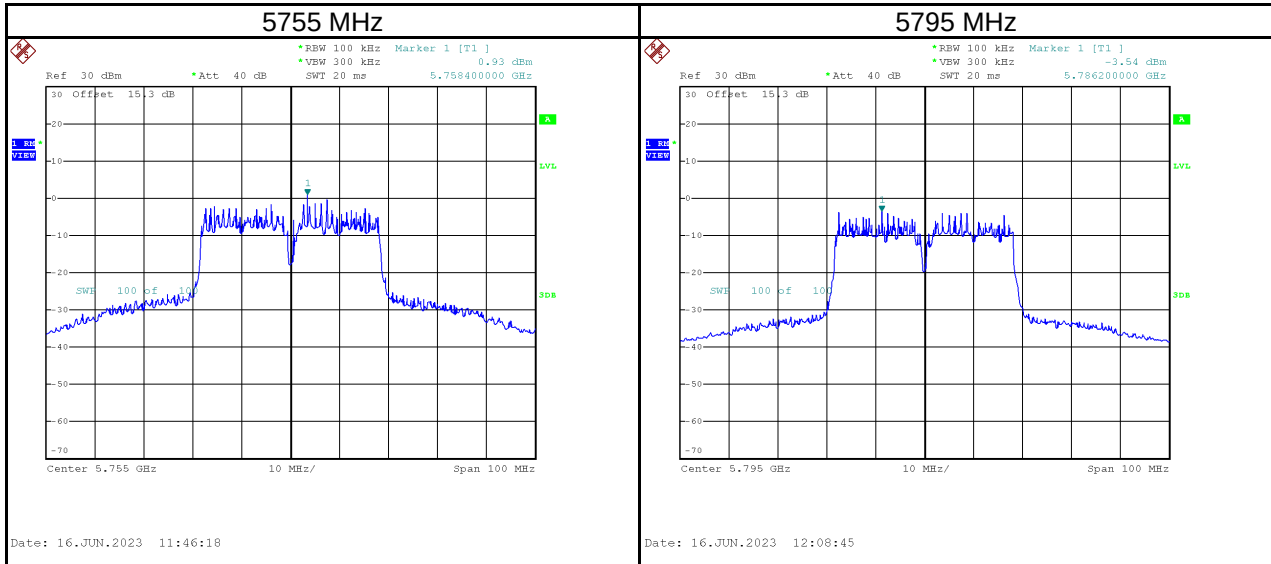


Test Mode	IEEE 802.11n (HT40)_Ant 2
-----------	---------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	-7.95	2.74	-5.21	14.94	Pass
5230	-2.20	2.74	0.54	14.94	Pass

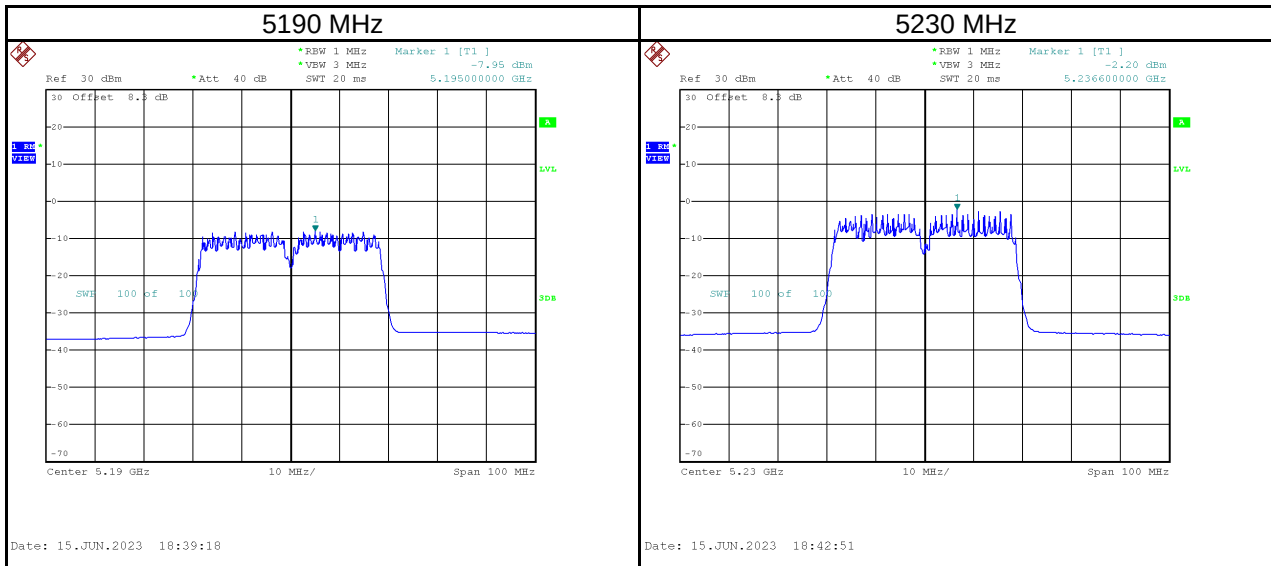


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	-4.80	2.74	-2.06	8.94	Pass
5310	-8.86	2.74	-6.12	8.94	Pass

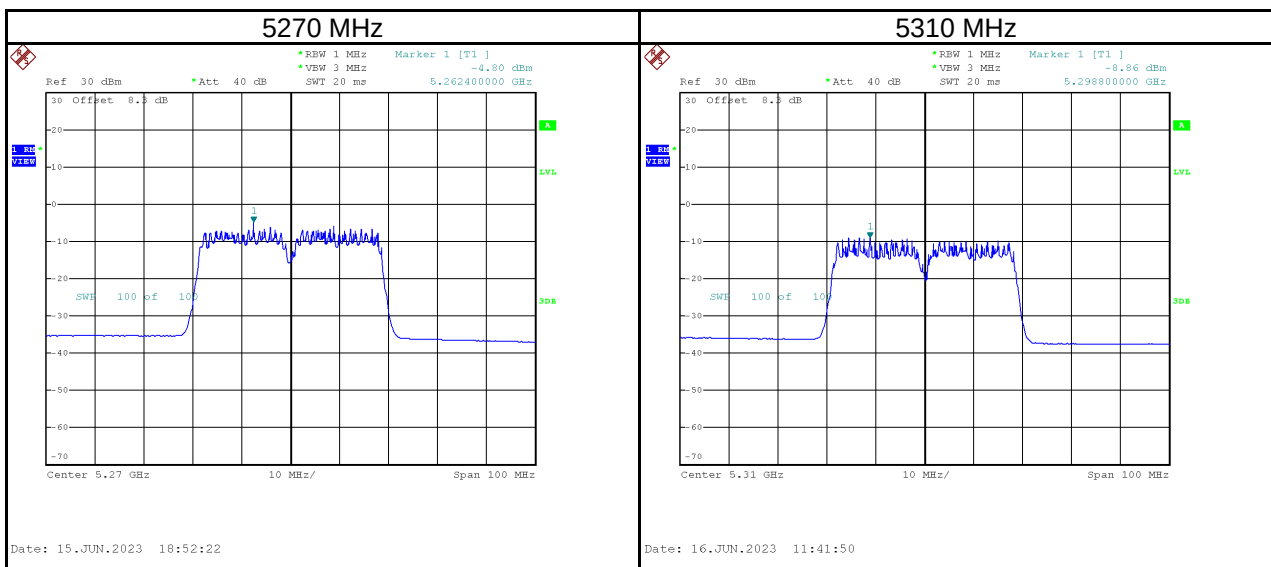

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	0.33	7.32	2.74	10.06	27.94	Pass
5795	-4.83	2.16	2.74	4.90	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

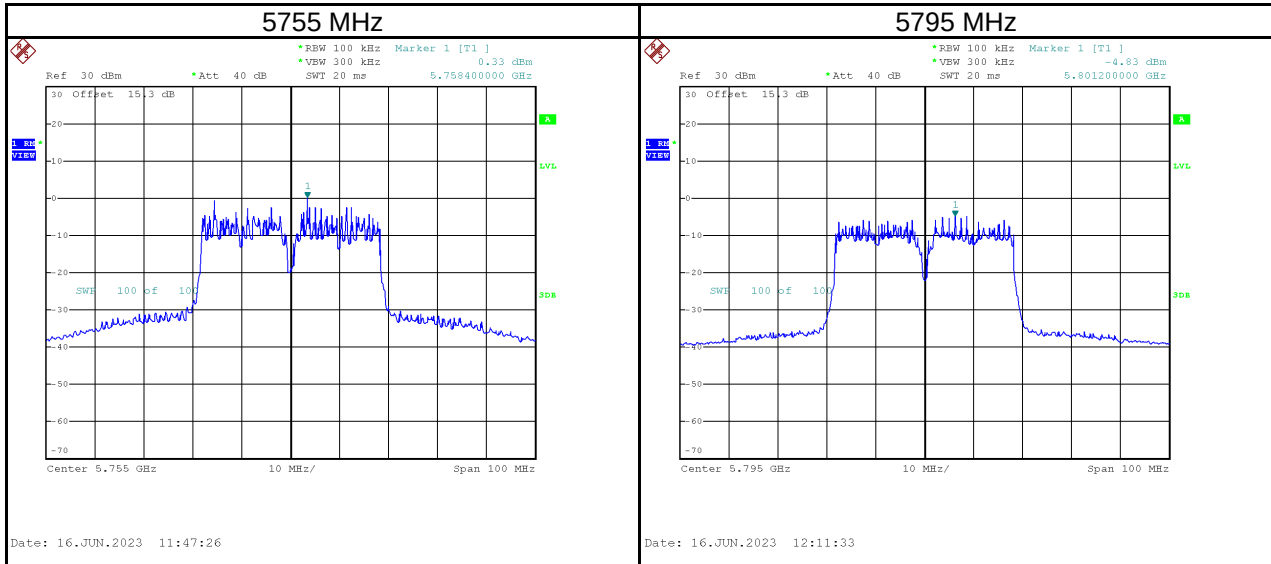

Test Mode	IEEE 802.11n (HT40)_Total
-----------	---------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	-4.53	2.74	-1.78	14.94	Pass
5230	0.83	2.74	3.57	14.94	Pass
5270	-1.94	2.74	0.80	8.94	Pass
5310	-5.55	2.74	-2.81	8.94	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	3.65	10.64	2.74	13.38	27.94	Pass
5795	-1.13	5.86	2.74	8.61	27.94	Pass


NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11ac (VHT80)_Ant 1
-----------	-----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	-0.98	1.03	0.05	14.94	Pass

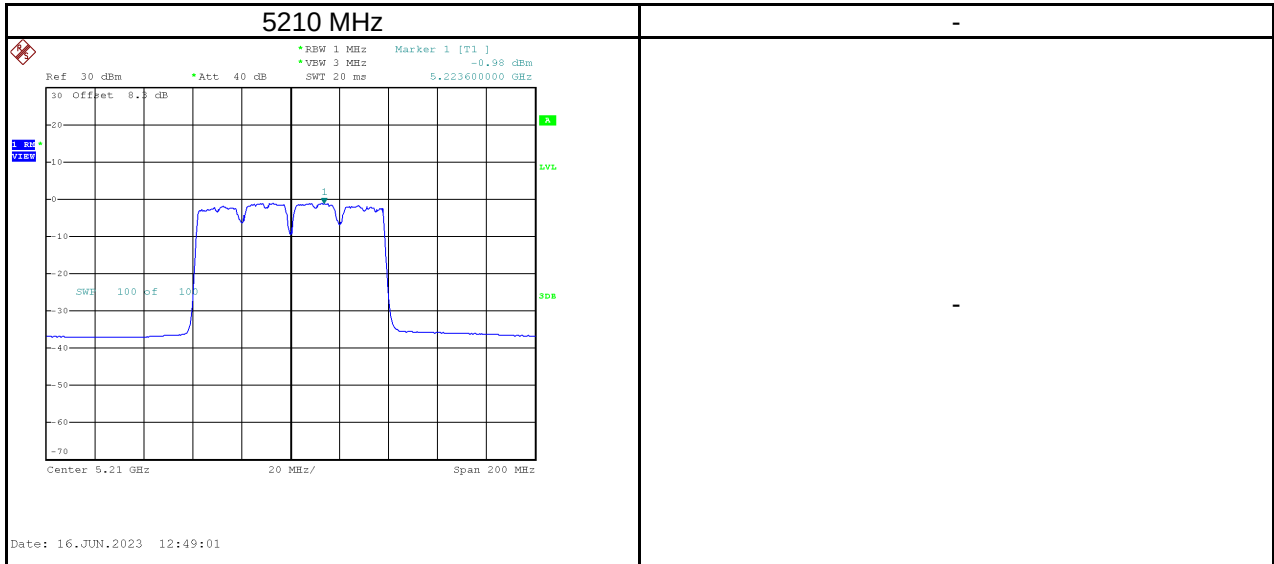

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5290	-1.48	1.03	-0.45	8.94	Pass

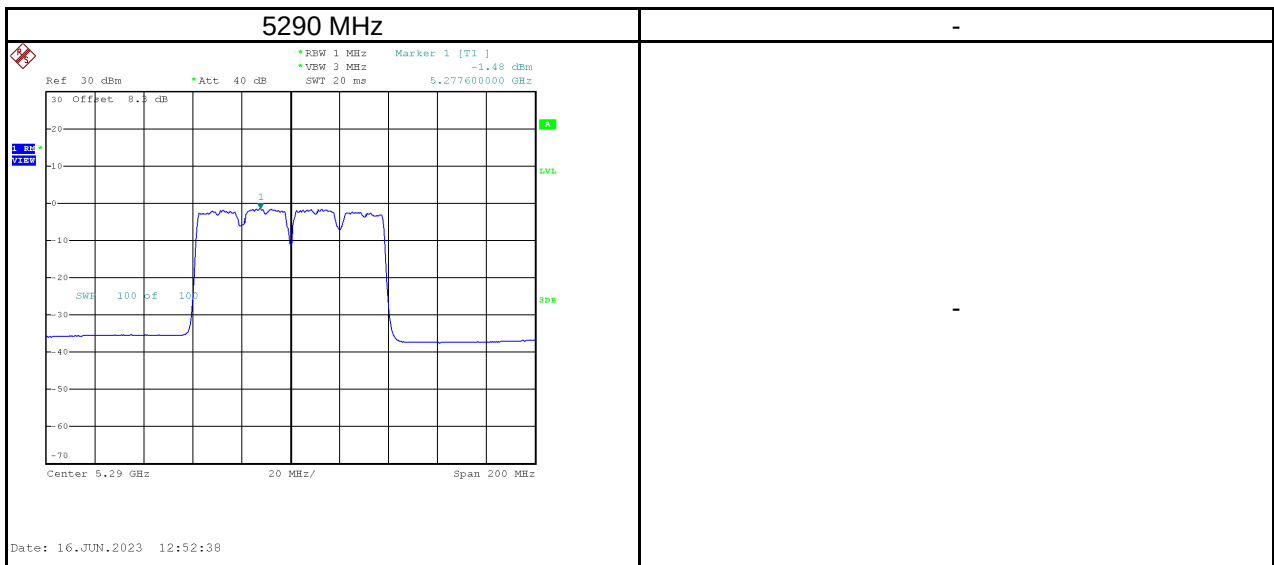


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	3.80	10.79	1.03	11.82	27.94	Pass
NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$						

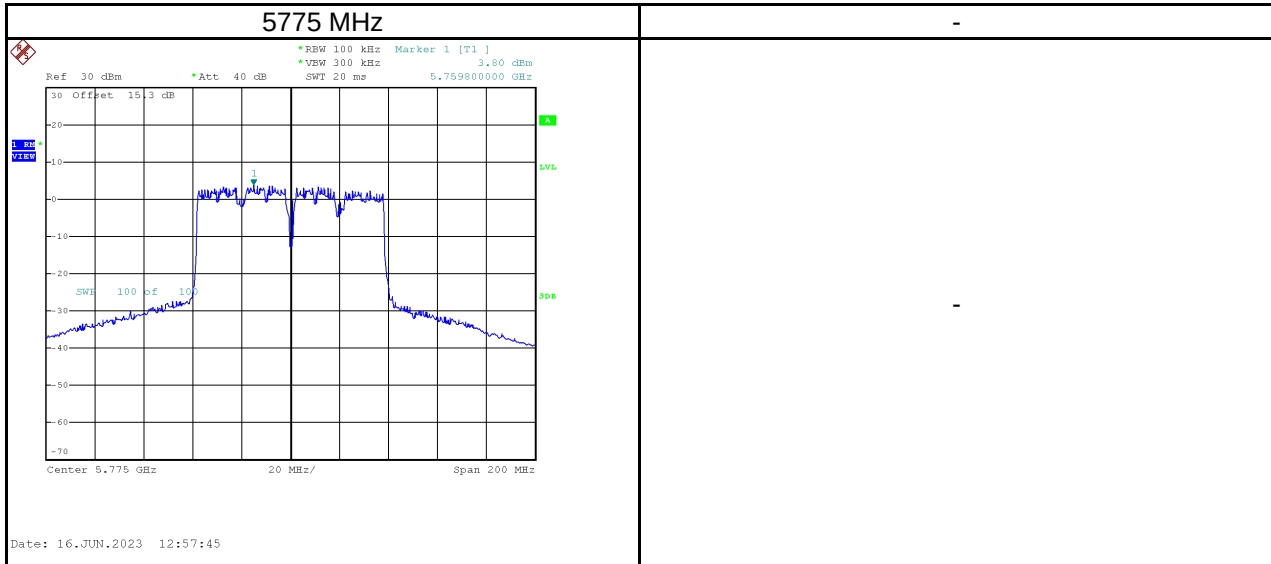


Test Mode	IEEE 802.11ac (VHT80)_Ant 2
-----------	-----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	-1.88	1.03	-0.85	14.94	Pass

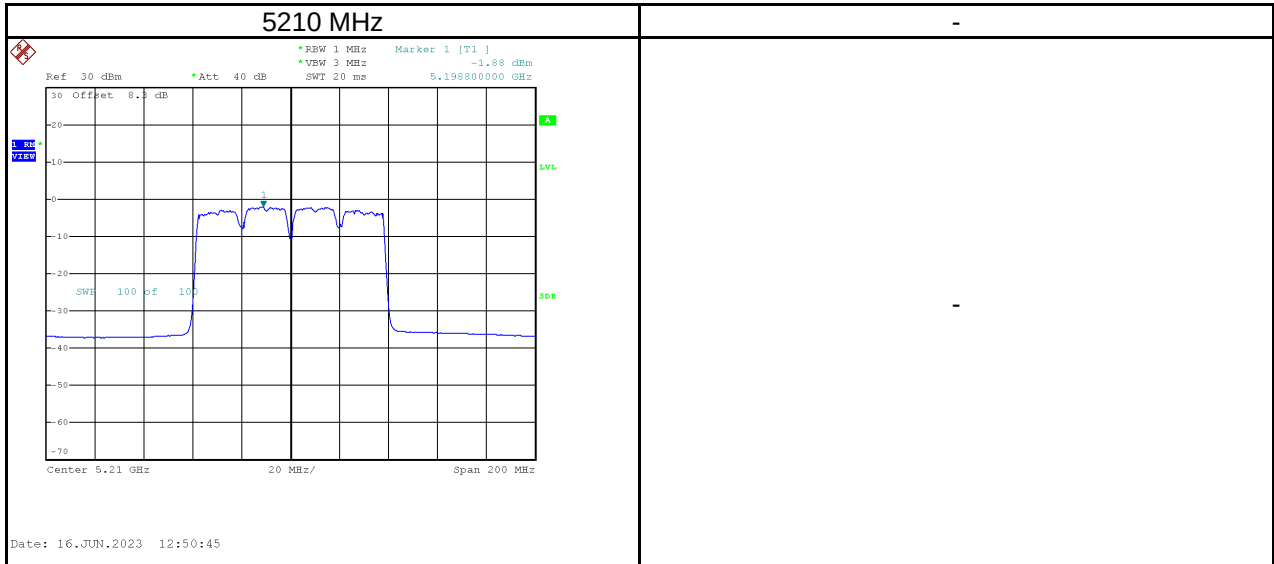


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5290	-2.55	1.03	-1.52	8.94	Pass

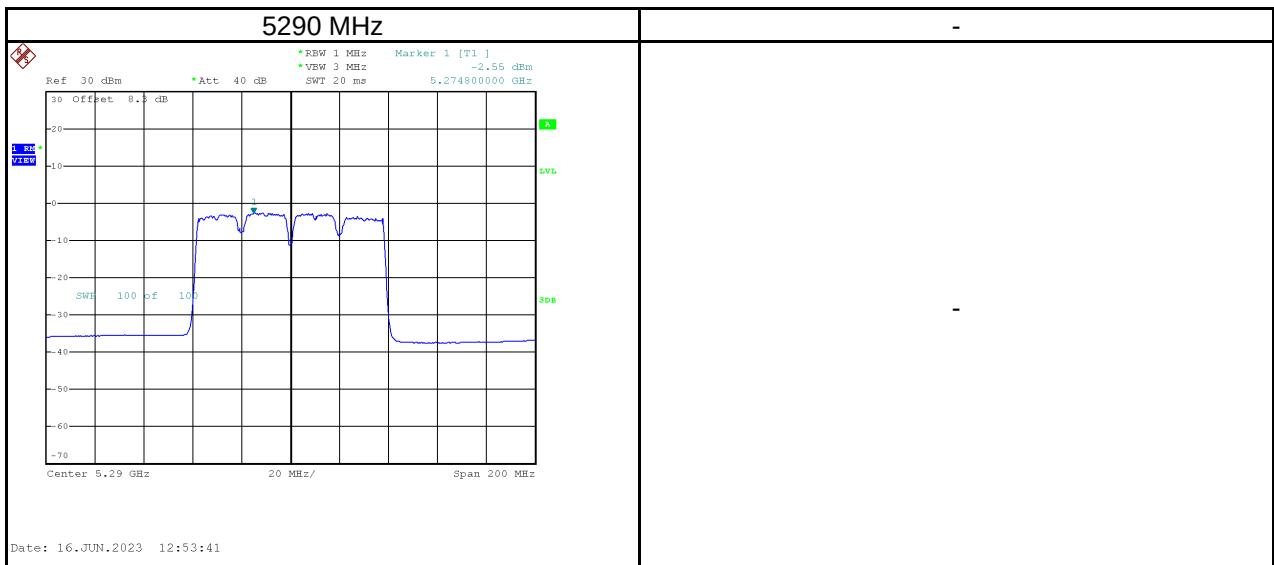

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	1.79	8.78	1.03	9.81	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

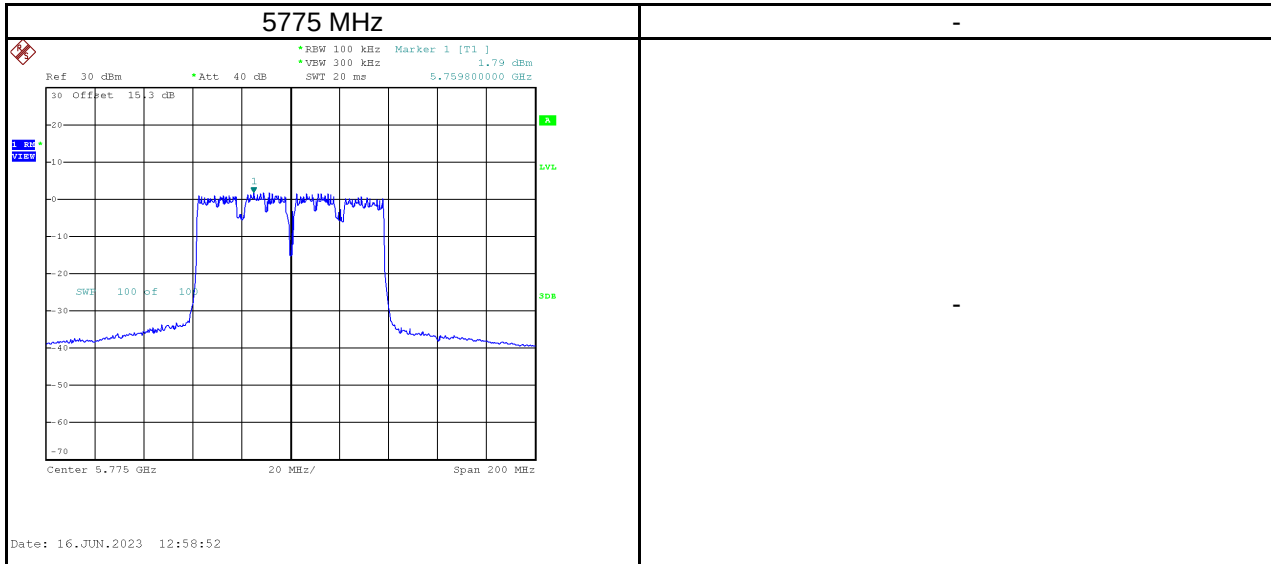

Test Mode	IEEE 802.11ac (VHT80)_Total
-----------	-----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	1.60	1.03	2.64	14.94	Pass
5290	1.03	1.03	2.06	8.94	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	5.92	12.91	1.03	13.94	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$


Test Mode	IEEE 802.11ac (VHT160)_Ant 1
-----------	------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-4.93	0.95	-3.98	14.94	Pass

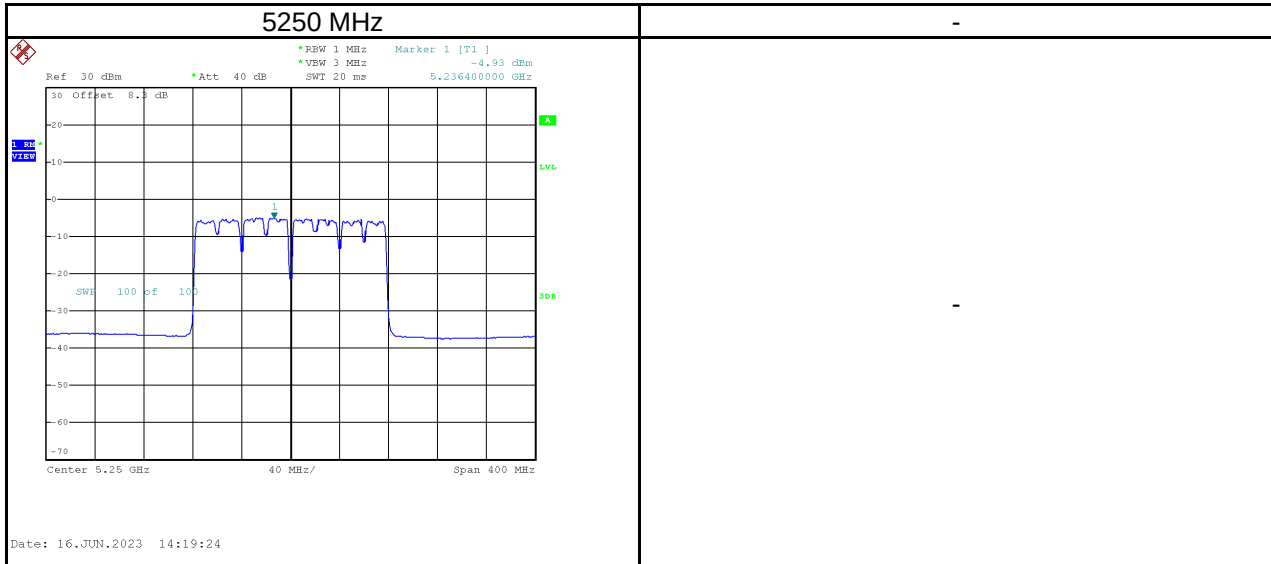

Test Mode	IEEE 802.11ac (VHT160)_Ant 2
-----------	------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-5.08	0.95	-4.13	14.94	Pass

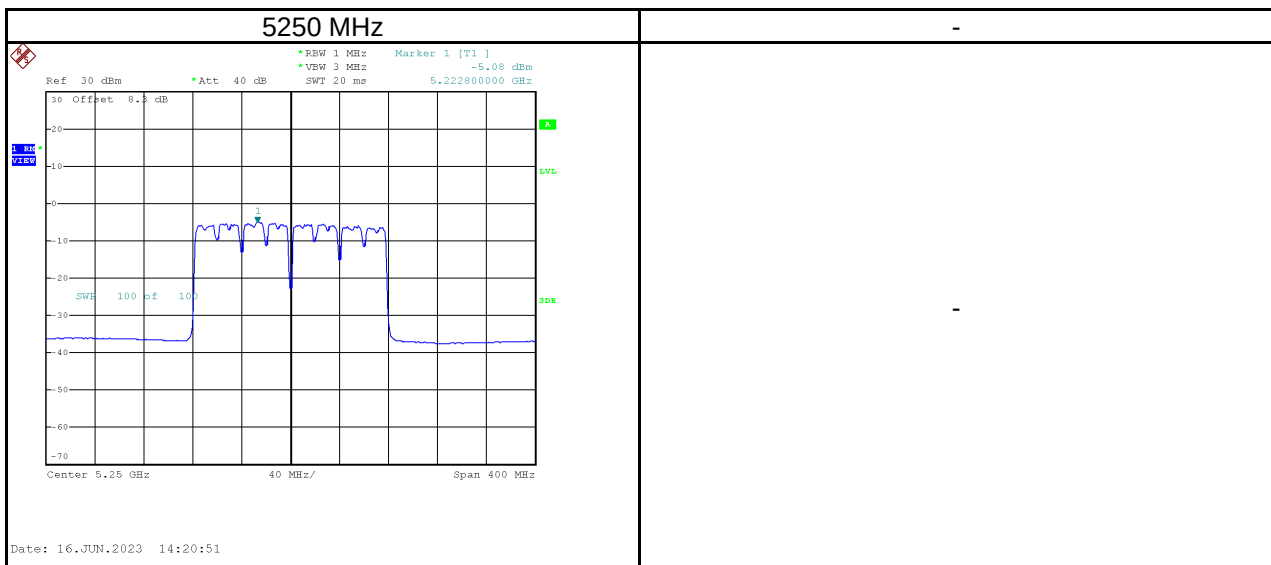


Test Mode	IEEE 802.11ac (VHT160)_Total
-----------	------------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-1.99	0.95	-1.04	14.94	Pass

Test Mode	IEEE 802.11ax (HE20)_Ant 1
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	4.98	0.42	5.40	14.94	Pass
5200	10.93	0.42	11.35	14.94	Pass
5240	11.31	0.42	11.73	14.94	Pass

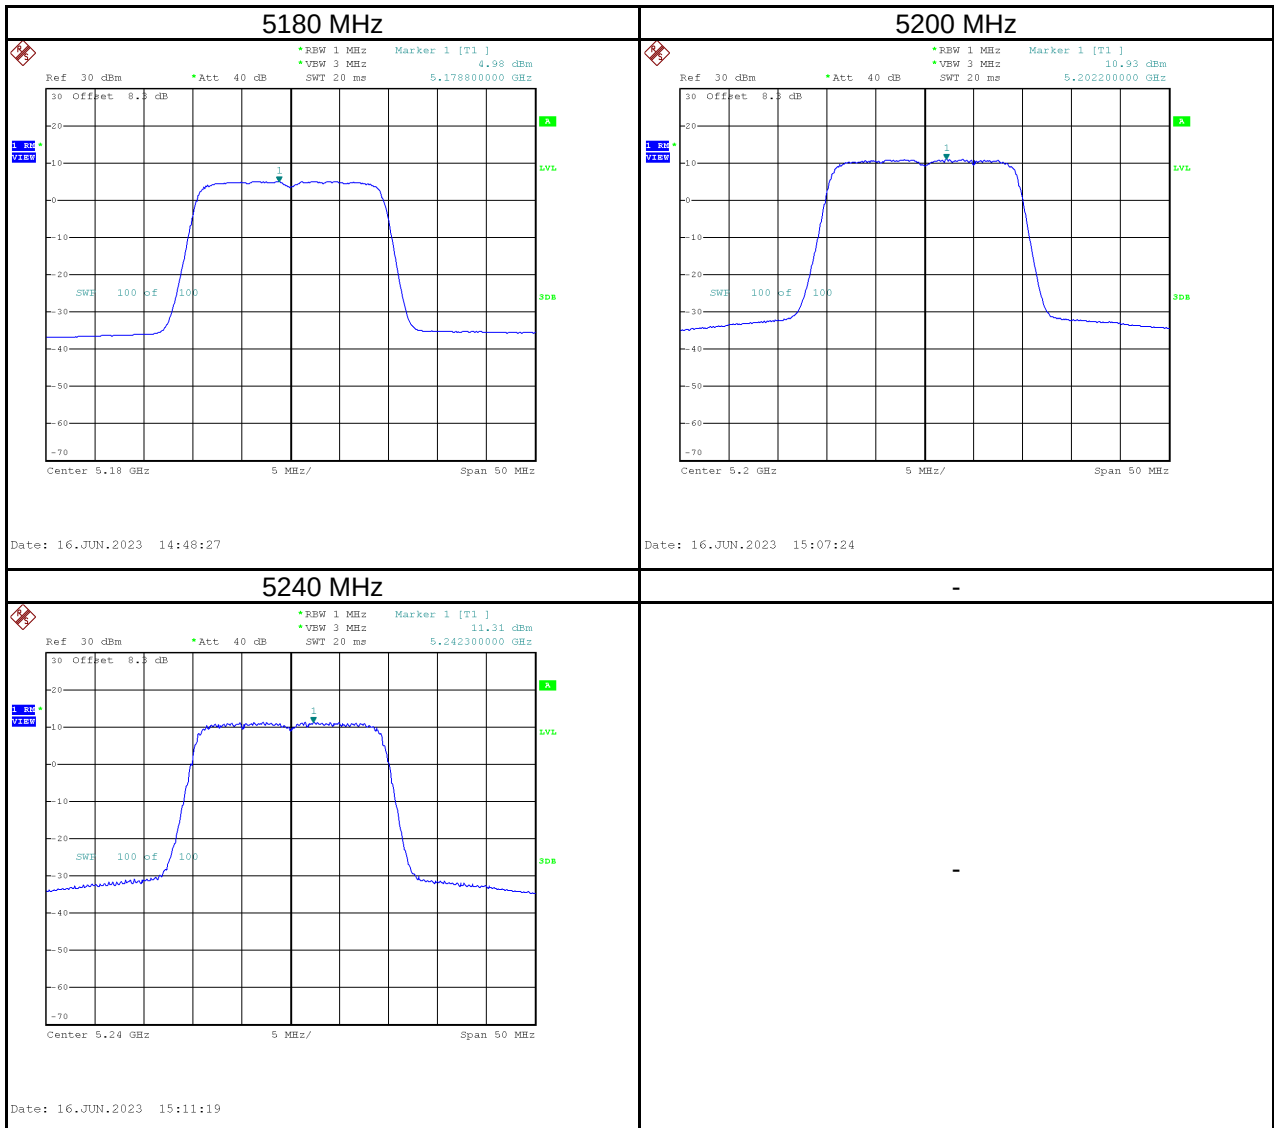


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	5.38	0.42	5.80	8.94	Pass
5300	3.62	0.42	4.04	8.94	Pass
5320	5.41	0.42	5.83	8.94	Pass

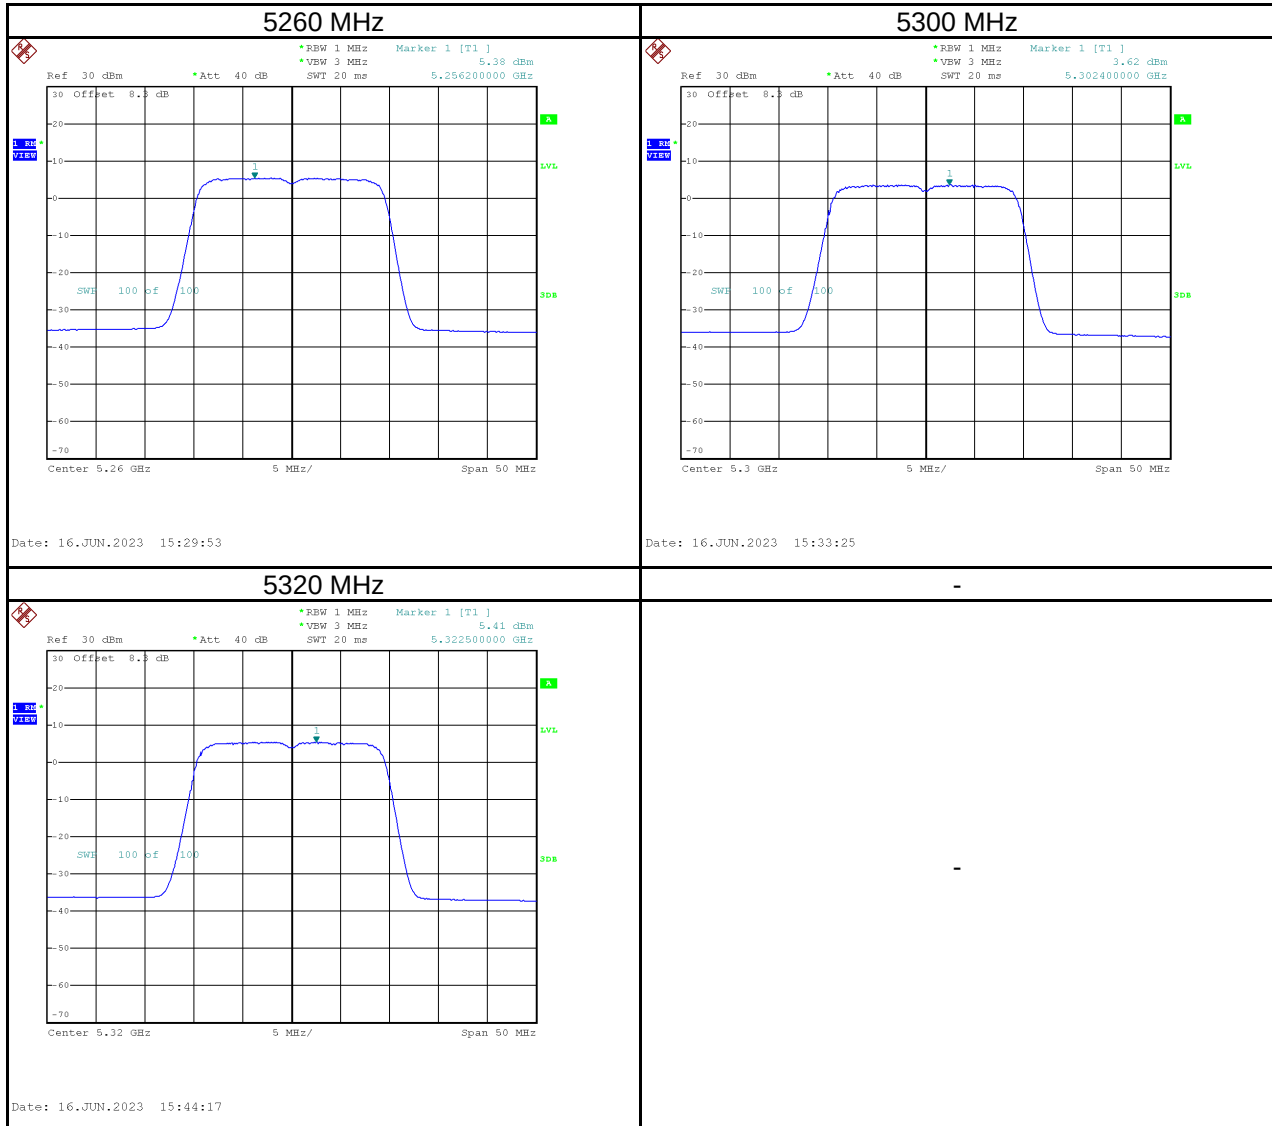


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	9.86	16.85	0.42	17.27	27.94	Pass
5785	8.39	15.38	0.42	15.80	27.94	Pass
5825	7.70	14.69	0.42	15.11	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

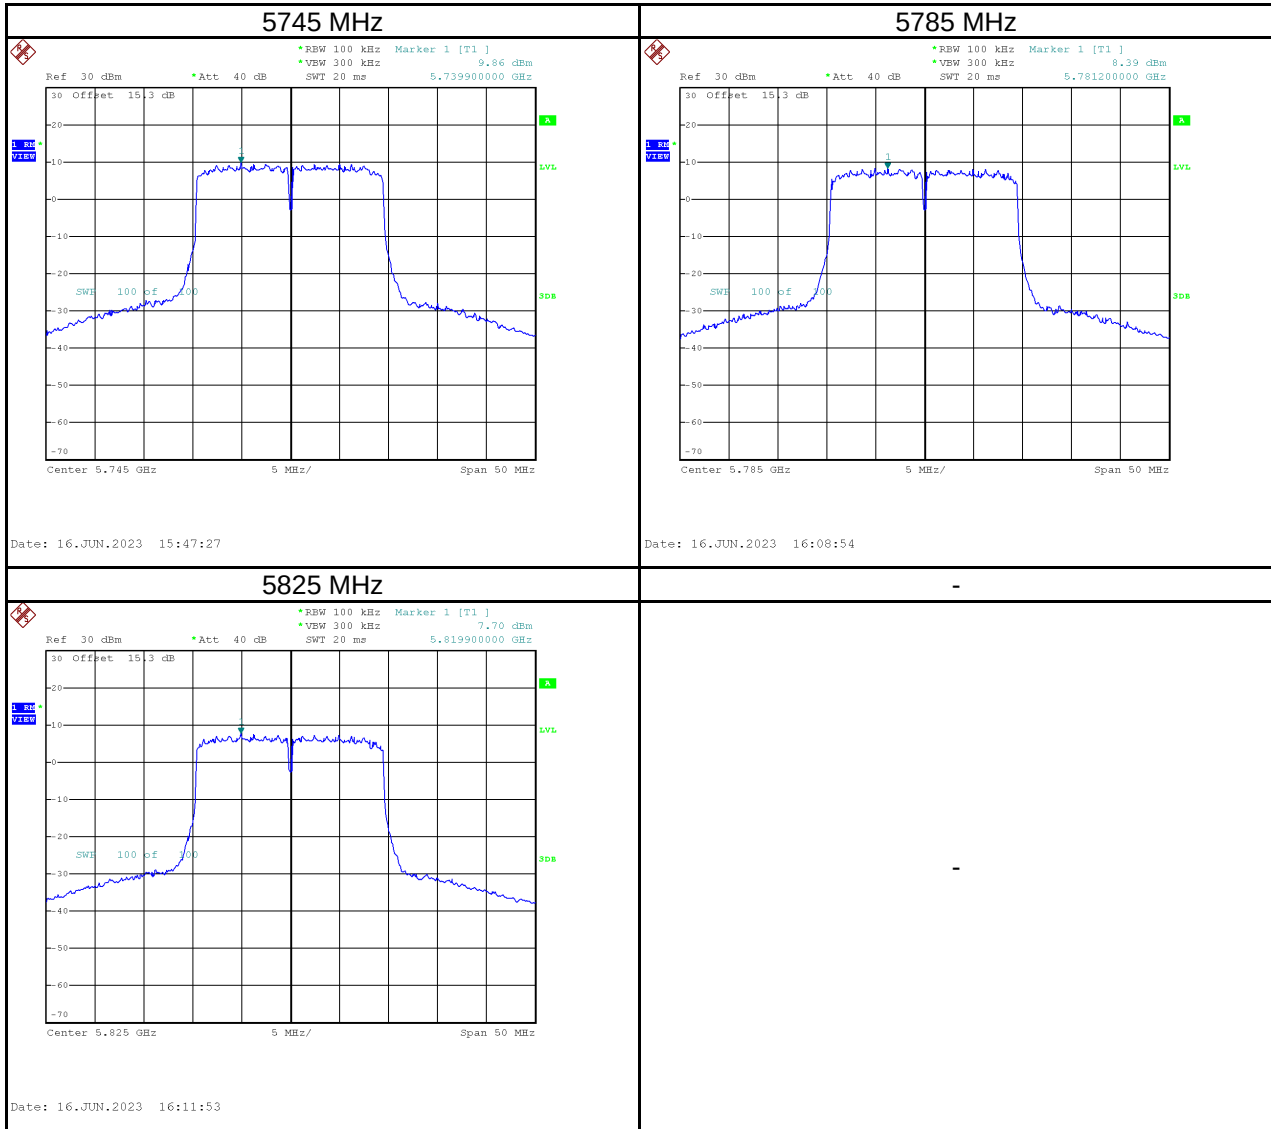


Test Mode	IEEE 802.11ax (HE20)_Ant 2
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	5.97	0.42	6.39	14.94	Pass
5200	11.08	0.42	11.50	14.94	Pass
5240	11.22	0.42	11.64	14.94	Pass

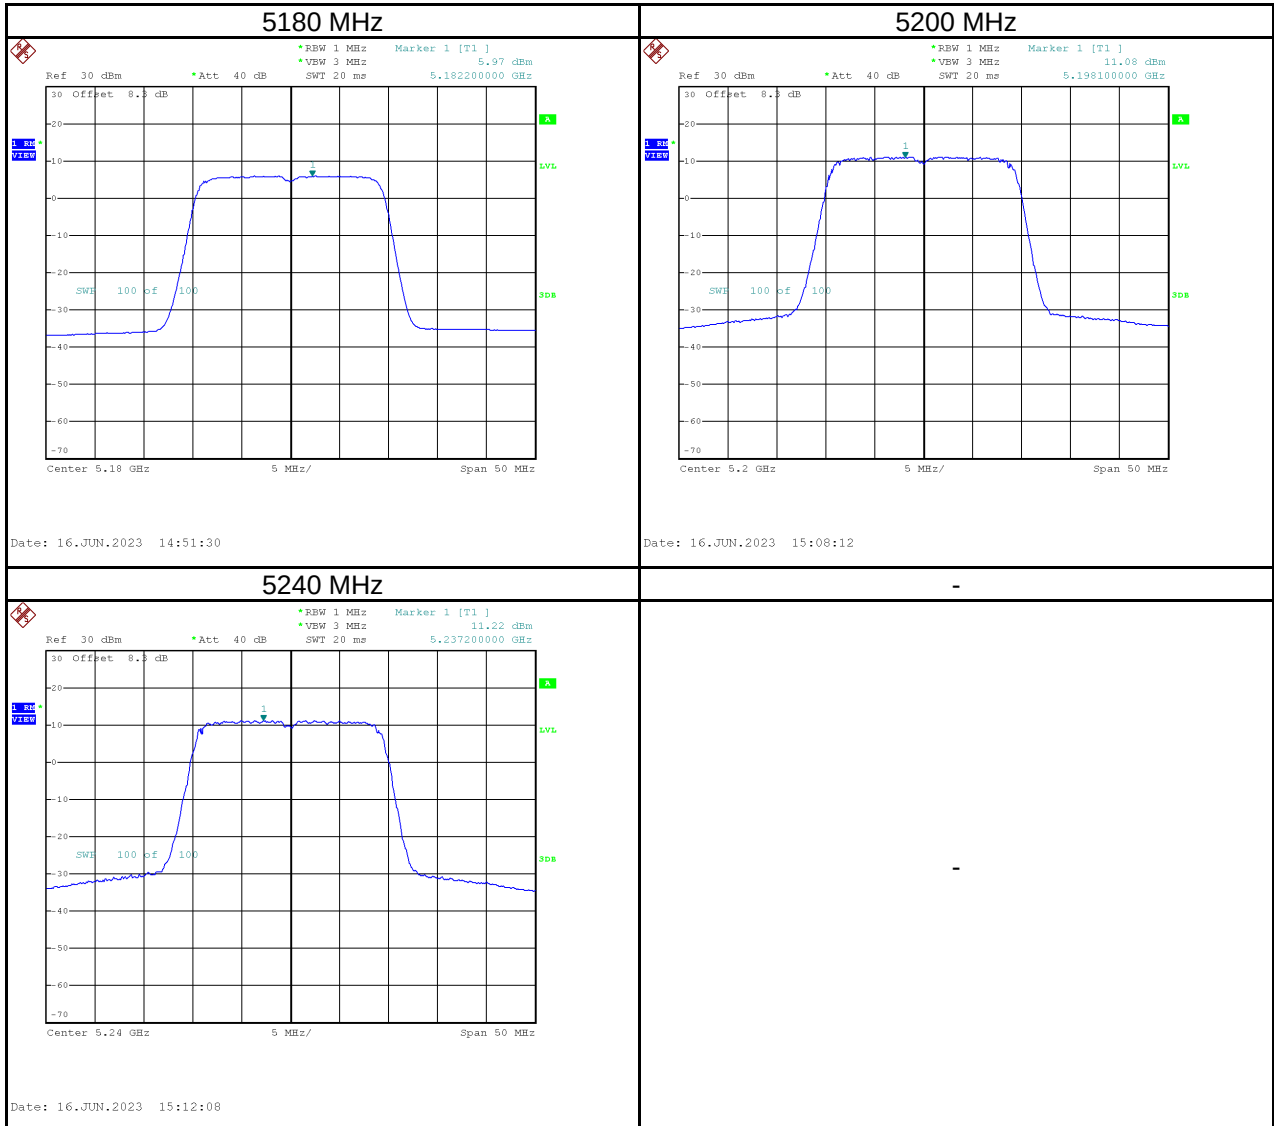


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	5.22	0.42	5.64	8.94	Pass
5300	3.71	0.42	4.13	8.94	Pass
5320	5.38	0.42	5.80	8.94	Pass

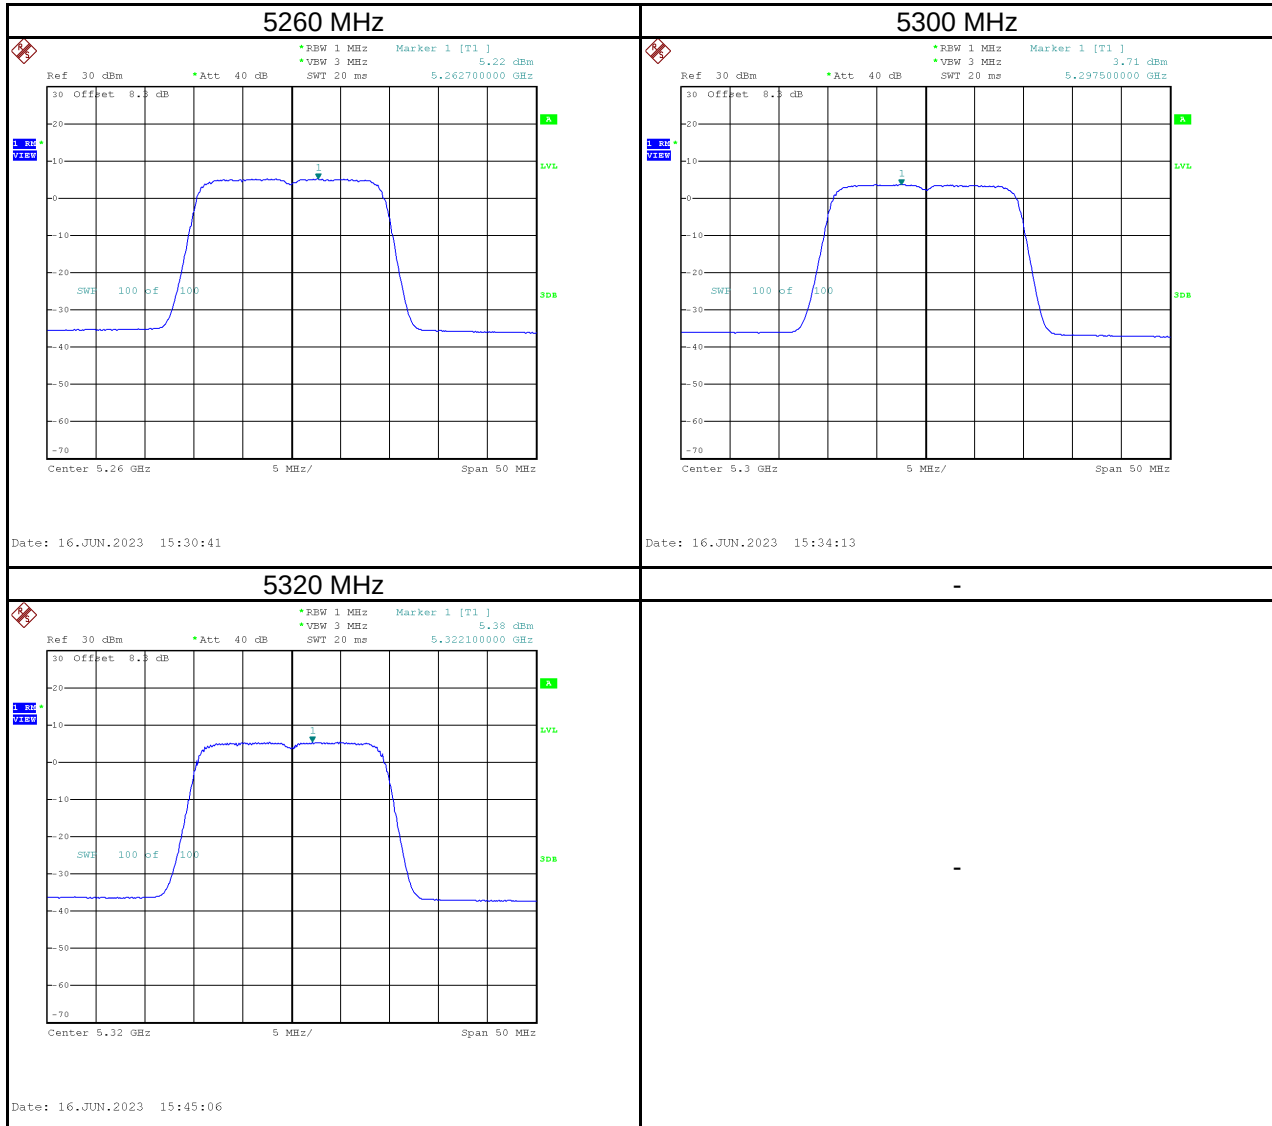

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	8.30	15.29	0.42	15.71	27.94	Pass
5785	7.56	14.55	0.42	14.97	27.94	Pass
5825	6.73	13.72	0.42	14.14	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

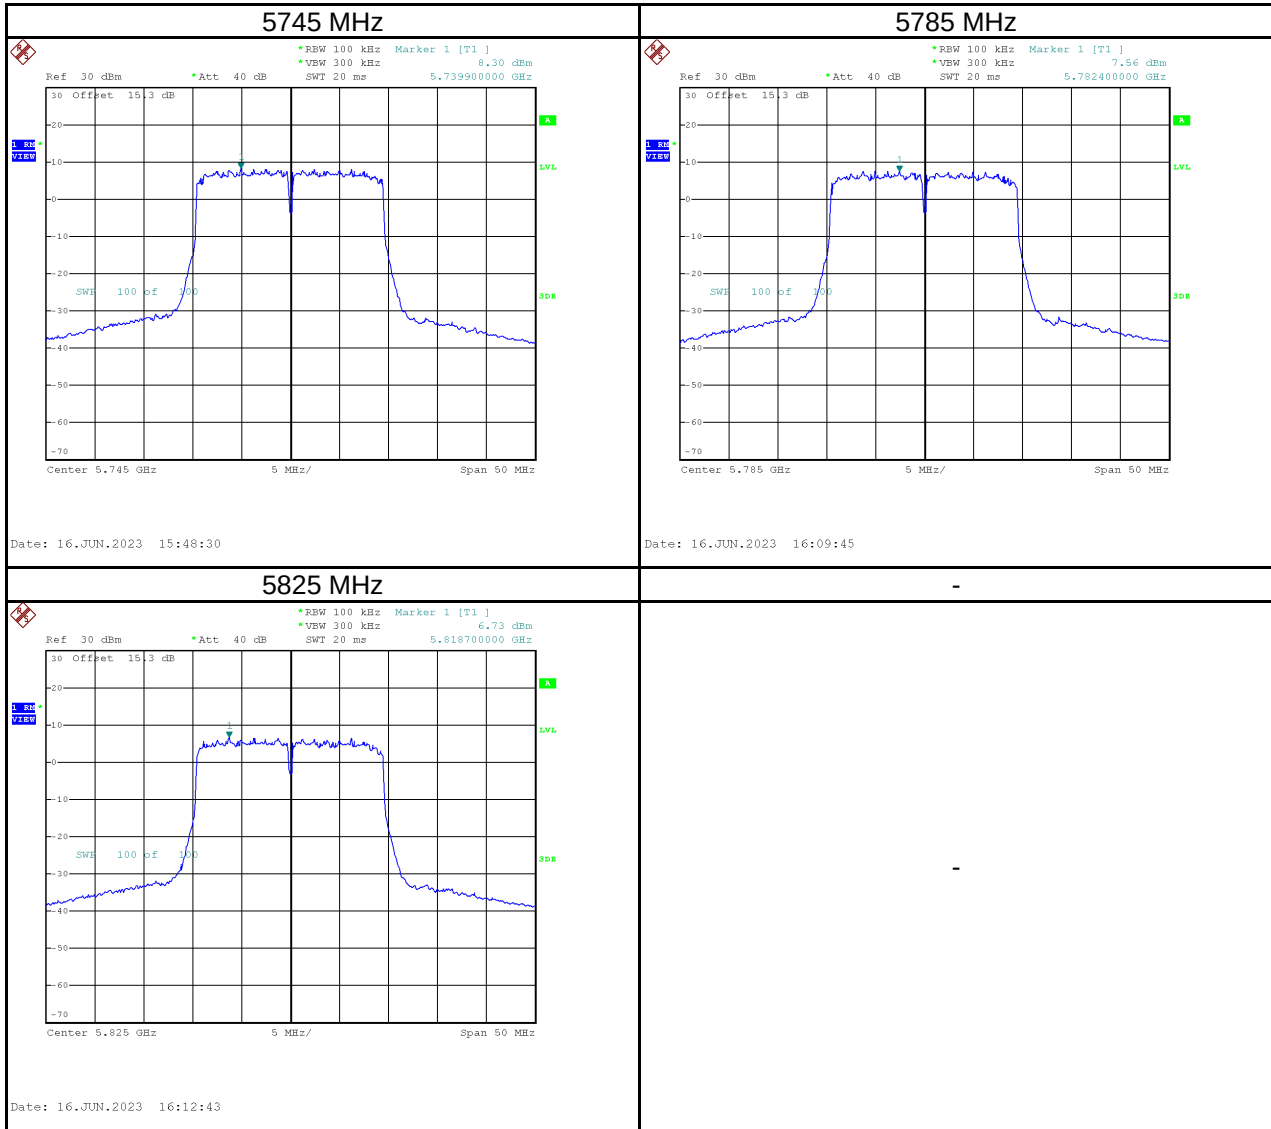

Test Mode	IEEE 802.11ax (HE20)_Total
-----------	----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	8.51	0.42	8.93	14.94	Pass
5200	14.02	0.42	14.43	14.94	Pass
5240	14.28	0.42	14.69	14.94	Pass
5260	8.31	0.42	8.73	8.94	Pass
5300	6.68	0.42	7.09	8.94	Pass
5320	8.41	0.42	8.82	8.94	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	12.16	19.15	0.42	19.57	27.94	Pass
5785	11.01	17.99	0.42	18.41	27.94	Pass
5825	10.25	17.24	0.42	17.66	27.94	Pass


NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100KHz} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11ax (HE40)_Ant 1
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	3.52	0.46	3.98	14.94	Pass
5230	6.90	0.46	7.36	14.94	Pass

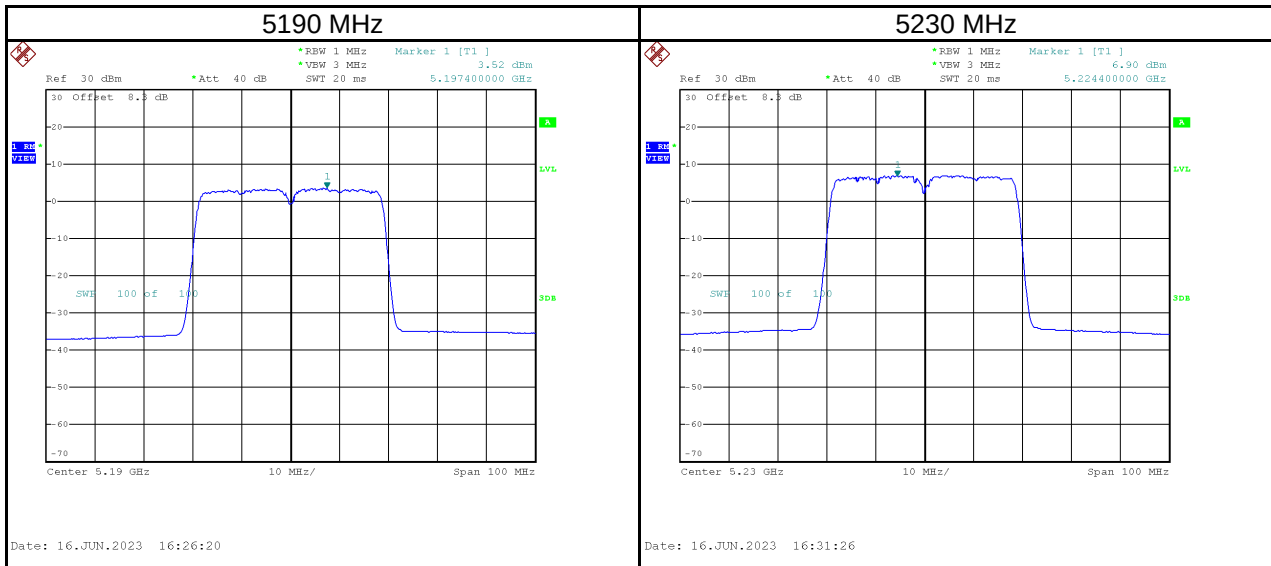


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	5.58	0.46	6.04	8.94	Pass
5310	2.66	0.46	3.12	8.94	Pass

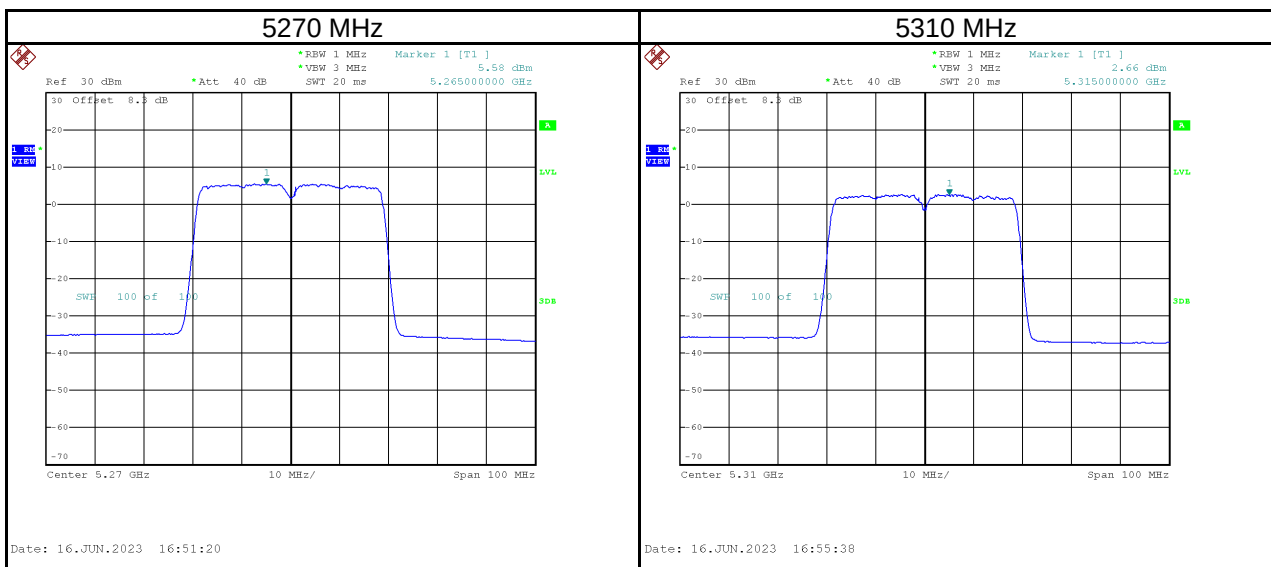


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	8.08	15.07	0.46	15.53	27.94	Pass
5795	7.25	14.24	0.46	14.70	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

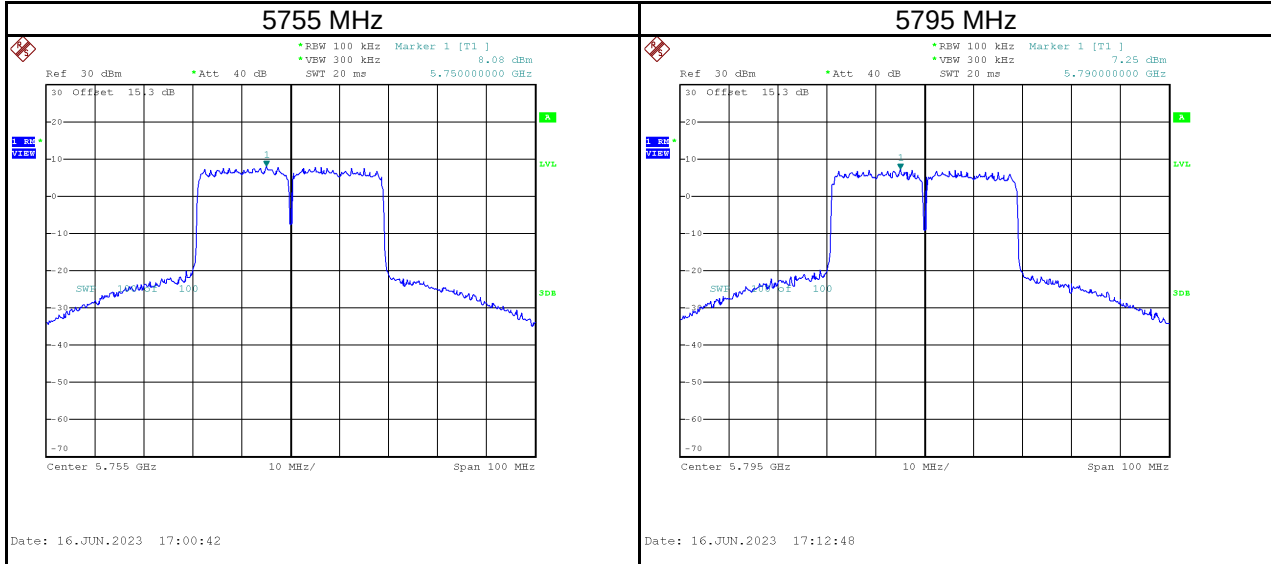


Test Mode	IEEE 802.11ax (HE40)_Ant 2
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	3.33	0.46	3.79	14.94	Pass
5230	6.18	0.46	6.64	14.94	Pass

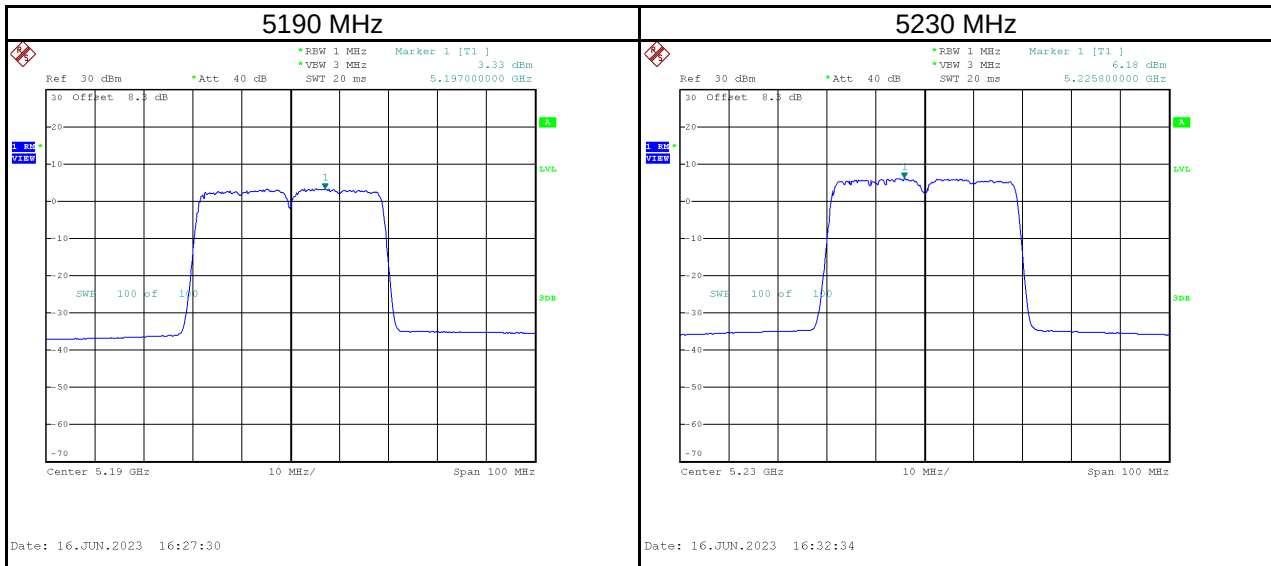


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	4.89	0.46	5.35	8.94	Pass
5310	2.23	0.46	2.69	8.94	Pass

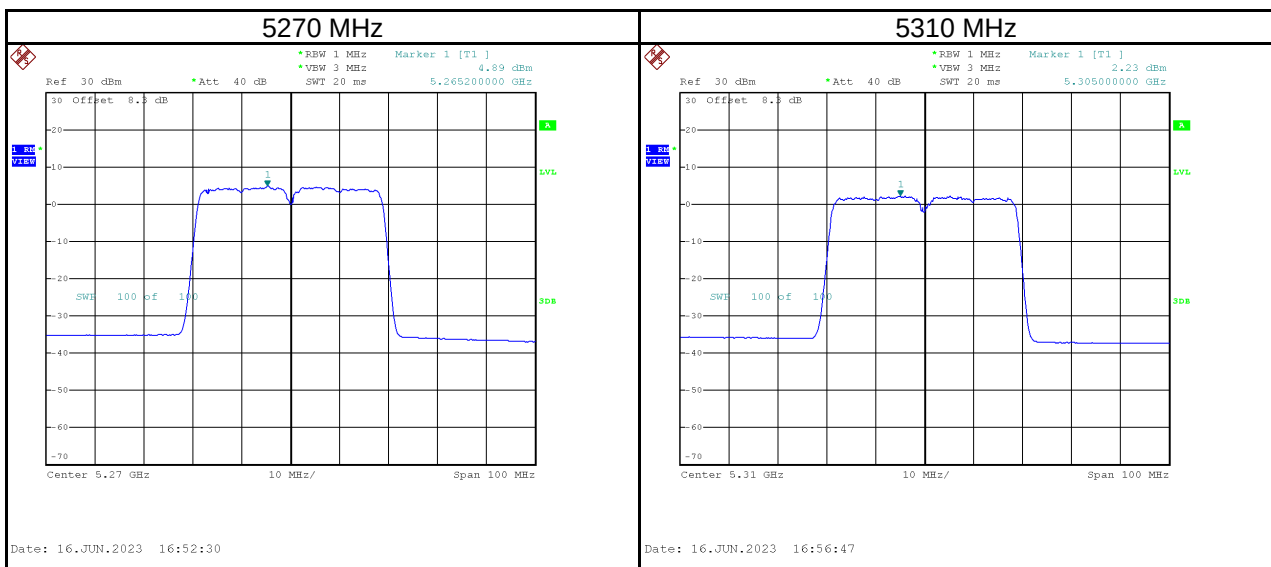

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	6.75	13.74	0.46	14.20	27.94	Pass
5795	5.67	12.66	0.46	13.12	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

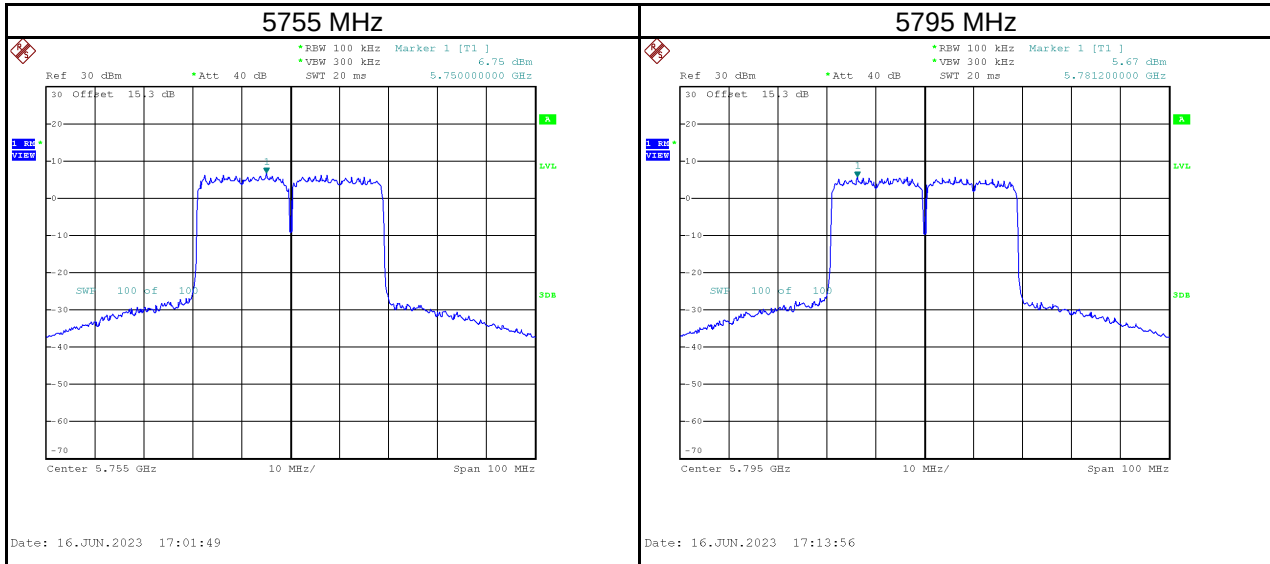

Test Mode	IEEE 802.11ax (HE40)_Total
-----------	----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	6.44	0.46	6.90	14.94	Pass
5230	9.57	0.46	10.03	14.94	Pass
5270	8.26	0.46	8.72	8.94	Pass
5310	5.46	0.46	5.92	8.94	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	10.48	17.47	0.46	17.93	27.94	Pass
5795	9.54	16.53	0.46	16.99	27.94	Pass


NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11ax (HE80)_Ant 1
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	0.94	0.42	1.36	14.94	Pass

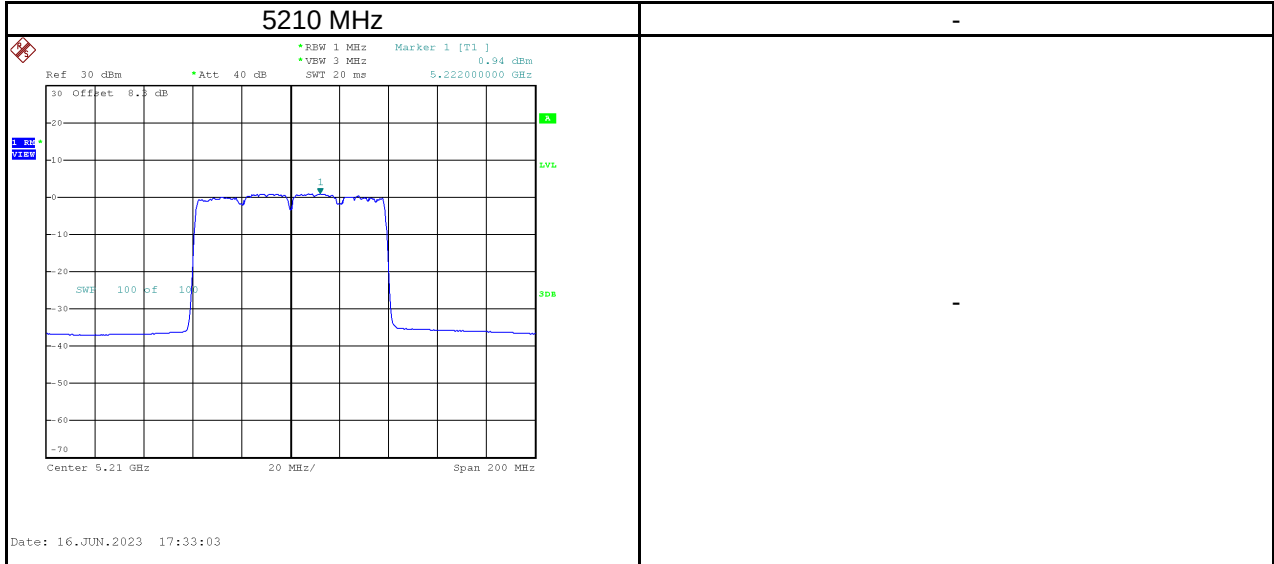


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5290	-0.09	0.42	0.33	8.94	Pass

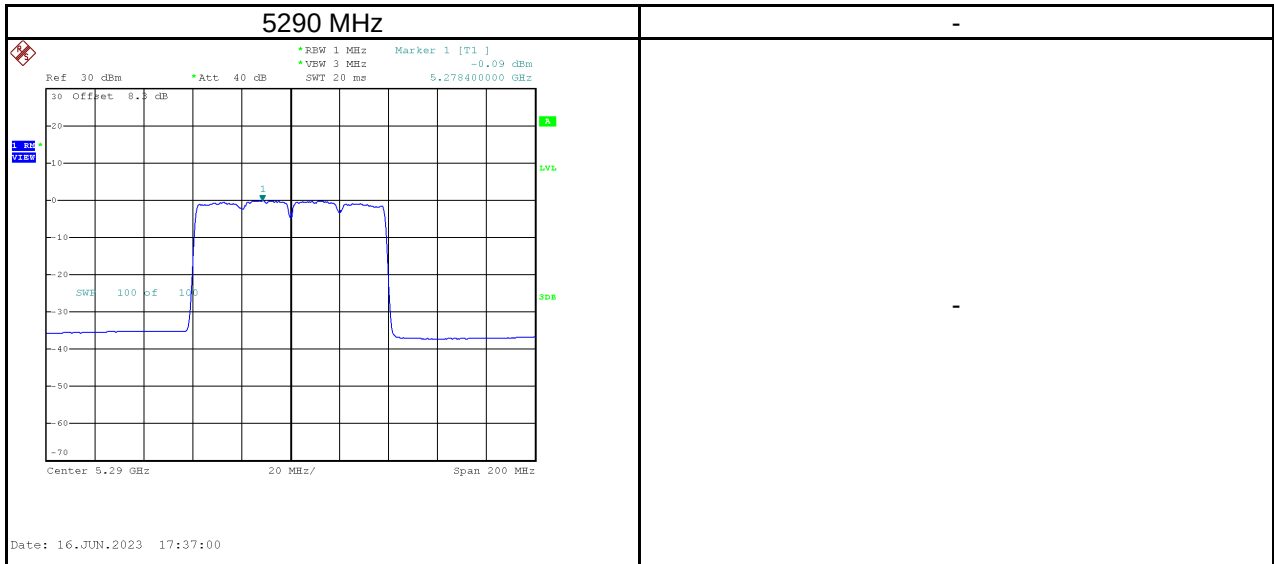


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-9.27	-2.28	0.42	-1.86	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

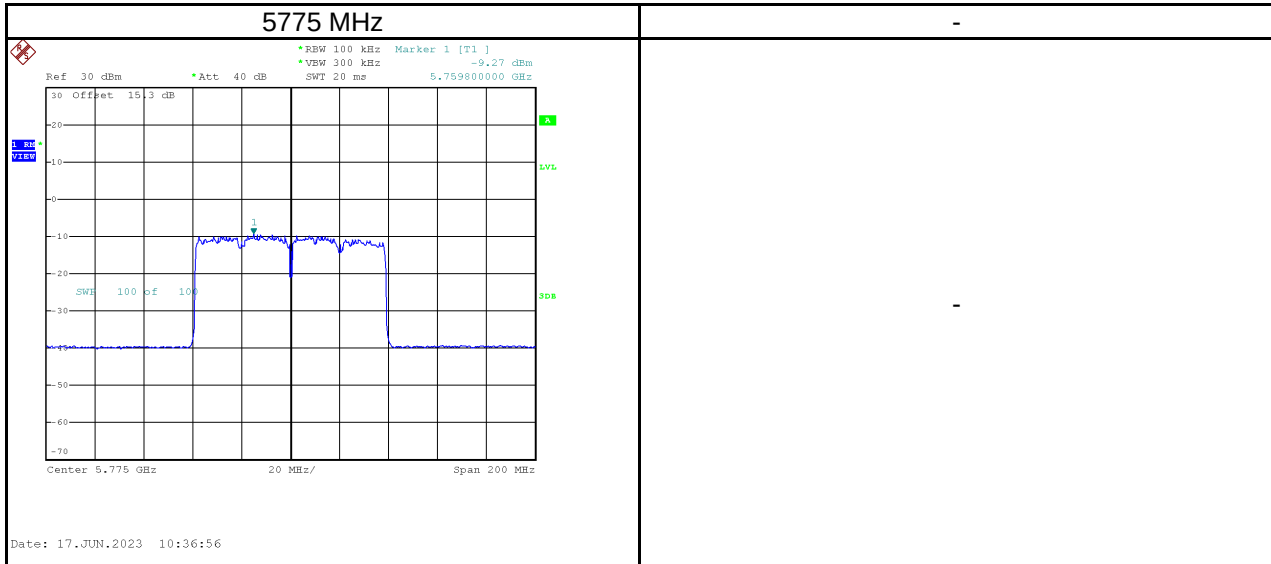


Test Mode	IEEE 802.11ax (HE80)_Ant 2
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	0.07	0.42	0.49	14.94	Pass

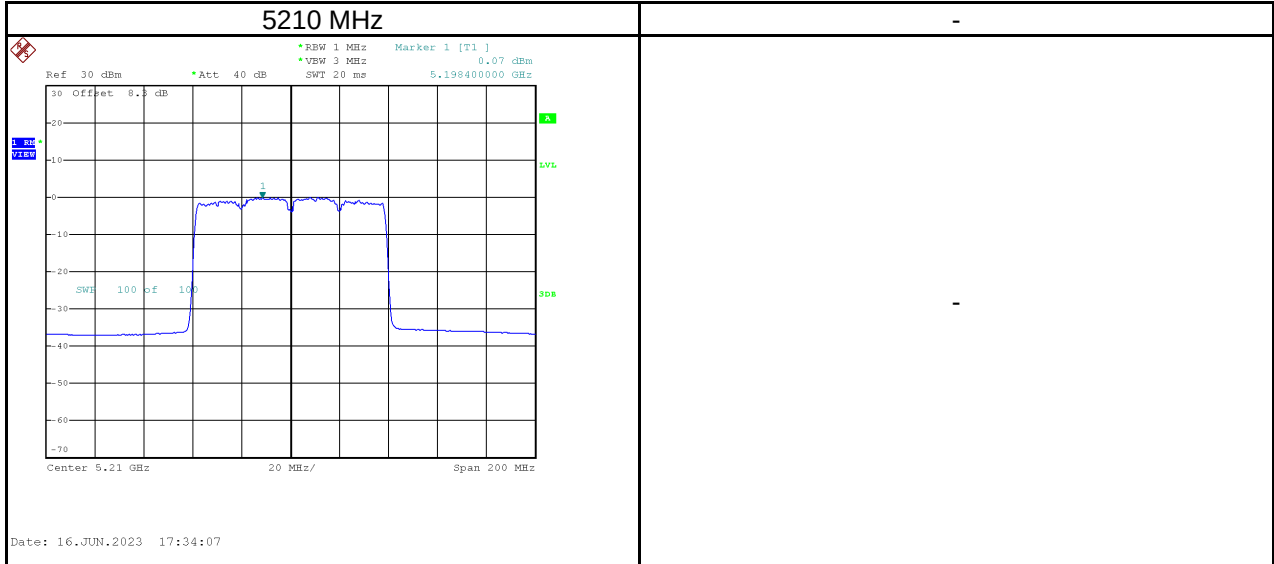


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5290	-1.35	0.42	-0.93	8.94	Pass

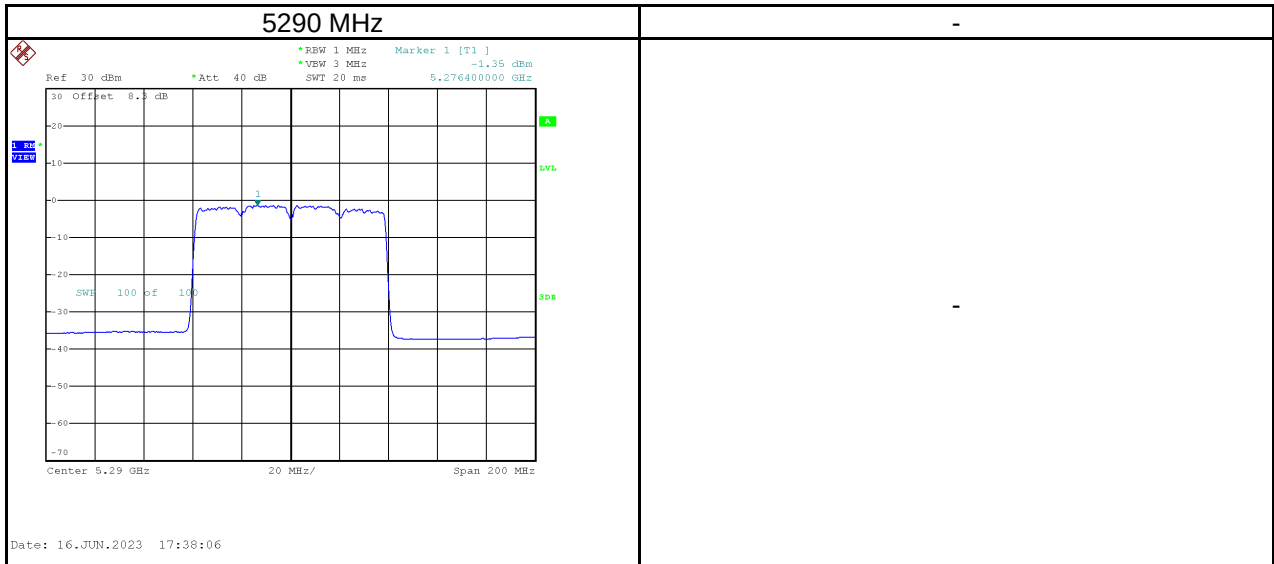

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-9.35	-2.36	0.42	-1.94	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

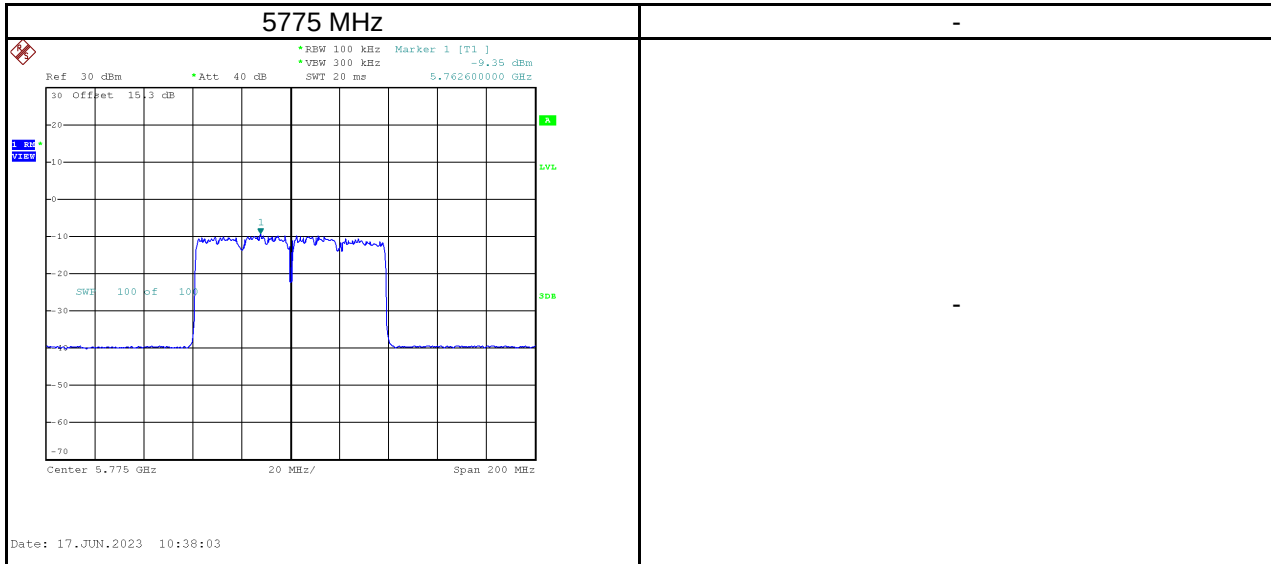

Test Mode	IEEE 802.11ax (HE80)_Total
-----------	----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	3.54	0.42	3.96	14.94	Pass
5290	2.34	0.42	2.76	8.94	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-6.30	0.69	0.42	1.11	27.94	Pass

NOTE: $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$


Test Mode	IEEE 802.11ax (HE160)_Ant 1
-----------	-----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-4.02	0.48	-3.54	14.94	Pass

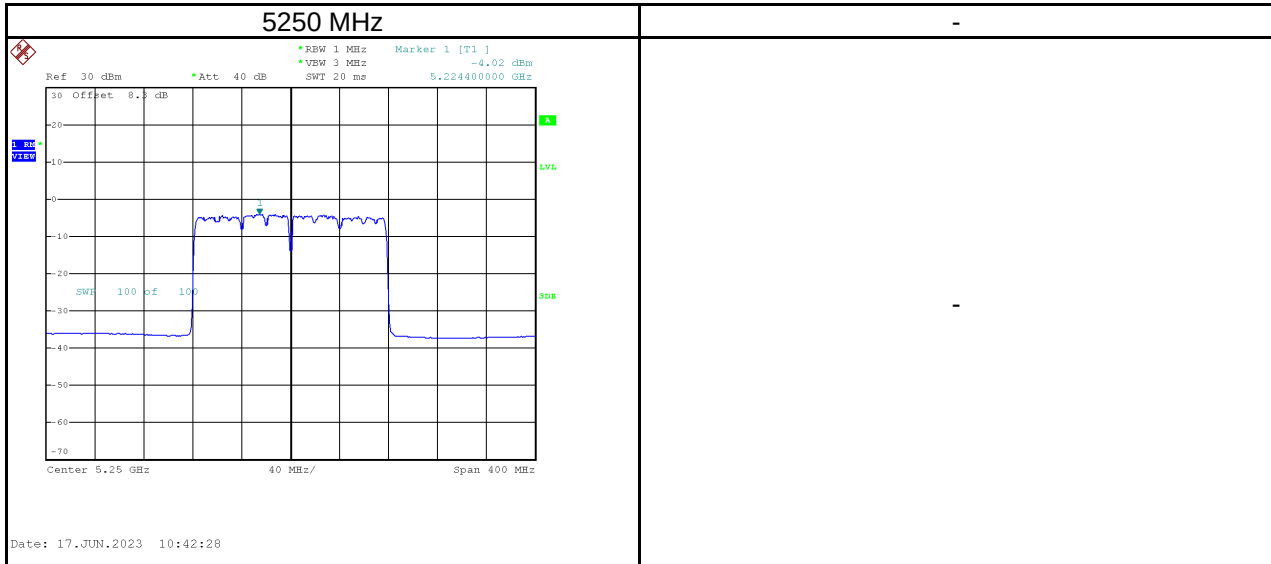

Test Mode	IEEE 802.11ax (HE160)_Ant 2
-----------	-----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-4.18	0.48	-3.70	14.94	Pass

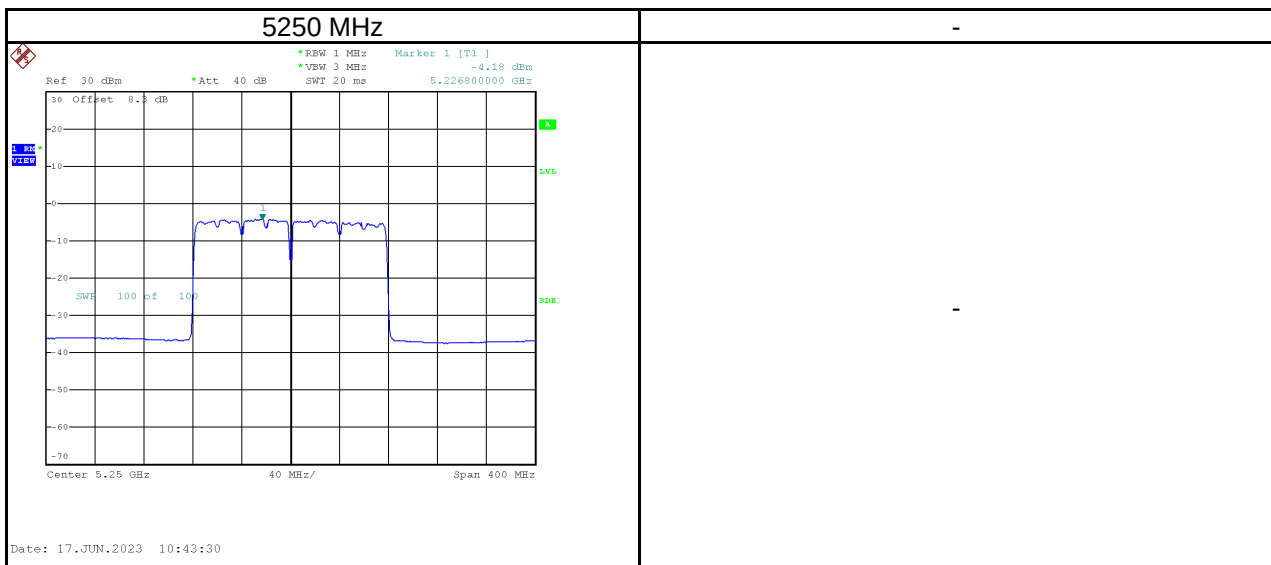

Test Mode	IEEE 802.11ax (HE160)_Total
-----------	-----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-1.09	0.48	-0.61	14.94	Pass

End of Test Report