



EDR Mode (8DPSK):

Hopping Numbers-3DH1

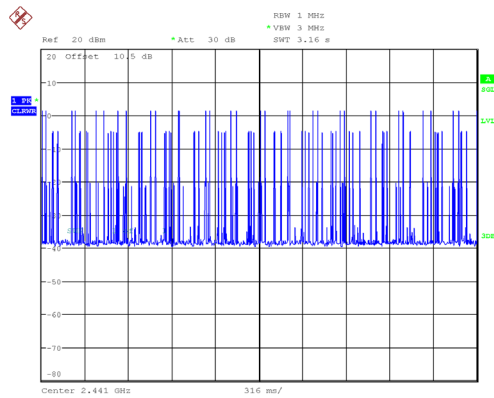


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 23.JAN.2026 09:30:24

Hopping Numbers-3DH1

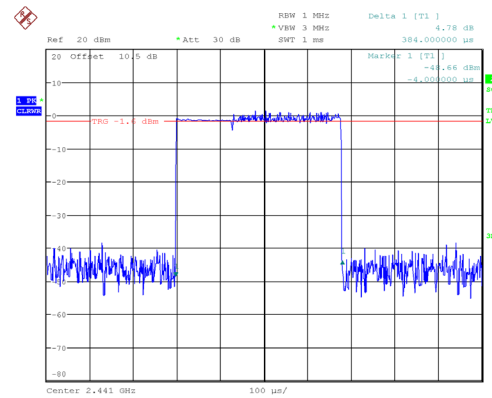


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 23.JAN.2026 09:31:32

Hopping Numbers-3DH3

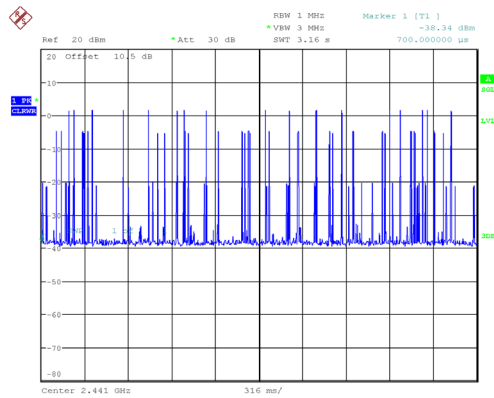


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 23.JAN.2026 09:39:35

Hopping Numbers-3DH3

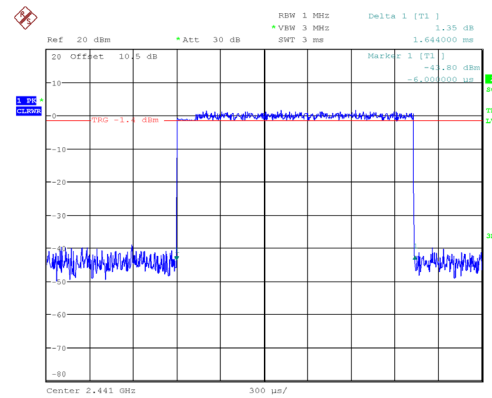


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 23.JAN.2026 09:40:42

Hopping Numbers-3DH5

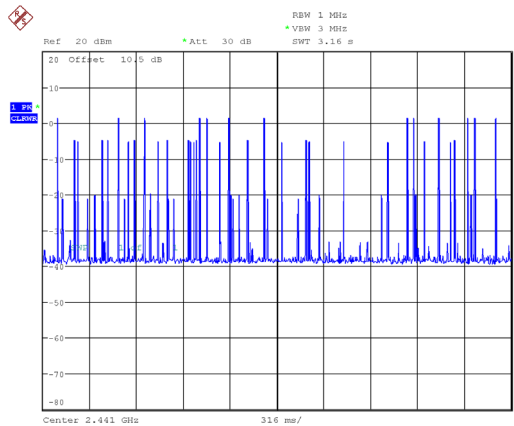

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 23.JAN.2026 09:50:41

Hopping Numbers-3DH5

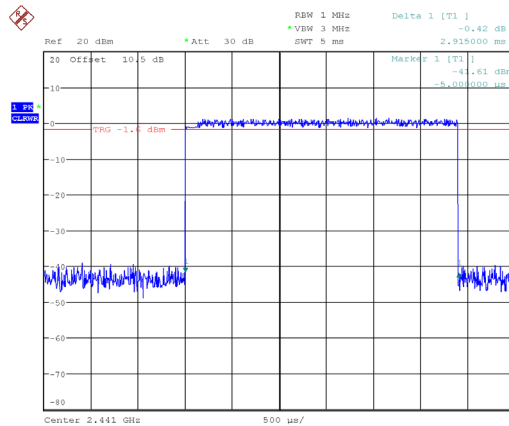

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 23.JAN.2026 09:51:48


PEAK OUTPUT POWER MEASUREMENT**Environmental Conditions & Test Information**

Test Date:	2026-01-22
Temperature:	19.9 °C
Relative Humidity:	26 %
ATM Pressure:	103.2 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

EUT operation mode: Transmitting


Mode	Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)
GFSK	Low	2402	2.47	21
	Middle	2441	2.60	
	High	2480	3.09	
$\pi/4$ -DQPSK	Low	2402	1.80	
	Middle	2441	1.95	
	High	2480	2.42	
8DPSK	Low	2402	1.97	
	Middle	2441	2.14	
	High	2480	2.58	

BDR(GFSK) : 2402MHz

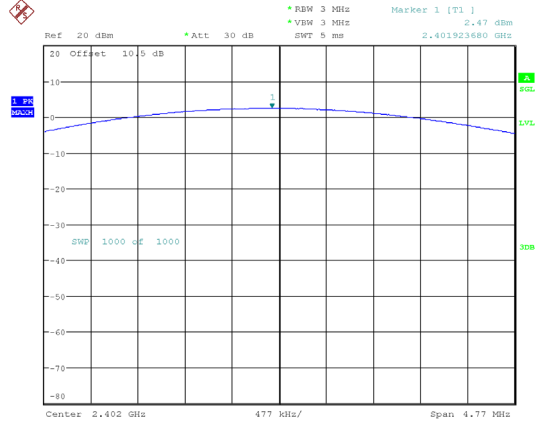


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 17:23:54

BDR(GFSK) : 2441MHz

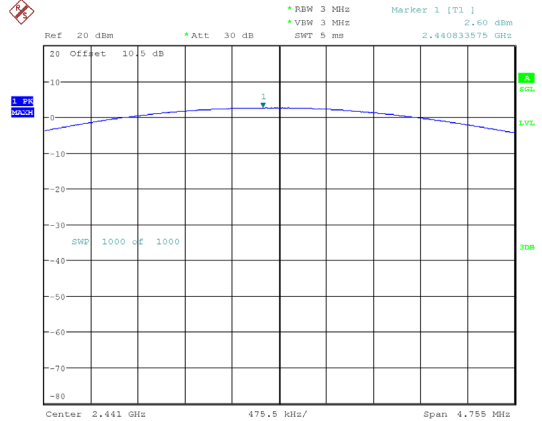


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 17:34:21

BDR(GFSK) : 2480MHz

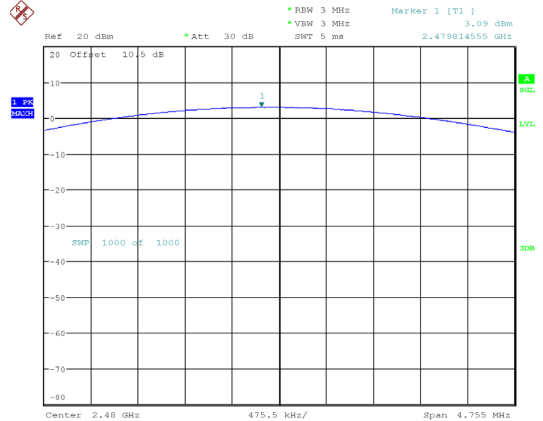


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 17:42:58

EDR($\pi/4$ -DQPSK) : 2402MHz

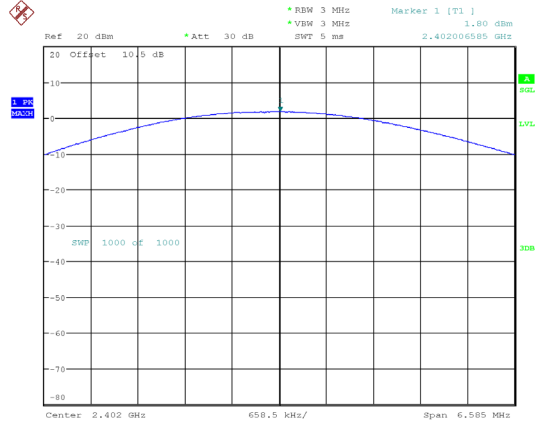


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 17:58:09

EDR($\pi/4$ -DQPSK) : 2441MHz

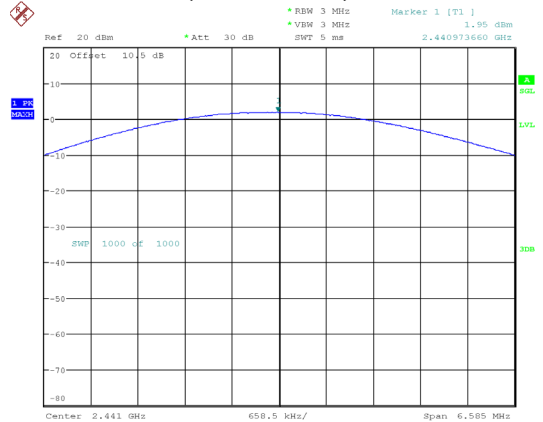


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:09:34

EDR($\pi/4$ -DQPSK) : 2480MHz

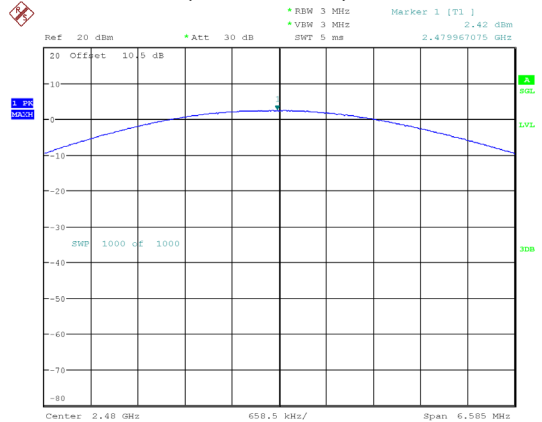


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:18:20

EDR(8DPSK) : 2402MHz

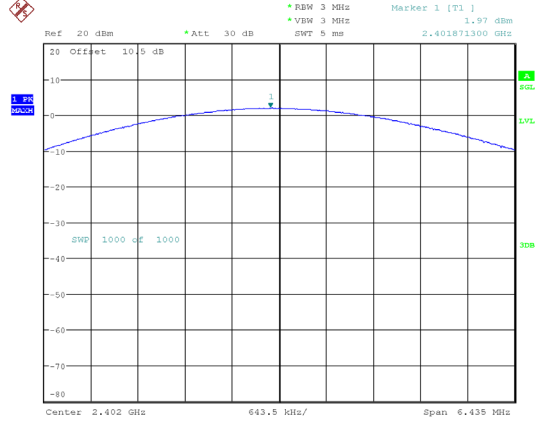


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:38:25

EDR(8DPSK) :2441MHz

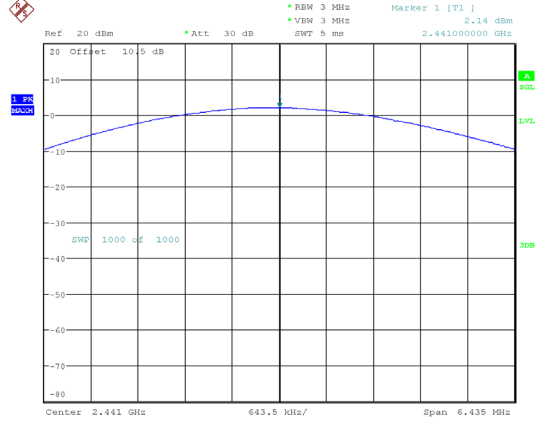

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:53:21

EDR(8DPSK) : 2480MHz

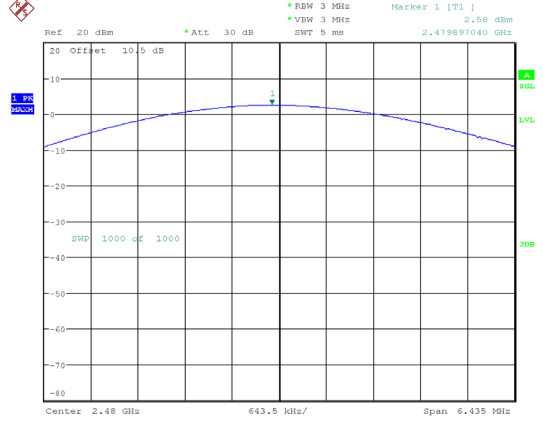

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 19:03:16

BAND EDGES**Environmental Conditions & Test Information**

Test Date:	2026-01-22	2026-03-31
Temperature:	19.9 °C	23.5 °C
Relative Humidity:	26 %	42 %
ATM Pressure:	103.2 kPa	101.6 kPa
Test Result:	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou


EUT operation mode: Transmitting & Hopping

Test Result: Compliant.

Mode	Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)
BDR (GFSK)	Low	2402	45.74	20
	High	2480	46.50	
EDR ($\pi/4$ -DQPSK)	Low	2402	42.09	
	High	2480	42.81	
EDR (8DPSK)	Low	2402	42.04	
	High	2480	43.34	
BDR(GFSK) (Hopping)	Low	2402	45.55	
	High	2480	45.37	
EDR($\pi/4$ -DQPSK) (Hopping)	Low	2402	42.85	
	High	2480	42.46	
EDR(8DPSK) (Hopping)	Low	2402	42.52	
	High	2480	41.70	


Band Edge

BDR(GFSK) : Left Side

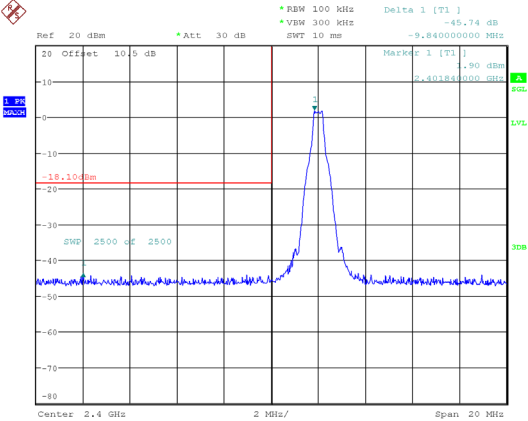


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 17:26:07

BDR(GFSK) : Right Side

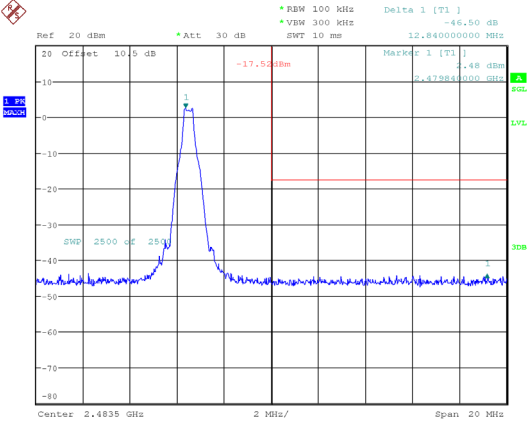


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 17:45:12

EDR($\pi/4$ -DQPSK) : Left Side

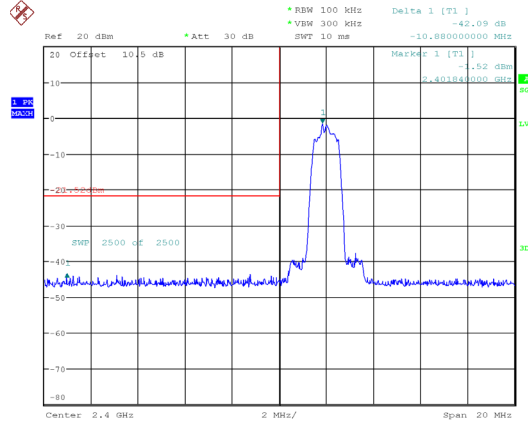


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:00:24

EDR($\pi/4$ -DQPSK) : Right Side

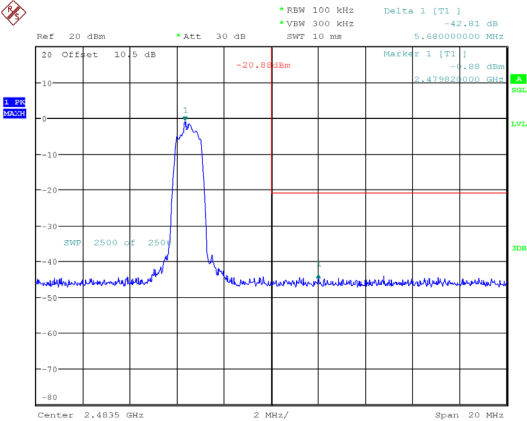


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:20:35

EDR(8DPSK) : Left Side

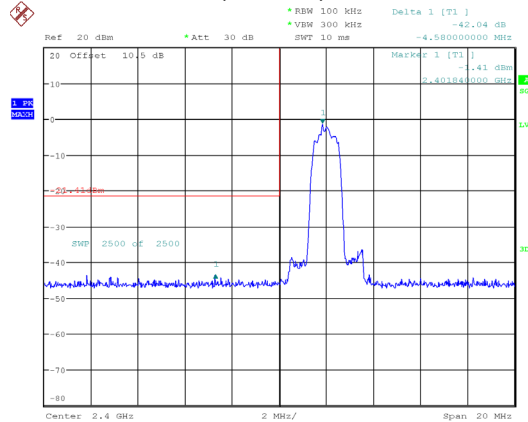


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:40:40


EDR(8DPSK) : Right Side

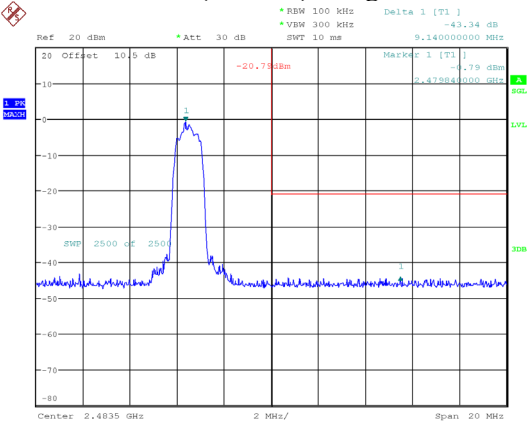


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 19:05:31

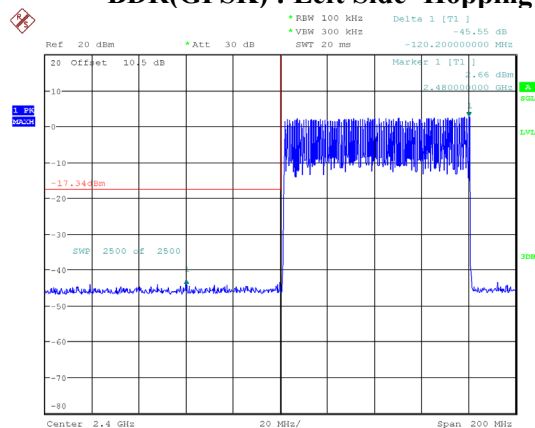BDR(GFSK) : Left Side- Hopping


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 31.MAR.2026 13:27:39

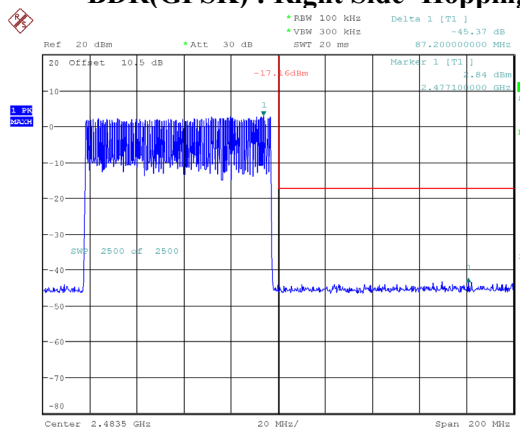BDR(GFSK) : Right Side- Hopping


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 31.MAR.2026 13:36:01

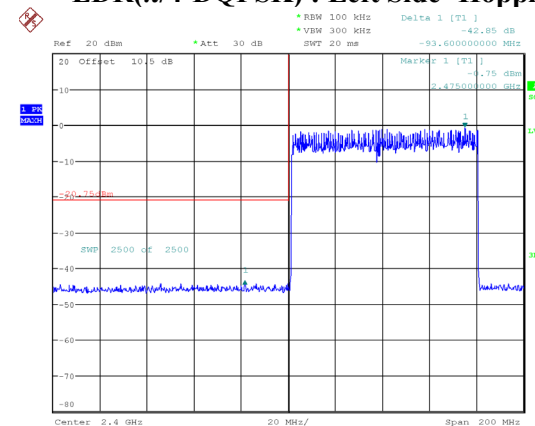EDR($\pi/4$ -DQPSK) : Left Side- Hopping


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 31.MAR.2026 13:44:12

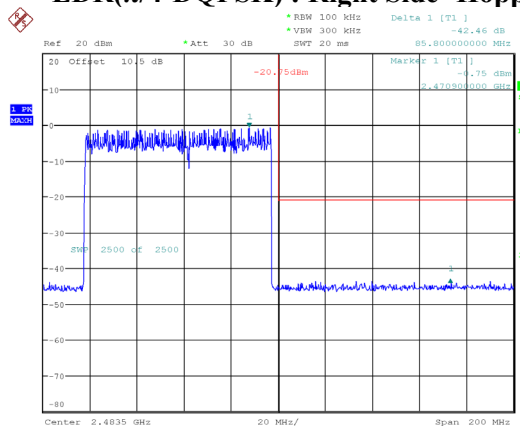EDR($\pi/4$ -DQPSK) : Right Side- Hopping

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 31.MAR.2026 13:46:18

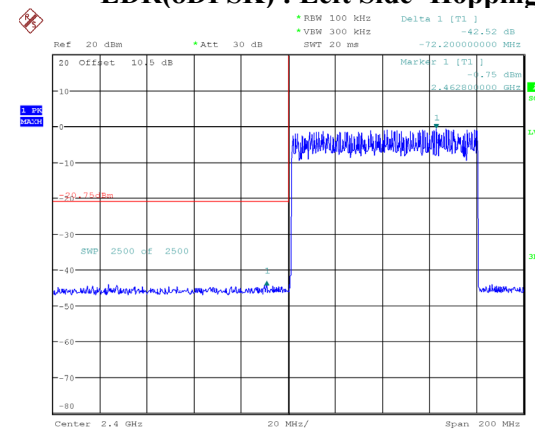EDR(8DPSK) : Left Side- Hopping

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 31.MAR.2026 13:48:48

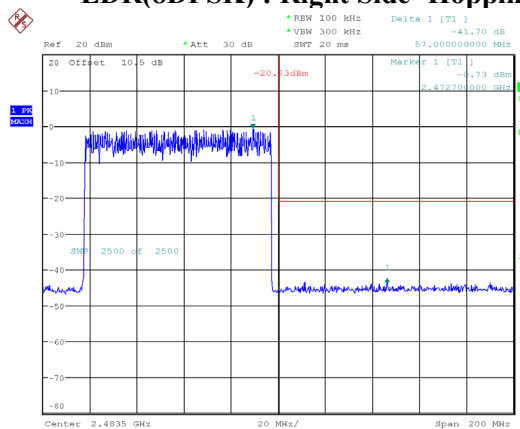EDR(8DPSK) : Right Side- Hopping

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 31.MAR.2026 13:50:52


CONDUCTED SPURIOUS EMISSION**Environmental Conditions & Test Information**

Test Date:	2026-01-22	2026-01-23
Temperature:	19.9 °C	20.3 °C
Relative Humidity:	26 %	43 %
ATM Pressure:	103.2 kPa	103.5 kPa
Test Result:	Pass	
Test Engineer:	Neil Zhou	


Mode	Channel	Result (dB)	Limit (dB)
BDR(GFSK)	Low	42.44	20.00
	Middle	42.22	20.00
	High	42.68	20.00
EDR($\pi/4$ -DQPSK)	Low	38.29	20.00
	Middle	37.93	20.00
	High	38.72	20.00
EDR(8DPSK)	Low	37.28	20.00
	Middle	38.97	20.00
	High	39.42	20.00

Note: the maximum path attenuation of 30MHz~25GHz was added into the offset

BDR(GFSK)_Low

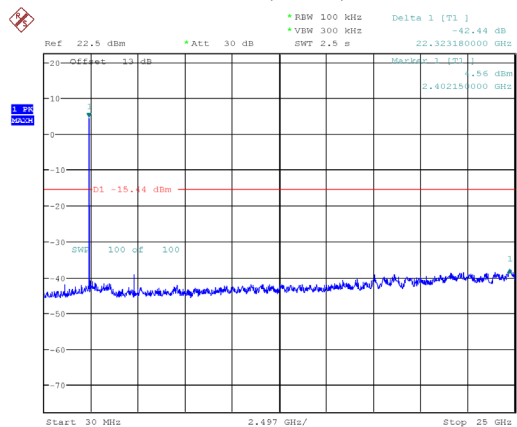


BDR(GFSK)_Middle

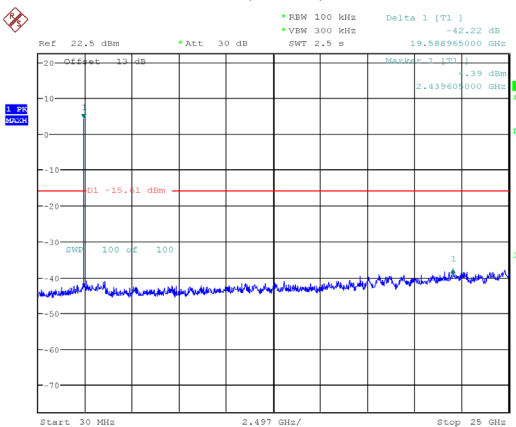


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 17:31:10

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 23.JAN.2026 10:20:12

BDR(GFSK)_High

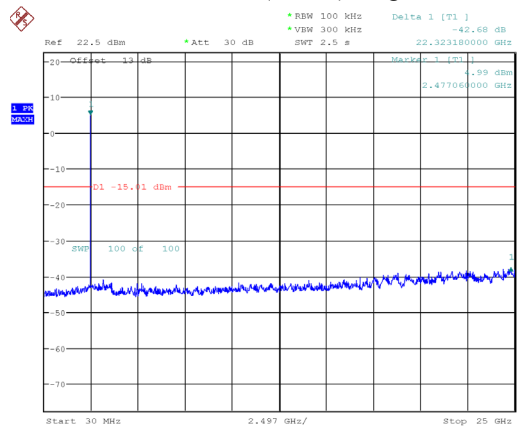


EDR($\pi/4$ -DQPSK)_Low

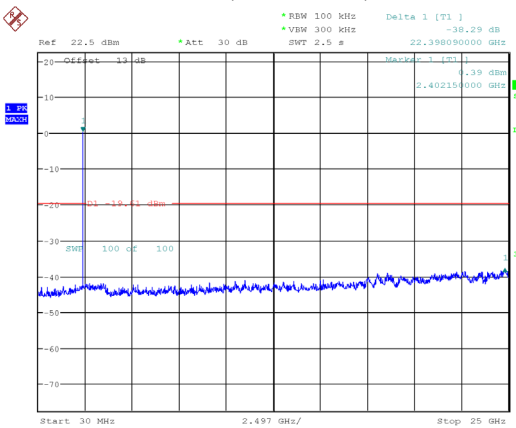


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 17:51:10

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:05:43

EDR($\pi/4$ -DQPSK)_Middle

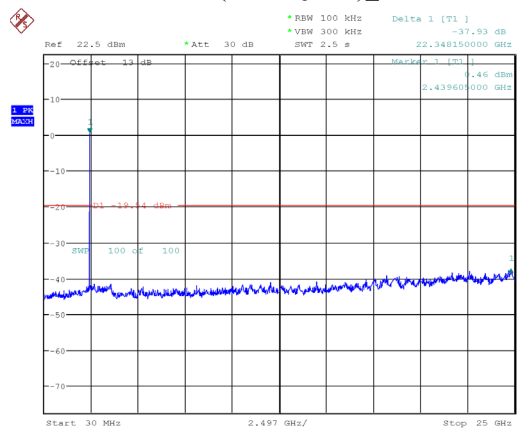


EDR($\pi/4$ -DQPSK)_High

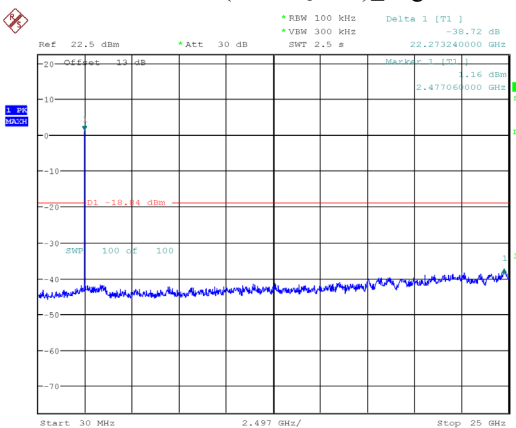

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:15:33


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:26:04

EDR(8DPSK)_Low

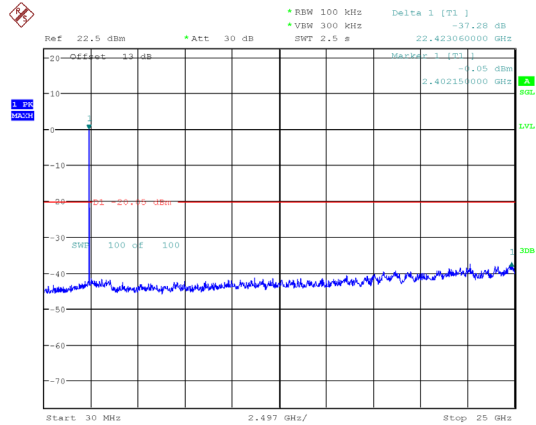


ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 18:46:40

EDR(8DPSK)_Middle

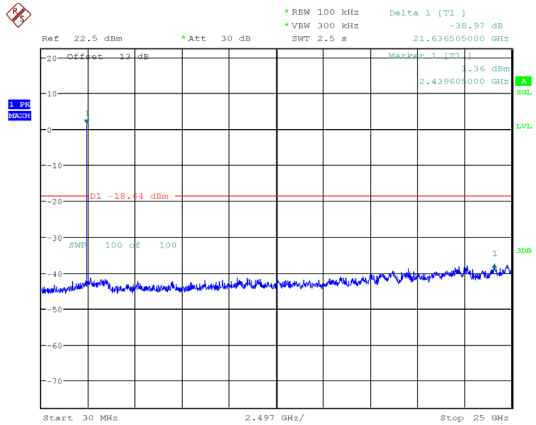

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 19:00:06

EDR(8DPSK)_High

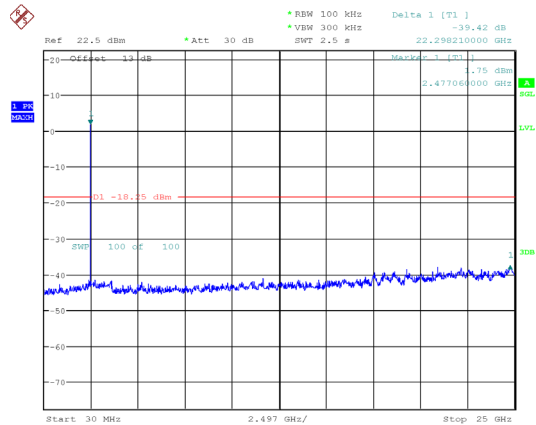

ProjectNo.:RSZA251226002 Tester:Neil Zhou
Date: 22.JAN.2026 19:10:50

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******