eurofins | Product Service

FCC TEST REPORT

FCC 47 CFR Part 15C
Industry Canada RSS-210

Frequency hopping systems operating within the 2400 – 2483.5 MHz band

Report Reference No.....:	G0M-1408-4062-TFC247BT75-V01
Testing Laboratory.....:	Eurofins Product Service GmbH
Address.....:	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation.....:	A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name.....:	Sonetics Corporation
Address.....:	7340 SW Durham Road OR 97224 Portland USA
Test specification:	
Standard.....:	47 CFR Part 15C RSS-210, Issue 8, 2010-12 RSS-Gen, Issue 3, 2010-12 ANSI C63.4:2009
Test scope…….....:	complete Radio compliance test
Equipment under test (EUT):	
Product description	Communication Headsets
Model No.	APX375
Additional Model(s)	None
Brand Name(s)	Sonetics
Hardware version	APX375 Rev A (See Additional Information)
Firmware / Software version	Revision A (See Additional Information)
	FCC-ID: V9N950325400V1 IC: 7895A-95032540
Test result	**Passed**

Possible test case verdicts:

- neither assessed nor tested .....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object .....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Test Lab Temperature.....:	20 – 23 °C	
Test Lab Humidity .....:	32 – 38 %	
Date of receipt of test item .....:	2014-09-22	
Date (s) of performance of tests .....:	2014-09-30 - 2014-10-10	
Compiled by ..... :	Antje Bartusch	
Tested by (+ signature)..... : (Responsible for Test)	Wilfried Treffke	W. Treffke
Approved by (+ signature) ..... :	Christian Weber	C. Weber
Date of issue ..... :	2014-12-18	
Total number of pages ..... :	91	

General remarks:

The test results presented in this report relate only to the object tested.
The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Testing has been performed on model APX379 Rev A as the worst case model. The Bluetooth radio parts and antennas of both models (APX379 Rev A and APX375 Rev A) are identical. See customer declarations below.

Page 1 of 2

Sonetics CORPORATION

Subject: Hardware Software/Firmware Declaration
Date: December 01, 2014
Model Number: APX379 DECT & Bluetooth Headset, Revision A

The APX379 Headset shares the same common hardware and software as represented in table A

Table A: Common and Un-common Communication Headset Ear Muff Features	300 Series Model Number		
	APX379	APX377	APX375
Convertible Design: Overhead and Underhelmet	X	X	X
Identical Materials and Headset Muff Design	X	X	X
Waterproof Design	X	X	X
Wired Aux Line In	X	X	X
Internal Sound Dosimeter	X	X	X
Stereo Listen Thru	X	X	X
Automatic Noise Gate	X	X	X
Passive Noise Reduction	X	X	X
Automatic Active Noise Reduction	X	X	X
Voice Prompts	X	X	X
Wireless Bluetooth (Line in)	X		X
Wireless DECT (2 way radio)	X	X	

Sonetics Corporation hereby declares that the above referenced model, submitted to Eurofins for FCC and IC testing, has the following firmware and hardware installed.

APX379 DECT & Bluetooth Headset Revision A	(No Headband P/N: 950-3257-00 Revision A)				
Item Reference	Part Number	Description	Qty	BOM Version Revision	Firmware Radio Related?
10	490-4006-00	Firmware, GEN-3 BOOT LOADER	1	A	No
15	490-4016-00	Firmware, APX379, DECT, BT	1	A	Yes
20	490-4009-00	Firmware, BLUETOOTH CONFIG	1	A	Yes
25	490-4012-00	Firmware, RTX1040 RADIO RTX Release Ver 7.0	1	A	Yes
35	490-4015-00	Firmware, VOICEPROMPTS, PP, ENGLISH-	1	A	No
40	490-4017-00	Firmware, APX379, CONFIGURATION	1	A	No
5	121-4030-G1	PCBA, APX379, HS, MAIN BOARD	1	G	Hardware
0	121-4031-J1	PCBA,HS-7X,BATTERY BOARD	1	J	Hardware

The above is declares accurate and true as of 12 01, 2014.
Sincerely,

Michael Heade
Quality Assurance Engineer
Regulatory & Product Compliance Engineer
Sonetics Corporation
Phone: 800-833-4558 ext. 122
Direct: 503-608-3422
Email: michael.heade@soneticscorp.com
www.soneticscorp.com
www.firecom.com
7340 SW Durham Road.• Portland, Oregon U.S.A. 97224 • 503/684-7080 • Fax 503/620-2943

Sonetics CORPORATION

Subject: Hardware Software/Firmware Declaration
Date: December 01, 2014
Model Number: APX375 Bluetooth Headset, Revision A

The APX375 and APX379 Headsets share the same common hardware and software as represented in table A and as described as Hardware and Software Differences below:

Table A: Common and Un-common Communication Headset Ear Muff Features	300 Series Model Number		
	APX379	APX377	APX375
Convertible Design: Overhead and Underhelmet	X	X	X
Identical Materials and Headset Muff Design	X	X	X
Waterproof Design	X	X	X
Wired Aux Line In	X	X	X
Internal Sound Dosimeter	X	X	X
Stereo Listen Thru	X	X	X
Automatic Noise Gate	X	X	X
Passive Noise Reduction	X	X	X
Automatic Active Noise Reduction	X	X	X
Voice Prompts	X	X	X
Wireless Bluetooth (Line in)	X		X
Wireless DECT (2 way radio)	X	X	

Sonetics Corporation hereby declares that the above referenced model, submitted to Eurofins for FCC and IC testing has the following firmware installed:

APX375 Bluetooth (only) Headset Revision A	(No Headband P/N: 950-3254-00 Revision A)				
Item Reference	Part Number	Description	Qty	BOM Version Revision	Firmware Radio Related?
10	490-4006-00	Firmware, GEN-3 BOOT LOADER	1	A	No
15	490-4020-00	Firmware, APX375, BLUETOOTH ONLY	1	A	Yes
20	490-4009-00	Firmware, BLUETOOTH CONFIG	1	A	Yes
25	490-4015-00	Firmware, VOICEPROMPTS, PP, ENGLISH-	1	A	Yes
30	490-4021-00	FW, APX375, CONFIGURATION	1	A	No
5	121-4036-G1	PCBA, APX375, HS, MAIN BOARD	1	G	Hardware
0	121-4031-J1	PCBA,HS-7X,BATTERY BOARD	1	J	Hardware

Hardware and Software Differences: between APX375 and APX379:

The APX 375 is the same physically as APX 379 with the exception that the 490-4012-00-00 and 490-4014-00 DECT Firmware is not loaded and the 490-4020-00 firmware which replaces the 490-0016-00 firmware is the same but deletes un-used DECT menus which are not used in the APX375.
The 121-4036-G1 Mainboard in the APX375 is physically the same PCBA as the APX379 except the following DECT related components are omitted from the PCBA: C1, C2, C3, C4, C5, C6, C9, C10, C13, C15, C16, C17, C19, C20, C23, C24, C26, C27, C106, C166, E1, J1, J6, J10, L1, L2, L6, L10, L14, L16, L86, L90, R5, R19, R20, R23, R24, R27, R28, R39, R40, R43, R54, R72, R74, R75, R78, R82, R138, R169, R286, R290, S1, U1, U7, U10, U11

7340 SW Durham Road.• Portland, Oregon U.S.A. 97224 • 503/684-7080 • Fax 503/620-2943

Version History

Version	Issue Date	Remarks	Revised by
01	2014-12-18	Initial Release	

REPORT INDEX

1	**EQUIPMENT (TEST ITEM) DESCRIPTION**	**7**
1.1	Photos – Equipment External	8
1.2	Photos – Equipment internal	10
1.3	Photos – Test setup	12
1.4	Supporting Equipment Used During Testing	13
1.5	Test Modes	14
1.6	Test Equipment Used During Testing	15
1.7	Sample emission level calculation	17
2	**RESULT SUMMARY**	**18**
3	**TEST CONDITIONS AND RESULTS**	**19**
3.1	Test Conditions and Results – Occupied Bandwidth	19
3.2	Test Conditions and Results – 20 dB Bandwidth	23
3.3	Test Conditions and Results – Number of hopping frequencies	27
3.4	Test Conditions and Results – Frequency hopping channel separation	31
3.5	Test Conditions and Results – Time of occupancy (Dwell Time)	33
3.6	Test Conditions and Results – Maximum peak conducted power	35
3.7	Test Conditions and Results – AC power line conducted emissions	37
3.8	Test Conditions and Results – Band edge compliance	40
3.9	Test Conditions and Results – Conducted spurious emissions	45
3.10	Test Conditions and Results – Transmitter radiated emissions	49
3.11	Test Conditions and Results – Receiver radiated emissions	51
ANNEX A	Transmitter radiated spurious emissions	53
ANNEX B	Receiver radiated spurious emissions	84

1 Equipment (Test item) Description

Description	Communication Headsets	
Model	APX375	
Additional Model(s)	None	
Brand Name(s)	Sonetics	
Serial number	None	
Hardware version	APX375 Rev A (See Additional Information)	
Software / Firmware version	Revision A (See Additional Information)	
FCC-ID	V9N950325400V1	
IC	7895A-95032540	
Equipment type	Radio module	
Radio type	Transceiver	
Radio technology	Bluetooth	
Operating frequency range	2402 - 2480 MHz	
Assigned frequency band	2400 - 2483.5 MHz	
Main test frequencies	F_{LOW}	2402 MHz
	F_{MID}	2441 MHz
	F_{HIGH}	2480 MHz
Spreading	FHSS	
Modulations	GFSK	
Number of channels	79 hopping channels at all	
Channel spacing	1 MHz	
Number of antennas	1	
Antenna	Type	integrated
	Model	W3008
	Manufacturer	Pulse
	Gain	1.7
Manufacturer	Sonetics Corporation 7340 SW Durham Road OR 97224 Portland USA	
Power supply	V_{NOM}	3.7 VDC
	V_{MIN}	N/R
	V_{MIN}	N/R
AC/DC-Adaptor	Model	YMC06-3U
	Vendor	Ji Ming
	Input	100-240 VAC
	Output	12.0 VDC / 0.5A

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
None				

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Test Modes

Mode #	Description	
DH5-Sngl	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 78 % Power level = Maximum
DH5-Hop	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Modulation = GFSK Packet type = DH5 Data rate = 1 Mbps Duty cycle = 78 % Power level = Maximum
Receive	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone receive Spreading = Hopping
AC-Powerline	General conditions:	EUT powered by commercial AC/DC-Adapter
	Radio conditions:	Mode = standalone transmit Spreading = Hopping Power level = Maximum

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

20dB Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Number of hopping frequencies					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Time of occupancy					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Maximum peak conducted power					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Band edge compliance					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Conducted spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	2013-01	2015-01
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2012-10	2014-10
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

Reading on Analyzer (dBµV) + A.F. (dB) = Net field strength (dBµV/m)

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

Limit (dBµV/m) = 20*log (µV/m)

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit = Margin
21.5 dBµV	+	26 dB	=	47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m = -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, IC RSS-210				
Product Specific Standard Section	**Requirement – Test**	**Reference Method**	**Result**	**Remarks**
RSS-Gen 4.6.1	Occupied Bandwidth	RSS-Gen 4.6.1	N/R	Informational only
FCC § 15.247(a)(1) IC RSS-210 § A8.1	20 dB Bandwidth	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-210 § A8.1	Number of hopping frequencies	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1) IC RSS-210 § A8.1	Frequency hopping channel separation	Public notice DA 00-705	PASS	
FCC § 15.247(a)(1)(iii) IC RSS-210 § A8.1	Time of occupancy (Dwell time)	Public notice DA 00-705	PASS	
FCC § 15.247(b)(1) IC RSS-210 § A8.4	Maximum peak conducted power	Public notice DA 00-705	PASS	
47 CFR 15.207 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Band edge compliance	Public notice DA 00-705	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Conducted spurious emissions	Public notice DA 00-705	PASS	
FCC § 15.247(d) FCC § 15.209 IC RSS-210 A8.5 IC RSS-Gen 4.9 IC RSS-Gen 7.2.5	Transmitter radiated spurious emissions	Public notice DA 00-705 / ANSI C 63.4	PASS	
IC RSS-Gen 4.10 IC RSS-Gen 6.1	Receiver radiated spurious emissions	ANSI C 63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth

Occupied Bandwidth acc. IC RSS-Gen	**Verdict: PASS**
Test according to measurement reference	Reference Method
	RSS-Gen 4.6.1
Test frequency range	Tested frequencies
	F_{LOW} / F_{MID} / F_{HIGH}

Limits

None (Informational only)

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set to at least twice the emission spectrum
3. Resolution bandwidth set to 1 % of span
4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function

Test results

Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
F_{LOW}	2402	DH5-Sngl	922.3
F_{MID}	2441	DH5-Sngl	909.8
F_{HIGH}	2480	DH5-Sngl	912.3

Comments:

Occupied Bandwidth – DH5-Sngl F_{LOW}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, 2402 MHz, modulated
Test Date:	2014-10-10
Verdict:	NONE (INFORMATION ONLY)
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	conducted measurement

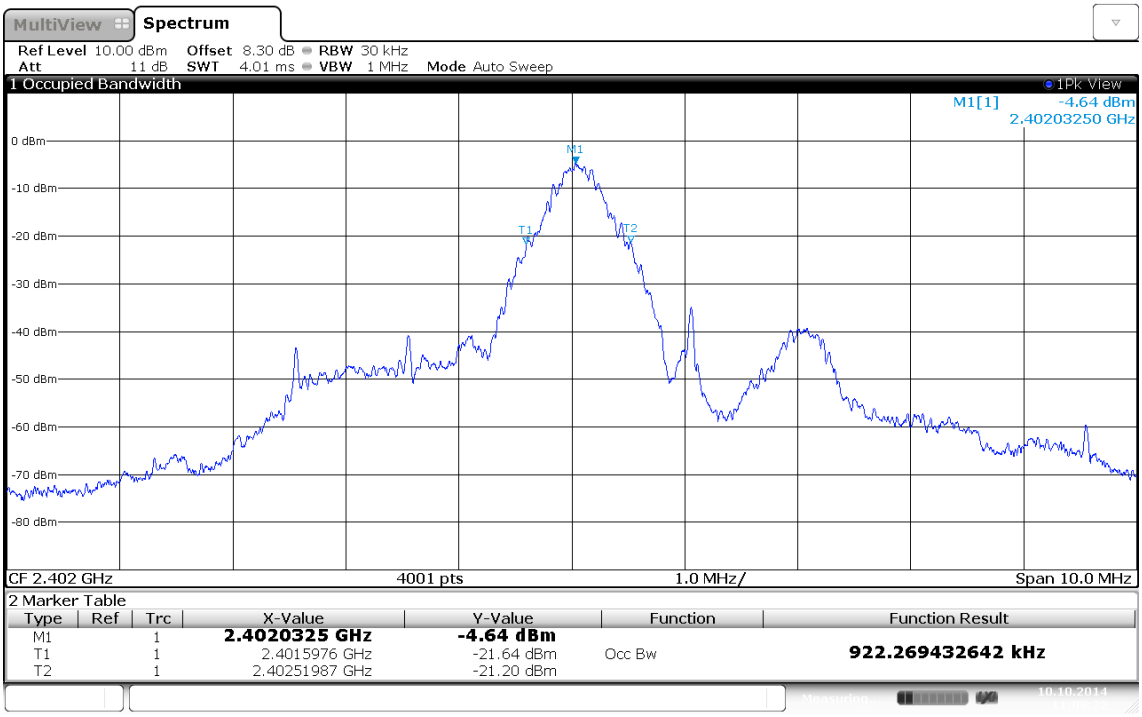

Occupied bandwidth: 922.3 KHz

Date: 10.OCT.2014 11:09:22

Occupied Bandwidth – DH5-Sngl F_{MID}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, 2441 MHz, modulated
Test Date:	2014-10-10
Verdict:	NONE (INFORMATION ONLY)
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	conducted measurement

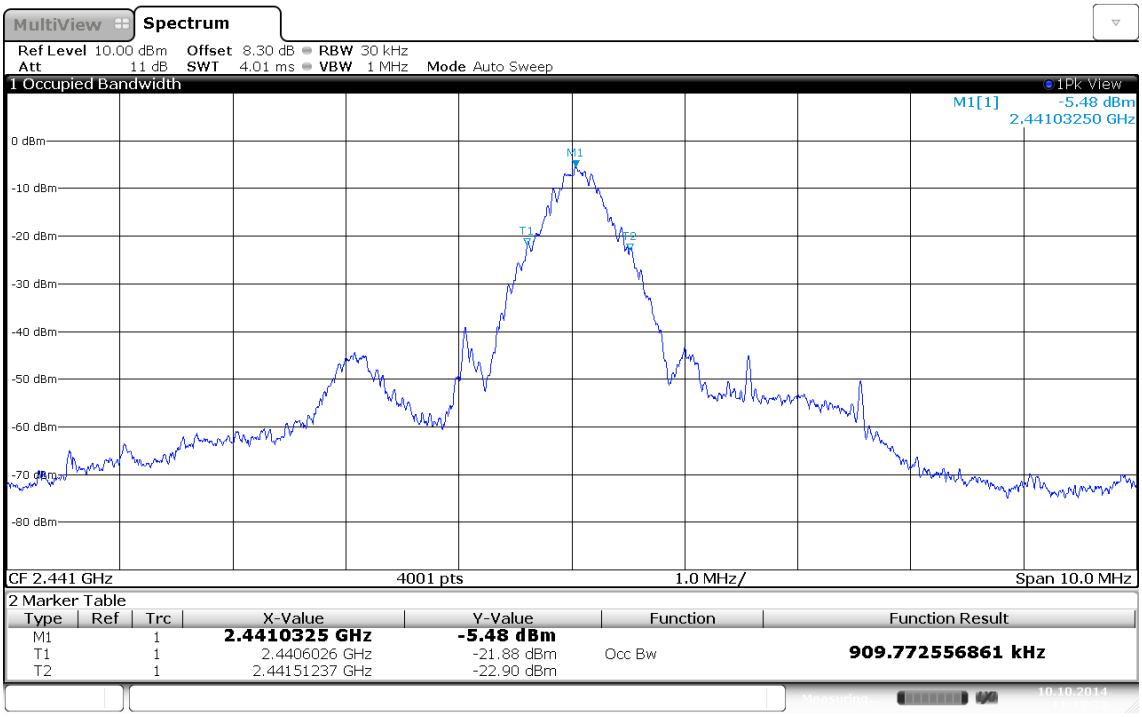

Occupied bandwidth: 909.8 KHz

Date: 10.OCT.2014 11:12:32

Occupied Bandwidth – DH5-Sngl F_{HIGH}

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, 2480 MHz, modulated
Test Date:	2014-10-10
Verdict:	NONE (INFORMATION ONLY)
Note 1:	A spectrum analyzer with an integrated 99% power bandwidth function is used
Note 2:	conducted measurement

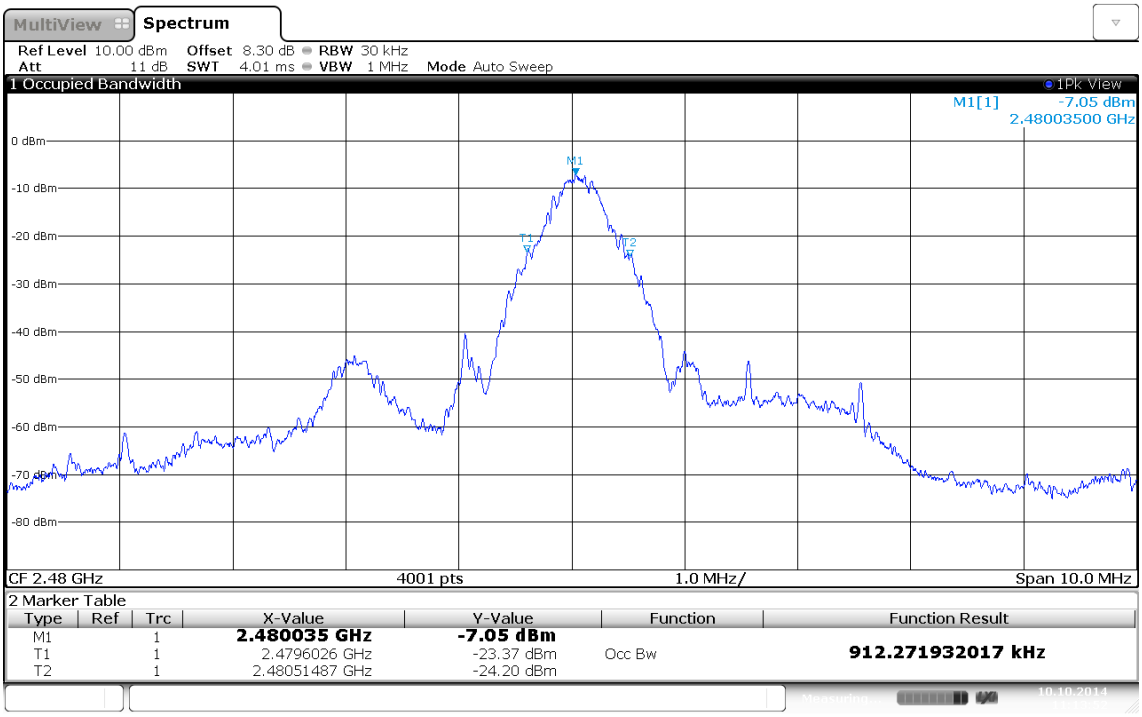

Occupied bandwidth: 912.3 KHz

Date: 10.OCT.2014 11:13:52

3.2 Test Conditions and Results – 20 dB Bandwidth

20 dB Bandwidth acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(a)(1) / IC RSS-210 A8.1
Test according to measurement reference	Reference Method
	FCC Public Notice DA 00-705
Test frequency range	Tested frequencies
	F_{LOW} / F_{MID} / F_{HIGH}

Limits

Limit	Condition
1.5 · Carrier spacing	Output power ≤ 125 mW / 21 dBm
1.0 · Carrier spacing	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set to at least twice the emission spectrum
3. Detector set to peak and max hold
4. Envelope peak value of emission spectrum is selected
5. Marker on envelope of spectrum is set to level of -20 dB to the left of the peak
6. Marker on envelope of spectrum is set to level of -20 dB to the right of the peak
7. 20dB Bandwidth is determined by marker frequency separation

Test results

Channel	Frequency [MHz]	Mode	20 dB Bandwidth [MHz]	Limit [MHz]	Result
F_{LOW}	2402	DH5-Sngl	0.923	1.5	PASS
F_{MID}	2441	DH5-Sngl	0.925	1.5	PASS
F_{HIGH}	2480	DH5-Sngl	0.923	1.5	PASS

Comments:

20 dB Bandwidth – DH5-Sngl F_{LOW}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BT, 2402 MHz, modulated
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	FCC part 15 section 247 (a)
Note 2:	GFSK

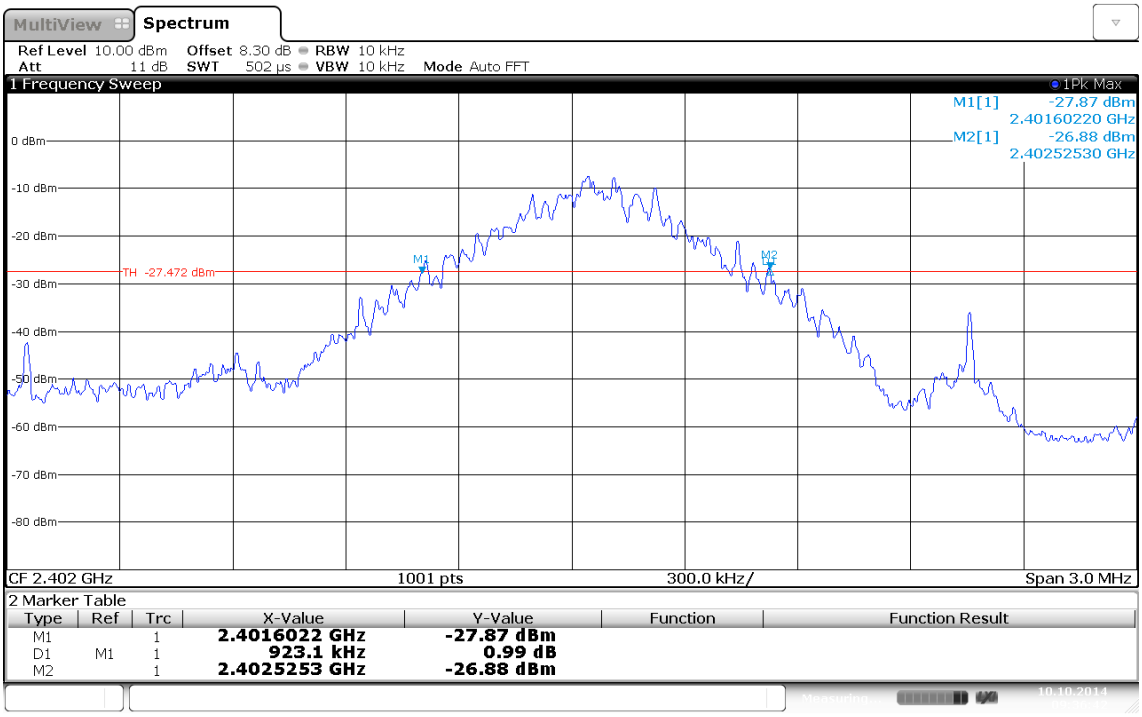

Date: 10.OCT.2014 09:36:42

20 dB Bandwidth – DH5-Sngl F_{MID}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BT, 2440 MHz, modulated
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	FCC part 15 section 247 (a)
Note 2:	GFSK

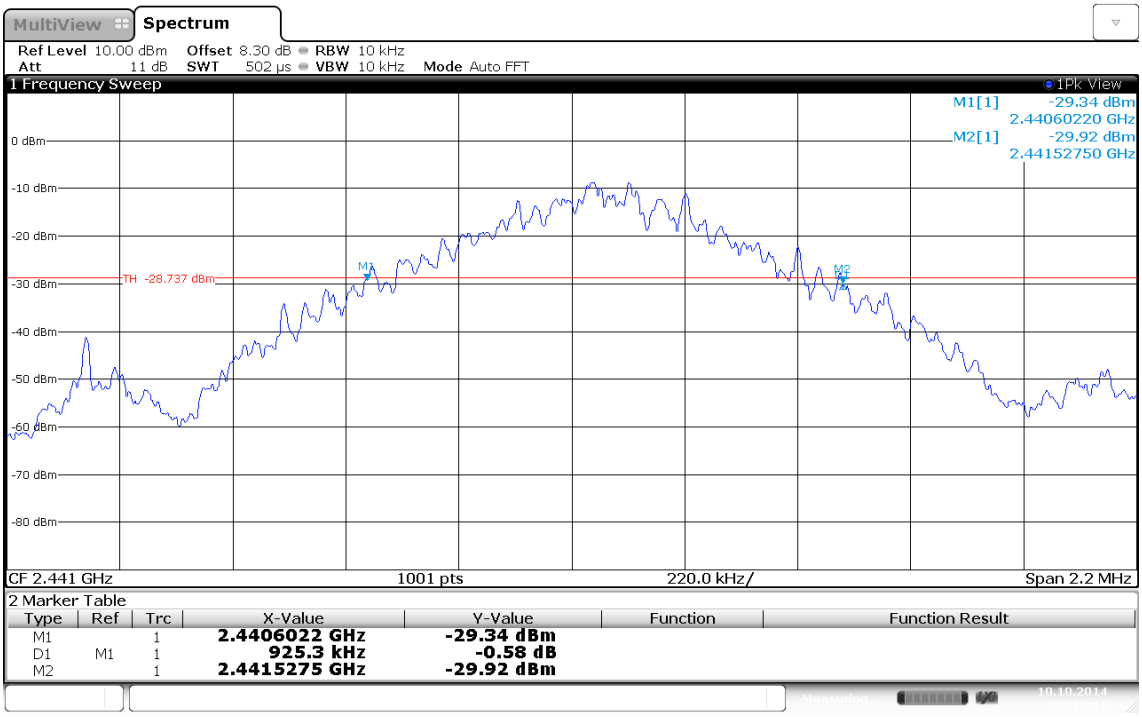

20 dB bandwidth: 925.3 KHz

Date: 10.OCT.2014 09:49:45

20 dB Bandwidth – DH5-Sngl F_{HIGH}

20 dB Bandwidth acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, BT, 2480 MHz, modulated
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	FCC part 15 section 247 (a)
Note 2:	GFSK

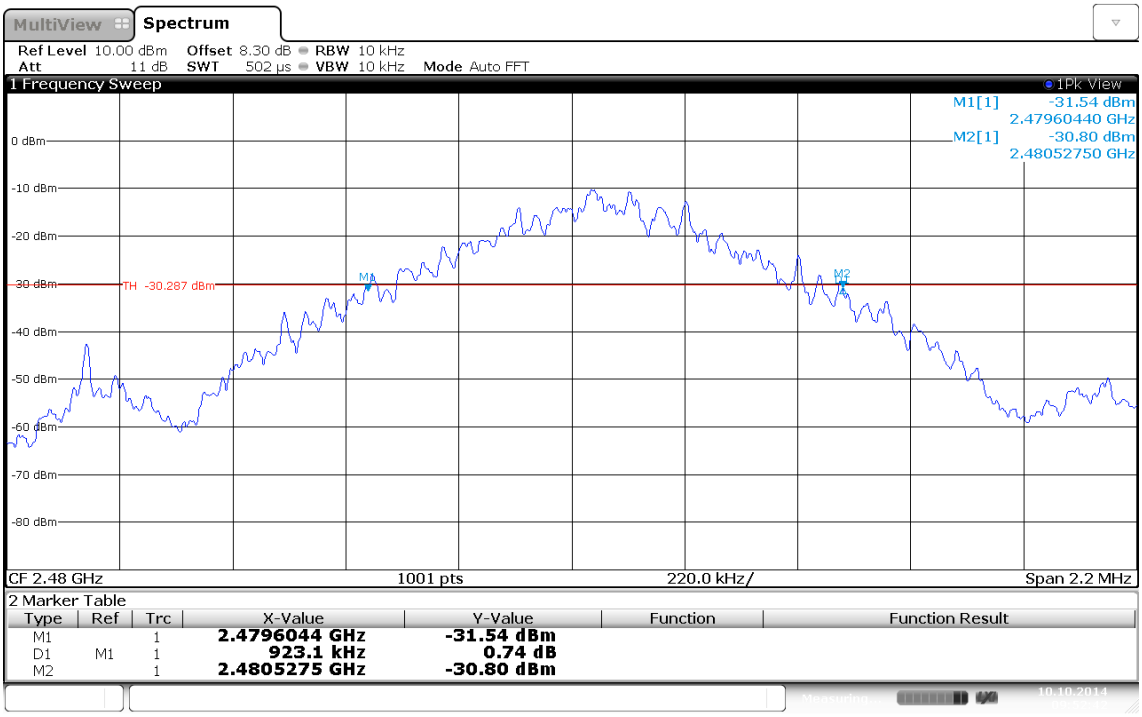

20 dB bandwidth: 923.1 KHz

Date: 10.OCT.2014 09:52:42

3.3 Test Conditions and Results – Number of hopping frequencies

Number of hopping frequencies acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(a)(1)(iii) / IC RSS-210 A8.1
Test according to measurement reference	Reference Method
	FCC Public Notice DA 00-705
Test frequency range	Tested frequencies
	F_{LOW} - F_{HIGH}
EUT test mode	DH5-Hop

Limits

Limit	Condition
Number of hopping channels ≥ 15	Output power ≤ 125 mW / 21 dBm
Number of hopping channels ≥ 75	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set to measurement frequency range
3. Detector set to peak and max hold
4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra
5. The number of peaks is counted to determine number of hopping frequencies

Test results

Number of hopping frequencies	Limit	Result
79	≥ 15	PASS

Comments:

Number of hopping frequencies - Range A

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, hopping mode
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Number of Hopping Frequencies (DA 00-705 Meas Guidance)
Note 2:	conducted measurement, channel 0-24

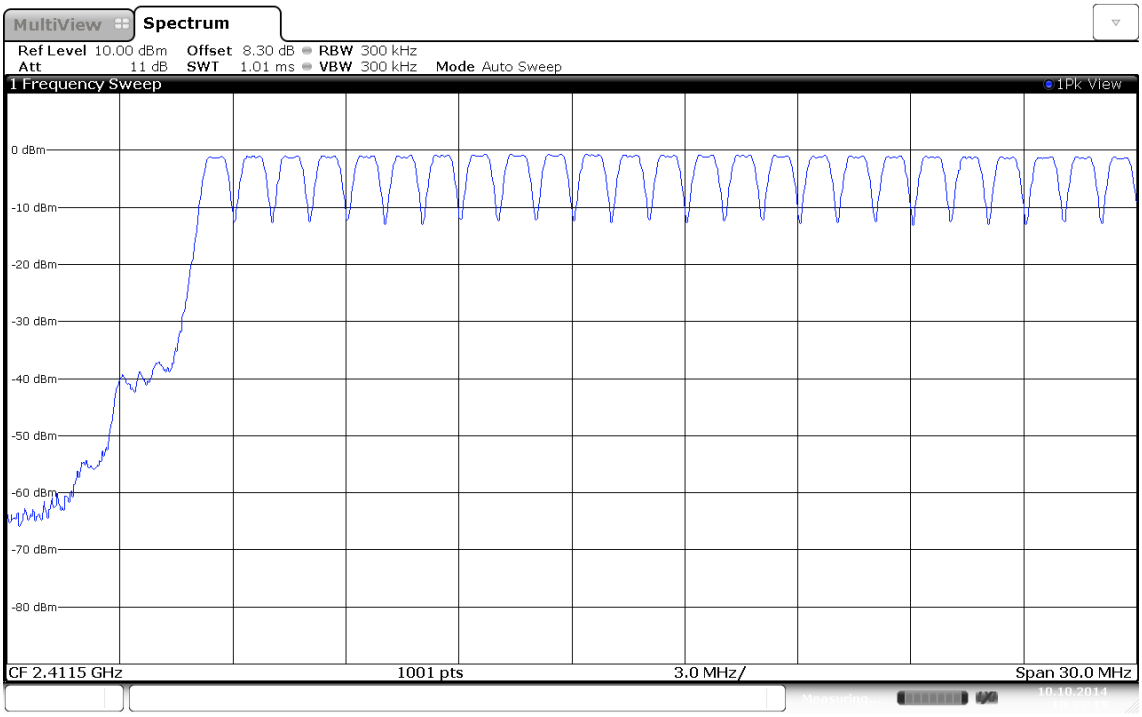

Number of hopping frequencies
Date: 10.OCT.2014 10:22:15

Number of hopping frequencies - Range B

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, hopping mode
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Number of Hopping Frequencies (DA 00-705 Meas Guidance)
Note 2:	conducted measurement, channel 25-54

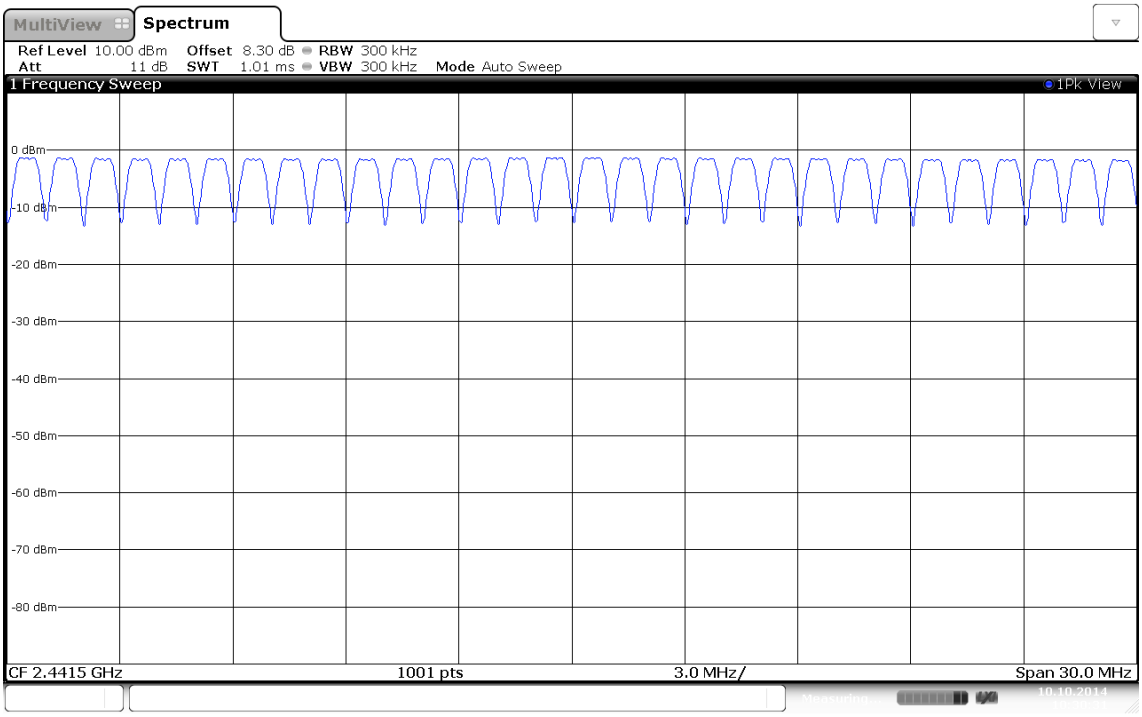

Number of hopping frequencies
Date: 10.OCT.2014 10:30:31

Number of hopping frequencies - Range C

Number of Hopping Frequencies acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, hopping mode
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Number of Hopping Frequencies (DA 00-705 Meas Guidance)
Note 2:	conducted measurement, channel 55-78

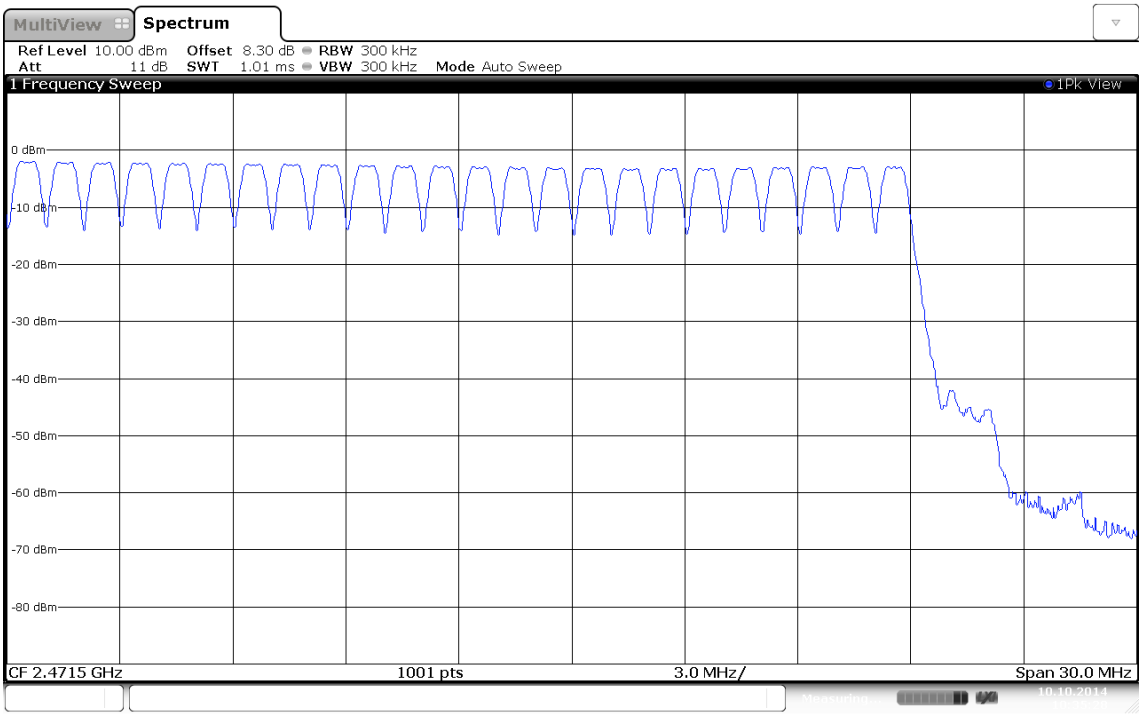

Number of hopping frequencies
Date: 10.OCT.2014 10:35:28

3.4 Test Conditions and Results – Frequency hopping channel separation

Frequency hopping channel separation acc. FCC 15.247 / IC RSS-210		**Verdict: PASS**
EUT requirement rule parts and clause	Reference	
	FCC 15.247(a)(1) / IC RSS-210 A8.1	
Test according to measurement reference	Reference Method	
	FCC Public Notice DA 00-705	
Test frequency range	Tested frequencies	
	2441 & 2442 MHz	
EUT test mode	DH5-Hop	

Limits	
Limit	Condition
≥ 25 kHz or ⅔ of 20 dB bandwidth	Output power ≤ 125 mW / 21 dBm
≥ 25 kHz or 20 dB bandwidth	125 mW / 21 dBm < Output power ≤ 1 W / 30 dBm

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set to measurement frequency range
3. Detector set to peak and max hold
4. Resolution bandwidth is set small enough to resolve hopping channel emission spectra
5. The two adjacent channel peaks are marked
6. Channel separation is determined from frequency separation of markers

Test results

Channel separation [kHz]	Limit [kHz]	Result
1002.20	≥ ⅔ · 925 = 616.66	PASS

Comments:

Frequency hopping channel separation

Carrier Frequency Separation acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, hopping mode
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Carrier Frequency Separation (DA 00-705 Meas Guidance)
Note 2:	conducted measurement

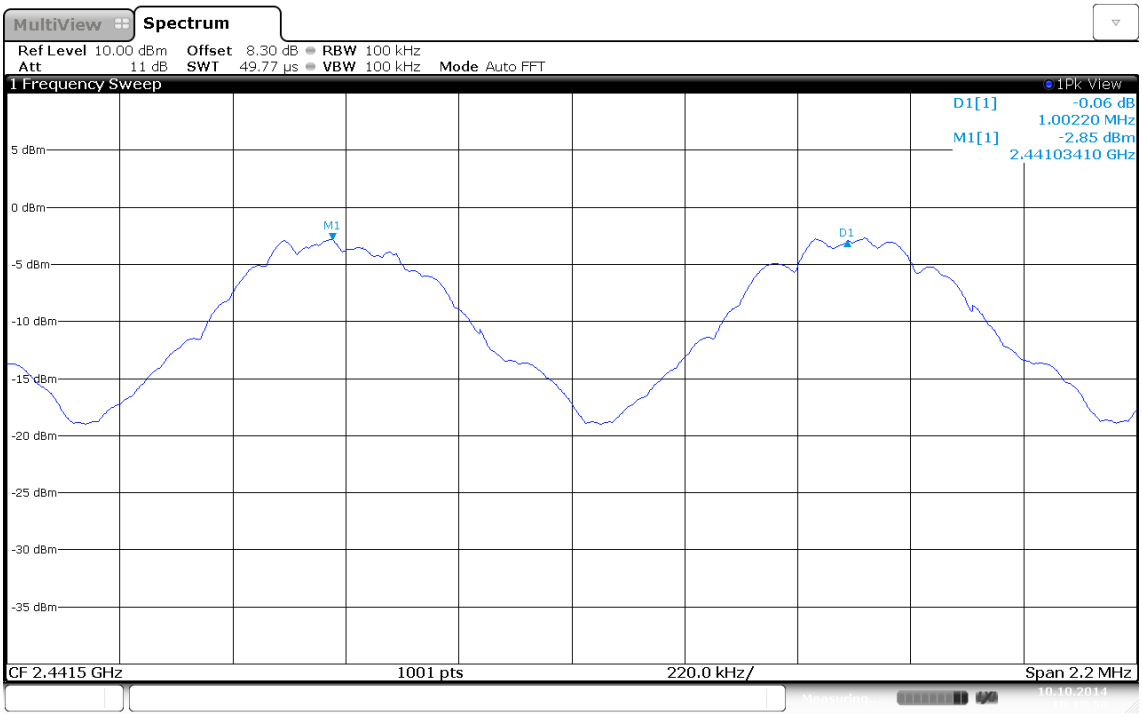

Limit: > two-thirds of the 20 dB bandwidth ; Result: Pass

Date: 10.OCT.2014 10:18:51

3.5 Test Conditions and Results – Time of occupancy (Dwell Time)

Time of occupancy (Dwell time) acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(a)(1)(iii) / IC RSS-210 A8.1
Test according to measurement reference	Reference Method
	FCC Public Notice DA 00-705
Test frequency range	Tested frequencies
	2441 MHz
EUT test mode	DH5-Hop

Limits

Limit
Time of occupancy ≤ 0.4 s within 0.4 s · Number of hopping channels

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Center frequency set to test channel center frequency
3. Span set to zero span and detector to peak and max hold
4. Resolution bandwidth is set to 100kHz and sweep time to observation period
5. Time of occupancy determined from number of peaks multiplied by single hop dwell time

Test results

Observation period [s]	No. of hops	Dwell time/hop [s]	Time of occupancy [s]	Limit [s]	Result
31.6	92	0.002877	0.264	≤ 0.4	PASS

Comments:

Time of occupancy

Time of Occupancy acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, channel 2441MHz, hopping mode
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	92 events * 2.877ms; Result: 264.7ms Limit<0.4s
Note 2:	conducted measurement, (DA 00-705 Meas Guidance)

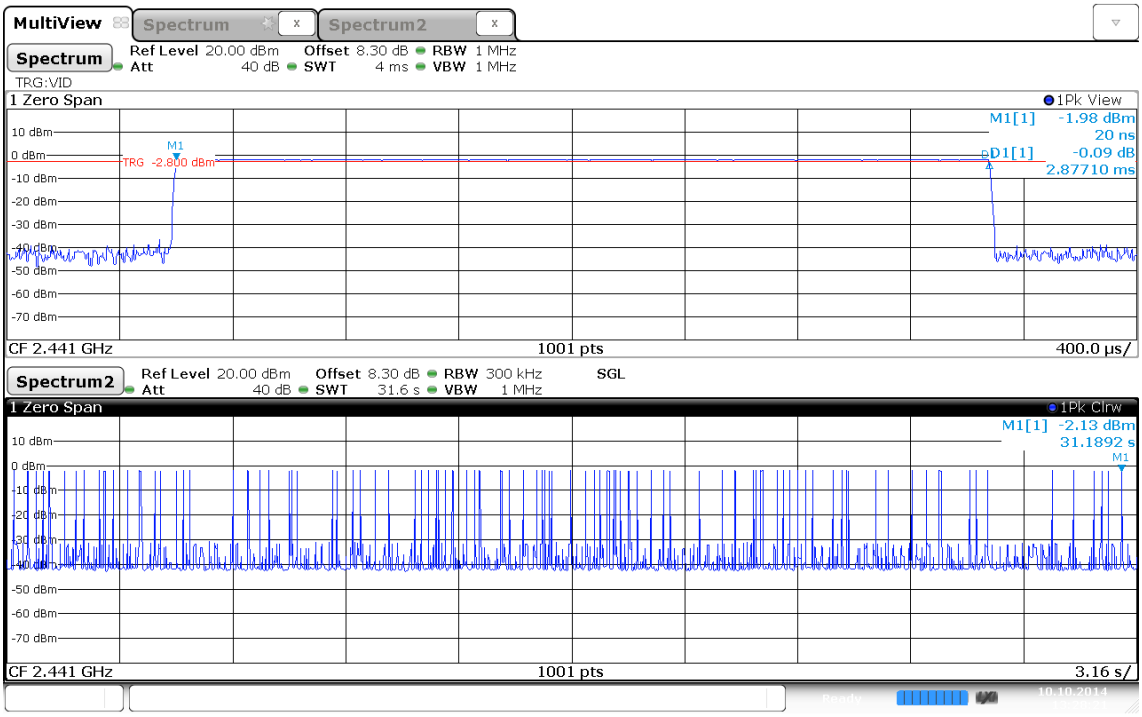

Burst length=2.8771 ms

Date: 10.OCT.2014 13:28:21

3.6 Test Conditions and Results – Maximum peak conducted power

Maximum peak conducted power acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(b)(1) / IC RSS-210 A8.4
Test according to measurement reference	Reference Method
	FCC Public Notice DA 00-705
Test frequency range	Tested frequencies
	F_{LOW} / F_{MID} / F_{HIGH}
Measurement mode	Peak
Maximum antenna gain	1.7 dBi ⇒ Limit correction = 0 dB

Limits

Limit	Condition
1 W (30 dBm)	Number of hopping channels ≥ 75
0.125 W (21 dBm)	75 > Number of hopping channels ≥ 15

The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Center frequency set to test channel center frequency
3. Span set to twice the 20 dB bandwidth and detector to peak and max hold
4. Resolution bandwidth is set to 3 MHz
5. Peak conducted power is determined from peak of spectrum envelope

Test results								
Channel	Frequency [MHz]	Voltage	Mode	Peak power [dbm]	Peak power [W]	Limit [dBm]	Margin [dB]	Result
F_{LOW}	2402	3.7 VDC	DH5-Sngl	-0.8	0.0008	30	-30.80	PASS
F_{MID}	2441	3.7 VDC	DH5-Sngl	-1.9	0.0006	30	-31.90	PASS
F_{HIGH}	2480	3.7 VDC	DH5-Sngl	-3.4	0.0005	30	-33.40	PASS
Comments:								

3.7 Test Conditions and Results – AC power line conducted emissions

Power line conducted emissions acc. FCC 47 CFR 15.207 / IC RSS-Gen				Verdict: PASS
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Points of Application	Application Interface			
AC Mains	LISN			
EUT test mode	AC-Power line			
Limits and results				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

Conducted Emissions

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer:	Sonetics Corporation
EUT Name:	Communication Headsets
Model:	APX379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Marquardt
Test Conditions:	Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)
LISN:	ESH2-Z5 N
Mode:	charging
Test Date:	2014-11-18
Note:	

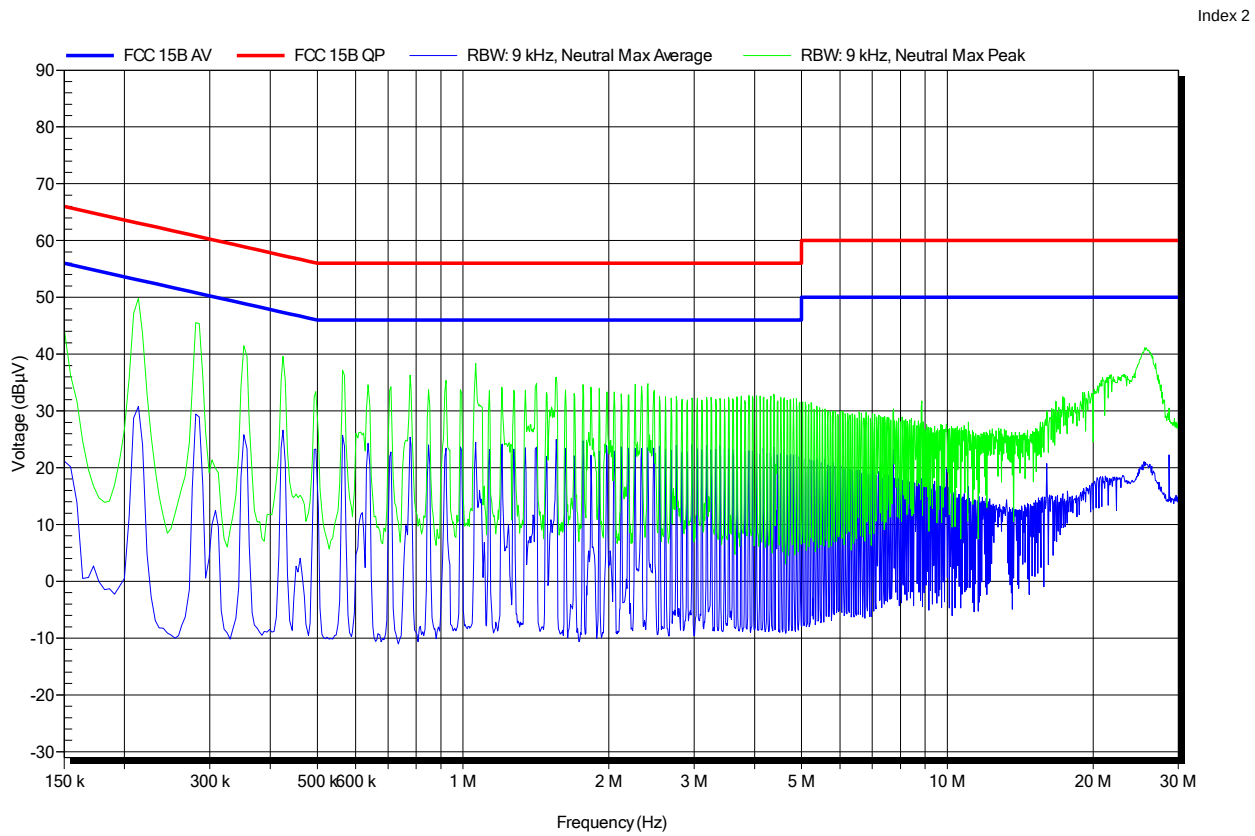

Conducted Emissions

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer:	Sonetics Corporation
EUT Name:	Communication Headsets
Model:	APX379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Marquardt
Test Conditions:	Tnom: 23°C, Unom: 120 VAC (AC/DC adapter)
LISN:	ESH2-Z5 L
Mode:	charging
Test Date:	2014-11-18
Note:	

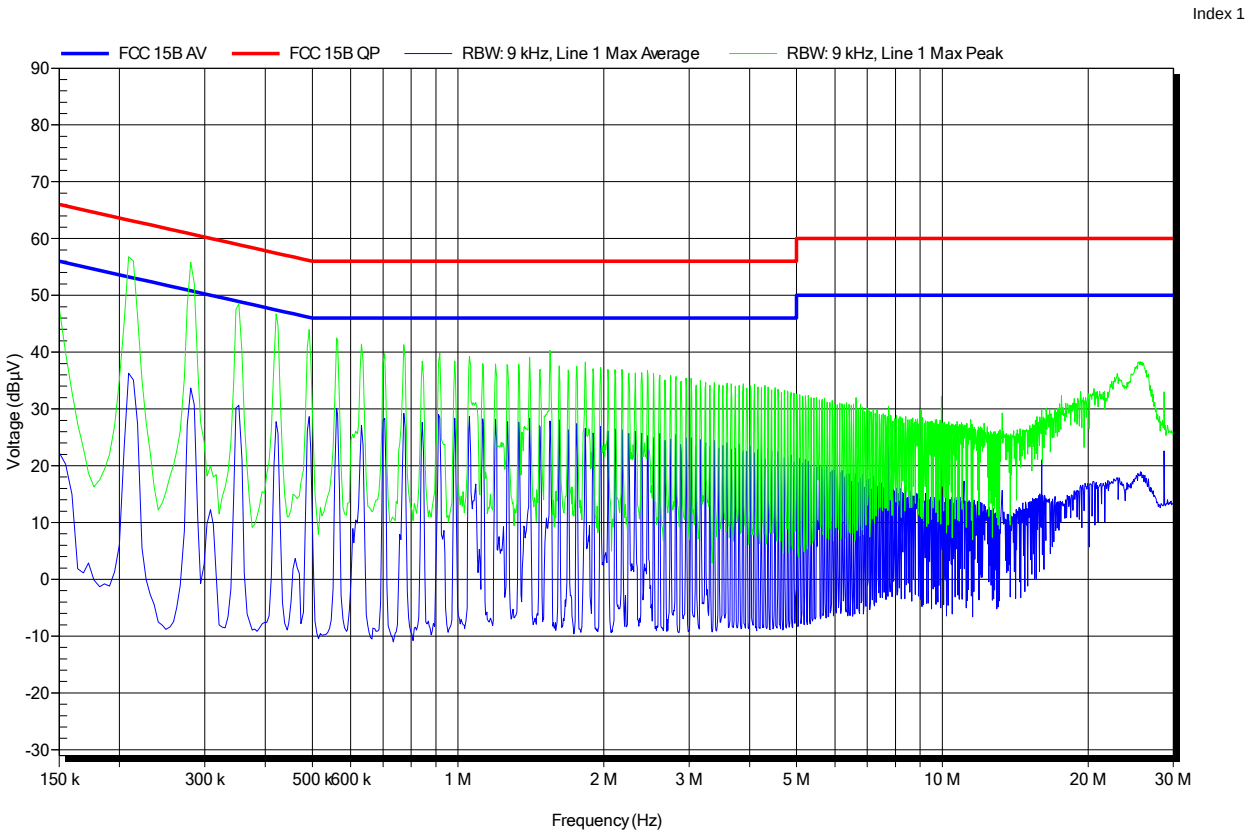

3.8 Test Conditions and Results – Band edge compliance

Band-edge compliance acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(d) / IC RSS-210 A8.5
Test according to measurement reference	Reference Method
	FCC Public Notice DA 00-705
Test frequency range	Tested frequencies
	F_{LOW} / F_{HIGH}
Measurement mode	Peak

Limits

Limit	Condition
≤ -20 dB/100 kHz	Peak power measurement detector = Peak
≤ -30 dB/100 kHz	Peak power measurement detector = RMS

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span set around lower band edge and detector is set to peak and max hold
3. Resolution bandwidth is set to 100 kHz
4. Markers are set to peak emission levels within frequency band and outside frequency band
5. Band edge attenuation is determined from level difference

Test results

Channel	Frequency [MHz]	Mode	Level [dBc]	Limit [dBc]	Margin [dB]	Result
F_{LOW}	2402	DH5-Sngl	-40.05	-20	-20.05	PASS
F_{HIGH}	2480	DH5-Sngl	-60.09	-20	-40.09	PASS
F_{LOW}	2402	DH5-Hop	-62.05	-20	-42.05	PASS
F_{HIGH}	2480	DH5-Hop	-40.98	-20	-20.98	PASS

Comments:

Band-edge compliance – DH5-Sngl F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, 2402 MHz, single frequency
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Marker-delta method (DA 00-705 Meas Guidance)
Note 2:	lower Band-edge, conducted measurement

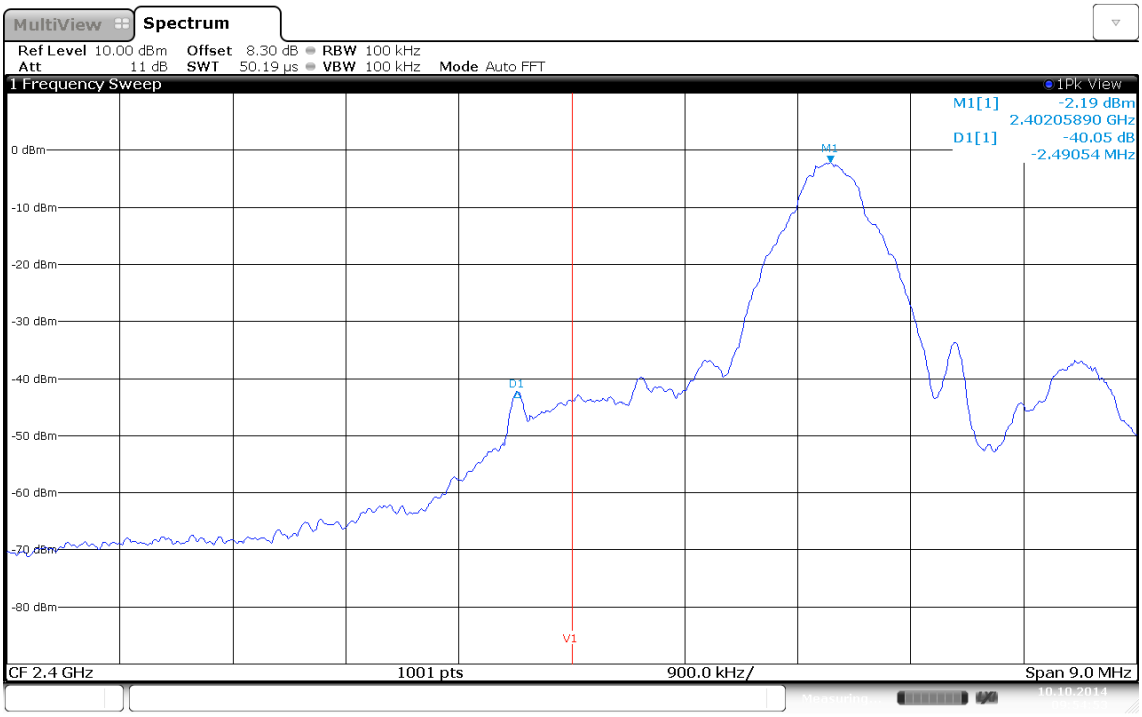

Limit: Marker Delta value >20 dB; Result: PASS

Date: 10.OCT.2014 09:54:53

Band-edge compliance – DH5-Sngl F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, 2480 MHz, single frequency
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Marker-delta method (DA 00-705 Meas Guidance)
Note 2:	upper Band-edge, conducted measurement

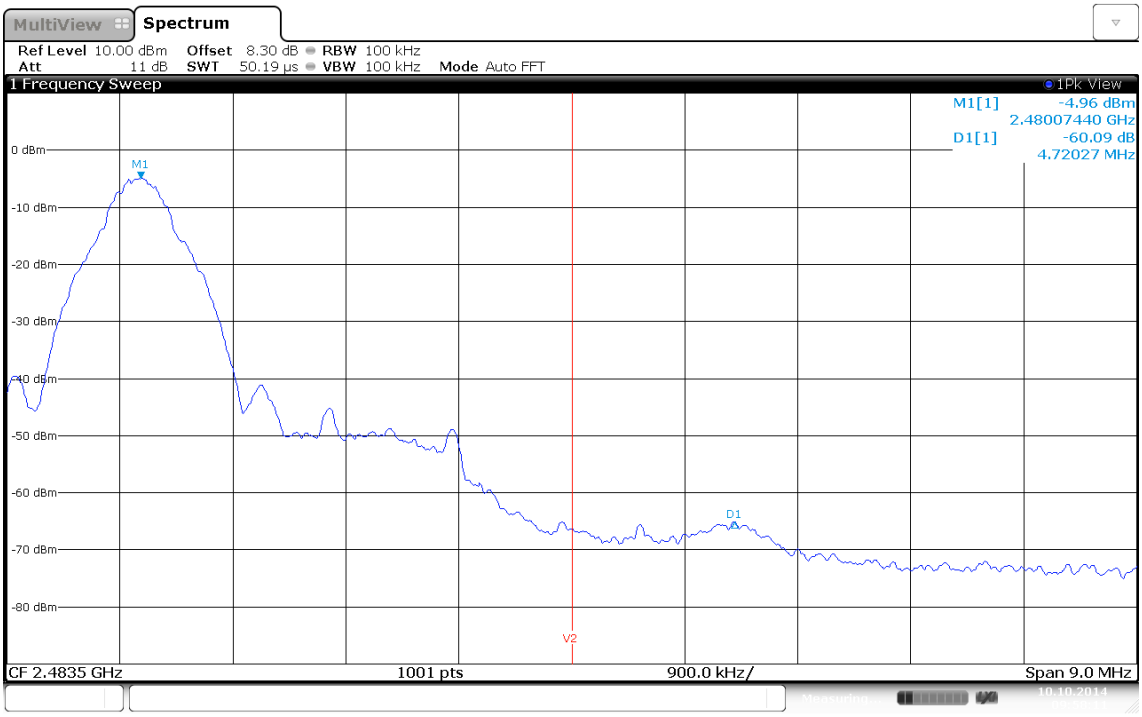

Limit: Marker Delta value >20 dB; Result: PASS

Date: 10.OCT.2014 09:58:11

Band-edge compliance – DH5-Hop F_{LOW}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, hopping mode
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Marker-delta method (DA 00-705 Meas Guidance)
Note 2:	upper Band-edge, conducted measurement

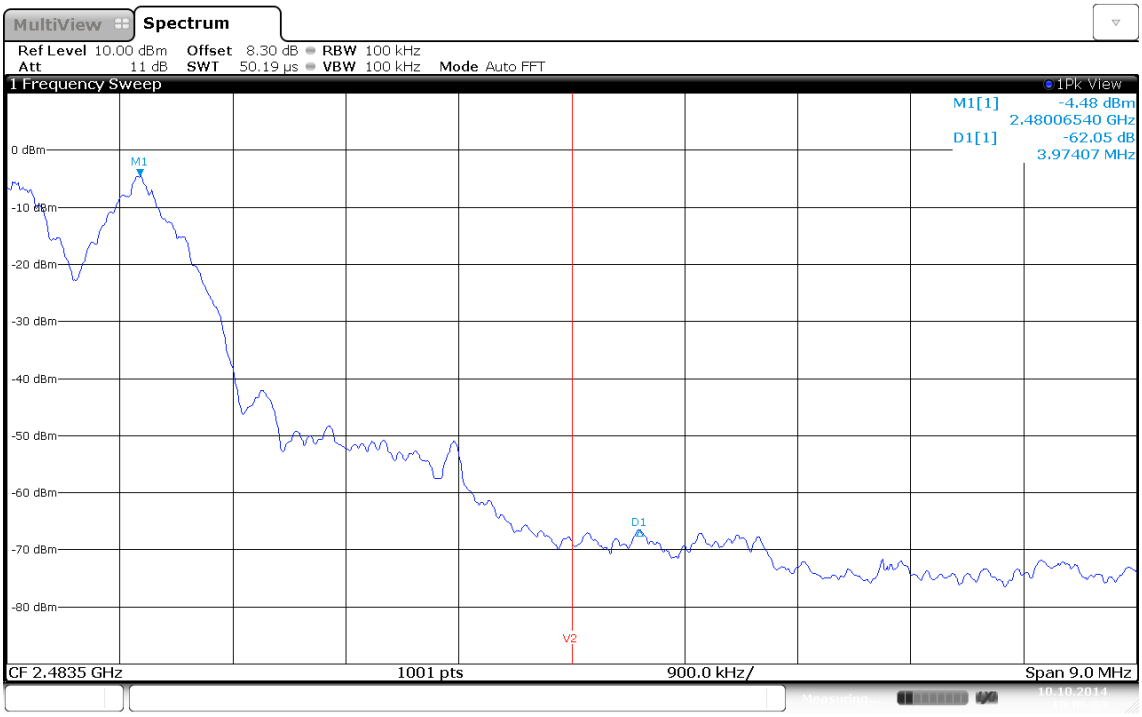

Limit: Marker Delta value >20 dB; Result: PASS
Date: 10.OCT.2014 10:06:03

Band-edge compliance – DH5-Hop F_{HIGH}

Band-edge compliance acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, hopping mode
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Marker-delta method (DA 00-705 Meas Guidance)
Note 2:	lower Band-edge, conducted measurement

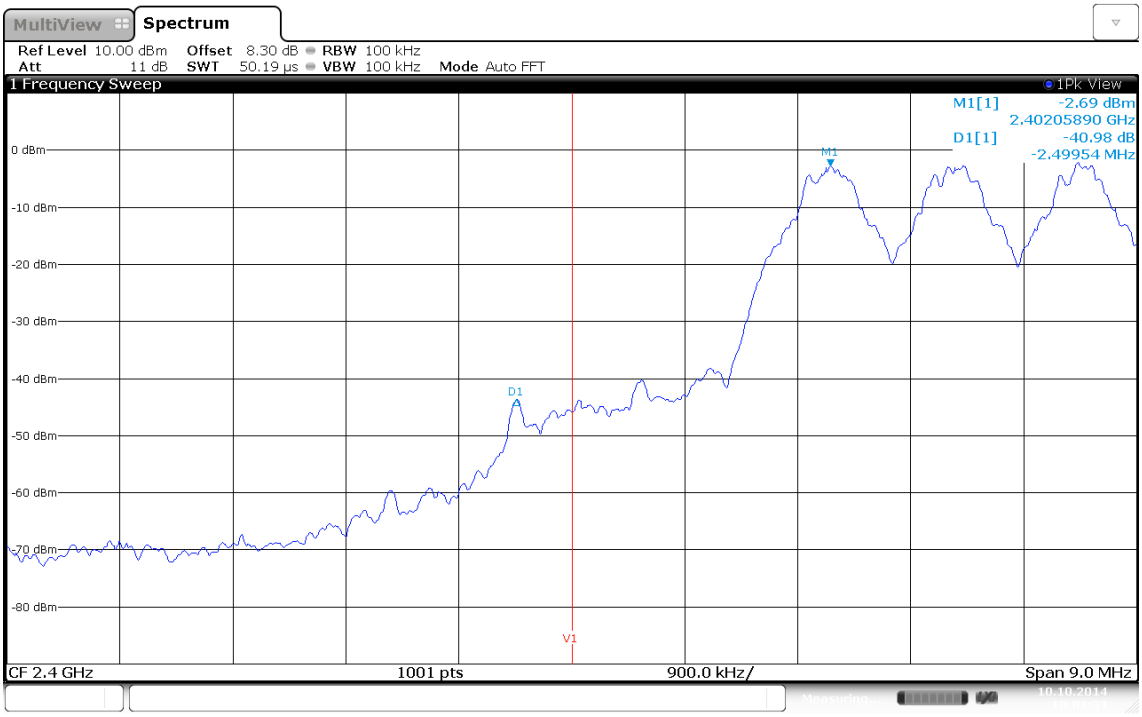

Limit: Marker Delta value >20 dB; Result: PASS

Date: 10.OCT.2014 10:01:31

3.9 Test Conditions and Results – Conducted spurious emissions

Conducted spurious emissions acc. FCC 15.247 / IC RSS-210	**Verdict: PASS**
EUT requirement rule parts and clause	Reference
	FCC 15.247(d) / IC RSS-210 A8.5
Test according to measurement reference	Reference Method
	FCC Public Notice DA 00-705
Test frequency range	Tested frequencies
	10 MHz – 10th Harmonic
Measurement mode	Peak

Limits

Limit	Condition
≤ -20 dB/100 kHz	Peak power measurement detector = Peak
≤ -30 dB/100 kHz	Peak power measurement detector = RMS

Test setup



Test procedure

1. EUT set to test mode (Communication tester is used if needed)
2. Span it set according to measurement range
3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold
4. Markers are set to peak emission levels within frequency band
5. Emission level is determined by second marker on emission peak
6. Attenuation is determined from level difference

Test results

Channel	Frequency [MHz]	Mode	Emission [MHz]	Emission Level [dbm]	Peak power [dBm]	Limit [dBm]	Margin [dB]	Result
F_{LOW}	2402	DH5-Sngl	4804	-48.17	-1.9	-21.9	-26.27	PASS
F_{MID}	2441	DH5-Sngl	4882	-57.89	-2.9	-22.9	-34.99	PASS
F_{HIGH}	2480	DH5-Sngl	4960	-56.53	-4.2	-24.2	-32.33	PASS

Comments:

Conducted spurious emissions – DH5-Sngl F_{LOW}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, 2402 MHz, modulated
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
Note 2:	conducted measurement

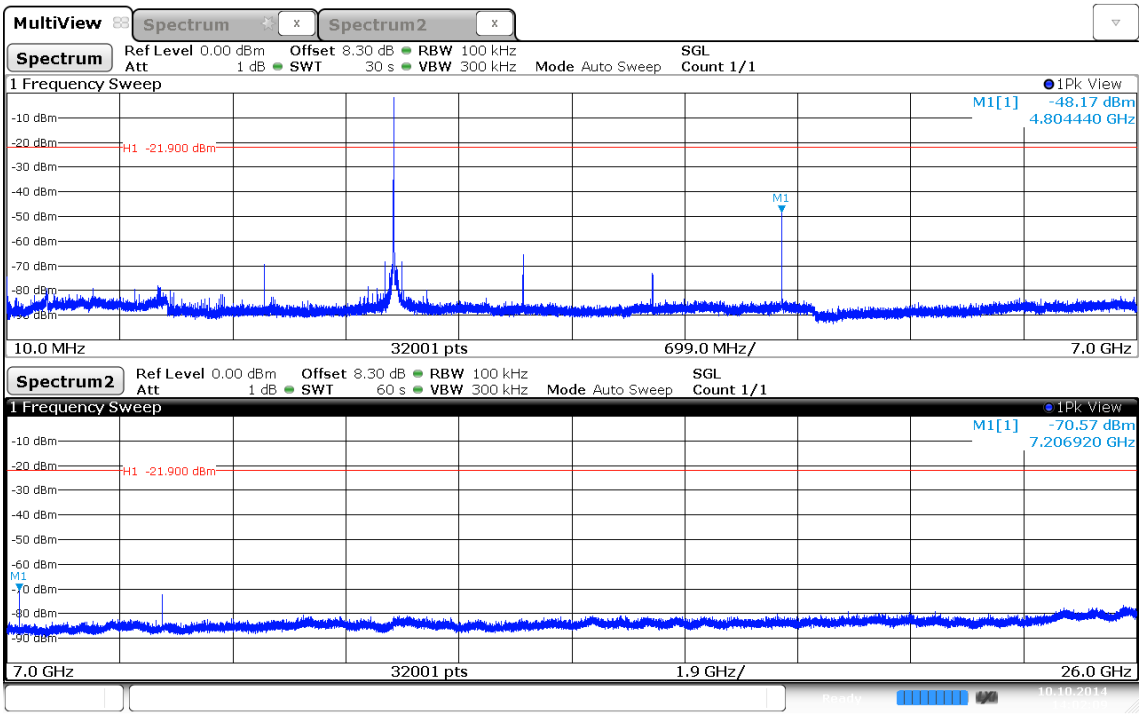

Date: 10.OCT.2014 14:02:10

Conducted spurious emissions – DH5-Sngl F_{MID}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, 2441 MHz, modulated
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
Note 2:	conducted measurement

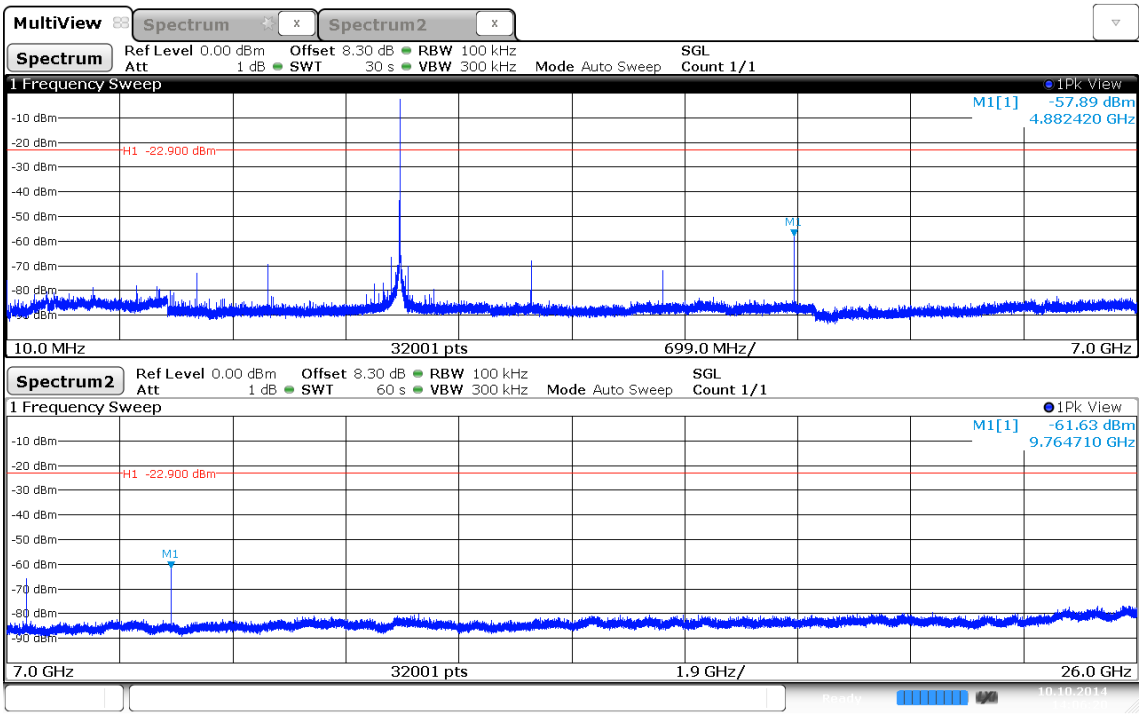

Date: 10.OCT.2014 14:06:20

Conducted spurious emissions – DH5-Sngl F_{HIGH}

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Wilfried Treffke
Test Conditions:	Tnom / Vnom
Mode:	Tx, GFSK, 2480 MHz, modulated
Test Date:	2014-10-10
Verdict:	PASS
Note 1:	Spurious in non-restricted frequency bands (DA 00-705 Meas Guidance)
Note 2:	conducted measurement

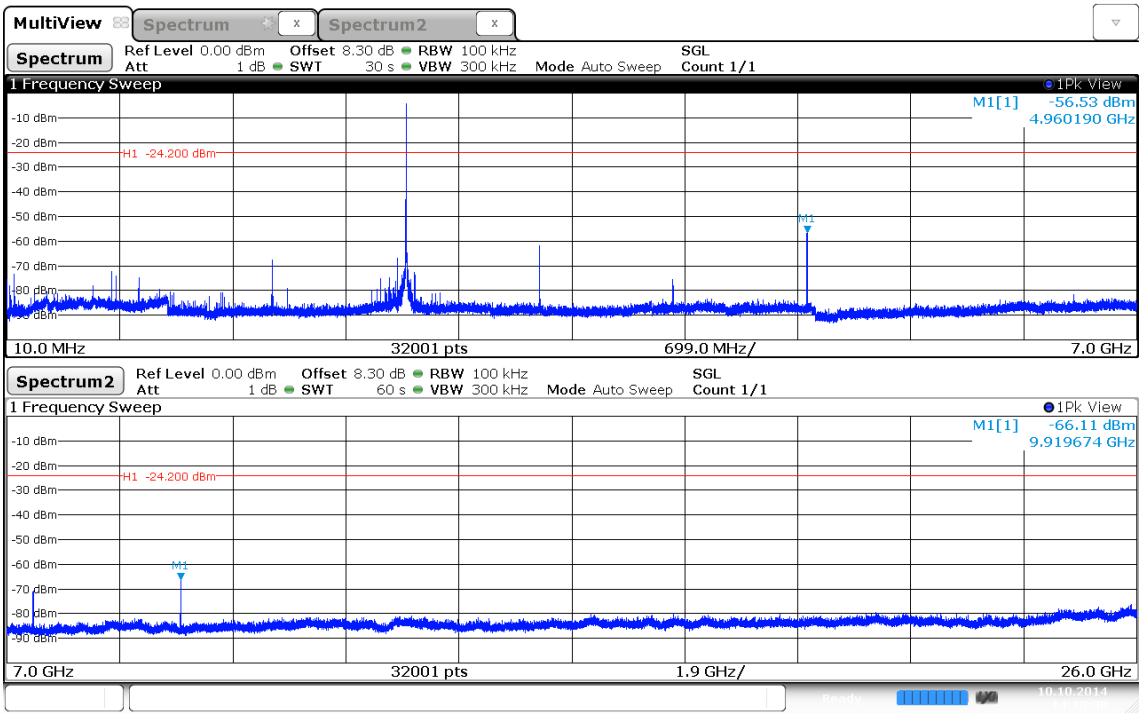

Date: 10.OCT.2014 14:10:39

3.10 Test Conditions and Results – Transmitter radiated emissions

Transmitter radiated emissions acc. FCC 47 CFR 15.247 / IC RSS-210				**Verdict: PASS**
Test according referenced standards		Reference Method		
		FCC 15.247(d) / IC RSS-210 A8.5		
Test according to measurement reference		Reference Method		
		FCC Public Notice DA 00-705 / ANSI C63.4		
Test frequency range		Tested frequencies		
		30 MHz – 10th Harmonic		
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.				
Test setup				

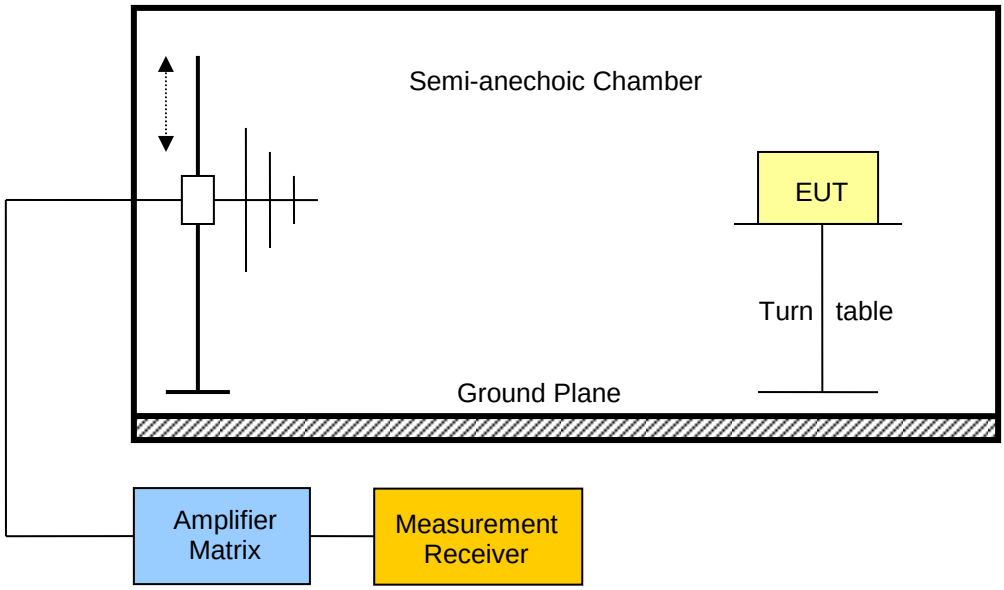

Test procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels within restricted bands

Test results – Internal Antenna

Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dbµV/m]	Det.	Pol.	Limit [dbµV/m]	Limit dist. [m]*	Margin [dB]
F_{LOW}	2402	DH5-Sngl	4804	56.97	pk	hor	74.00	3	-17.03
F_{LOW}	2402	DH5-Sngl	4804	52.81	avg	hor	54.00	3	-01.19
F_{LOW}	2402	DH5-Sngl	4804	58.03	pk	ver	74.00	3	-15.97
F_{LOW}	2402	DH5-Sngl	4804	50.99	avg	ver	54.00	3	-03.01
F_{MID}	2441	DH5-Sngl	4882	54.28	pk	hor	74.00	3	-19.72
F_{MID}	2441	DH5-Sngl	4882	50.86	avg	hor	54.00	3	-03.14
F_{MID}	2441	DH5-Sngl	4882	56.40	pk	ver	74.00	3	-17.60
F_{MID}	2441	DH5-Sngl	4882	52.04	avg	ver	54.00	3	-01.96
F_{HIGH}	2480	DH5-Sngl	2483.5	55.82	pk	hor	74.00	3	-18.18
F_{HIGH}	2480	DH5-Sngl	2483.5	33.29	RMS	hor	54.00	3	-20.71
F_{HIGH}	2480	DH5-Sngl	4960	54.38	pk	ver	74.00	3	-19.62
F_{HIGH}	2480	DH5-Sngl	4960	49.41	avg	ver	54.00	3	-04.59

Comments: * Physical distance between EUT and measurement antenna.

3.11 Test Conditions and Results – Receiver radiated emissions

Receiver radiated emissions acc. IC RSS-210				**Verdict: PASS**
Test according referenced standards	Reference Method			
	IC RSS-210 A8.5			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	30 MHz – 3th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [µV/m]	Limit [dBµV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				

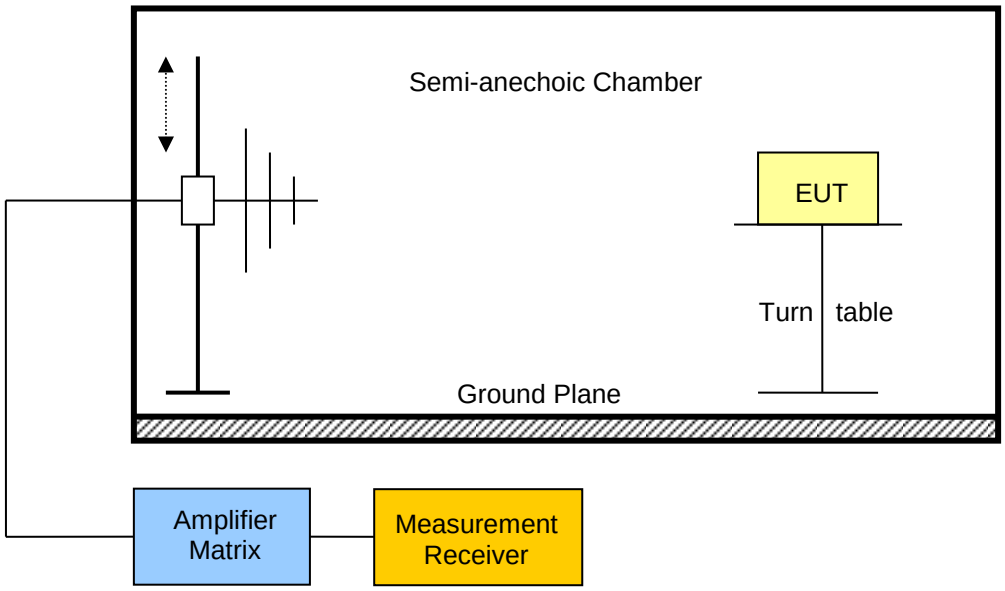

Test procedure
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels

Test results

Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dbµV/m]	Emission Level [µV/m]	Det.	Limit [µV/m]	Margin [µV/m]
F_{MID}	2441	419.2	30.24	32.51	pk	200	167.49

Comments:
* Physical distance between EUT and measurement antenna.
** Emission level corresponds to ambient noise floor

ANNEX A Transmitter radiated spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	worst case

Index 89

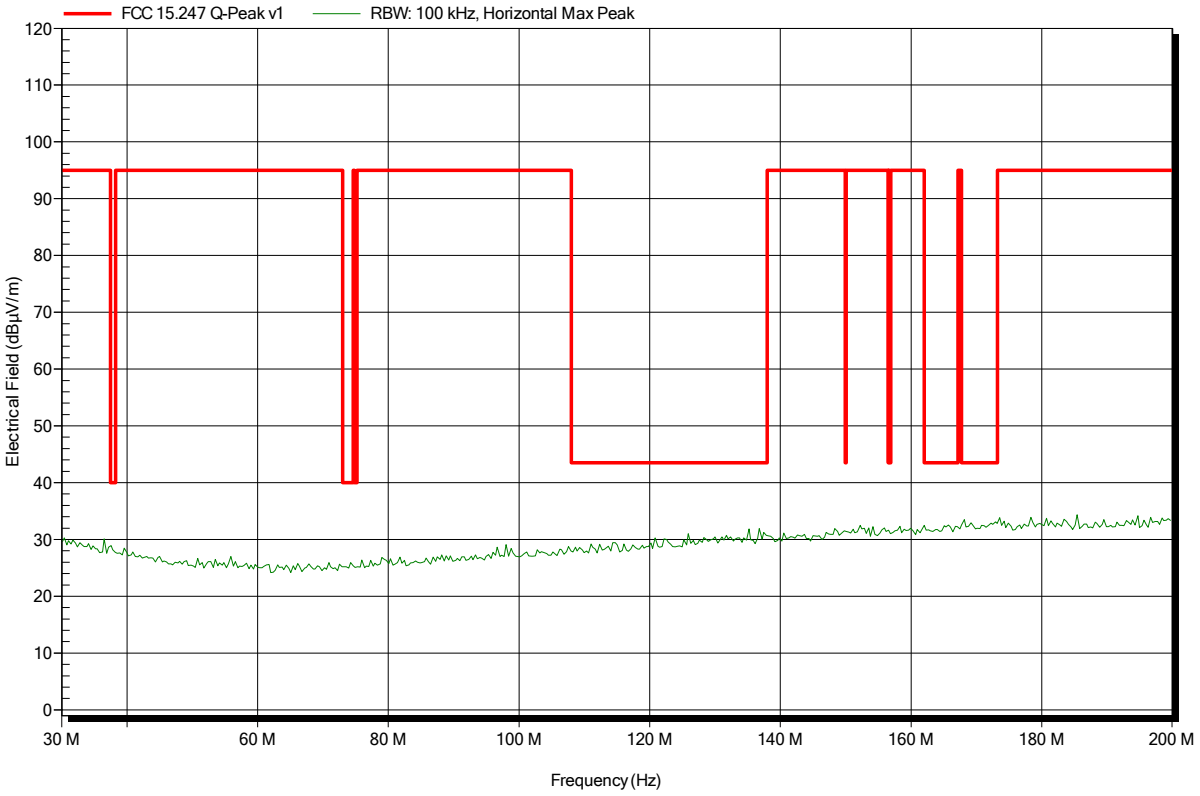

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	worst case

Index 90

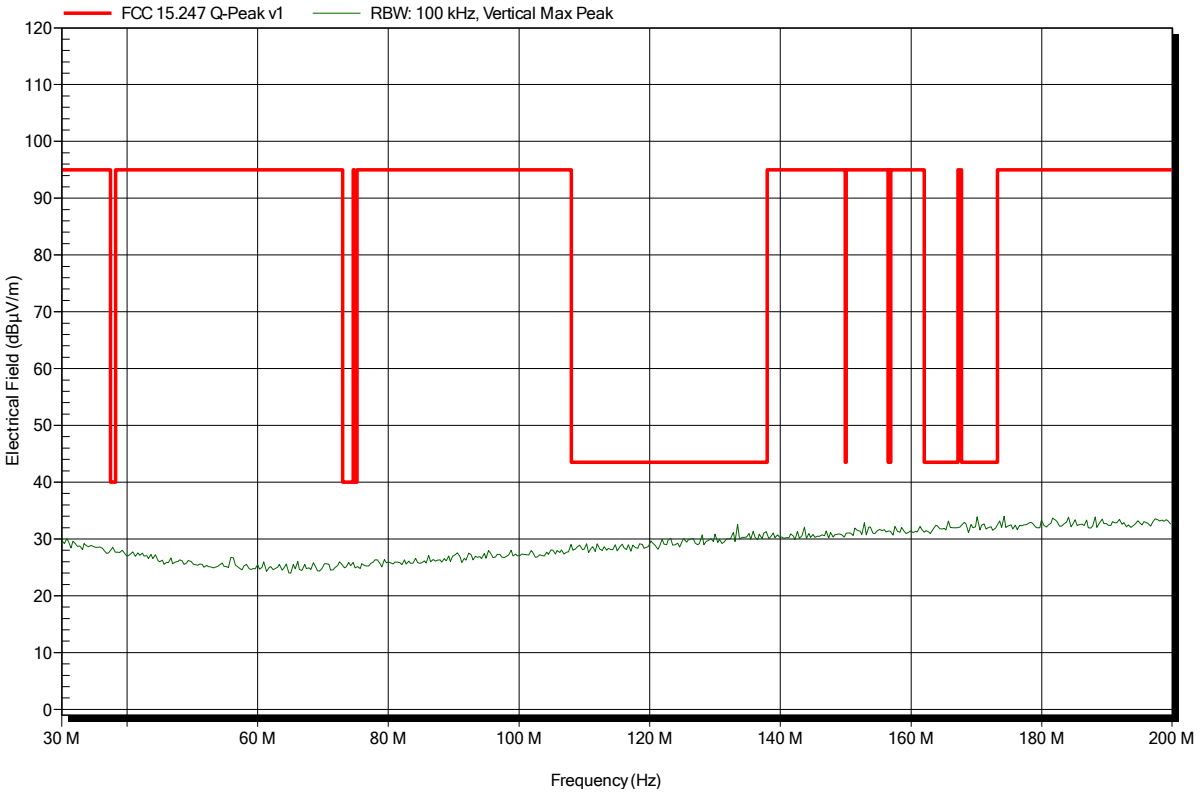

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	worst case

Index 87

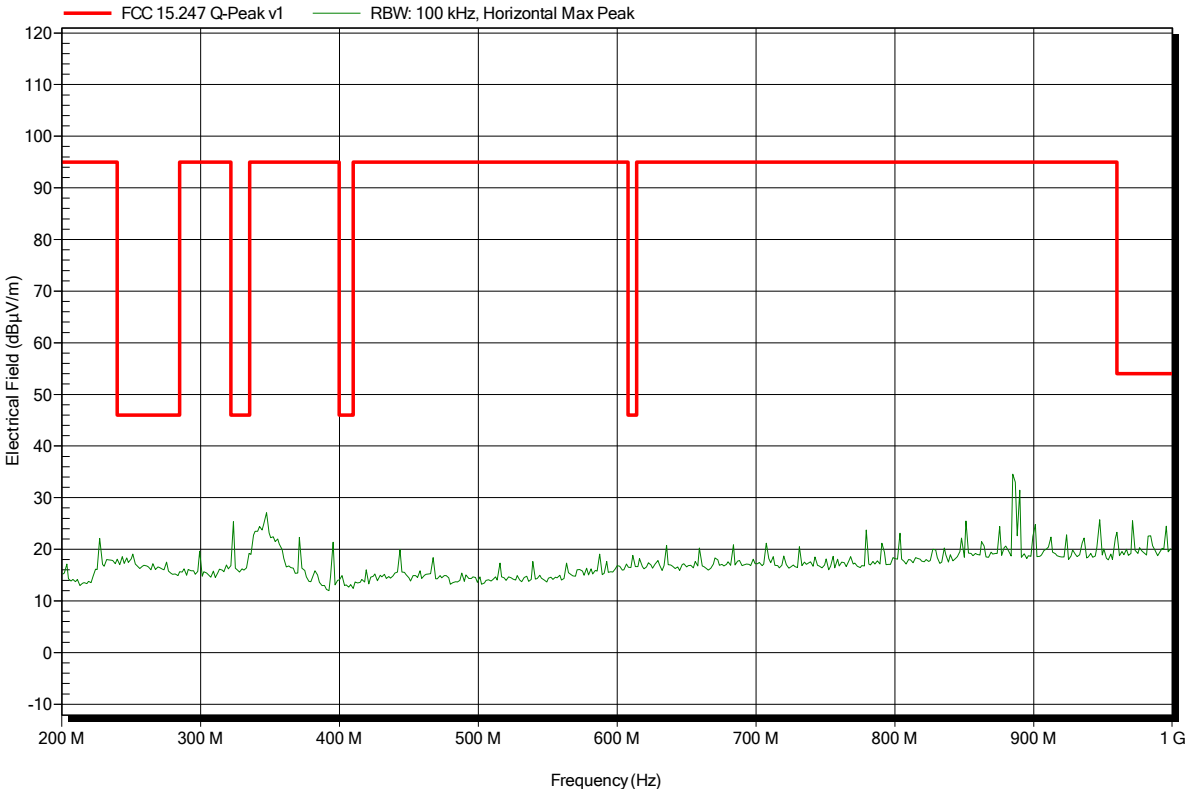

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	worst case

Index 88

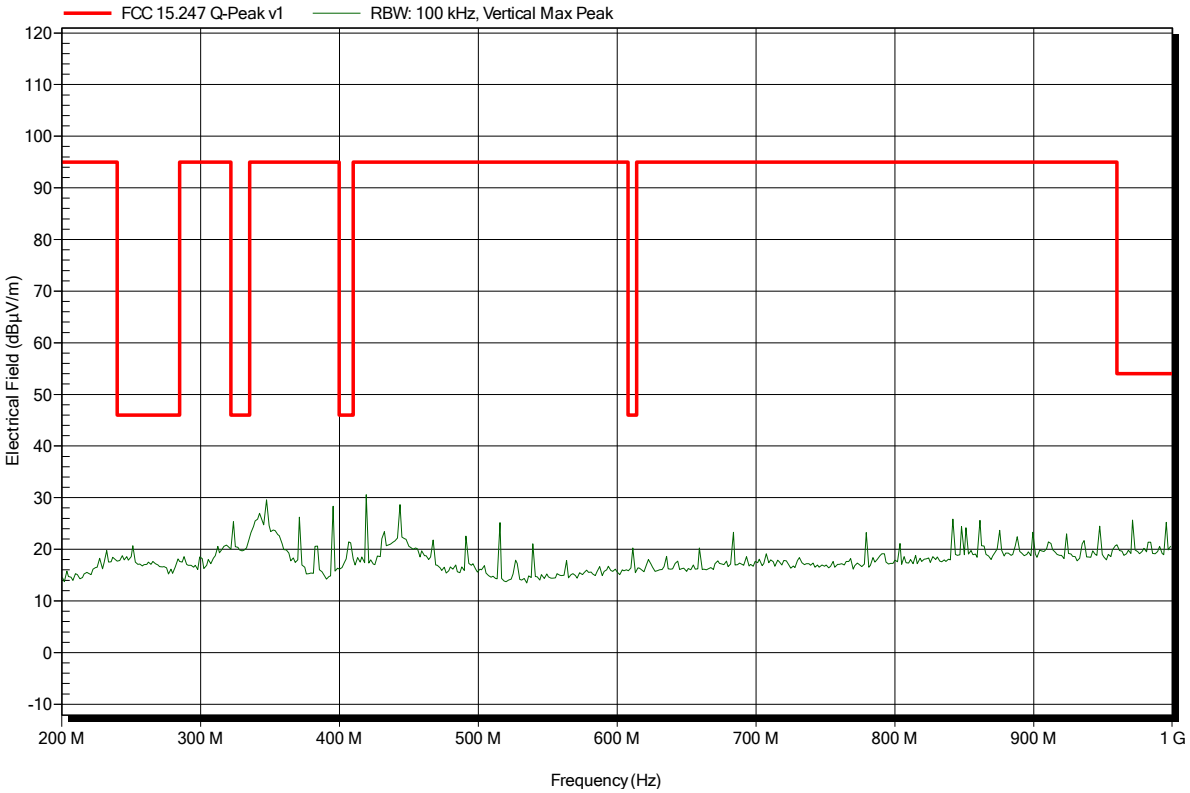

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	

Index 61

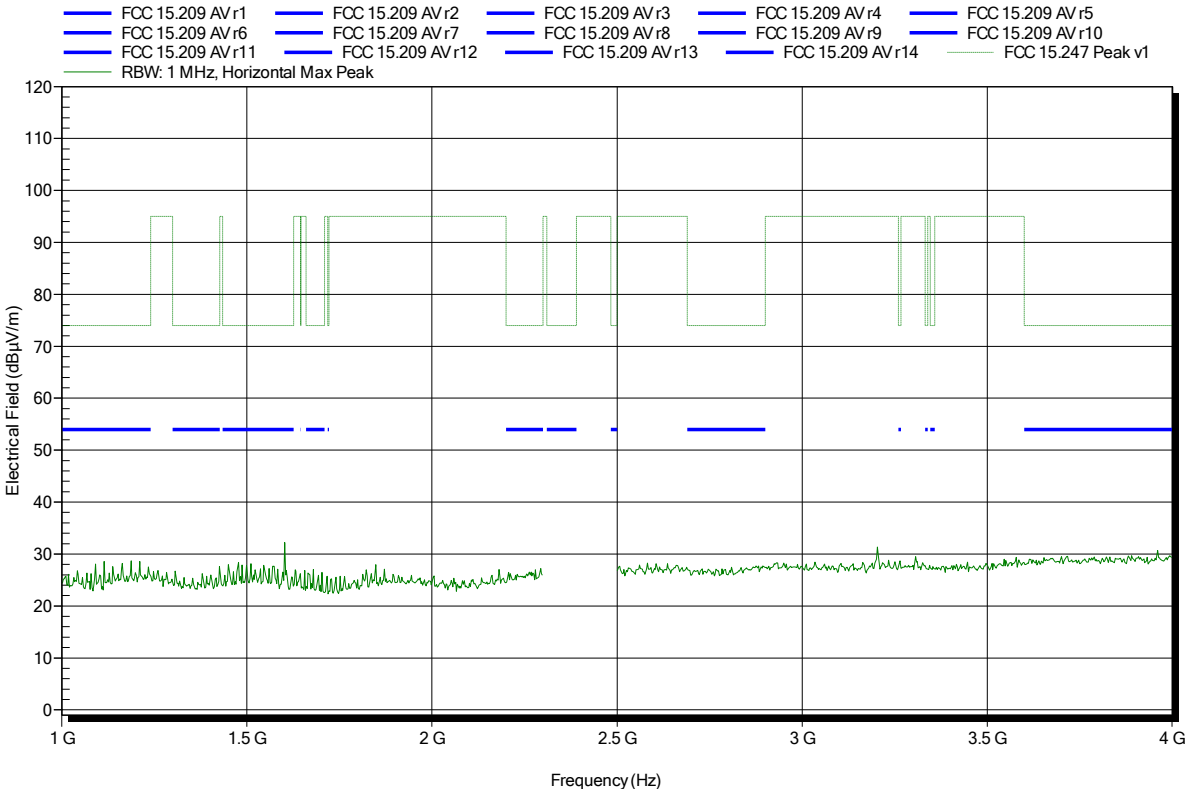

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	

Index 60

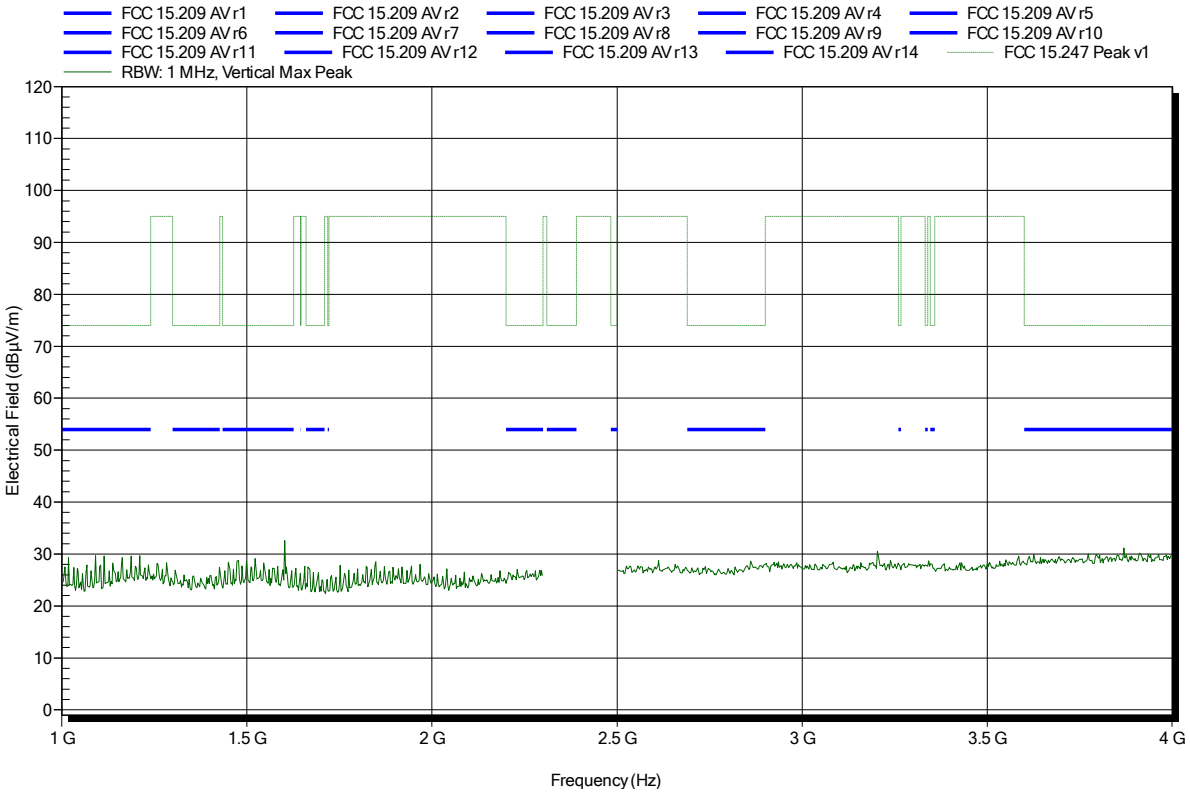

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	lower bandedge

Index 62

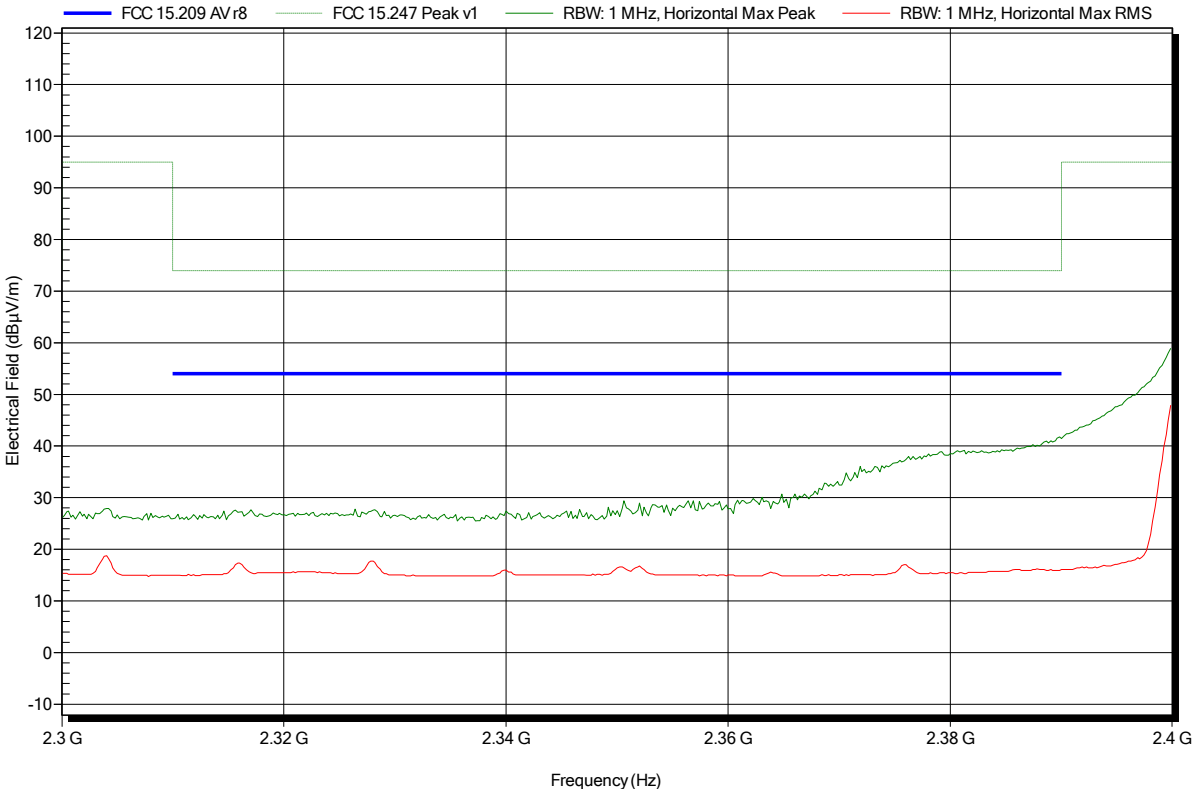

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	lower bandedge

Index 63

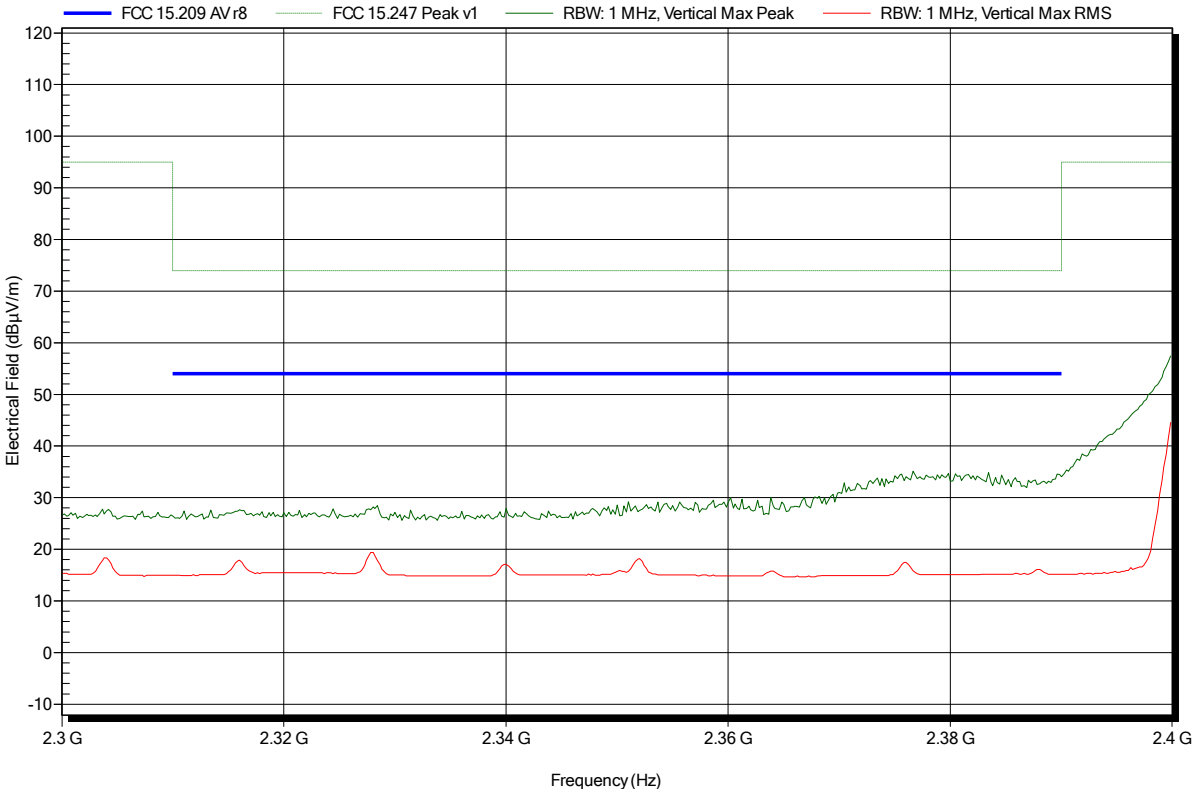

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	

Index 57

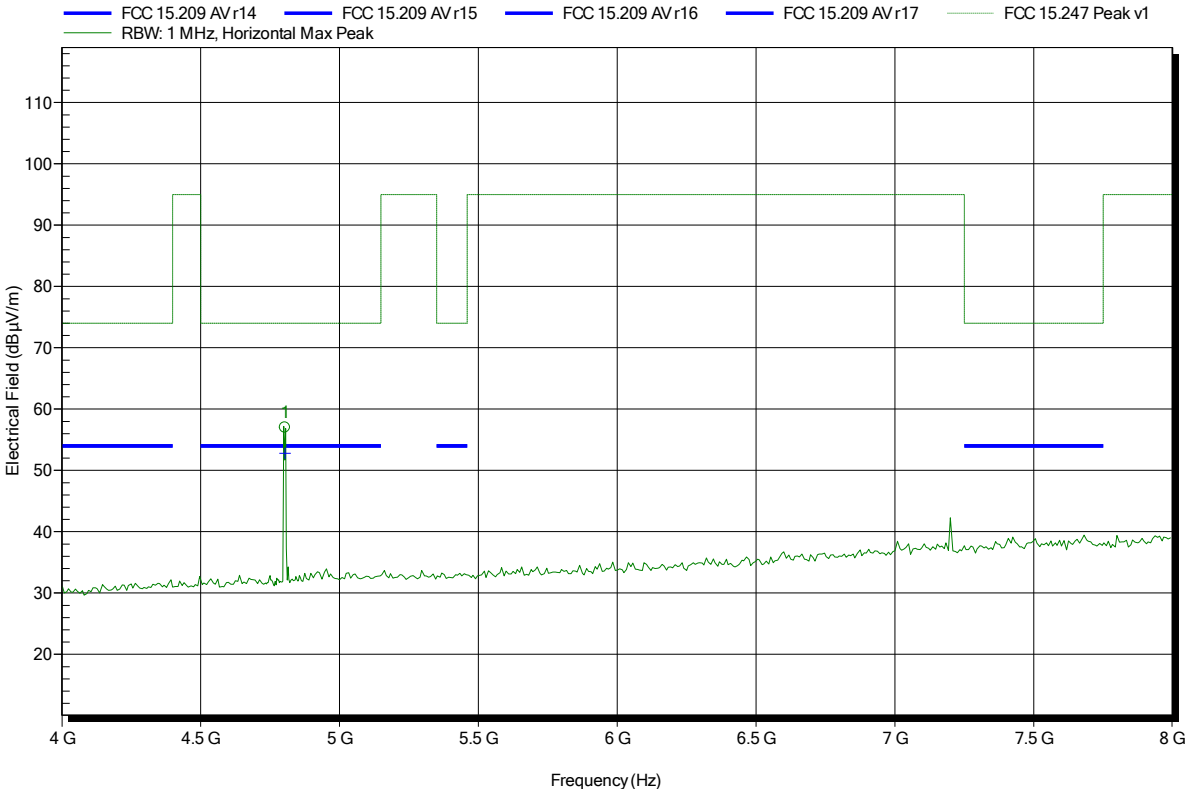

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.804 GHz	56.97 dBµV/m	74 dBµV/m	-17.03 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
4.804 GHz	52.81 dBµV/m	54 dBµV/m	-1.19 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	

Index 68

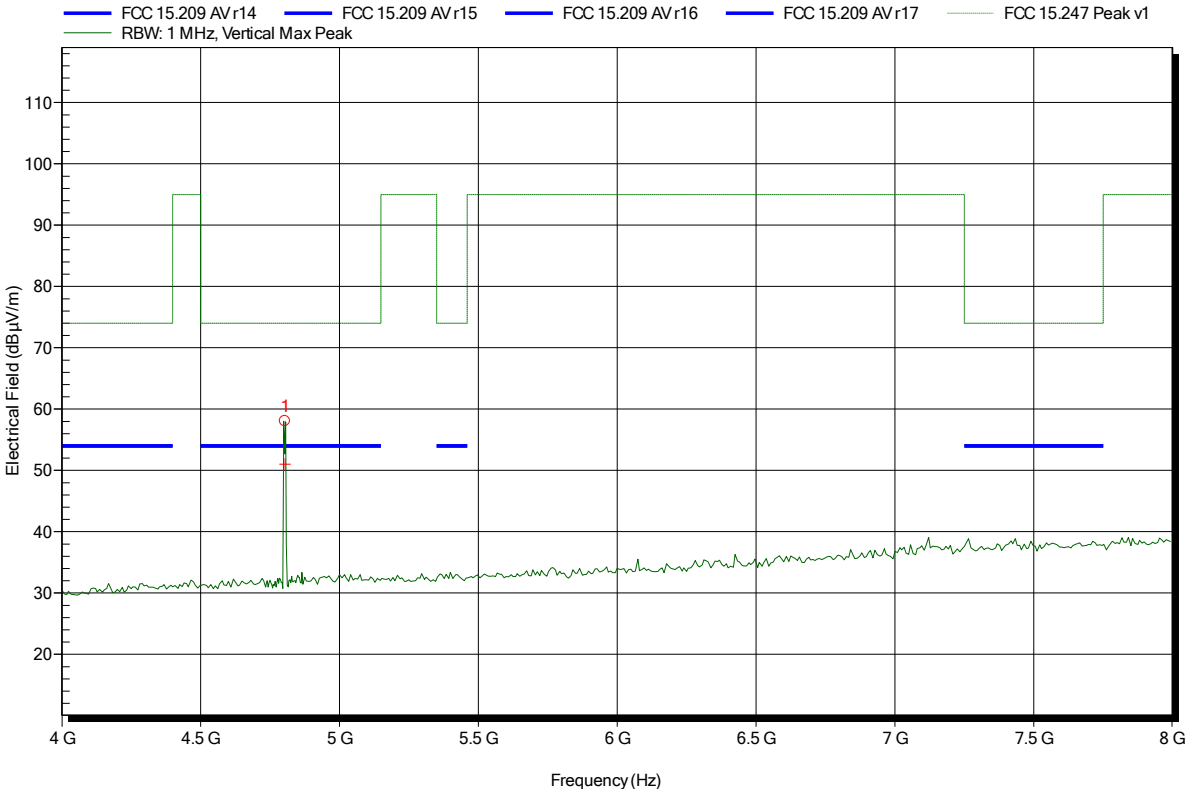

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.804 GHz	58.03 dBµV/m	74 dBµV/m	-15.97 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
4.804 GHz	50.99 dBµV/m	54 dBµV/m	-3.01 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	

Index 58

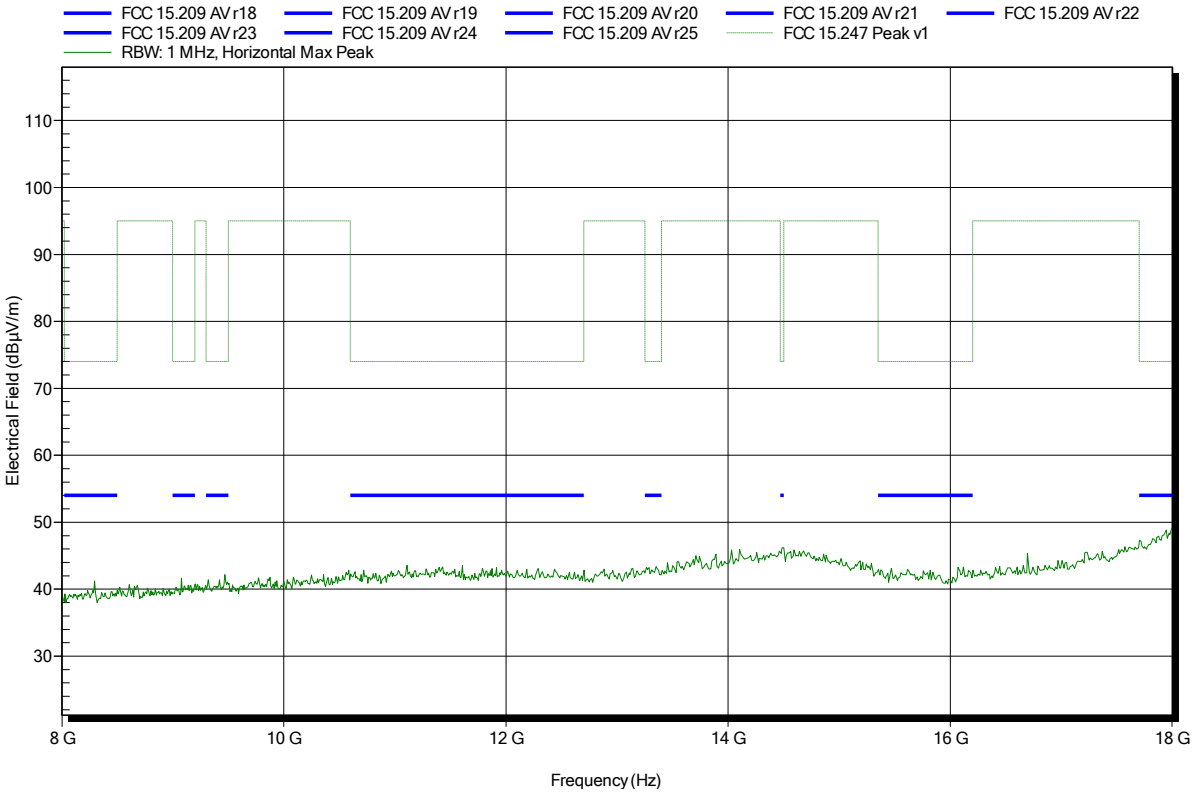

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	

Index 66

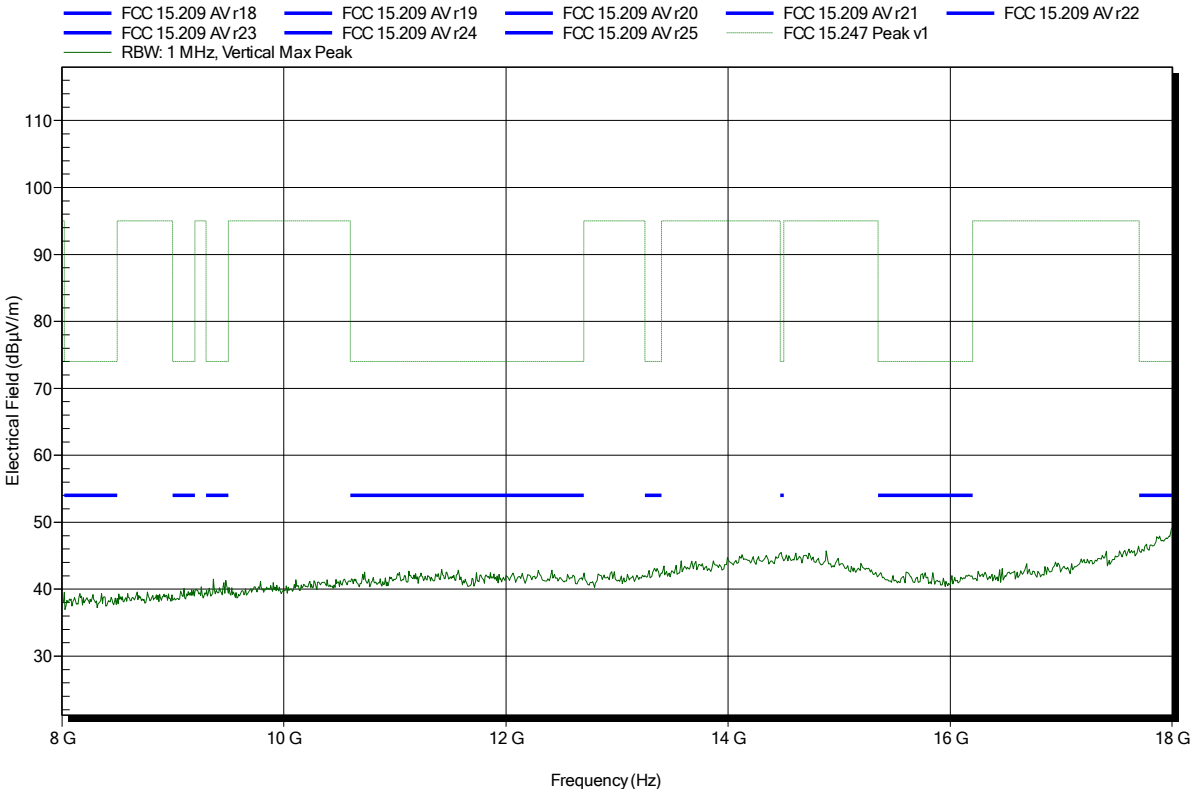

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	

Index 59

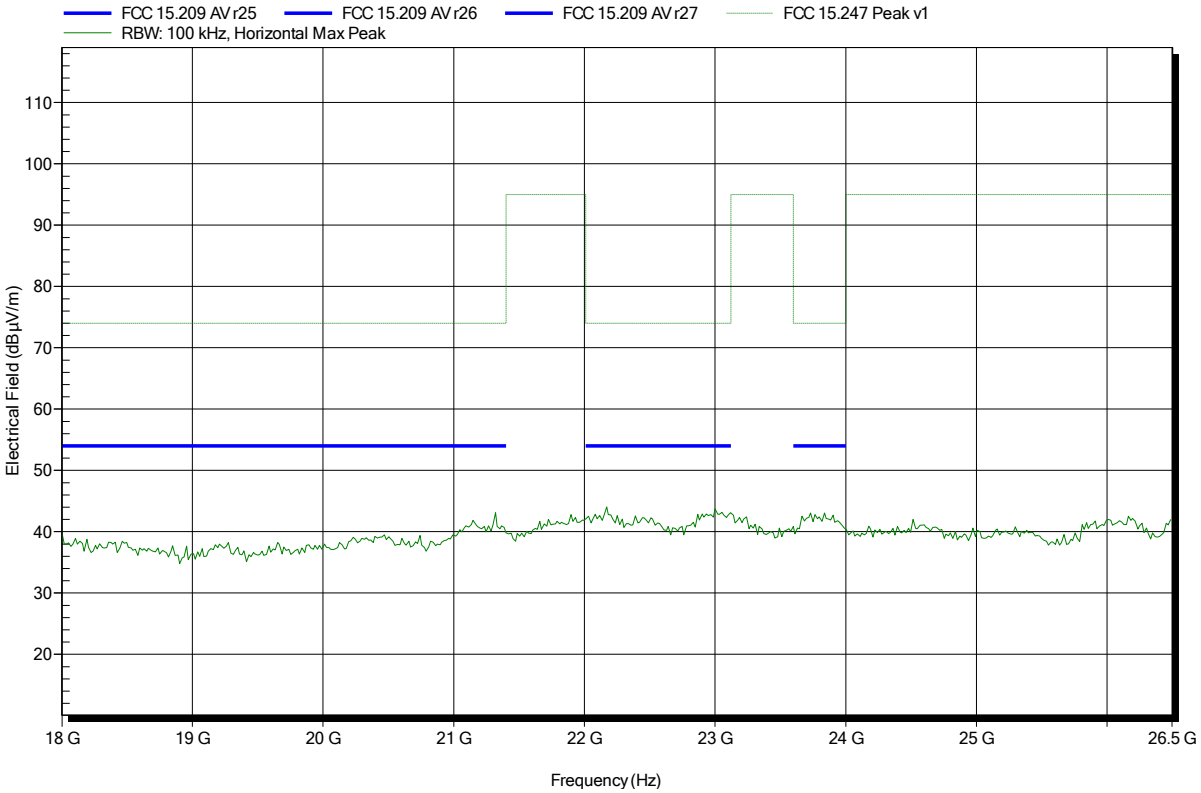

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2402 MHz
Test Date:	2014-10-02
Note:	

Index 67

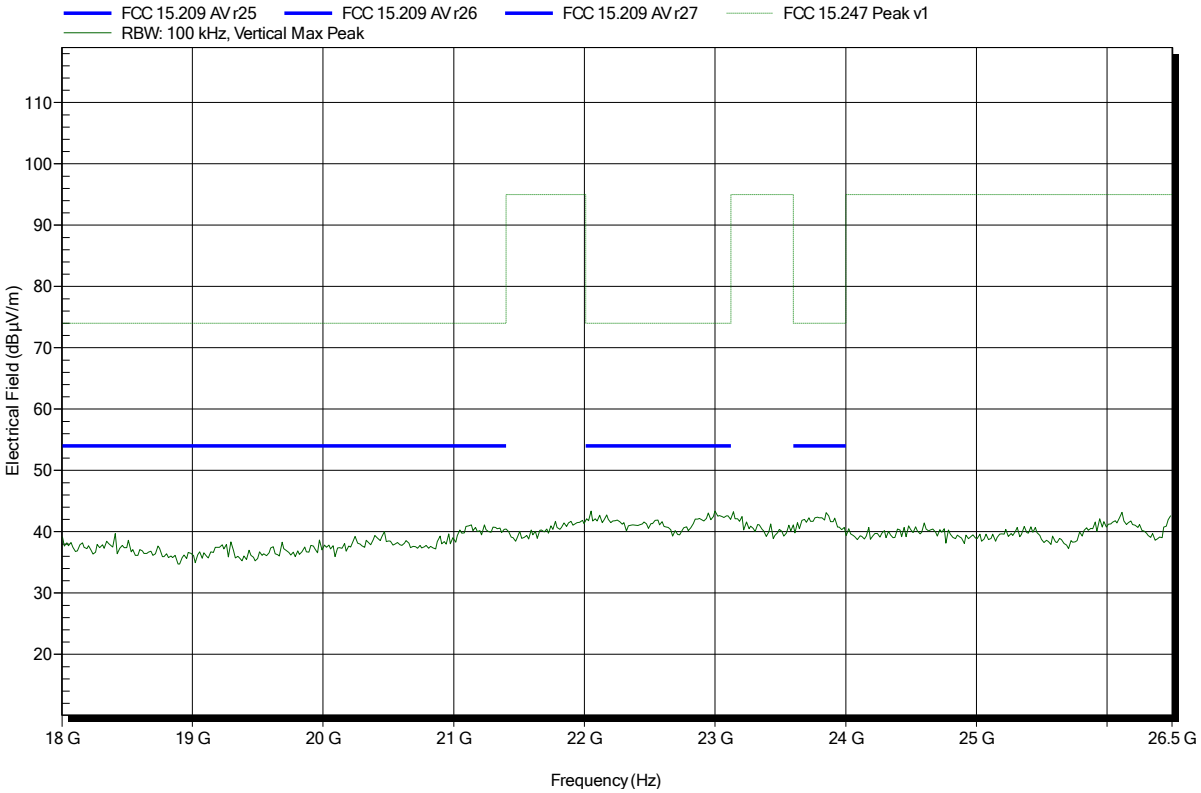

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1m converted to 3m
Mode:	TX; GFSK; DH5; 2441 mHz
Test Date:	2014-10-02
Note:	

Index 69

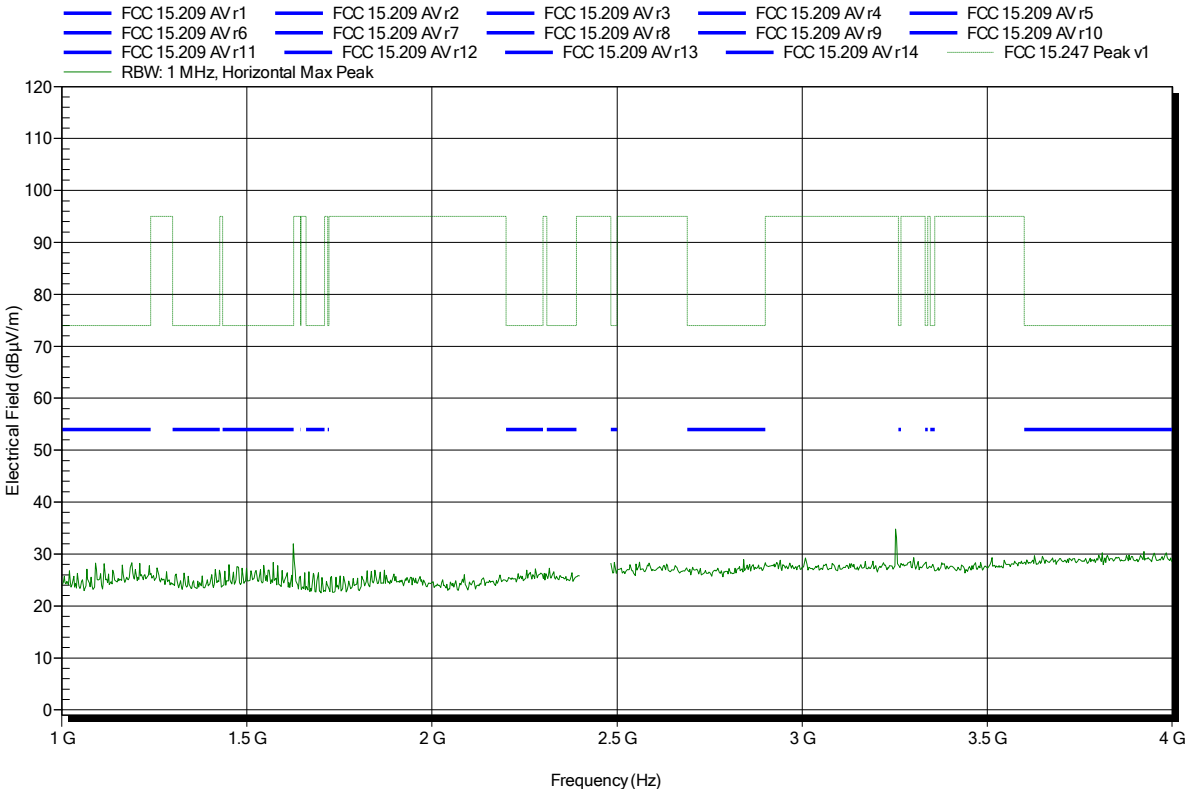

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2441 MHz
Test Date:	2014-10-02
Note:	

Index 73

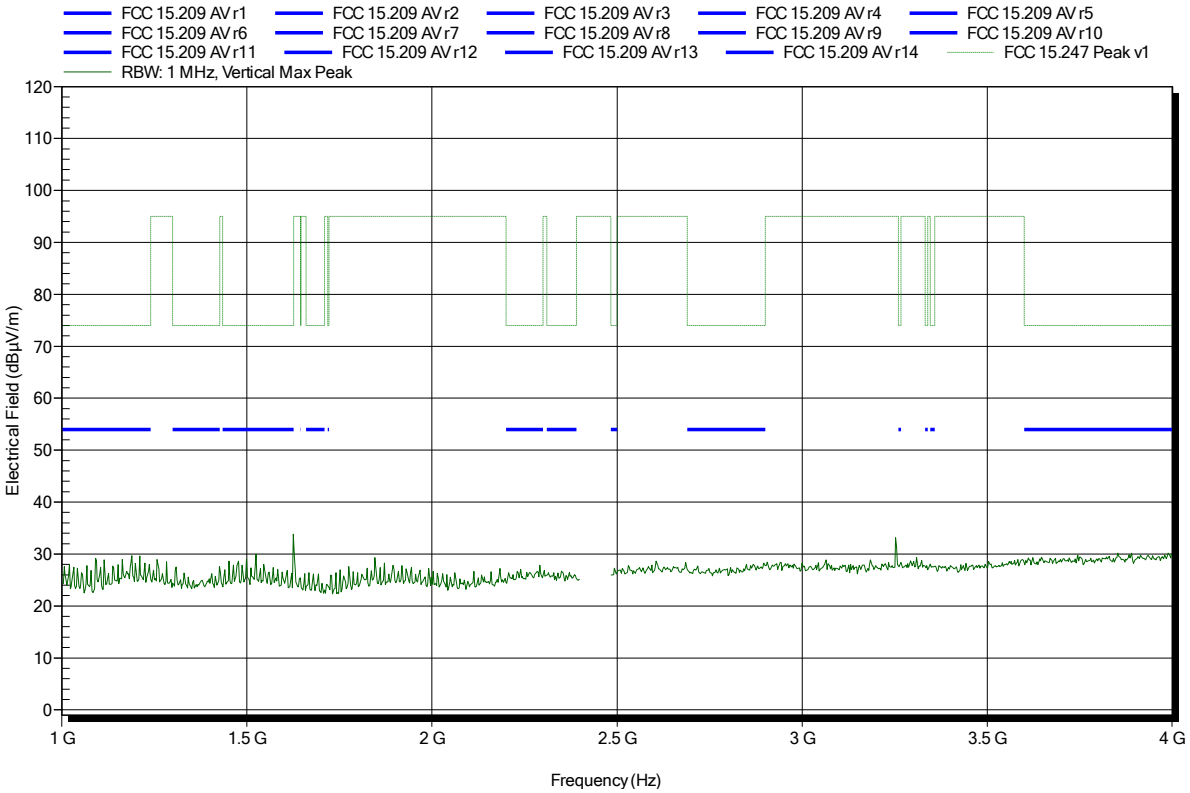

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2441 MHz
Test Date:	2014-10-02
Note:	

Index 70

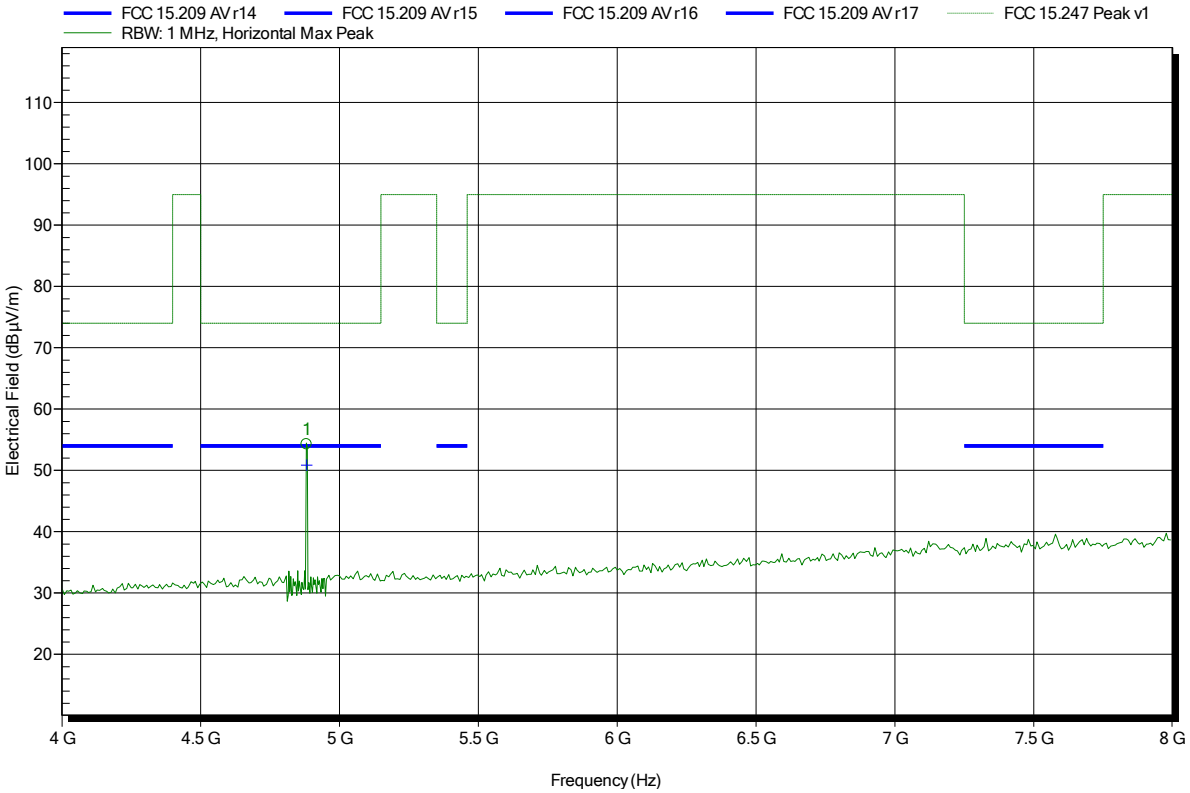

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.882 GHz	54.28 dBµV/m	74 dBµV/m	-19.72 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
4.882 GHz	50.86 dBµV/m	54 dBµV/m	-3.14 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2441 MHz
Test Date:	2014-10-02
Note:	

Index 75

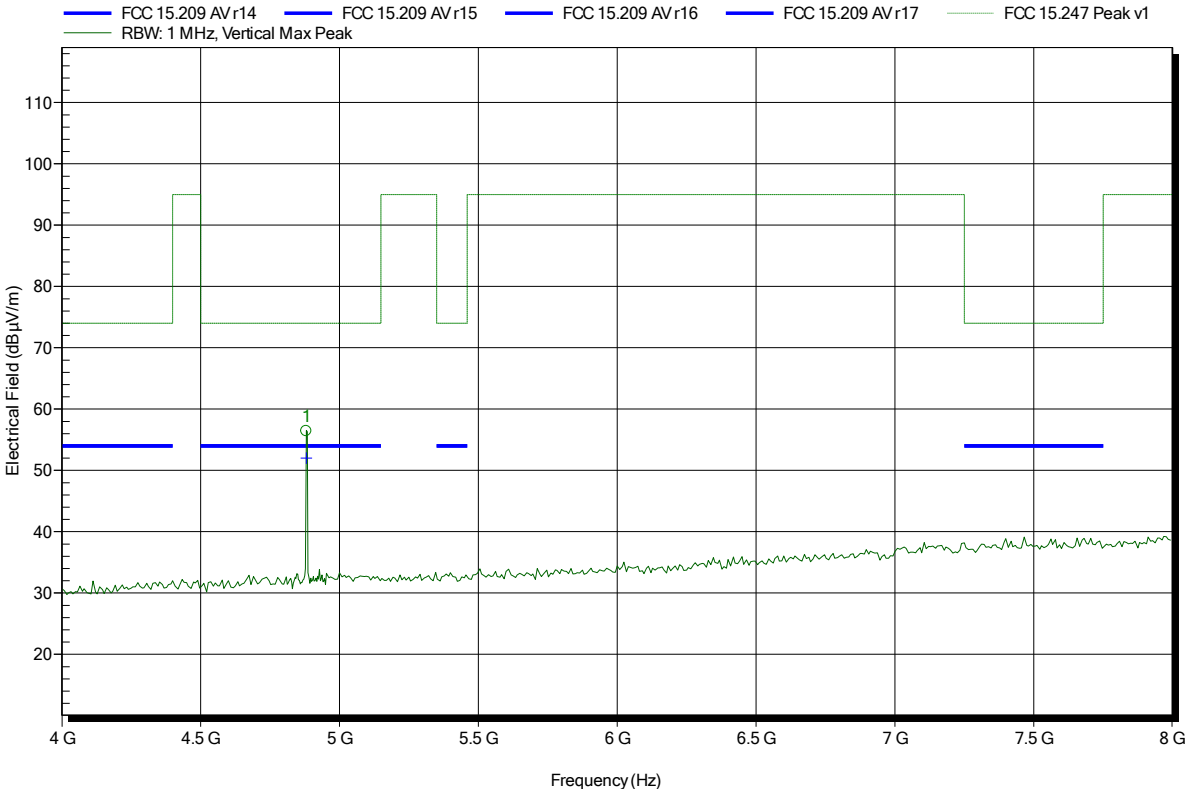

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.882 GHz	56.4 dBµV/m	74 dBµV/m	-17.6 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
4.882 GHz	52.04 dBµV/m	54 dBµV/m	-1.96 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2441 MHz
Test Date:	2014-10-02
Note:	

Index 71

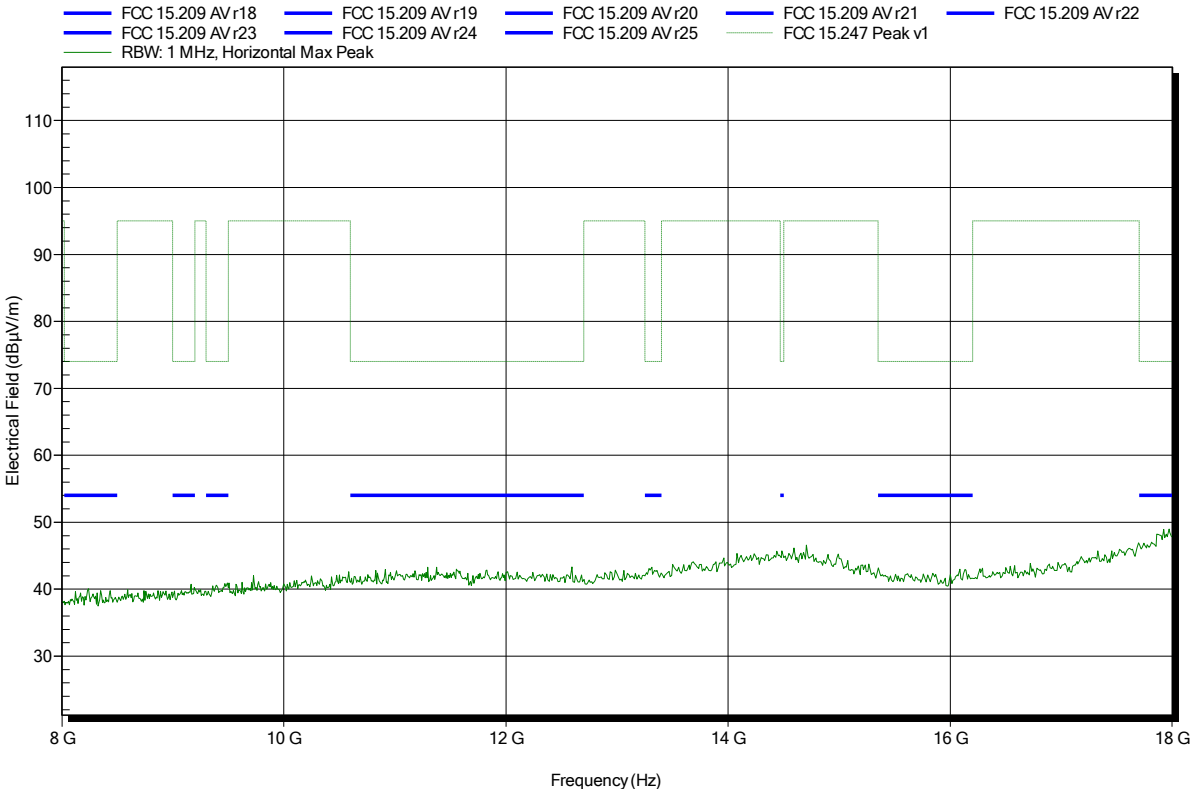

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2441 MHz
Test Date:	2014-10-02
Note:	

Index 76

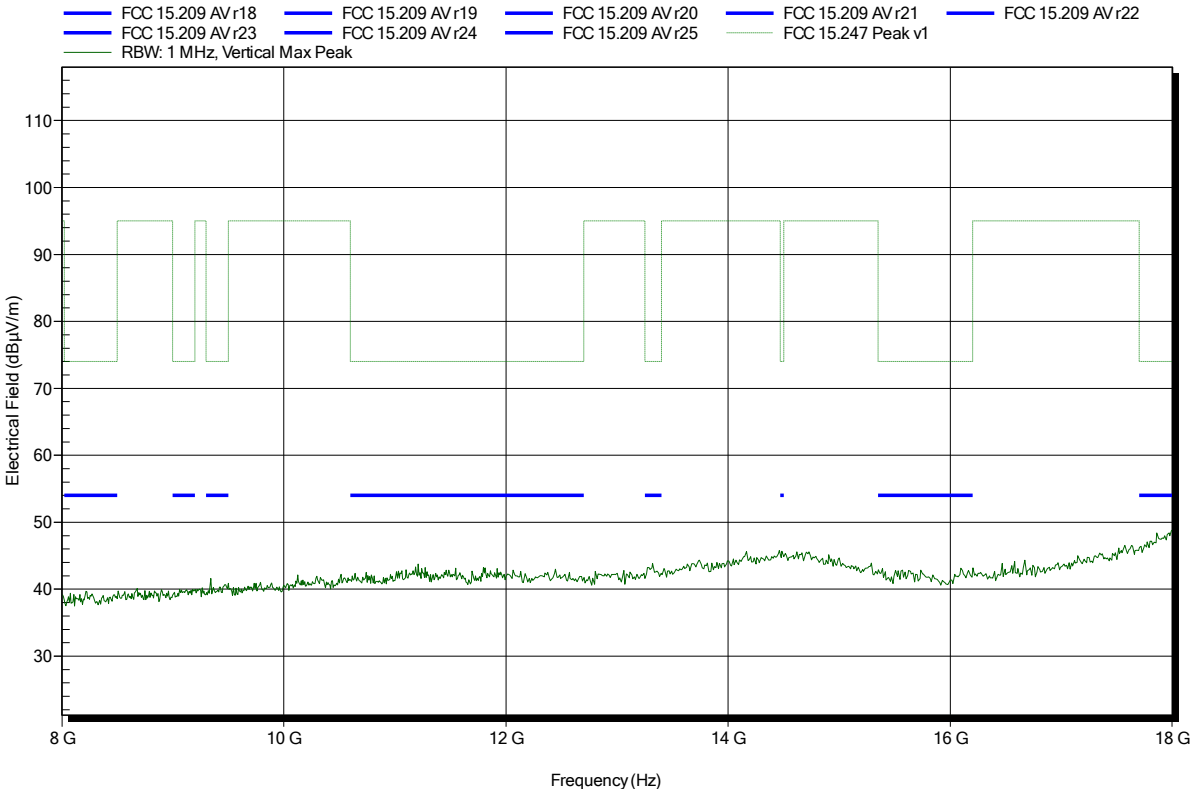

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2441 MHz
Test Date:	2014-10-02
Note:	

Index 72

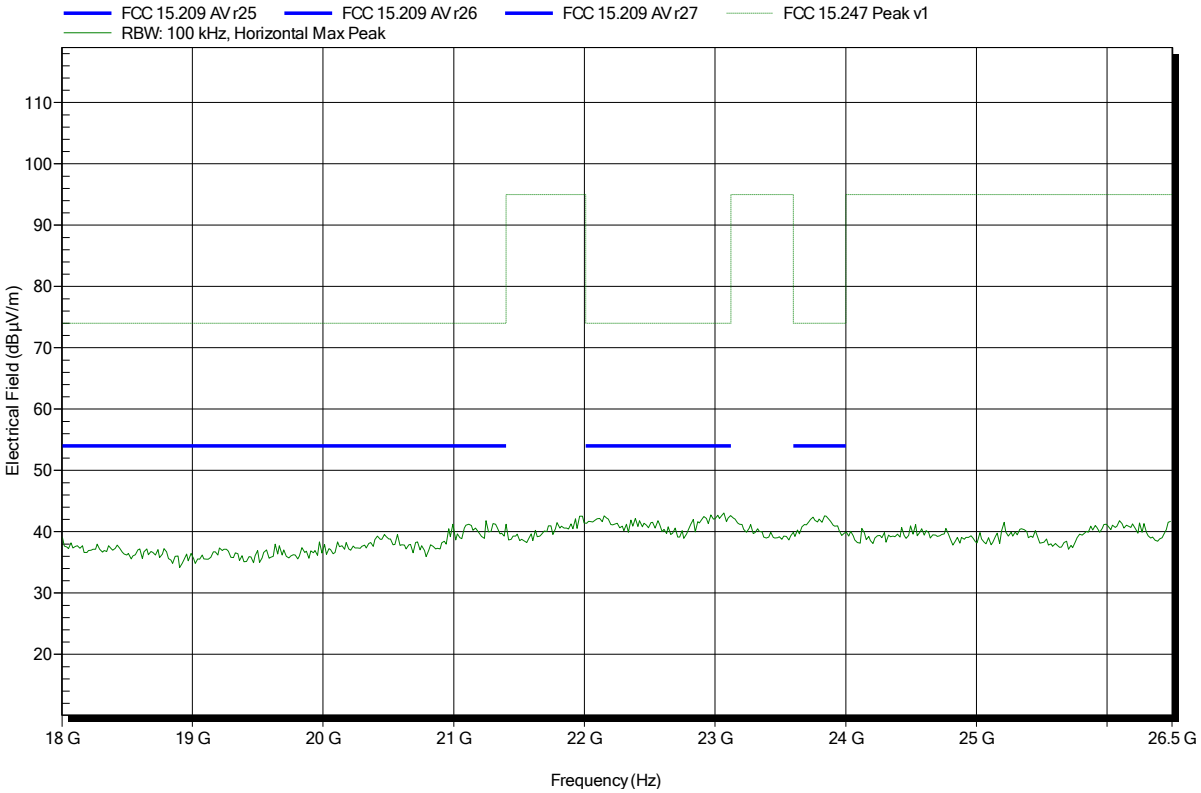

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2441 MHz
Test Date:	2014-10-02
Note:	

Index 77

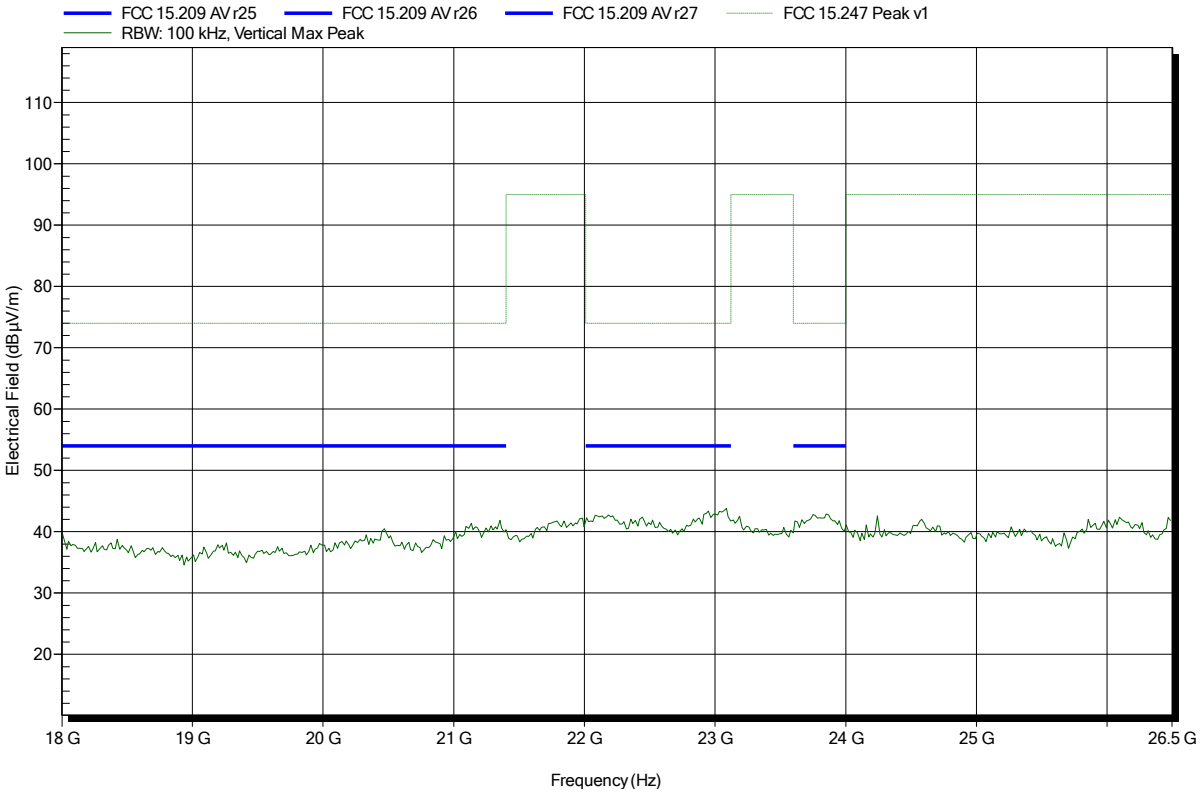

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	

Index 78

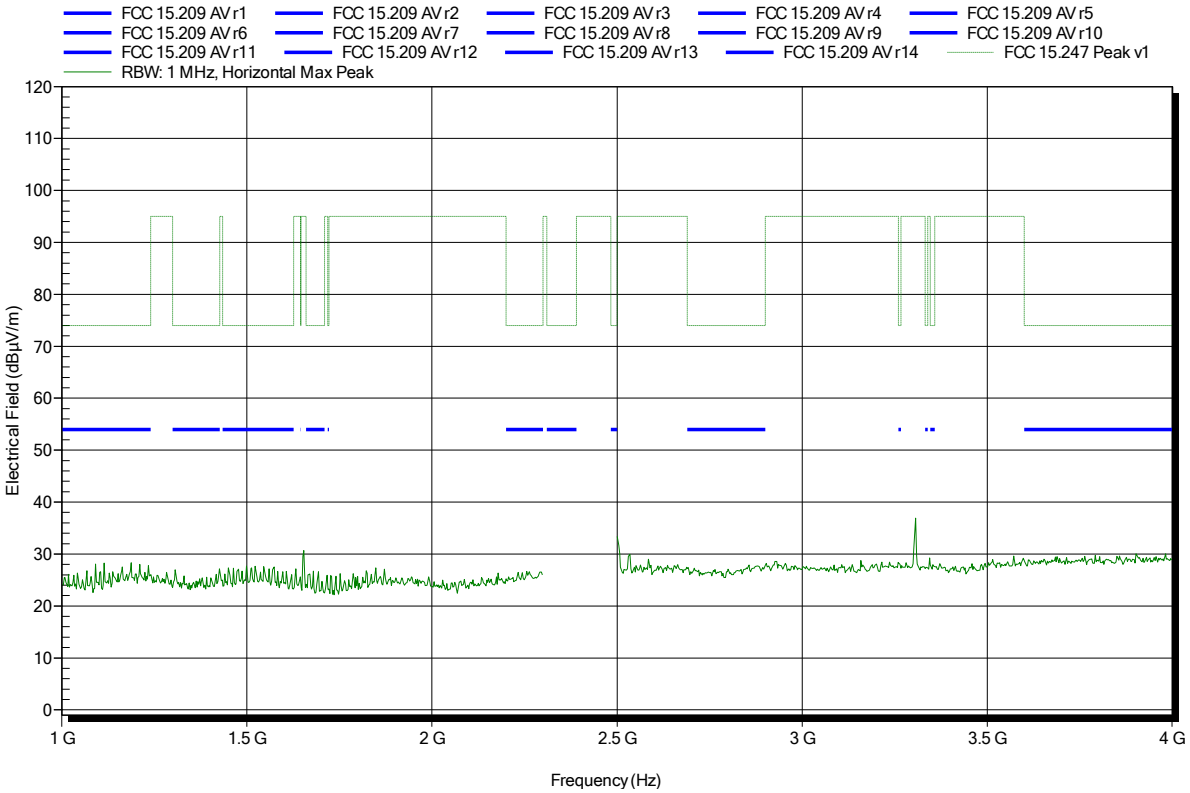

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	

Index 82

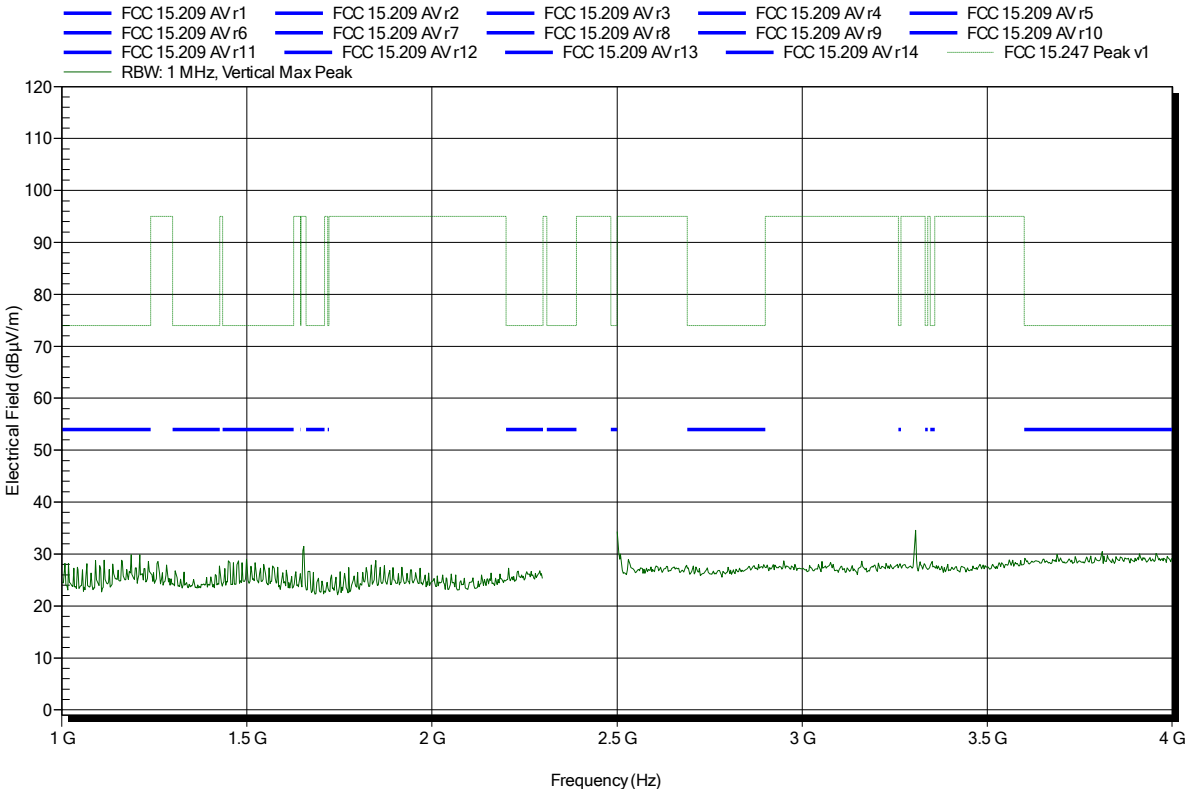

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	upper bandedge

Index 79

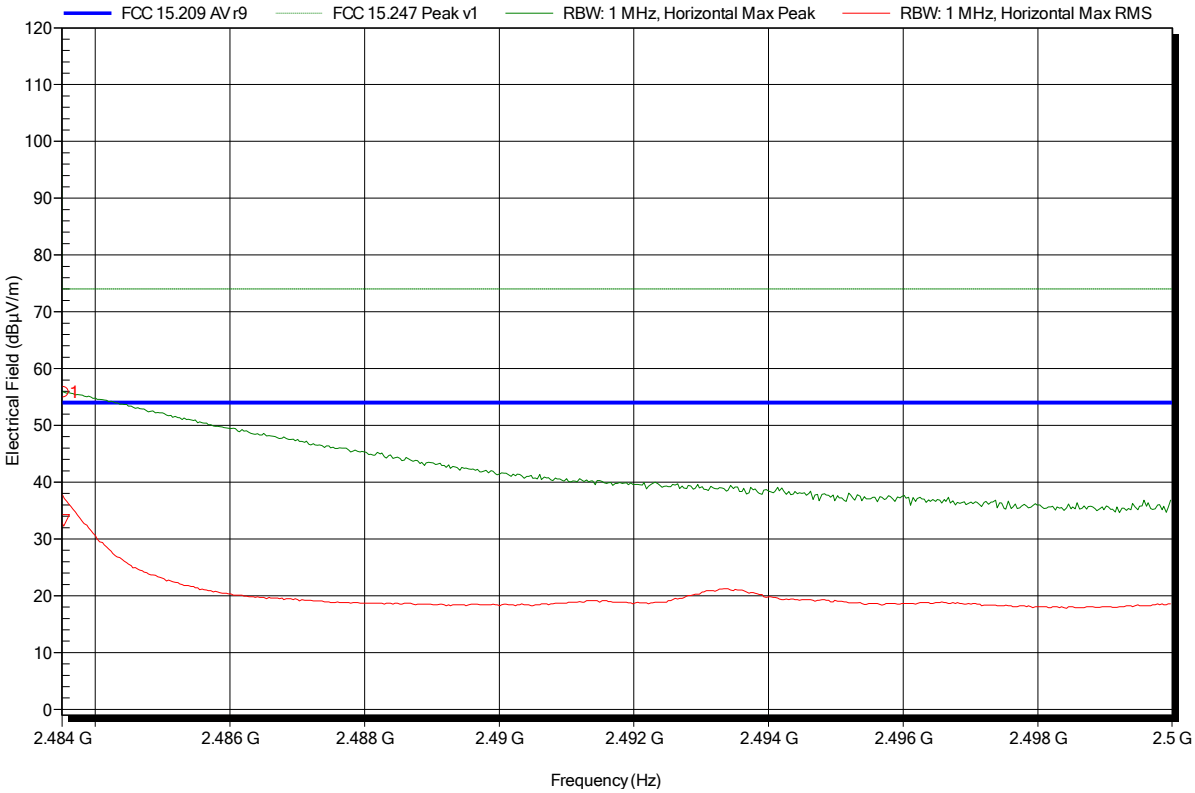

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	55.82 dBµV/m	74 dBµV/m	-18.18 dB	Pass

Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	33.29 dBµV/m	54 dBµV/m	-20.71 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	upper bandedge

Index 83

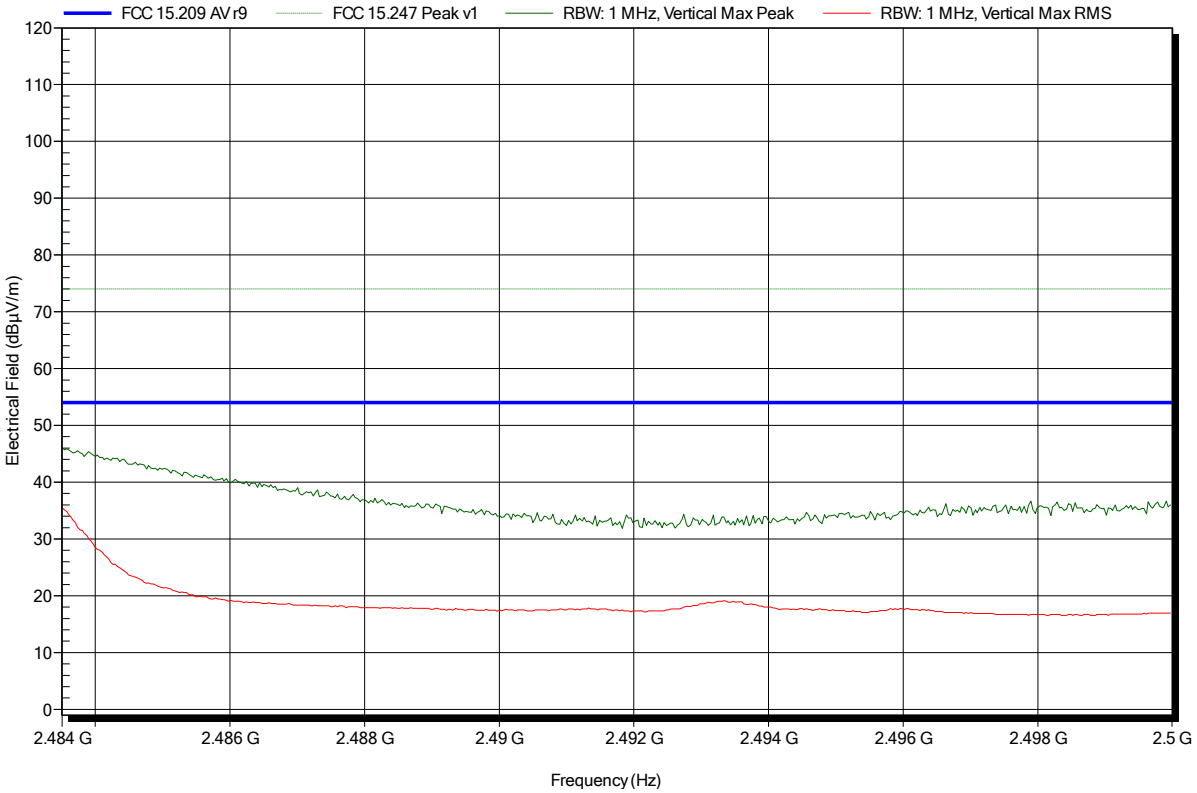

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	

Index 80

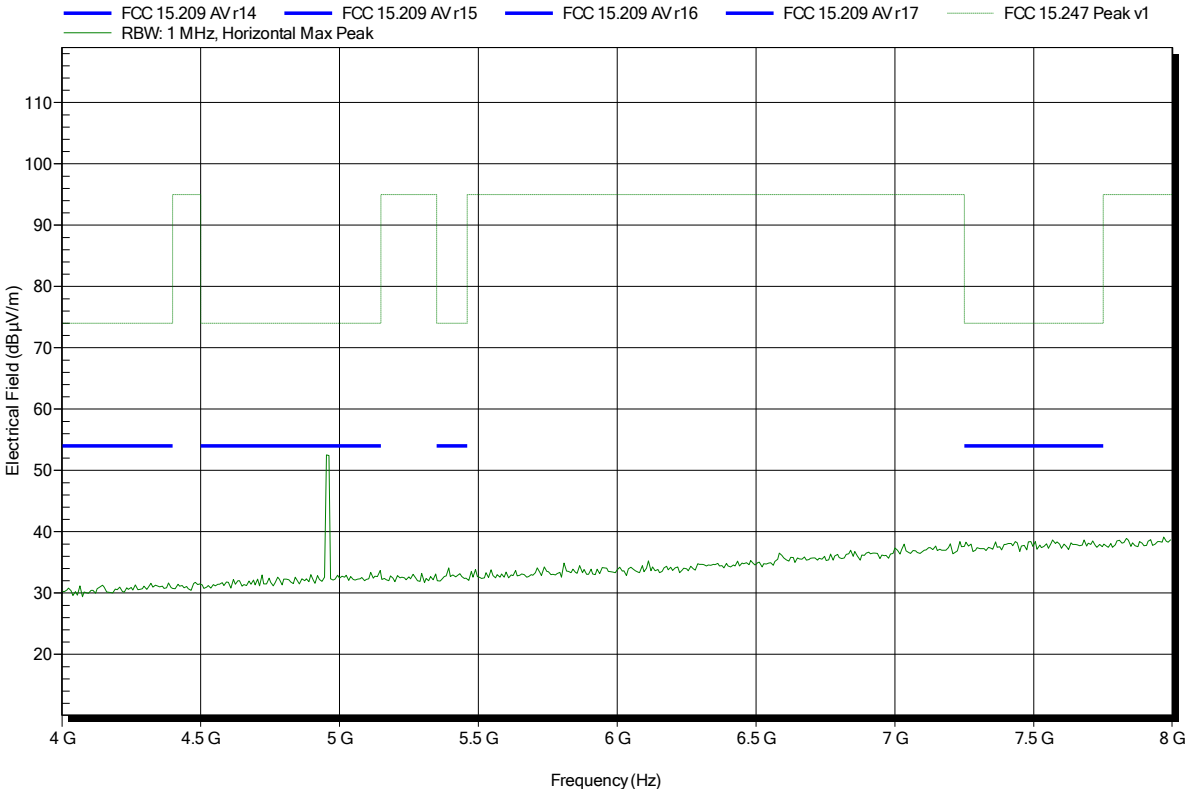

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	

Index 84

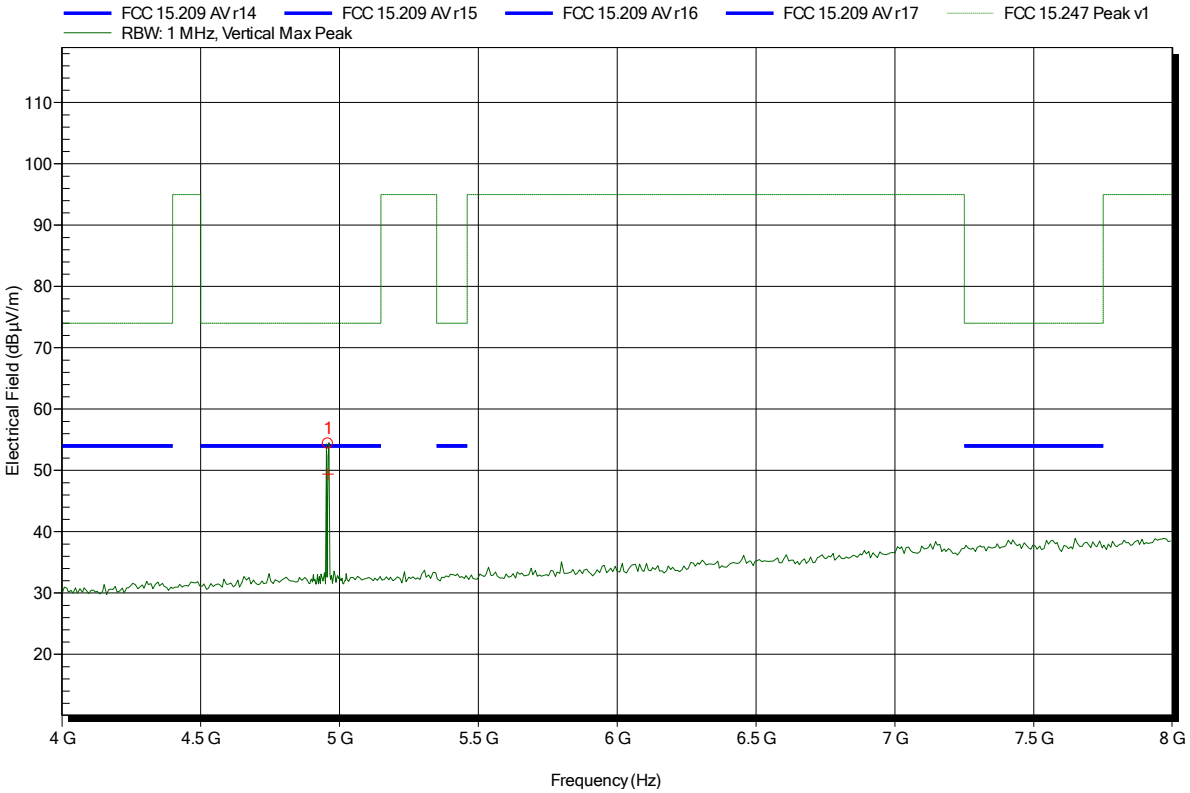

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	54.38 dBµV/m	74 dBµV/m	-19.62 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
4.96 GHz	49.41 dBµV/m	54 dBµV/m	-4.59 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	

Index 81

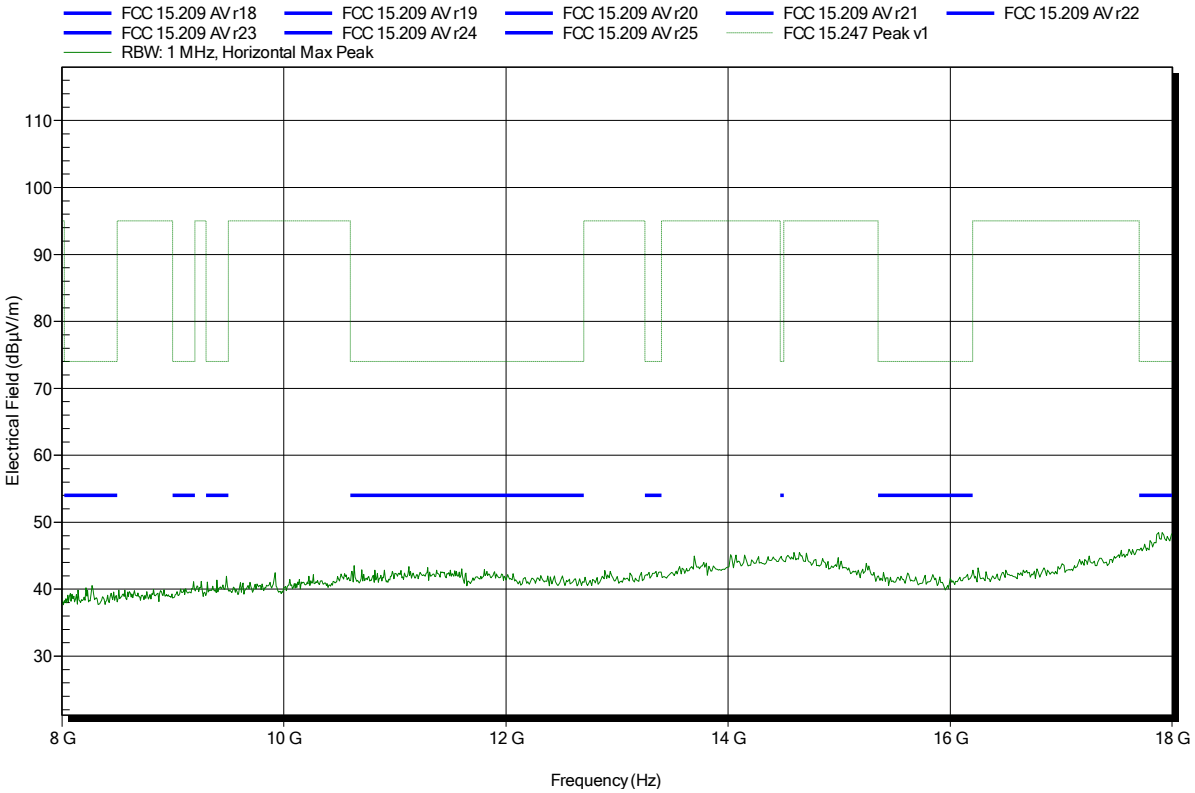

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	

Index 85

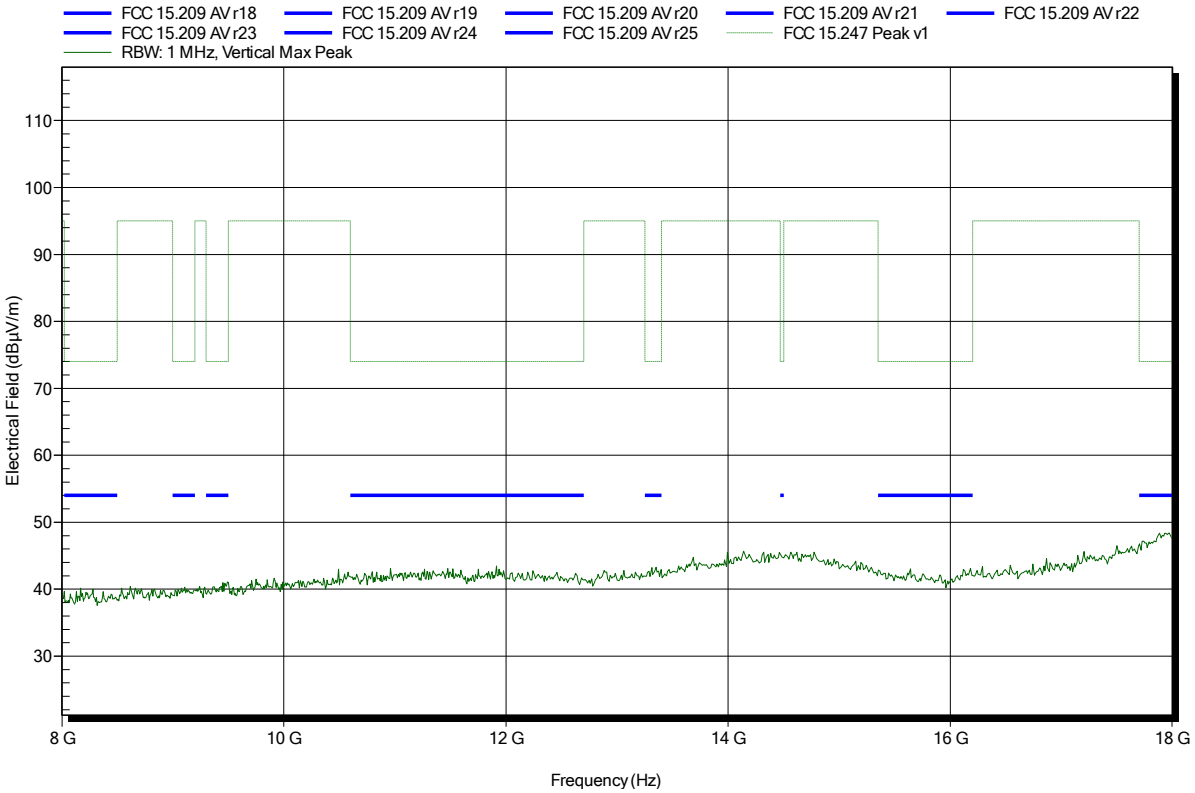

Spurious emissions according to FCC 15.247

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; GFSK; DH5; 2480 MHz
Test Date:	2014-10-02
Note:	

Index 86

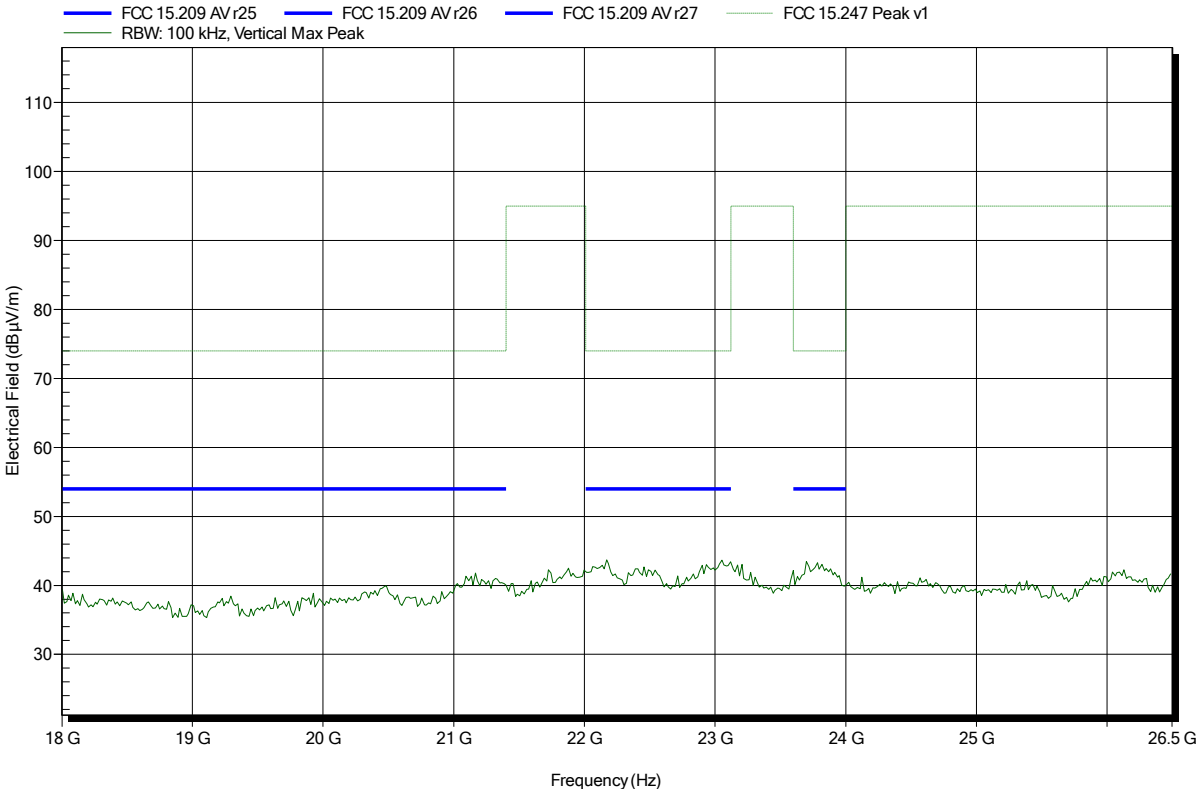

ANNEX B Receiver radiated spurious emissions

Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	RX; DECT ch.2 and BT ch.39 acrive
Test Date:	2014-10-02
Note:	

Index 91

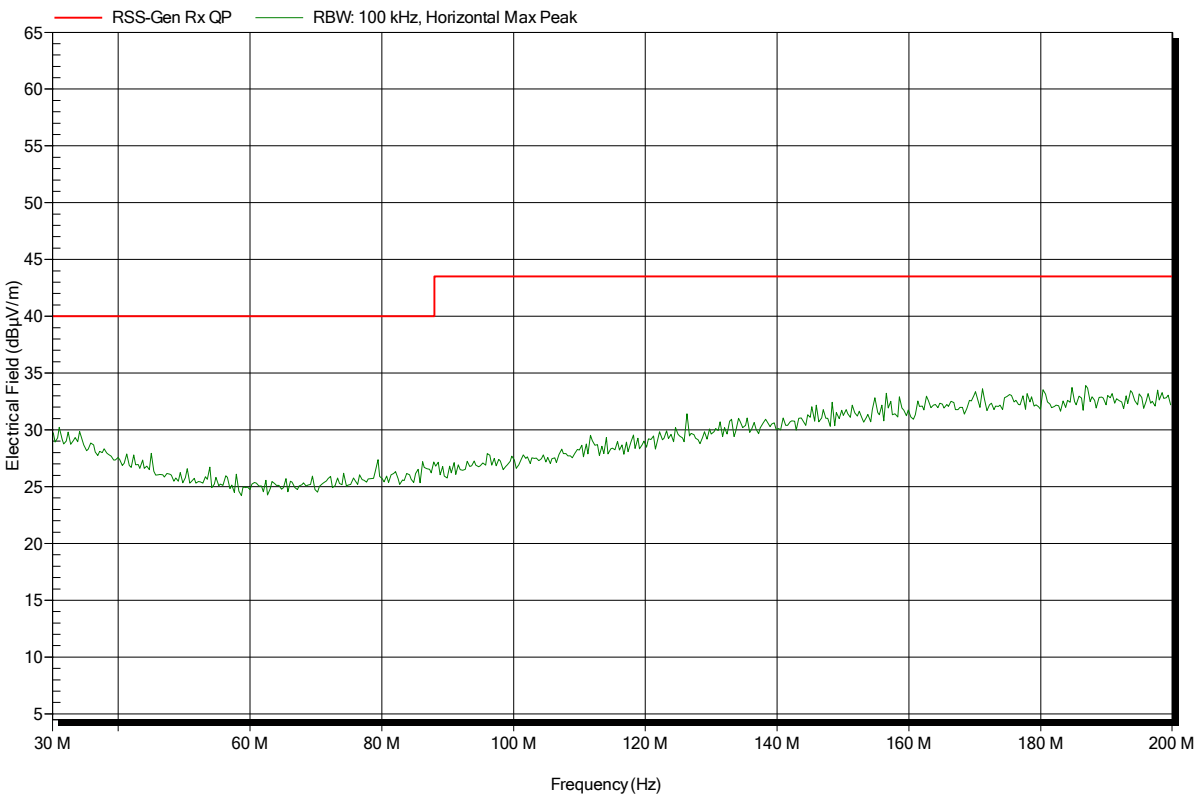

Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	RX; DECT ch.2 and BT ch.39 acrive
Test Date:	2014-10-02
Note:	

Index 92

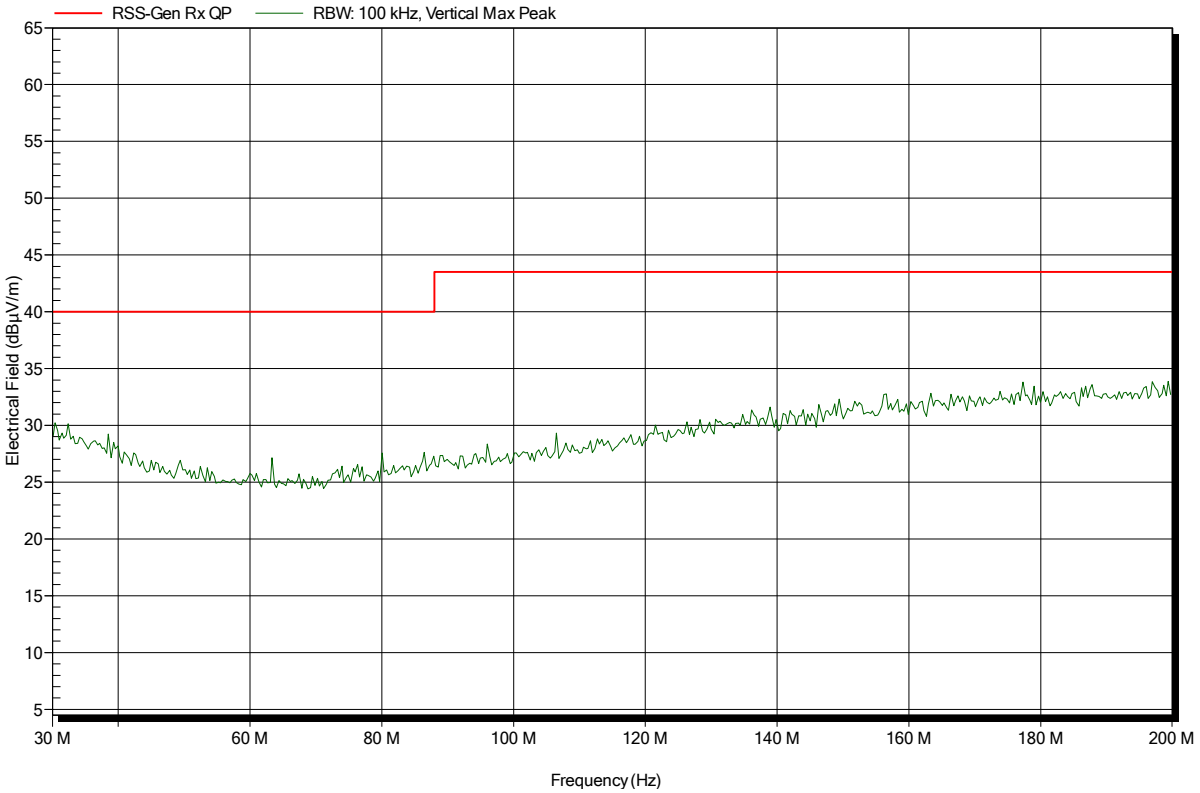

Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3 m
Mode:	RX; DECT ch.2 and BT ch.39 acrive
Test Date:	2014-10-02
Note:	

Index 93

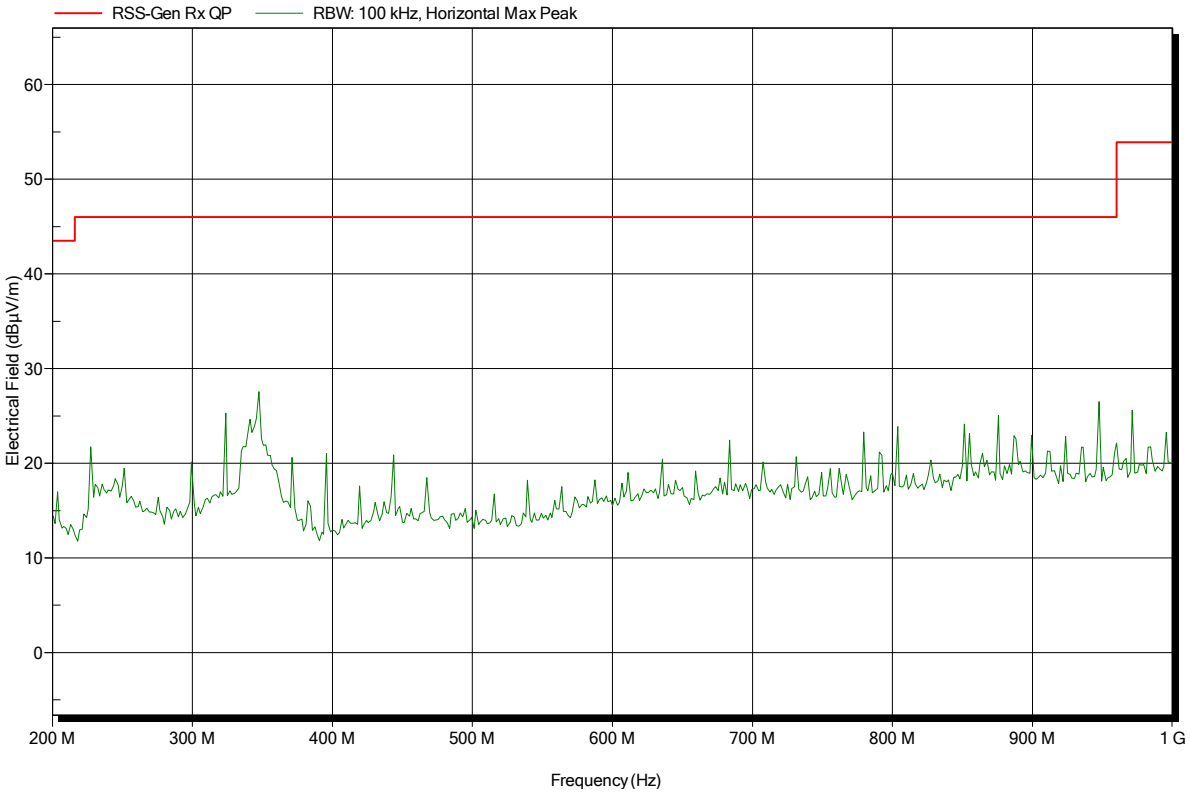

Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3 m
Mode:	RX; DECT ch.2 and BT ch.39 acrive
Test Date:	2014-10-02
Note:	

Index 94

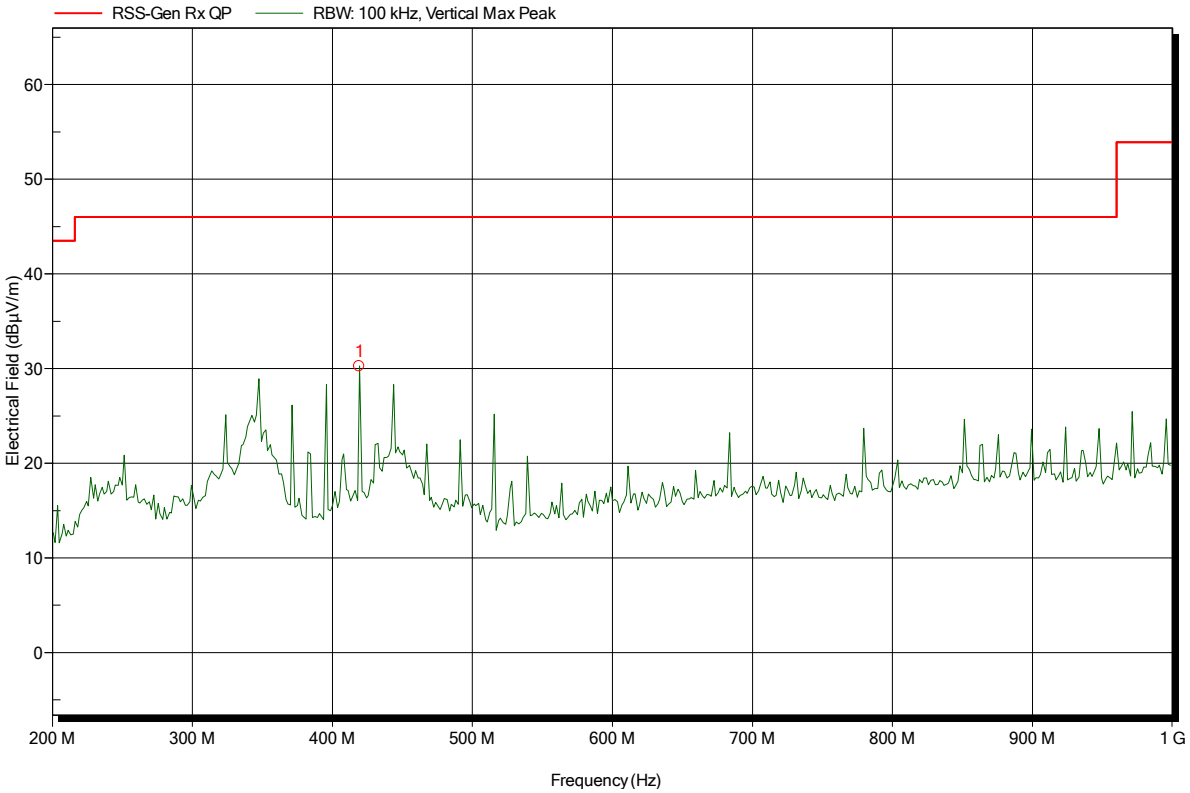

Frequency	Peak	Peak Limit	Peak Difference	Status
419.2 MHz	30.24 dBµV/m	46 dBµV/m	-15.76 dB	Pass

Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; DECT ch.2 and BT ch.39 acrive
Test Date:	2014-10-02
Note:	

Index 95

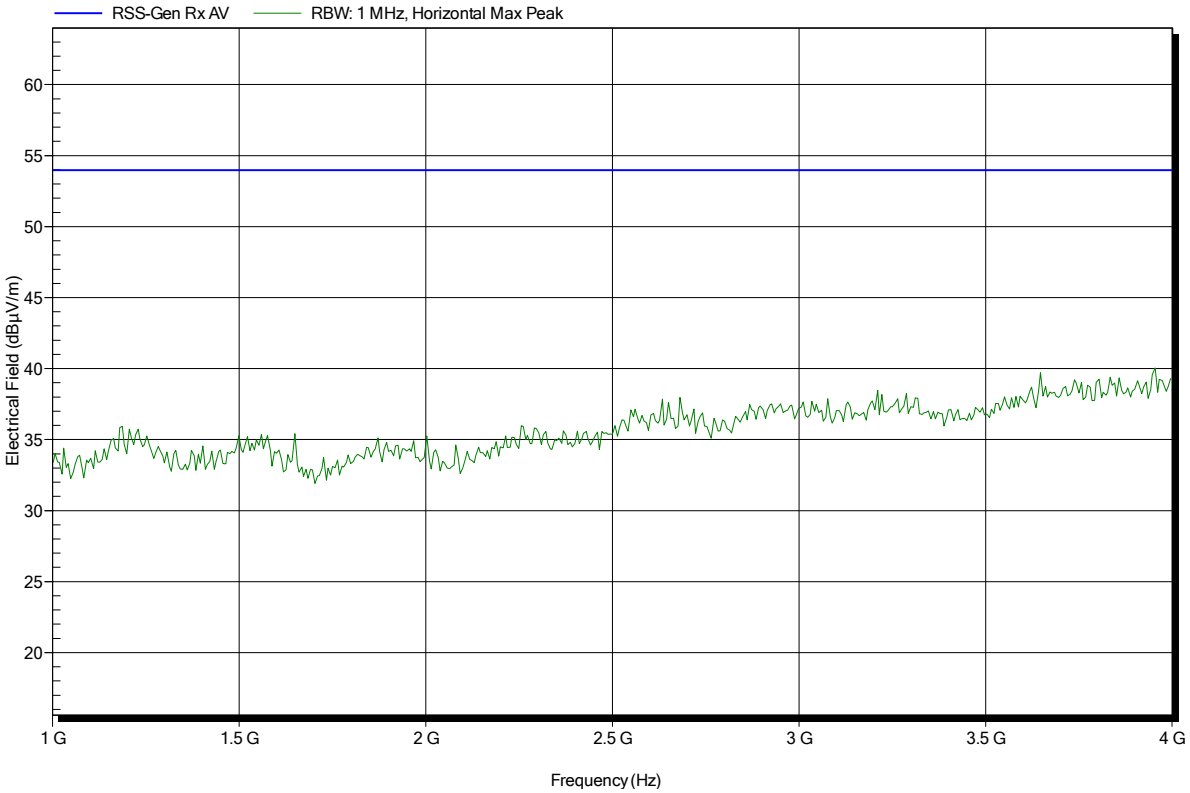

Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	RX; DECT ch.2 and BT ch.39 acrive
Test Date:	2014-10-02
Note:	

Index 97

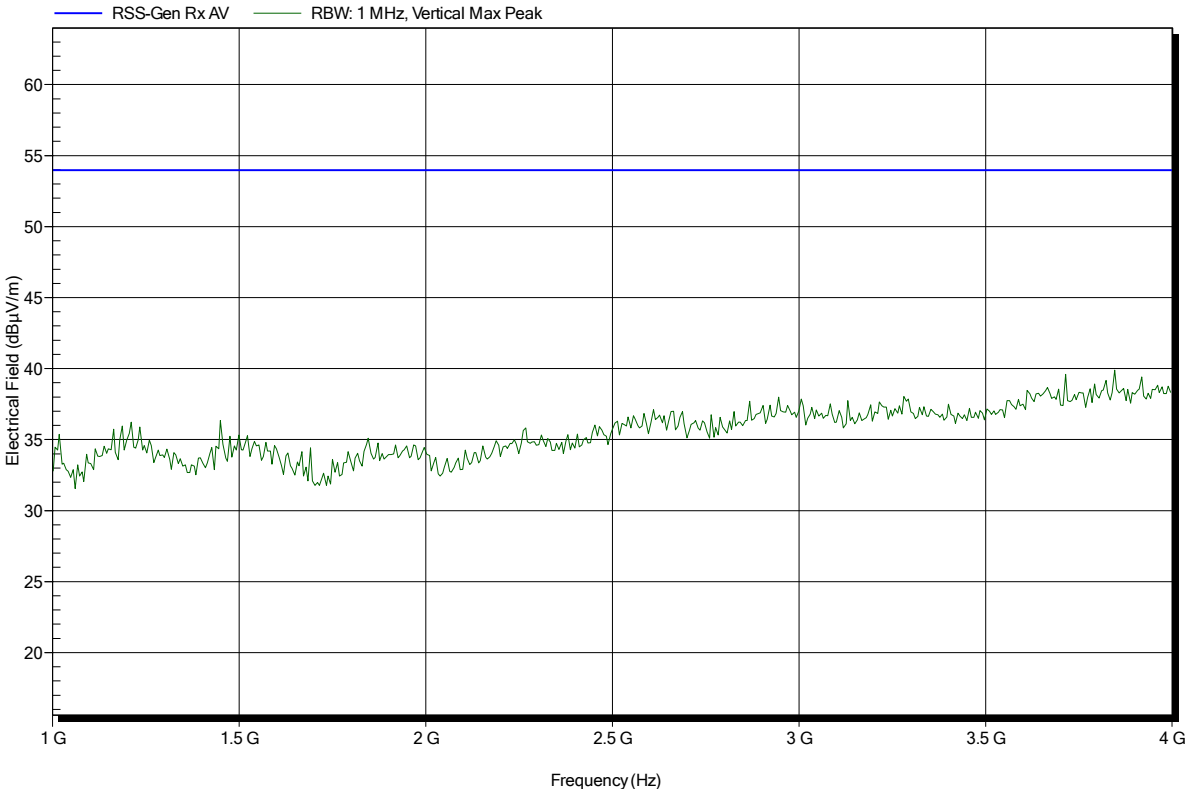

Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3 m
Mode:	RX; DECT ch.2 and BT ch.39 acrive
Test Date:	2014-10-02
Note:	

Index 96

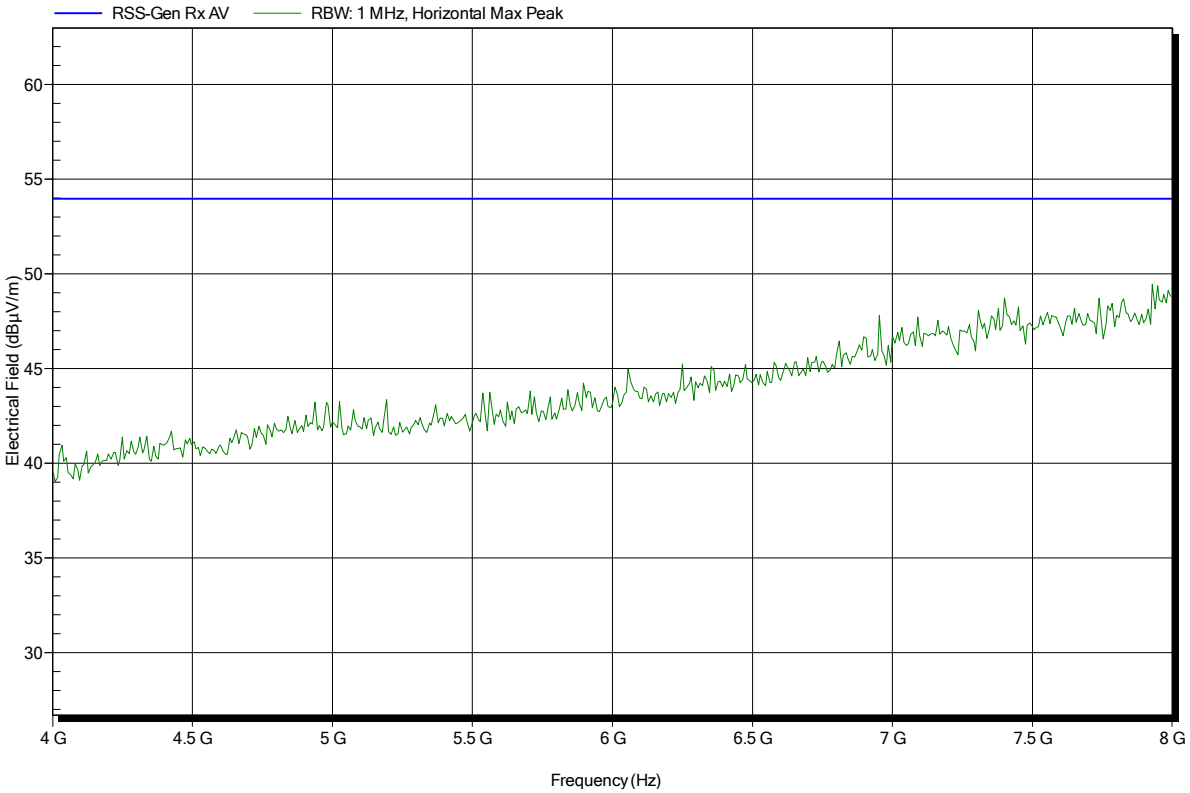

Spurious emissions according to RSS-GEN

Project number: G0M-1408-4062

Applicant:	Sonetics Corporation
EUT Name:	Communications Headset
Model:	AXP379
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Treffke
Test Conditions:	Tnom: 25°C, Vnom: 3.7 VDC lithium battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3 m
Mode:	RX; DECT ch.2 and BT ch.39 acrive
Test Date:	2014-10-02
Note:	
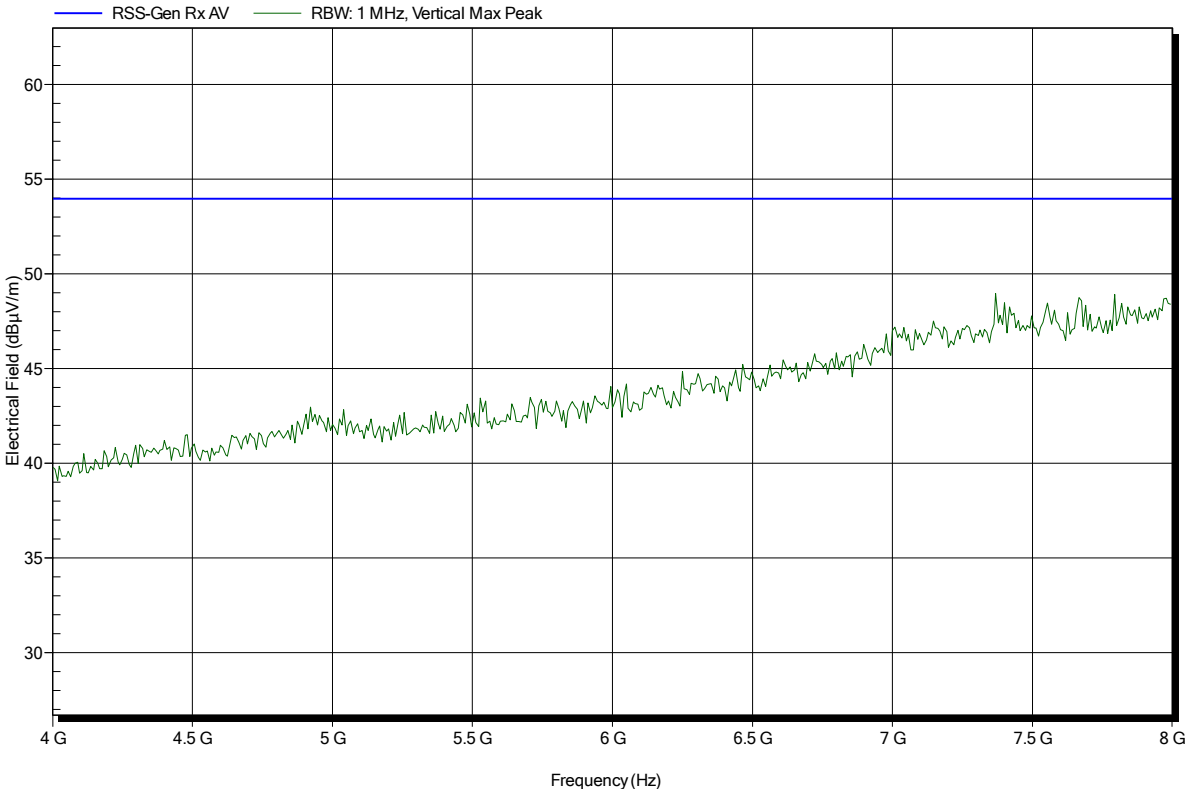
Index 98