



## Shenzhen Huaxin Information Technology Service Co., Ltd

101, R & D Building, No.3 guansheng 4th Road, Luhua Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-21018313 Http: //www.tecovo.net

# TEST REPORT

**Report No.** .....: **HX260804R003**

**FCC ID**.....: **VA8-W660**

**IC**.....: **7114A-W660**

**FCC Applicant**.....: **Wolf Steel Ltd.**

**FCC Address**.....: 24 Napoleon Road, Barrie, Ontario, L4M 0G8, Canada

**IC Applicant**.....: **WOLF STEEL LTD.**

**IC Address**.....: 24 Napoleon Road, Barrie, ON, L4M 0G8, Canada

**Manufacturer**.....: ChangSha micro-control software technology Co., Ltd.

**Address**.....: R14021, Building B, #89, Jiefang East Road, Changsha City, Hunan Province, China.

**Product Name**.....: **FlameLogic Plus Touch Remote**

**Trade Mark**.....: FlameLogic

**Model/Type reference**.....: W660-10011164

**Listed Model(s)** .....: /

**Standard**.....: **FCC Rules Part 15.247**  
**RSS-247 Issue 4**

**Date of receipt of test sample**...: Jul. 24, 2026

**Date of testing**.....: Jul. 24, 2026 ~ Aug. 05, 2026

**Date of issue**.....: Aug. 05, 2026

**Result**.....: **PASS**

Compiled by:

(Printed name + signature)

Terry Su



Approved by:

(Printed name + signature)

Amy Zhai

**Testing Laboratory Name**.....: **Shenzhen Huaxin Information Technology Service Co., Ltd**

**Address**.....: 101, R & D Building, No.3 guansheng 4th Road, Luhua Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China

This test report shall not be copied in any form except with the written approval of our laboratory. The customer shall not claim that the product has been endorsed by Shenzhen Huaxin Information Technology Service Co., Ltd. based on this report, The test results in the report are only applicable to the samples tested. Without the signatures of the compiled engineer and the approver, the test report will be invalid. Any objection shall be submitted to Shenzhen Huaxin Information Technology Service Co., Ltd. within 15 days from the date of receiving the report. After this period, it will not be considered. The test report only corresponds to the test sample.



## Table of Contents

## Page

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. TEST SUMMARY .....</b>                            | <b>3</b>  |
| 1.1. TEST STANDARDS .....                               | 3         |
| 1.2. REPORT VERSION .....                               | 3         |
| 1.3. TEST DESCRIPTION .....                             | 4         |
| 1.4. TEST FACILITY .....                                | 5         |
| 1.5. MEASUREMENT UNCERTAINTY .....                      | 5         |
| 1.6. ENVIRONMENTAL CONDITIONS .....                     | 6         |
| <b>2. GENERAL INFORMATION .....</b>                     | <b>7</b>  |
| 2.1. CLIENT INFORMATION .....                           | 7         |
| 2.2. GENERAL DESCRIPTION OF EUT .....                   | 7         |
| 2.3. ACCESSORY EQUIPMENT INFORMATION .....              | 8         |
| 2.4. OPERATION STATE .....                              | 9         |
| 2.5. MEASUREMENT INSTRUMENTS LIST .....                 | 10        |
| <b>3. TEST ITEM AND RESULTS .....</b>                   | <b>12</b> |
| 3.1. CONDUCTED EMISSION .....                           | 12        |
| 3.2. RADIATED EMISSION .....                            | 15        |
| 3.3. RADIATED EMISSIONS RESTRICTED BAND .....           | 55        |
| 3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) ..... | 64        |
| 3.5. DTS BANDWIDTH .....                                | 72        |
| 3.6. PEAK OUTPUT POWER .....                            | 77        |
| 3.7. POWER SPECTRAL DENSITY .....                       | 80        |
| 3.8. DUTY CYCLE .....                                   | 83        |
| 3.9. ANTENNA REQUIREMENT .....                          | 86        |



# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS-247 Issue 4](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSS) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024](#): American National Standard for Testing Unlicensed Wireless Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

## 1.2. Report version

| Revised No. | Date of issue | Description |
|-------------|---------------|-------------|
| 01          | Aug. 05, 2026 | Original    |
|             |               |             |
|             |               |             |
|             |               |             |



### 1.3. Test Description

| FCC Part 15 Subpart C (15.247) / RSS-247 Issue 4                   |                           |                            |        |               |
|--------------------------------------------------------------------|---------------------------|----------------------------|--------|---------------|
| Test Item                                                          | Standard Section          |                            | Result | Test Engineer |
|                                                                    | FCC                       | IC                         |        |               |
| Antenna Requirement                                                | 15.203 & 15.247(b)(4)     | RSS-Gen 6.8                | Pass   | Sain Liao     |
| Conducted Emission                                                 | 15.207                    | RSS-Gen 8.8                | Pass   | Ann Lu        |
| Conducted Band Edge and Spurious Emissions                         | 15.247(d)                 | RSS-247 6.6 & RSS-Gen 8.10 | Pass   | Sain Liao     |
| Radiated Emissions Restricted Band and Radiated Spurious Emissions | 15.205&15.209 & 15.247(d) | RSS-Gen 8.9 & RSS-Gen 8.10 | Pass   | Sain Liao     |
| 6dB Bandwidth                                                      | 15.247(a)(2)              | RSS-247 6.3.1 (a)          | Pass   | Sain Liao     |
| Occupied Bandwidth                                                 | /                         | RSS-Gen 6.7                | Pass   | Sain Liao     |
| Peak Output Power                                                  | 15.247(b)(3)              | RSS-247 6.3.2              | Pass   | Sain Liao     |
| Power Spectral Density                                             | 15.247(e)                 | RSS-247 6.3.1 (b)          | Pass   | Sain Liao     |
| Transmitter Radiated Spurious                                      | 15.209&15.247(d)          | RSS-247 6.6 & RSS-Gen 8.10 | Pass   | Sain Liao     |

Note: "N/A" is not applicable.

The measurement uncertainty is not included in the test result.



## 1.4. Test Facility

### **Shenzhen Huaxin Information Technology Service Co., Ltd**

Add: 101, R & D Building, No.3 guansheng 4th Road, Luhuhu Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China

### **Laboratory accreditation**

The test facility is recognized, certified, or accredited by the following organizations:

#### **A2LA-Lab Cert. No.: 6855.01**

Shenzhen Huaxin Information Technology Service Co., Ltd EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **Industry Canada (Company Number: 31786, CAB Identifier: CN0147)**

Shenzhen Huaxin Information Technology Service Co., Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 31786.

#### **FCC (Registration No.: 932271, Designation Number CN1344)**

Shenzhen Huaxin Information Technology Service Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC)Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration NO.: 932271.

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huaxin Information Technology Service Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for Shenzhen Huaxin Information Technology Service Co., Ltd



| Test Items                           | Measurement Uncertainty | Notes |
|--------------------------------------|-------------------------|-------|
| DTS Bandwidth                        | $\pm 3.70\%$            | (1)   |
| Maximum Conducted Output Power       | $\pm 0.60\text{dB}$     | (1)   |
| Maximum Power Spectral Density Level | $\pm 0.46\text{dB}$     | (1)   |
| Band-edge Compliance                 | $\pm 4.40\text{dB}$     | (1)   |
| Conducted Spurious Emissions         | $\pm 1.40\text{dB}$     | (1)   |
| Conducted Emissions 9kHz~30MHz       | $\pm 3.10\text{dB}$     | (1)   |
| Radiated Emissions 9kHz~30MHz        | $\pm 3.62\text{dB}$     | (1)   |
| Radiated Emissions 30~1000MHz        | $\pm 4.63\text{dB}$     | (1)   |
| Radiated Emissions 1~18GHz           | $\pm 4.40\text{dB}$     | (1)   |
| Radiated Emissions 18~40GHz          | $\pm 4.40\text{dB}$     | (1)   |

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |             |
|--------------------|-------------|
| Temperature:       | 21°C ~ 27°C |
| Relative Humidity: | 40% ~ 60%   |
| Air Pressure:      | 101kPa      |



## 2. GENERAL INFORMATION

### 2.1. Client Information

|                |                                                                                   |
|----------------|-----------------------------------------------------------------------------------|
| FCC Applicant: | Wolf Steel Ltd.                                                                   |
| FCC Address:   | 24 Napoleon Road, Barrie, Ontario, L4M 0G8, Canada                                |
| IC Applicant:  | WOLF STEEL LTD.                                                                   |
| IC Address:    | 24 Napoleon Road, Barrie, ON, L4M 0G8, Canada                                     |
| Manufacturer:  | ChangSha micro-control software technology Co., Ltd.                              |
| Address:       | R14021, Building B, #89, Jiefang East Road, Changsha City, Hunan Province, China. |

### 2.2. General Description of EUT

|                         |                                                   |
|-------------------------|---------------------------------------------------|
| Product Name:           | FlameLogic Plus Touch Remote                      |
| Trade Mark:             | FlameLogic                                        |
| Model/Type reference:   | W660-10011164                                     |
| Listed Model(s):        | /                                                 |
| Power supply:           | 5Vdc form USB cable<br>3.7Vdc form Li-ion battery |
| Hardware version:       | V2.2                                              |
| Software version:       | V0.5.1                                            |
| Samples No.:            | YP260803-E002-2                                   |
| <b>RF Specification</b> |                                                   |
| Modulation:             | GFSK                                              |
| Data rate:              | 1Mbps, 2Mbps                                      |
| Operation frequency:    | 2402MHz~2480MHz                                   |
| Channel number:         | 40                                                |
| Channel separation:     | 2MHz                                              |
| Antenna type:           | Coaxial line antenna                              |
| Antenna gain:           | 2.91dBi Max                                       |



## 2.3. Accessory Equipment information

| Equipment Information     |               |                  |              |
|---------------------------|---------------|------------------|--------------|
| Name                      | Model         | S/N              | Manufacturer |
| Notebook                  | MCLG-16       | 2NZBB24117801340 | HUAWEI       |
| AC/DC Adapter             | TEKA-UCA20US  | /                | TEKA         |
| Cable Information         |               |                  |              |
| Name                      | Shielded Type | Ferrite Core     | Length       |
| DC in cable               | Without       | Without          | 1M           |
| Test Software Information |               |                  |              |
| Name                      | Versions      | /                | /            |
| bgtool                    | v2.13.6-327   | /                | /            |



## 2.4. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT BLE, 40 channels are provided to the EUT. Channels 00/19/39 were selected for testing. Operation Frequency List:

| Channel   | Frequency [MHz] |
|-----------|-----------------|
| <b>00</b> | <b>2402</b>     |
| 01        | 2404            |
| :         | :               |
| 18        | 2438            |
| <b>19</b> | <b>2440</b>     |
| 20        | 2442            |
| :         | :               |
| 38        | 2478            |
| <b>39</b> | <b>2480</b>     |

Note: The display in grey were the channel selected for testing.

### Power setting

| Test Mode | Frequency [MHz] | Power setting (Value) |
|-----------|-----------------|-----------------------|
| BLE 1Mbps | 2402            | 0                     |
|           | 2440            | 0                     |
|           | 2480            | 0                     |
| BLE 2Mbps | 2402            | 0                     |
|           | 2440            | 0                     |
|           | 2480            | 0                     |

### Test mode

|                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| For RF test items:                                                                                                                                                                                                       |
| The engineering test program was provided and enabled to make EUT continuous transmit.                                                                                                                                   |
| For AC power line conducted emissions:                                                                                                                                                                                   |
| The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.                                                                                                                         |
| For Radiated spurious emissions test item:                                                                                                                                                                               |
| The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report. |



## 2.5. Measurement Instruments List

| RF Test System - SRD |                                       |              |           |                      |                  |
|----------------------|---------------------------------------|--------------|-----------|----------------------|------------------|
| Item                 | Test Equipment                        | Manufacturer | Model No. | Versions/ Serial No. | Calibrated until |
| 1                    | Spectrum Analyzer                     | Agilent      | N9020A    | MY51280803           | Apr. 08, 2027    |
| 2                    | Wideband Radio Communication Tester   | R&S          | CMW500    | 157763               | Apr. 08, 2027    |
| 3                    | MXG Vector Signal Generator           | Agilent      | N5182A    | 101795               | Apr. 08, 2027    |
| 4                    | EXG Analog Signal Generator           | Agilent      | N5181A    | MY47421151           | Apr. 08, 2027    |
| 5                    | RF Sensor Unit                        | Techy        | TR1029-2  | 20220428P009         | Apr. 08, 2027    |
| 6                    | High and low temperature test chamber | Asprey       | LX-225L   | 2020091401           | Apr. 08, 2027    |
| 7                    | SRD Test Software                     | TACHOY       | RTS       | V1.0.0               | /                |
| 8                    | 2G/3G/4G Test Software                | TST          | TST-PASS  | V2.0                 | /                |

| Radiated emission |                            |                    |                            |                      |                  |
|-------------------|----------------------------|--------------------|----------------------------|----------------------|------------------|
| Item              | Test Equipment             | Manufacturer       | Model No.                  | Versions/ Serial No. | Calibrated until |
| 1                 | EMI spectrum receiver      | R&S                | ESR7                       | 102543               | Apr. 09, 2027    |
| 2                 | 9*6*6 anechoic chamber     | Mao Rui            | 9*6*6                      | /                    | Apr. 09, 2028    |
| 3                 | Spectrum analyzer          | R&S                | FSV40-N                    | 101795               | Apr. 09, 2027    |
| 4                 | Preamplifier               | Agilent            | 8449B                      | 3008A00551           | Apr. 08, 2027    |
| 5                 | Preamplifier               | HP                 | 8447D                      | 1616A02061           | Apr. 09, 2027    |
| 6                 | Preamplifier               | SKET               | LNPA1840G-50               | SK2019040302         | Apr. 09, 2027    |
| 7                 | Horn Antenna               | SCHWARZBECK        | BBHA9170                   | 00369                | Apr. 10, 2028    |
| 8                 | Horn Antenna               | A. H. System, Inc  | SAS-571                    | 915                  | Apr. 10, 2028    |
| 9                 | Trilog-Broadband Antenna   | SCHWARZBECK        | VULB 9168                  | 01318                | Apr. 10, 2028    |
| 10                | Loop Antenna               | SCHWARZBECK        | FMZB1519B                  | 00128                | Apr. 08, 2027    |
| 11                | 6dB Fixed Attenuator       | SKET               | AP_DC01G-2W-N-6dB          | SK2021012803         | Apr. 08, 2027    |
| 12                | RF Cable<br>0.009~1000MHz  | Langjingkeji       | N/J-NJ-RG58(1G)<br>9m      | /                    | Apr. 09, 2027    |
| 13                | RF Cable<br>1000~18000MHz  | Langjingkeji       | N/J-SMAAJ-406(18G)<br>) 9m | /                    | Apr. 09, 2027    |
| 14                | RF Cable                   | Langjingkeji       | 2.92/M-2.92/M-0.5M         | /                    | Apr. 12, 2027    |
| 15                | RF Cable<br>18000~40000MHz | Langjingkeji       | 2.92/M-2.92/M-3M           | /                    | Apr. 12, 2027    |
| 16                | Test Software              | SKET               | EMC-I                      | V1.4.0.1             | /                |
| 17                | Test Software              | FARA               | EZ-EMC                     | FA-03A3              | /                |
| 18                | band filter                | Yangxin Technology | ZHPF6-C3000-40000<br>-174  | 09229935             | 2027.04.09       |



| Conducted emission |                   |              |                        |                      |                  |
|--------------------|-------------------|--------------|------------------------|----------------------|------------------|
| Item               | Test Equipment    | Manufacturer | Model No.              | Versions/ Serial No. | Calibrated until |
| 1                  | LISN              | R&S          | ENV216                 | 101291               | Apr. 09, 2027    |
| 2                  | LISN              | R&S          | ESH3-Z5                | 894981/024           | Apr. 09, 2027    |
| 3                  | EMI Test Receiver | R&S          | ESR7                   | 102543               | Apr. 09, 2027    |
| 5                  | RF Cable          | Langjingkeji | N/J-NJ-RG58(1G)<br>10m | /                    | Apr. 09, 2027    |
| 6                  | Test Software     | SKET         | EMC-I                  | V1.4.0.1             | /                |

Note: 1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


##### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS-Gen 8.8

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

##### Test Configuration

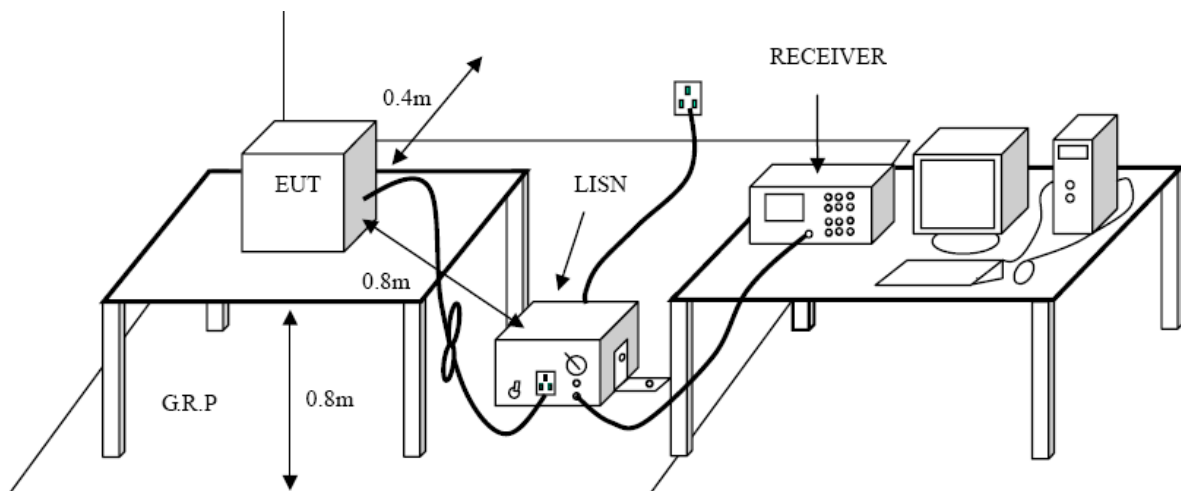

##### Test Procedure

1. The EUT was setup according to ANSI C63.10-2020+COR. 1-2023+C63.10A-2024+ERRATA TO C63.10A-2024 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, Raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

### Test Mode:

Please refer to the clause 2.4.


## Test Results

|                      |                        |
|----------------------|------------------------|
| <b>Test Voltage:</b> | AC 120V/60Hz           |
| <b>Test Mode:</b>    | BLE 1Mbps Mode 2402MHz |
| <b>Terminal:</b>     | Live                   |

| No. | Frequency  | Reading dBuV | Factor dB | Level dBuV | Limit dBuV | Delta dB | Detector | Polar |
|-----|------------|--------------|-----------|------------|------------|----------|----------|-------|
| 1   | 550.000kHz | 33.84        | 9.70      | 43.54      | 56.00      | -12.46   | QP       | L1    |
| 2   | 1.134MHz   | 28.03        | 9.80      | 37.83      | 56.00      | -18.17   | QP       | L1    |
| 3   | 2.182MHz   | 26.00        | 9.90      | 35.90      | 56.00      | -20.10   | QP       | L1    |
| 4   | 2.790MHz   | 24.54        | 10.00     | 34.54      | 56.00      | -21.46   | QP       | L1    |
| 5   | 16.042MHz  | 25.01        | 11.90     | 36.91      | 60.00      | -23.09   | QP       | L1    |
| 6   | 8.418MHz   | 23.84        | 10.70     | 34.54      | 60.00      | -25.46   | QP       | L1    |
| 7   | 562.000kHz | 19.70        | 9.70      | 29.40      | 46.00      | -16.60   | AV       | L1    |
| 8   | 642.000kHz | 16.24        | 9.70      | 25.94      | 46.00      | -20.06   | AV       | L1    |
| 9   | 434.000kHz | 17.42        | 9.70      | 27.12      | 47.18      | -20.06   | AV       | L1    |
| 10  | 19.330MHz  | 15.22        | 12.40     | 27.62      | 50.00      | -22.38   | AV       | L1    |
| 11  | 2.242MHz   | 11.53        | 9.90      | 21.43      | 46.00      | -24.57   | AV       | L1    |
| 12  | 8.230MHz   | 12.35        | 10.70     | 23.05      | 50.00      | -26.95   | AV       | L1    |

Emission Level= Read Level+ Correct Factor



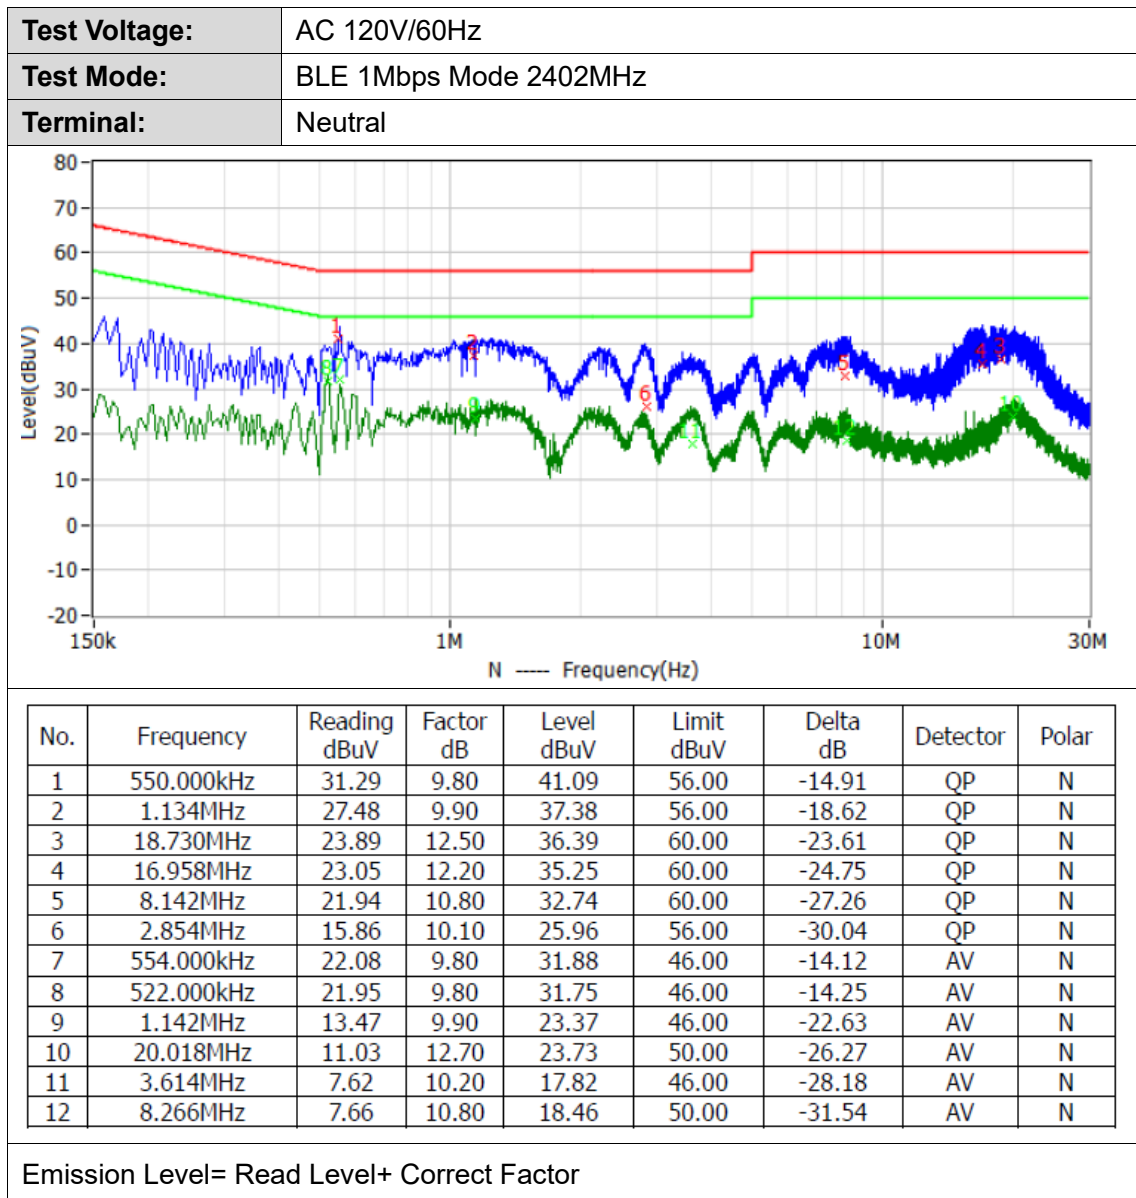

## 3.2. Radiated Emission

### Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS-Gen 8.9

| Frequency         | Limit (dBuV/m @3m) | Value      |
|-------------------|--------------------|------------|
| 30 MHz ~ 88 MHz   | 40.00              | Quasi-peak |
| 88 MHz ~ 216 MHz  | 43.50              | Quasi-peak |
| 216 MHz ~ 960 MHz | 46.00              | Quasi-peak |
| 960 MHz ~ 1 GHz   | 54.00              | Quasi-peak |
| Above 1 GHz       | 54.00              | Average    |
|                   | 74.00              | Peak       |


### Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


### Test Configuration

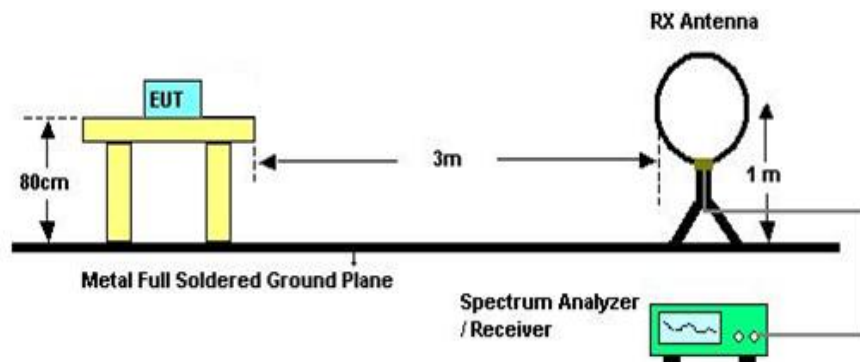

Below 30MHz Test Setup

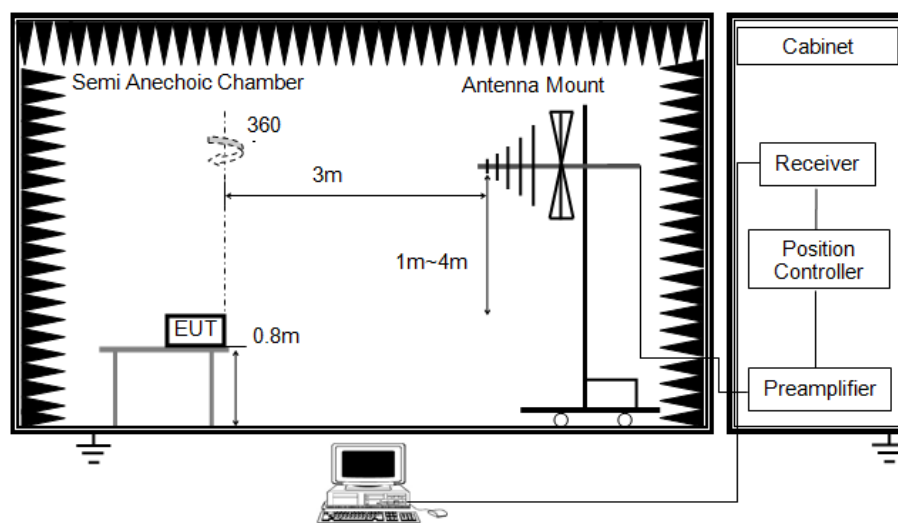

30MHz ~ 1000MHz Test Setup

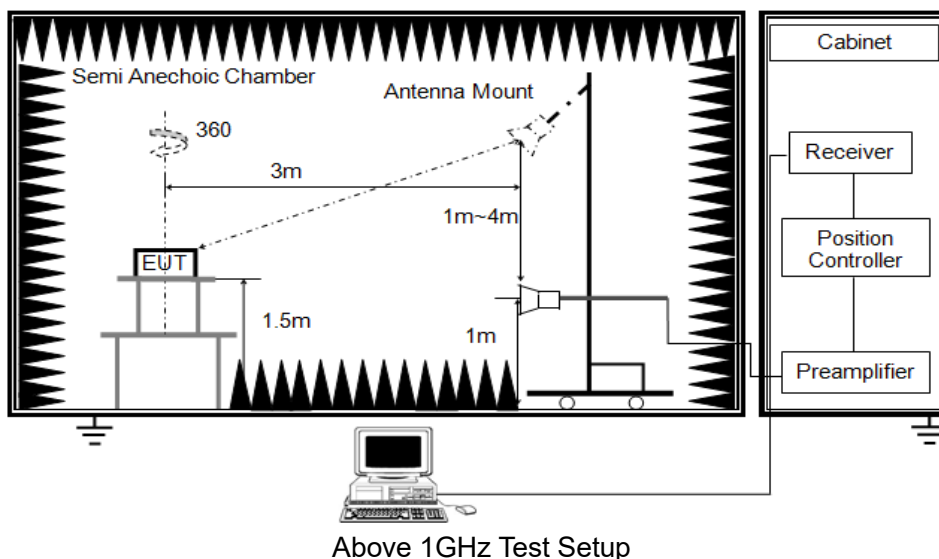

### **Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10-2020+COR. 1-2023+C63.10A-2024+ERRATA TO C63.10A-2024
  2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
  3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
  4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
  5. Set to the maximum power setting and enable the EUT transmit continuously.
  6. Use the following spectrum analyzer settings
    - (1) Span shall wide enough to fully capture the emission being measured;
    - (2) Below 30 MHz:  
9kHz – 150kHz, RBW=200Hz, VBW $\geq$ RBW, Sweep=auto, Detector function=peak, Trace=max hold;  
150kHz – 30MHz, RBW=9kHz, VBW $\geq$ RBW, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
    - (3) 30 MHz - 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
    - (3) From 1 GHz to 10<sup>th</sup> harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW $\geq$ 1/T Peak detector for Average value.
- Note 1: For the 1/T& Duty Cycle please refer to clause 3.8 Duty Cycle.

### **Test Mode**

Please refer to the clause 2.4.

### **Test Result**


#### **9 KHz~30 MHz**


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




## 30MHz-1GHz

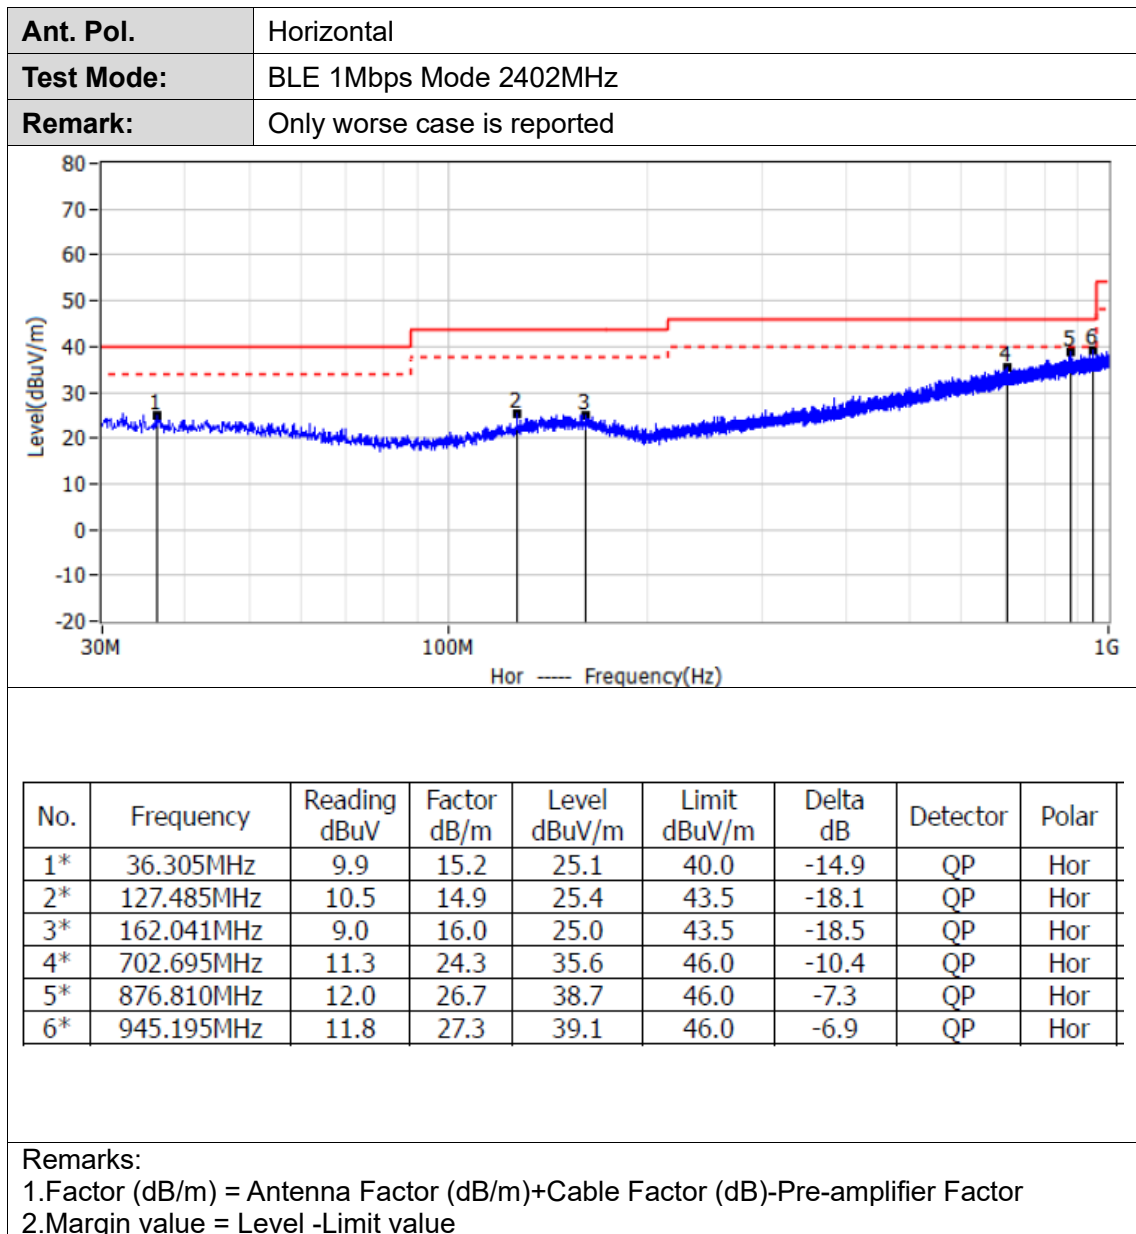


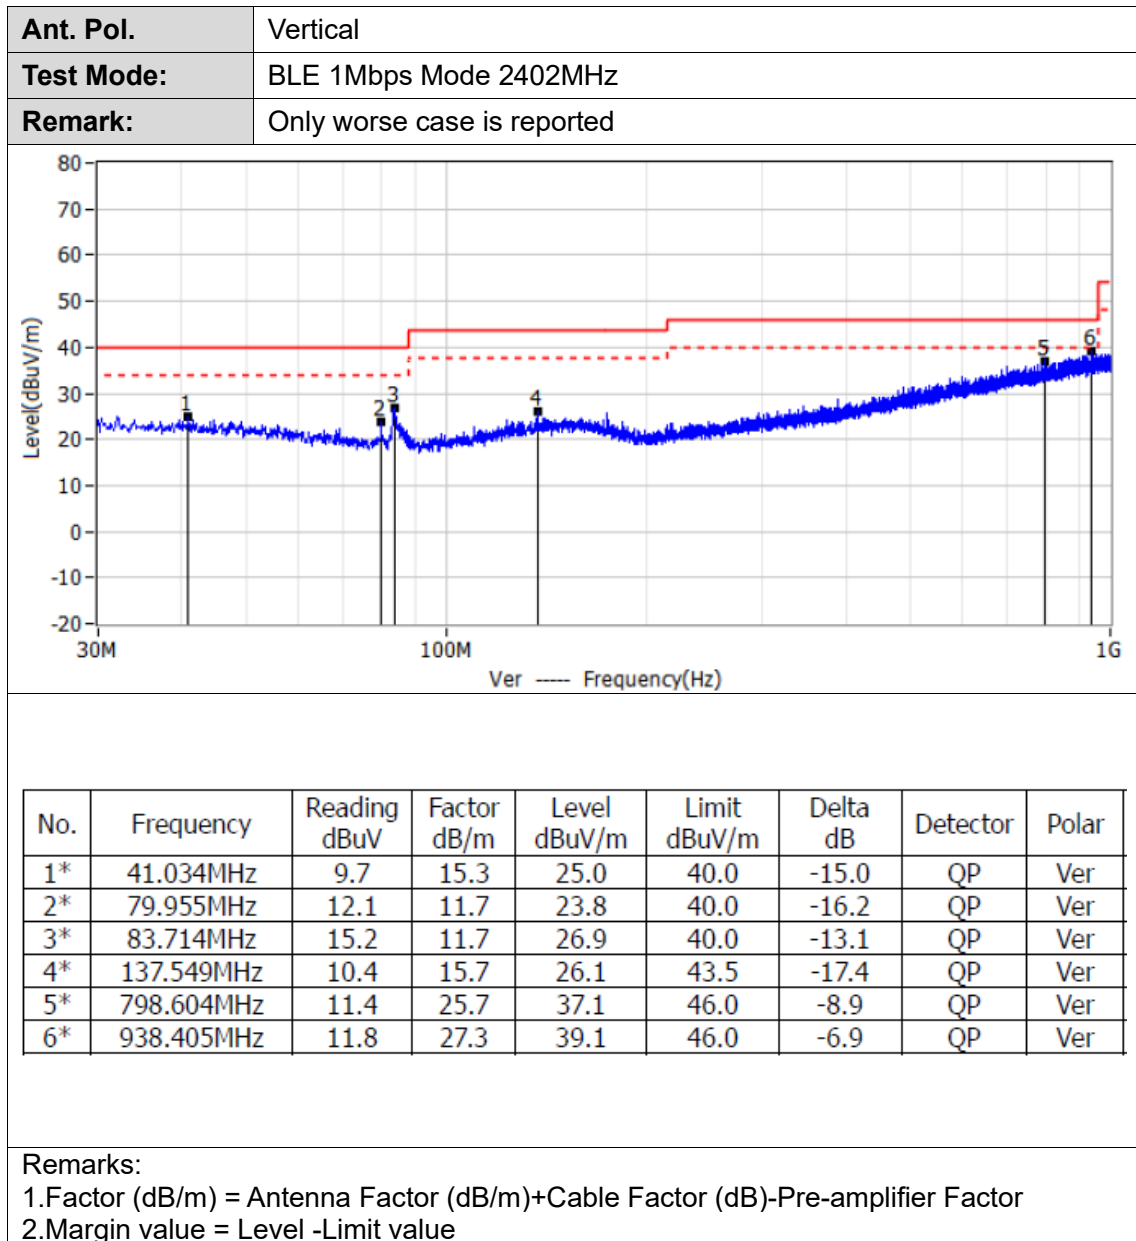






## 1GHz-3GHz

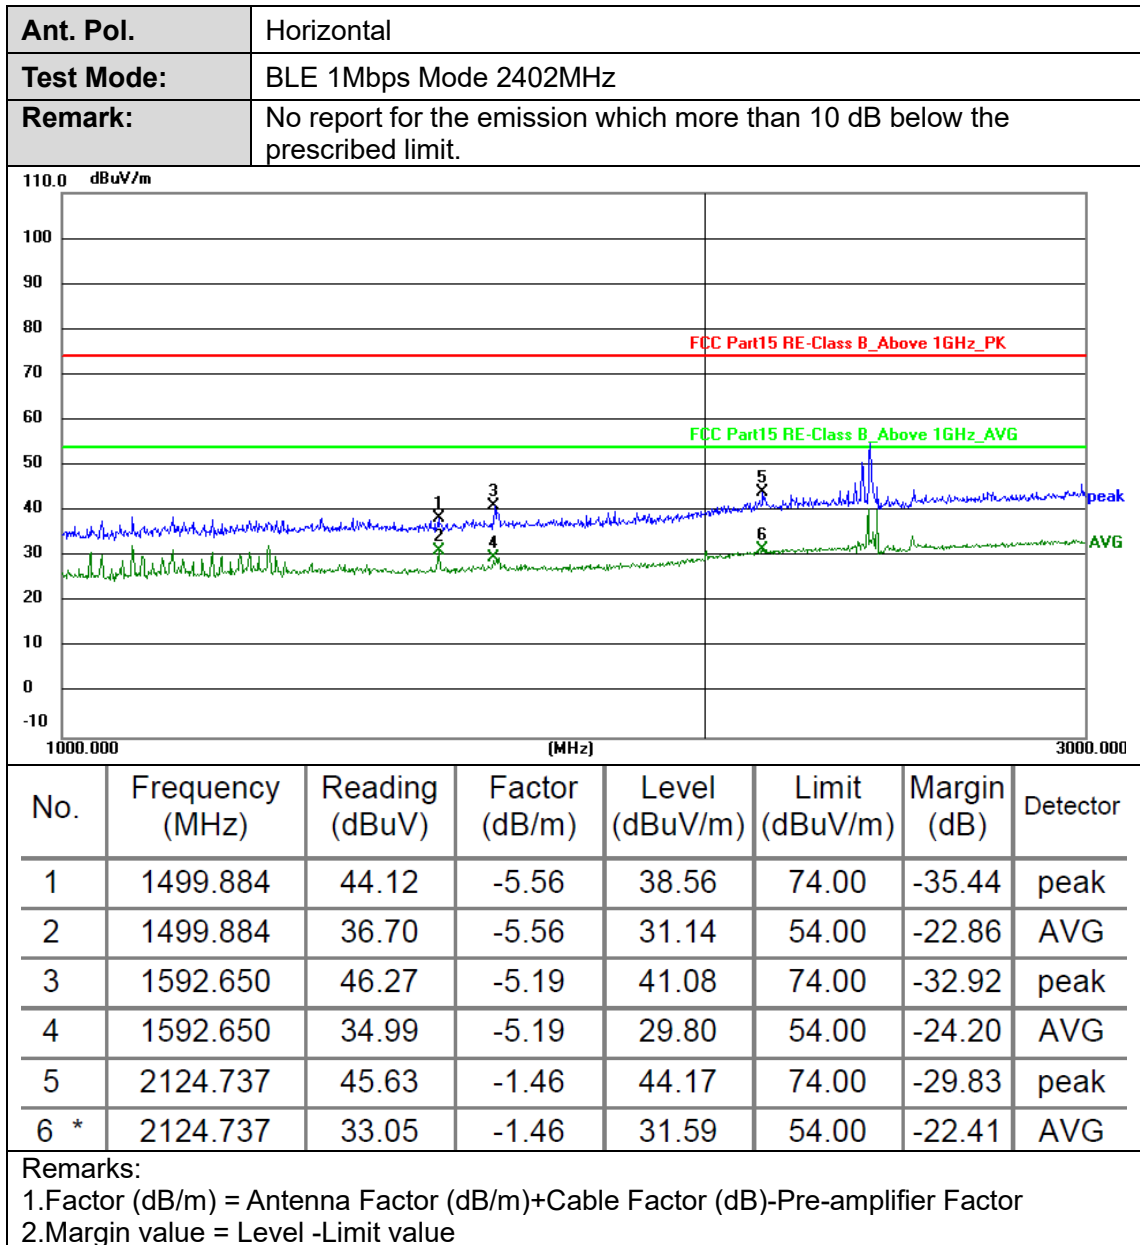


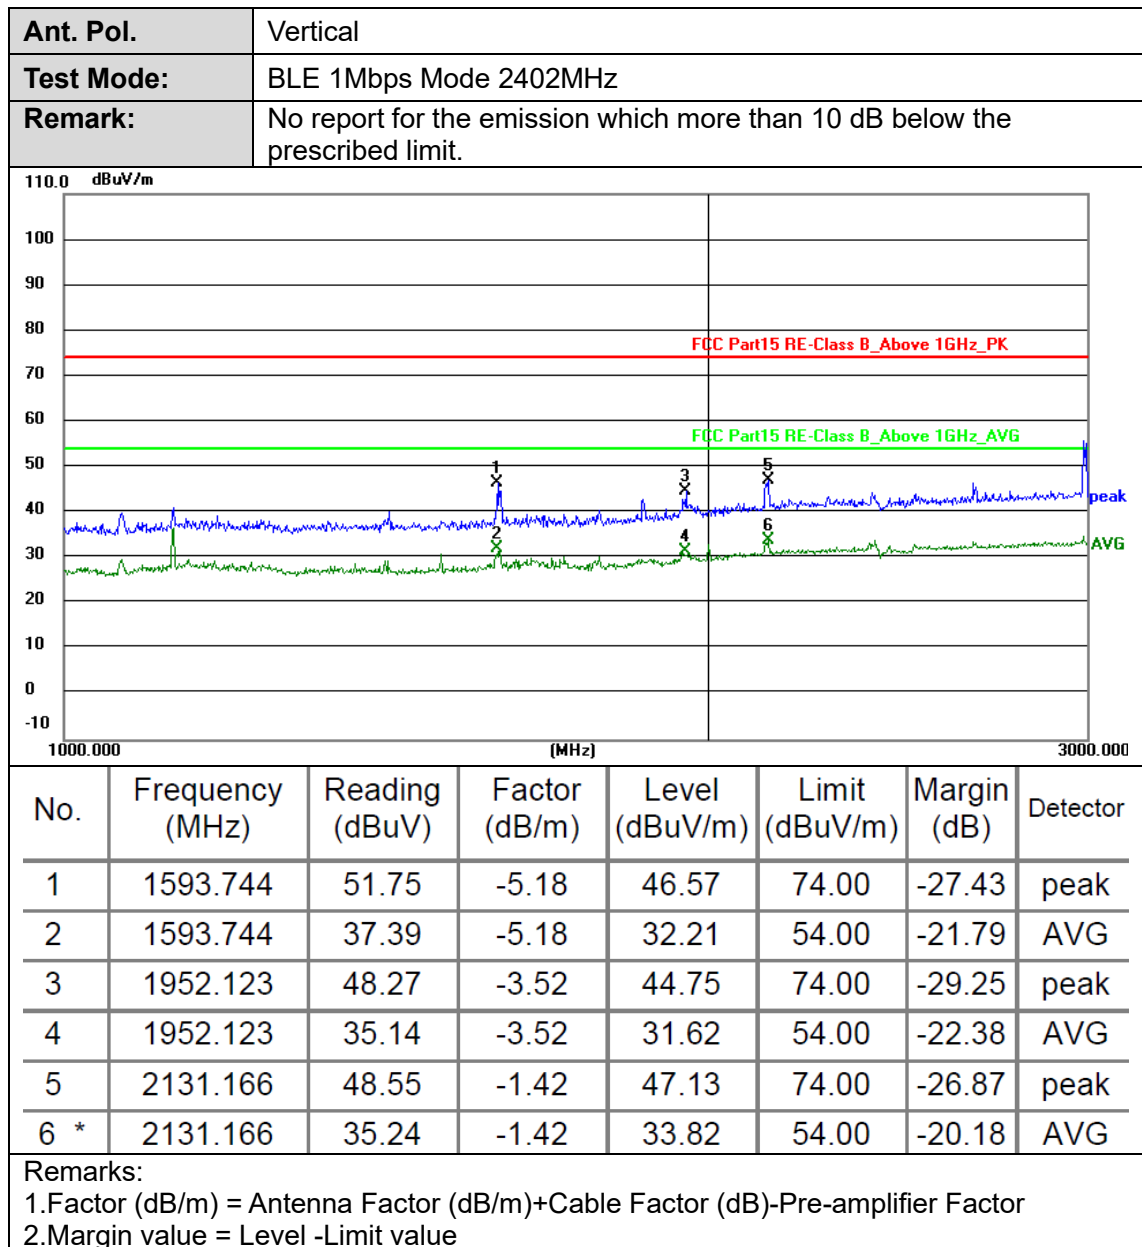

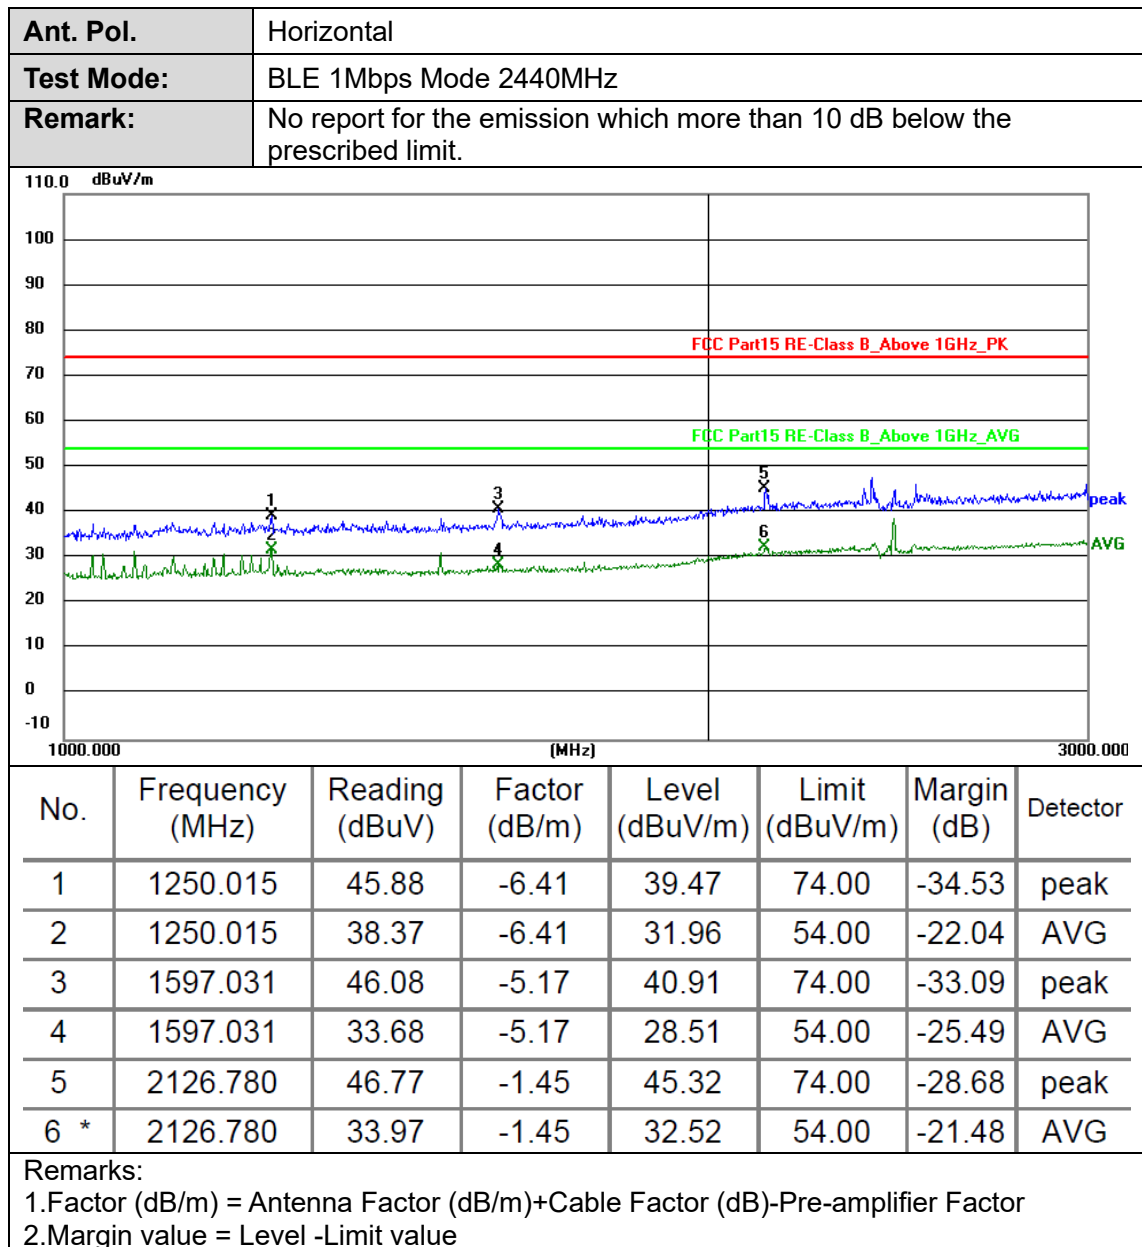

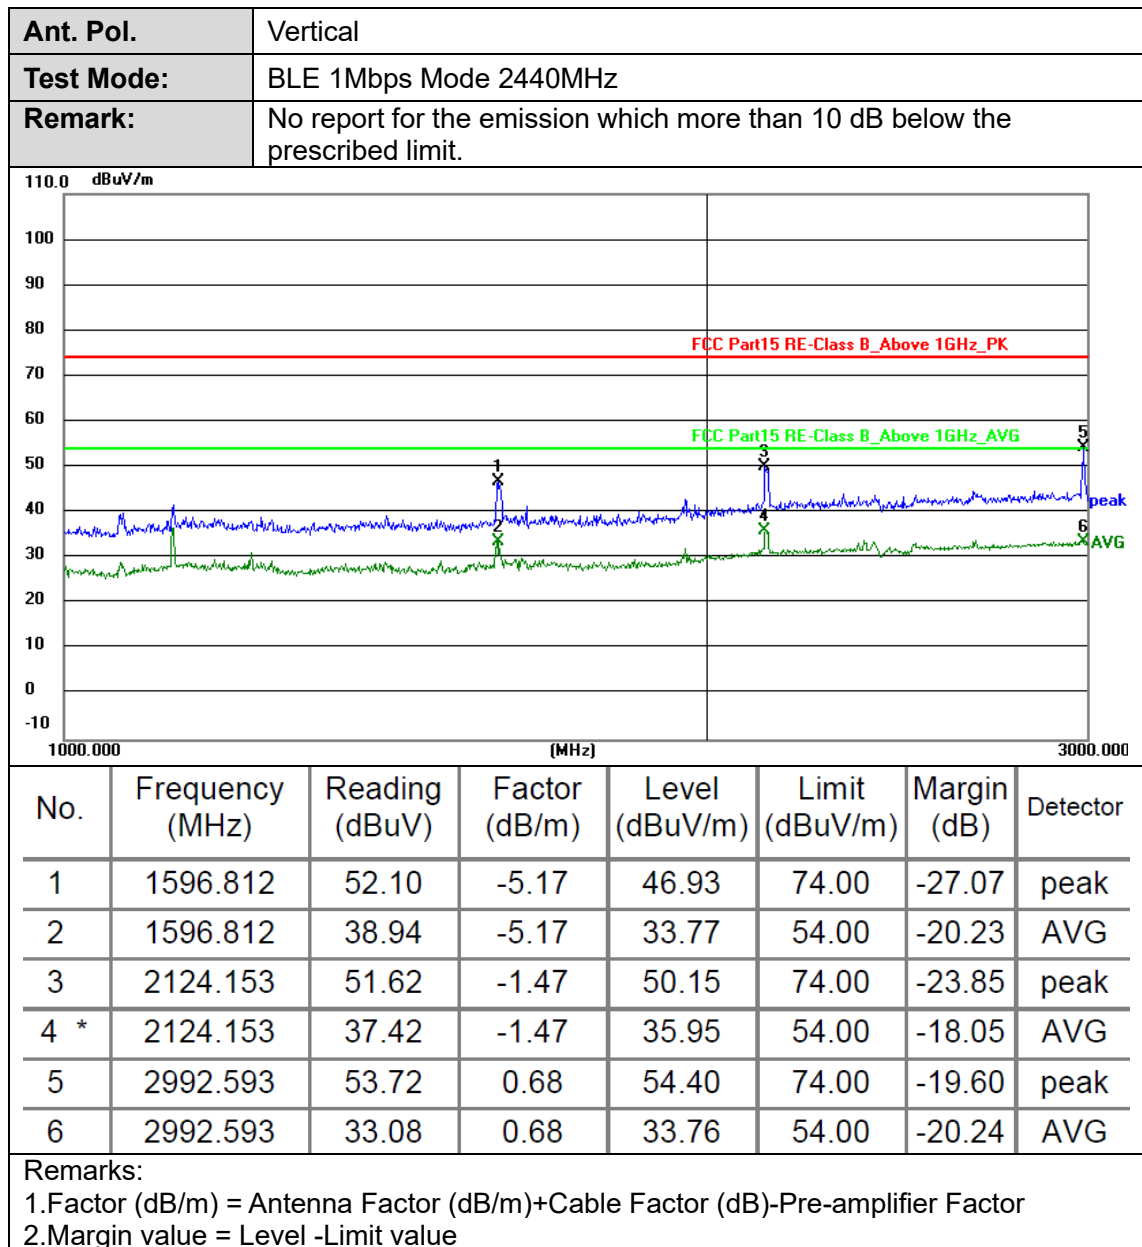


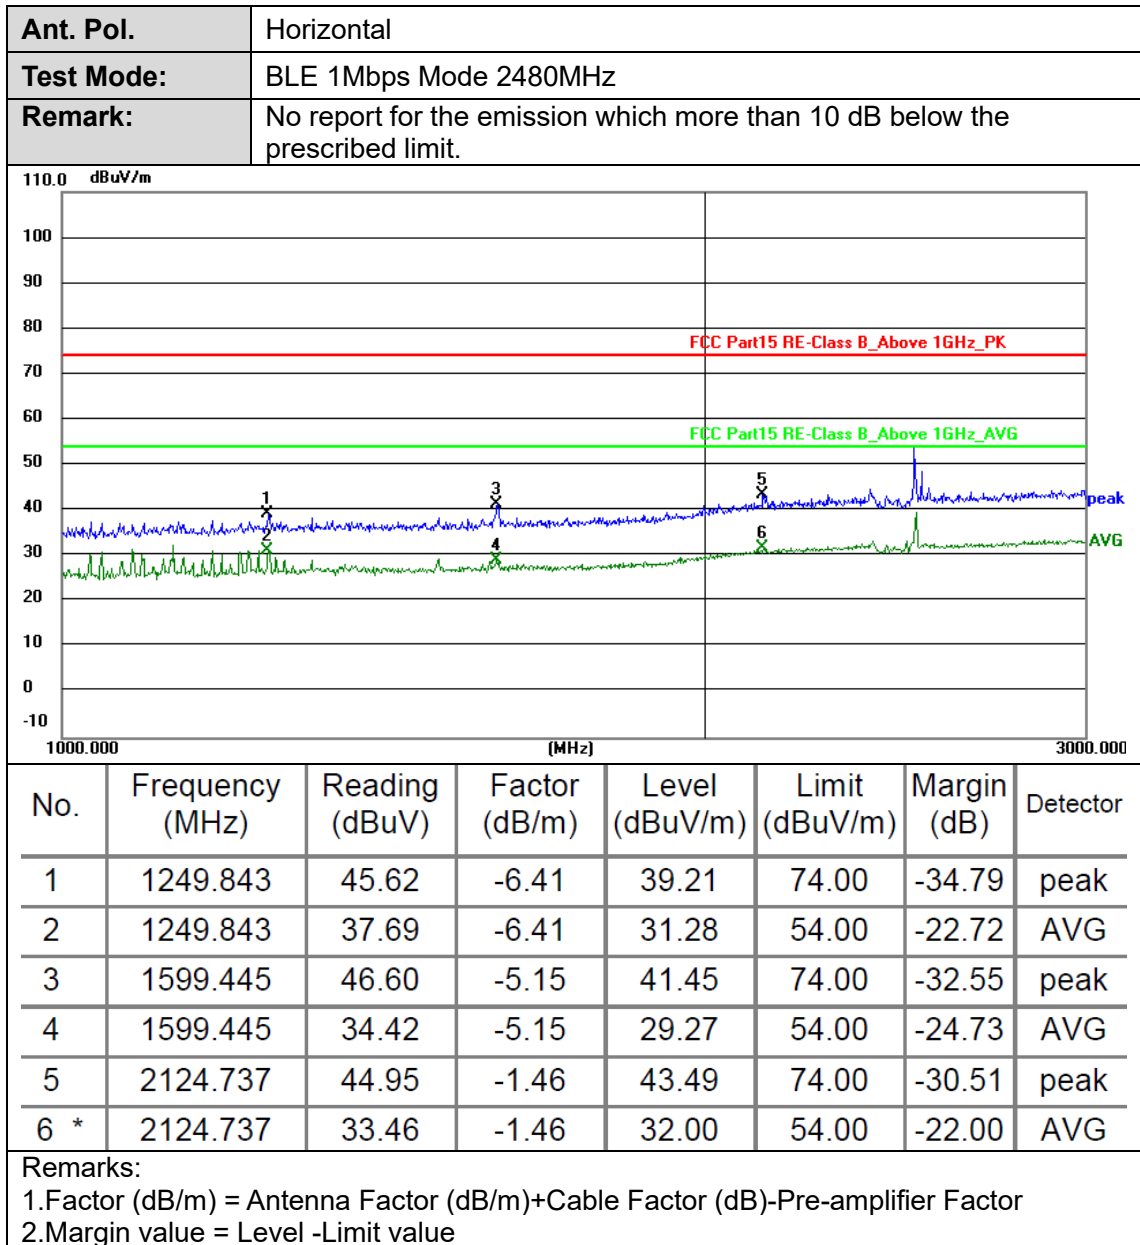

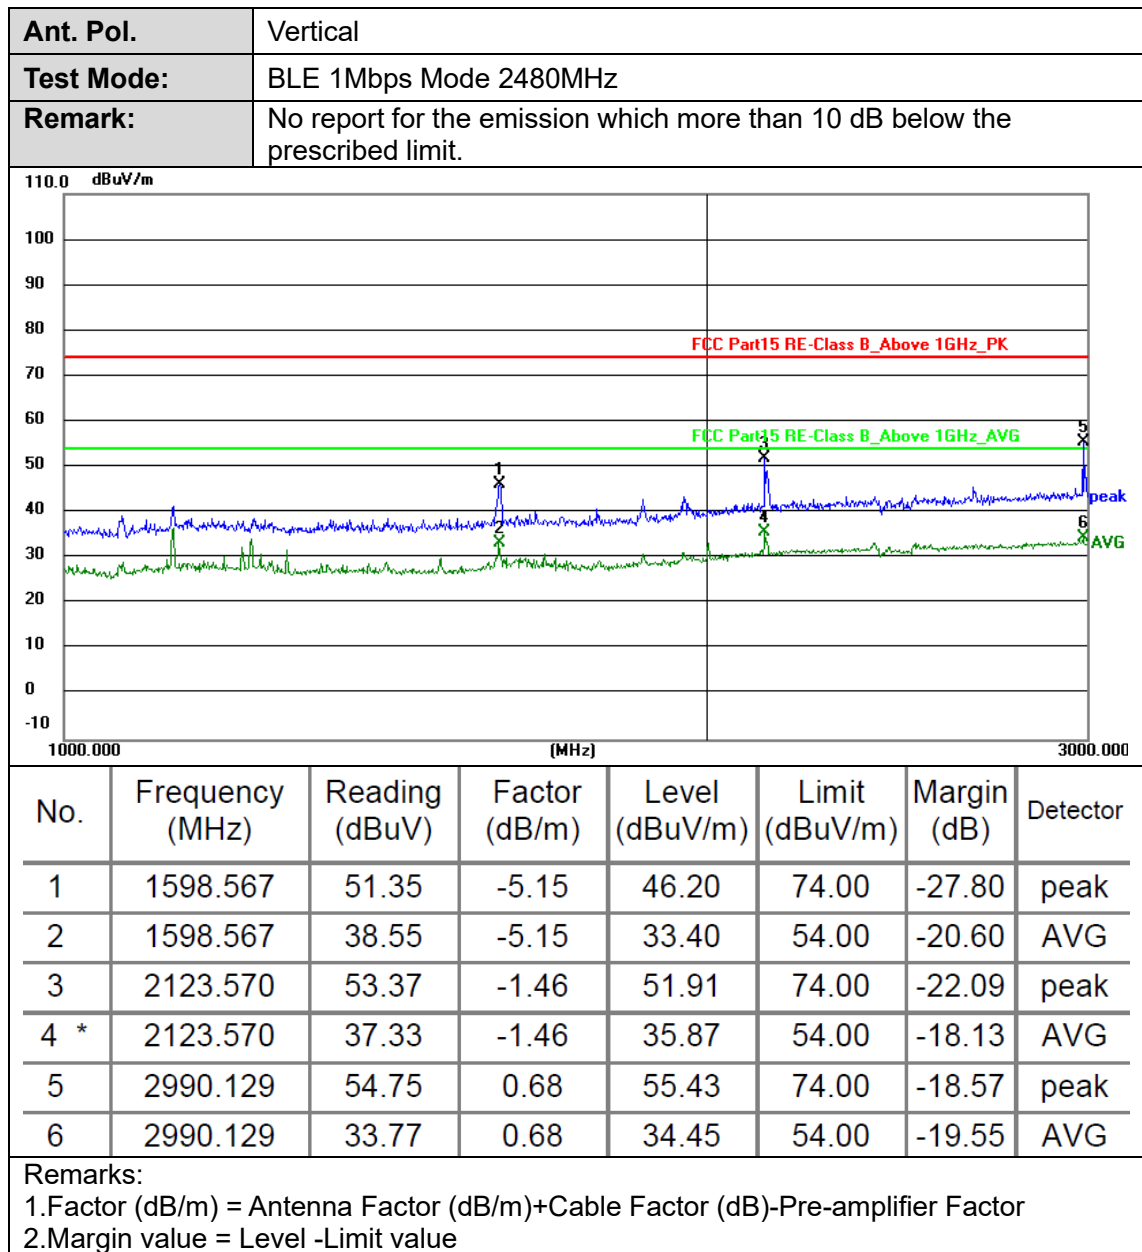



|            |                                                                              |
|------------|------------------------------------------------------------------------------|
| Ant. Pol.  | Horizontal                                                                   |
| Test Mode: | BLE 2Mbps Mode 2402MHz                                                       |
| Remark:    | No report for the emission which more than 10 dB below the prescribed limit. |

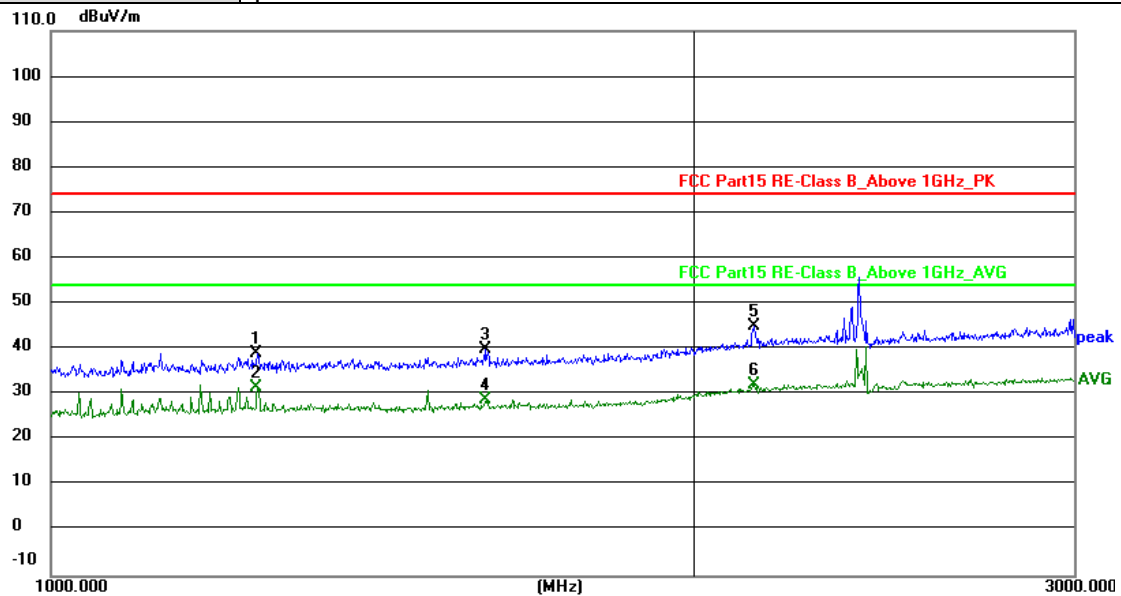



| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 1249.843        | 45.57          | -6.41         | 39.16          | 74.00          | -34.84      | peak     |
| 2   | 1249.843        | 37.97          | -6.41         | 31.56          | 54.00          | -22.44      | AVG      |
| 3   | 1596.373        | 45.24          | -5.17         | 40.07          | 74.00          | -33.93      | peak     |
| 4   | 1596.373        | 33.98          | -5.17         | 28.81          | 54.00          | -25.19      | AVG      |
| 5   | 2127.657        | 46.55          | -1.44         | 45.11          | 74.00          | -28.89      | peak     |
| 6 * | 2127.657        | 33.57          | -1.44         | 32.13          | 54.00          | -21.87      | AVG      |


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor


2. Margin value = Level - Limit value

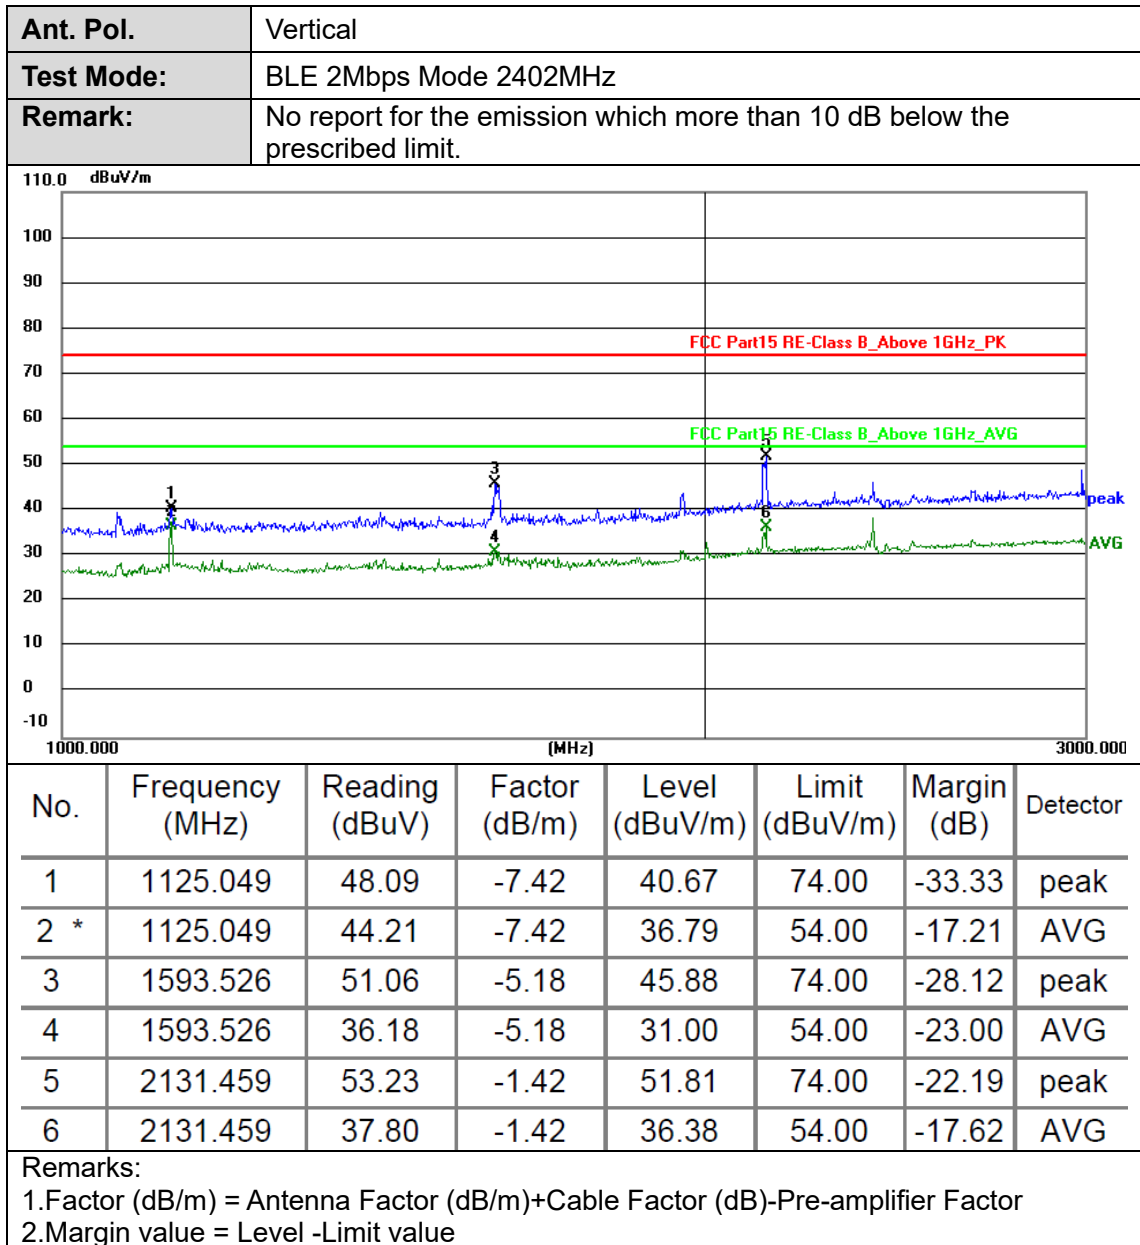

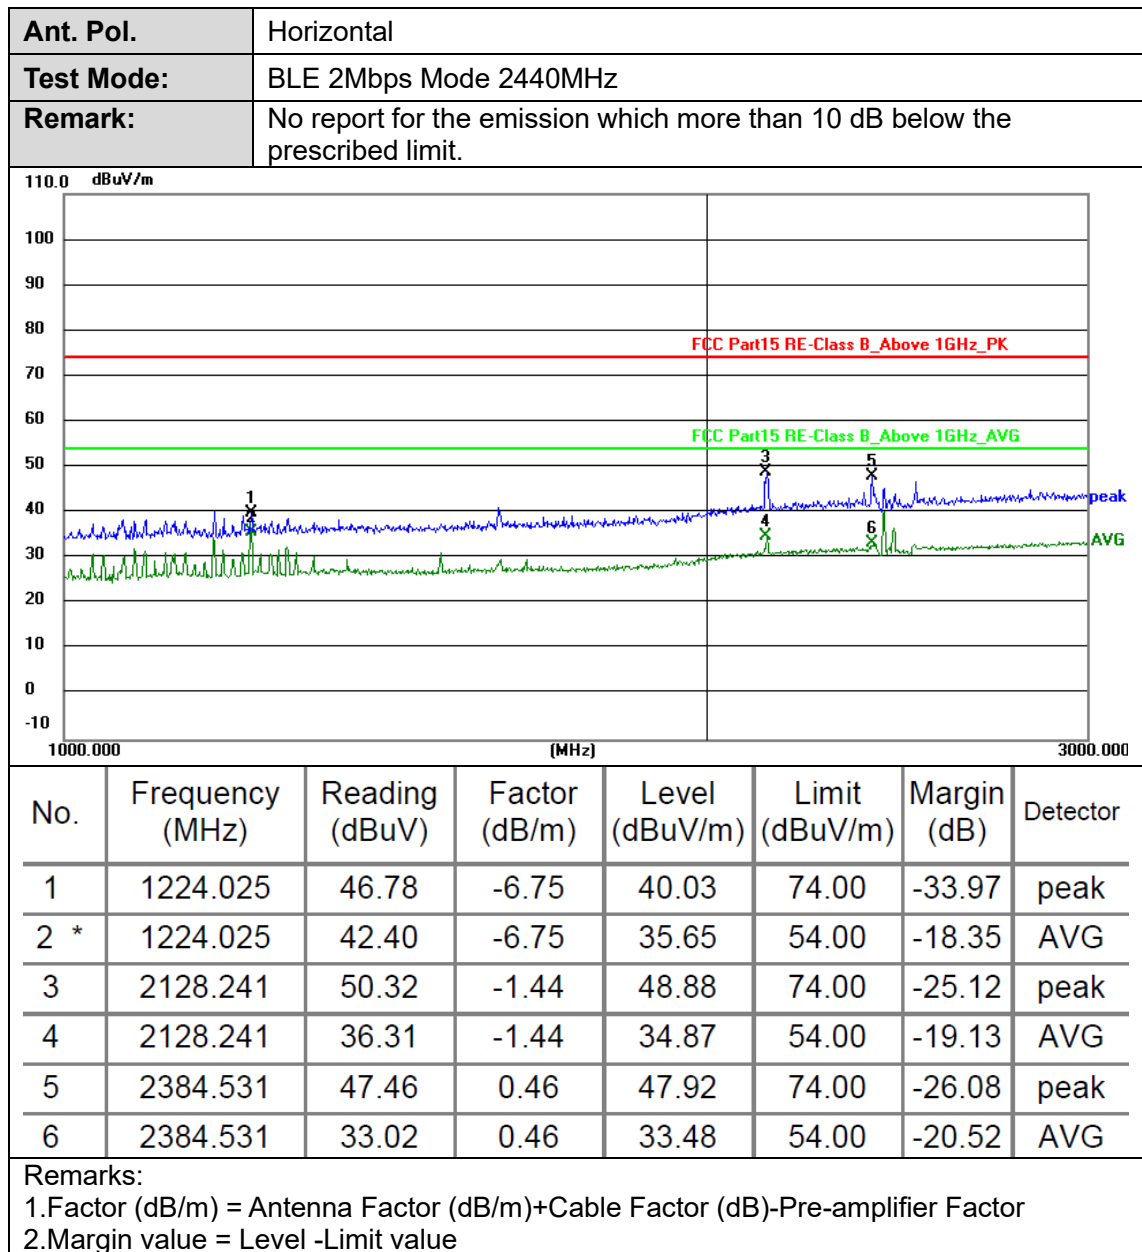

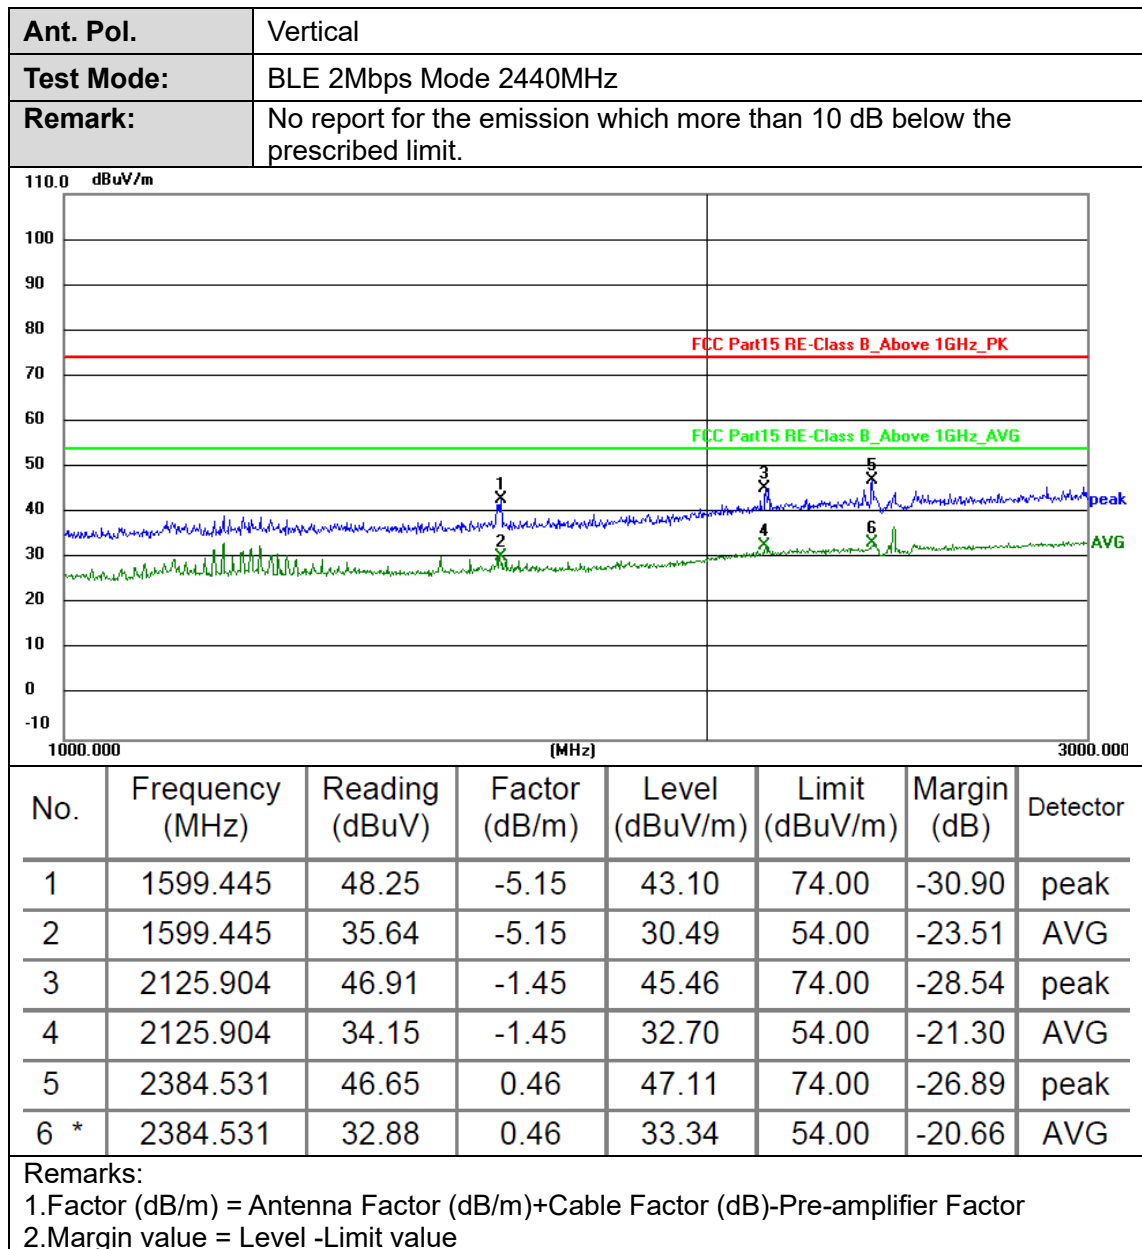


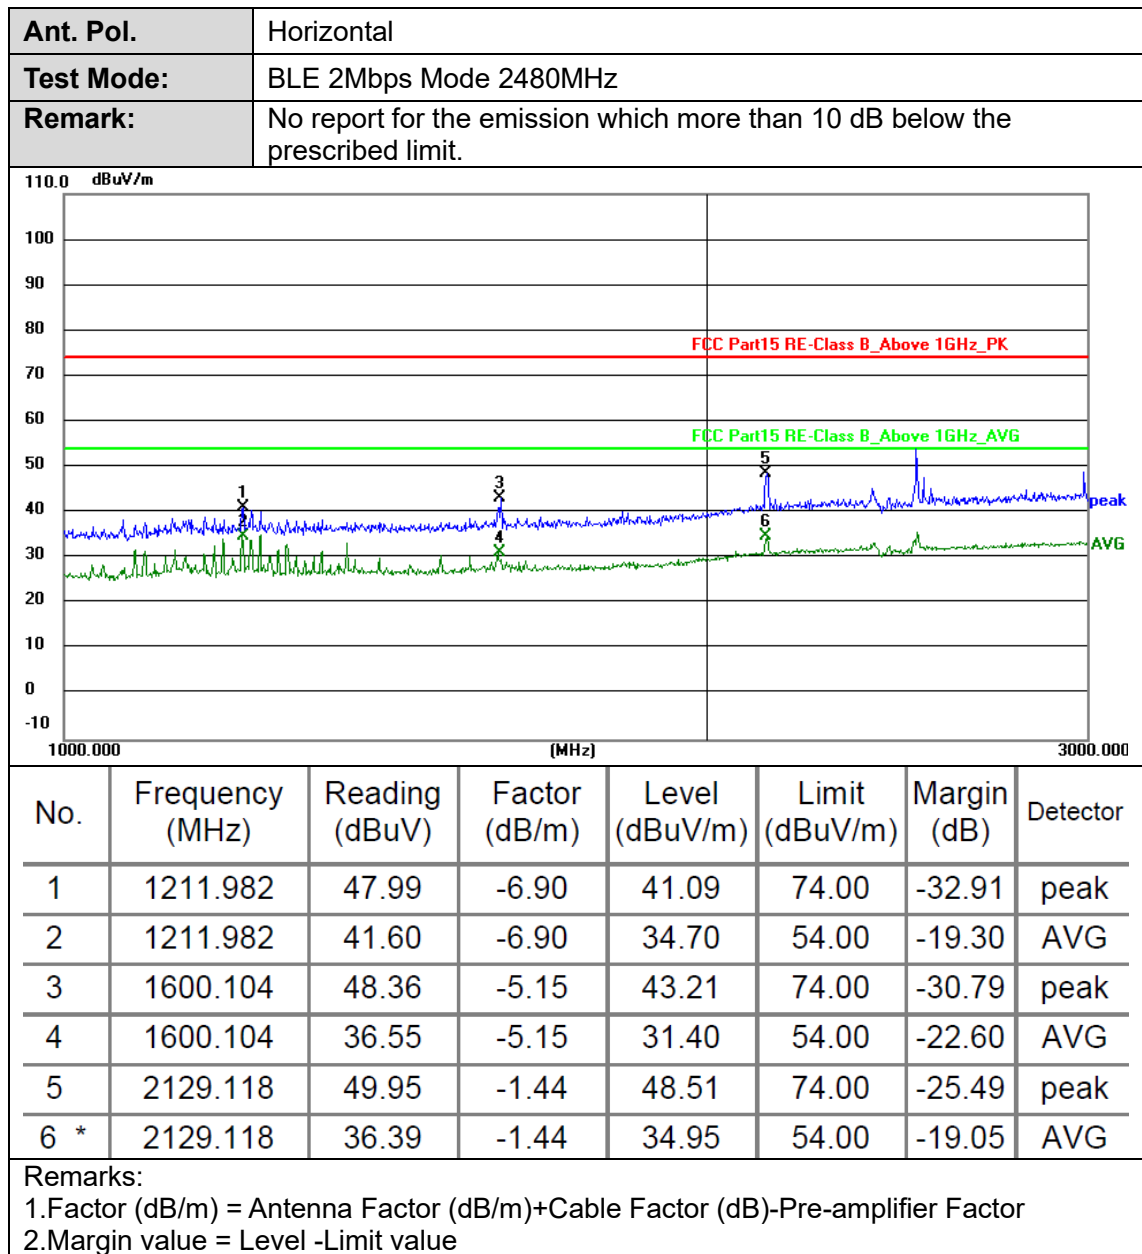


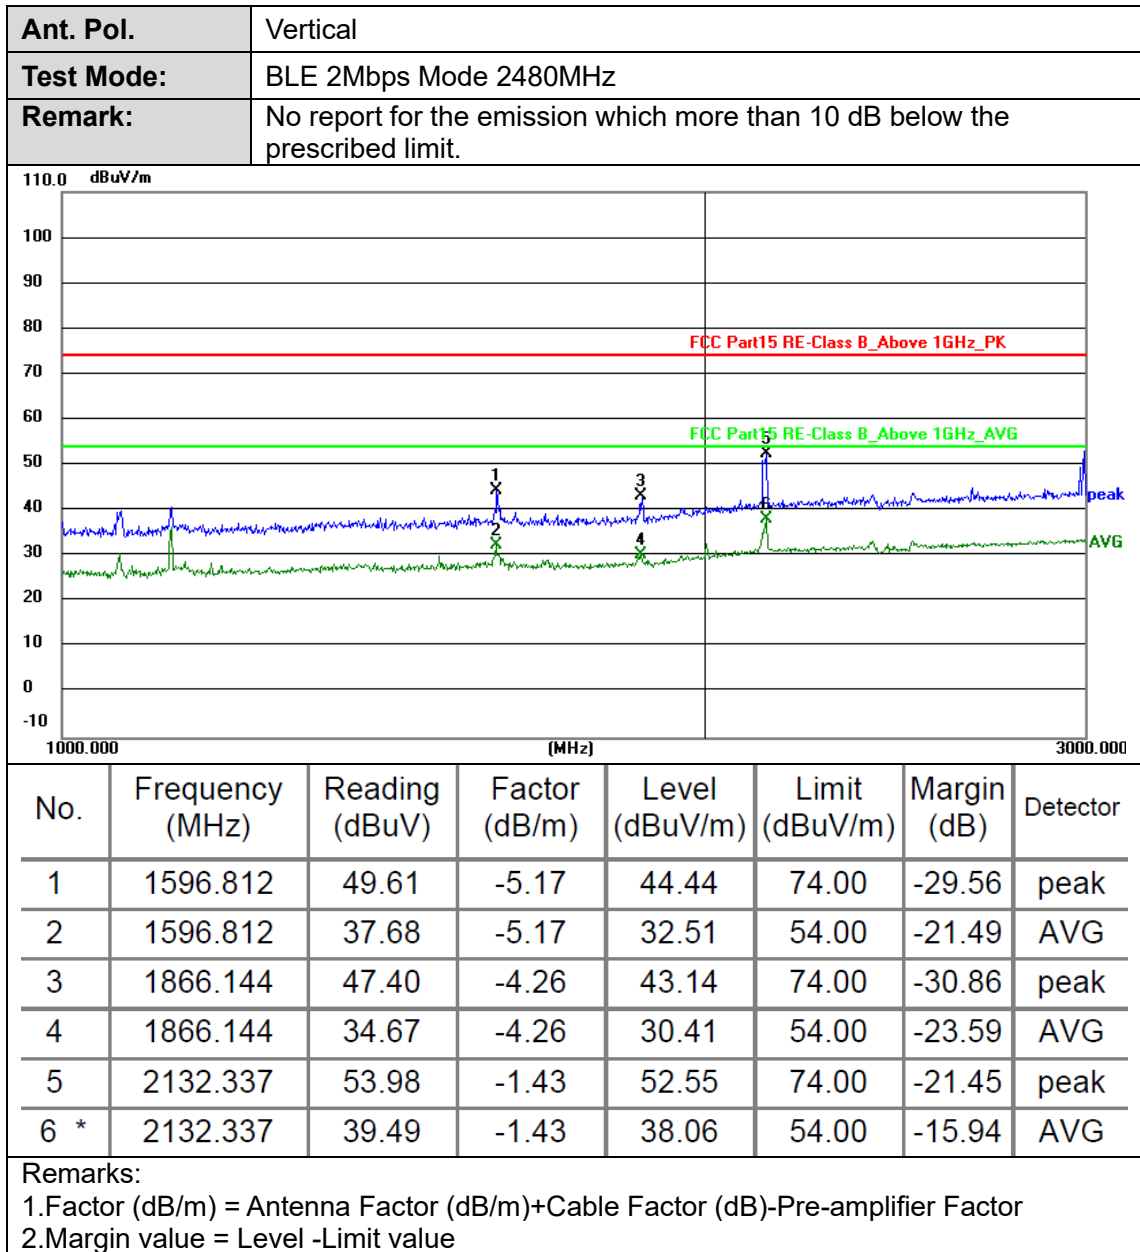






## 3GHz-18GHz

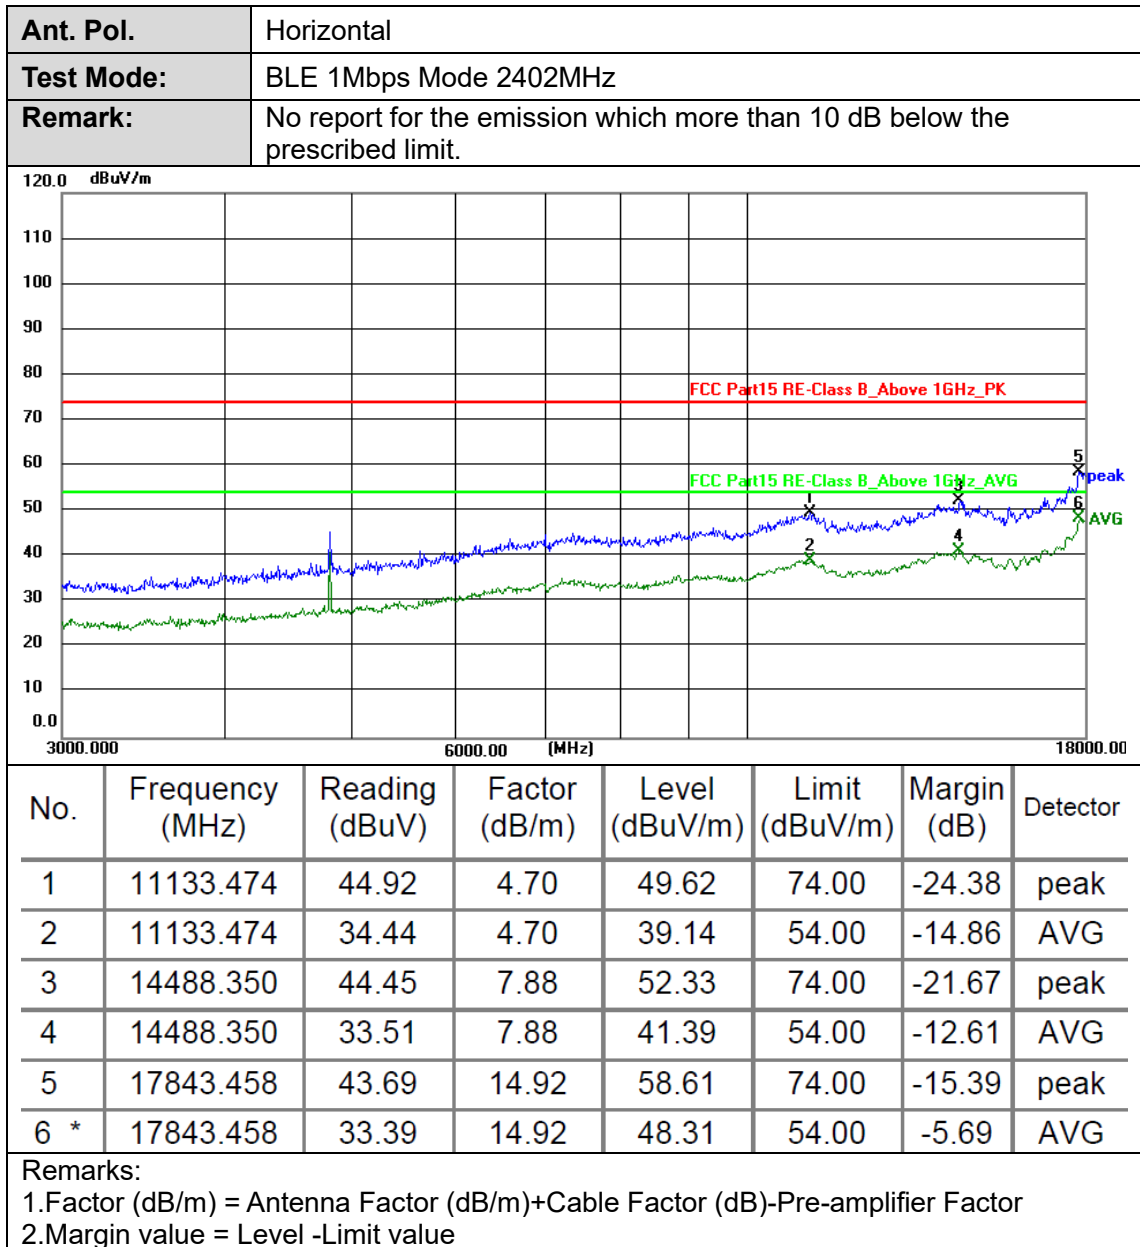


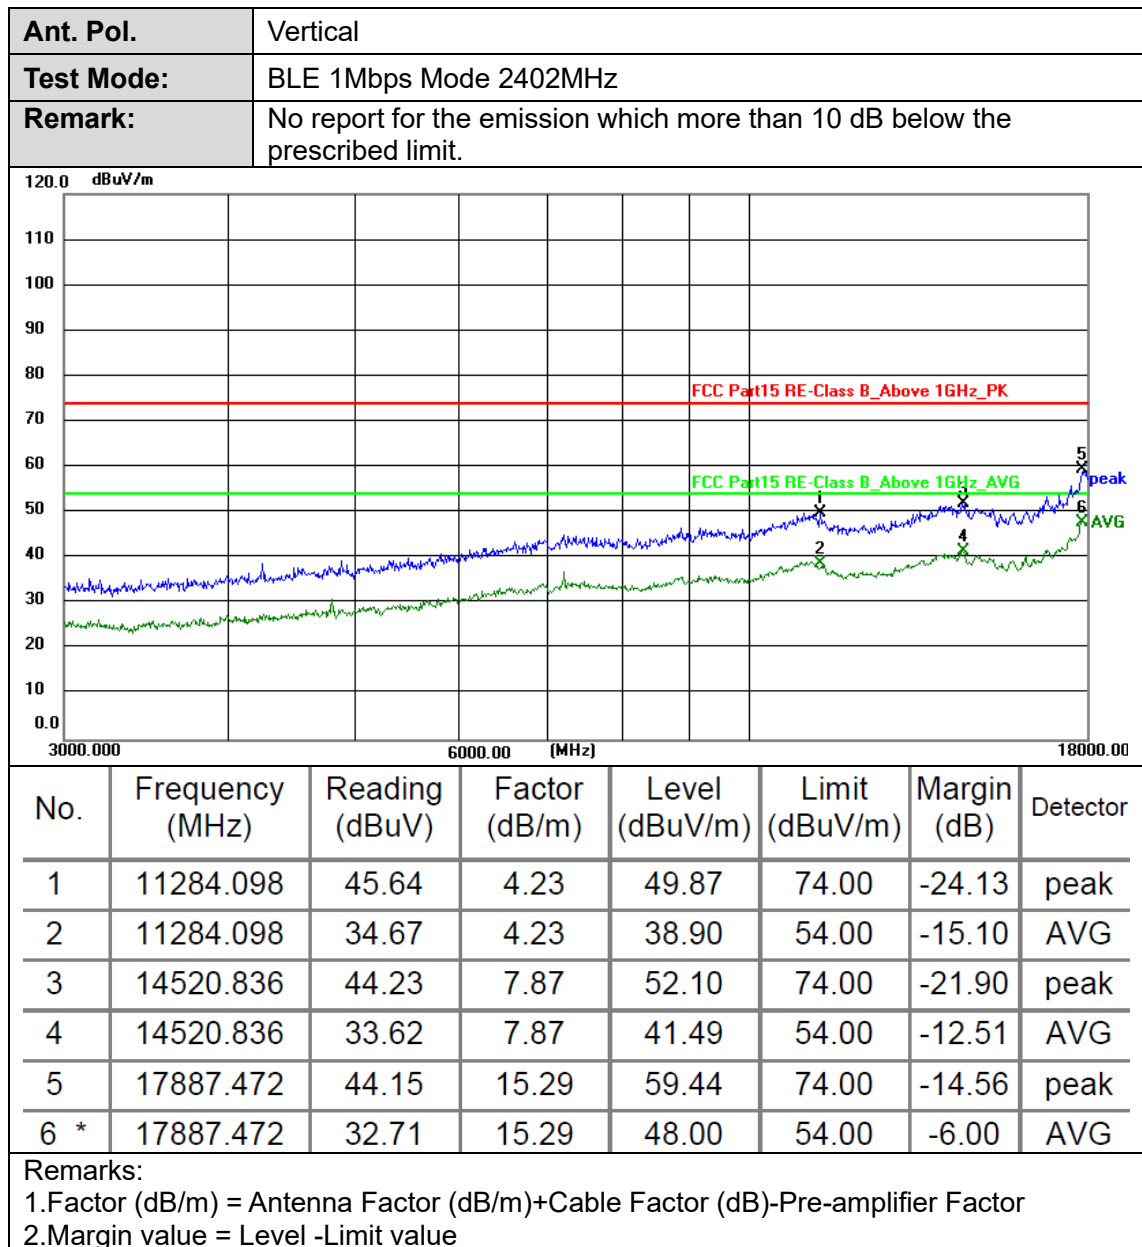


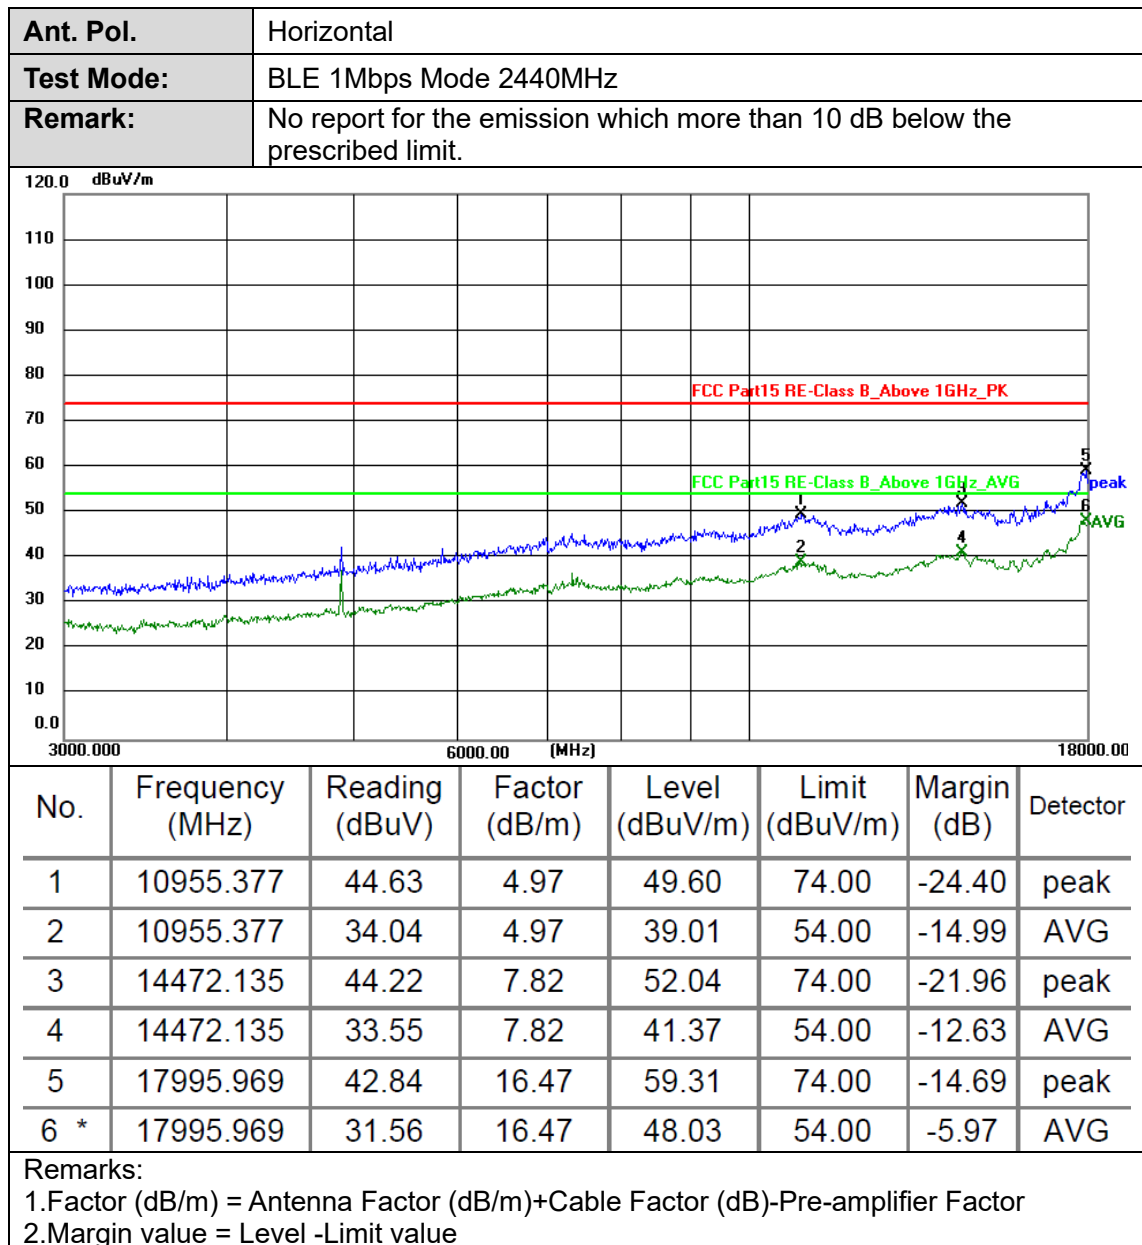


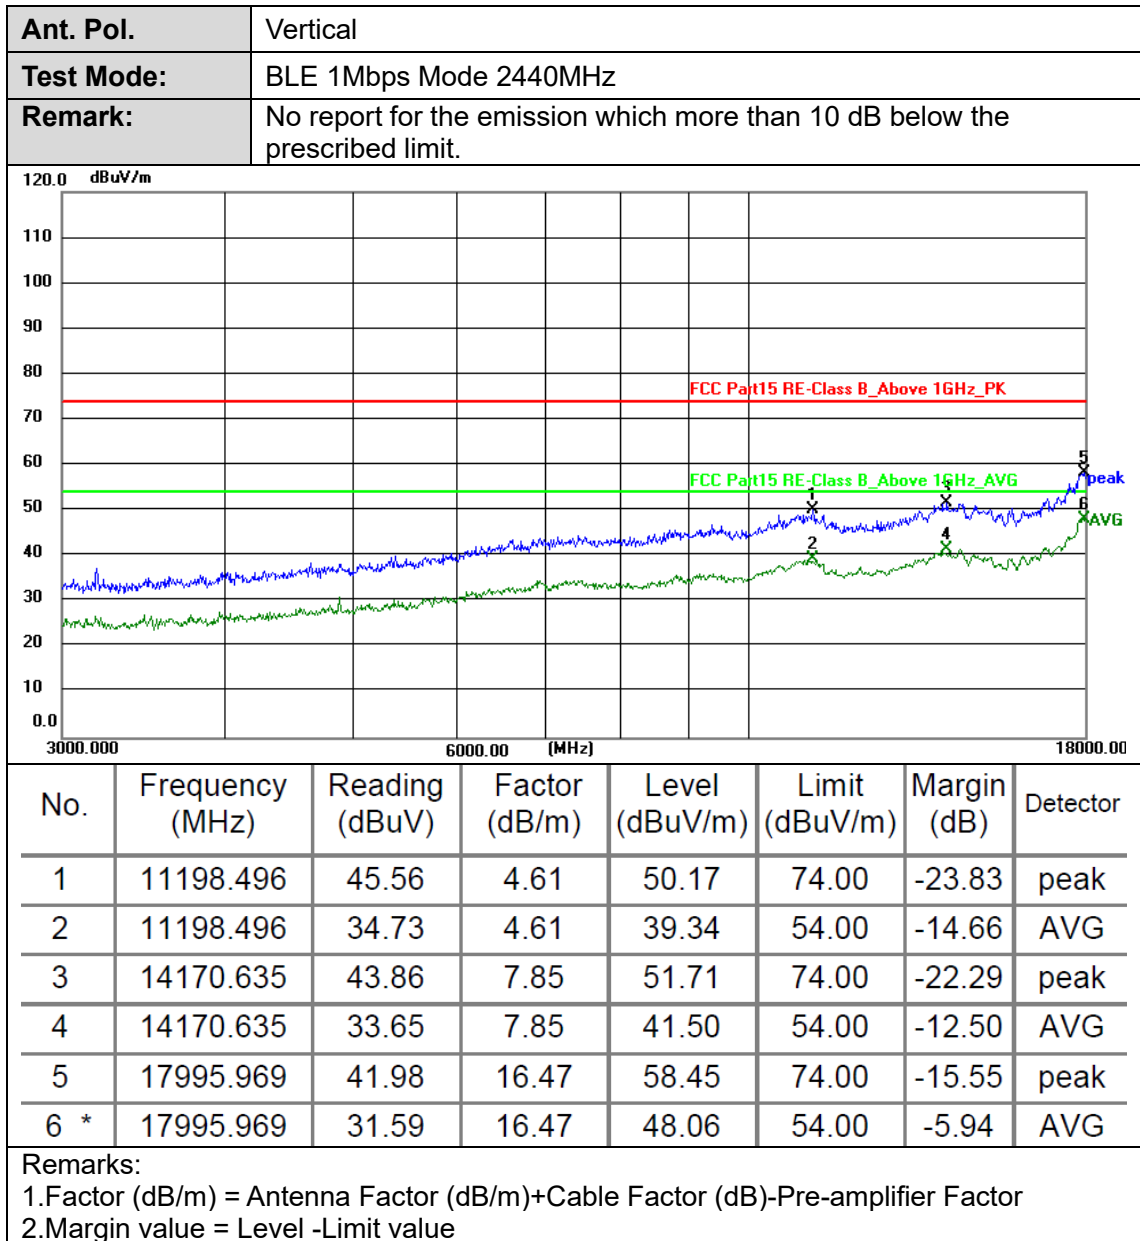


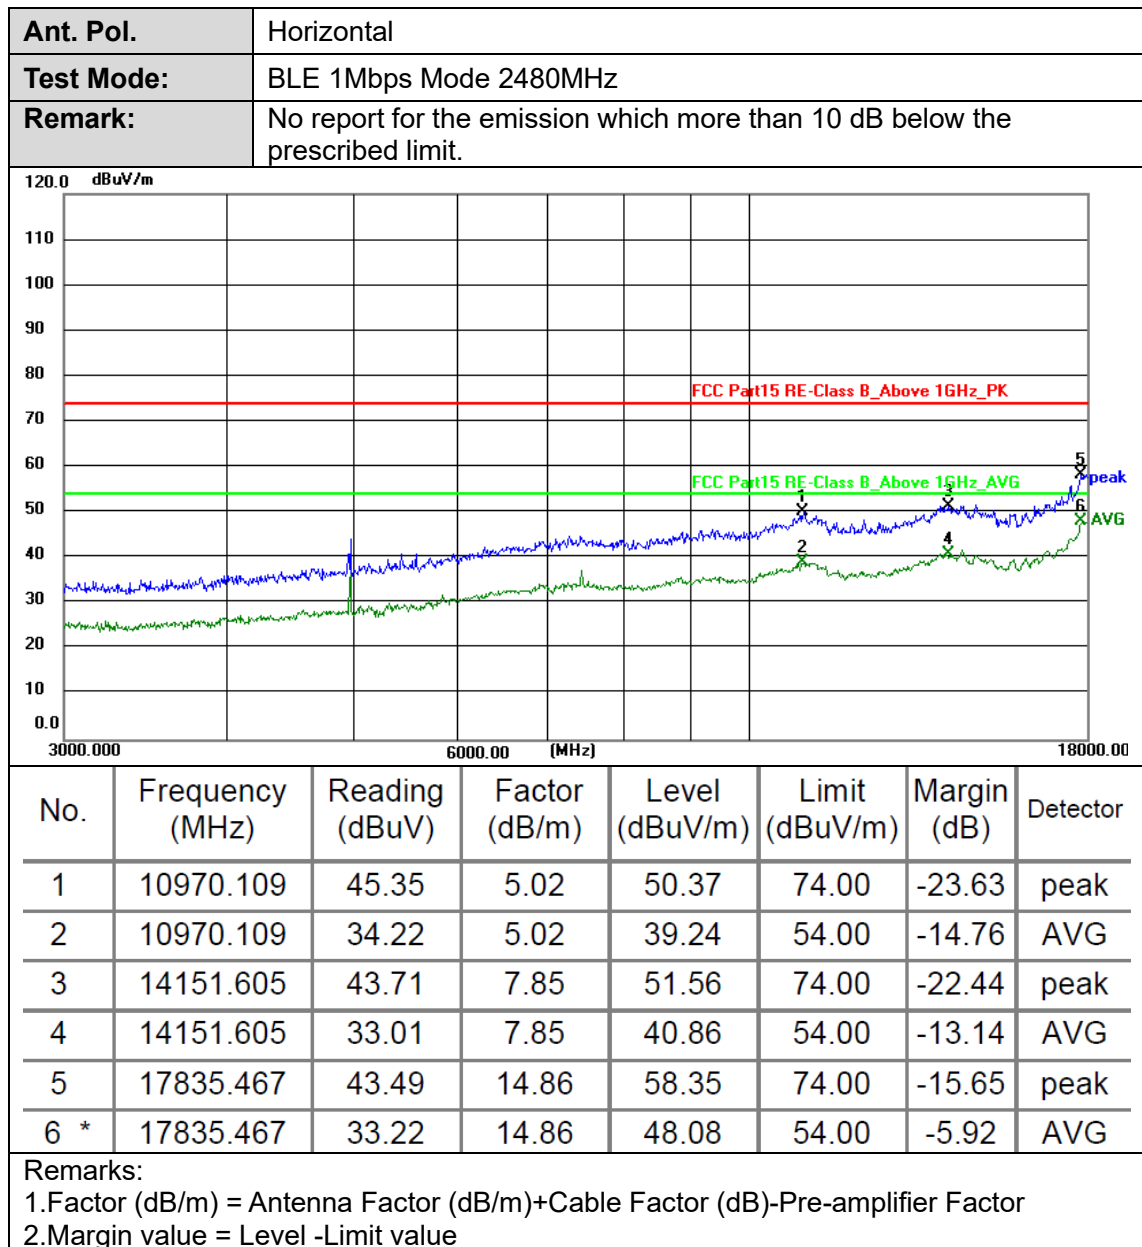


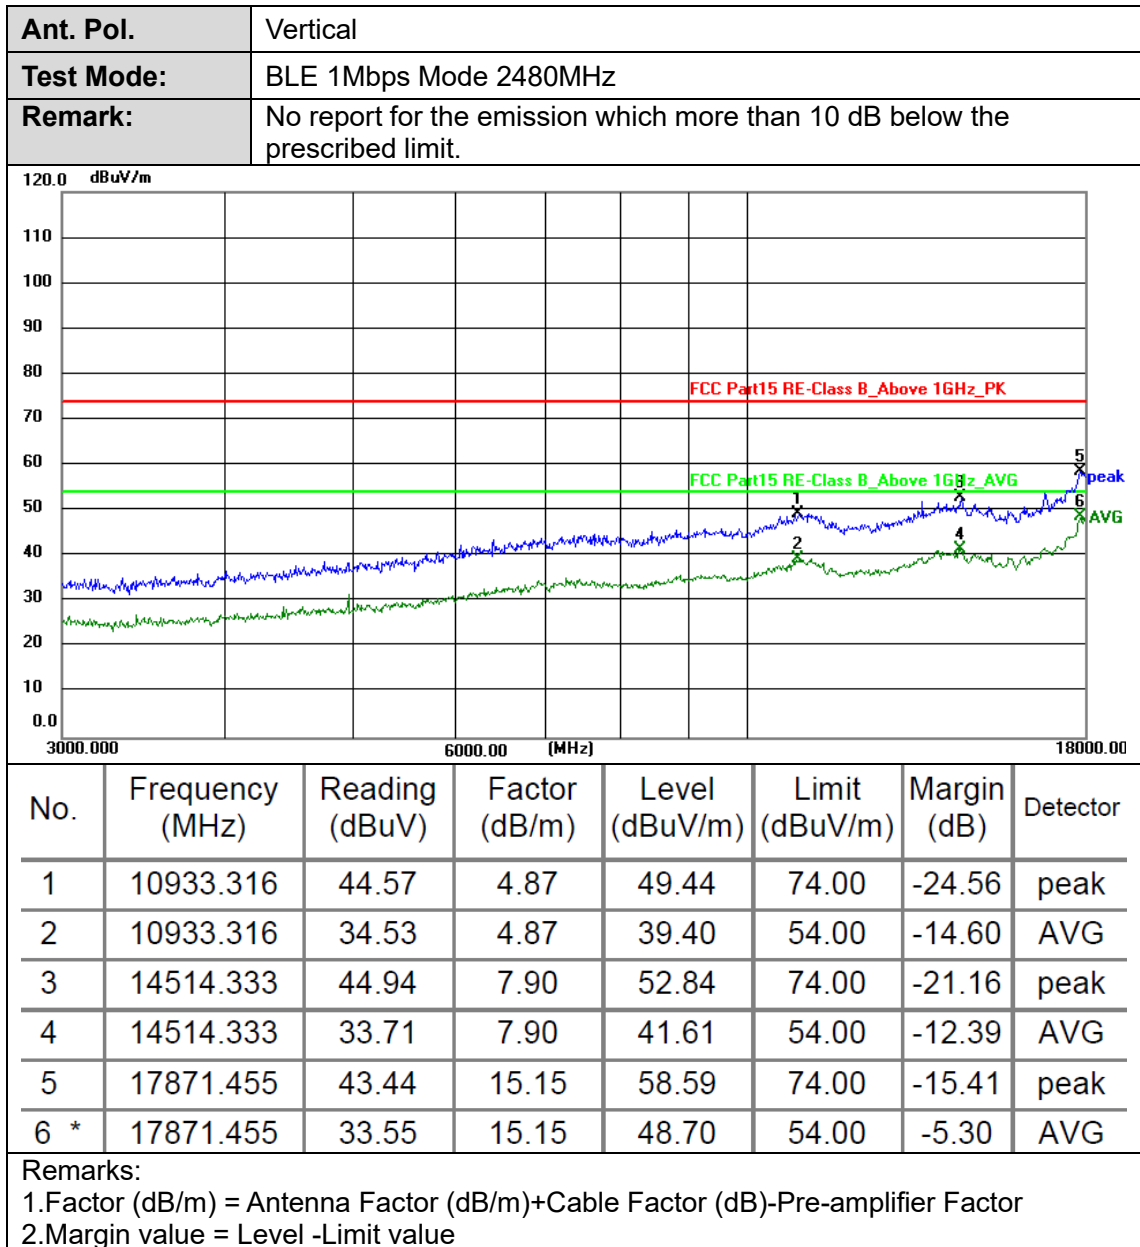


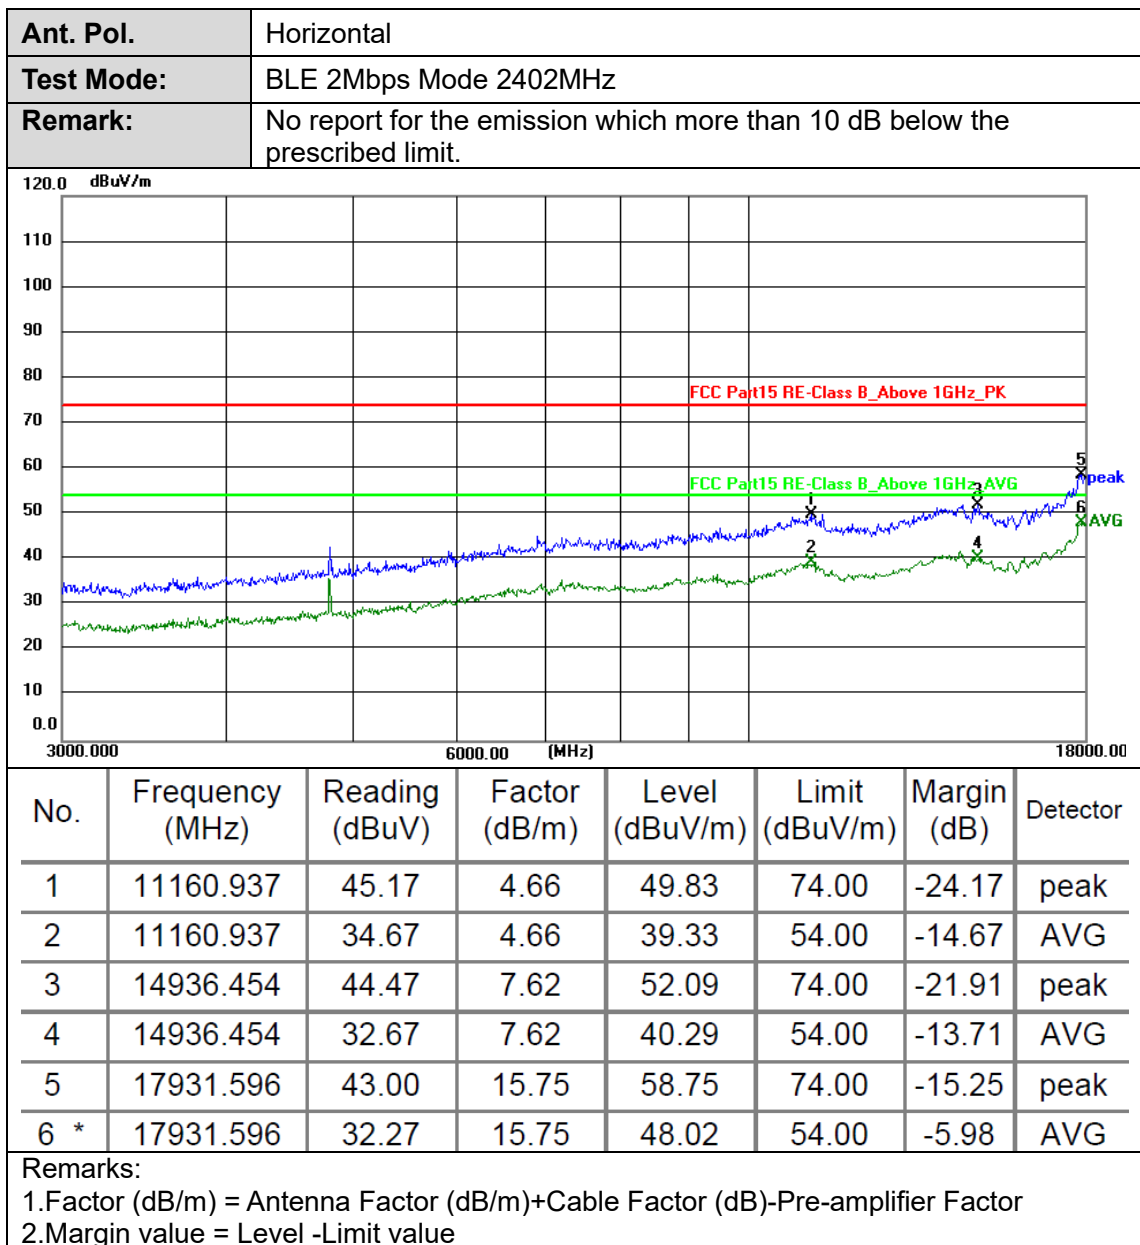


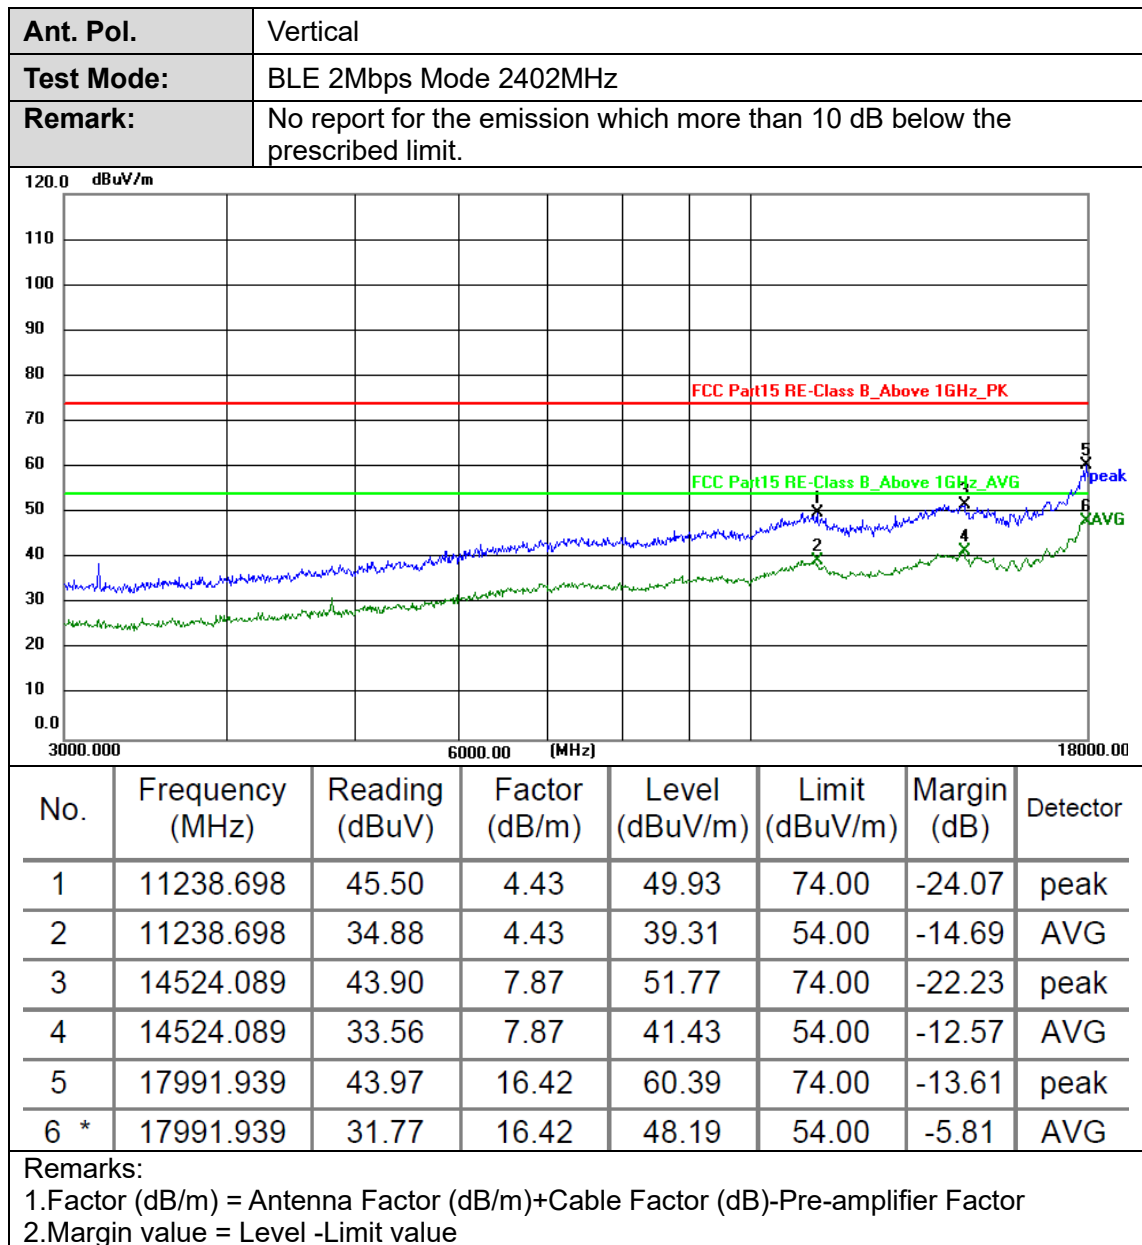

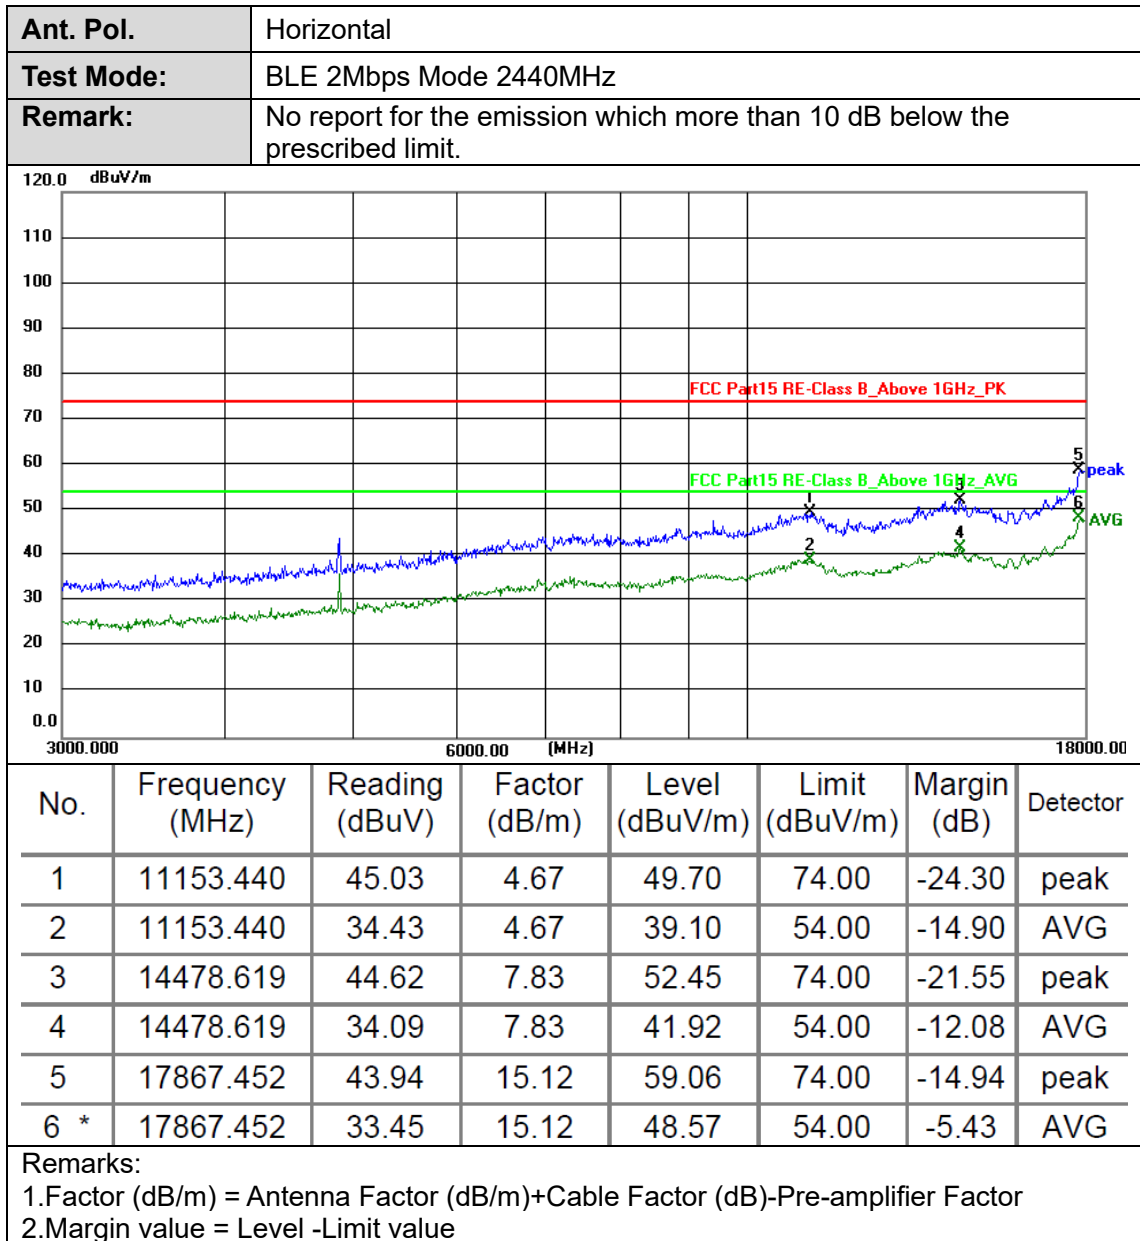

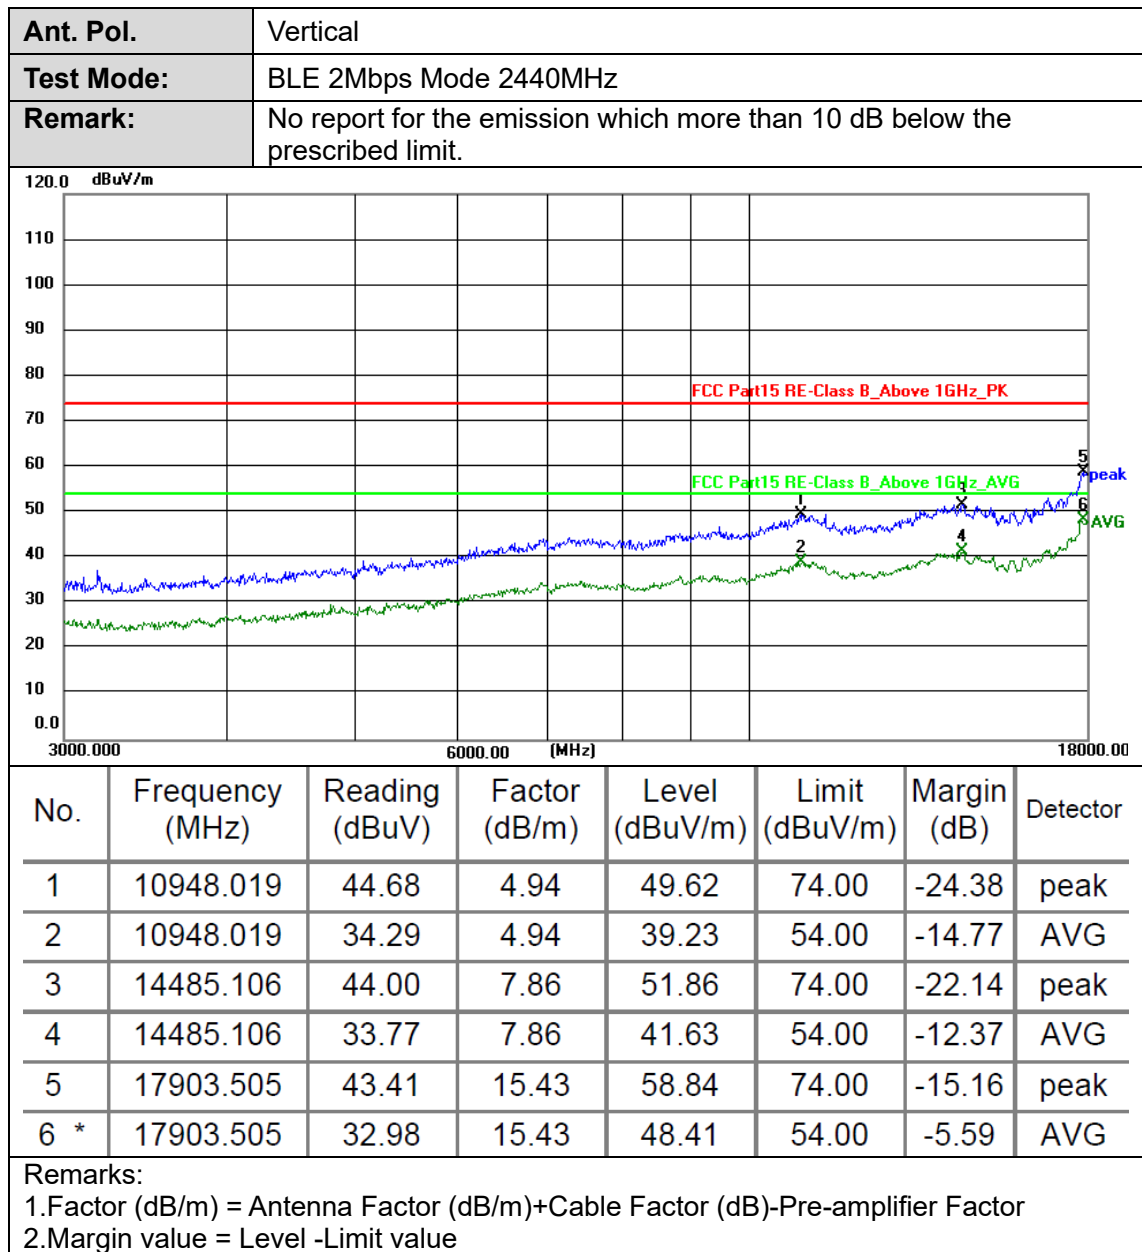


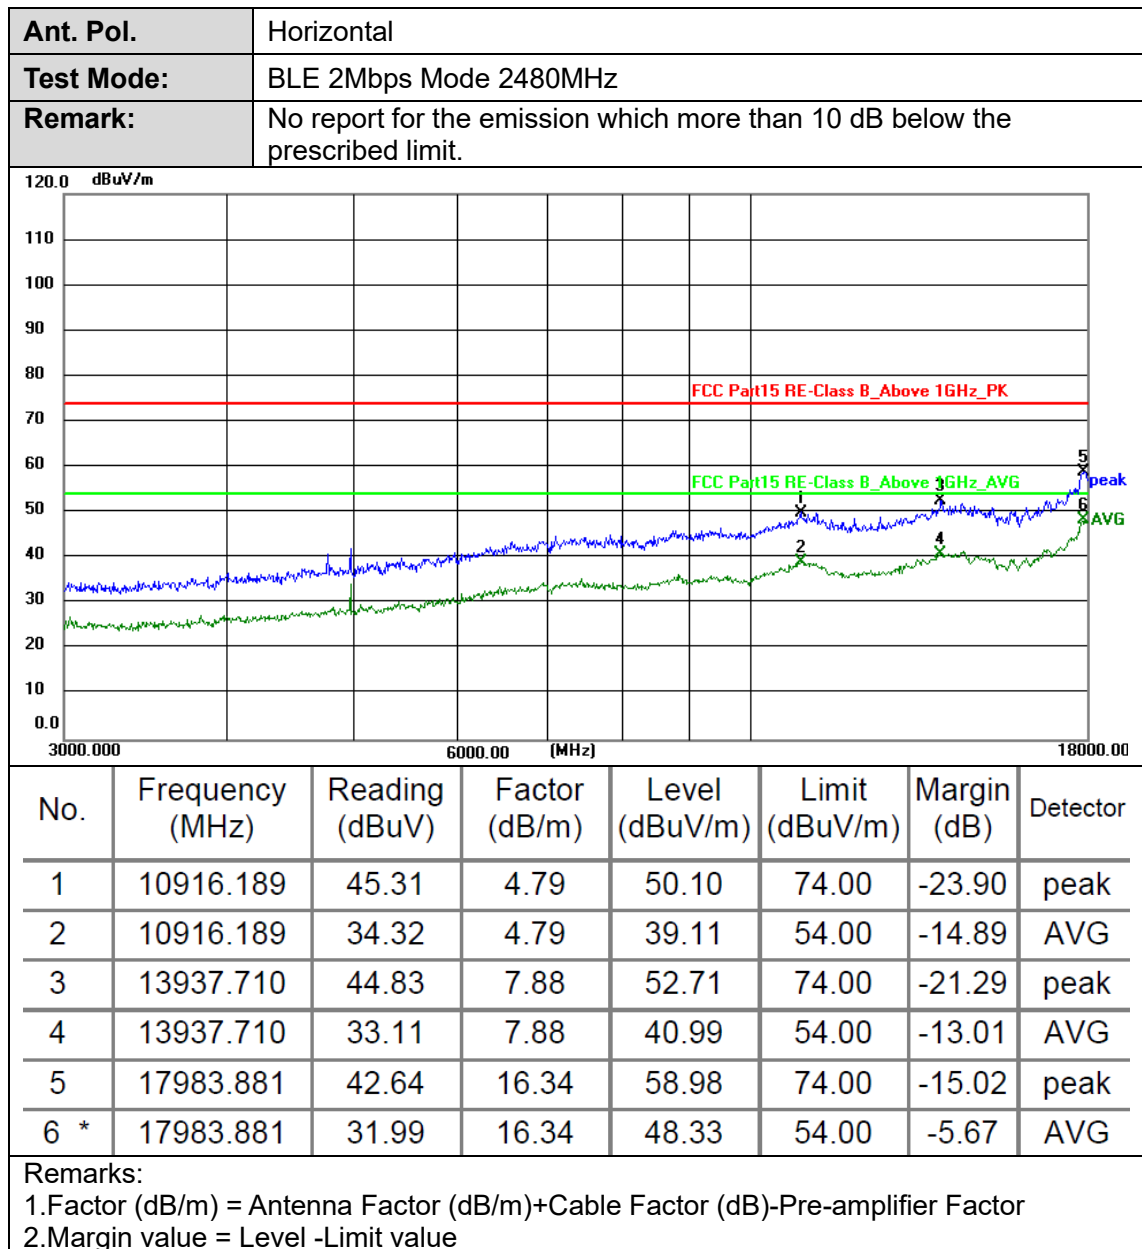


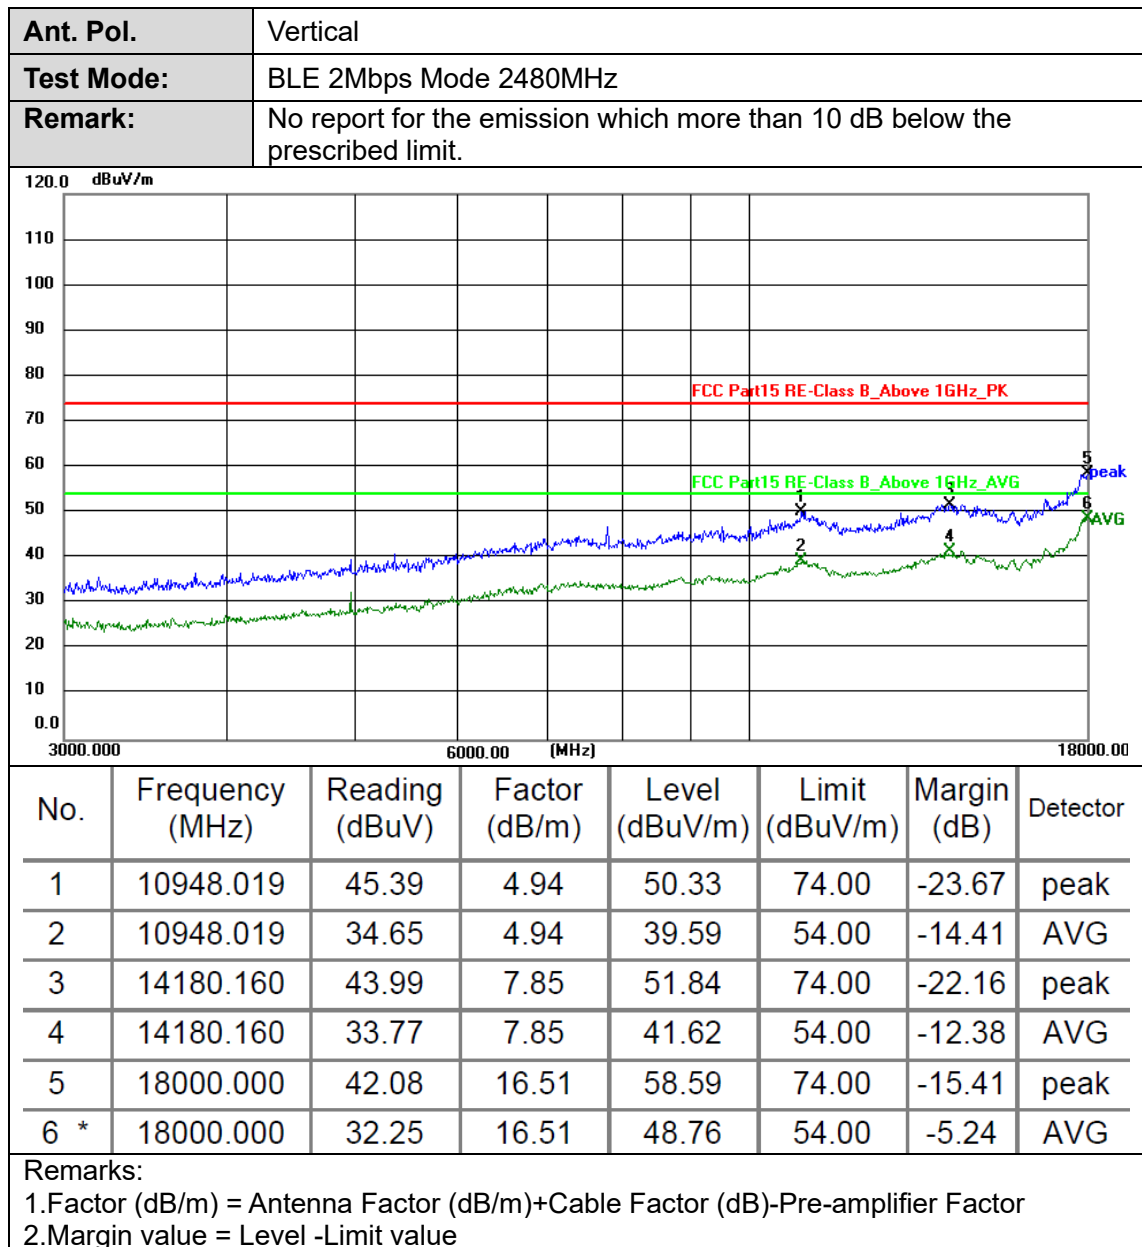






## 18GHz-25GHz

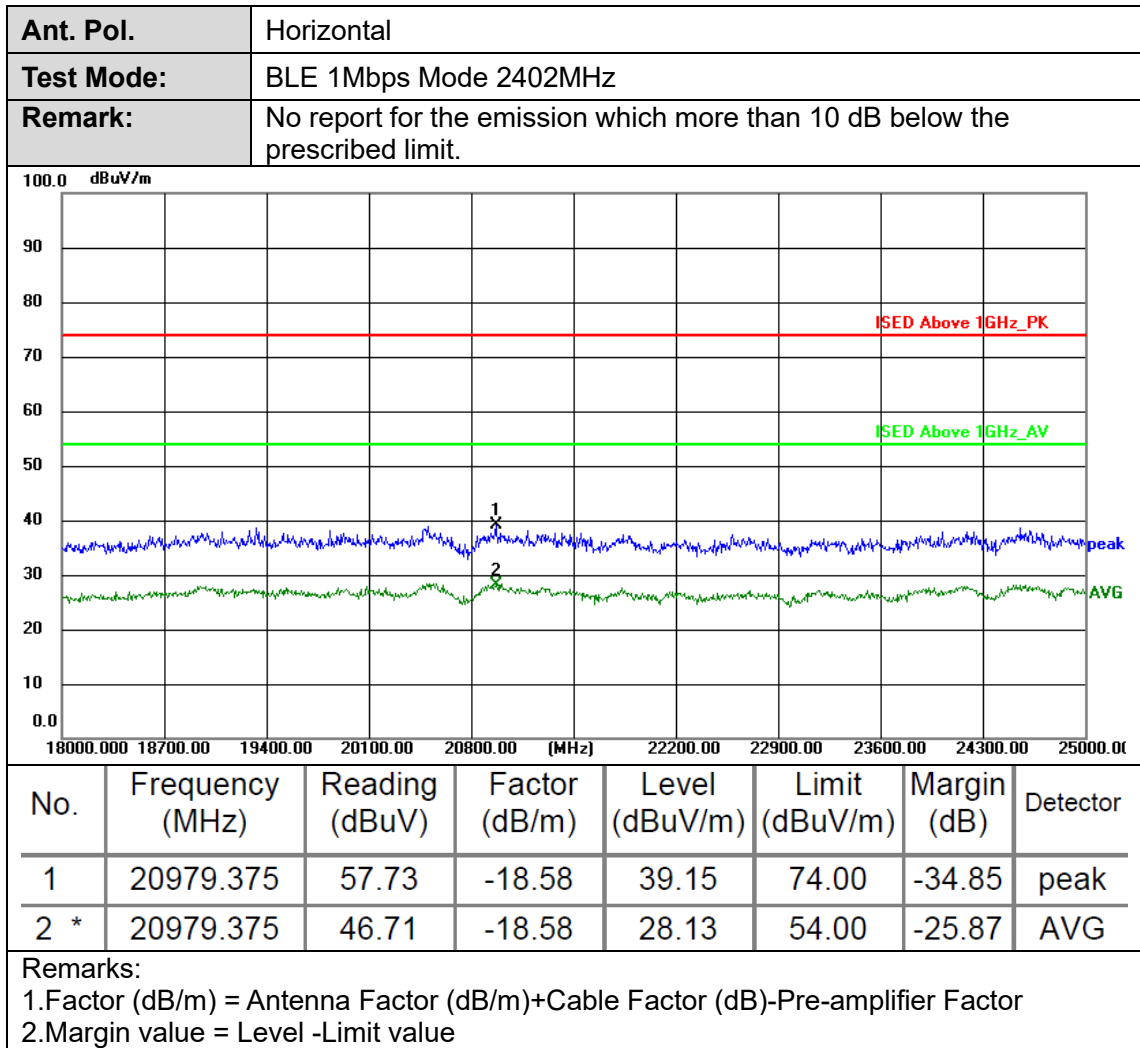


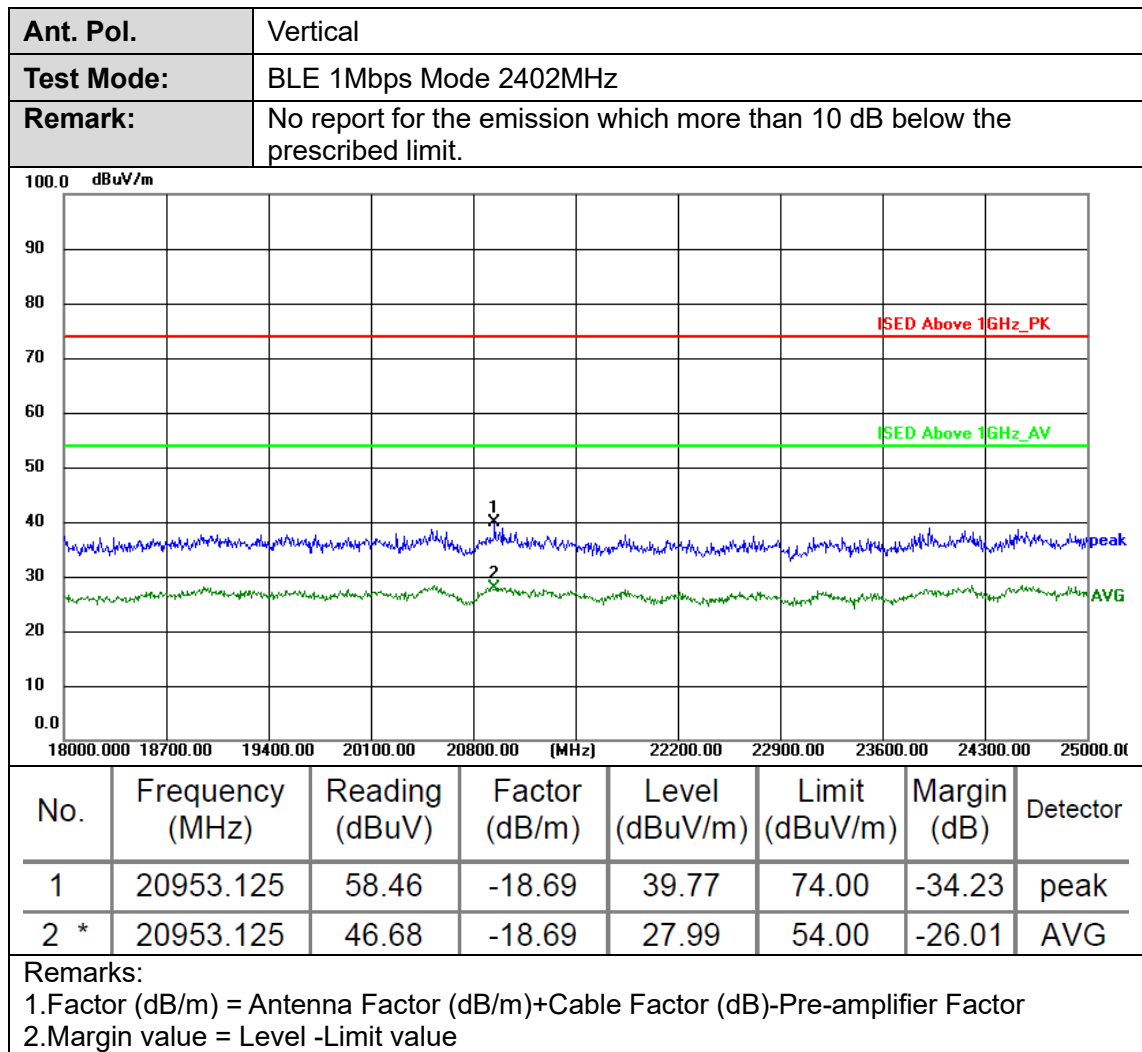


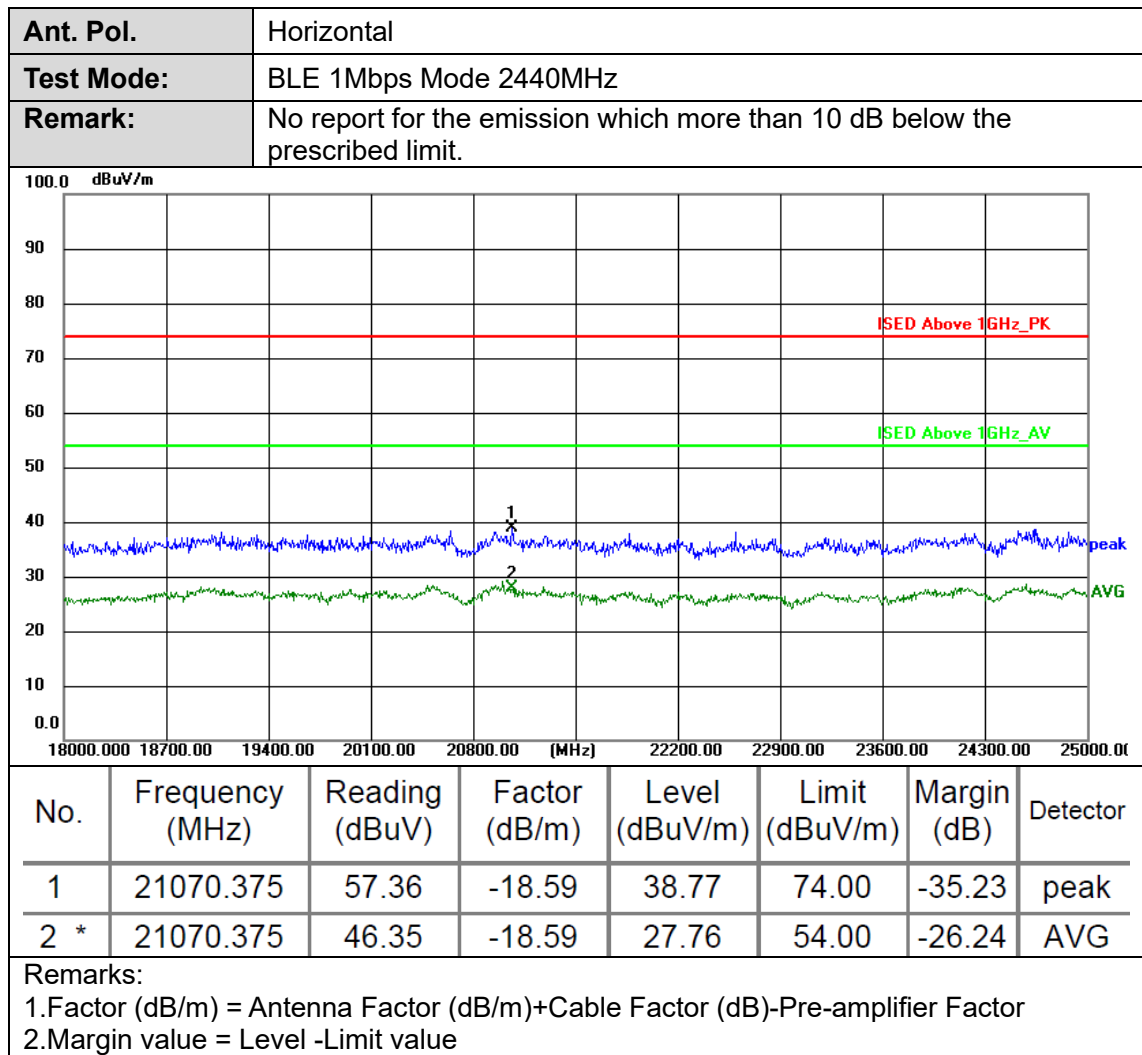


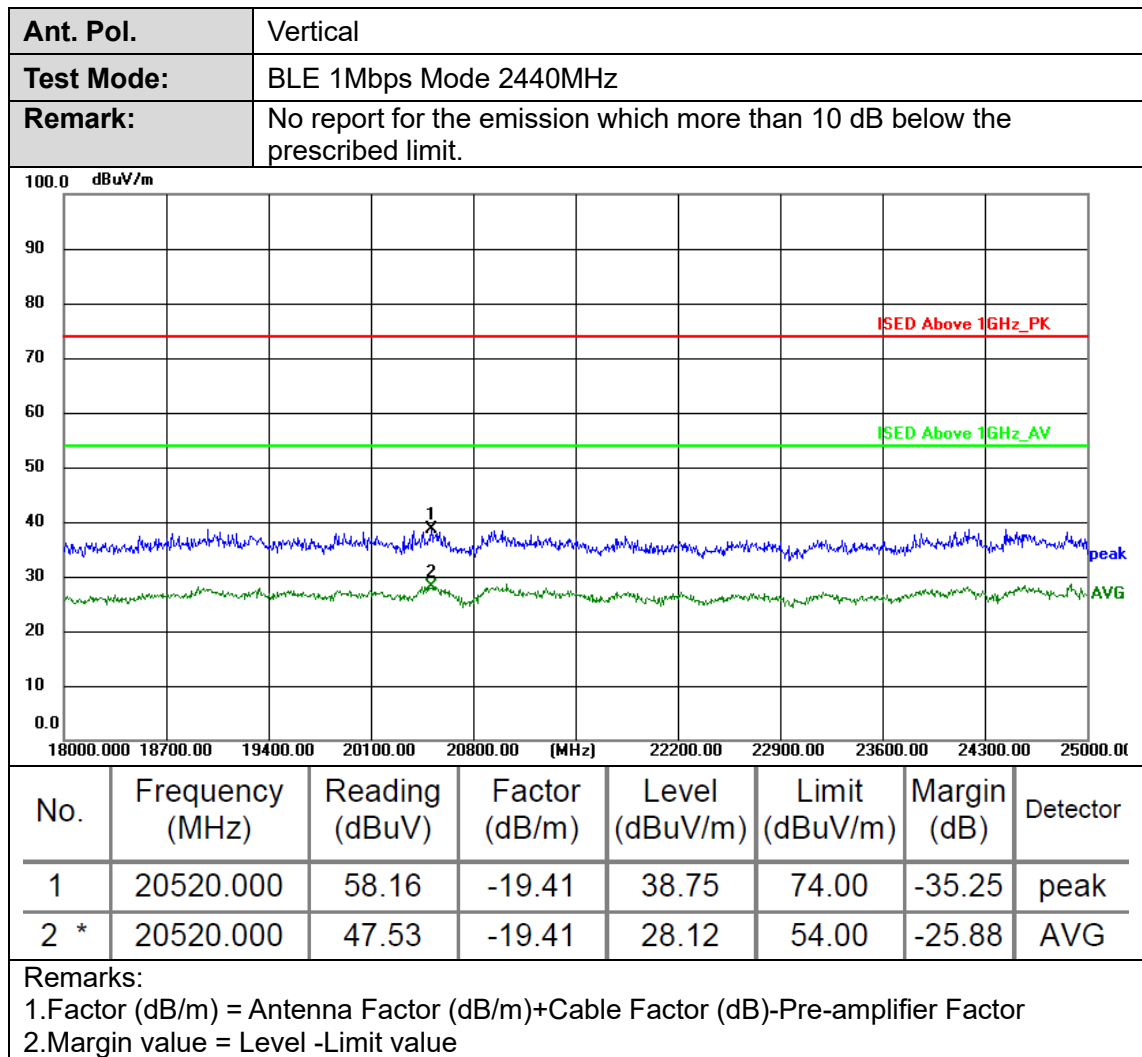


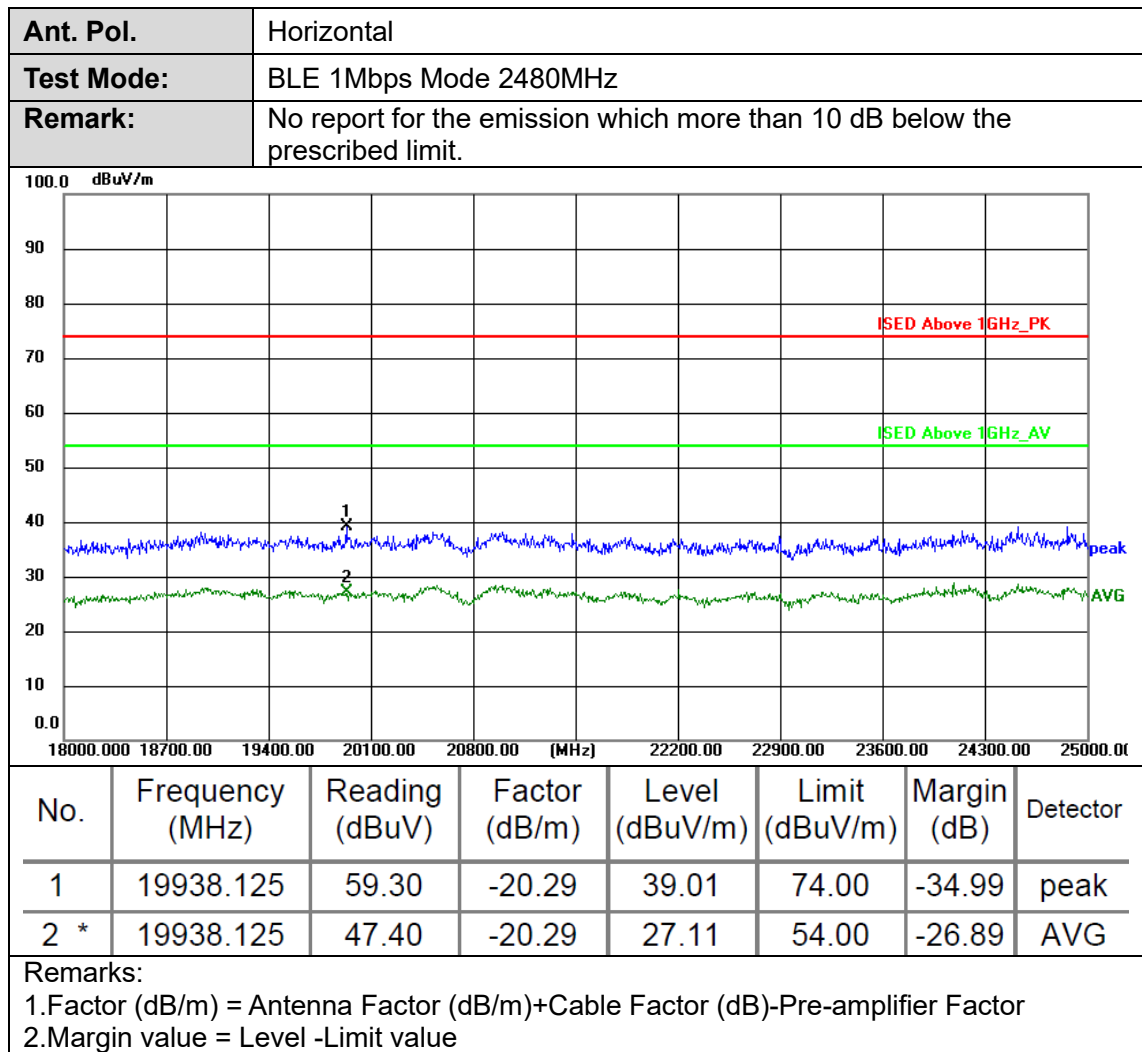


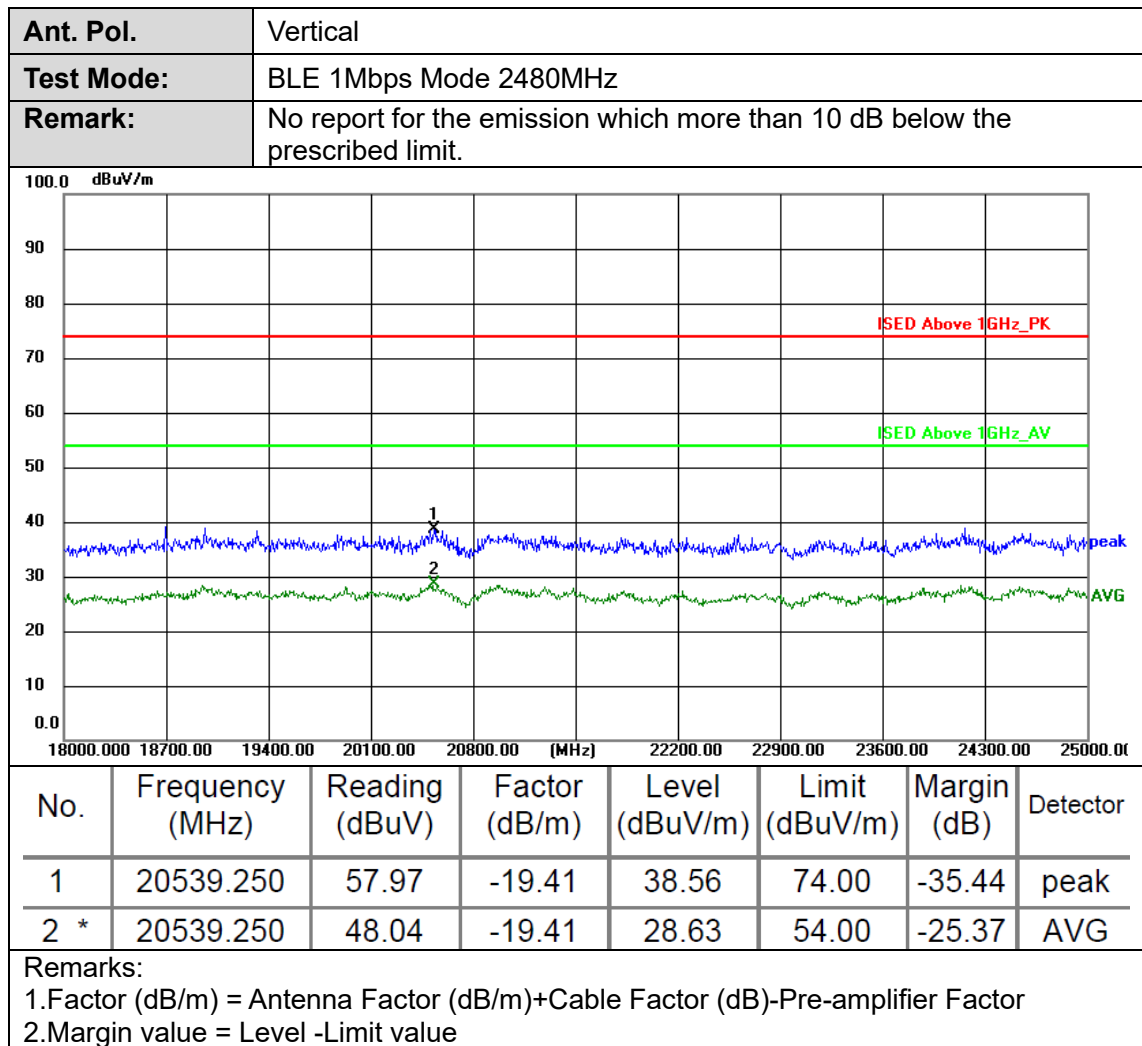


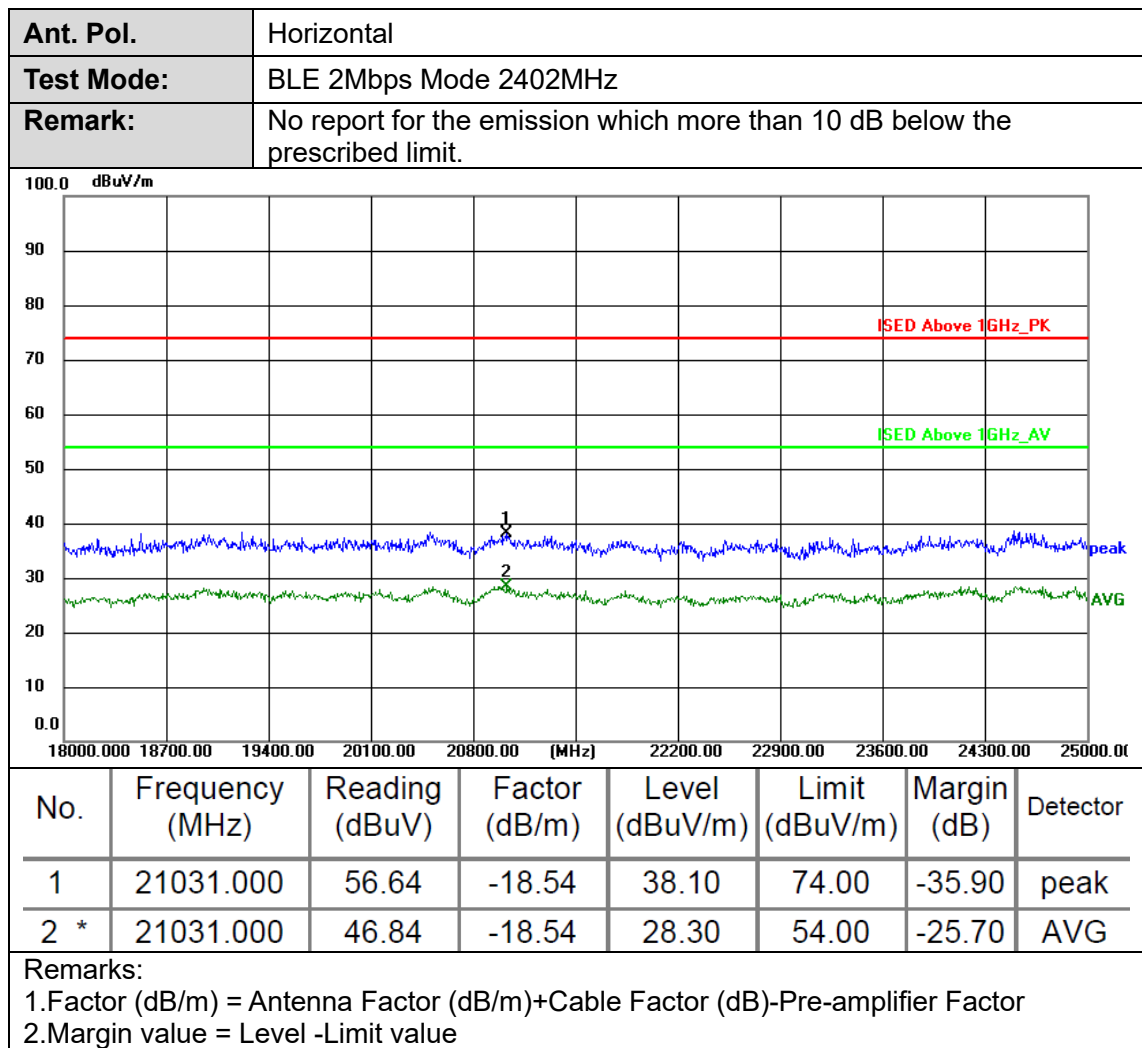


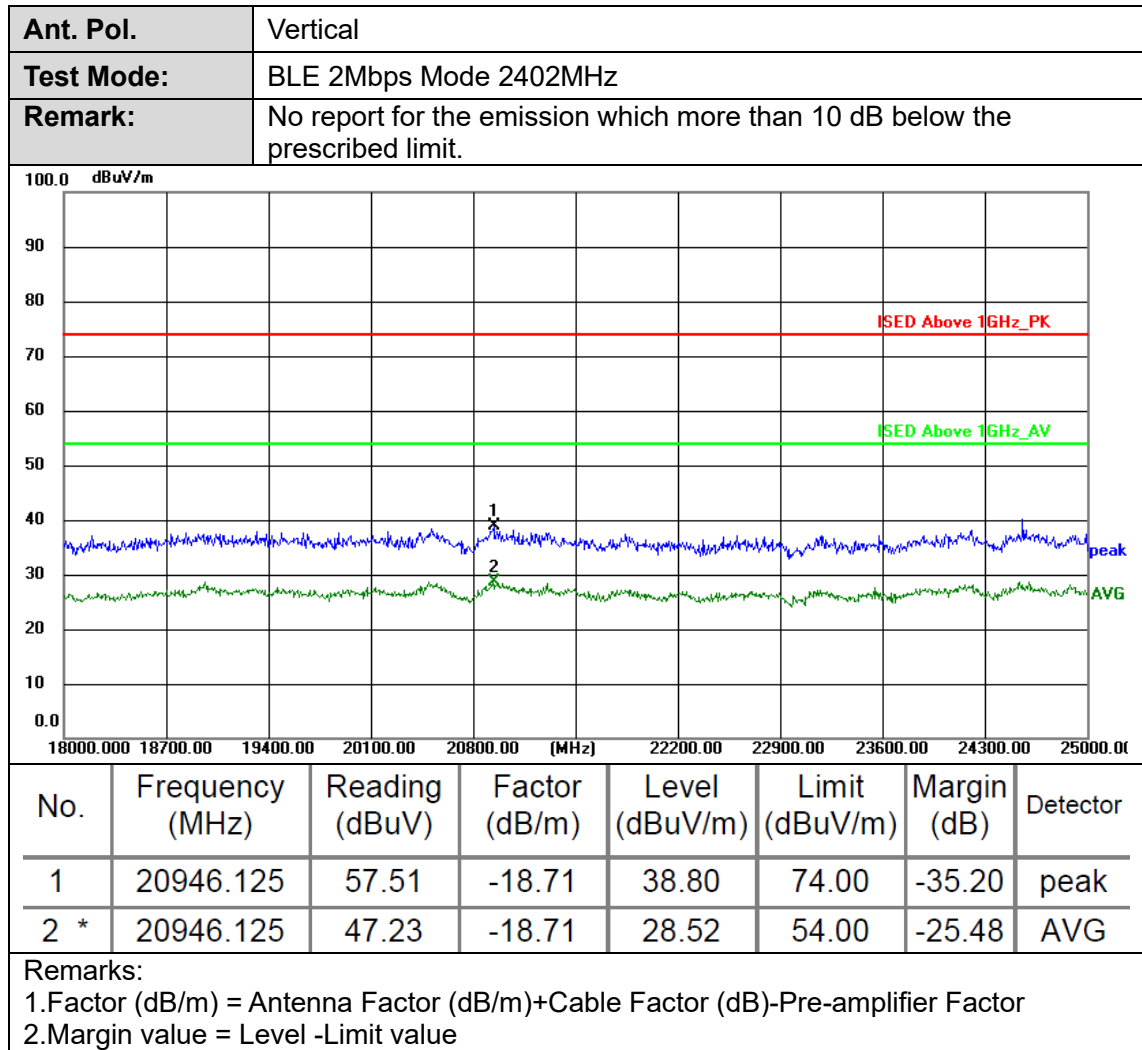

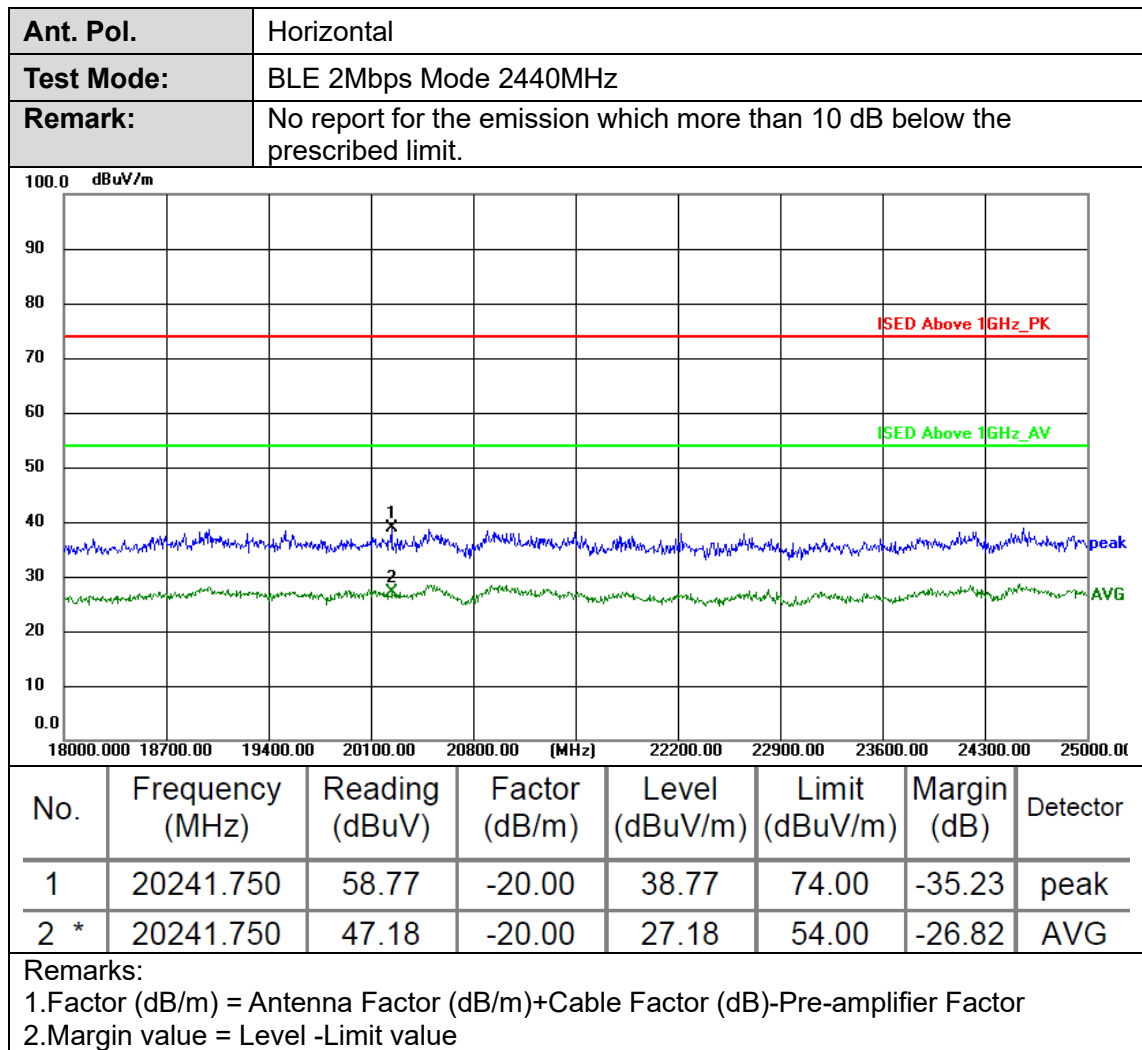

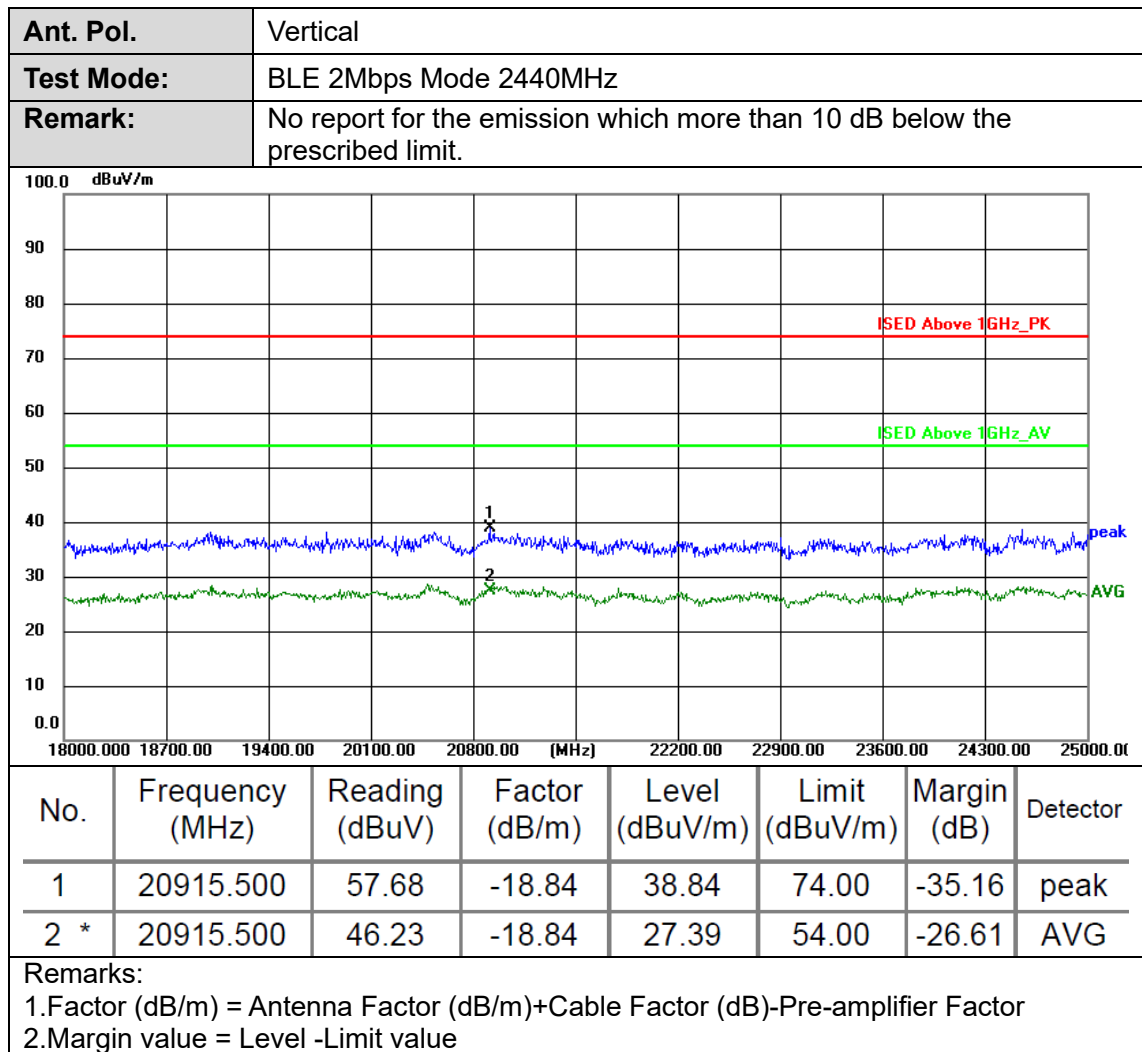

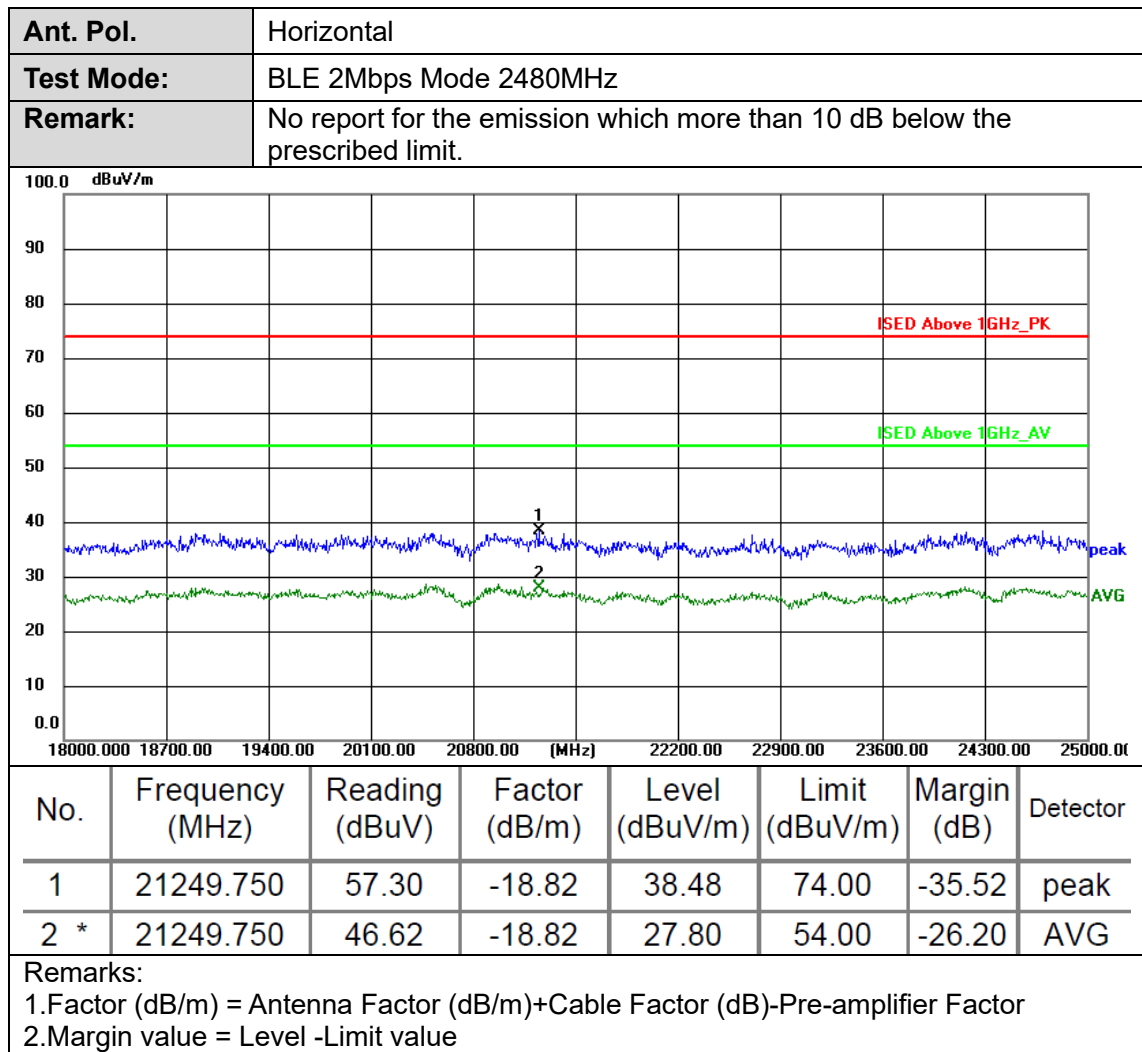

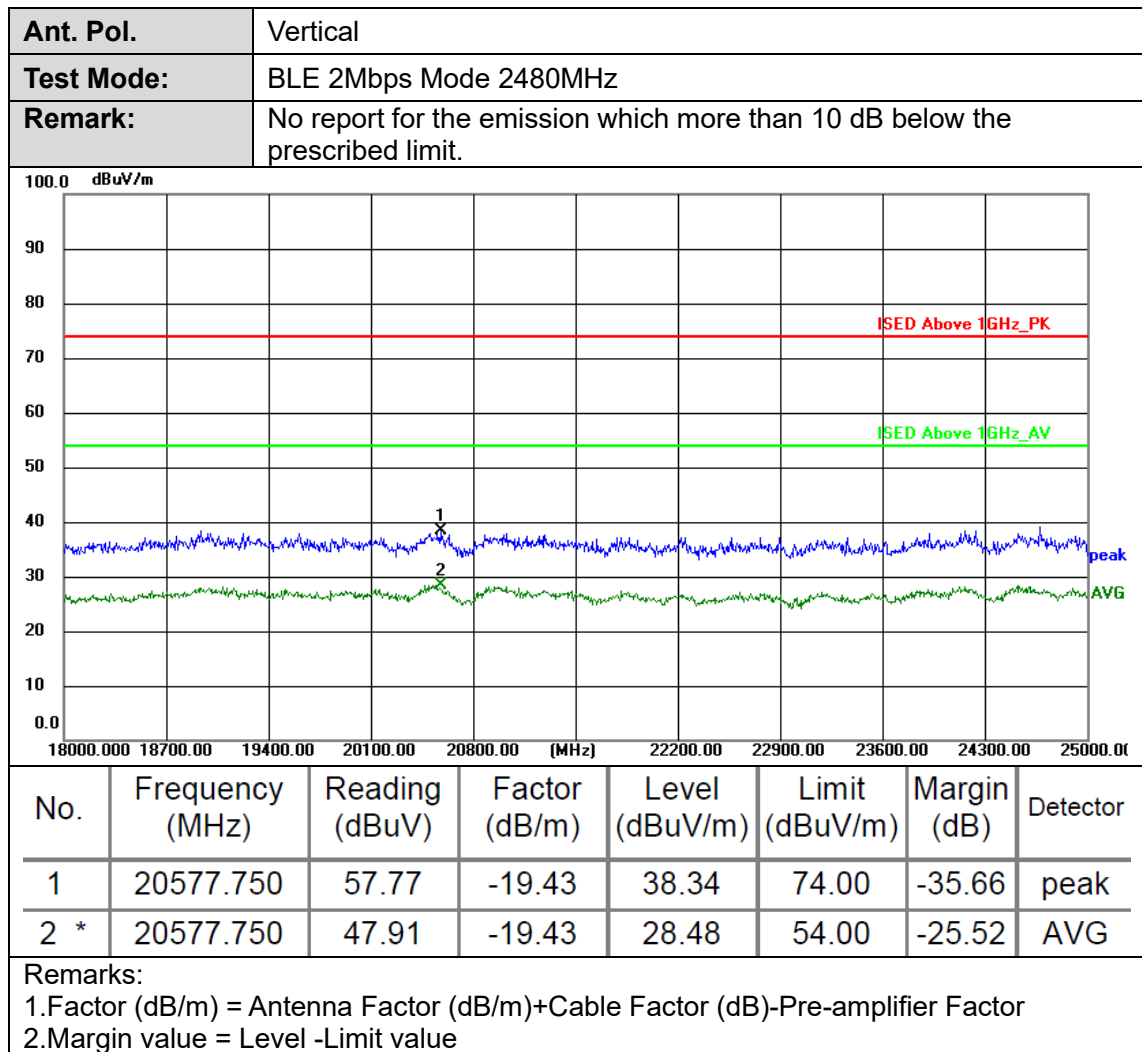


### 3.3. Radiated Emissions Restricted Band

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)/ RSS-Gen 8.10

| Restricted Frequency Band (MHz) | (dBuV/m)(at 3m) |         |
|---------------------------------|-----------------|---------|
|                                 | Peak            | Average |
| 2310 ~ 2390                     | 74              | 54      |
| 2483.5 ~ 2500                   | 74              | 54      |

#### Test Configuration

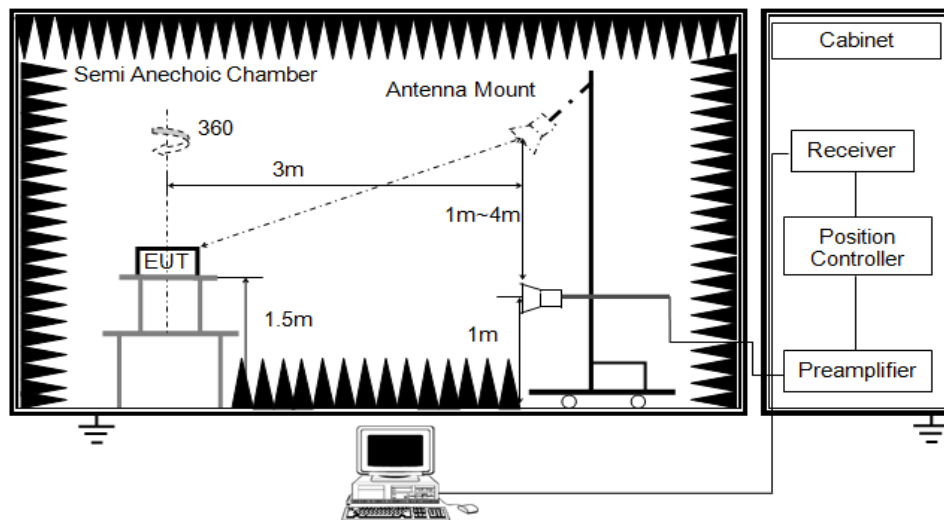


#### Test Procedure


1. The EUT was setup and tested according to ANSI C63.10-2020+COR. 1-2023+C63.10A-2024+ERRATA TO C63.10A-2024 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2020+COR. 1-2023+C63.10A-2024+ERRATA TO C63.10A-2024 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


#### Test Mode


Please refer to the clause 2.4.

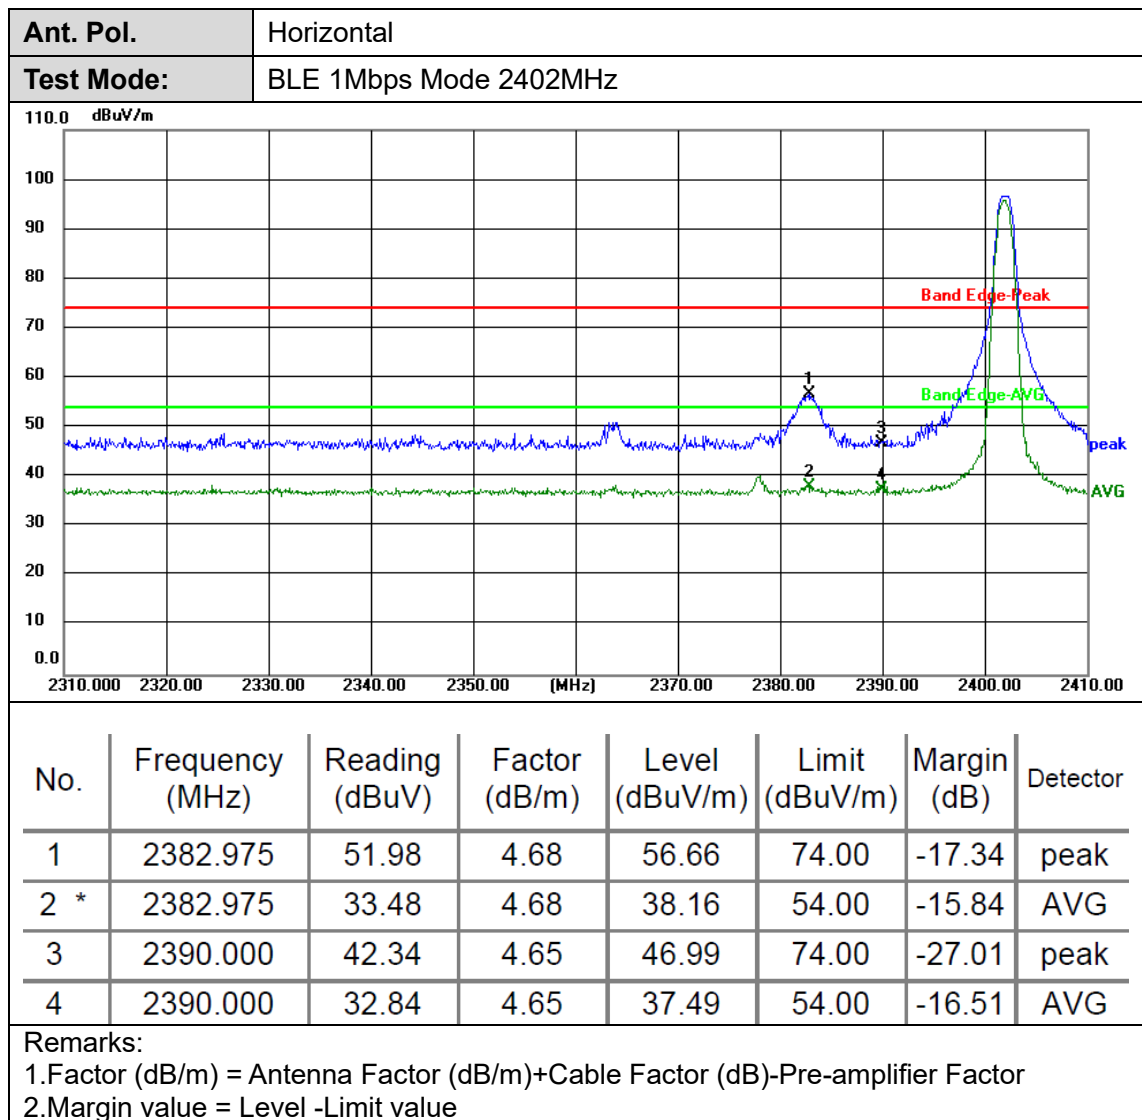
**Test Results**

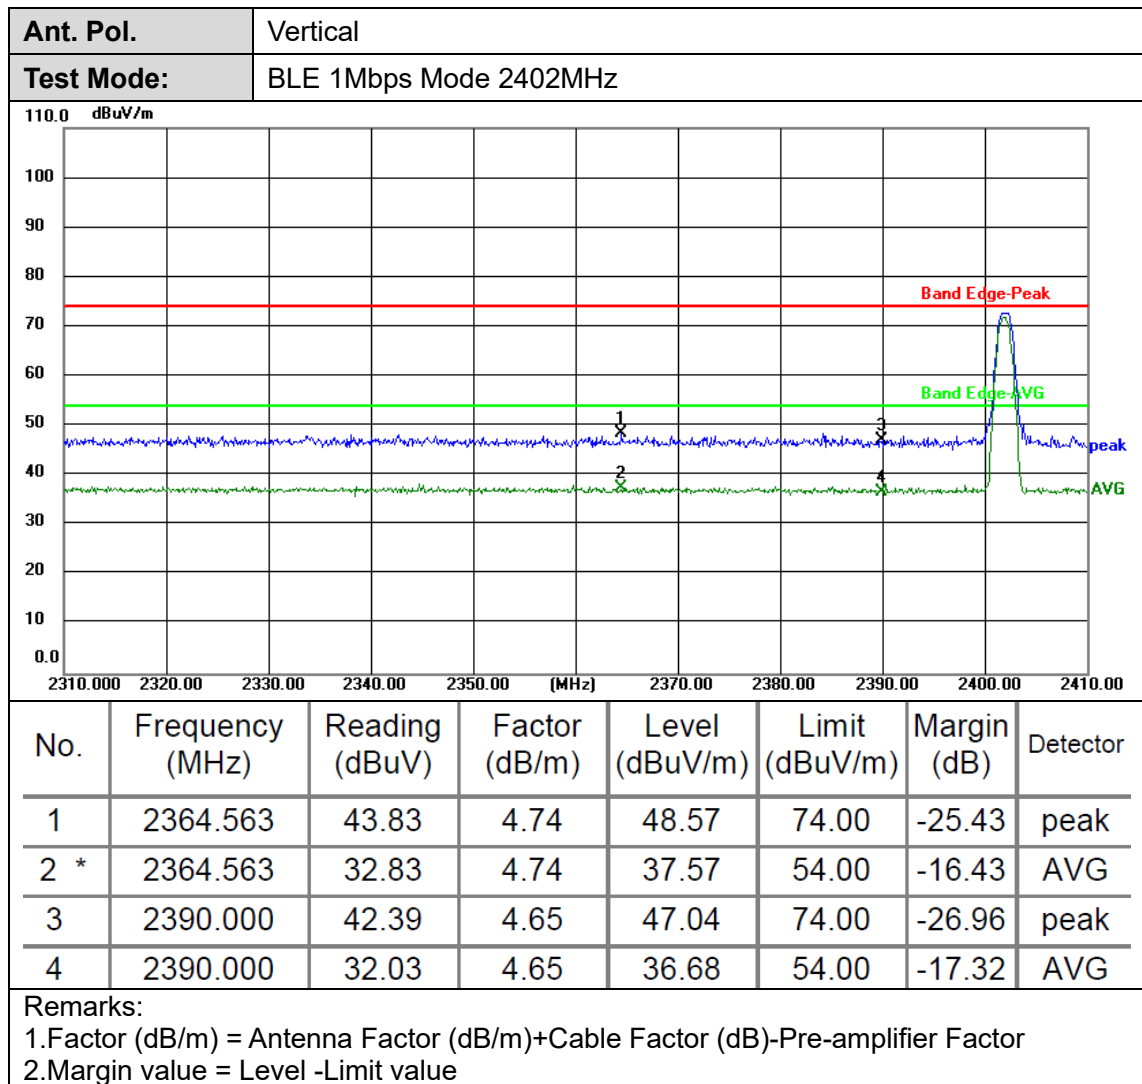


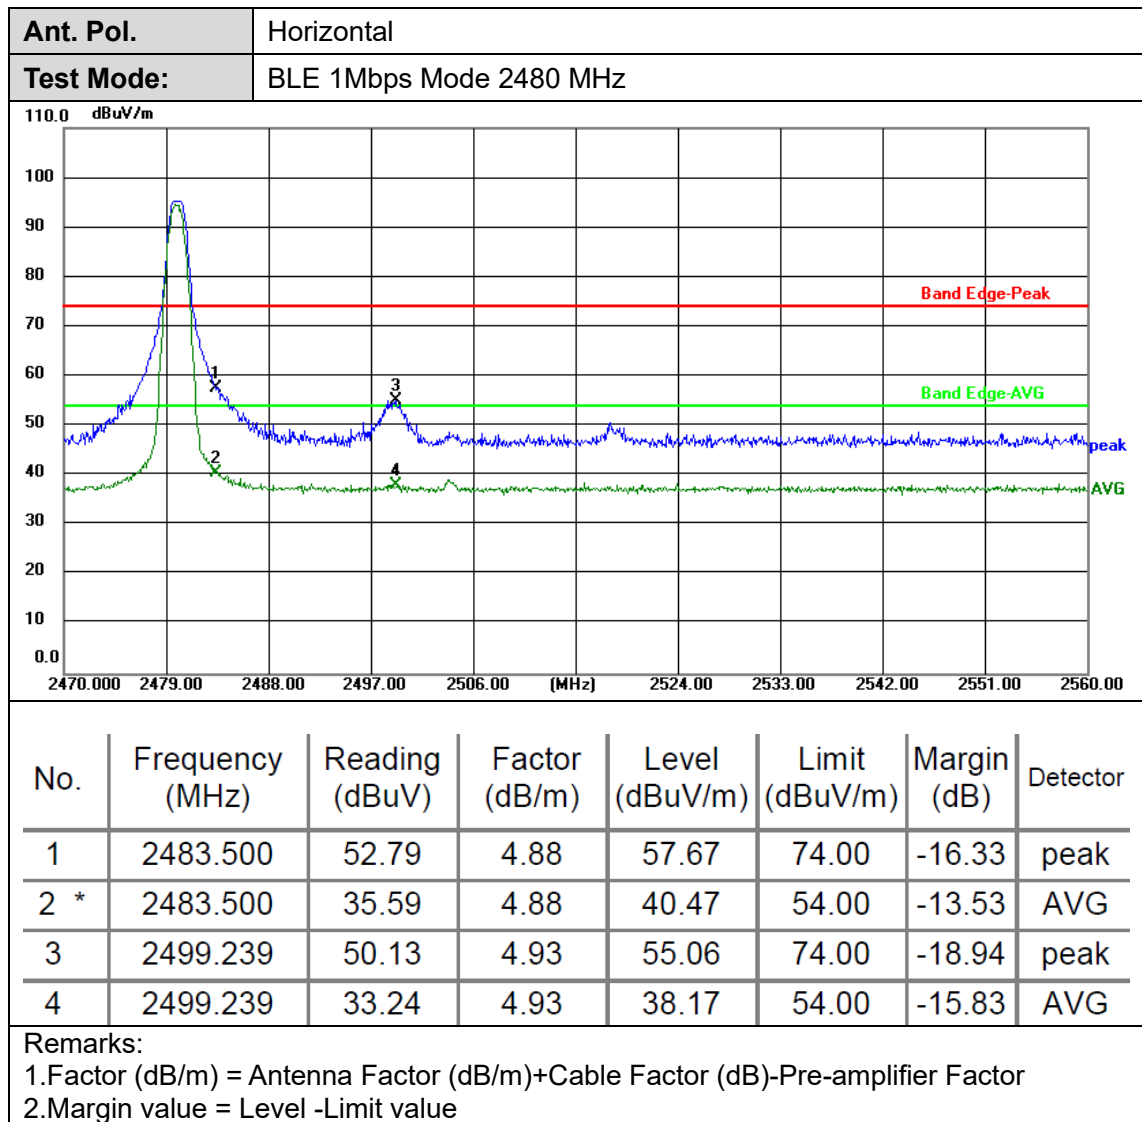


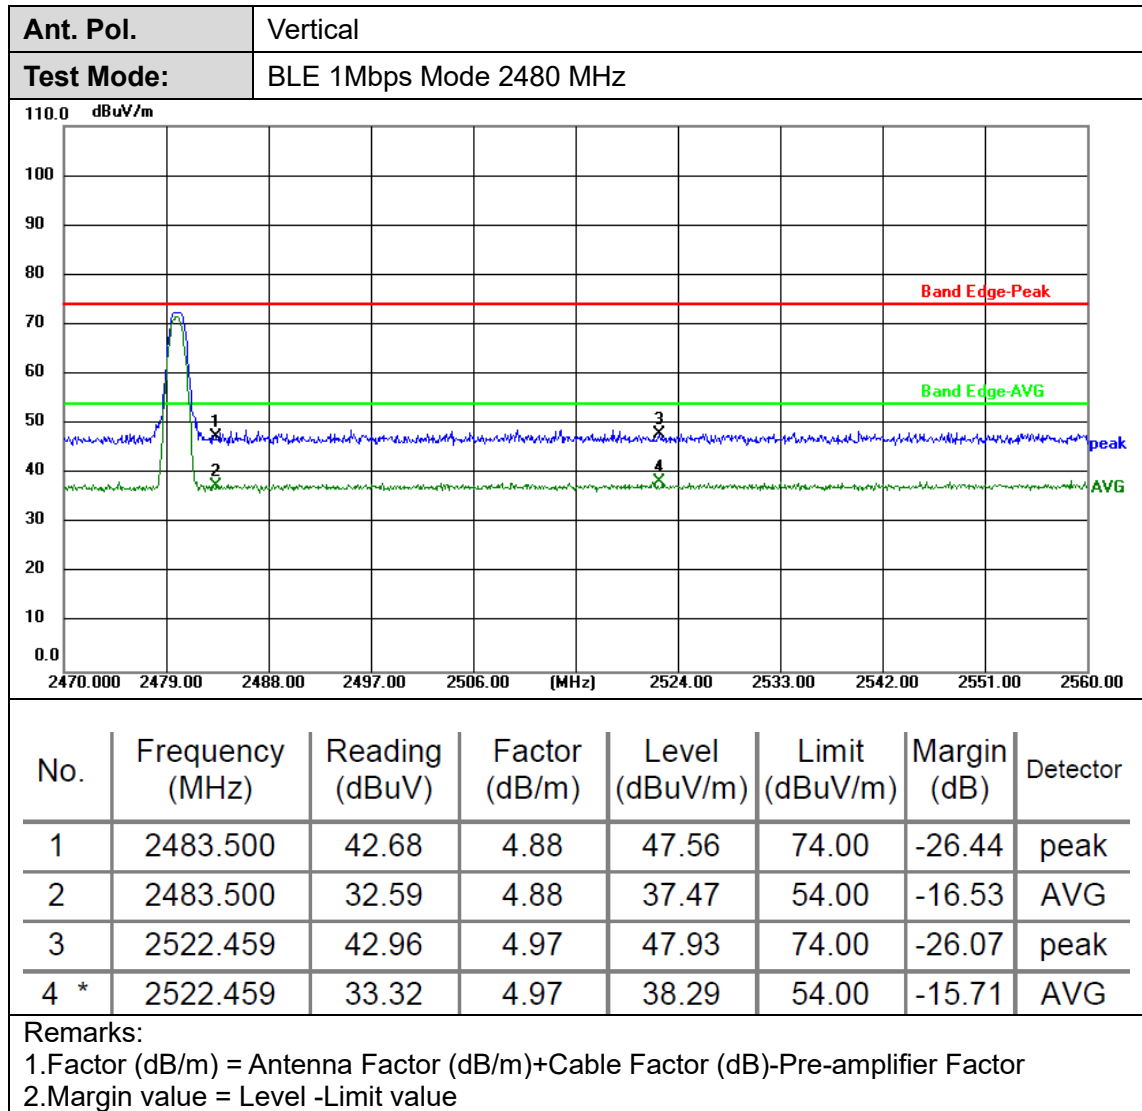

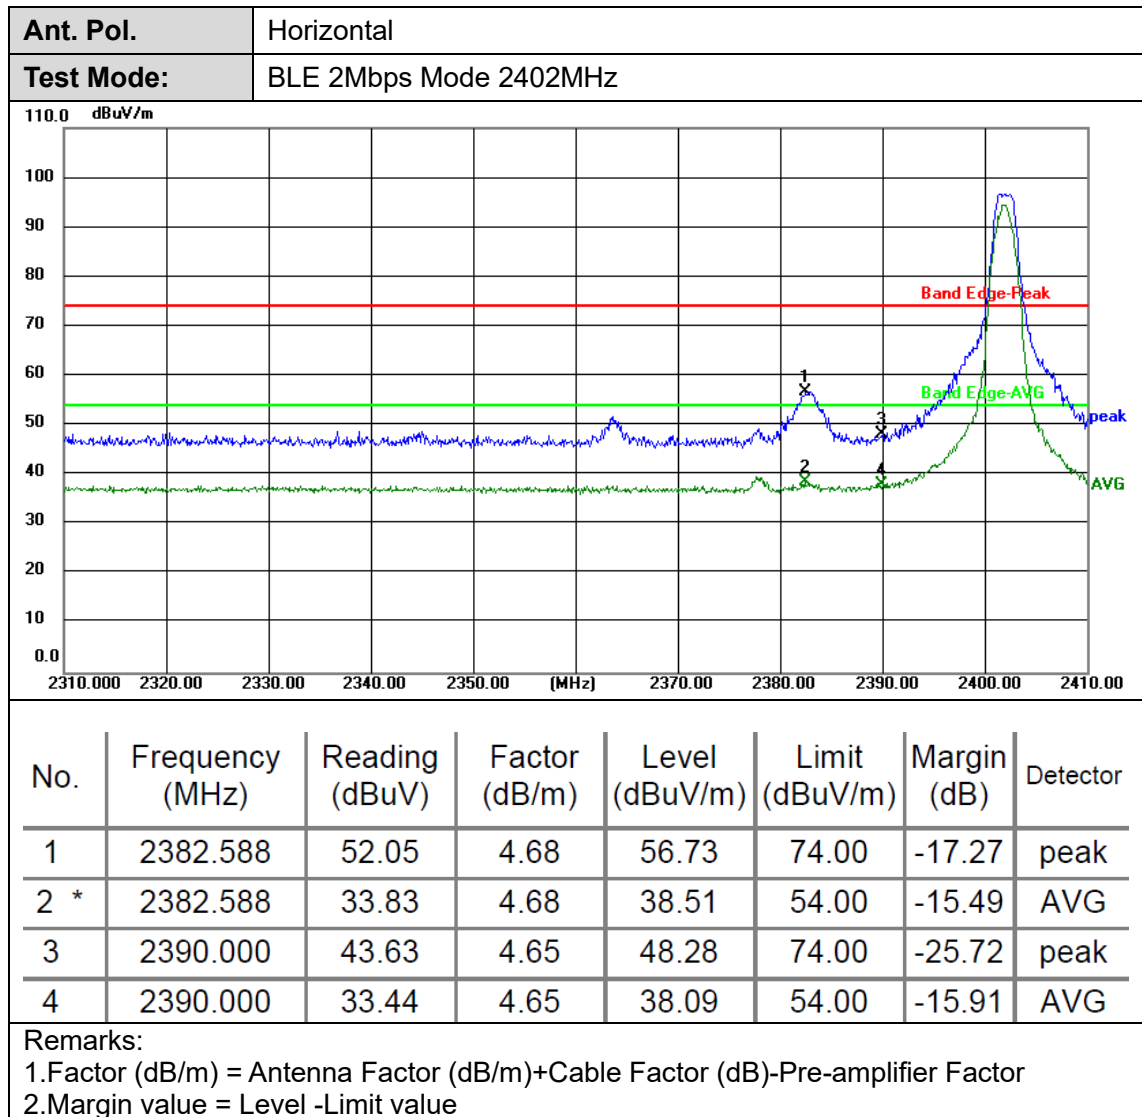

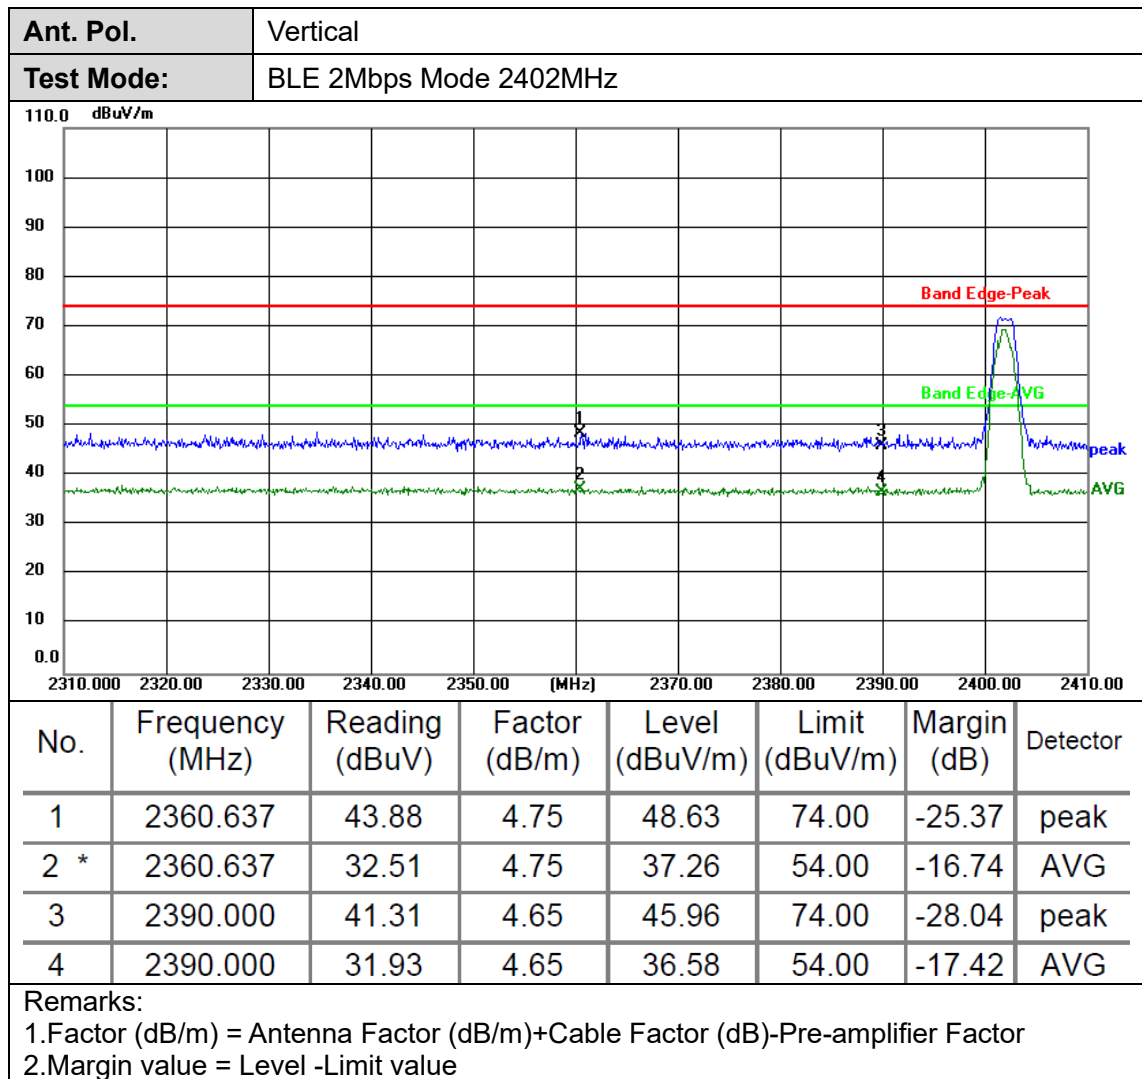

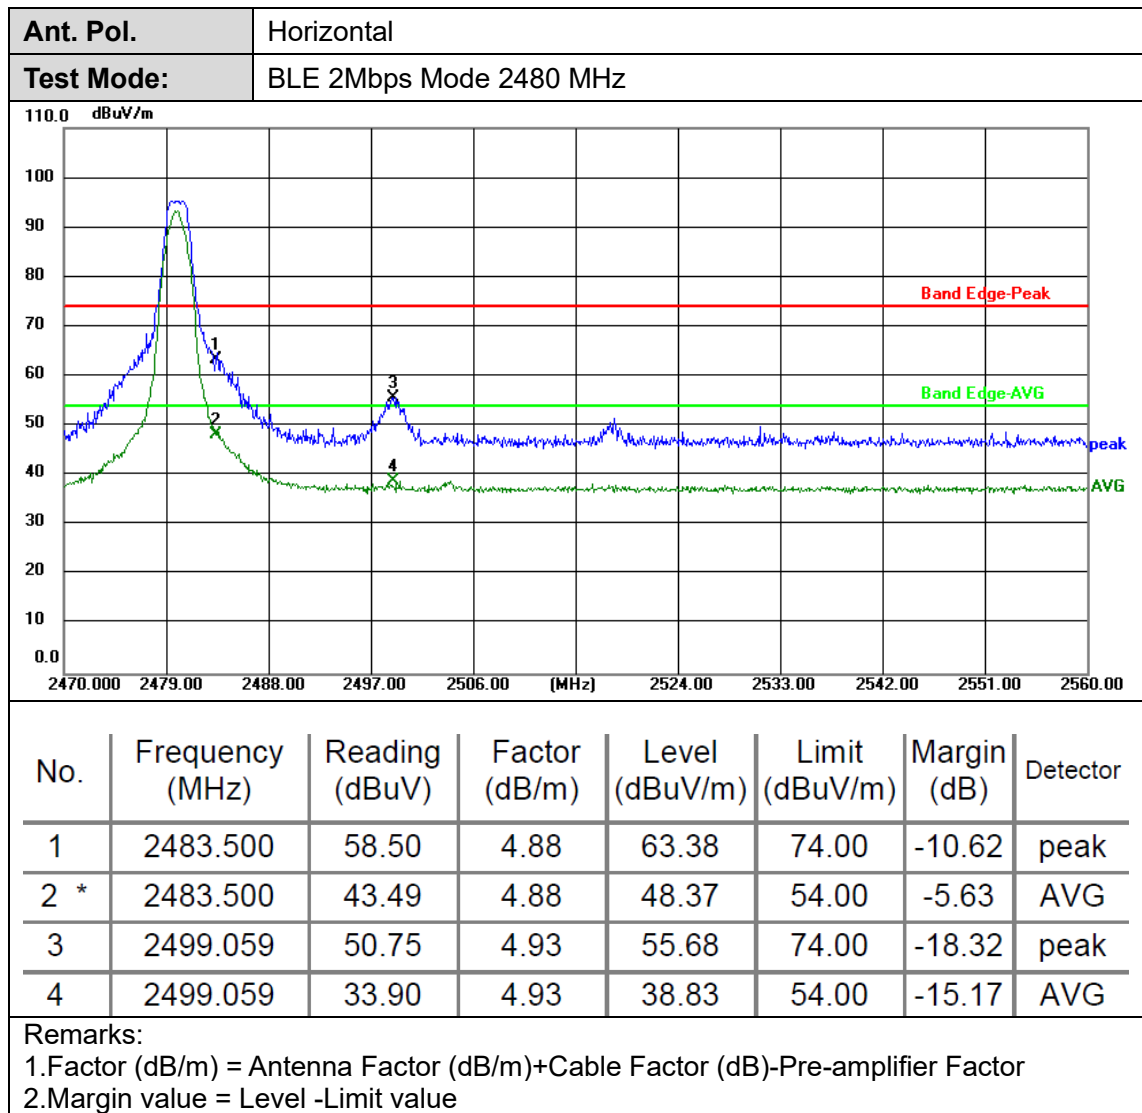

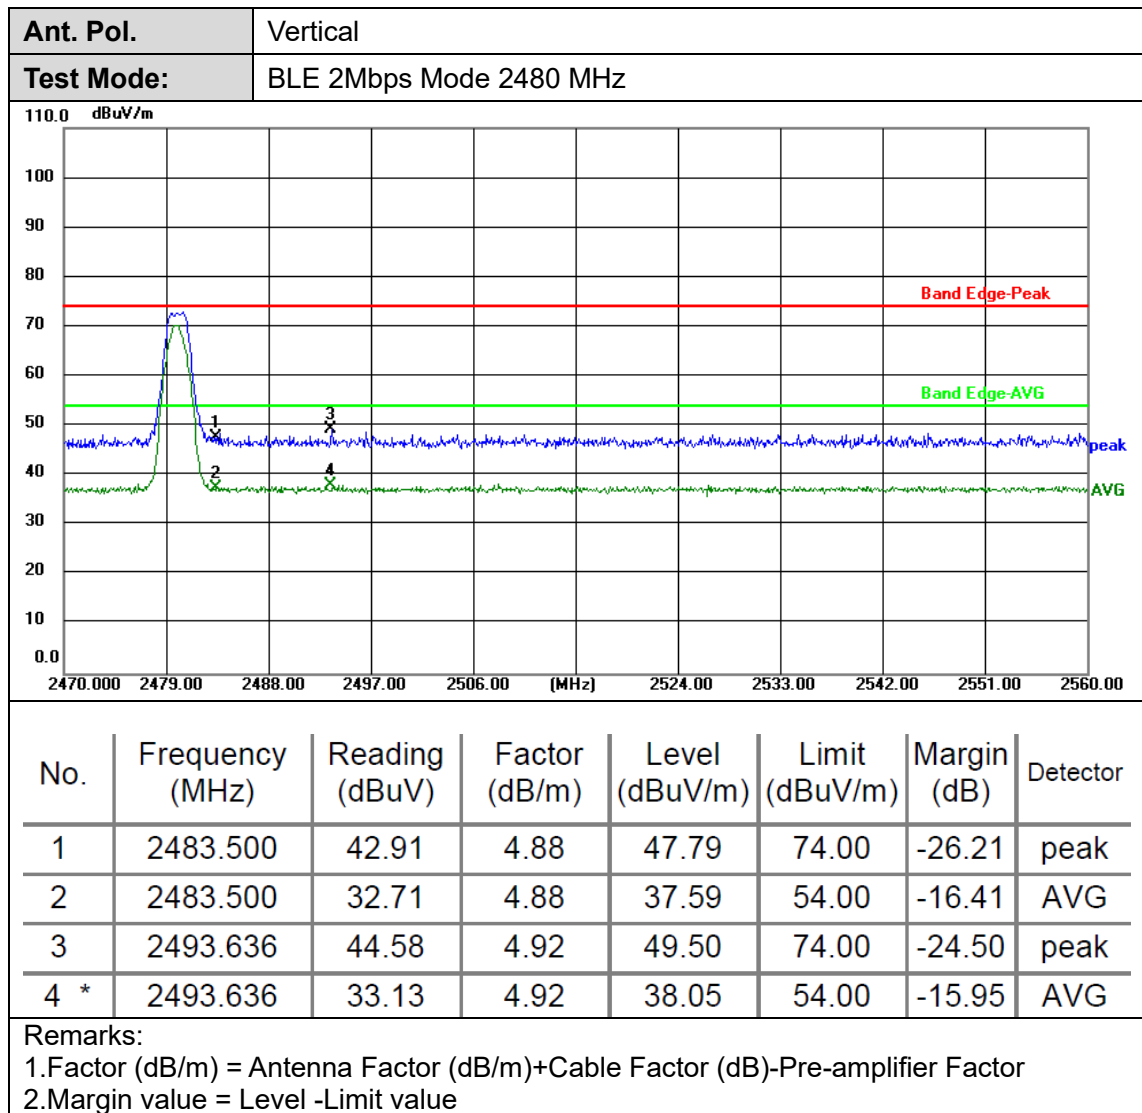




### 3.4. Band edge and Spurious Emissions (Conducted)

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)/ RSS-247 Section 6.6: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### Test Configuration



#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW ≥ RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.4.

#### Test Results

##### (1) Band edge Conducted Test


| Test Mode | Frequency[MHz] | Ref Level[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|----------------|----------------|-------------|------------|---------|
| BLE 1Mbps | 2402           | 0.663          | -49.653     | -19.337    | PASS    |
|           | 2480           | 0.505          | -55.018     | -19.495    | PASS    |
| BLE 2Mbps | 2402           | 0.330          | -35.053     | -19.670    | PASS    |
|           | 2480           | 0.184          | -43.936     | -19.816    | PASS    |




## BLE\_1Mbps\_Low\_2402




## BLE\_1Mbps\_High\_2480

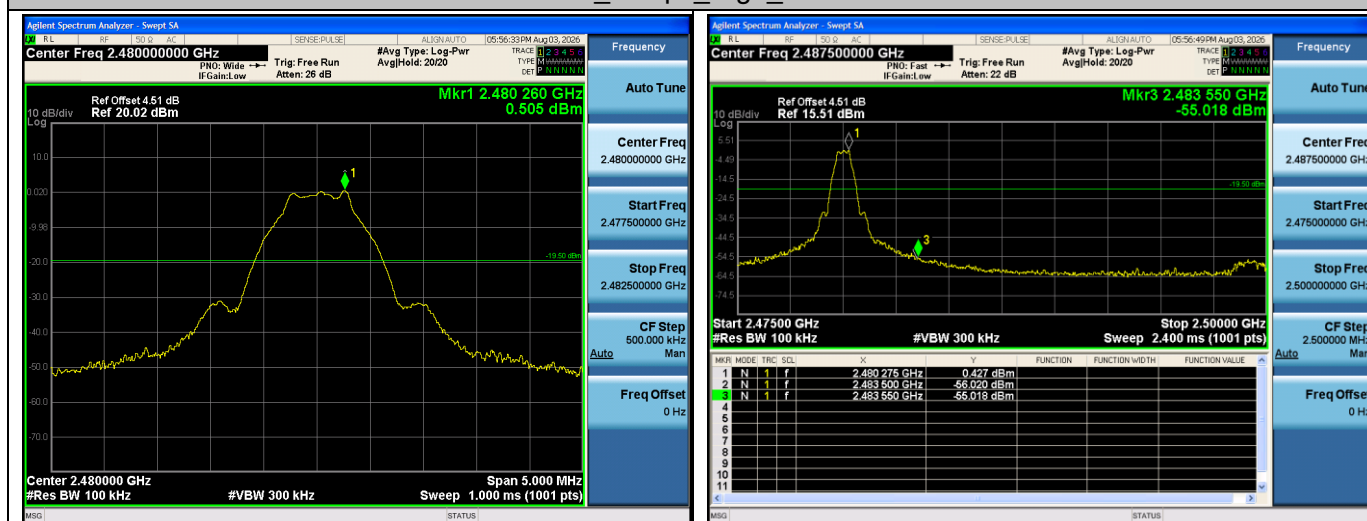

## BLE\_2Mbps\_Low\_2402

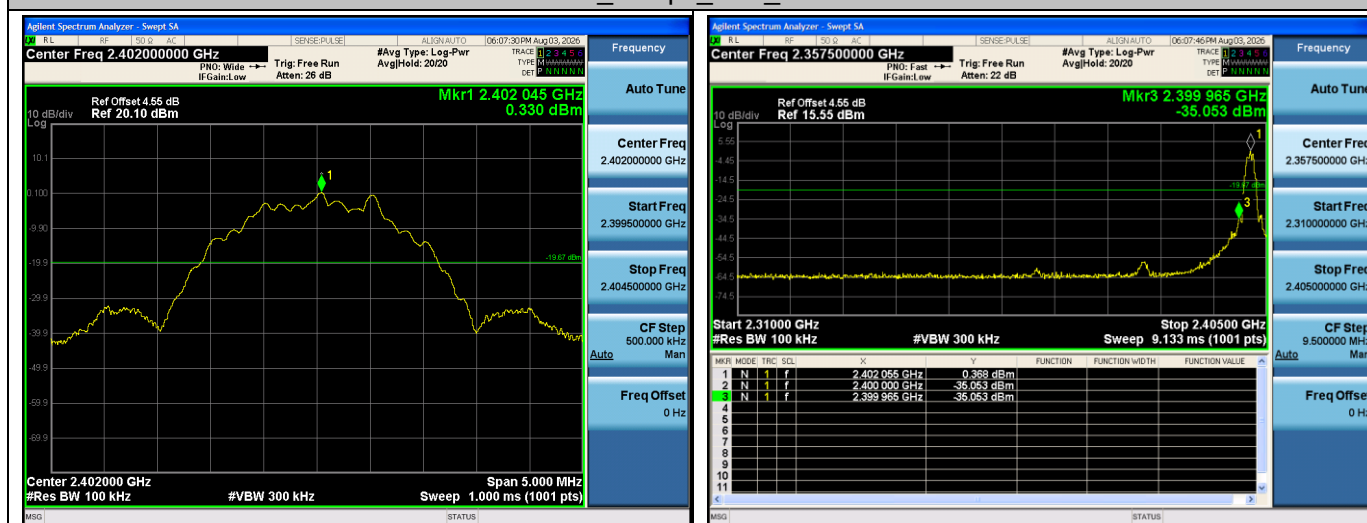

## BLE\_2Mbps\_High\_2480

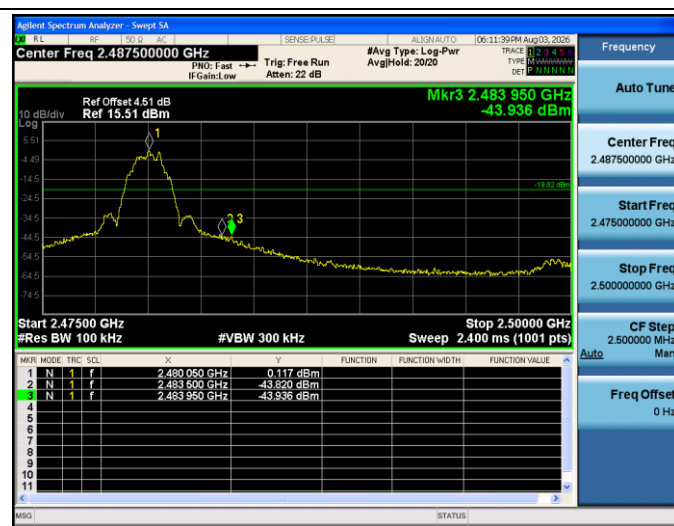


**(2) Conducted Spurious Emissions Test**


| Test Mode | Frequency [MHz] | Ref Level [dBm] | Spurious level[dBm] | Limit[dBm] | Verdict |
|-----------|-----------------|-----------------|---------------------|------------|---------|
| BLE 1Mbps | 2402            | 0.663           | -50.264             | -19.337    | PASS    |
|           | 2440            | 0.302           | -50.918             | -19.698    | PASS    |
|           | 2480            | 0.505           | -50.731             | -19.495    | PASS    |
| BLE 2Mbps | 2402            | 0.330           | -49.596             | -19.670    | PASS    |
|           | 2440            | 0.212           | -50.531             | -19.788    | PASS    |
|           | 2480            | 0.184           | -50.789             | -19.816    | PASS    |




## BLE\_1Mbps\_2402\_Reference

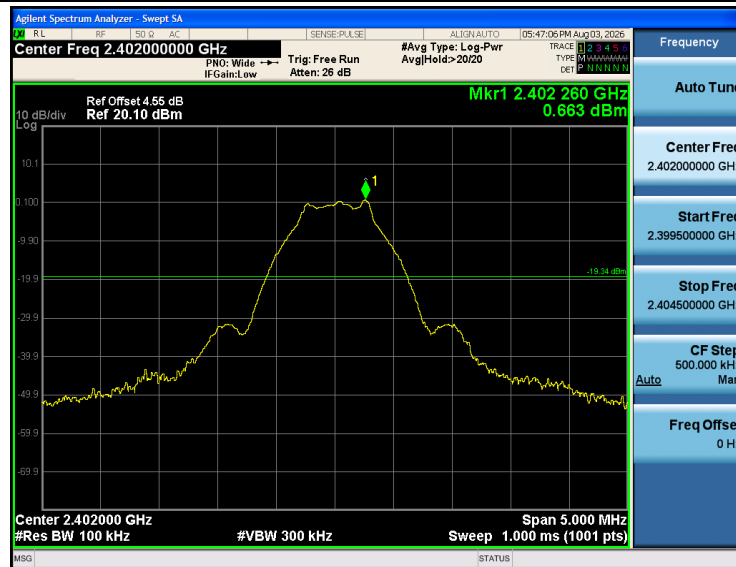


## BLE\_1Mbps\_2402\_30~25000

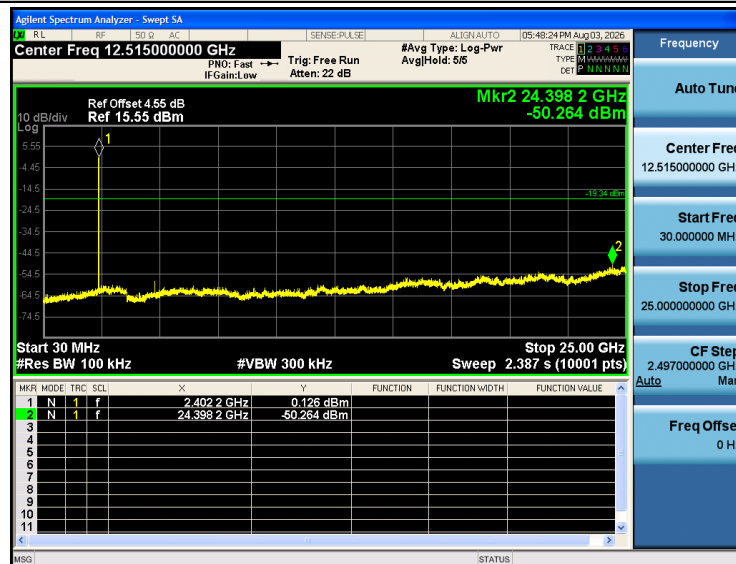


## BLE\_1Mbps\_2440\_Reference

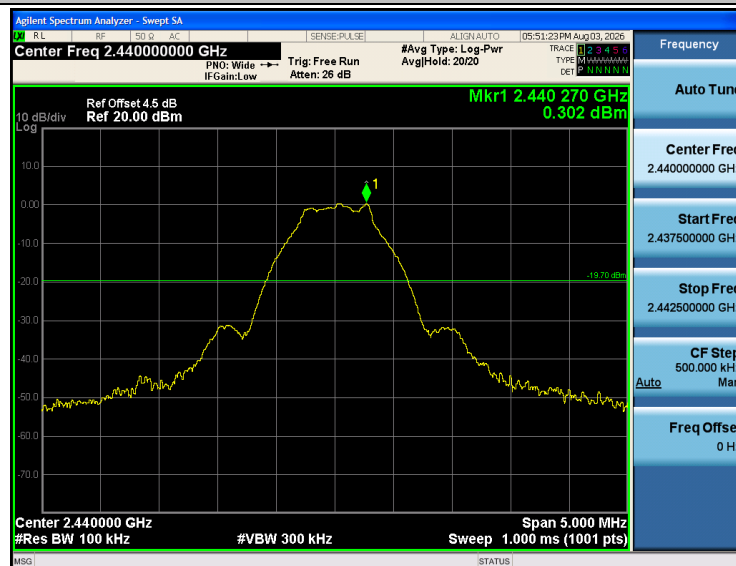


## BLE\_1Mbps\_2440\_30~25000

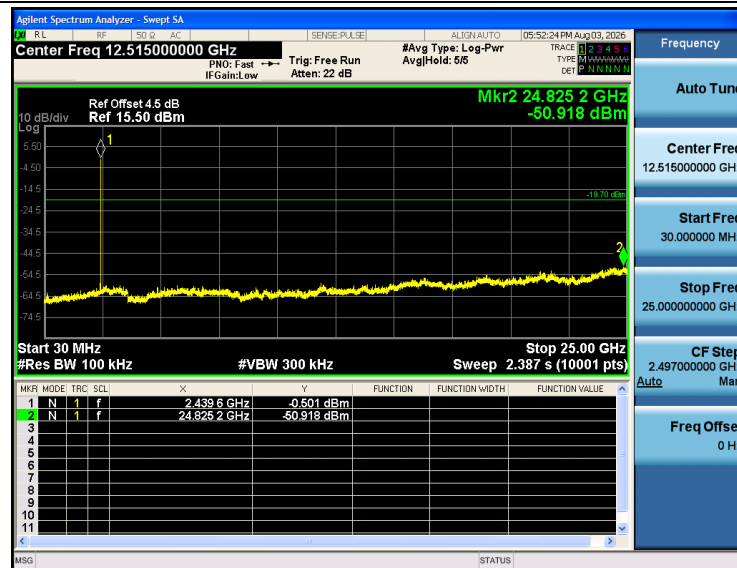


## BLE\_1Mbps\_2480\_0~Reference

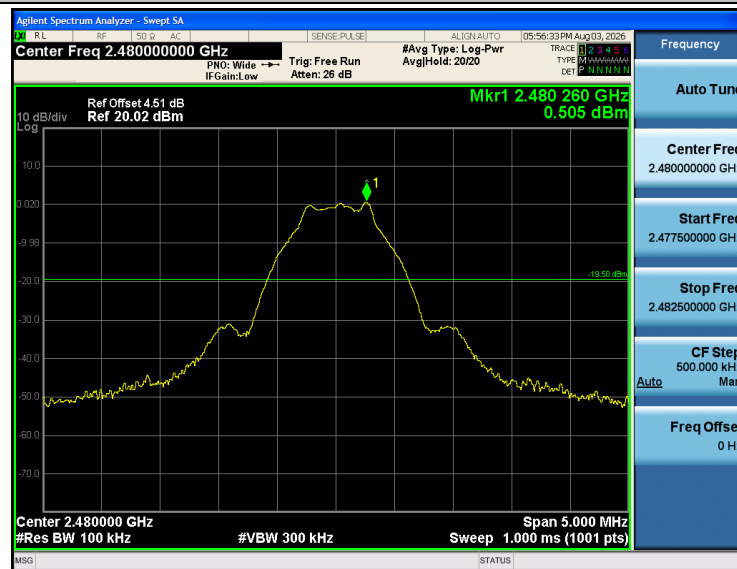


## BLE\_1Mbps\_2480\_30~25000

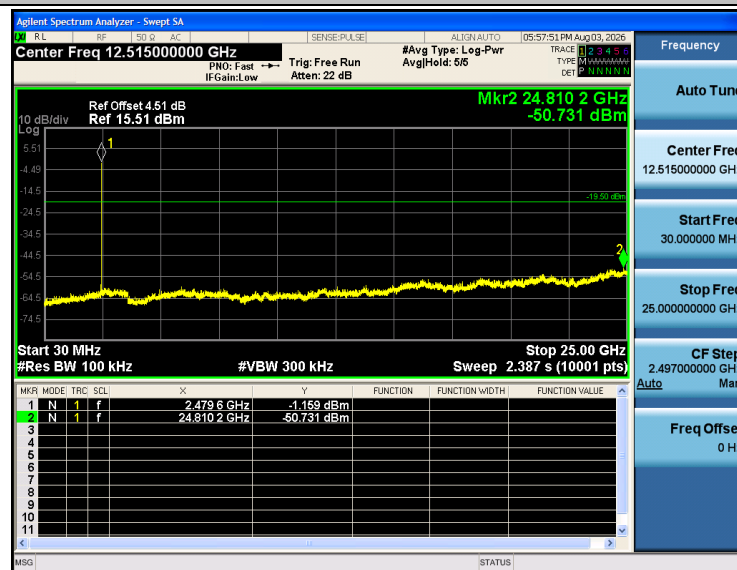


## BLE\_2Mbps\_2402\_0~Reference

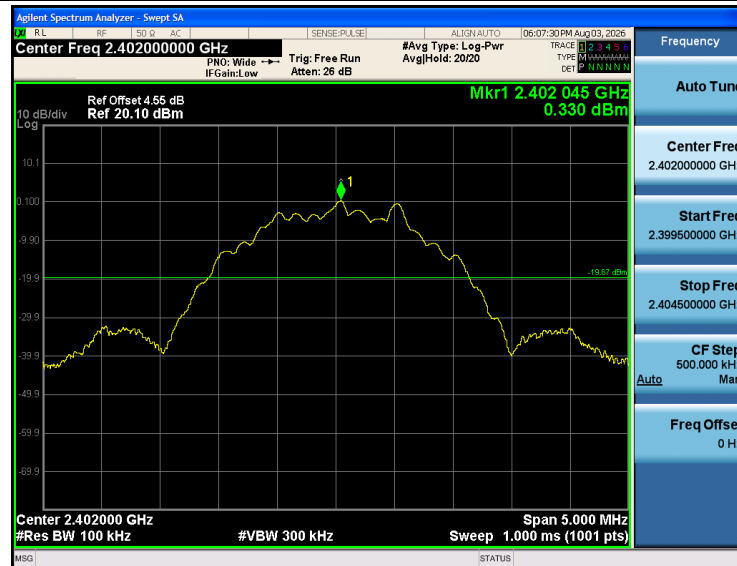


BLE\_2Mbps\_2402\_30~25000

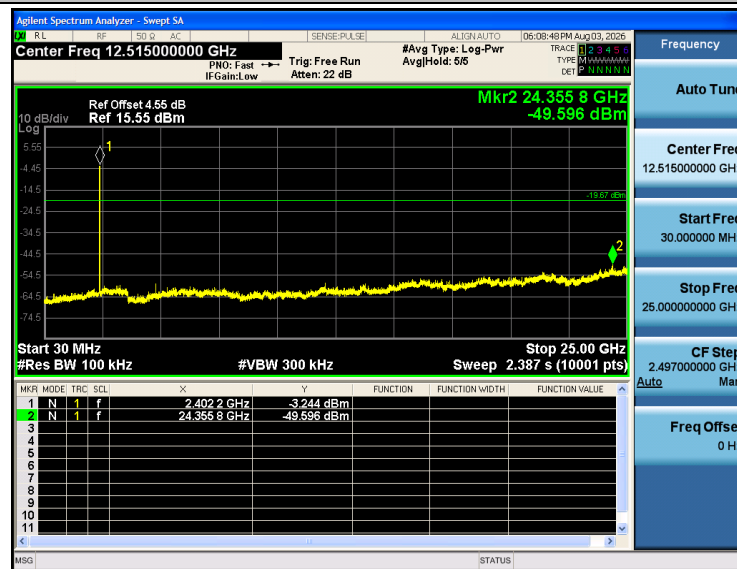

BLE\_2Mbps\_2440\_0~Reference

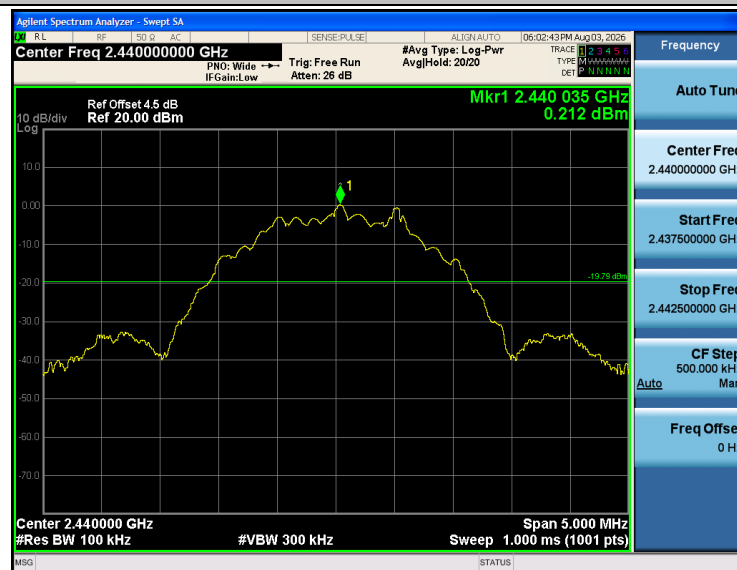


BLE\_2Mbps\_2440\_30~25000

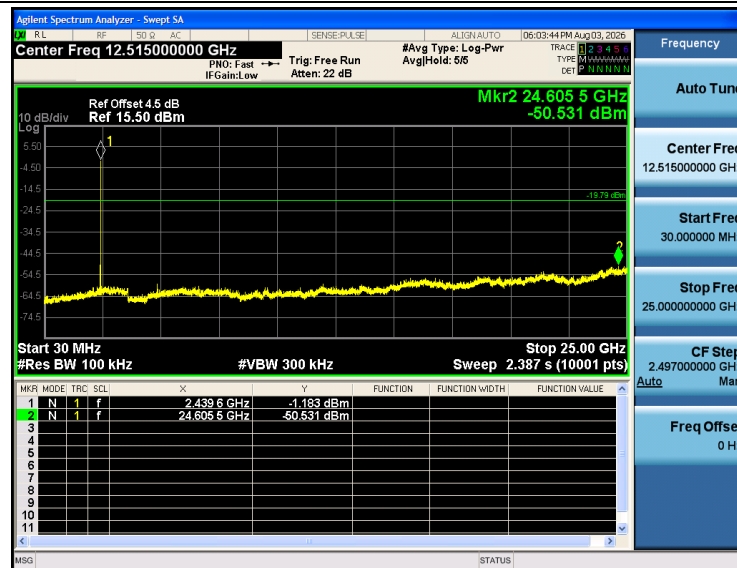

## BLE\_2Mbps\_2480\_0~Reference



## BLE\_2Mbps\_2480\_30~25000

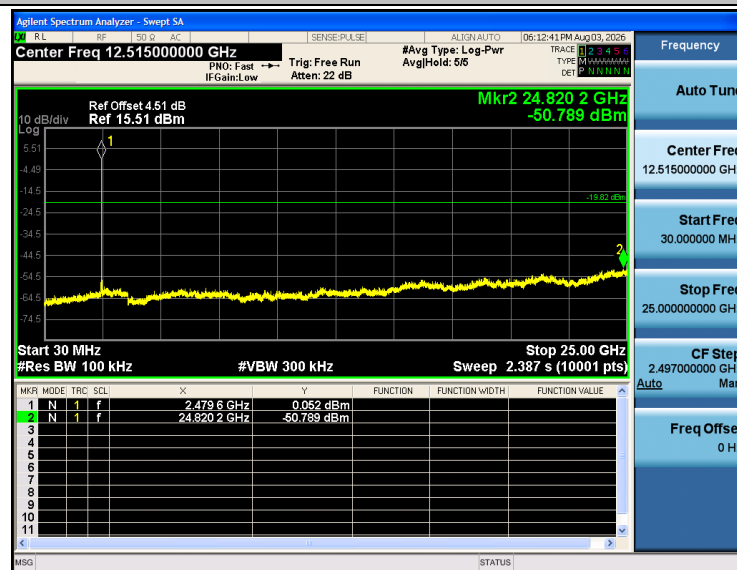




### 3.5. DTS Bandwidth

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)/ RSS-247 6.3.1 a:

| Test Item     | Limit                             | Frequency Range(MHz) |
|---------------|-----------------------------------|----------------------|
| DTS Bandwidth | $\geq 500$ KHz<br>(6dB bandwidth) | 2400~2483.5          |

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. DTS Spectrum Setting:
  - (1) Set RBW = 100 kHz.
  - (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.OCB Spectrum Setting:
  - (1) Set RBW = 1% ~ 5% occupied bandwidth.
  - (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

#### Test Mode


Please refer to the clause 2.4.

#### Test Results

| Test Mode | Frequency[MHz] | 99% OBW[MHz] | DTS BW[kHz] | Limit[kHz] | Verdict |
|-----------|----------------|--------------|-------------|------------|---------|
| BLE 1Mbps | 2402           | 1.020        | 648.61      | >500       | PASS    |
|           | 2440           | 1.020        | 648.36      | >500       | PASS    |
|           | 2480           | 1.021        | 648.88      | >500       | PASS    |
| BLE 2Mbps | 2402           | 2.024        | 1160.69     | >500       | PASS    |
|           | 2440           | 2.020        | 1167.83     | >500       | PASS    |
|           | 2480           | 2.024        | 1165.03     | >500       | PASS    |



## BLE\_1Mbps\_OBW\_2402

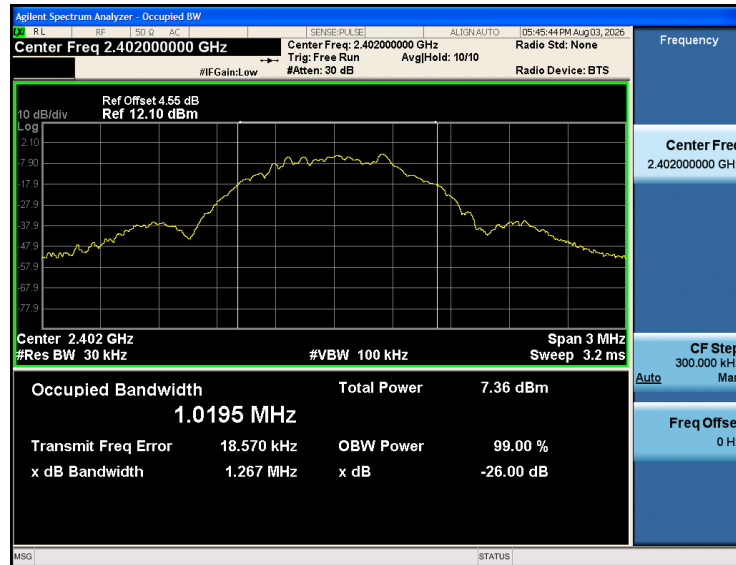


## BLE\_1Mbps\_OBW\_2440




## BLE\_1Mbps\_OBW\_2480




## BLE\_2Mbps\_OBW\_2402

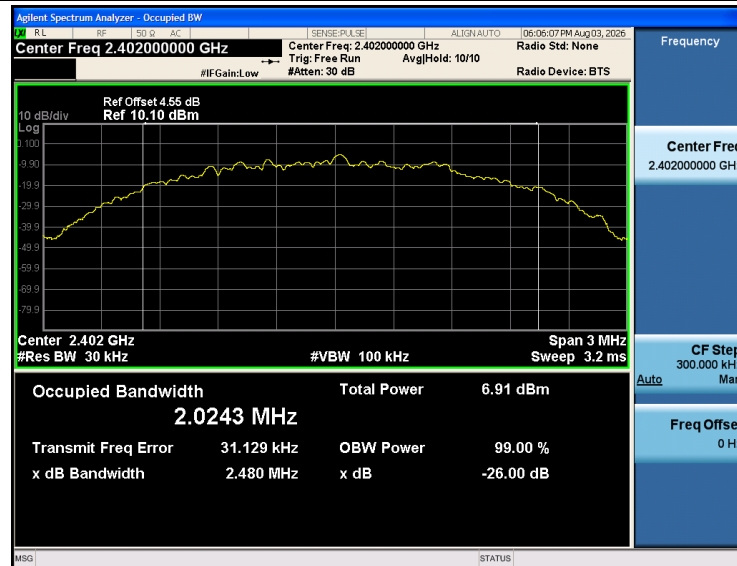

## BLE\_2Mbps\_OBW\_2440

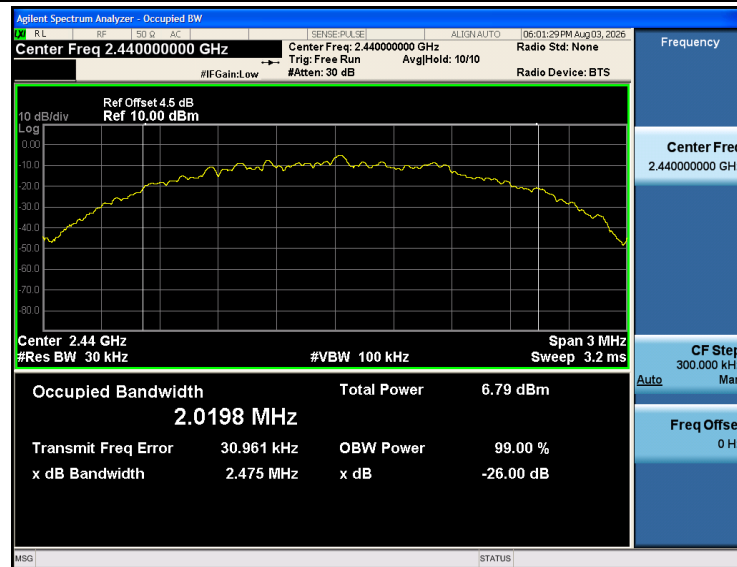


## BLE\_2Mbps\_OBW\_2480

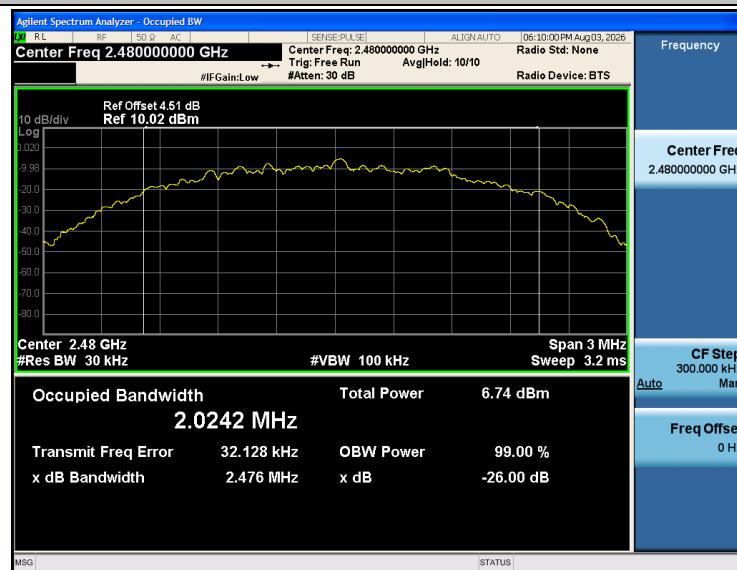



## BLE\_1Mbps\_DTS\_2402

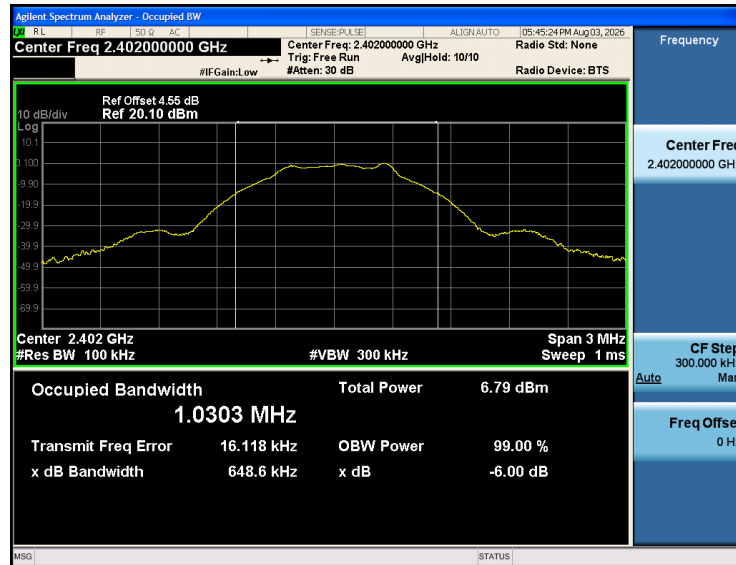


## BLE\_1Mbps\_DTS\_2440




## BLE\_1Mbps\_DTS\_2480




## BLE\_2Mbps\_DTS\_2402

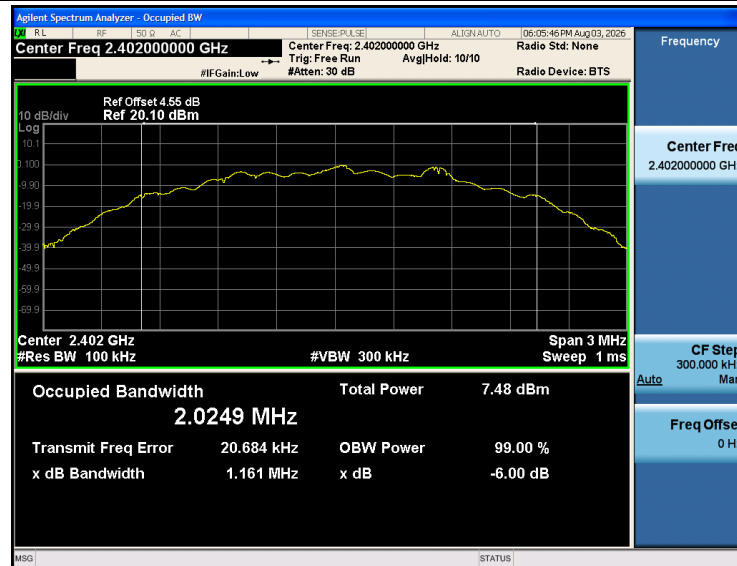

## BLE\_2Mbps\_DTS\_2440

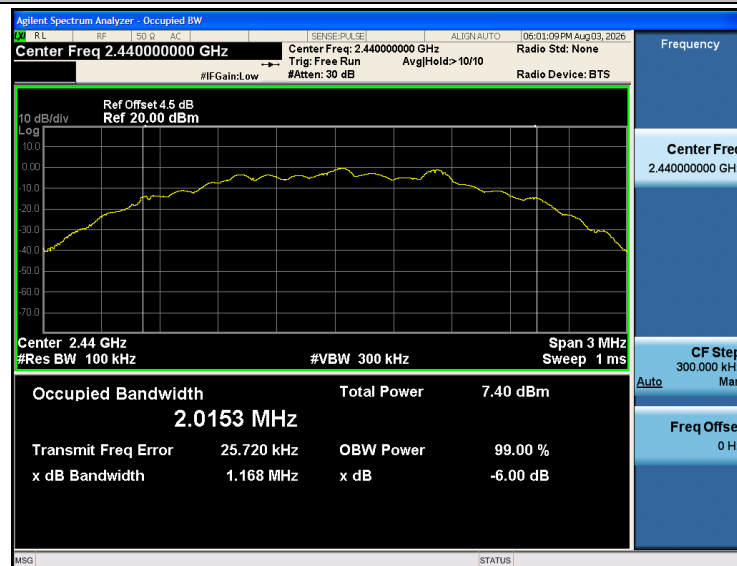

## BLE\_2Mbps\_DTS\_2480

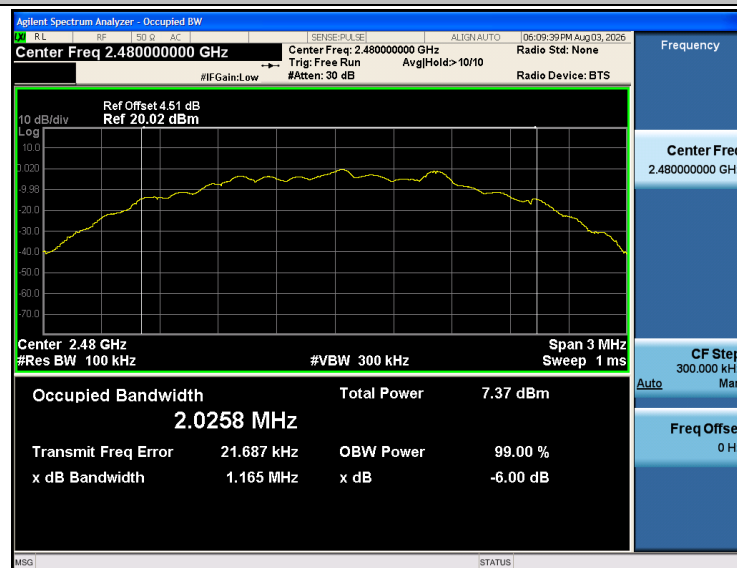




### 3.6. Peak Output Power

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)/ RSS-247 6.3.2:

| Section                 | Test Item                      | Limit           | Frequency Range(MHz) |
|-------------------------|--------------------------------|-----------------|----------------------|
| CFR 47 FCC 15.247(b)(3) | Maximum conducted output power | 1 Watt or 30dBm | 2400~2483.5          |
| ISED RSS-247 6.3.2      | Maximum conducted output power | 1 Watt or 30dBm | 2400~2483.5          |
| ISED RSS-247 6.3.2      | EIRP                           | 4 Watt or 36dBm | 2400~2483.5          |

#### Test Configuration



#### Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:  
 Peak Detector:  $RBW \geq DTS \text{ Bandwidth}$ ,  $VBW \geq 3 * RBW$ .  
 Sweep time=Auto.  
 Detector= Peak.  
 Trace mode= Maxhold.  
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### Test Mode

Please refer to the clause 2.4.


#### Test Result

| Test Mode | Frequency [MHz] | Result[dBm] | Conducted Limit [dBm] | Antenna gain [dBi] | E.I.R.P Result[dBm] | E.I.R.P Limit[dBm] | Verdict |
|-----------|-----------------|-------------|-----------------------|--------------------|---------------------|--------------------|---------|
| BLE 1Mbps | 2402            | 0.72        | $\leq 30$             | 2.91               | 3.63                | $\leq 36$          | PASS    |
|           | 2440            | 0.63        | $\leq 30$             | 2.91               | 3.54                | $\leq 36$          | PASS    |
|           | 2480            | 0.57        | $\leq 30$             | 2.91               | 3.48                | $\leq 36$          | PASS    |
| BLE 2Mbps | 2402            | <b>0.74</b> | $\leq 30$             | 2.91               | <b>3.65</b>         | $\leq 36$          | PASS    |
|           | 2440            | 0.62        | $\leq 30$             | 2.91               | 3.53                | $\leq 36$          | PASS    |
|           | 2480            | 0.56        | $\leq 30$             | 2.91               | 3.47                | $\leq 36$          | PASS    |


Note: E.I.R.P output power = Conducted output power + Antenna gain




## BLE\_1Mbps\_2402

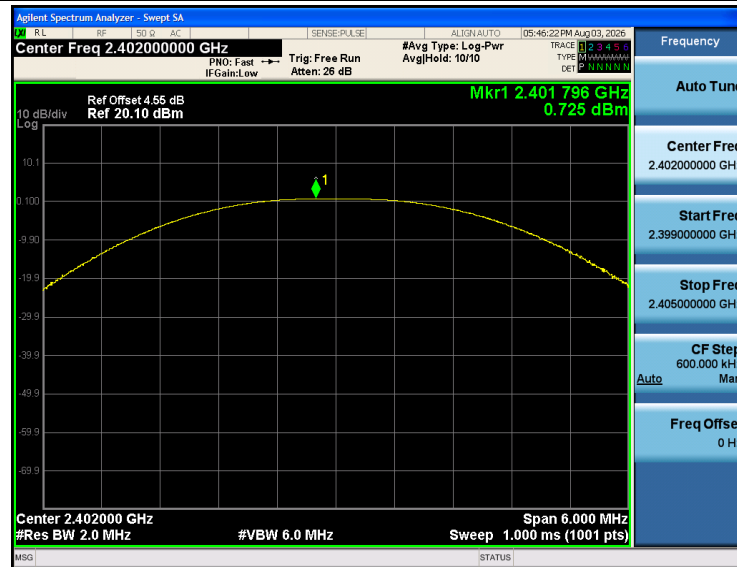


## BLE\_1Mbps\_2440

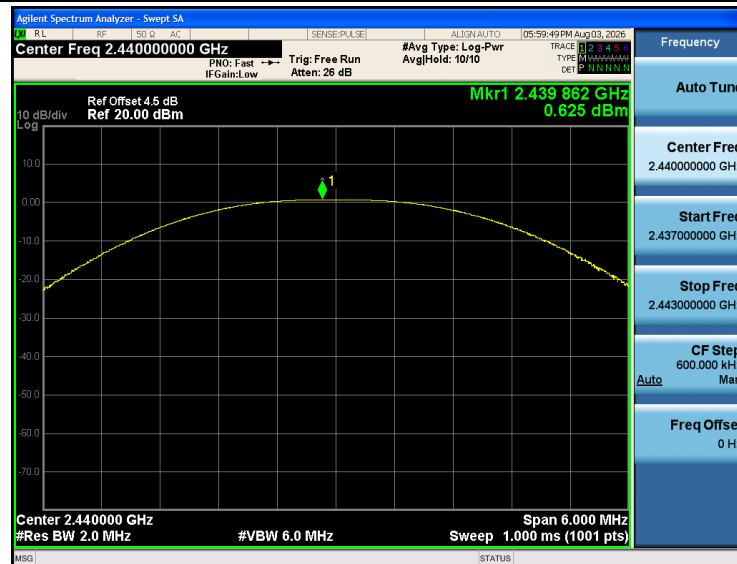


## BLE\_1Mbps\_2480

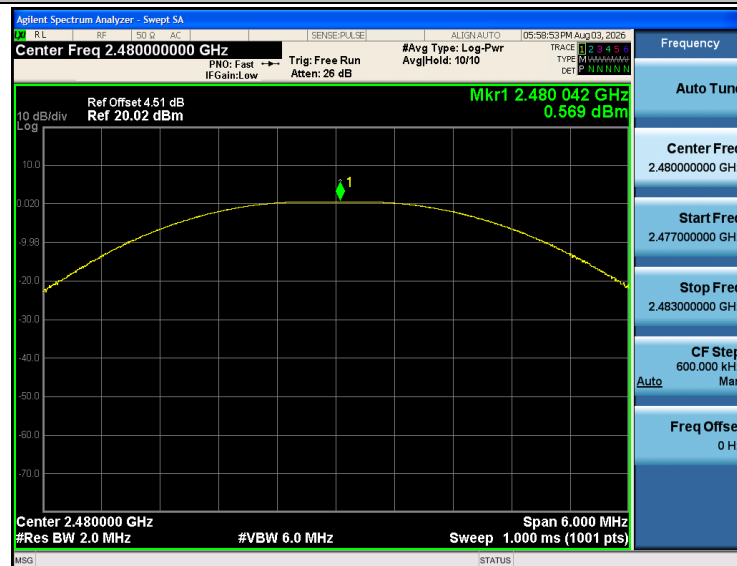


## BLE\_2Mbps\_2402

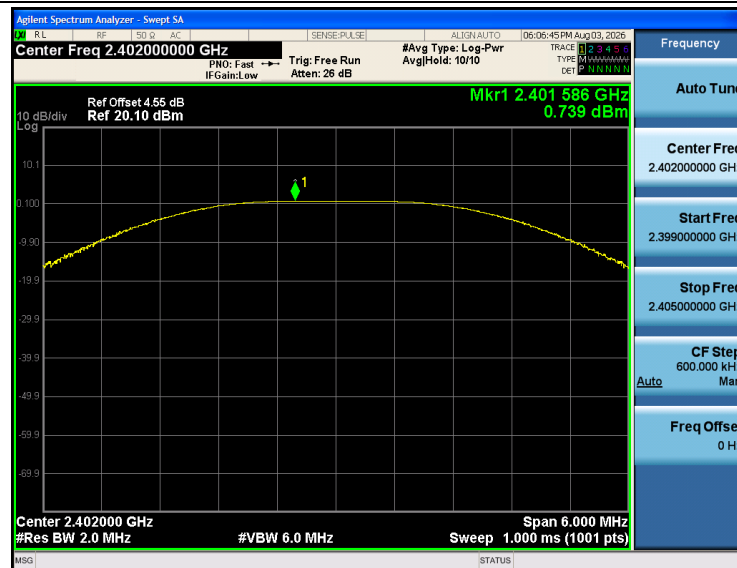

BLE\_2Mbps\_2440

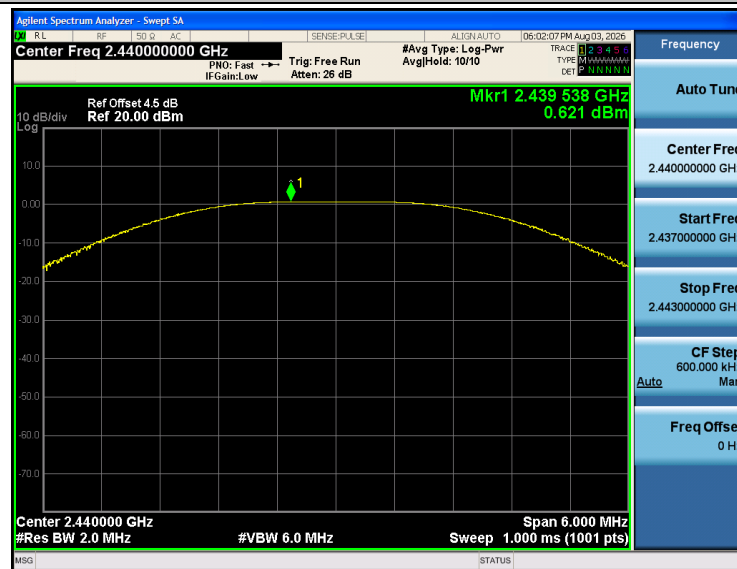

BLE\_2Mbps\_2480

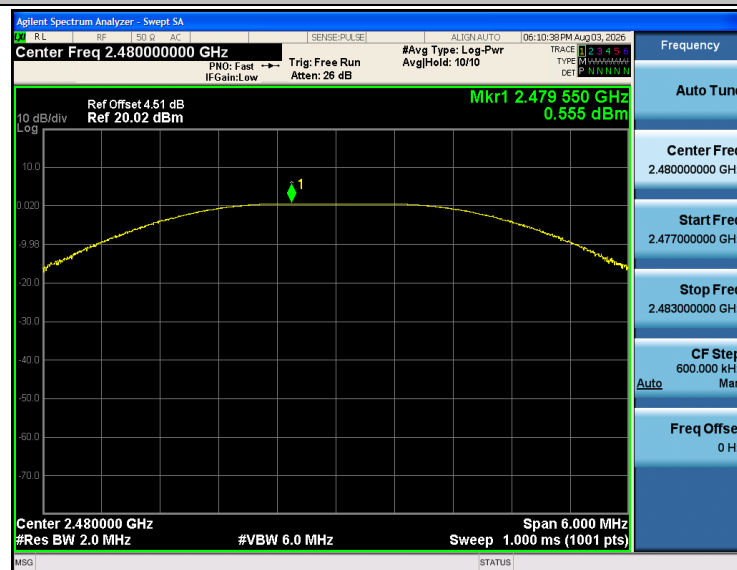




### 3.7. Power Spectral Density

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)/ RSS-247 6.3.1 b:

| Test Item              | Limit              | Frequency Range(MHz) |
|------------------------|--------------------|----------------------|
| Power Spectral Density | 8dBm(in any 3 kHz) | 2400~2483.5          |

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
Set analyzer center frequency to DTS channel center frequency.  
Set the span to 1.5 times the DTS bandwidth.  
Set the RBW to: 3 kHz  
Set the VBW to: 10 kHz  
Detector: peak  
Sweep time: auto  
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### Test Mode


Please refer to the clause 2.4.

#### Test Result

| Test Mode | Frequency[MHz] | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|----------------|------------------|-----------------|---------|
| BLE 1Mbps | 2402           | -14.68           | <=8             | PASS    |
|           | 2440           | -14.74           | <=8             | PASS    |
|           | 2480           | -14.81           | <=8             | PASS    |
| BLE 2Mbps | 2402           | -18.25           | <=8             | PASS    |
|           | 2440           | -18.34           | <=8             | PASS    |
|           | 2480           | -18.43           | <=8             | PASS    |



## BLE\_1Mbps\_2402

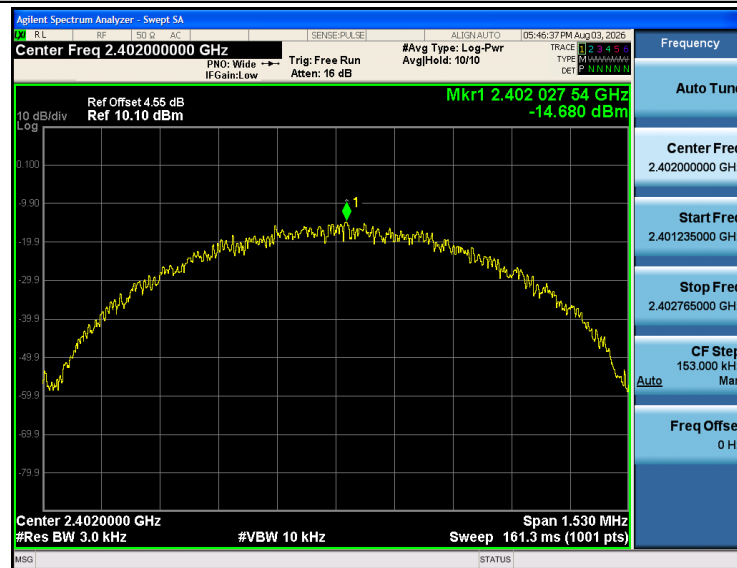


## BLE\_1Mbps\_2440




## BLE\_1Mbps\_2480




## BLE\_2Mbps\_2402

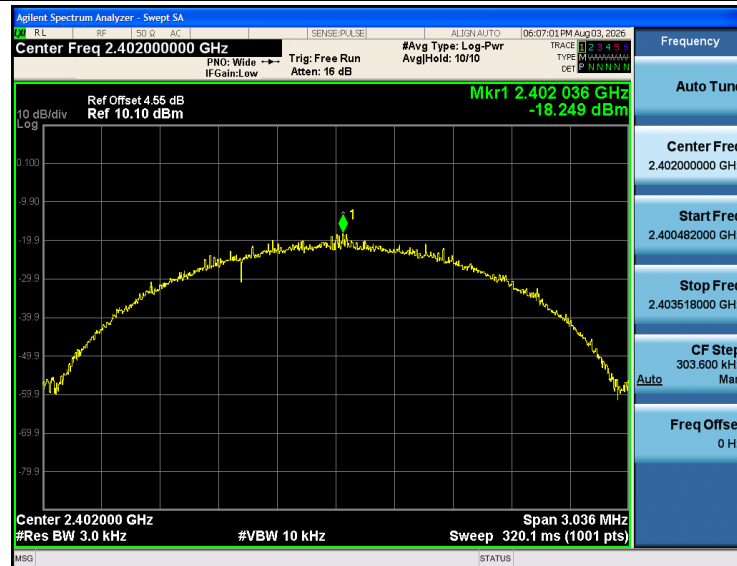

BLE\_2Mbps\_2440

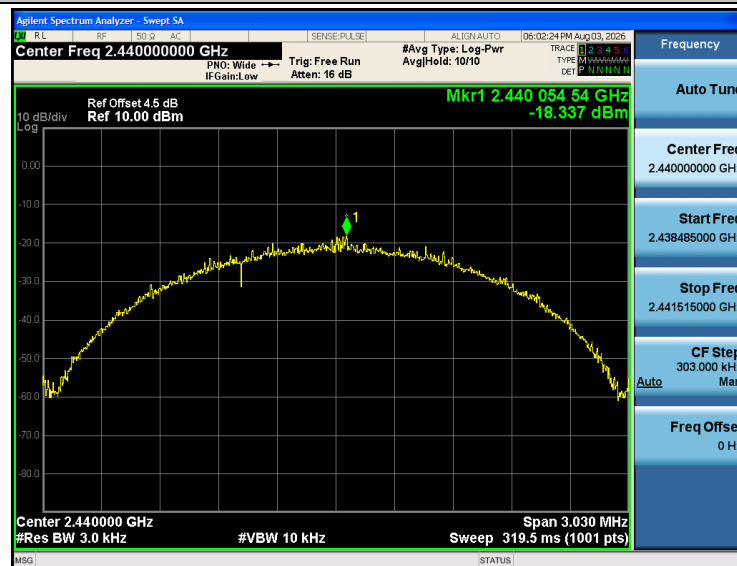

BLE\_2Mbps\_2480

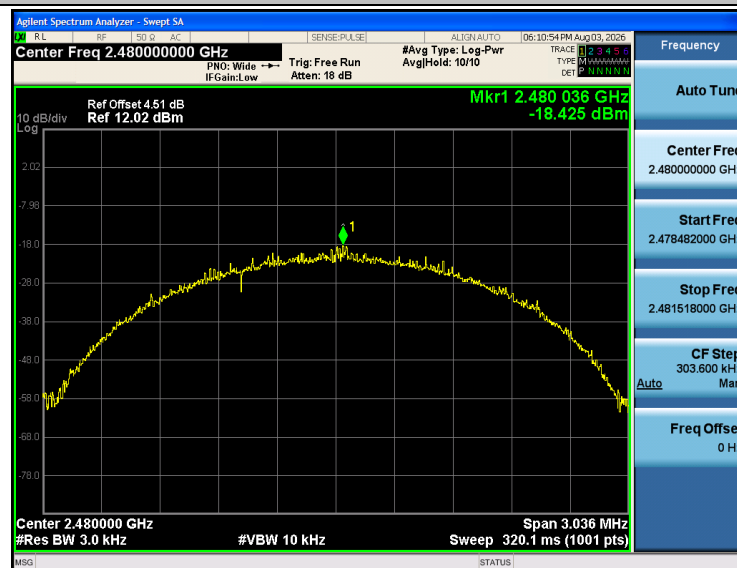




### 3.8. Duty Cycle

#### Limit

None, for report purposes only.

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
Set analyzer center frequency to test channel center frequency.  
Set the span to 0Hz  
Set the RBW to 8MHz  
Set the VBW to 8MHz  
Detector: Peak  
Sweep time: Auto  
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### Test Mode


Please refer to the clause 2.4.

#### Test Result


| Test Mode | Frequency [MHz] | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] | 1/T Minimum VBW (kHz) | Final setting For VBW (kHz) |
|-----------|-----------------|----------------------------|--------------------------|----------------|-----------------------|-----------------------------|
| BLE 1Mbps | 2402            | 2.14                       | 2.50                     | 85.60          | 0.47                  | 1                           |
|           | 2440            | 2.14                       | 2.50                     | 85.60          | 0.47                  | 1                           |
|           | 2480            | 2.14                       | 2.50                     | 85.60          | 0.47                  | 1                           |
| BLE 2Mbps | 2402            | 1.08                       | 1.88                     | 57.45          | 0.93                  | 1                           |
|           | 2440            | 1.08                       | 1.88                     | 57.45          | 0.93                  | 1                           |
|           | 2480            | 1.08                       | 1.88                     | 57.45          | 0.93                  | 1                           |




## BLE\_1Mbps\_2402

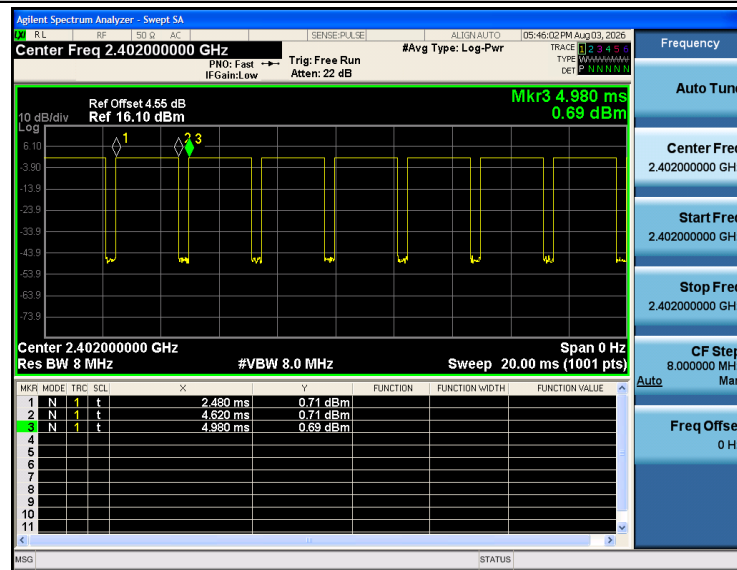


## BLE\_1Mbps\_2440

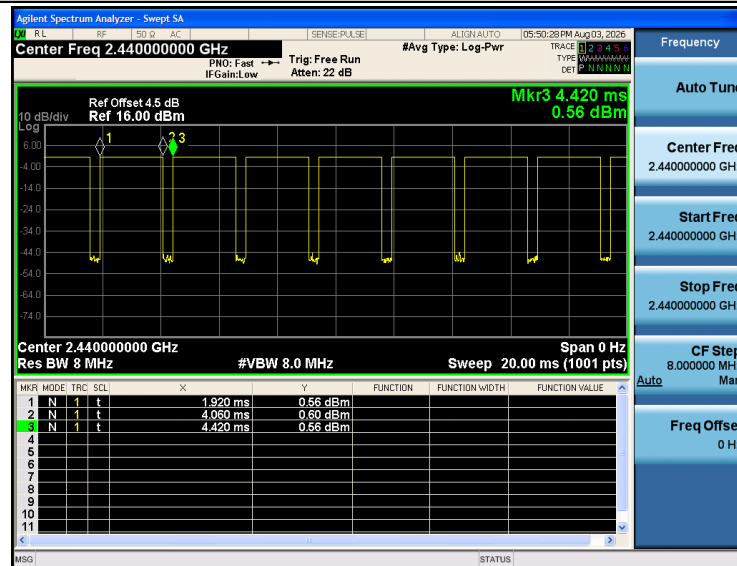


## BLE\_1Mbps\_2480

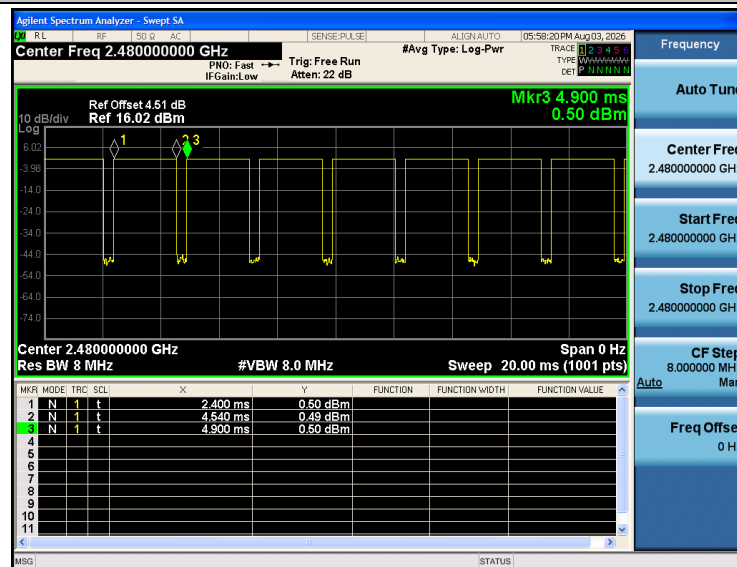


## BLE\_2Mbps\_2402

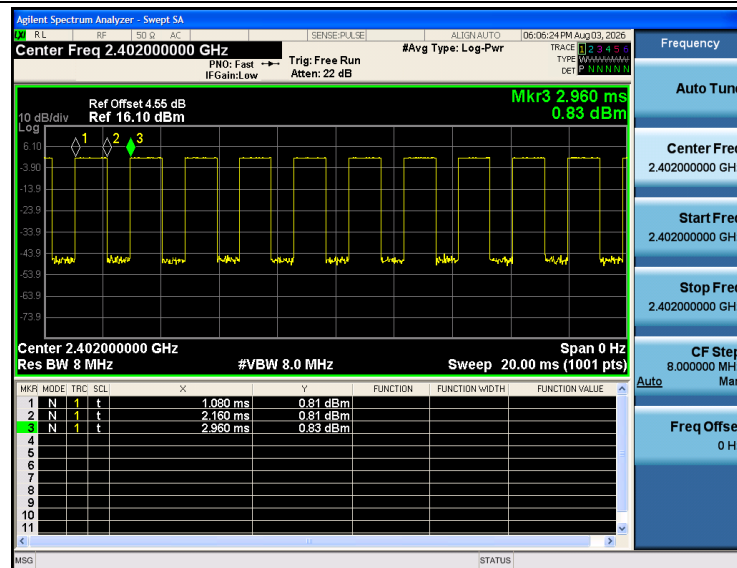

## BLE\_2Mbps\_2440

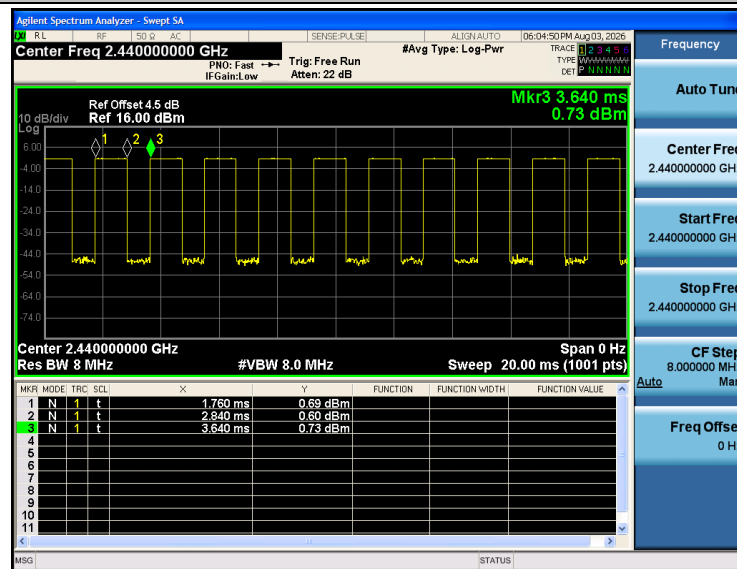

## BLE\_2Mbps\_2480

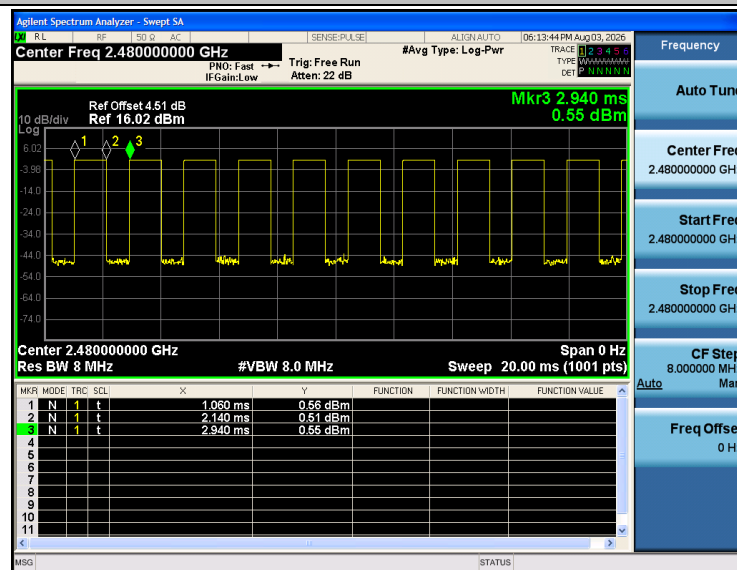



### 3.9. Antenna requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

According to RSS-GEN Issue 5, section 6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotopically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

#### Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

\*\*\*\*\*THE END\*\*\*\*\*