


Instruction manual

Dimmer

Model : ED26WF-2US1 ED26WF-US1

It Works with most dimmable LED bulbs and most incandescent bulbs .It have a convenient button that turns lights on and off , also can brighten or dim the bulbs continuously.Using Wi-Fi technology provides an easy,secure way to achieve remote control.

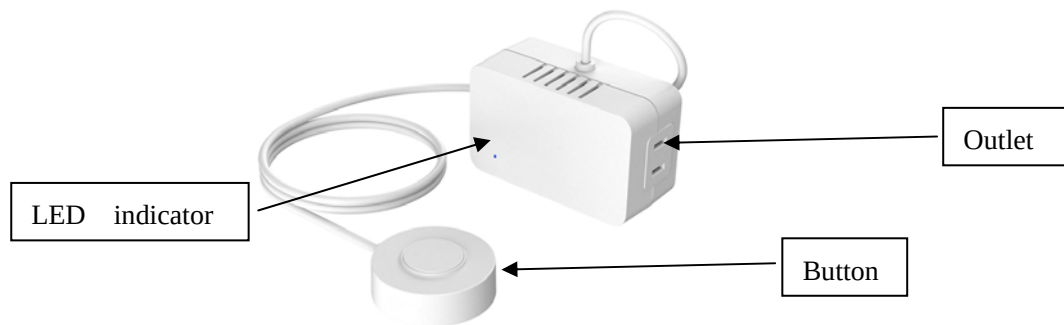

Diagram

Operation

Install:

Plug the dimmer into socket of AC power,and attach the load with outlet.

TURN ON/OFF:

Tap botton once:lights turn on

Tap botton again:lights turn off

DIM/BRIGHT:

Hold down botton —lights will brighten slowly.When brightness is highest,Hold down botton —lights will dim slowly until brightness is lowest.

WI-FI:

Turn on the dimmer, then press button for six times within three seconds (the sixth press should hold on more than 5 seconds), when the LED indicator starts flash and enter into pairing model. Connect app by phone, and control the dimmer.

Attention

No use outdoor

Need dimmable LED light

Specifications

rated voltage: 125V AC, 60Hz

Max load: LED 150W; other 300W

Manufacturer:



Manufacturer: EverFlourish
Address: 1234 Main Street, Suite 100, Toronto, Ontario M5E 1B5, Canada

This device complies with Part 15 of the FCC. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution:

This device complies with Part 15 of the FCC Rules / Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference. (2) this device must accept any interference received, including interference that may cause undesired operation.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation,

Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

MPE Reminding

To satisfy FCC / IC RF exposure requirements, a separation distance of 20 cm or more should be maintained between the antenna of this device and persons during device operation. To ensure compliance, operations at closer than this distance is not recommended.

L'antenne installée doit être située de façon à ce que la population ne puisse être exposée à une distance de moins de 20 cm. Installer l'antenne de façon à ce que le personnel ne puisse approcher à 20 cm ou moins de la position centrale de l'antenne. La FCC des états-unis stipule que cet appareil doit être en tout temps éloigné d'au moins 20 cm des personnes pendant son fonctionnement.