

PEAK TO AVERAGE POWER (PAPR) - BAND n66



element

XMIT 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------|------------|-----|-----------|-----------|
| Analyzer - Spectrum Analyzer | Agilent | N9010A | AFL | 27-Feb-20 | 27-Feb-21 |
| Generator - Signal | Keysight | N5171B-506 | TEW | 2-May-18 | 2-May-21 |

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Power Ratio (PAPR) was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed the rule part defined limit.

The PAPR measurement method is described in ANSI C63.26 section 5.2.3.4.
The PAPR was measured using the CCDF function of the spectrum analyzer.

Per 27.50(d)(2), the PAPR limit shall not exceed 13 dB for more than the ANSI described 0.1% of the time.

RF conducted emissions testing was performed only on one port. The testing was performed on the same version of hardware (AHFIG) as the original certification test. The AHFIG antenna ports are essentially electrically identical (the RF power variation between antenna ports is small as shown in the original certification testing) and antenna port 4 was selected to perform the testing under this effort as allowed by ANSI C63.26-2015 paragraph 5.7.2

5G NR carrier bandwidths of 5MHz, 10MHz, 15MHz, and 20MHz with QPSK, 16QAM, 64QAM and 256QAM modulation types were verified under this effort. The 5G NR carriers/modulation types for this testing are set up according to 3GPP TS 38.141-1 Test Models and are NR-FR1-TM 1.1 (QPSK modulation type), NR-FR1-TM 3.1 (16QAM modulation type), NR-FR1-TM 3.1 (64QAM modulation type), and NR-FR1-TM 3.1a (256QAM modulation type).

PEAK TO AVERAGE POWER (PAPR) - BAND n66



TStx 2020.06.06.0 BETA XMI 2020.03.25.0

| | | |
|--|---------------|---|
| EUT: AHFIG | | Work Order: NOKI0016 |
| Serial Number: K9191322351 | | Date: 18-Jun-20 |
| Customer: Nokia Solutions and Networks | | Temperature: 22.7 °C |
| Attendees: Mitchell Hill, John Rattanavong | | Humidity: 51.6% RH |
| Project: None | | Barometric Pres.: 1015 mbar |
| Tested by: Brandon Hobbs | Power: 54 VDC | Job Site: TX05 |
| TEST SPECIFICATIONS | | |
| FCC 27:2020 | | Test Method: ANSI C63.26:2015 |
| COMMENTS | | |
| All measurement path losses were accounted for in the reference level offset including any attenuators, filters and DC blocks. The carrier was set to maximum for all testing. | | |
| DEVIATIONS FROM TEST STANDARD | | |
| None | | |
| Configuration # | 2 |  |


| | PAPR Value (dB) | PAPR Limit (dB) | Results |
|---------------------------------------|-----------------|-----------------|---------|
| Port 4, Band n66, 2110 MHz - 2200 MHz | | | |
| 5 MHz Bandwidth | | | |
| QPSK Modulation | | | |
| Low Channel 2112.5 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.1 | 13 | Pass |
| High Channel 2197.5 MHz | 7.1 | 13 | Pass |
| 16-QAM Modulation | | | |
| Low Channel 2112.5 MHz | 7.3 | 13 | Pass |
| Mid Channel 2155 MHz | 7.3 | 13 | Pass |
| High Channel 2197.5 MHz | 7.3 | 13 | Pass |
| 64-QAM Modulation | | | |
| Low Channel 2112.5 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.1 | 13 | Pass |
| High Channel 2197.5 MHz | 7.1 | 13 | Pass |
| 256-QAM Modulation | | | |
| Low Channel 2112.5 MHz | 7.2 | 13 | Pass |
| Mid Channel 2155 MHz | 7.2 | 13 | Pass |
| High Channel 2197.5 MHz | 7.2 | 13 | Pass |
| 10 MHz Bandwidth | | | |
| QPSK Modulation | | | |
| Low Channel 2115 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.1 | 13 | Pass |
| High Channel 2195 MHz | 7.1 | 13 | Pass |
| 16-QAM Modulation | | | |
| Low Channel 2115 MHz | 7.3 | 13 | Pass |
| Mid Channel 2155 MHz | 7.3 | 13 | Pass |
| High Channel 2195 MHz | 7.3 | 13 | Pass |
| 64-QAM Modulation | | | |
| Low Channel 2115 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.1 | 13 | Pass |
| High Channel 2195 MHz | 7.1 | 13 | Pass |
| 256-QAM Modulation | | | |
| Low Channel 2115 MHz | 7.2 | 13 | Pass |
| Mid Channel 2155 MHz | 7.2 | 13 | Pass |
| High Channel 2195 MHz | 7.2 | 13 | Pass |
| 15 MHz Bandwidth | | | |
| QPSK Modulation | | | |
| Low Channel 2117.5 MHz | 7.2 | 13 | Pass |
| Mid Channel 2155 MHz | 7.1 | 13 | Pass |
| High Channel 2192.5 MHz | 7.1 | 13 | Pass |
| 16-QAM Modulation | | | |
| Low Channel 2117.5 MHz | 7.2 | 13 | Pass |
| Mid Channel 2155 MHz | 7.2 | 13 | Pass |
| High Channel 2192.5 MHz | 7.2 | 13 | Pass |
| 64-QAM Modulation | | | |
| Low Channel 2117.5 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.1 | 13 | Pass |
| High Channel 2192.5 MHz | 7.1 | 13 | Pass |
| 256-QAM Modulation | | | |
| Low Channel 2117.5 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.1 | 13 | Pass |
| High Channel 2192.5 MHz | 7.1 | 13 | Pass |
| 20 MHz Bandwidth | | | |
| QPSK Modulation | | | |
| Low Channel 2120 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.0 | 13 | Pass |
| High Channel 2190 MHz | 7.1 | 13 | Pass |
| 16-QAM Modulation | | | |
| Low Channel 2120 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.1 | 13 | Pass |
| High Channel 2190 MHz | 7.2 | 13 | Pass |
| 64-QAM Modulation | | | |
| Low Channel 2120 MHz | 7.1 | 13 | Pass |
| Mid Channel 2155 MHz | 7.0 | 13 | Pass |
| High Channel 2190 MHz | 7.1 | 13 | Pass |
| 256-QAM Modulation | | | |
| Low Channel 2120 MHz | 7.0 | 13 | Pass |
| Mid Channel 2155 MHz | 7.0 | 13 | Pass |
| High Channel 2190 MHz | 7.1 | 13 | Pass |

PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Low Channel 2112.5 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.11 | 13 | Pass | | |

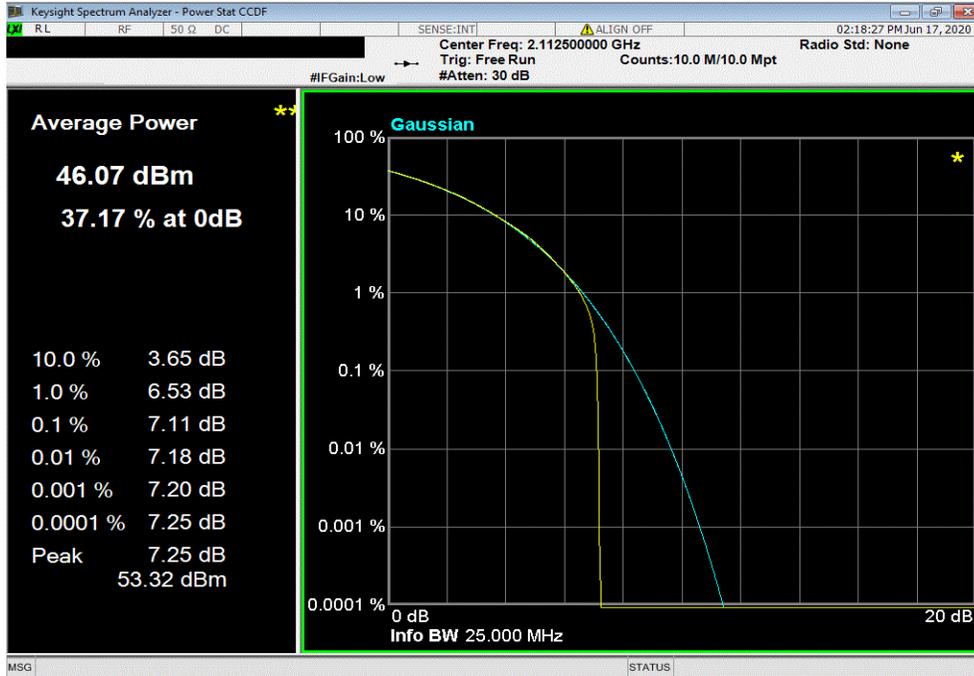

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.1 | 13 | Pass | | |

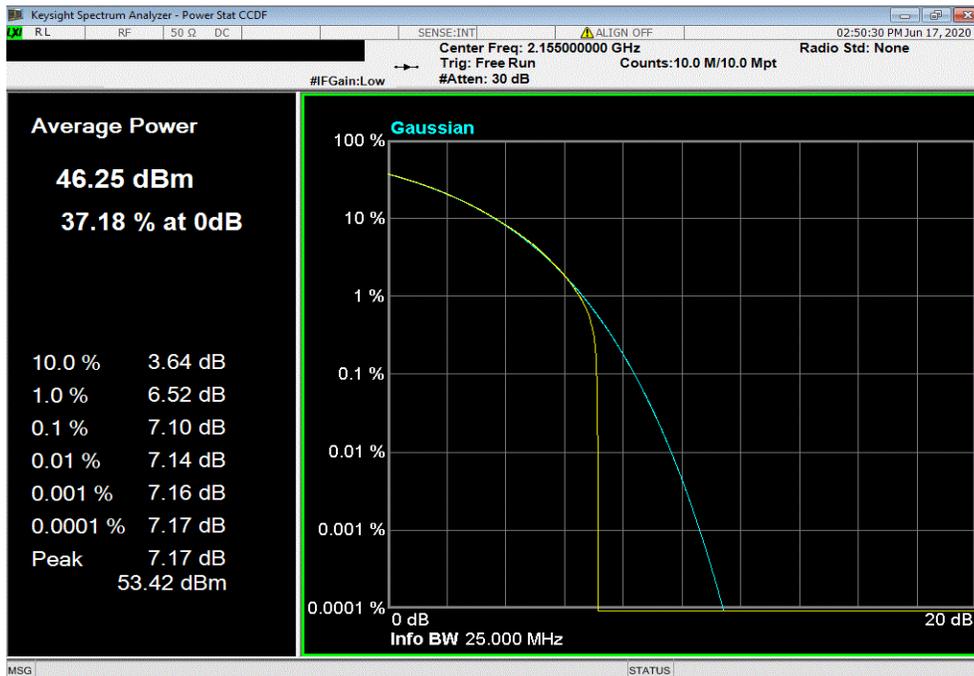


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, High Channel 2197.5 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.11 | 13 | Pass | | |

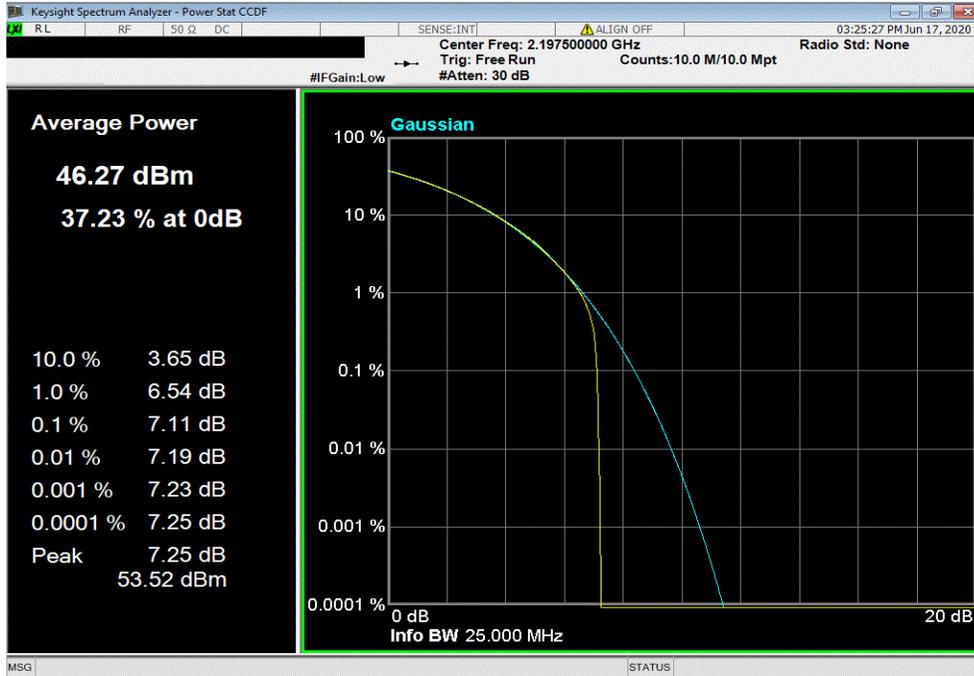

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Low Channel 2112.5 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.26 | 13 | Pass | | |

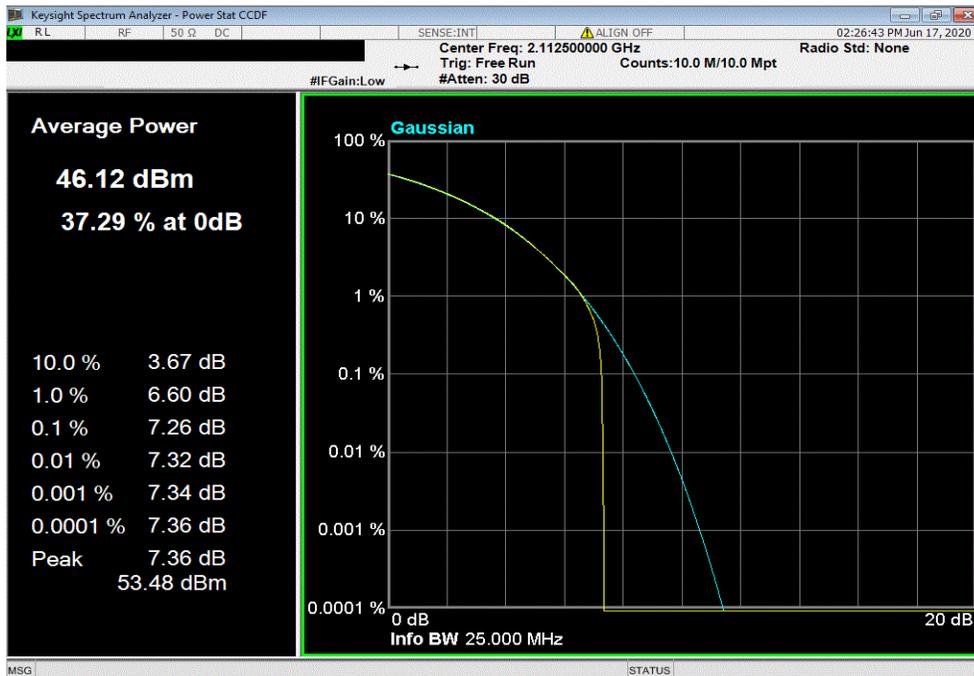


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.27 | 13 | Pass | | |

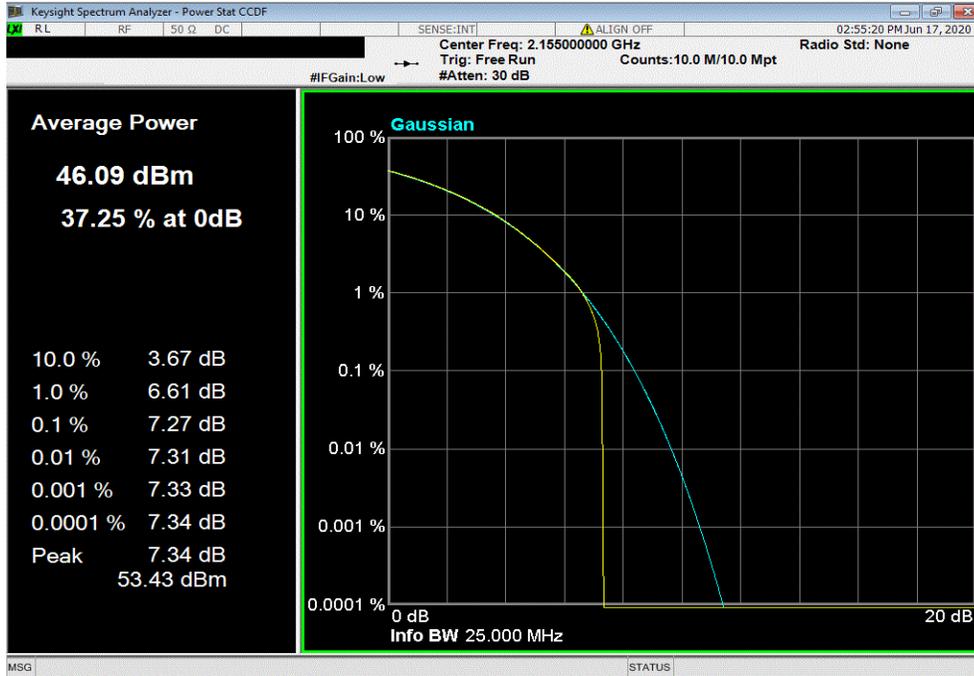

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, High Channel 2197.5 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.26 | 13 | Pass | | |

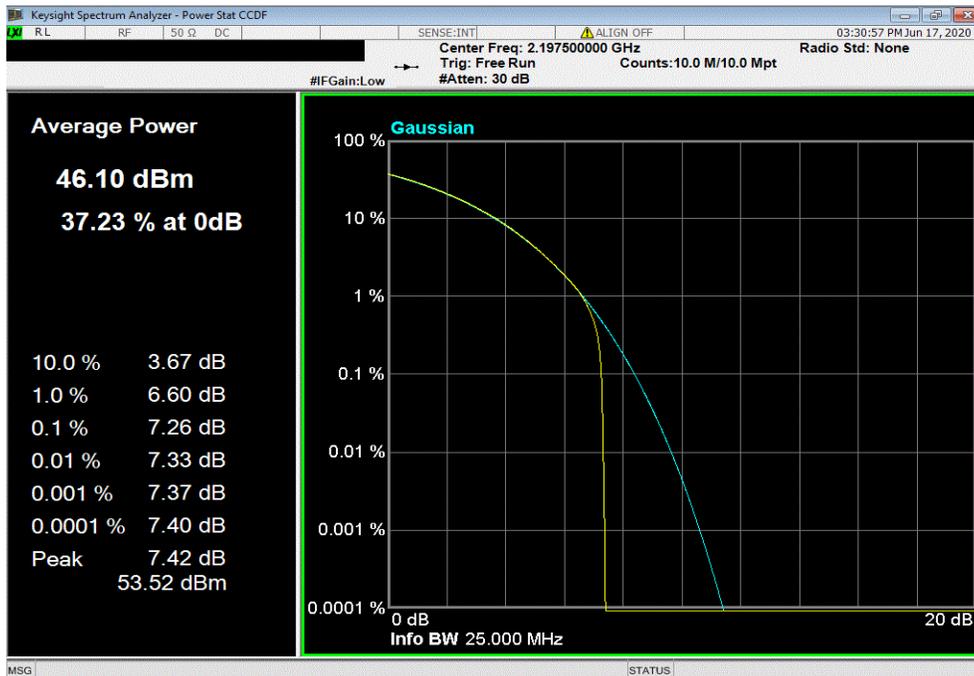


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 64-QAM Modulation, Low Channel 2112.5 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.09 | 13 | Pass | | |

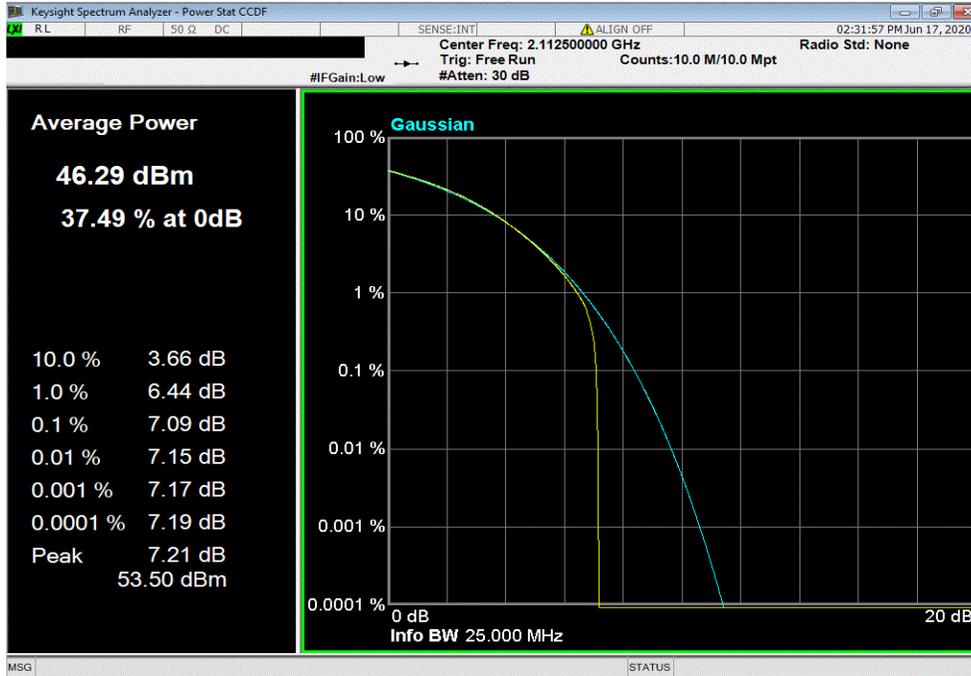

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 64-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.08 | 13 | Pass | | |

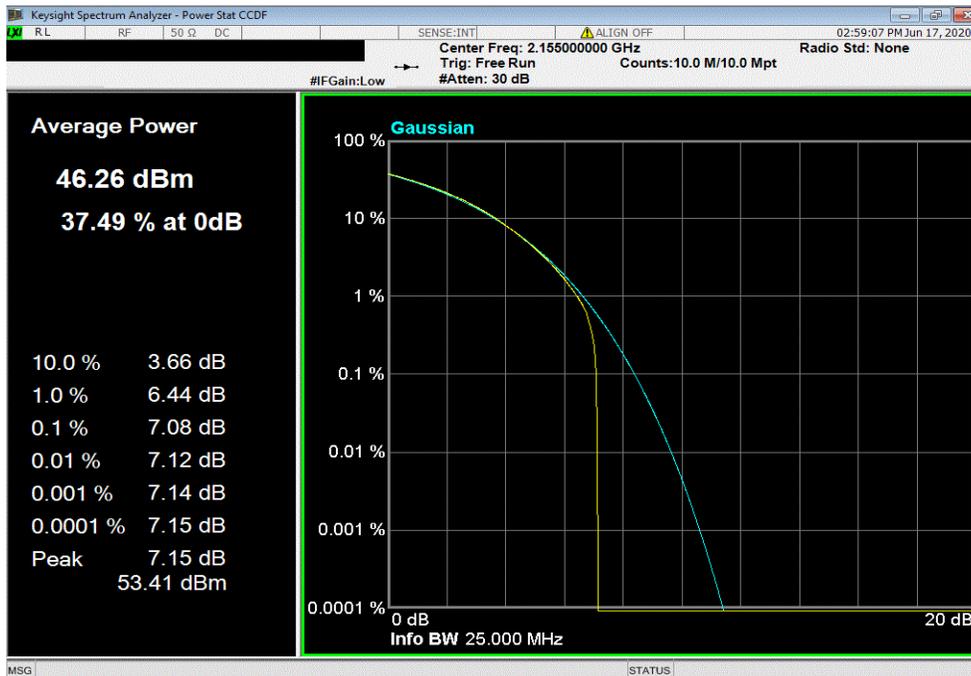


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 64-QAM Modulation, High Channel 2197.5 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.09 | 13 | Pass | | |

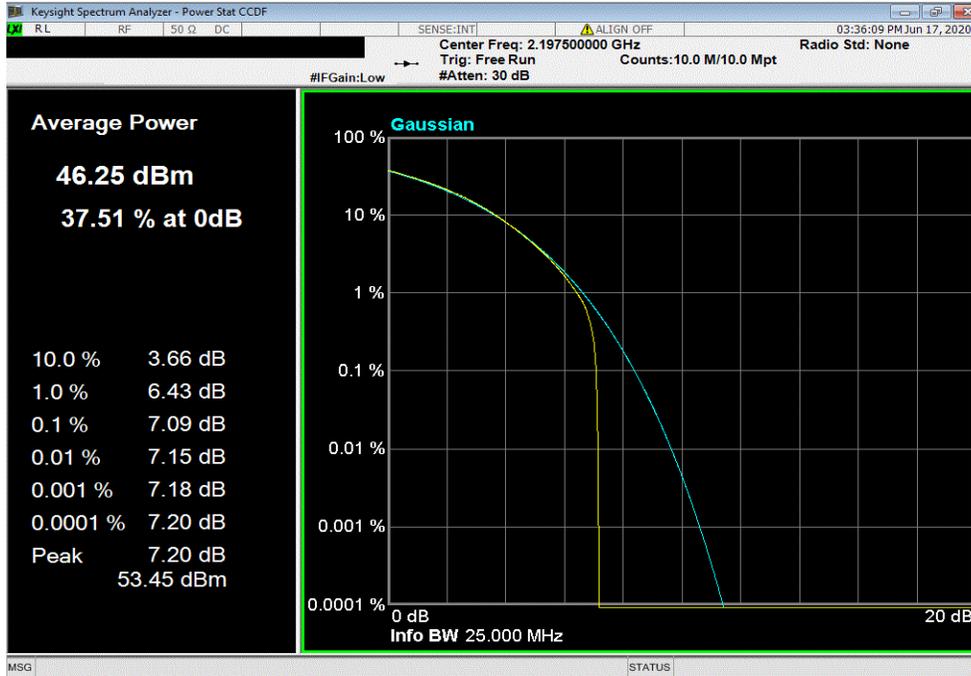

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 256-QAM Modulation, Low Channel 2112.5 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.18 | 13 | Pass | | |

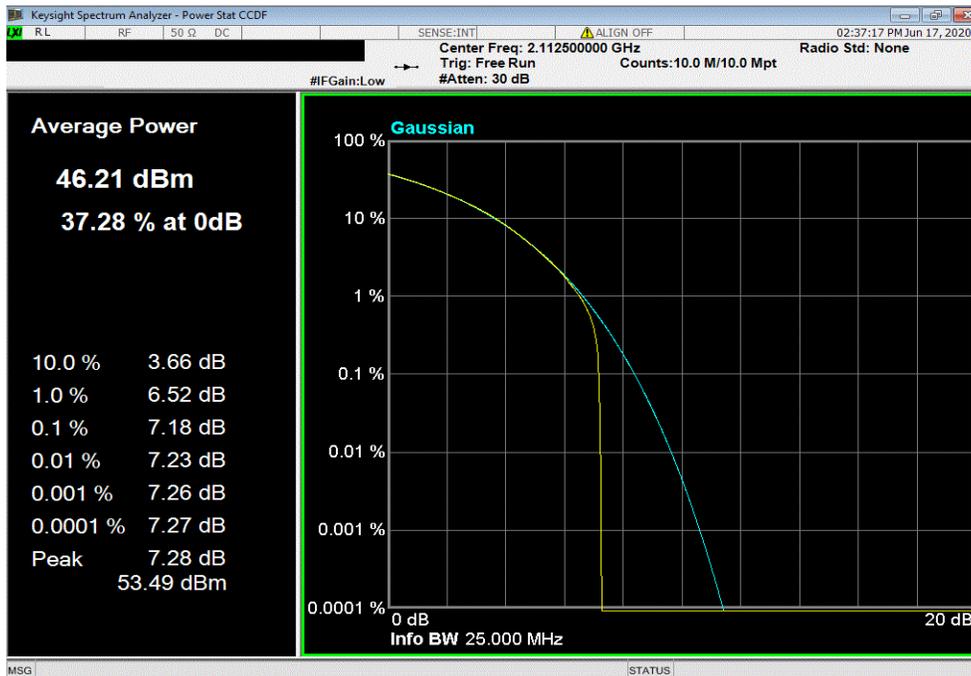


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 256-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.17 | 13 | Pass | | |

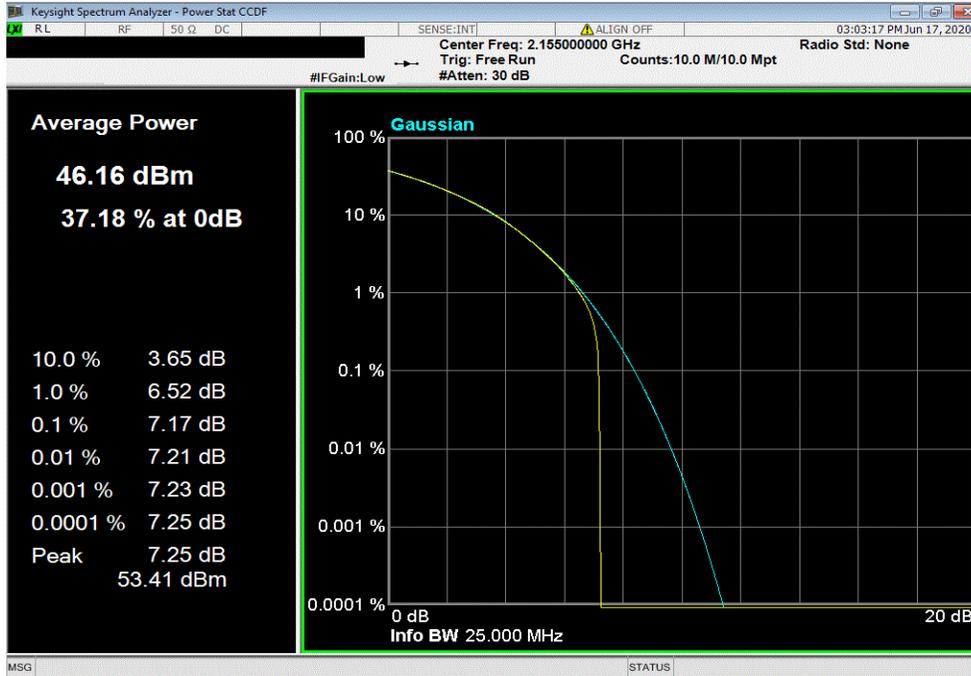

| Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 256-QAM Modulation, High Channel 2197.5 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.16 | 13 | Pass | | |

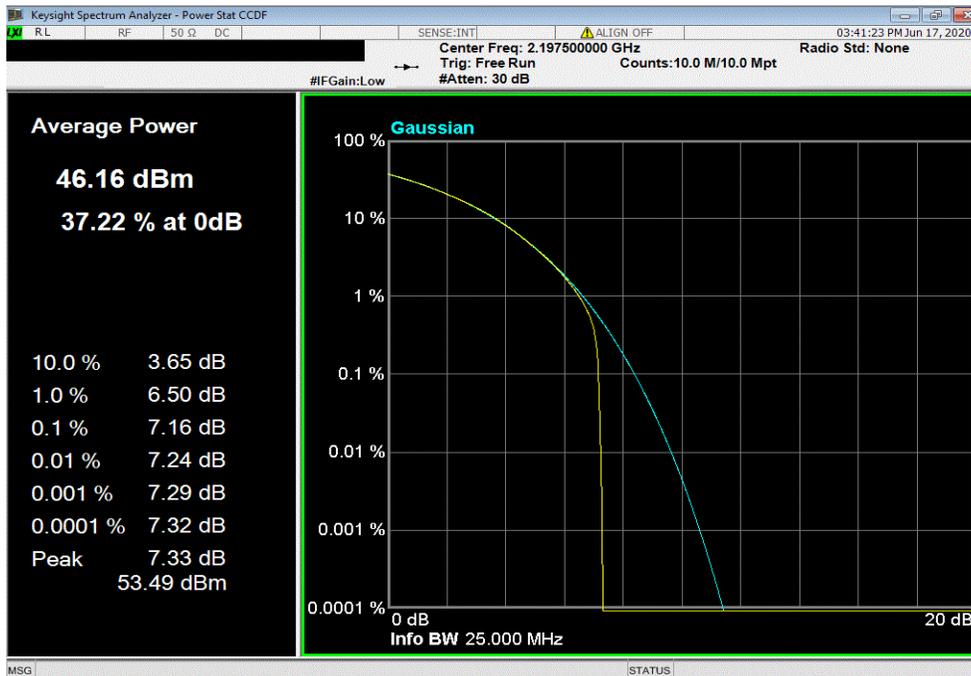


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, QPSK Modulation, Low Channel 2115 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.13 | 13 | Pass | | | |

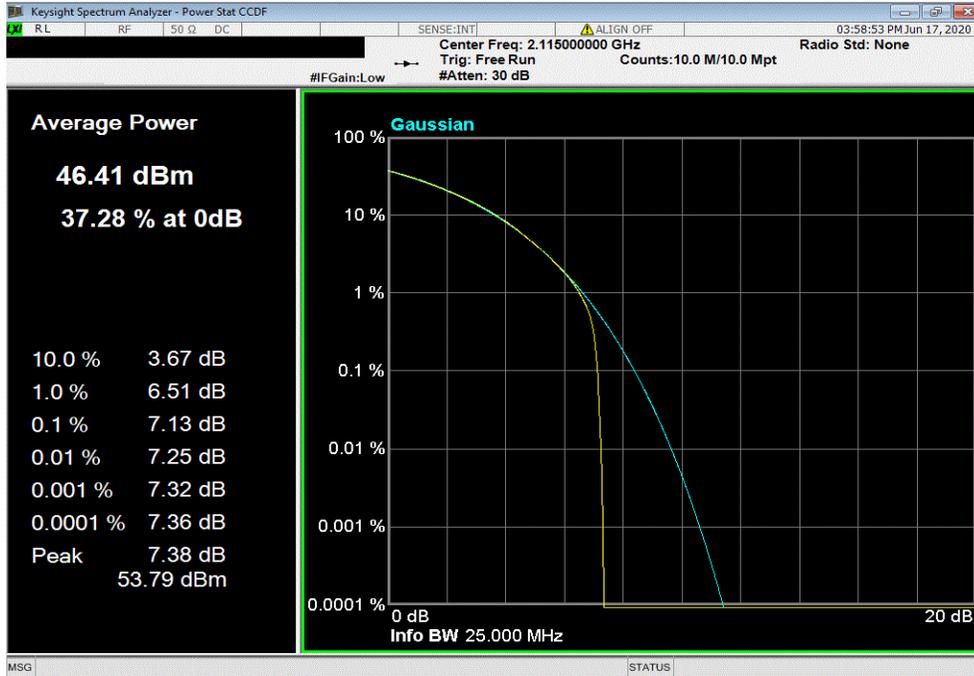

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.1 | 13 | Pass | | | |

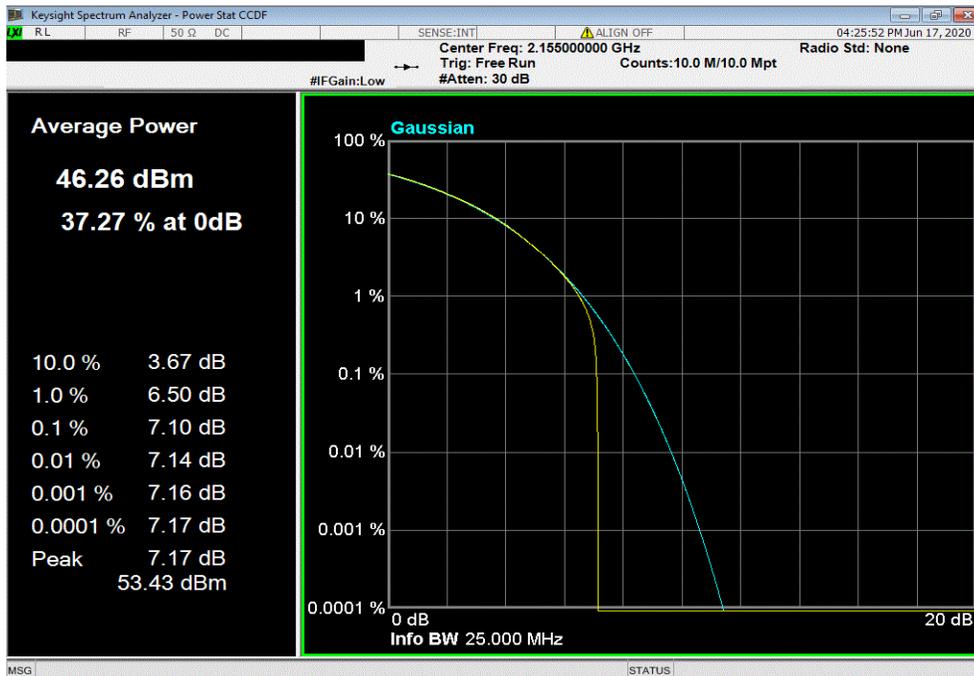


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth , QPSK Modulation, High Channel 2195 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.12 | 13 | Pass | | | |

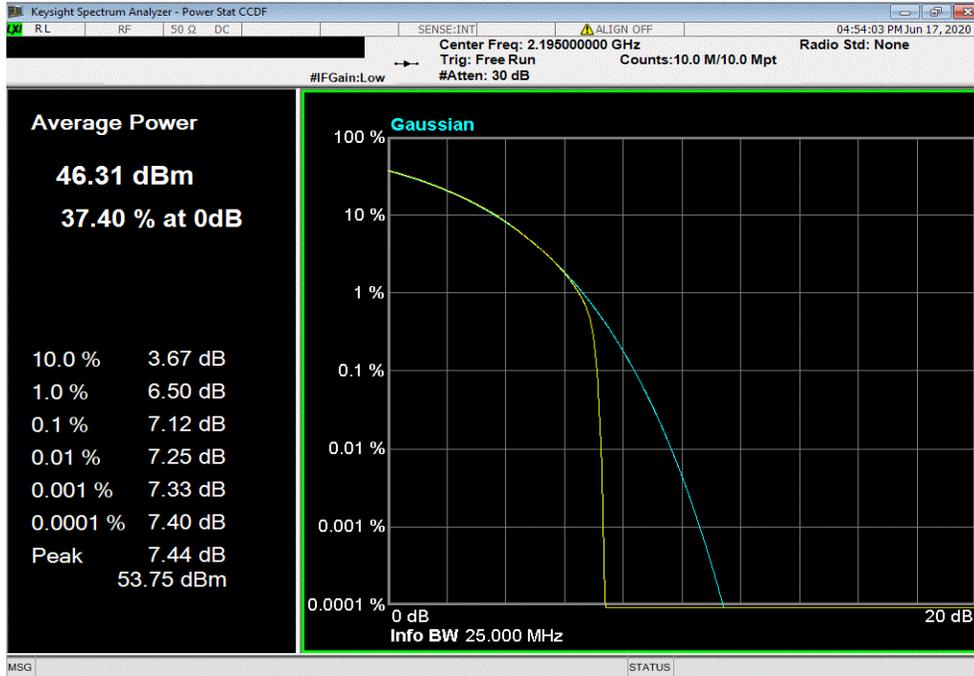

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth , 16-QAM Modulation, Low Channel 2115 MHz | | | | | | |
|---|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.27 | 13 | Pass | | | |

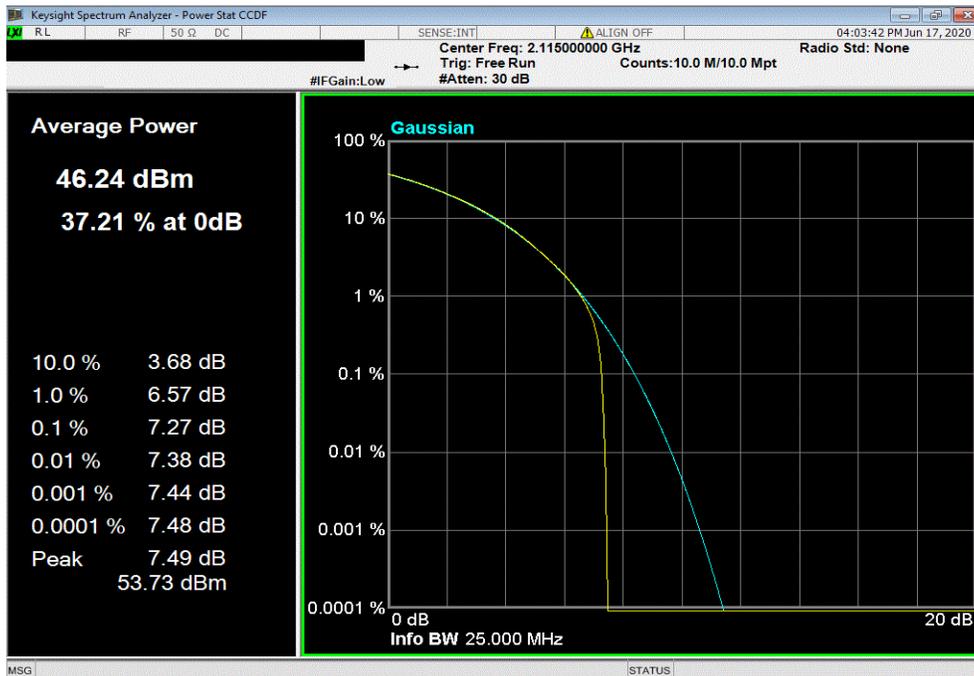


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.25 | 13 | Pass | | |

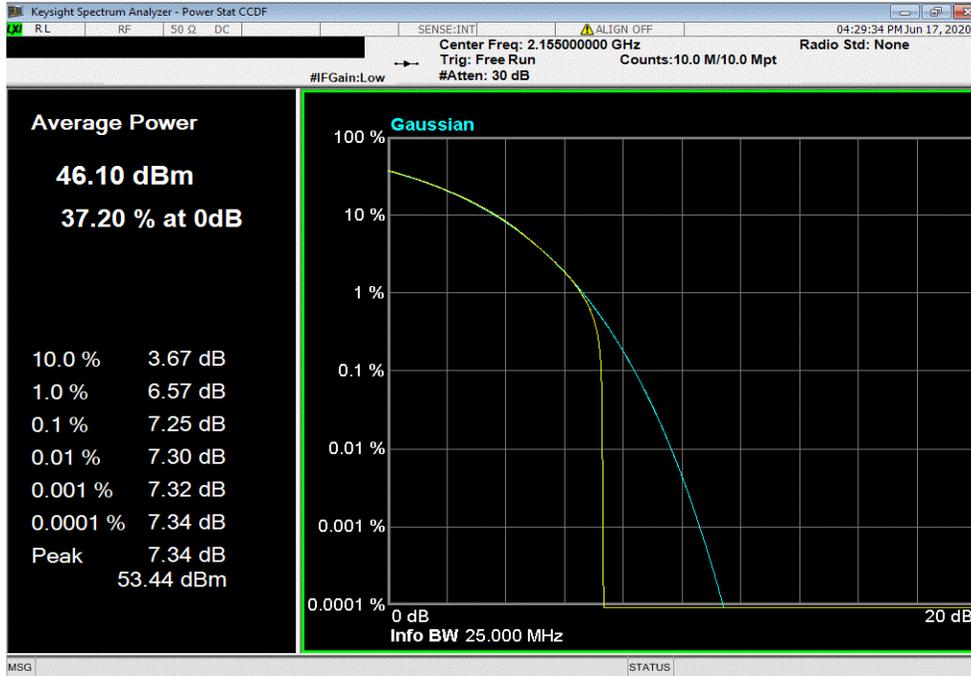

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 16-QAM Modulation, High Channel 2195 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.26 | 13 | Pass | | |

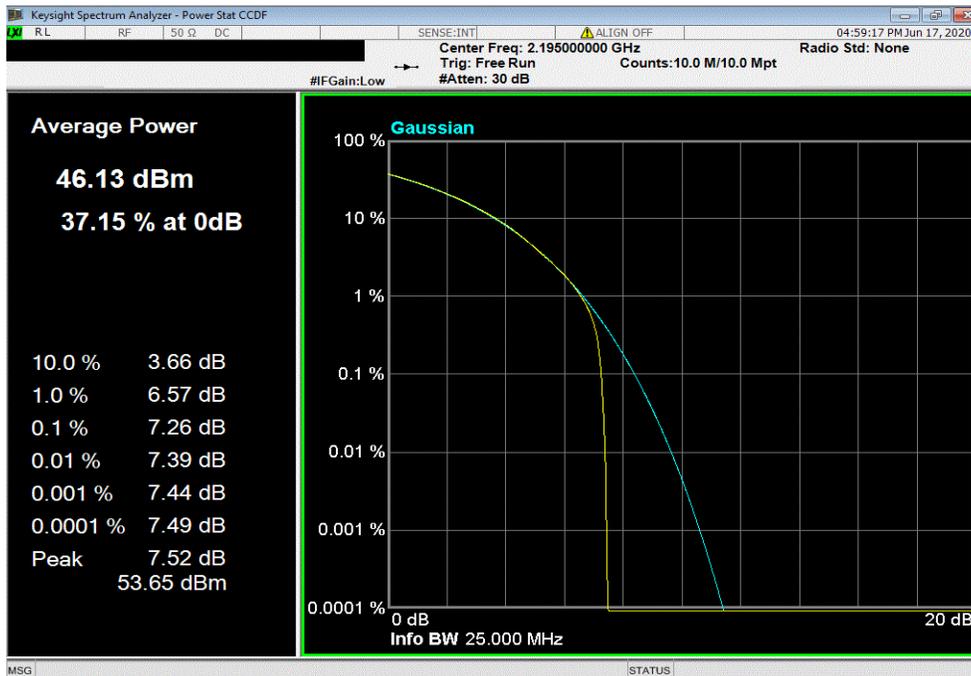


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 64-QAM Modulation, Low Channel 2115 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.14 | 13 | Pass | | |

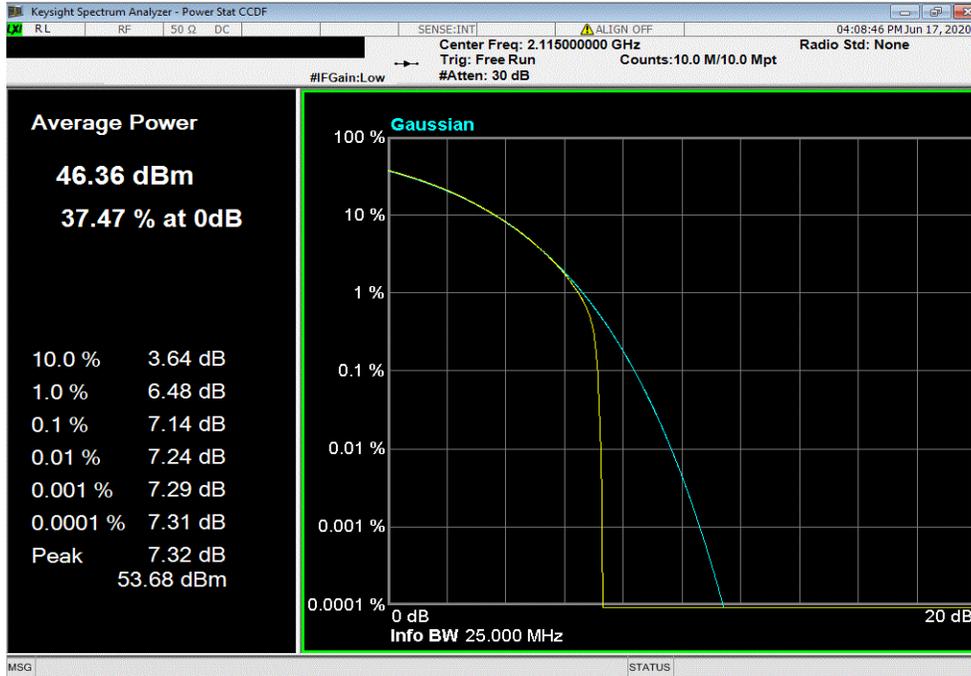

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.1 | 13 | Pass | | |

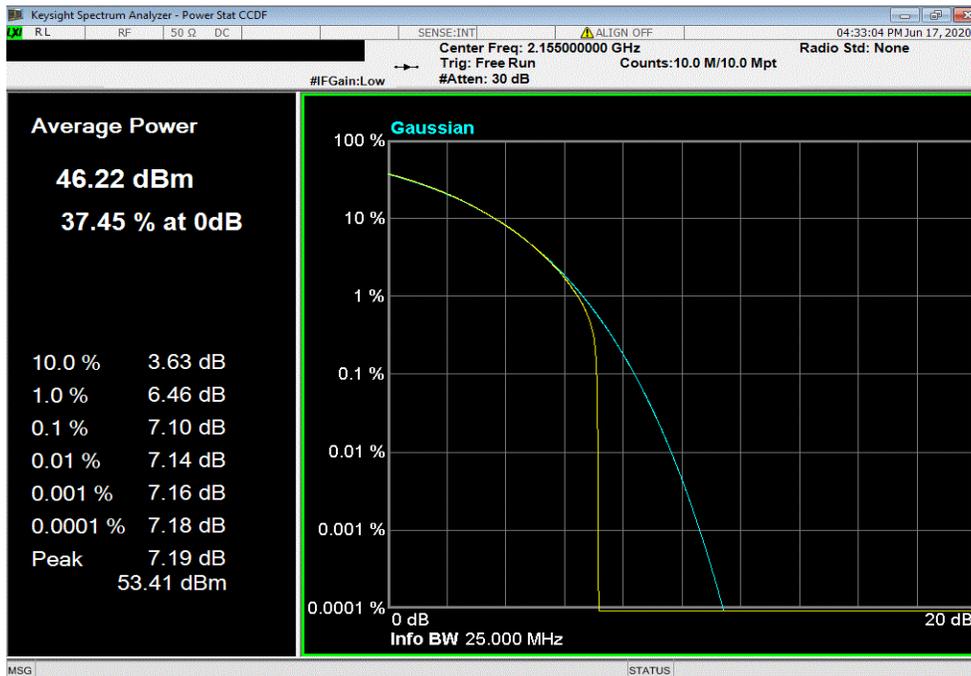


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth , 64-QAM Modulation, High Channel 2195 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.12 | 13 | Pass | | | |

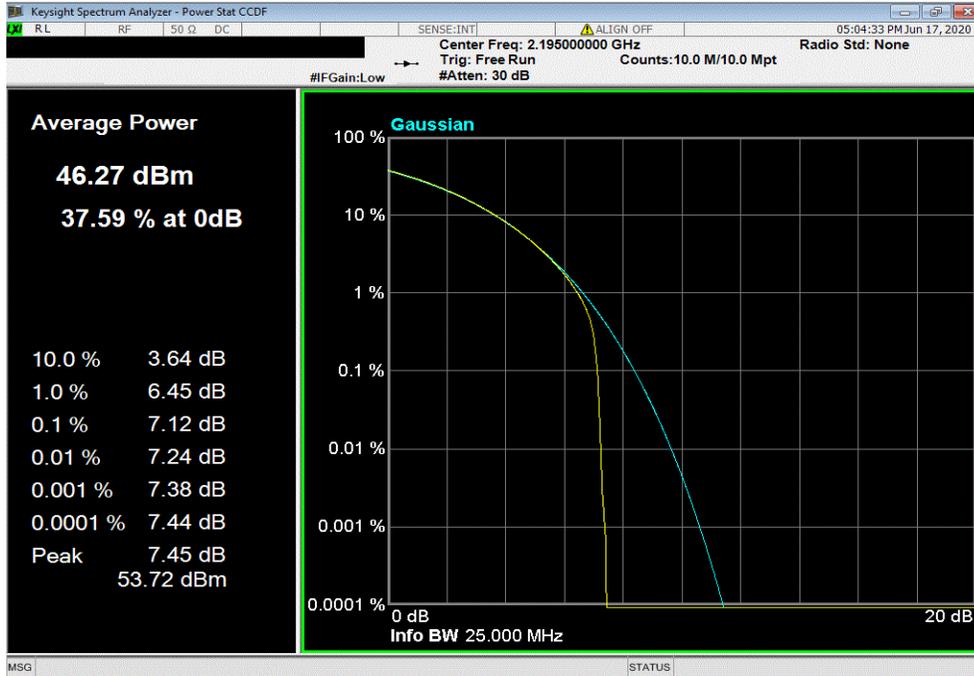

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth , 256-QAM Modulation, Low Channel 2115 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.19 | 13 | Pass | | | |

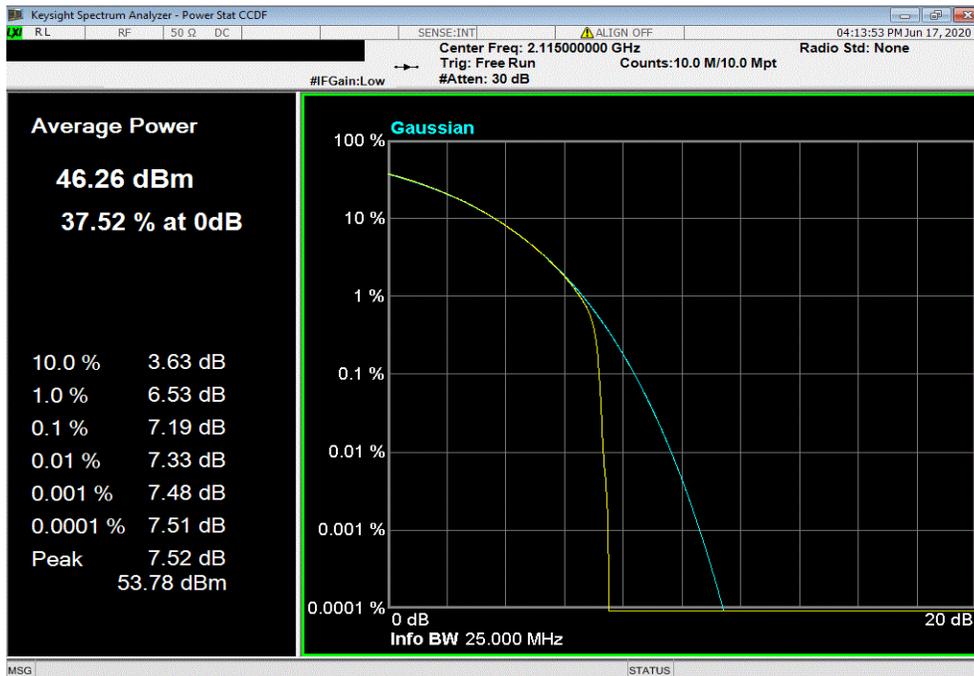


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.18 | 13 | Pass | | |

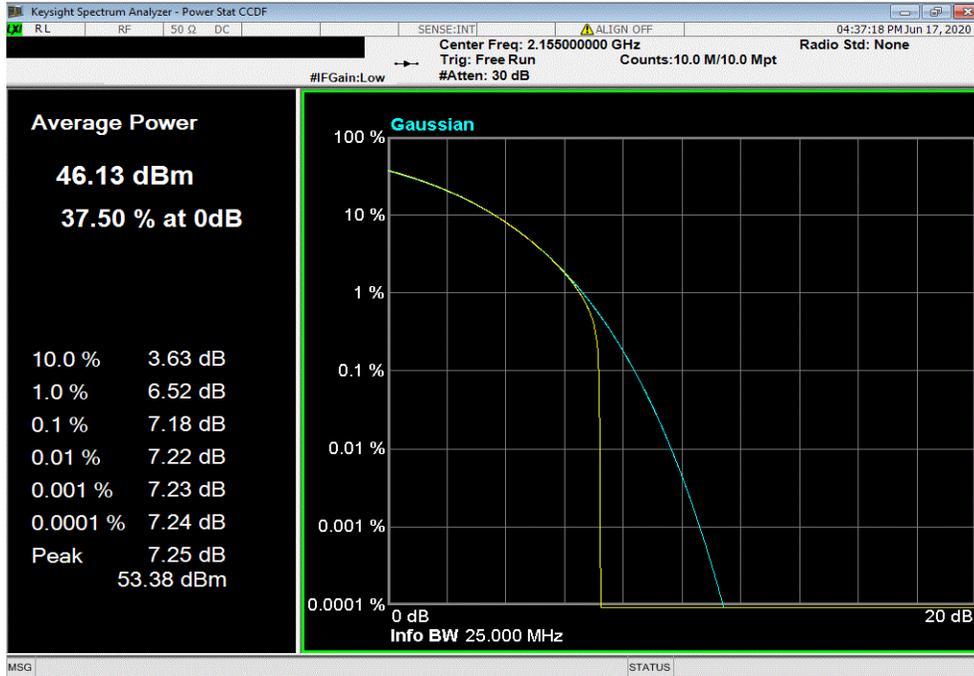

| Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, High Channel 2195 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.2 | 13 | Pass | | |

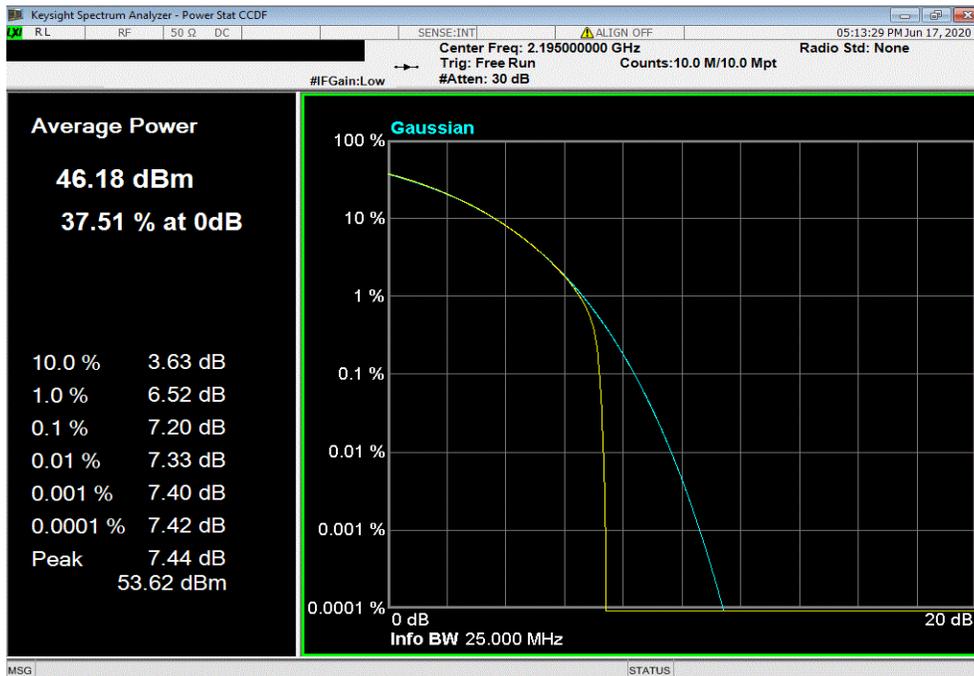


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, QPSK Modulation, Low Channel 2117.5 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.15 | 13 | Pass | | |

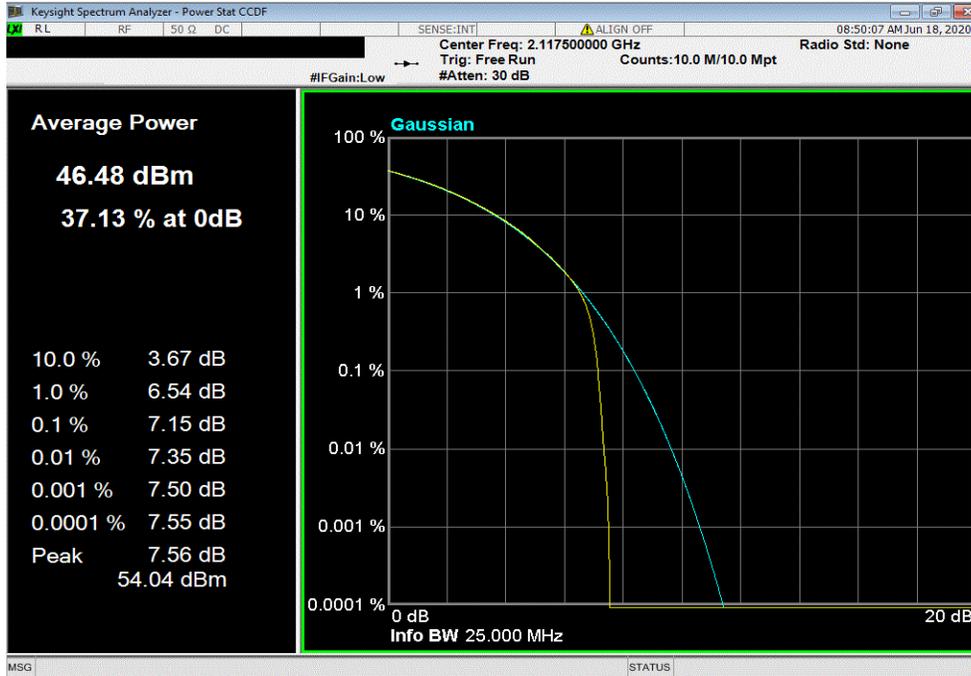

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.08 | 13 | Pass | | |

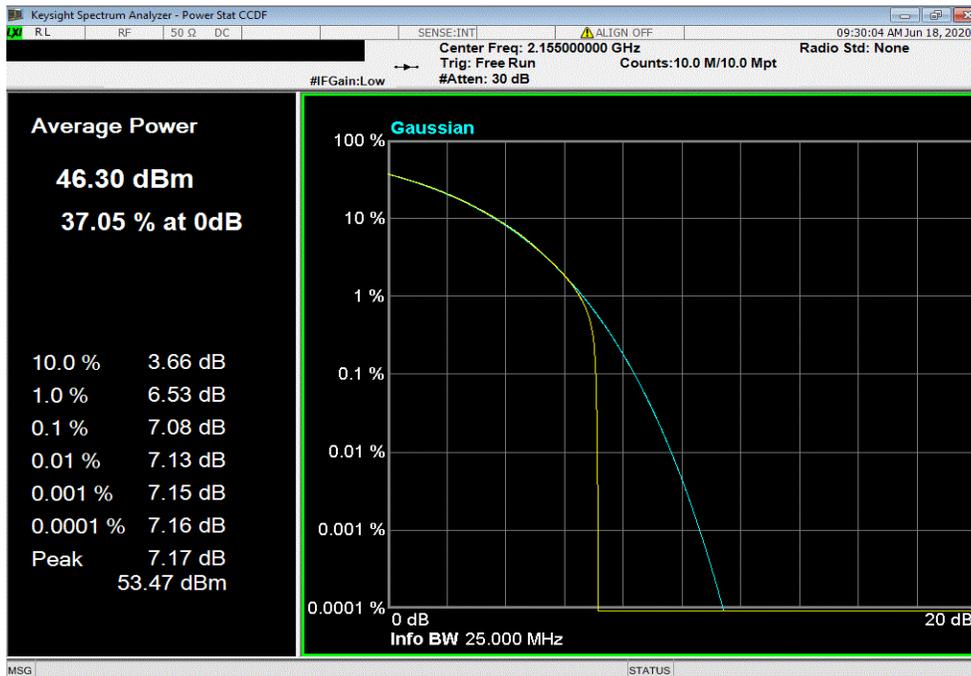


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, QPSK Modulation, High Channel 2192.5 MHz | | | | | | |
|---|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.14 | 13 | Pass | | | |

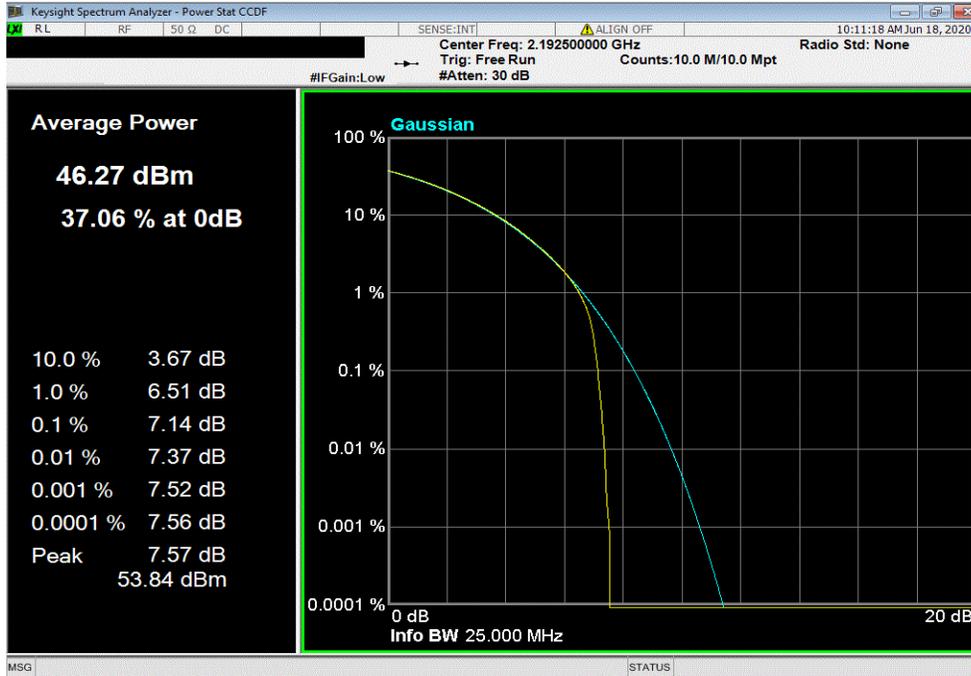

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 16-QAM Modulation, Low Channel 2117.5 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.21 | 13 | Pass | | | |

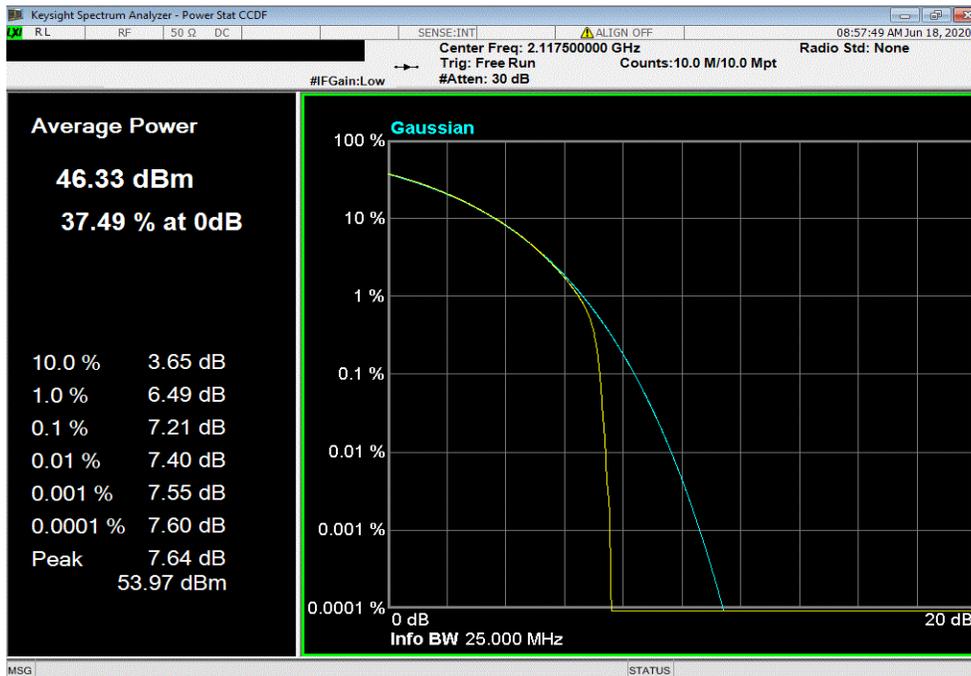


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.15 | 13 | Pass | | |

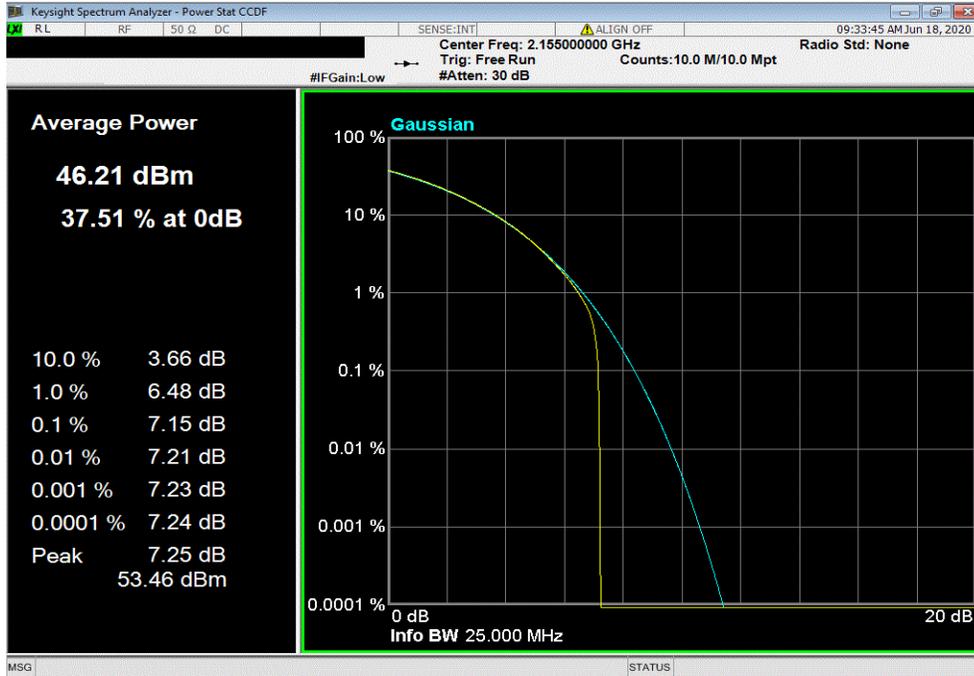

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 16-QAM Modulation, High Channel 2192.5 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.22 | 13 | Pass | | |

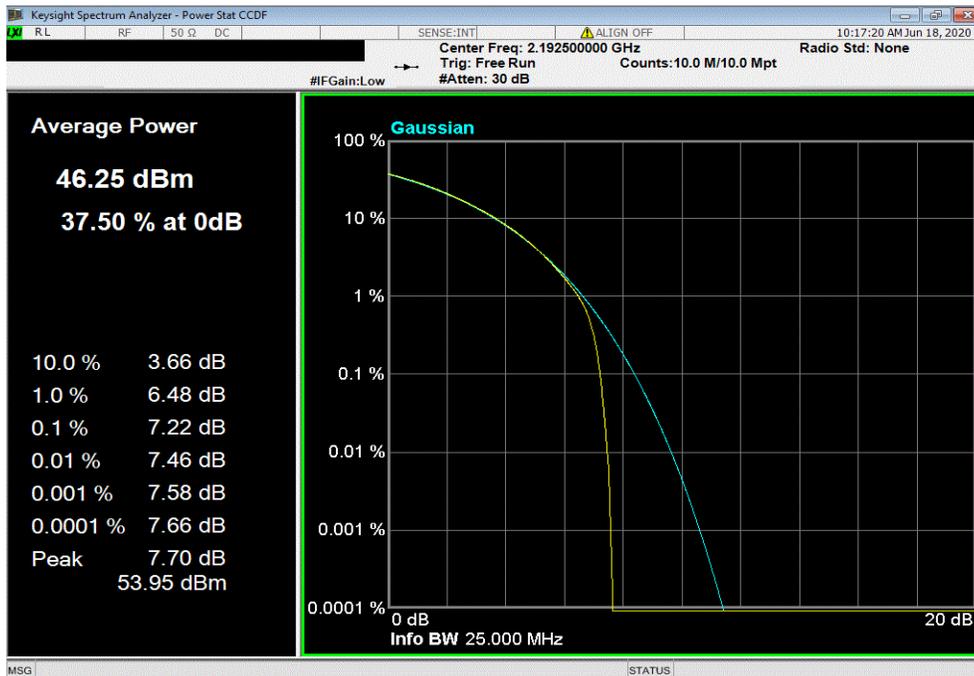


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth , 64-QAM Modulation, Low Channel 2117.5 MHz | | | | | | |
|---|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.09 | 13 | Pass | | | |

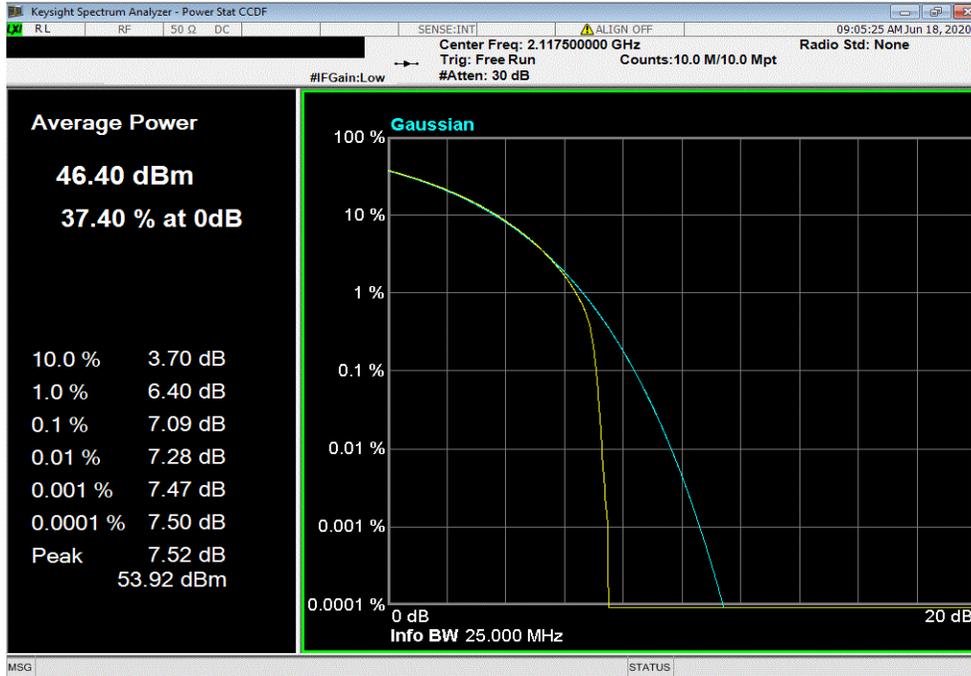

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth , 64-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|---|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.07 | 13 | Pass | | | |

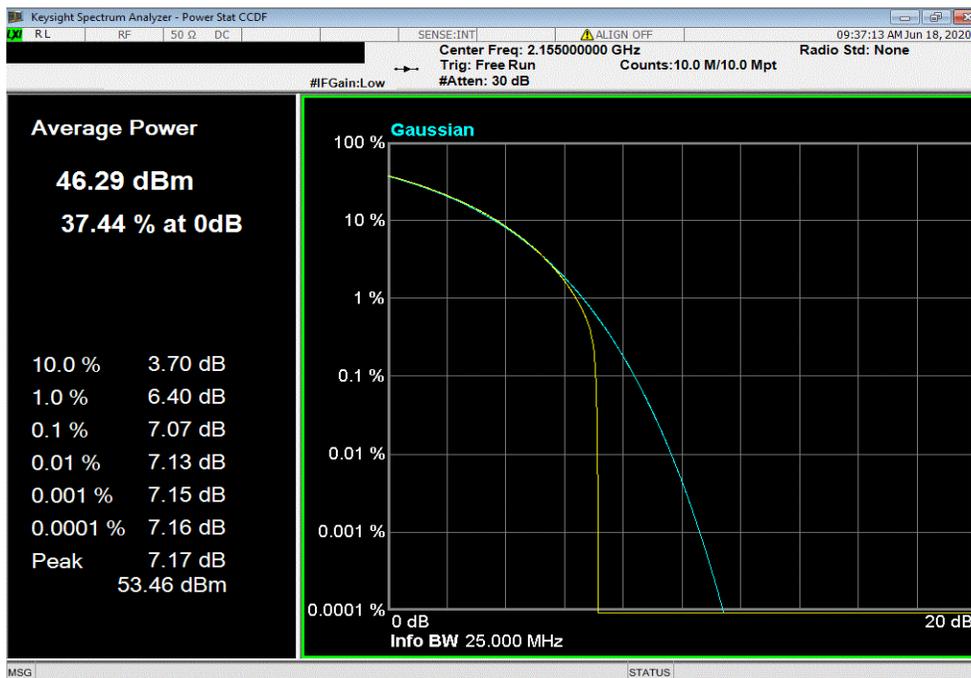


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth , 64-QAM Modulation, High Channel 2192.5 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.13 | 13 | Pass | | |

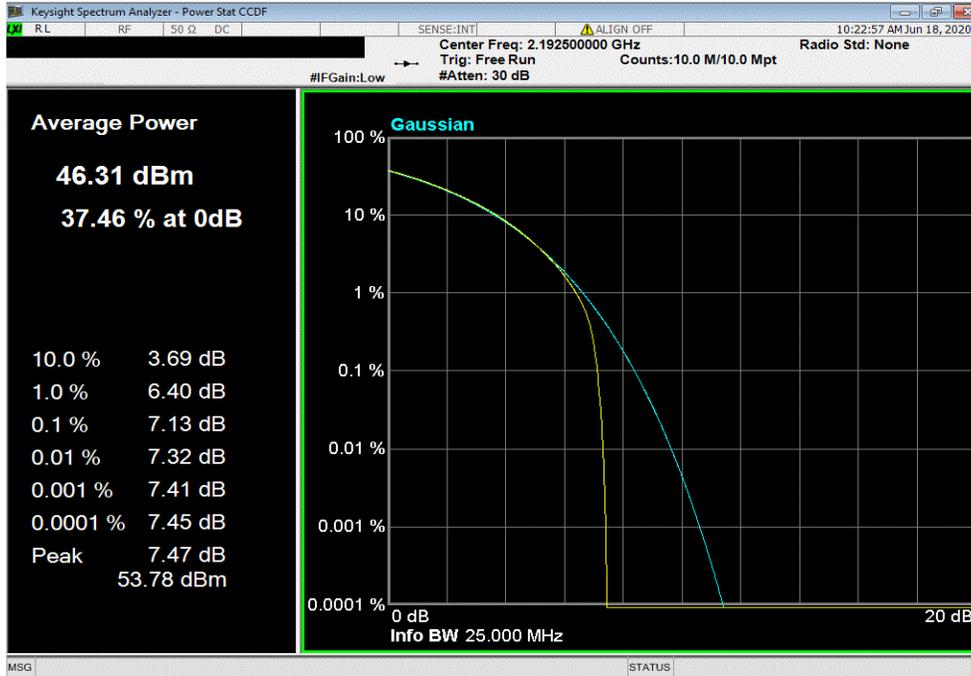

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth , 256-QAM Modulation, Low Channel 2117.5 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.11 | 13 | Pass | | |

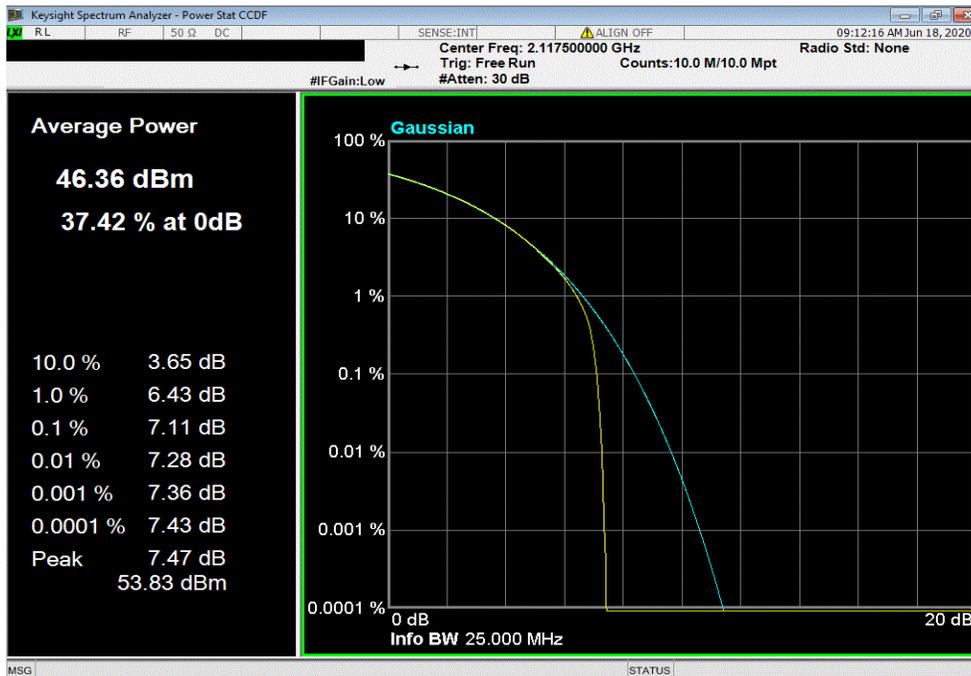


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|---|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.08 | 13 | Pass | | | |

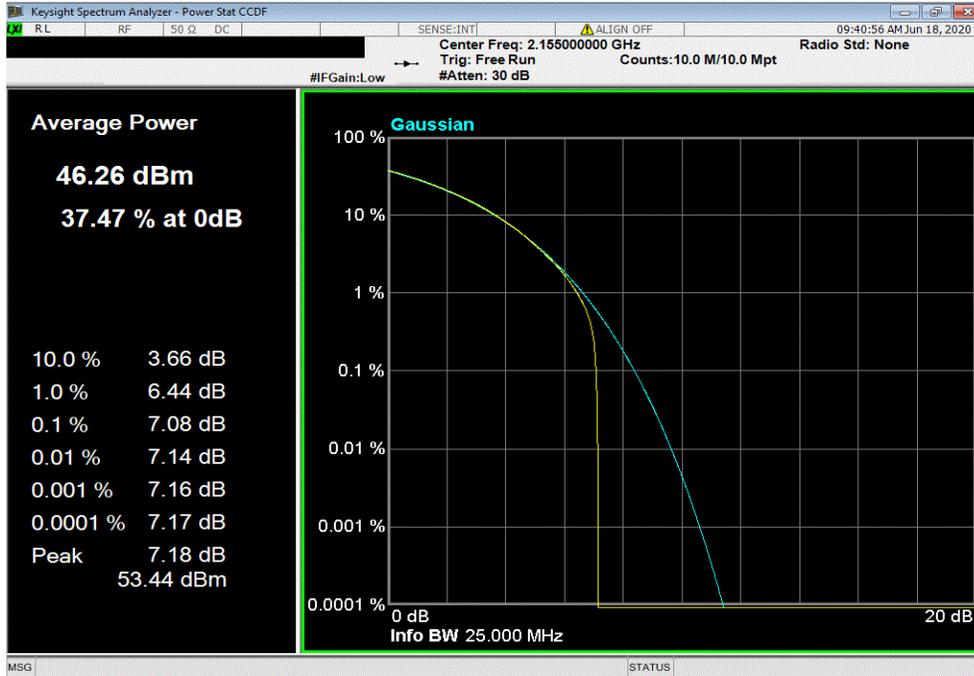

| Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, High Channel 2192.5 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.14 | 13 | Pass | | | |

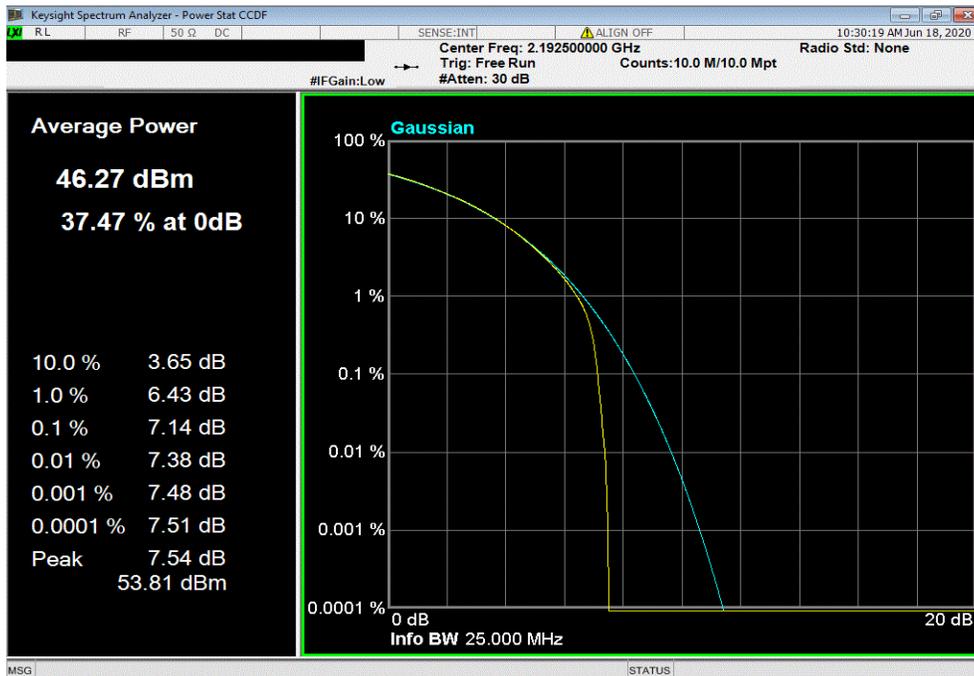


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, QPSK Modulation, Low Channel 2120 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.06 | 13 | Pass | | |

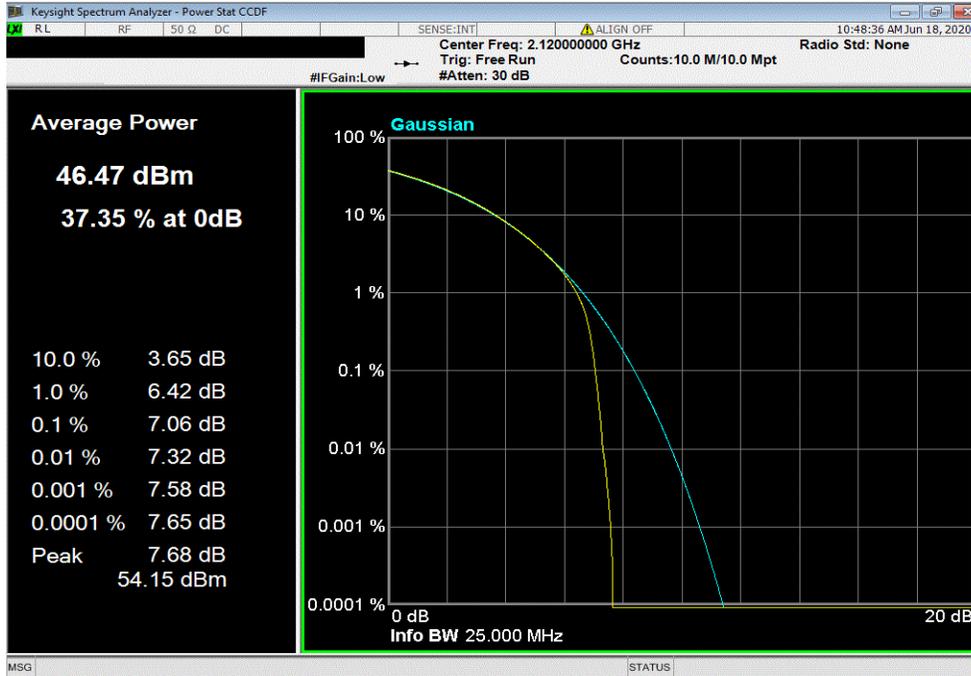

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7 | 13 | Pass | | |

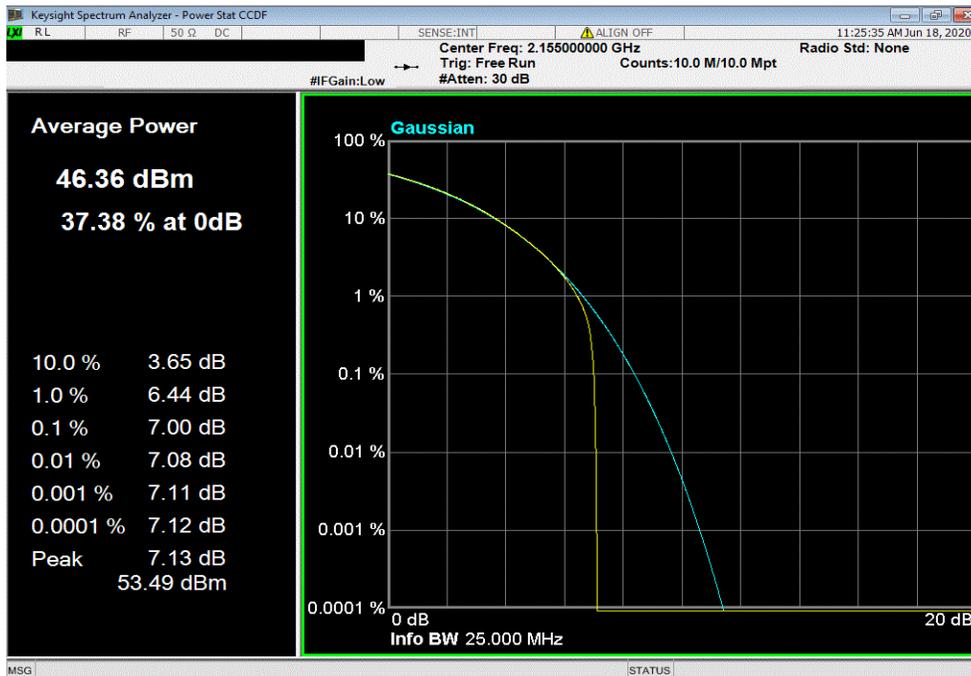


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, QPSK Modulation, High Channel 2190 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.12 | 13 | Pass | | |

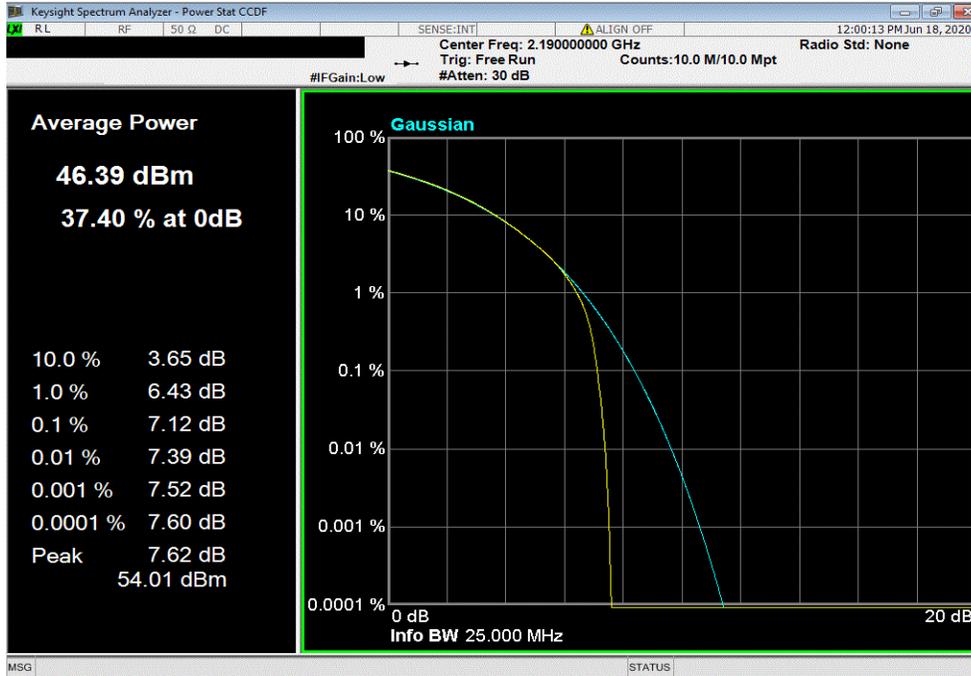

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 16-QAM Modulation, Low Channel 2120 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.14 | 13 | Pass | | |

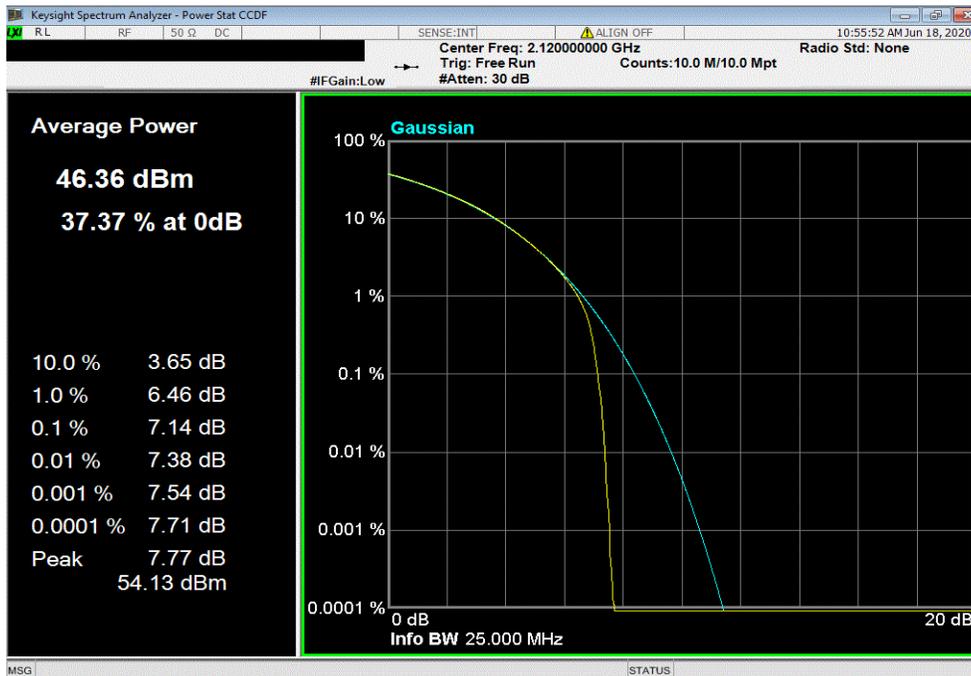


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|--|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.06 | 13 | Pass | | |

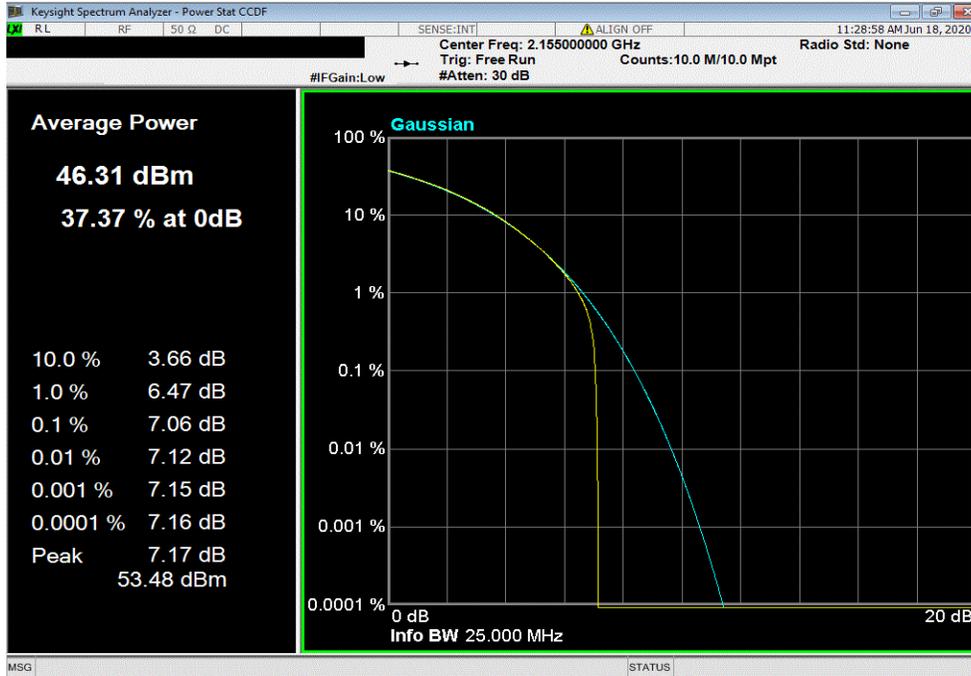

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 16-QAM Modulation, High Channel 2190 MHz | | | | | | |
|---|--|-----------------|-----------------|---------|--|--|
| | | PAPR Value (dB) | PAPR Limit (dB) | Results | | |
| | | 7.16 | 13 | Pass | | |

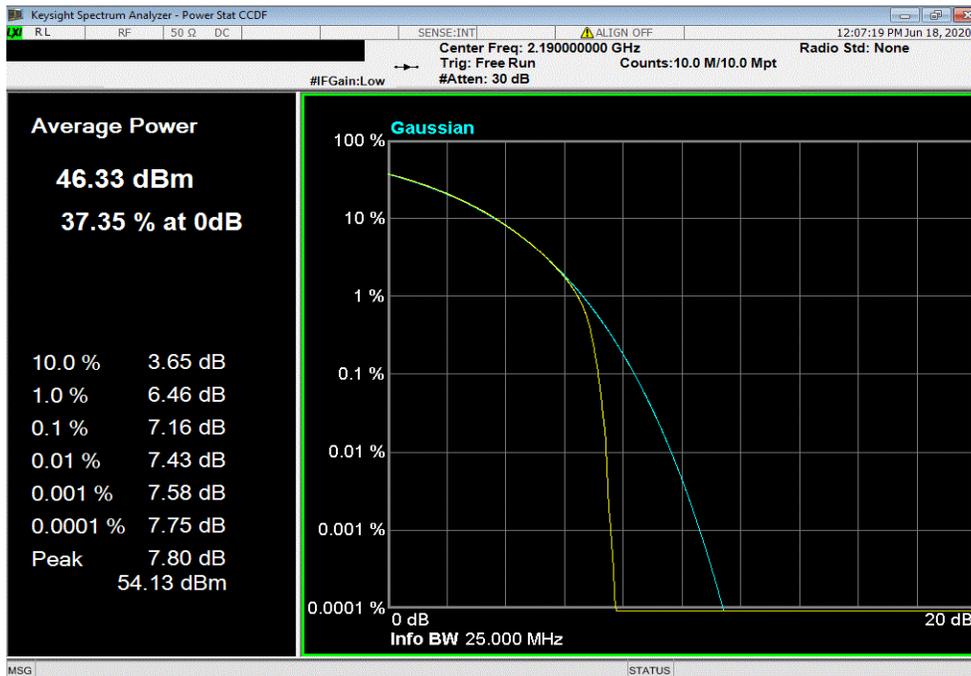


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 64-QAM Modulation, Low Channel 2120 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.08 | 13 | Pass | | | |

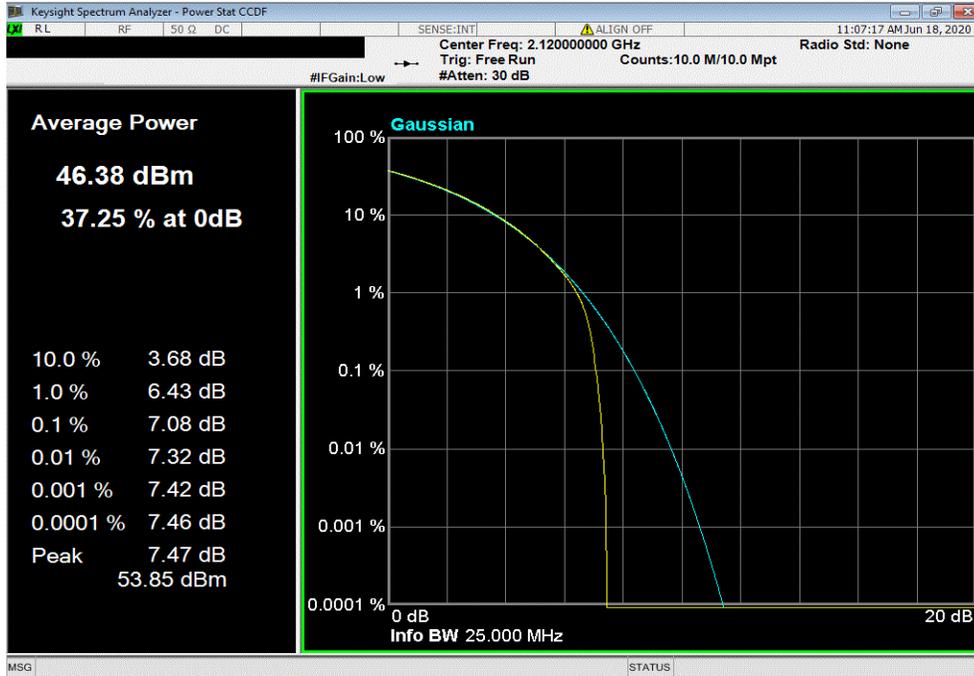

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7 | 13 | Pass | | | |

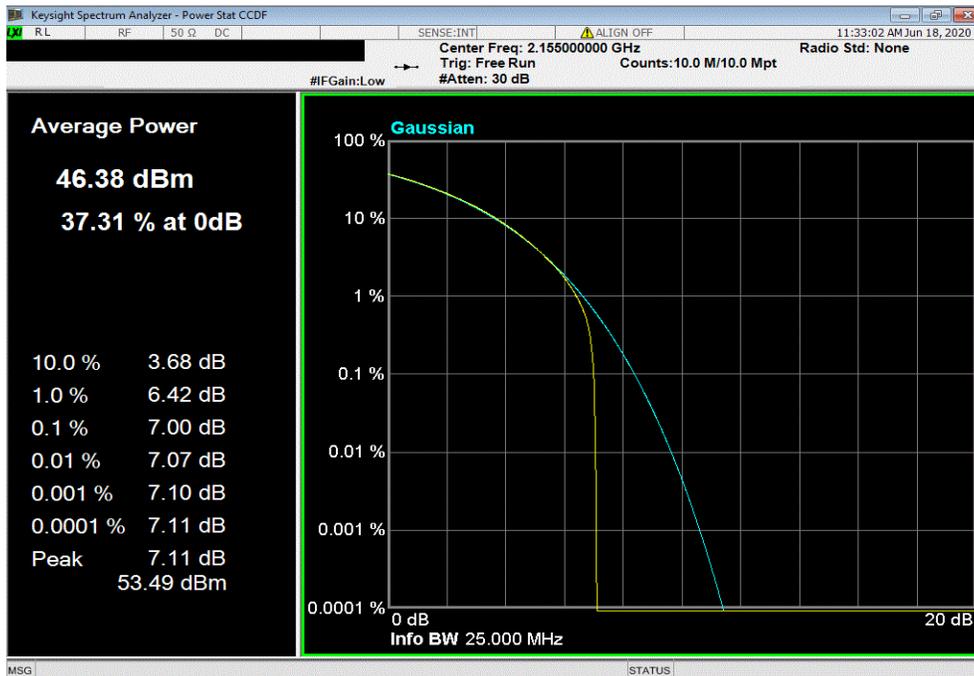


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 64-QAM Modulation, High Channel 2190 MHz | | | | | | |
|---|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.11 | 13 | Pass | | | |

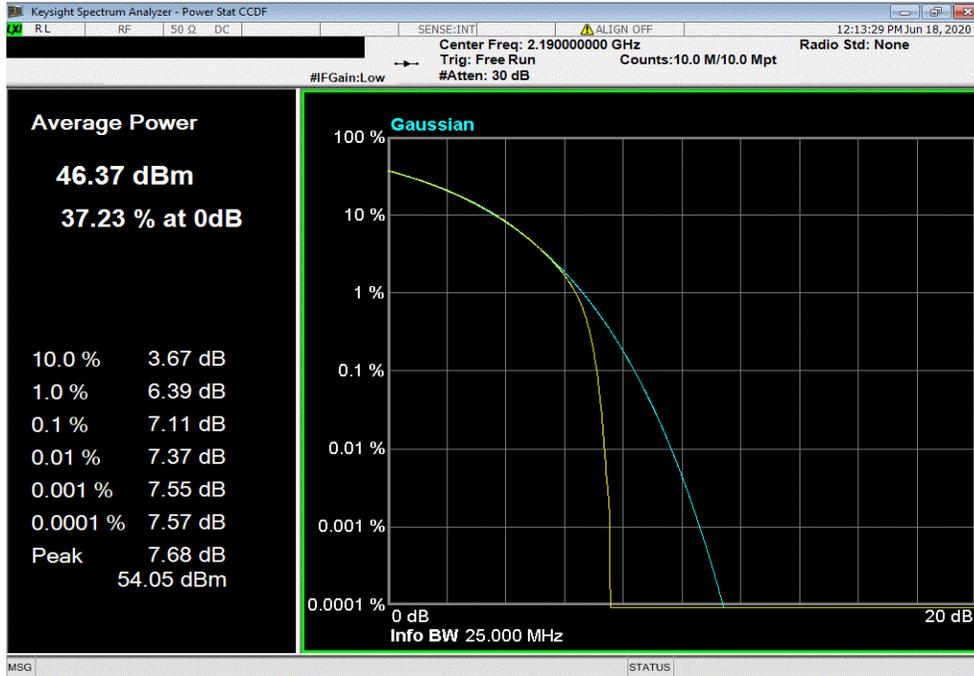

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Low Channel 2120 MHz | | | | | | |
|---|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.04 | 13 | Pass | | | |

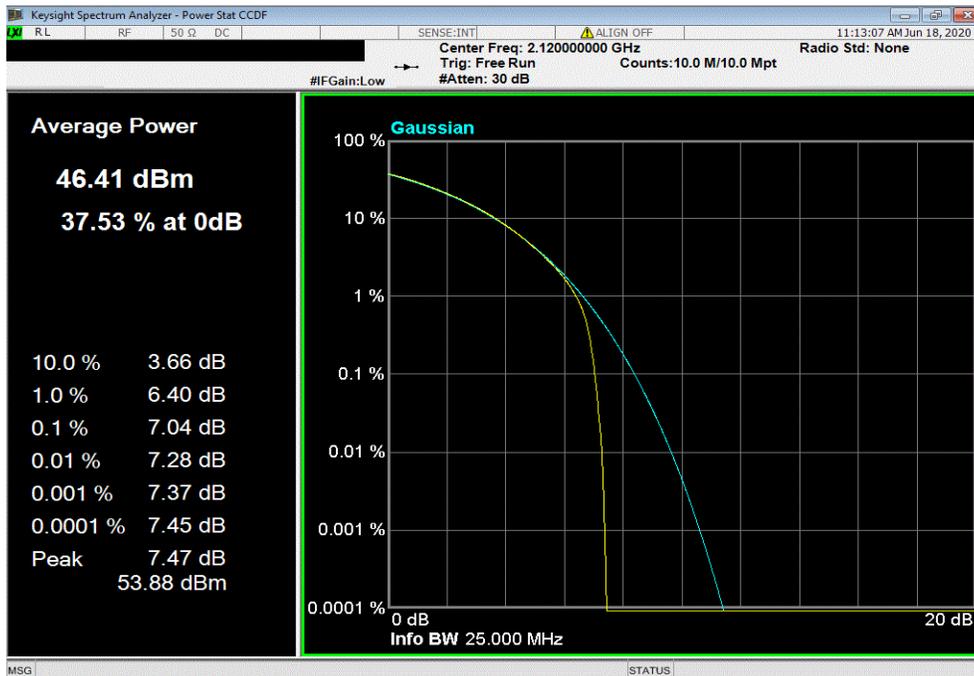


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz | | | | | | |
|---|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 6.98 | 13 | Pass | | | |

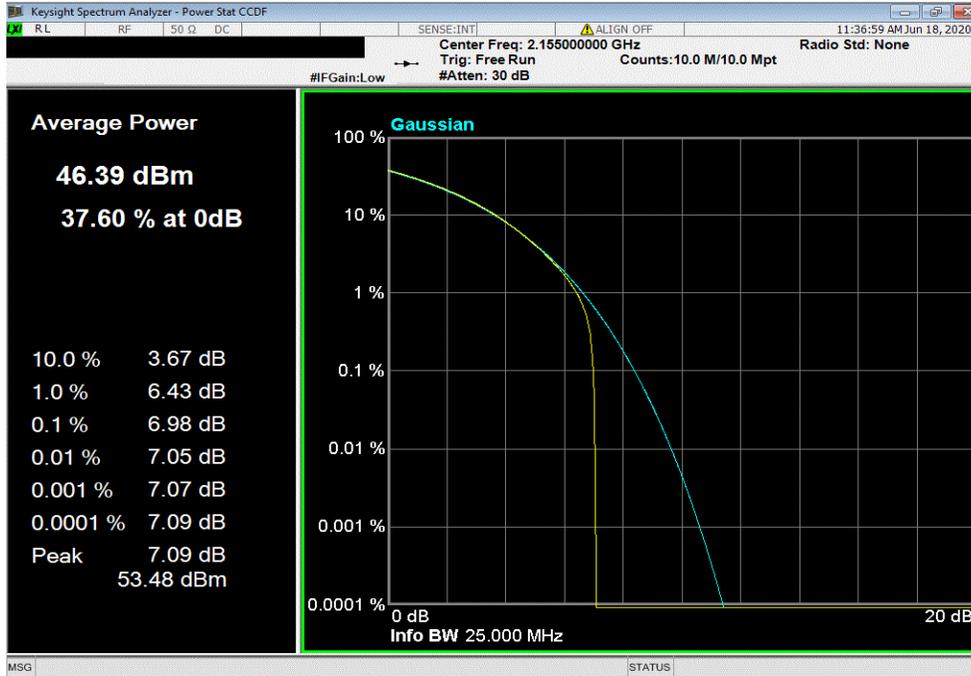

| Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, High Channel 2190 MHz | | | | | | |
|--|-----------------|-----------------|---------|--|--|--|
| | PAPR Value (dB) | PAPR Limit (dB) | Results | | | |
| | 7.11 | 13 | Pass | | | |

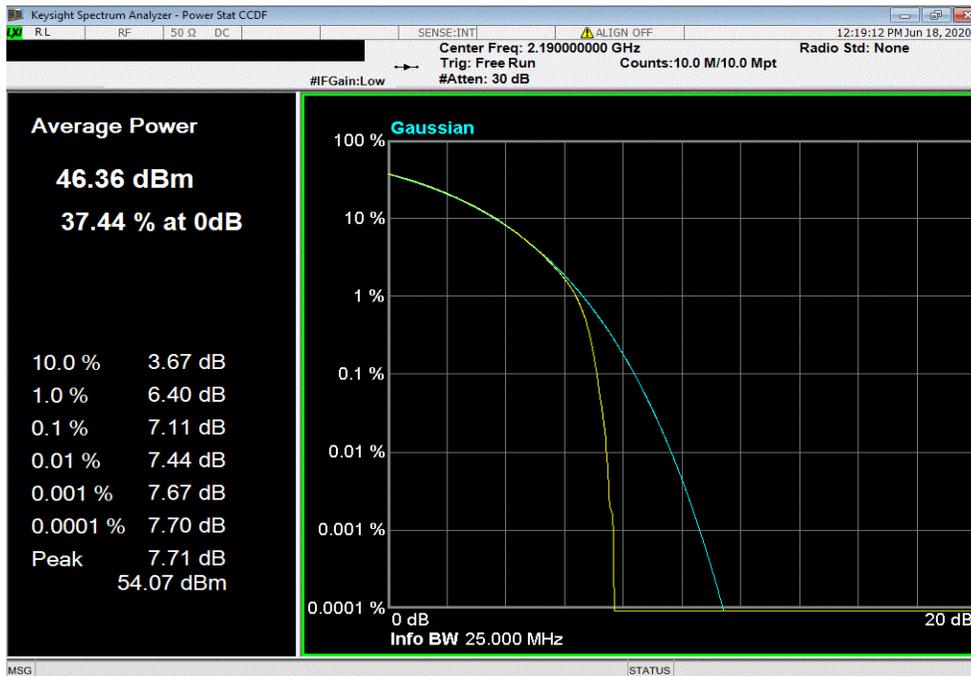

BAND EDGE COMPLIANCE - BAND 25



XMIT 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------|------------|-----|-----------|-----------|
| Analyzer - Spectrum Analyzer | Agilent | N9010A | AFL | 27-Feb-20 | 27-Feb-21 |
| Generator - Signal | Keysight | N5171B-506 | TEW | 2-May-18 | 2-May-21 |

TEST DESCRIPTION

Prior to making the measurements the setup including cables and attenuator was calibrated with a signal generator and a power meter.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

All limits were adjusted by a factor of $[-10 \cdot \log(4)]$ dB to account for the device operation as a 4 port MIMO transmitter, as per FCC KDB 622911.

Per FCC 24.238(a) the power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm. The limit is adjusted to -19 dBm $[-13 \text{ dBm} - 10 \log(4)]$ per FCC KDB 662911D01 v02r01 because the BTS may operate as a 4 port MIMO transmitter.

Per FCC 24.238(b) emissions seen up to 1 MHz outside of authorized operating frequency range band edges shall be measured with a RBW of 1% of the measured emission bandwidth. Any emission seen to be > 1 MHz further outside the band edges shall be measured with a RBW of 1 MHz. However, a narrower RBW of at least 1% of the emission bandwidth is still allowed provided that the measured power is integrated over the full reference bandwidth of 1 MHz.

RF conducted emissions testing was performed only on one port. The testing was performed on the same version of hardware (AHFIG) as the original certification test. The AHFIG antenna ports are essentially electrically identical (the RF power variation between antenna ports is small as shown in the original certification testing) and antenna port 4 was selected to perform the testing under this effort as allowed by ANSI C63.26-2015 paragraph 5.7.2i.

Carrier bandwidths of 10, 15, & 20MHz were verified using NB IoT GB carriers under this effort. The LTE modulation type for this testing was set up according to 3GPP TS 36.141 E-UTRA Test Models and is "E-TM 1.1 (QPSK modulation type) with N-TM (narrow band IoT)".

BAND EDGE COMPLIANCE - BAND 25



TstTx 2020.06.06.0 BETA XMI 2020.03.25.0

| | | | | | | |
|--|-------------------------|---|---------------------|-----------------|---------------|--------|
| EUT: AHFIG | | Work Order: NOKI0016 | | | | |
| Serial Number: K9191322351 | | Date: 23-Jun-20 | | | | |
| Customer: Nokia Solutions and Networks | | Temperature: 22.6 °C | | | | |
| Attendees: Mitchell Hill, John Rattavong | | Humidity: 52.1% RH | | | | |
| Project: None | | Barometric Pres.: 1016 mbar | | | | |
| Tested by: Brandon Hobbs | | Power: 54 VDC | | | | |
| | | Job Site: TX05 | | | | |
| TEST SPECIFICATIONS | | Test Method | | | | |
| FCC 24E:2020 | | ANSI C63.26:2015 | | | | |
| COMMENTS | | | | | | |
| All measurement path losses were accounted for in the reference level offset including any attenuators, filters and DC blocks. The carrier was set to maximum for all testing. | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 6 | Signature  | | | | |
| | | Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result |
| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz | | | | | | |
| 10 MHz Bandwidth | | | | | | |
| QPSK Modulation | | | | | | |
| | Low Channel 1935 MHz | 1 | 1930.0 | -23.27 | -19 | Pass |
| | Low Channel 1935 MHz | 2 | 1928.5 | -23.60 | -19 | Pass |
| | Low Channel 1935 MHz | 3 | 1927.8 | -22.72 | -19 | Pass |
| | High Channel 1990 MHz | 1 | 1995.0 | -22.32 | -19 | Pass |
| | High Channel 1990 MHz | 2 | 1996.5 | -22.18 | -19 | Pass |
| | High Channel 1990 MHz | 3 | 1997.0 | -21.43 | -19 | Pass |
| 15 MHz Bandwidth | | | | | | |
| QPSK Modulation | | | | | | |
| | Low Channel 1937.5 MHz | 1 | 1930.0 | -25.52 | -19 | Pass |
| | Low Channel 1937.5 MHz | 2 | 1928.5 | -24.58 | -19 | Pass |
| | Low Channel 1937.5 MHz | 3 | 1927.5 | -22.87 | -19 | Pass |
| | High Channel 1987.5 MHz | 1 | 1995.0 | -23.52 | -19 | Pass |
| | High Channel 1987.5 MHz | 2 | 1996.5 | -21.30 | -19 | Pass |
| | High Channel 1987.5 MHz | 3 | 1997.2 | -21.07 | -19 | Pass |
| 20 MHz Bandwidth | | | | | | |
| QPSK Modulation | | | | | | |
| | Low Channel 1940 MHz | 1 | 1930.0 | -24.07 | -19 | Pass |
| | Low Channel 1940 MHz | 2 | 1928.5 | -22.89 | -19 | Pass |
| | Low Channel 1940 MHz | 3 | 1927.7 | -21.21 | -19 | Pass |
| | High Channel 1985 MHz | 1 | 1995.0 | -22.34 | -19 | Pass |
| | High Channel 1985 MHz | 2 | 1996.5 | -19.46 | -19 | Pass |
| | High Channel 1985 MHz | 3 | 1997.2 | -19.57 | -19 | Pass |

BAND EDGE COMPLIANCE - BAND 25




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, Low Channel 1935 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 1 | 1930 | -23.27 | -19 | Pass | | |



| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, Low Channel 1935 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 2 | 1928.5 | -23.60 | -19 | Pass | | |

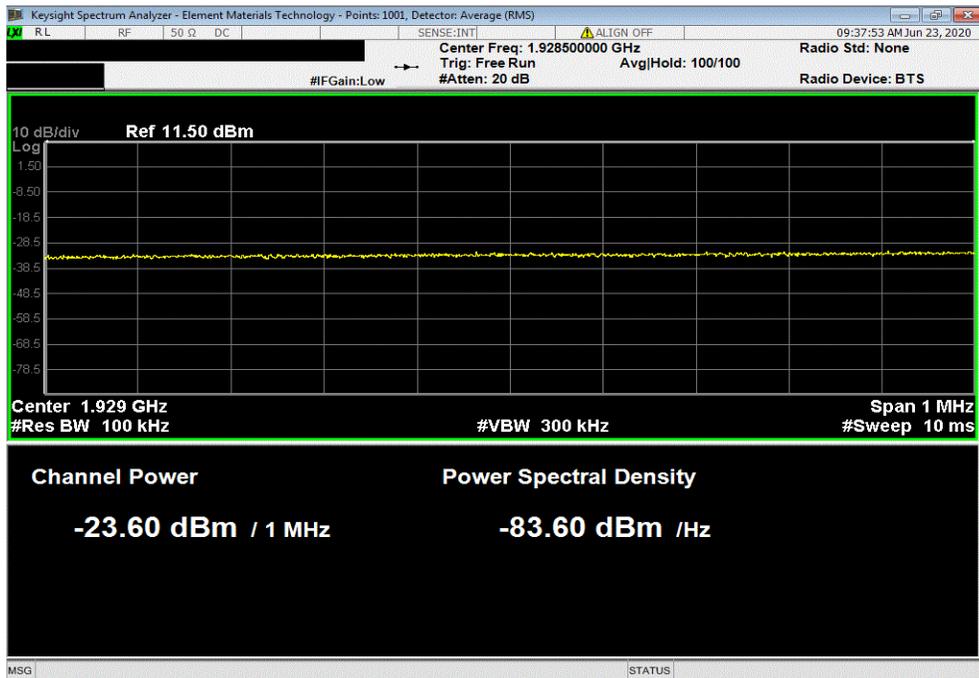


BAND EDGE COMPLIANCE - BAND 25




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, Low Channel 1935 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 3 | 1927.8 | -22.72 | -19 | Pass | | |

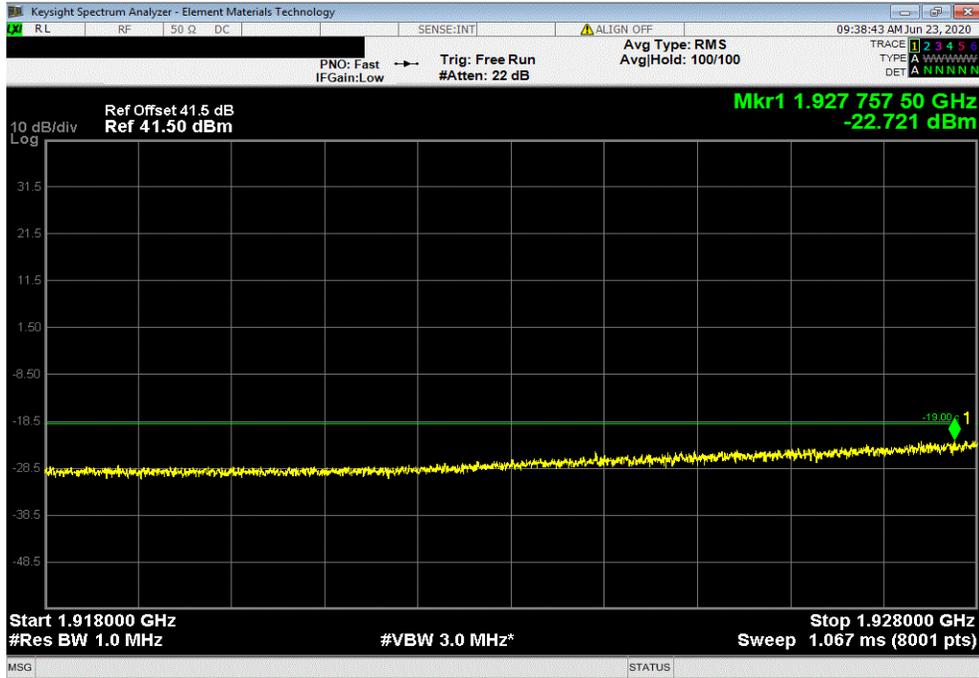

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, High Channel 1990 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 1 | 1995.0 | -22.32 | -19 | Pass | | |

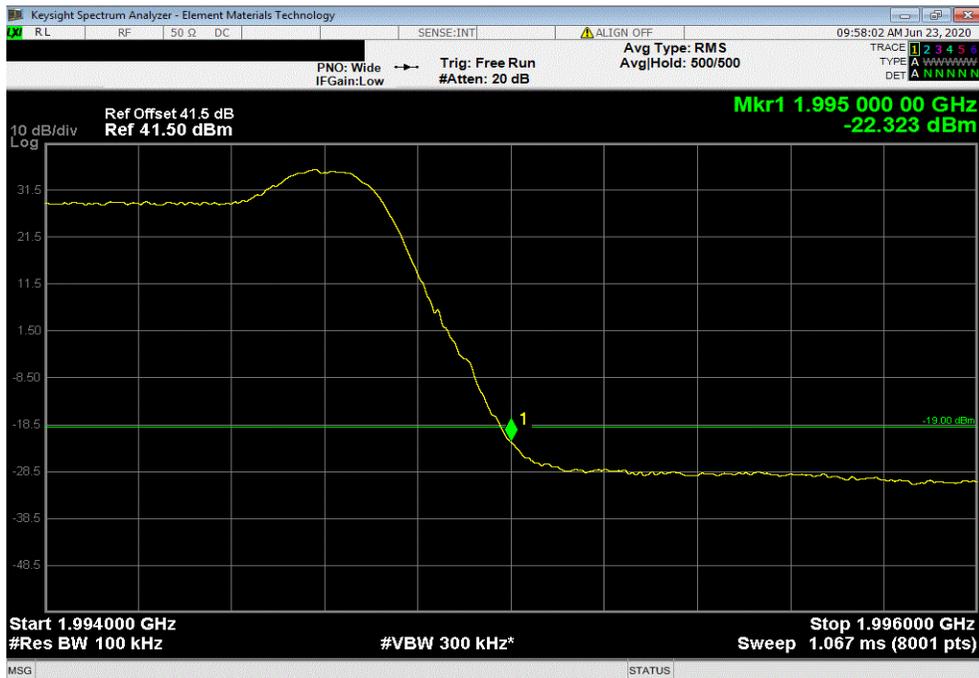


BAND EDGE COMPLIANCE - BAND 25




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, High Channel 1990 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 2 | 1996.5 | -22.18 | -19 | Pass | | |

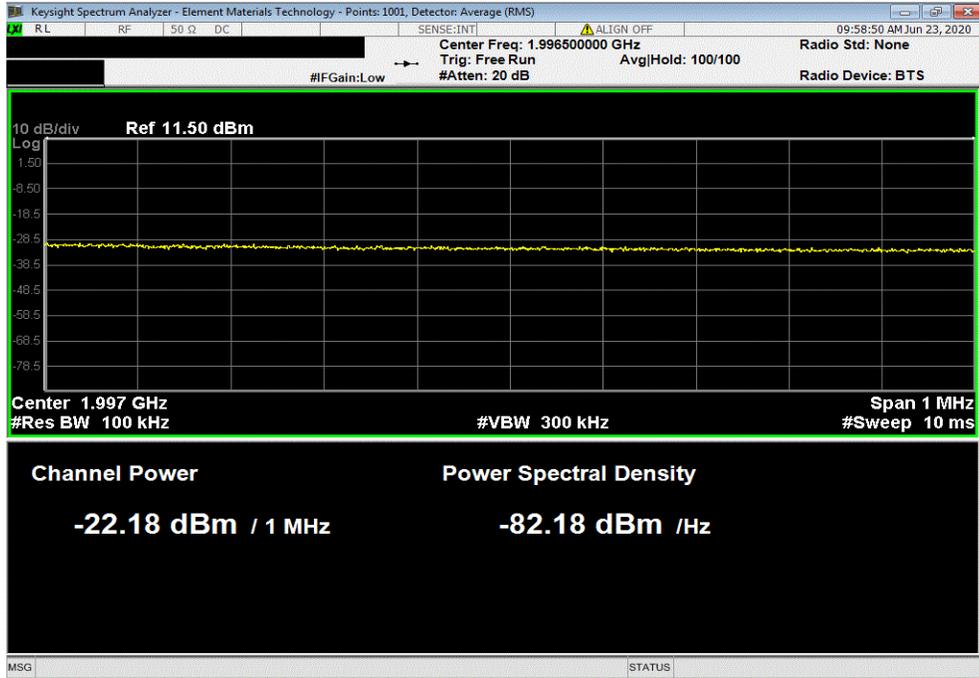

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, High Channel 1990 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 3 | 1997.0 | -21.43 | -19 | Pass | | |

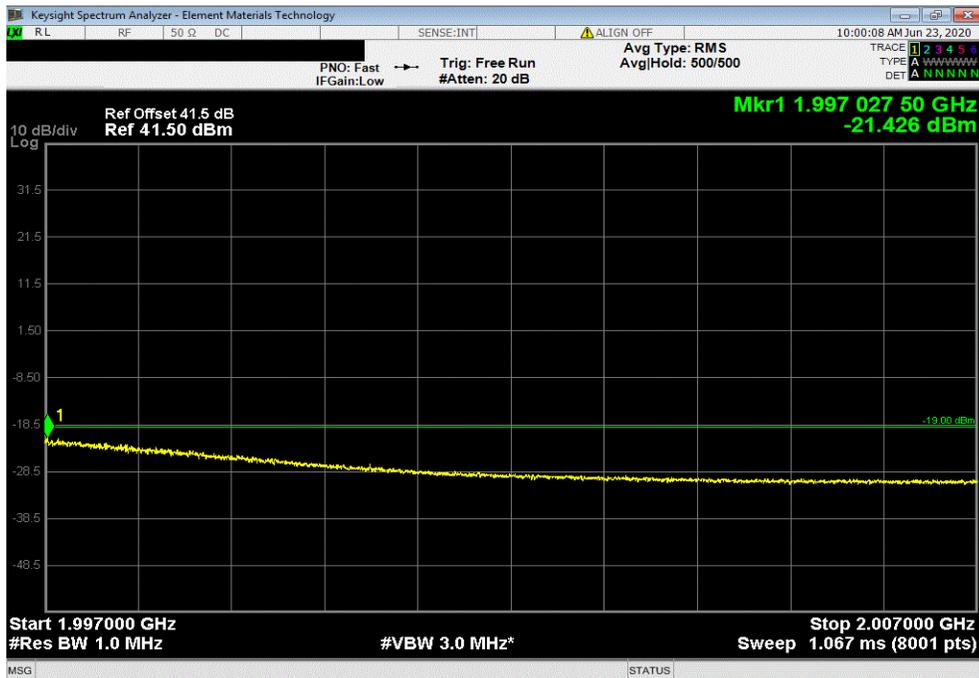


BAND EDGE COMPLIANCE - BAND 25




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, Low Channel 1937.5 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 1 | 1930.0 | -25.52 | -19 | Pass | | |

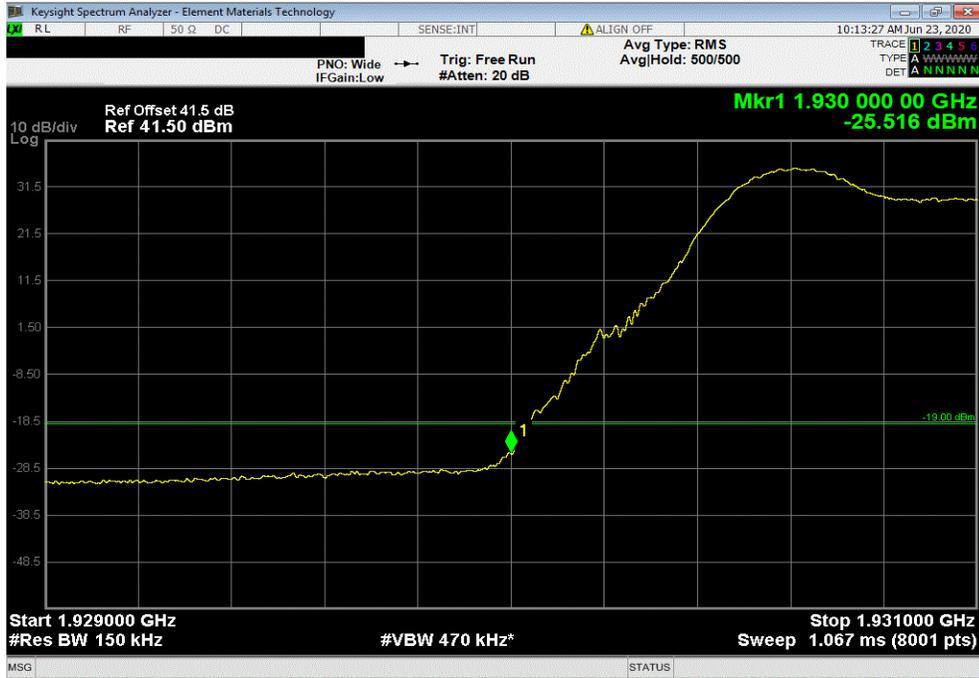

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, Low Channel 1937.5 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 2 | 1928.5 | -24.58 | -19 | Pass | | |

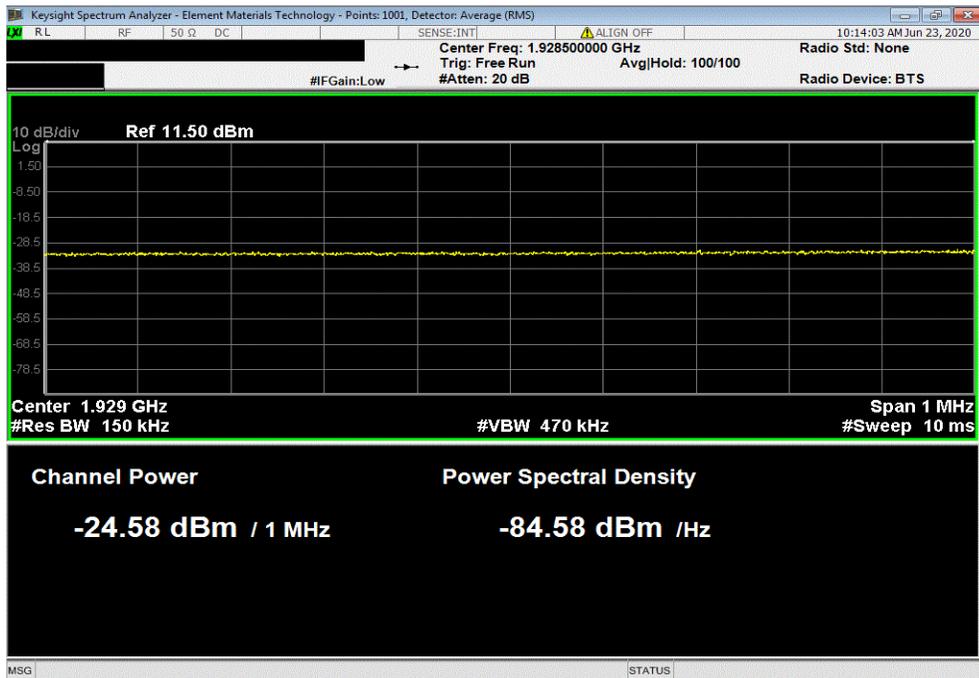


BAND EDGE COMPLIANCE - BAND 25




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, Low Channel 1937.5 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 3 | 1927.5 | -22.87 | -19 | Pass | | |

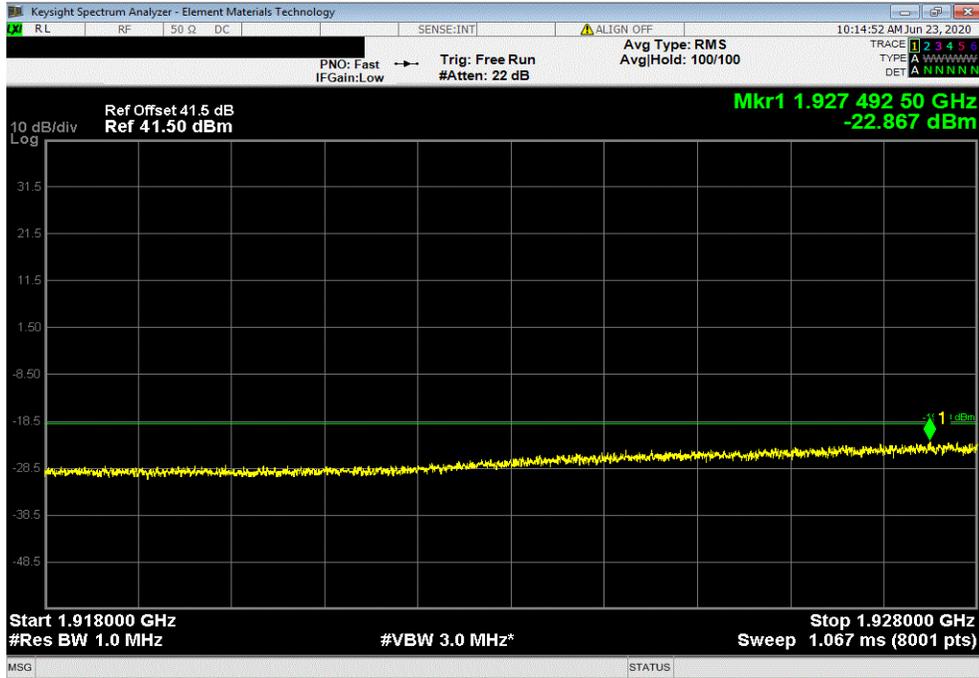

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, High Channel 1987.5 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 1 | 1995.0 | -23.52 | -19 | Pass | | |

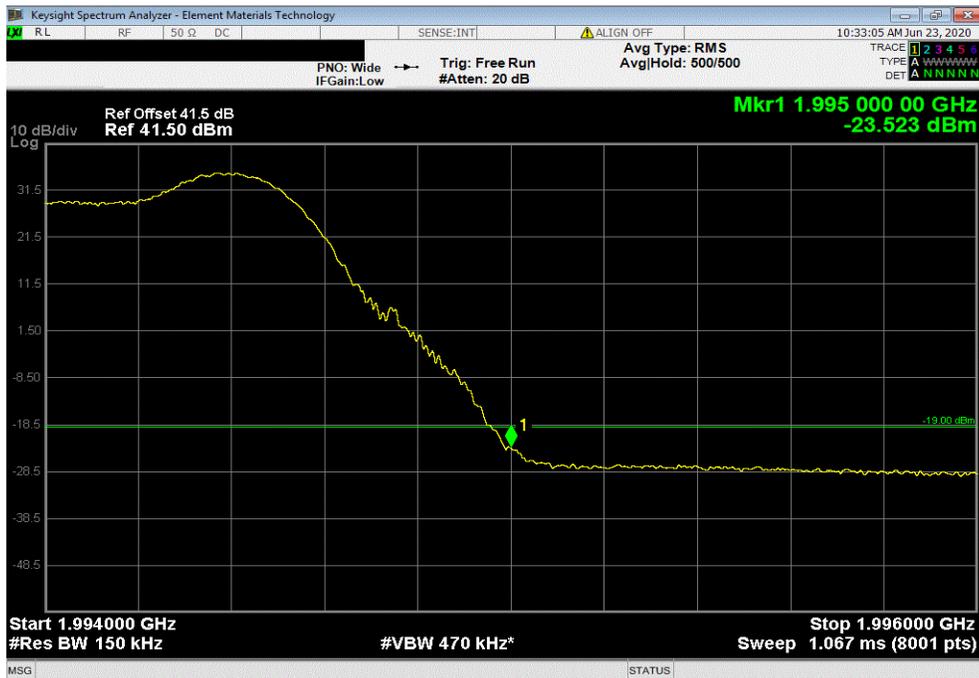


BAND EDGE COMPLIANCE - BAND 25




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, High Channel 1987.5 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 2 | 1996.5 | -21.30 | -19 | Pass | | |

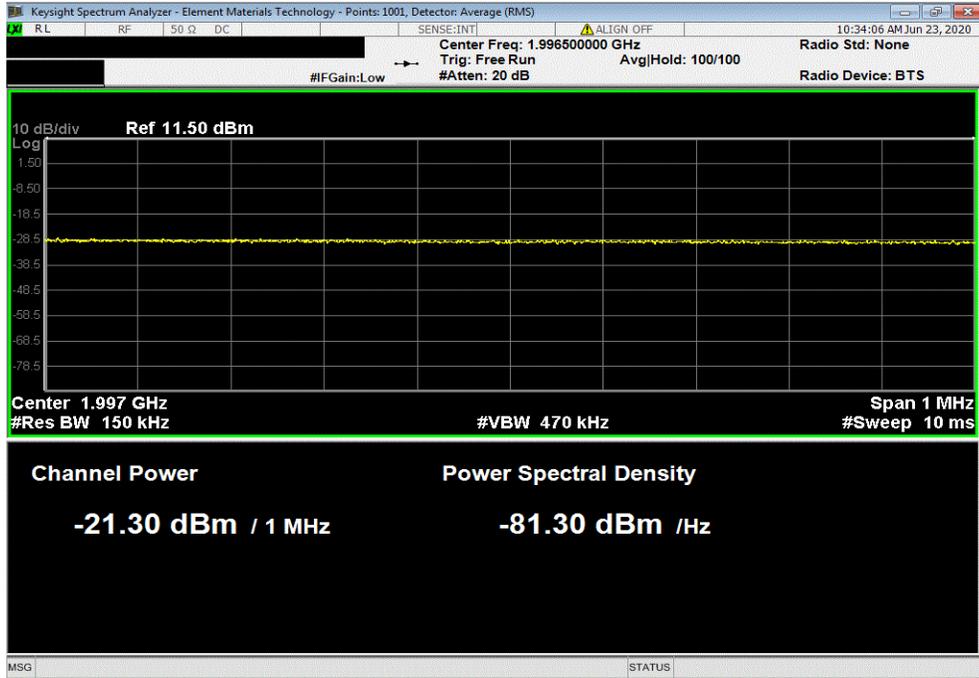

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, High Channel 1987.5 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 3 | 1997.2 | -21.07 | -19 | Pass | | |

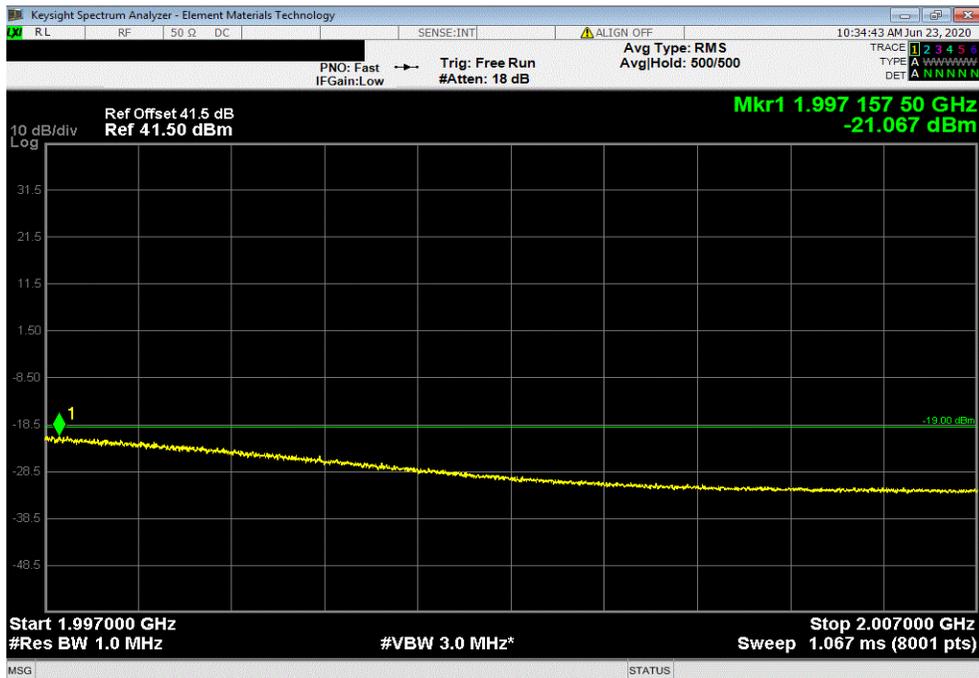

BAND EDGE COMPLIANCE - BAND 25




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, Low Channel 1940 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 1 | 1930.0 | -24.07 | -19 | Pass | | |



| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, Low Channel 1940 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 2 | 1928.5 | -22.89 | -19 | Pass | | |

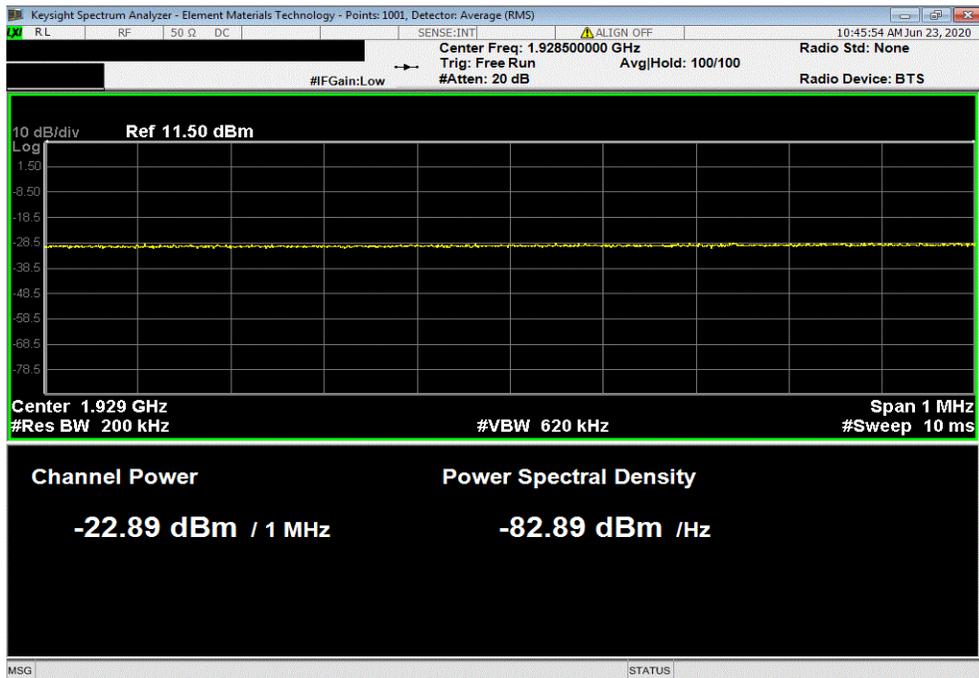


BAND EDGE COMPLIANCE - BAND 25




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, Low Channel 1940 MHz | | | | | | |
|--|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 3 | 1927.7 | -21.21 | -19 | Pass | | |

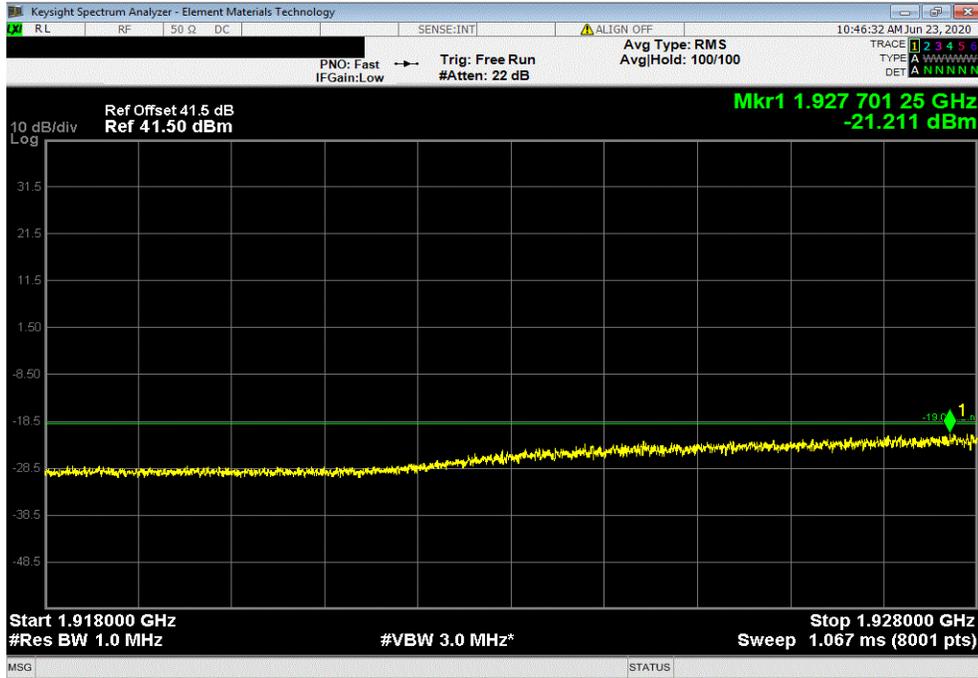

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, High Channel 1985 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 1 | 1995.0 | -22.34 | -19 | Pass | | |

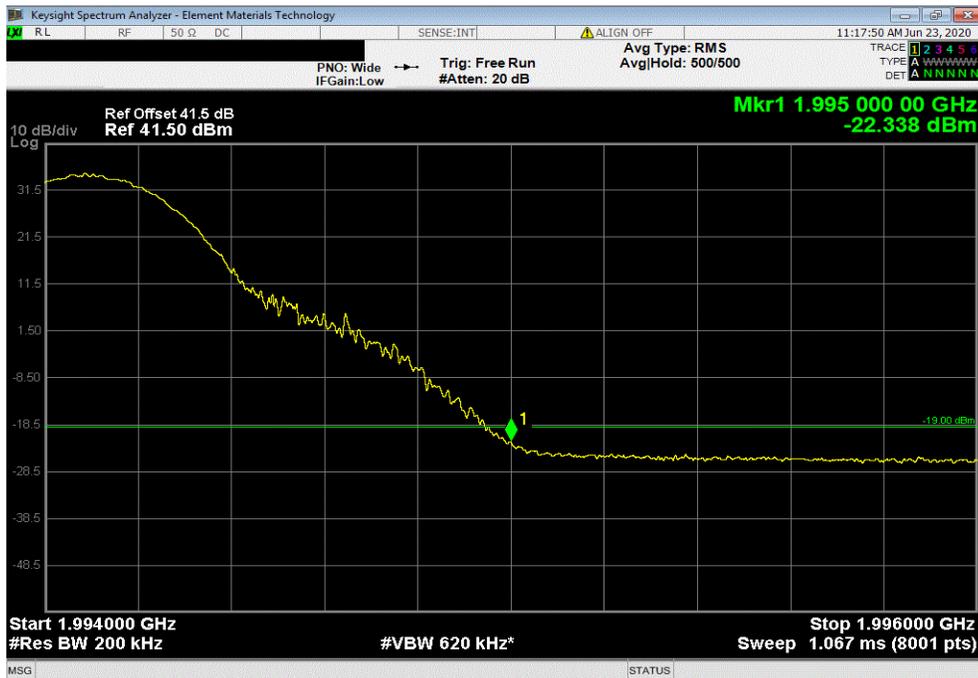


BAND EDGE COMPLIANCE - BAND 25



TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, High Channel 1985 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 2 | 1996.5 | -19.46 | -19 | Pass | | |

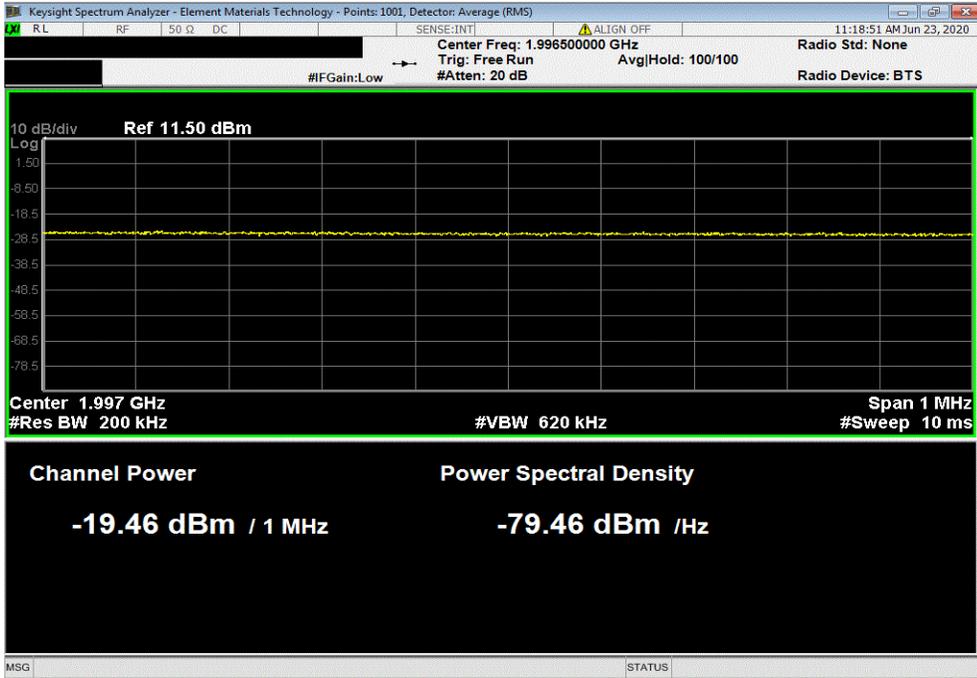

| Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, High Channel 1985 MHz | | | | | | |
|---|---------------------|-----------------|---------------|--------|--|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBm) | Limit < (dBm) | Result | | |
| 3 | 1997.2 | -19.57 | -19 | Pass | | |

