

CONDUCTED OUTPUT POWER



XMIT 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	2020-07-17	2023-07-17
Block - DC	Fairview Microwave	SD3379	AMT	2021-09-14	2022-09-14
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFQ	2022-01-17	2023-01-17

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The fundamental emission output power (maximum average conducted output power) was measured using the channels and modes as called out on the following data sheets. The transmit power was set to its default maximum.

The method in section 5.2.4.4 of ANSI C63.26 was used to make the measurements. This method uses trace averaging across the ON and OFF times of the EUT transmissions in the spectrum analyzer channel power function using an RMS detector. Following the measurement a duty cycle correction was applied by adding $[10 \log (1/D)]$, where D is the duty cycle in decimal, to the measured power to compute the average power during the actual transmission times

RF conducted emissions testing was performed only on one port. All four AHFII antenna ports are essentially electrically identical and antenna port 1 was selected to perform the testing under this effort as allowed by ANSI C63.26-2015 paragraphs 5.2.5.3, 5.7.2i and 6.4.

The total average transmit power of all antenna ports was determined per ANSI C63.26-2105 paragraph 6.4.3.1.

CONDUCTED OUTPUT POWER



TbTb 2021.12.14.1 XMI 2022.02.07.0


EUT:	AHFI Remote Radio Head		Work Order:		NOKI0037	
Serial Number:	YK214000036		Date:		28-Feb-22	
Customer:	Nokia Solutions and Networks		Temperature:		22.6 °C	
Attendees:	David Le, John Rattanavong		Humidity:		23.7% RH	
Project:	None		Barometric Pres.:		1026 mbar	
Tested by:	Mark Baytan	Power:	54 VDC	Job Site:		TX09
TEST SPECIFICATIONS			Test Method			
FCC 24E:2022			ANSI C63.26:2015			
RSS-133 Issue 6:2013+A1:2018			RSS-133 Issue 6:2013+A1:2018			
COMMENTS						
All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. Band 25 carriers enabled at maximum power is 80 watts/carrier. The following is the output power measurements at the radio output ports. The output power was measured for a single carrier over the carrier channel bandwidth on port 1. The total output power for multiport (2x2 MIMO, 4x4 MIMO) operation was determined based upon ANSI 63.26 clauses 6.4.3.1 and 6.4.3.2.4 (10 log Nout). The total output power for two port operation is single port power + 3dB [i.e. 10log(2)]. The total output power for four port operation is single port power + 6dB [i.e. 10log(4)].						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	2					
		Initial Value dBm/Carrier BW	Duty Cycle Factor (dB)	Single Port dBm/Carrier BW	Two Port dBm/Carrier BW	Four Port dBm/Carrier BW
Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier						
Port 1						
1.4 MHz Bandwidth						
256-QAM Modulation						
		Low Channel, 1930.7 MHz	48.697	0	48.7	54.7
		Mid Channel, 1962.5 MHz	48.808	0	48.8	54.8
		High Channel, 1989.3 MHz	48.945	0	48.9	54.9
3 MHz Bandwidth						
256-QAM Modulation						
		Mid Channel, 1962.5 MHz	48.83	0	48.8	54.8
		Low Channel, 1931.5 MHz	48.81	0	48.8	54.8
		High Channel, 1988.5 MHz	48.978	0	49.0	55.0
5 MHz Bandwidth						
QPSK Modulation						
		Mid Channel, 1962.5 MHz	48.305	0	48.3	54.3
16-QAM Modulation						
		Mid Channel, 1962.5 MHz	48.263	0	48.3	54.3
64-QAM Modulation						
		Mid Channel, 1962.5 MHz	48.252	0	48.3	54.3
256-QAM Modulation						
		Mid Channel, 1962.5 MHz	48.25	0	48.3	54.3
		Low Channel, 1932.5 MHz	48.89	0	48.9	54.9
		High Channel, 1992.5 MHz	49.069	0	49.1	55.1
10 MHz Bandwidth						
256-QAM Modulation						
		Mid Channel, 1962.5 MHz	48.801	0	48.8	54.8
		Low Channel, 1935 MHz	48.95	0	49	55
		High Channel, 1990 MHz	49.046	0	49.0	55.0
15 MHz Bandwidth						
256-QAM Modulation						
		Mid Channel, 1962.5 MHz	48.816	0	48.8	54.8
		Low Channel, 1937.5 MHz	48.1	0	48.1	54.1
		High Channel, 1987.5 MHz	49.078	0	49.1	55.1
20 MHz Bandwidth						
256-QAM Modulation						
		Mid Channel, 1962.5 MHz	48.824	0	48.8	54.8
		Low Channel, 1940 MHz	48.92	0	48.9	54.9
		High Channel, 1985 MHz	49.043	0	49.0	55.0

CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1930.7 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.697	0	48.7	51.7	54.7		

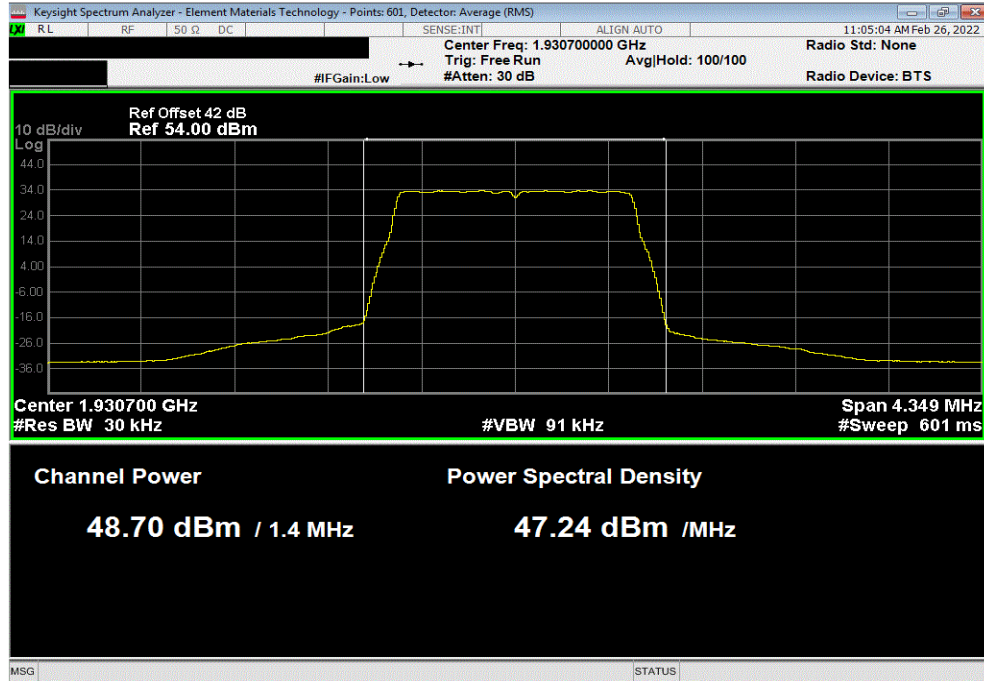

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.808	0	48.8	51.8	54.8		

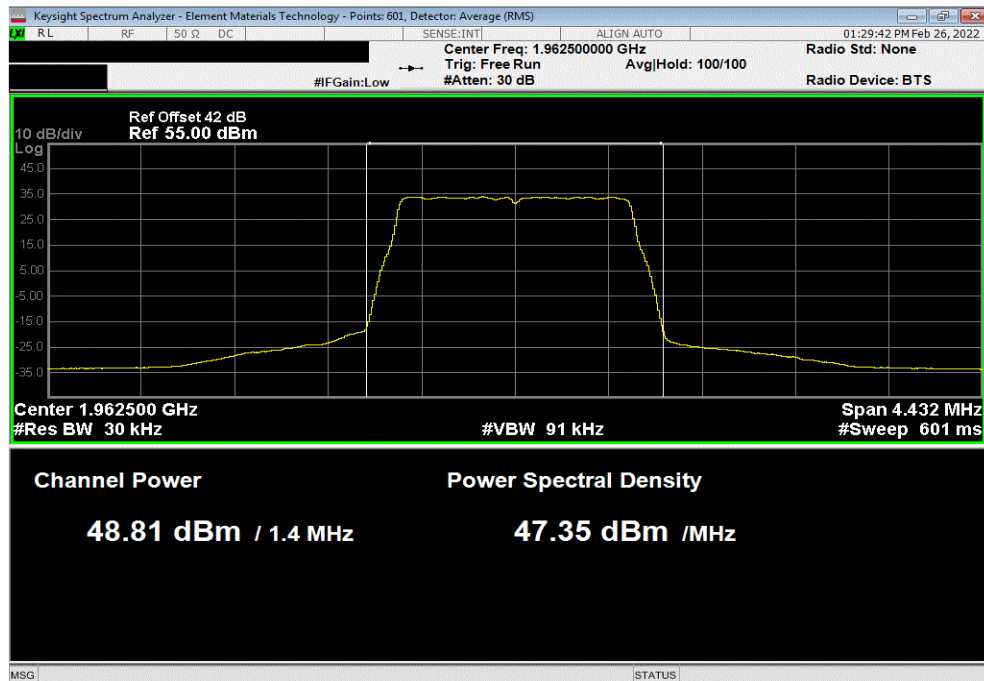


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, High Channel, 1989.3 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.945	0	48.9	51.9	54.9		

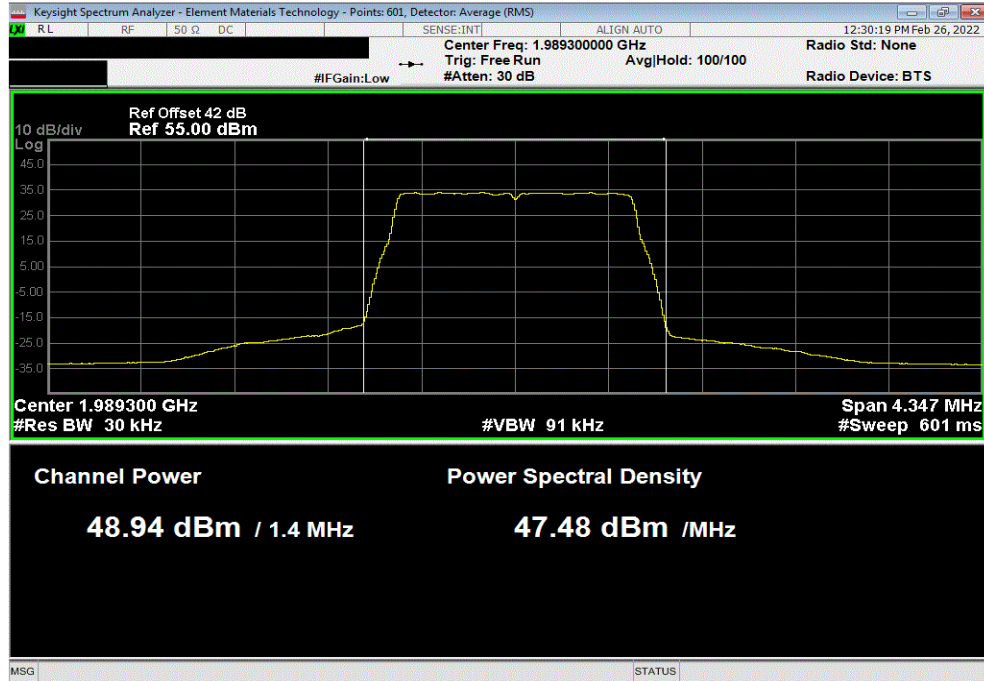

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.83	0	48.8	51.8	54.8		

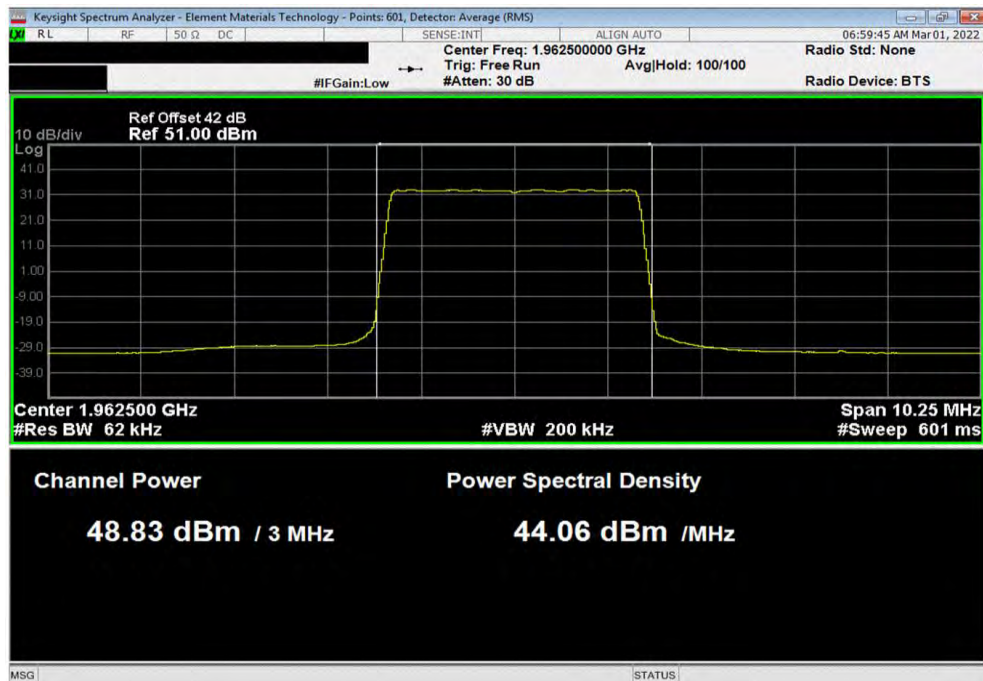


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1931.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.81	0	48.8	51.8	54.8		

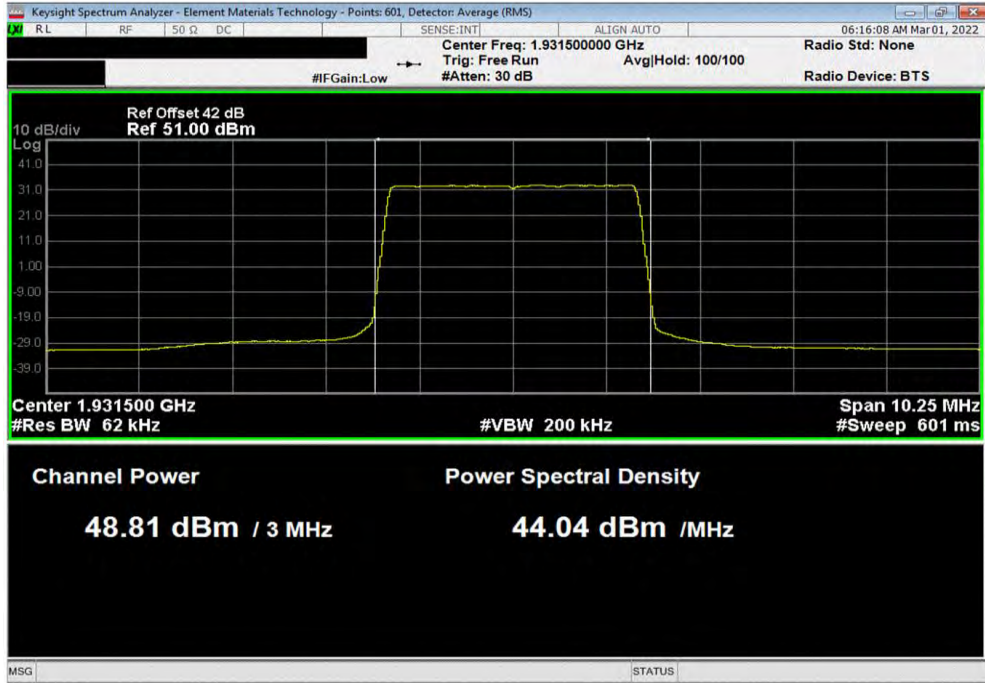

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, High Channel, 1988.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.978	0	49.0	52.0	55.0		

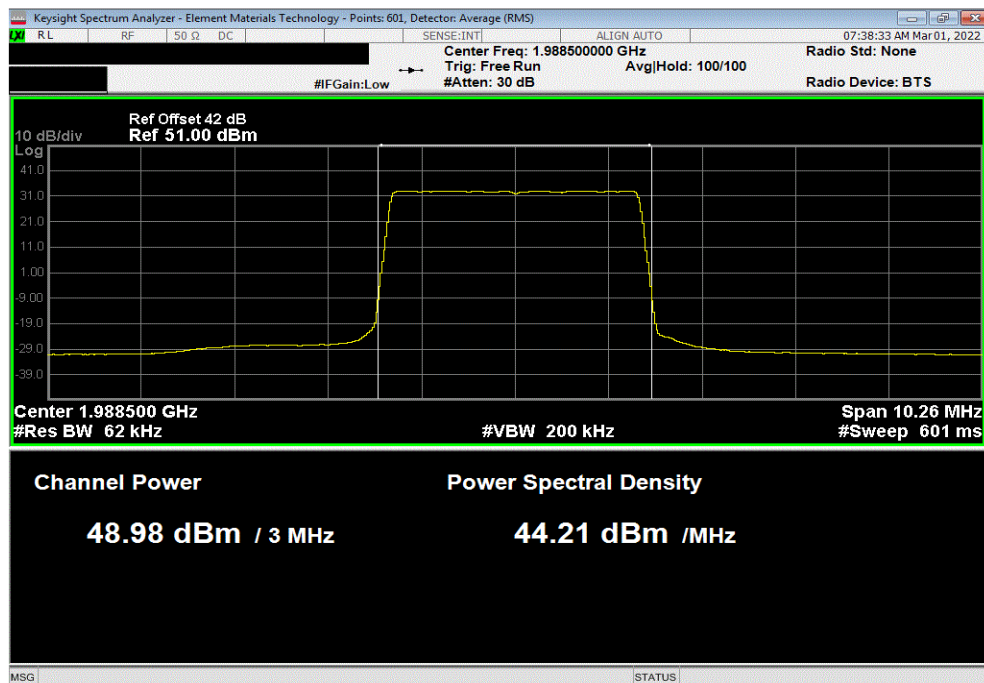


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, QPSK Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.305	0	48.3	51.3	54.3		

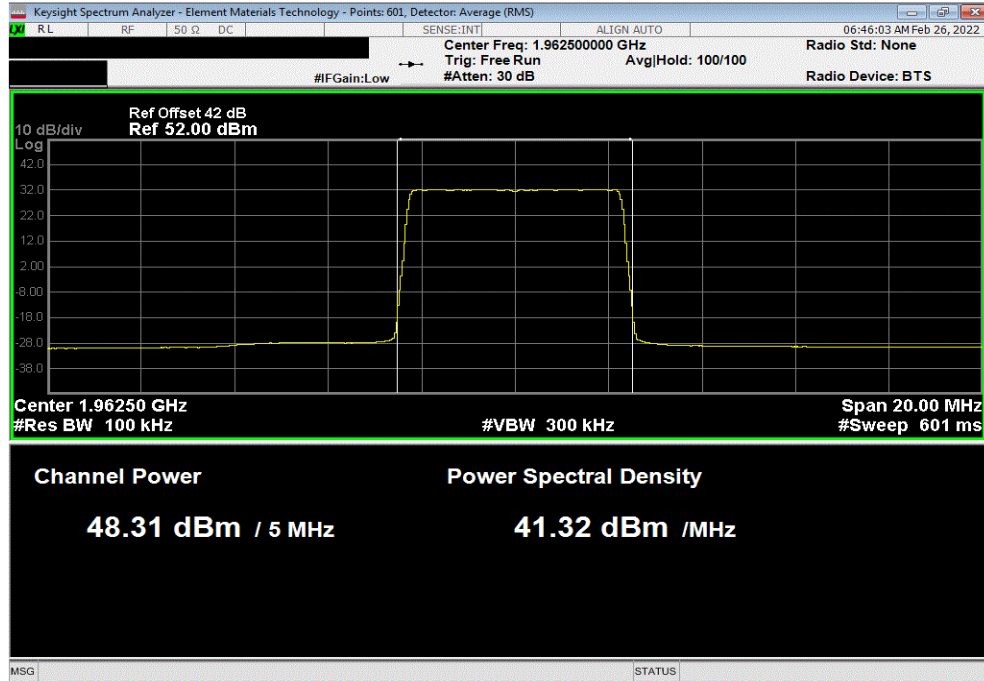

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.263	0	48.3	51.3	54.3		

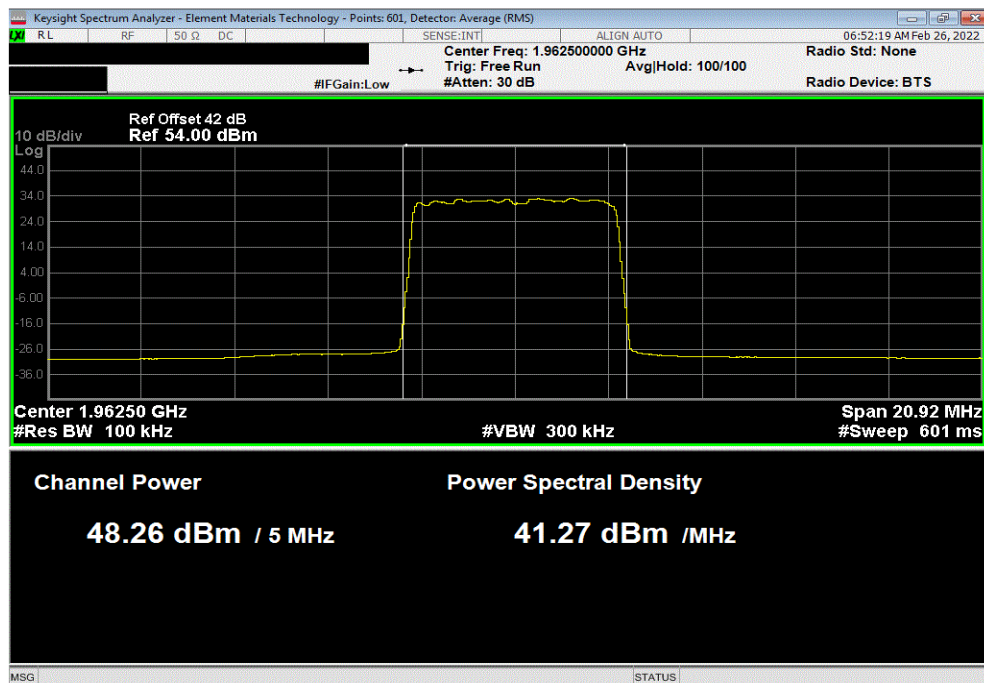


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.252	0	48.3	51.3	54.3		

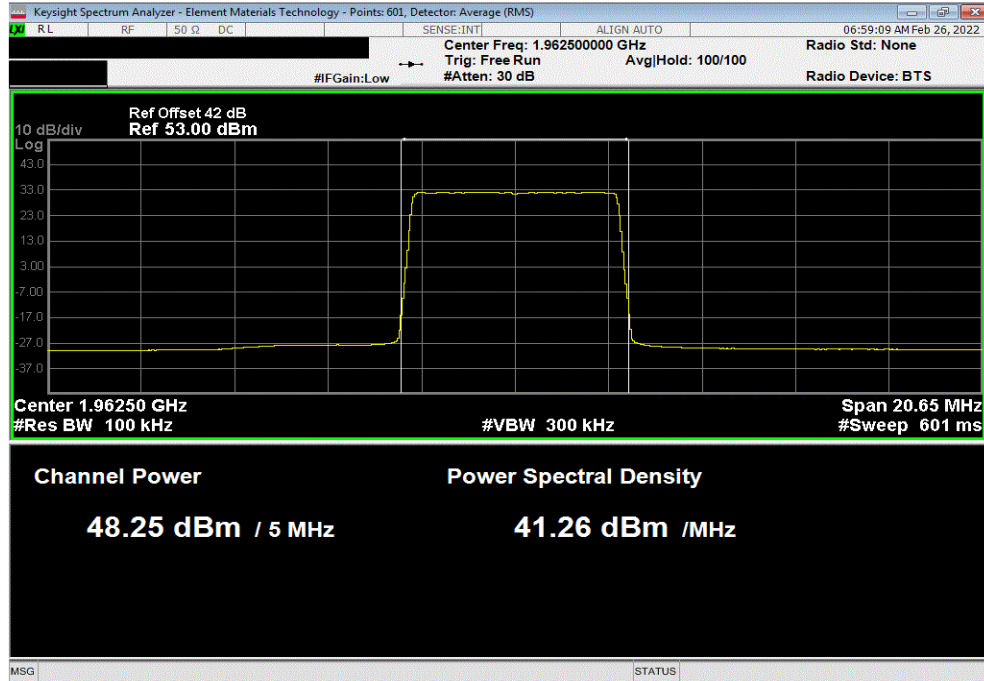

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.25	0	48.3	51.3	54.3		

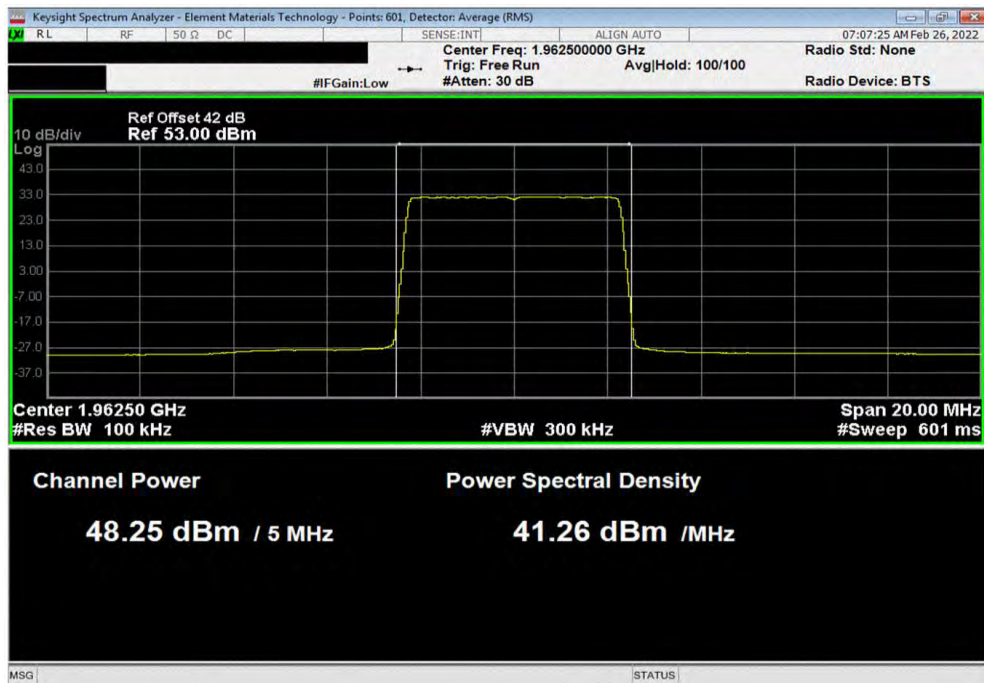


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1932.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.89	0	48.9	51.9	54.9		

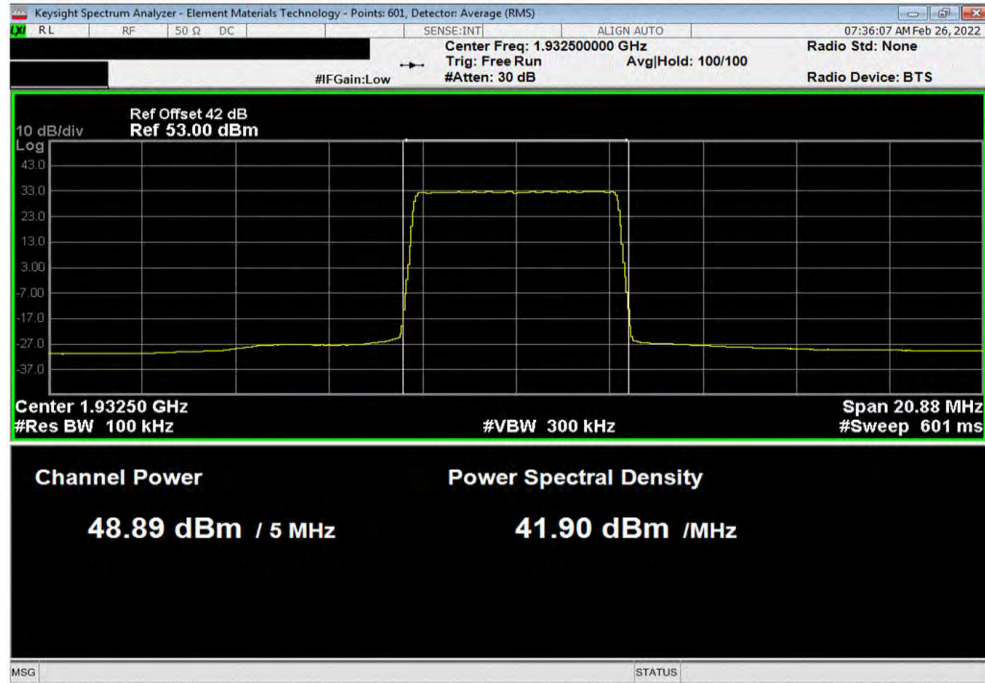

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, High Channel, 1992.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.069	0	49.1	52.1	55.1		

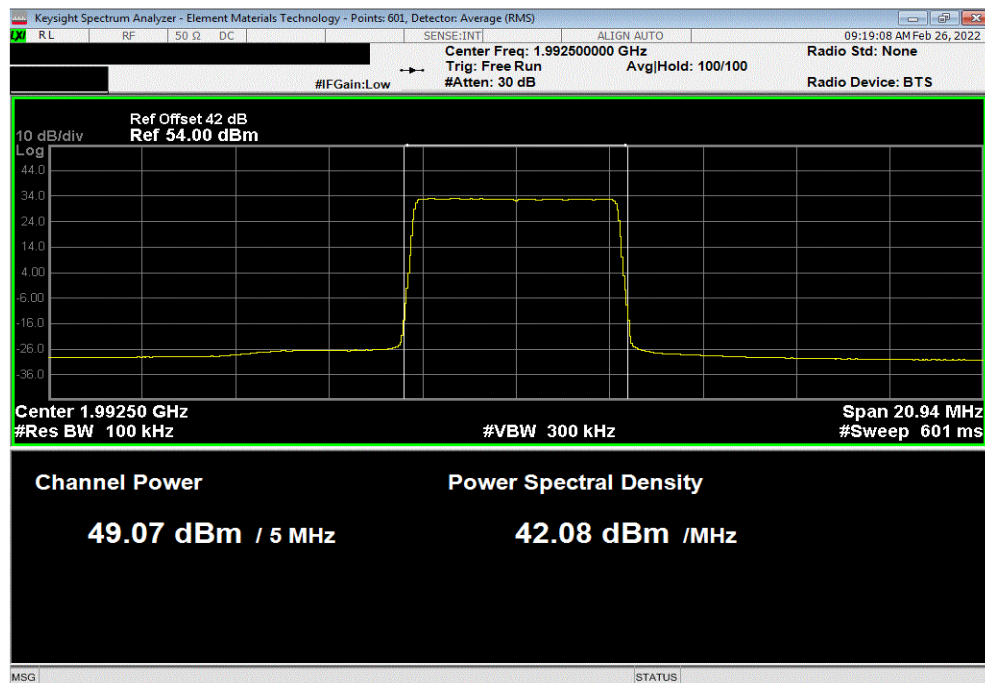


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.801	0	48.8	51.8	54.8		

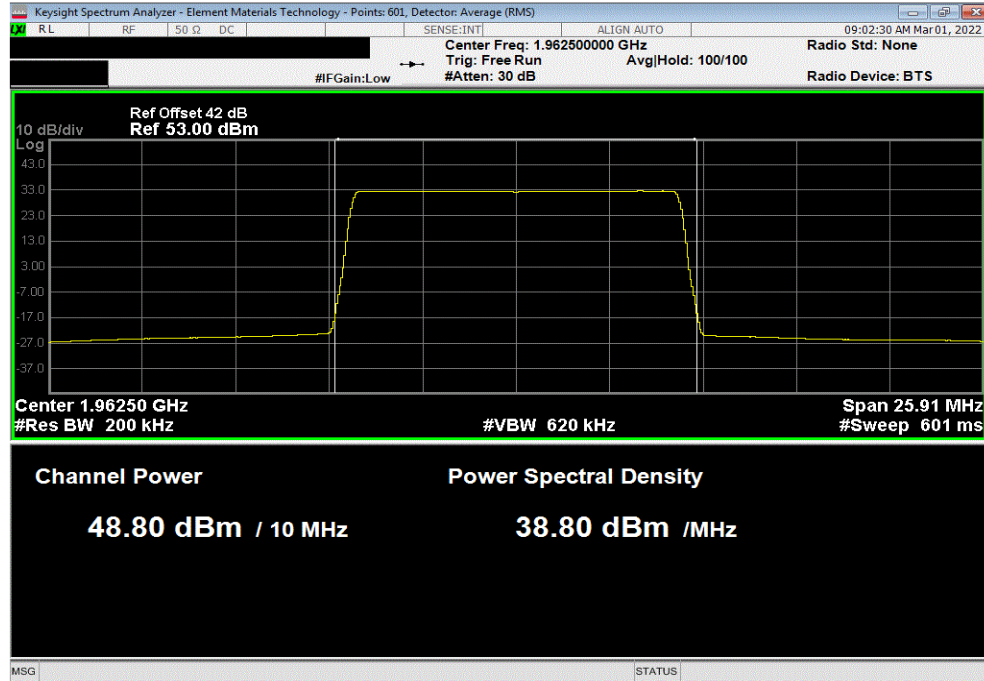

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1935 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.95	0	49	52	55		

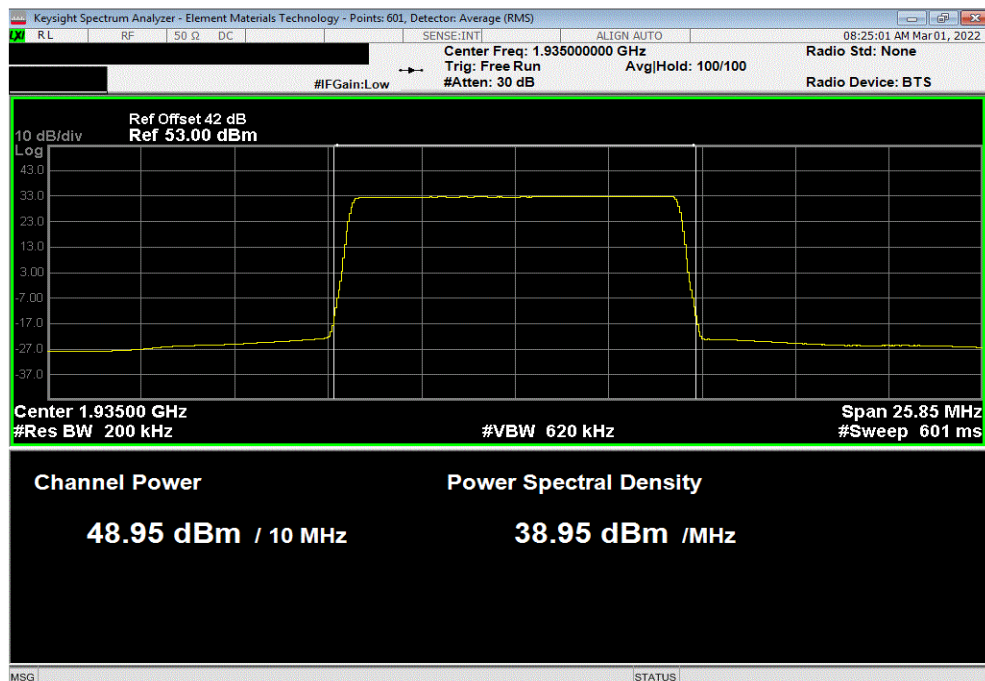


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, High Channel, 1990 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.046	0	49.0	52.0	55.0		

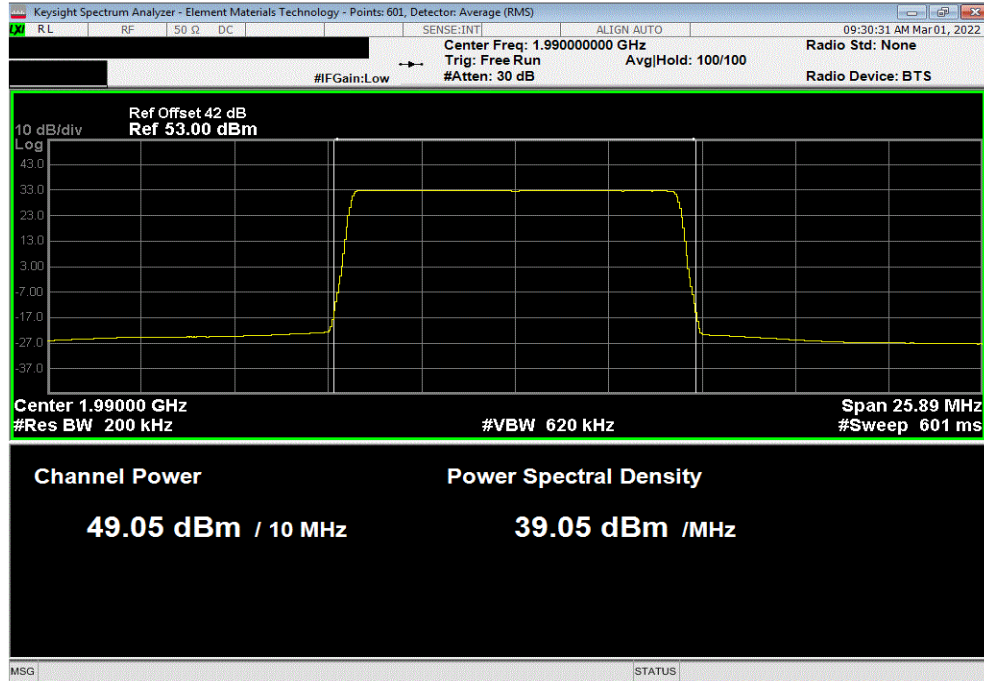

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.816	0	48.8	51.8	54.8		

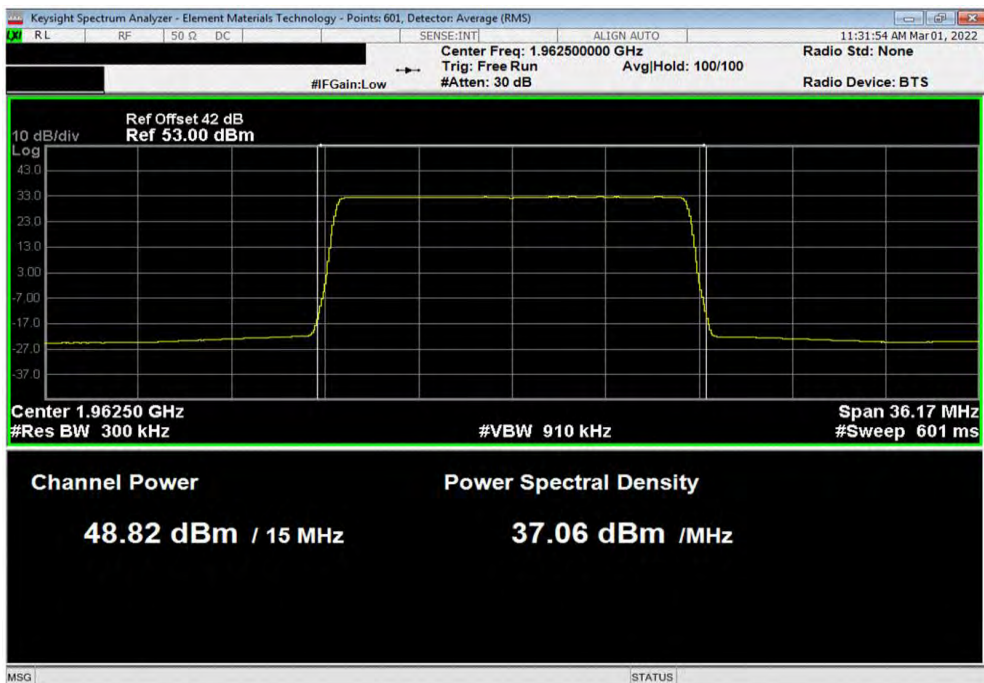


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1937.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.1	0	48.1	51.1	54.1		

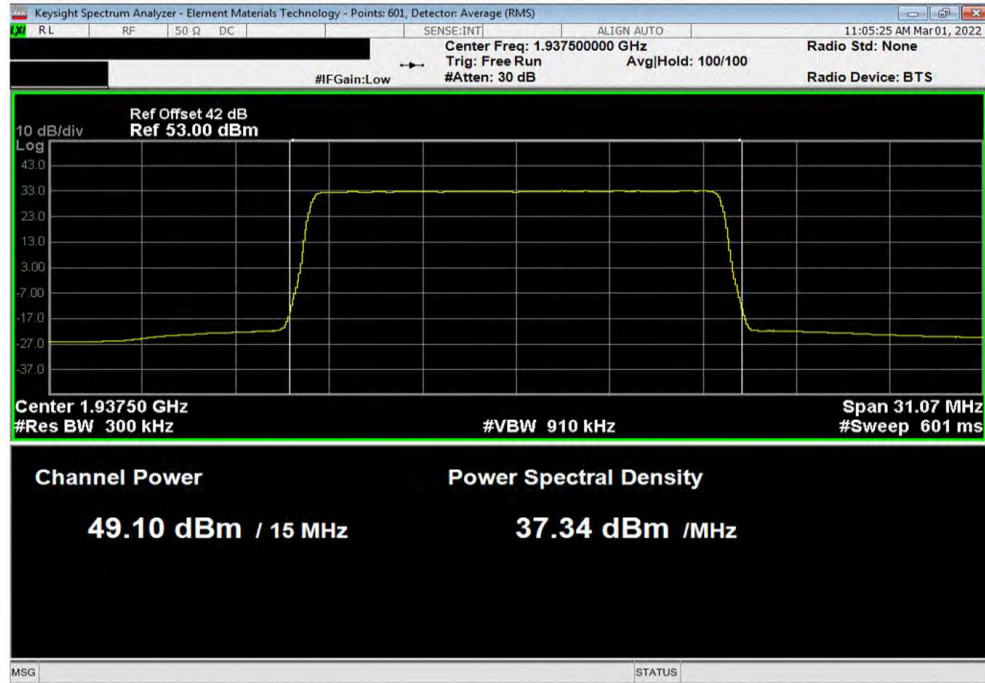

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, High Channel, 1987.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.078	0	49.1	52.1	55.1		

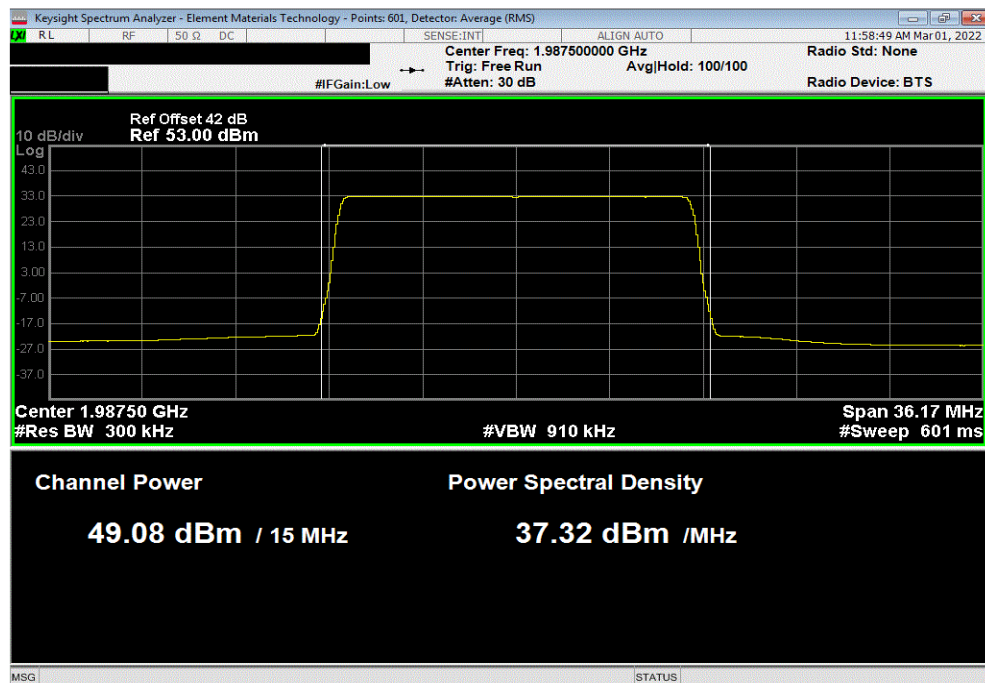


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMR 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.824	0	48.8	51.8	54.8		

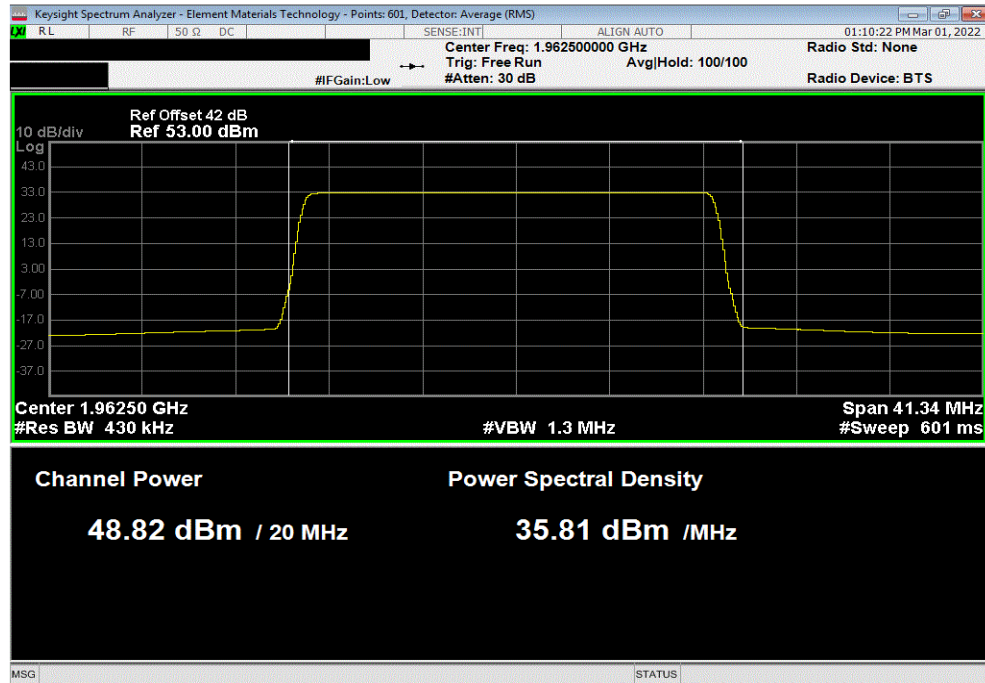

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1940 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.92	0	48.9	51.9	54.9		

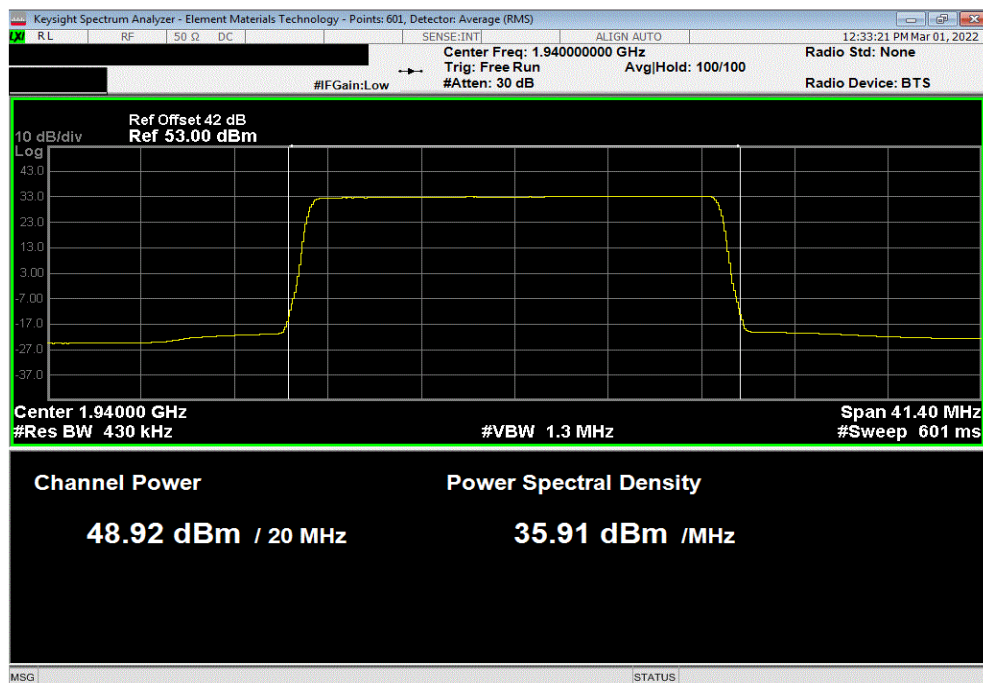


CONDUCTED OUTPUT POWER



TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, High Channel, 1985 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.043	0	49.0	52.0	55.0		

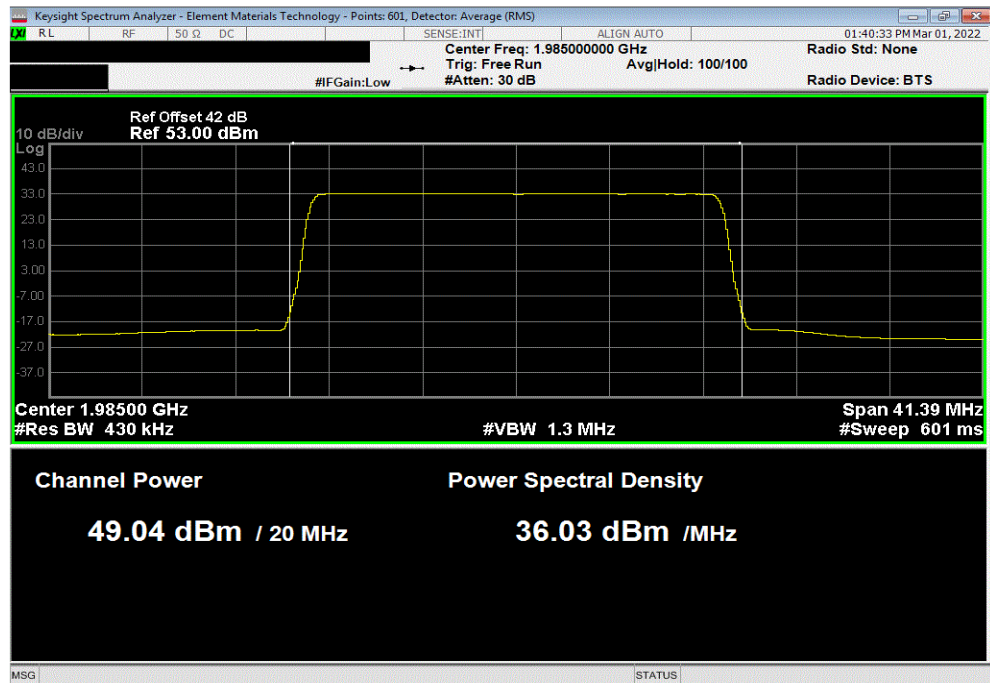

CONDUCTED OUTPUT POWER



TSTx 2021.12.14.1 XMR 2022.02.07.0


EUT: AHFII Remote Radio Head			Work Order: NOKI0037		
Serial Number: YK214000036			Date: 28-Feb-22		
Customer: Nokia Solutions and Networks			Temperature: 22.6 °C		
Attendees: David Le, John Rattanavong			Humidity: 23.7% RH		
Project: None			Barometric Pres.: 1026 mbar		
Tested by: Mark Baytan		Power: 54 VDC	Job Site: TX09		
TEST SPECIFICATIONS			Test Method		
FCC 27:2022		ANSI C63.26:2015			
RSS-139 Issue 3:2015		RSS-139 Issue 3:2015			
RSS-170 Issue 3:2015		RSS-170 Issue 3:2015			
COMMENTS					
All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. Band 66 carriers enabled at maximum power is 80 watts/carrier. The following is the output power measurements at the radio output ports. The output power was measured for a single carrier over the carrier channel bandwidth on port 1. The total output power for multiport (2x2 MIMO, 4x4 MIMO) operation was determined based upon ANSI 63.26 clauses 6.4.3.1 and 6.4.3.2.4 (10 log Nout). The total output power for two port operation is single port power + 3dB [i.e. 10log(2)]. The total output power for four port operation is single port power + 6dB [i.e. 10log(4)].					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	2				
		Initial Value dBm/Carrier BW	Duty Cycle Factor (dB)	Single Port dBm/Carrier BW	Two Port dBm/Carrier BW
					Four Port dBm/Carrier BW
Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier					
Port 1					
1.4 MHz Bandwidth					
256-QAM Modulation					
Low Channel, 2110.7 MHz		48.808	0	48.8	54.8
Mid Channel, 2155 MHz		48.964	0	49.0	55.0
High Channel, 2199.3 MHz		48.906	0	48.9	55.9
3 MHz Bandwidth					
256-QAM Modulation					
Low Channel, 2111.5 MHz		48.775	0	48.8	54.8
Mid Channel, 2155 MHz		48.995	0	49.0	55.0
High Channel, 2198.5 MHz		48.958	0	49.0	55.0
5 MHz Bandwidth					
QPSK Modulation					
Mid Channel, 2155 MHz..		48.845	0	48.8	54.8
16-QAM Modulation					
Mid Channel, 2155 MHz..		48.857	0	48.9	54.8
64-QAM Modulation					
Mid Channel, 2155 MHz..		48.871	0	48.9	54.9
256-QAM Modulation					
Low Channel, 2112.5 MHz		48.873	0	48.9	54.9
Mid Channel, 2155 MHz		48.885	0	48.9	54.9
High Channel, 2197.5 MHz		48.95	0	49.0	55.0
10 MHz Bandwidth					
256-QAM Modulation					
Low Channel, 2115 MHz		48.978	0	49.0	55.0
Mid Channel, 2155 MHz		48.963	0	49.0	55.0
High Channel, 2195 MHz		49.162	0	49.2	55.2
15 MHz Bandwidth					
256-QAM Modulation					
Low Channel, 2117.5 MHz		49.1	0	49.1	55.1
Mid Channel, 2155 MHz		48.998	0	49.0	55.0
High Channel, 2192.5 MHz		49.202	0	49.2	55.2
20 MHz Bandwidth					
256-QAM Modulation					
Low Channel, 2120 MHz		49.116	0	49.1	55.1
Mid Channel, 2155 MHz		48.941	0	48.9	54.9
High Channel, 2190 MHz		49.077	0	49.1	55.1

CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2110.7 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.808	0	48.8	51.8	54.8		

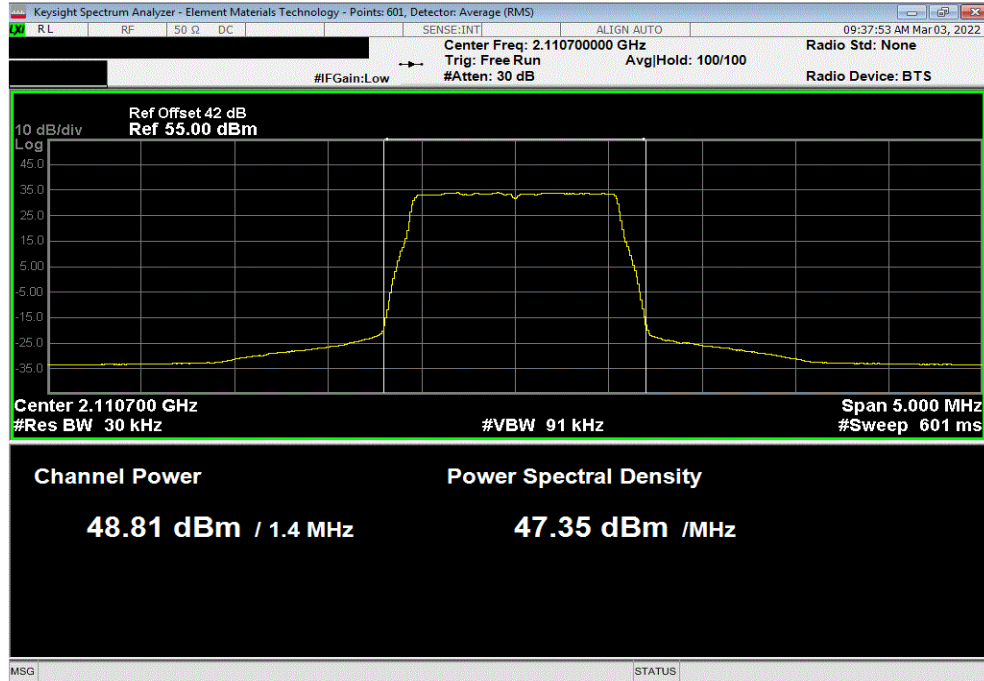

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.964	0	49.0	52.0	55.0		

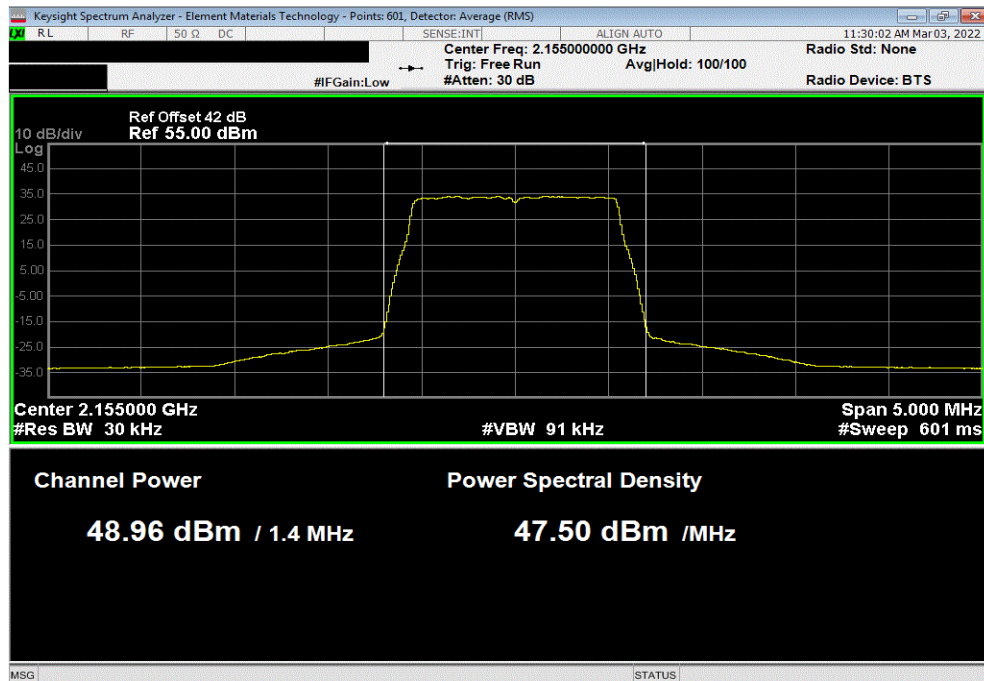


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, High Channel, 2199.3 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.906	0	48.9	52.9	55.9		

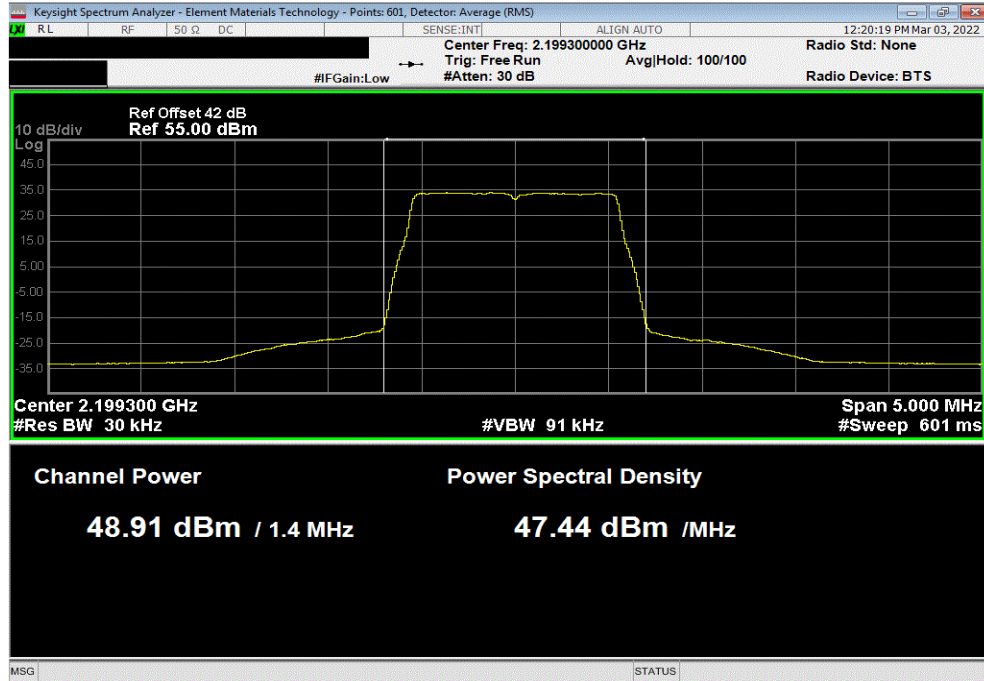

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2111.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.775	0	48.8	51.8	54.8		

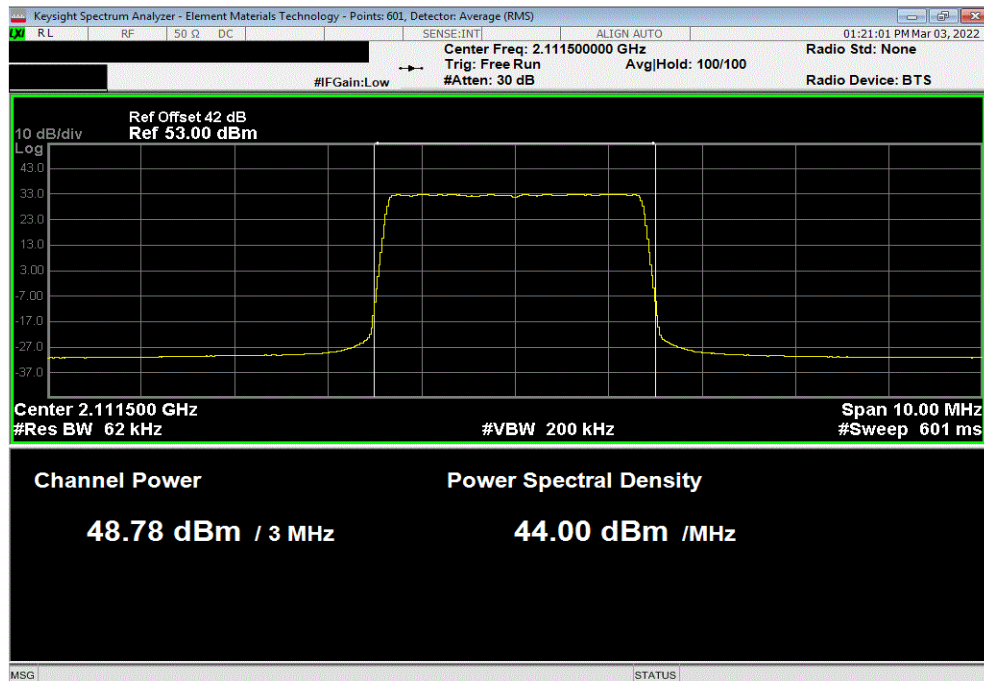


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz.						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.995	0	49.0	52.0	55.0		

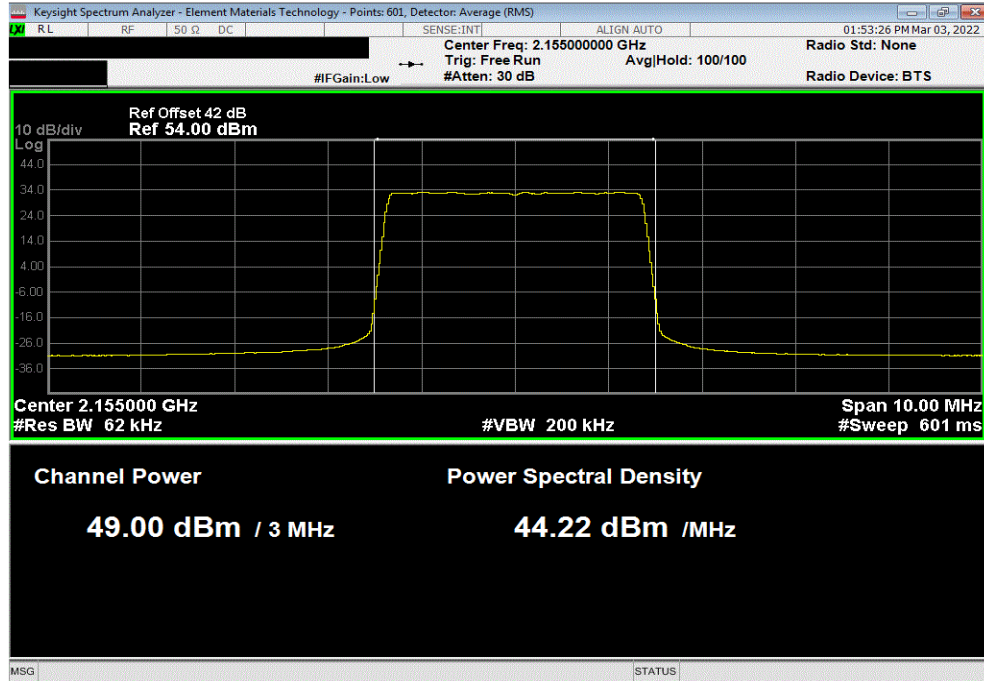

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, High Channel, 2198.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.958	0	49.0	52.0	55.0		

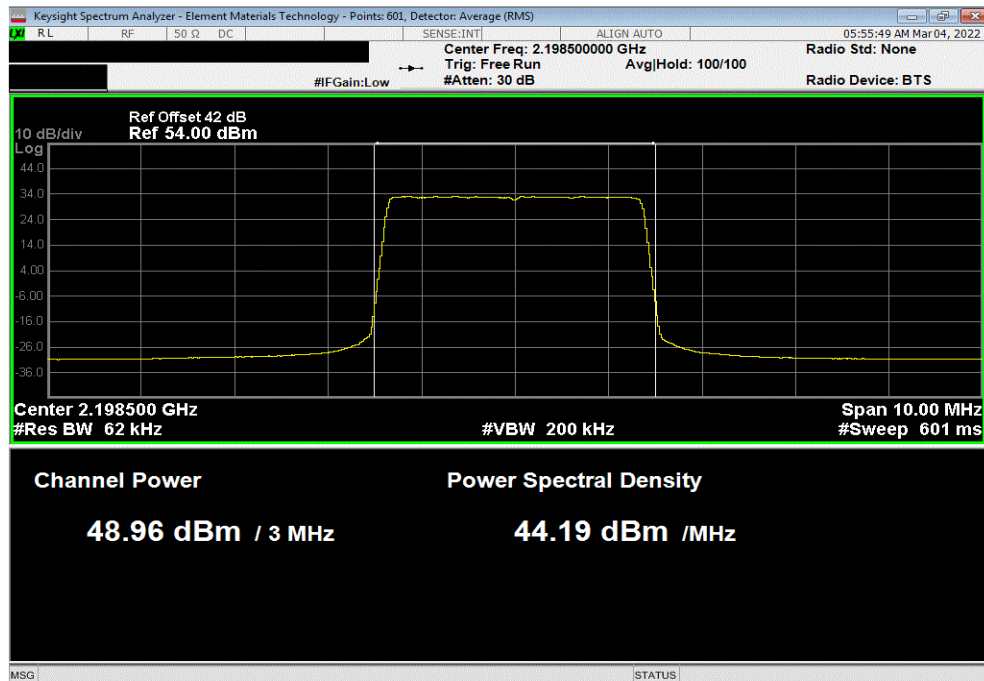


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, QPSK Modulation, Mid Channel, 2155 MHz..						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.845	0	48.8	51.8	54.8		

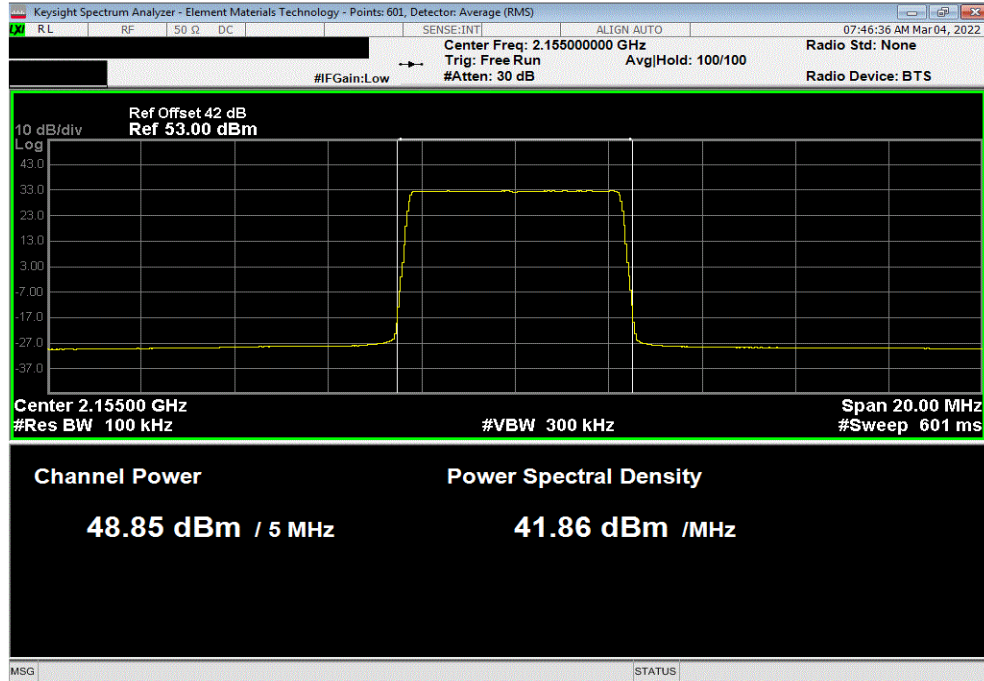

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel, 2155 MHz..						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.857	0	48.9	51.8	54.8		

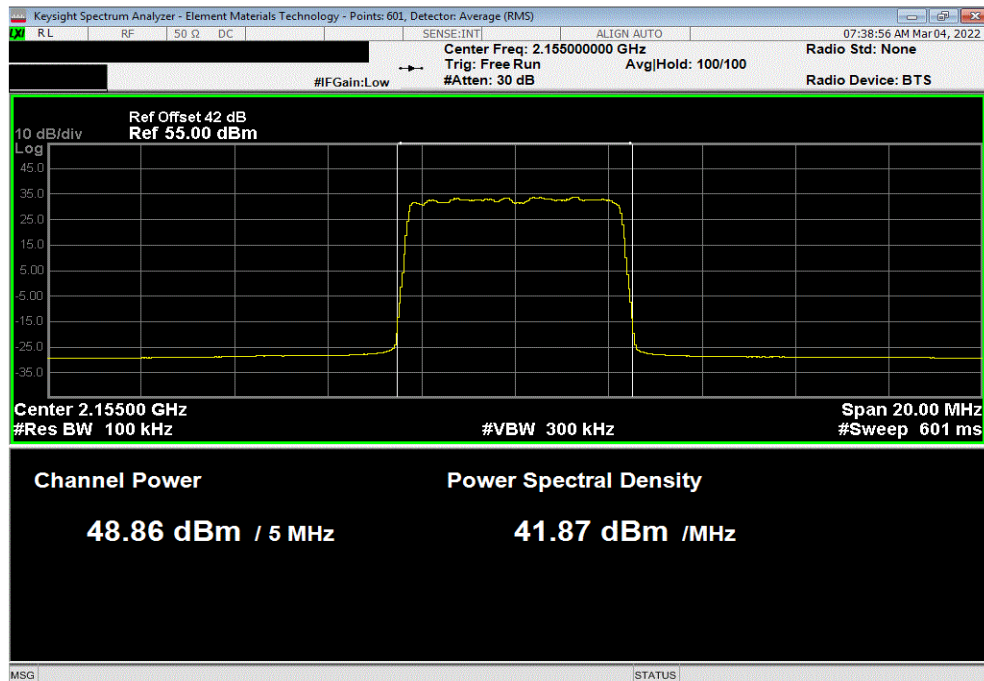


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel, 2155 MHz..						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.871	0	48.9	51.9	54.9		

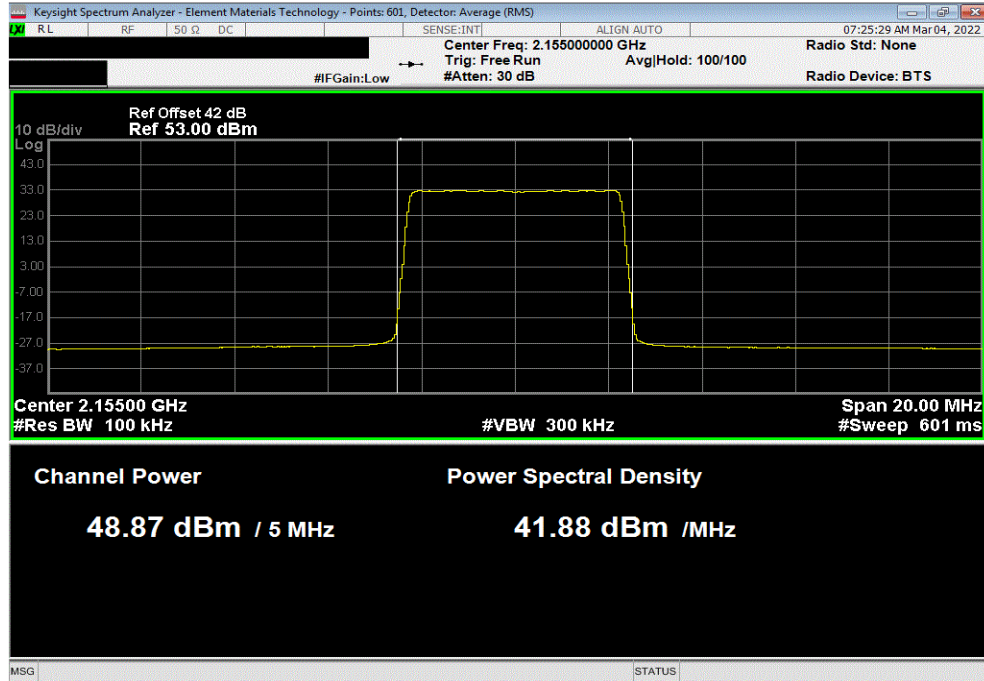

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2112.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.873	0	48.9	51.9	54.9		

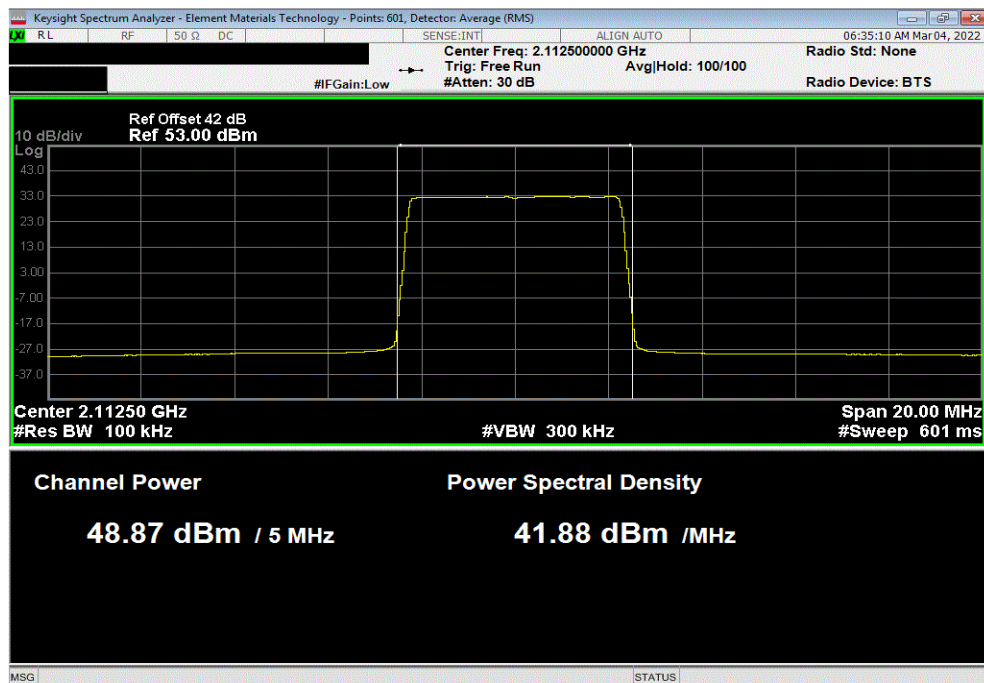


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz..						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.885	0	48.9	51.9	54.9		

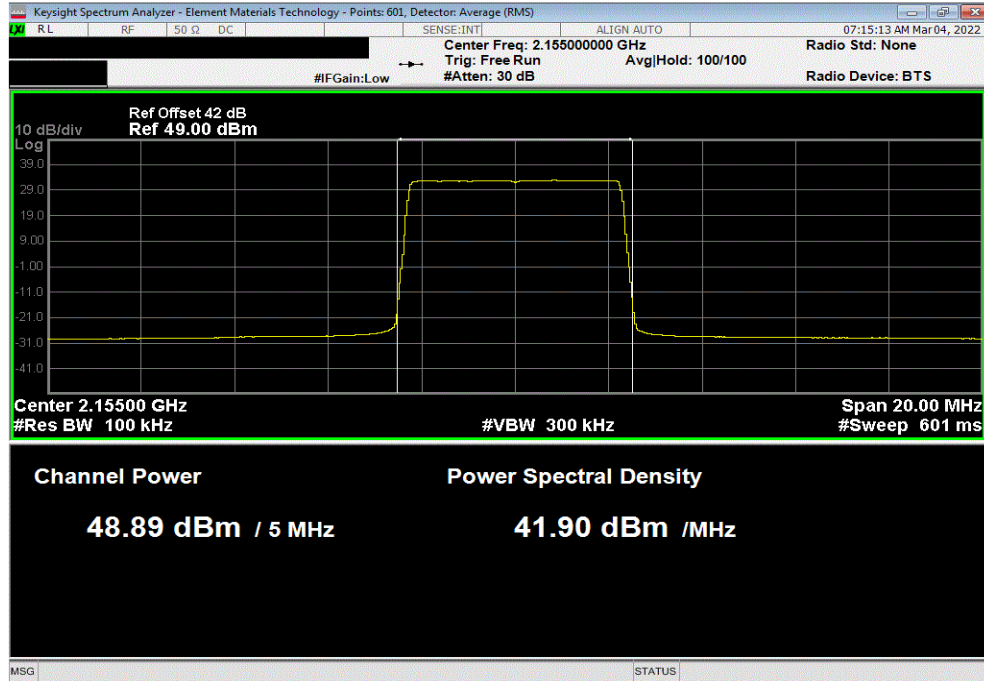

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, High Channel, 2197.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.95	0	49.0	52.0	55.0		

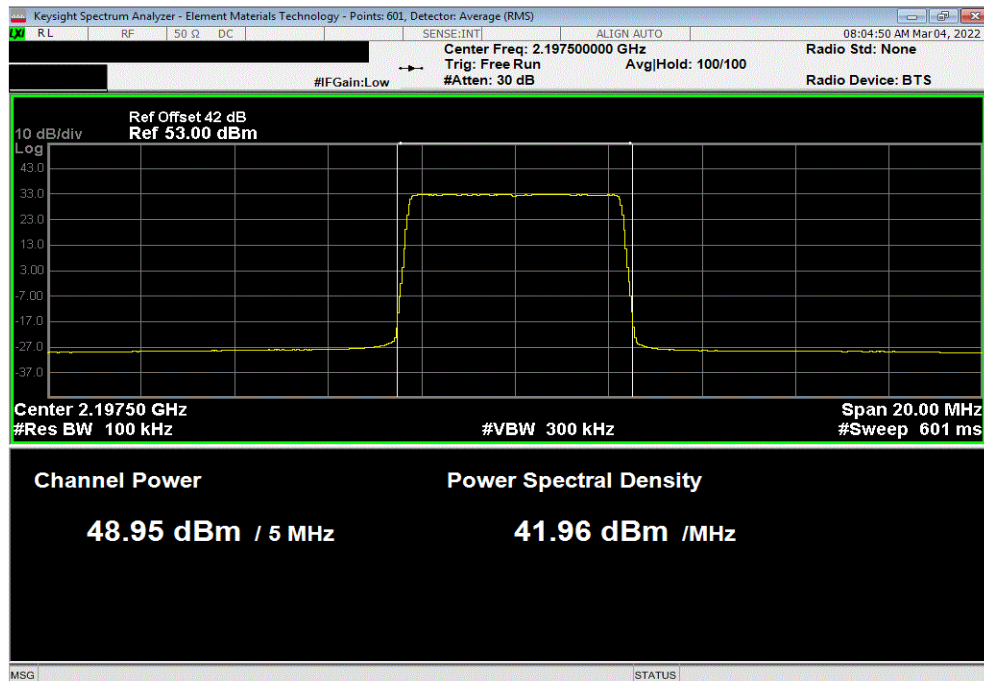


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2115 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.978	0	49.0	52.0	55.0		

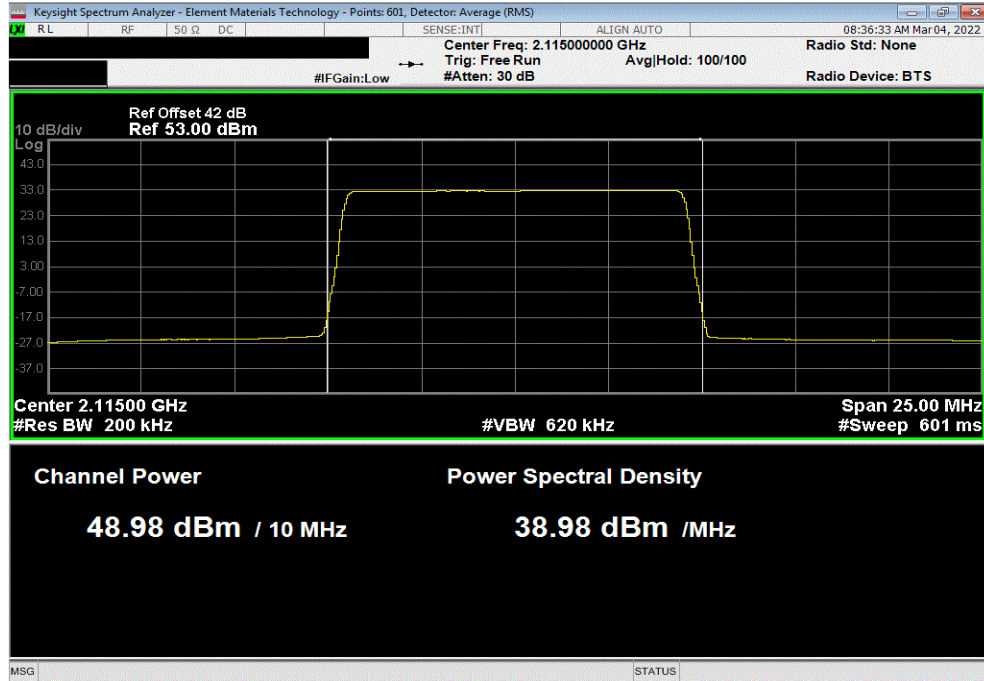

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz...						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.963	0	49.0	52.0	55.0		

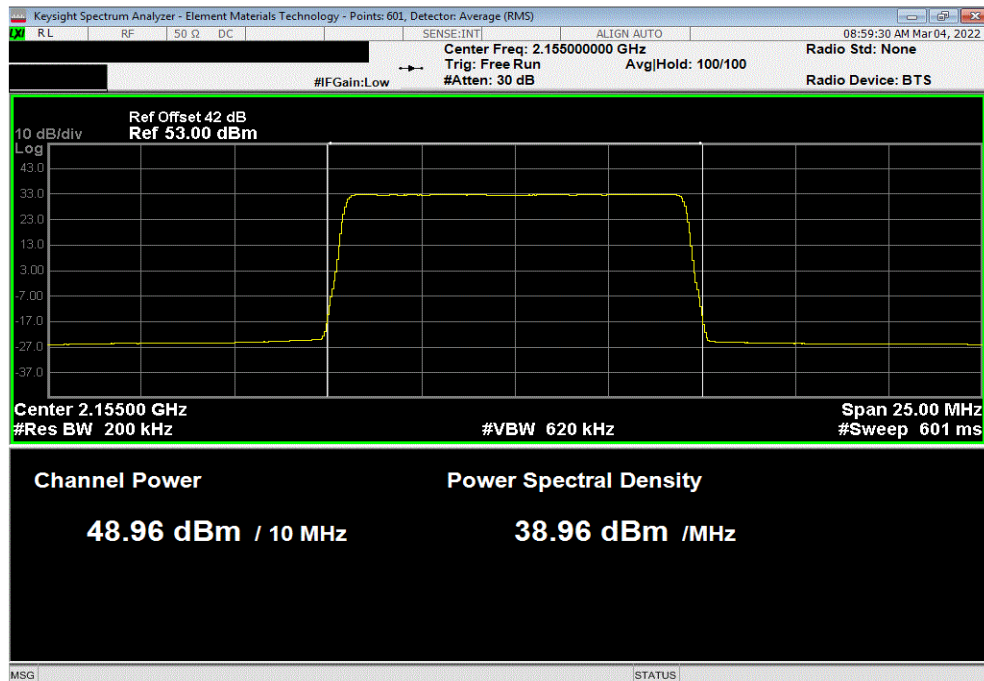


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, High Channel, 2195 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.162	0	49.2	52.2	55.2		

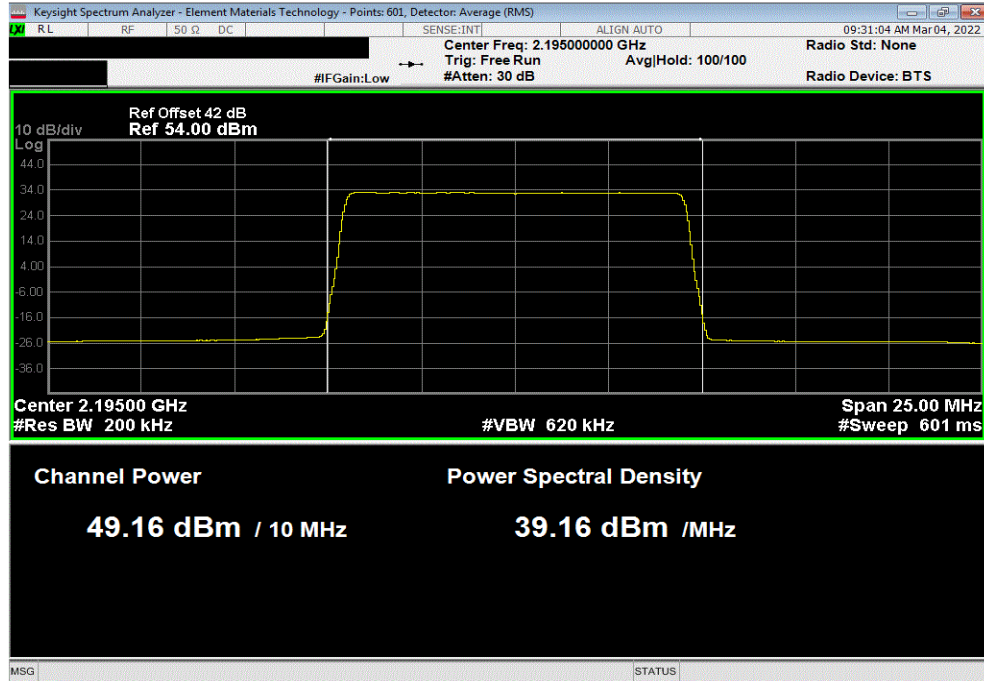

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2117.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.1	0	49.1	52.1	55.1		

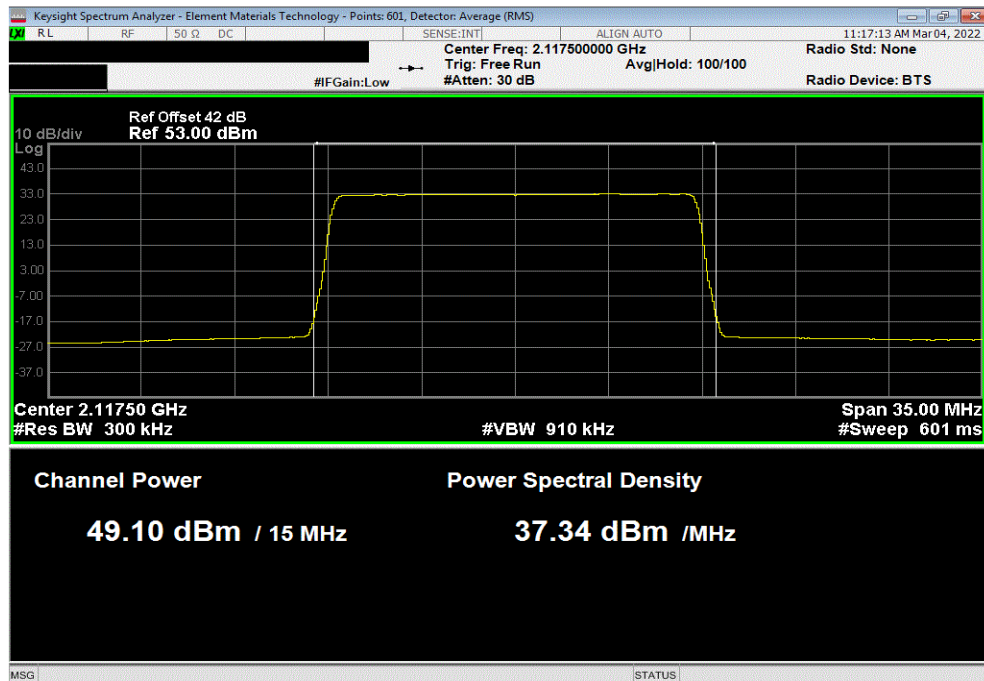


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMR 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz...						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.998	0	49.0	52.0	55.0		

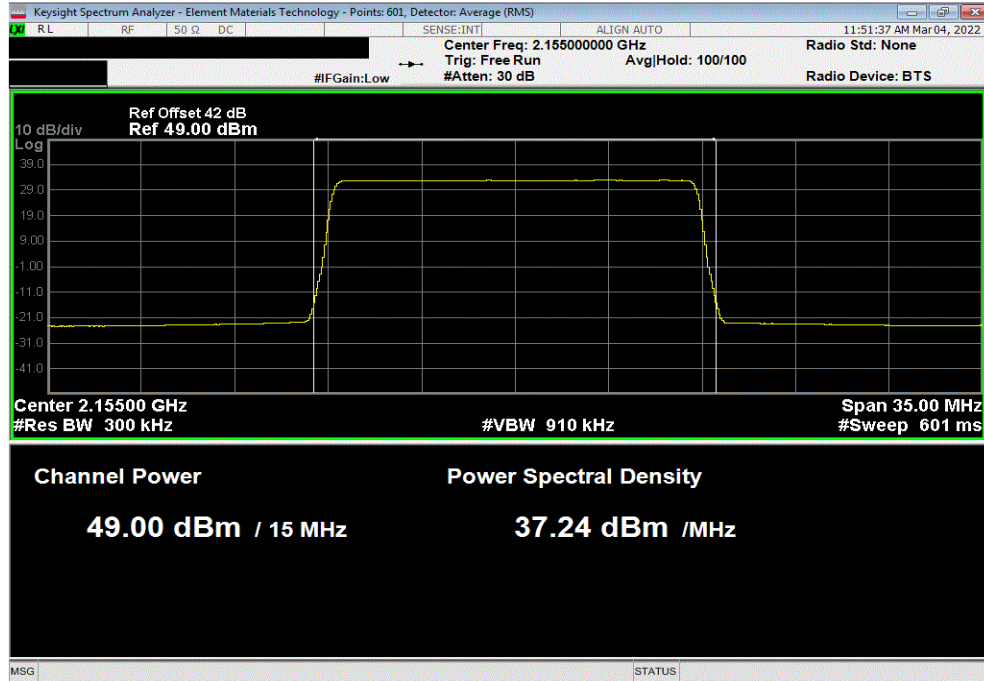

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, High Channel, 2192.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.202	0	49.2	52.2	55.2		

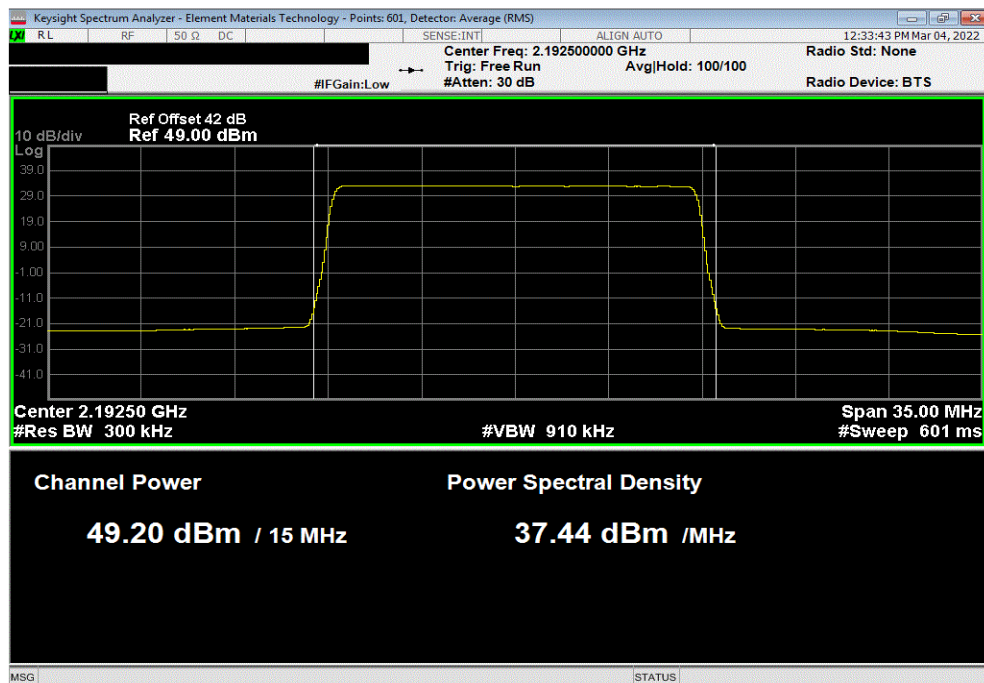


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2120 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.116	0	49.1	52.1	55.1		

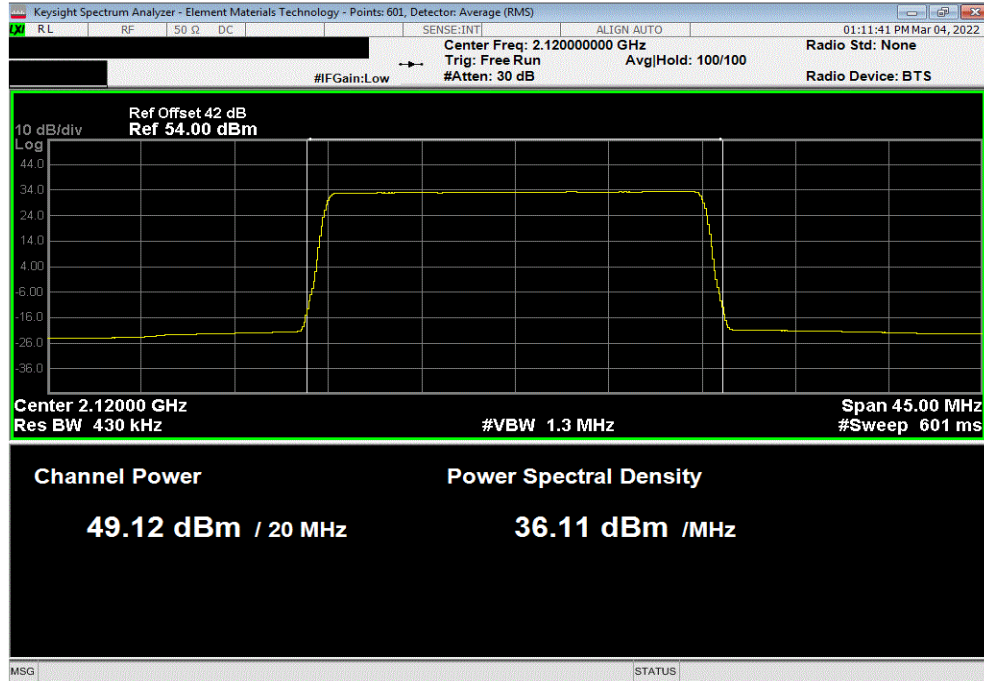

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz.....						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
48.941	0	48.9	51.9	54.9		

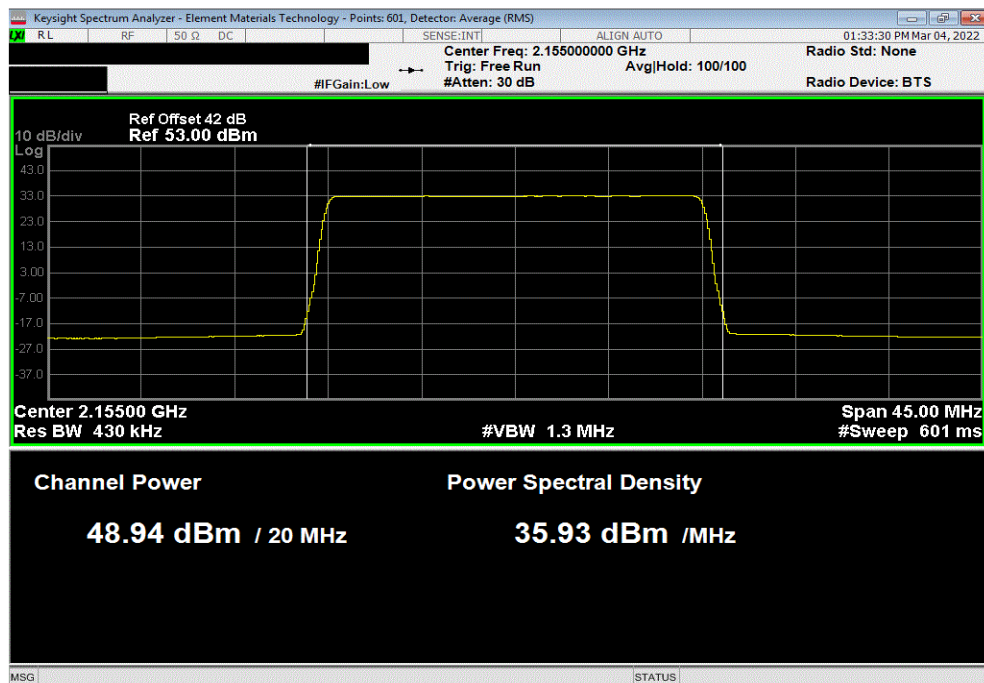


CONDUCTED OUTPUT POWER



TbTx 2021.12.14.1 XMt 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, High Channel, 2190 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
49.077	0	49.1	52.1	55.1		

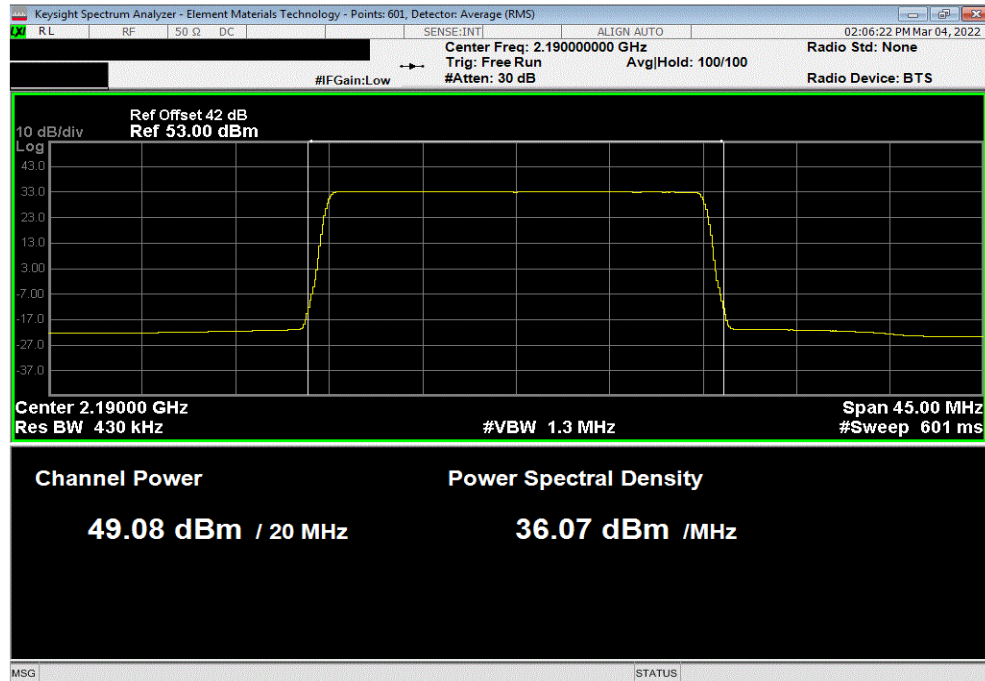

CONDUCTED OUTPUT POWER




EUT: AHFII Remote Radio Head		Work Order: NOKI0037	
Serial Number: YK214000036		Date: 28-Feb-22	
Customer: Nokia Solutions and Networks		Temperature: 22.6 °C	
Attendees: David Le, John Rattanavong		Humidity: 23.7% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Mark Baytan		Power: 54 VDC	
Job Site: TX09			
TEST SPECIFICATIONS		Test Method	
FCC 24E:2022		ANSI C63.26:2015	
RSS-133 Issue 6:2013+A1:2018		RSS-133 Issue 6:2013+A1:2018	
COMMENTS			
All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. For Test Case 1: The carriers are operated at maximum power (~26W/PCS carrier and 40W/AWS carrier) with at total port power of 120 watts (80W for PCS band carriers + 40W for AWS band carrier). For Test Case 2: The carriers are operated at maximum power (~40W/PCS carrier and 40W/AWS carrier) with at total port power of 120 watts (80W for PCS band carriers + 40W for AWS band carrier). For Test Case 3: The carriers are operated at maximum power (~40W/PCS carrier and 40W/AWS carrier) with at total port power of 120 watts (80W for PCS band carriers + 40W for AWS band carrier).			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature	
		Initial Value dBm/Carrier BW	Duty Cycle Factor (dB)
		Single Port dBm/Carrier BW	Two Port dBm/Carrier BW
		Four Port dBm/Carrier BW	
PCS Multicarrier Multiband			
Port 1			
Test Case 1: PCS Band LTE5 (3 Carriers), AWS Band LTE1.4 (Single Carrier)			
256-QAM Modulation			
	PCS Carrier 1, 1932.5 MHz	43.024	0
	PCS Carrier 2, 1937.5 MHz	43.326	0
	PCS Carrier 3, 1992.5 MHz	43.458	0
	AWS Single Carrier, 2155 MHz	45.815	0
Test Case 2: PCS Band LTE20 (2 Carriers), AWS Band LTE20 (Single Carrier)			
256-QAM Modulation			
	PCS Carrier 1, 1940 MHz	45.599	0
	PCS Carrier 2, 1960 MHz	45.735	0
	AWS Single Carrier, 2155 MHz.	45.931	0
Test Case 3: PCS Band LTE20 (2 Carriers), AWS Band LTE20 (Single Carrier)			
256-QAM Modulation			
	PCS Carrier 1, 1965 MHz	45.806	0
	PCS Carrier 2, 1985 MHz	45.364	0
	AWS Single Carrier, 2155 MHz..	45.849	0

CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

PCS Multicarrier Multiband, Port 1, Test Case 1: PCS Band LTE5 (3 Carriers), AWS Band LTE1.4 (Single Carrier), 256-QAM Modulation, PCS Carrier 1, 1932.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
43.024	0	43.0	46.0	49.0		

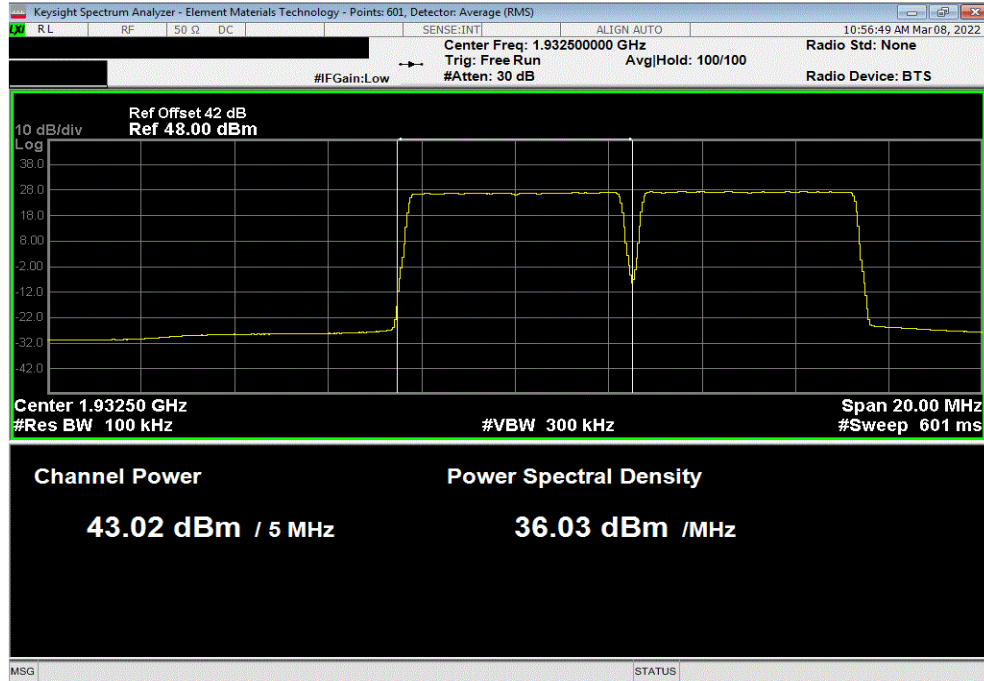

PCS Multicarrier Multiband, Port 1, Test Case 1: PCS Band LTE5 (3 Carriers), AWS Band LTE1.4 (Single Carrier), 256-QAM Modulation, PCS Carrier 2, 1937.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
43.326	0	43.3	46.3	49.3		

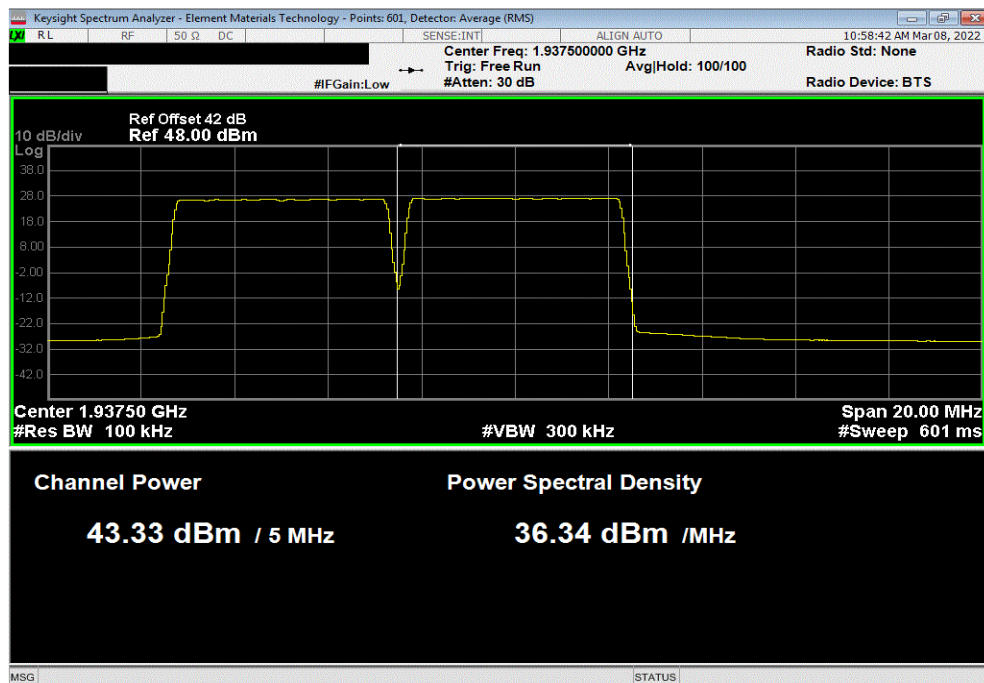


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMI 2022.02.07.0

PCS Multicarrier Multiband, Port 1, Test Case 1: PCS Band LTE5 (3 Carriers), AWS Band LTE1.4 (Single Carrier), 256-QAM Modulation, PCS Carrier 3, 1992.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
43.458	0	43.5	46.5	49.5		

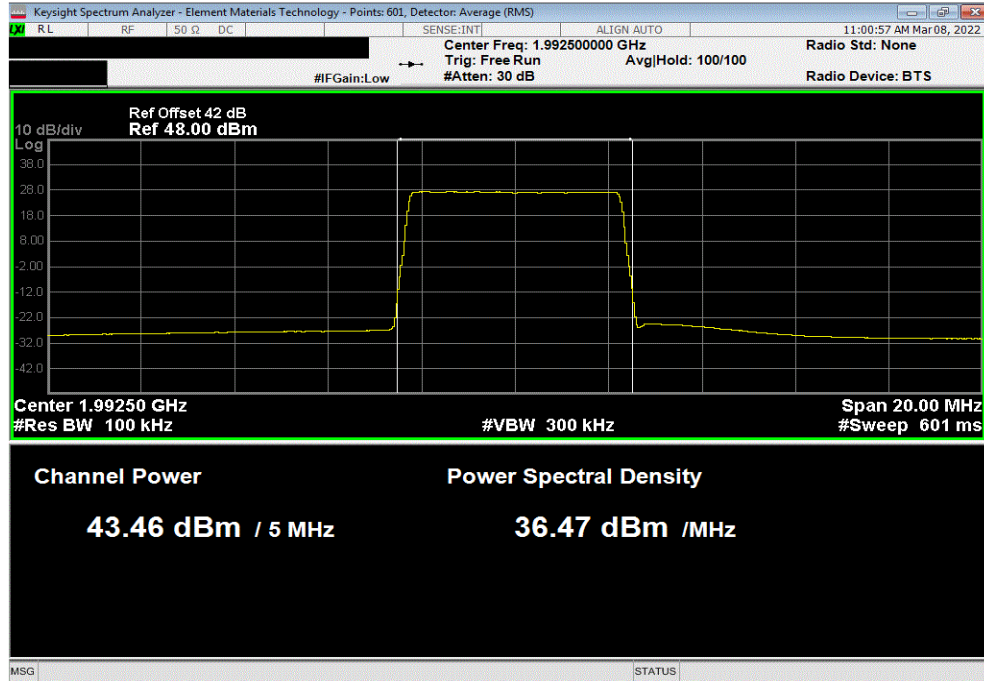

PCS Multicarrier Multiband, Port 1, Test Case 1: PCS Band LTE5 (3 Carriers), AWS Band LTE1.4 (Single Carrier), 256-QAM Modulation, AWS Single Carrier, 2155 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
45.815	0	45.8	48.8	51.8		

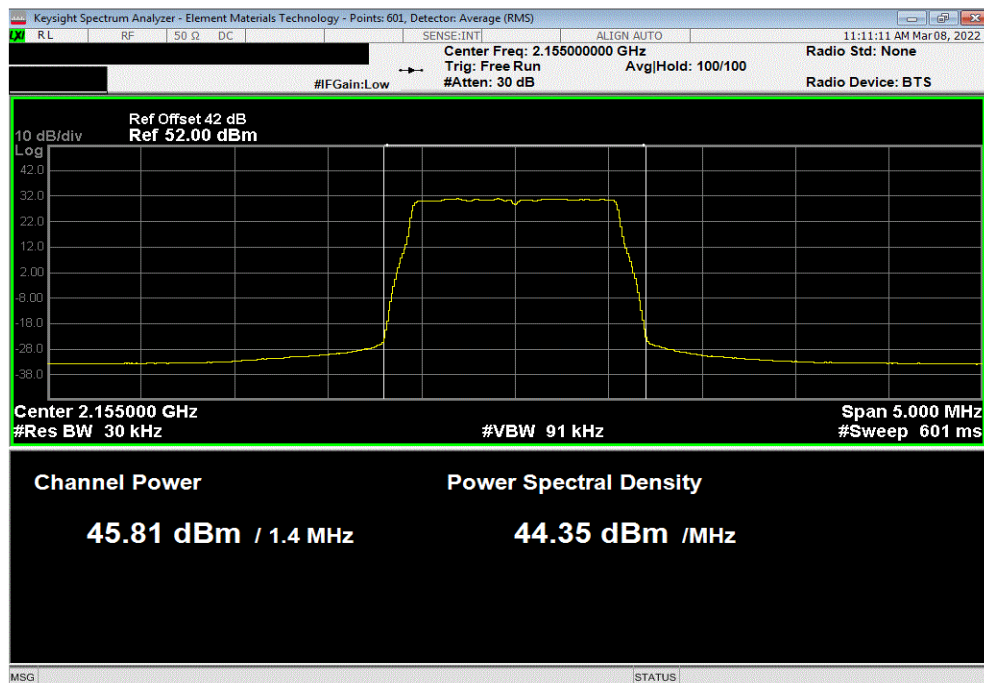


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

PCS Multicarrier Multiband, Port 1, Test Case 2: PCS Band LTE20 (2 Carriers), AWS Band LTE20 (Single Carrier), 256-QAM Modulation, PCS Carrier 1, 1940 MHz						
	Initial Value	Duty Cycle	Single Port	Two Port	Four Port	
	dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW	
	45.599	0	45.6	48.6	51.6	

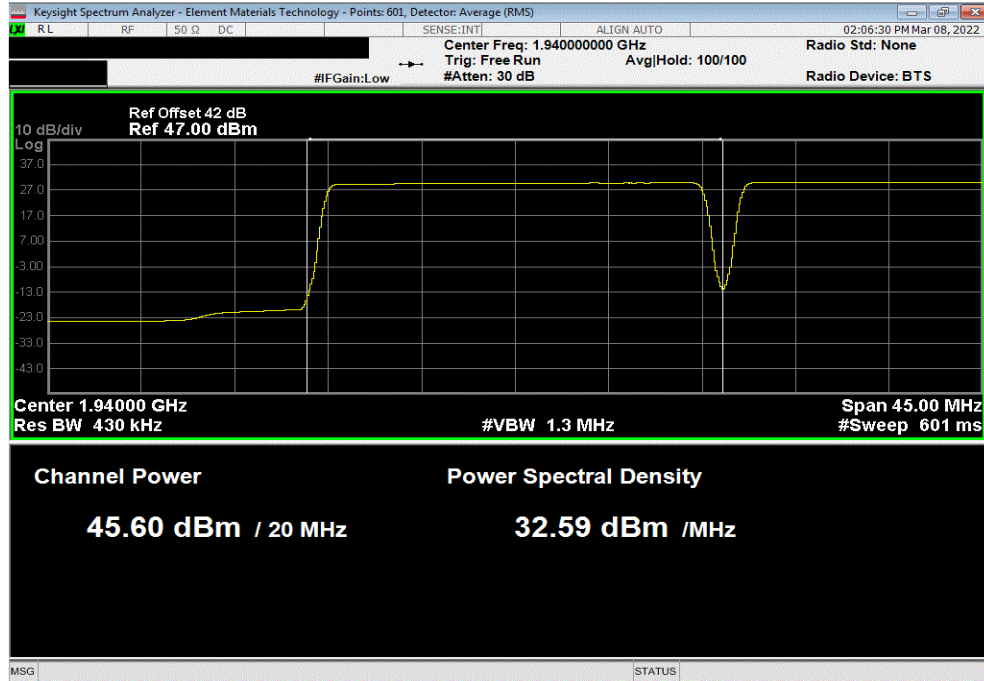

PCS Multicarrier Multiband, Port 1, Test Case 2: PCS Band LTE20 (2 Carriers), AWS Band LTE20 (Single Carrier), 256-QAM Modulation, PCS Carrier 2, 1960 MHz						
	Initial Value	Duty Cycle	Single Port	Two Port	Four Port	
	dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW	
	45.735	0	45.8	48.7	51.7	

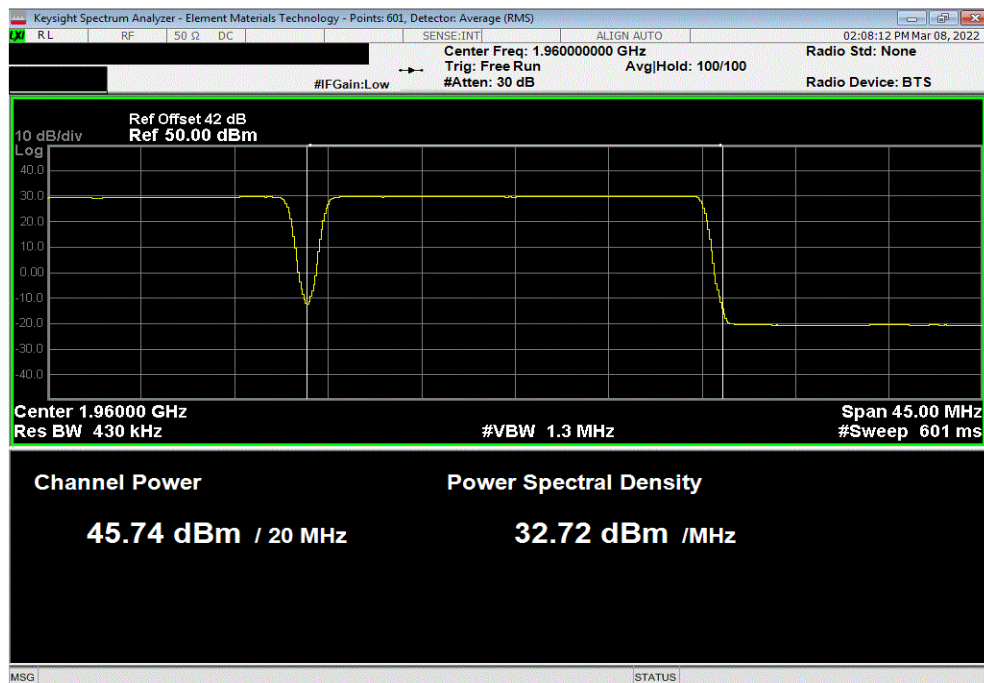


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

PCS Multicarrier Multiband, Port 1, Test Case 2: PCS Band LTE20 (2 Carriers), AWS Band LTE20 (Single Carrier), 256-QAM Modulation, AWS Single Carrier, 2155 MHz.						
	Initial Value	Duty Cycle	Single Port	Two Port	Four Port	
	dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW	
	45.931	0	45.9	48.9	51.9	

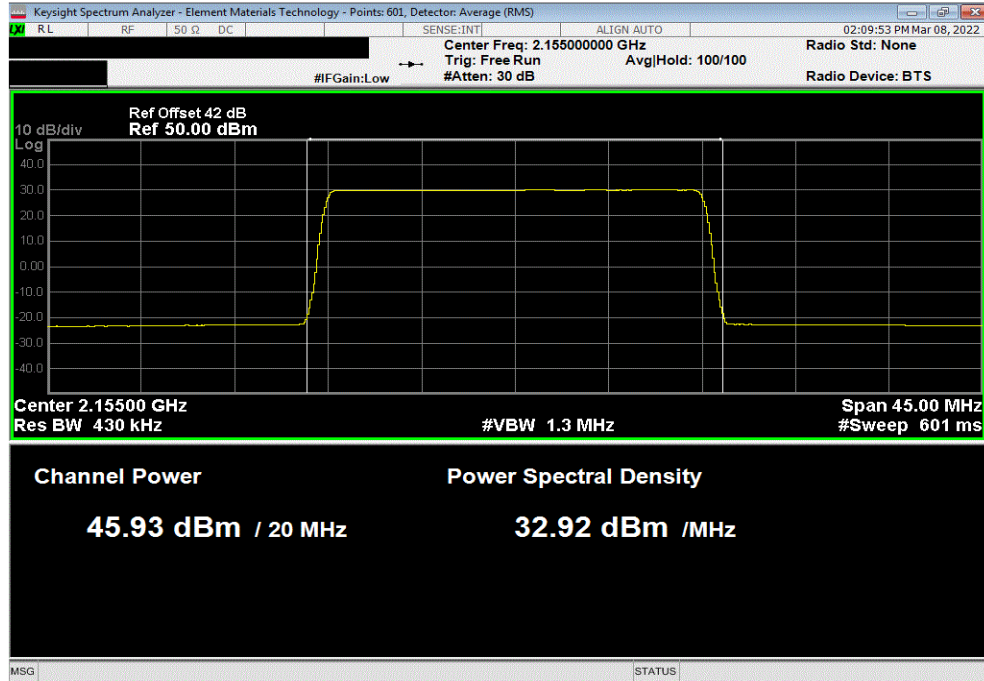

PCS Multicarrier Multiband, Port 1, Test Case 3: PCS Band LTE20 (2 Carriers), AWS Band LTE20 (Single Carrier), 256-QAM Modulation, PCS Carrier 1, 1965 MHz						
	Initial Value	Duty Cycle	Single Port	Two Port	Four Port	
	dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW	
	45.806	0	45.8	48.8	51.8	

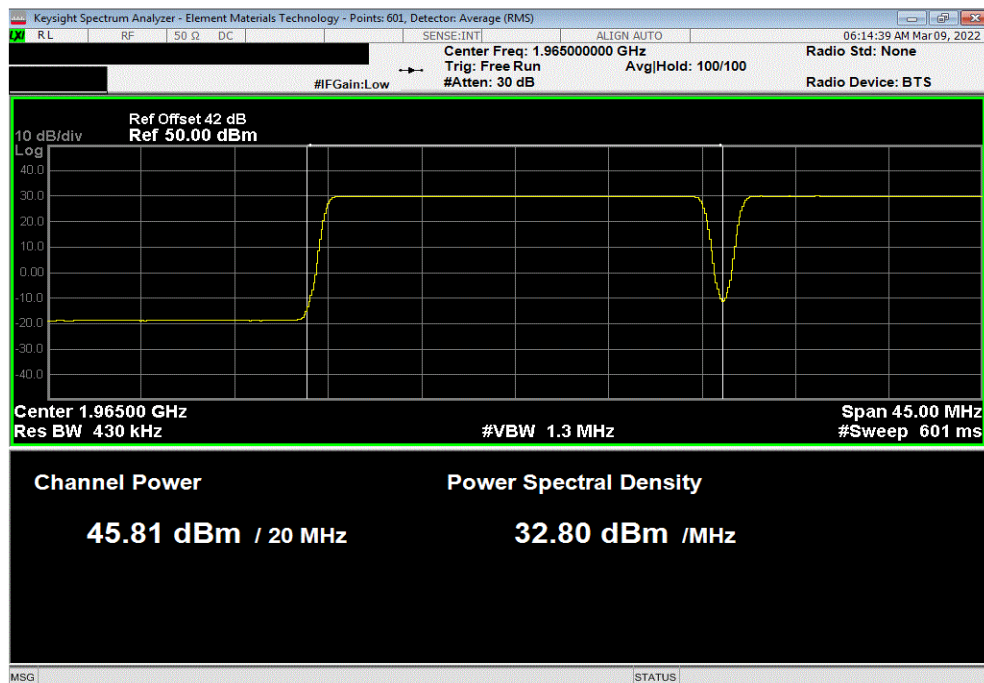


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

PCS Multicarrier Multiband, Port 1, Test Case 3: PCS Band LTE20 (2 Carriers), AWS Band LTE20 (Single Carrier), 256-QAM Modulation, PCS Carrier 2, 1985 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
45.364	0	45.4	48.4	51.4		

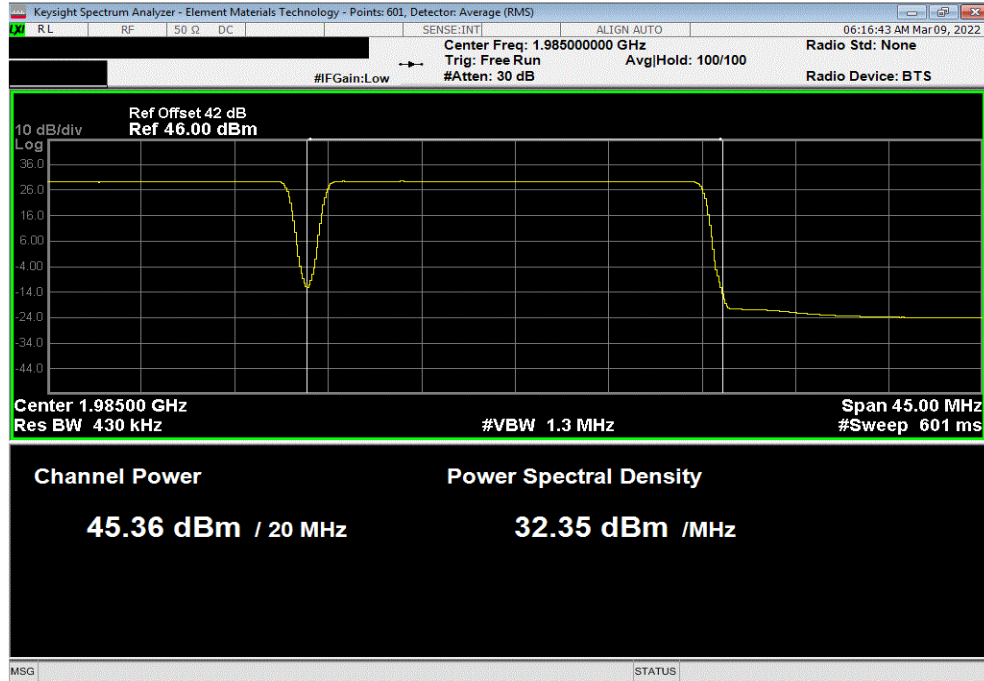

PCS Multicarrier Multiband, Port 1, Test Case 3: PCS Band LTE20 (2 Carriers), AWS Band LTE20 (Single Carrier), 256-QAM Modulation, AWS Single Carrier, 2155 MHz..						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
45.849	0	45.8	48.8	51.8		

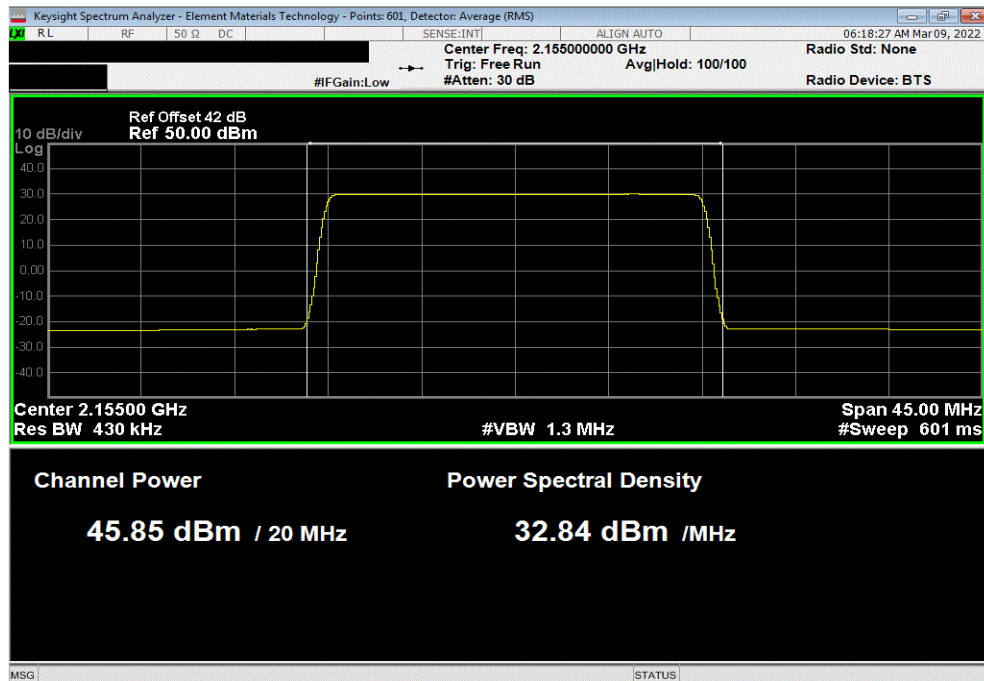

CONDUCTED OUTPUT POWER



EUT: AHFI Remote Radio Head		Work Order: NOKI0037	
Serial Number: YK214000036		Date: 28-Feb-22	
Customer: Nokia Solutions and Networks		Temperature: 22.6 °C	
Attendees: David Le, John Rattanavong		Humidity: 23.7% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Mark Baytan	Power: 54 VDC	Job Site: TX09	

TEST SPECIFICATIONS		Test Method	
FCC 27:2022	ANSI C63.26:2015		
RSS-139 Issue 3:2015	RSS-139 Issue 3:2015		
RSS-170 Issue 3:2015	RSS-170 Issue 3:2015		

COMMENTS

All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. For Test Case 1: The carriers were operated at maximum power (~26W/AWS carrier and 40W/PCS carrier) with at total port power of 120 watts (80W for AWS band carriers + 40W for PCS band carrier). For Test Case 2: The carriers are operated at maximum power (~40W/PCS carrier and 40W/AWS carrier) with at total port power of 120 watts (40W for PCS band carrier + 80W for AWS band carriers). For Test Case 3: The carriers are operated at maximum power (~40W/PCS carrier and 40W/AWS carrier) with at total port power of 120 watts (40W for PCS band carrier + 80W for AWS band carriers).

DEVIATIONS FROM TEST STANDARD

None

Configuration #	2	Signature				
		Initial Value dBm/Carrier BW	Duty Cycle Factor (dB)	Single Port dBm/Carrier BW	Two Port dBm/Carrier BW	Four Port dBm/Carrier BW

AWS Multicarrier Multiband

Port 1

Test Case 1: AWS Band LTE1.4 (3 Carriers), PCS Band LTE1.4 (Single Carrier)

256-QAM Modulation

AWS Carrier 1, 2110.7 MHz	43.599	0	43.6	46.6	49.6
AWS Carrier 2, 2112.1 MHz	43.584	0	43.6	46.6	49.6
AWS Carrier 3, 2199.3 MHz	44.304	0	44.3	47.3	50.3
PCS Single Carrier, 1962.5 MHz	44.991	0	45.0	48.0	51.0

Test Case 2: AWS Band LTE20 (2 Carriers), PCS Band LTE20 (Single Carrier)

256-QAM Modulation

AWS Carrier 1, 2120 MHz	45.306	0	45.3	48.3	51.3
AWS Carrier 2, 2140 MHz	45.717	0	45.7	48.7	51.7
PCS Single Carrier, 1962.5 MHz	45.29	0	45.3	48.3	51.8

Test Case 3: AWS Band LTE20 (2 Carriers), PCS Band LTE20 (Single Carrier)

256-QAM Modulation


AWS Carrier 1, 2170 MHz	45.943	0	45.9	48.9	51.9
AWS Carrier 2, 2190 MHz	45.791	0	45.8	48.8	51.8
PCS Single Carrier, 1962.5 MHz	45.5	0	45.5	48.5	51.5

CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

AWS Multicarrier Multiband, Port 1, Test Case 1: AWS Band LTE1.4 (3 Carriers), PCS Band LTE1.4 (Single Carrier), 256-QAM Modulation, AWS Carrier 1, 2110.7 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
43.599	0	43.6	46.6	49.6		

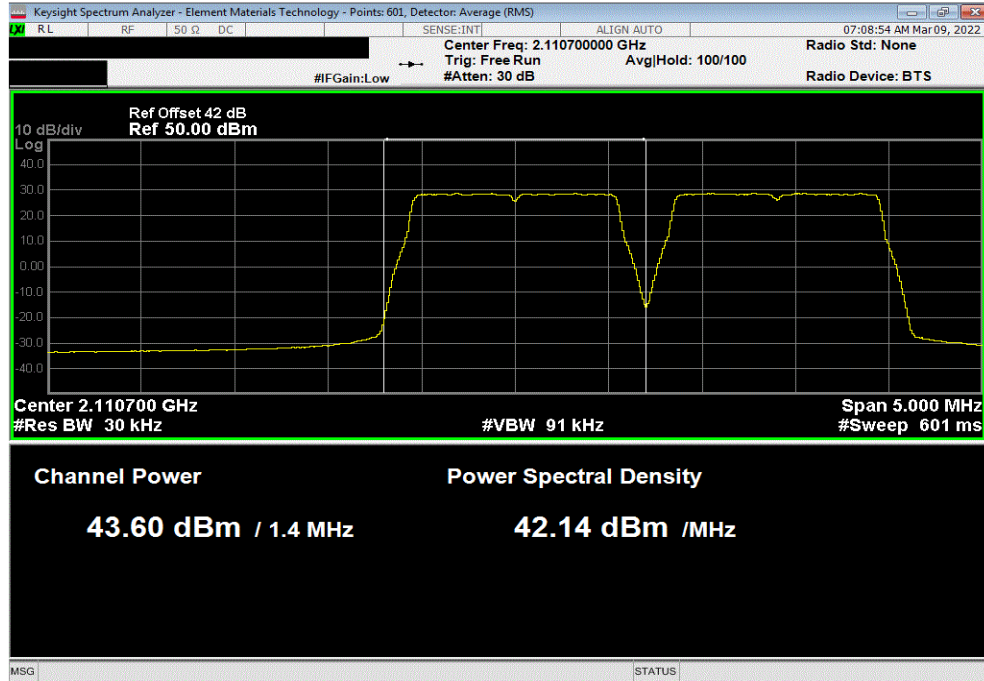

AWS Multicarrier Multiband, Port 1, Test Case 1: AWS Band LTE1.4 (3 Carriers), PCS Band LTE1.4 (Single Carrier), 256-QAM Modulation, AWS Carrier 2, 2112.1 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
43.584	0	43.6	46.6	49.6		

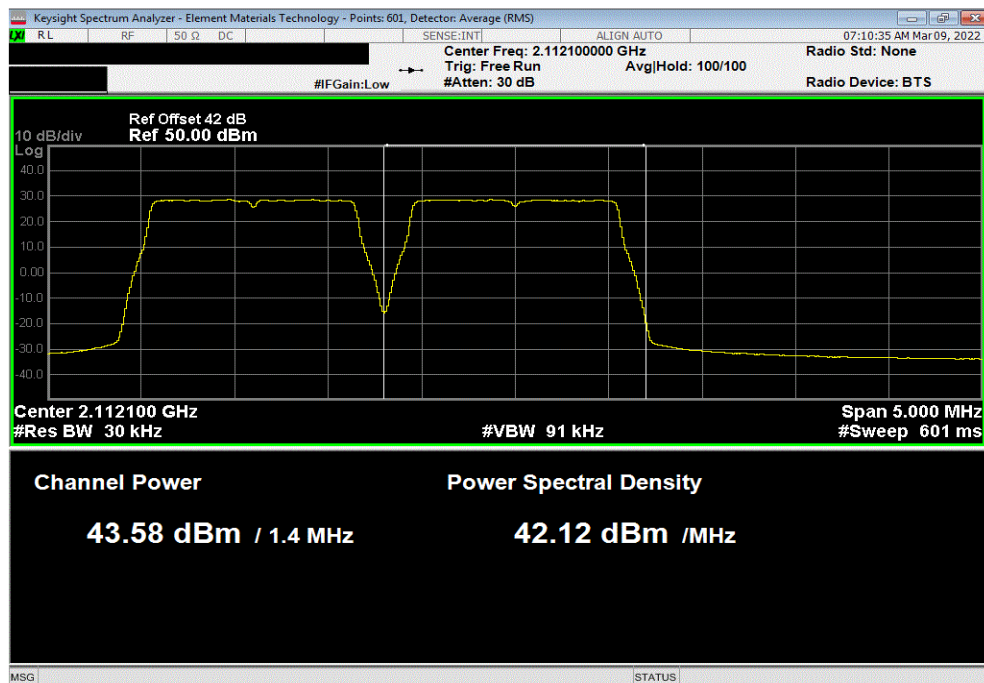


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMR 2022.02.07.0

AWS Multicarrier Multiband, Port 1, Test Case 1: AWS Band LTE1.4 (3 Carriers), PCS Band LTE1.4 (Single Carrier), 256-QAM Modulation, AWS Carrier 3, 2199.3 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
44.304	0	44.3	47.3	50.3		

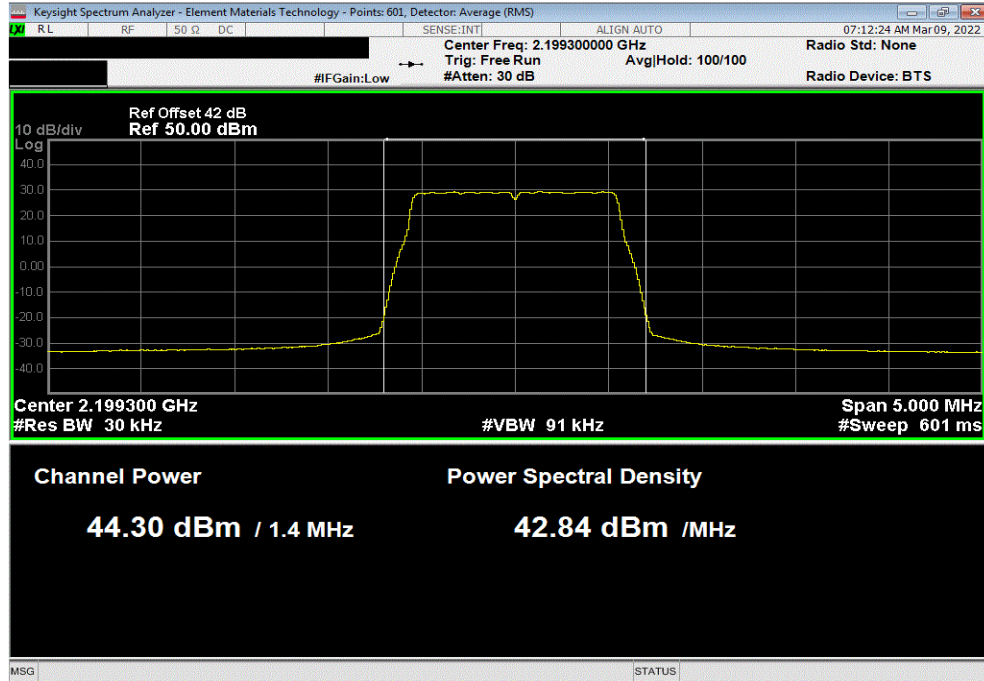

AWS Multicarrier Multiband, Port 1, Test Case 1: AWS Band LTE1.4 (3 Carriers), PCS Band LTE1.4 (Single Carrier), 256-QAM Modulation, PCS Single Carrier, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
44.991	0	45.0	48.0	51.0		

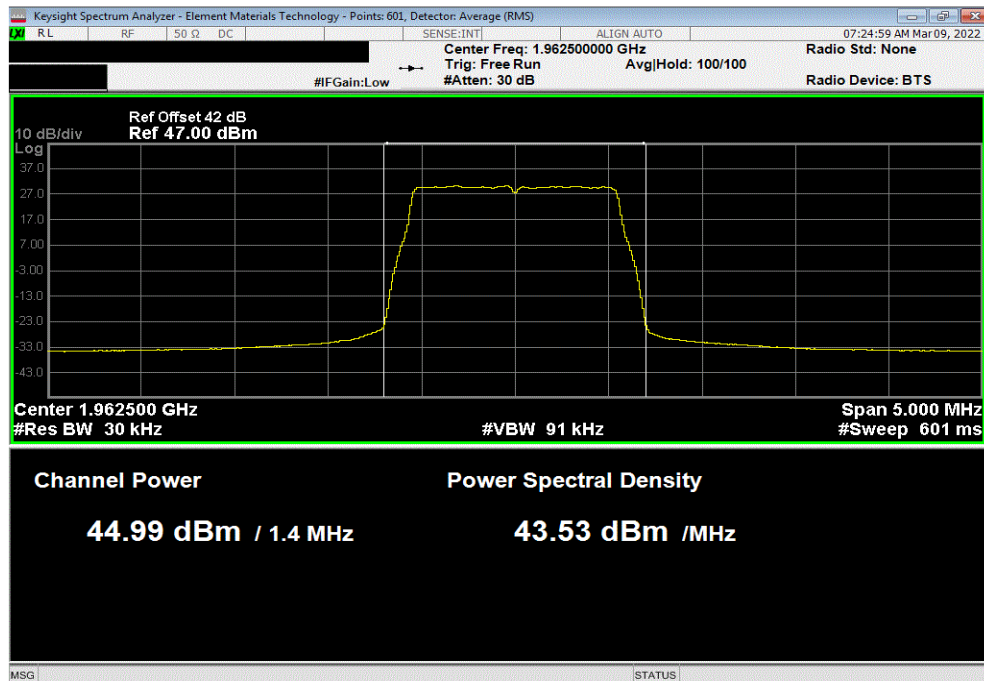


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

AWS Multicarrier Multiband, Port 1, Test Case 2: AWS Band LTE20 (2 Carriers), PCS Band LTE20 (Single Carrier), 256-QAM Modulation, AWS Carrier 1, 2120 MHz						
	Initial Value	Duty Cycle	Single Port	Two Port	Four Port	
	dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW	
	45.306	0	45.3	48.3	51.3	

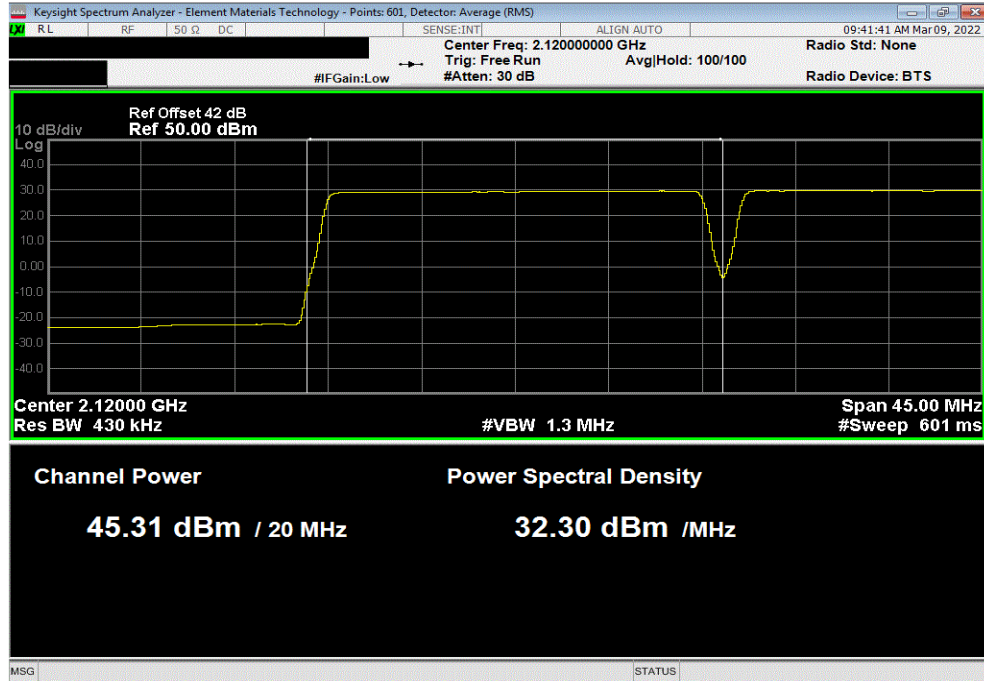

AWS Multicarrier Multiband, Port 1, Test Case 2: AWS Band LTE20 (2 Carriers), PCS Band LTE20 (Single Carrier), 256-QAM Modulation, AWS Carrier 2, 2140 MHz						
	Initial Value	Duty Cycle	Single Port	Two Port	Four Port	
	dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW	
	45.717	0	45.7	48.7	51.7	

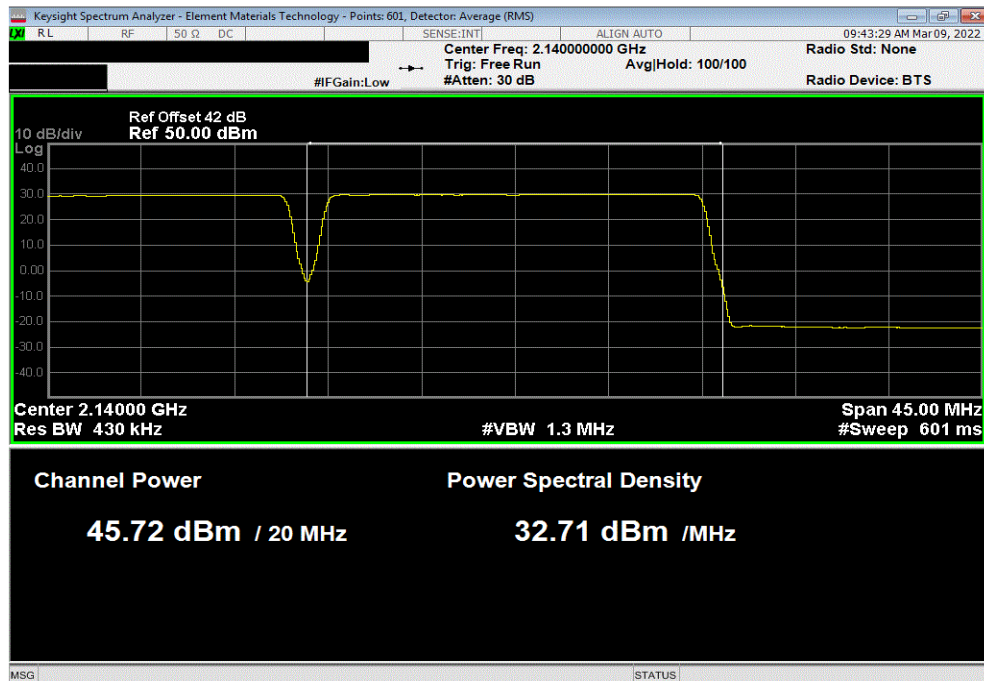


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

AWS Multicarrier Multiband, Port 1, Test Case 2: AWS Band LTE20 (2 Carriers), PCS Band LTE20 (Single Carrier), 256-QAM Modulation, PCS Single Carrier, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
45.29	0	45.3	48.3	51.8		

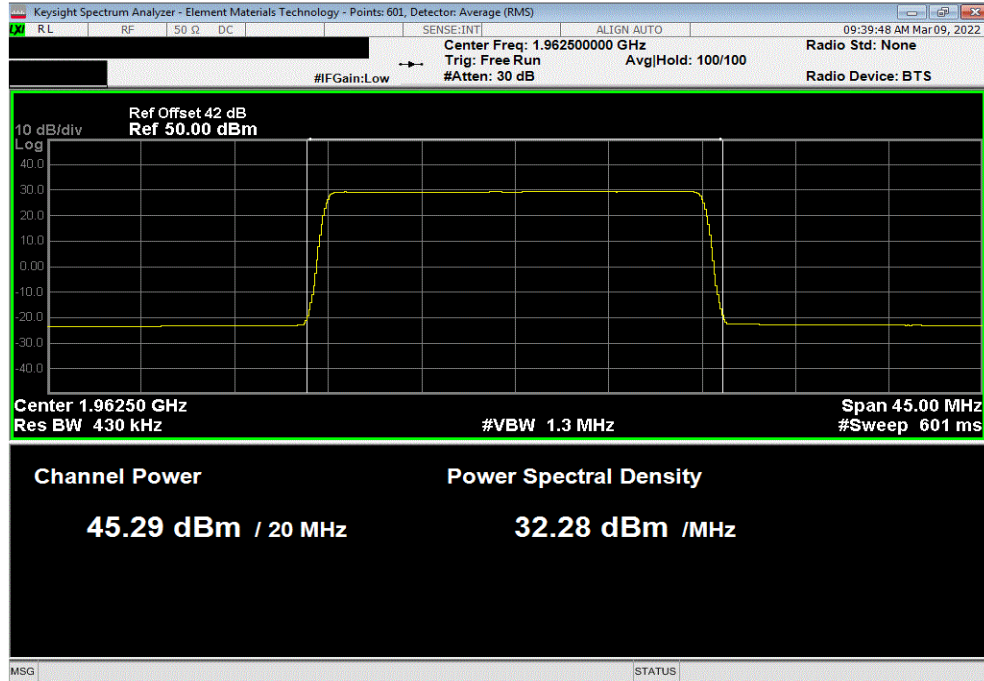

AWS Multicarrier Multiband, Port 1, Test Case 3: AWS Band LTE20 (2 Carriers), PCS Band LTE20 (Single Carrier), 256-QAM Modulation, AWS Carrier 1, 2170 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
45.943	0	45.9	48.9	51.9		

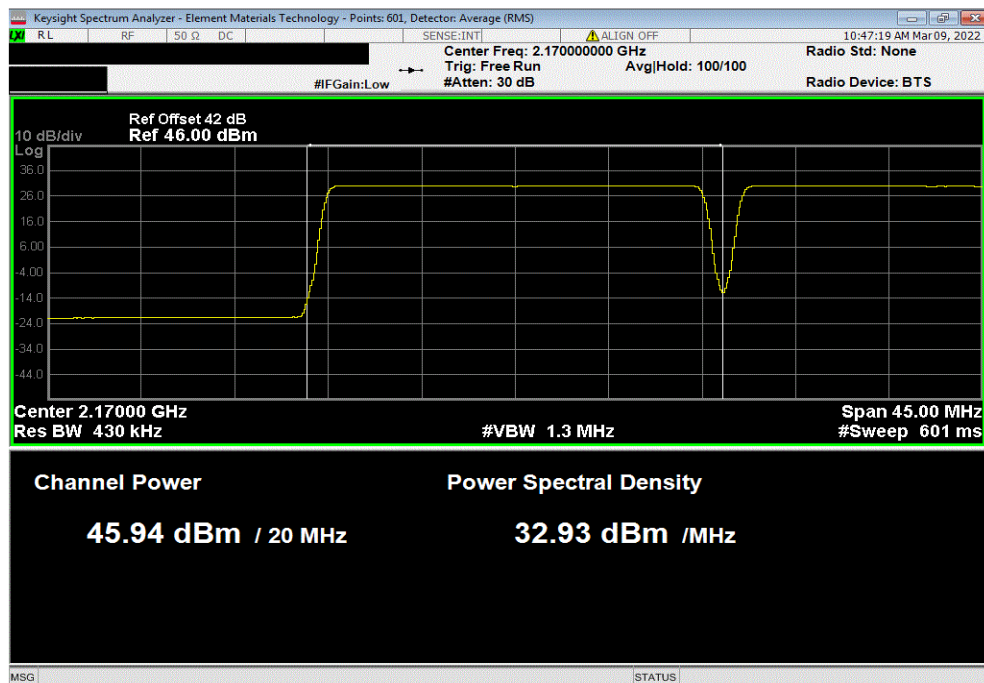


CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

AWS Multicarrier Multiband, Port 1, Test Case 3: AWS Band LTE20 (2 Carriers), PCS Band LTE20 (Single Carrier), 256-QAM Modulation, AWS Carrier 2, 2190 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
45.791	0	45.8	48.8	51.8		

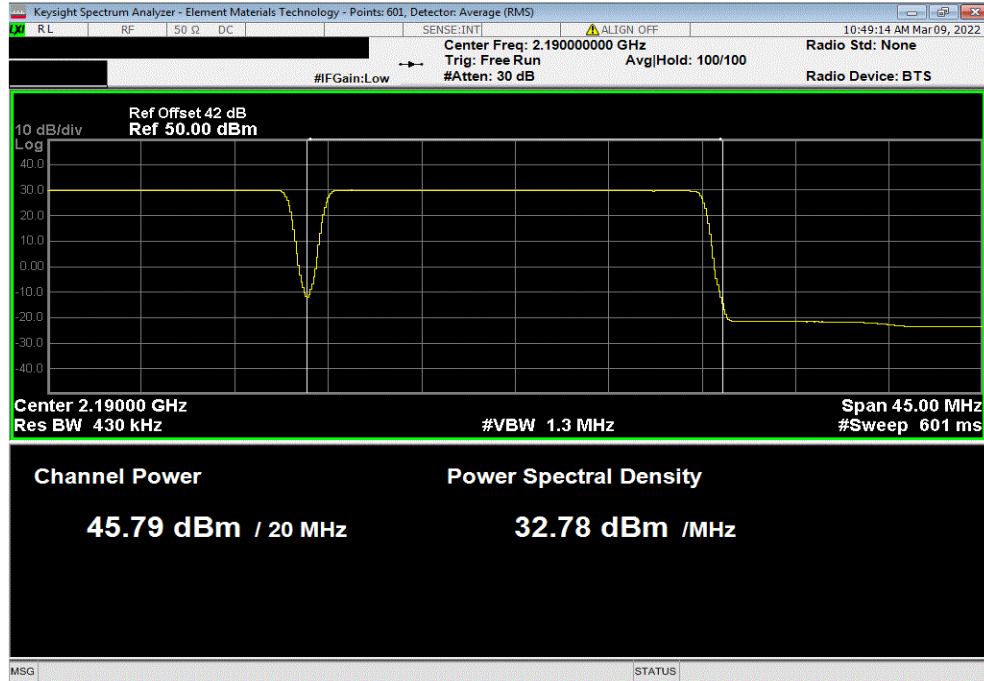


AWS Multicarrier Multiband, Port 1, Test Case 3: AWS Band LTE20 (2 Carriers), PCS Band LTE20 (Single Carrier), 256-QAM Modulation, PCS Single Carrier, 1962.5 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
45.5	0	45.5	48.5	51.5		

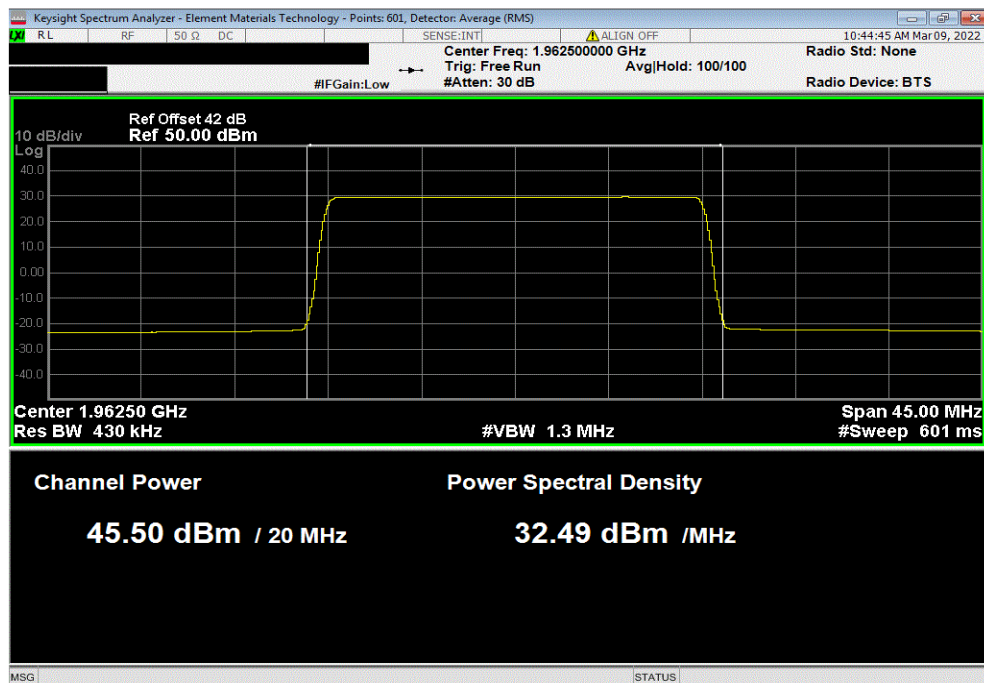

CONDUCTED OUTPUT POWER



ThxTV 2021.12.14.1 XMM 2022.02.07.0


EUT: AHFII Remote Radio Head		Work Order: NOKI0037	
Serial Number: YK214000036		Date: 28-Feb-22	
Customer: Nokia Solutions and Networks		Temperature: 22.6 °C	
Attendees: David Le, John Rattanavong		Humidity: 23.7% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Mark Baytan	Power: 54 VDC	Job Site: TX09	
TEST SPECIFICATIONS		Test Method	
FCC 24E:2022		ANSI C63.26:2015	
RSS-133 Issue 6:2013+A1:2018		RSS-133 Issue 6:2013+A1:2018	
COMMENTS			
All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. The carriers were operated at maximum power (40W/PCS carrier and 40W/AWS carrier) with at total port power of 120 watts (80W for PCS band carriers + 40W for AWS band carrier).			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Initial Value dBm/Carrier BW	Duty Cycle Factor (dB)
		Single Port dBm/Carrier BW	Two Port dBm/Carrier BW
			Four Port dBm/Carrier BW
Multicarrier Multiband			
Port 1			
Test Case 1: PCS Band LTE1.4 (2 Carriers), AWS Band LTE1.4 (Single Carrier)			
256-QAM Modulation			
	PCS Carrier 1, 1930.7 MHz	44.436	0
	PCS Carrier 2, 1932.1 MHz	44.664	0
	AWS Carrier 1, 2199.3 MHz	45.625	0
		44.4	47.4
		44.7	47.7
		45.6	48.6
			50.4
			50.7
			51.6

CONDUCTED OUTPUT POWER




TbTx 2021.12.14.1 XMt 2022.02.07.0

Multicarrier Multiband, Port 1, Test Case 1: PCS Band LTE1.4 (2 Carriers), AWS Band LTE1.4 (Single Carrier), 256-QAM Modulation, PCS Carrier 1, 1930.7 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
44.436	0	44.4	47.4	50.4		

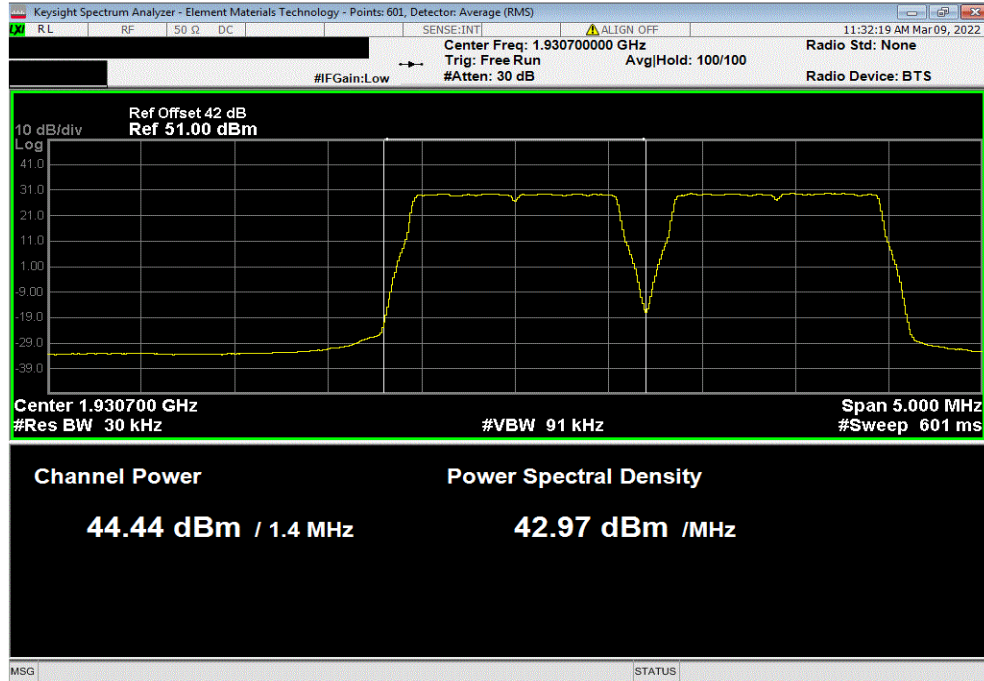

Multicarrier Multiband, Port 1, Test Case 1: PCS Band LTE1.4 (2 Carriers), AWS Band LTE1.4 (Single Carrier), 256-QAM Modulation, PCS Carrier 2, 1932.1 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
44.664	0	44.7	47.7	50.7		

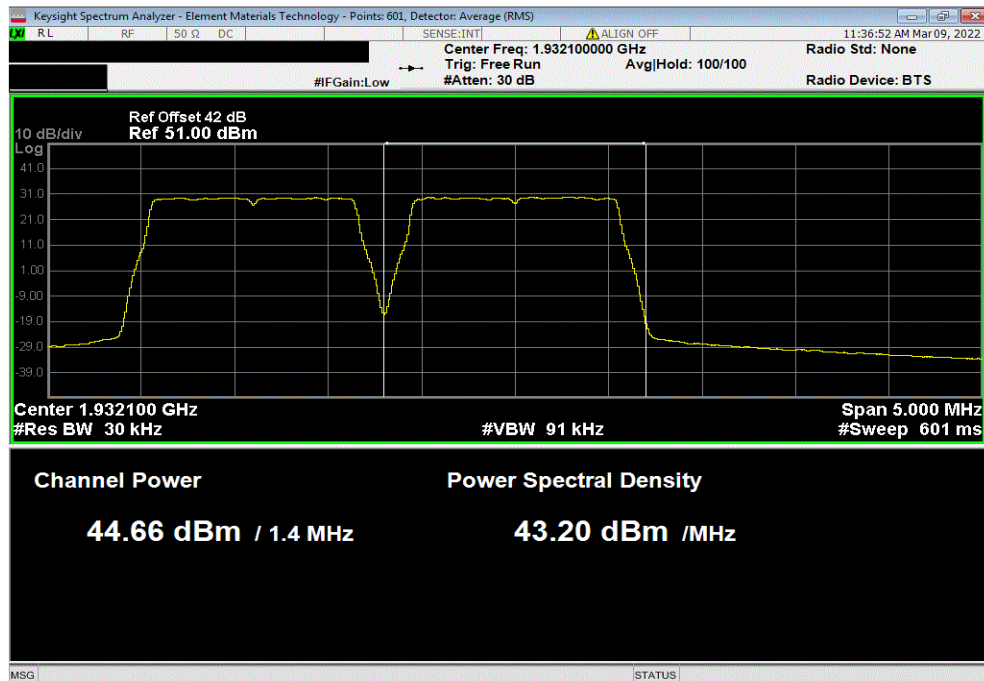

CONDUCTED OUTPUT POWER



TbTx 2021.12.14.1 XMt 2022.02.07.0

Multicarrier Multiband, Port 1, Test Case 1: PCS Band LTE1.4 (2 Carriers), AWS Band LTE1.4 (Single Carrier), 256-QAM Modulation, AWS Carrier 1, 2199.3 MHz						
Initial Value	Duty Cycle	Single Port	Two Port	Four Port		
dBm/Carrier BW	Factor (dB)	dBm/Carrier BW	dBm/Carrier BW	dBm/Carrier BW		
45.625	0	45.6	48.6	51.6		

