

TEST REPORT

Applicant:	Grandex International Development Limited
Address:	Unit 2401, 24/F, Million Fortune Industrial Centre, No.34-36 Chai Wan Kok Street, Tsuen Wan, N.T., Hong Kong

Manufacturer or Supplier	Grandex International Development Limited
Address	Unit 2401, 24/F, Million Fortune Industrial Centre, No.34-36 Chai Wan Kok Street, Tsuen Wan, N.T., Hong Kong
Product:	R/C VEHICLE
Brand Name:	N/A
Model:	96097
Additional Model & Model Difference	N/A
Date of tests:	May 18, 2026 ~ Jun. 14, 2026

the tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.249**

CONCLUSION: The submitted sample was found to **COMPLY** with the test requirement

Prepared by Loren Luo Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Jul. 13, 2026

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS.....	4
2 MEASUREMENT UNCERTAINTY	4
3 GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 DESCRIPTION OF TEST MODES	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4 DESCRIPTION OF SUPPORT UNITS	8
3.5 DUTY CYCLE OF TESET SIGNAL	9
3.6 CONFIGURATION OF SYSTEM UNDER TEST	10
4. TEST TYPES AND RESULTS.....	11
4.1 RADIATED EMISSION MEASUREMENT	11
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.1.2 TEST INSTRUMENTS	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 20DB BANDWIDTH MEASUREMENT	30
4.2.1 LIMITS OF 20DB BANDWIDTH MEASUREMENT	30
4.2.2 TEST INSTRUMENTS	30
4.2.3 TEST PROCEDURE	31
4.2.4 DEVIATION FROM TEST STANDARD	31
4.2.5 TEST SETUP	31
4.2.6 EUT OPERATING CONDITIONS.....	31
4.2.7 TEST RESULTS	32
4.3 PHOTOGRAPHS OF THE TEST CONFIGURATION.....	34
5. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	35



Test Report No.: RF2605WDG0118

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2605WDG0118	Original release	Jul. 13, 2026

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.249)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used
§15.207 (a)	Conducted Emission	N/A	Powered from battery
§15.205	Restricted Band of Operation	PASS	Compliant
§15.209 §15.249(a)	Radiated Emission	PASS	Compliant
§15.215(c)	20dB Bandwidth Test	PASS	Compliant

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.48dB
	30MHz ~ 1GMHz	4.32dB
	1GHz ~ 18GHz	4.76dB
	18GHz ~ 40GHz	4.50dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	R/C VEHICLE
MODEL NO.	96097
ADDITIONAL MODEL	N/A
FCC ID	VC996097240
NOMINAL VOLTAGE	DC 3V(1.5V*AA*2) From Battery
MODULATION TECHNOLOGY	GFSK
OPERATING FREQUENCY	2407MHz ~ 2477MHz
ANTENNA TYPE	Wire Antenna, with 0dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2605WDG0118) for detailed product photo.

3.2 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on X axis for radiated emission. The EUT was tested under the following mode.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	BW	
A	√	√	-	√	DC 3V from battery

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
BW: 20db bandwidth

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

Following channel(s) was (were) selected for the test as listed below.

TESTED CHANNEL	TESTED FREQUENCY
Low	2407 MHz
Middle	2447 MHz
High	2477 MHz

Channel List

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2407	19	2425	37	2443	55	2461
2	2408	20	2426	38	2444	56	2462
3	2409	21	2427	39	2445	57	2463
4	2410	22	2428	40	2446	58	2464
5	2411	23	2429	41	2447	59	2465
6	2412	24	2430	42	2448	60	2466
7	2413	25	2431	43	2449	61	2467
8	2414	26	2432	44	2450	62	2468
9	2415	27	2433	45	2451	63	2469
10	2416	28	2434	46	2452	64	2470
11	2417	29	2435	47	2453	65	2471
12	2418	30	2436	48	2454	66	2472
13	2419	31	2437	49	2455	67	2473
14	2420	32	2438	50	2456	68	2474
15	2421	33	2439	51	2457	69	2475
16	2422	34	2440	52	2458	70	2476
17	2423	35	2441	53	2459	71	2477
18	2424	36	2442	54	2460		

Note: The more detailed channel, please refer to the product specifications

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE	25deg. C, 55%RH	DC 3V from Battery	Ludius
BW	24deg. C, 56%RH	DC 3V from Battery	Vincent
PLC	-	-	-

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.249

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any other necessary accessories or support units


3.5 DUTY CYCLE OF TESET SIGNAL

$T_p = 10.7391\text{ms}$


$T_{on} = 521.7\mu\text{s} \times 1 = 521.7\mu\text{s}$

Duty Cycle = $T_{on} / T_p \times 100\% = (0.5217 / 10.7391) / 100 \approx 4.86\%$

AV factor = $20 \log (\text{Duty cycle}) = 20 \log (4.86\%) \approx -26.27\text{dB}$

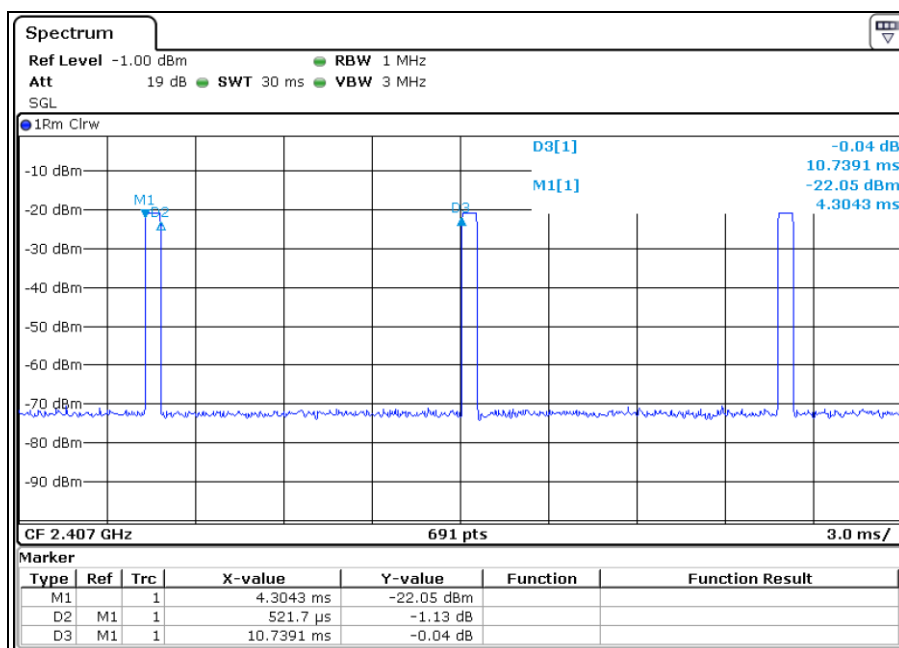

CONFIGURATION OF SYSTEM UNDER TEST

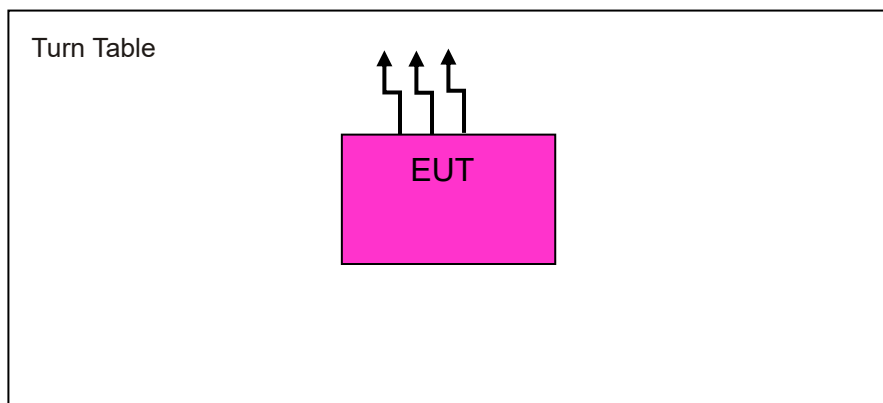

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Spectrum Analyzer	Rohde&Schwarz	FSV3044	101326	Apr. 07, 27
EMI Test Receiver	Rohde&Schwarz	ESCI3	101418	Jul.06, 26
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-555	Jan. 04, 27
Pre-Amplifier	Agilent	8447D	2944A10488	Jul.01, 26
3m Semi-anechoic Chamber	ETS-Lindgren	9m*6m*6m	D3040003DG-1	Jul 30, 26
Coaxial RF Cable	Joinfront	JFAA6-NMNM-8000	2100033742	Jul.01, 26
Coaxial RF Cable	Joinfront	JFAR-NMBNCM-2000	2100033742	Jul.01, 26
Coaxial RF Cable	Joinfront	JFAR-BNCMSMM-500	2100033742	Jul.01, 26
Test software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Horn Antenna	ETS-Lindgren	3117	00240040	Apr. 11, 27
Horn Antenna	SCHWARZBECK	BBHA 9170	01023	Oct. 21, 26
Pre-Amplifier (1GHz-18GHz)	Rohde&Schwarz	SCU18	102265	Jul.01, 26
Pre-Amplifier (18GHz-40GHz)	Rohde&Schwarz	SCU40	100437	Oct. 10, 26
Coaxial RF Cable	Joinfront	JFAA6-NMNM-8000	2100033742	Jul.01, 26
Coaxial RF Cable	Joinfront	JFAA6-NMSMM-2000	2100033742	Jul.01, 26
Coaxial RF Cable	Joinfront	JFAA6-NMSMM-800	2100033742	Jul.01, 26
Coaxial RF Cable	Joinfront	HF160-KMKM-2.00M	C23100012DG-1	Nov. 27, 26
Coaxial RF Cable	Joinfront	HF160-KMKM-5.00M	C23100013DG-1	Nov. 27, 26

NOTES:

1. The test was performed in performed in 966 Chamber.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site registration No. is 749762, and the designation number is CN1174.
5. Test Date: May 14, 2026

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1.3m above the ground.
- g. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. Average value =PK Emission +AV Factor.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP


Below 30MHz test setup

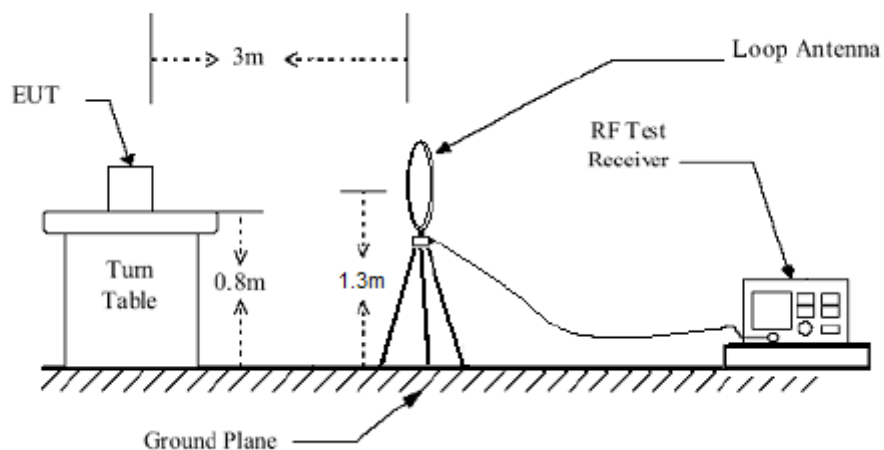

Below 1GHz test setup

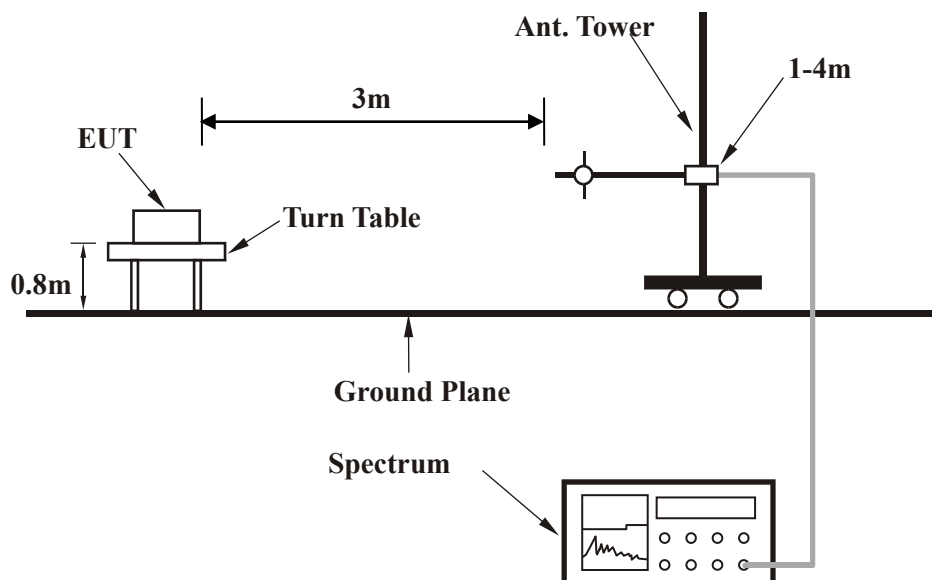

Above 1GHz test setup

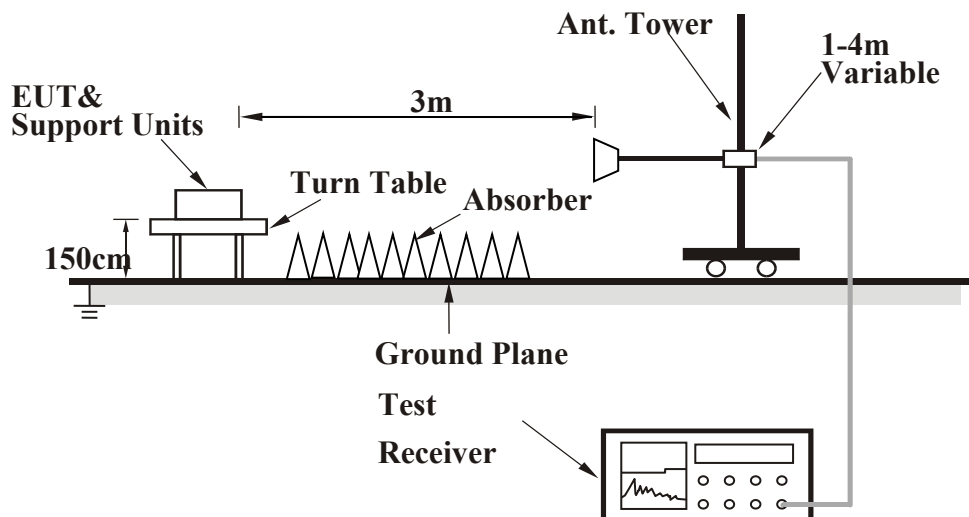

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turned on the power of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

4.1.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	55.22	15.48 QP	40.00	-24.52	189 H	318	29.34	-13.86
2	135.73	15.95 QP	43.50	-27.55	133 H	190	29.66	-13.71
3	339.43	18.53 QP	46.00	-27.47	200 H	131	29.27	-10.74
4	481.05	21.51 QP	46.00	-24.49	117 H	152	29.20	-7.69
5	675.05	25.55 QP	46.00	-20.45	159 H	106	29.56	-4.01
6	845.77	28.76 QP	46.00	-17.24	100 H	162	29.24	-0.48

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

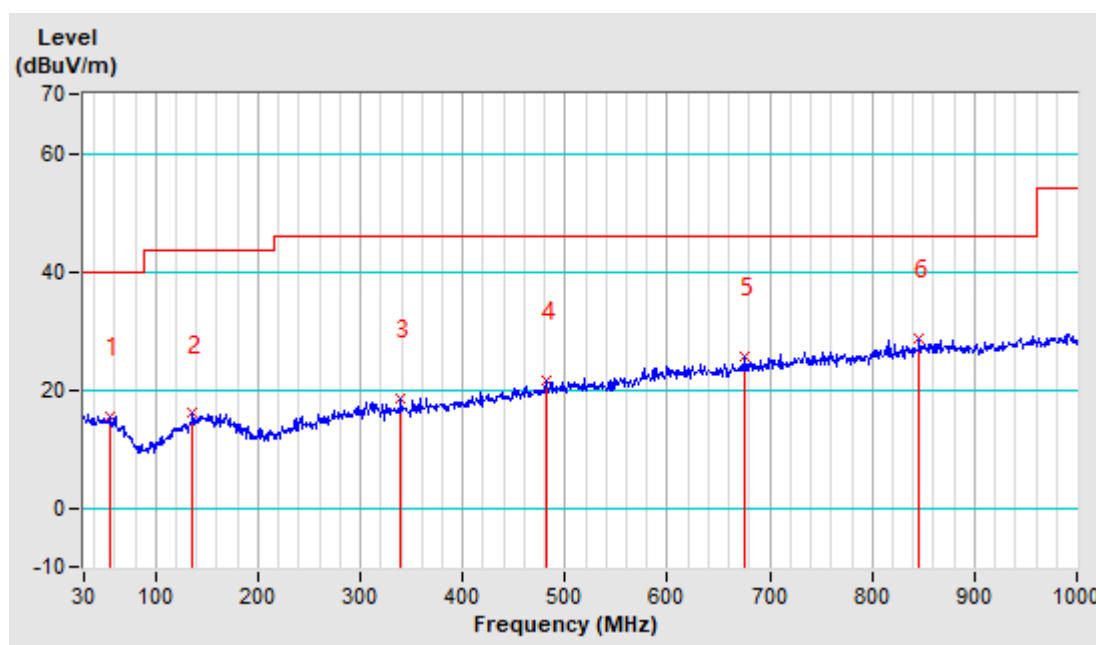


CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.67	20.71 QP	40.00	-19.29	112 V	73	34.83	-14.12
2	55.22	17.72 QP	40.00	-22.28	196 V	43	31.58	-13.86
3	148.34	16.53 QP	43.50	-26.97	100 V	169	29.44	-12.91
4	364.65	19.03 QP	46.00	-26.97	151 V	102	29.41	-10.38
5	519.85	22.46 QP	46.00	-23.54	103 V	56	29.49	-7.03
6	864.20	29.34 QP	46.00	-16.66	200 V	101	29.66	-0.32

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

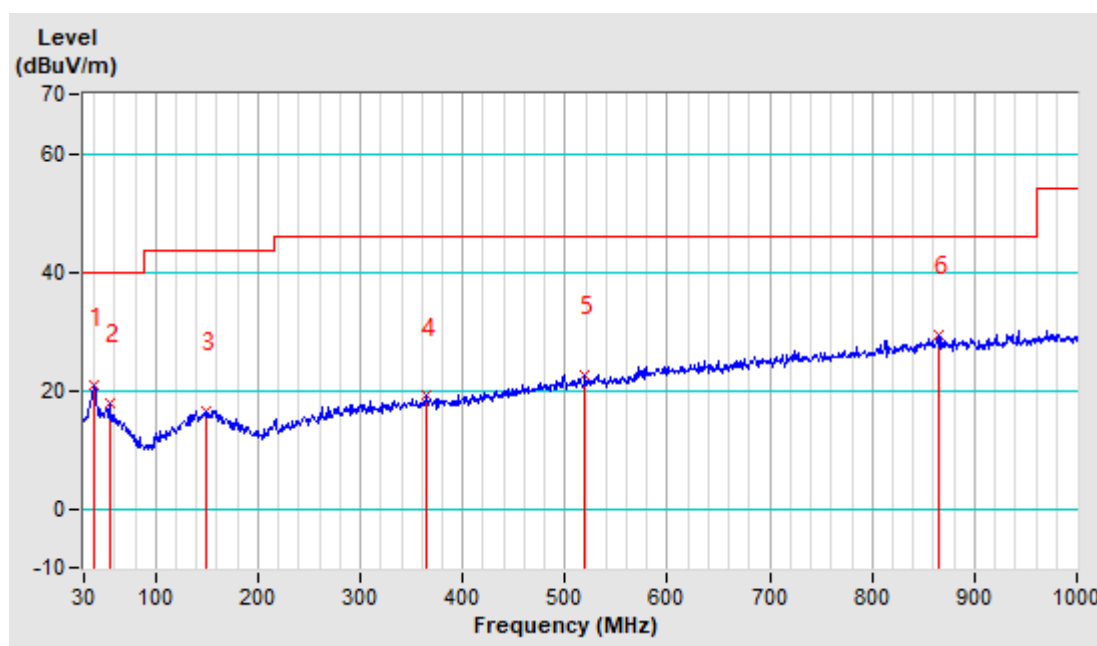

ABOVE 1GHz WORST-CASE DATA:


CHANNEL	TX Low Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2400.00	57.89 PK	74	-16.11	100 H	120	62.07	-4.18
2	2400.00	31.62 AV	54	-22.38	100 H	120	35.80	-4.18
3	*2407.00	93.83 PK	114	-20.17	100 H	120	97.99	-4.16
4	*2407.00	67.56 AV	94	-26.44	100 H	120	71.72	-4.16
5	4814.00	53.26 PK	74	-20.74	154 H	132	54.77	-1.51
6	4814.00	26.99 AV	54	-27.01	154 H	132	28.50	-1.51
7	7221.00	45.26 PK	74	-28.74	102 H	305	45.13	0.13
8	7221.00	18.99 AV	54	-35.01	102 H	305	18.86	0.13
ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2399.50	50.06 PK	74	-23.94	100 V	164	54.24	-4.18
2	2399.50	23.79 AV	54	-30.21	100 V	164	27.97	-4.18
3	2400.00	48.53 PK	74	-25.47	100 V	164	52.71	-4.18
4	2400.00	22.26 AV	54	-31.74	100 V	164	26.44	-4.18
5	*2407.00	87.37 PK	114	-26.63	100 V	164	91.53	-4.16
6	*2407.00	61.10 AV	94	-32.90	100 V	164	65.26	-4.16
7	4814.00	46.29 PK	74	-27.71	120 V	163	47.80	-1.51
8	4814.00	20.02 AV	54	-33.98	120 V	163	21.53	-1.51
9	7221.00	45.31 PK	74	-28.69	159 V	75	45.18	0.13
10	7221.00	19.04 AV	54	-34.96	159 V	75	18.91	0.13


REMARK:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.
6. Average value = PK Emission + 20*log(duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (4.86\%) \approx -26.27\text{dB}$, Please see page 9 for plotted duty.


2407MHz Horizontal

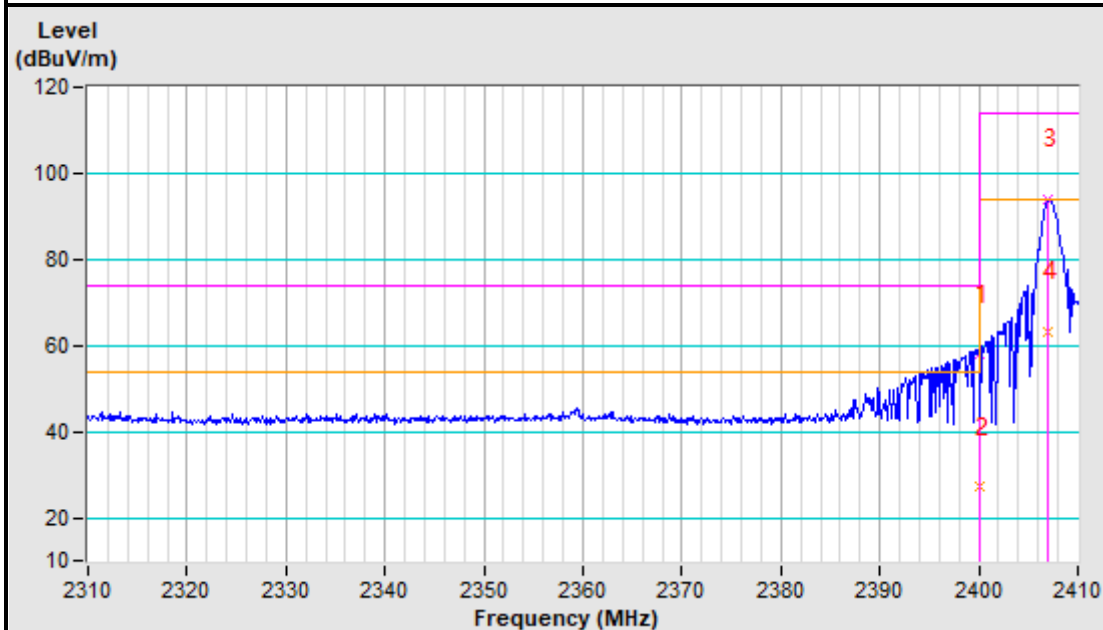


2407MHz Vertical

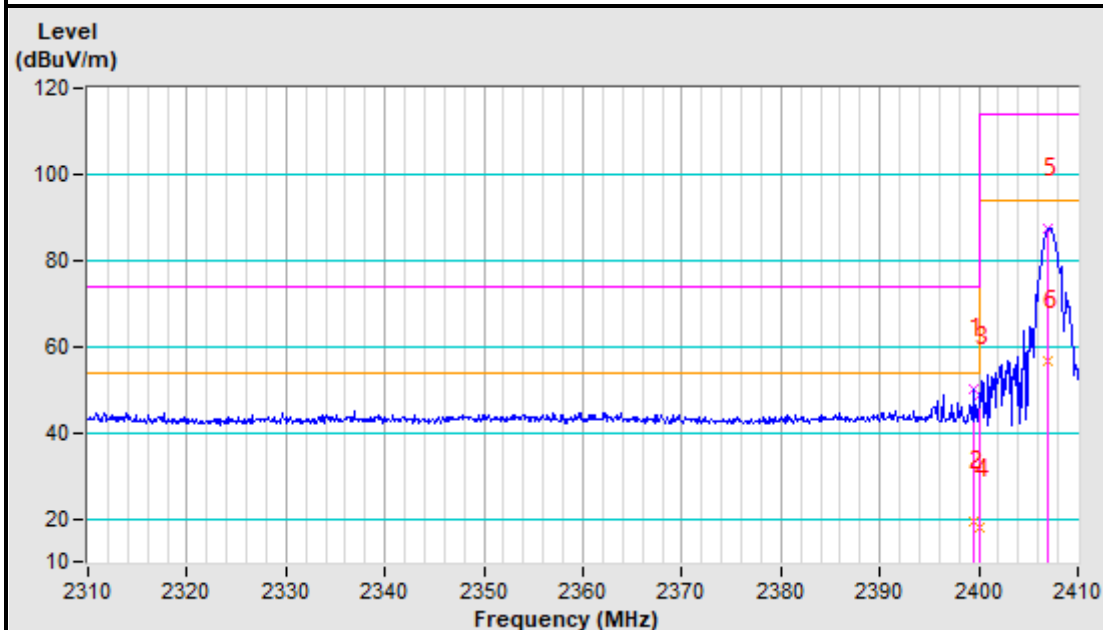

2407MHz Horizontal

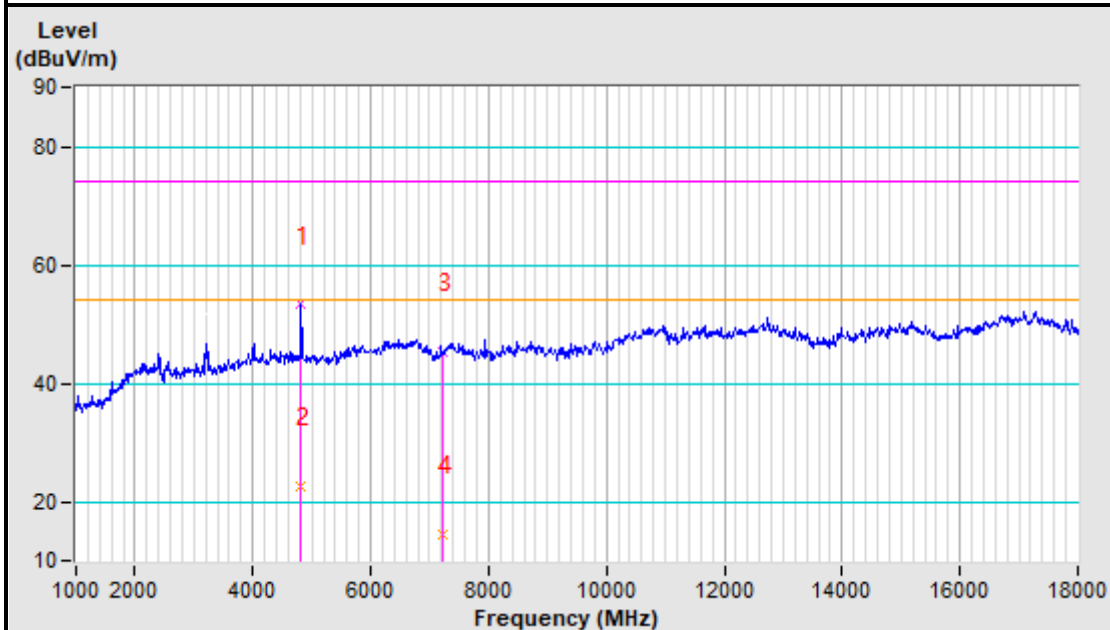


2407MHz Vertical

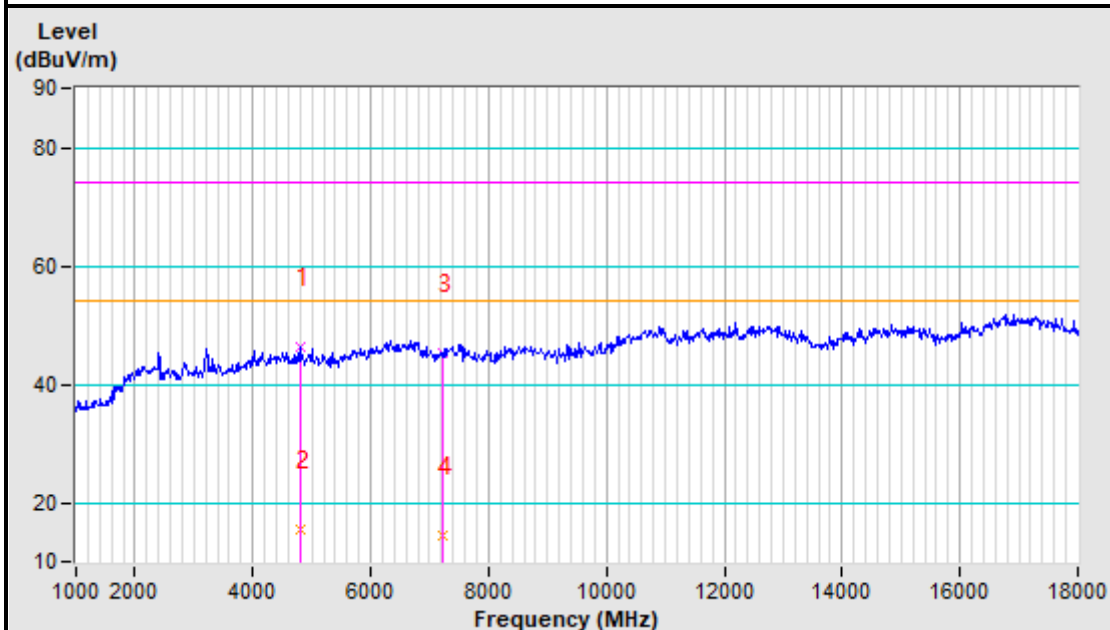


Note: When the harmonic frequency test a fundamental frequency filter is used.

2407MHz Horizontal

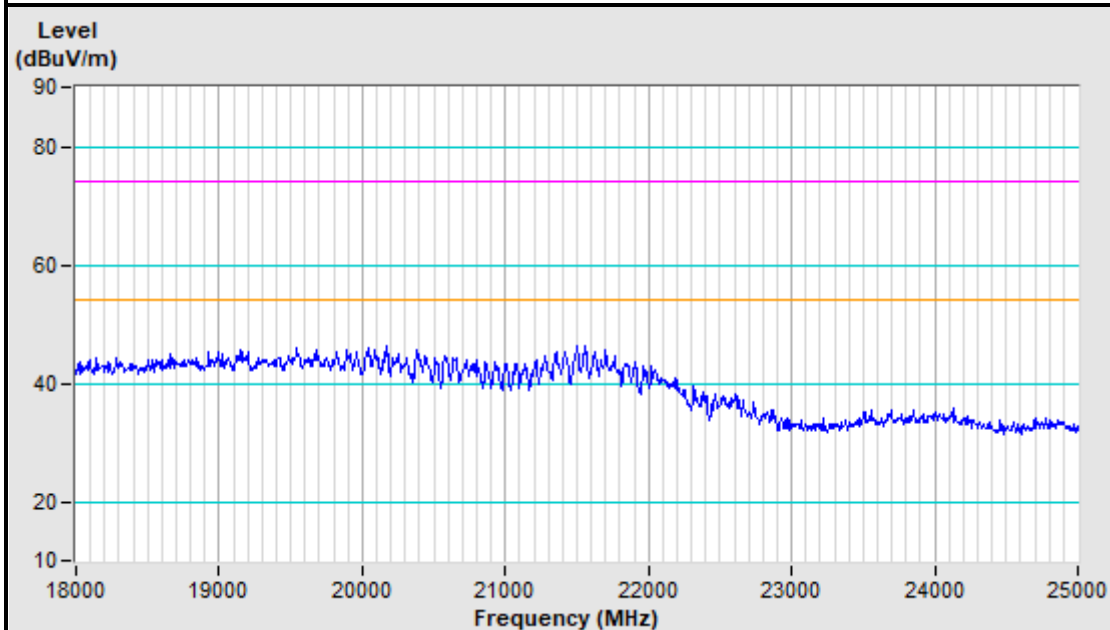

2407MHz Vertical

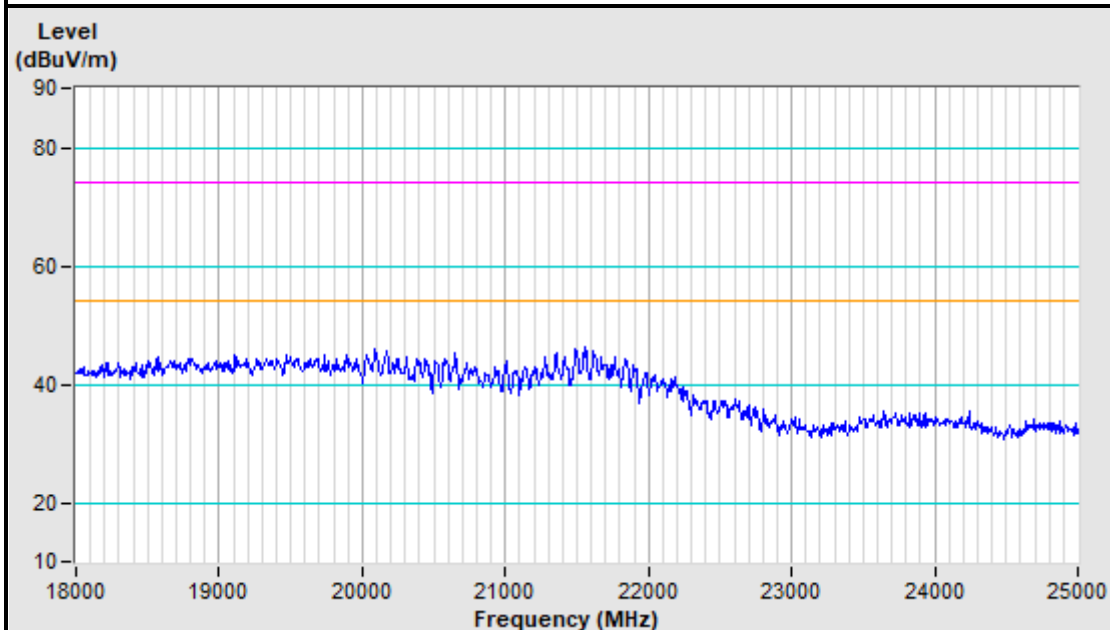

Note: When the harmonic frequency test a fundamental frequency filter is used.



**BUREAU
VERITAS**

Test Report No.: RF2605WDG0118


CHANNEL	TX Middle Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	* 2447.00	100.58 PK	114	-13.42	200 H	102	104.68	-4.1
2	* 2447.00	74.31 AV	94	-19.69	200 H	102	78.41	-4.1
3	4894.00	50.72 PK	74	-23.28	128 H	119	52.10	-1.38
4	4894.00	24.45 AV	54	-29.55	128 H	119	25.83	-1.38
5	7341.00	46.39 PK	74	-27.61	114 H	205	46.12	0.27
6	7341.00	20.12 AV	54	-33.88	114 H	205	19.85	0.27
ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	* 2447.00	92.25 PK	114	-21.75	200 V	157	96.35	-4.1
2	* 2447.00	65.98 AV	94	-28.02	200 V	157	70.08	-4.1
3	4894.00	47.65 PK	74	-26.35	163 V	90	49.03	-1.38
4	4894.00	21.38 AV	54	-32.62	163 V	90	22.76	-1.38
5	7341.00	45.45 PK	74	-28.55	190 V	258	45.18	0.27
6	7341.00	19.18 AV	54	-34.82	190 V	258	18.91	0.27


REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. Average value = PK Emission + 20*log(duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (4.86\%) \approx -26.27\text{dB}$, Please see page 9 for plotted duty.


2447MHz Horizontal

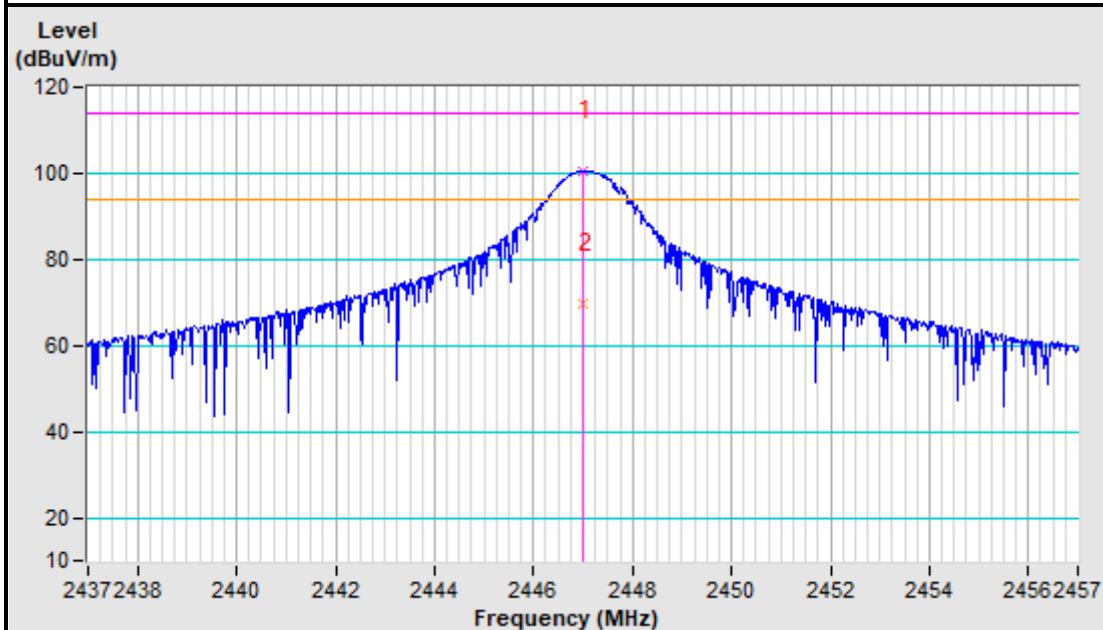


2447MHz Vertical

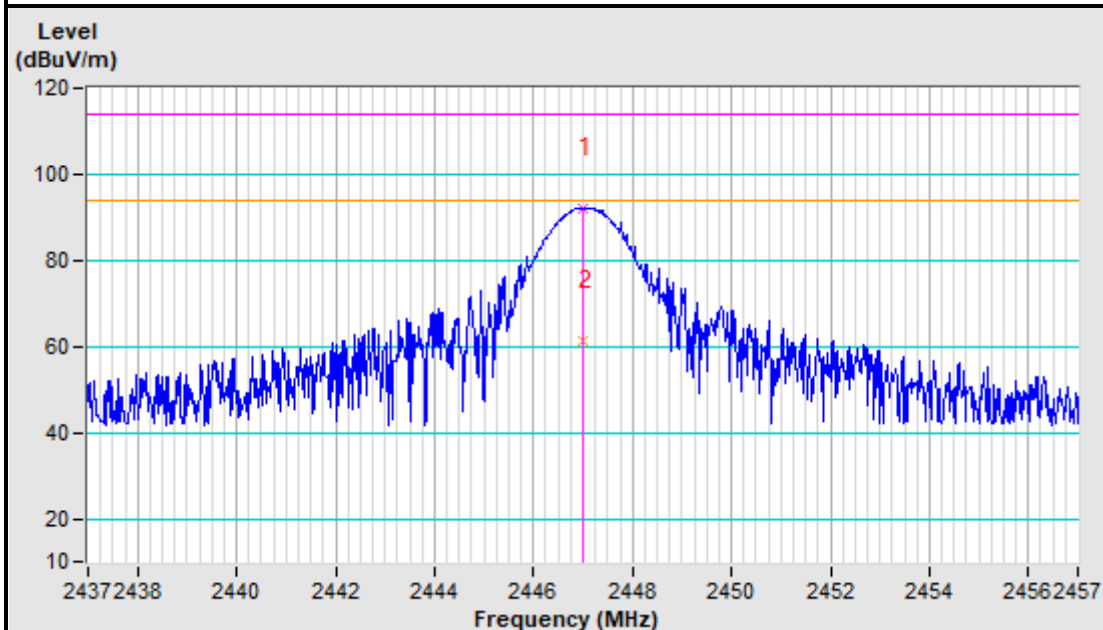

2447MHz Horizontal

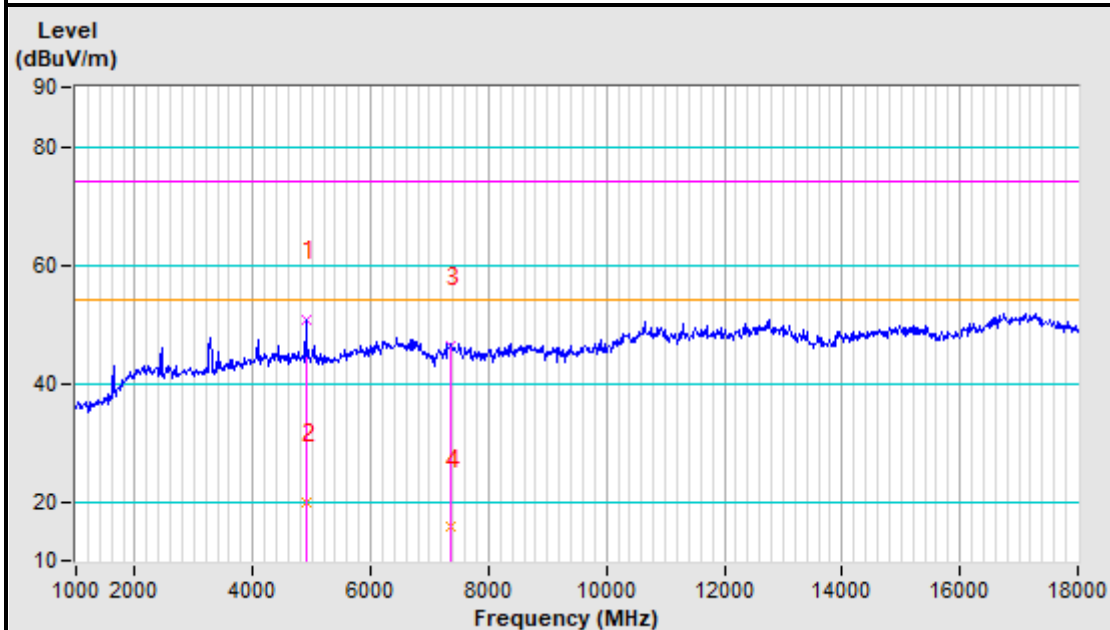


2447MHz Vertical

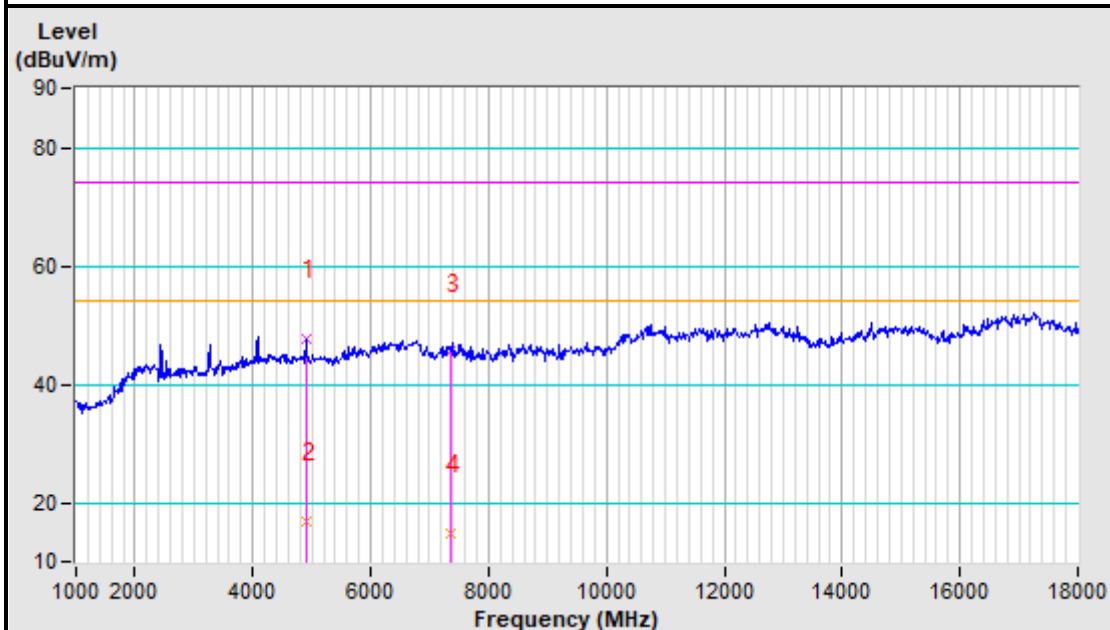


Note: When the harmonic frequency test a fundamental frequency filter is used.

2447MHz Horizontal

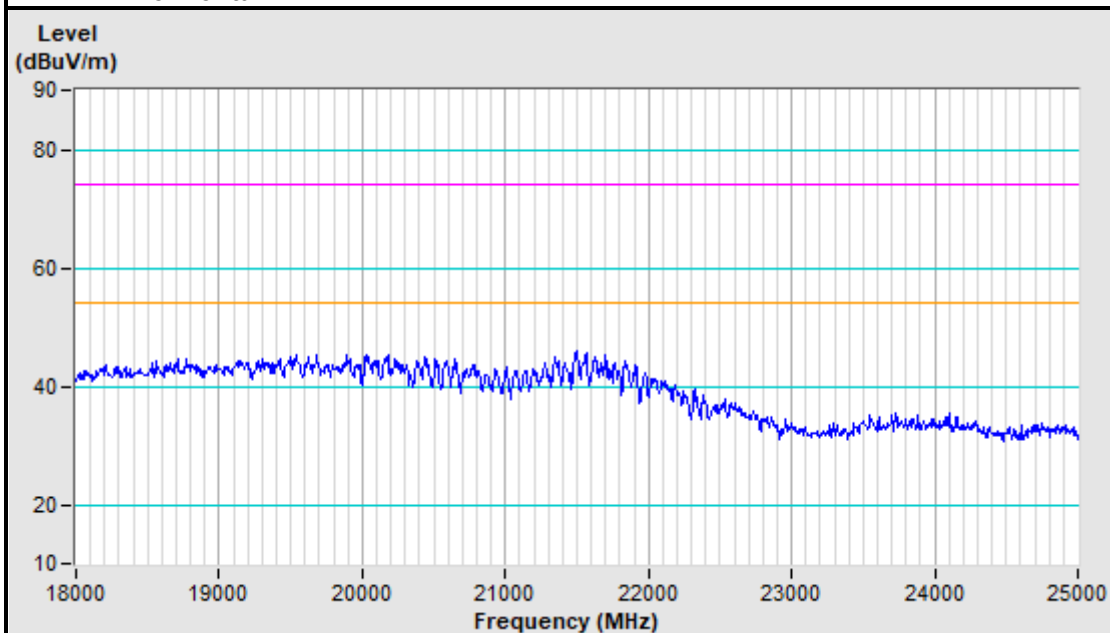

2447MHz Vertical

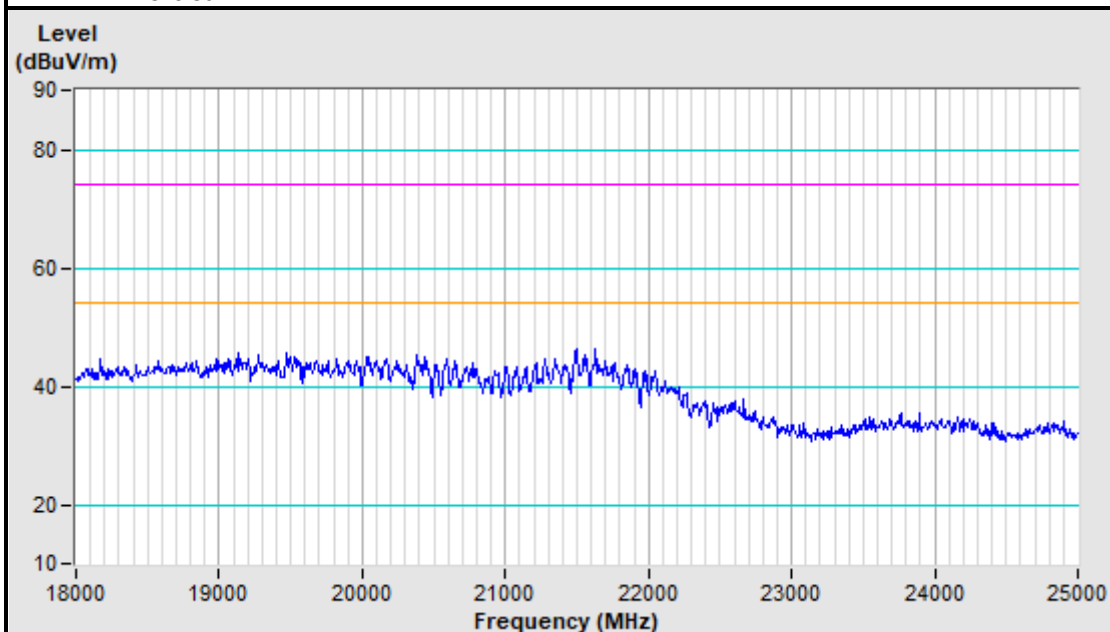

Note: When the harmonic frequency test a fundamental frequency filter is used.


CHANNEL	TX High Channel	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	* 2477.00	94.72 PK	114	-19.28	100 H	123	98.77	-4.05
2	* 2477.00	68.45 AV	94	-25.55	100 H	123	72.50	-4.05
3	2483.50	60.42 PK	74	-13.58	100 H	123	64.46	-4.04
4	2483.50	34.15 AV	54	-19.85	100 H	123	38.19	-4.04
5	4954.00	49.03 PK	74	-24.97	172 H	304	50.31	-1.28
6	4954.00	22.76 AV	54	-31.24	172 H	304	24.04	-1.28
7	7431.00	46.03 PK	74	-27.97	156 H	245	45.64	0.39
8	7431.00	19.76 AV	54	-34.24	156 H	245	19.37	0.39
ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	* 2477.00	85.82 PK	114	-28.18	100 V	189	89.87	-4.05
2	* 2477.00	59.55 AV	94	-34.45	100 V	189	63.60	-4.05
3	2483.50	45.22 PK	74	-28.78	100 V	189	49.26	-4.04
4	2483.50	18.95 AV	54	-35.05	100 V	189	22.99	-4.04
5	2483.80	50.91 PK	74	-23.09	100 V	189	54.95	-4.04
6	2483.80	24.64 AV	54	-29.36	100 V	189	28.68	-4.04
7	4954.00	47.27 PK	74	-26.73	155 V	208	48.55	-1.28
8	4954.00	21.00 AV	54	-33.00	155 V	208	22.28	-1.28
9	7431.00	46.02 PK	74	-27.98	109 V	87	45.63	0.39
10	7431.00	19.75 AV	54	-34.25	109 V	87	19.36	0.39


REMARK:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.
6. Average value = PK Emission + 20*log(duty cycle) Where the duty factor is calculated from following formula: $20 \log (\text{Duty cycle}) = 20 \log (4.86\%) \approx -26.27\text{dB}$, Please see page 9 for plotted duty.s


2477MHz Horizontal

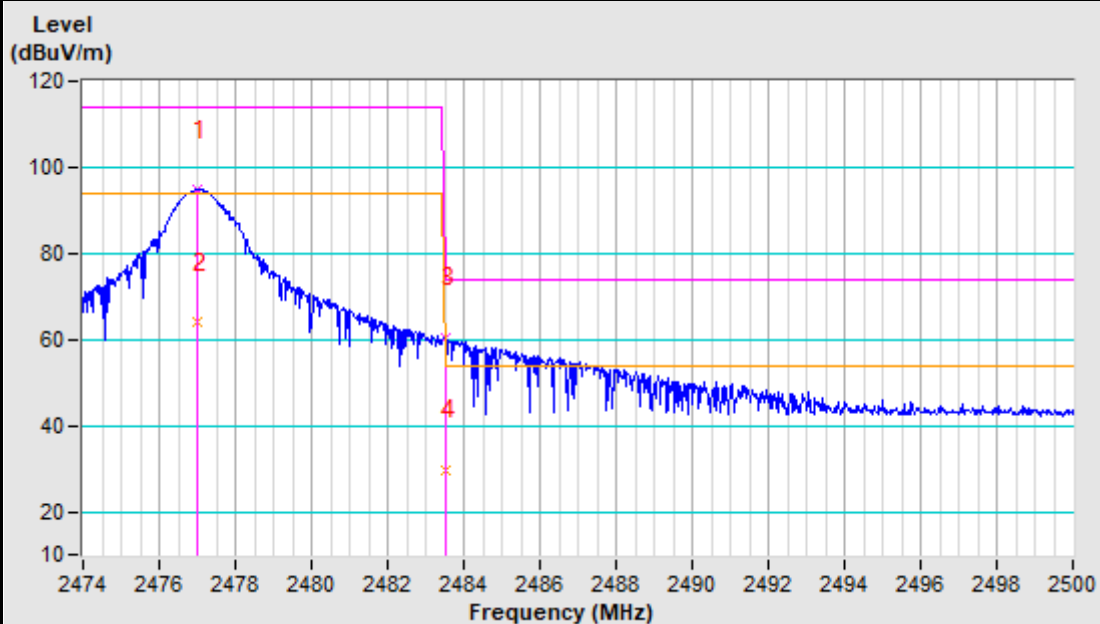


2477MHz Vertical

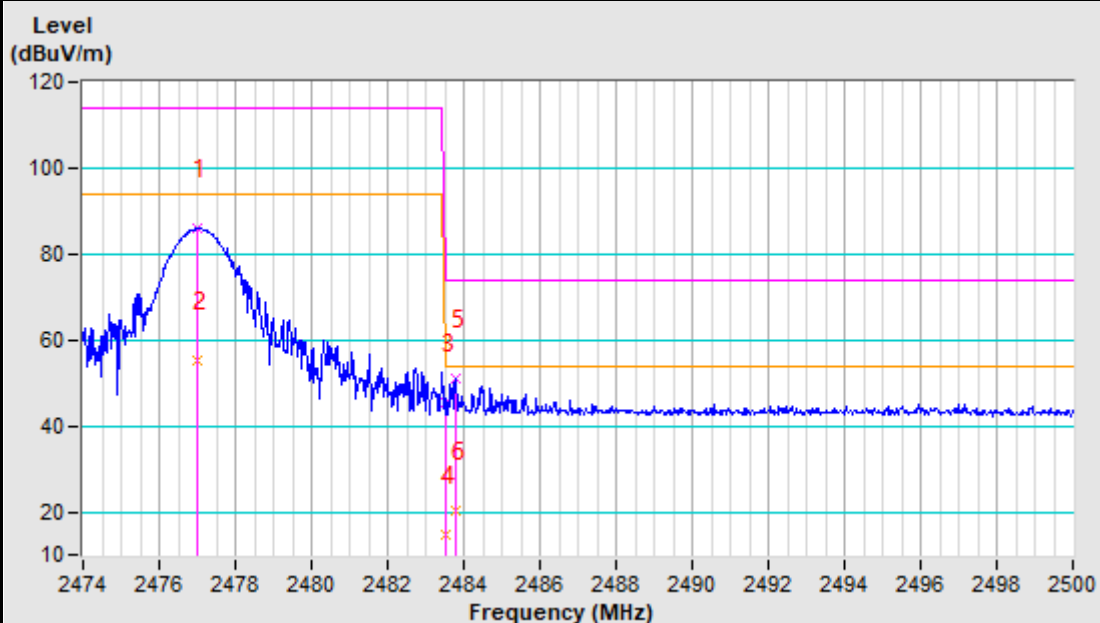

2477MHz Horizontal

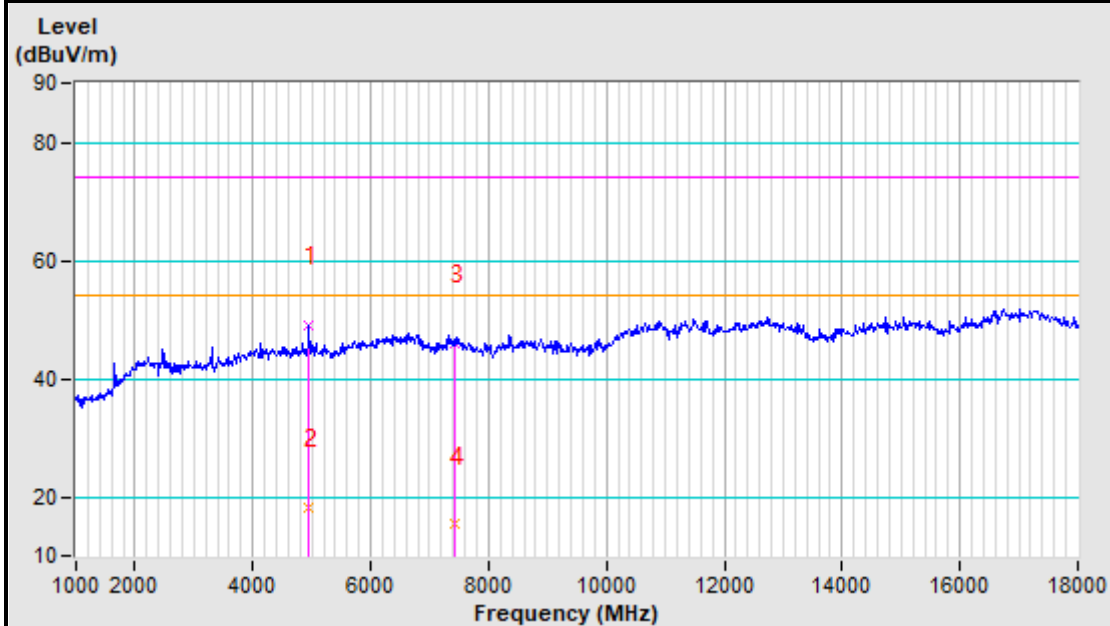


2477MHz Vertical

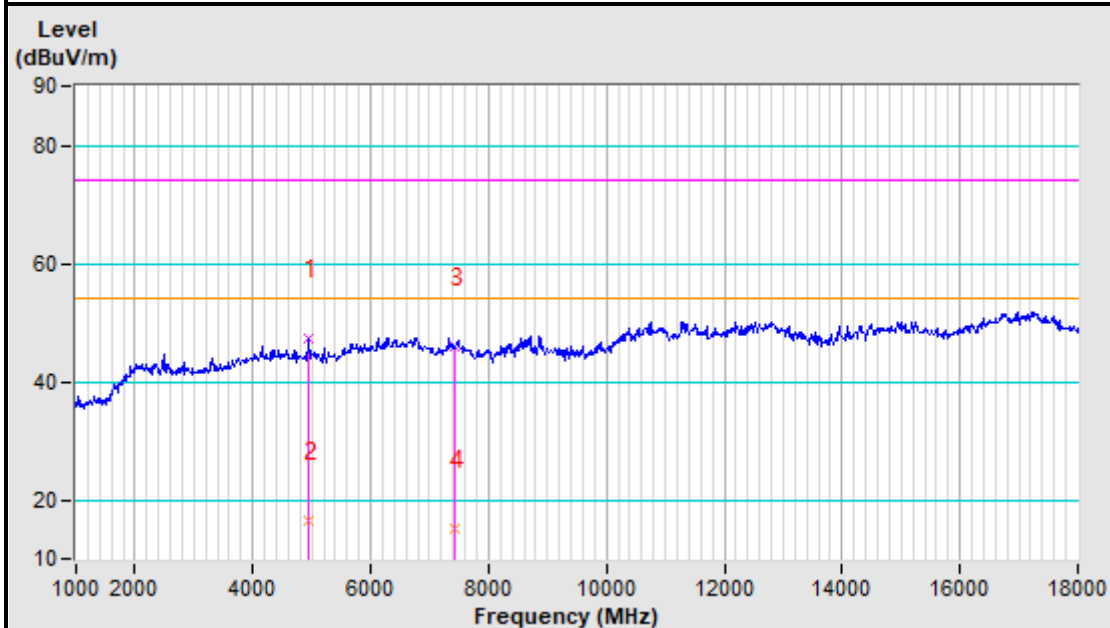


Note: When the harmonic frequency test a fundamental frequency filter is used.

2477MHz Horizontal

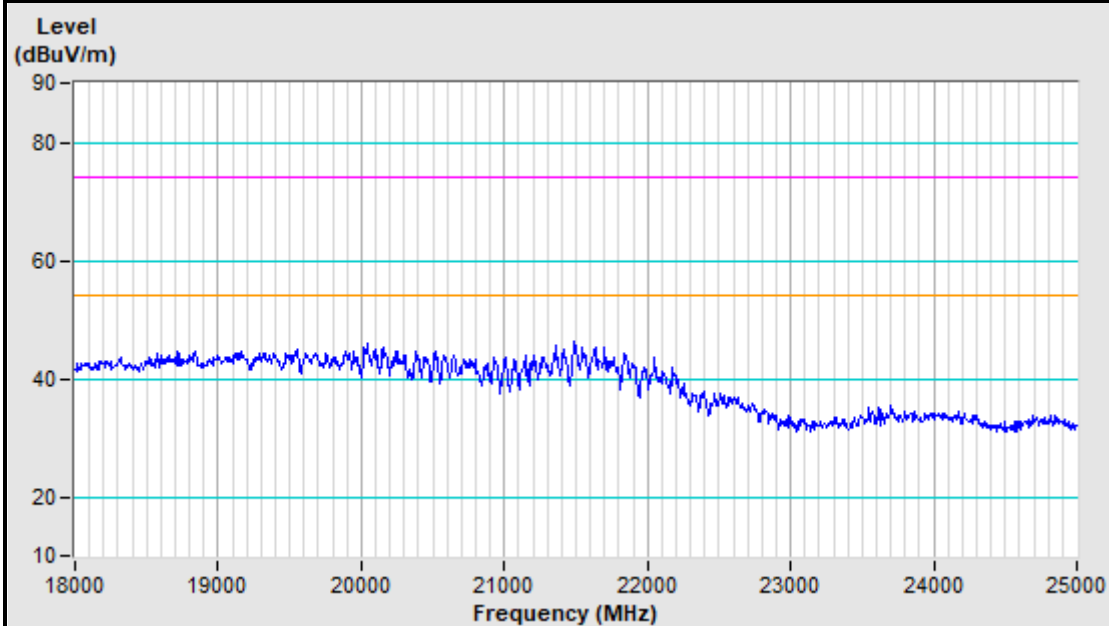

2477MHz Vertical

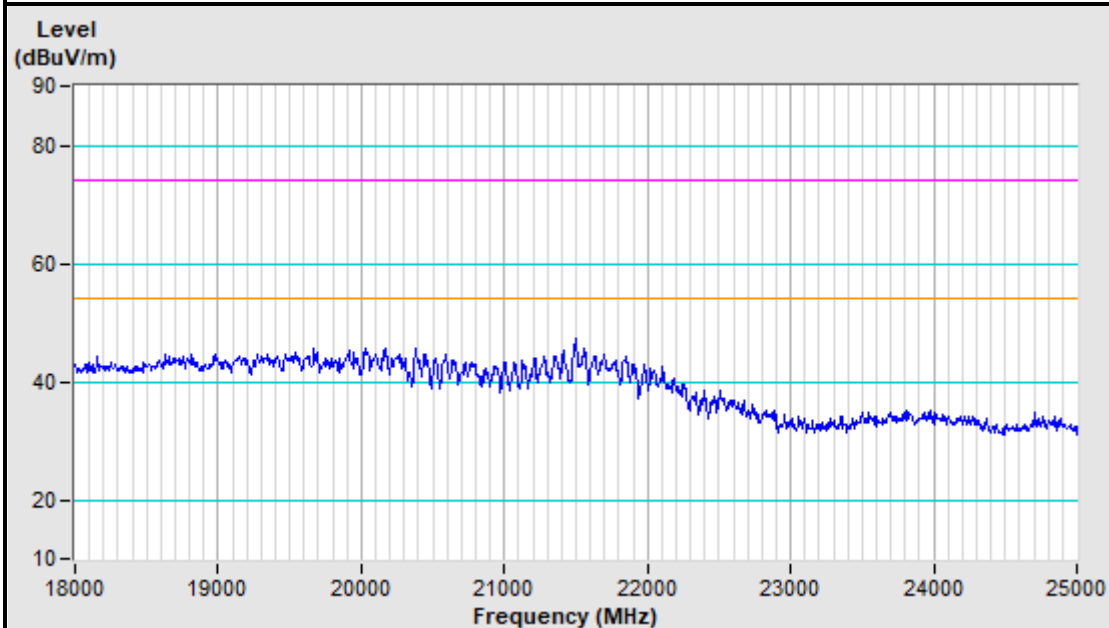

Note: When the harmonic frequency test a fundamental frequency filter is used.

4.2 20dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

According to FCC 15.215(c), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Wireless Connectivity Tester	Rohde&Schwarz	CMW270	100616	Oct. 09, 26
Spectrum Analyzer	Rohde&Schwarz	FSV40	101003	Oct. 09, 26
Frequency Analyzer	Keysight	N9010B	MY60240432	Oct. 10, 26
Power Meter	Rohde&Schwarz	NRX	103107	Apr. 07, 27
Power Sensor	Rohde&Schwarz	NRP6A	103356	Apr. 07, 27
Programmable Temperature&Humidity Chamber	Hongjin	HYC-TH-225DH	DG-180746	Oct. 08, 26
Attenuator	MINI	BW-S10W2+	S130129FGE2	Jul. 06, 26
DC Source	Agilent	E3640A	MY40004013	Oct. 08, 26
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.4	N/A	N/A

NOTES:

1. The test was performed in RF Test Shielded Room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. Test Date: May 15, 2026


4.2.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP




4.2.6 EUT OPERATING CONDITIONS

- a) Turned on the power of all equipment.
- b) EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


4.2.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
Low	2407	1.081
Middle	2447	1.081
High	2477	1.081


Test Data: Low channel

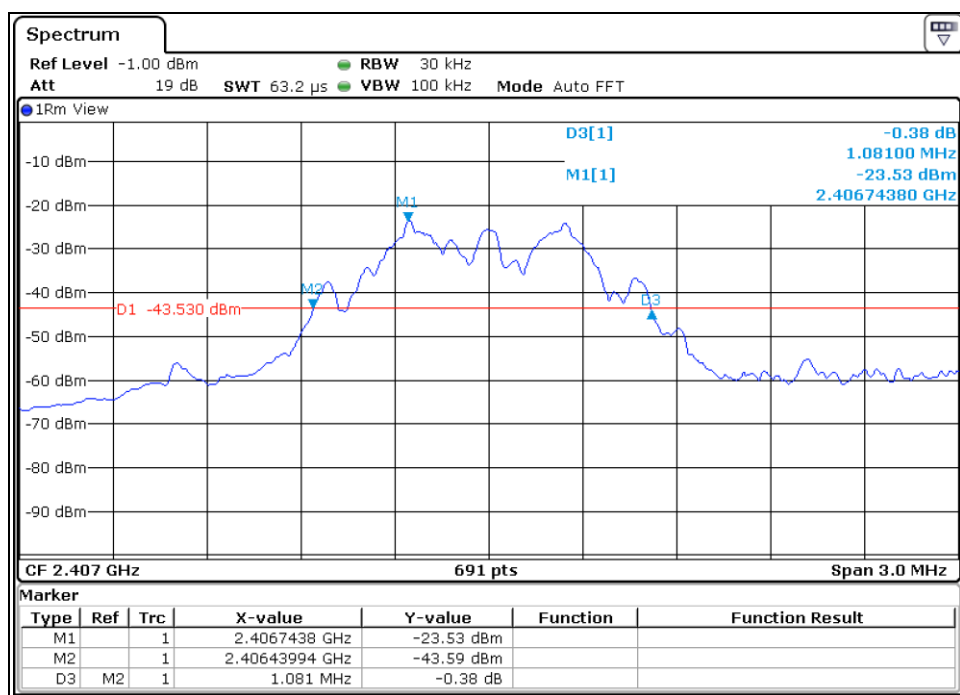

Test Data: Middle channel

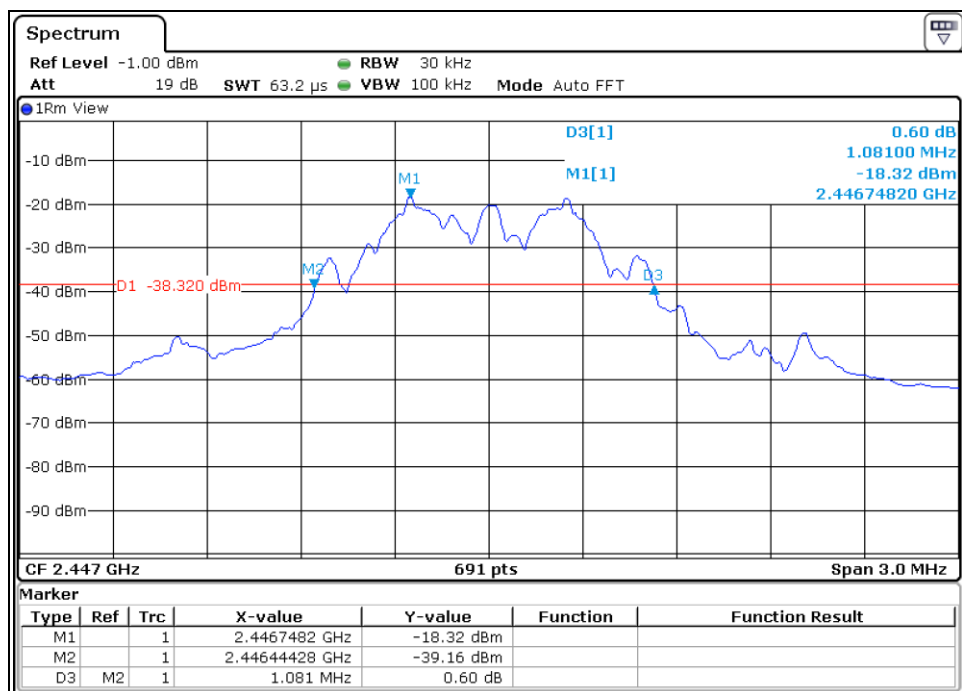

Test Data: High channel

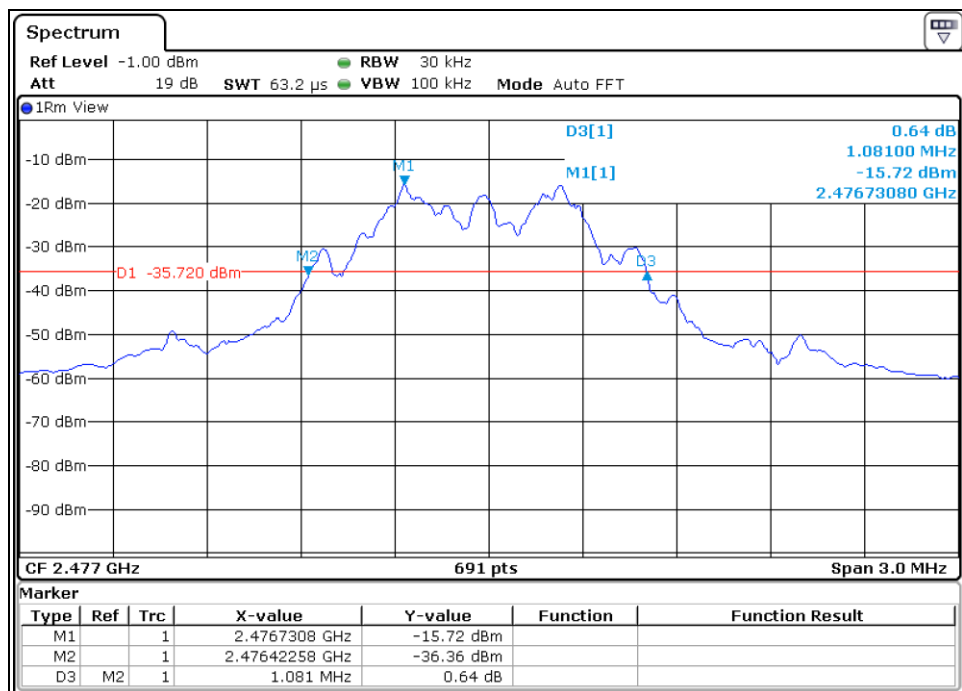

4.3 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

5. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---