

RF Test Report

Applicant : DrayTek Corp.

Product Name : VigorAP 1070C 802.11be Ceiling-mount Access Point

Trade Name : DrayTek

Model Number : VigorAP 1070C

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2020

Received Date : Feb. 24, 2025

Test Period : Aug. 21, 2025 ~ Nov. 14, 2025

Issued Date : Dec. 31, 2025

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range: 9 kHz to 40 GHz
Test Firm Registration Number: 226252 (Bade test site)
Test Firm Registration Number: 191812 (Wugu test site)

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Dec. 31, 2025	Initial Issue	Rowan Hsieh

Verification of Compliance

Applicant : DrayTek Corp.

Product Name : VigorAP 1070C 802.11be Ceiling-mount Access Point

Trade Name : DrayTek

Model Number : VigorAP 1070C

FCC ID : VGYAP1070C

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2020

Test Result : Complied

Issued By : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Kai Yu Yang

TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Measurement Uncertainty	7
1.4.	Test Site Environment	7
2	EUT Description.....	8
3	Test Methodology	15
3.1.	Mode of Operation	15
3.2.	EUT Test Step	18
3.3.	Configuration of Test System Details	19
3.4.	Test Instruments.....	21
4	Measurement Procedure	24
4.1.	AC Power Conducted Emission Measurement	24
4.2.	Transmitter Radiated Emissions Measurement.....	26
4.3.	Maximum Output Power Measurement.....	31
4.4.	Emission Bandwidth Measurement.....	33
4.5.	In-Band Emission (Mask) Measurement	35
4.6.	Frequency Stability Measurement.....	37
4.7.	Maximum Power Spectral Density Measurement.....	38
4.8.	Contention Based Protocol Measurement.....	41
4.9.	Operational restrictions for 6 GHz U-NII devices	43
4.10.	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point Measurement	44
4.11.	Transmit Power Control, Very Low Power Devices Measurement	45
4.12.	Automatically discontinue transmission.....	46
4.13.	Antenna Requirement	46
5	Test Results	48
5.1.	Conducted Emission	48
5.2.	Radiated Emission Measurement	51
5.3.	Conducted Test Results	193

Appendix A. Test Data

Appendix B. Test Results

Appendix C. Test Plots

Appendix D. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Output Power	PASS	---
15.407(a)	Emission Bandwidth	PASS	---
15.407(a)	Maximum Power Spectral Density	PASS	---
15.407(b)	In-Band Emission (Mask)	PASS	---
15.407(d)	Contention based Protocol	PASS	---
15.407(d)	Operational restrictions for 6 GHz U-NII devices	PASS	Note 2
15.407(a)	Dual Client Proper Power Adjustment	N/A	Note 3
15.407(a)	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	N/A	Note 3
15.407(d)	Transmit Power Control, Very Low Power Devices	N/A	Note 4
15.407(c)	Automatically discontinue transmission	PASS	---
15.203	Antenna Requirement	PASS	---

Note 1: The above test items refer to the test standards

Note 2: Declaration by applicant

Note 3: Device associates with low power indoor AP only

Note 4: Device does not support very low power operation

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033 D02 v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
KDB 987594 D02 v03	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure 6 GHz (U-NII) Devices Part 15, Subpart E

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ■ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)

Site Address: ■ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

Test Item	Frequency	Uncertainty				
		BD	WG			
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB	2.6 dB			
Conducted Output Power		1.1 dB	1.1 dB			
RF Bandwidth		4.5 %	4.5 %			
Power Spectral Density		1.1 dB	1.1 dB			
Duty Cycle		0.3 %	0.3 %			
Time Occupancy		0.2 %	0.1 %			
Frequency Stability		1.2 x 10 ⁻⁷	1.2 x 10 ⁻⁷			
Test Item	Frequency	Uncertainty				
		96601-BD	96603-BD	96602-WG	96603-WG	96604-WG
Radiated Emission	9 kHz ~ 30 MHz	1.8 dB	1.8 dB	1.6 dB	1.6 dB	1.7 dB
	30 MHz ~ 1000 MHz	4.7 dB	4.6 dB	4.7 dB	4.7 dB	4.5 dB
	1000 MHz ~ 18000 MHz	4.4 dB	4.5 dB	4.5 dB	4.7 dB	5.0 dB
	18000 MHz ~ 26500 MHz	3.6 dB	3.8 dB	3.8 dB	4.0 dB	4.3 dB
	26500 MHz ~ 40000 MHz	3.9 dB	3.9 dB	4.0 dB	4.0 dB	4.4 dB

1.4. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity(except Maximum Output Power (e.i.r.p.)).

Applicant	DrayTek Corp. No.26 Fu Shing Rd., HuKou County,Hsin-Chu Industrial Park,Hsin-Chu,Taiwan 303 R.O.C		
Product Name	VigorAP 1070C 802.11be Ceiling-mount Access Point		
Trade Name	DrayTek		
Model No.	VigorAP 1070C		
FCC ID	VGYAP1070C		
Operate Frequency	Frequency Band		Frequency Range (MHz)
	802.11ax HE20/ 802.11be EHT20	U-NII Band 5	5955 – 6415
		U-NII Band 6	6435 – 6515
		U-NII Band 7	6535 – 6855
		U-NII Band 8	6875 – 7095
	802.11ax HE40/ 802.11be EHT40	U-NII Band 5	5965 – 6405
		U-NII Band 6	6445 – 6485
		U-NII Band 7	6525 – 6845
		U-NII Band 8	6885 – 7085
	802.11ax HE80/ 802.11be EHT80	U-NII Band 5	5985 – 6385
		U-NII Band 6	6465 – 6545
		U-NII Band 7	6625 – 6785
		U-NII Band 8	6865 – 7025
	802.11ax HE160/ 802.11be EHT160	U-NII Band 5	6025 – 6345
		U-NII Band 6	6505
		U-NII Band 7	6665 – 6825
		U-NII Band 8	6985
	802.11be EHT320	U-NII Band 5	6105 – 6265
		U-NII Band 5/6/7	6425
		U-NII Band 6/7	6585
		U-NII Band 7/8	6745 – 6905

Modulation Type	OFDM/OFDMA				
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)	
	ANT-0 (Ant.5)	MLA25M-122AA0-A	Dipole antenna	U-NII Band 5	5.4
				U-NII Band 6	5.4
				U-NII Band 7	5.5
				U-NII Band 8	5.5
	ANT-1 (Ant.6)			U-NII Band 5	4.4
				U-NII Band 6	4.4
				U-NII Band 7	4.7
				U-NII Band 8	4.7
	ANT-2 (Ant.7)			U-NII Band 5	4.2
				U-NII Band 6	4.4
				U-NII Band 7	4.9
				U-NII Band 8	4.9
	ANT-3 (Ant.8)	U-NII Band 5	4.4		
		U-NII Band 6	4.3		
		U-NII Band 7	5.8		
		U-NII Band 8	5.8		
Antenna Delivery	Reference section 3.1				
Operate Temp. Range	0 ~ +40 ℃				
EUT Power Rating	DC 12 V, 3.5 A (form AC Adapter); DC 42 V-57 V / 0.57 A-0.78 A (form POE)				

Testing Sample No.		
Test Item		Sample Number
Radiated Emissions	Below 1 GHz	C252334_A011
	Above 1 GHz	C252334_A011
Conducted		C252334_A005
Conducted Emission		C252334_A011

Frequency Band		Maximum Output Power (e.i.r.p.)	
		(dBm)	(W)
802.11ax HE20	U-NII Band 5	16.390	0.044
	U-NII Band 6	15.950	0.039
	U-NII Band 7	16.350	0.043
	U-NII Band 8	16.430	0.044
802.11ax HE40	U-NII Band 5	18.500	0.071
	U-NII Band 6	18.300	0.068
	U-NII Band 7	18.580	0.072
	U-NII Band 8	18.530	0.071
802.11ax HE80	U-NII Band 5	20.810	0.121
	U-NII Band 6	21.050	0.127
	U-NII Band 7	21.280	0.134
	U-NII Band 8	20.980	0.125
802.11ax HE160	U-NII Band 5	23.670	0.233
	U-NII Band 6	23.100	0.204
	U-NII Band 7	22.480	0.177
	U-NII Band 8	23.680	0.233

Frequency Band		Maximum Output Power (e.i.r.p.)	
		(dBm)	(W)
802.11be EHT20	U-NII Band 5	16.430	0.044
	U-NII Band 6	16.030	0.040
	U-NII Band 7	16.390	0.044
	U-NII Band 8	16.470	0.044
802.11be EHT40	U-NII Band 5	18.510	0.071
	U-NII Band 6	18.310	0.068
	U-NII Band 7	18.600	0.072
	U-NII Band 8	18.550	0.072
802.11be EHT80	U-NII Band 5	20.810	0.121
	U-NII Band 6	21.050	0.127
	U-NII Band 7	21.300	0.135
	U-NII Band 8	20.990	0.126
802.11be EHT160	U-NII Band 5	23.710	0.235
	U-NII Band 6	23.120	0.205
	U-NII Band 7	22.490	0.177
	U-NII Band 8	23.680	0.233
802.11be EHT320	U-NII Band 5	26.150	0.412
	U-NII Band 6	25.100	0.324
	U-NII Band 7	24.020	0.252
	U-NII Band 8	21.740	0.149

Equipment Type	
Indoor access point	V
Subordinate device	---
Indoor Client devices	---

BW 20M	CH	1	5	9	13	17	21	25	29
	Freq.(MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	CH	3		11		19		27	
	Freq.(MHz)	5965		6005		6045		6085	
BW 80M	CH	7				23			
	Freq.(MHz)	5985				6065			
BW 160M	CH	15							
	Freq.(MHz)	6025							

BW 20M	CH	33	37	41	45	49	53	57	61
	Freq.(MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	CH	35		43		51		59	
	Freq.(MHz)	6125		6165		6205		6245	
BW 80M	CH	39				55			
	Freq.(MHz)	6145				6225			
BW 160M	CH	47							
	Freq.(MHz)	6185							
BW 320M	CH	31							
	Freq.(MHz)	6105							

BW 20M	CH	65	69	73	77	81	85	89	93
	Freq.(MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	CH	67		75		83		91	
	Freq.(MHz)	6285		6325		6365		6405	
BW 80M	CH	71				87			
	Freq.(MHz)	6305				6385			
BW 160M	CH	79							
	Freq.(MHz)	6345							
BW 320M	CH	63							
	Freq.(MHz)	6265							

BW 320M	CH	95							
	Freq.(MHz)	6425							

BW 20M	CH	97	101	105	109	113	117	121	125
	Freq.(MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	CH	99		107		115		123	
	Freq.(MHz)	6445		6485		6525		6565	
BW 80M	CH	103				119			
	Freq.(MHz)	6465				6545			
BW 160M	CH	111							
	Freq.(MHz)	6505							
BW 320M	CH	127							
	Freq.(MHz)	6585							

BW 20M	CH	129	133	137	141	145	149	153	157
	Freq.(MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	CH	131		139		147		155	
	Freq.(MHz)	6605		6645		6685		6725	
BW 80M	CH	135				151			
	Freq.(MHz)	6625				6705			
BW 160M	CH	143							
	Freq.(MHz)	6665							

BW 20M	CH	161	165	169	173	177	181	185	189
	Freq.(MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	CH	163		171		179		187	
	Freq.(MHz)	6765		6805		6845		6885	
BW 80M	CH	167				183			
	Freq.(MHz)	6785				6865			
BW 160M	CH	175							
	Freq.(MHz)	6825							
BW 320M	CH	159							
	Freq.(MHz)	6745							
	CH	191							
	Freq.(MHz)	6905							

BW 20M	CH	193	197	201	205	209	213	217	221
	Freq.(MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	CH	195		203		211		219	
	Freq.(MHz)	6925		6965		7005		7045	
BW 80M	CH	199				215			
	Freq.(MHz)	6945				7025			
BW 160M	CH	207							
	Freq.(MHz)	6985							

BW 20M	CH	225	229
	Freq.(MHz)	7075	7095
BW 40M	CH	227	
	Freq.(MHz)	7085	

BW 20M	CH	233							
	Freq.(MHz)	7115							

3 Test Methodology

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	Final-Test Mode
Transmit Mode	V
802.11ax HE20	
802.11ax HE40	
802.11ax HE80	
802.11ax HE160	
802.11be EHT20	V
802.11be EHT40	V
802.11be EHT80	V
802.11be EHT160	V
802.11be EHT320	V

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1: Investigation has been done on all the possible configurations for searching the worst cases (EHT covers HE). The table is a list of the test modes show in this test report.

Note 2: The test result of IEEE 802.11ax and 802.11be only supports Full RU.

Note 3: This product supports normal mode and Beamforming on mode. According to power table, the normal mode is worst power. So, normal mode has to test and record results for Conducted.

Note 4: 20 MHz bandwidth is not support 7115 MHz.

Test Mode	ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3
802.11ax HE20	V	V	V	V	V
802.11ax HE40	V	V	V	V	V
802.11ax HE80	V	V	V	V	V
802.11ax HE160	V	V	V	V	V
802.11be EHT20	V	V	V	V	V
802.11be EHT40	V	V	V	V	V
802.11be EHT80	V	V	V	V	V
802.11be EHT160	V	V	V	V	V
802.11be EHT320	V	V	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11ax HE20	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	1, 45, 93
			U-NII Band 6	97, 105, 113
			U-NII Band 7	117, 149, 181
			U-NII Band 8	185, 189, 209, 229
802.11ax HE40	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	3, 43, 91
			U-NII Band 6	99, 107
			U-NII Band 7	115, 123, 147, 179
			U-NII Band 8	187, 195, 211, 227
802.11ax HE80	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	7, 39, 87
			U-NII Band 6	103
			U-NII Band 7	119, 135, 151, 167, 183
			U-NII Band 8	199, 215
802.11ax HE160	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	15, 47, 79
			U-NII Band 6	111
			U-NII Band 7	143, 175
			U-NII Band 8	207
802.11be EHT20	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	1, 45, 93
			U-NII Band 6	97, 105, 113
			U-NII Band 7	117, 149, 181
			U-NII Band 8	185, 189, 209, 229
802.11be EHT40	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	3, 43, 91
			U-NII Band 6	99, 107
			U-NII Band 7	115, 123, 147, 179
			U-NII Band 8	187, 195, 211, 227
802.11be EHT80	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	7, 39, 87
			U-NII Band 6	103
			U-NII Band 7	119, 135, 151, 167, 183
			U-NII Band 8	199, 215
802.11be EHT160	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	15, 47, 79
			U-NII Band 6	111
			U-NII Band 7	143, 175
			U-NII Band 8	207
802.11be EHT320	4TX (CDD/Beamforming on)	MCS0	U-NII Band 5	31, 63
			U-NII Band 6	95
			U-NII Band 7	127, 159
			U-NII Band 8	191


3.2. EUT Test Step

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.


1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

3.3. Configuration of Test System Details


Conducted Emission

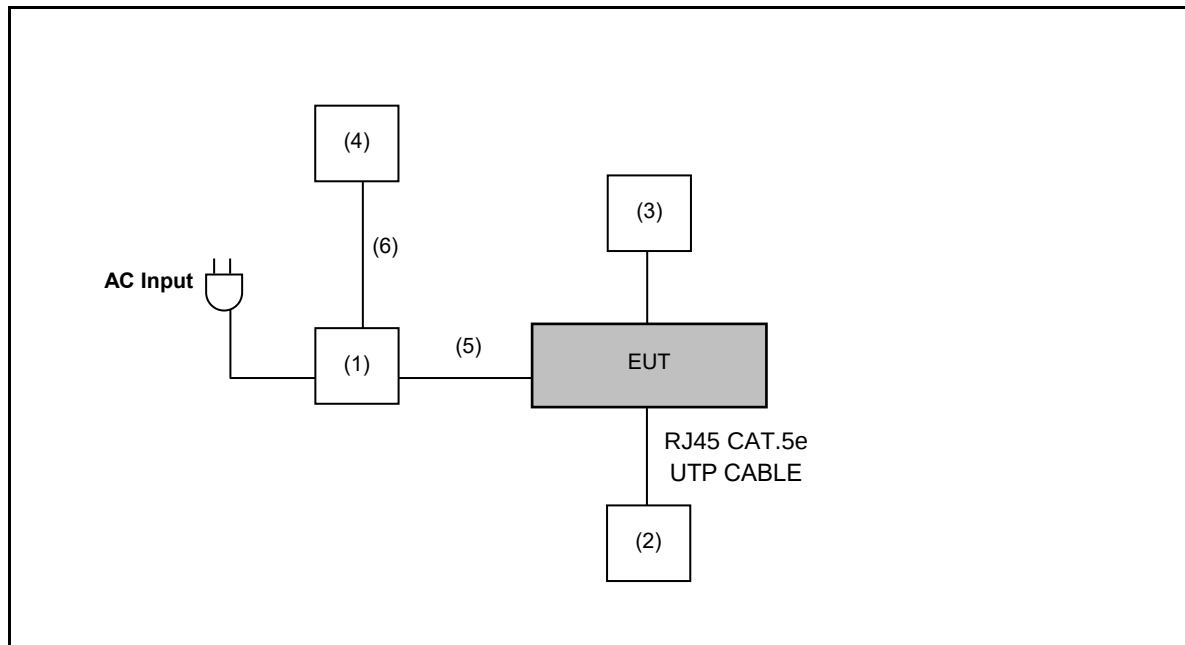

Radiated Emissions (Below 1 GHz)

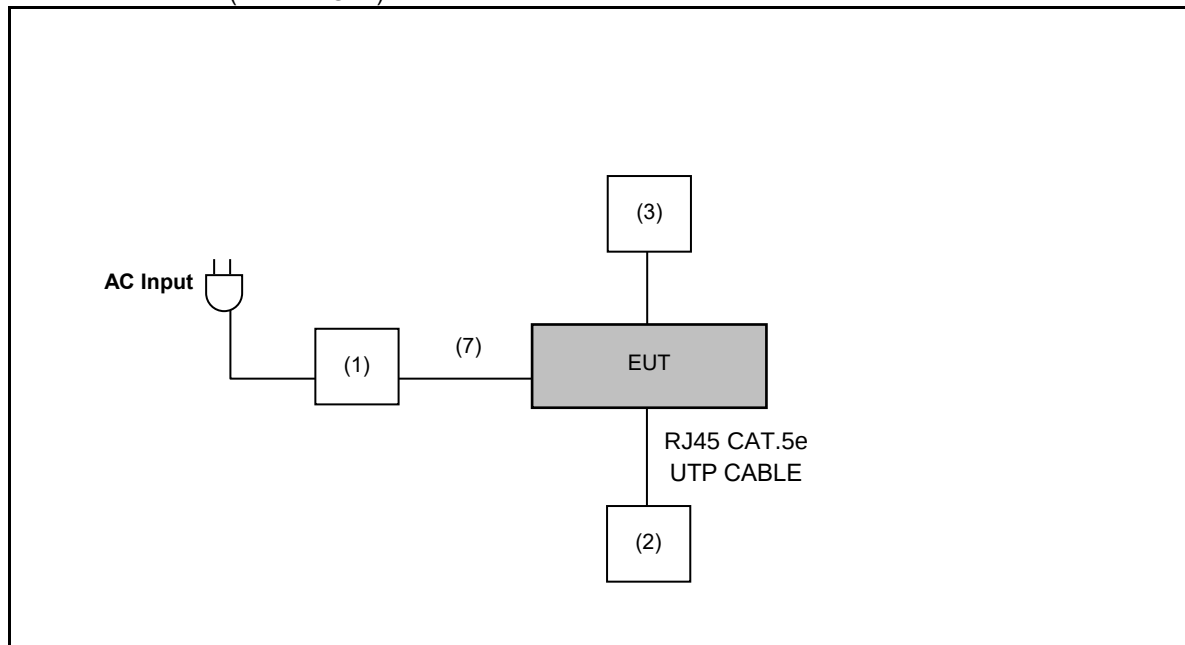

Radiated Emissions (Above 1 GHz)

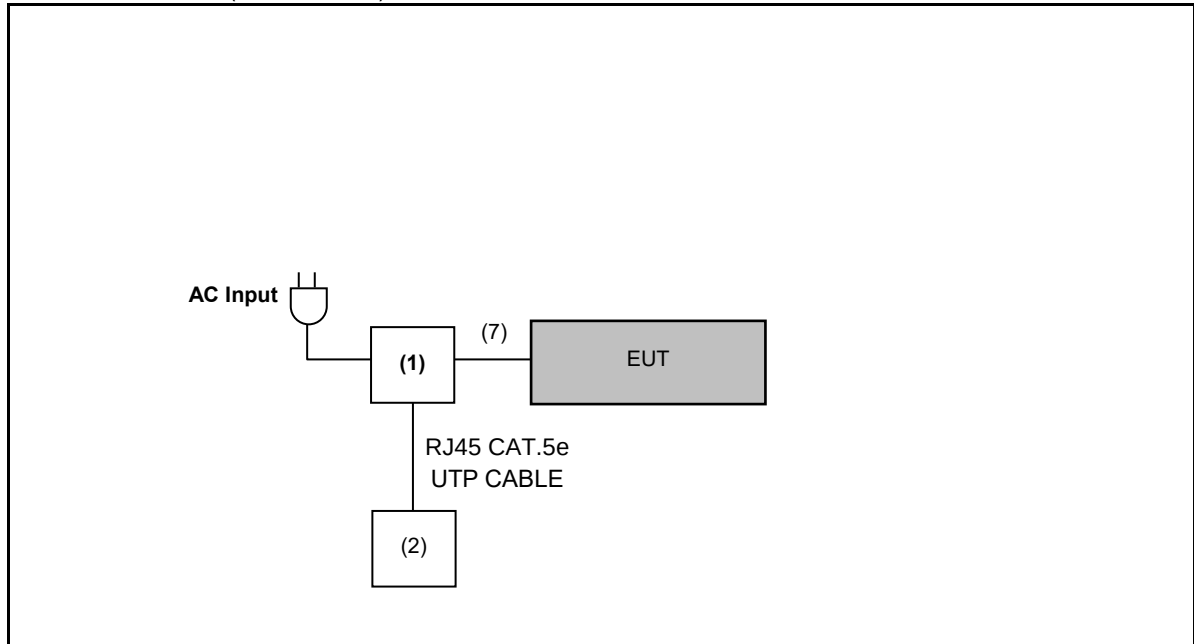

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	10G PoE Injector	ITI	PI021Y	---	---
(2)	Notebook	Lenovo	TP00120F2	---	---
(3)	Mouse	ASUS	M106	---	---
(4)	Notebook	Lenovo	TP00120F2	---	---
(5)	RJ45 Cable	PowerSync	CLN6VAR9020A	---	---
(6)	RJ45 Cable	PowerSync	CLN6VAR9050A	---	---
(7)	RJ45 Cable	MAGIC	CBH-CAT6A-15Y	---	---

3.4. Test Instruments

For Conducted

Test Period: Sep. 16, 2025 ~ Nov. 14, 2025

Testing Engineer: Joanne Tian

Test Site		RF04-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Power Sensor	Anritsu	MA24408A	11998	Jan. 17, 2025	1 year
☒	Spectrum Analyzer (10 Hz~44 GHz)	R&S	FSV3044	101255	Dec. 18, 2024	1 year
☒	Switch Box	R&S	OSP-B157W8	100850	Dec. 17, 2024	1 year

For Conducted

Test Period: Sep. 01, 2025 ~ Sep. 17, 2025

Testing Engineer: Luke Yang

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460166	Mar. 06, 2025	1 year
☒	Signal Generator	Keysight	N5182B	MY53052569	Apr. 18, 2025	1 year
☒	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 18, 2025	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Aug. 21, 2025 ~ Oct. 01, 2025

Testing Engineer: Jason Yeh, Joe Chueh

Radiation test sites		Semi Anechoic Room 96603-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	LOOP Antenna (9 kHz~30 MHz)	Schwarzbeck Mess-Elektronik	FMZB 1513-60	00031	Mar. 06, 2025	1 year
☒	Trilog Broadband Antenna (30 MHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	1276	Jan. 20, 2025	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	RF SPIN	DRH18-E	210307A18ES	Dec. 10, 2024	1 year
☒	Broadband Horn Antenna (15 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	BBHA9170	1133	Nov. 01, 2024	1 year
☒	Spectrum Analyzer (2 Hz~50 GHz)	KEYSIGHT	N9030B	MY57143537	Mar. 10, 2025	1 year
☒	Pre-Amplifier	EMCI	EMC001330	980859	Nov. 27, 2024	1 year
☒	Pre-Amplifier	EMCI	EMC118A45SE	980818	Dec. 12, 2024	1 year
☒	Pre-Amplifier	EMCI	EMC184045SE	980861	Dec. 18, 2024	1 year
☒	Coaxial Cable (9 kHz~1000 MHz)	EMCI	EMCCFD400-NM-NM-2000	211009	Oct. 24, 2024	1 year
☒	Coaxial Cable (9 kHz~1000 MHz)	EMCI	EMCCFD400-NM-NM-2000	211010	Oct. 24, 2024	1 year
☒	Coaxial Cable (9 kHz~1000 MHz)	EMCI	EMCCFD400-NM-NM-6000	211018	Oct. 24, 2024	1 year
☒	Coaxial Cable (1 GHz~18 GHz)	EMCI	EMC104-SM-SM-1000	211029	Oct. 24, 2024	1 year
☒	Coaxial Cable (1 GHz~18 GHz)	EMCI	EMC104-SM-SM-2000	211033	Oct. 24, 2024	1 year
☒	Coaxial Cable (1 GHz~18 GHz)	EMCI	EMC104-SM-SM-8000	211038	Oct. 24, 2024	1 year
☒	Coaxial Cable (18 GHz~40 GHz)	EMCI	EMC101G-KM-KM-600	211211	Jan. 15, 2025	1 year
☒	Coaxial Cable (18 GHz~40 GHz)	EMCI	EMC101G-KM-KM-2000	211210	Jan. 15, 2025	1 year
☒	Coaxial Cable (18 GHz~40 GHz)	EMCI	EMC101G-KM-KM-6000	211209	Jan. 15, 2025	1 year
☒	Highpass Filter	Warison	WFIL-H6000-26500F	WR4BBFWC4B1	Oct. 24, 2024	1 year
☒	Highpass Filter	Warison	WFIL-H8000-26000F	001	Oct. 24, 2024	1 year
☒	Software	R_RAM	V1.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

For Conduction Emissions
Test Period: Sep. 12, 2025
Testing Engineer: Joe Chueh

Radiation test sites		Conducted Emission Measurement Conduction01-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESR3	102919	Nov. 26, 2024	1 year
☒	LISN	R&S	ENV216	101041	Dec. 11, 2024	1 year
☒	ISN	R&S	ENY81-CA6	101948	Nov. 27, 2024	1 year
☒	Current Probe	R&S	EZ-17	101687	Jun. 12, 2025	1 year
☒	Cable	EMCI	EMCCFD300-BM-NM-4000	220402	Jun. 19, 2025	1 year
☒	Software	ELEKTRA	94.50.4	N.A.	N.C.R.	N.C.R.

Note: N.C.R. = No Calibration Request.


4 Measurement Procedure

4.1. AC Power Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

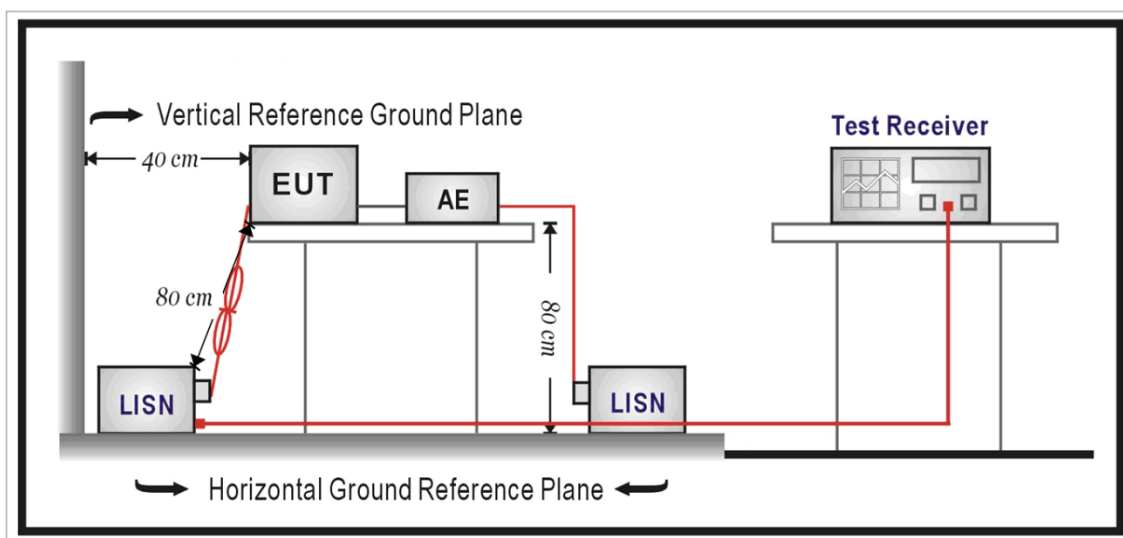

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored

4.2. Transmitter Radiated Emissions Measurement

■ Limit

(1) Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(a) For transmitters operating in the band 5925~6425 MHz, 6425~6525 MHz, 6525~6875 MHz and 6875~7125 MHz all emissions outside the band 5925~7125 MHz shall not exceed -27 dBm/MHz E.I.R.P..

E.I.R.P. (dBm/MHz)	Avg Field Strength at 3 m(dBuV/m)
-7 (Peak)	88.2 (Peak)
-27 (AVG)	68.2 (AVG)

(2) Limits of Radiated Emission Measurement


Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


Note: 1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

■ Setup


9 kHz ~ 30 MHz

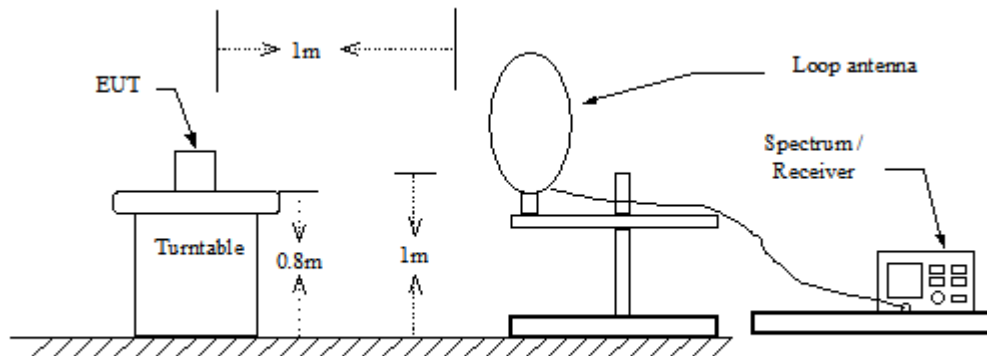

30 MHz ~ 1 GHz

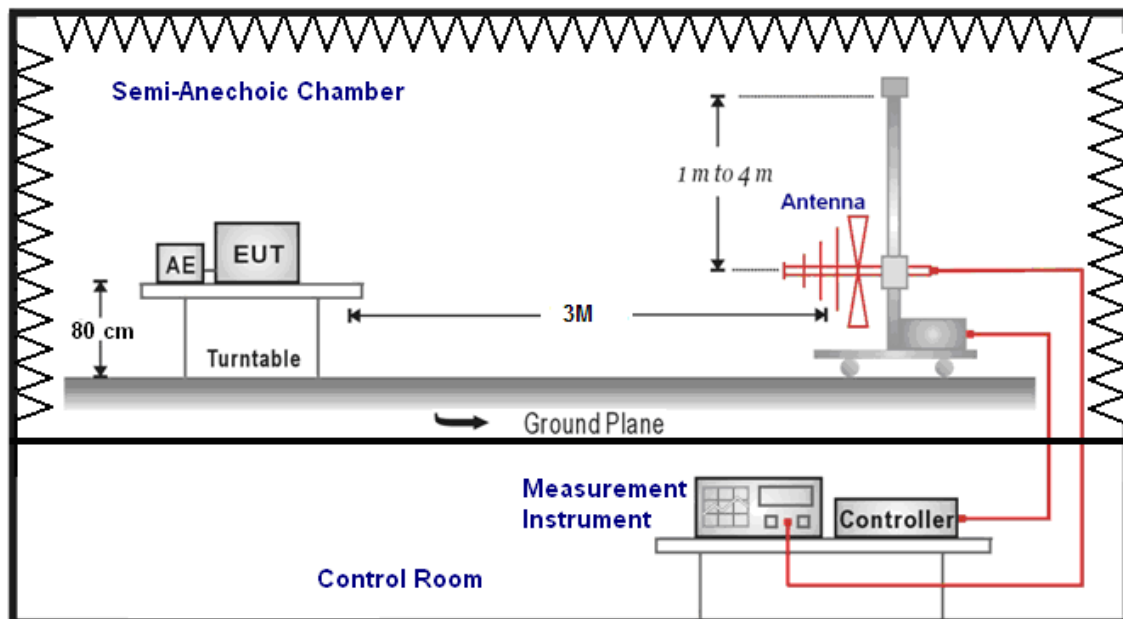

Above 1 GHz

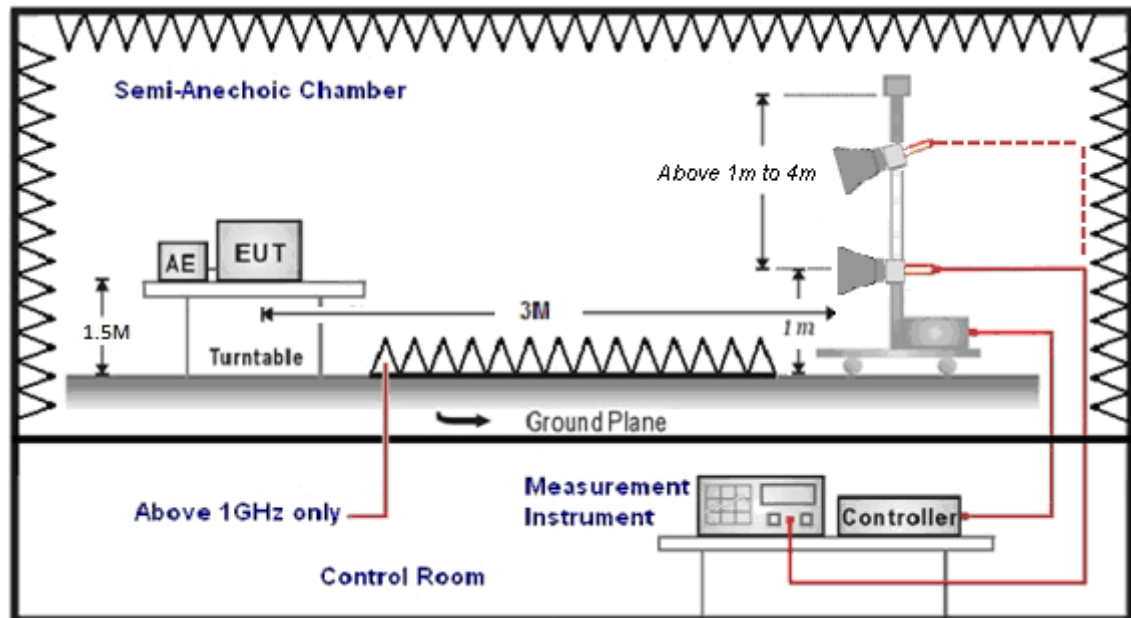

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization. SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB/m), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dB/m) +CL (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average (Only WLAN 6G)


4.3. Maximum Output Power Measurement

■ Limit

Frequency Range (GHz)	Maximum Output Power Limit
5.925 ~ 6.425	For standard power access point and fixed client device: e.i.r.p. $\leq$ 36dBm, for outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125mW (21dBm).
	For indoor access point: e.i.r.p. $\leq$ 30dBm.
	For subordinate device control of an indoor access point: e.i.r.p. $\leq$ 30dBm.
	For client device control of a standard power access point: e.i.r.p. $\leq$ 30dBm.
	For client device control of an indoor access point: e.i.r.p. $\leq$ 24dBm.
	For very low power devices: e.i.r.p. $\leq$ 14dBm.
6.425 ~ 6.525	For indoor access point: e.i.r.p. $\leq$ 30dBm.
	For subordinate device control of an indoor access point: e.i.r.p. $\leq$ 30dBm.
	For client device control of an indoor access point: e.i.r.p. $\leq$ 24dBm.
	For very low power devices: e.i.r.p. $\leq$ 14dBm.
6.525 ~ 6.875	For standard power access point and fixed client device: e.i.r.p. $\leq$ 36dBm, for outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125mW (21dBm).
	For indoor access point: e.i.r.p. $\leq$ 30dBm.
	For subordinate device control of an indoor access point: e.i.r.p. $\leq$ 30dBm.
	For client device control of a standard power access point: e.i.r.p. $\leq$ 30dBm.
	For client device control of an indoor access point: e.i.r.p. $\leq$ 24dBm.
	For very low power devices: e.i.r.p. $\leq$ 14dBm.
6.875 ~ 7.125	For indoor access point: e.i.r.p. $\leq$ 30dBm.
	For subordinate device control of an indoor access point: e.i.r.p. $\leq$ 30dBm.
	For client device control of an indoor access point: e.i.r.p. $\leq$ 24dBm.
	For very low power devices: e.i.r.p. $\leq$ 14dBm.

For Radiation Method

■ Test Setup

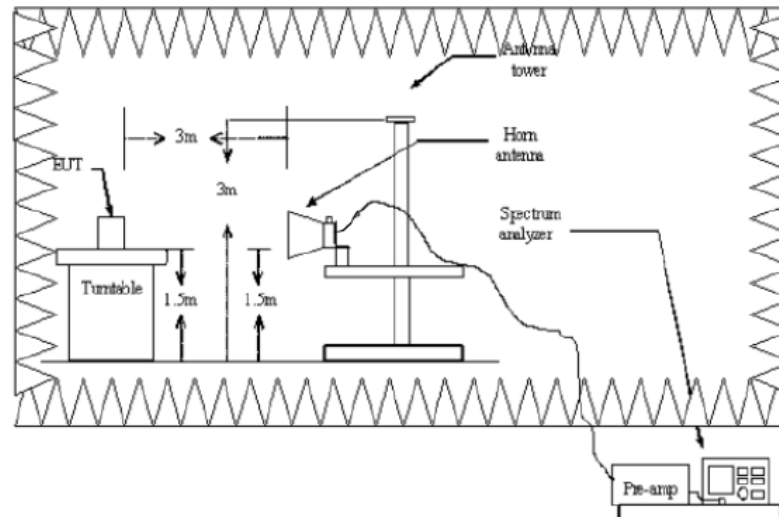

■ Test Procedure

The test is performed in accordance with [ANSI C63.10](#) section 12.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices.

Accordance with [ANSI C63.10](#) section 12.1.2 use radiated compliance measurements.


1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a antenna tower.
3. The height of antenna is fixed 1.5 meter, both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. Perform a EIRP level measurement and record the worse read value, is the EIRP level value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor.

4.4. Emission Bandwidth Measurement

■ Limit

≤ 320 MHz

■ Test Setup

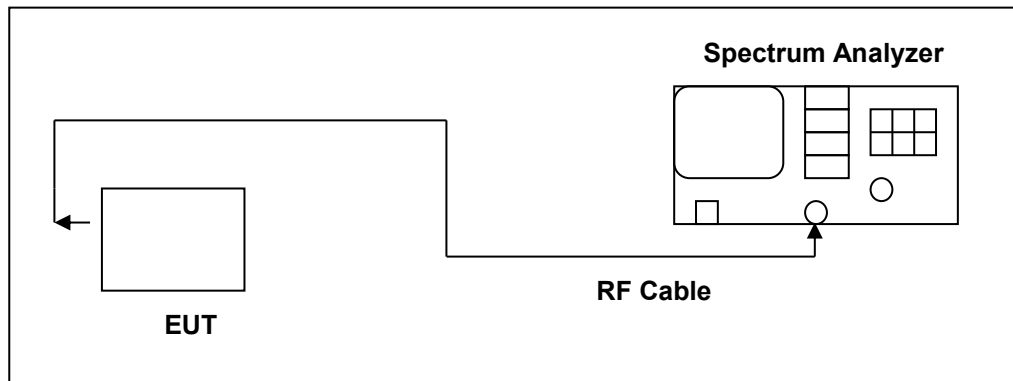

■ Test Procedure

The test is performed in accordance with ANSI C63.10 section 12.5 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

For 26 dB Bandwidth:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26 dB Bandwidth
RBW	Approximately 1 % to 5 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Bandwidth:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5 times and 5.0 times the OBW
RBW	Approximately 1 % ~ 5 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.5. In-Band Emission (Mask) Measurement

■ Limit

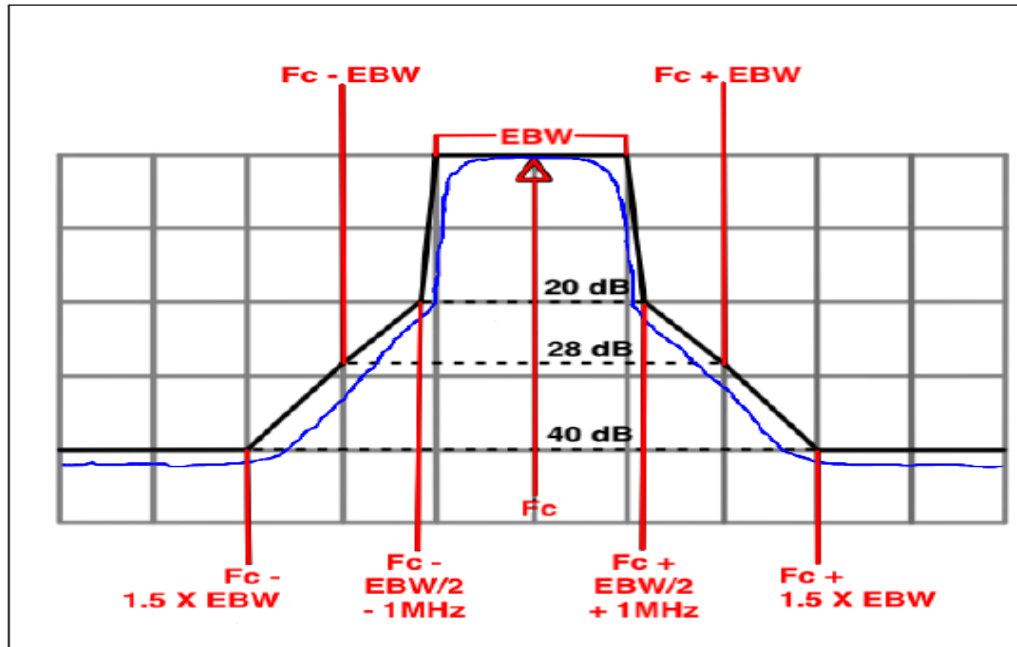

■ Test Setup

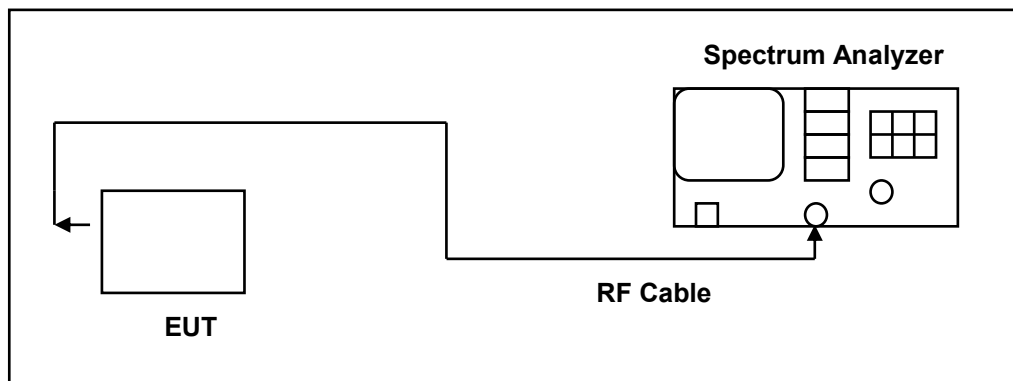

■ Test Procedure


1. Connect output of the antenna port to a spectrum analyzer.
2. Measure the 26 dB EBW using the test procedure 12.5.2 of ANSI C63.10.
3. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
4. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
5. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
6. Adjust the span to encompass the entire mask as necessary.
7. Clear trace.
8. Trace average at least 100 traces in power averaging (rms) mode.
9. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

4.6. Frequency Stability Measurement

■ Limit

The carrier frequency remains within the operating frequency band.

■ Test Setup

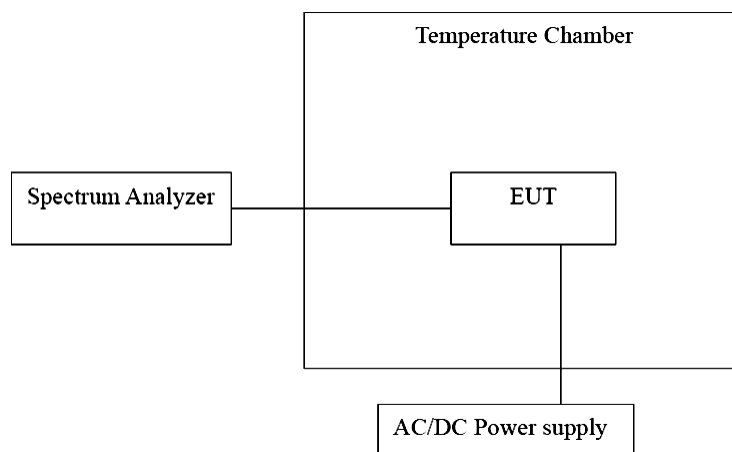

■ Test Procedure

1. The EUT and test equipment were set up as shown on the following section.
2. Turn the on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.
5. Repeat step 4 with the temperature chamber set to the lower the chamber temperature by not more that 10 °C, and allow the temperature inside the chamber to stabilize.
6. The test chamber was allowed to stabilize at +20°C for a minimum of 30 minutes. The supply voltage was then adjusted of the EUT form 85% (or end point) to 115% and the frequency record.


4.7. Maximum Power Spectral Density Measurement

■ Limit

Frequency Range (GHz)	Maximum Power Spectral Density Limit
5.925 ~ 6.425	For standard power access point and fixed client device: e.i.r.p. PSD ≤ 23 dBm/MHz.
	For indoor access point: e.i.r.p. PSD ≤ 5 dBm/MHz.
	For subordinate device control of an indoor access point: e.i.r.p. PSD ≤ 5 dBm/MHz.
	For client device control of a standard power access point: e.i.r.p. PSD ≤ 17 dBm/MHz.
	For client device control of an indoor access point: e.i.r.p. PSD ≤ -1 dBm/MHz.
	For very low power devices: e.i.r.p. PSD ≤ -5 dBm/MHz.
6.425 ~ 6.525	For indoor access point: e.i.r.p. PSD ≤ 5 dBm/MHz.
	For subordinate device control of an indoor access point: e.i.r.p. PSD ≤ 5 dBm/MHz.
	For client device control of an indoor access point: e.i.r.p. PSD ≤ -1 dBm/MHz.
	For very low power devices: e.i.r.p. PSD ≤ -5 dBm/MHz.
6.525 ~ 6.875	For standard power access point and fixed client device: e.i.r.p. PSD ≤ 23 dBm/MHz.
	For indoor access point: e.i.r.p. PSD ≤ 5 dBm/MHz.
	For subordinate device control of an indoor access point: e.i.r.p. PSD ≤ 5 dBm/MHz.
	For client device control of a standard power access point: e.i.r.p. PSD ≤ 17 dBm/MHz.
	For client device control of an indoor access point: e.i.r.p. PSD ≤ -1 dBm/MHz.
	For very low power devices: e.i.r.p. PSD ≤ -5 dBm/MHz.
6.875 ~ 7.125	For indoor access point: e.i.r.p. PSD ≤ 5 dBm/MHz.
	For subordinate device control of an indoor access point: e.i.r.p. PSD ≤ 5 dBm/MHz.
	For client device control of an indoor access point: e.i.r.p. PSD ≤ -1 dBm/MHz.
	For very low power devices: e.i.r.p. PSD ≤ -5 dBm/MHz.

For Radiation Method

■ Test Setup

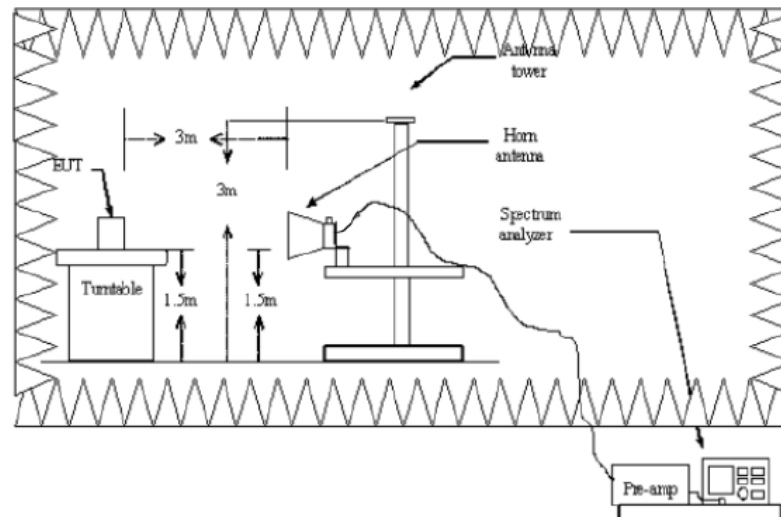

■ Test Procedure

The test is performed in accordance with ANSI C63.10 section 12.6, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Accordance with ANSI C63.10 section 12.1.2 use radiated compliance measurements.

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a antenna tower.
3. The height of antenna is fixed 1.5 meter, both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. Perform a EIRP level measurement and record the worse read value, is the EIRP level value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.8. Contention Based Protocol Measurement


■ Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

■ Test Setup

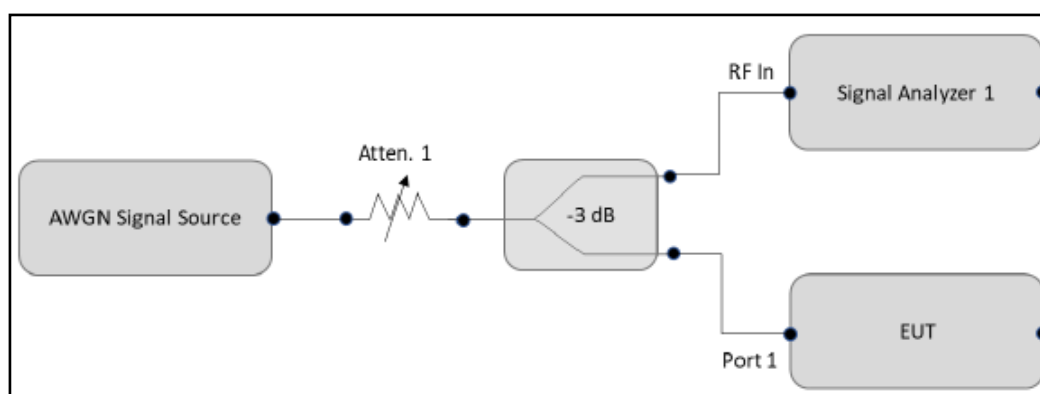

■ Test Procedure

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EEUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
5. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB divider, to the signal analyzer 1 and the EUT as shown in Test Setup.
6. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
7. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
8. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
9. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 4, choose a different center frequency for the AWGN signal and repeat the process.

4.9. Operational restrictions for 6 GHz U-NII devices

- **Limits**

In the 5.925-7.125 GHz band, client devices, except fixed client devices, must operate under the control of a standard power access point, indoor access point or subordinate devices; Subordinate devices must operate under the control of an indoor access point.

- **Declare**


Device is an indoor client device under the control of a low power indoor access point. Please refer to the declaration letter exhibit supplied within this application.

4.10. Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point Measurement

■ Limit

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

■ Test Setup

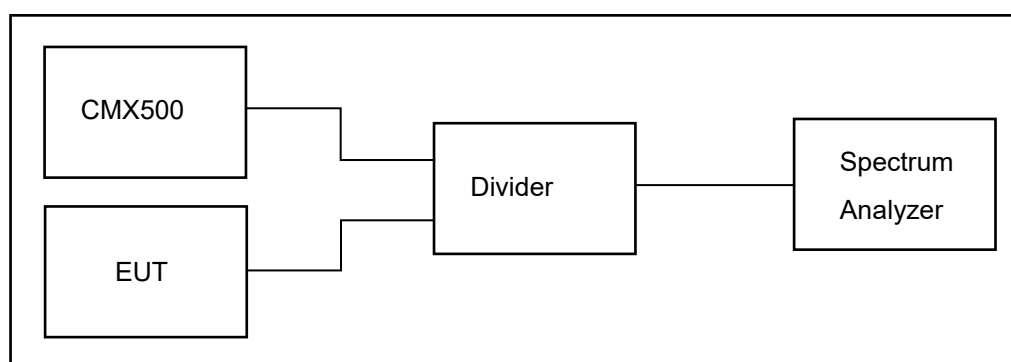

■ Test Procedure


1. Connect the equipment as shown in the test setup above.
2. In the figure, the Std Power AP can be configured using a developmental board, an Access Point incorporated with test software, or any other hardware configuration that adequately demonstrates proper client power adjustment.
3. Adjust Atten 1 to Std Power AP to facilitate error-free communication with the Client but protect the Client receiver from overload or damage.
4. Configure the Client and AP to associate and send data (stream data). The AP should be configured so its registered power is 36 dBm EIRP.
5. Verify transmission between the Client and the Standard Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices. Use this power and its antenna gain to calculate the Client EIRP.
6. The Client EIRP should be minimally 6 dB lower than the APs.
7. Repeat Steps 2 through 5 at two other selected measurement points—the first at the midpoint and the second at the client's lowest rated power, as declared by the manufacturer.

4.11. Transmit Power Control, Very Low Power Devices Measurement

■ Limit

Very low-power devices operating in the 5.925 ~ 7.125 GHz bands shall employ a TPC mechanism. A very low-power device must demonstrate the capability to operate at least 6 dB below the maximum EIRP PSD value of -5 dBm/MHz.

■ Test Setup

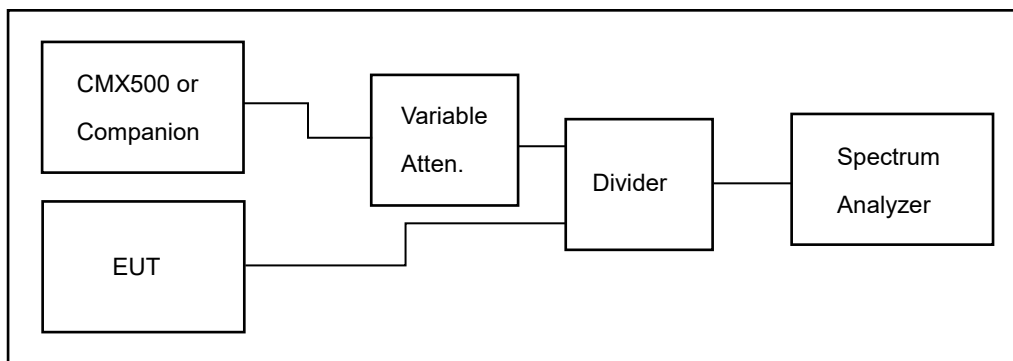

■ Test Procedure

1. Connect the equipment as shown in the test setup above.
2. Connect the EUT to the CMX500 or Companion in VLP mode.
3. Adjust variable Attenuation and measure the power spectral density (PSD) as high power RSSI.
4. Verify that the EIRP PSD is ≤ -11 dBm/MHz.
5. Adjust variable Attenuation and measure the power spectral density (PSD) as low power RSSI.
6. Verify that the EIRP PSD is ≤ -5 dBm/MHz.

■ Measurement Procedure

The test follows KDB 789033 D02 v02r01, Section F) Maximum Power Spectral Density (PSD):

1. Set span to encompass the EBW.
2. Set RBW = 1 MHz.
3. Set VBW ≥ 3 MHz.
4. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
5. Trace average at least 100 traces in power averaging (rms) mode.
6. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
7. If Method SA-2 or SA-2 Alternative was used, add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.

4.12. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

■ Declare

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

4.13. Antenna Requirement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Connector Construction

See section 2 – antenna information.

■ Directional Gain Calculated

Test mode	Band	Transmission Type	Antenna				Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
			Ant-0 (dBi)	Ant-1 (dBi)	Ant-2 (dBi)	Ant-3 (dBi)		
802.11ax HE20 802.11ax HE40 802.11ax HE80	Band 5	CDD	5.40	4.40	4.20	4.40	5.40	10.63
802.11ax HE160	Band 6		5.40	4.40	4.40	4.30	5.40	10.66
802.11be EHT20 802.11be EHT40 802.11be EHT80	Band 7		5.50	4.70	4.90	5.80	5.80	11.26
802.11be EHT160 802.11be EHT320	Band 8		5.50	4.70	4.90	5.80	5.80	11.26

Directional gain (Power) = GANT

Directional gain (PSD) = GANT + Array Gain

Beamforming on


Test mode	Band	Transmission Type	Antenna				Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)
			Ant-0 (dBi)	Ant-1 (dBi)	Ant-2 (dBi)	Ant-3 (dBi)		
802.11ax HE20 802.11ax HE40 802.11ax HE80	Band 5	Beamforming	5.40	4.40	4.20	4.40	10.63	10.63
802.11ax HE160	Band 6		5.40	4.40	4.40	4.30	10.66	10.66
802.11be EHT20 802.11be EHT40 802.11be EHT80	Band 7		5.50	4.70	4.90	5.80	11.26	11.26
802.11be EHT160 802.11be EHT320	Band 8		5.50	4.70	4.90	5.80	11.26	11.26

Directional gain = GANT + Array Gain

5 Test Results

5.1. Conducted Emission

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit mode		
Description:			

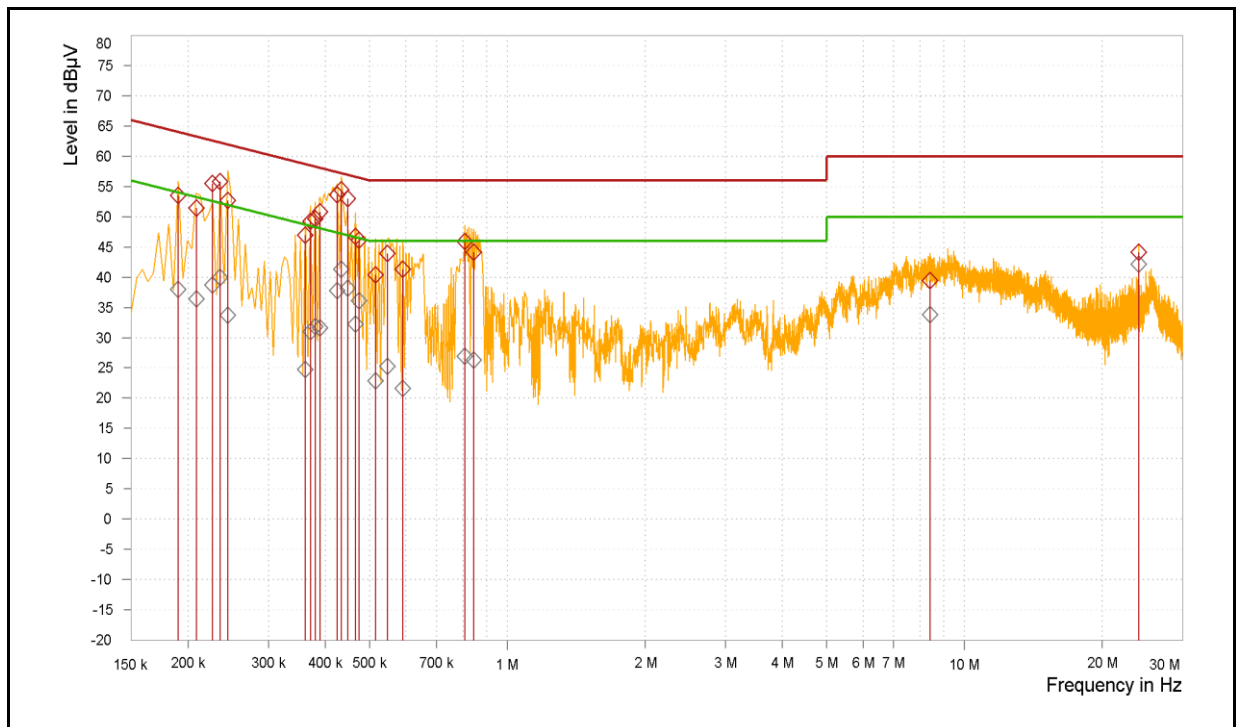


Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit mode		
Description:			

Rg	Frequency [MHz]	QP Result [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Result [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Correction factor [dB]	Line
1	0.191	53.50	64.01	10.52	37.95	54.01	16.07	9.60	L1
1	0.209	51.39	63.26	11.88	36.44	53.26	16.83	9.60	L1
1	0.227	55.50	62.58	7.07	38.67	52.58	13.91	9.60	L1
1	0.236	55.81	62.25	6.44	39.94	52.25	12.32	9.60	L1
1	0.245	52.64	61.94	9.30	33.66	51.94	18.28	9.60	L1
1	0.362	47.00	58.69	11.70	24.76	48.69	23.94	9.61	L1
1	0.371	49.29	58.49	9.20	31.00	48.49	17.49	9.61	L1
1	0.380	49.68	58.29	8.61	31.83	48.29	16.46	9.61	L1
1	0.389	50.77	58.10	7.33	31.57	48.10	16.53	9.61	L1
1	0.425	53.66	57.36	3.70	37.75	47.36	9.61	9.61	L1
1	0.434	54.50	57.19	2.68	41.35	47.19	5.84	9.61	L1
1	0.447	53.02	56.93	3.91	38.18	46.93	8.75	9.61	L1
1	0.465	46.78	56.60	9.82	32.22	46.60	14.39	9.61	L1
1	0.474	46.13	56.44	10.32	36.06	46.44	10.38	9.61	L1
1	0.515	40.36	56.00	15.64	22.86	46.00	23.14	9.61	L1
1	0.546	43.97	56.00	12.03	25.28	46.00	20.72	9.61	L1
1	0.591	41.34	56.00	14.66	21.60	46.00	24.40	9.62	L1
1	0.807	45.88	56.00	10.12	26.88	46.00	19.12	9.62	L1
1	0.843	44.18	56.00	11.82	26.26	46.00	19.74	9.63	L1
1	8.408	39.41	60.00	20.59	33.82	50.00	16.18	9.79	L1
1	24.068	44.18	60.00	15.82	42.10	50.00	7.90	9.90	L1

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit mode		
Description:			

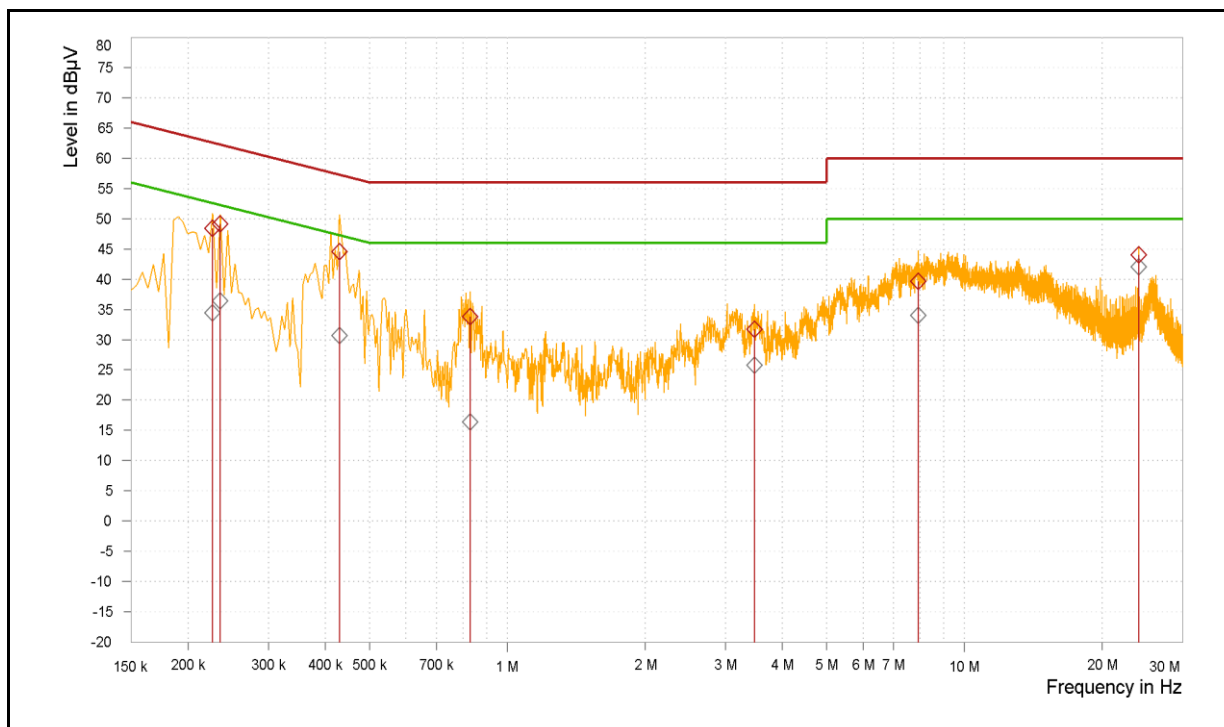

Rg	Frequency [MHz]	QP Result [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Result [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Correction factor [dB]	Line
1	0.227	48.42	62.58	14.16	34.43	52.58	18.14	9.66	N
1	0.236	49.17	62.25	13.08	36.38	52.25	15.87	9.66	N
1	0.429	44.57	57.27	12.71	30.70	47.27	16.57	9.67	N
1	0.830	33.79	56.00	22.21	16.37	46.00	29.63	9.68	N
1	3.471	31.74	56.00	24.26	25.82	46.00	20.18	9.74	N
1	7.917	39.60	60.00	20.40	34.03	50.00	15.97	9.85	N
1	24.068	44.00	60.00	16.00	42.09	50.00	7.91	10.13	N


Note: 1. Result (dBμV) = Correction factor (dB) + Reading(dBμV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5.2. Radiated Emission Measurement


Below 1 GHz

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	Transmit mode		
Polarization:	Horizontal		
Remark:			

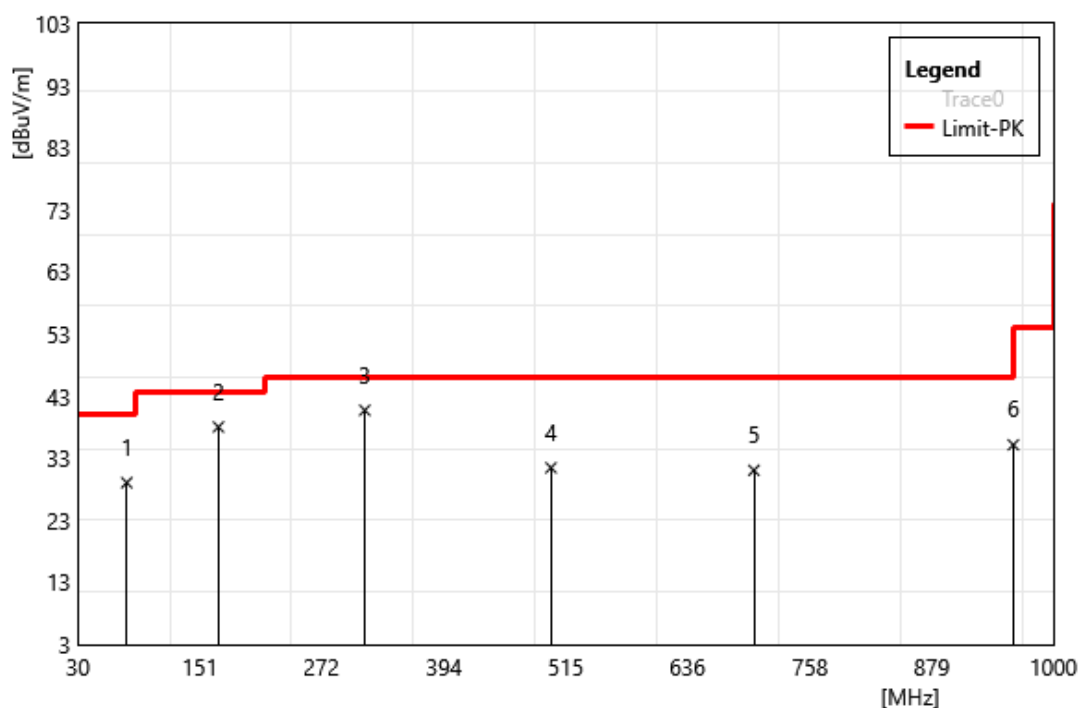

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	78.50	45.32	-16.25	29.07	40.00	-10.93	QP
2	169.68	50.30	-12.26	38.04	43.50	-5.46	QP
3	315.18	51.48	-10.76	40.72	46.00	-5.28	QP
4	500.45	38.19	-6.73	31.46	46.00	-14.54	QP
5	702.21	34.17	-3.11	31.06	46.00	-14.94	QP
6	960.23	35.05	0.12	35.17	54.00	-18.83	QP

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	Transmit mode		
Polarization:	Vertical		
Remark:			

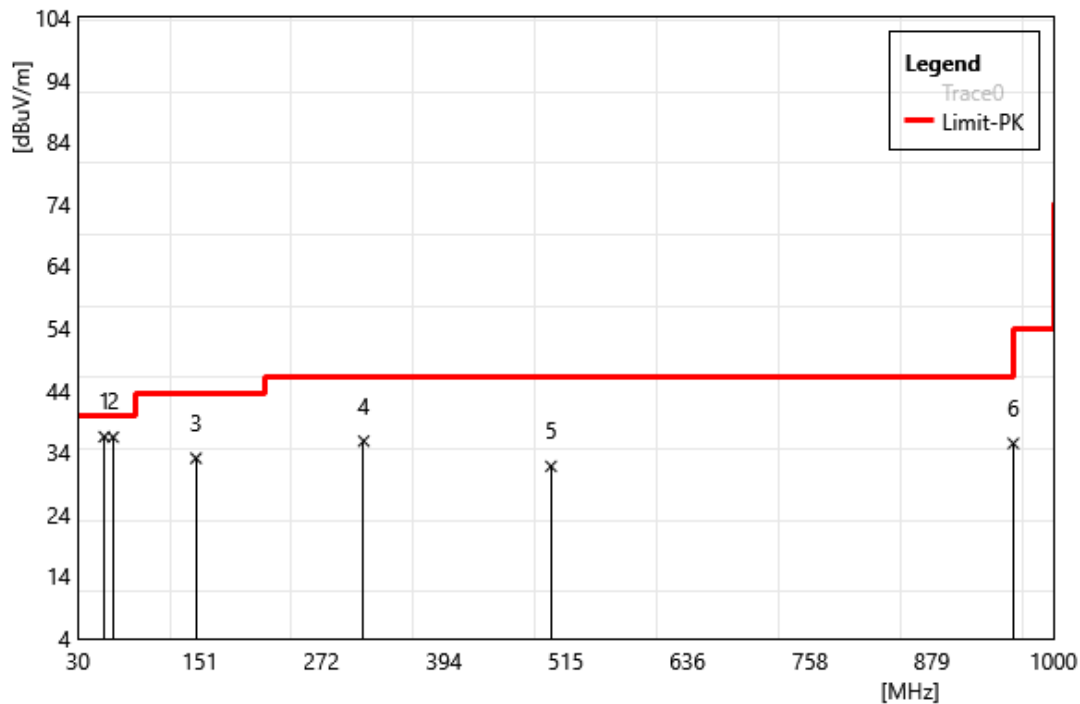


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	56.19	48.15	-11.66	36.49	40.00	-3.51	QP
2	64.92	49.44	-13.01	36.43	40.00	-3.57	QP
3	147.37	44.71	-11.68	33.03	43.50	-10.47	QP
4	314.21	46.58	-10.78	35.80	46.00	-10.20	QP
5	500.45	38.46	-6.73	31.73	46.00	-14.27	QP
6	960.23	35.30	0.12	35.43	54.00	-18.58	QP

Harmonic


Above 1 GHz

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

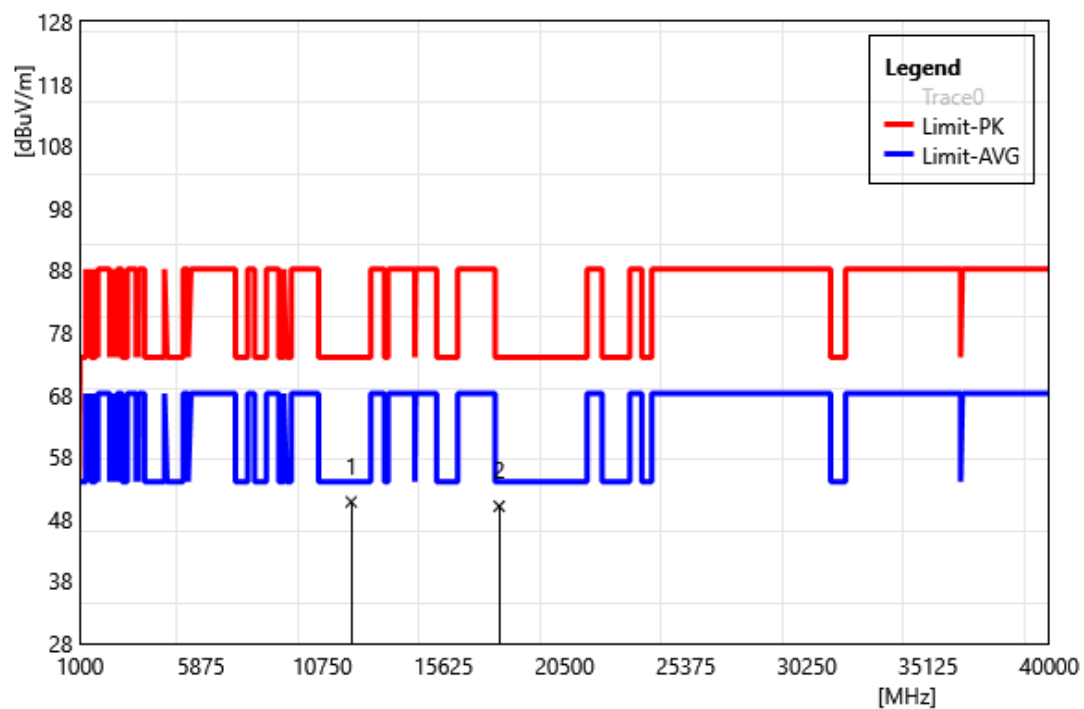


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	41.57	9.19	50.76	74.00	-23.24	PEAK
2	17865.00	42.13	7.93	50.06	74.00	-23.94	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

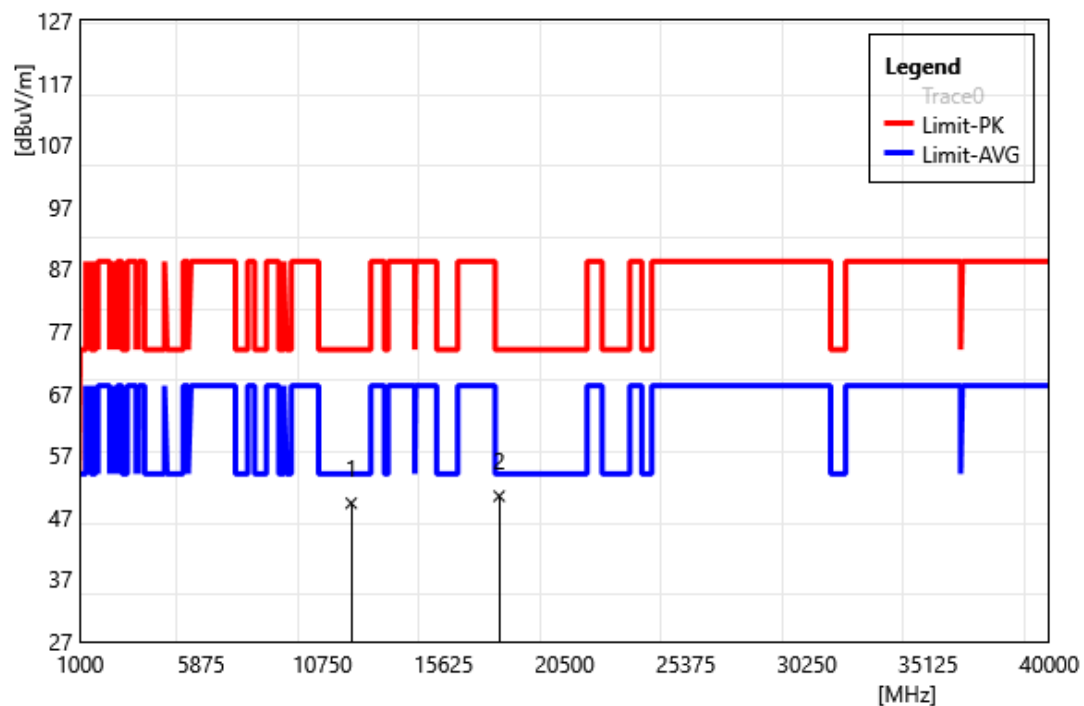


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	40.09	9.19	49.28	74.00	-24.72	PEAK
2	17865.00	42.48	7.93	50.41	74.00	-23.59	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6175		
	MHz		
Polarization:	Horizontal		
Remark:			

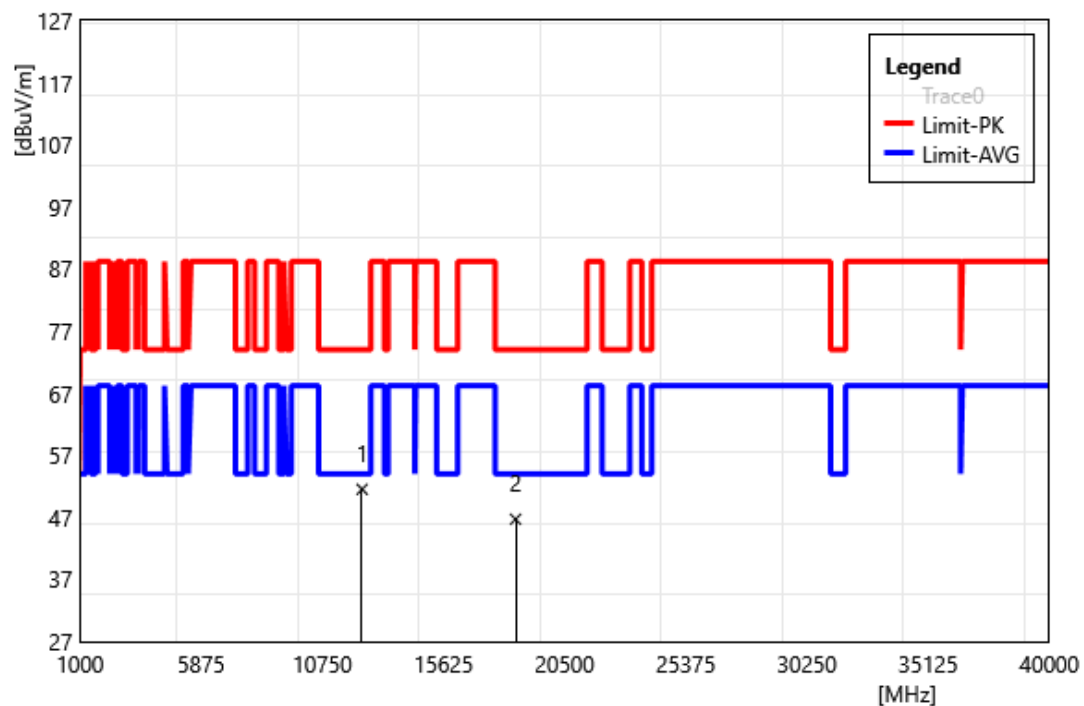


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	42.29	9.24	51.53	74.00	-22.47	PEAK
2	18525.00	44.47	2.24	46.71	74.00	-27.29	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6175		
	MHz		
Polarization:	Vertical		
Remark:			

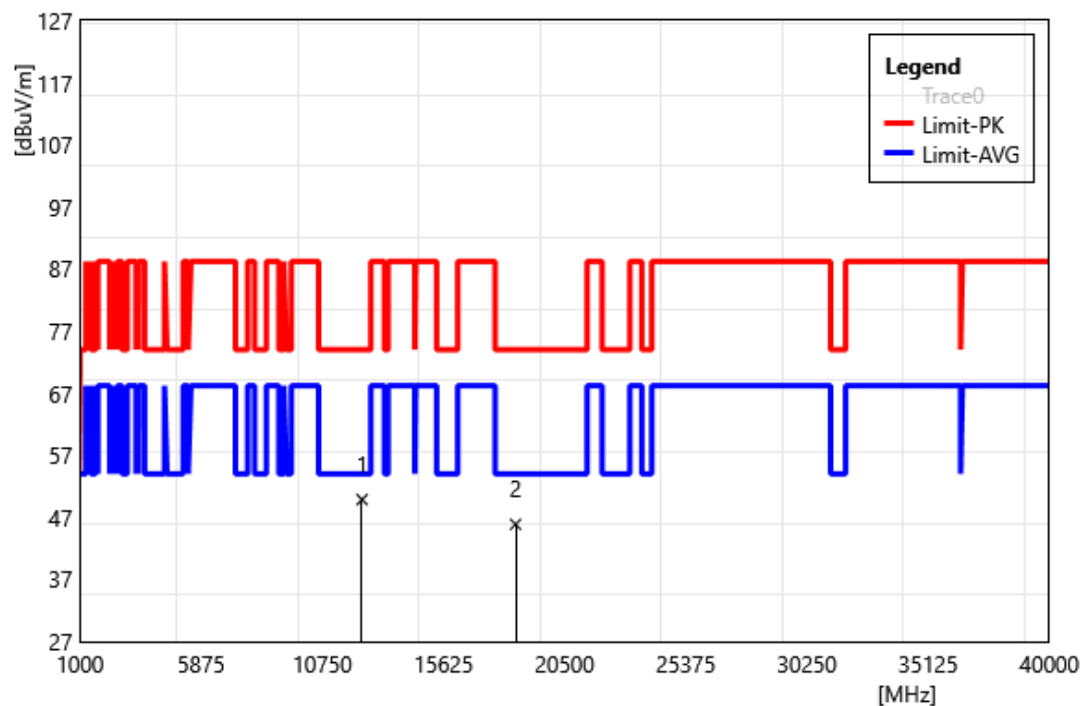


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	40.62	9.24	49.86	74.00	-24.14	PEAK
2	18525.00	43.65	2.24	45.89	74.00	-28.11	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6415		
	MHz		
Polarization:	Horizontal		
Remark:			

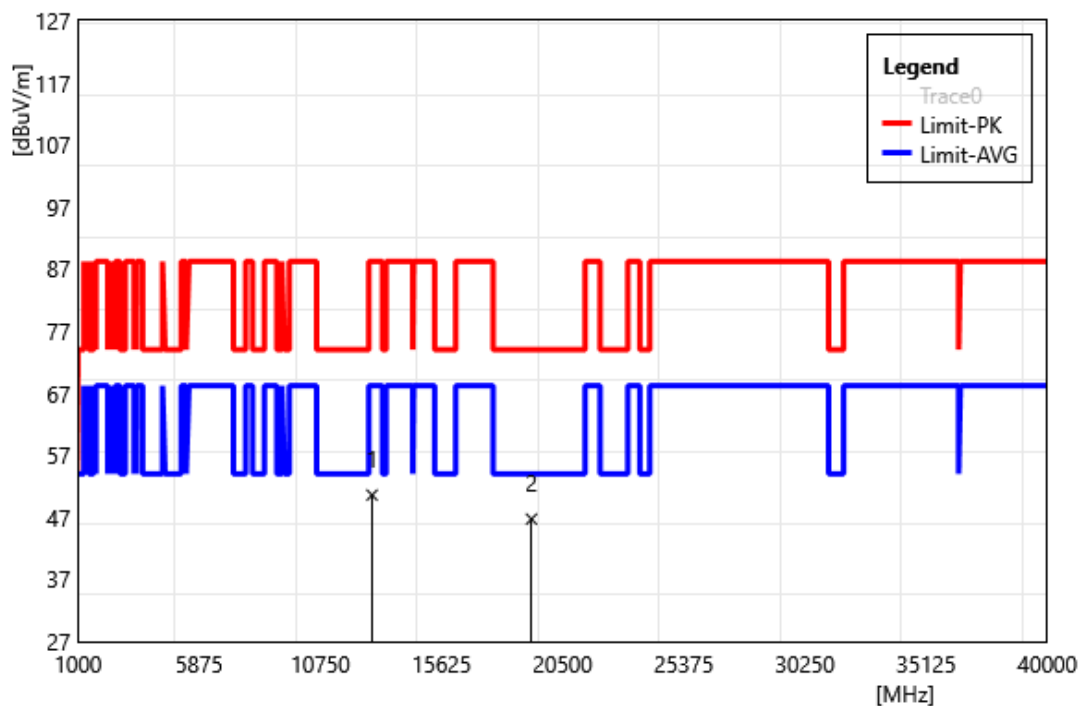


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	40.76	9.83	50.59	88.20	-37.61	PEAK
2	19245.00	41.32	5.41	46.73	74.00	-27.27	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6415		
	MHz		
Polarization:	Vertical		
Remark:			

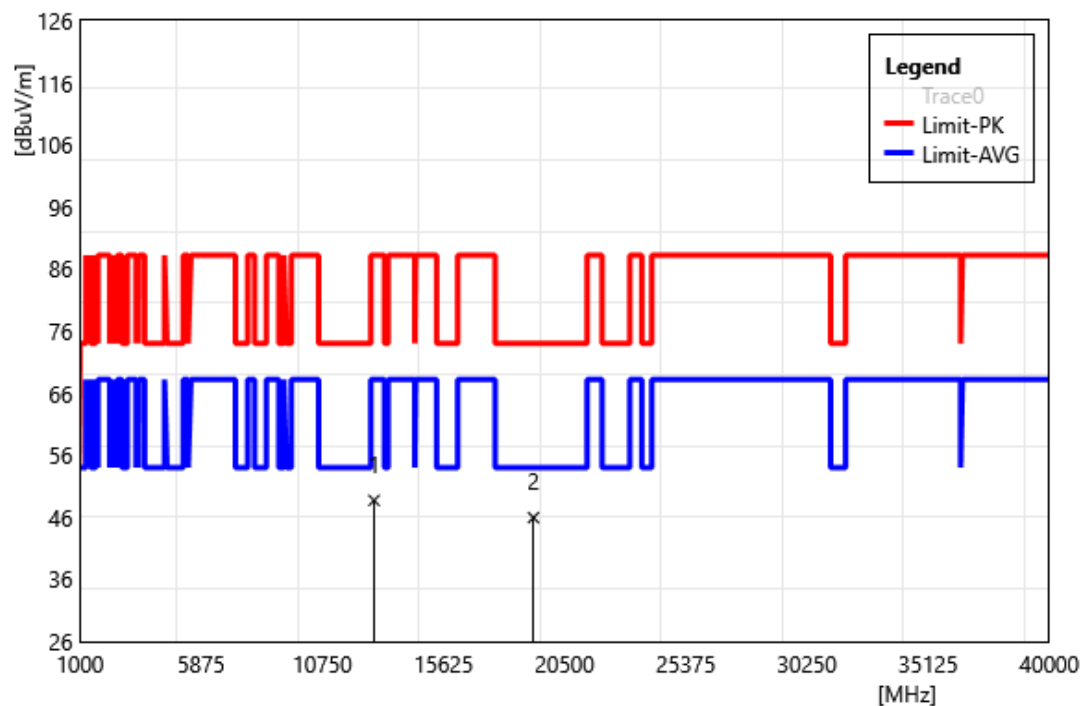


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	38.91	9.83	48.74	88.20	-39.46	PEAK
2	19245.00	40.55	5.41	45.96	74.00	-28.04	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6435		
	MHz		
Polarization:	Horizontal		
Remark:			

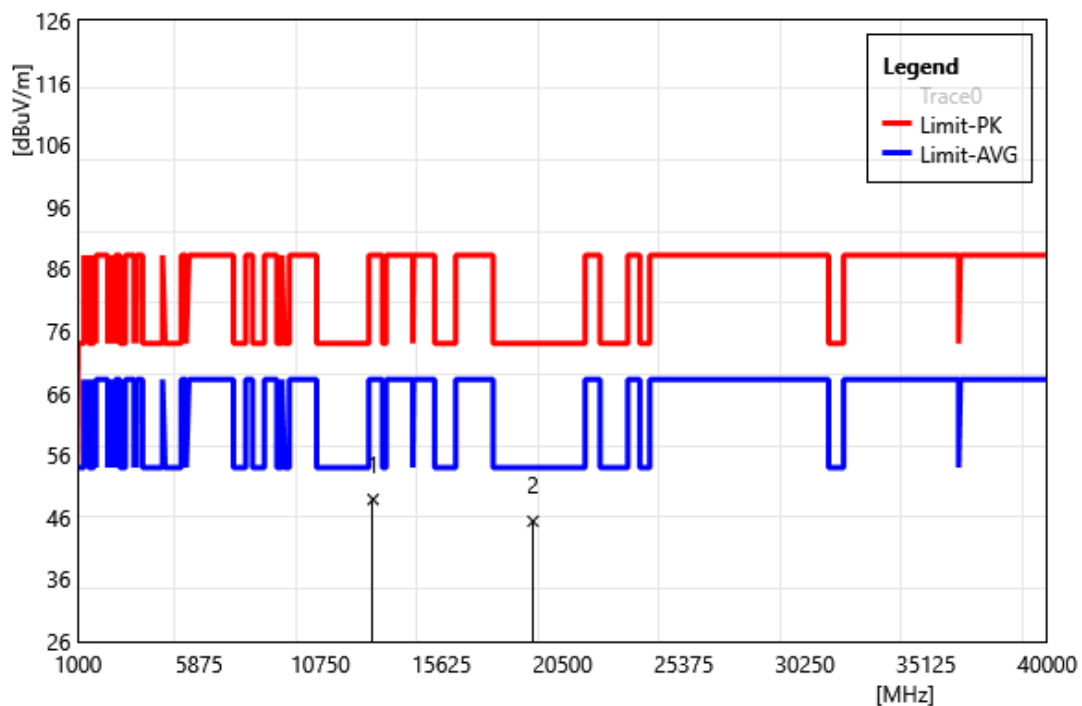


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	39.10	9.78	48.88	88.20	-39.32	PEAK
2	19305.00	39.75	5.62	45.37	74.00	-28.63	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6435		
	MHz		
Polarization:	Vertical		
Remark:			

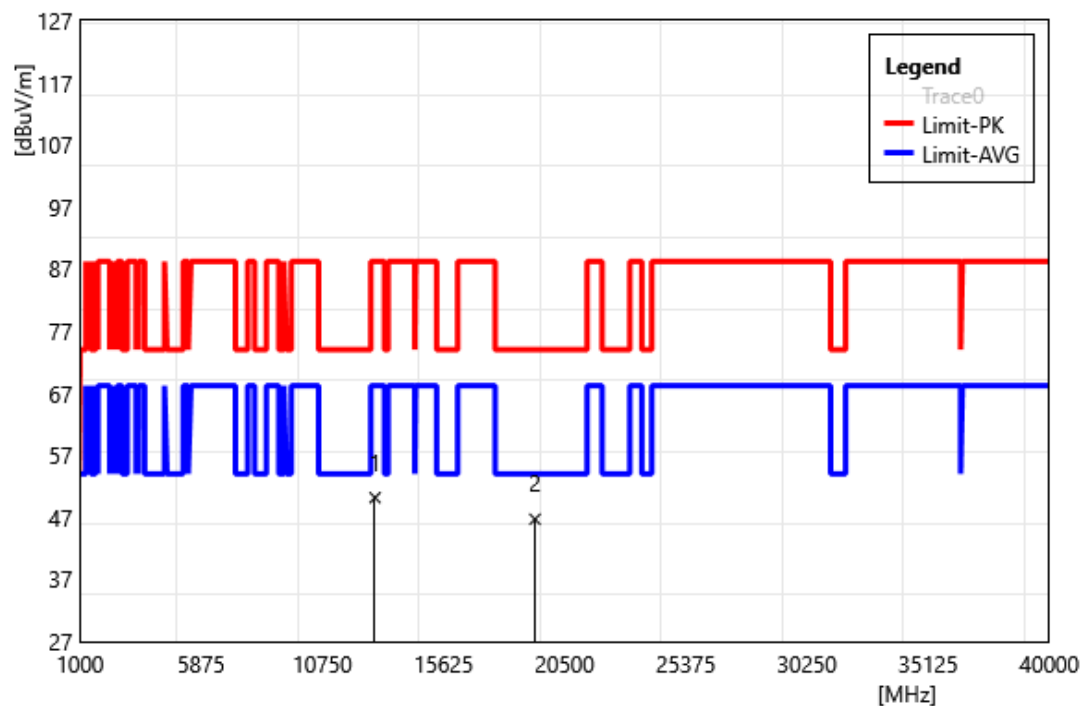


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	40.39	9.78	50.17	88.20	-38.03	PEAK
2	19305.00	41.09	5.62	46.71	74.00	-27.29	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6475		
	MHz		
Polarization:	Horizontal		
Remark:			

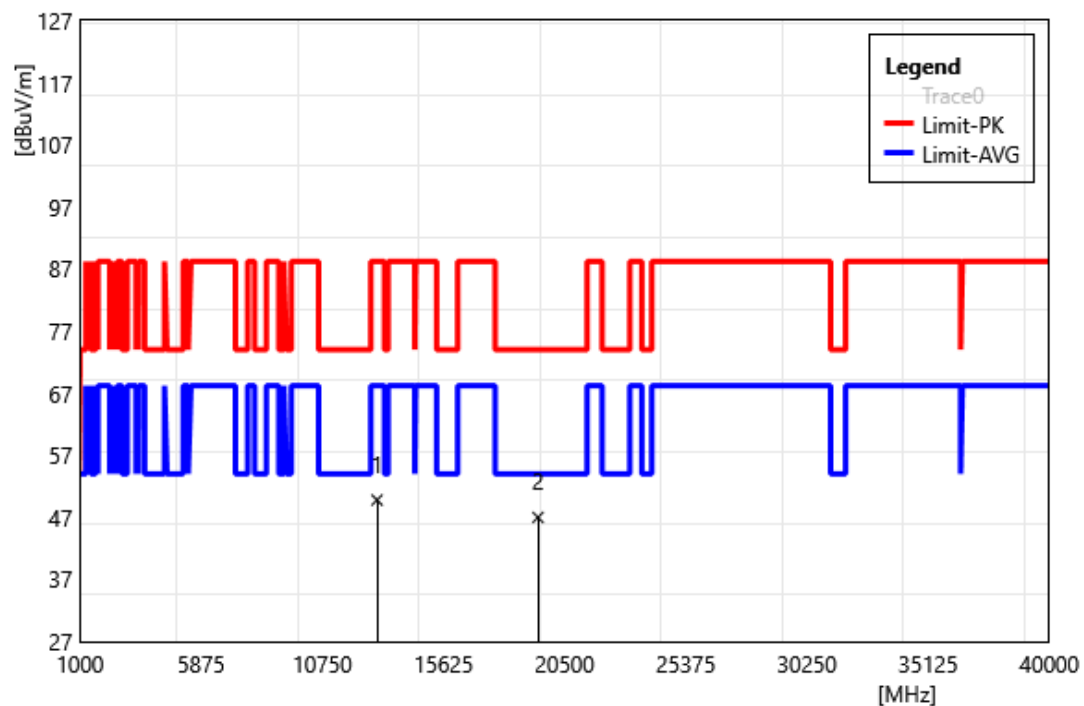


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	40.12	9.68	49.80	88.20	-38.40	PEAK
2	19425.00	40.96	6.03	46.99	74.00	-27.01	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6475		
	MHz		
Polarization:	Vertical		
Remark:			

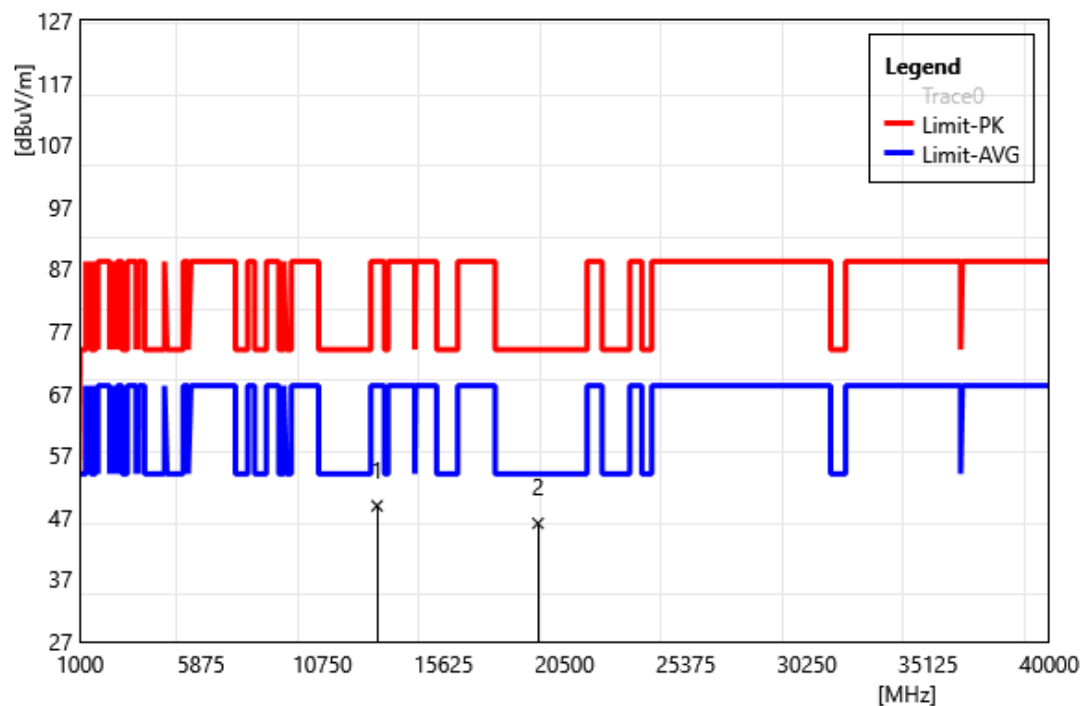


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	39.18	9.68	48.86	88.20	-39.34	PEAK
2	19425.00	40.00	6.03	46.03	74.00	-27.97	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6515		
	MHz		
Polarization:	Horizontal		
Remark:			

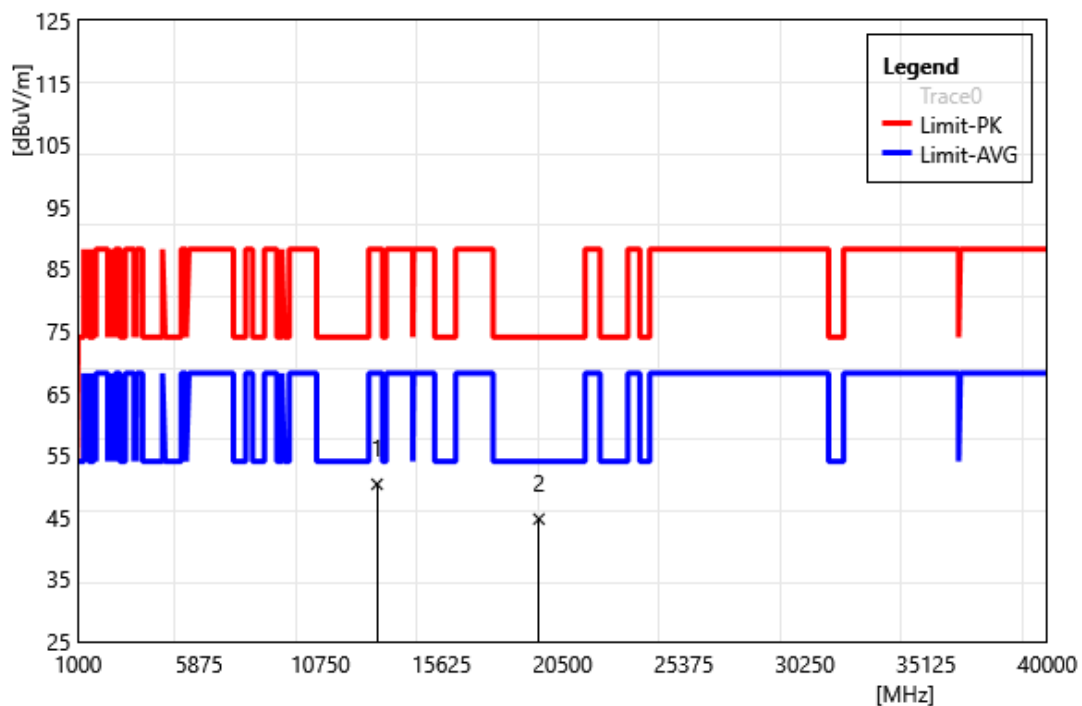


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	40.71	9.62	50.33	88.20	-37.87	PEAK
2	19545.00	38.41	6.32	44.73	74.00	-29.27	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6515		
	MHz		
Polarization:	Vertical		
Remark:			

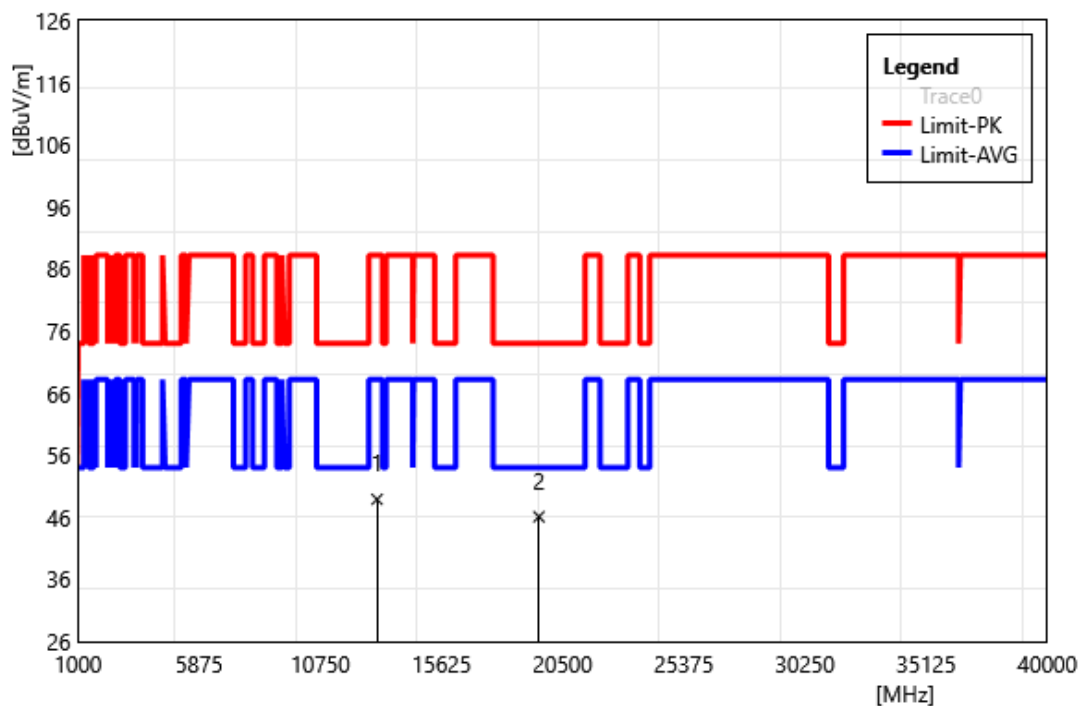


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	39.29	9.62	48.91	88.20	-39.29	PEAK
2	19545.00	39.77	6.32	46.09	74.00	-27.91	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6535		
	MHz		
Polarization:	Horizontal		
Remark:			

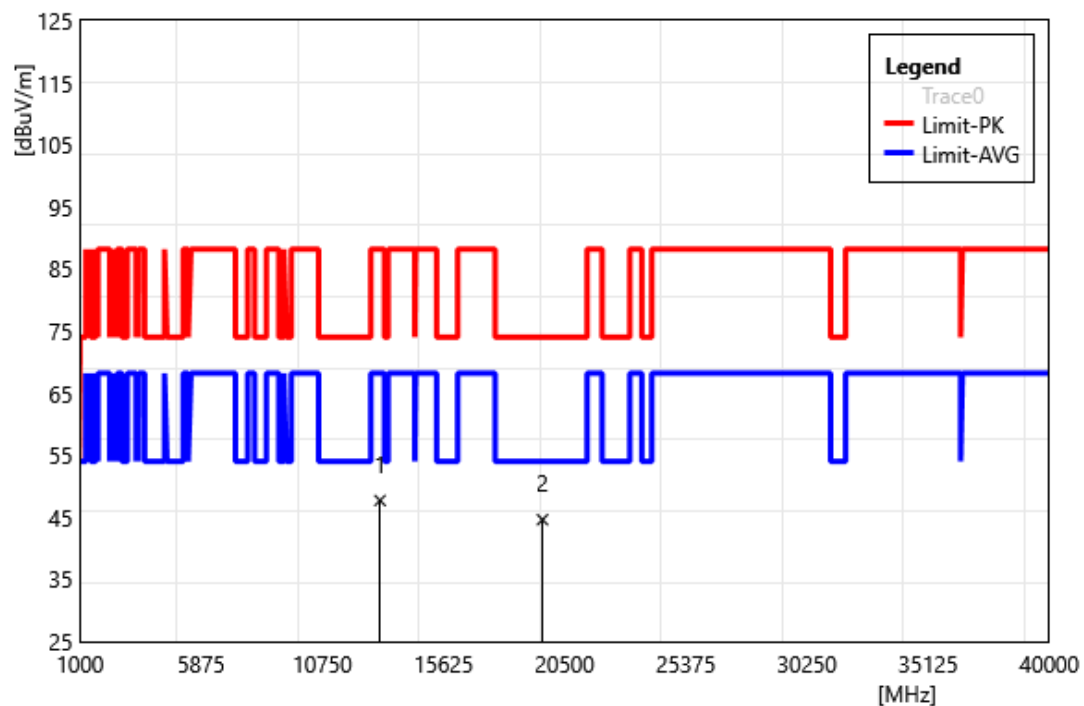


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	38.10	9.62	47.72	88.20	-40.48	PEAK
2	19605.00	38.27	6.36	44.63	74.00	-29.37	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6535		
	MHz		
Polarization:	Vertical		
Remark:			

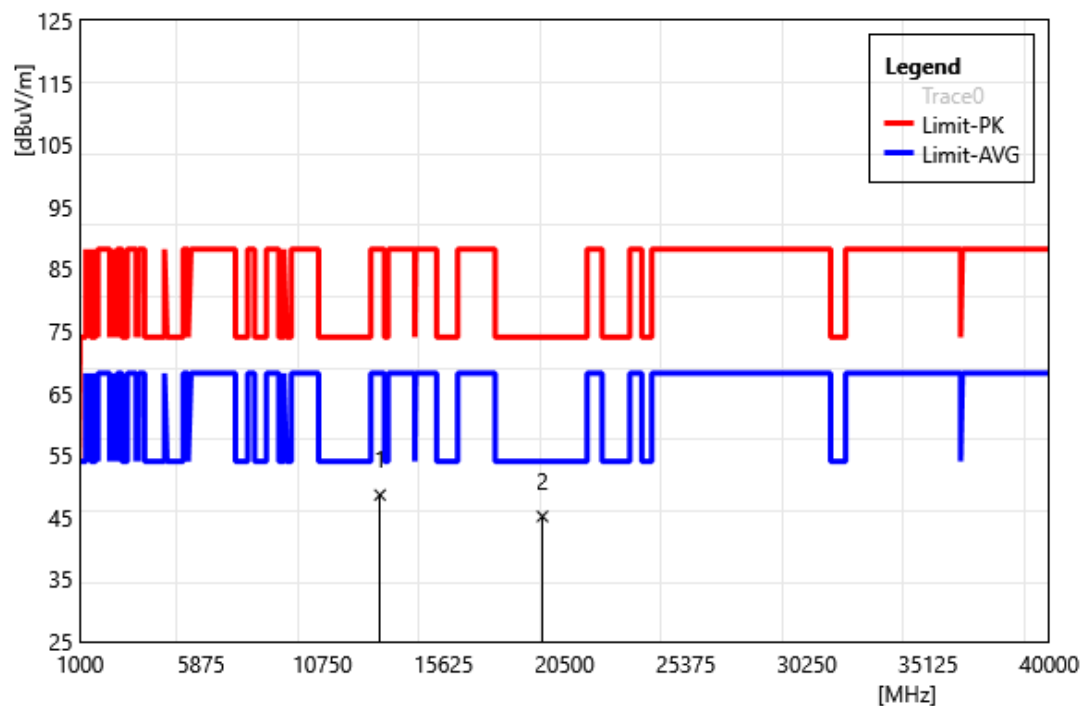


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	38.98	9.62	48.60	88.20	-39.60	PEAK
2	19605.00	38.79	6.36	45.15	74.00	-28.85	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6695		
	MHz		
Polarization:	Horizontal		
Remark:			

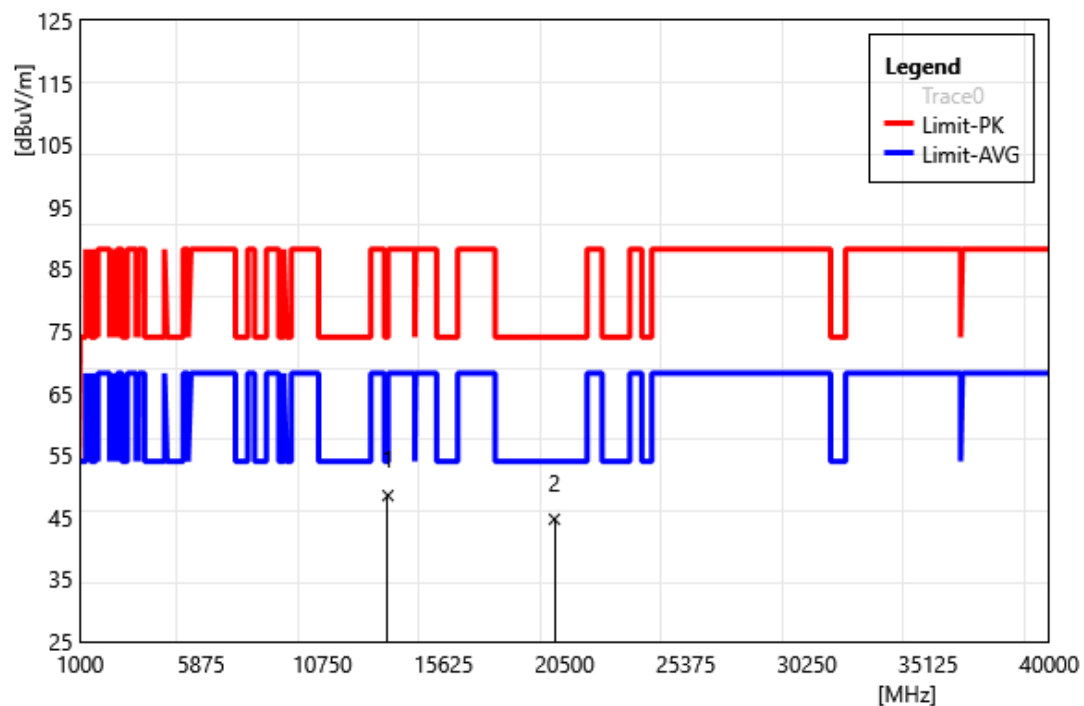


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	39.08	9.43	48.51	74.00	-25.49	PEAK
2	20085.00	38.01	6.68	44.69	74.00	-29.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6695		
	MHz		
Polarization:	Vertical		
Remark:			

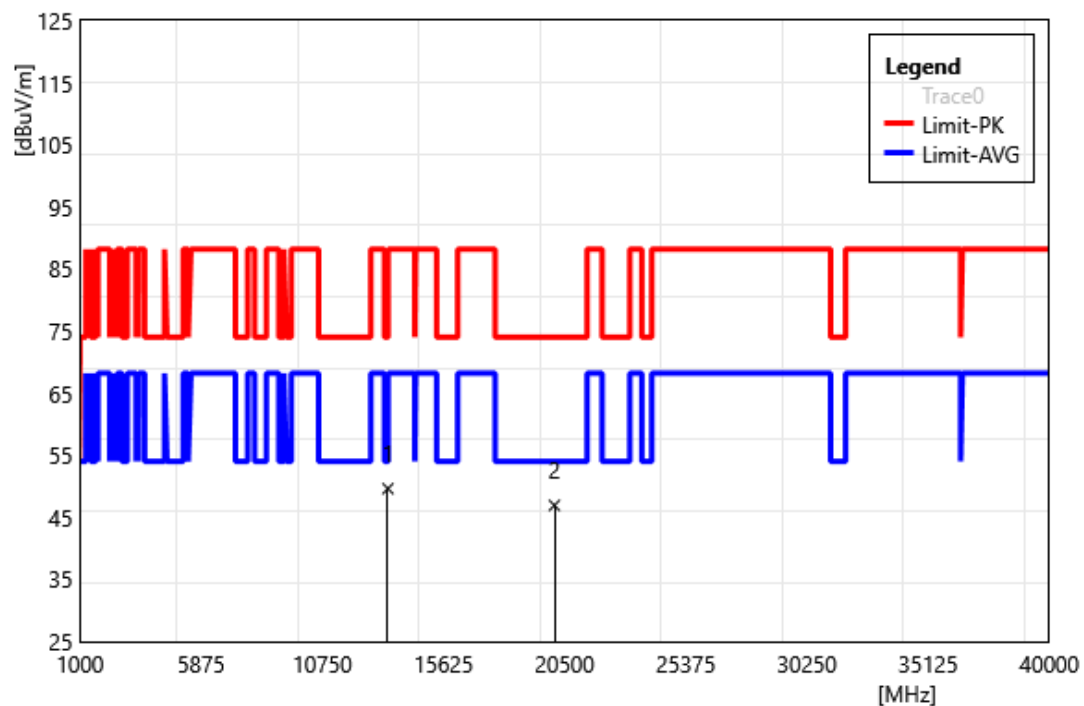


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	40.19	9.43	49.62	74.00	-24.38	PEAK
2	20085.00	40.25	6.68	46.93	74.00	-27.07	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6855		
	MHz		
Polarization:	Horizontal		
Remark:			

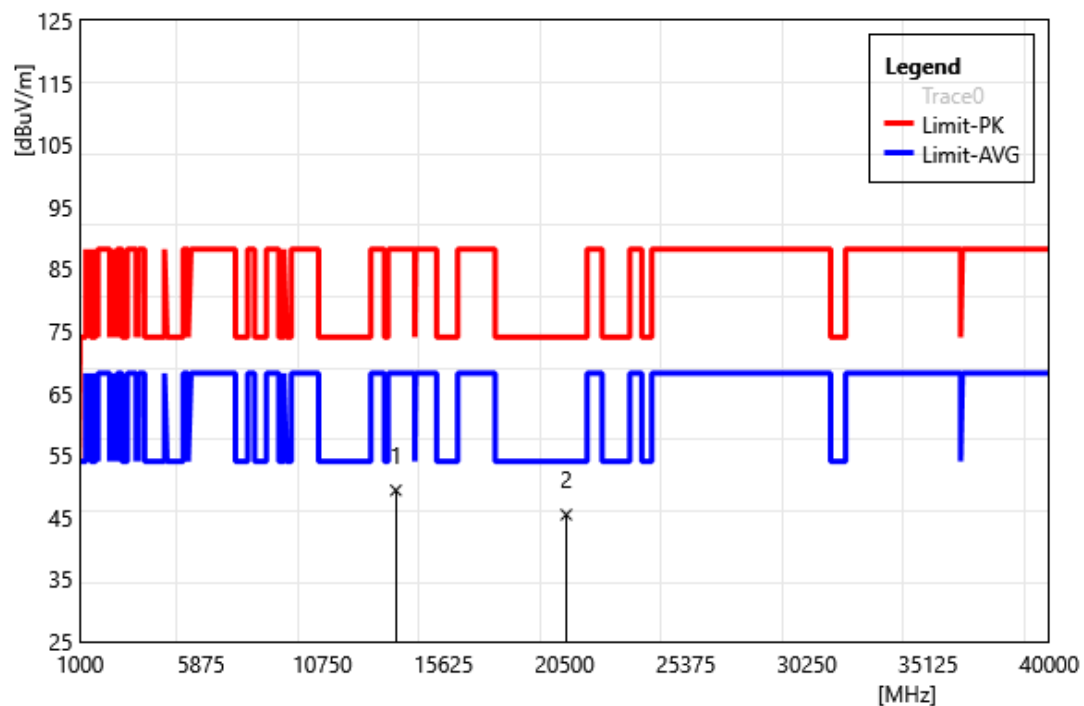


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	40.58	8.78	49.36	88.20	-38.84	PEAK
2	20565.00	38.01	7.42	45.43	74.00	-28.57	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6855		
	MHz		
Polarization:	Vertical		
Remark:			

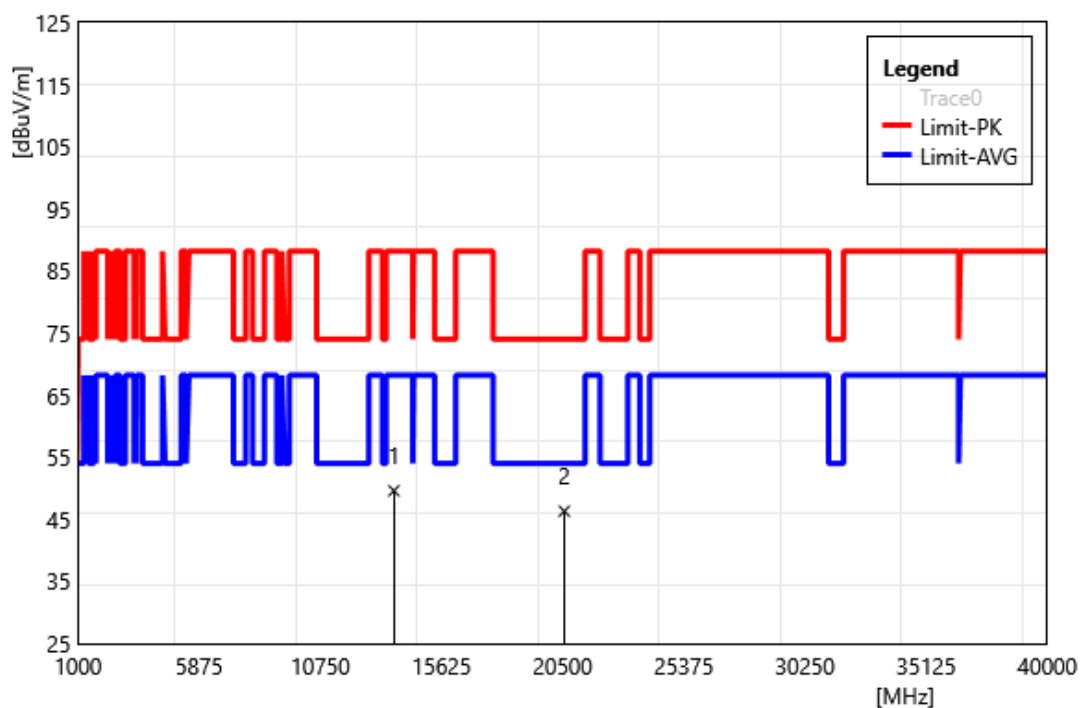


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	40.83	8.78	49.61	88.20	-38.59	PEAK
2	20565.00	38.89	7.42	46.31	74.00	-27.69	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6875		
	MHz		
Polarization:	Horizontal		
Remark:			

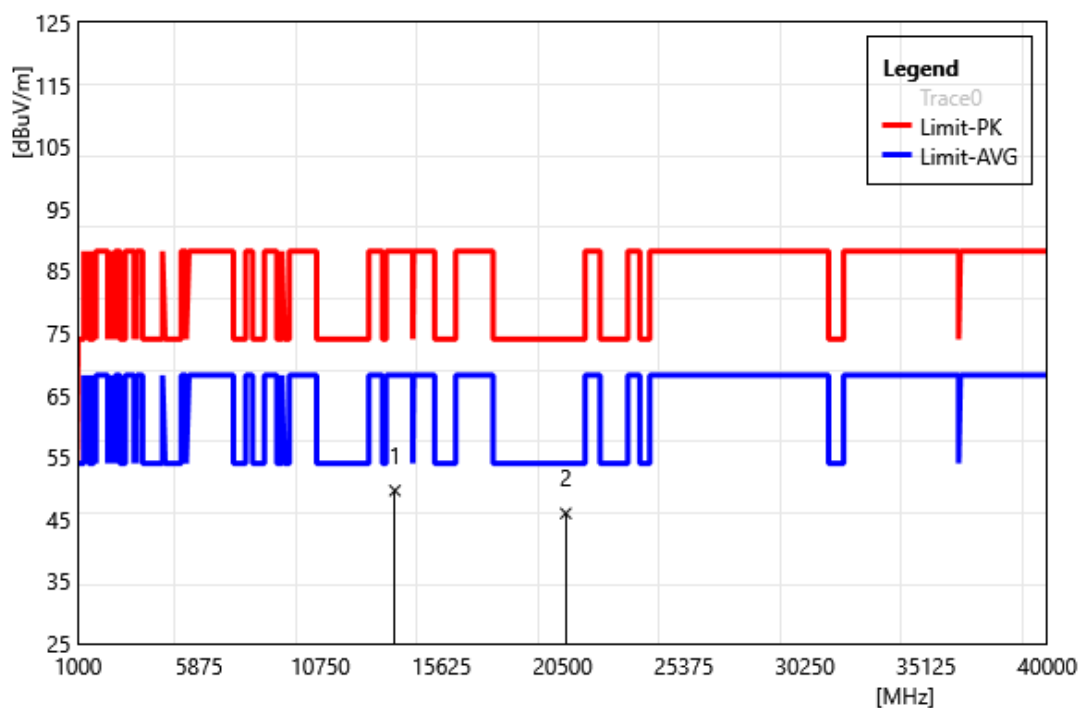


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	40.84	8.79	49.63	88.20	-38.57	PEAK
2	20625.00	38.39	7.57	45.96	74.00	-28.04	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6875		
	MHz		
Polarization:	Vertical		
Remark:			

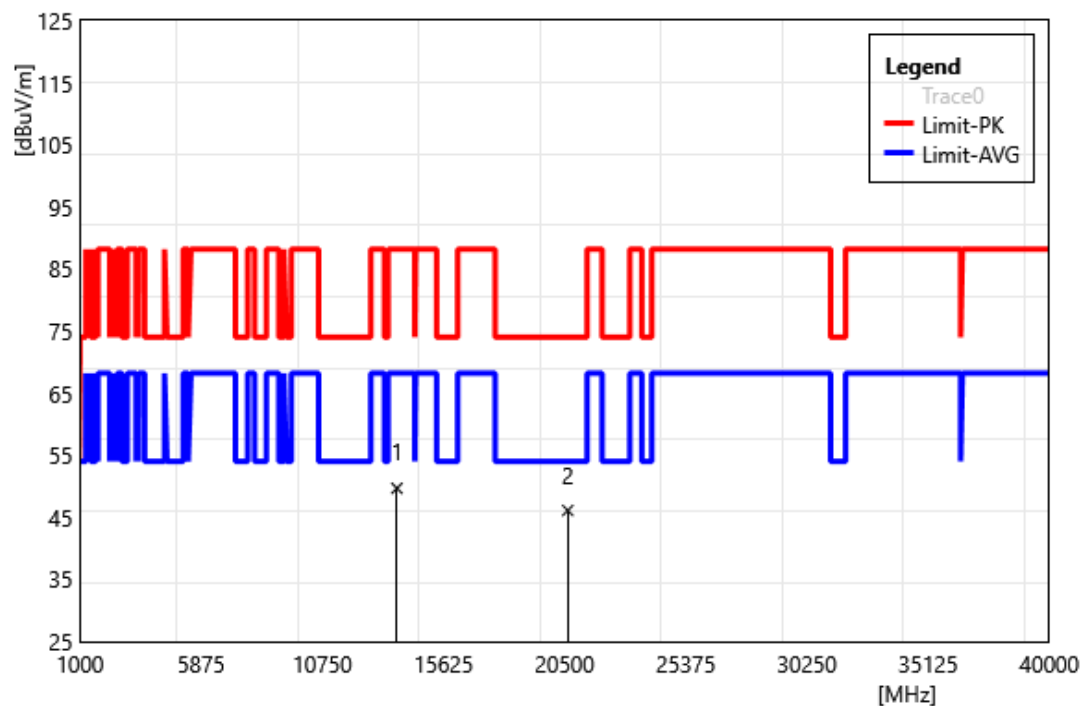


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	40.89	8.79	49.68	88.20	-38.52	PEAK
2	20625.00	38.53	7.57	46.10	74.00	-27.90	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6895		
	MHz		
Polarization:	Horizontal		
Remark:			

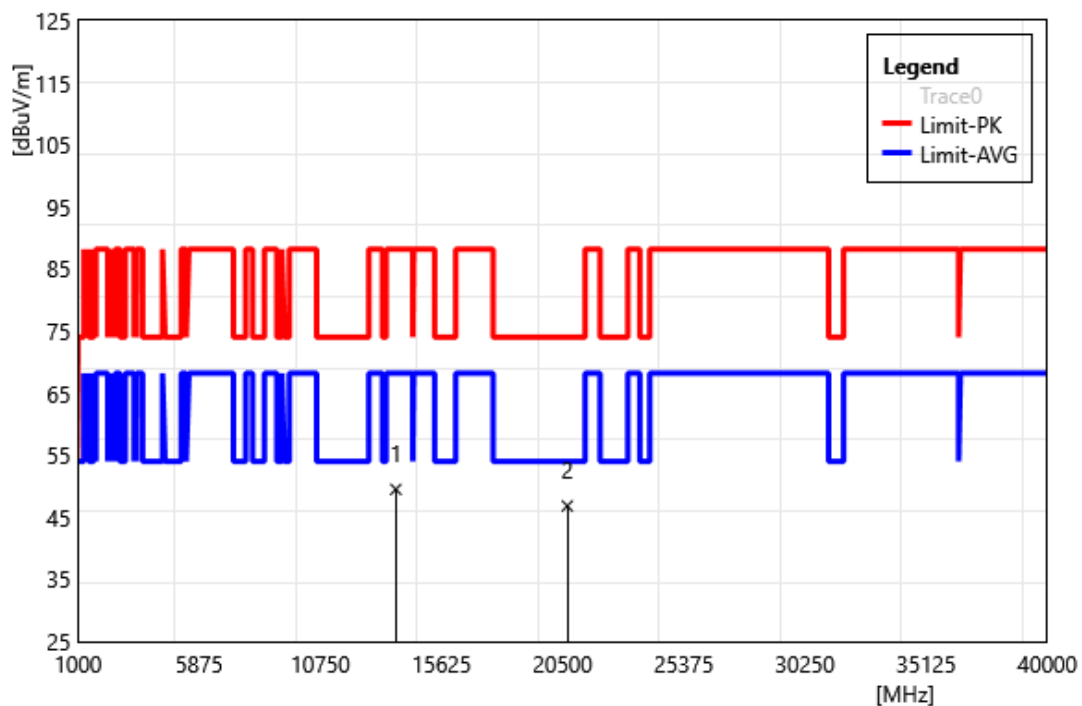


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	40.69	8.82	49.51	88.20	-38.69	PEAK
2	20685.00	39.11	7.72	46.83	74.00	-27.17	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6895		
	MHz		
Polarization:	Vertical		
Remark:			

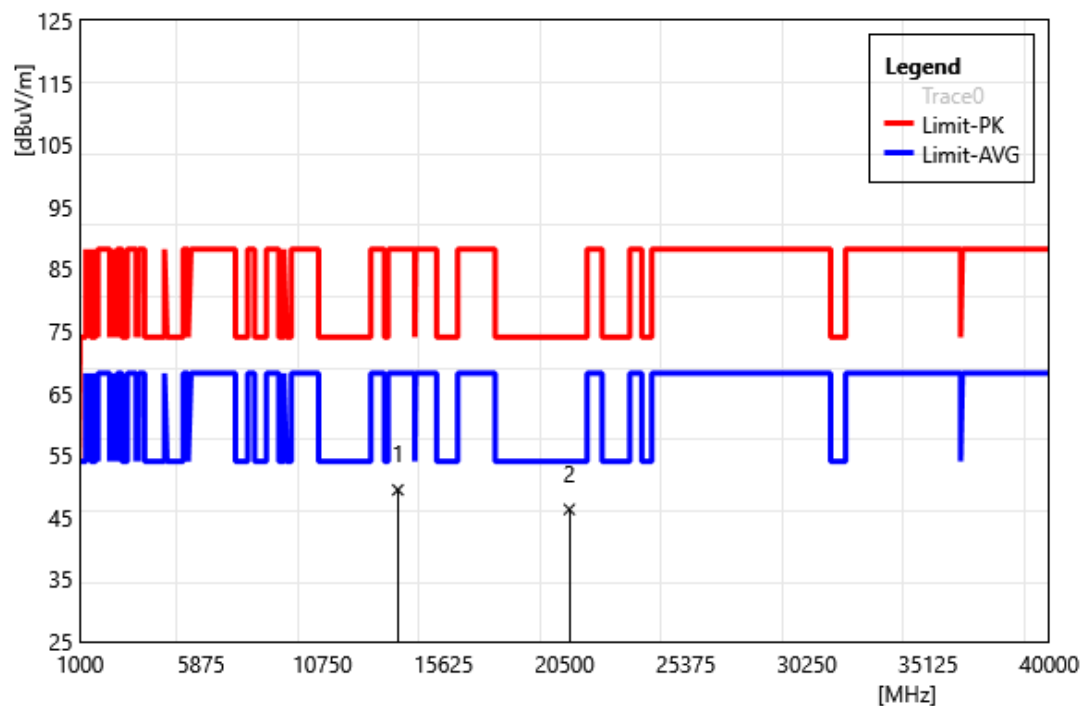


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	40.60	8.82	49.42	88.20	-38.78	PEAK
2	20685.00	38.56	7.72	46.28	74.00	-27.72	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6995		
	MHz		
Polarization:	Horizontal		
Remark:			

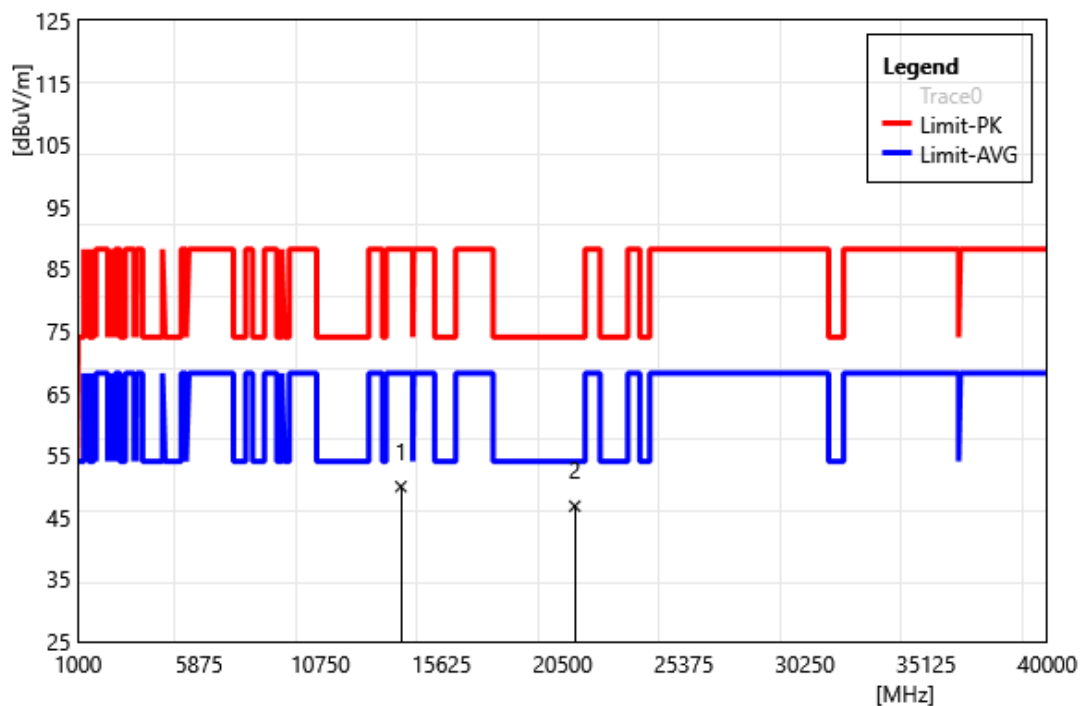


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	41.18	8.77	49.95	88.20	-38.25	PEAK
2	20985.00	38.35	8.45	46.80	74.00	-27.20	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6995		
	MHz		
Polarization:	Vertical		
Remark:			

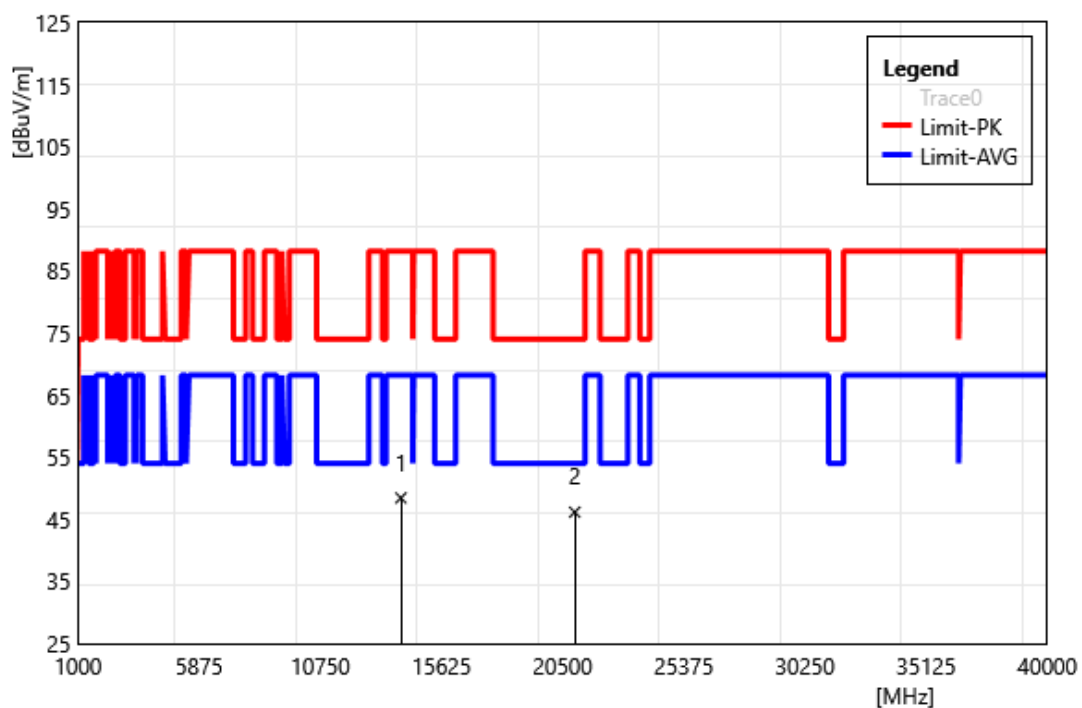


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	39.67	8.77	48.44	88.20	-39.76	PEAK
2	20985.00	37.71	8.45	46.16	74.00	-27.84	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

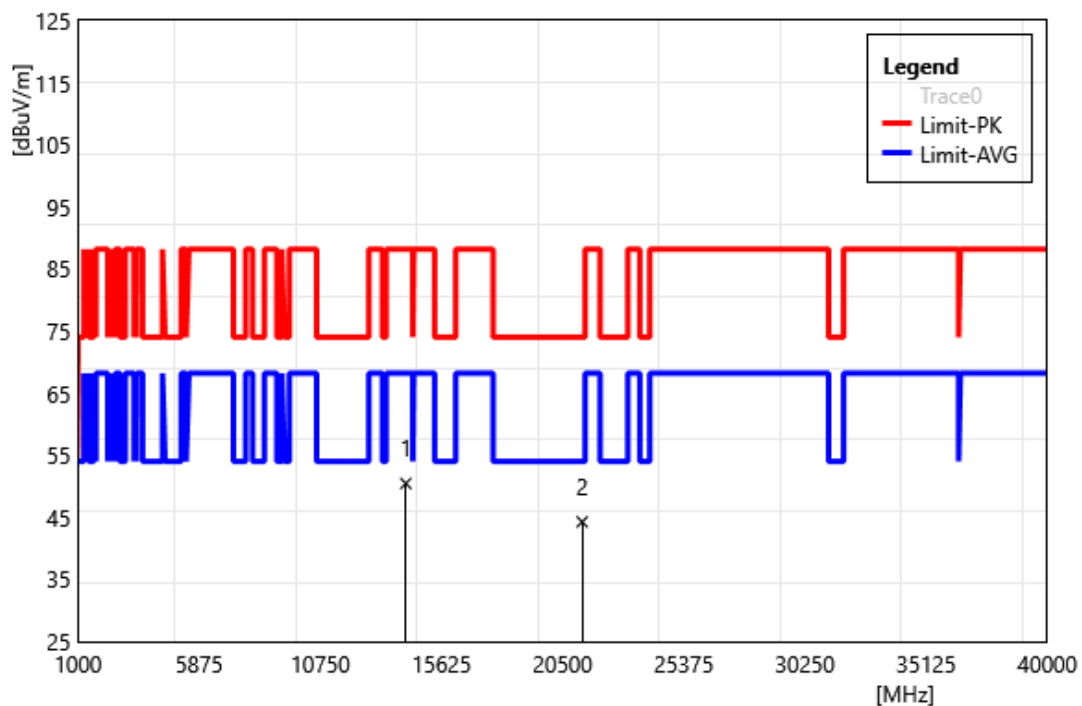


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14190.00	41.19	9.26	50.45	88.20	-37.75	PEAK
2	21285.00	31.96	12.31	44.27	74.00	-29.73	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

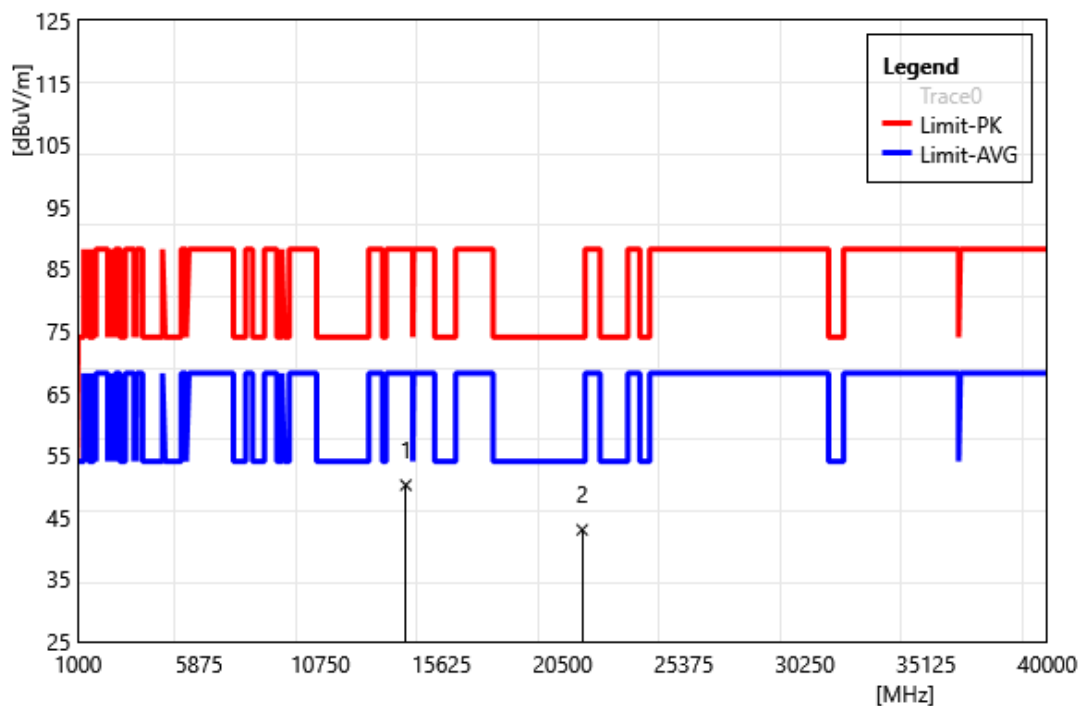


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14190.00	40.93	9.26	50.19	88.20	-38.01	PEAK
2	21285.00	30.69	12.31	43.00	74.00	-31.00	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

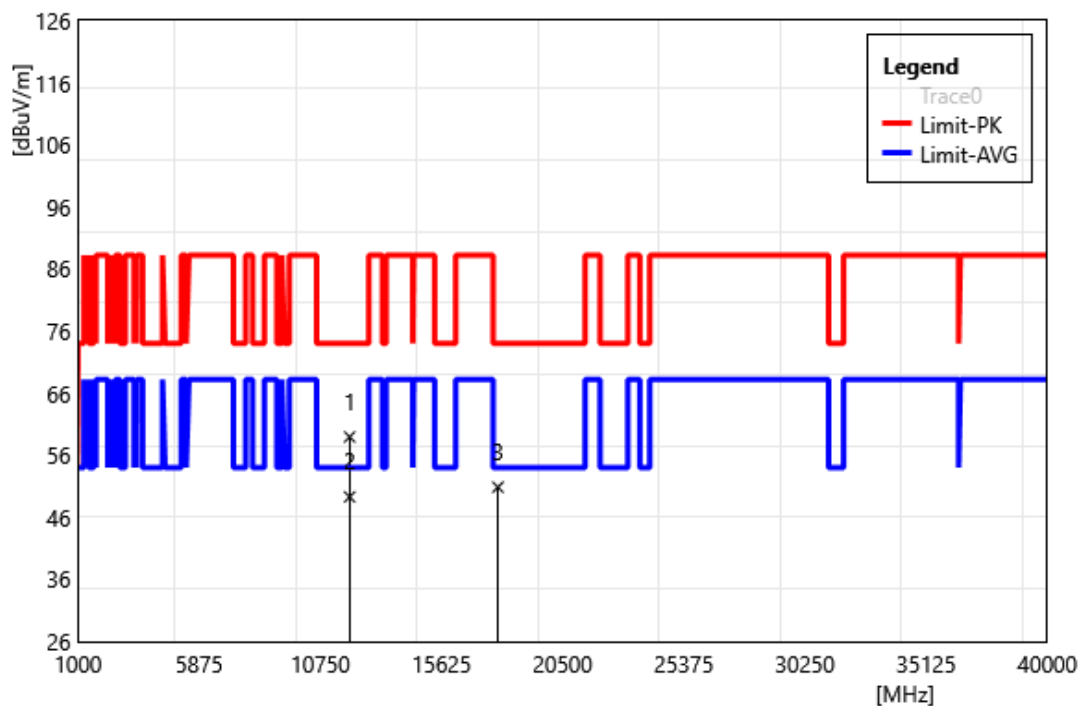


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	49.69	9.26	58.95	74.00	-15.05	PEAK
2	11930.00	40.03	9.26	49.29	54.00	-4.71	AVG
3	17895.00	42.94	7.92	50.86	74.00	-23.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

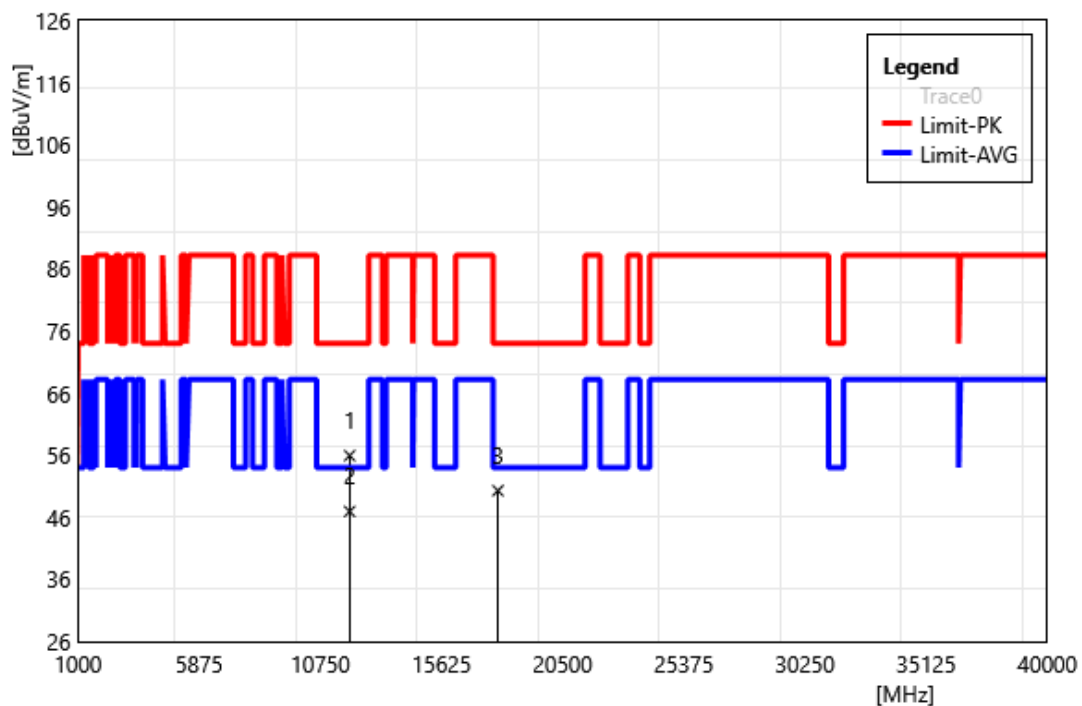


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	46.68	9.26	55.94	74.00	-18.06	PEAK
2	11930.00	37.69	9.26	46.95	54.00	-7.05	AVG
3	17895.00	42.38	7.92	50.30	74.00	-23.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6165		
	MHz		
Polarization:	Horizontal		
Remark:			

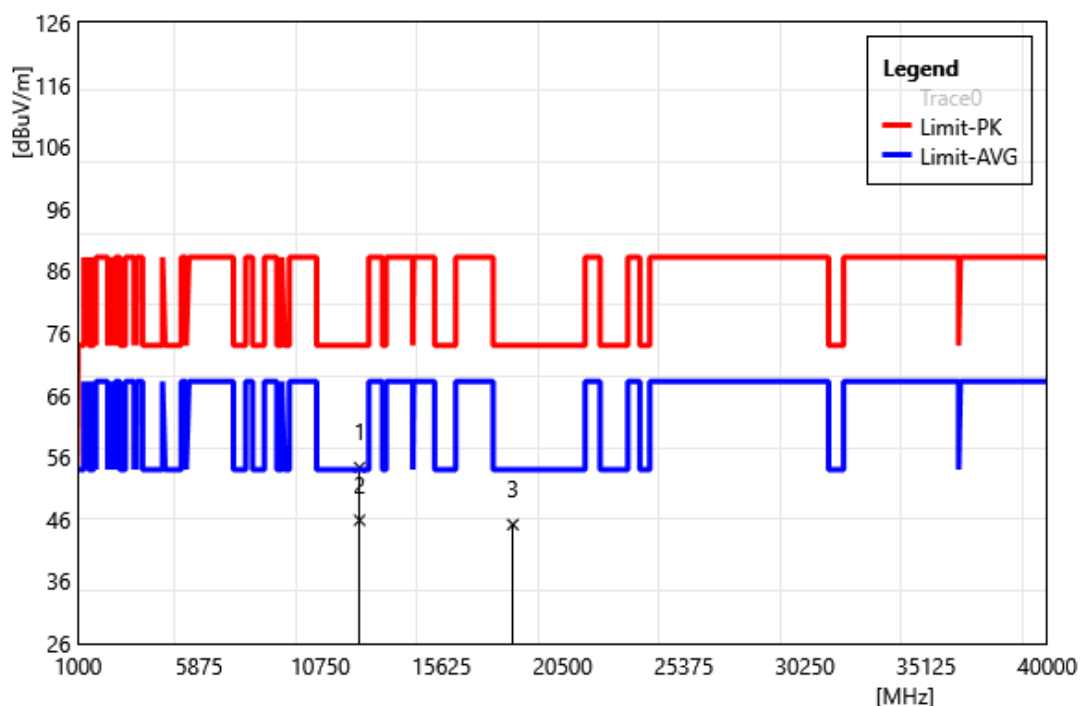


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	45.17	9.19	54.36	74.00	-19.64	PEAK
2	12330.00	36.67	9.19	45.86	54.00	-8.14	AVG
3	18495.00	43.05	2.11	45.16	74.00	-28.84	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6165		
	MHz		
Polarization:	Vertical		
Remark:			

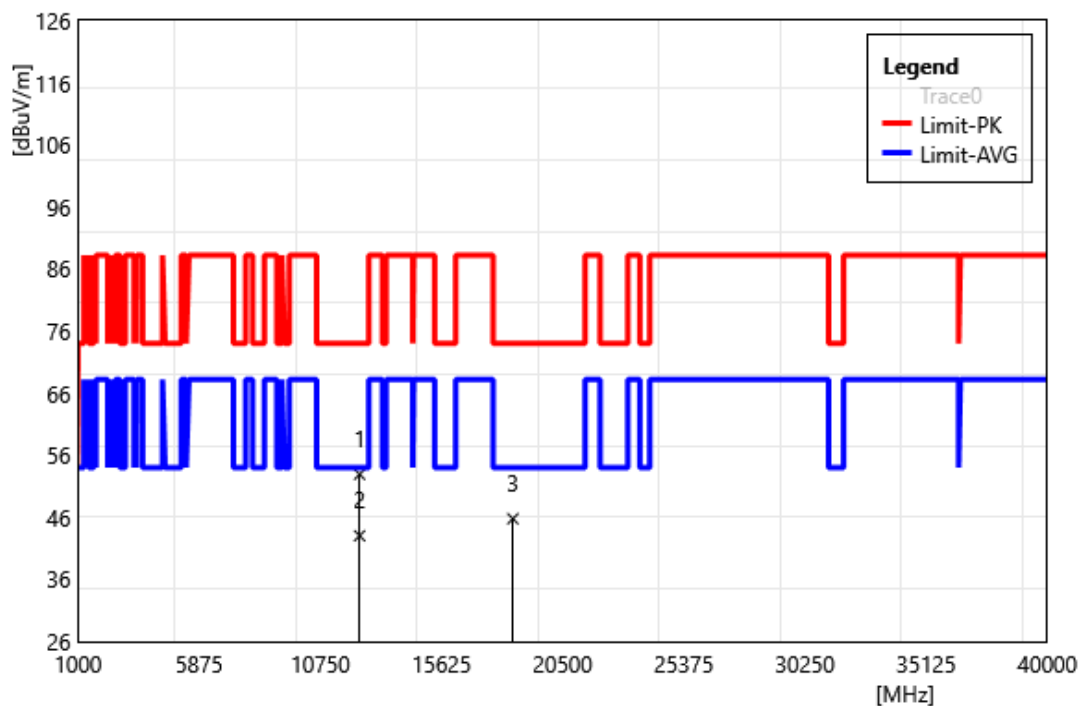


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	43.75	9.19	52.94	74.00	-21.06	PEAK
2	12330.00	33.84	9.19	43.03	54.00	-10.97	AVG
3	18495.00	43.67	2.11	45.78	74.00	-28.22	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6405		
	MHz		
Polarization:	Horizontal		
Remark:			

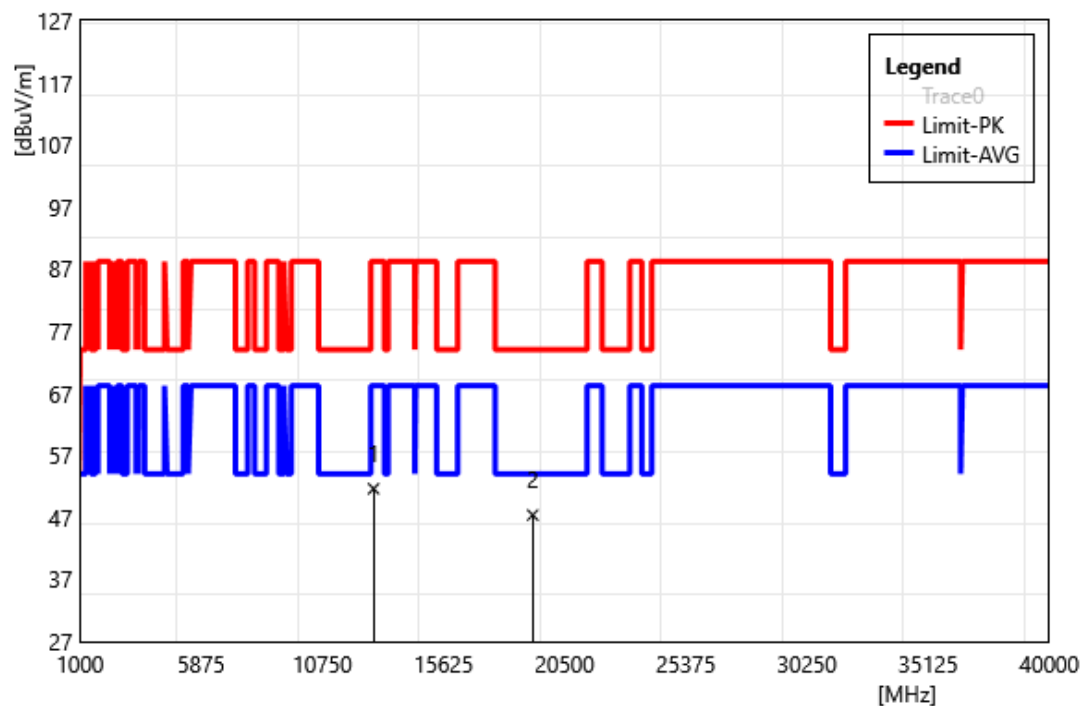


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	41.76	9.85	51.61	88.20	-36.59	PEAK
2	19215.00	42.08	5.30	47.38	74.00	-26.63	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6405		
	MHz		
Polarization:	Vertical		
Remark:			

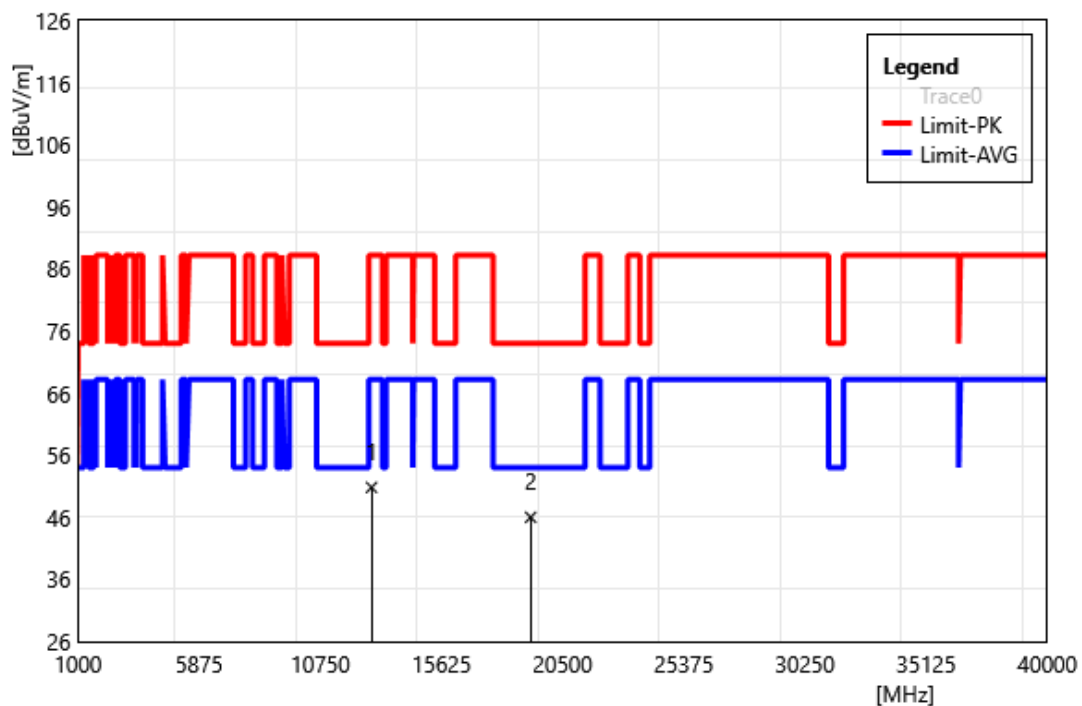


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	40.97	9.85	50.82	88.20	-37.38	PEAK
2	19215.00	40.71	5.30	46.01	74.00	-27.99	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6445		
	MHz		
Polarization:	Horizontal		
Remark:			

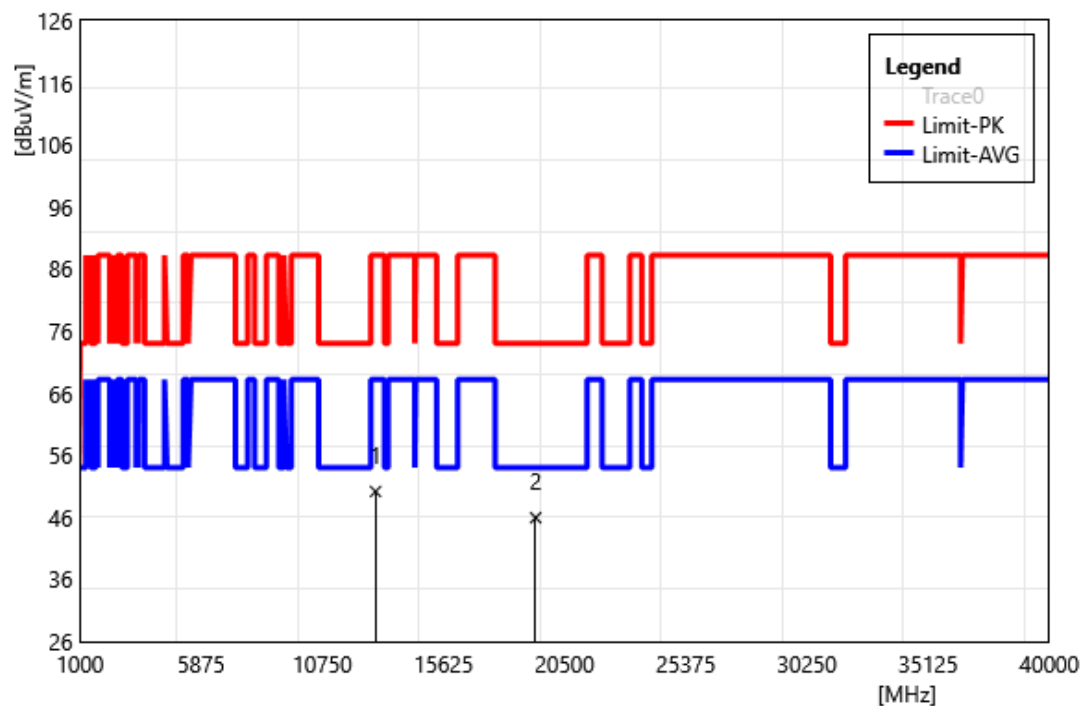


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	40.42	9.75	50.17	88.20	-38.03	PEAK
2	19335.00	40.22	5.72	45.94	74.00	-28.06	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6445		
	MHz		
Polarization:	Vertical		
Remark:			

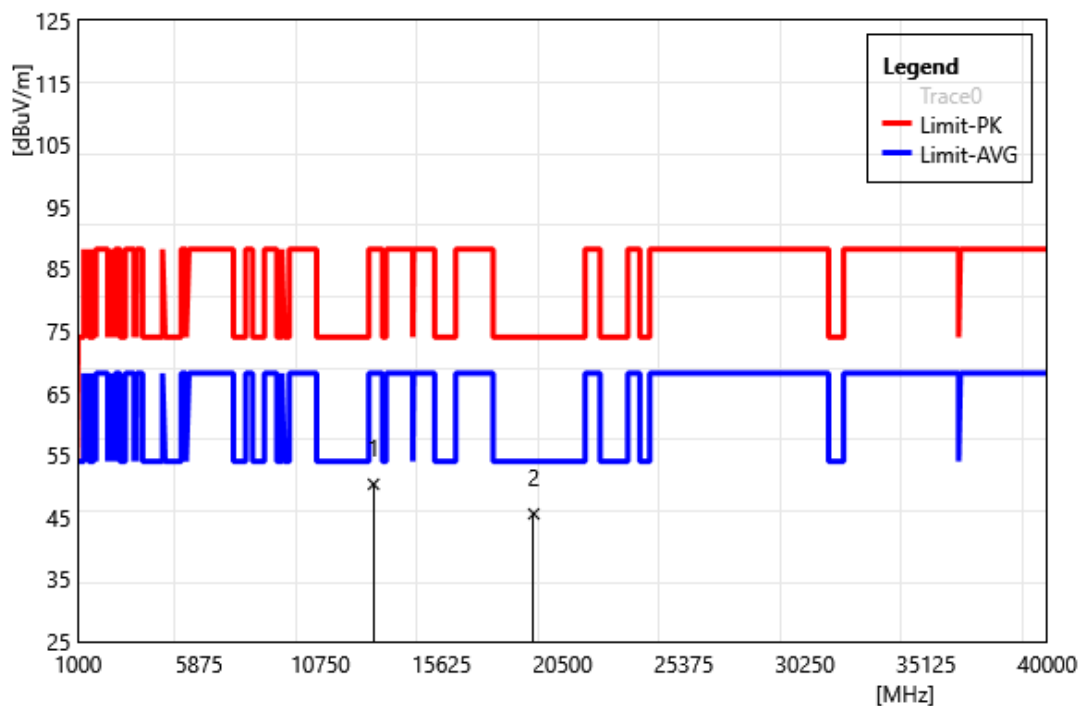


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	40.58	9.75	50.33	88.20	-37.87	PEAK
2	19335.00	39.84	5.72	45.56	74.00	-28.44	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6485		
	MHz		
Polarization:	Horizontal		
Remark:			

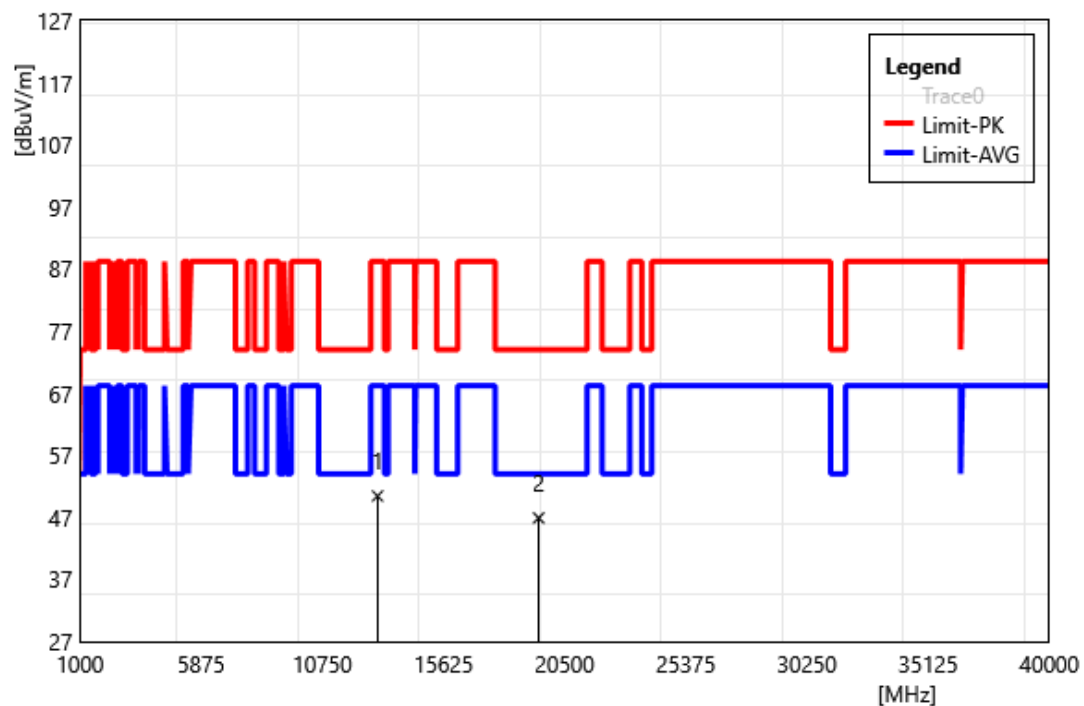


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	40.77	9.66	50.43	88.20	-37.77	PEAK
2	19455.00	40.76	6.14	46.90	74.00	-27.10	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6485		
	MHz		
Polarization:	Vertical		
Remark:			

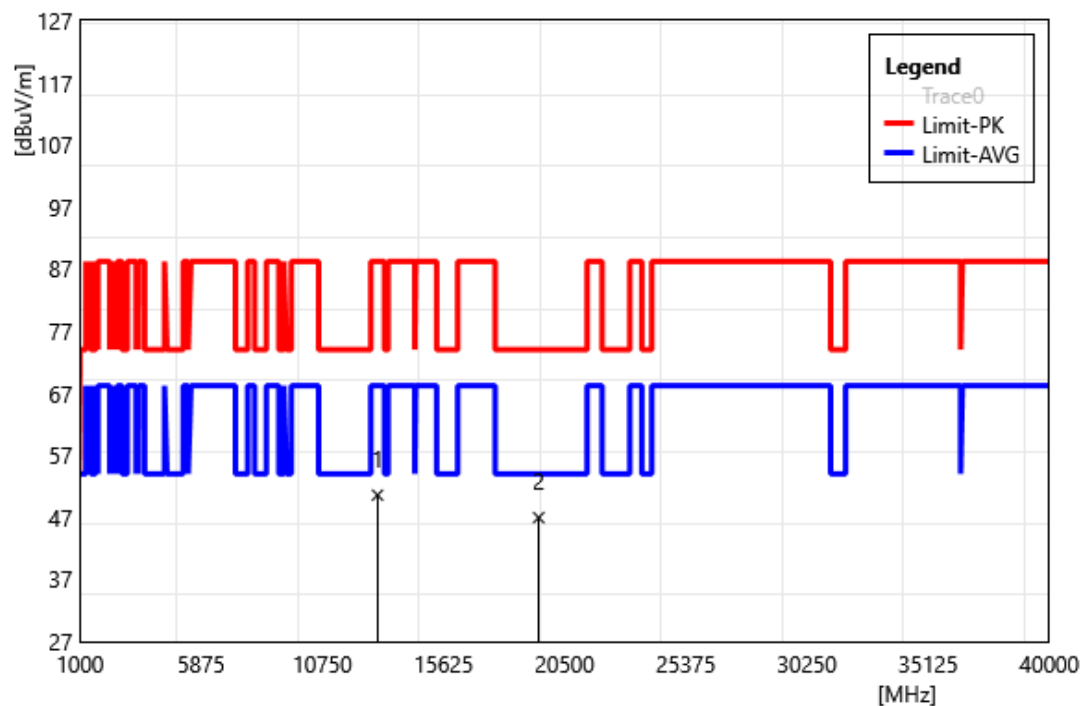


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	40.91	9.66	50.57	88.20	-37.63	PEAK
2	19455.00	40.82	6.14	46.96	74.00	-27.04	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6525		
	MHz		
Polarization:	Horizontal		
Remark:			

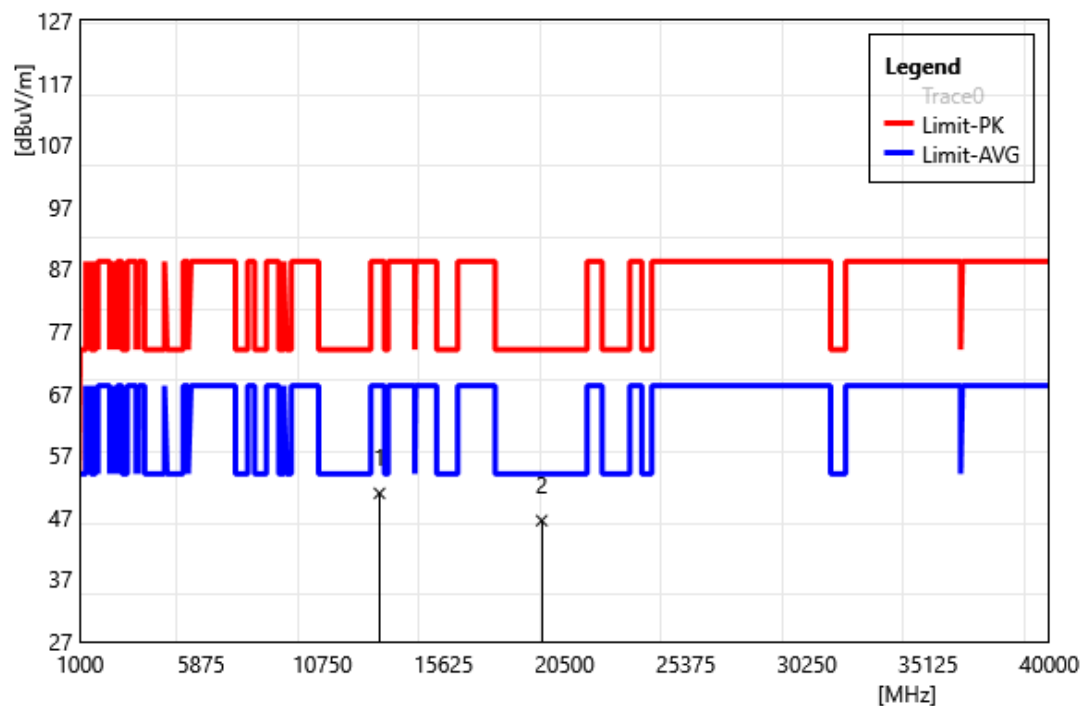


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	41.26	9.62	50.88	88.20	-37.32	PEAK
2	19575.00	40.13	6.34	46.47	74.00	-27.53	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6525		
	MHz		
Polarization:	Vertical		
Remark:			

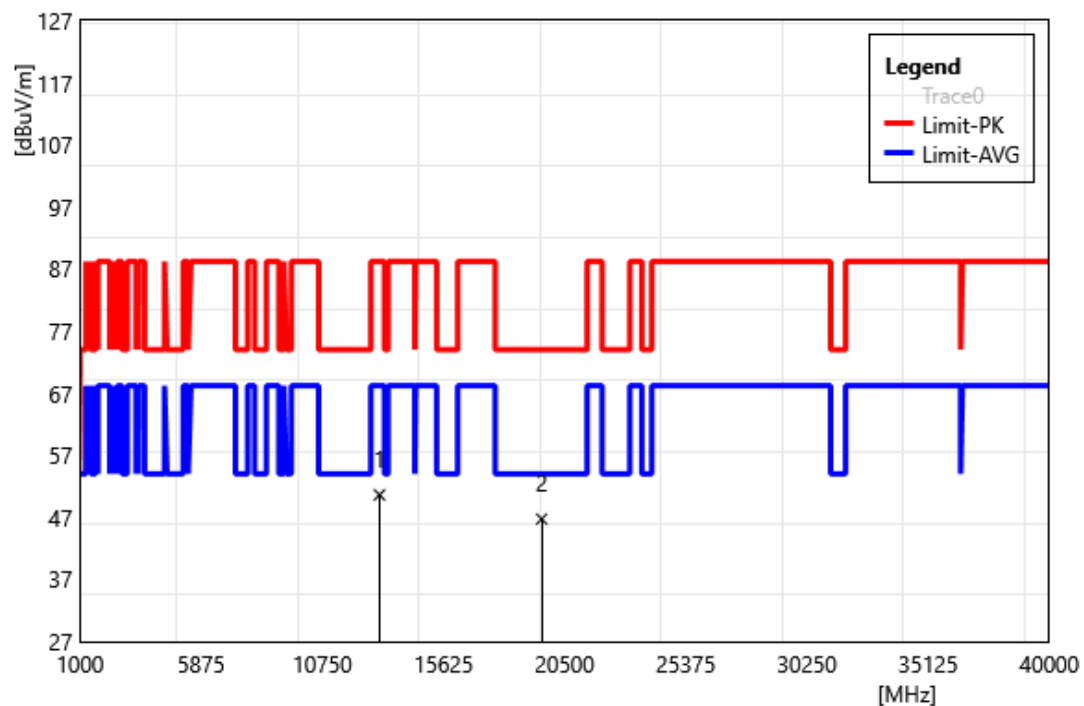


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	41.00	9.62	50.62	88.20	-37.58	PEAK
2	19575.00	40.38	6.34	46.72	74.00	-27.28	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6565		
	MHz		
Polarization:	Horizontal		
Remark:			

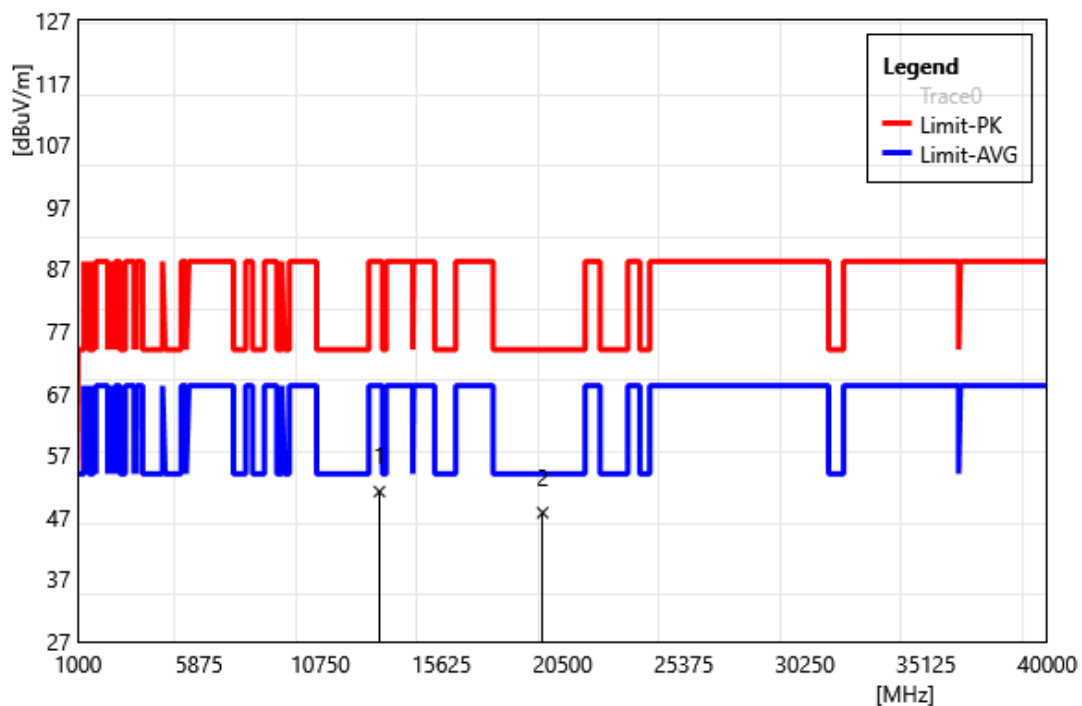


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	41.56	9.59	51.15	88.20	-37.05	PEAK
2	19695.00	41.35	6.40	47.75	74.00	-26.25	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6565		
	MHz		
Polarization:	Vertical		
Remark:			

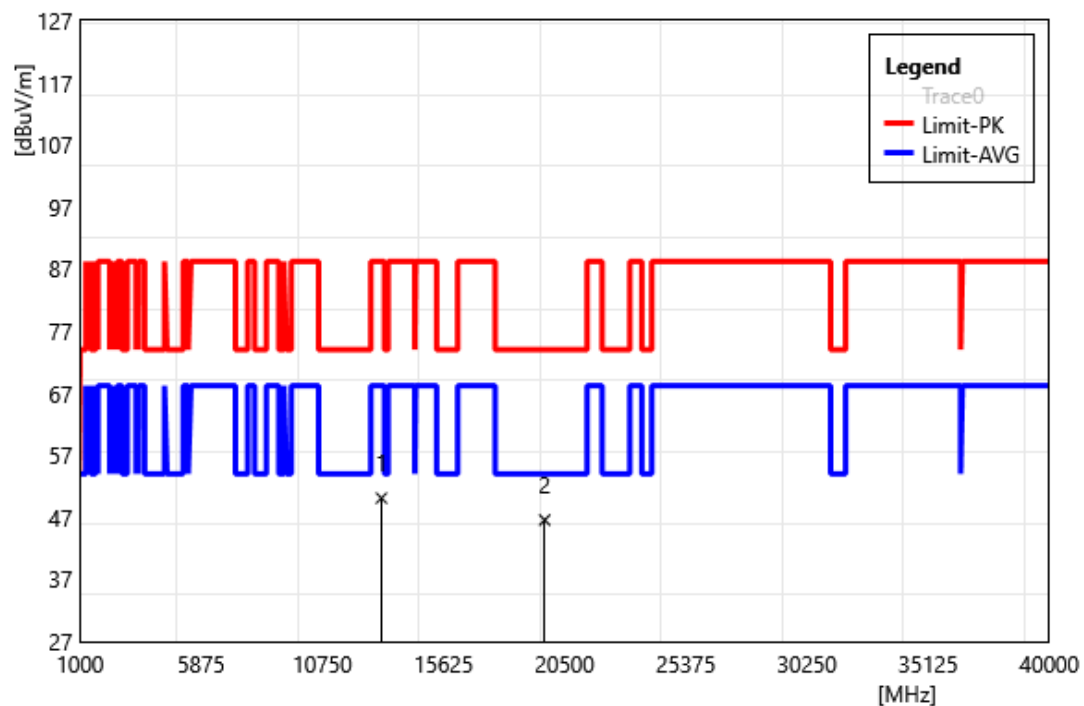


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	40.51	9.59	50.10	88.20	-38.10	PEAK
2	19695.00	40.17	6.40	46.57	74.00	-27.43	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6685		
	MHz		
Polarization:	Horizontal		
Remark:			

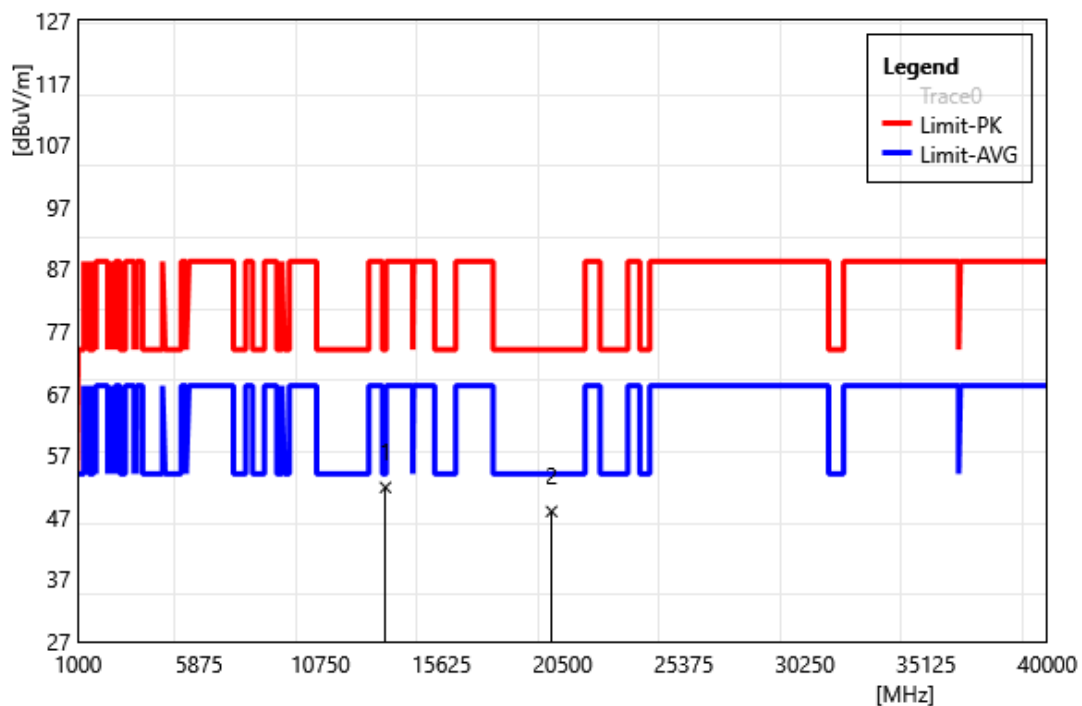


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	42.35	9.48	51.83	74.00	-22.17	PEAK
2	20055.00	41.31	6.64	47.95	74.00	-26.05	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6685		
	MHz		
Polarization:	Vertical		
Remark:			

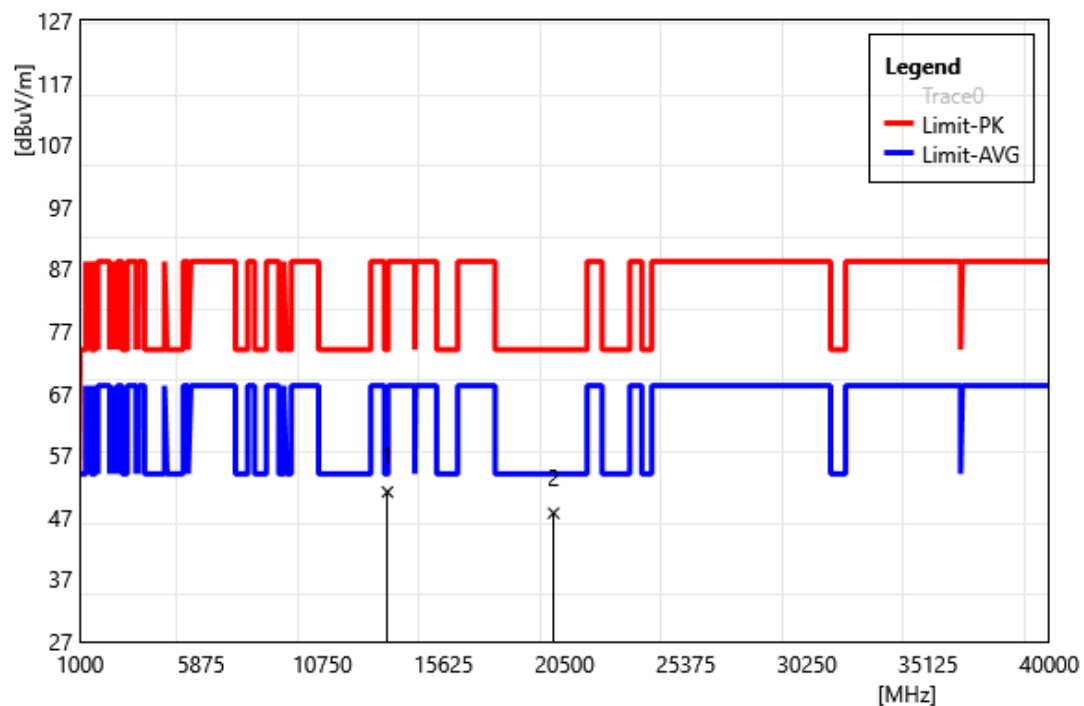


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	41.61	9.48	51.09	74.00	-22.91	PEAK
2	20055.00	41.04	6.64	47.68	74.00	-26.32	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6845		
	MHz		
Polarization:	Horizontal		
Remark:			

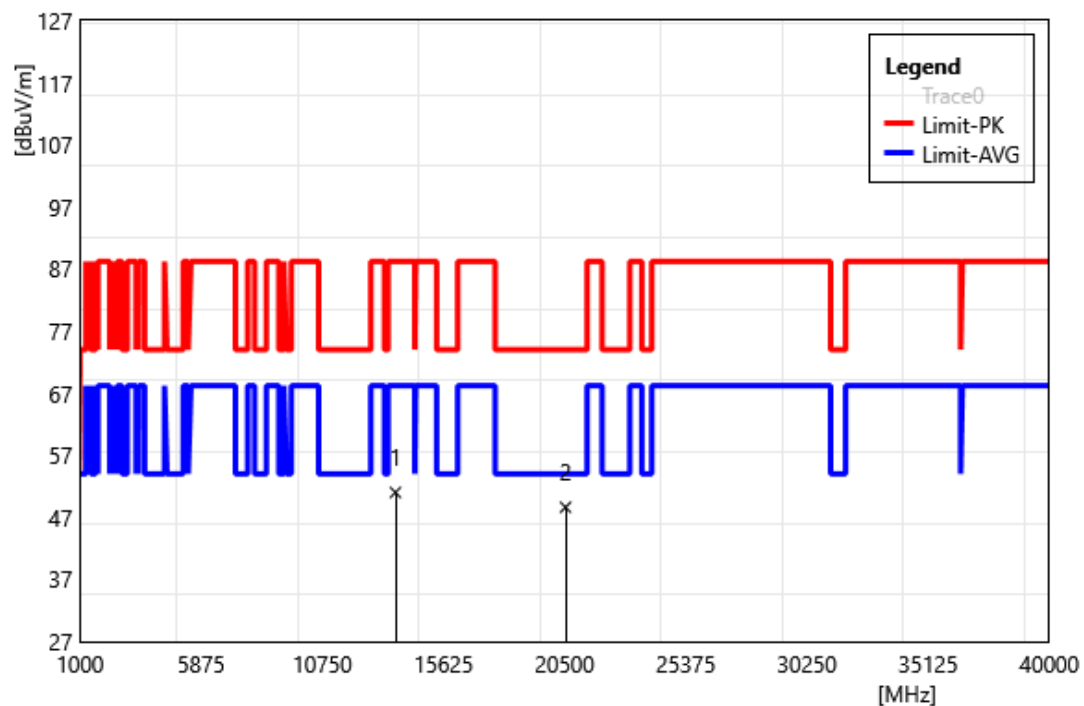


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	42.20	8.81	51.01	88.20	-37.19	PEAK
2	20535.00	41.27	7.35	48.62	74.00	-25.38	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6845		
	MHz		
Polarization:	Vertical		
Remark:			

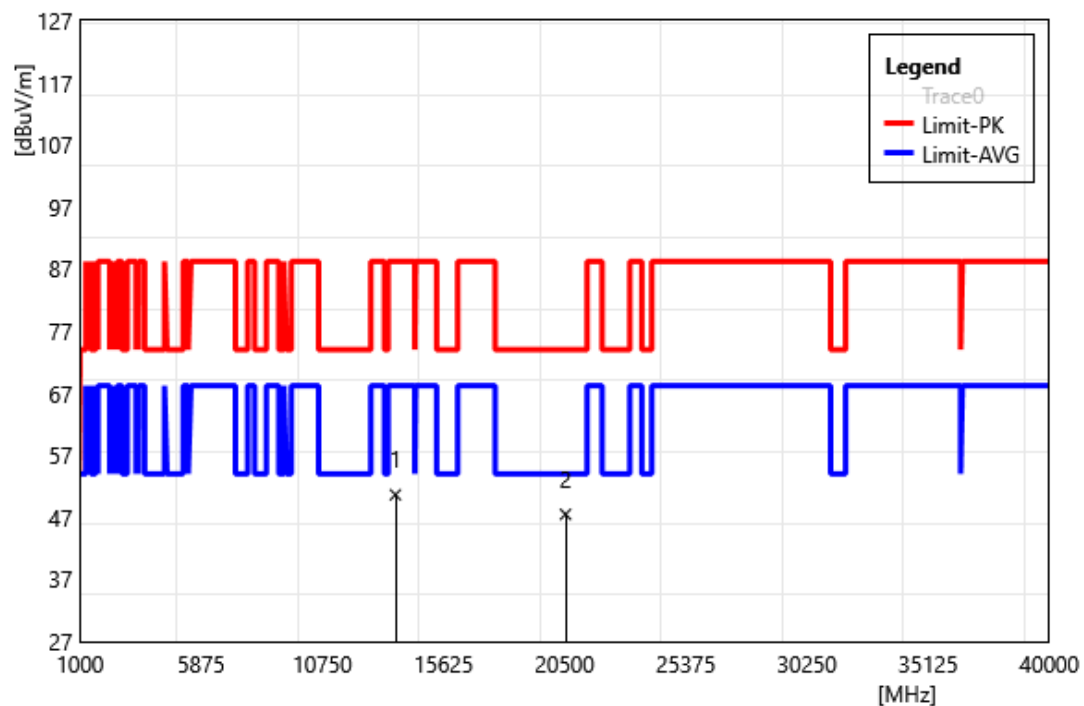


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	41.82	8.81	50.63	88.20	-37.57	PEAK
2	20535.00	40.13	7.35	47.48	74.00	-26.52	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6885 MHz		
Polarization:	Horizontal		
Remark:			

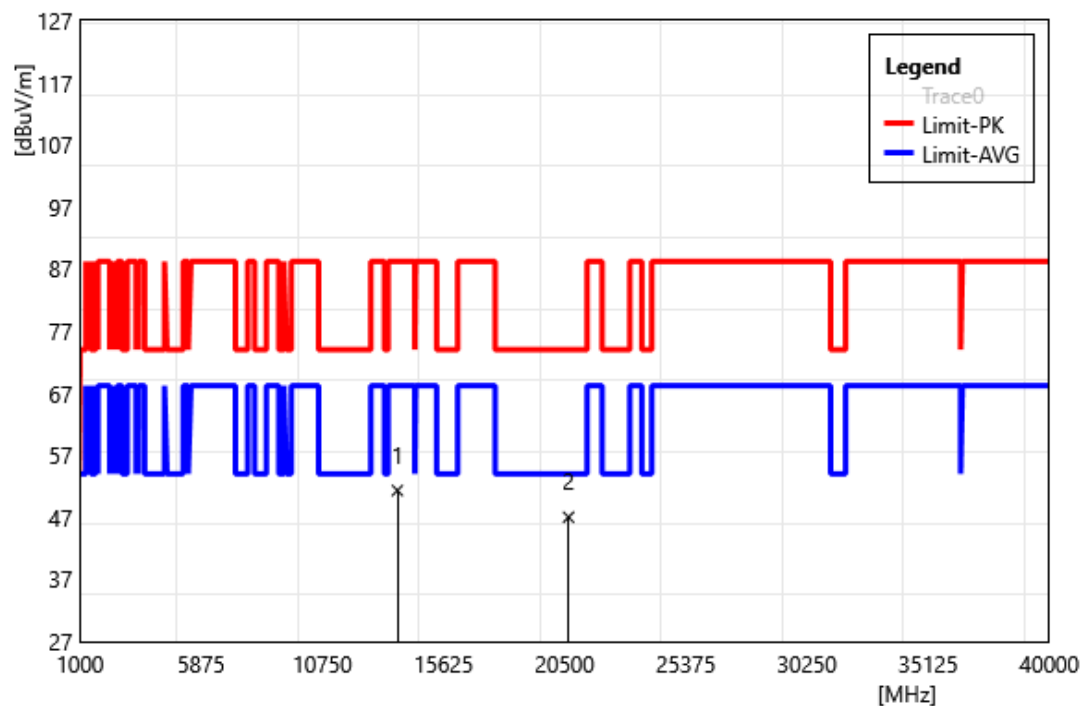


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	42.51	8.81	51.32	88.20	-36.88	PEAK
2	20655.00	39.38	7.64	47.02	74.00	-26.98	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6885		
	MHz		
Polarization:	Vertical		
Remark:			

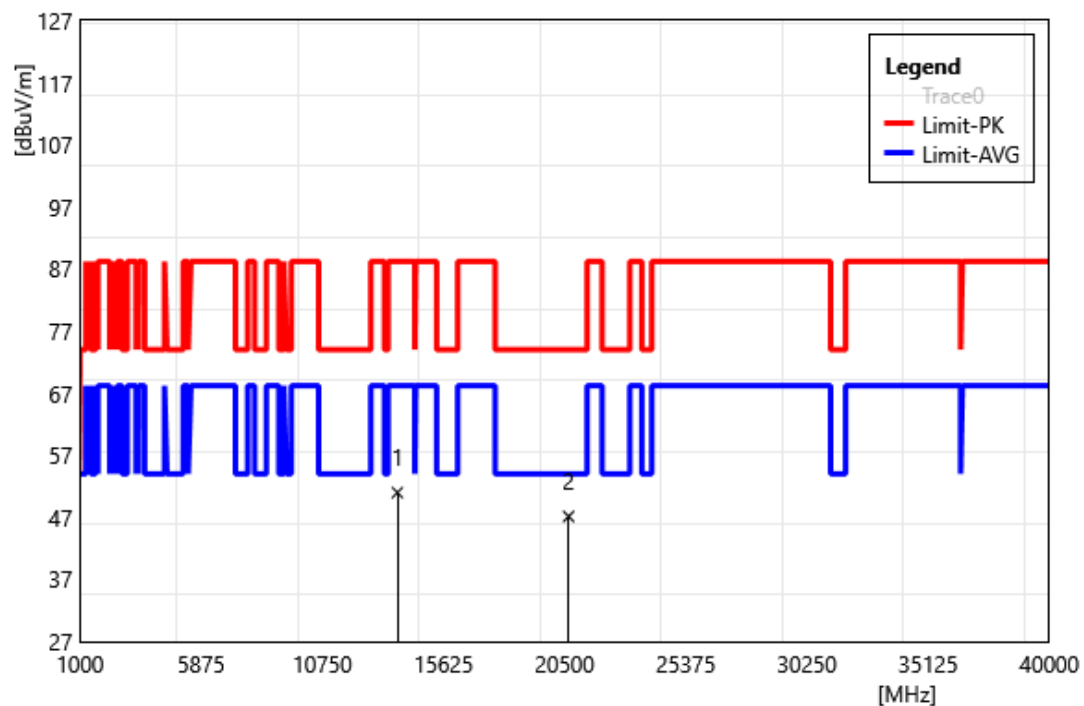


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	42.17	8.81	50.98	88.20	-37.22	PEAK
2	20655.00	39.50	7.64	47.14	74.00	-26.86	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6925		
	MHz		
Polarization:	Horizontal		
Remark:			

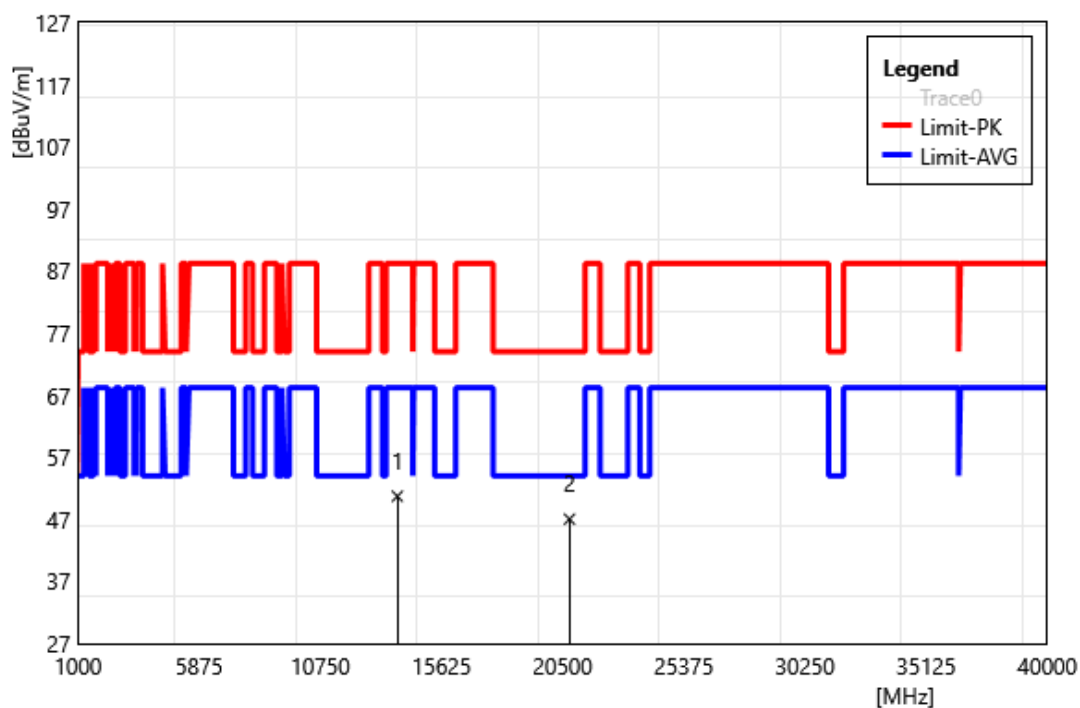


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	41.99	8.73	50.72	88.20	-37.48	PEAK
2	20775.00	39.12	7.93	47.05	74.00	-26.95	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6925		
	MHz		
Polarization:	Vertical		
Remark:			

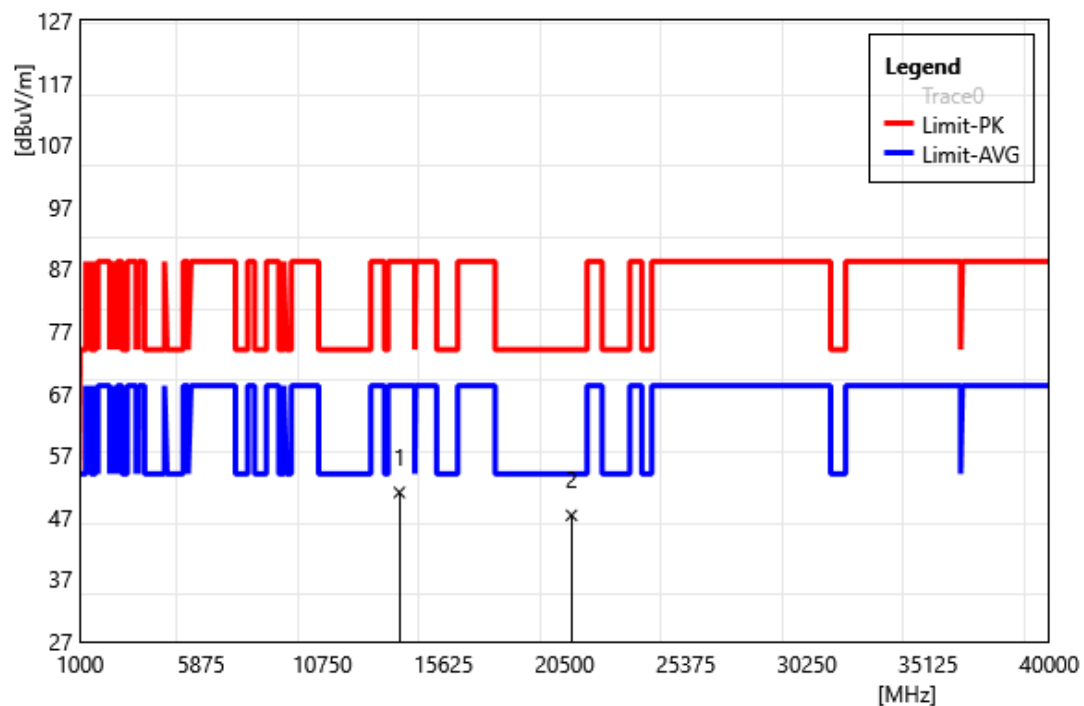


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	42.28	8.73	51.01	88.20	-37.19	PEAK
2	20775.00	39.39	7.93	47.32	74.00	-26.68	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7005		
	MHz		
Polarization:	Horizontal		
Remark:			

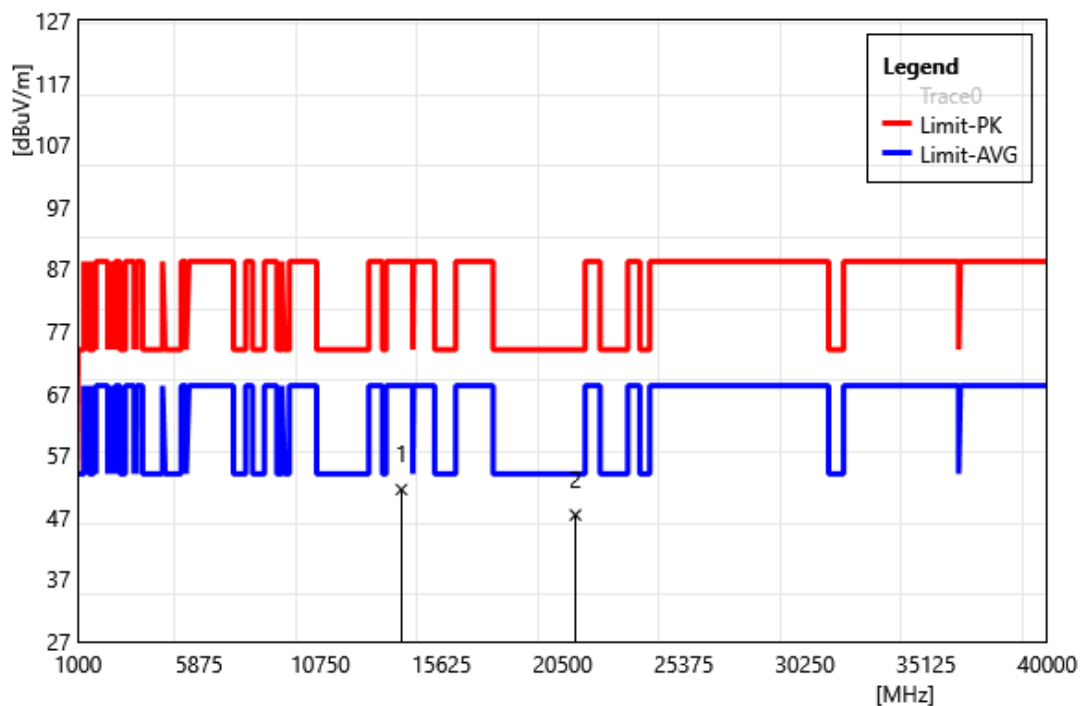


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	42.68	8.80	51.48	88.20	-36.72	PEAK
2	21015.00	38.82	8.57	47.39	74.00	-26.61	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7005		
	MHz		
Polarization:	Vertical		
Remark:			

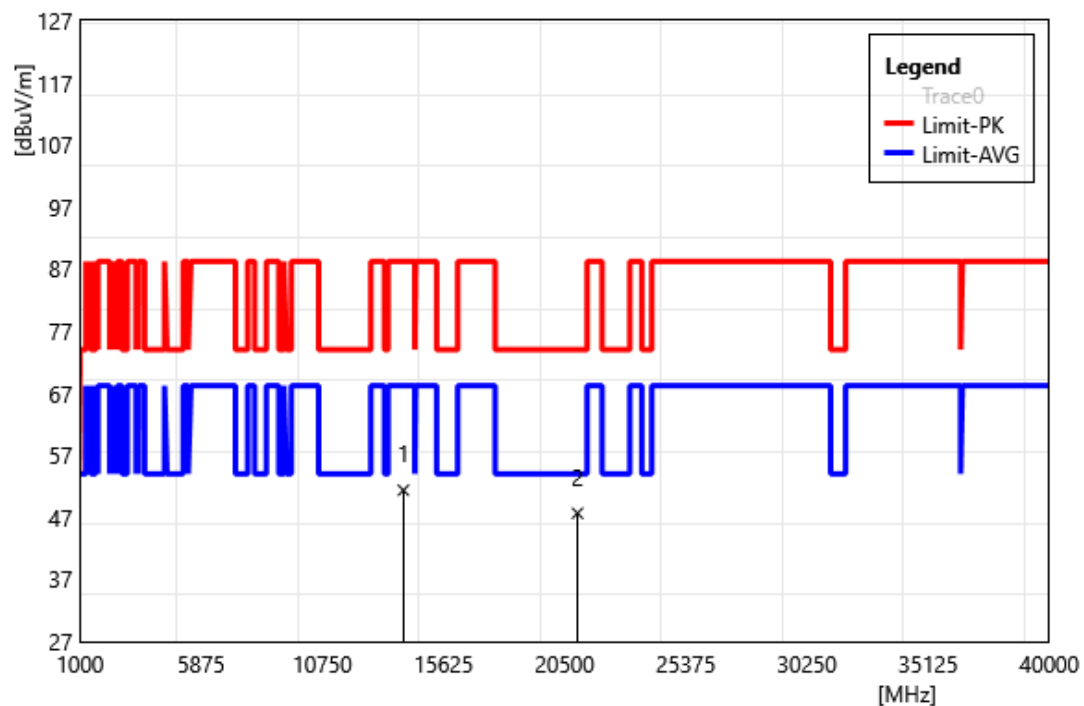


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	42.58	8.80	51.38	88.20	-36.82	PEAK
2	21015.00	39.09	8.57	47.66	74.00	-26.34	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

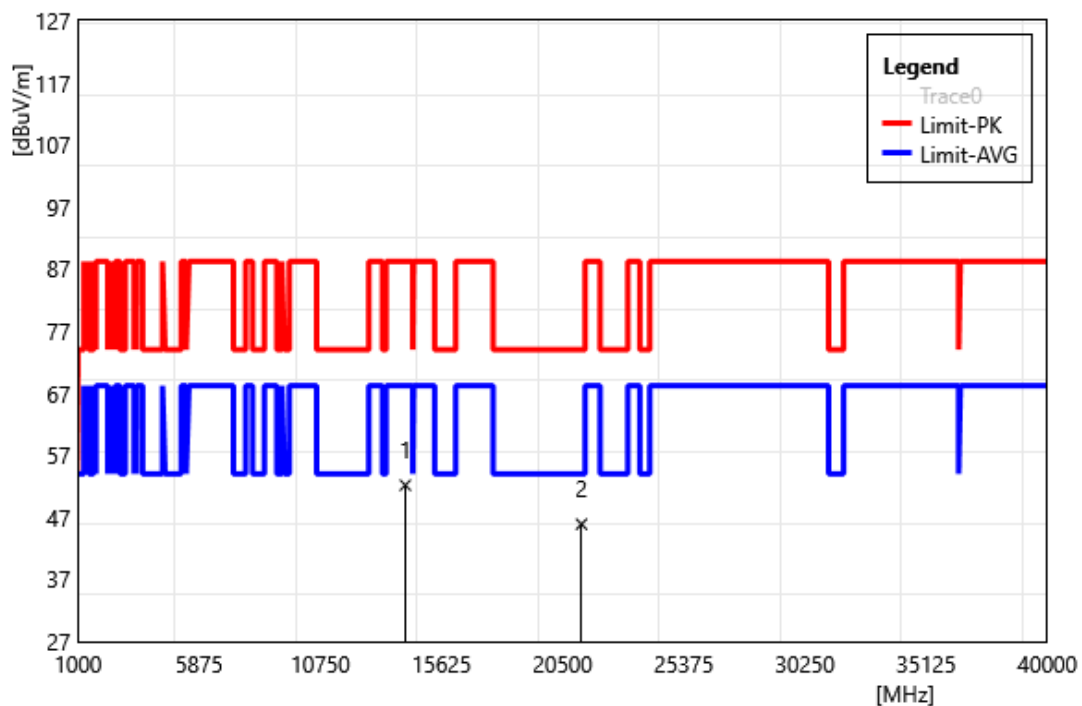


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	43.19	8.99	52.18	88.20	-36.02	PEAK
2	21255.00	36.11	9.79	45.90	74.00	-28.10	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

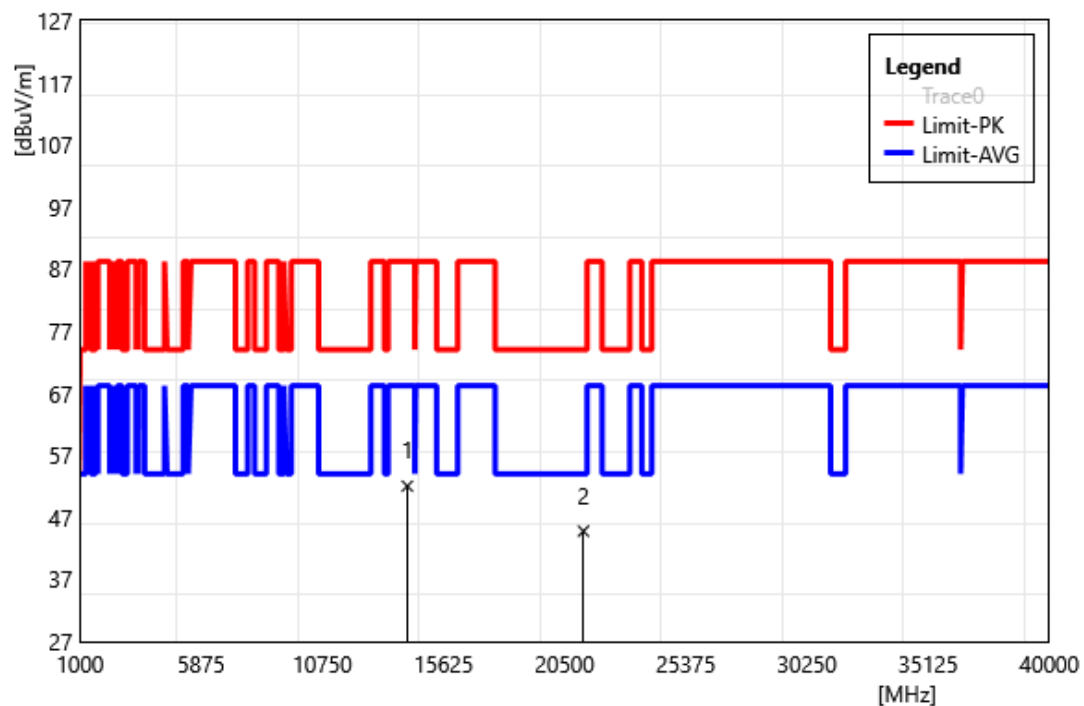


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	43.03	8.99	52.02	88.20	-36.18	PEAK
2	21255.00	34.98	9.79	44.77	74.00	-29.23	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

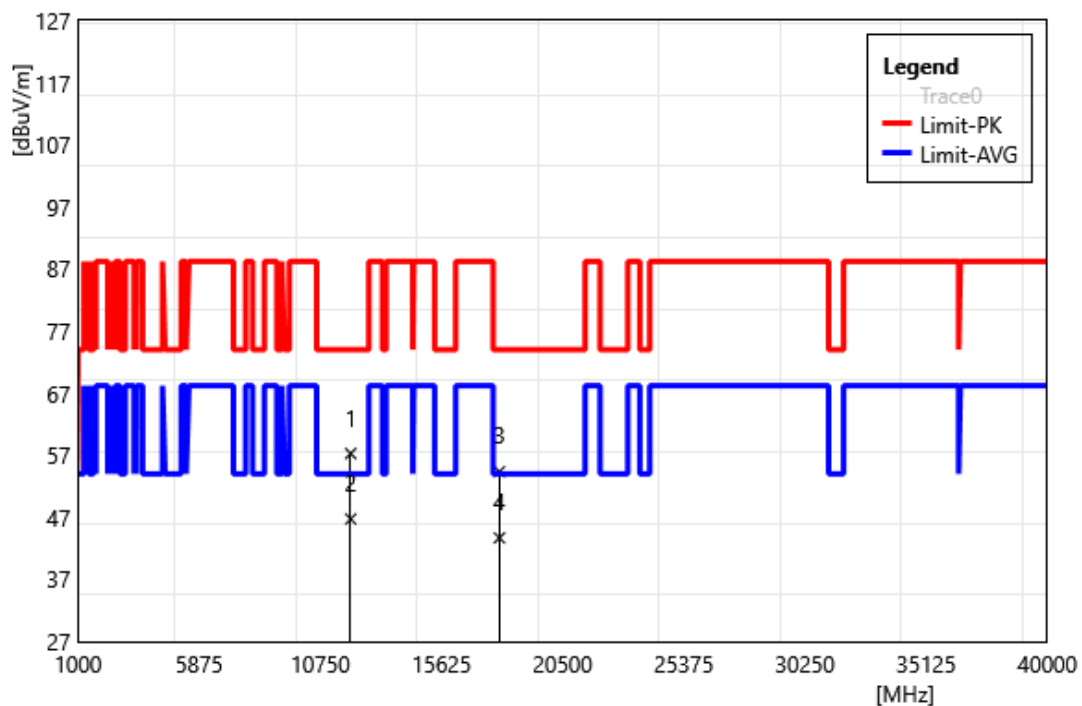


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	47.90	9.38	57.28	74.00	-16.72	PEAK
2	11970.00	37.36	9.38	46.74	54.00	-7.26	AVG
3	17955.00	46.37	7.98	54.35	74.00	-19.65	PEAK
4	17955.00	35.71	7.98	43.69	54.00	-10.31	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

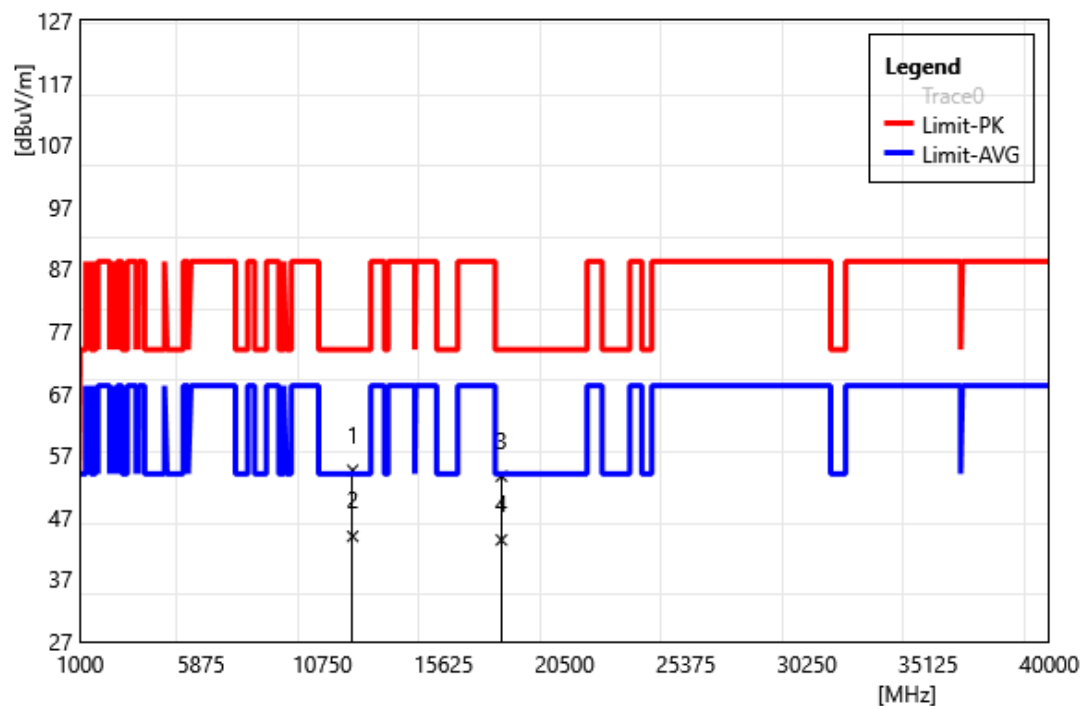


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	45.19	9.38	54.57	74.00	-19.43	PEAK
2	11970.00	34.56	9.38	43.94	54.00	-10.06	AVG
3	17955.00	45.66	7.98	53.64	74.00	-20.36	PEAK
4	17955.00	35.38	7.98	43.36	54.00	-10.64	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6145		
	MHz		
Polarization:	Horizontal		
Remark:			

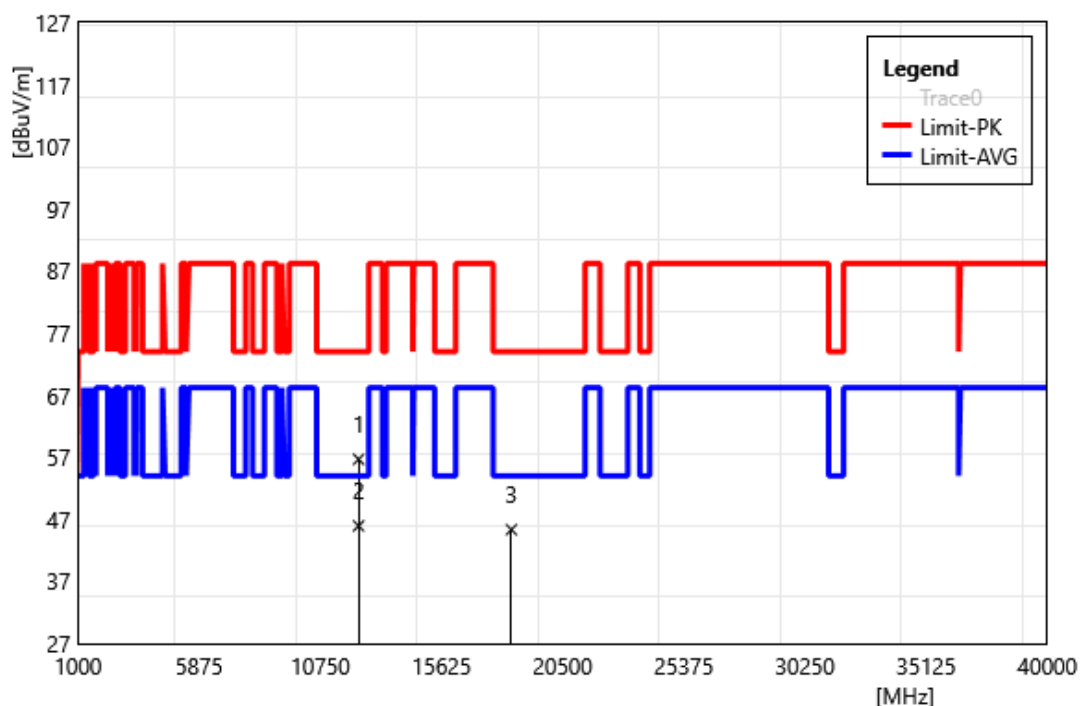


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	47.55	9.13	56.68	74.00	-17.33	PEAK
2	12290.00	36.81	9.13	45.94	54.00	-8.06	AVG
3	18435.00	43.34	2.00	45.34	74.00	-28.66	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6145		
	MHz		
Polarization:	Vertical		
Remark:			

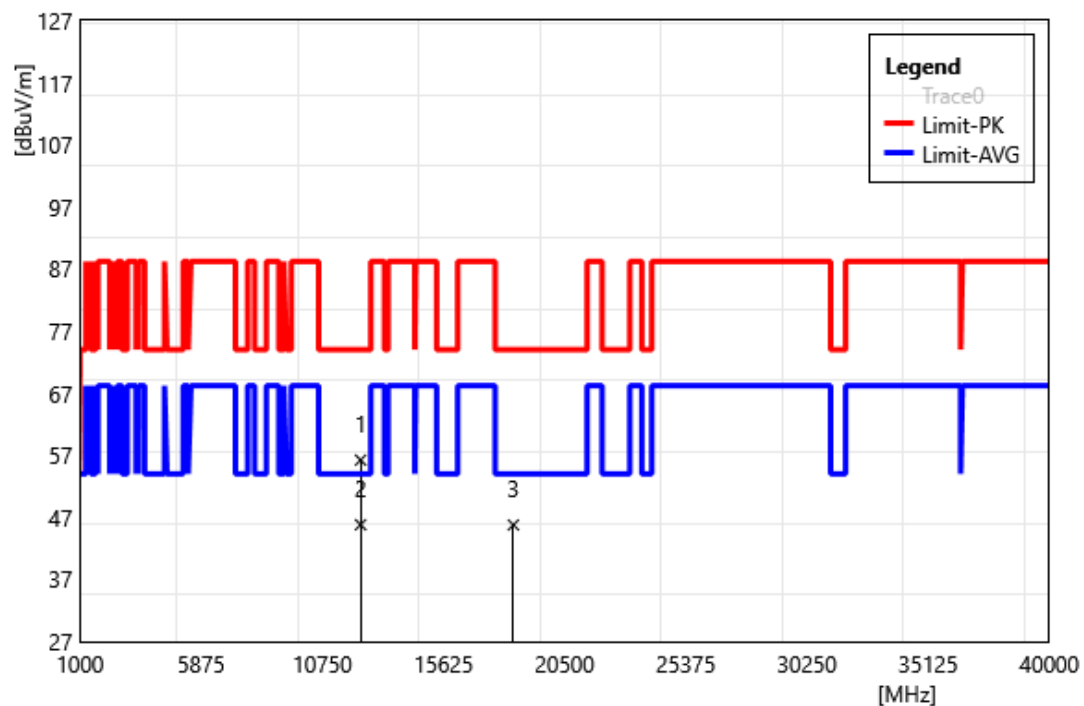


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	47.10	9.13	56.23	74.00	-17.77	PEAK
2	12290.00	36.68	9.13	45.81	54.00	-8.19	AVG
3	18435.00	43.78	2.00	45.78	74.00	-28.22	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6385		
	MHz		
Polarization:	Horizontal		
Remark:			

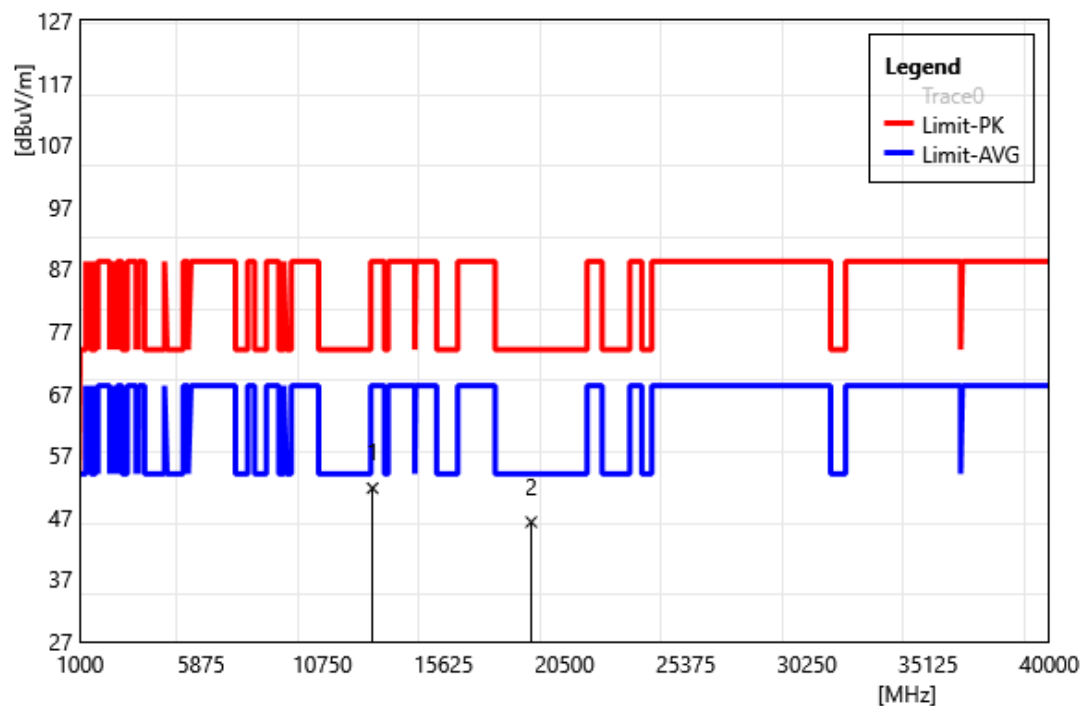


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	41.95	9.75	51.70	88.20	-36.50	PEAK
2	19155.00	41.15	5.09	46.24	74.00	-27.76	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6385		
	MHz		
Polarization:	Vertical		
Remark:			

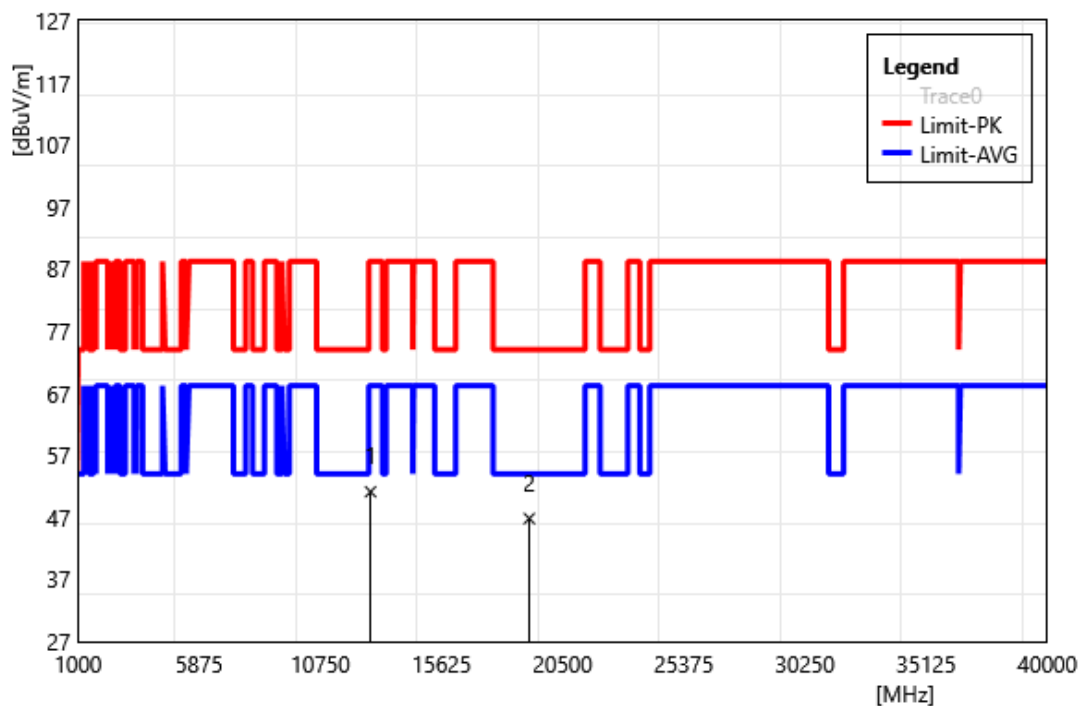


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	41.36	9.75	51.11	88.20	-37.09	PEAK
2	19155.00	41.71	5.09	46.80	74.00	-27.20	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6465		
	MHz		
Polarization:	Horizontal		
Remark:			

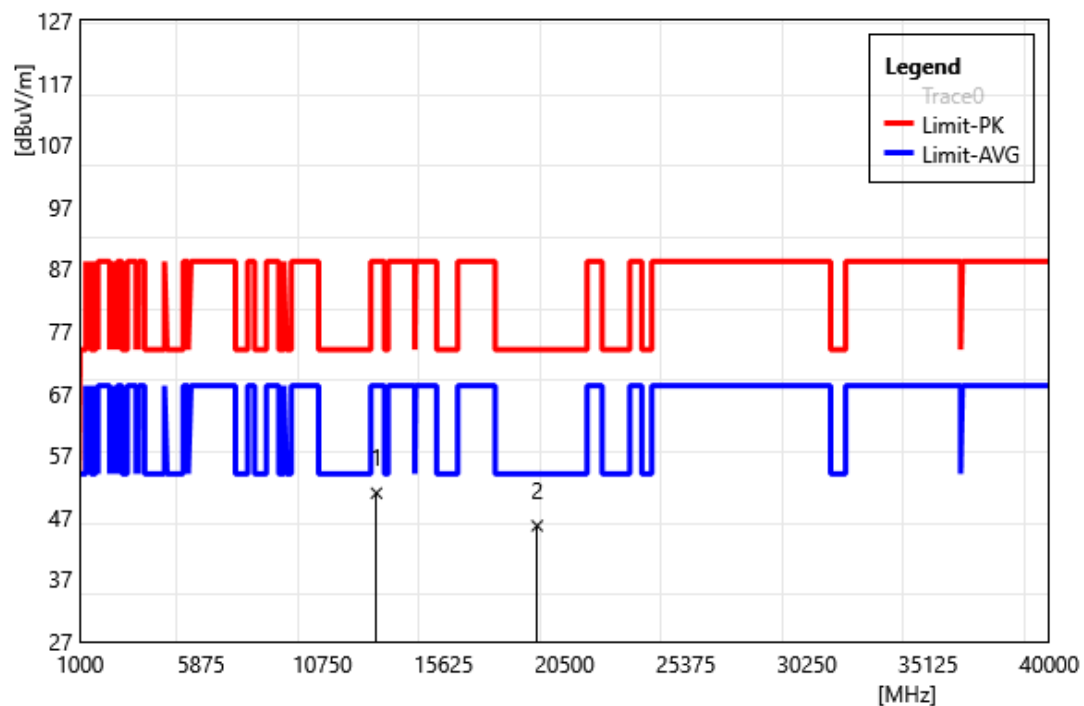


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	41.19	9.71	50.90	88.20	-37.30	PEAK
2	19395.00	39.72	5.93	45.65	74.00	-28.35	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6465		
	MHz		
Polarization:	Vertical		
Remark:			

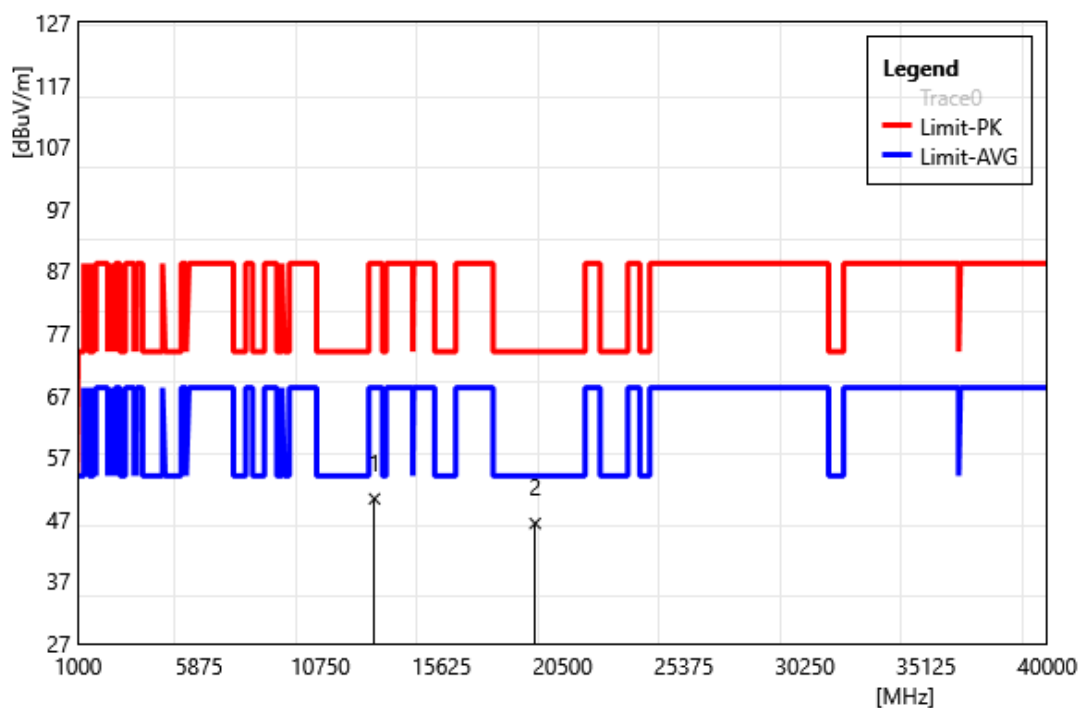


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	40.59	9.71	50.30	88.20	-37.90	PEAK
2	19395.00	40.41	5.93	46.34	74.00	-27.66	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6545		
	MHz		
Polarization:	Horizontal		
Remark:			

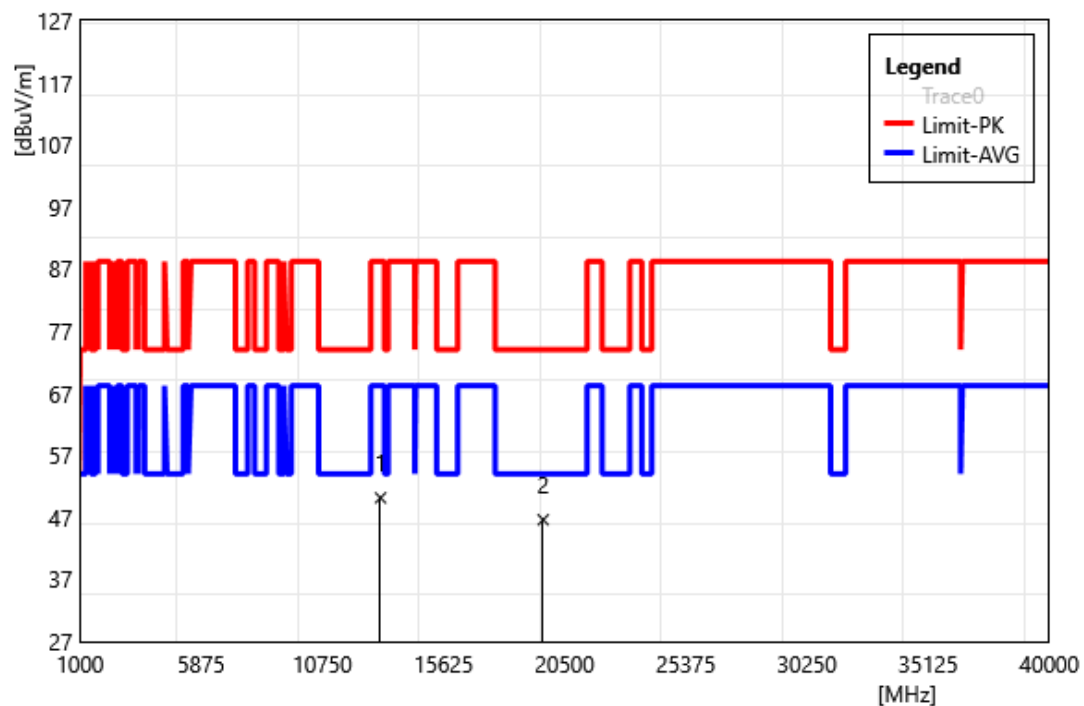


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	40.52	9.62	50.14	88.20	-38.06	PEAK
2	19635.00	40.23	6.38	46.61	74.00	-27.39	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6545		
	MHz		
Polarization:	Vertical		
Remark:			

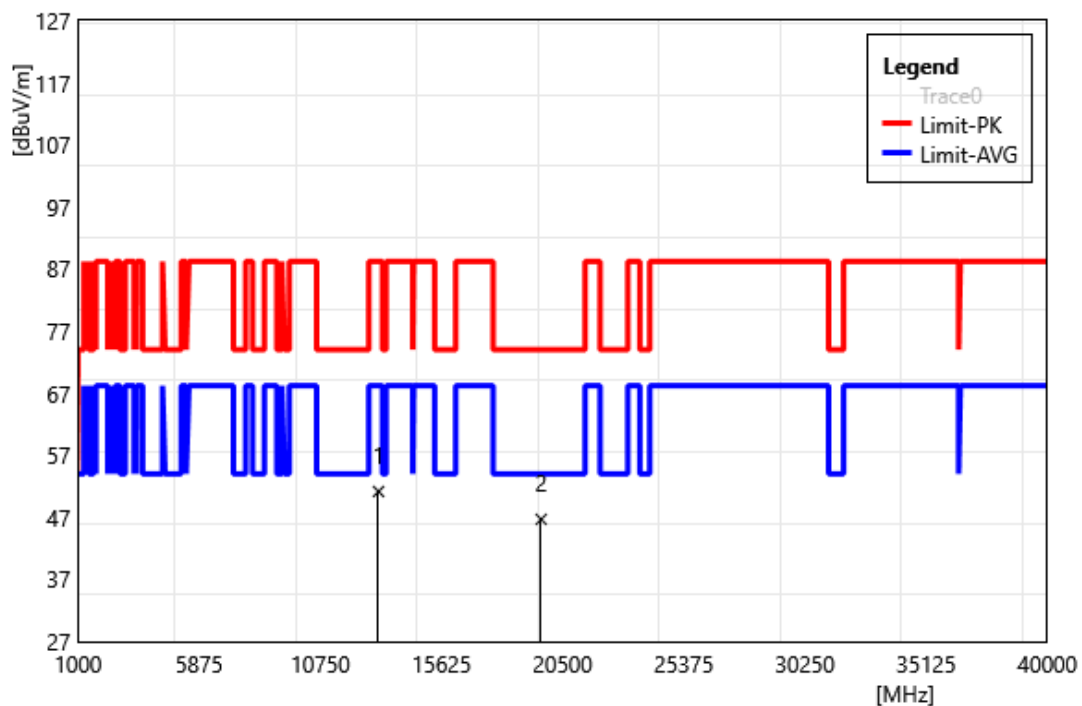


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	41.54	9.62	51.16	88.20	-37.04	PEAK
2	19635.00	40.31	6.38	46.69	74.00	-27.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6625		
	MHz		
Polarization:	Horizontal		
Remark:			

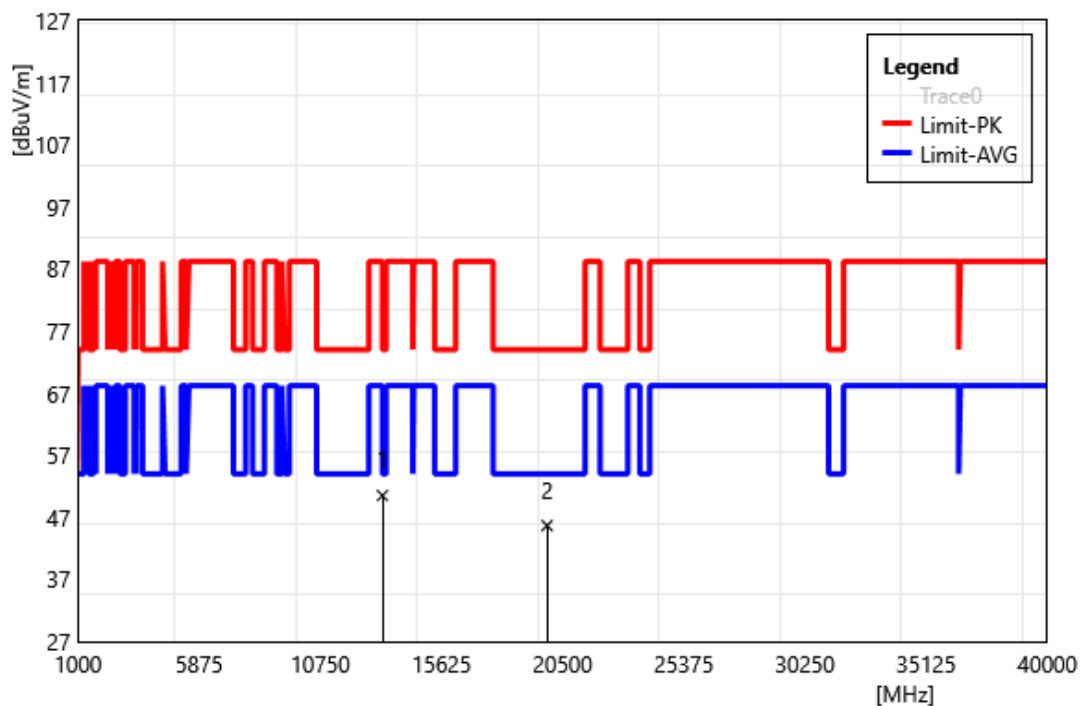


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	40.95	9.57	50.52	74.00	-23.48	PEAK
2	19875.00	39.19	6.49	45.68	74.00	-28.32	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6625		
	MHz		
Polarization:	Vertical		
Remark:			

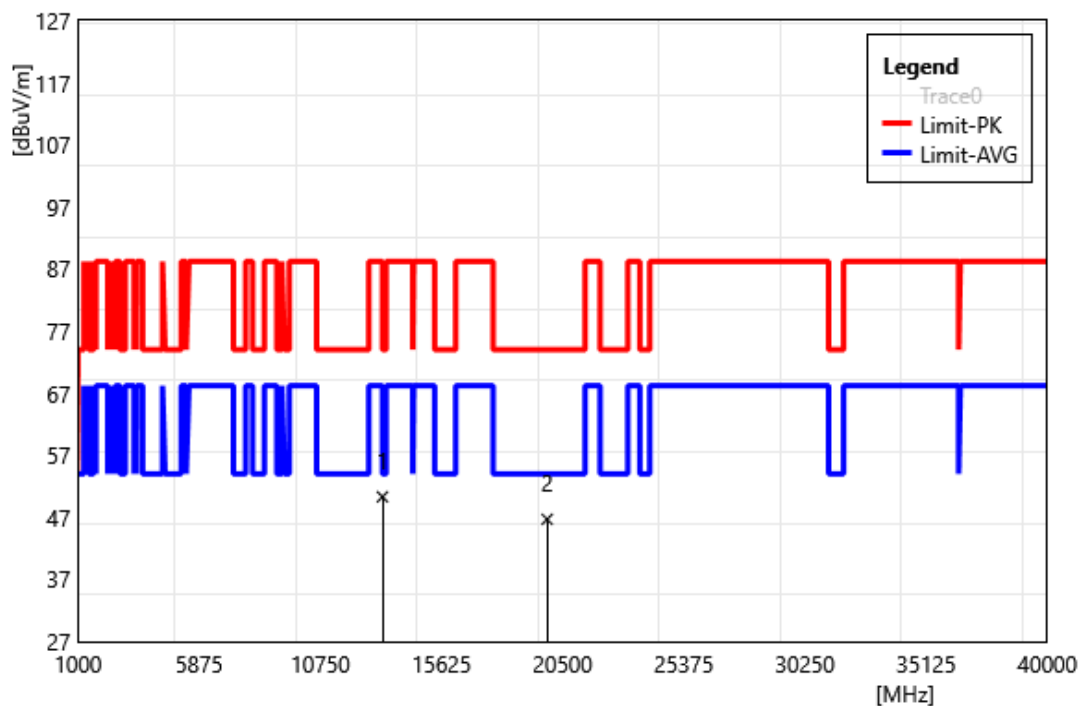


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	40.73	9.57	50.30	74.00	-23.70	PEAK
2	19875.00	40.20	6.49	46.69	74.00	-27.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6705		
	MHz		
Polarization:	Horizontal		
Remark:			

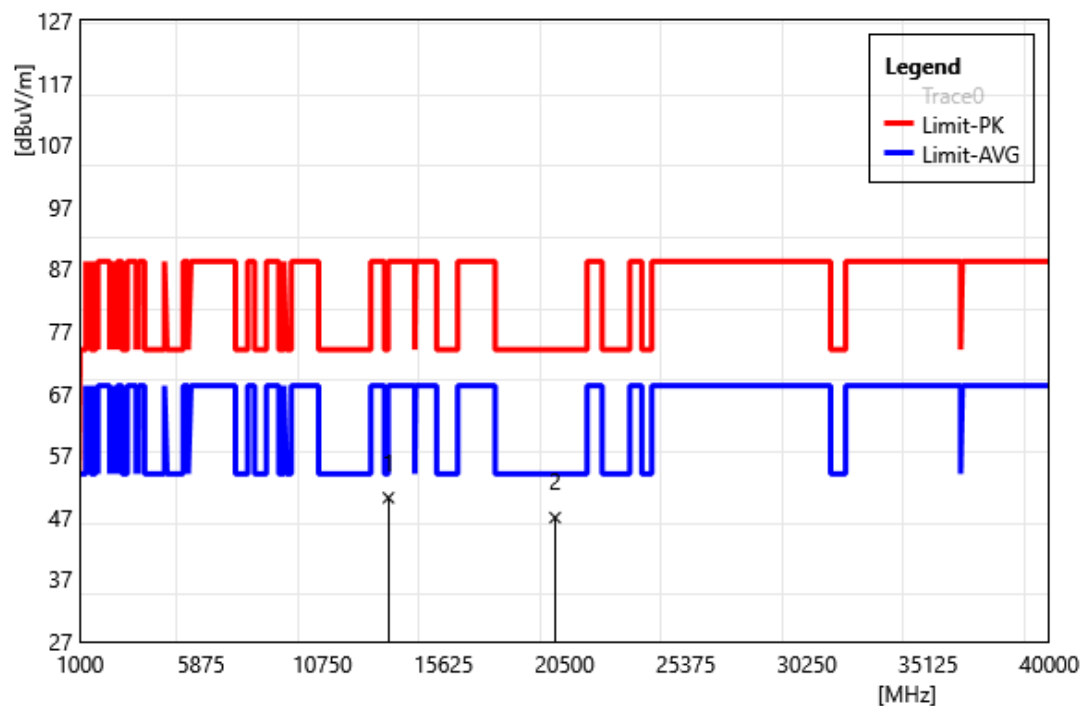


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	40.76	9.39	50.15	88.20	-38.05	PEAK
2	20115.00	40.25	6.72	46.97	74.00	-27.03	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6705		
	MHz		
Polarization:	Vertical		
Remark:			

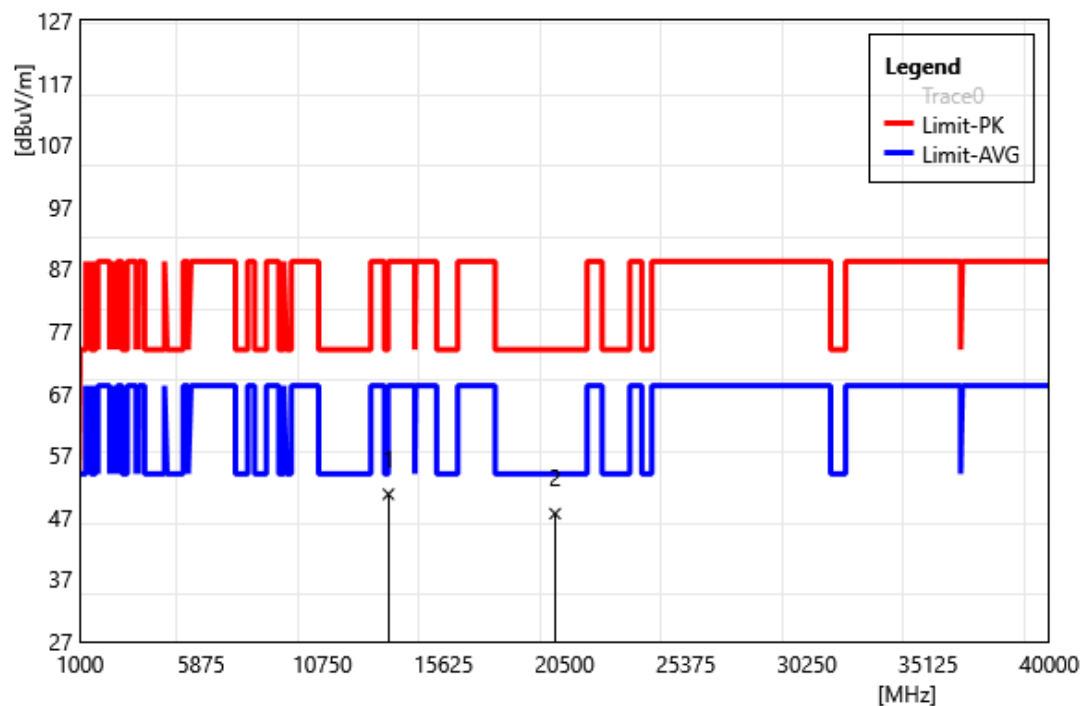


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	41.33	9.39	50.72	88.20	-37.48	PEAK
2	20115.00	40.88	6.72	47.60	74.00	-26.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6785 MHz		
Polarization:	Horizontal		
Remark:			

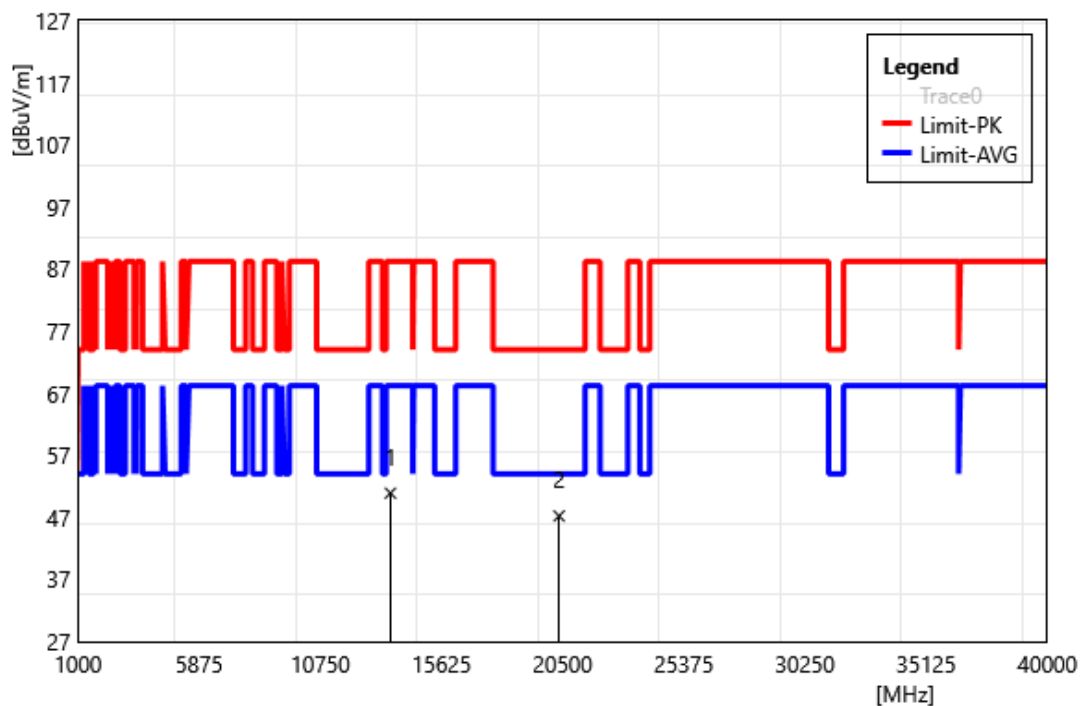


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	41.79	9.10	50.89	88.20	-37.31	PEAK
2	20355.00	40.18	7.05	47.23	74.00	-26.77	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6785		
	MHz		
Polarization:	Vertical		
Remark:			

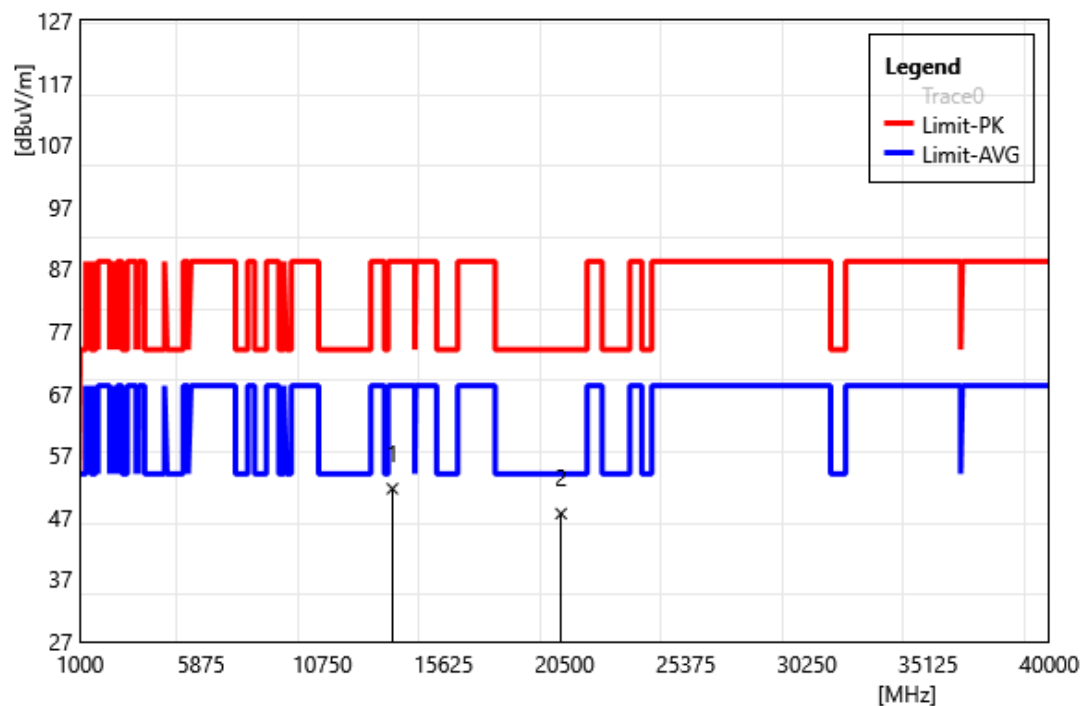


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	42.52	9.10	51.62	88.20	-36.58	PEAK
2	20355.00	40.55	7.05	47.60	74.00	-26.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6865		
	MHz		
Polarization:	Horizontal		
Remark:			

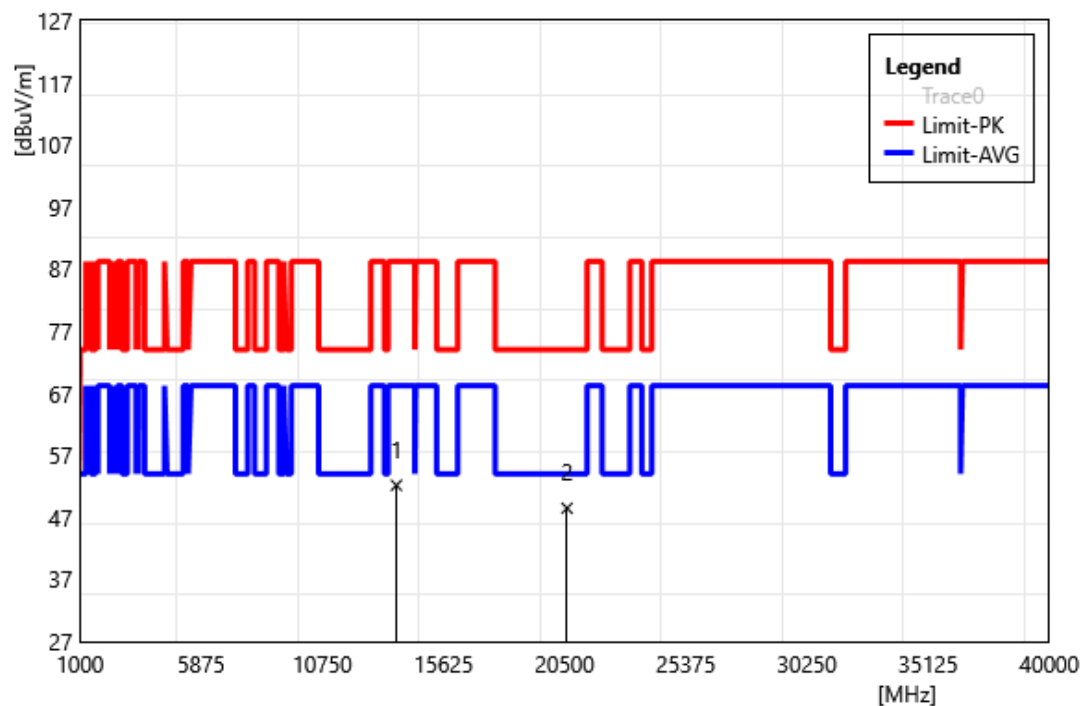


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	43.37	8.79	52.16	88.20	-36.04	PEAK
2	20595.00	40.97	7.50	48.47	74.00	-25.53	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6865		
	MHz		
Polarization:	Vertical		
Remark:			

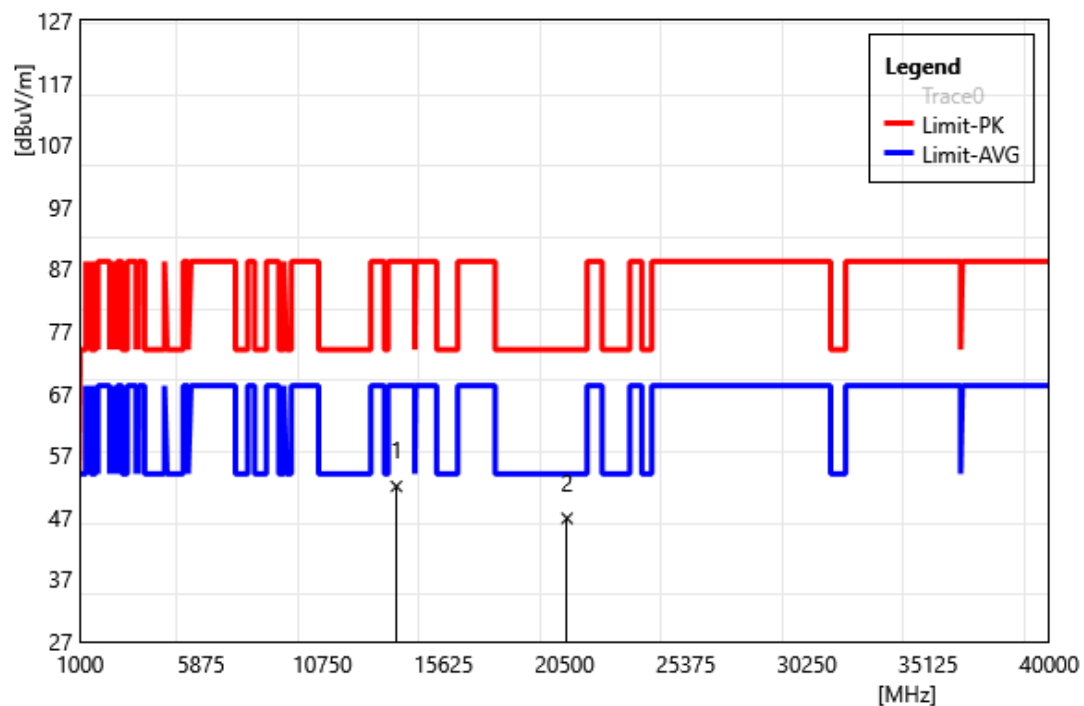


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	43.20	8.79	51.99	88.20	-36.21	PEAK
2	20595.00	39.33	7.50	46.83	74.00	-27.17	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6945		
	MHz		
Polarization:	Horizontal		
Remark:			

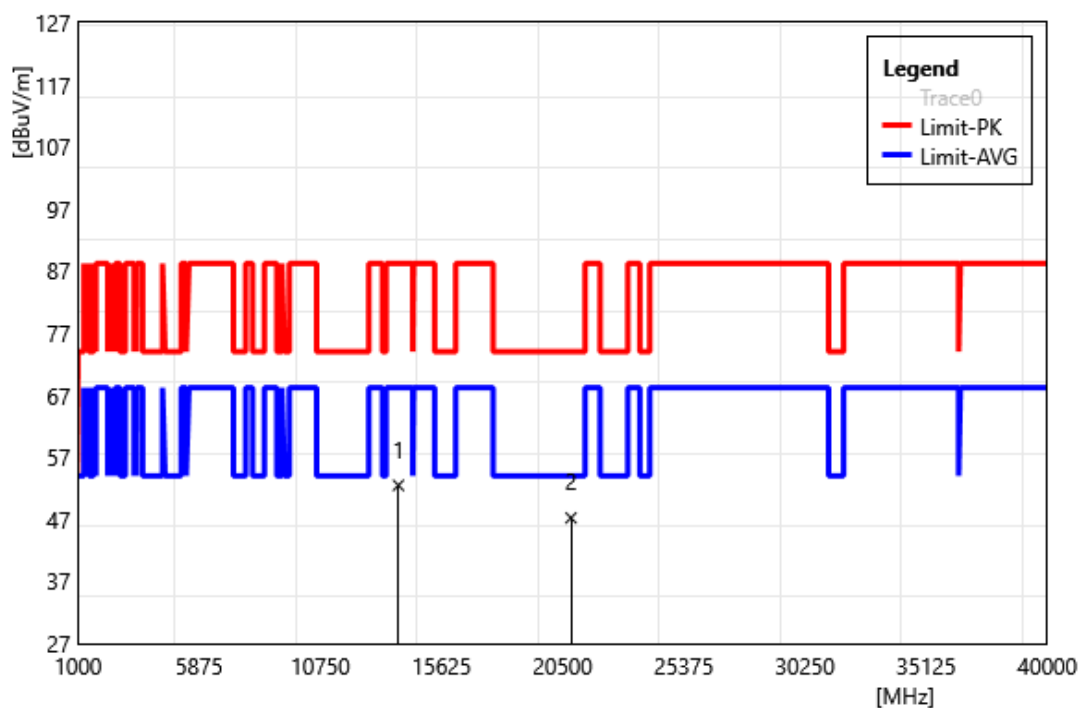


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	43.81	8.67	52.48	88.20	-35.72	PEAK
2	20835.00	39.14	8.08	47.22	74.00	-26.78	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6945		
	MHz		
Polarization:	Vertical		
Remark:			

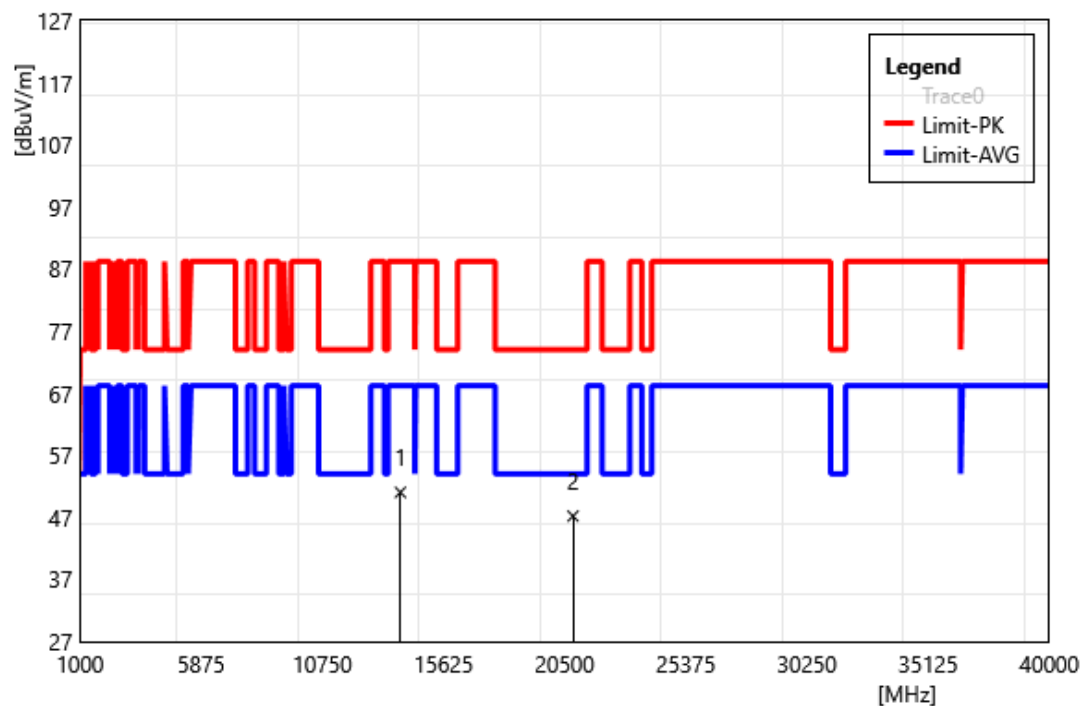


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	42.36	8.67	51.03	88.20	-37.17	PEAK
2	20835.00	39.12	8.08	47.20	74.00	-26.80	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

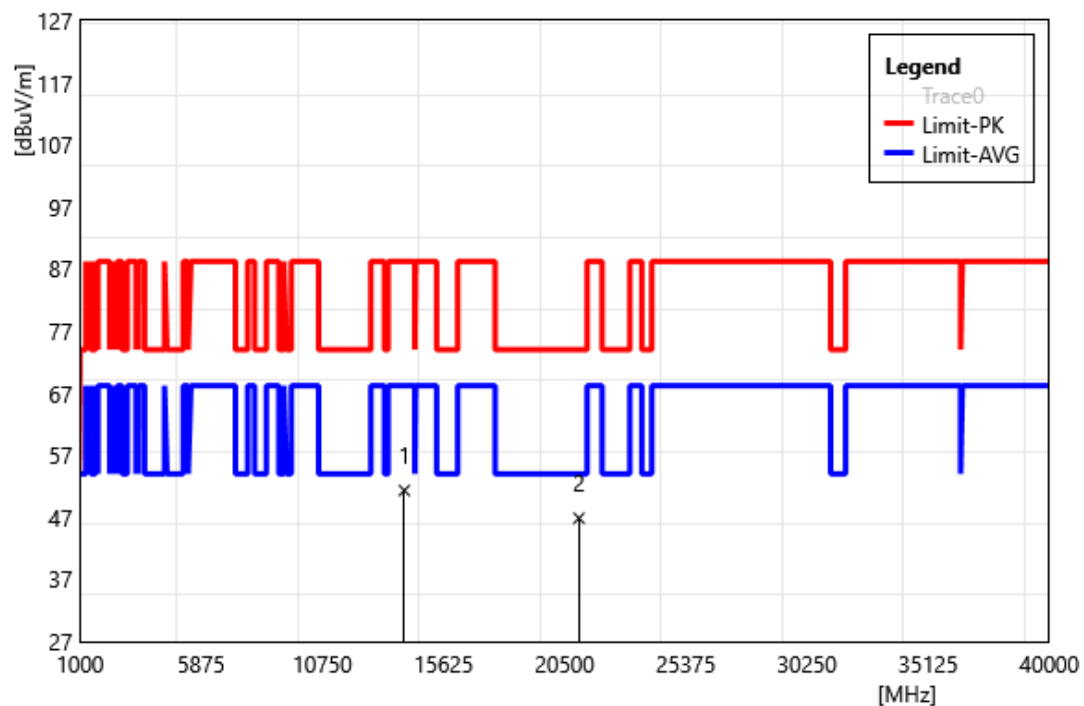


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	42.45	8.87	51.32	88.20	-36.88	PEAK
2	21075.00	37.97	8.88	46.85	74.00	-27.15	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

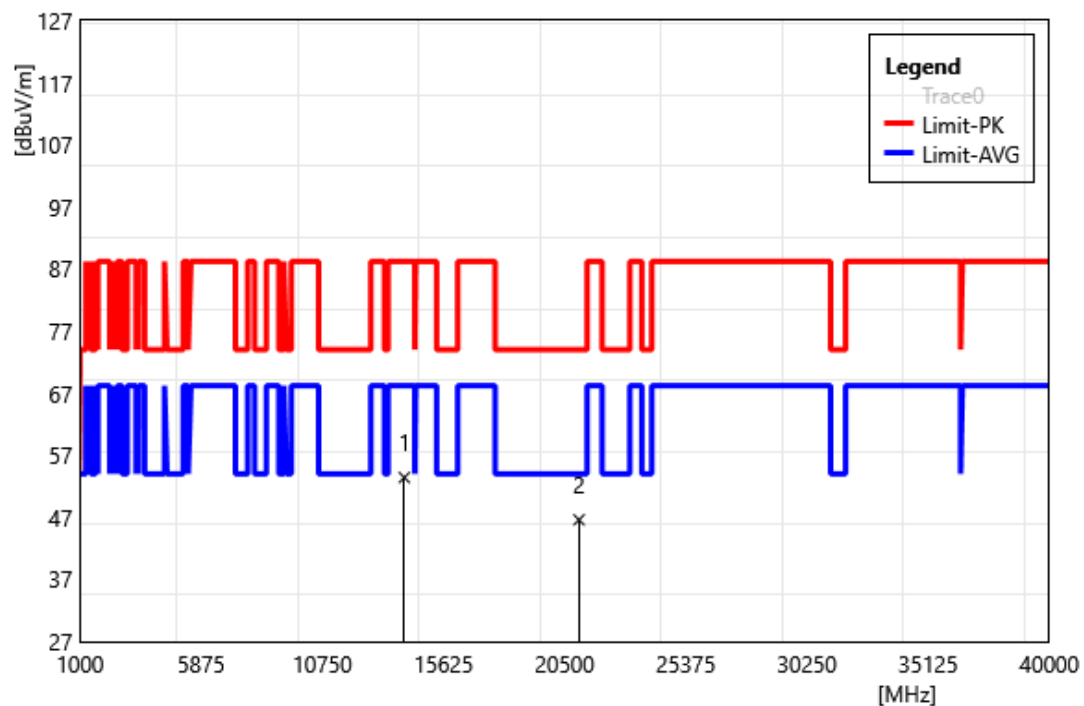


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	44.55	8.87	53.42	88.20	-34.78	PEAK
2	21075.00	37.72	8.88	46.60	74.00	-27.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

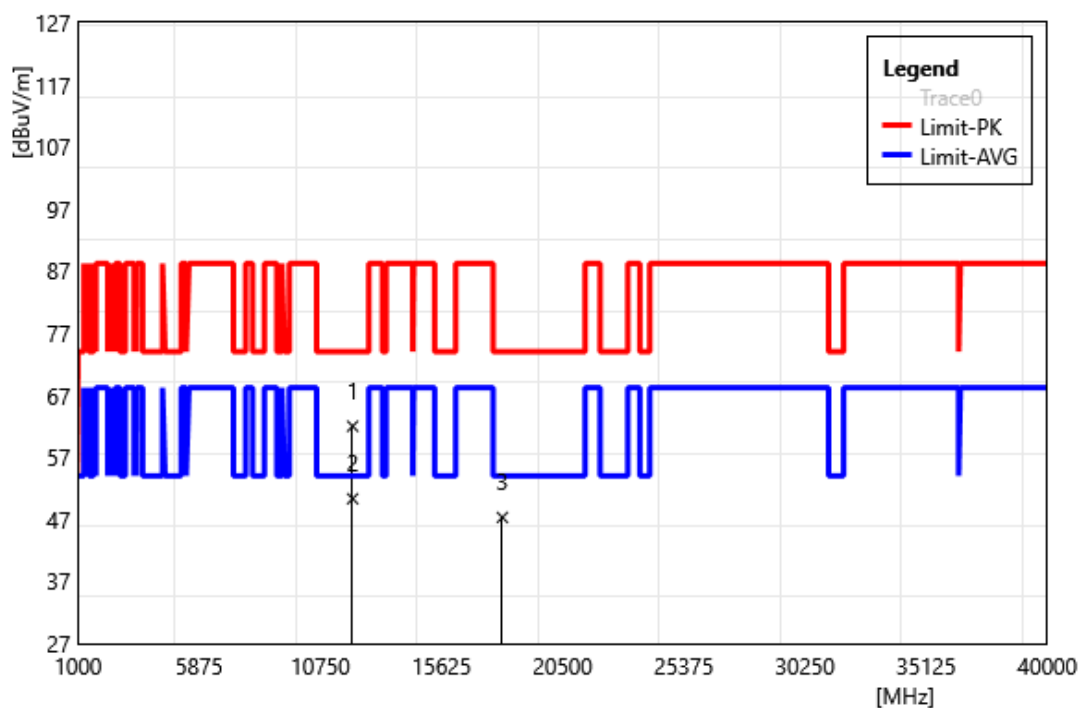


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	52.59	9.40	61.99	74.00	-12.01	PEAK
2	12050.00	41.12	9.20	50.32	54.00	-3.68	AVG
3	18075.00	45.98	1.33	47.31	74.00	-26.69	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

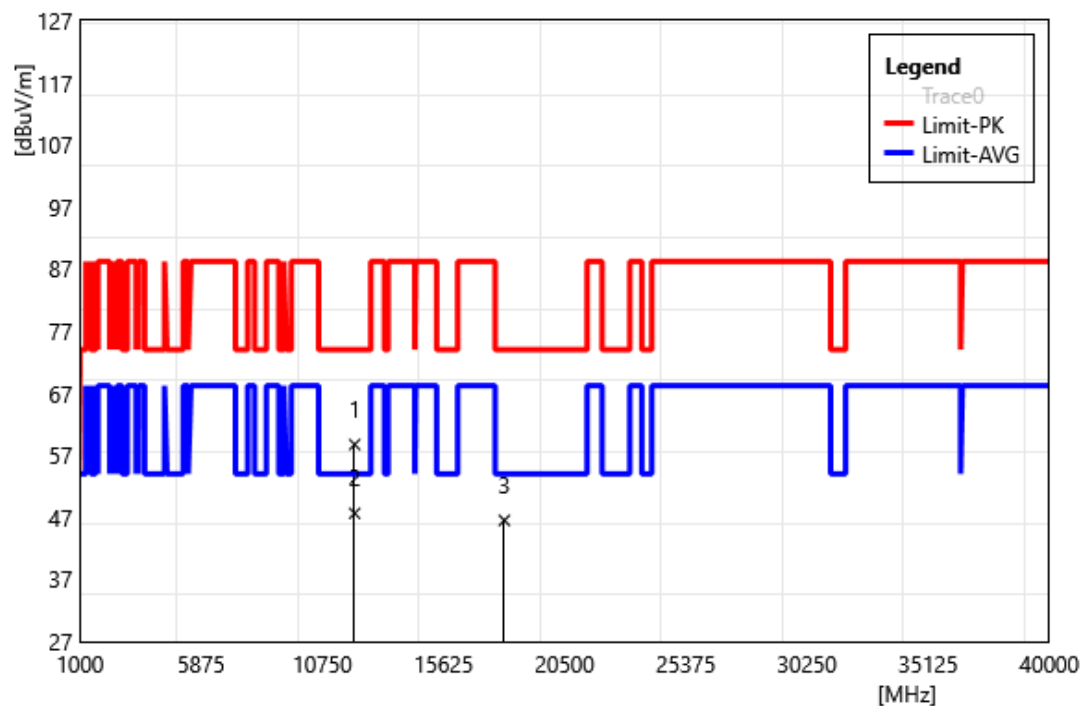


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	49.33	9.40	58.73	74.00	-15.27	PEAK
2	12050.00	38.25	9.40	47.65	54.00	-6.35	AVG
3	18075.00	45.18	1.33	46.51	74.00	-27.49	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Horizontal		
Remark:			

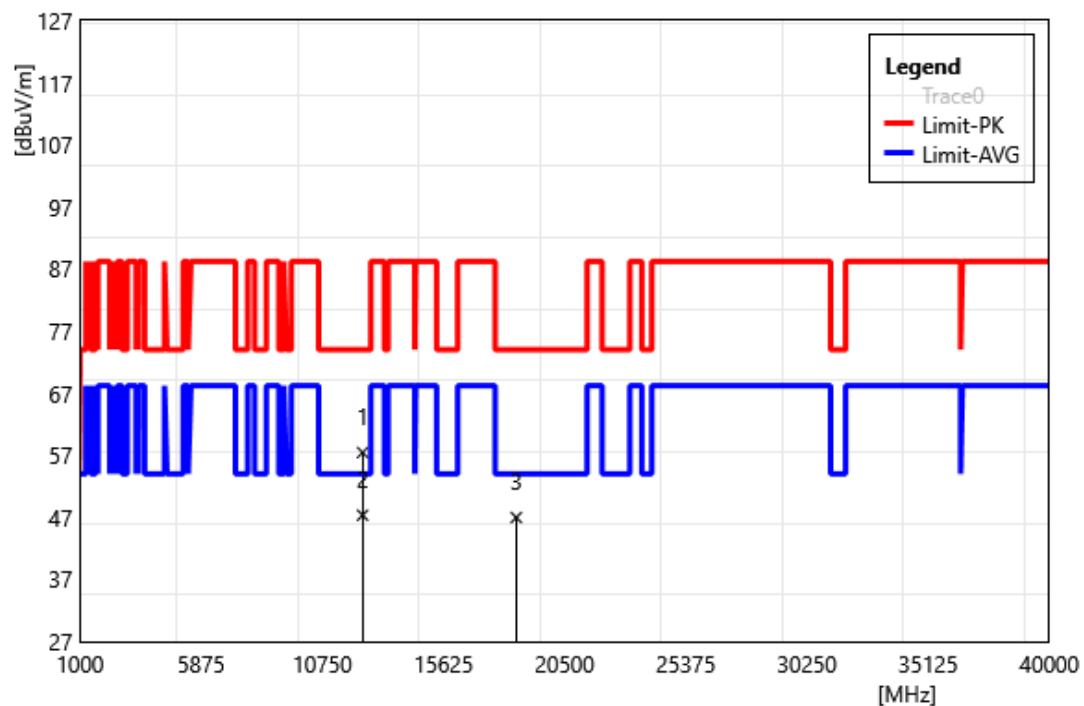


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	48.15	9.29	57.44	74.00	-16.56	PEAK
2	12370.00	38.06	9.29	47.35	54.00	-6.65	AVG
3	18555.00	44.60	2.38	46.98	74.00	-27.02	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Vertical		
Remark:			

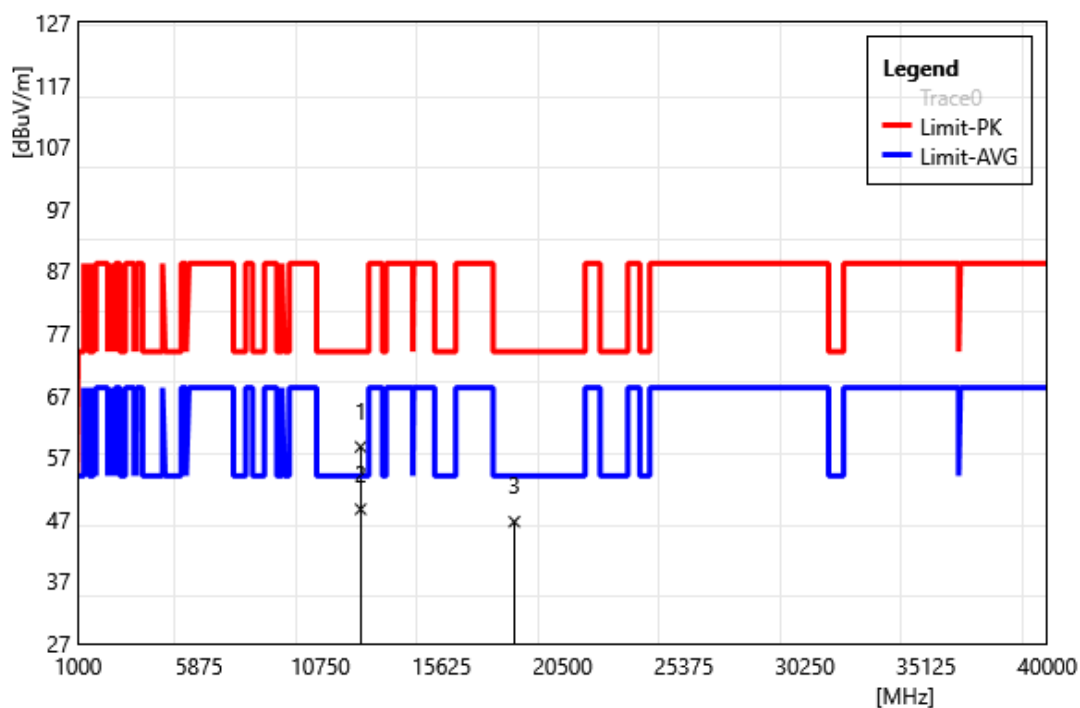


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	49.38	9.29	58.67	74.00	-15.33	PEAK
2	12370.00	39.34	9.29	48.63	54.00	-5.37	AVG
3	18555.00	44.24	2.38	46.62	74.00	-27.38	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Horizontal		
Remark:			

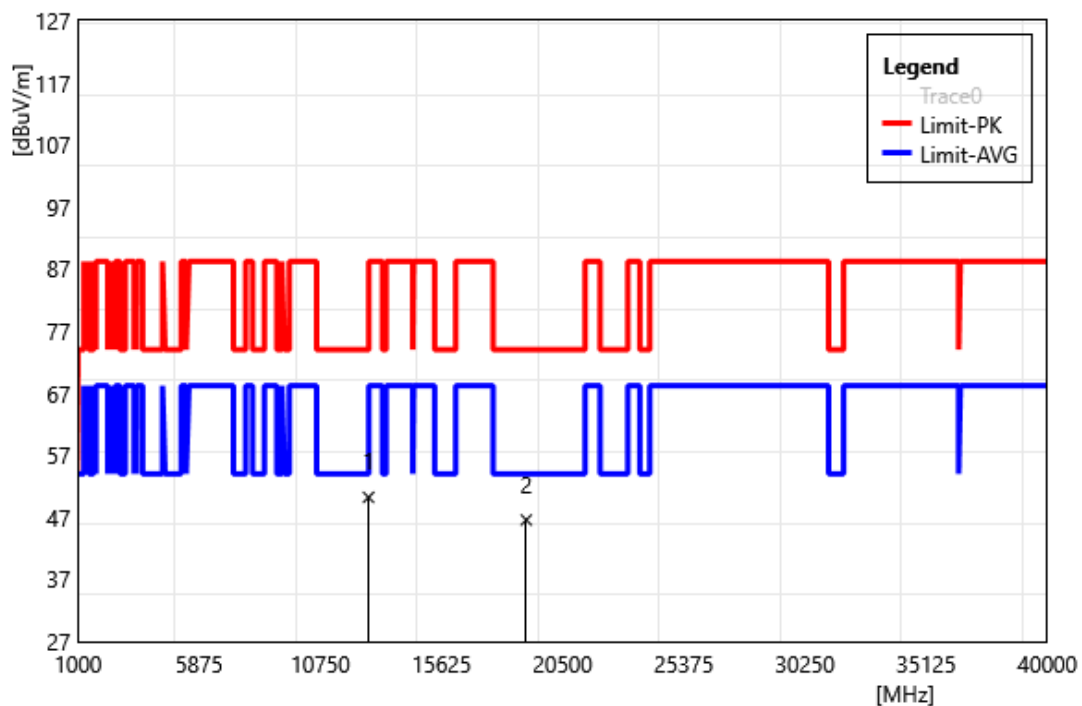


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	40.74	9.48	50.22	74.00	-23.78	PEAK
2	19035.00	41.92	4.66	46.58	74.00	-27.42	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Vertical		
Remark:			

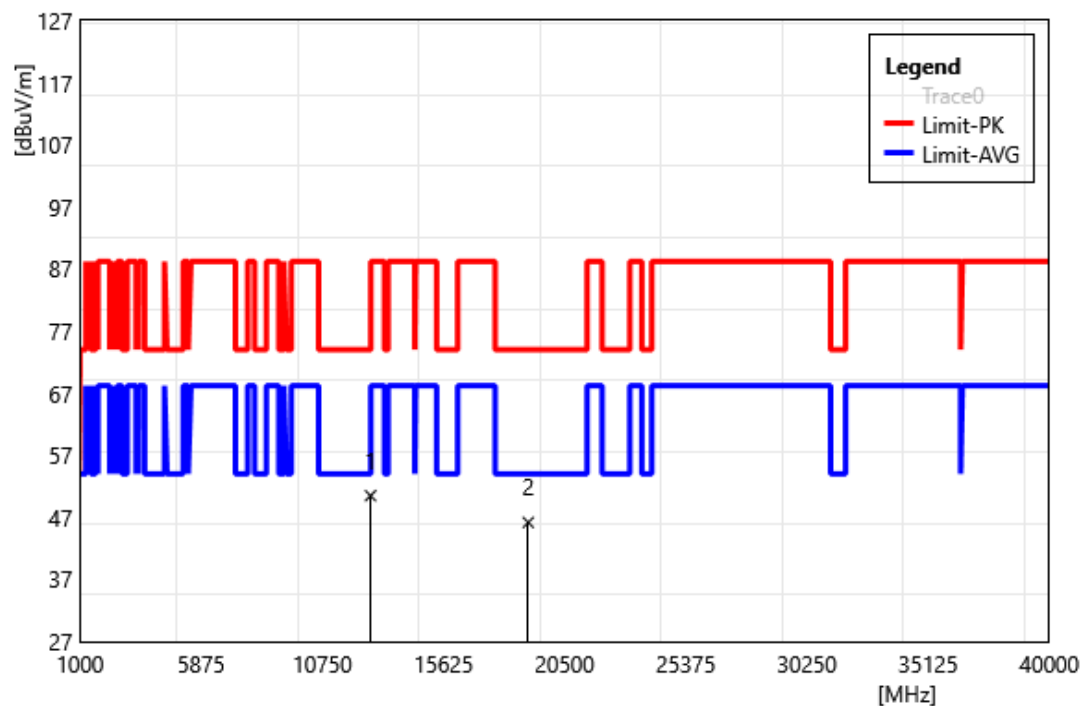


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	41.00	9.48	50.48	74.00	-23.52	PEAK
2	19035.00	41.53	4.66	46.19	74.00	-27.81	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505 MHz		
Polarization:	Horizontal		
Remark:			

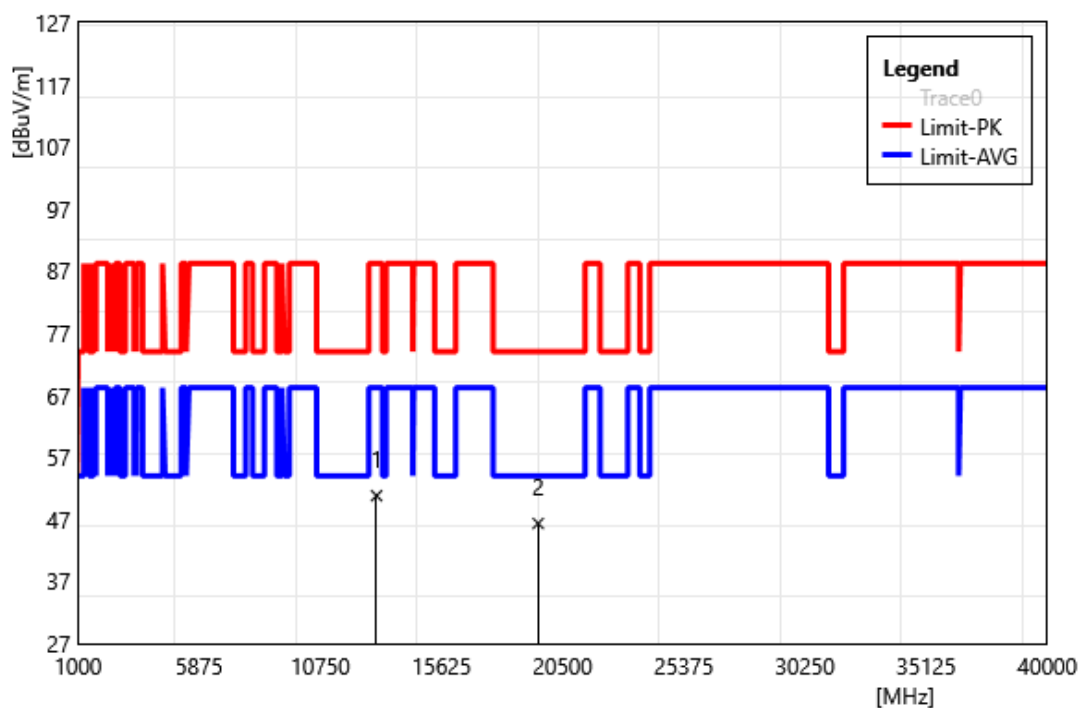


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	41.19	9.62	50.81	88.20	-37.39	PEAK
2	19515.00	40.01	6.32	46.33	74.00	-27.67	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Vertical		
Remark:			

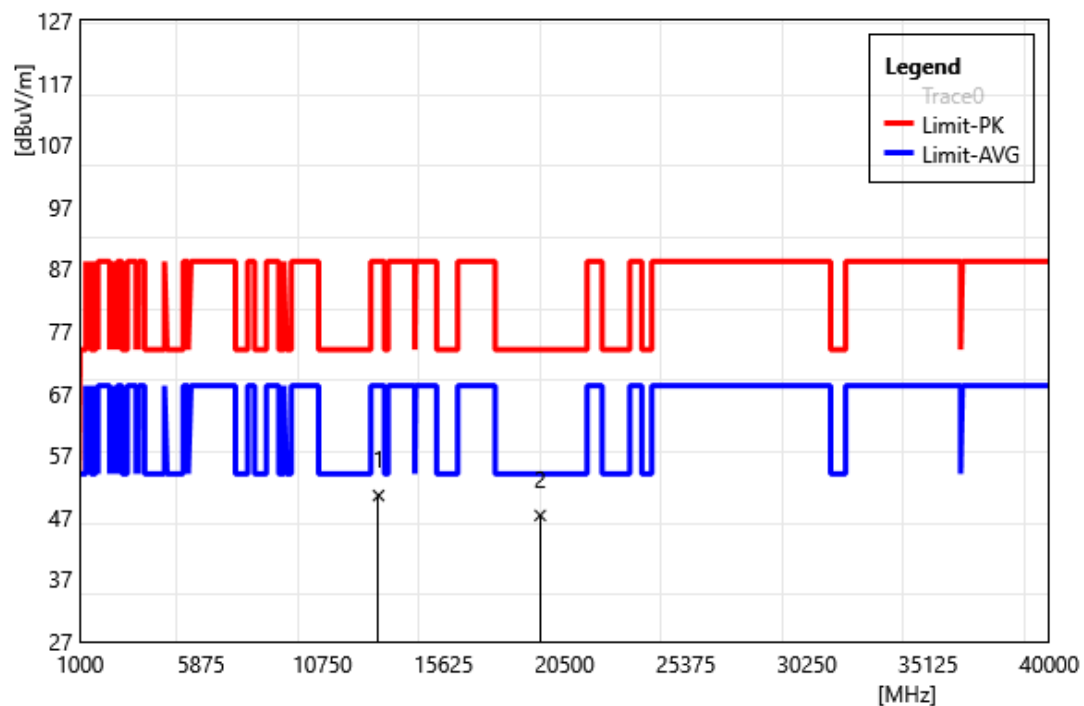


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	40.89	9.62	50.51	88.20	-37.69	PEAK
2	19515.00	40.98	6.32	47.30	74.00	-26.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665		
	MHz		
Polarization:	Horizontal		
Remark:			

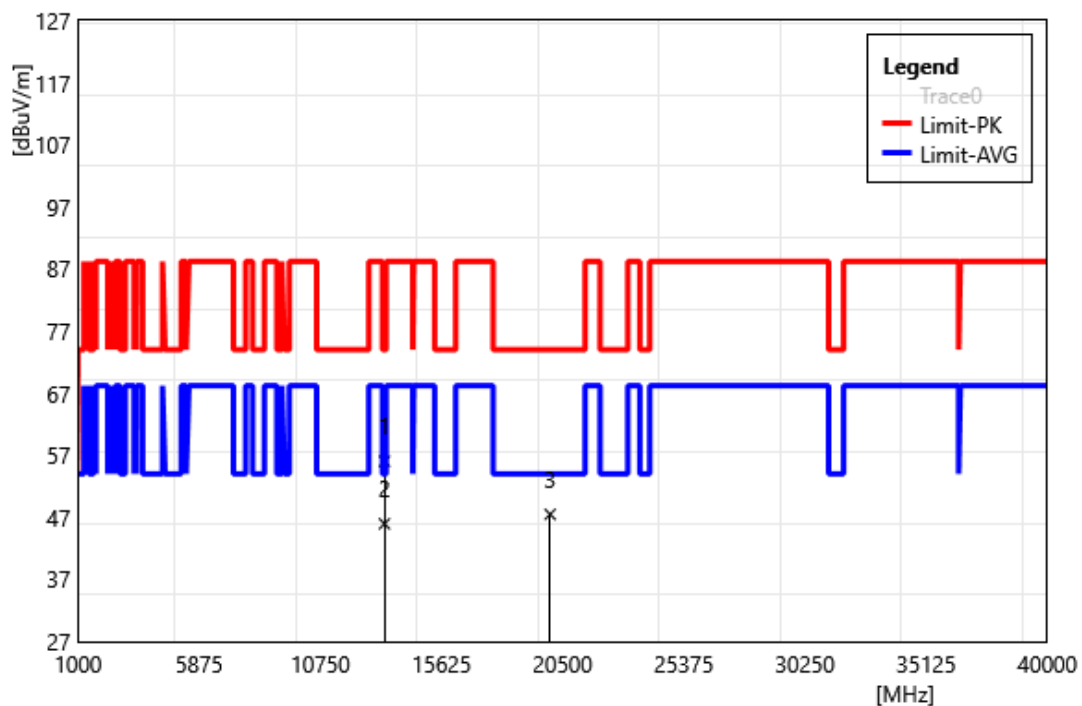


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	46.47	9.56	56.03	74.00	-17.97	PEAK
2	13330.00	36.40	9.56	45.96	54.00	-8.04	AVG
3	19995.00	40.94	6.55	47.49	74.00	-26.51	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Vertical		
Remark:			

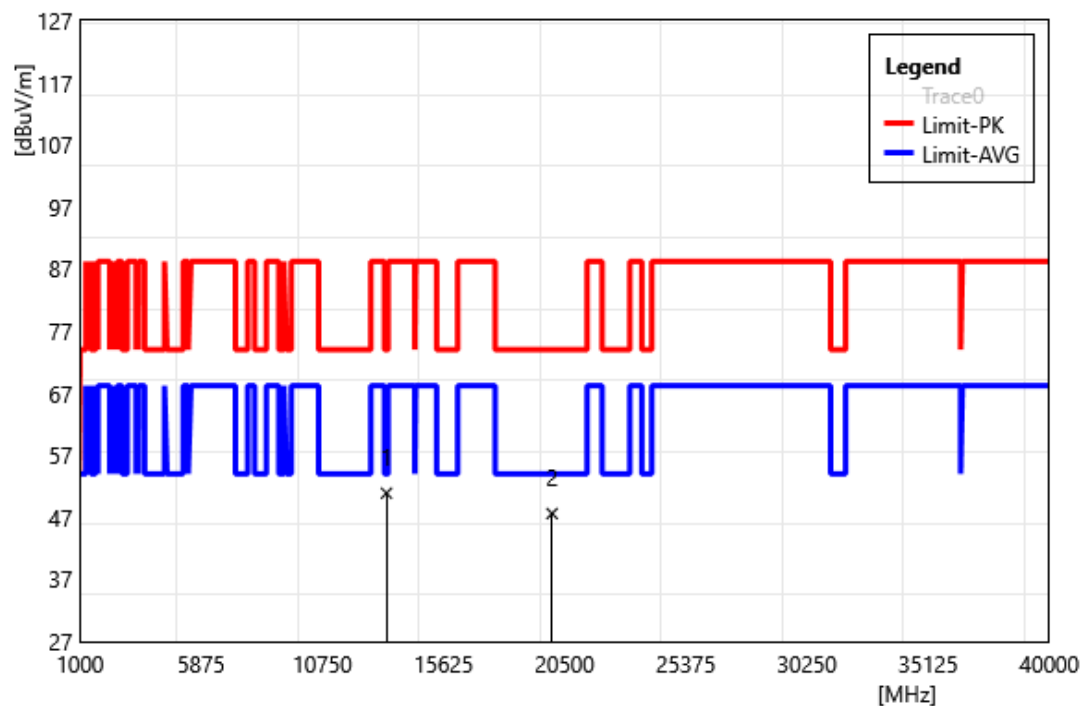


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	41.33	9.56	50.89	74.00	-23.11	PEAK
2	19995.00	41.06	6.55	47.61	74.00	-26.39	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825 MHz		
Polarization:	Horizontal		
Remark:			

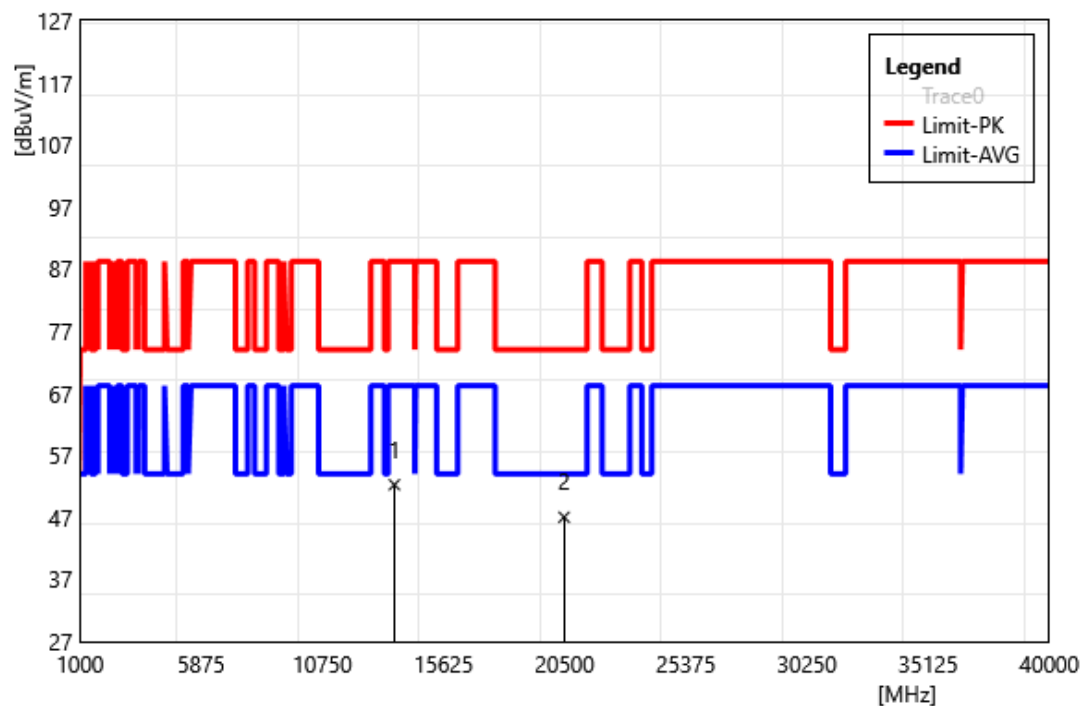


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	43.32	8.92	52.24	88.20	-35.96	PEAK
2	20475.00	39.79	7.23	47.02	74.00	-26.98	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825		
	MHz		
Polarization:	Vertical		
Remark:			

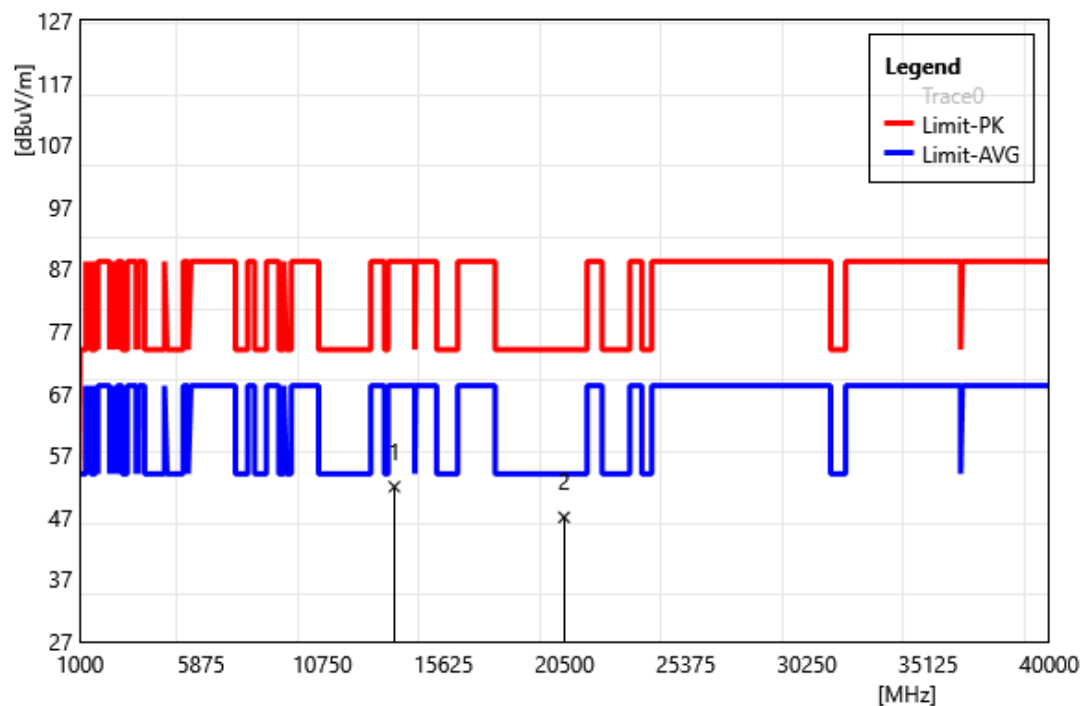


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	43.01	8.92	51.93	88.20	-36.27	PEAK
2	20475.00	39.78	7.23	47.01	74.00	-26.99	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

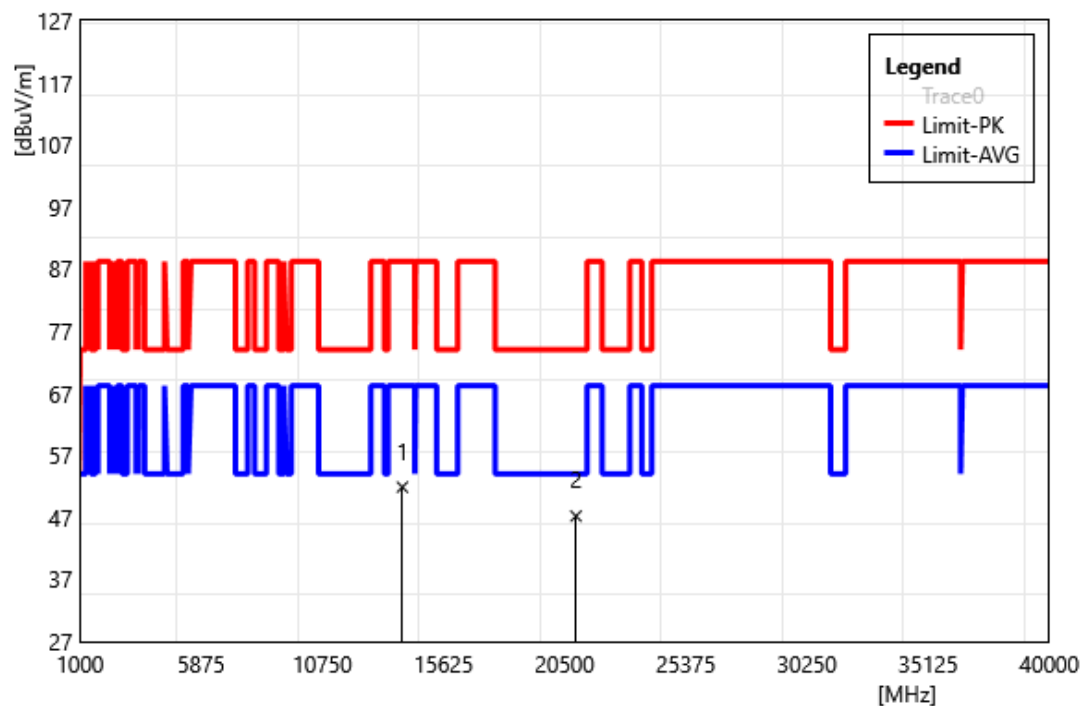


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	43.13	8.74	51.87	88.20	-36.33	PEAK
2	20955.00	38.83	8.38	47.21	74.00	-26.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

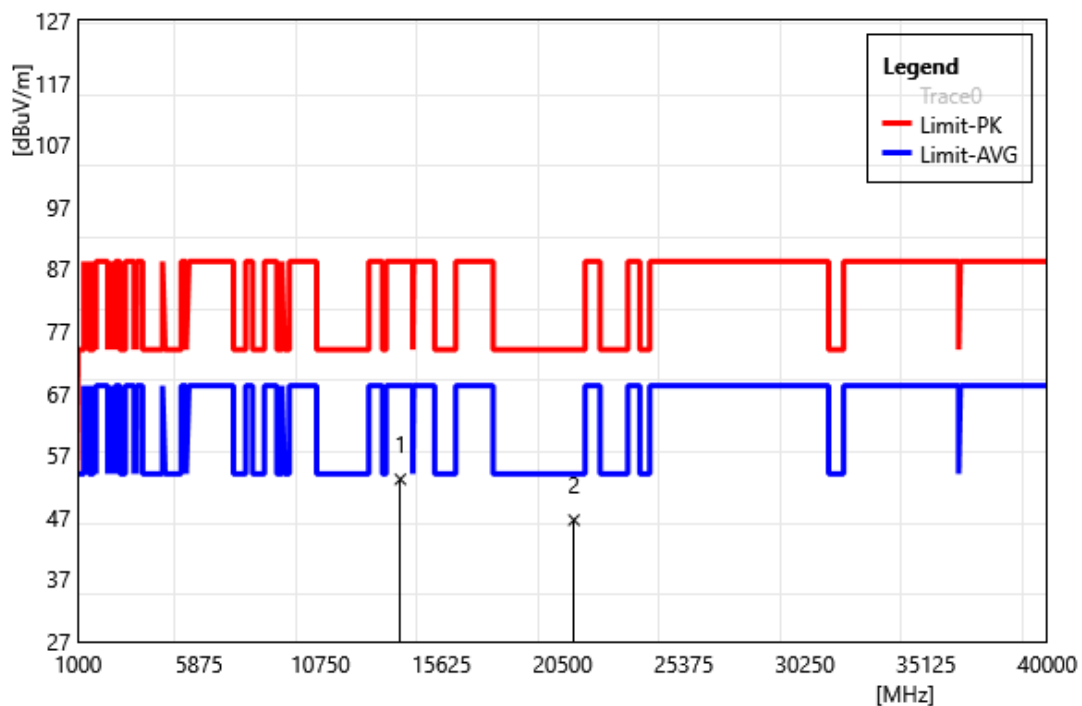


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	44.38	8.74	53.12	88.20	-35.08	PEAK
2	20955.00	38.18	8.38	46.56	74.00	-27.44	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

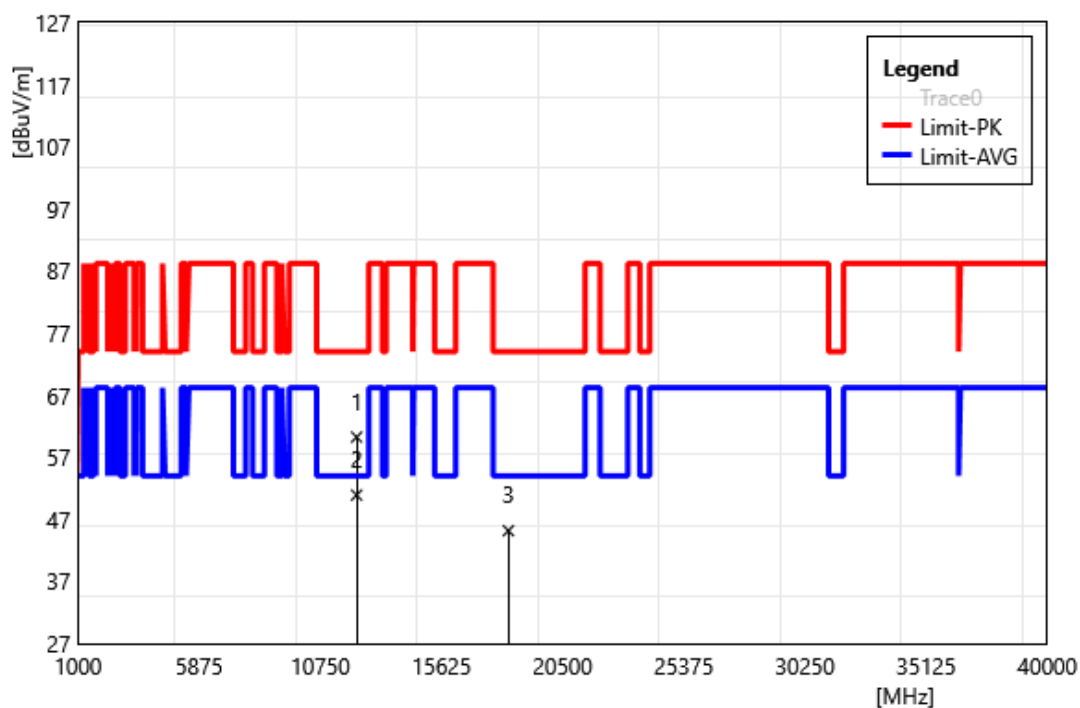


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	51.36	8.89	60.25	74.00	-13.75	PEAK
2	12210.00	42.02	8.89	50.91	54.00	-3.09	AVG
3	18315.00	43.39	1.78	45.17	74.00	-28.83	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

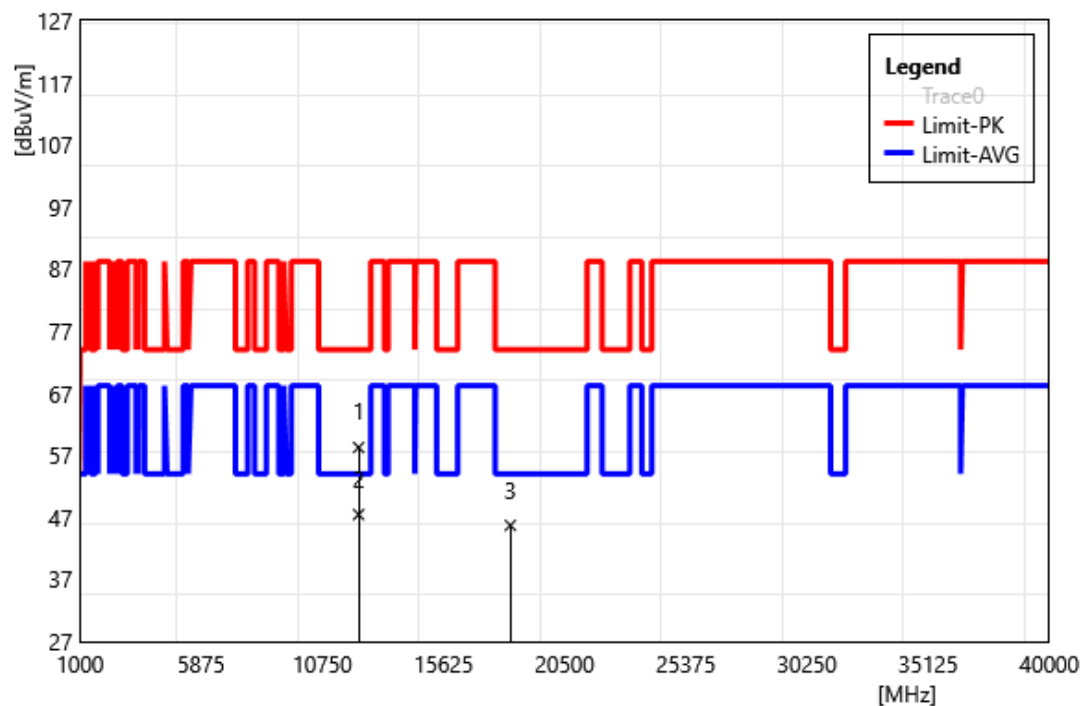


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	49.36	8.89	58.25	74.00	-15.75	PEAK
2	12210.00	38.56	8.89	47.45	54.00	-6.55	AVG
3	18315.00	43.92	1.78	45.70	74.00	-28.30	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Horizontal		
Remark:			

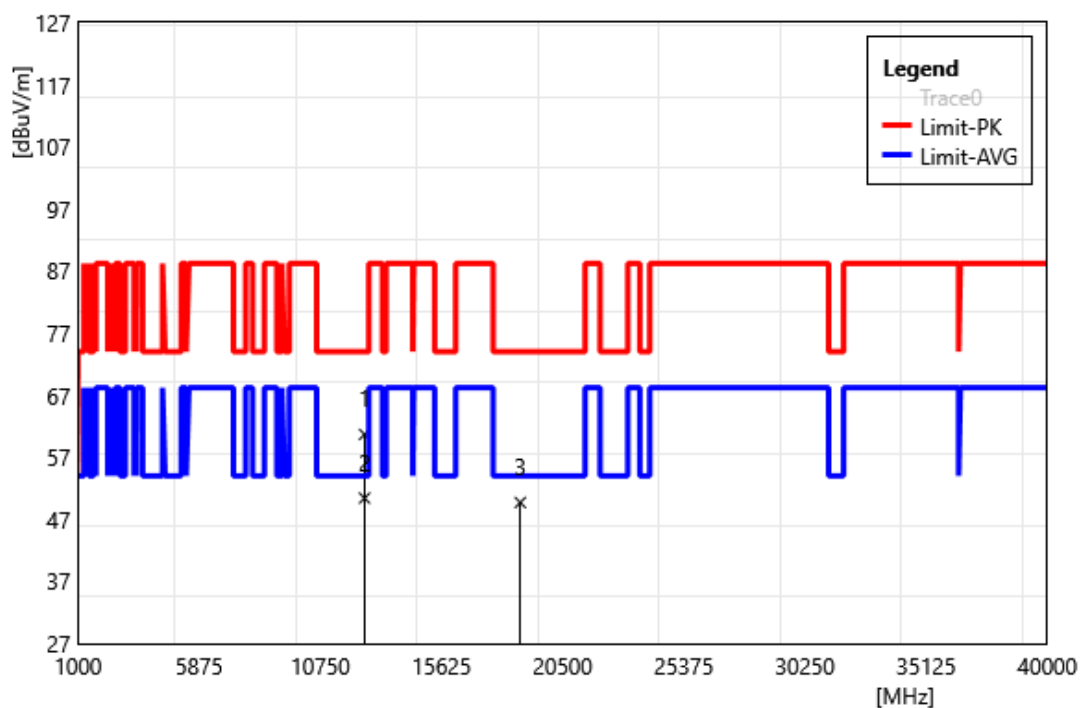


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	52.84	7.83	60.67	74.00	-13.33	PEAK
2	12530.00	42.60	7.83	50.43	54.00	-3.57	AVG
3	18795.00	46.17	3.55	49.72	74.00	-24.28	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Vertical		
Remark:			

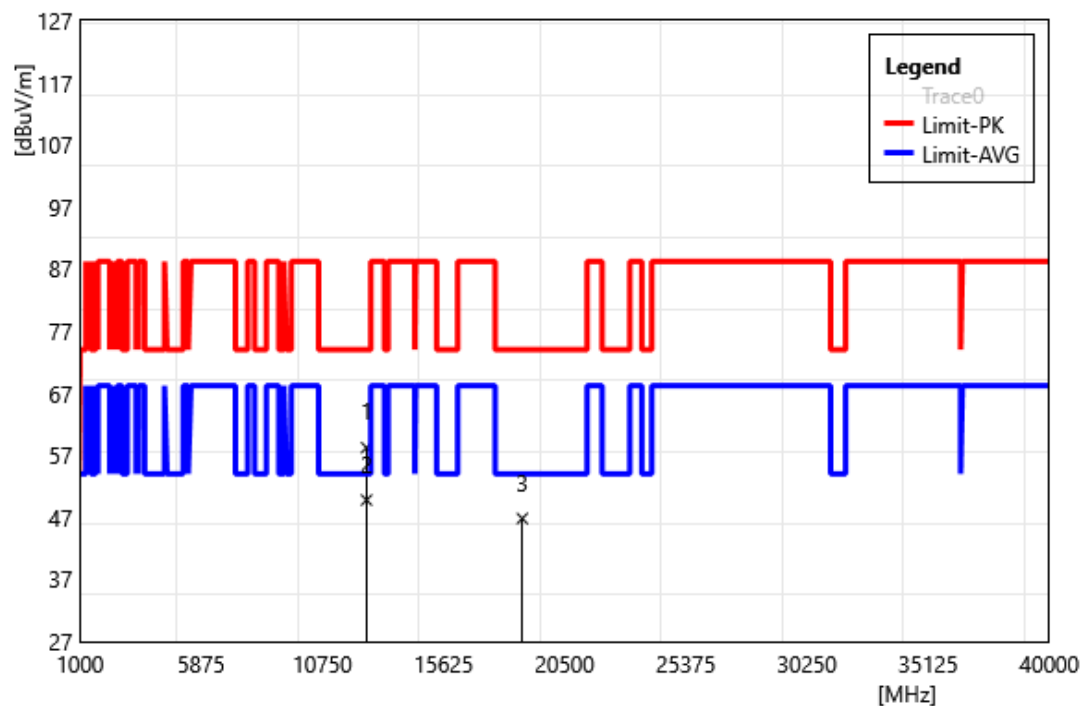


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	50.39	7.83	58.22	74.00	-15.78	PEAK
2	12530.00	41.96	7.83	49.79	54.00	-4.21	AVG
3	18795.00	43.26	3.55	46.81	74.00	-27.19	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Horizontal		
Remark:			

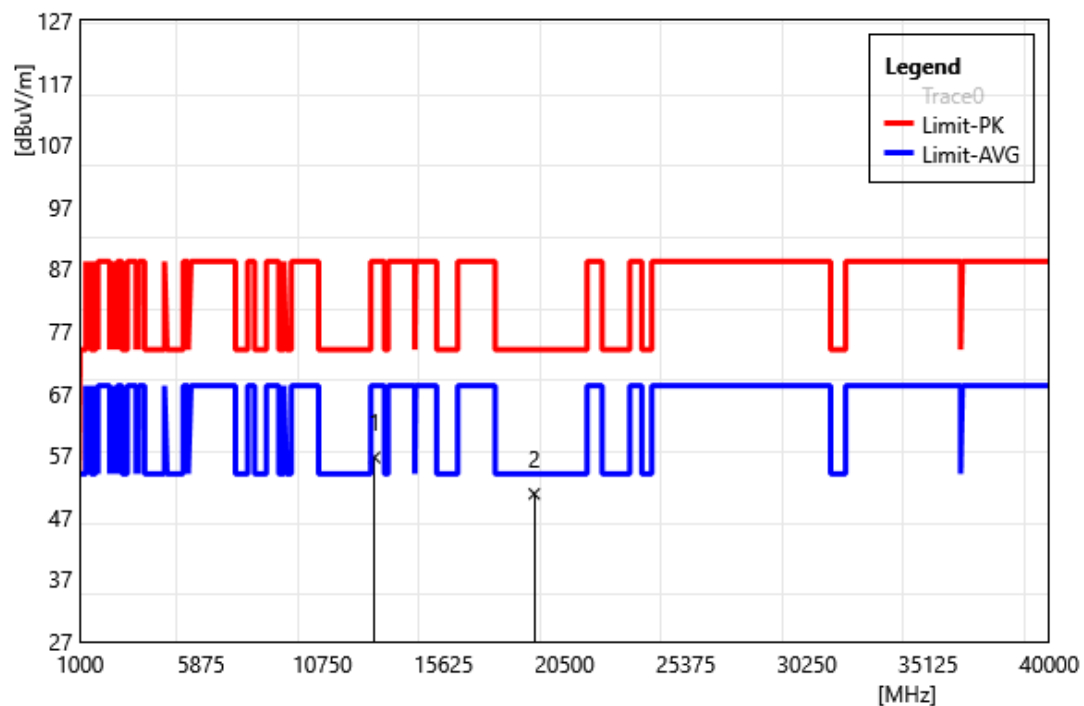


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	46.84	9.80	56.64	88.20	-31.56	PEAK
2	19275.00	45.27	5.50	50.77	74.00	-23.23	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Vertical		
Remark:			

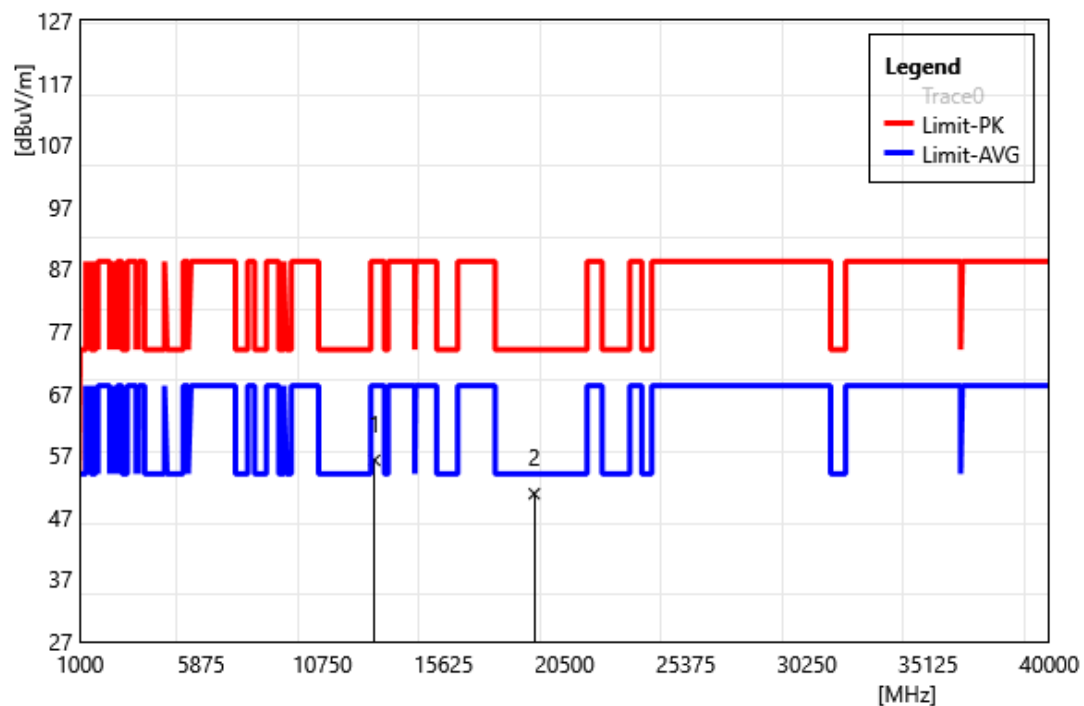


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	46.39	9.80	56.19	88.20	-32.01	PEAK
2	19275.00	45.30	5.50	50.80	74.00	-23.20	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585		
	MHz		
Polarization:	Horizontal		
Remark:			

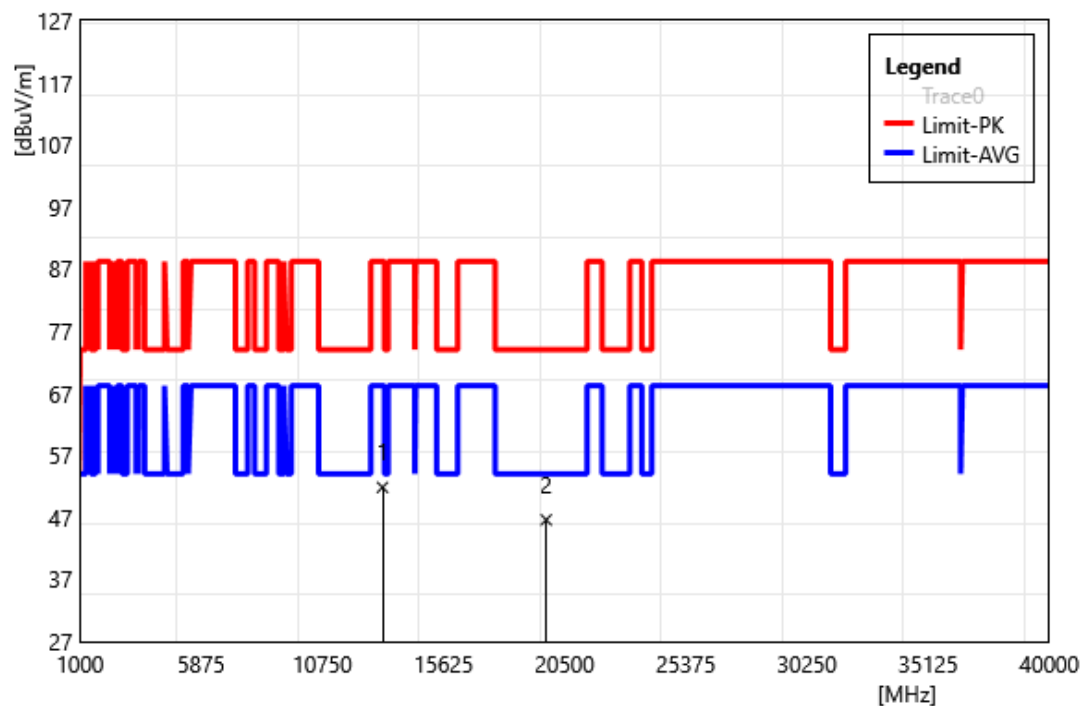


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	42.27	9.55	51.82	88.20	-36.38	PEAK
2	19755.00	40.15	6.44	46.59	74.00	-27.41	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585		
	MHz		
Polarization:	Vertical		
Remark:			

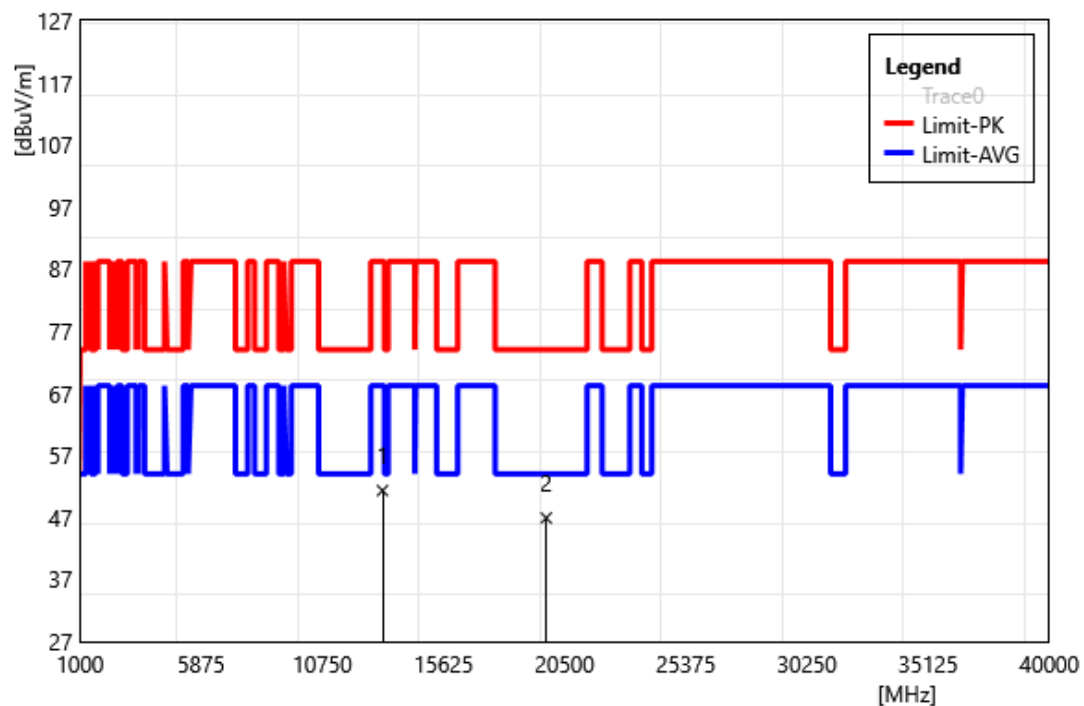


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	41.77	9.55	51.32	88.20	-36.88	PEAK
2	19755.00	40.46	6.44	46.90	74.00	-27.10	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745		
	MHz		
Polarization:	Horizontal		
Remark:			

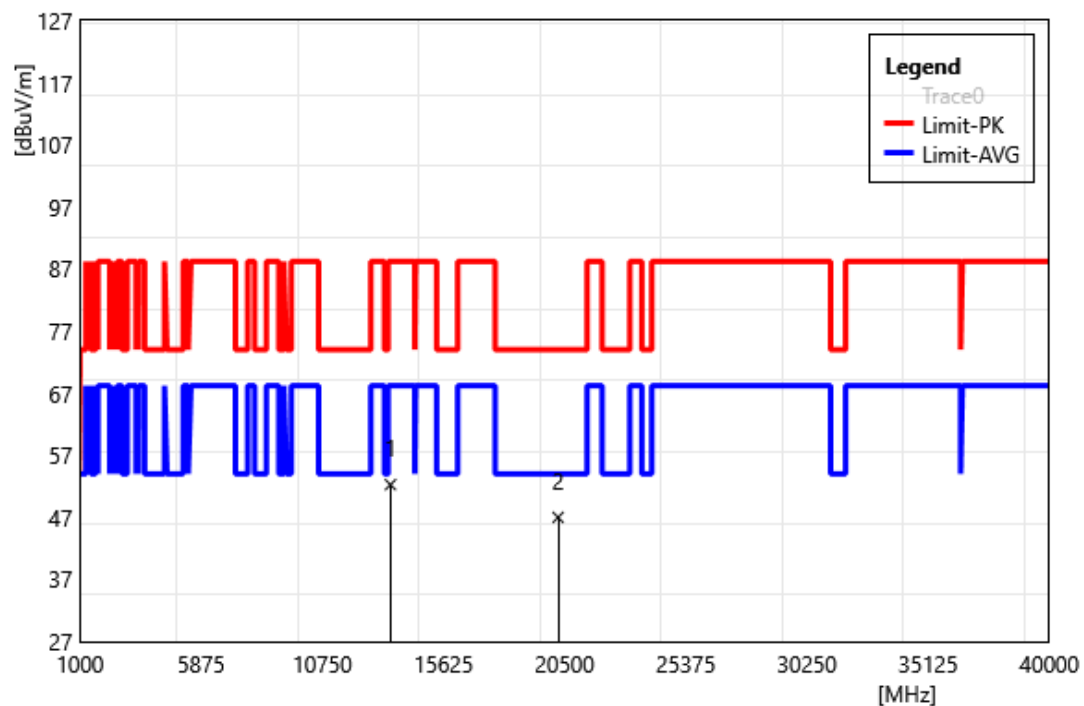


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	43.04	9.23	52.27	88.20	-35.93	PEAK
2	20235.00	40.12	6.89	47.01	74.00	-26.99	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745		
	MHz		
Polarization:	Vertical		
Remark:			

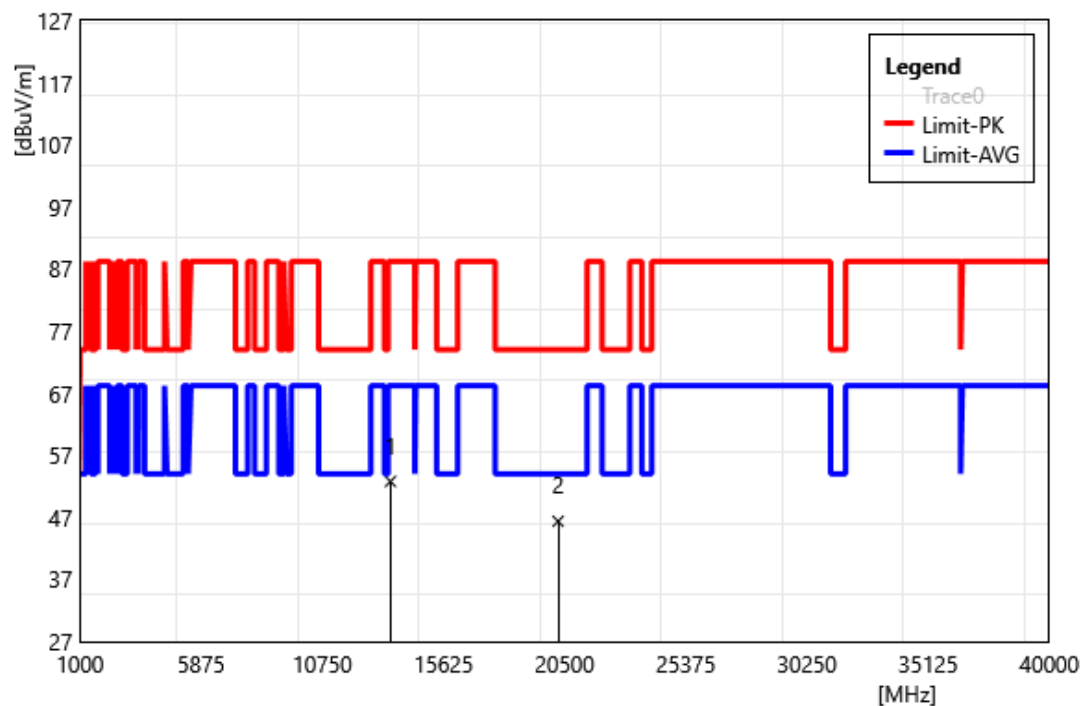


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	43.56	9.23	52.79	88.20	-35.41	PEAK
2	20235.00	39.48	6.89	46.37	74.00	-27.63	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Horizontal		
Remark:			

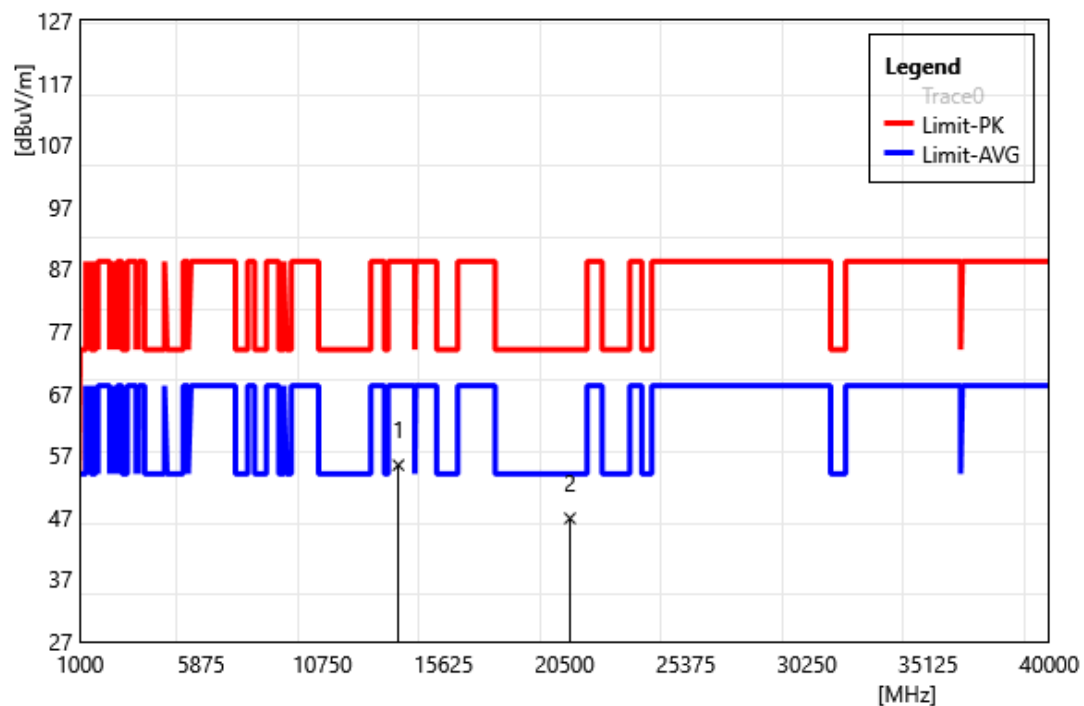

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	46.61	8.80	55.41	88.20	-32.79	PEAK
2	20715.00	39.04	7.79	46.83	74.00	-27.17	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Vertical		
Remark:			

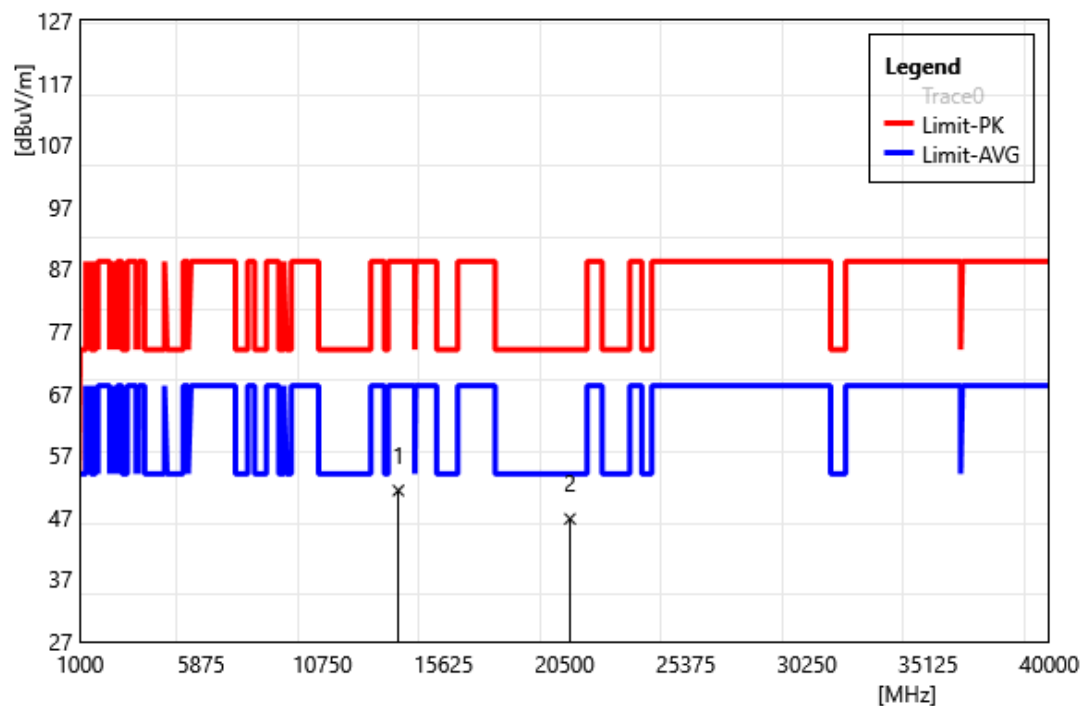


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	42.52	8.80	51.32	88.20	-36.88	PEAK
2	20715.00	38.96	7.79	46.75	74.00	-27.25	PEAK

Band Edge


Peak

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

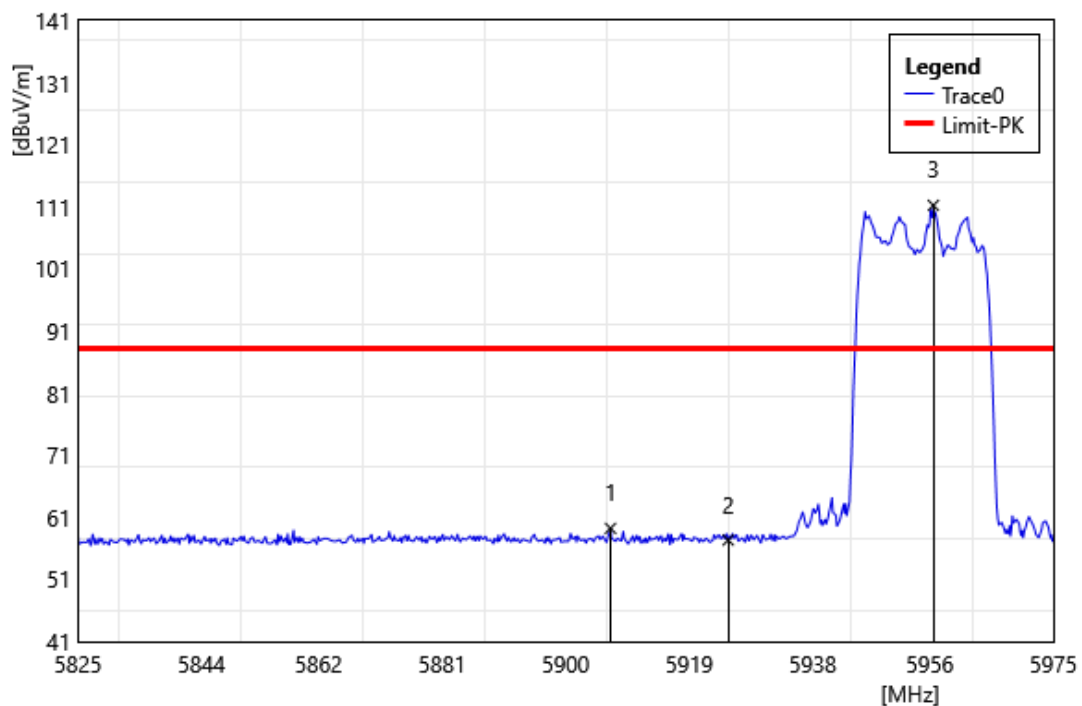


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5906.90	54.74	4.48	59.22	88.20	-28.98	PEAK
2	5925.00	53.03	4.31	57.34	88.20	-30.86	PEAK
3	5956.55	107.18	4.07	111.25	88.20	23.05	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

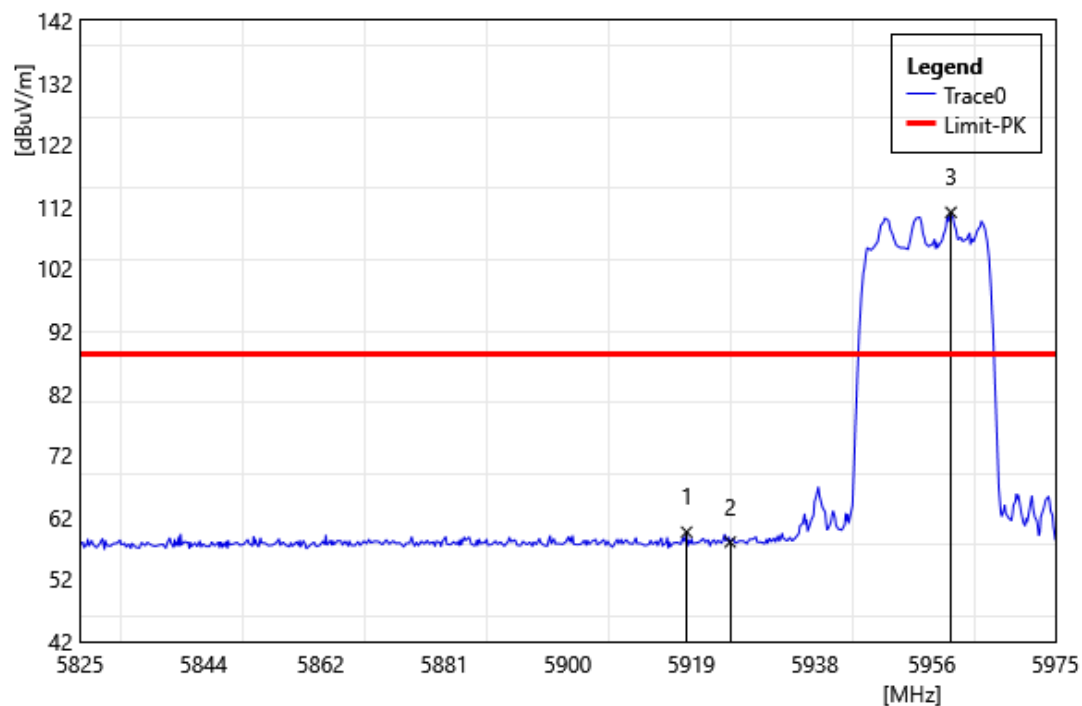


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.30	55.24	4.38	59.62	88.20	-28.58	PEAK
2	5925.00	53.72	4.31	58.03	88.20	-30.17	PEAK
3	5958.95	107.07	4.06	111.13	88.20	22.93	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

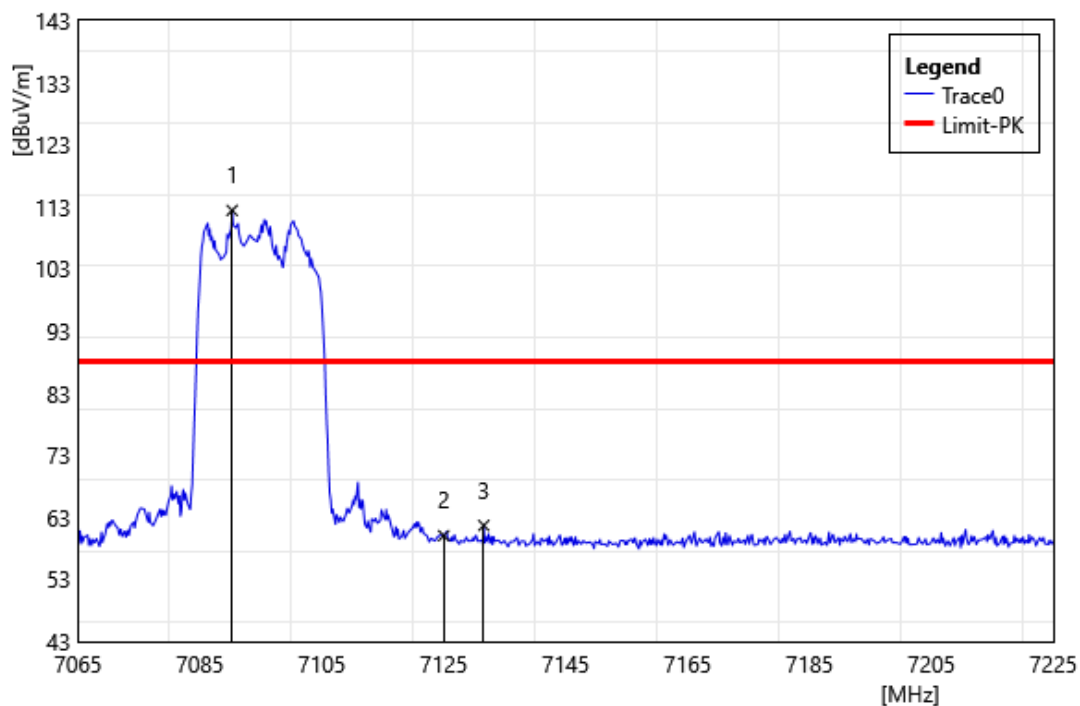


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7090.28	104.45	7.98	112.43	88.20	24.23	PEAK
2	7125.00	52.04	8.01	60.05	88.20	-28.15	PEAK
3	7131.56	53.71	7.99	61.70	88.20	-26.50	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

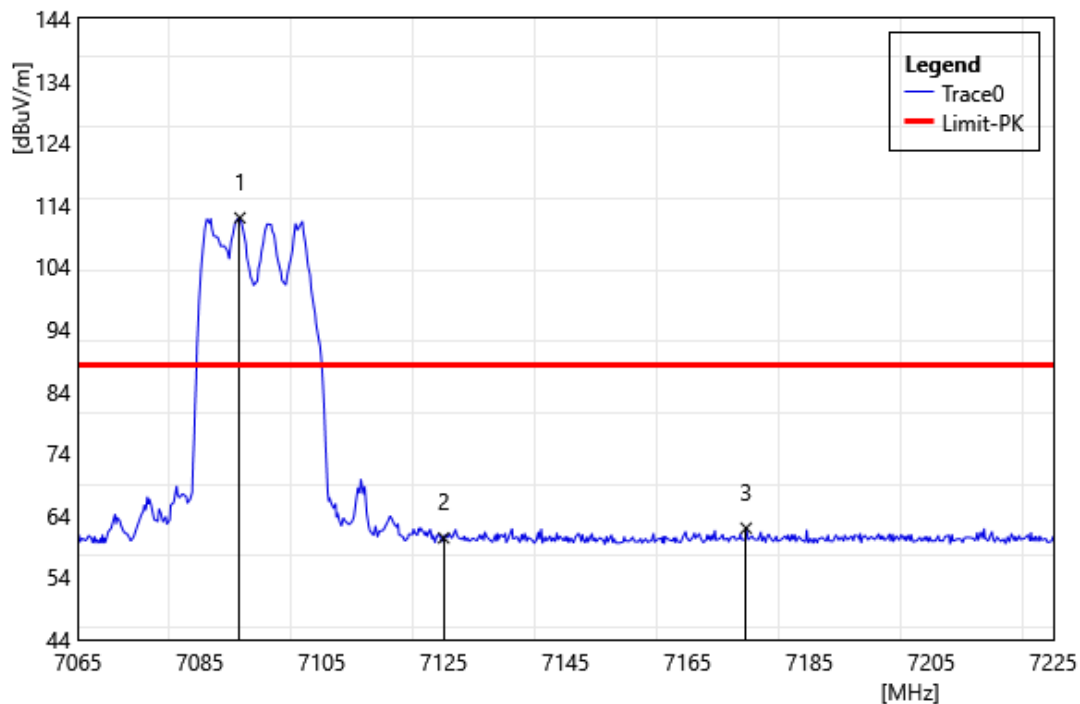


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7091.56	103.92	7.99	111.91	88.20	23.71	PEAK
2	7125.00	52.35	8.01	60.36	88.20	-27.84	PEAK
3	7174.60	53.96	7.99	61.95	88.20	-26.25	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

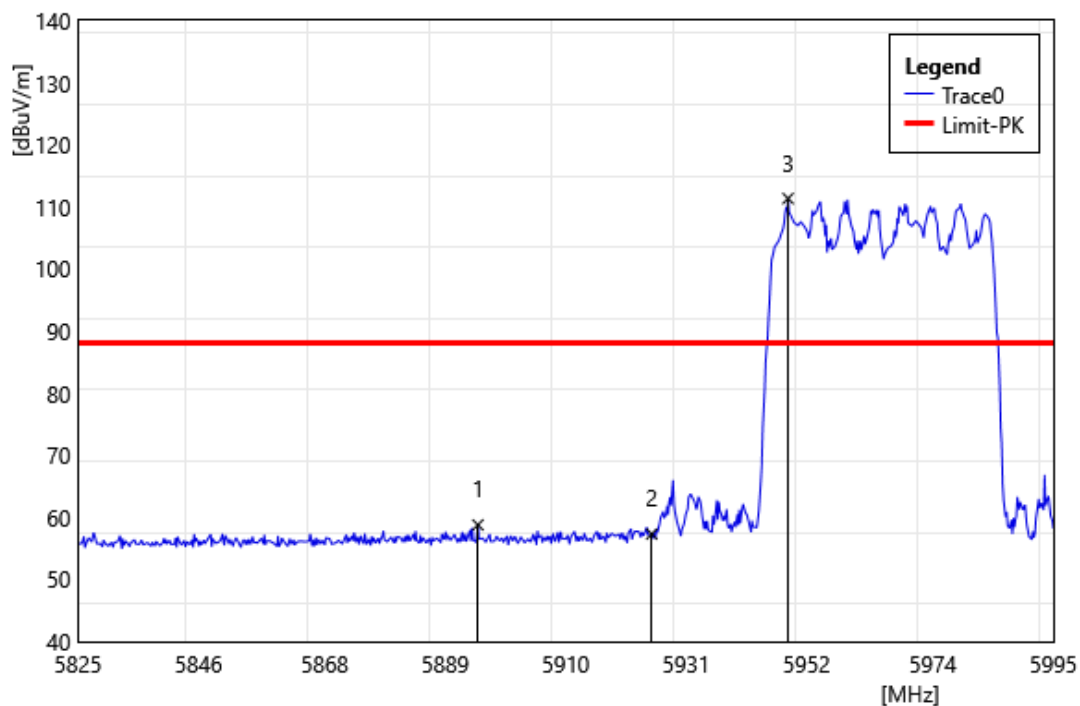


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5894.70	54.27	4.52	58.79	88.20	-29.41	PEAK
2	5925.00	53.00	4.31	57.31	88.20	-30.89	PEAK
3	5948.76	107.25	4.09	111.34	88.20	23.14	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

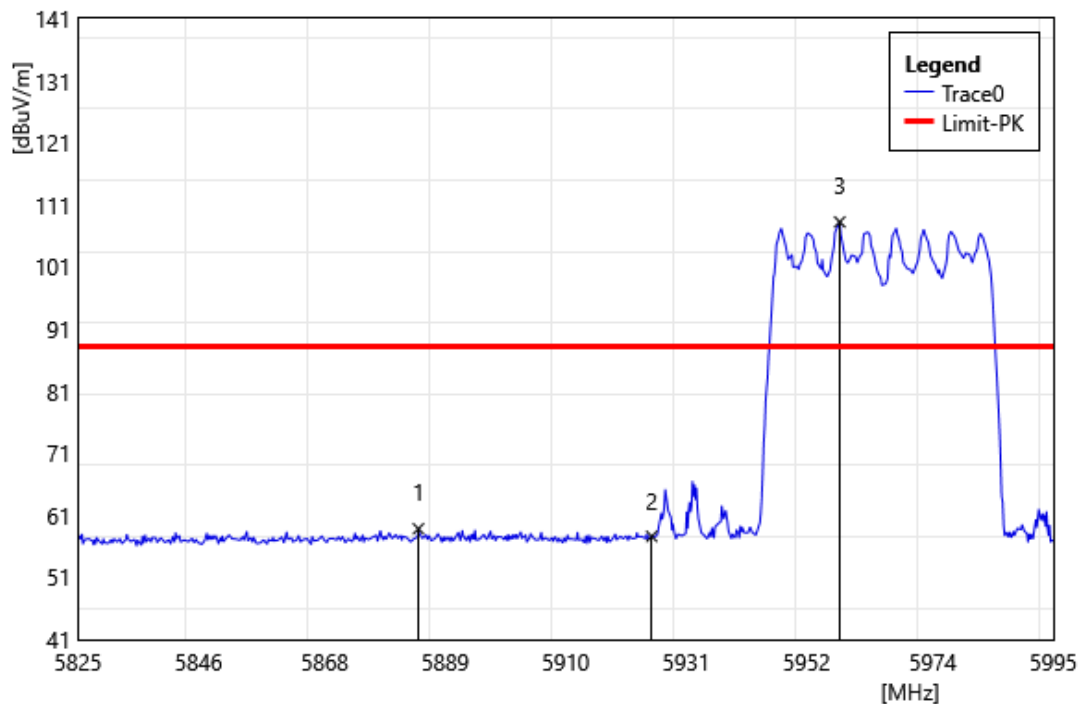


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5884.33	54.37	4.47	58.84	88.20	-29.36	PEAK
2	5925.00	53.32	4.31	57.63	88.20	-30.58	PEAK
3	5957.77	104.20	4.06	108.26	88.20	20.06	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

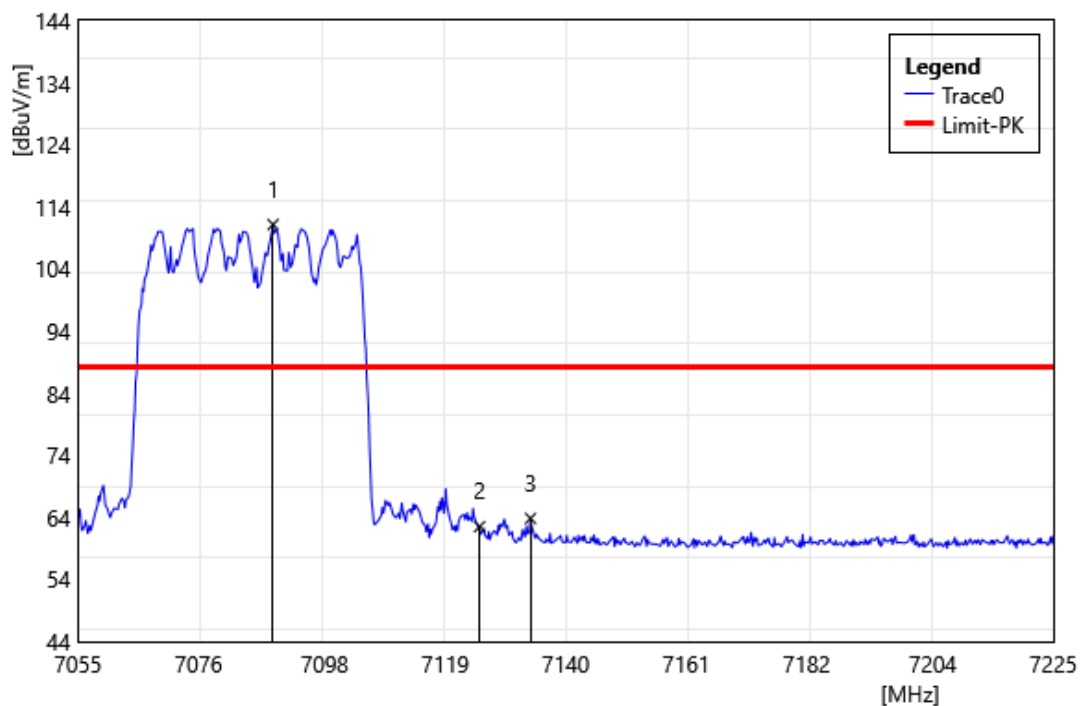


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7089.00	103.18	7.98	111.16	88.20	22.96	PEAK
2	7125.00	54.48	8.01	62.49	88.20	-25.71	PEAK
3	7133.88	55.83	7.99	63.82	88.20	-24.38	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

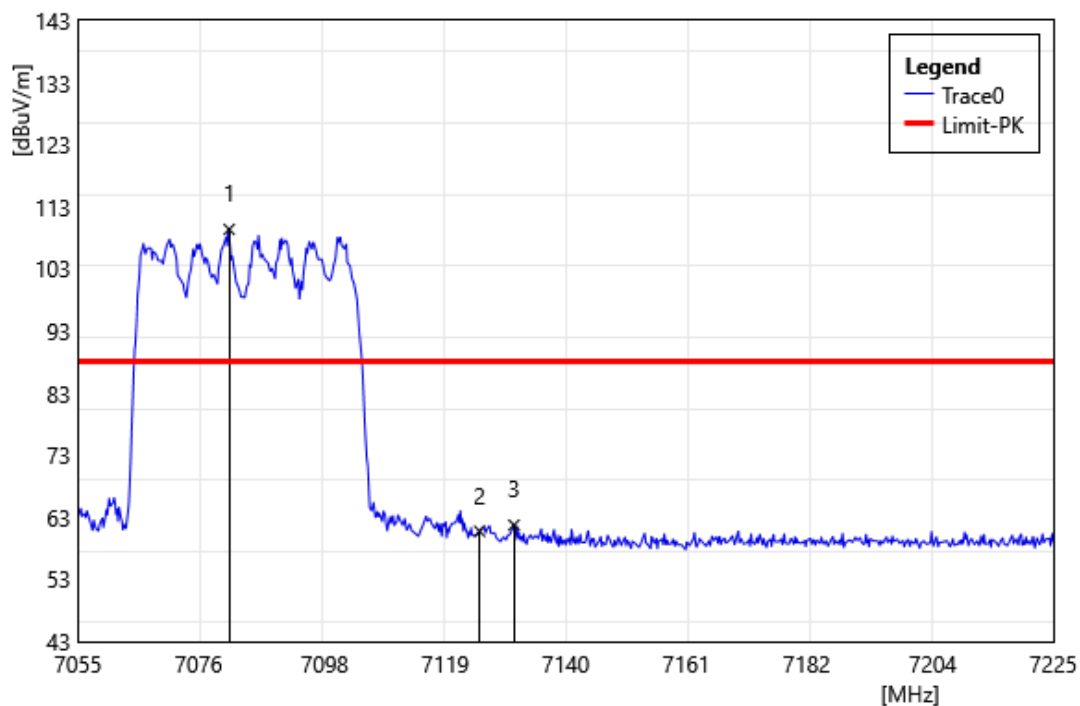


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7081.35	101.44	7.94	109.38	88.20	21.18	PEAK
2	7125.00	52.74	8.01	60.75	88.20	-27.45	PEAK
3	7130.99	53.77	7.99	61.76	88.20	-26.44	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

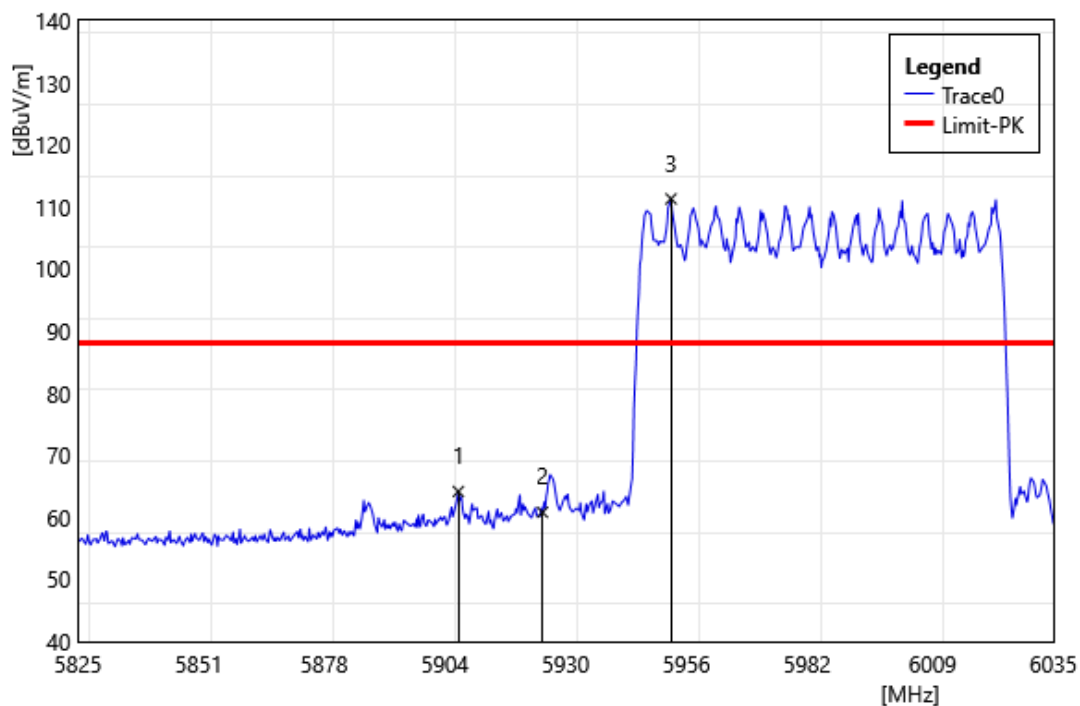


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5906.90	59.69	4.48	64.17	88.20	-24.03	PEAK
2	5925.00	56.51	4.31	60.82	88.20	-27.38	PEAK
3	5952.68	107.23	4.07	111.30	88.20	23.10	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

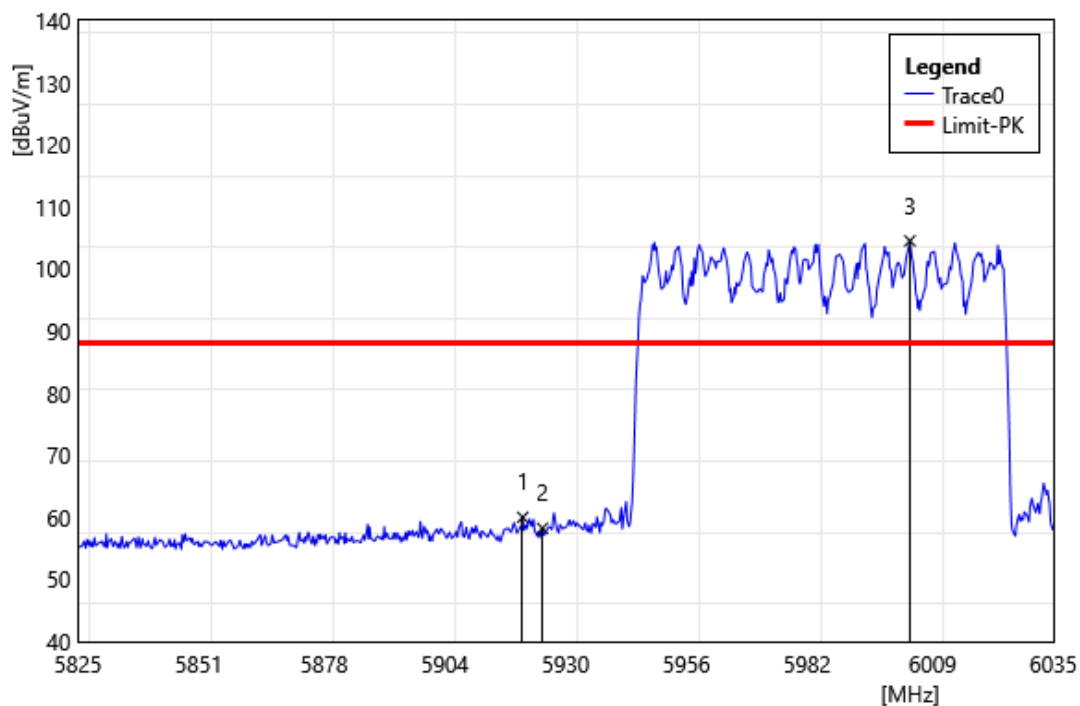


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.76	55.66	4.35	60.01	88.20	-28.19	PEAK
2	5925.00	53.94	4.31	58.25	88.20	-29.95	PEAK
3	6004.13	100.48	4.04	104.52	88.20	16.32	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

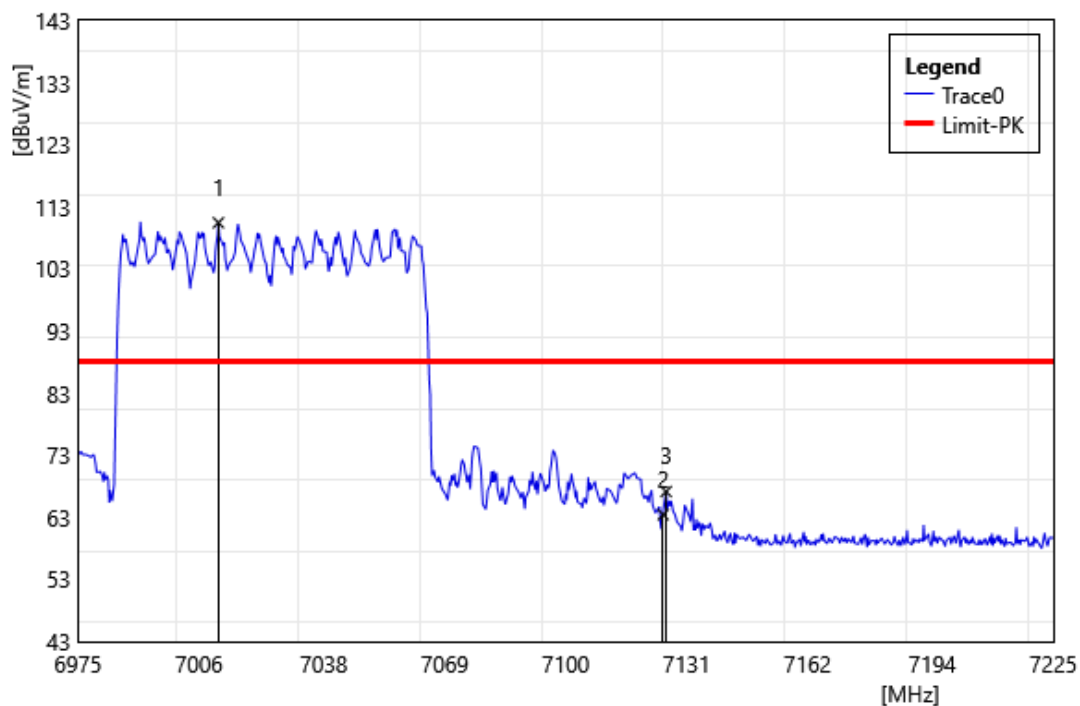


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7011.00	102.53	7.92	110.45	88.20	22.25	PEAK
2	7125.00	55.42	8.01	63.43	88.20	-24.77	PEAK
3	7125.75	59.15	8.00	67.15	88.20	-21.05	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

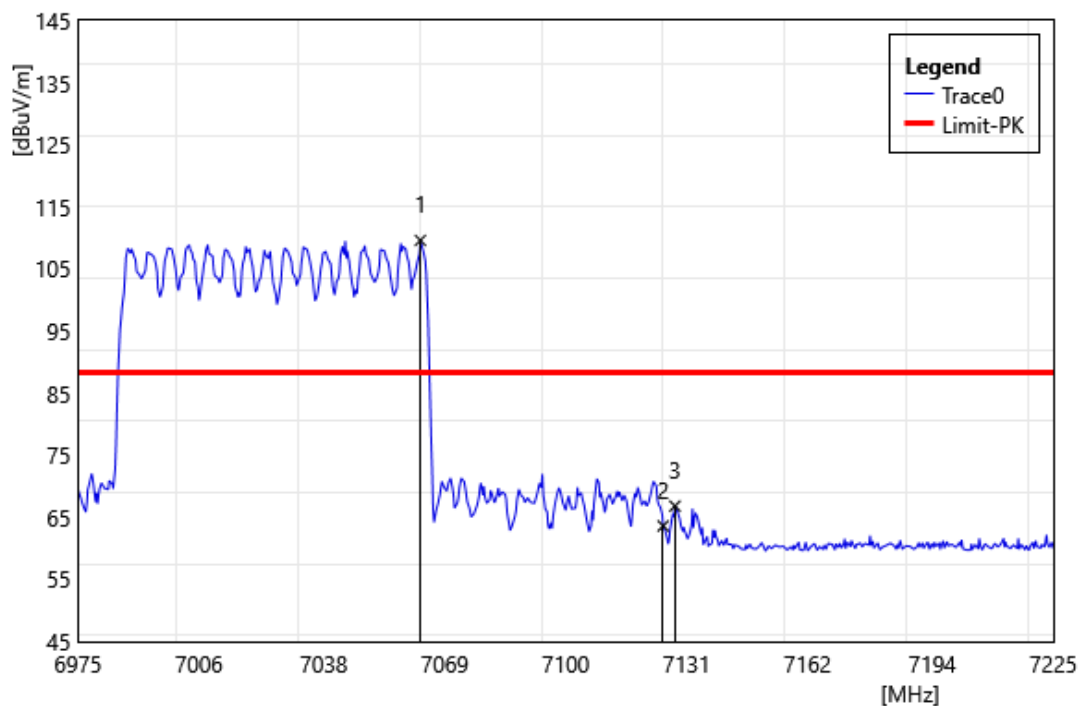


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7062.75	101.73	7.86	109.60	88.20	21.40	PEAK
2	7125.00	55.61	8.01	63.62	88.20	-24.58	PEAK
3	7128.00	58.83	7.99	66.82	88.20	-21.38	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

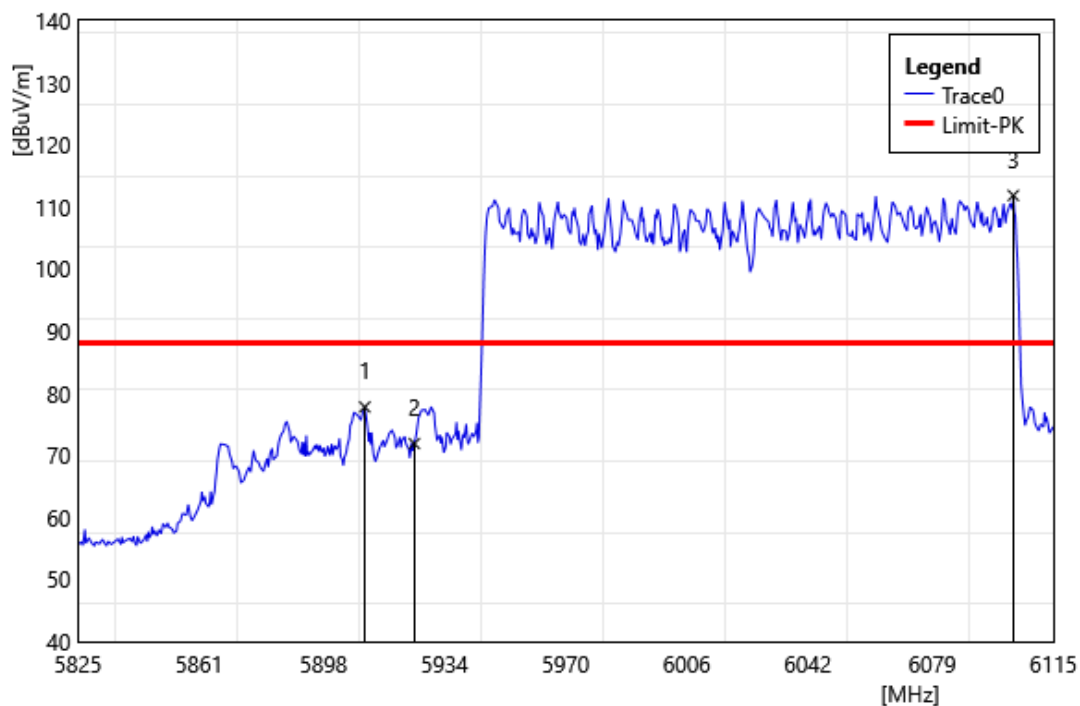


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5910.26	73.33	4.45	77.78	88.20	-10.42	PEAK
2	5925.00	67.58	4.31	71.89	88.20	-16.31	PEAK
3	6103.11	107.10	4.75	111.85	88.20	23.65	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

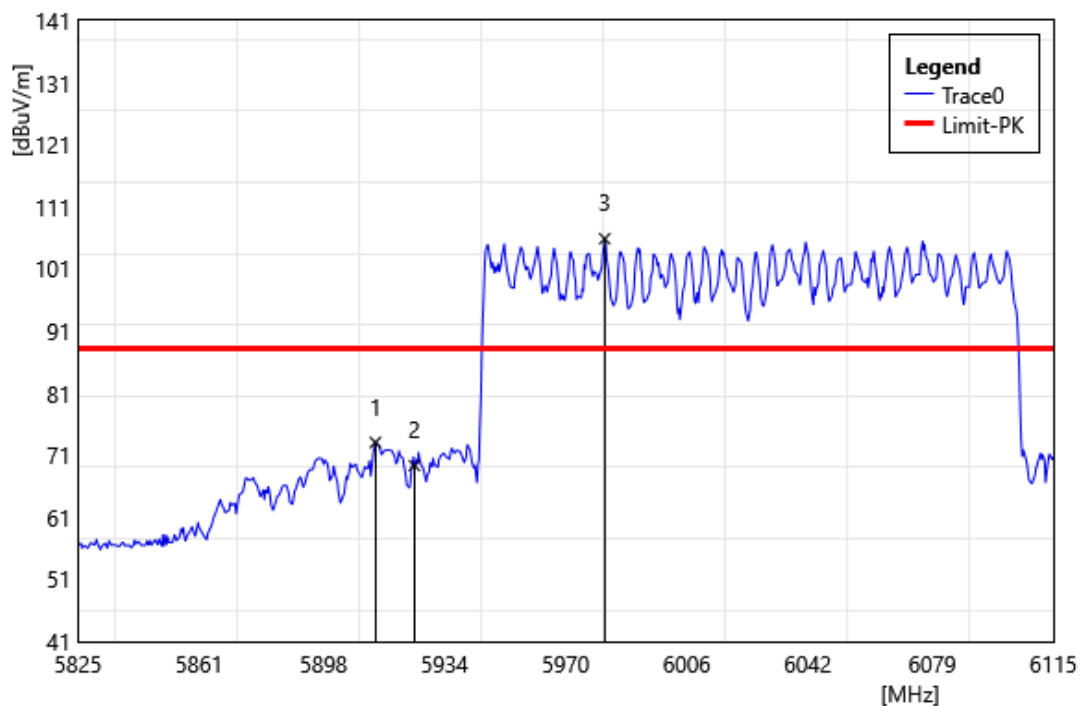


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5913.45	68.64	4.42	73.06	88.20	-15.14	PEAK
2	5925.00	65.02	4.31	69.33	88.20	-18.87	PEAK
3	5981.60	101.84	4.04	105.88	88.20	17.68	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

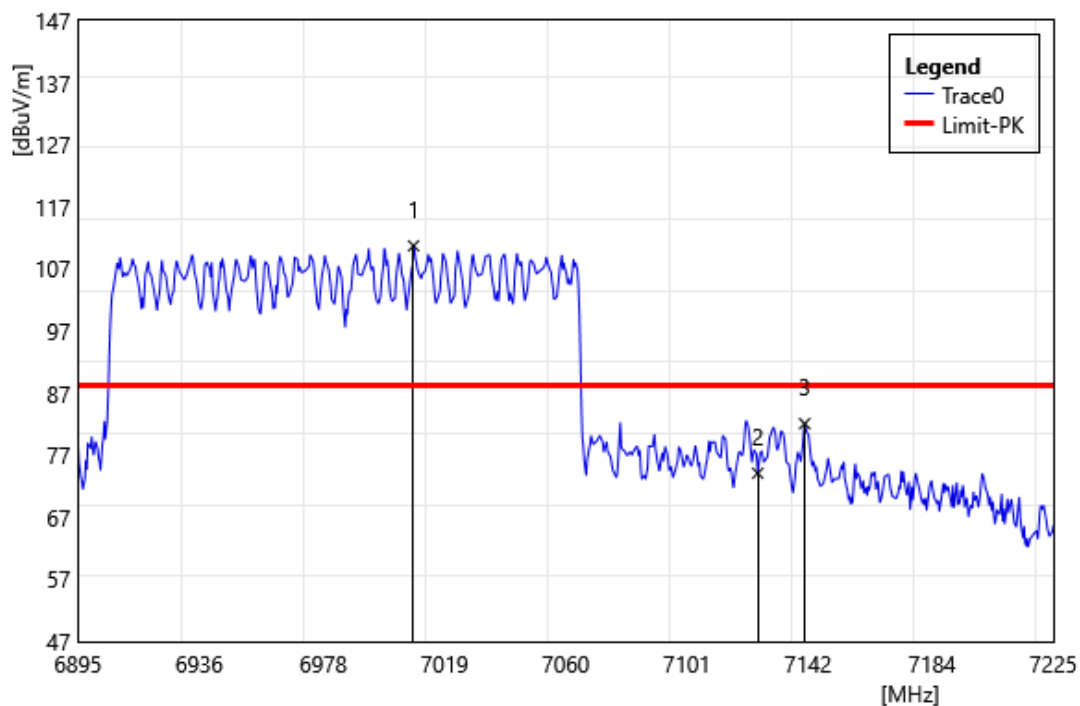


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7008.52	102.80	7.92	110.72	88.20	22.52	PEAK
2	7125.00	66.10	8.01	74.11	88.20	-14.09	PEAK
3	7140.85	74.11	7.98	82.09	88.20	-6.11	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

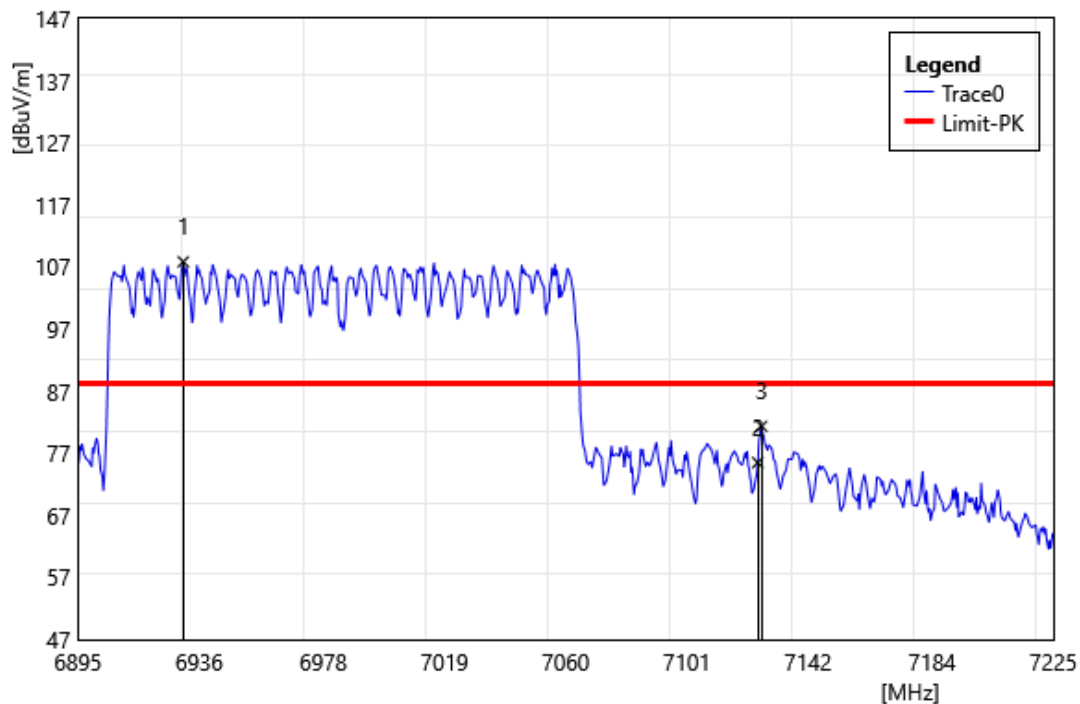


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6930.64	99.89	7.94	107.83	88.20	19.63	PEAK
2	7125.00	67.48	8.01	75.49	88.20	-12.71	PEAK
3	7126.33	73.34	8.00	81.35	88.20	-6.86	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

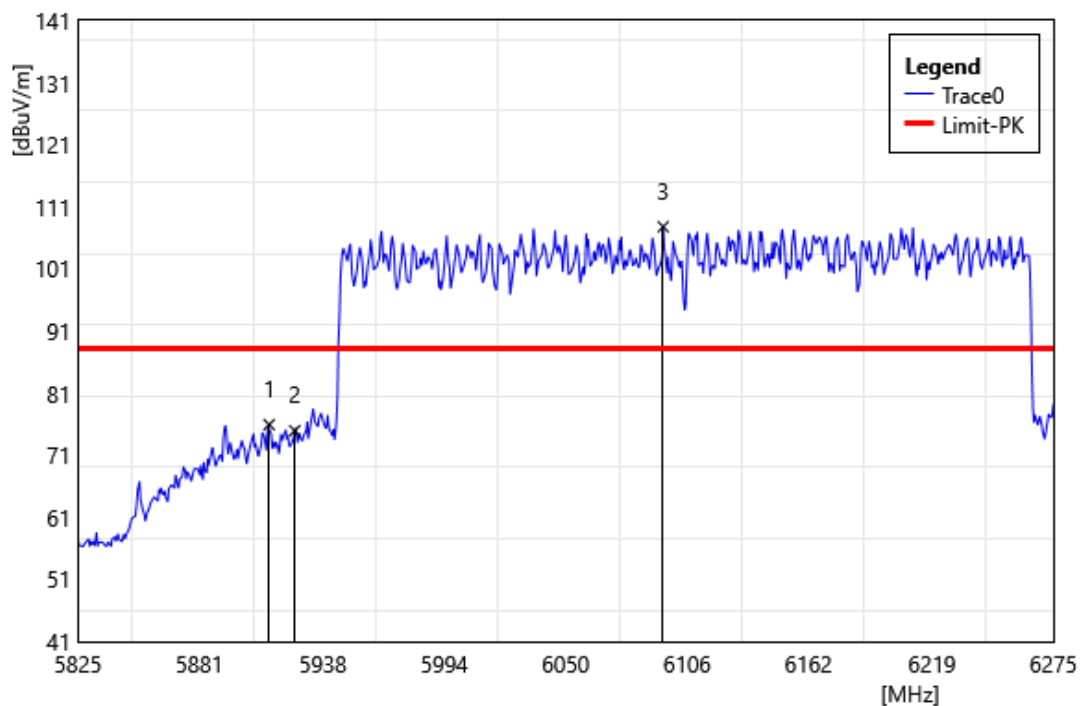


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5913.20	71.51	4.42	75.93	88.20	-12.27	PEAK
2	5925.00	70.64	4.31	74.95	88.20	-13.25	PEAK
3	6095.00	103.12	4.68	107.80	88.20	19.60	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Vertical		
Remark:			

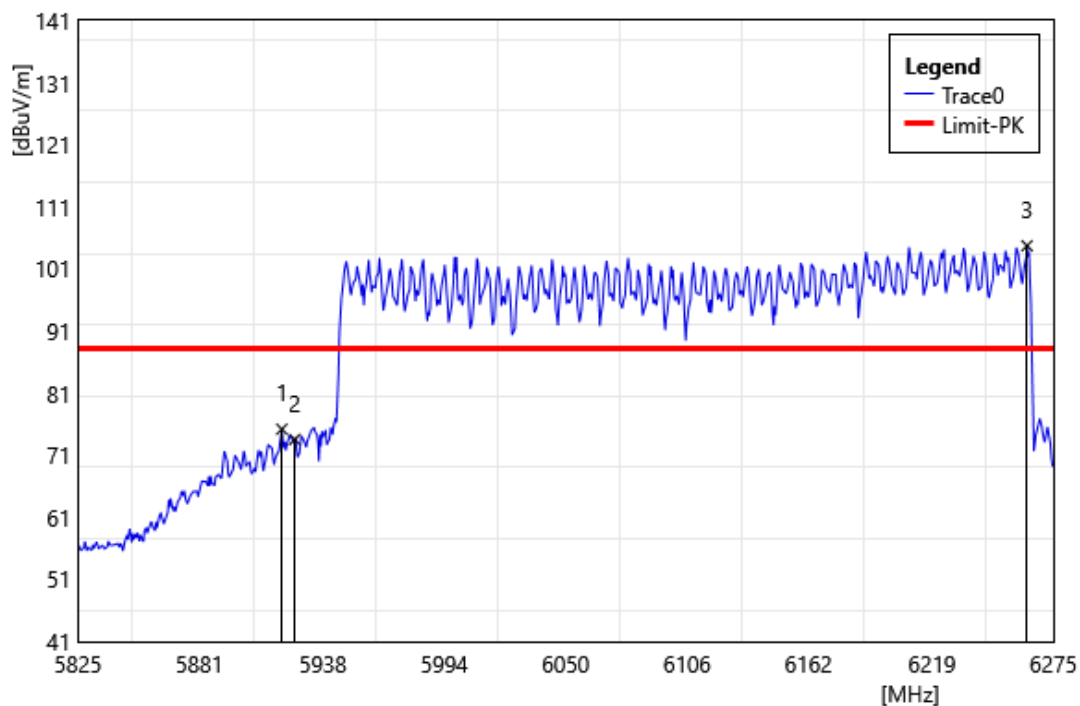


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5919.05	70.82	4.37	75.20	88.20	-13.01	PEAK
2	5925.00	69.23	4.31	73.54	88.20	-14.66	PEAK
3	6262.85	98.75	5.99	104.74	88.20	16.54	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

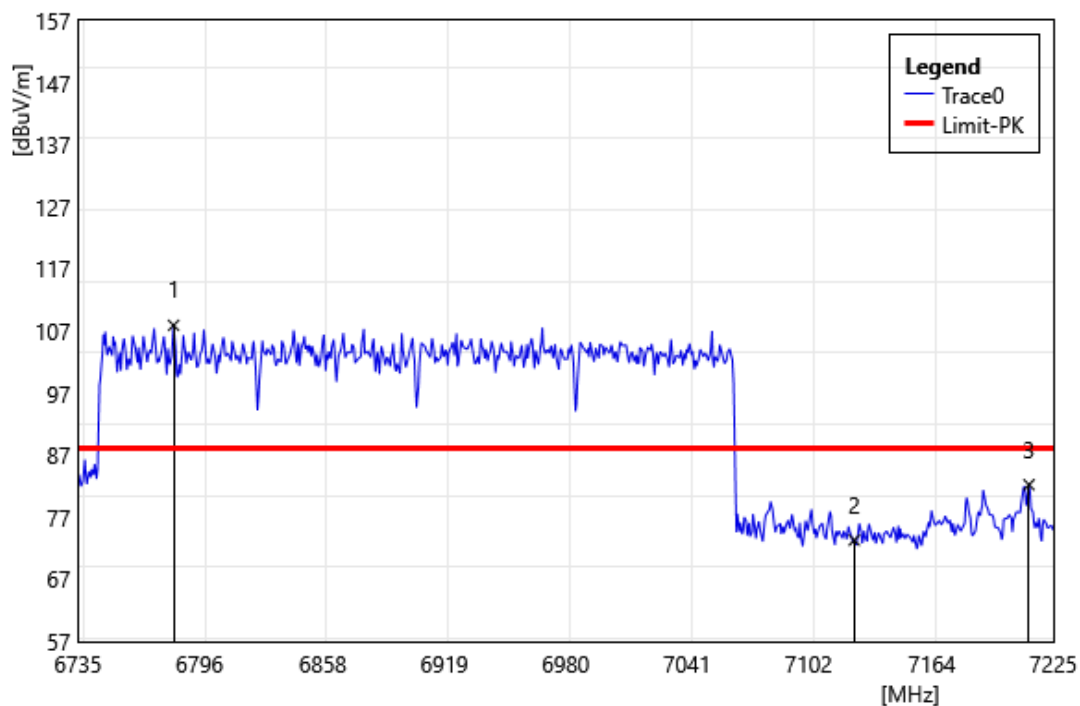

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6783.02	100.15	7.78	107.93	88.20	19.73	PEAK
2	7125.00	65.31	8.01	73.32	88.20	-14.88	PEAK
3	7212.75	74.26	7.99	82.25	88.20	-5.95	PEAK


Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

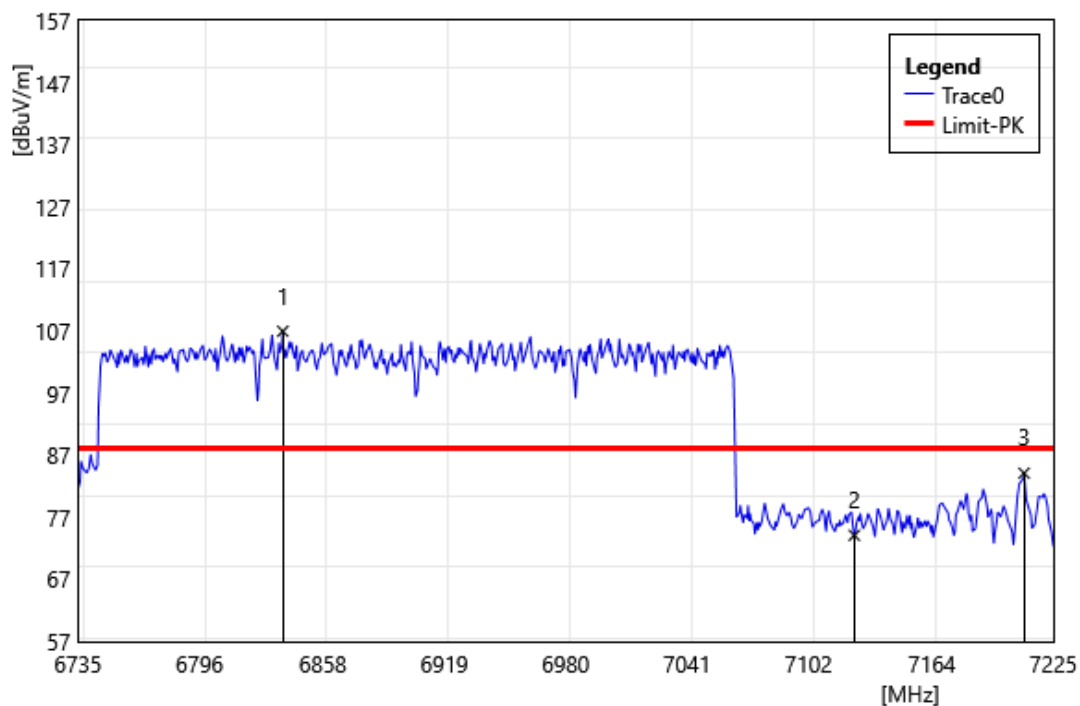

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6837.90	99.14	7.82	106.96	88.20	18.76	PEAK
2	7125.00	66.09	8.01	74.10	88.20	-14.10	PEAK
3	7210.30	76.13	7.99	84.12	88.20	-4.08	PEAK


Average

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

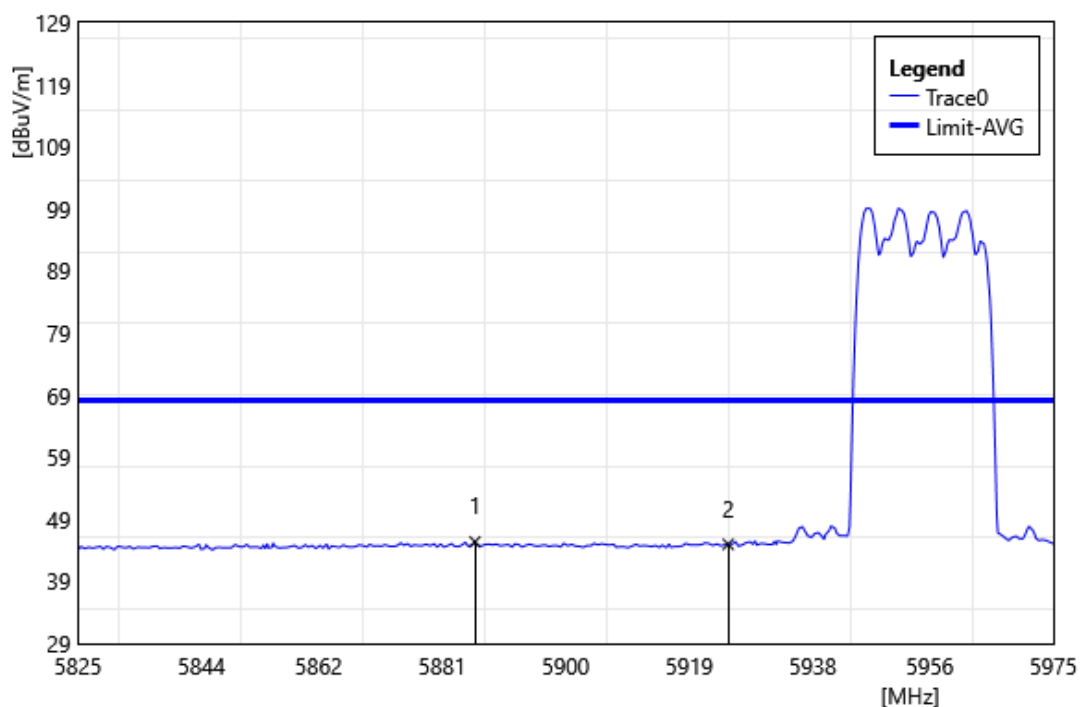


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5886.05	40.91	4.47	45.38	68.20	-22.82	AVG
2	5925.00	40.66	4.31	44.97	68.20	-23.23	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

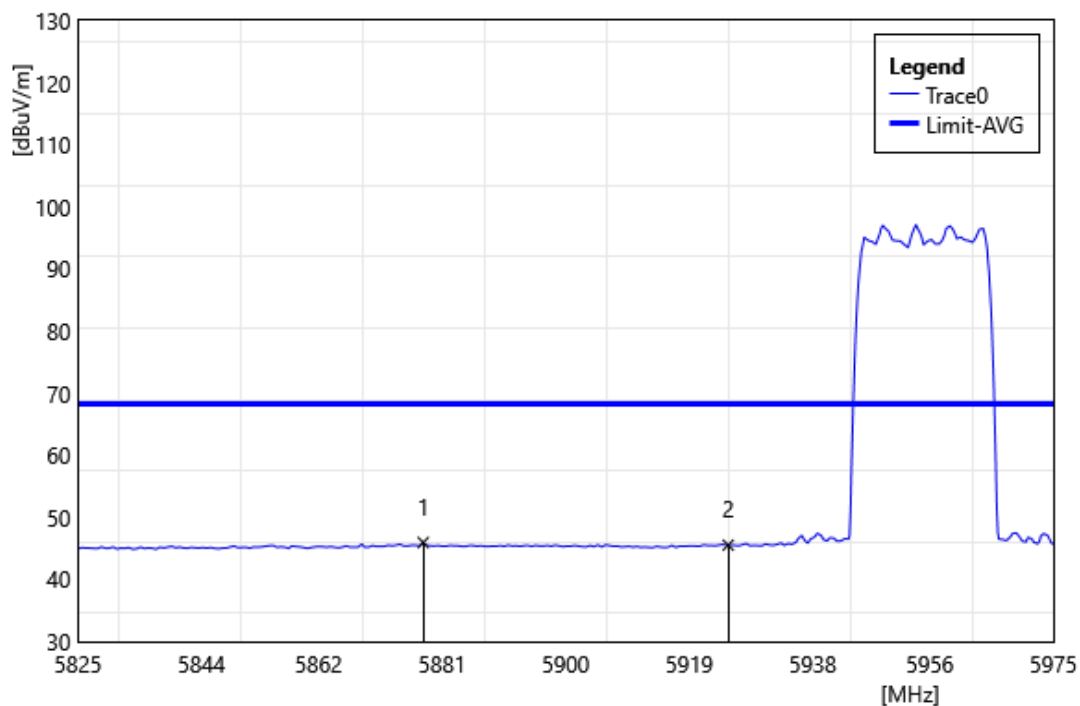


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5878.10	41.51	4.44	45.95	68.20	-22.25	AVG
2	5925.00	41.22	4.31	45.53	68.20	-22.67	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

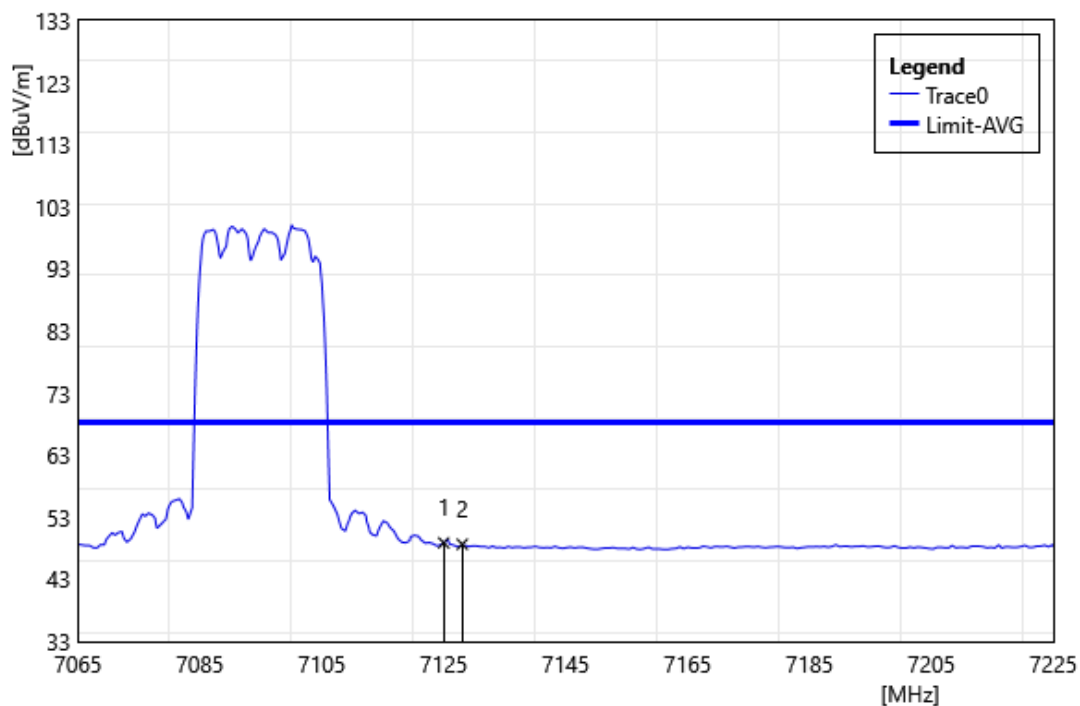


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	40.89	8.01	48.90	68.20	-19.30	AVG
2	7128.04	40.67	7.99	48.66	68.20	-19.54	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

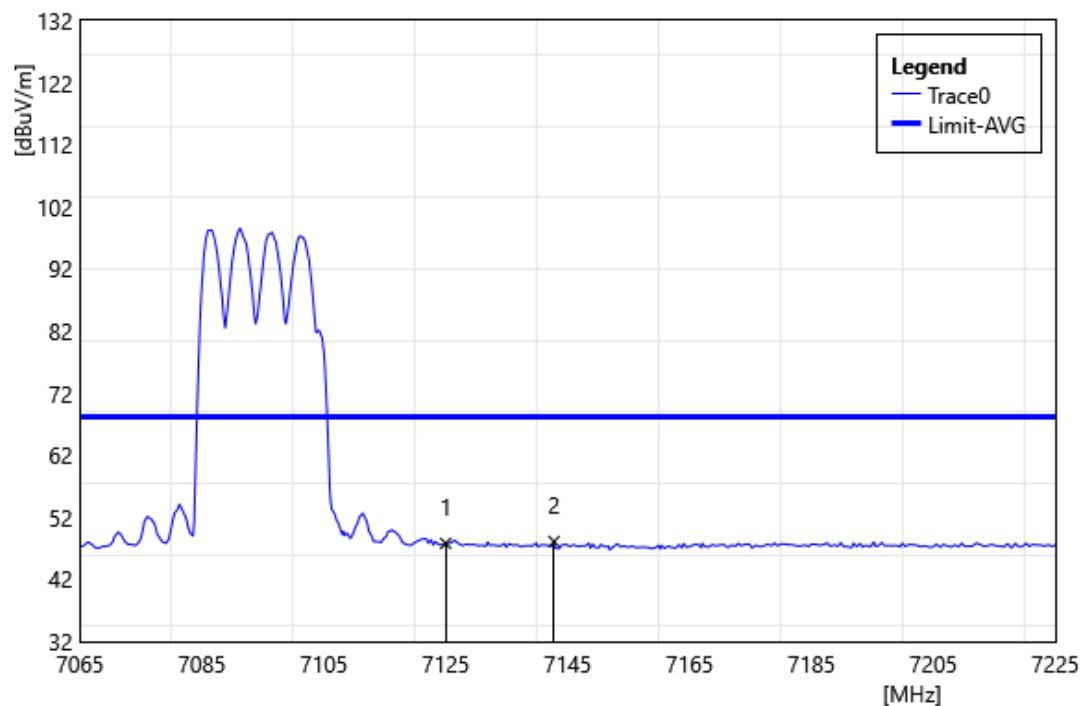


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	39.79	8.01	47.80	68.20	-20.40	AVG
2	7142.76	40.14	7.98	48.12	68.20	-20.08	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

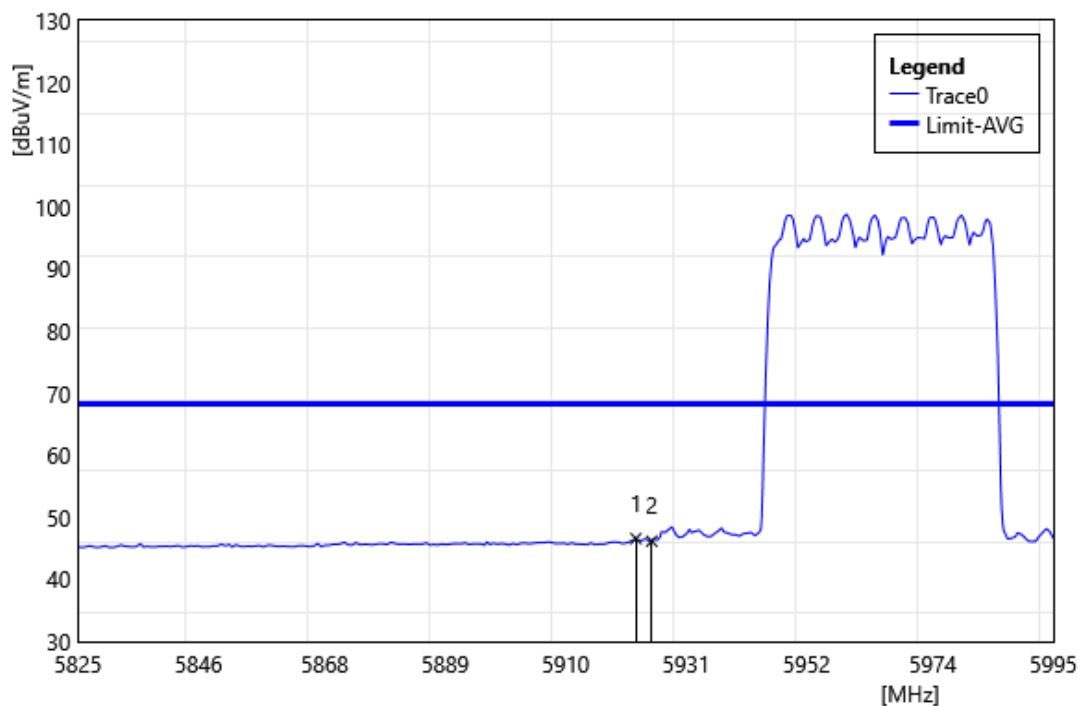


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.24	42.25	4.34	46.59	68.20	-21.61	AVG
2	5925.00	41.86	4.31	46.17	68.20	-22.03	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

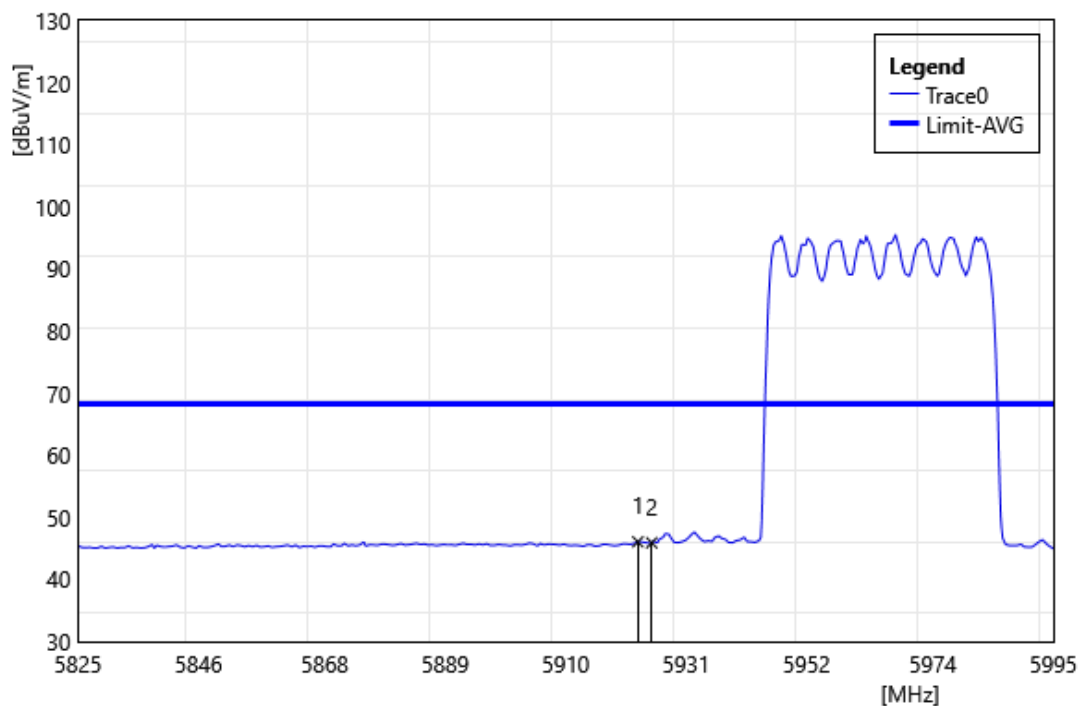


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.58	41.73	4.33	46.06	68.20	-22.14	AVG
2	5925.00	41.59	4.31	45.90	68.20	-22.30	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

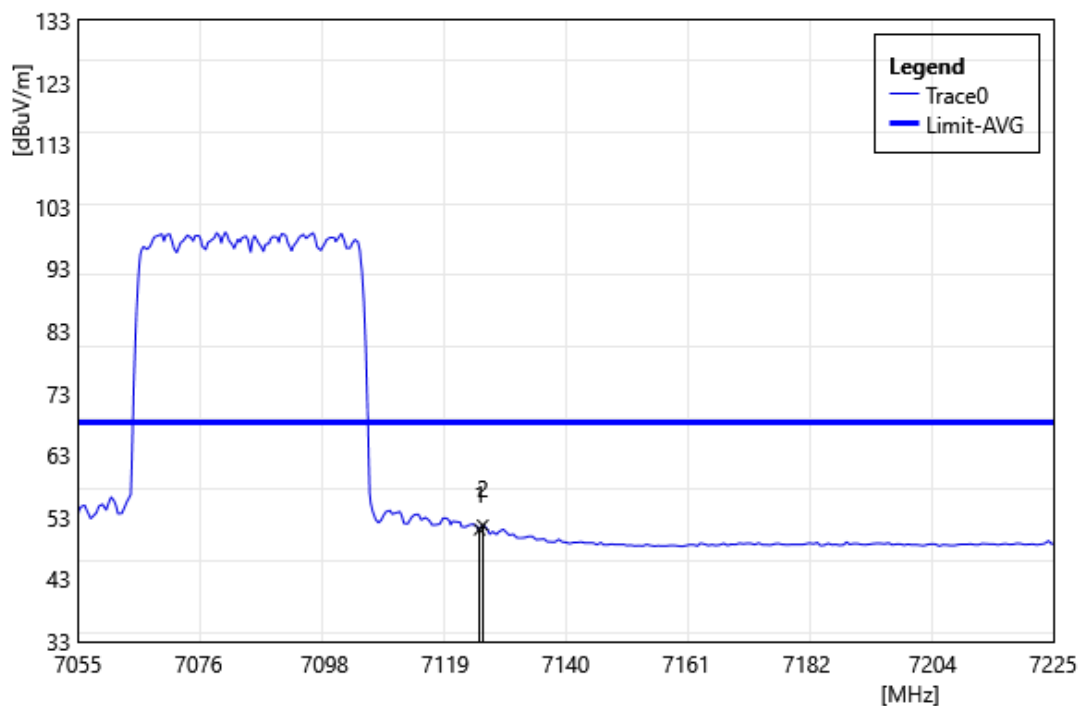


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	43.00	8.01	51.01	68.20	-17.19	AVG
2	7125.55	43.72	8.00	51.72	68.20	-16.48	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Vertical		
Remark:			

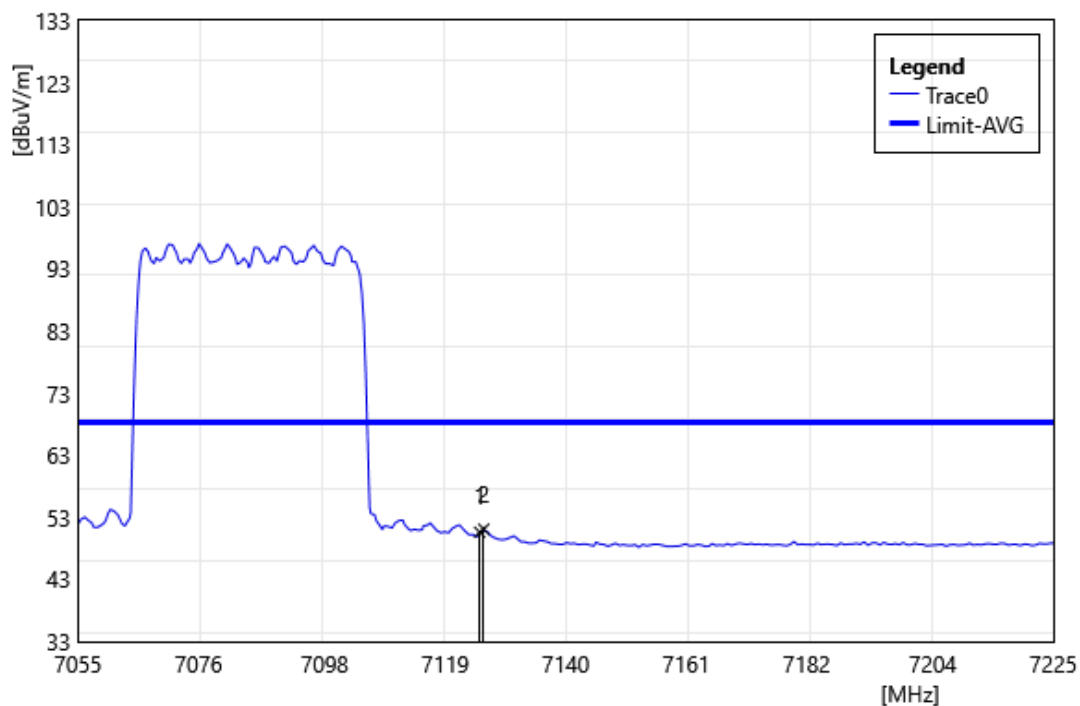


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	42.60	8.01	50.61	68.20	-17.59	AVG
2	7125.72	43.09	8.00	51.09	68.20	-17.11	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

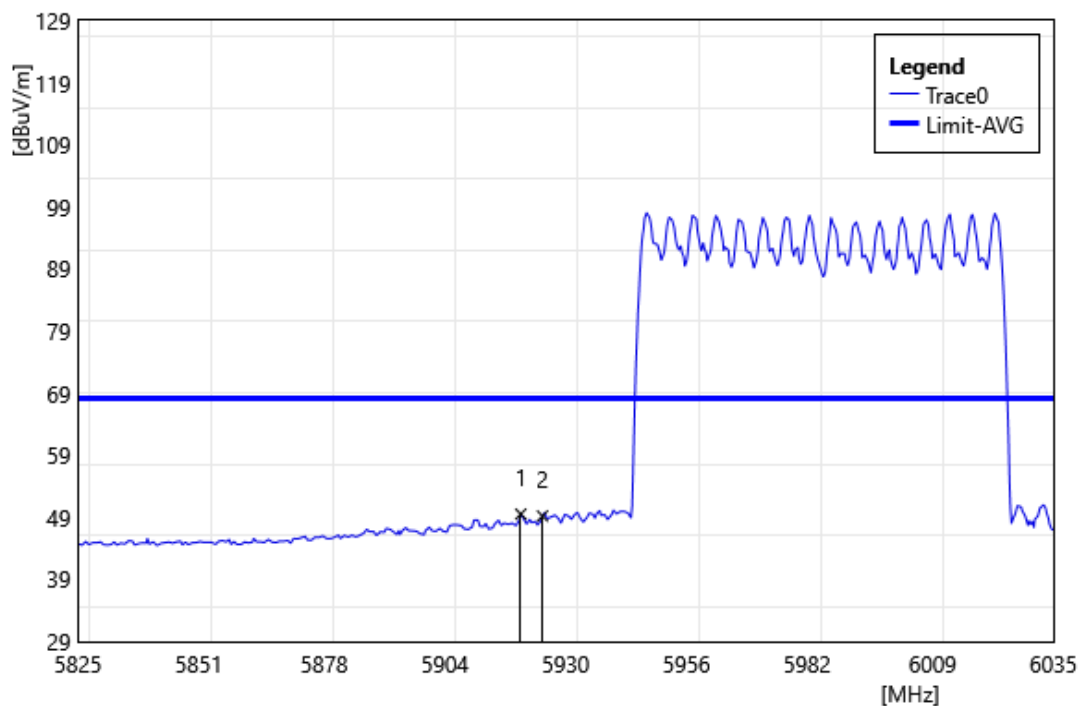


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.34	45.17	4.36	49.53	68.20	-18.68	AVG
2	5925.00	44.91	4.31	49.22	68.20	-18.98	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

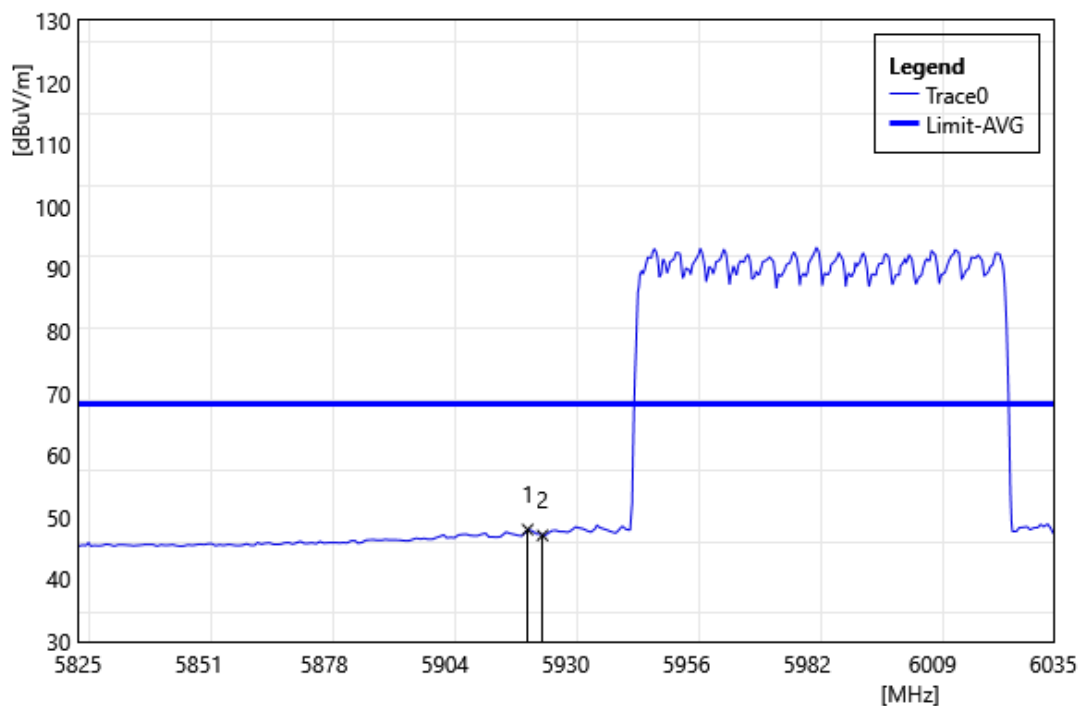


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.81	43.70	4.34	48.04	68.20	-20.16	AVG
2	5925.00	42.78	4.31	47.09	68.20	-21.11	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

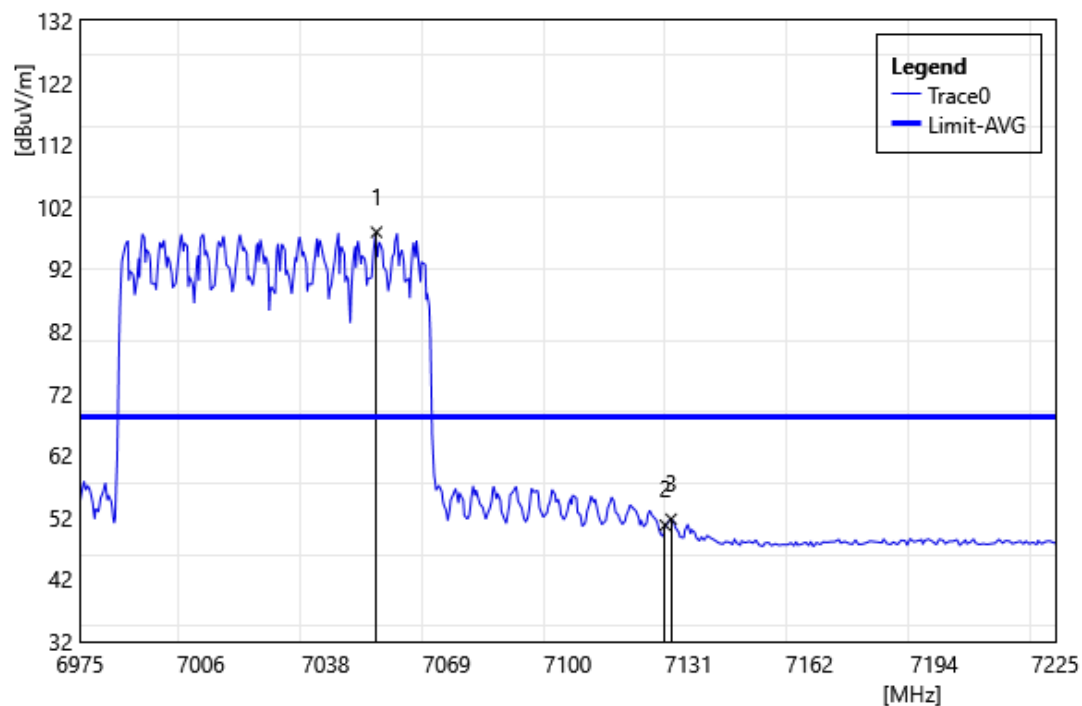


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7051.00	90.13	7.80	97.93	68.20	29.73	PEAK
2	7125.00	42.72	8.01	50.73	68.20	-17.47	PEAK
3	7126.50	43.70	8.00	51.70	68.20	-16.50	PEAK

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

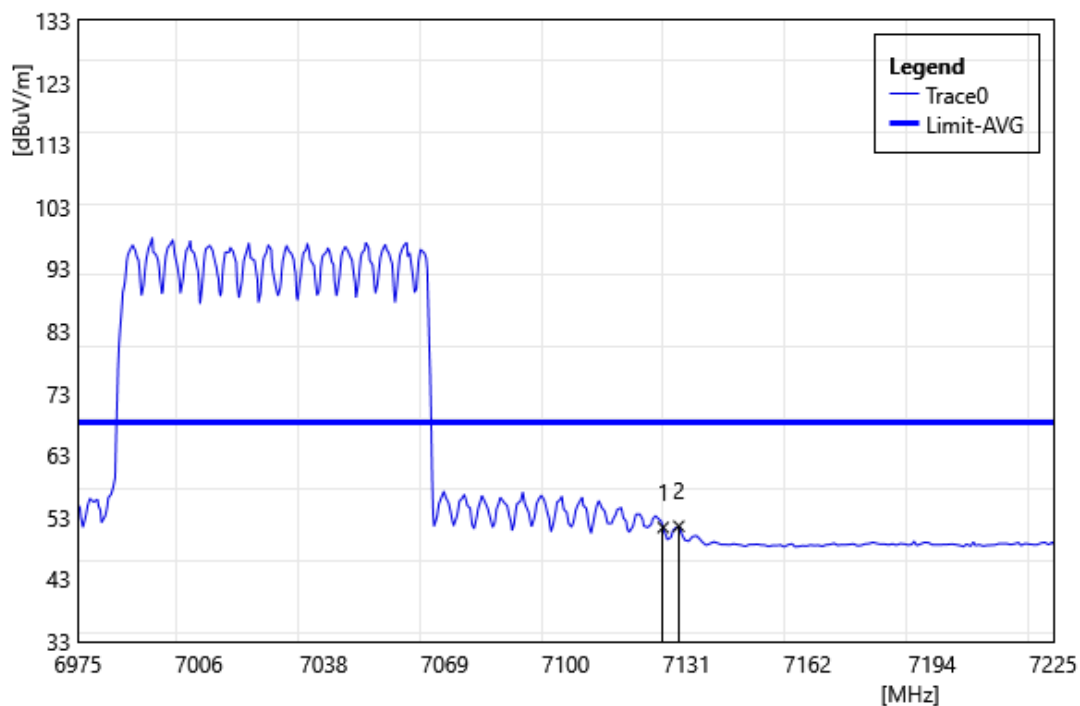


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	43.35	8.01	51.36	68.20	-16.84	AVG
2	7129.00	43.59	7.99	51.58	68.20	-16.62	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

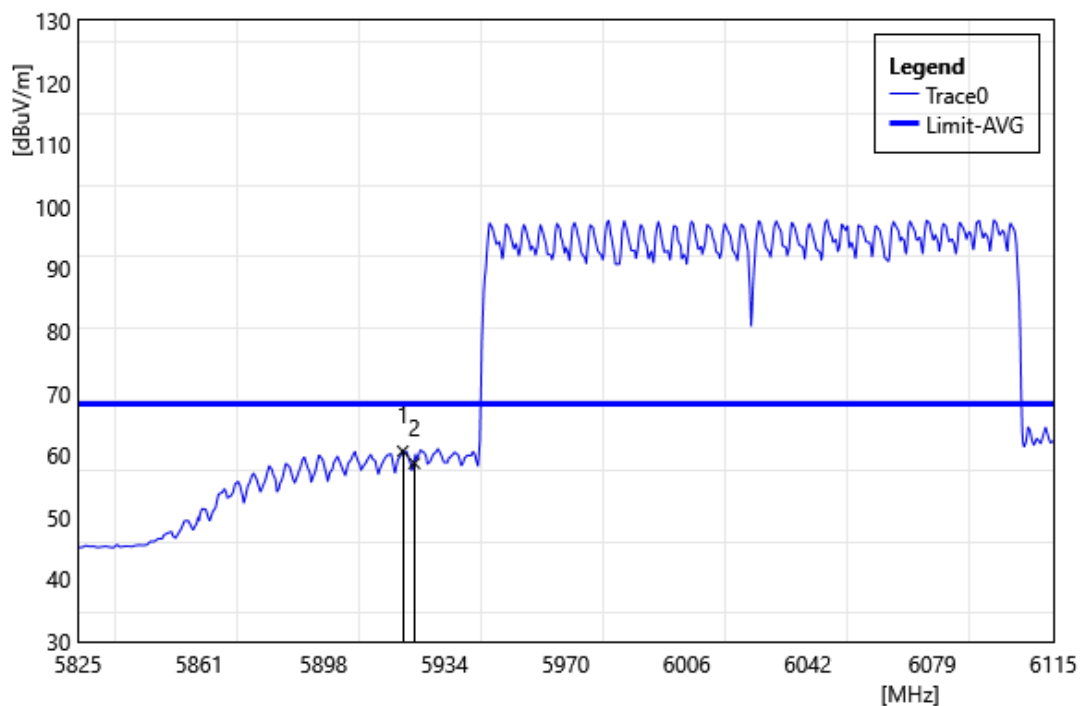


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.57	56.32	4.34	60.66	68.20	-7.54	AVG
2	5925.00	54.40	4.31	58.71	68.20	-9.49	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

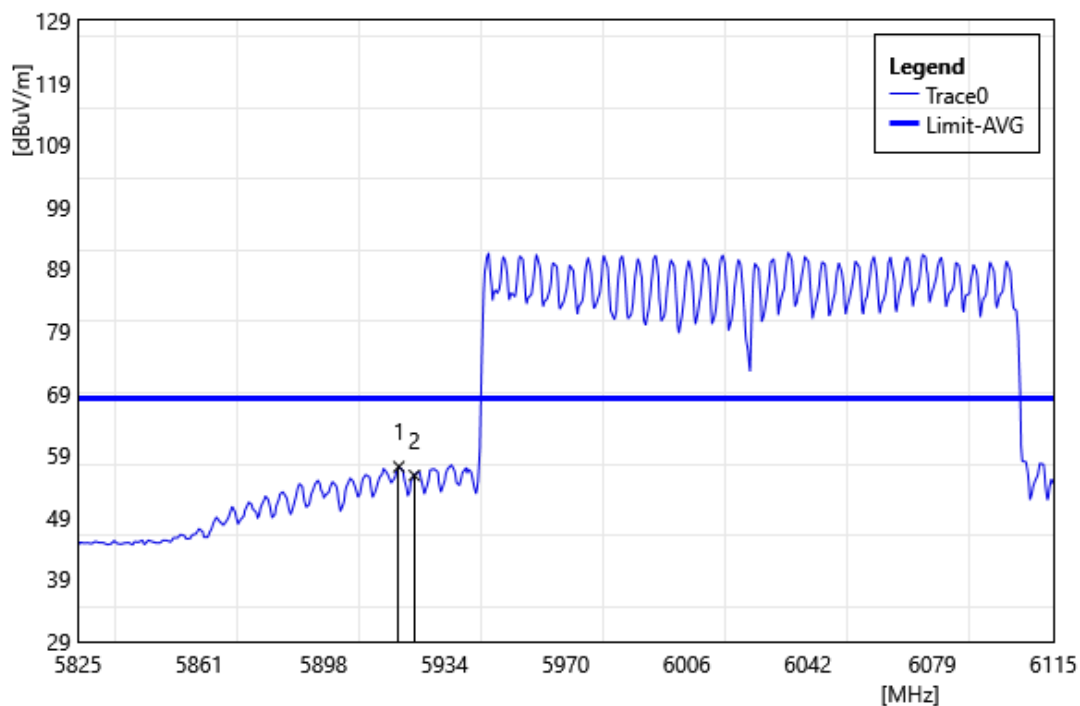


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.41	52.78	4.36	57.14	68.20	-11.06	AVG
2	5925.00	51.43	4.31	55.74	68.20	-12.46	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

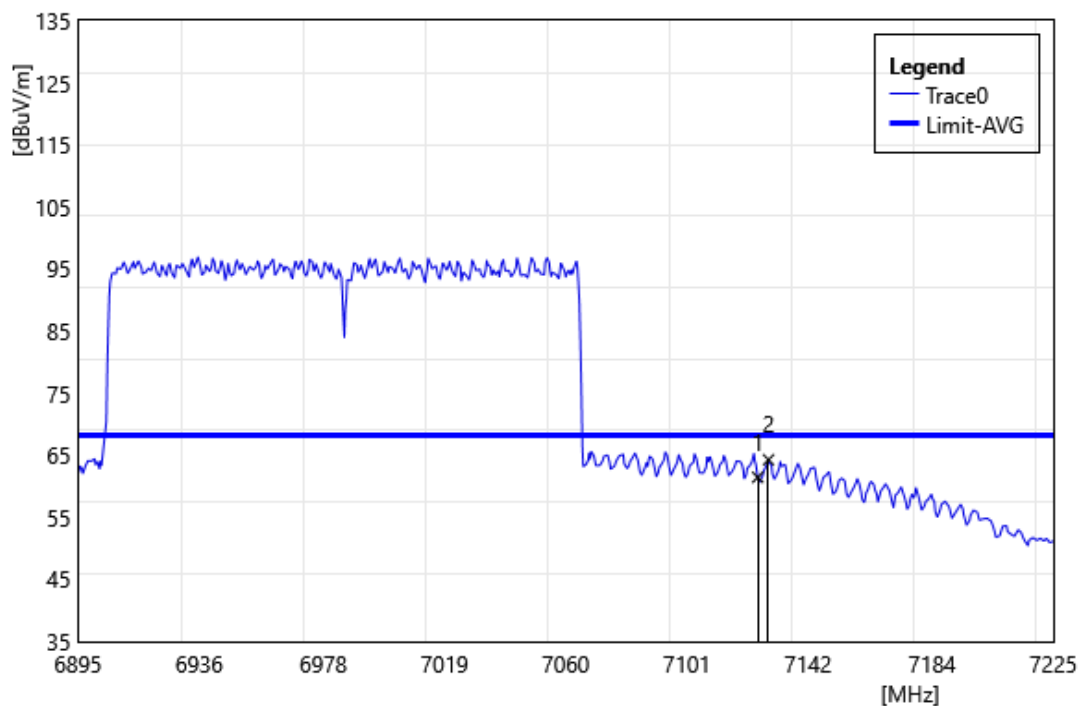


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	53.44	8.01	61.45	68.20	-6.75	AVG
2	7128.64	56.30	7.99	64.29	68.20	-3.91	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

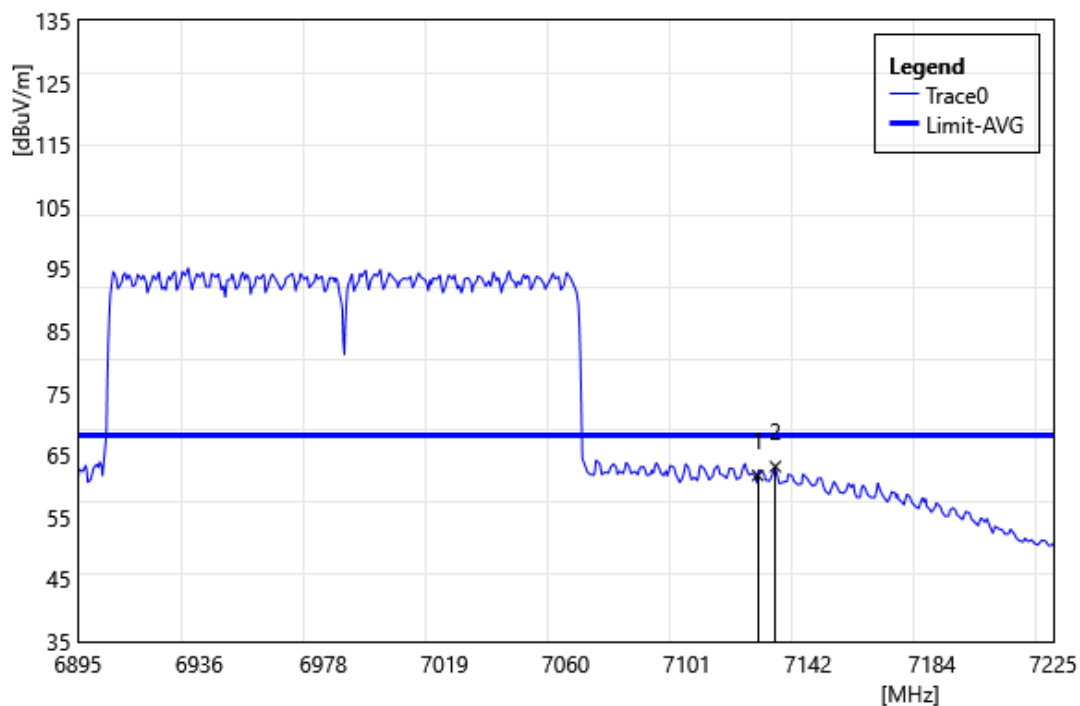


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	53.74	8.01	61.75	68.20	-6.45	AVG
2	7130.95	55.19	7.99	63.18	68.20	-5.02	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

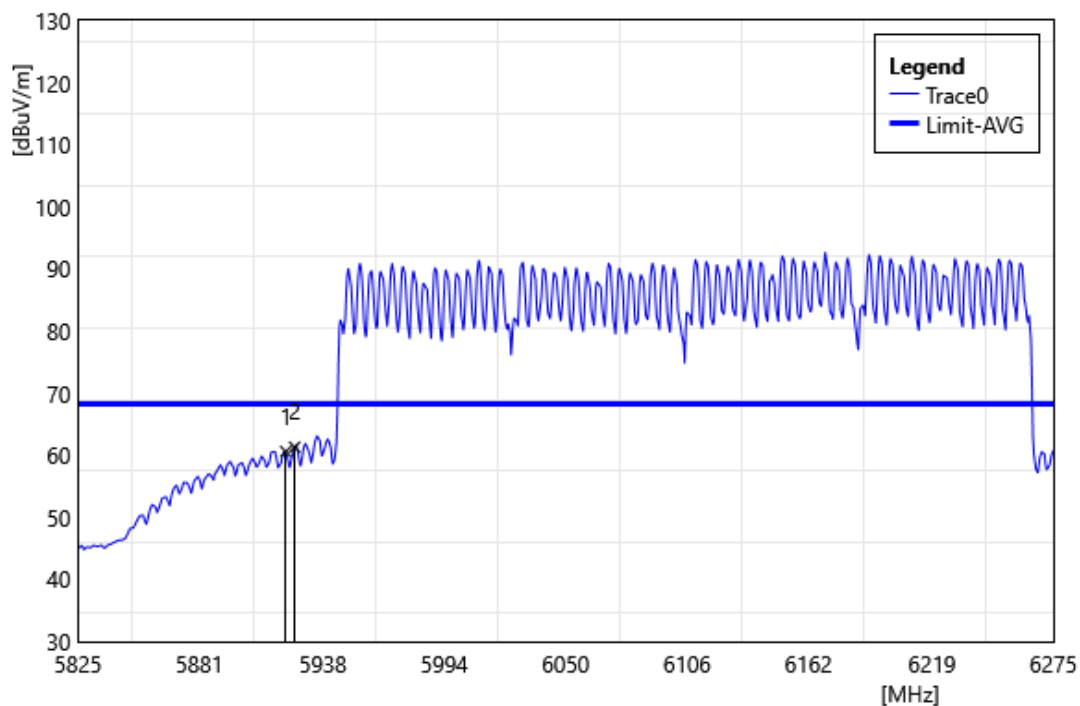


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.85	56.26	4.35	60.61	68.20	-7.60	AVG
2	5925.00	56.99	4.31	61.30	68.20	-6.90	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

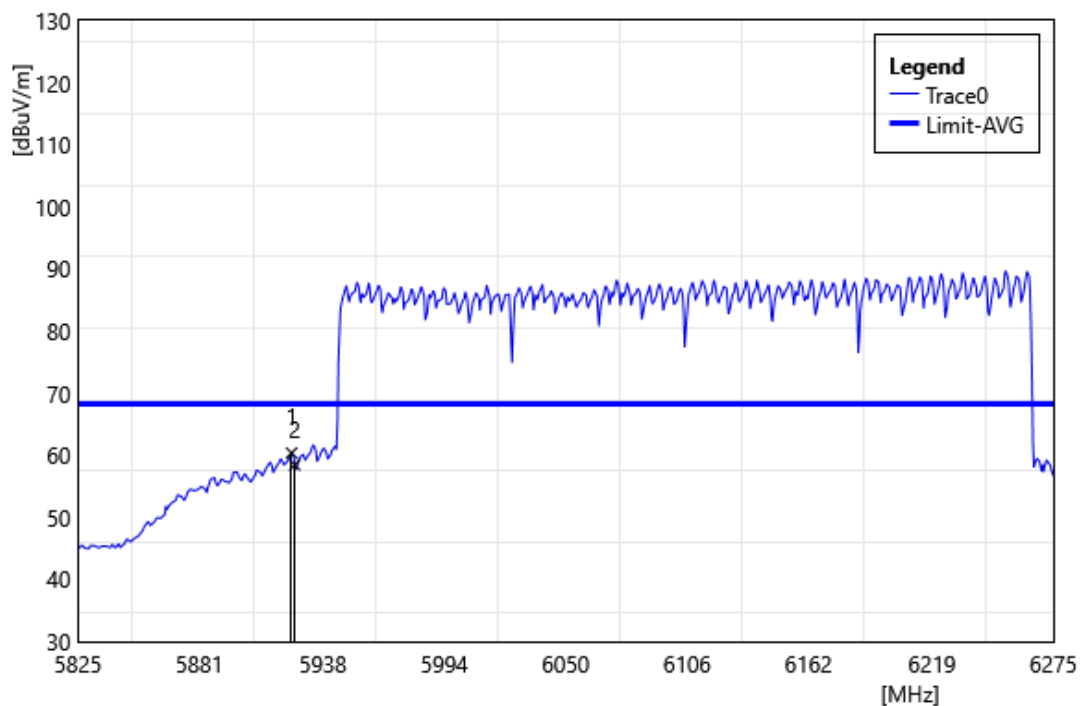


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.55	56.05	4.32	60.37	68.20	-7.84	AVG
2	5925.00	54.14	4.31	58.45	68.20	-9.75	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

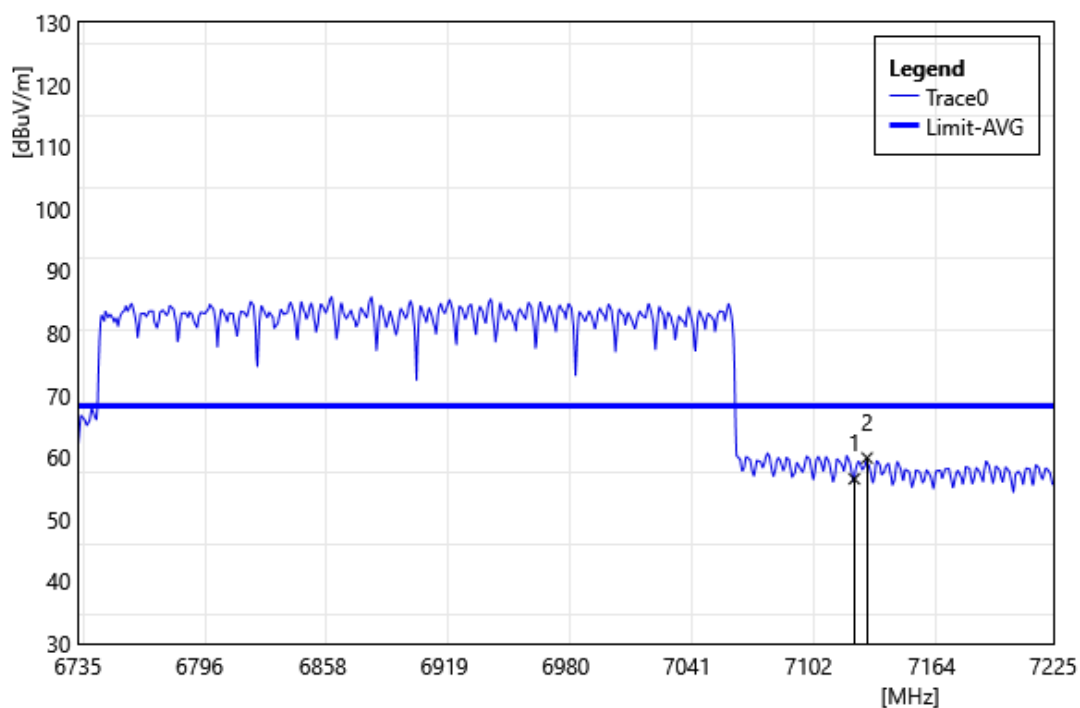

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	48.66	7.86	56.52	68.20	-11.68	AVG
2	7131.41	52.00	7.89	59.89	68.20	-8.31	AVG

Test Site:	96602-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

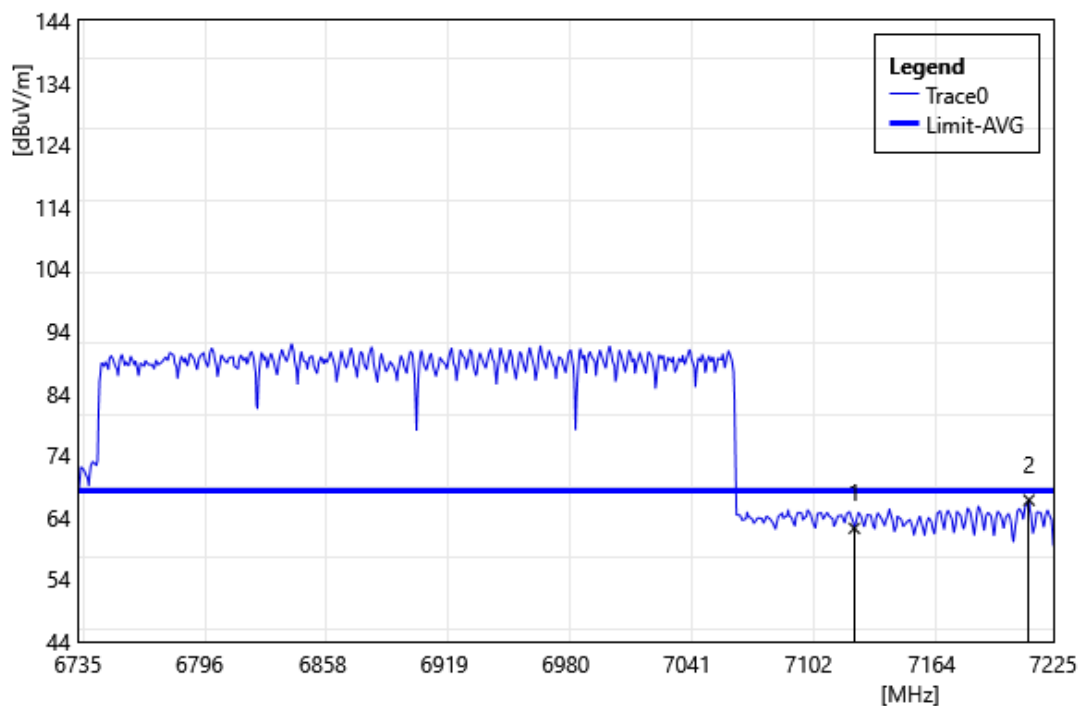

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	54.22	8.01	62.23	68.20	-5.97	AVG
2	7212.75	58.79	7.99	66.78	68.20	-1.42	AVG

5.3. Conducted Test Results

5.3.1. Duty cycle

Duty Cycle							
Mode	Frequency (MHz)	On time (us)	On+off time (us)	Duty cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11ax HE20	5955	350.000	400.000	87.50	0.58	0.00	1.00
802.11ax HE40	5965	232.000	290.000	80.00	0.97	0.00	1.00
802.11ax HE80	5985	165.000	215.000	76.74	1.15	0.01	1.00
802.11ax HE160	6025	138.000	196.000	70.41	1.52	0.01	1.00
802.11be EHT20	5955	359.000	408.000	87.99	0.56	0.00	1.00
802.11be EHT40	5965	240.000	299.000	80.27	0.95	0.00	1.00
802.11be EHT80	5985	173.300	223.300	77.61	1.10	0.01	1.00
802.11be EHT160	6025	145.000	204.000	71.08	1.48	0.01	1.00
802.11be EHT320	6105	131.000	180.000	72.78	1.38	0.01	1.00

■ Test Graphs

Reference Appendix C

5.3.2. Maximum Output Power Measurement

Mode	Channel	Frequency (MHz)	Polarization (H/V)	EIRP					
				Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Limit
11ax HE20	1	5955	H	10.90	10.900	4.07	0.58	15.550	30.00
			V	6.73					
	45	6175	H	10.60	10.600	5.21	0.58	16.390	30.00
			V	5.93					
	93	6415	H	7.96	7.960	6.81	0.58	15.350	30.00
			V	4.41					
	97	6435	H	8.50	8.500	6.87	0.58	15.950	30.00
			V	4.28					
	105	6475	H	7.35	7.350	6.89	0.58	14.820	30.00
			V	3.76					
	113	6515	H	7.75	7.750	6.89	0.58	15.220	30.00
			V	6.21					
	117	6535	H	7.96	7.960	6.90	0.58	15.440	30.00
			V	5.38					
	149	6695	H	7.65	7.650	7.44	0.58	15.670	30.00
			V	5.72					
	181	6855	H	7.96	7.960	7.81	0.58	16.350	30.00
			V	6.58					
	185	6875	H	6.87	6.870	7.83	0.58	15.280	30.00
			V	6.41					
	189	6895	H	6.89	6.890	7.85	0.58	15.320	30.00
			V	5.96					
	209	6995	H	7.68	7.680	7.95	0.58	16.210	30.00
			V	6.34					
	229	7095	H	7.84	7.840	8.01	0.58	16.430	30.00
			V	7.02					

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Limit
11ax HE40	3	5965	H	13.03	13.030	4.06	0.97	18.060	30.00
			V	8.55					
	43	6165	H	11.77	11.770	5.16	0.97	17.900	30.00
			V	10.06					
	91	6405	H	10.75	10.750	6.78	0.97	18.500	30.00
			V	6.61					
	99	6445	H	10.43	10.430	6.90	0.97	18.300	30.00
			V	6.72					
	107	6485	H	10.32	10.320	6.88	0.97	18.170	30.00
			V	5.93					
	115	6525	H	9.47	9.470	6.89	0.97	17.330	30.00
			V	6.67					
	123	6565	H	10.53	10.530	7.02	0.97	18.520	30.00
			V	8.14					
	147	6685	H	10.22	10.220	7.39	0.97	18.580	30.00
			V	8.00					
	179	6845	H	9.18	9.180	7.81	0.97	17.960	30.00
			V	8.69					
	187	6885	H	9.72	9.720	7.84	0.97	18.530	30.00
			V	9.01					
	195	6925	H	8.64	8.640	7.93	0.97	17.540	30.00
			V	7.42					
	211	7005	H	9.51	9.510	7.94	0.97	18.420	30.00
			V	8.48					
	227	7085	H	8.96	8.960	7.96	0.97	17.890	30.00
			V	7.72					

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Limit
11ax HE80	7	5985	H	15.63	15.630	4.03	1.15	20.810	30.00
			V	10.54					
	39	6145	H	14.27	14.270	5.05	1.15	20.470	30.00
			V	10.74					
	87	6385	H	12.73	12.730	6.68	1.15	20.560	30.00
			V	8.67					
	103	6465	H	13.00	13.000	6.90	1.15	21.050	30.00
			V	8.72					
	119	6545	H	13.21	13.210	6.92	1.15	21.280	30.00
			V	12.25					
	135	6625	H	11.17	11.170	7.24	1.15	19.560	30.00
			V	9.85					
	151	6705	H	12.07	12.070	7.48	1.15	20.700	30.00
			V	10.64					
	167	6785	H	9.95	9.950	7.78	1.15	18.880	30.00
			V	9.06					
	183	6865	H	10.93	10.930	7.82	1.15	19.900	30.00
			V	10.82					
	199	6945	H	11.84	11.840	7.99	1.15	20.980	30.00
			V	10.76					
	215	7025	H	11.85	11.850	7.87	1.15	20.870	30.00
			V	10.51					

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Limit
11ax HE160	15	6025	H	18.01	18.010	4.14	1.52	23.670	30.00
			V	13.12					
	47	6185	H	15.13	15.130	5.26	1.52	21.910	30.00
			V	10.65					
	79	6345	H	12.00	12.000	6.48	1.52	20.000	30.00
			V	11.43					
	111	6505	H	14.70	14.700	6.88	1.52	23.100	30.00
			V	11.58					
	143	6665	H	13.67	13.670	7.29	1.52	22.480	30.00
			V	11.15					
	175	6825	H	12.84	12.840	7.84	1.52	22.200	30.00
			V	12.14					
	207	6985	H	14.19	14.190	7.97	1.52	23.680	30.00
			V	12.61					

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Limit
11be_EHT20	1	5955	H	10.94	10.940	4.07	0.56	15.570	30.00
			V	6.79					
	45	6175	H	10.66	10.660	5.21	0.56	16.430	30.00
			V	5.97					
	93	6415	H	8.02	8.020	6.81	0.56	15.390	30.00
			V	4.46					
	97	6435	H	8.60	8.600	6.87	0.56	16.030	30.00
			V	4.33					
	105	6475	H	7.40	7.400	6.89	0.56	14.850	30.00
			V	3.80					
	113	6515	H	7.79	7.790	6.89	0.56	15.240	30.00
			V	6.24					
	117	6535	H	7.98	7.980	6.90	0.56	15.440	30.00
			V	5.44					
	149	6695	H	7.68	7.680	7.44	0.56	15.680	30.00
			V	5.69					
	181	6855	H	8.02	8.020	7.81	0.56	16.390	30.00
			V	6.63					
	185	6875	H	6.90	6.900	7.83	0.56	15.290	30.00
			V	6.44					
	189	6895	H	6.92	6.920	7.85	0.56	15.330	30.00
			V	6.05					
	209	6995	H	7.71	7.710	7.95	0.56	16.220	30.00
			V	6.37					
	229	7095	H	7.90	7.900	8.01	0.56	16.470	30.00
			V	7.09					

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Limit
11be_EHT40	3	5965	H	13.06	13.060	4.06	0.95	18.070	30.00
			V	8.58					
	43	6165	H	11.82	11.820	5.16	0.95	17.930	30.00
			V	10.09					
	91	6405	H	10.78	10.780	6.78	0.95	18.510	30.00
			V	6.64					
	99	6445	H	10.46	10.460	6.90	0.95	18.310	30.00
			V	6.75					
	107	6485	H	10.35	10.350	6.88	0.95	18.180	30.00
			V	5.96					
	115	6525	H	9.52	9.520	6.89	0.95	17.360	30.00
			V	6.76					
	123	6565	H	10.57	10.570	7.02	0.95	18.540	30.00
			V	8.18					
	147	6685	H	10.26	10.260	7.39	0.95	18.600	30.00
			V	8.03					
	179	6845	H	9.22	9.220	7.81	0.95	17.980	30.00
			V	8.74					
	187	6885	H	9.76	9.760	7.84	0.95	18.550	30.00
			V	9.06					
	195	6925	H	8.69	8.690	7.93	0.95	17.570	30.00
			V	7.45					
	211	7005	H	9.55	9.550	7.94	0.95	18.440	30.00
			V	8.52					
	227	7085	H	9.01	9.010	7.96	0.95	17.920	30.00
			V	7.76					

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Limit
11be_EHT80	7	5985	H	15.68	15.680	4.03	1.10	20.810	30.00
			V	10.60					
	39	6145	H	14.34	14.340	5.05	1.10	20.490	30.00
			V	10.78					
	87	6385	H	12.80	12.800	6.68	1.10	20.580	30.00
			V	8.72					
	103	6465	H	13.05	13.050	6.90	1.10	21.050	30.00
			V	8.75					
	119	6545	H	13.28	13.280	6.92	1.10	21.300	30.00
			V	12.29					
	135	6625	H	11.23	11.230	7.24	1.10	19.570	30.00
			V	9.88					
	151	6705	H	12.12	12.120	7.48	1.10	20.700	30.00
			V	10.67					
	167	6785	H	10.00	10.000	7.78	1.10	18.880	30.00
			V	9.10					
	183	6865	H	10.99	10.990	7.82	1.10	19.910	30.00
			V	10.85					
	199	6945	H	11.90	11.900	7.99	1.10	20.990	30.00
			V	10.79					
	215	7025	H	11.90	11.900	7.87	1.10	20.870	30.00
			V	10.54					

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Limit
11be_EHT160	15	6025	H	18.09	18.090	4.14	1.48	23.710	30.00
			V	13.19					
	47	6185	H	15.25	15.250	5.26	1.48	21.990	30.00
			V	10.75					
	79	6345	H	12.18	12.180	6.48	1.48	20.140	30.00
			V	11.49					
	111	6505	H	14.76	14.760	6.88	1.48	23.120	30.00
			V	11.78					
	143	6665	H	13.72	13.720	7.29	1.48	22.490	30.00
			V	11.19					
	175	6825	H	12.88	12.880	7.84	1.48	22.200	30.00
			V	12.18					
	207	6985	H	14.23	14.230	7.97	1.48	23.680	30.00
			V	12.64					
11be_EHT320	31	6105	H	17.97	17.970	4.76	1.38	24.110	30.00
			V	13.48					
	63	6265	H	18.77	18.770	6.00	1.38	26.150	30.00
			V	13.70					
	95	6425	H	16.89	16.890	6.83	1.38	25.100	30.00
			V	12.32					
	127	6585	H	15.48	15.480	7.16	1.38	24.020	30.00
			V	13.28					
	159	6745	H	13.09	13.090	7.59	1.38	22.060	30.00
			V	12.29					
	191	6905	H	12.49	12.490	7.87	1.38	21.740	30.00
			V	10.79					

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

■ Maximum Conducted Output Power Measurement

Reference Appendix B

5.3.3. Emission Bandwidth Measurement

Reference Appendix A

5.3.4. Maximum Power Spectral Density Measurement

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT20	1	5955	H	0.249	0.249	4.07	0.56	4.879	5.00	4.5
			V	-4.475						
	45	6175	H	-0.869	-0.869	5.21	0.56	4.901	5.00	4.5
			V	-5.019						
	93	6415	H	-2.437	-2.437	6.81	0.56	4.933	5.00	6
			V	-6.698						
	97	6435	H	-2.438	-2.438	6.87	0.56	4.992	5.00	5.5
			V	-6.185						
	105	6475	H	-2.480	-2.480	6.89	0.56	4.970	5.00	5
			V	-7.154						
	113	6515	H	-2.891	-2.891	6.89	0.56	4.559	5.00	7.5
			V	-4.664						
	117	6535	H	-2.523	-2.523	6.90	0.56	4.937	5.00	6.5
			V	-5.509						
	149	6695	H	-3.121	-3.121	7.44	0.56	4.879	5.00	7
			V	-5.392						
	181	6855	H	-3.483	-3.483	7.81	0.56	4.887	5.00	7
			V	-4.682						
	185	6875	H	-3.463	-3.463	7.83	0.56	4.927	5.00	6
			V	-4.305						
	189	6895	H	-3.484	-3.484	7.85	0.56	4.926	5.00	6.5
			V	-4.699						
	209	6995	H	-3.651	-3.651	7.95	0.56	4.859	5.00	5.5
			V	-4.721						
	229	7095	H	-3.654	-3.654	8.01	0.56	4.916	5.00	6
			V	-4.241						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT40	3	5965	H	-0.071	-0.071	4.06	0.95	4.939	5.00	6.5
			V	-5.399						
	43	6165	H	-1.212	-1.212	5.16	0.95	4.898	5.00	9
			V	-3.372						
	91	6405	H	-2.957	-2.957	6.78	0.95	4.773	5.00	8
			V	-6.755						
	99	6445	H	-2.960	-2.960	6.90	0.95	4.890	5.00	7.5
			V	-6.817						
	107	6485	H	-3.029	-3.029	6.88	0.95	4.801	5.00	7
			V	-7.308						
	115	6525	H	-3.319	-3.319	6.89	0.95	4.521	5.00	7.5
			V	-6.593						
	123	6565	H	-2.972	-2.972	7.02	0.95	4.998	5.00	9.5
			V	-3.974						
	147	6685	H	-3.345	-3.345	7.39	0.95	4.995	5.00	9.5
			V	-5.519						
	179	6845	H	-3.833	-3.833	7.81	0.95	4.927	5.00	8.5
			V	-4.722						
	187	6885	H	-4.083	-4.083	7.84	0.95	4.707	5.00	9.5
			V	-4.113						
	195	6925	H	-4.118	-4.118	7.93	0.95	4.762	5.00	7
			V	-6.703						
	211	7005	H	-4.168	-4.168	7.94	0.95	4.722	5.00	7
			V	-5.222						
	227	7085	H	-4.247	-4.247	7.96	0.95	4.663	5.00	6.5
			V	-5.332						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT80	7	5985	H	-0.137	-0.137	4.03	1.10	4.993	5.00	9
			V	-6.415						
	39	6145	H	-1.181	-1.181	5.05	1.10	4.969	5.00	9.5
			V	-4.614						
	87	6385	H	-2.847	-2.847	6.68	1.10	4.933	5.00	9.5
			V	-7.294						
	103	6465	H	-3.699	-3.699	6.90	1.10	4.301	5.00	10
			V	-6.450						
	119	6545	H	-3.290	-3.290	6.92	1.10	4.730	5.00	13
			V	-4.751						
	135	6625	H	-3.422	-3.422	7.24	1.10	4.918	5.00	10.5
			V	-6.319						
	151	6705	H	-4.171	-4.171	7.48	1.10	4.409	5.00	11.5
			V	-5.558						
	167	6785	H	-3.915	-3.915	7.78	1.10	4.965	5.00	10
			V	-7.245						
	183	6865	H	-3.926	-3.926	7.82	1.10	4.994	5.00	11
			V	-5.043						
	199	6945	H	-4.155	-4.155	7.99	1.10	4.935	5.00	10.5
			V	-4.398						
	215	7025	H	-4.030	-4.030	7.87	1.10	4.940	5.00	9.5
			V	-5.346						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Reading (dBuV) WORST	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT160	15	6025	H	-0.668	-0.668	4.14	1.48	4.952	5.00	13
			V	-4.777						
	47	6185	H	-1.960	-1.960	5.26	1.48	4.780	5.00	10
			V	-5.945						
	79	6345	H	-3.186	-3.186	6.48	1.48	4.774	5.00	12
			V	-6.143						
	111	6505	H	-3.527	-3.527	6.88	1.48	4.833	5.00	13
			V	-6.040						
	143	6665	H	-3.794	-3.794	7.29	1.48	4.976	5.00	13
			V	-6.797						
	175	6825	H	-4.364	-4.364	7.84	1.48	4.956	5.00	12.5
			V	-7.049						
	207	6985	H	-4.454	-4.454	7.97	1.48	4.996	5.00	12.5
			V	-6.899						
11be_EHT320	31	6105	H	-3.157	-3.157	4.76	1.38	2.983	5.00	12.5
			V	-7.904						
	63	6265	H	-2.631	-2.631	6.00	1.38	4.749	5.00	13
			V	-8.095						
	95	6425	H	-3.251	-3.251	6.83	1.38	4.959	5.00	13.5
			V	-8.886						
	127	6585	H	-4.139	-4.139	7.16	1.38	4.401	5.00	13.5
			V	-8.732						
	159	6745	H	-7.535	-7.535	7.59	1.38	1.435	5.00	12
			V	-8.658						
	191	6905	H	-8.140	-8.140	7.87	1.38	1.110	5.00	10.5
			V	-10.337						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

■ Test Graphs

Reference Appendix C

5.3.5. In-Band Emission (Mask) Measurement

Reference Appendix A

5.3.6. Contention Based Protocol Measurement

Contention Based Protocol							
Band	Bandwidth (MHz)	AWGN Freq. (MHz)	Number of Times	Number of Detection	AWGN Detection Probability (%)	Limit Probability (%)	Result
U-NII-5	20	6135	10	10	100	90	PASS
	320	5950	10	10	100	90	PASS
		6105	10	10	100	90	PASS
		6260	10	10	100	90	PASS
U-NII-6	20	6455	10	10	100	90	PASS
	320	6430	10	10	100	90	PASS
		6585	10	10	100	90	PASS
		6740	10	10	100	90	PASS
U-NII-7	20	6695	10	10	100	90	PASS
	320	6750	10	10	100	90	PASS
		6905	10	10	100	90	PASS
		7060	10	10	100	90	PASS
U-NII-8	20	7015	10	10	100	90	PASS
	320	6750	10	10	100	90	PASS
		6905	10	10	100	90	PASS
		7060	10	10	100	90	PASS

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Contention Based Protocol Threshold Level Verify									
Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-5	20	37	6135	6135	-57.8	4.20	-62.00	-62.00	OFF
					-73.8	4.20	-78.00	-62.00	Minimal
					-76.8	4.20	-81.00	-62.00	ON
	320	31	6105	5950	-57.8	4.20	-62.00	-62.00	OFF
					-72.8	4.20	-77.00	-62.00	Minimal
					-76.8	4.20	-81.00	-62.00	ON
				6105	-57.8	4.20	-62.00	-62.00	OFF
					-72.8	4.20	-77.00	-62.00	Minimal
					-76.8	4.20	-81.00	-62.00	ON
				6260	-57.8	4.20	-62.00	-62.00	OFF
					-72.8	4.20	-77.00	-62.00	Minimal
					-75.8	4.20	-80.00	-62.00	ON
U-NII-6	20	101	6455	6455	-57.7	4.30	-62.00	-62.00	OFF
					-72.7	4.30	-77.00	-62.00	Minimal
					-76.7	4.30	-81.00	-62.00	ON
	320	127	6585	6430	-57.7	4.30	-62.00	-62.00	OFF
					-72.7	4.30	-77.00	-62.00	Minimal
					-76.7	4.30	-81.00	-62.00	ON
				6585	-57.7	4.30	-62.00	-62.00	OFF
					-70.7	4.30	-75.00	-62.00	Minimal
					-74.7	4.30	-79.00	-62.00	ON
				6740	-57.7	4.30	-62.00	-62.00	OFF
					-74.7	4.30	-79.00	-62.00	Minimal
					-77.7	4.30	-82.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-7	20	149	6695	6695	-57.3	4.70	-62.00	-62.00	OFF
					-73.3	4.70	-78.00	-62.00	Minimal
					-76.3	4.70	-81.00	-62.00	ON
	320	191	6905	6750	-57.3	4.70	-62.00	-62.00	OFF
					-74.3	4.70	-79.00	-62.00	Minimal
					-77.3	4.70	-82.00	-62.00	ON
				6905	-57.3	4.70	-62.00	-62.00	OFF
					-72.3	4.70	-77.00	-62.00	Minimal
					-75.3	4.70	-80.00	-62.00	ON
				7060	-57.3	4.70	-62.00	-62.00	OFF
					-72.3	4.70	-77.00	-62.00	Minimal
					-74.3	4.70	-79.00	-62.00	ON
U-NII-8	20	213	7015	7015	-57.3	4.70	-62.00	-62.00	OFF
					-72.3	4.70	-77.00	-62.00	Minimal
					-76.3	4.70	-81.00	-62.00	ON
	320	191	6905	6750	-57.3	4.70	-62.00	-62.00	OFF
					-74.3	4.70	-79.00	-62.00	Minimal
					-77.3	4.70	-82.00	-62.00	ON
				6905	-57.3	4.70	-62.00	-62.00	OFF
					-72.3	4.70	-77.00	-62.00	Minimal
					-75.3	4.70	-80.00	-62.00	ON
				7060	-57.3	4.70	-62.00	-62.00	OFF
					-72.3	4.70	-77.00	-62.00	Minimal
					-74.3	4.70	-79.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

■ Test Graphs**Threshold level of AWGN interference Plot**

Reference Appendix C

Contention Based Protocol Plot

Reference Appendix C

Contention Based Protocol Threshold Level Verify

Reference Appendix C

--- END---