


|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5580MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

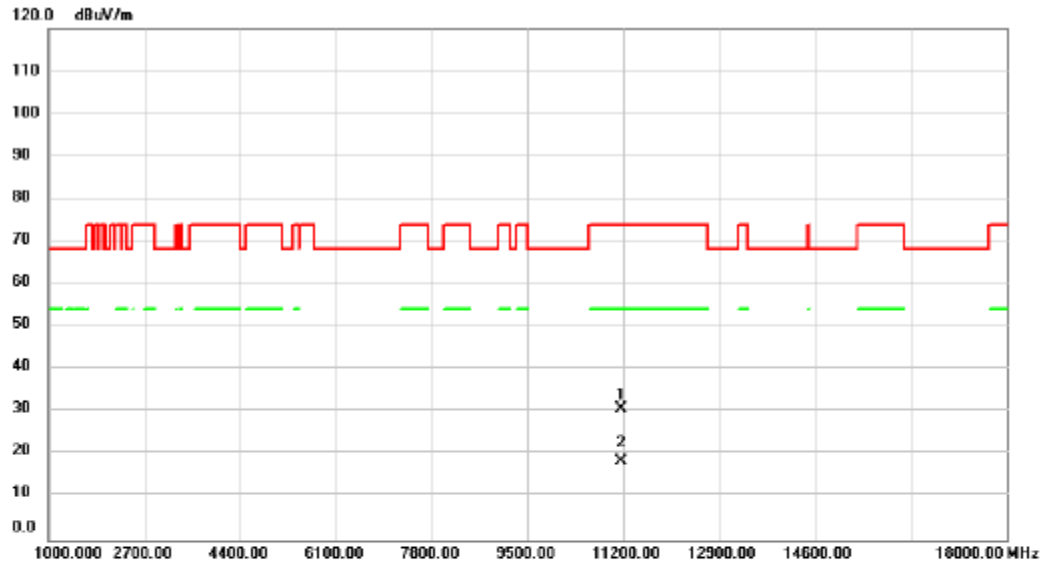


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11160.00     | 30.71                    | 0.08                    | 30.79                      | 74.00           | -43.21       | peak     |         |
| 2   | *   | 11160.00     | 18.22                    | 0.08                    | 18.30                      | 54.00           | -35.70       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5700MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

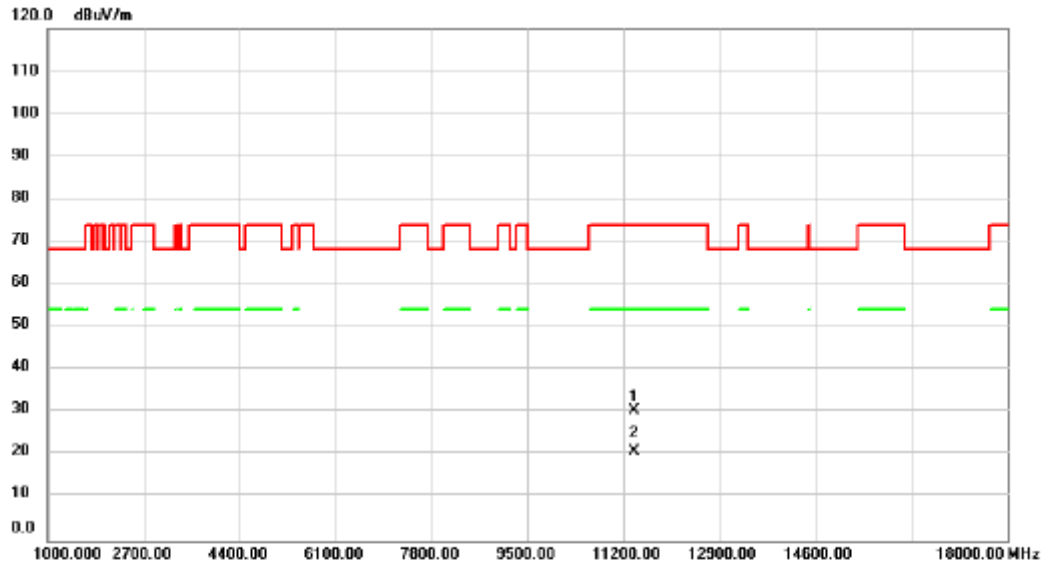


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11400.00     | 29.81                    | 0.61                    | 30.42                      | 74.00           | -43.58       | peak     |         |
| 2   | *   | 11400.00     | 20.14                    | 0.61                    | 20.75                      | 54.00           | -33.25       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5700MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

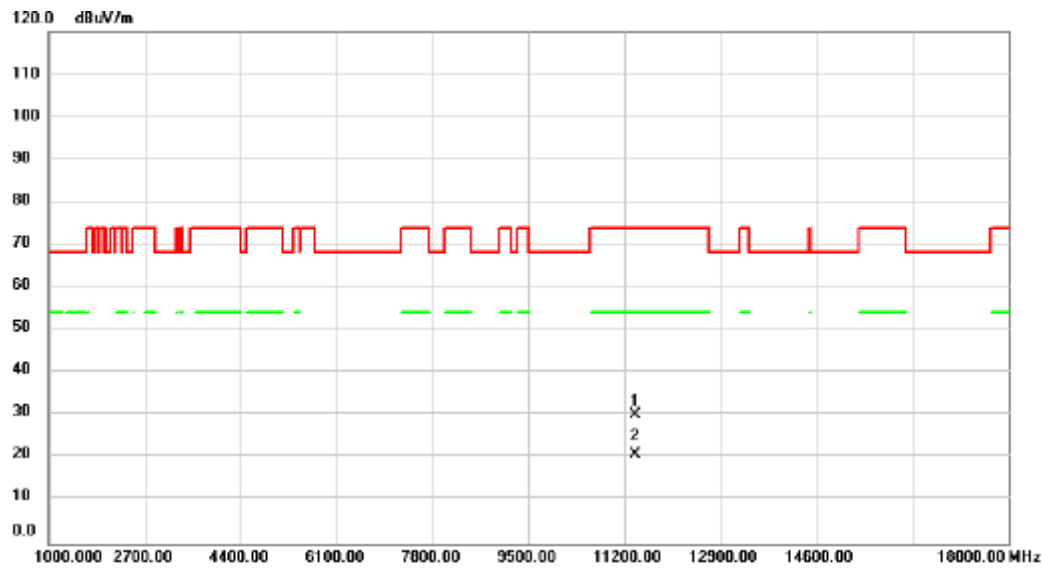


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11400.00     | 29.53                    | 0.61                    | 30.14                      | 74.00           | -43.86       | peak     |         |
| 2   | *   | 11400.00     | 20.35                    | 0.61                    | 20.96                      | 54.00           | -33.04       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

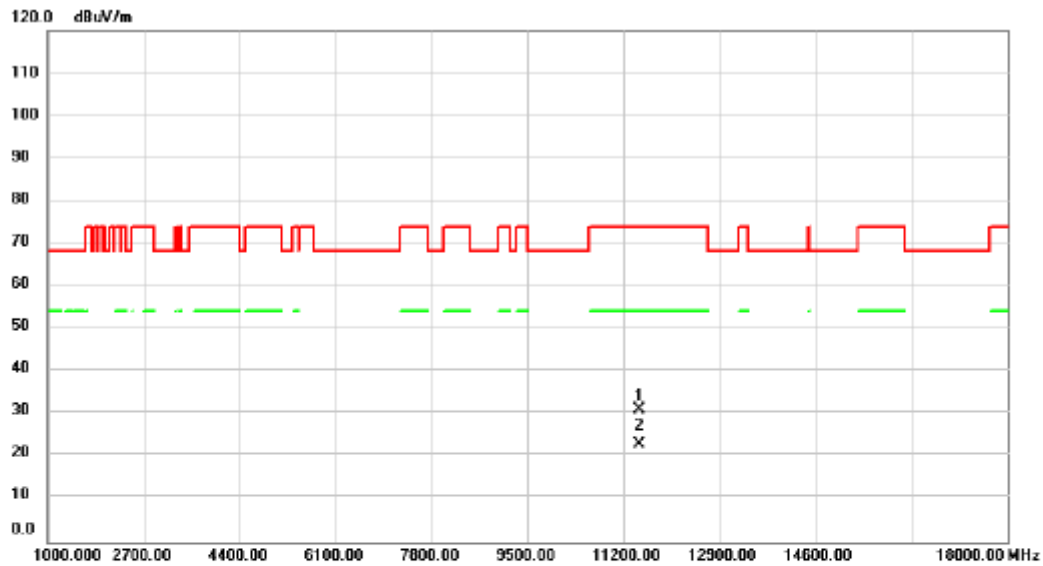


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11490.00     | 30.36                    | 0.82                    | 31.18                      | 74.00           | -42.82       | peak     |         |
| 2   | *   | 11490.00     | 22.11                    | 0.82                    | 22.93                      | 54.00           | -31.07       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

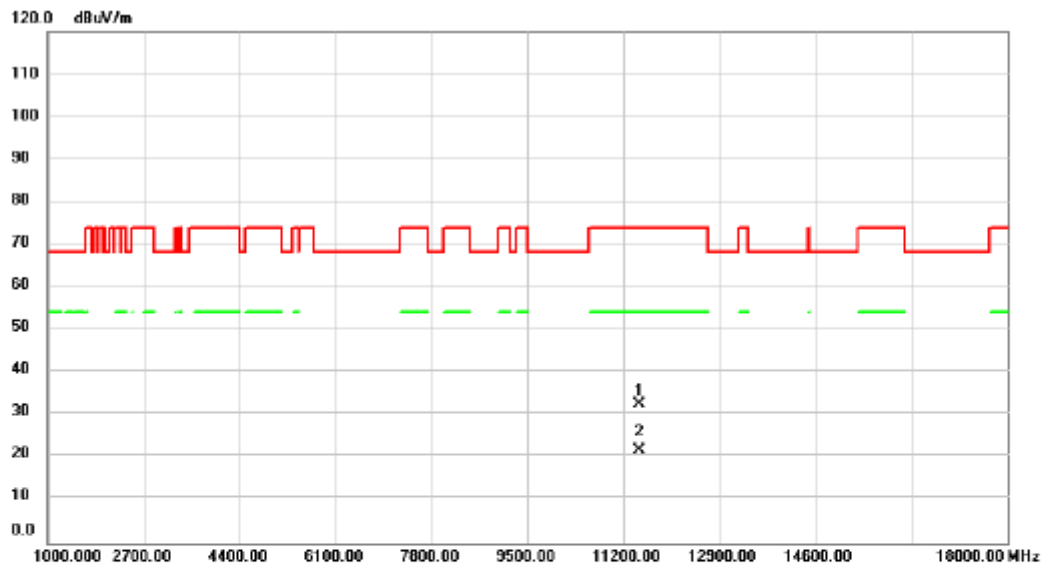


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11489.00     | 31.66                    | 0.81                    | 32.47                      | 74.00           | -41.53       | peak     |         |
| 2   | *   | 11489.00     | 21.06                    | 0.81                    | 21.87                      | 54.00           | -32.13       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5785MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

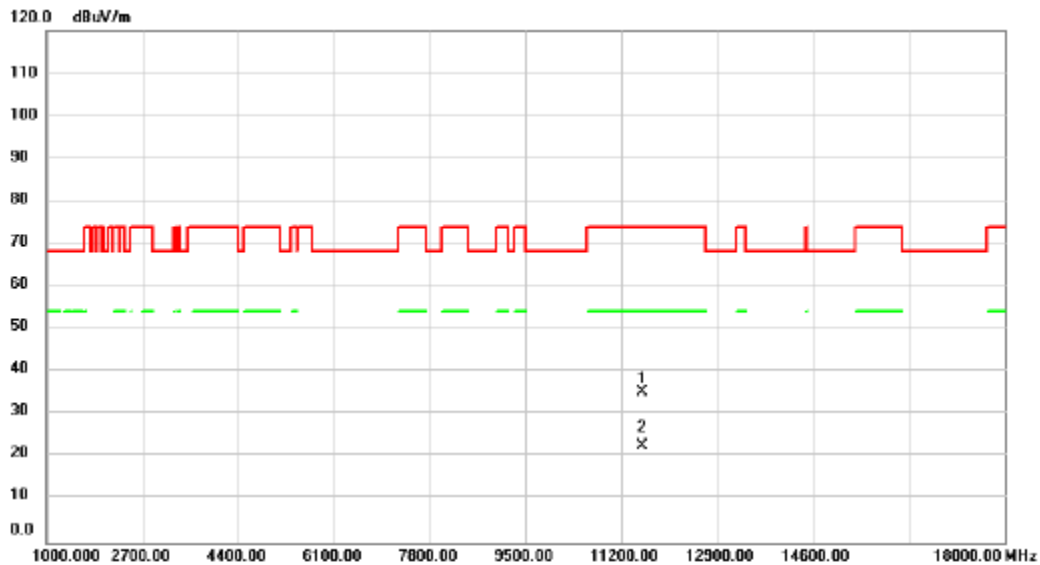


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11574.00     | 34.43                    | 0.83                    | 35.26                      | 74.00           | -38.74       | peak     |         |
| 2   | *   | 11574.00     | 21.93                    | 0.83                    | 22.76                      | 54.00           | -31.24       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5785MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

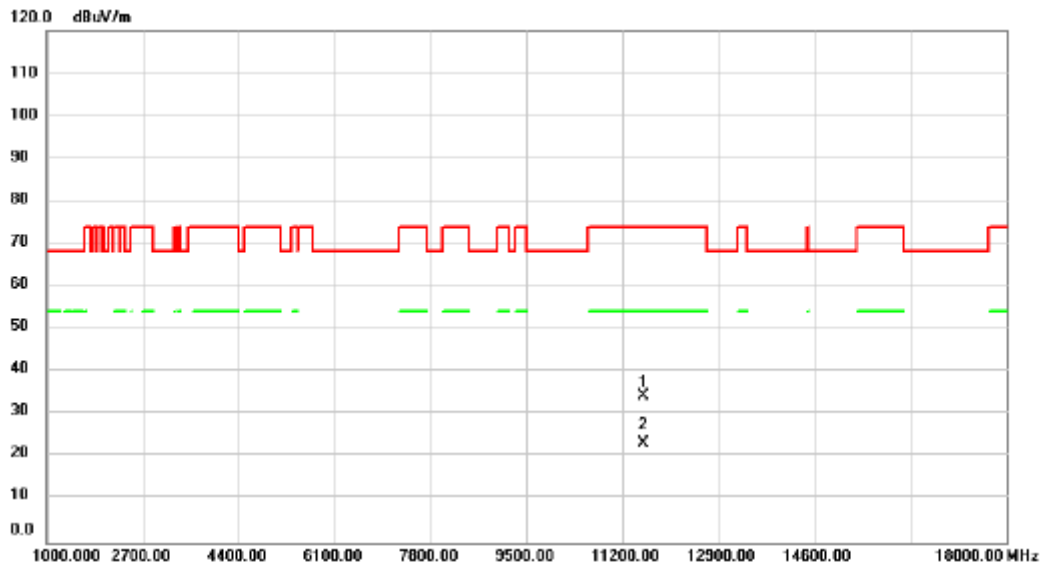


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11574.00     | 33.38                    | 0.83                    | 34.21                      | 74.00           | -39.79       | peak     |         |
| 2   | *   | 11574.00     | 22.30                    | 0.83                    | 23.13                      | 54.00           | -30.87       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5825MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

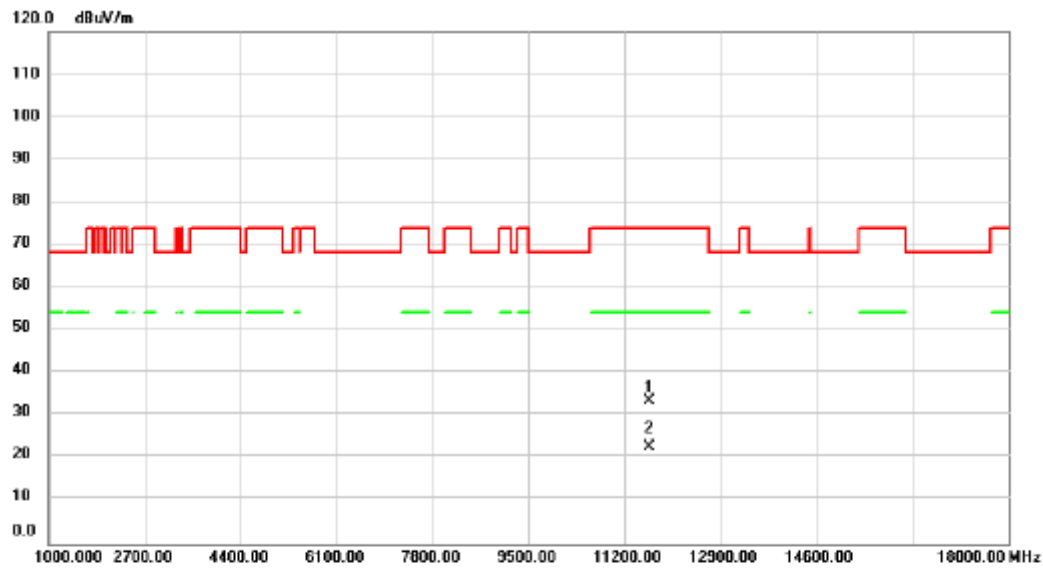


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11642.00     | 32.73                    | 0.83                    | 33.56                      | 74.00           | -40.44       | peak     |         |
| 2   | *   | 11642.00     | 21.69                    | 0.83                    | 22.52                      | 54.00           | -31.48       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT20) | Test Date    | 2024/11/22 |
| Test Frequency | 5825MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

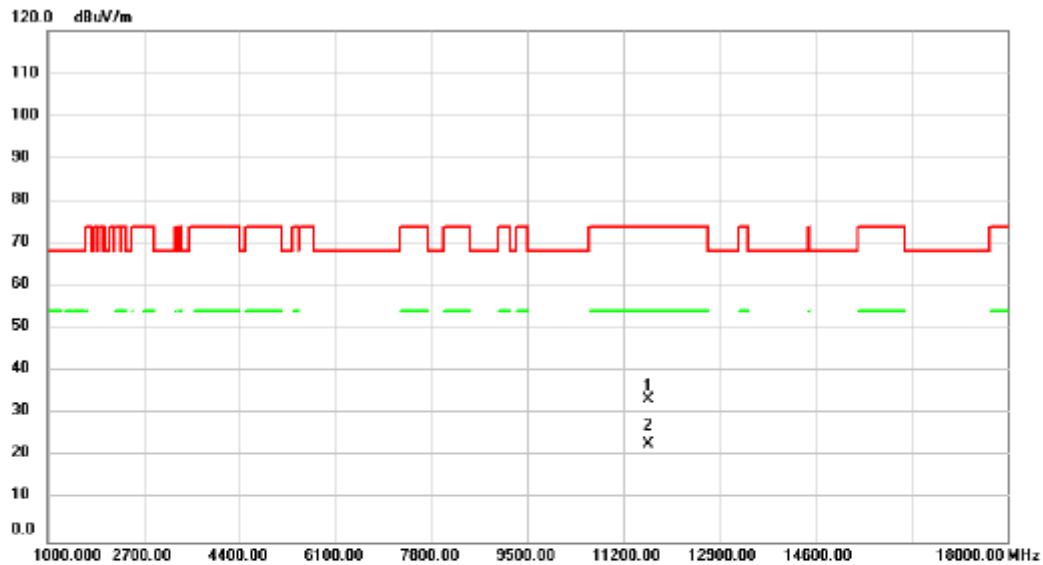


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11642.00     | 32.52                    | 0.83                    | 33.35                      | 74.00           | -40.65       | peak     |         |
| 2   | *   | 11642.00     | 22.18                    | 0.83                    | 23.01                      | 54.00           | -30.99       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5190MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

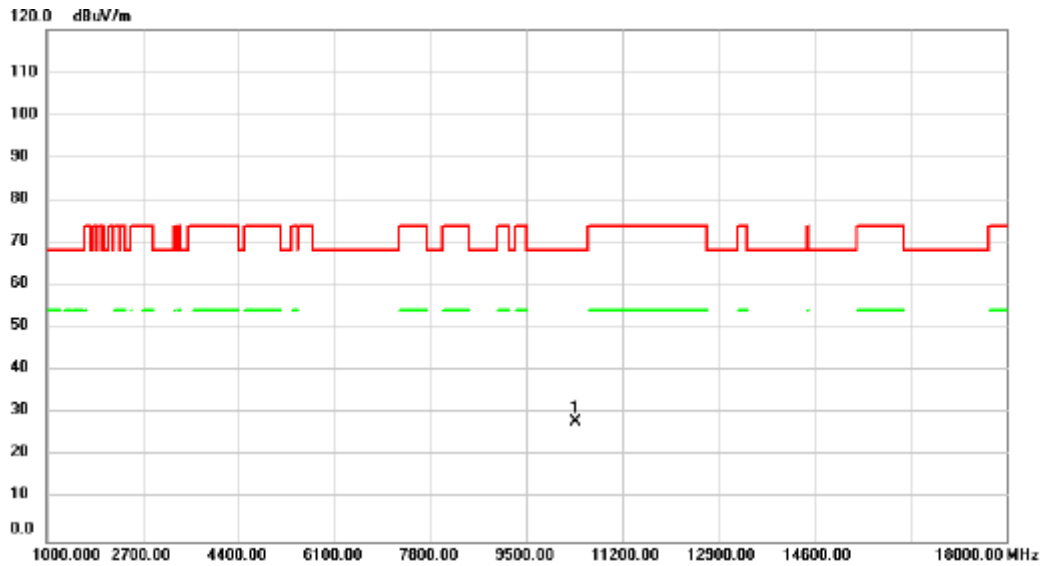


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10380.00 | 28.72         | -0.57          | 28.15       | 68.20  | -40.05 | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5190MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

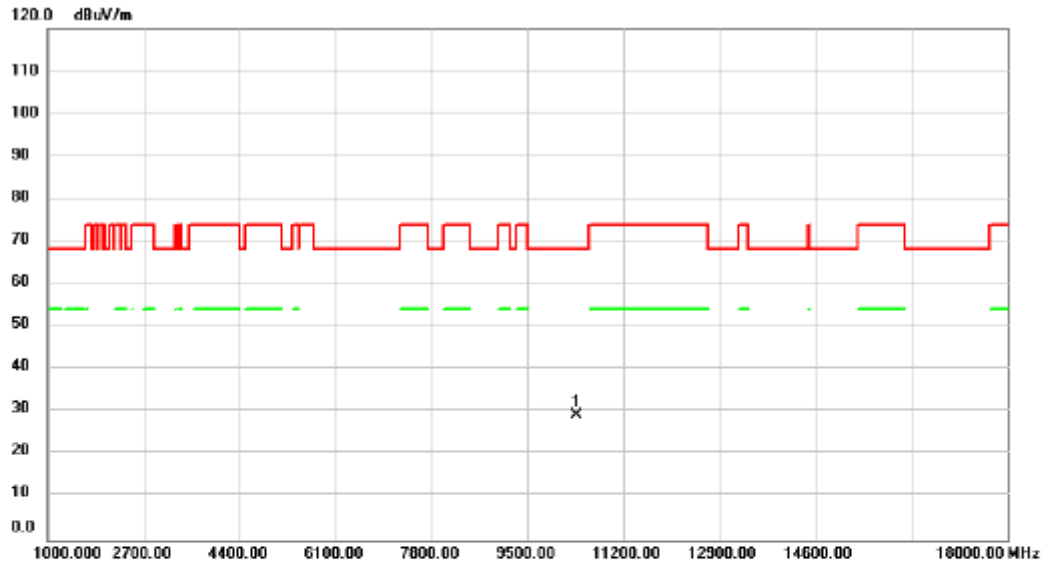


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 10380.00     | 29.91                    | -0.57                   | 29.34                      | 68.20           | -38.86       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5230MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

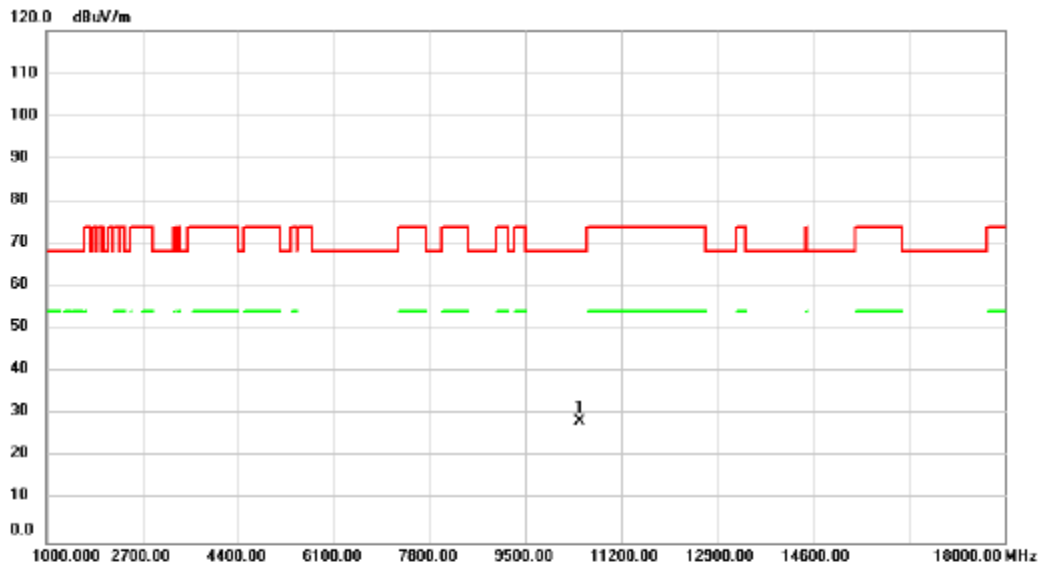


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   | *   | 10460.00 | 28.79         | -0.49          | 28.30       | 68.20  | -39.90 | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5230MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

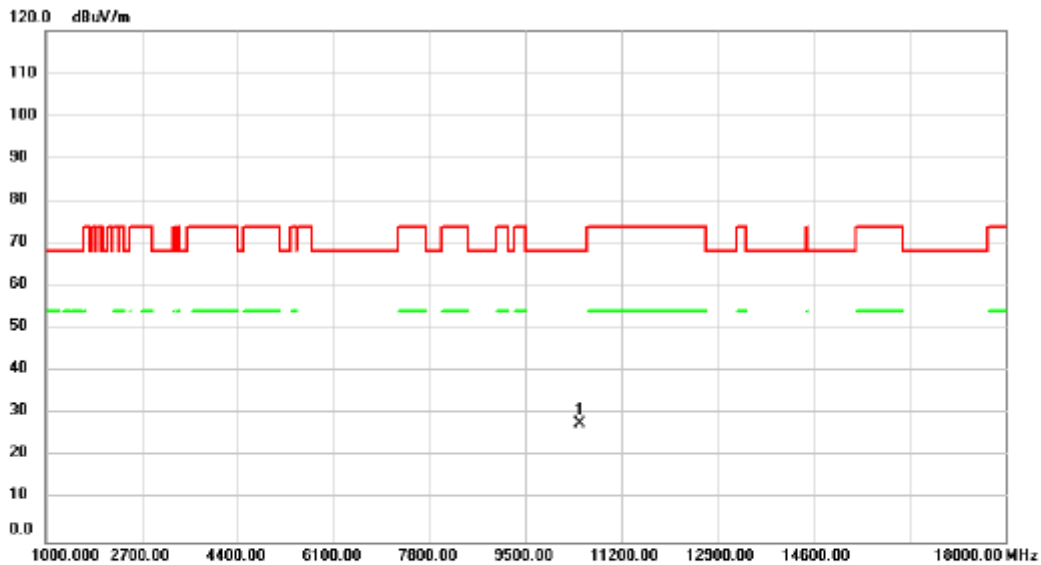


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   | *   | 10460.00 | 28.13         | -0.49          | 27.64       | 68.20  | -40.56 | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5270MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

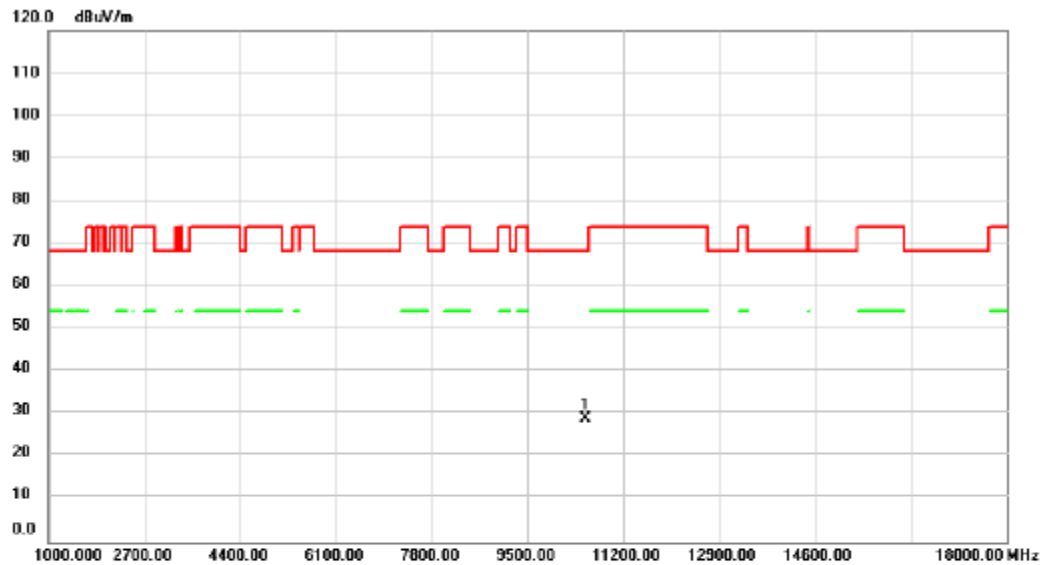


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10540.00 | 29.38         | -0.44          | 28.94       | 68.20  | -39.26 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5270MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

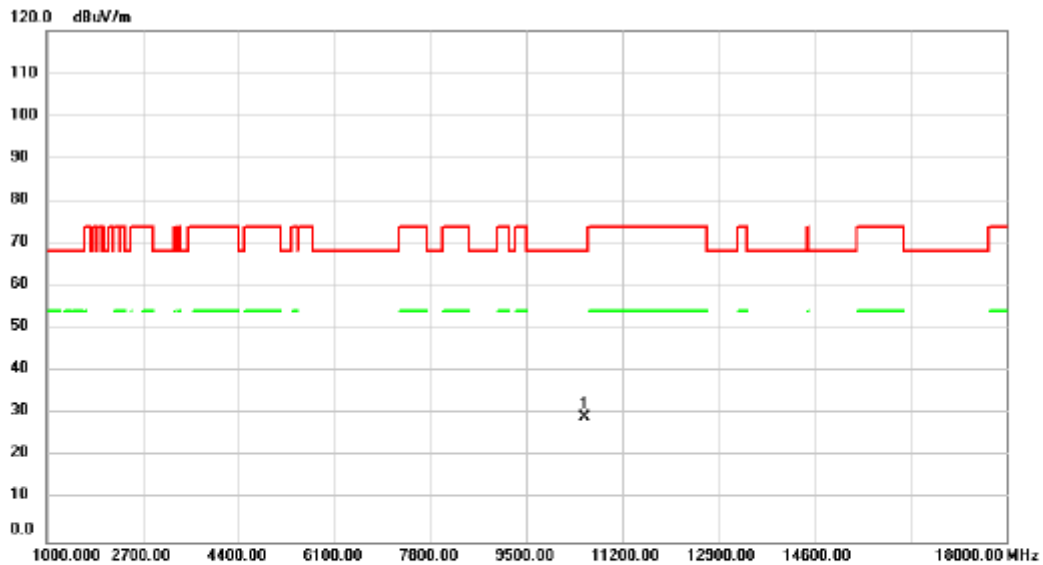


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   | *   | 10540.00 | 29.56         | -0.44          | 29.12       | 68.20  | -39.08 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5310MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

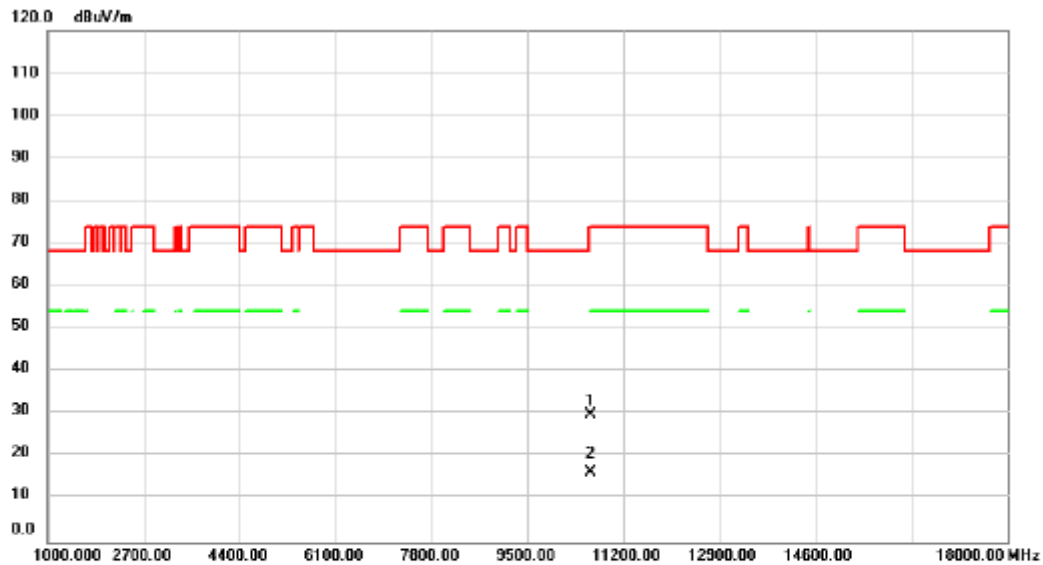


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   |     | 10620.00 | 30.29         | -0.40          | 29.89       | 74.00  | -44.11 | peak     |         |
| 2   | *   | 10620.00 | 16.88         | -0.40          | 16.48       | 54.00  | -37.52 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5310MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

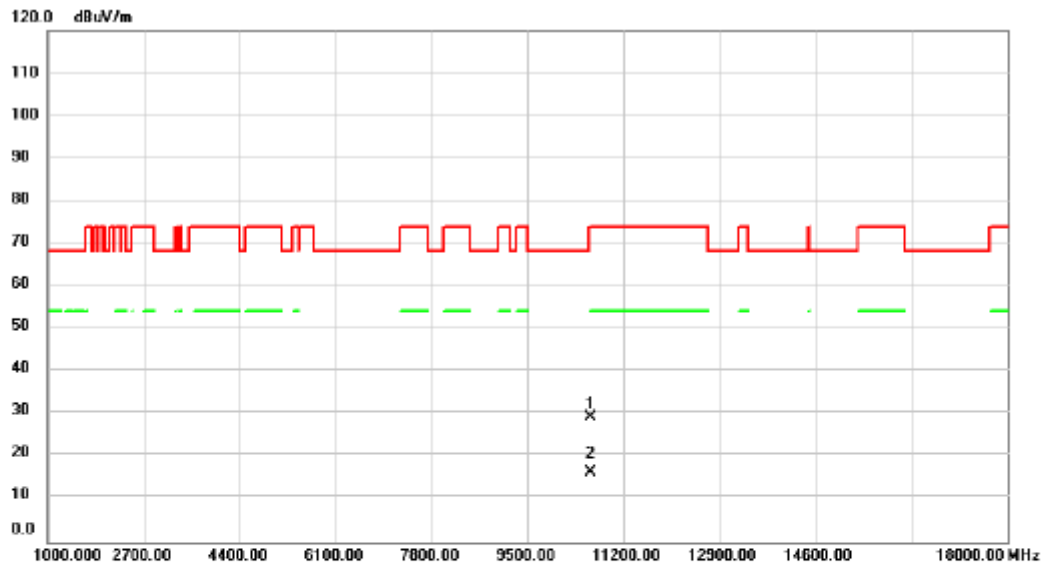


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 10620.00     | 29.69                    | -0.40                   | 29.29                      | 74.00           | -44.71       | peak     |         |
| 2 *     | 10620.00     | 16.67                    | -0.40                   | 16.27                      | 54.00           | -37.73       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5510MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

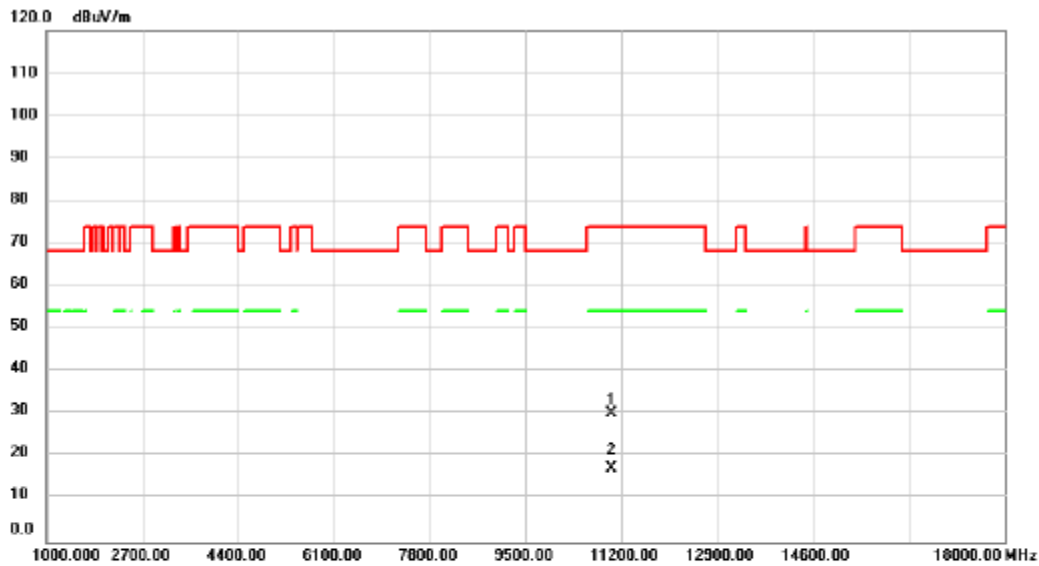


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 11020.00 | 30.24         | -0.22          | 30.02       | 74.00  | -43.98 | peak     |         |
| 2   | *   | 11020.00 | 17.56         | -0.22          | 17.34       | 54.00  | -36.66 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5510MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

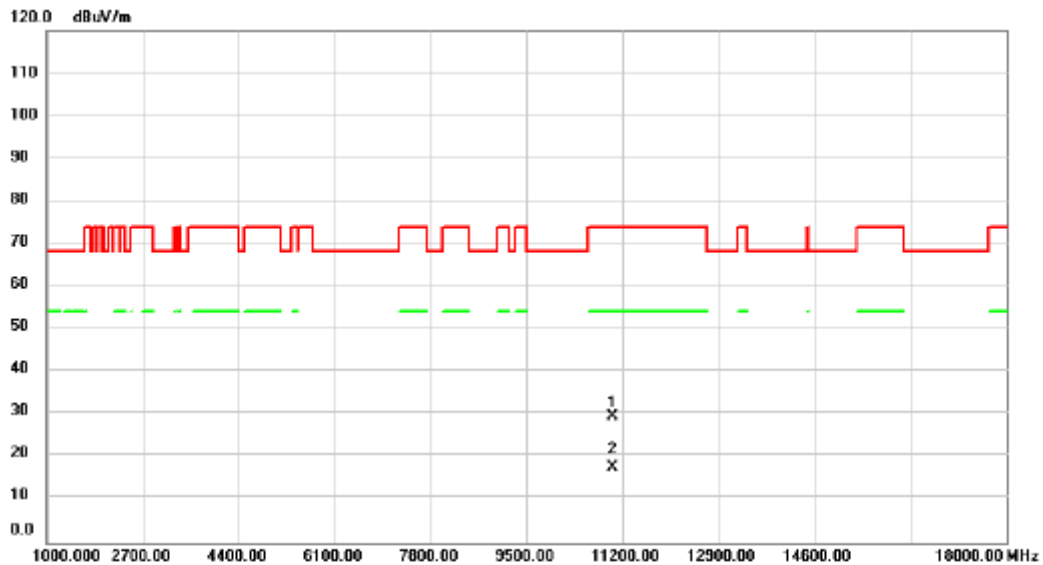


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11020.00     | 29.74                    | -0.22                   | 29.52                      | 74.00           | -44.48       | peak     |         |
| 2   | *   | 11020.00     | 17.79                    | -0.22                   | 17.57                      | 54.00           | -36.43       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5550MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

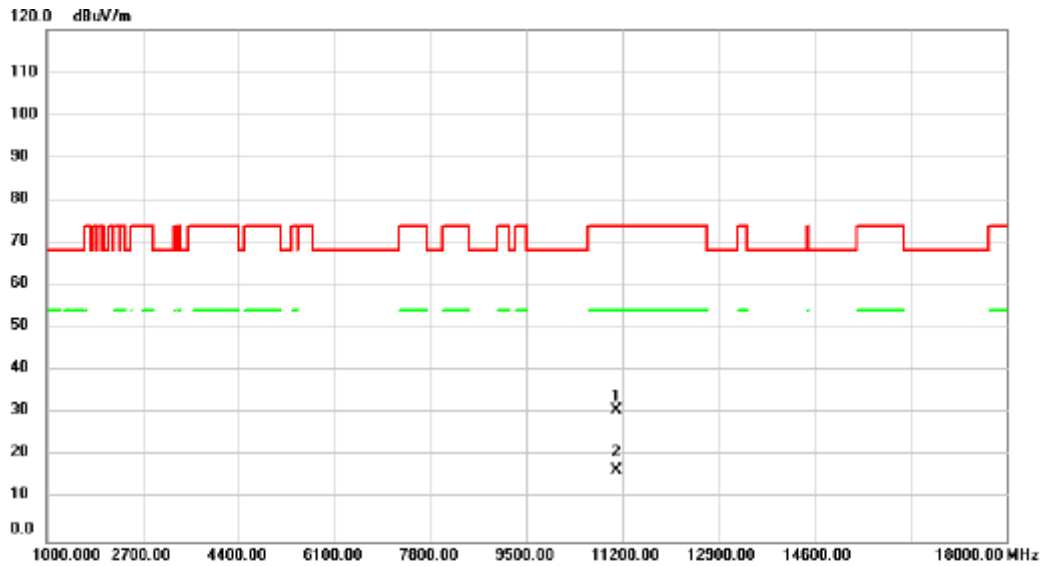


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11100.00     | 30.89                    | -0.04                   | 30.85                      | 74.00           | -43.15       | peak     |         |
| 2   | *   | 11100.00     | 16.68                    | -0.04                   | 16.64                      | 54.00           | -37.36       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5550MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

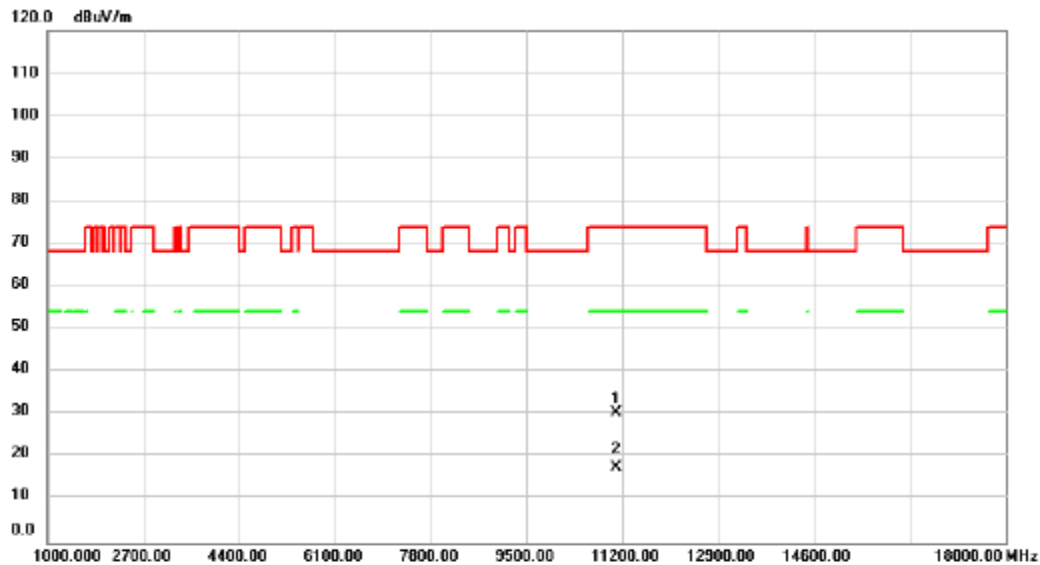


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11100.00     | 30.47                    | -0.04                   | 30.43                      | 74.00           | -43.57       | peak     |         |
| 2   | *   | 11100.00     | 17.65                    | -0.04                   | 17.61                      | 54.00           | -36.39       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5670MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

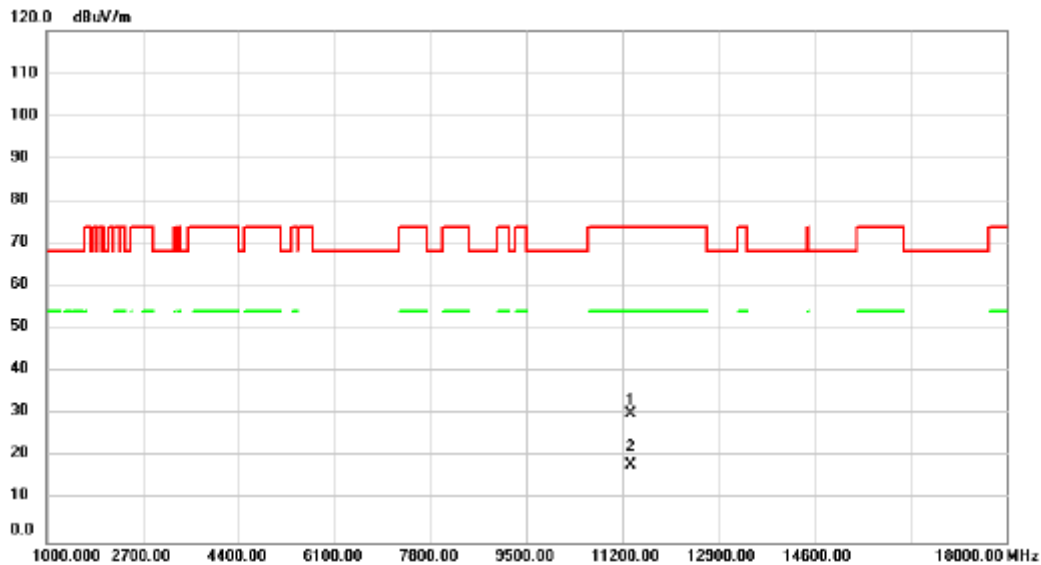


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11340.00     | 29.80                    | 0.49                    | 30.29                      | 74.00           | -43.71       | peak     |         |
| 2   | *   | 11340.00     | 17.66                    | 0.49                    | 18.15                      | 54.00           | -35.85       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5670MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

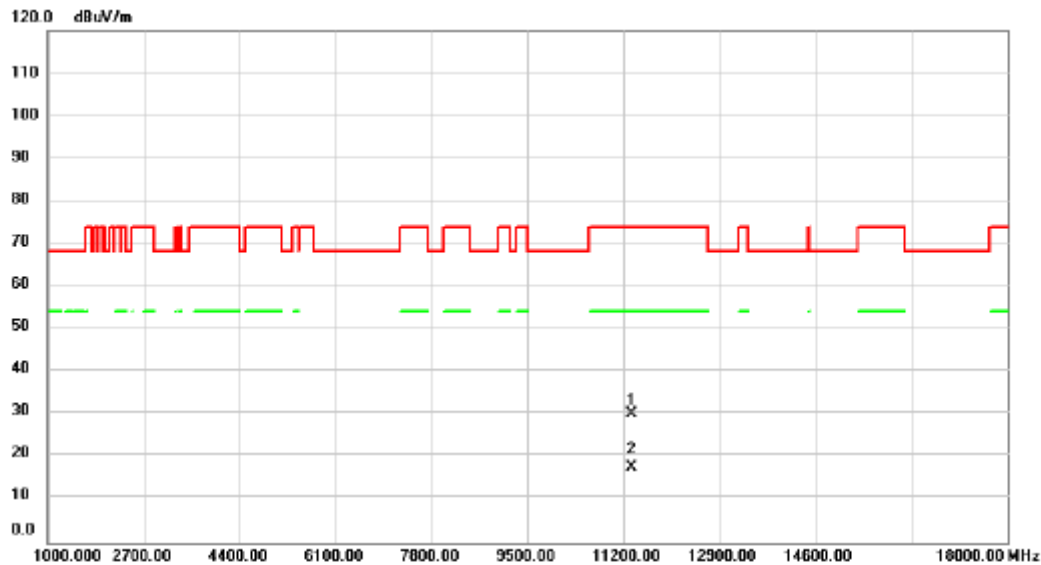


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11340.00     | 29.72                    | 0.49                    | 30.21                      | 74.00           | -43.79       | peak     |         |
| 2   | *   | 11340.00     | 17.11                    | 0.49                    | 17.60                      | 54.00           | -36.40       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5755MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

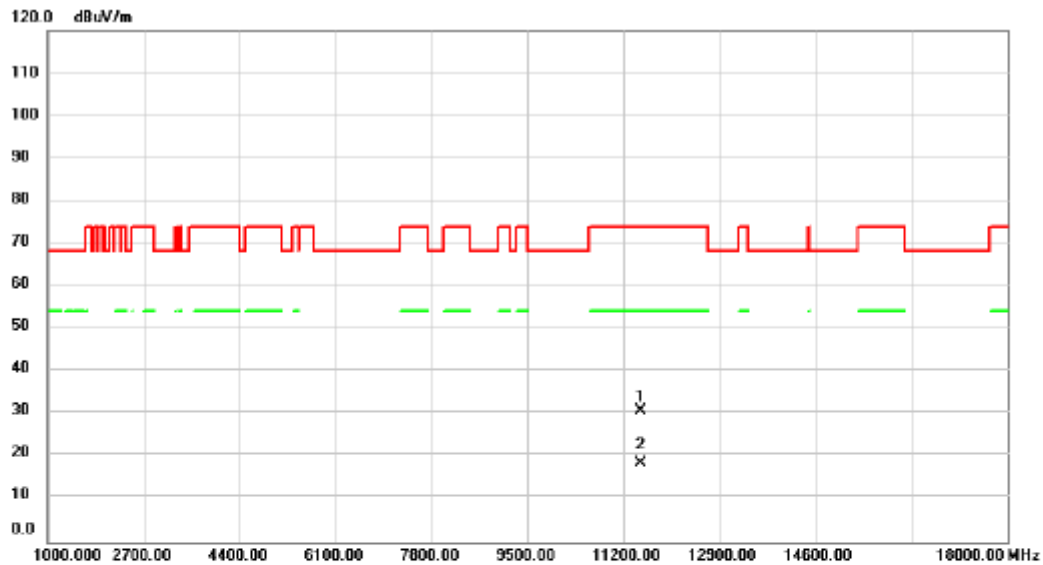


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11510.00     | 29.78                    | 0.83                    | 30.61                      | 74.00           | -43.39       | peak     |         |
| 2   | *   | 11510.00     | 17.72                    | 0.83                    | 18.55                      | 54.00           | -35.45       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5755MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

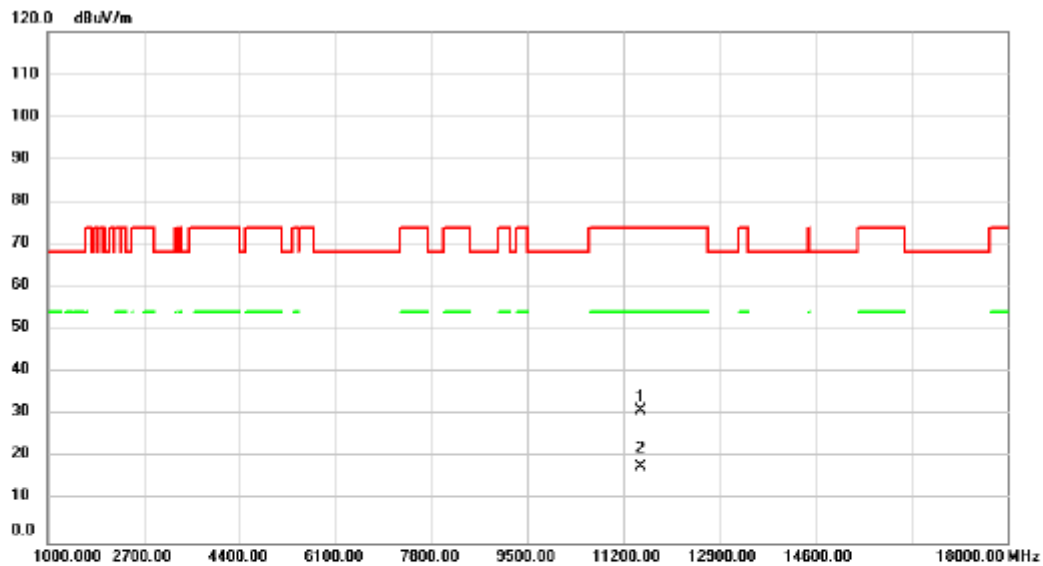


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 11510.00 | 30.24         | 0.83           | 31.07       | 74.00  | -42.93 | peak     |         |
| 2   | *   | 11510.00 | 17.08         | 0.83           | 17.91       | 54.00  | -36.09 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5795MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

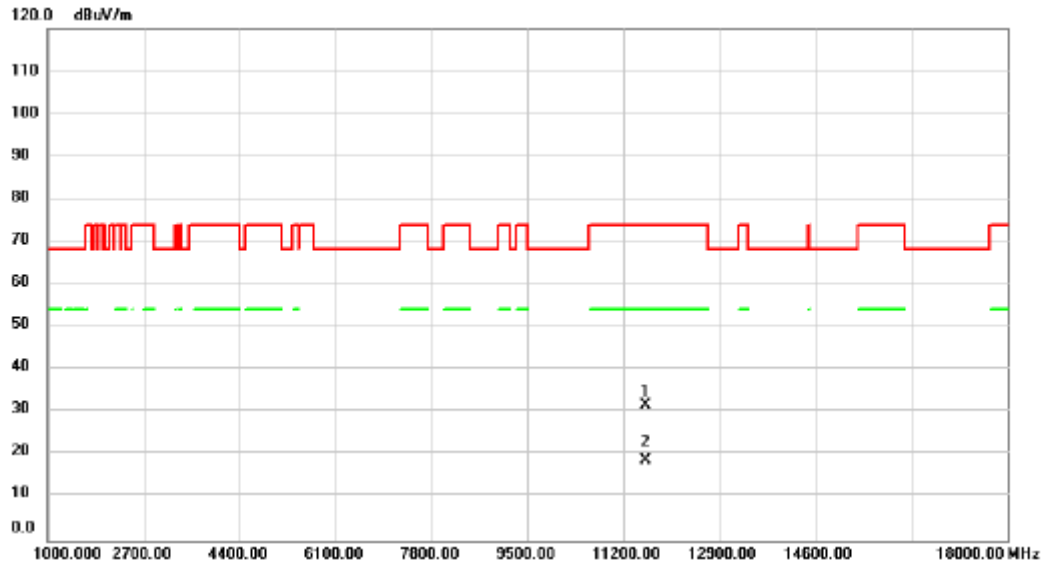


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11590.00     | 30.88                    | 0.84                    | 31.72                      | 74.00           | -42.28       | peak     |         |
| 2   | *   | 11590.00     | 17.95                    | 0.84                    | 18.79                      | 54.00           | -35.21       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT40) | Test Date    | 2024/11/22 |
| Test Frequency | 5795MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

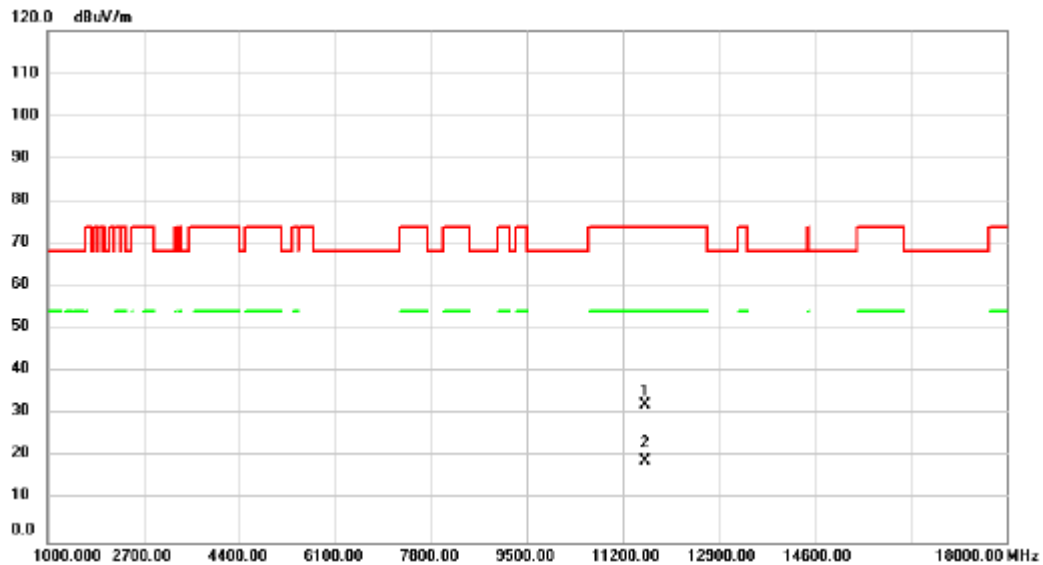


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11590.00     | 31.43                    | 0.84                    | 32.27                      | 74.00           | -41.73       | peak     |         |
| 2   | *   | 11590.00     | 18.10                    | 0.84                    | 18.94                      | 54.00           | -35.06       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5210MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

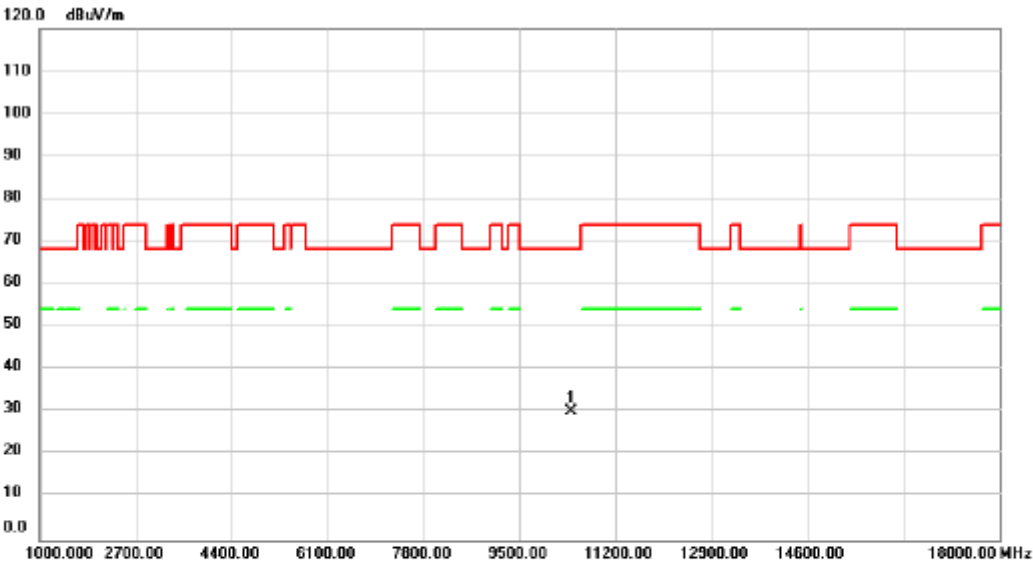


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10420.00 | 30.76         | -0.54          | 30.22       | 68.20  | -37.98 | peak     |         |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5210MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

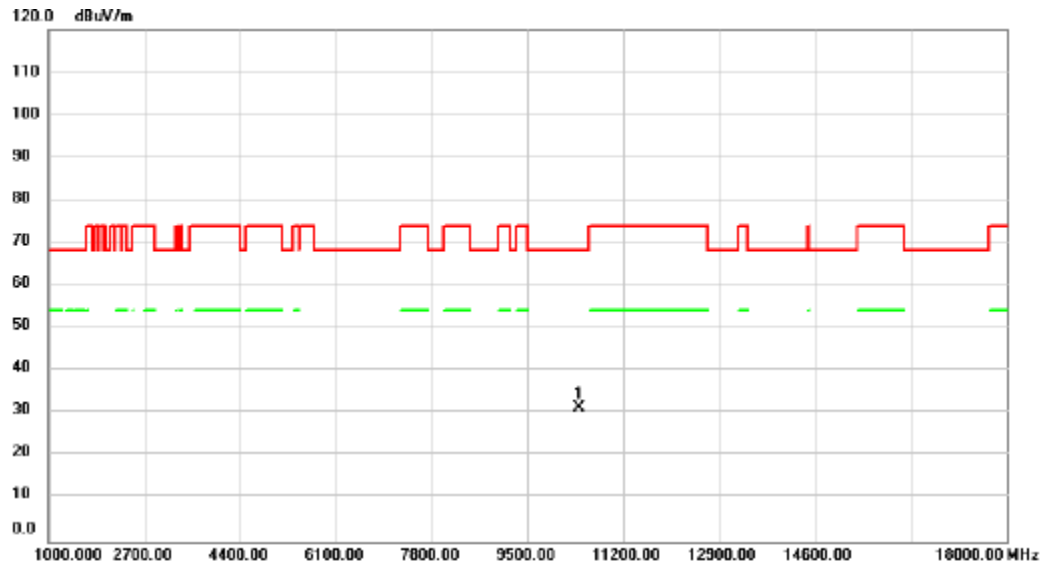


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10420.00 | 32.00         | -0.54          | 31.46       | 68.20  | -36.74 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5290MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

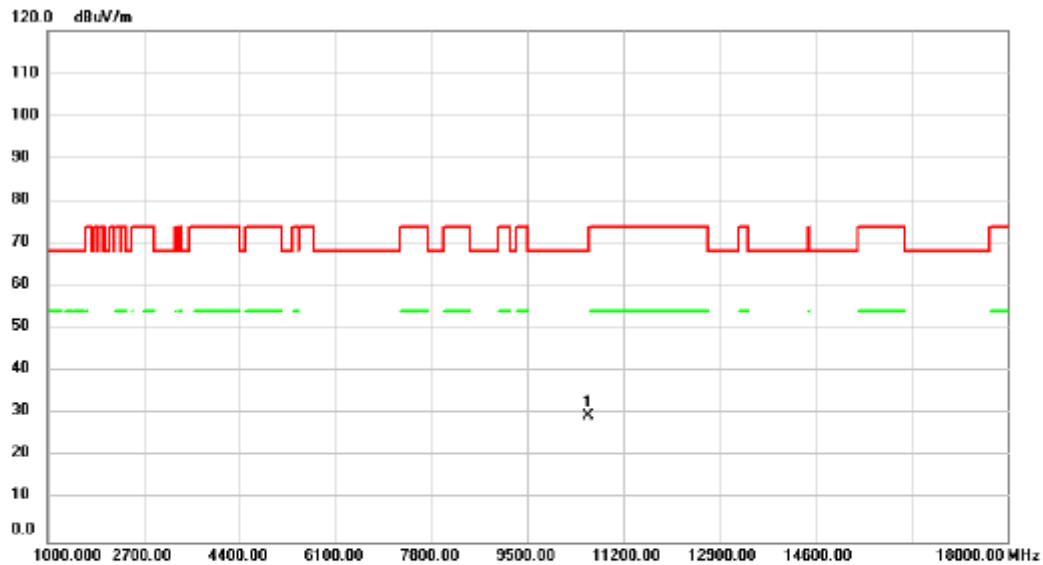


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   | *   | 10580.00 | 29.83         | -0.42          | 29.41       | 68.20  | -38.79 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5290MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

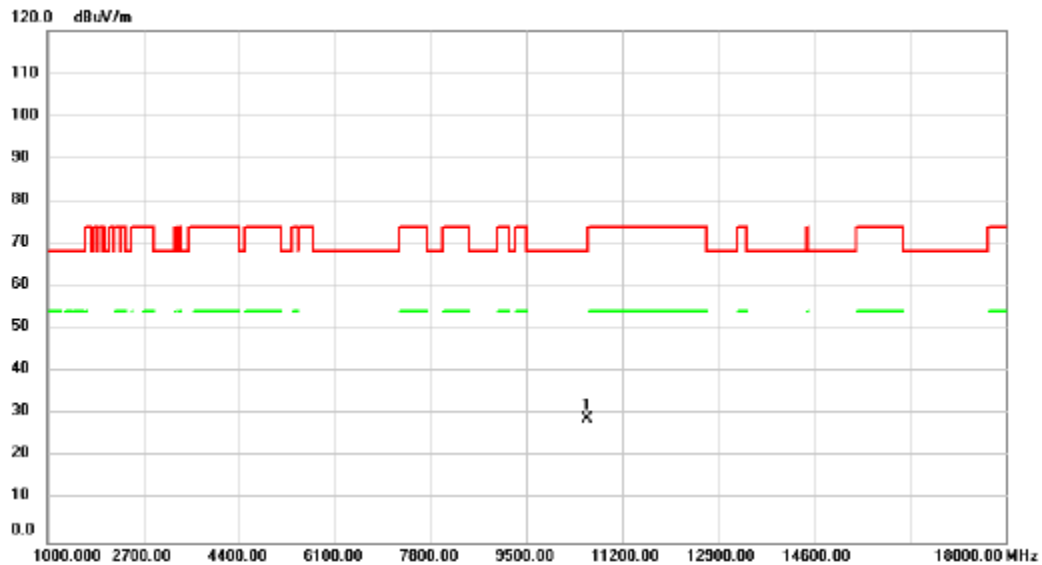


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10580.00 | 29.33         | -0.42          | 28.91       | 68.20  | -39.29 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5530MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

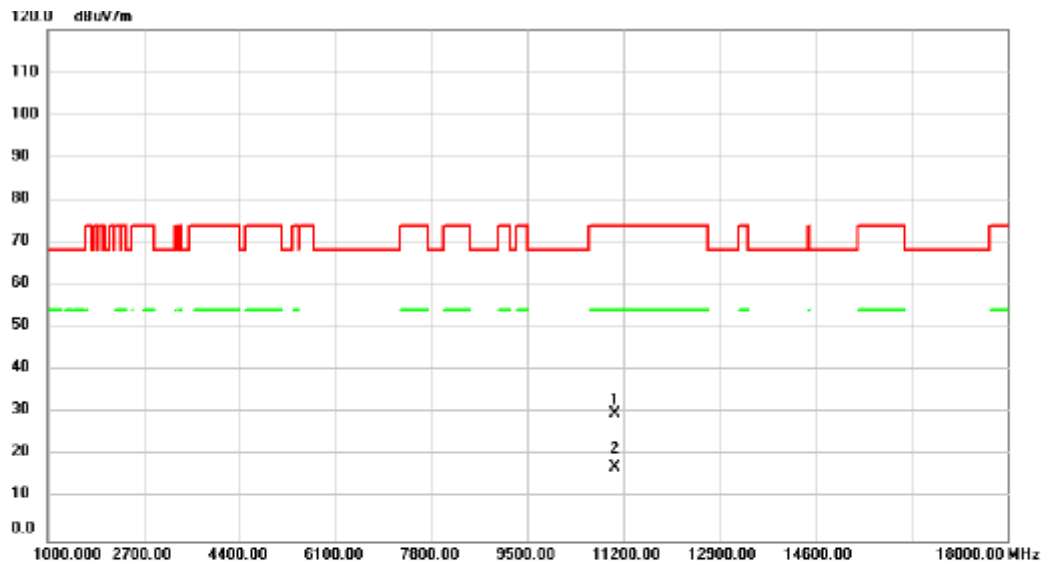


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11060.00     | 30.05                    | -0.13                   | 29.92                      | 74.00           | -44.08       | peak     |         |
| 2   | *   | 11060.00     | 17.30                    | -0.13                   | 17.17                      | 54.00           | -36.83       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5530MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

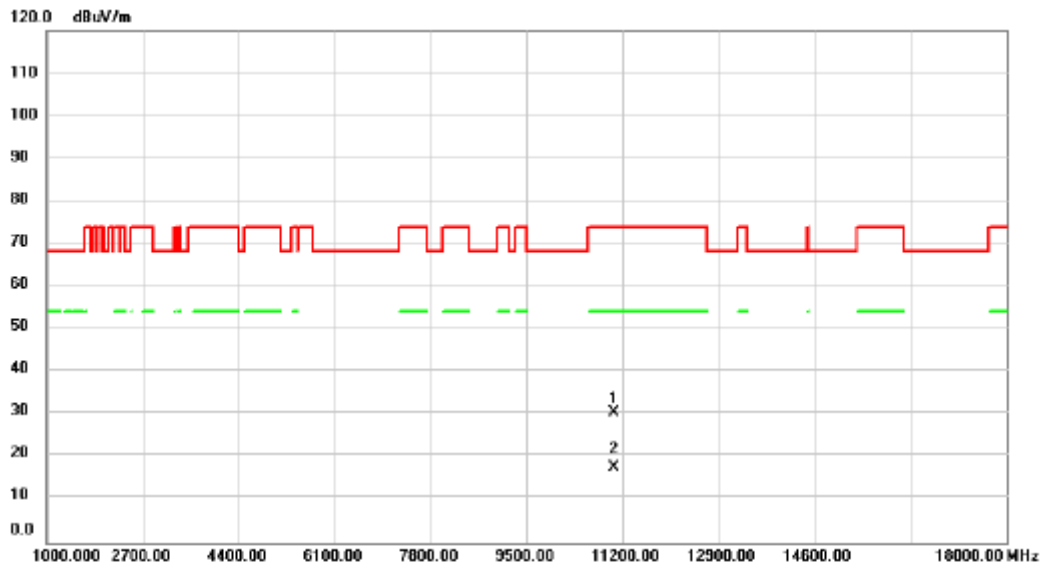


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11060.00     | 30.69                    | -0.13                   | 30.56                      | 74.00           | -43.44       | peak     |         |
| 2   | *   | 11060.00     | 17.60                    | -0.13                   | 17.47                      | 54.00           | -36.53       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5610MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

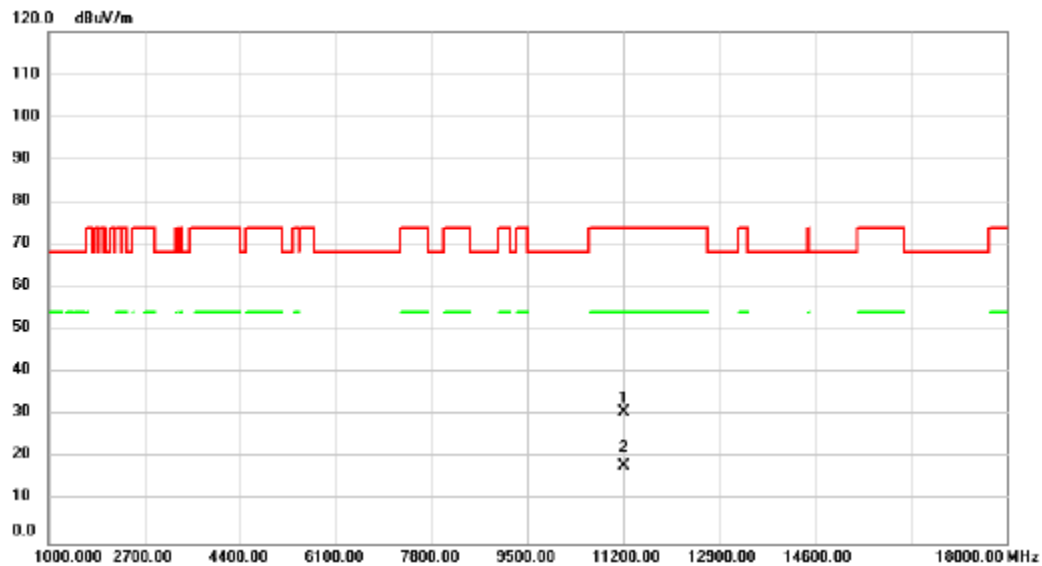


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11220.00     | 30.67                    | 0.22                    | 30.89                      | 74.00           | -43.11       | peak     |         |
| 2   | *   | 11220.00     | 17.94                    | 0.22                    | 18.16                      | 54.00           | -35.84       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5610MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

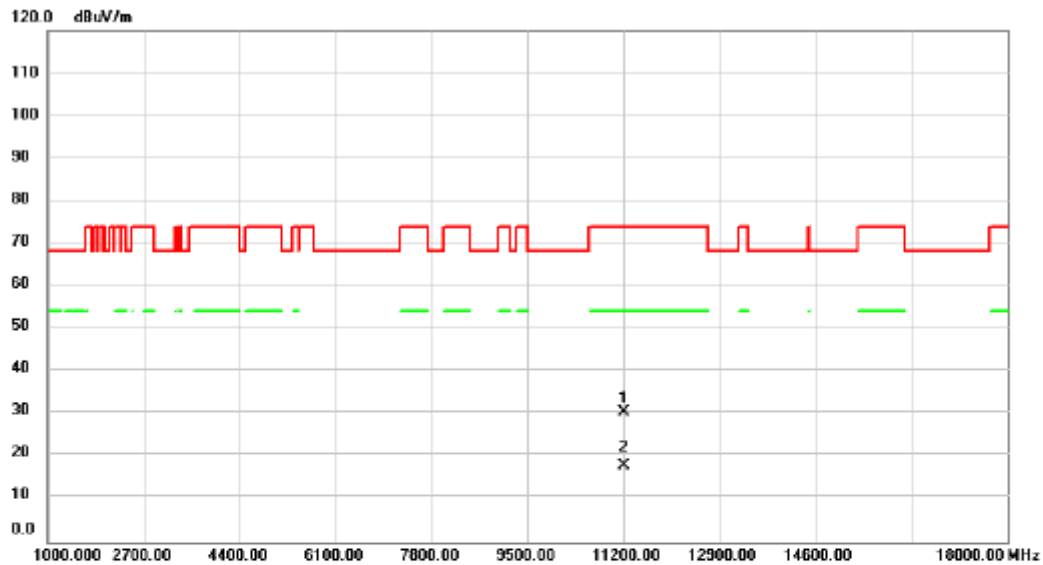


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11220.00     | 30.34                    | 0.22                    | 30.56                      | 74.00           | -43.44       | peak     |         |
| 2   | *   | 11220.00     | 17.62                    | 0.22                    | 17.84                      | 54.00           | -36.16       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5775MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

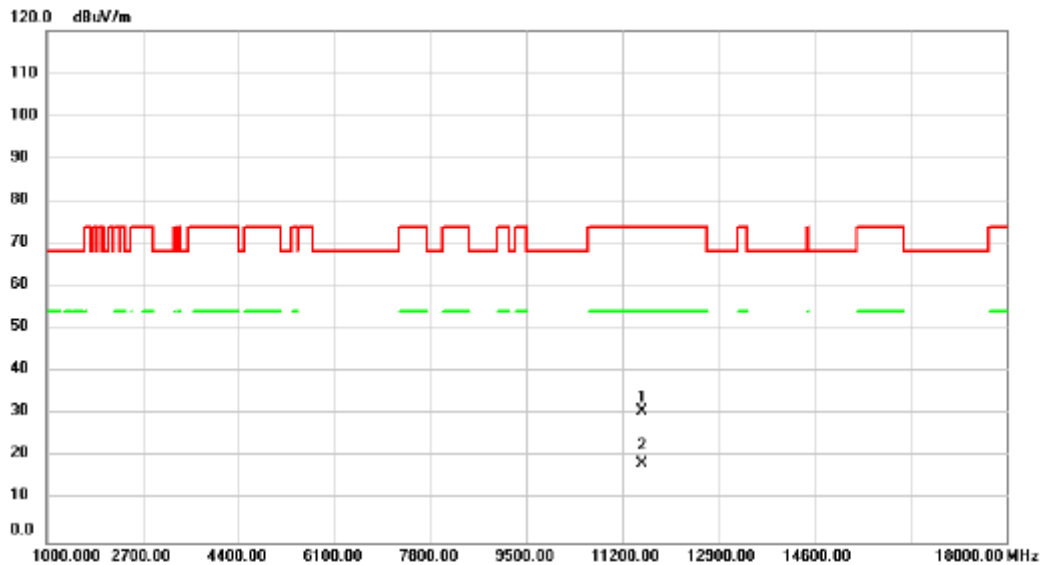


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11550.00     | 29.86                    | 0.84                    | 30.70                      | 74.00           | -43.30       | peak     |         |
| 2   | *   | 11550.00     | 17.54                    | 0.84                    | 18.38                      | 54.00           | -35.62       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT80) | Test Date    | 2024/11/22 |
| Test Frequency | 5775MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

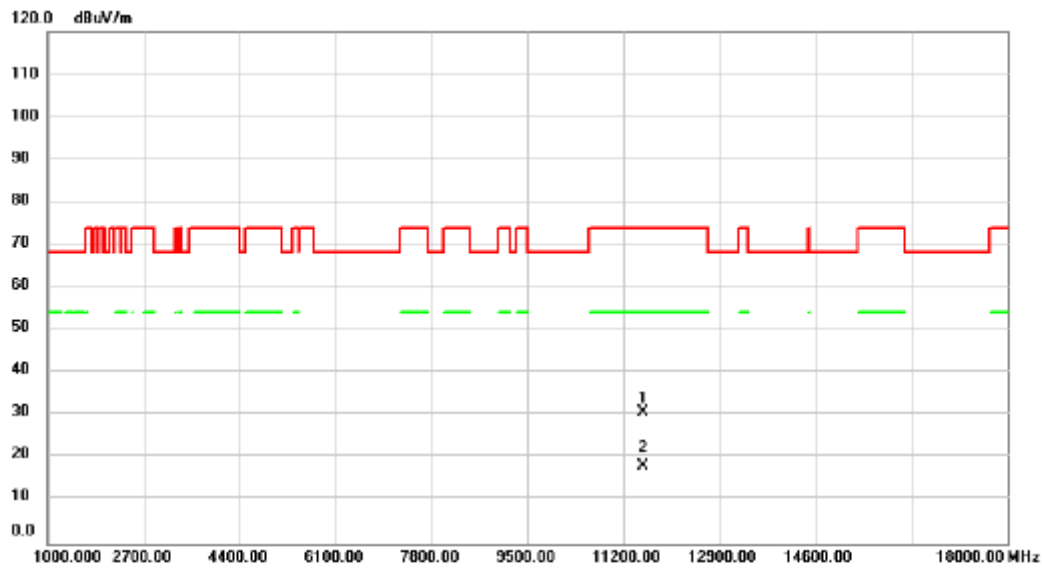


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11550.00     | 29.88                    | 0.84                    | 30.72                      | 74.00           | -43.28       | peak     |         |
| 2   | *   | 11550.00     | 17.45                    | 0.84                    | 18.29                      | 54.00           | -35.71       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT160) | Test Date    | 2024/11/22 |
| Test Frequency | 5250MHz               | Polarization | Vertical   |
| Temp           | 25°C                  | Hum.         | 65%        |

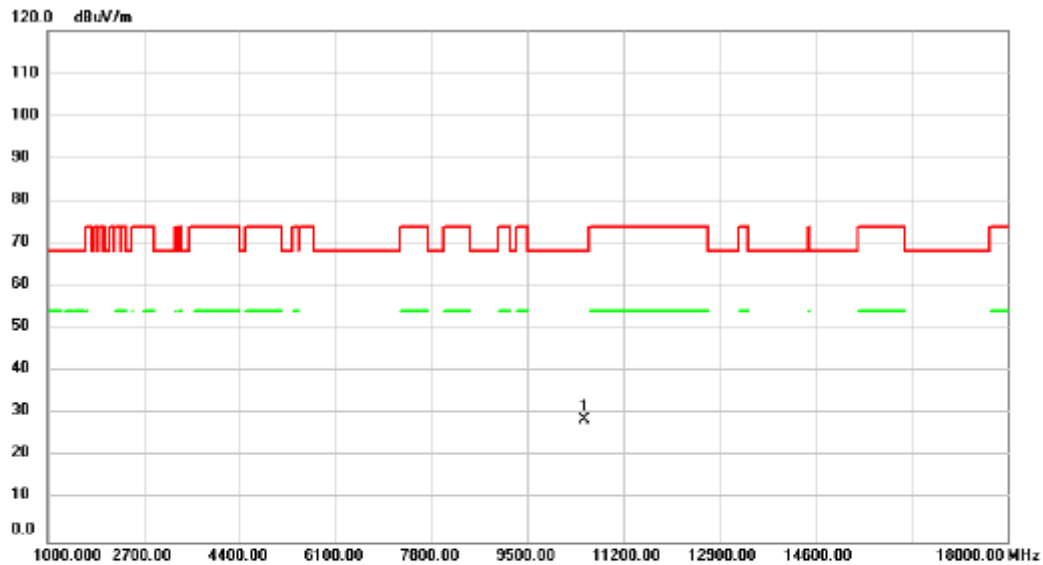


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10500.00 | 28.96         | -0.45          | 28.51       | 68.20  | -39.69 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT160) | Test Date    | 2024/11/22 |
| Test Frequency | 5250MHz               | Polarization | Horizontal |
| Temp           | 25°C                  | Hum.         | 65%        |

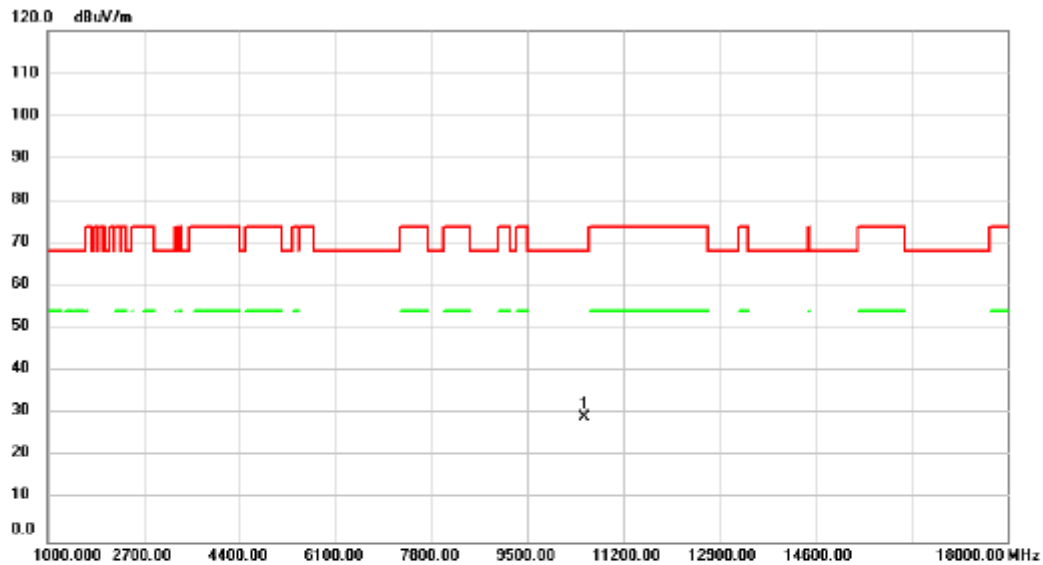


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   | *   | 10500.00 | 29.77         | -0.45          | 29.32       | 68.20  | -38.88 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT160) | Test Date    | 2024/11/22 |
| Test Frequency | 5570MHz               | Polarization | Vertical   |
| Temp           | 25°C                  | Hum.         | 65%        |

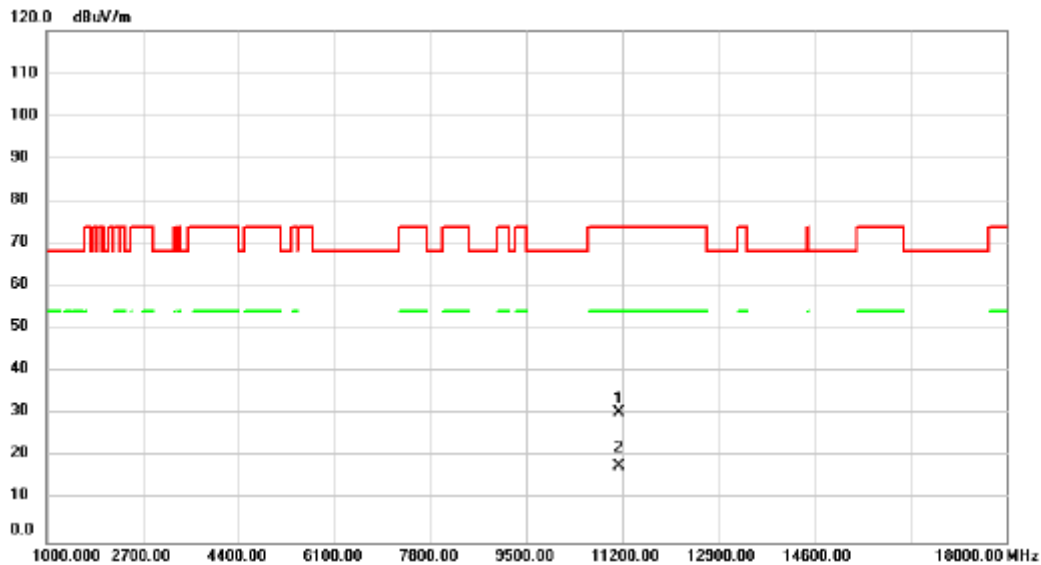


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11140.00     | 30.53                    | 0.03                    | 30.56                      | 74.00           | -43.44       | peak     |         |
| 2   | *   | 11140.00     | 17.89                    | 0.03                    | 17.92                      | 54.00           | -36.08       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac(VHT160) | Test Date    | 2024/11/22 |
| Test Frequency | 5570MHz               | Polarization | Horizontal |
| Temp           | 25°C                  | Hum.         | 65%        |

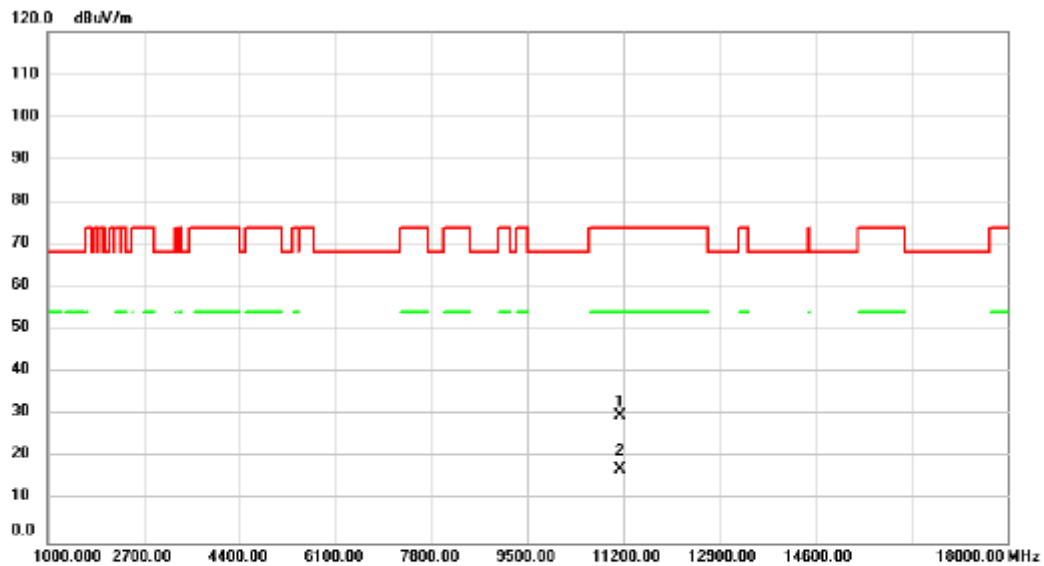


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11140.00     | 29.80                    | 0.03                    | 29.83                      | 74.00           | -44.17       | peak     |         |
| 2   | *   | 11140.00     | 17.35                    | 0.03                    | 17.38                      | 54.00           | -36.62       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5180MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

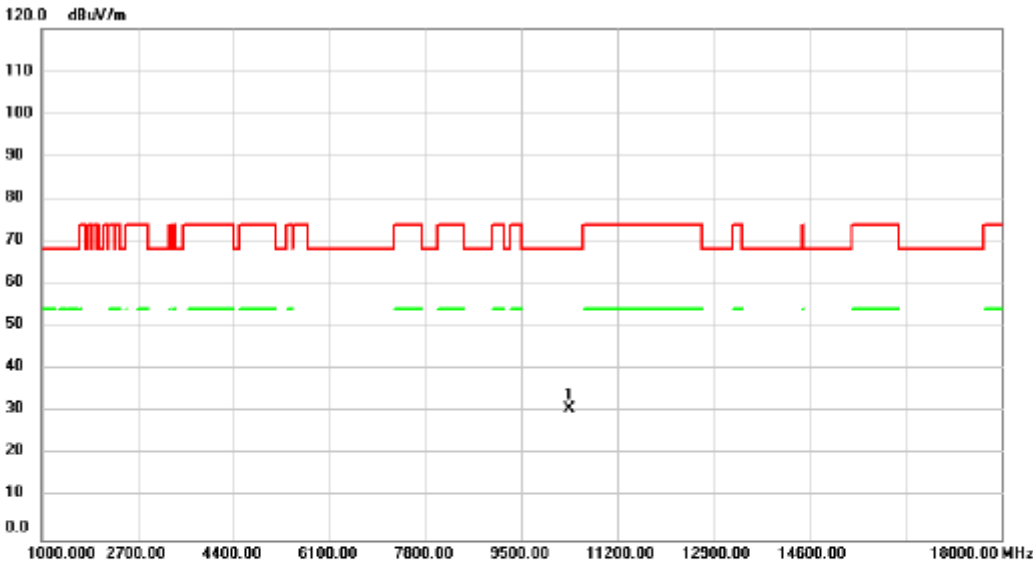

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 10360.00     | 31.45                    | -0.60                   | 30.85                      | 68.20           | -37.35       | peak     |         |

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5180MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

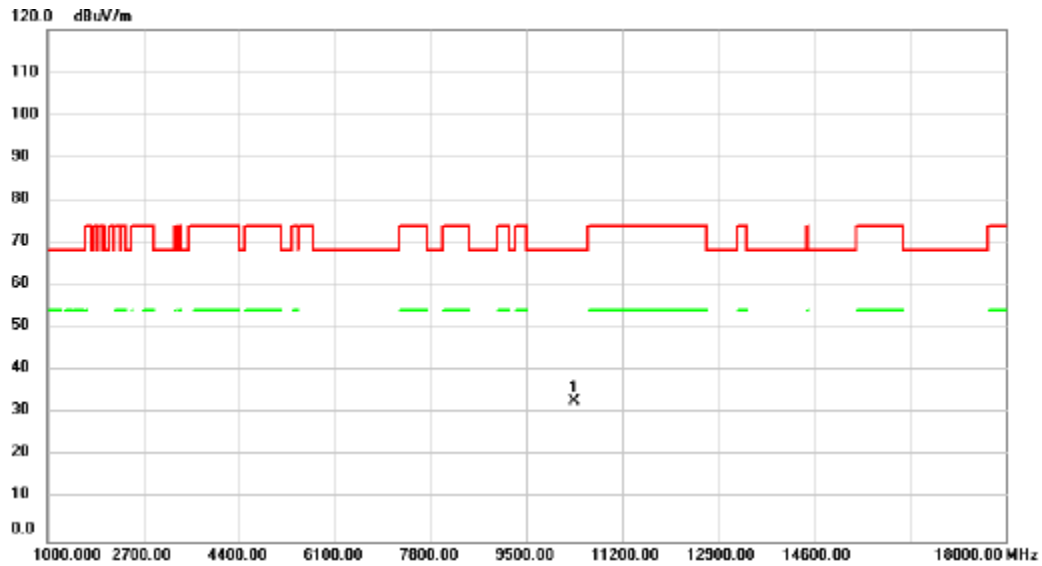


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10360.00 | 33.59         | -0.60          | 32.99       | 68.20  | -35.21 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5200MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

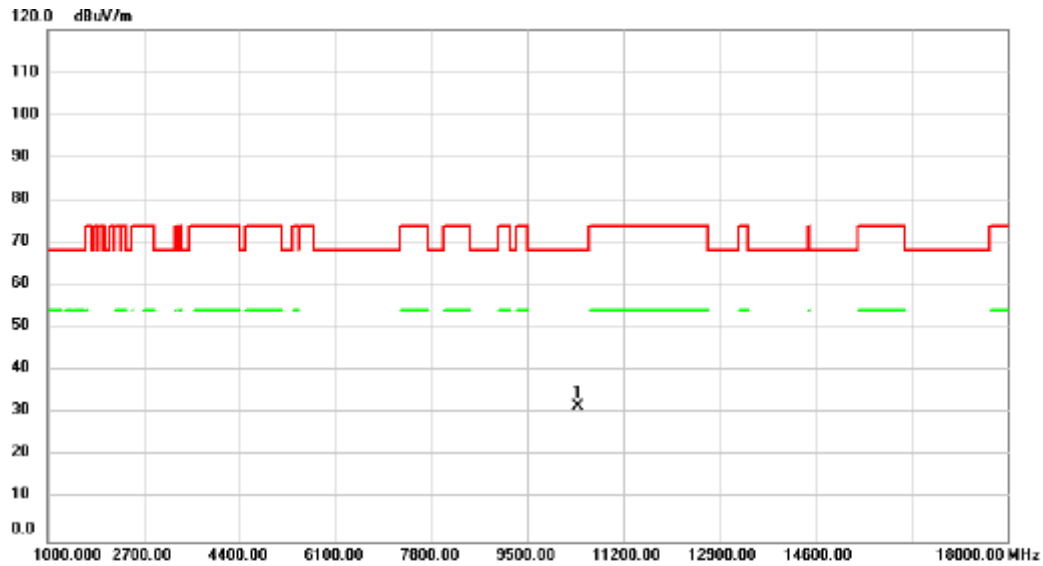


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10400.00 | 32.09         | -0.55          | 31.54       | 68.20  | -36.66 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5200MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

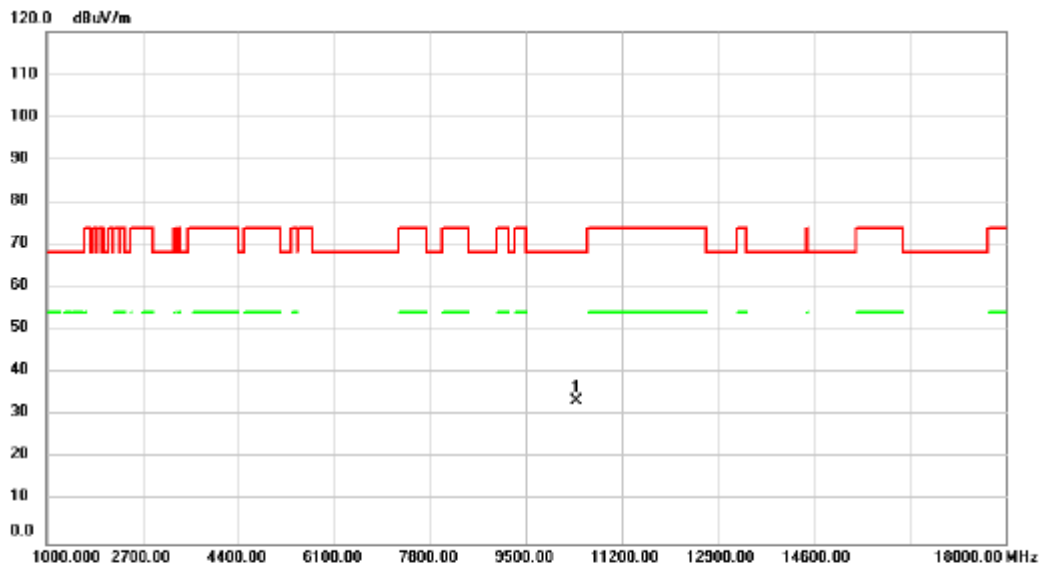


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   | *   | 10400.00 | 34.10         | -0.55          | 33.55       | 68.20  | -34.65 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5240MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

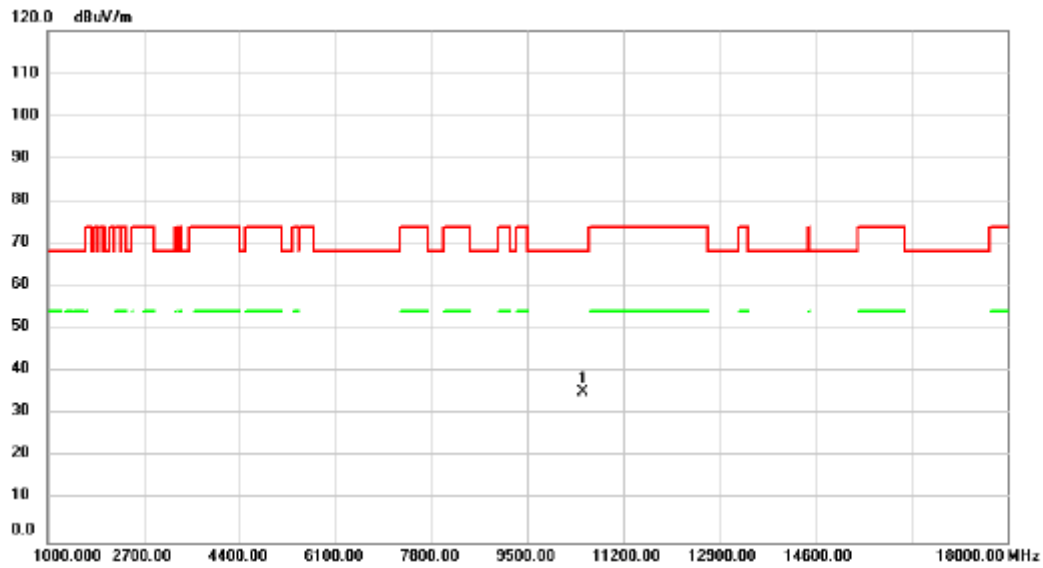


| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin |          |         |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     | MHz      | Level   | Factor  | ment     |        |        | Detector | Comment |
|     |     |          | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   | *   | 10480.00 | 35.68   | -0.47   | 35.21    | 68.20  | -32.99 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5240MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

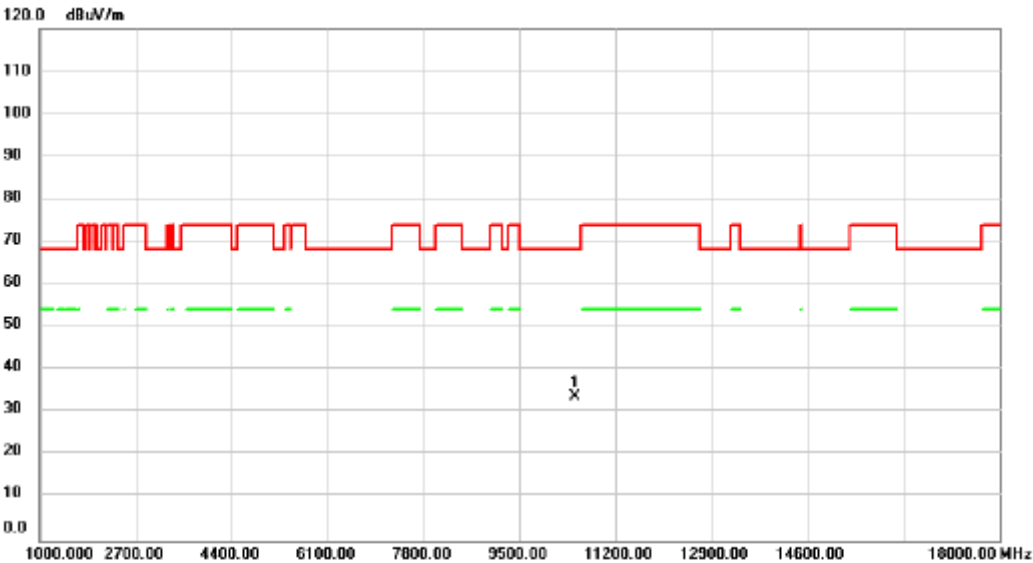


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10480.00 | 34.27         | -0.47          | 33.80       | 68.20  | -34.40 | peak     |         |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5260MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

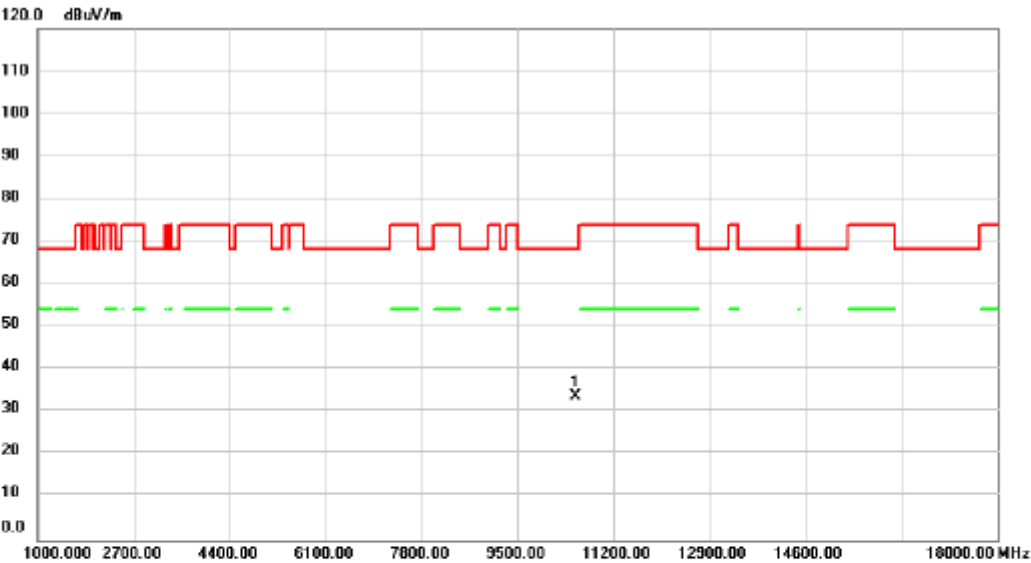

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10520.00 | 34.18         | -0.44          | 33.74       | 68.20  | -34.46 | peak     |         |

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5260MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

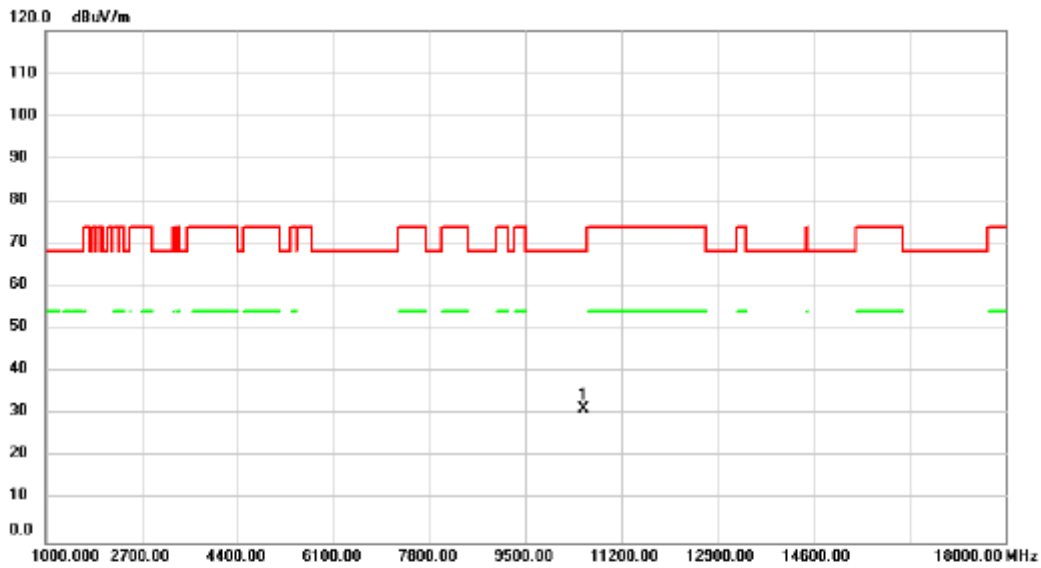


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 10520.00     | 31.81                    | -0.44                   | 31.37                      | 68.20           | -36.83       | peak     |         |

#### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5300MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

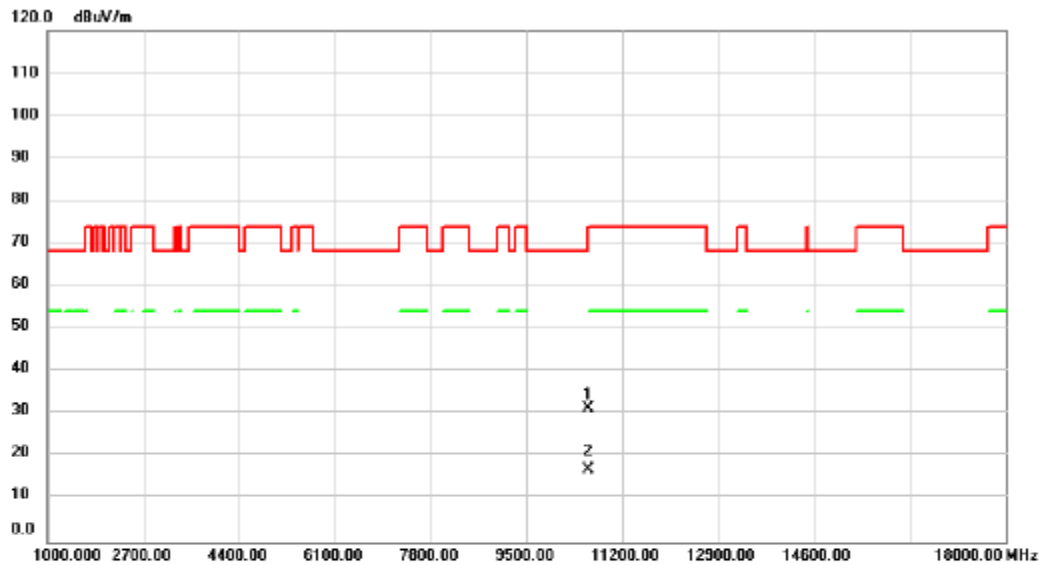


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 10600.00     | 31.68                    | -0.41                   | 31.27                      | 68.20           | -36.93       | peak     |         |
| 2   |     | 10600.00     | 17.34                    | -0.41                   | 16.93                      | 54.00           | -37.07       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5300MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

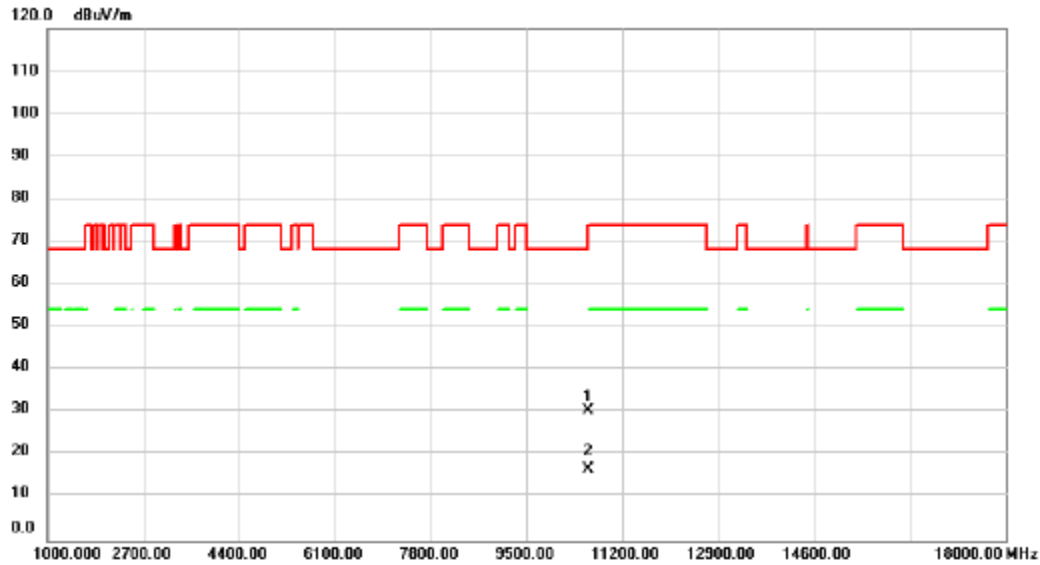


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10600.00     | 30.81                    | -0.41                   | 30.40                      | 68.20           | -37.80       | peak     |         |
| 2   | *   | 10600.00     | 17.07                    | -0.41                   | 16.66                      | 54.00           | -37.34       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5320MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

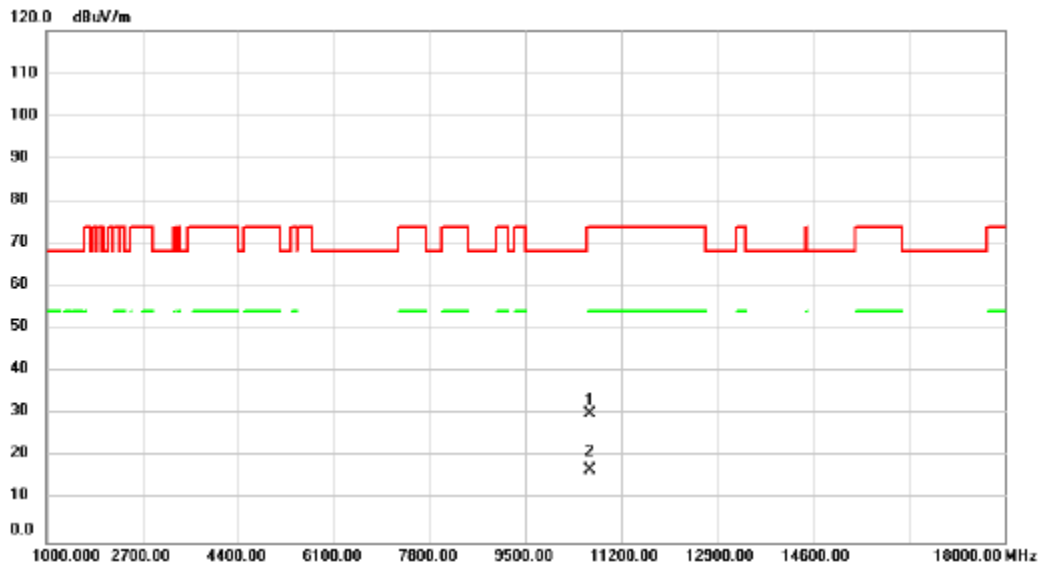


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10640.00     | 30.60                    | -0.41                   | 30.19                      | 74.00           | -43.81       | peak     |         |
| 2   | *   | 10640.00     | 17.38                    | -0.41                   | 16.97                      | 54.00           | -37.03       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5320MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

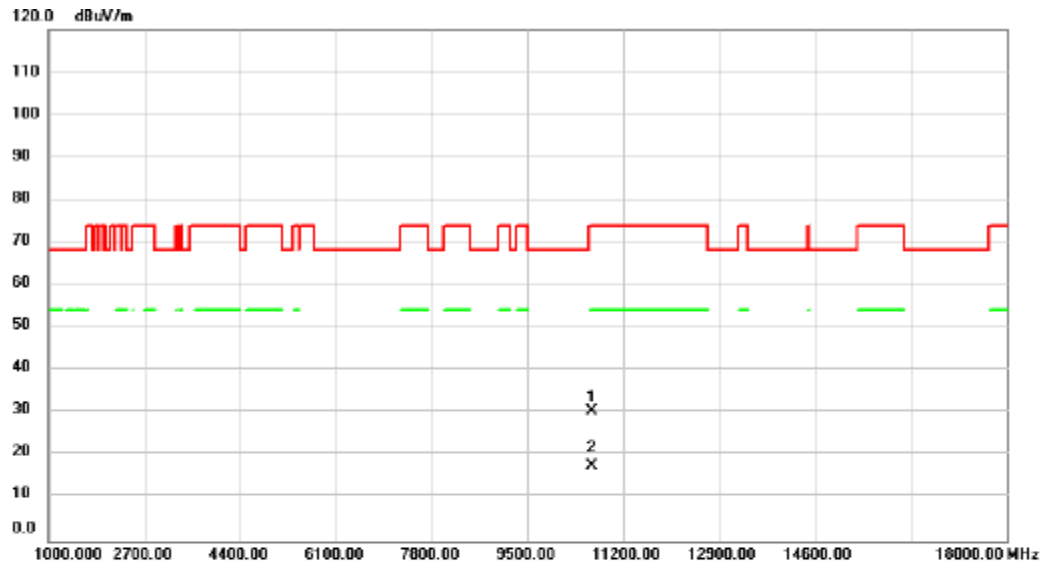


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10640.00     | 30.73                    | -0.41                   | 30.32                      | 74.00           | -43.68       | peak     |         |
| 2   | *   | 10640.00     | 17.99                    | -0.41                   | 17.58                      | 54.00           | -36.42       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5500MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

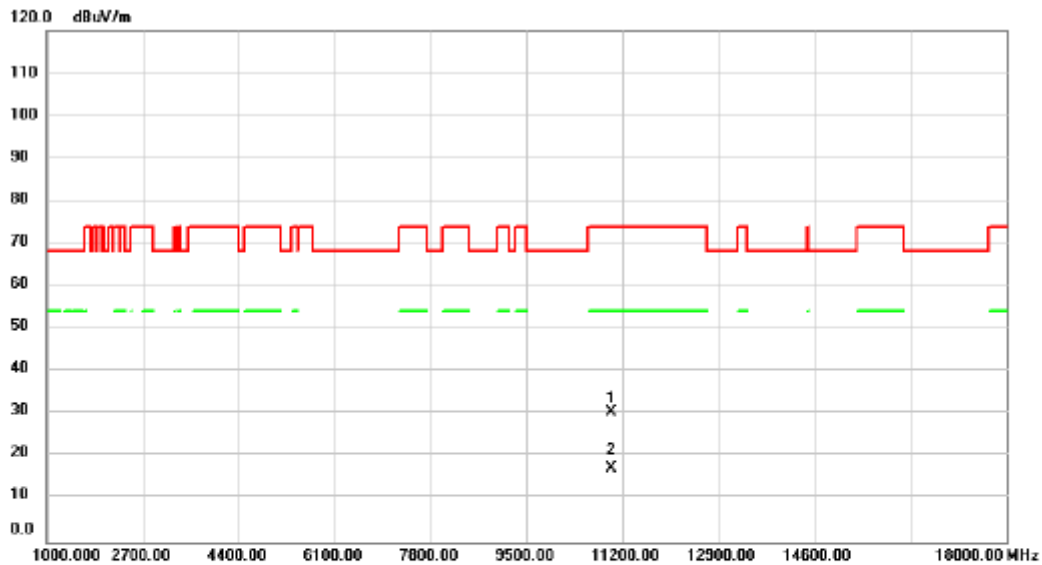


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11000.00     | 30.72                    | -0.27                   | 30.45                      | 74.00           | -43.55       | peak     |         |
| 2   | *   | 11000.00     | 17.55                    | -0.27                   | 17.28                      | 54.00           | -36.72       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5500MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

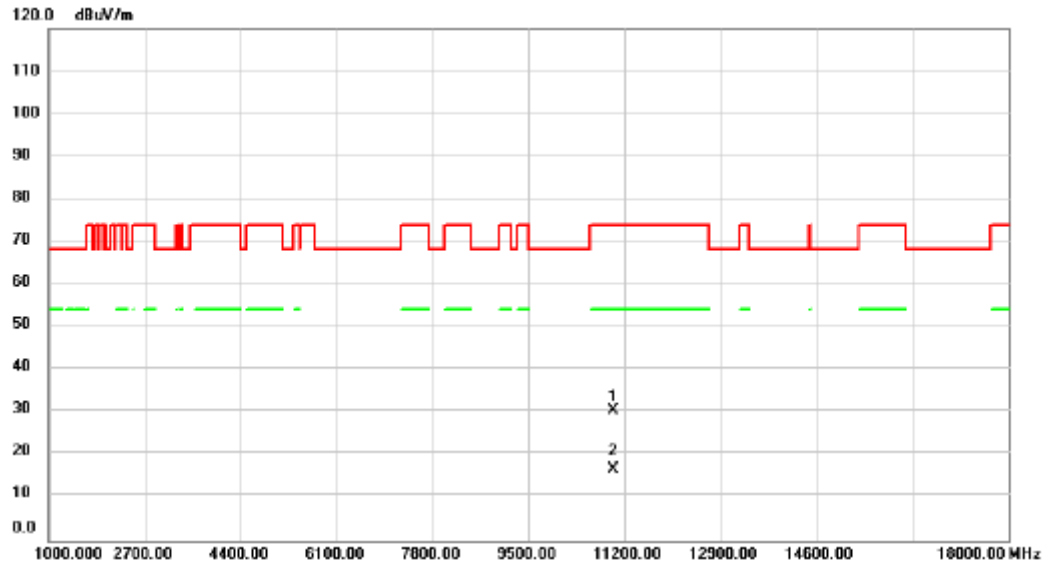


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11000.00     | 30.75                    | -0.27                   | 30.48                      | 74.00           | -43.52       | peak     |         |
| 2   | *   | 11000.00     | 17.03                    | -0.27                   | 16.76                      | 54.00           | -37.24       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5580MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

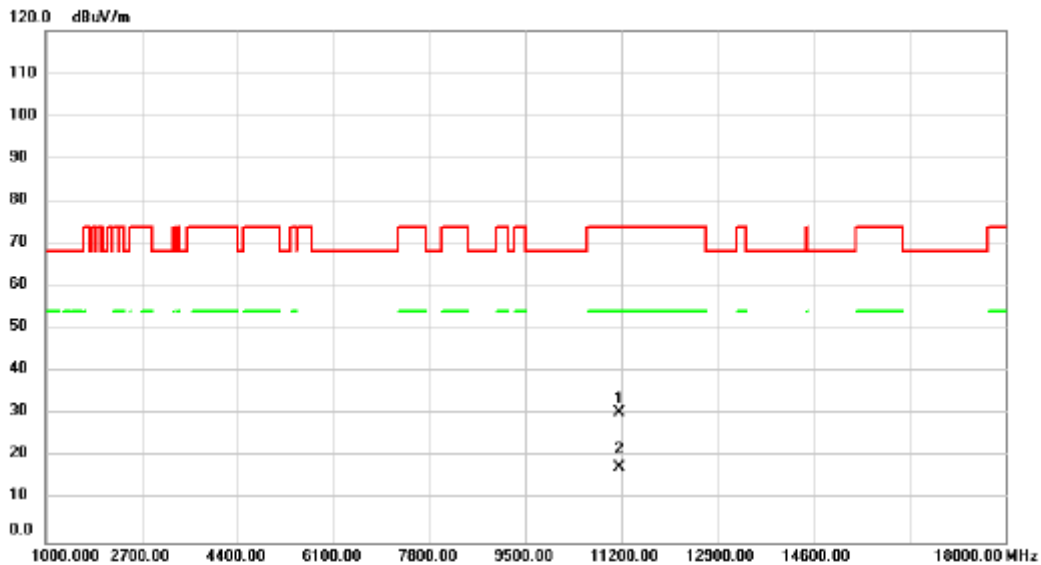


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 11160.00 | 30.23         | 0.08           | 30.31       | 74.00  | -43.69 | peak     |         |
| 2   | *   | 11160.00 | 17.53         | 0.08           | 17.61       | 54.00  | -36.39 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5580MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

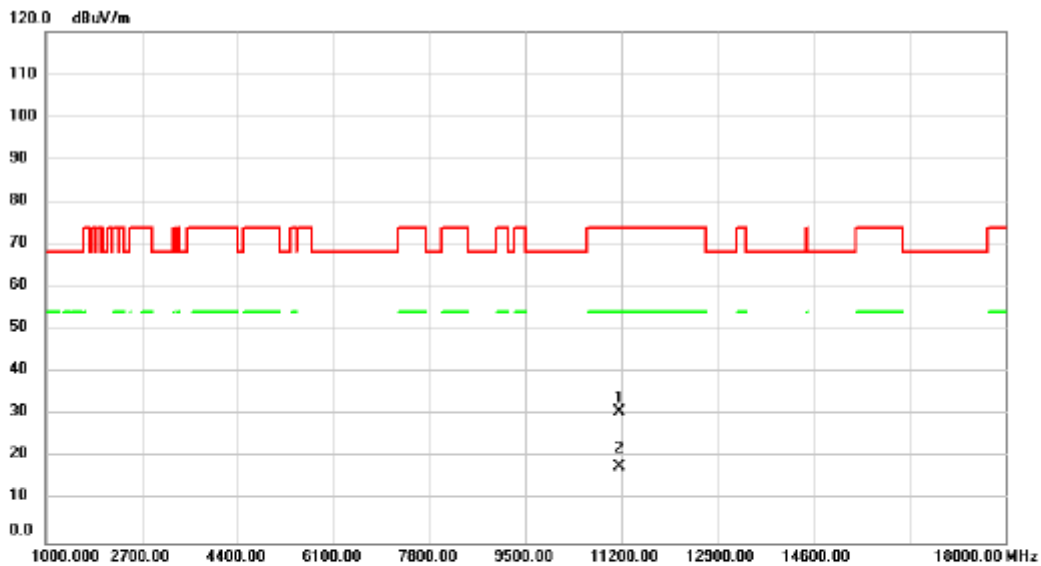


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11160.00     | 30.79                    | 0.08                    | 30.87                      | 74.00           | -43.13       | peak     |         |
| 2   | *   | 11160.00     | 17.69                    | 0.08                    | 17.77                      | 54.00           | -36.23       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5700MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

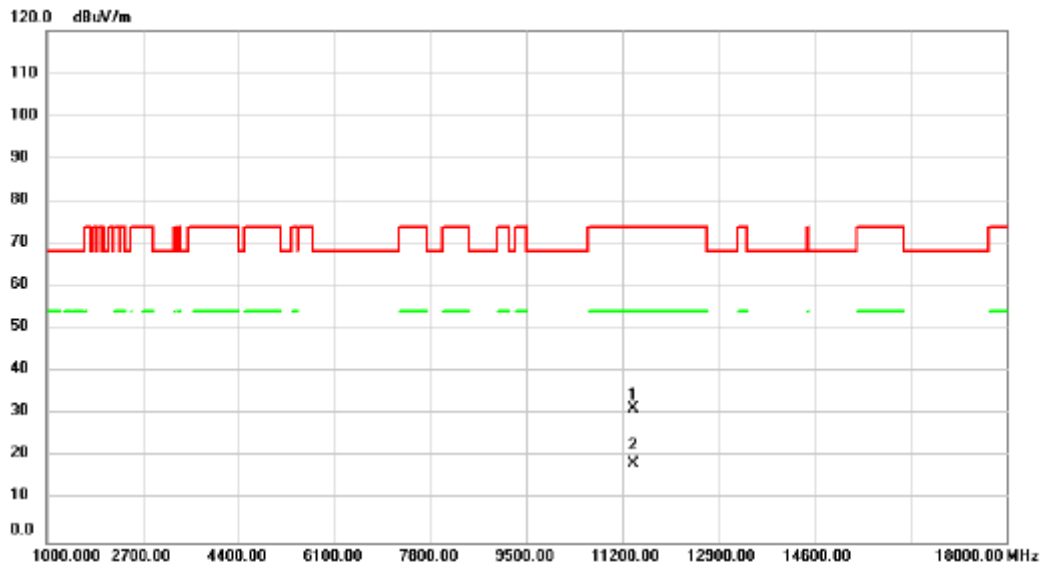


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11400.00     | 30.81                    | 0.61                    | 31.42                      | 74.00           | -42.58       | peak     |         |
| 2   | *   | 11400.00     | 17.83                    | 0.61                    | 18.44                      | 54.00           | -35.56       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5700MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

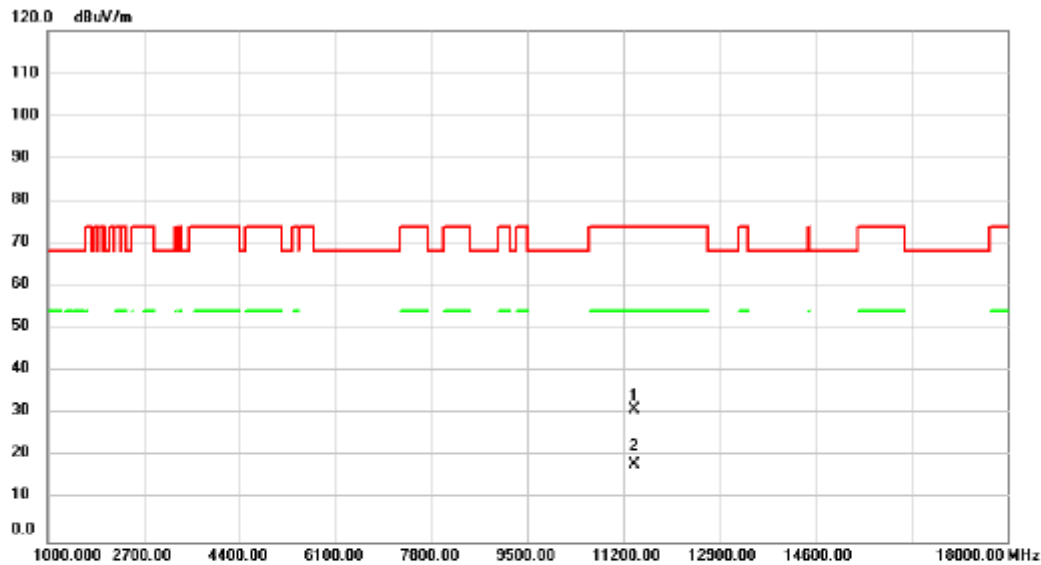


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11400.00     | 30.39                    | 0.61                    | 31.00                      | 74.00           | -43.00       | peak     |         |
| 2   | *   | 11400.00     | 17.48                    | 0.61                    | 18.09                      | 54.00           | -35.91       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

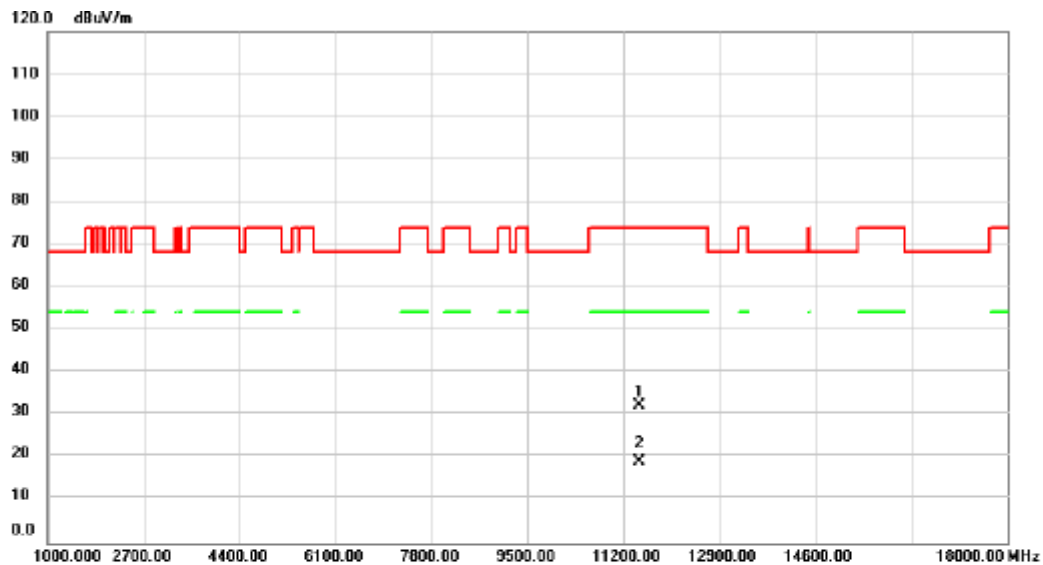


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 11490.00     | 31.55                    | 0.82                    | 32.37                      | 74.00           | -41.63       | peak     |         |
| 2 *     | 11490.00     | 18.17                    | 0.82                    | 18.99                      | 54.00           | -35.01       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

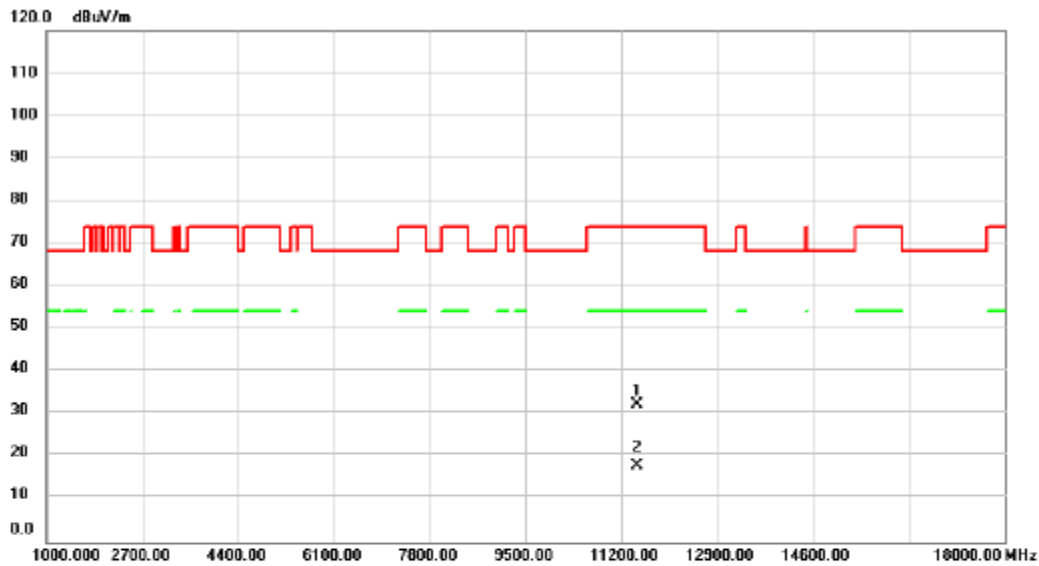


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11490.00     | 31.29                    | 0.82                    | 32.11                      | 74.00           | -41.89       | peak     |         |
| 2   | *   | 11490.00     | 17.15                    | 0.82                    | 17.97                      | 54.00           | -36.03       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5785MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

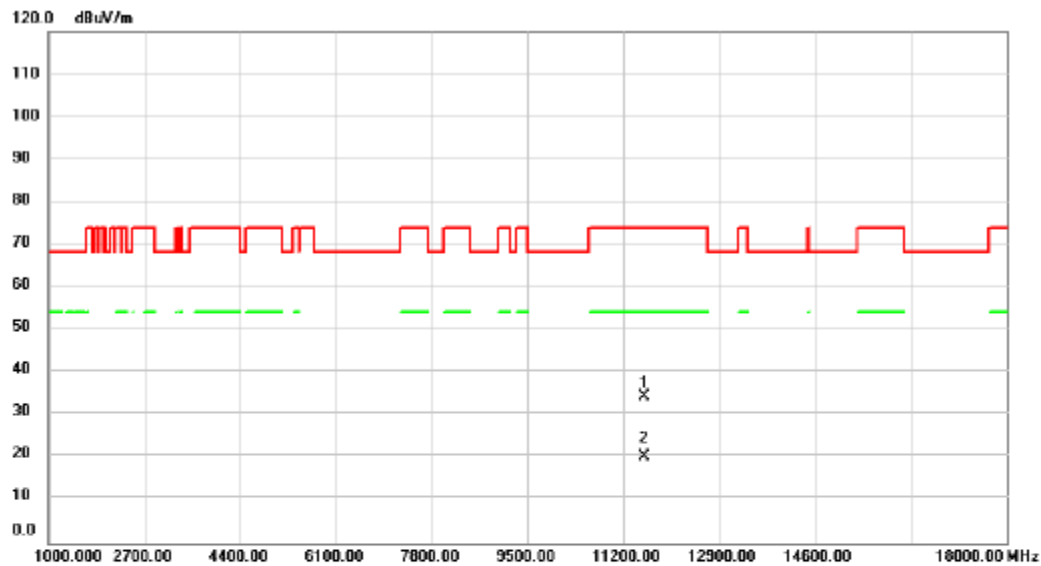


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11570.00     | 33.54                    | 0.83                    | 34.37                      | 74.00           | -39.63       | peak     |         |
| 2   | *   | 11570.00     | 19.56                    | 0.83                    | 20.39                      | 54.00           | -33.61       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5785MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

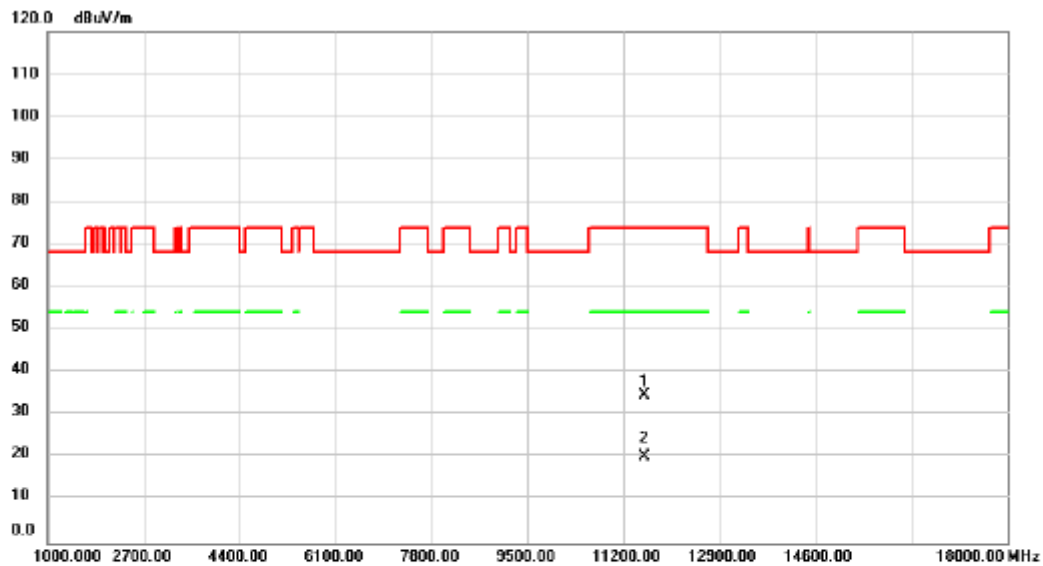


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 11570.00     | 33.83                    | 0.83                    | 34.66                      | 74.00           | -39.34       | peak     |         |
| 2 *     | 11570.00     | 19.27                    | 0.83                    | 20.10                      | 54.00           | -33.90       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5825MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

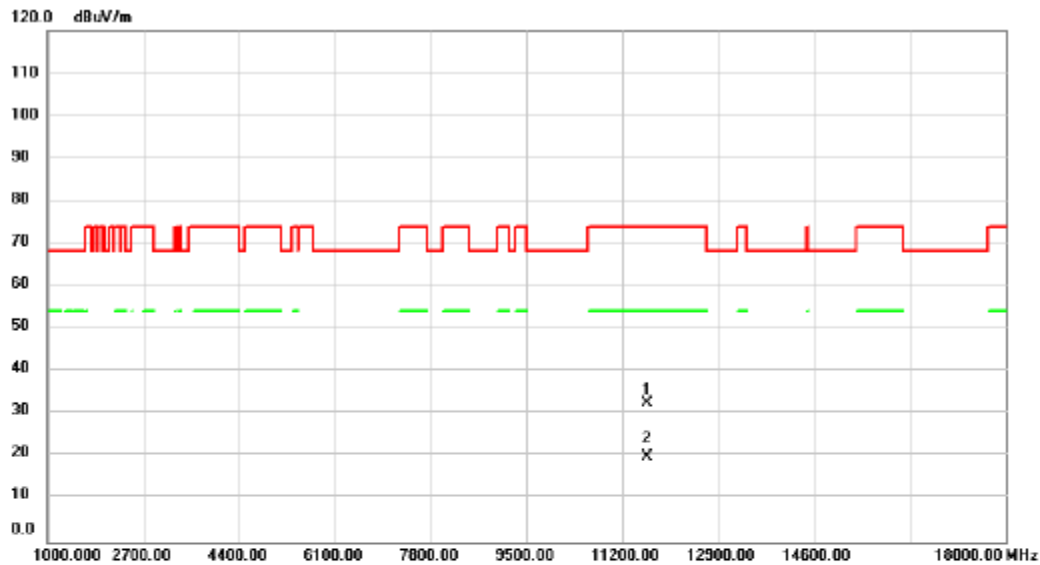


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 11650.00 | 31.62         | 0.83           | 32.45       | 74.00  | -41.55 | peak     |         |
| 2   | *   | 11650.00 | 19.00         | 0.83           | 19.83       | 54.00  | -34.17 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5825MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

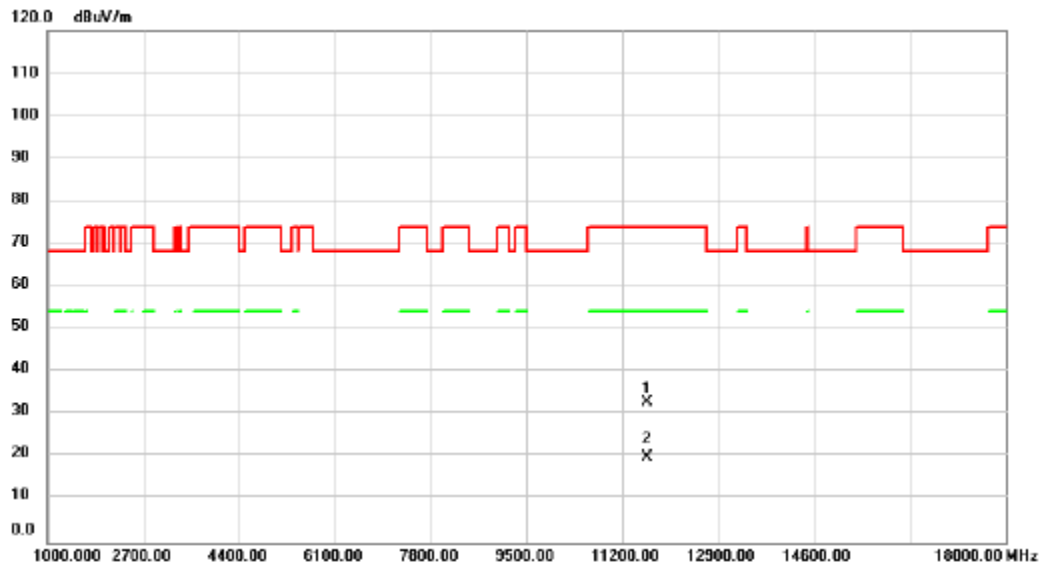


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11650.00     | 32.07                    | 0.83                    | 32.90                      | 74.00           | -41.10       | peak     |         |
| 2   | *   | 11650.00     | 19.03                    | 0.83                    | 19.86                      | 54.00           | -34.14       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5190MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

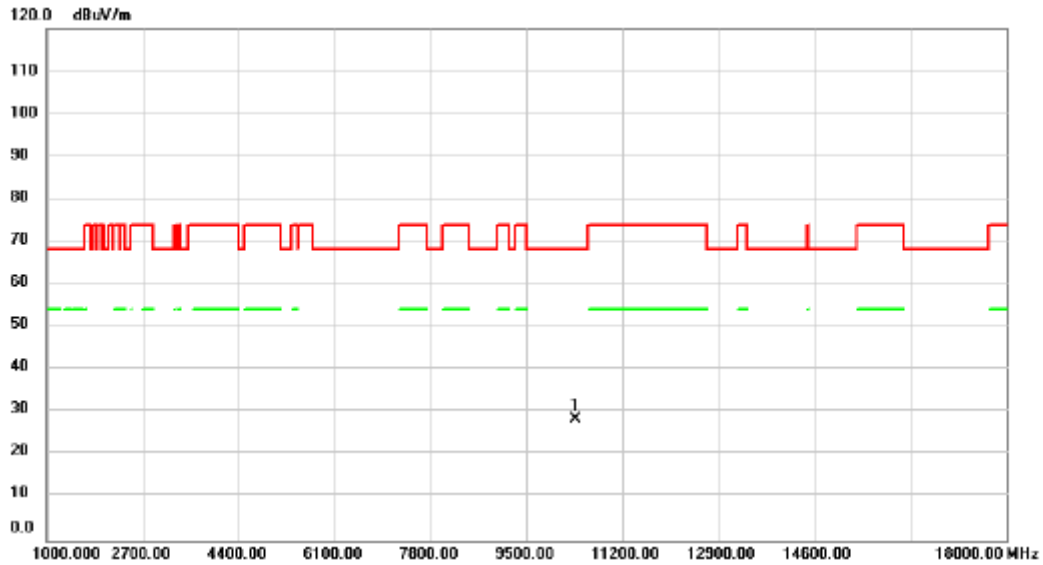


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10380.00 | 28.94         | -0.57          | 28.37       | 68.20  | -39.83 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5190MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

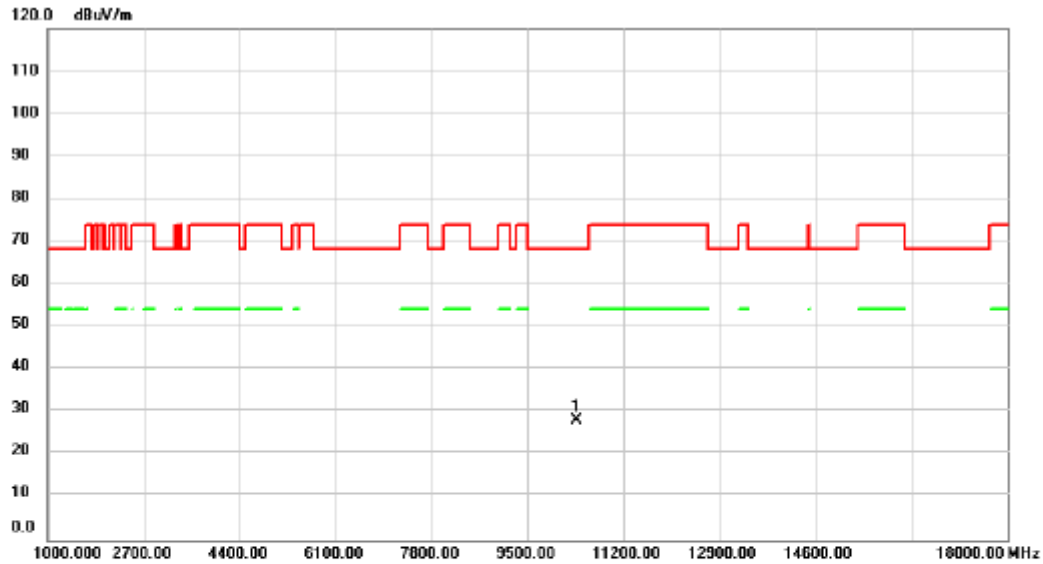


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10380.00 | 28.50         | -0.57          | 27.93       | 68.20  | -40.27 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5230MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

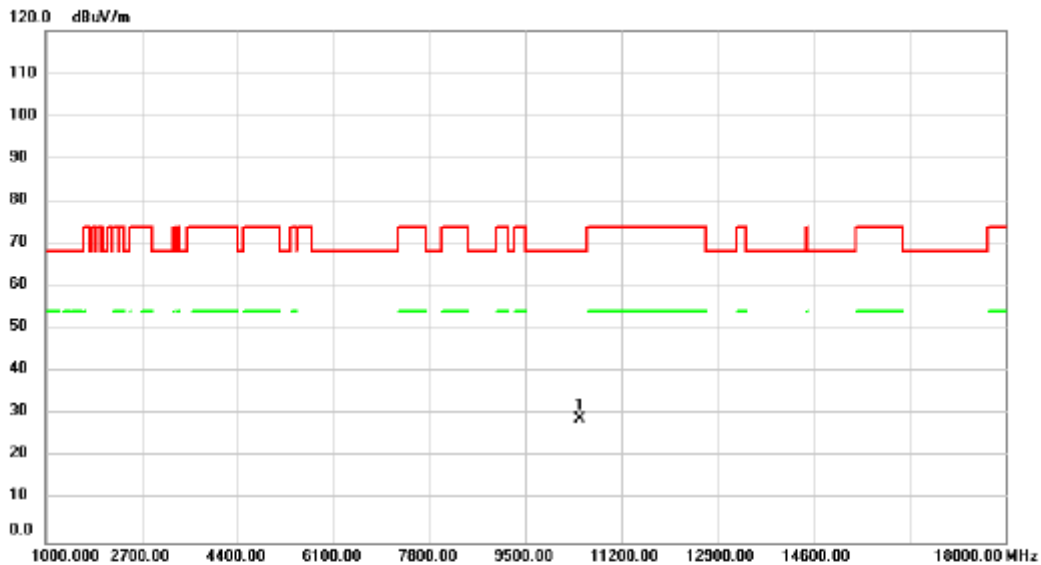


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 10460.00     | 29.41                    | -0.49                   | 28.92                      | 68.20           | -39.28       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5230MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

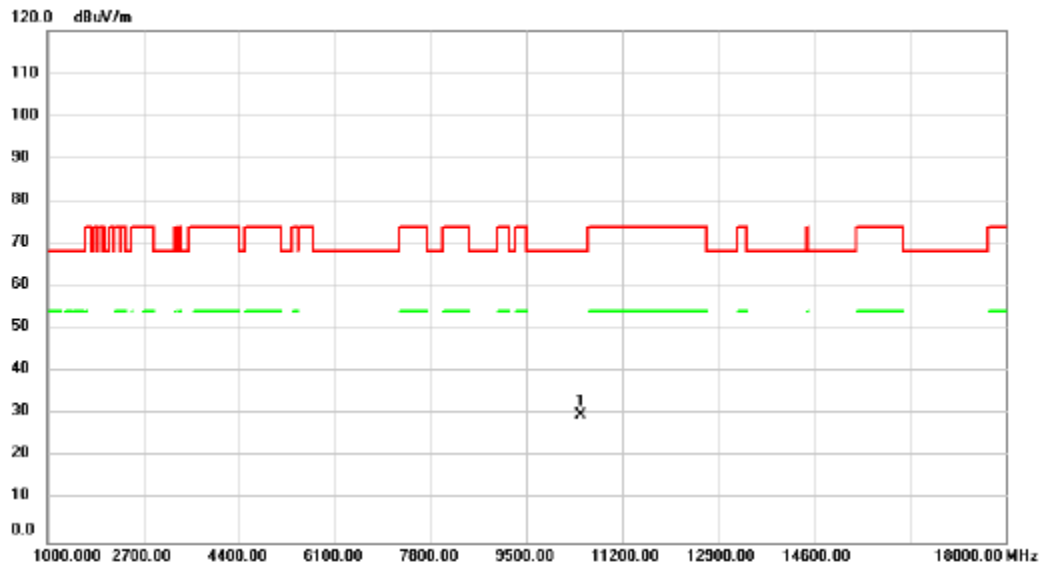


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10460.00 | 30.30         | -0.49          | 29.81       | 68.20  | -38.39 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5270MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

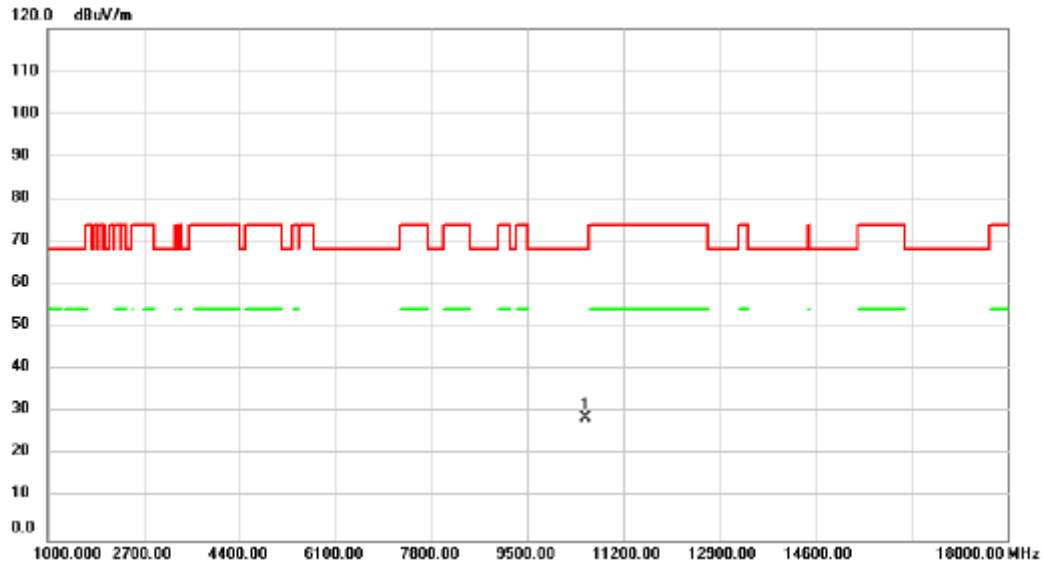


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10540.00 | 29.11         | -0.44          | 28.67       | 68.20  | -39.53 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5270MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

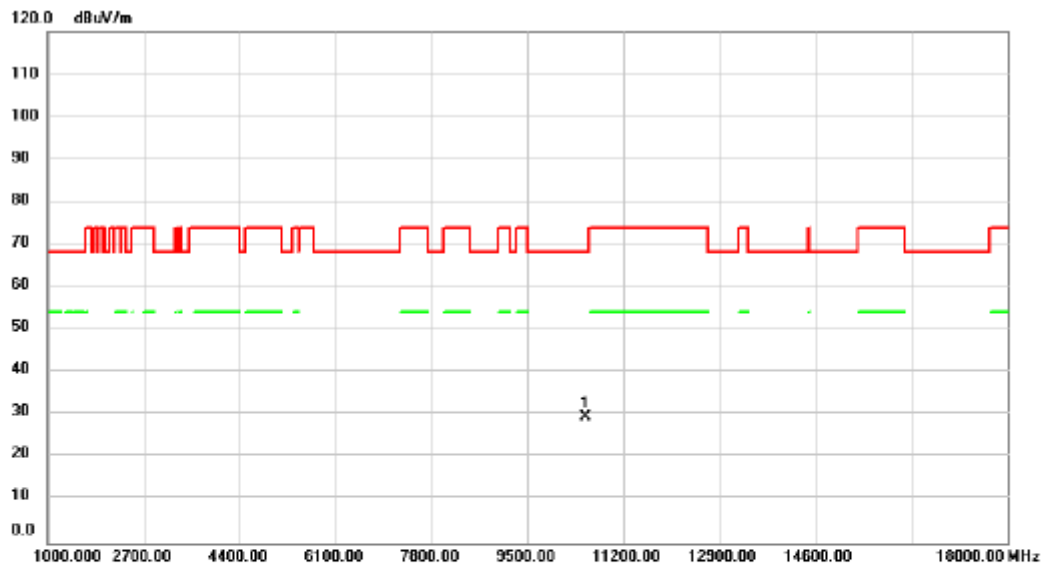


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10540.00 | 29.89         | -0.44          | 29.45       | 68.20  | -38.75 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5310MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

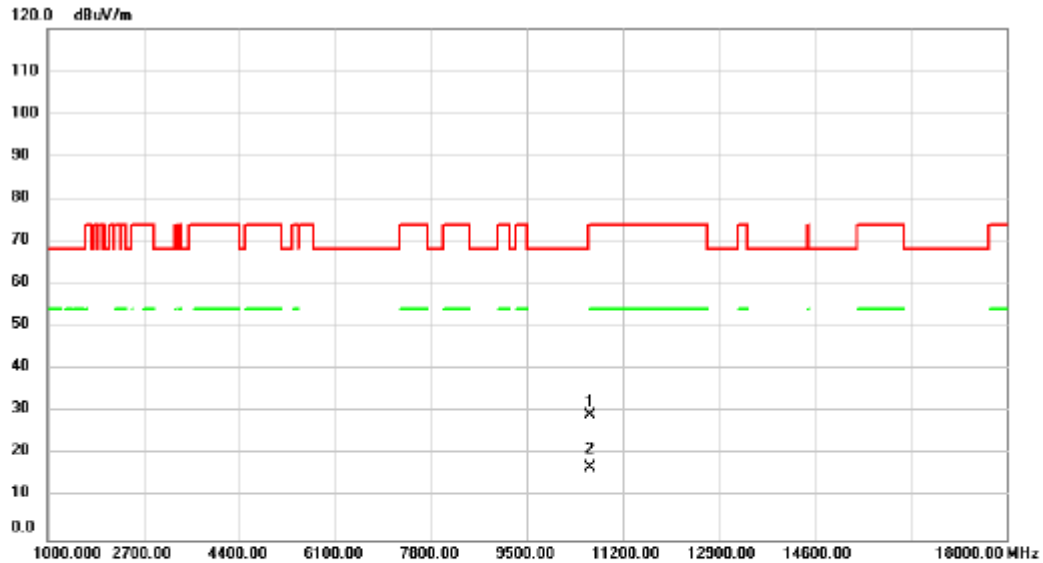


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10620.00     | 29.54                    | -0.40                   | 29.14                      | 74.00           | -44.86       | peak     |         |
| 2   | *   | 10620.00     | 17.22                    | -0.40                   | 16.82                      | 54.00           | -37.18       | AVG      |         |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5310MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

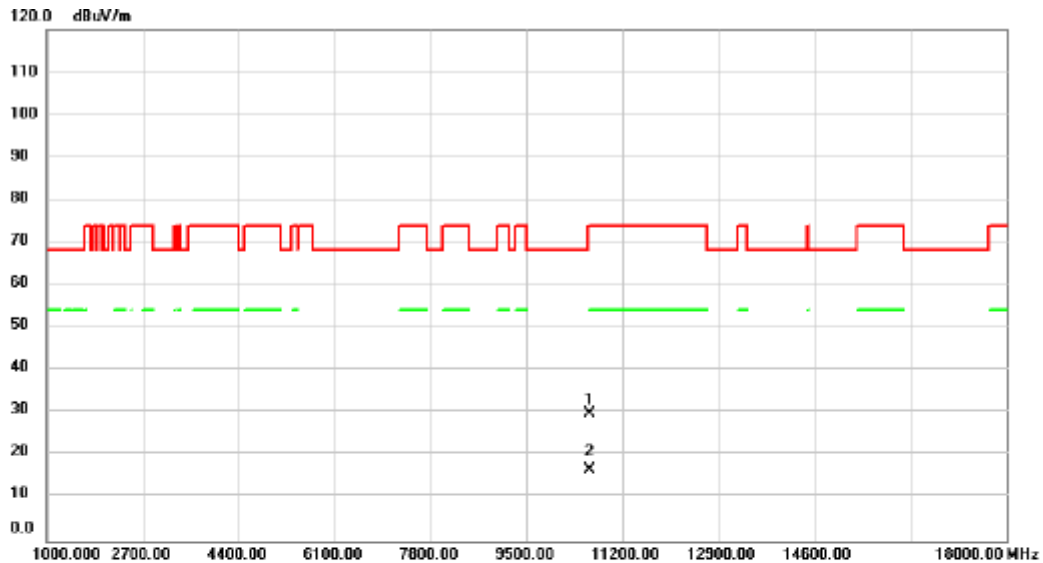


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 10620.00     | 30.40                    | -0.40                   | 30.00                      | 74.00           | -44.00       | peak     |         |
| 2   | *   | 10620.00     | 17.09                    | -0.40                   | 16.69                      | 54.00           | -37.31       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5510MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

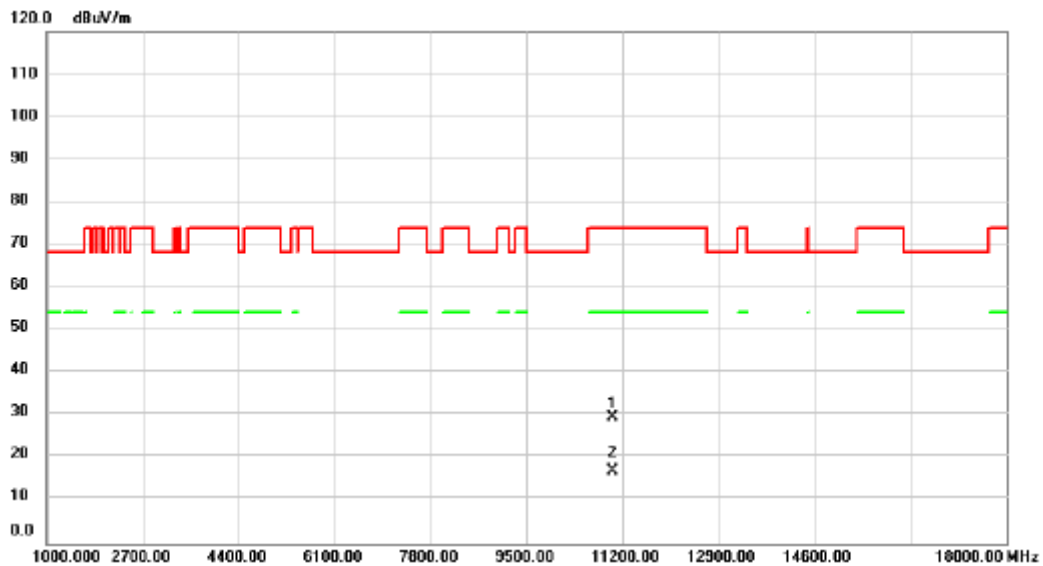


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11020.00     | 29.81                    | -0.22                   | 29.59                      | 74.00           | -44.41       | peak     |         |
| 2   | *   | 11020.00     | 17.27                    | -0.22                   | 17.05                      | 54.00           | -36.95       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5510MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

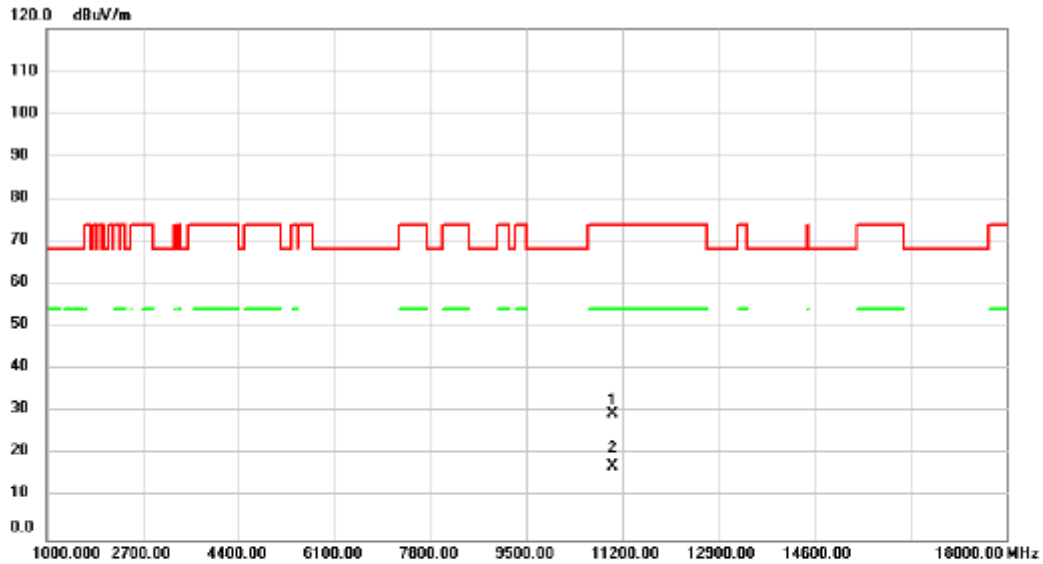


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11020.00     | 29.92                    | -0.22                   | 29.70                      | 74.00           | -44.30       | peak     |         |
| 2   | *   | 11020.00     | 17.48                    | -0.22                   | 17.26                      | 54.00           | -36.74       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5550MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

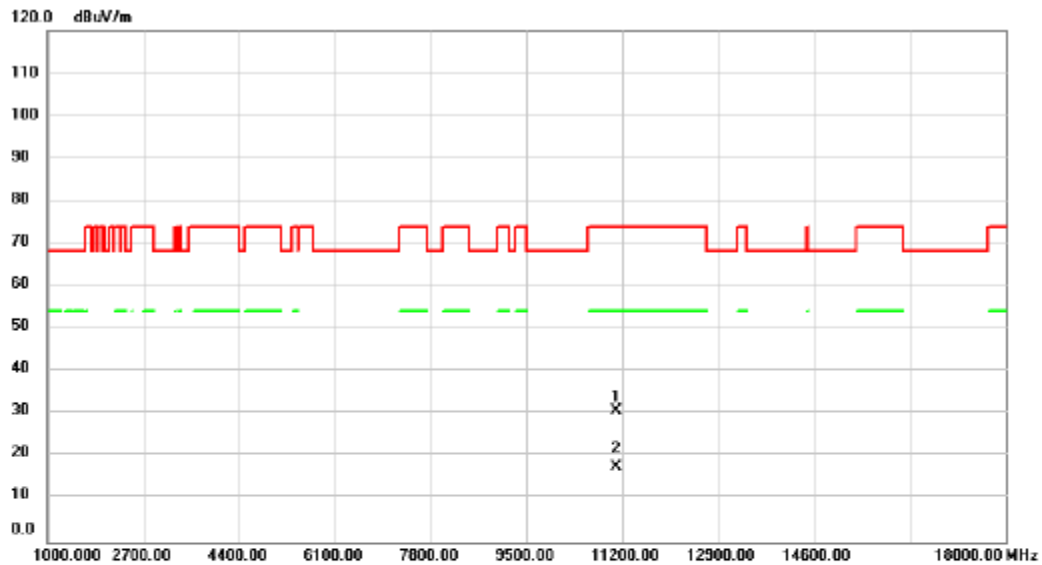


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 11100.00     | 30.65                    | -0.04                   | 30.61                      | 74.00           | -43.39       | peak     |         |
| 2 *     | 11100.00     | 17.51                    | -0.04                   | 17.47                      | 54.00           | -36.53       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5550MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

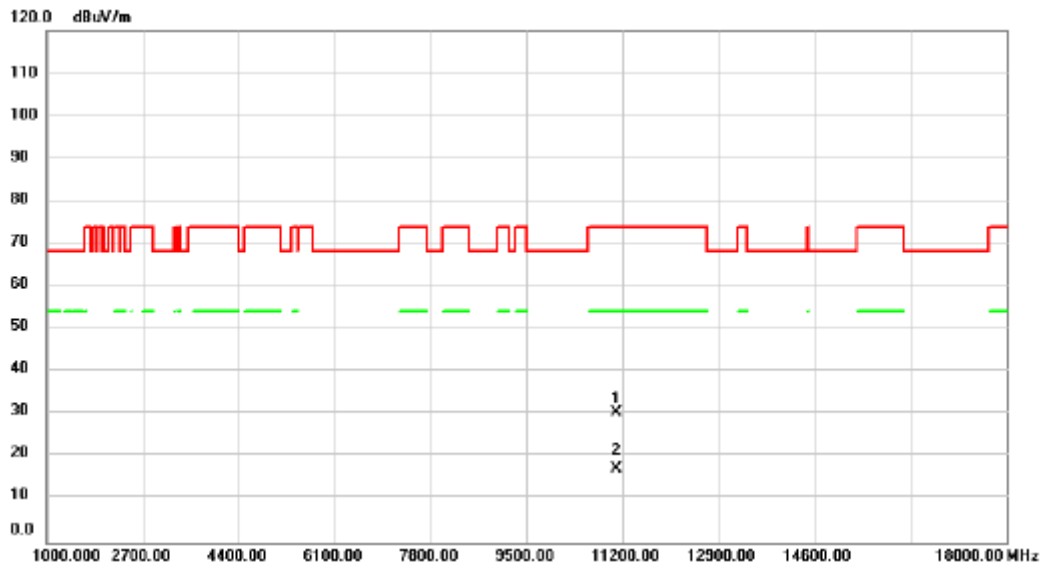


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11100.00     | 30.43                    | -0.04                   | 30.39                      | 74.00           | -43.61       | peak     |         |
| 2   | *   | 11100.00     | 17.42                    | -0.04                   | 17.38                      | 54.00           | -36.62       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5670MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

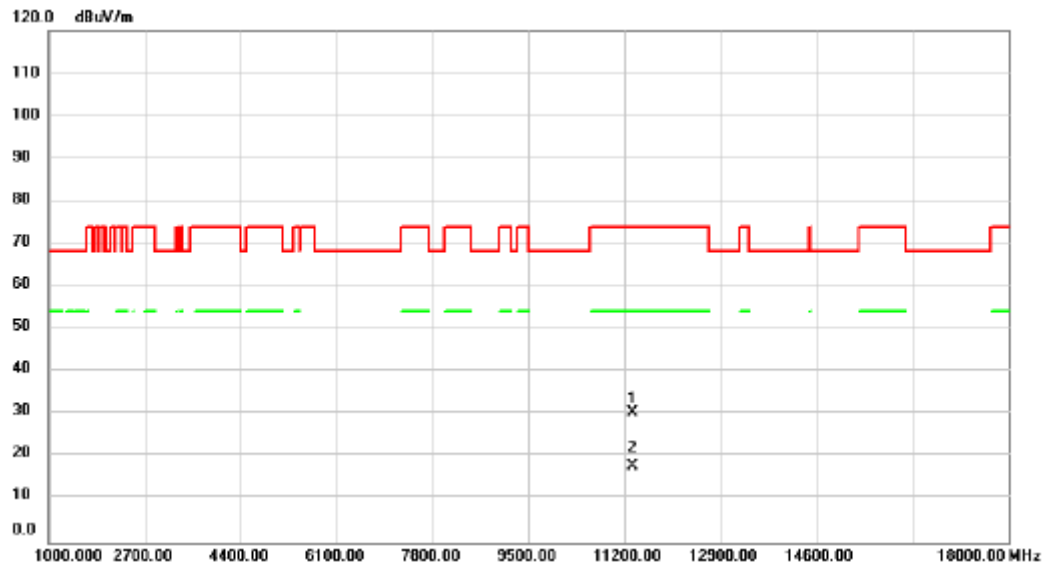


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11340.00     | 29.97                    | 0.49                    | 30.46                      | 74.00           | -43.54       | peak     |         |
| 2   | *   | 11340.00     | 17.51                    | 0.49                    | 18.00                      | 54.00           | -36.00       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5670MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

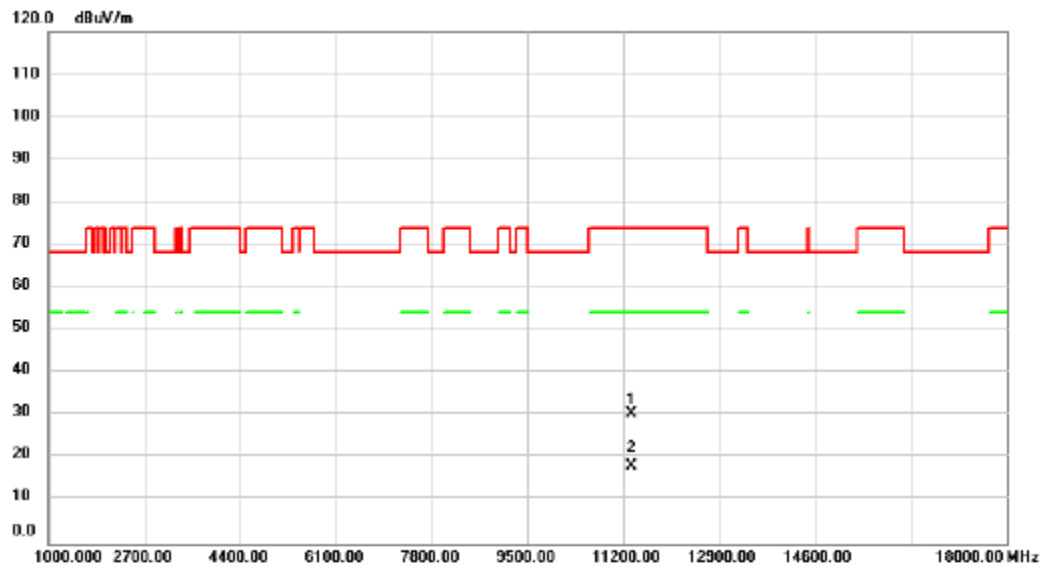


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11340.00     | 29.88                    | 0.49                    | 30.37                      | 74.00           | -43.63       | peak     |         |
| 2   | *   | 11340.00     | 17.64                    | 0.49                    | 18.13                      | 54.00           | -35.87       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5755MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

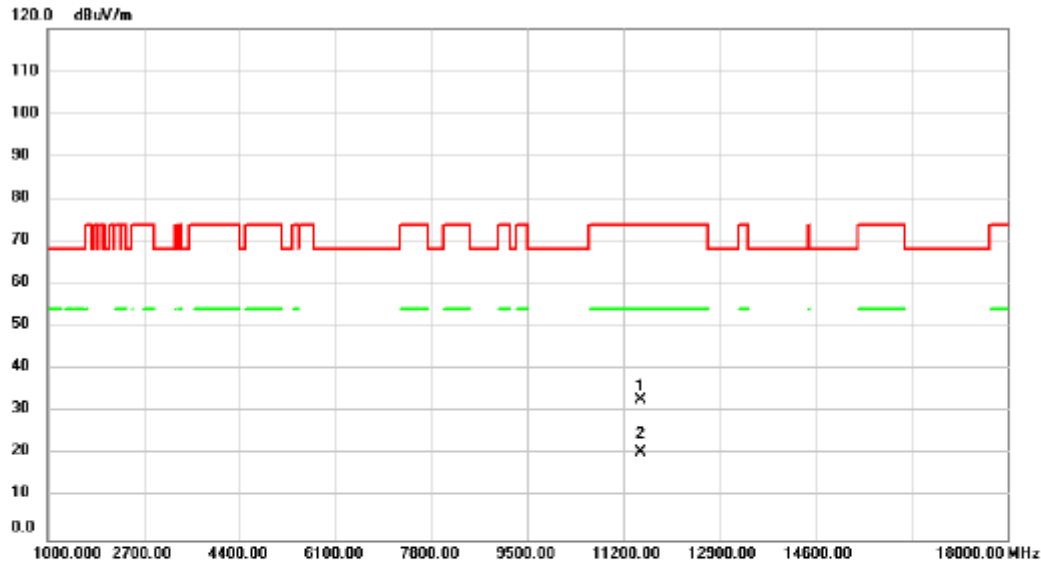


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11510.00     | 32.17                    | 0.83                    | 33.00                      | 74.00           | -41.00       | peak     |         |
| 2   | *   | 11510.00     | 19.83                    | 0.83                    | 20.66                      | 54.00           | -33.34       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5755MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

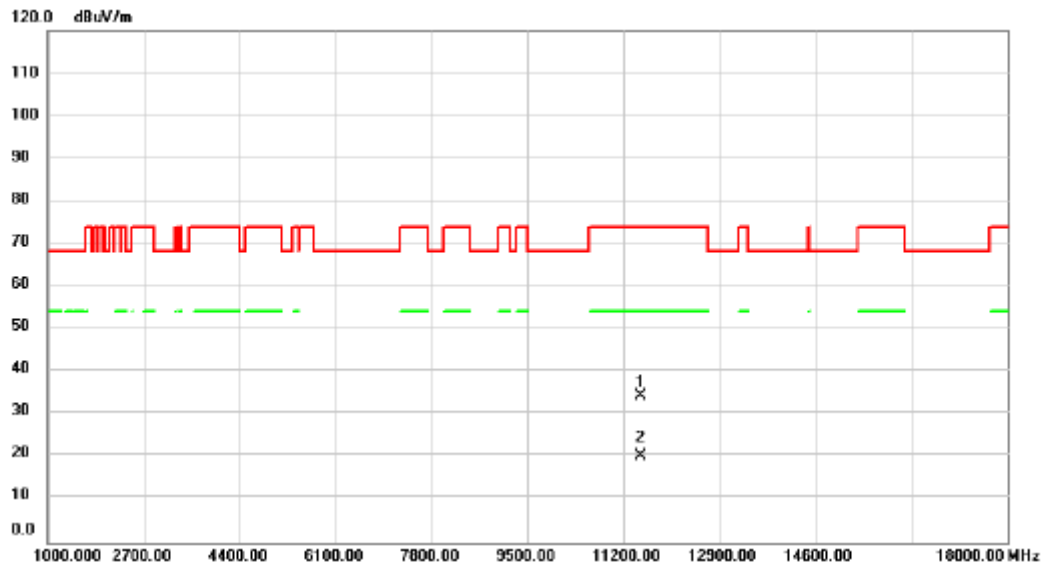


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11510.00     | 33.42                    | 0.83                    | 34.25                      | 74.00           | -39.75       | peak     |         |
| 2   | *   | 11510.00     | 19.55                    | 0.83                    | 20.38                      | 54.00           | -33.62       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5795MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

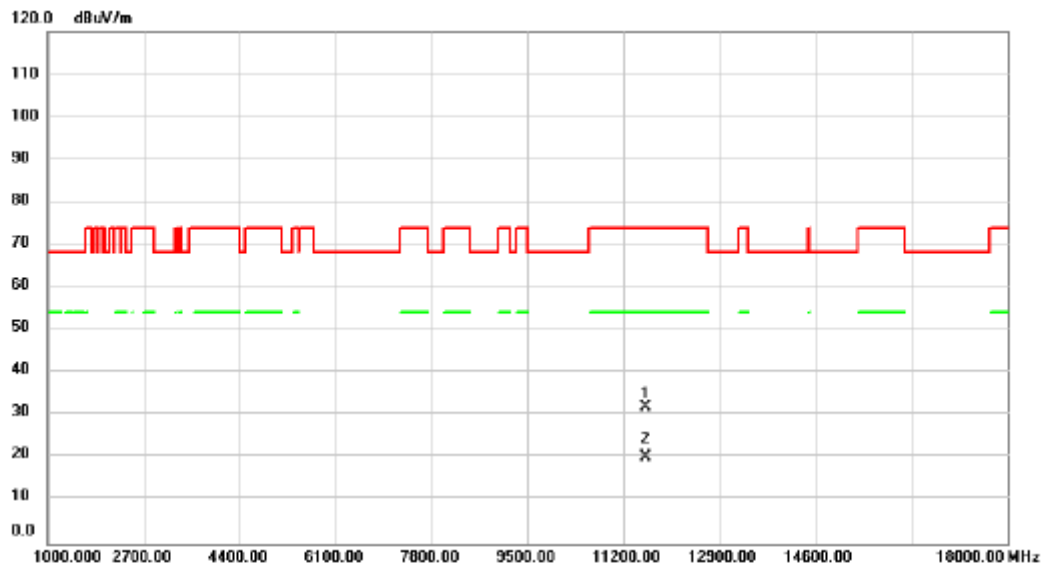


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 11590.00     | 31.10                    | 0.84                    | 31.94                      | 74.00           | -42.06       | peak     |         |
| 2 *     | 11590.00     | 19.27                    | 0.84                    | 20.11                      | 54.00           | -33.89       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE40) | Test Date    | 2024/11/22 |
| Test Frequency | 5795MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

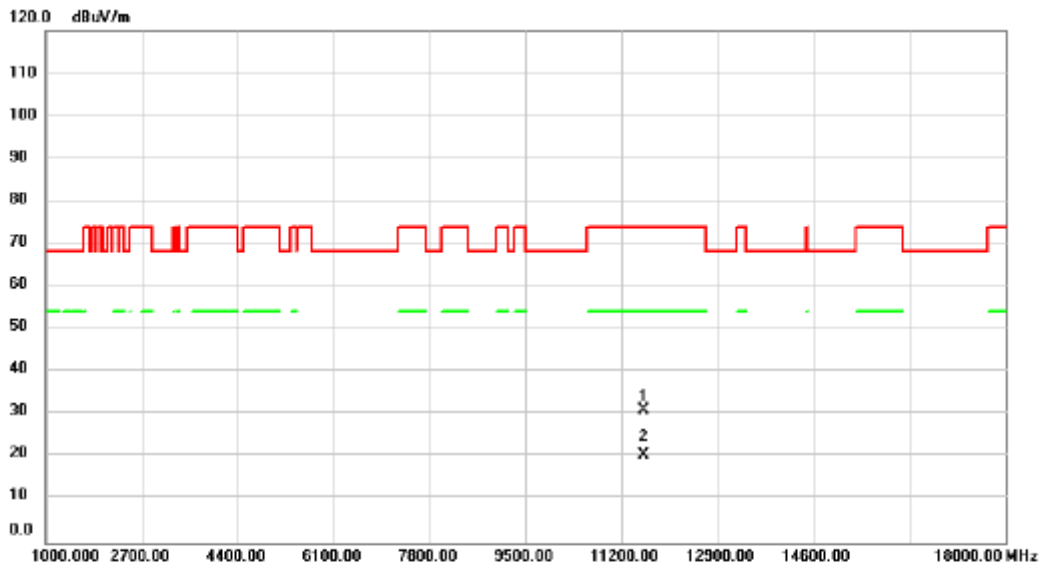


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11590.00     | 30.35                    | 0.84                    | 31.19                      | 74.00           | -42.81       | peak     |         |
| 2   | *   | 11590.00     | 19.64                    | 0.84                    | 20.48                      | 54.00           | -33.52       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5210MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

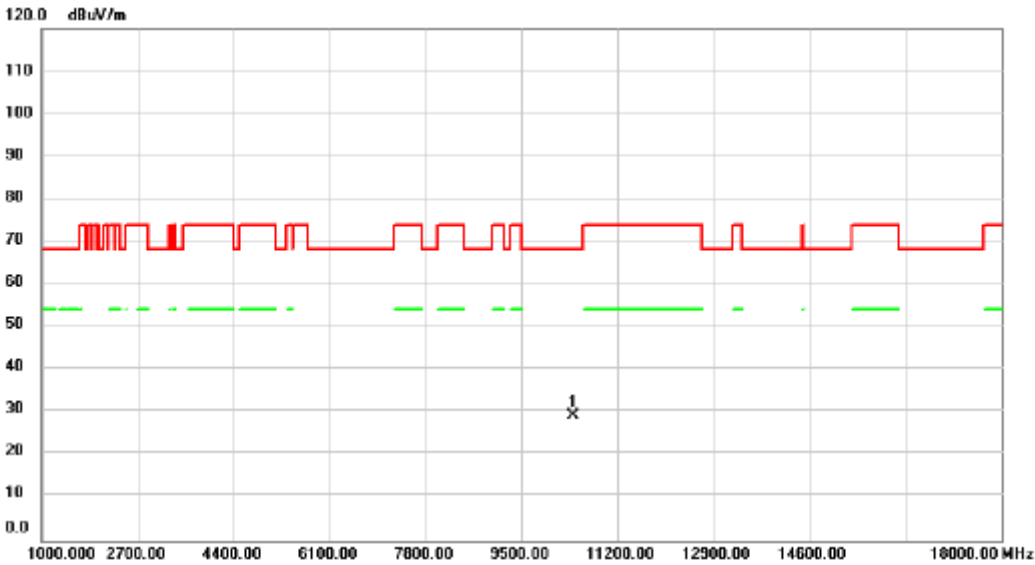

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 10420.00     | 29.81                    | -0.54                   | 29.27                      | 68.20           | -38.93       | peak     |         |

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5210MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

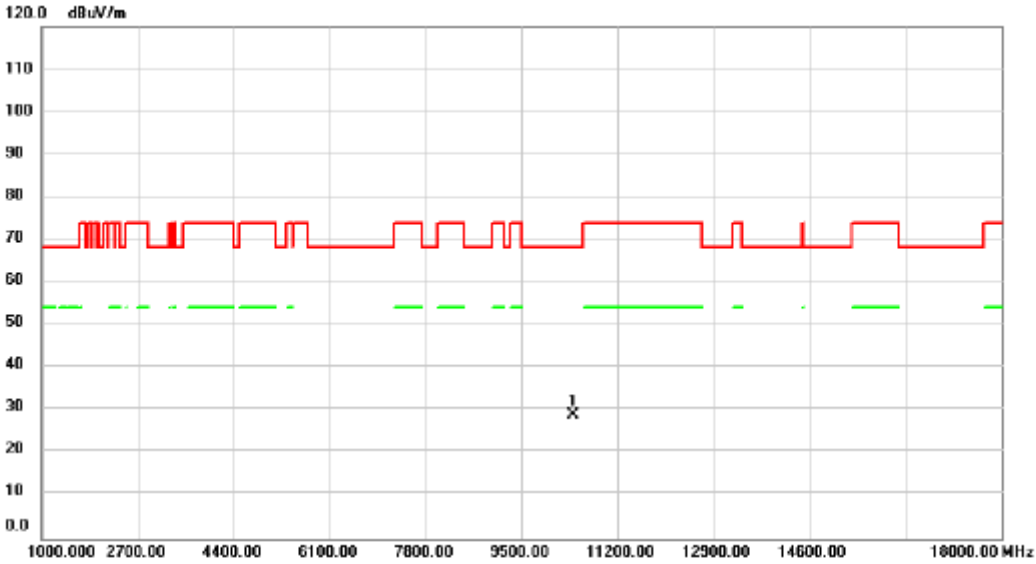


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10420.00 | 29.46         | -0.54          | 28.92       | 68.20  | -39.28 | peak     |         |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5290MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

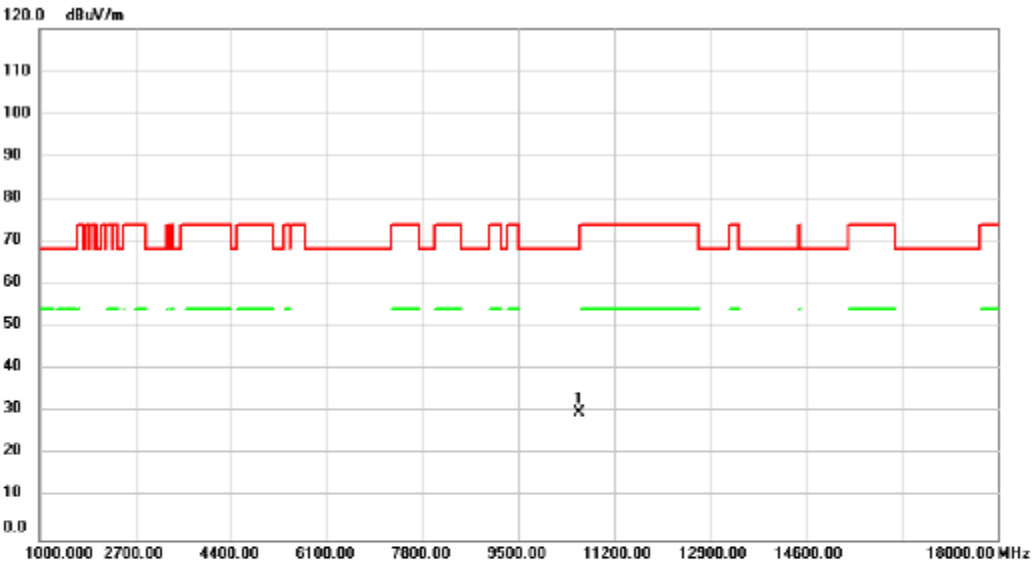


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   | *   | 10580.00 | 30.18         | -0.42          | 29.76       | 68.20  | -38.44 | peak     |         |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5290MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

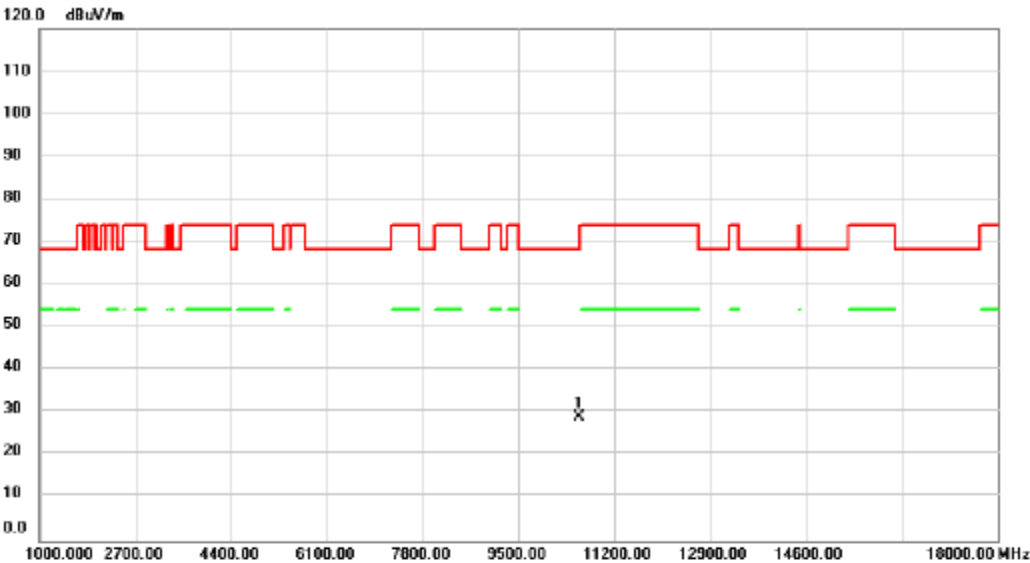


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   | *   | 10580.00 | 29.44         | -0.42          | 29.02       | 68.20  | -39.18 | peak     |         |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5530MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

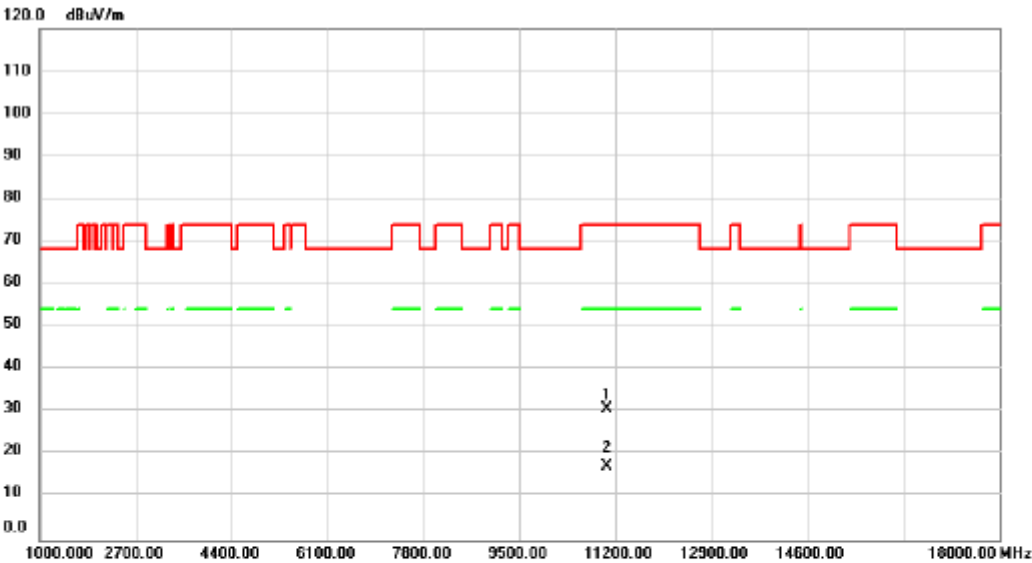

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11060.00     | 30.94                    | -0.13                   | 30.81                      | 74.00           | -43.19       | peak     |         |
| 2   | *   | 11060.00     | 17.46                    | -0.13                   | 17.33                      | 54.00           | -36.67       | AVG      |         |

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5530MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

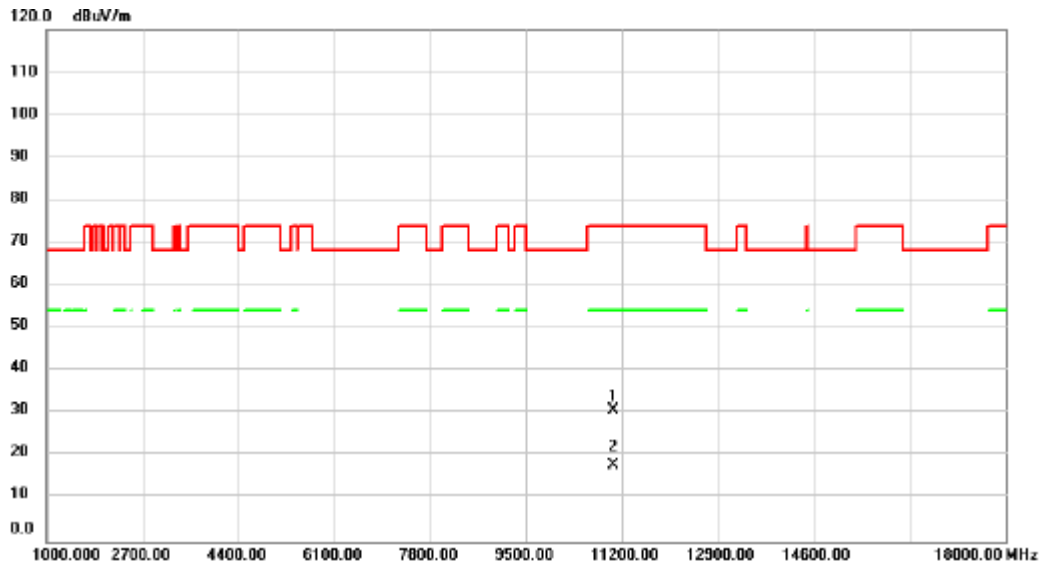


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 11060.00     | 30.92                    | -0.13                   | 30.79                      | 74.00           | -43.21       | peak     |         |
| 2 *     | 11060.00     | 17.92                    | -0.13                   | 17.79                      | 54.00           | -36.21       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5610MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

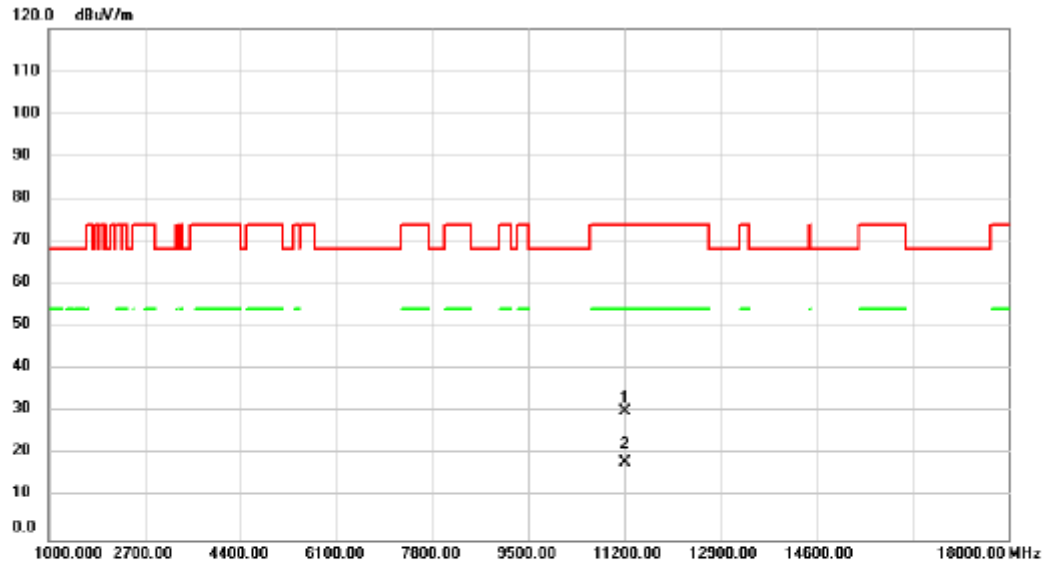


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11220.00     | 30.01                    | 0.22                    | 30.23                      | 74.00           | -43.77       | peak     |         |
| 2   | *   | 11220.00     | 17.96                    | 0.22                    | 18.18                      | 54.00           | -35.82       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5610MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

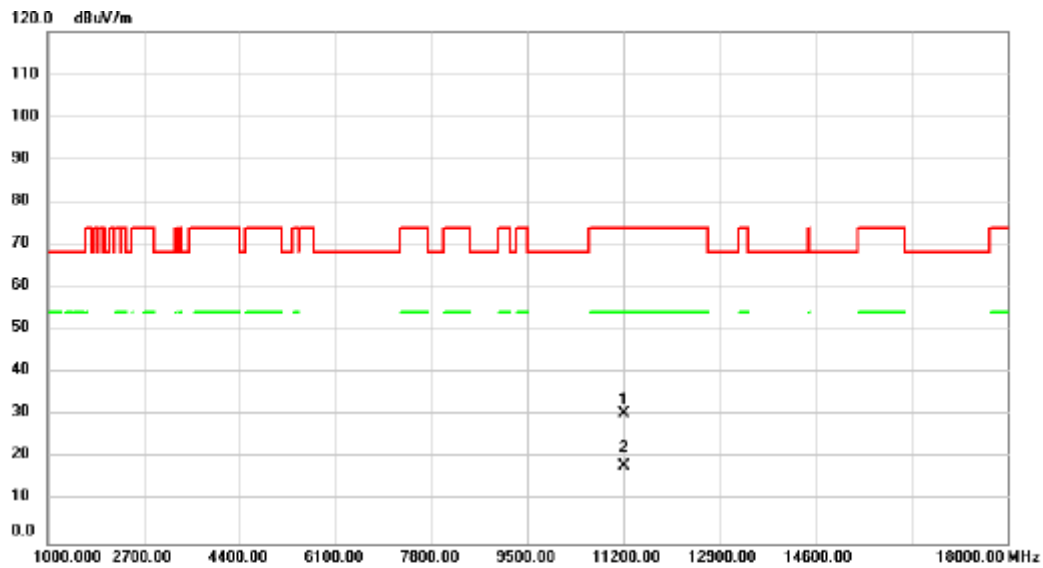


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11220.00     | 30.22                    | 0.22                    | 30.44                      | 74.00           | -43.56       | peak     |         |
| 2   | *   | 11220.00     | 17.90                    | 0.22                    | 18.12                      | 54.00           | -35.88       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5775MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

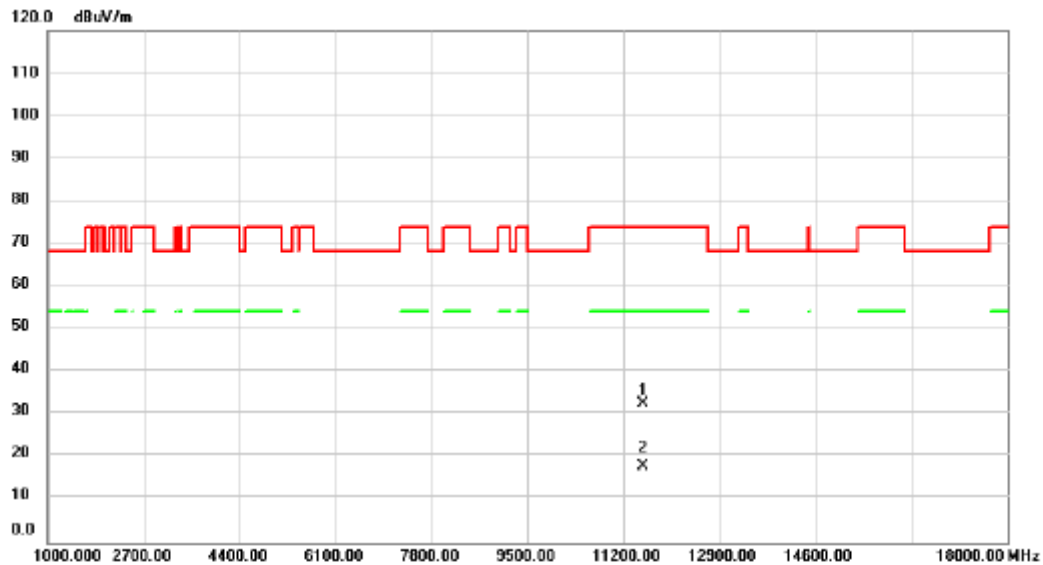


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11550.00     | 31.84                    | 0.84                    | 32.68                      | 74.00           | -41.32       | peak     |         |
| 2   | *   | 11550.00     | 17.09                    | 0.84                    | 17.93                      | 54.00           | -36.07       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE80) | Test Date    | 2024/11/22 |
| Test Frequency | 5775MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

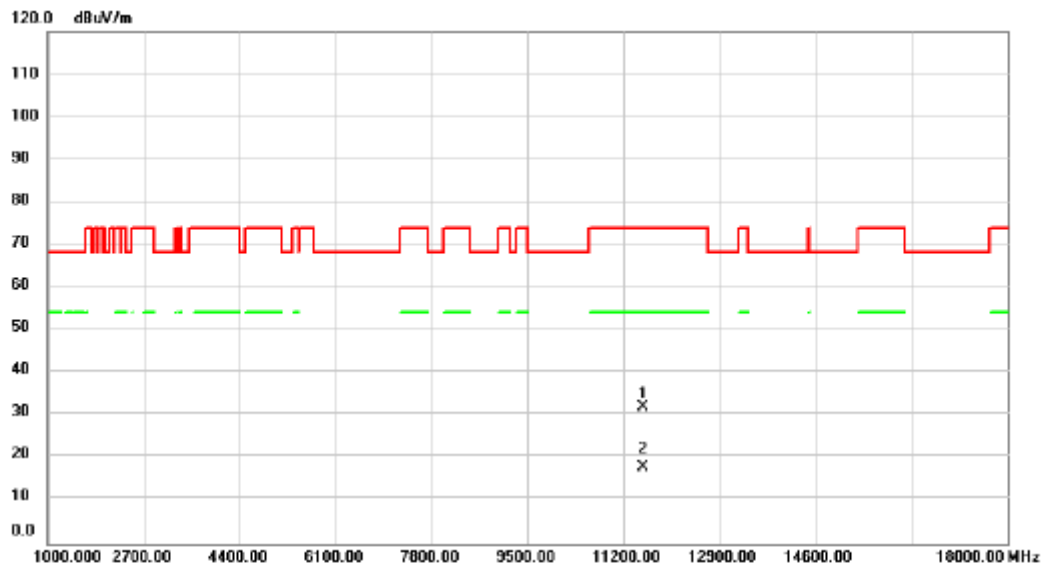


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 11550.00     | 31.18                    | 0.84                    | 32.02                      | 74.00           | -41.98       | peak     |         |
| 2 *     | 11550.00     | 17.11                    | 0.84                    | 17.95                      | 54.00           | -36.05       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE160) | Test Date    | 2024/11/22 |
| Test Frequency | 5210MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

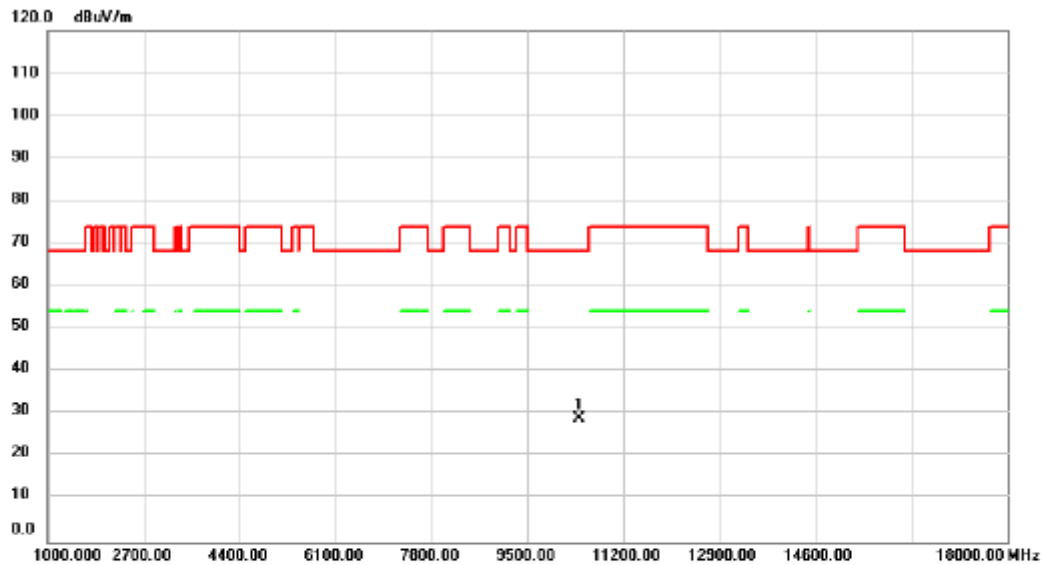


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 10420.00     | 29.35                    | -0.54                   | 28.81                      | 68.20           | -39.39       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE160) | Test Date    | 2024/11/22 |
| Test Frequency | 5210MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

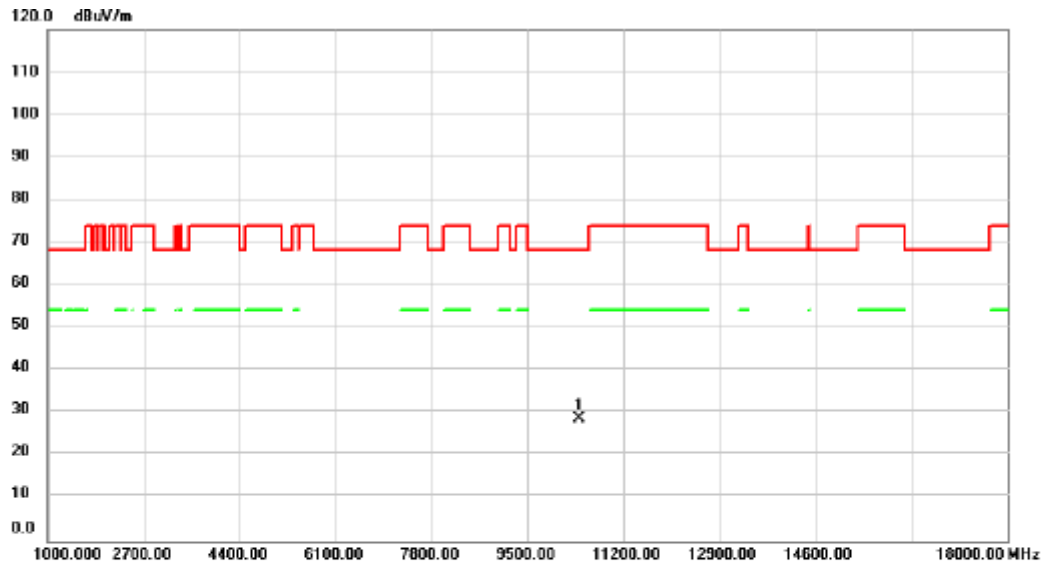


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10420.00 | 29.29         | -0.54          | 28.75       | 68.20  | -39.45 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE160) | Test Date    | 2024/11/22 |
| Test Frequency | 5570MHz              | Polarization | Vertical   |
| Temp           | 25°C                 | Hum.         | 65%        |

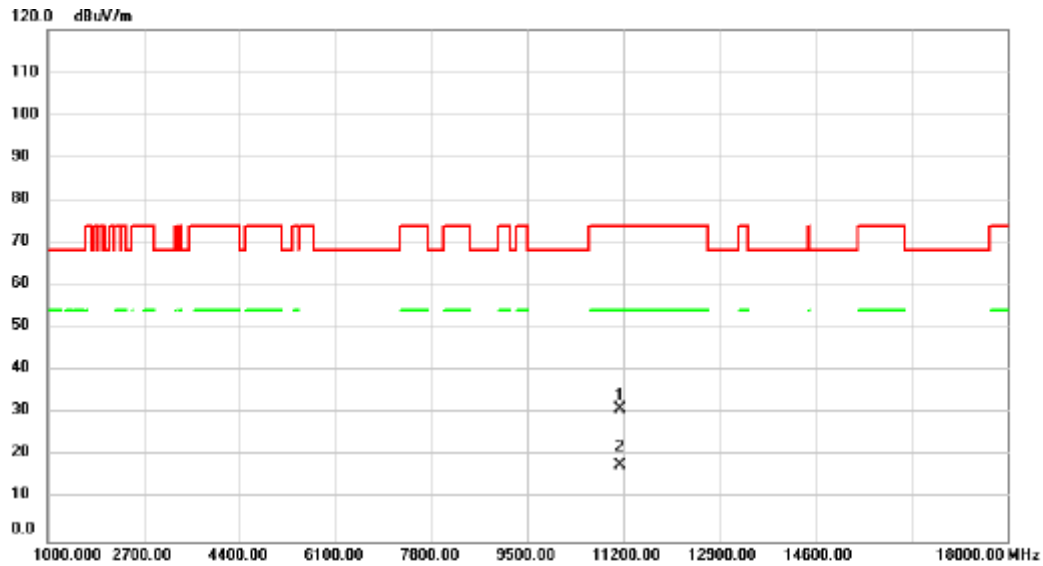


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11140.00     | 30.94                    | 0.03                    | 30.97                      | 74.00           | -43.03       | peak     |         |
| 2   | *   | 11140.00     | 17.76                    | 0.03                    | 17.79                      | 54.00           | -36.21       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE160) | Test Date    | 2024/11/22 |
| Test Frequency | 5570MHz              | Polarization | Horizontal |
| Temp           | 25°C                 | Hum.         | 65%        |

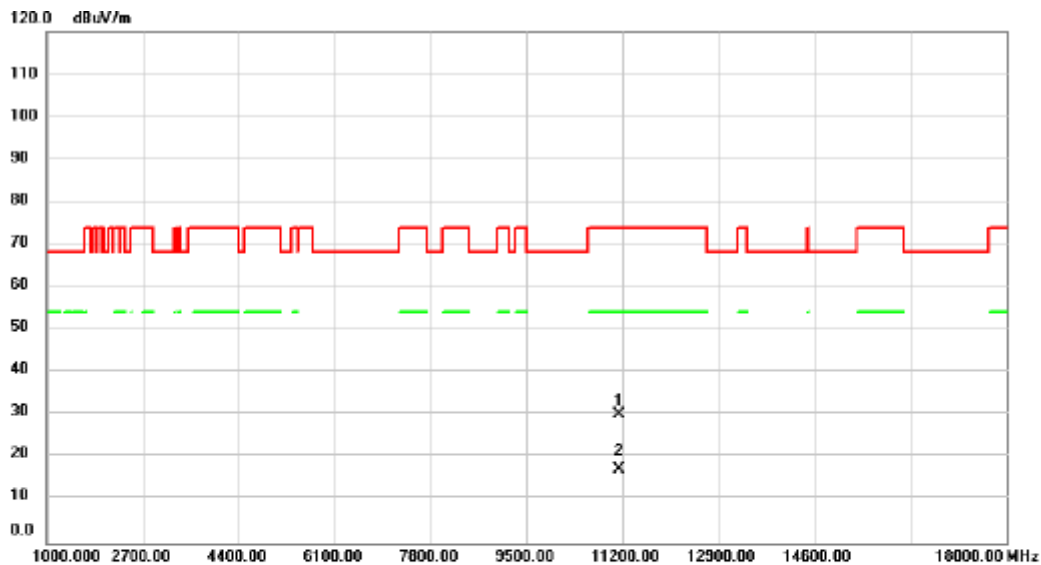


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11140.00     | 30.24                    | 0.03                    | 30.27                      | 74.00           | -43.73       | peak     |         |
| 2   | *   | 11140.00     | 17.31                    | 0.03                    | 17.34                      | 54.00           | -36.66       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

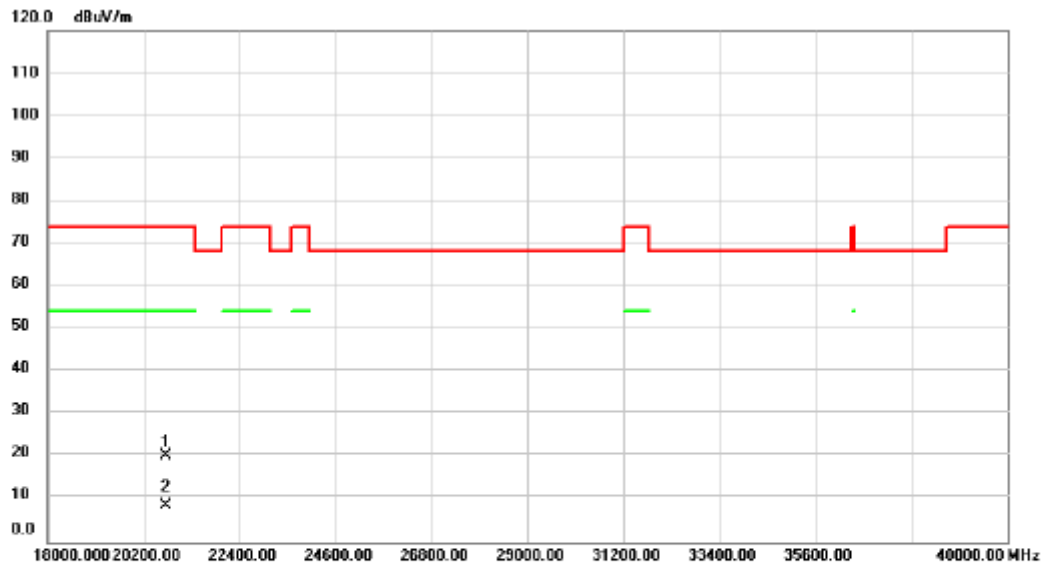


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 20720.00     | 30.10                    | -9.85                   | 20.25                      | 74.00           | -53.75       | peak     |         |
| 2   | *   | 20720.00     | 18.37                    | -9.85                   | 8.52                       | 54.00           | -45.48       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

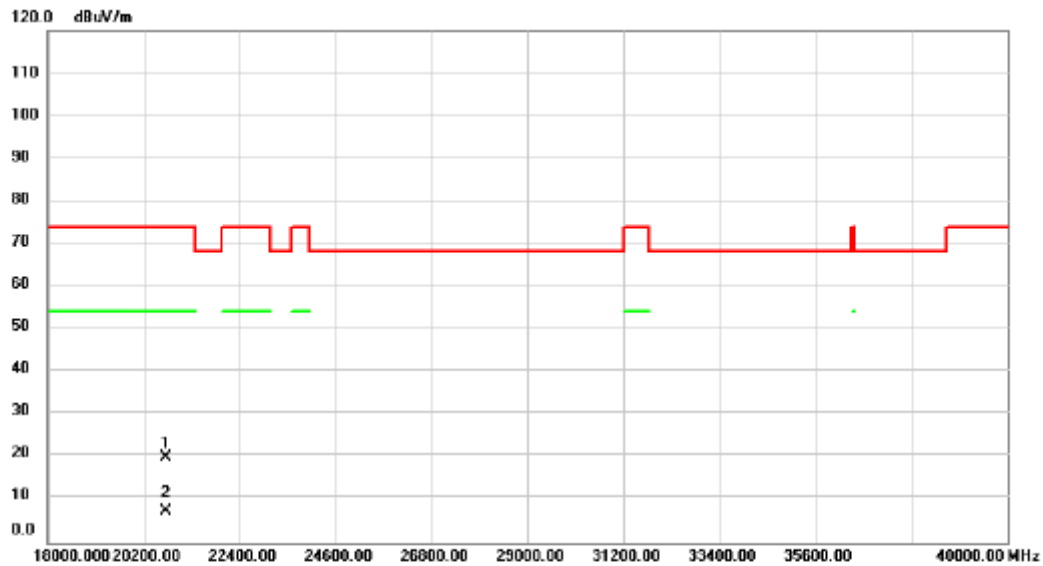


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 20720.00     | 29.92                    | -9.85                   | 20.07                      | 74.00           | -53.93       | peak     |         |
| 2   | *   | 20720.00     | 17.27                    | -9.85                   | 7.42                       | 54.00           | -46.58       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/20 |
| Test Frequency | 5745MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

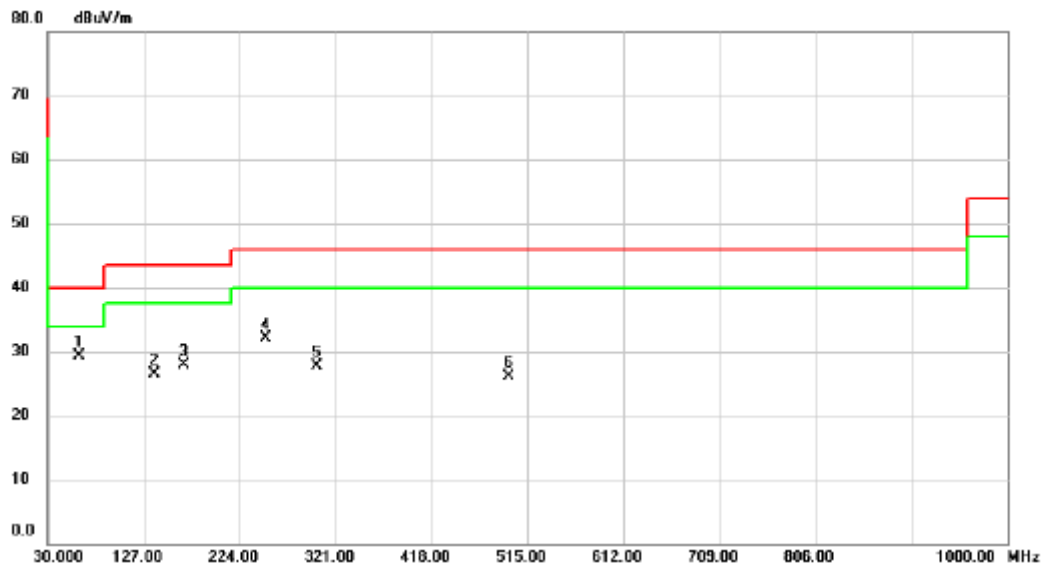


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 62.0100      | 41.52                    | -12.19                  | 29.33                      | 40.00           | -10.67       | peak     |         |
| 2   |     | 138.6400     | 38.69                    | -12.11                  | 26.58                      | 43.50           | -16.92       | peak     |         |
| 3   |     | 167.7400     | 39.50                    | -11.62                  | 27.88                      | 43.50           | -15.62       | peak     |         |
| 4   |     | 250.1900     | 44.10                    | -11.99                  | 32.11                      | 46.00           | -13.89       | peak     |         |
| 5   |     | 302.5700     | 37.80                    | -10.18                  | 27.62                      | 46.00           | -18.38       | peak     |         |
| 6   |     | 496.5700     | 31.45                    | -5.29                   | 26.16                      | 46.00           | -19.84       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/20 |
| Test Frequency | 5745MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

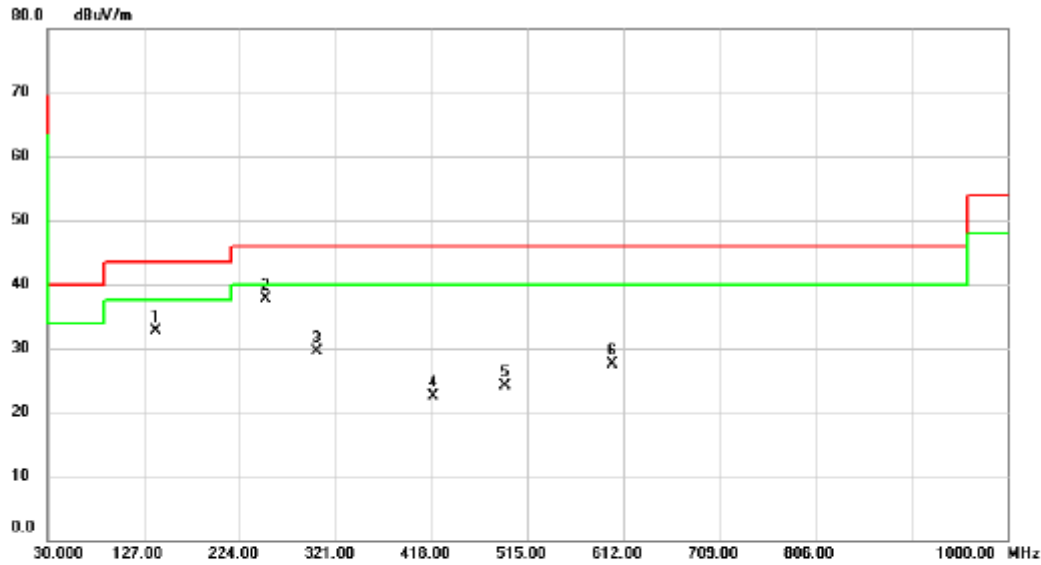


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 139.6100     | 44.75                    | -12.01                  | 32.74                      | 43.50           | -10.76       | peak     |         |
| 2 *     | 250.1900     | 49.72                    | -11.99                  | 37.73                      | 46.00           | -8.27        | peak     |         |
| 3       | 301.6000     | 39.65                    | -10.21                  | 29.44                      | 46.00           | -16.56       | peak     |         |
| 4       | 419.9400     | 29.32                    | -6.89                   | 22.43                      | 46.00           | -23.57       | peak     |         |
| 5       | 492.6900     | 29.53                    | -5.35                   | 24.18                      | 46.00           | -21.82       | peak     |         |
| 6       | 601.3300     | 29.99                    | -2.56                   | 27.43                      | 46.00           | -18.57       | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

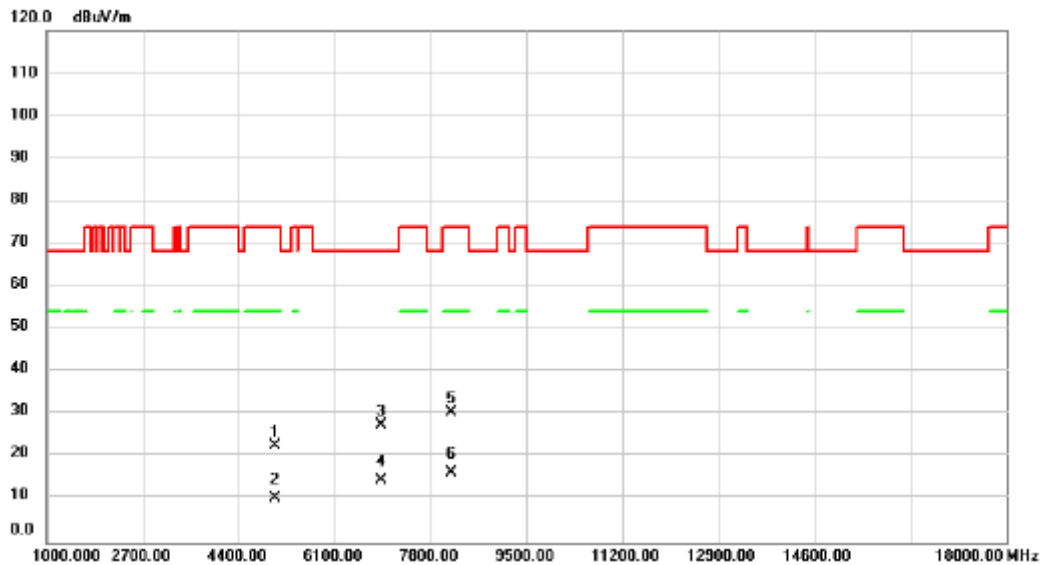


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 5046.000     | 30.70                    | -8.11                   | 22.59                      | 74.00           | -51.41       | peak     |         |
| 2   |     | 5046.000     | 18.58                    | -8.11                   | 10.47                      | 54.00           | -43.53       | AVG      |         |
| 3   |     | 6933.000     | 31.56                    | -4.18                   | 27.38                      | 68.20           | -40.82       | peak     |         |
| 4   |     | 6933.000     | 18.74                    | -4.18                   | 14.56                      | 68.20           | -53.64       | AVG      |         |
| 5   |     | 8174.000     | 33.01                    | -2.60                   | 30.41                      | 74.00           | -43.59       | peak     |         |
| 6   | *   | 8174.000     | 19.08                    | -2.60                   | 16.48                      | 54.00           | -37.52       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

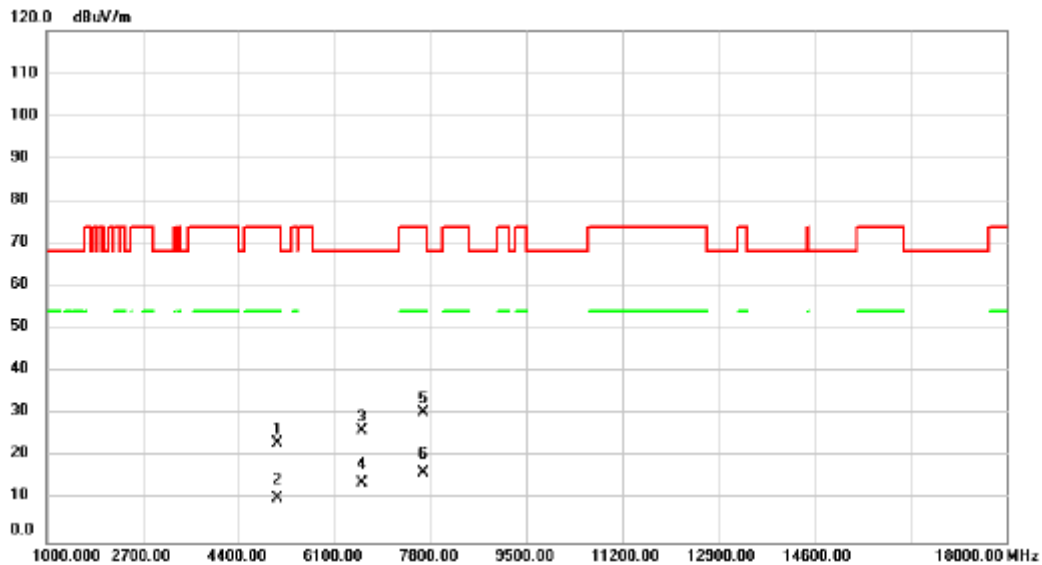


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 5097.000     | 31.38                    | -8.09                   | 23.29                      | 74.00           | -50.71       | peak     |         |
| 2   |     | 5097.000     | 18.48                    | -8.09                   | 10.39                      | 54.00           | -43.61       | AVG      |         |
| 3   |     | 6593.000     | 30.79                    | -4.60                   | 26.19                      | 68.20           | -42.01       | peak     |         |
| 4   |     | 6593.000     | 18.50                    | -4.60                   | 13.90                      | 68.20           | -54.30       | AVG      |         |
| 5   |     | 7664.000     | 33.37                    | -3.02                   | 30.35                      | 74.00           | -43.65       | peak     |         |
| 6   | *   | 7664.000     | 19.40                    | -3.02                   | 16.38                      | 54.00           | -37.62       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz             | Polarization | Vertical   |
| Temp           | 25°C                | Hum.         | 65%        |

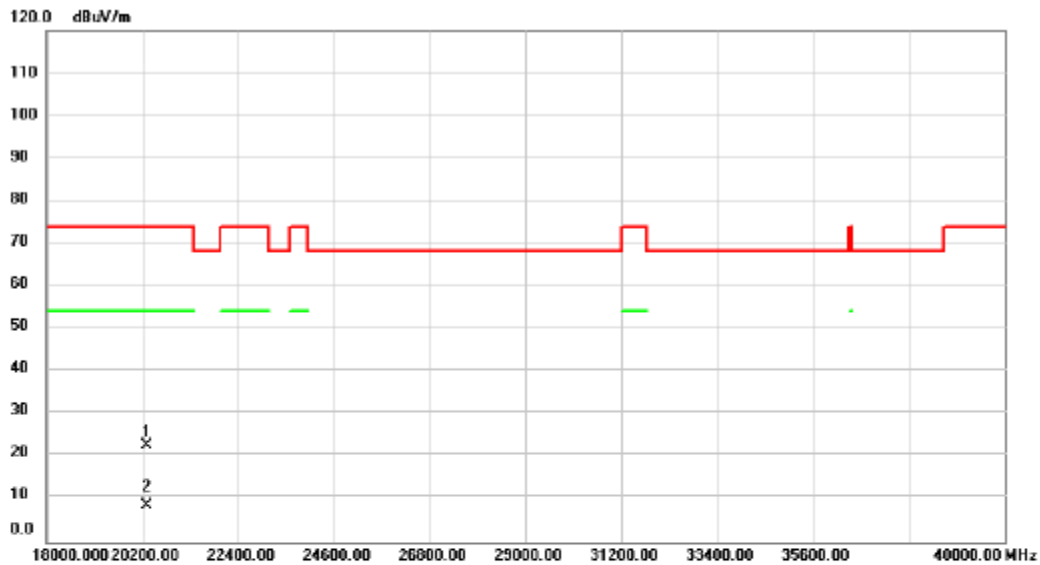


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 20288.00     | 32.85                    | -10.09                  | 22.76                      | 74.00           | -51.24       | peak     |         |
| 2   | *   | 20288.00     | 18.63                    | -10.09                  | 8.54                       | 54.00           | -45.46       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                     |              |            |
|----------------|---------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax(HE20) | Test Date    | 2024/11/22 |
| Test Frequency | 5745MHz             | Polarization | Horizontal |
| Temp           | 25°C                | Hum.         | 65%        |

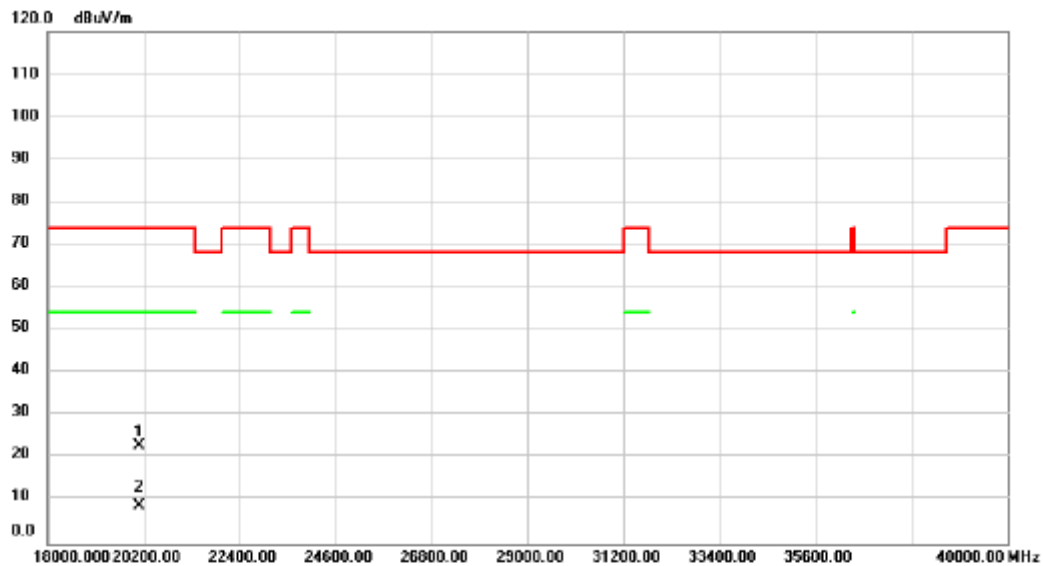

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 20090.00     | 32.81                    | -9.98                   | 22.83                      | 74.00           | -51.17       | peak     |         |
| 2   | *   | 20090.00     | 18.97                    | -9.98                   | 8.99                       | 54.00           | -45.01       | AVG      |         |

## REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D    BANDWIDTH**


|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX A Mode_Ant. 1 |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 31.500                | 17.200                        |
| 40      | 5200            | 30.699                | 17.500                        |
| 48      | 5240            | 26.599                | 17.200                        |

CH36

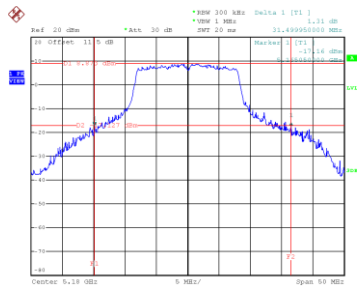


Date: 20.NOV.2024 21:51:59

CH40  
26 dB Bandwidth


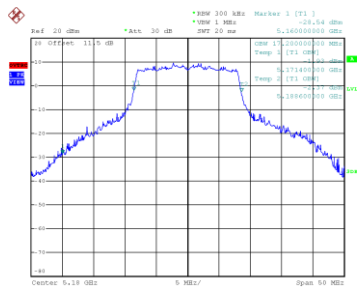
Date: 20.NOV.2024 21:53:12

CH48

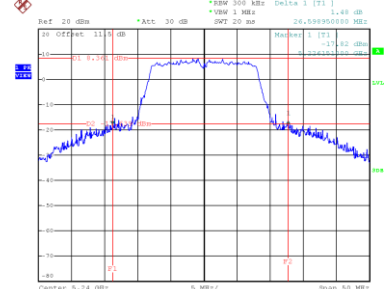


Date: 20.NOV.2024 21:54:37


99 % Occupied Bandwidth



Date: 20.NOV.2024 21:51:38



Date: 20.NOV.2024 21:52:45

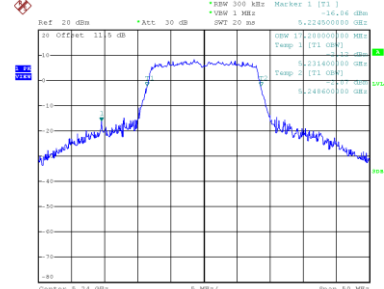


Date: 20.NOV.2024 21:54:05


|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-1_TX AC(VHT20) Mode_Ant. 1 |
|-----------|---------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 32.200                | 18.300                        |
| 40      | 5200            | 32.450                | 18.500                        |
| 48      | 5240            | 26.390                | 18.200                        |

CH36

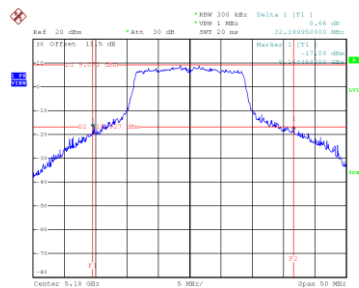


Date: 20.NOV.2024 23:07:15

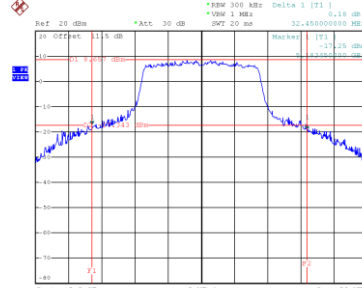CH40  
26 dB Bandwidth


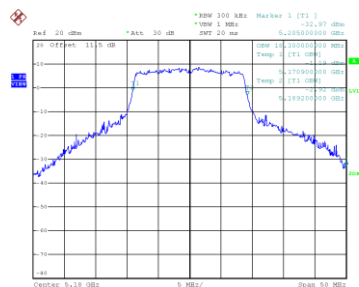
Date: 20.NOV.2024 23:09:27

CH48

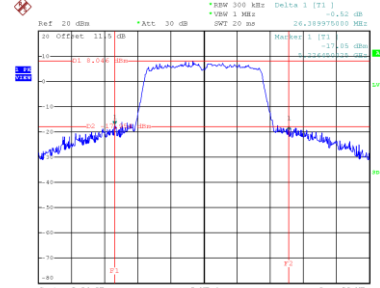


Date: 20.NOV.2024 23:10:59


99 % Occupied Bandwidth



Date: 20.NOV.2024 23:06:55

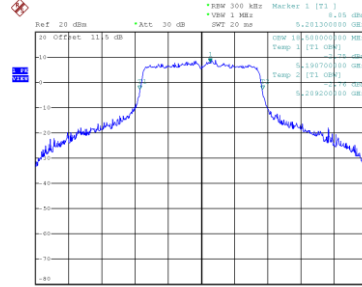

Date: 20.NOV.2024 23:09:06


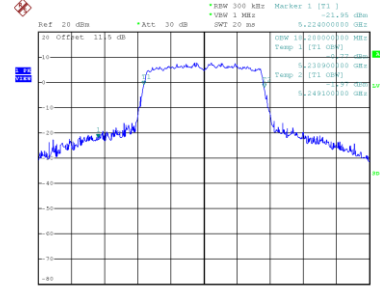


Date: 20.NOV.2024 23:10:30



|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-1_TX AC(VHT40) Mode_Ant. 1 |
|-----------|---------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 51.997                | 37.600                        |
| 46      | 5230            | 40.607                | 37.400                        |

CH38

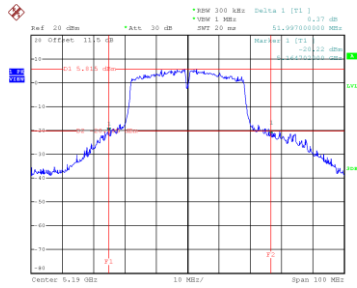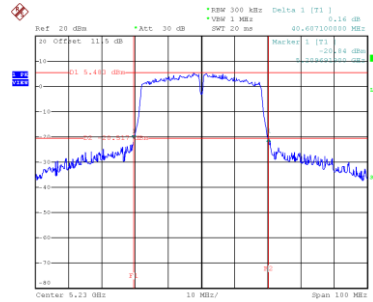
CH46  
26 dB Bandwidth


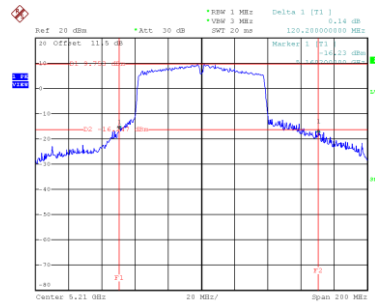
99 % Occupied Bandwidth

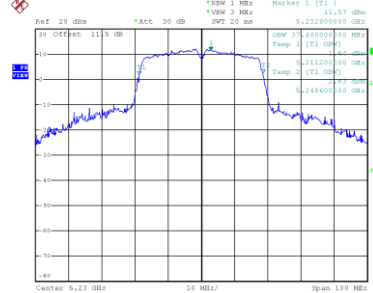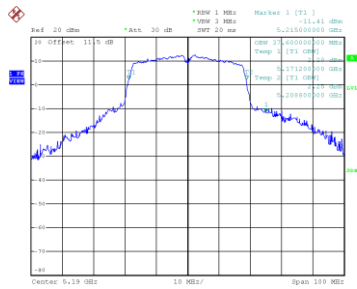

|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-1_TX AC(VHT80) Mode_Ant. 1 |
|-----------|---------------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 120.200               | 76.400                        |

## CH42 26 dB Bandwidth



Date: 21.NOV.2024 00:00:149

## 99 % Occupied Bandwidth

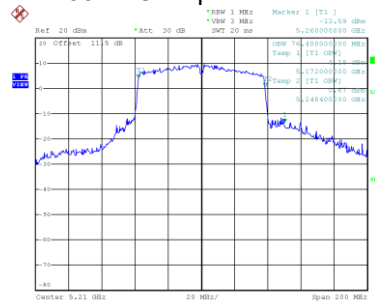


Date: 21.NOV.2024 00:00:13


|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-1_TX AX(HE20) Mode_Ant. 1 |
|-----------|--------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 25.690                | 19.300                        |
| 40      | 5200            | 28.890                | 19.400                        |
| 48      | 5240            | 28.150                | 19.000                        |

CH36

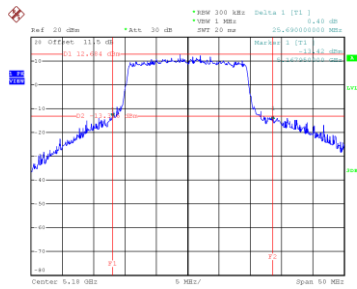


Date: 21.NOV.2024 17:01:16

CH40  
26 dB Bandwidth


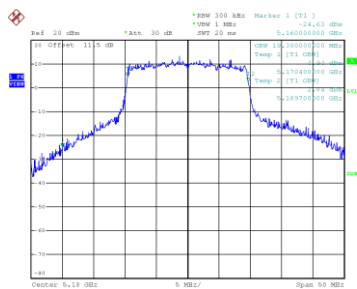
Date: 21.NOV.2024 17:02:48

CH48




Date: 21.NOV.2024 17:04:38


99 % Occupied Bandwidth



Date: 21.NOV.2024 17:00:43



Date: 21.NOV.2024 17:02:23




Date: 21.NOV.2024 17:04:17


|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-1_TX AX(HE40) Mode_Ant. 1 |
|-----------|--------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 40.808                | 38.400                        |
| 46      | 5230            | 46.999                | 38.200                        |

CH38

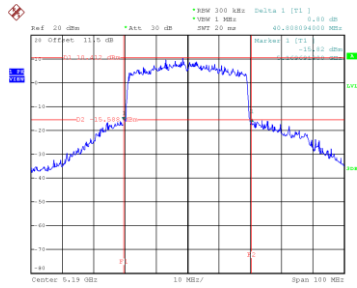


Date: 21.NOV.2024 17:13:16

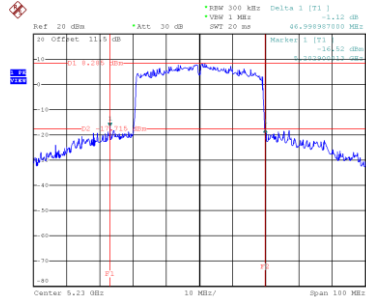
CH46  
26 dB Bandwidth


Date: 21.NOV.2024 17:13:12

99 % Occupied Bandwidth



Date: 21.NOV.2024 17:12:16

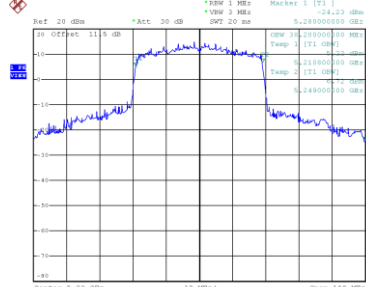


Date: 21.NOV.2024 17:13:13

|           |                                |
|-----------|--------------------------------|
| Test Mode | UNII-1_TX AX(HE80) Mode_Ant. 1 |
|-----------|--------------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 93.400                | 77.600                        |

## CH42 26 dB Bandwidth

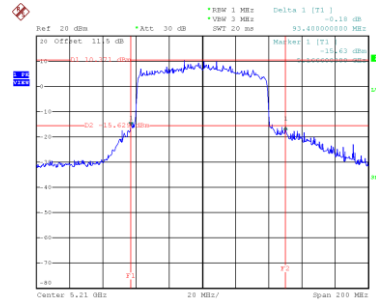

Date: 21.NOV.2024 18:07:17

## 99 % Occupied Bandwidth

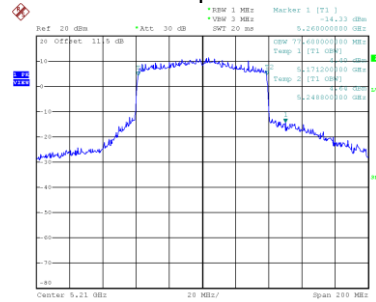


Date: 21.NOV.2024 17:48:36


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX A Mode_Ant. 1 |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 21.750                | 16.800                        |
| 60      | 5300            | 30.950                | 17.400                        |
| 64      | 5320            | 28.189                | 17.300                        |

CH52




Date: 20.NOV.2024 21:56:02

CH60  
26 dB Bandwidth



Date: 20.NOV.2024 21:57:14

CH64

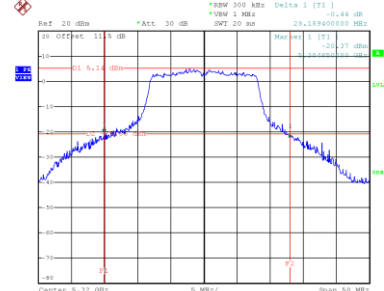


Date: 20.NOV.2024 21:58:32


99 % Occupied Bandwidth



Date: 20.NOV.2024 21:56:37



Date: 20.NOV.2024 21:56:52

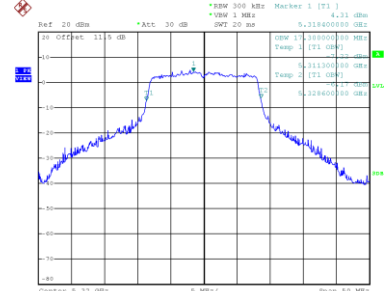


Date: 20.NOV.2024 21:58:08


|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode_Ant. 1 |
|-----------|----------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 22.550                | 18.000                        |
| 60      | 5300            | 30.088                | 18.400                        |
| 64      | 5320            | 30.350                | 18.400                        |

CH52

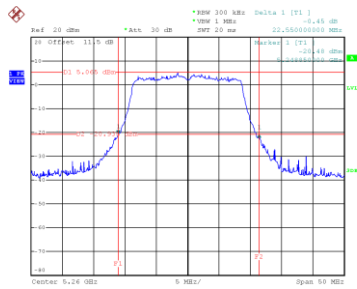


Date: 20.NOV.2024 23:12:39

CH60  
26 dB Bandwidth


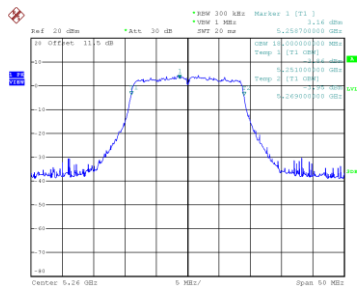
Date: 20.NOV.2024 23:13:56

CH64




Date: 20.NOV.2024 23:15:33


99 % Occupied Bandwidth



Date: 20.NOV.2024 23:12:13



Date: 20.NOV.2024 23:13:35




Date: 20.NOV.2024 23:15:12


|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode_Ant. 1 |
|-----------|----------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 40.599                | 36.800                        |
| 62      | 5310            | 52.300                | 37.000                        |

CH54

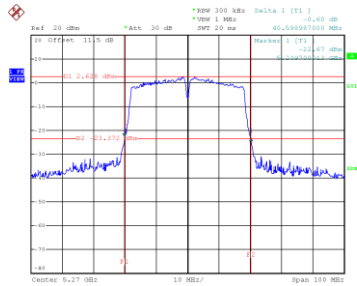


Date: 20.NOV.2024 23:46:22

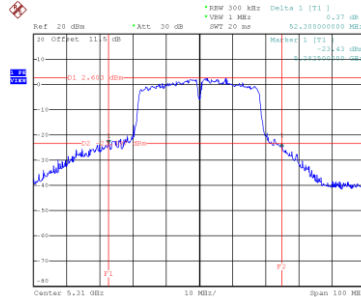
CH62  
26 dB Bandwidth


Date: 20.NOV.2024 23:46:37

99 % Occupied Bandwidth



Date: 20.NOV.2024 23:45:46

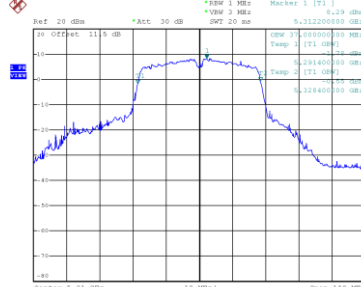


Date: 20.NOV.2024 23:47:55

|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode_Ant. 1 |
|-----------|----------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 58      | 5290            | 109.400               | 76.000                        |


## CH58 26 dB Bandwidth

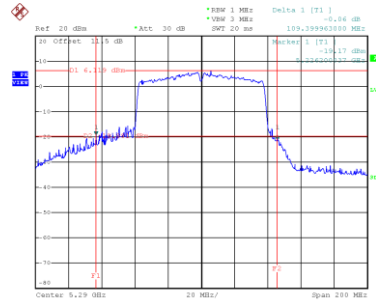


|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode_Ant. 1 |
|-----------|---------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 23.050                | 19.200                        |
| 60      | 5300            | 31.590                | 19.300                        |
| 64      | 5320            | 28.790                | 19.300                        |

CH52

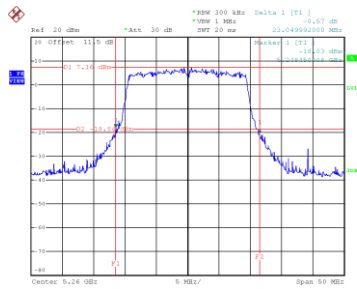


Date: 21.NOV.2024 17:05:54

CH60  
26 dB Bandwidth


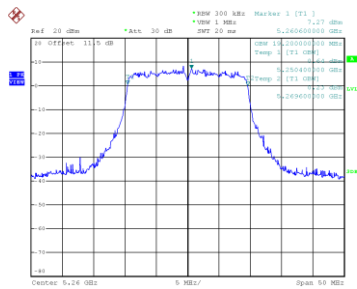
Date: 21.NOV.2024 17:11:06

CH64

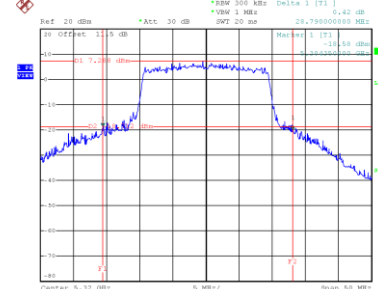


Date: 21.NOV.2024 17:16:29


99 % Occupied Bandwidth



Date: 21.NOV.2024 17:05:29



Date: 21.NOV.2024 17:11:28

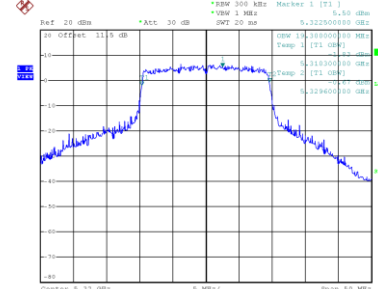


Date: 21.NOV.2024 17:16:06


|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode_Ant. 1 |
|-----------|---------------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 39.800                | 38.000                        |
| 62      | 5310            | 48.698                | 38.200                        |

CH54

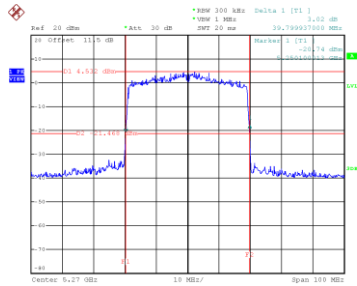


Date: 21.NOV.2024 17:13:00

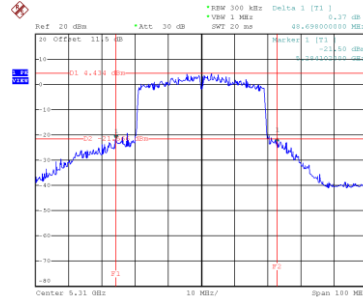
CH62  
26 dB Bandwidth


Date: 21.NOV.2024 17:13:26

99 % Occupied Bandwidth



Date: 21.NOV.2024 17:13:24

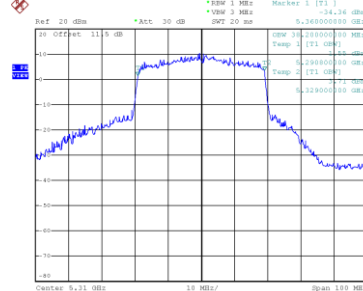


Date: 21.NOV.2024 17:13:54

|           |                                 |
|-----------|---------------------------------|
| Test Mode | UNII-2A_TX AX(HE80) Mode_Ant. 1 |
|-----------|---------------------------------|


| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99 % Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|----------------------------------|
| 58      | 5290               | 93.400                   | 77.600                           |

**CH58**  
26 dB Bandwidth

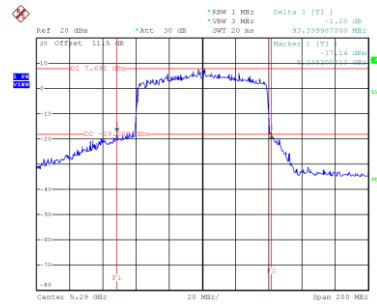

Date: 21.NOV.2024 17:50:43

99 % Occupied Bandwidth

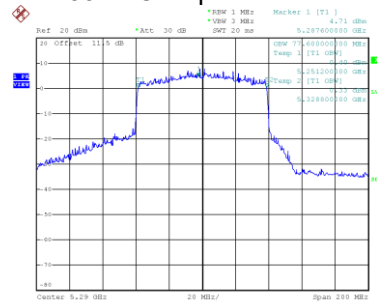


Date: 21.NOV.2024 17:50:10



|           |                                         |
|-----------|-----------------------------------------|
| Test Mode | UNII-1+UNII-2A_TX AX(HE160) Mode_Ant. 1 |
|-----------|-----------------------------------------|


| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99 % Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|----------------------------------|
| 50      | 5250               | 162.400                  | 156.800                          |

**CH50**  
26 dB Bandwidth

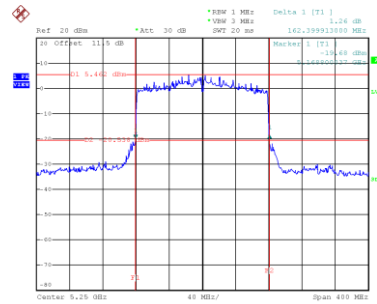

Date: 21.NOV.2024 17:57:42

99 % Occupied Bandwidth

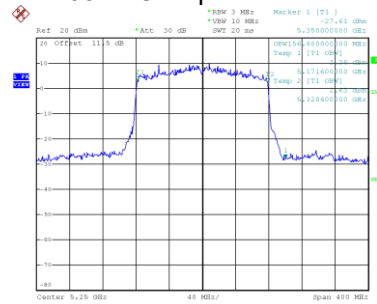


Date: 21.NOV.2024 17:56:59


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX A Mode_Ant. 1 |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 28.190                | 17.300                        |
| 116     | 5580            | 21.608                | 16.900                        |
| 140     | 5700            | 29.550                | 17.200                        |

CH100




Date: 20.NOV.2024 22:01:19

CH116  
26 dB Bandwidth



Date: 20.NOV.2024 22:02:36

CH140

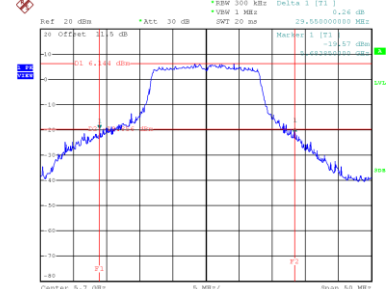


Date: 20.NOV.2024 22:04:00


99 % Occupied Bandwidth



Date: 20.NOV.2024 22:00:55



Date: 20.NOV.2024 22:02:10

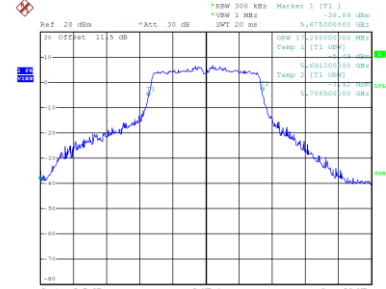

Date: 20.NOV.2024 22:03:39