

NOTES:

1.材質:打字消銀龍(50#),表面不上亮膜

2.整體尺寸公差為 +/-0.3mm

3.進料方式:捲狀,每捲1000pcs


4.歐盟RoHS限用物質

原料與外加工(印刷/噴漆/電鍍/染色/上光/背膠/薄膜/溶劑 等)物質
須符合規範如下:

項次	系列元素	含量
1	鉛(Pb)	<80 ppm
2	鎘(Cd)	<80 ppm
3	汞(Hg)	<80 ppm
4	六價鉻(Cr+6)	<80 ppm
5	多溴聯苯(PBBs)	<80 ppm
6	多溴二苯醚(PBDEs)	<80 ppm
以上六大元素總合		<80 ppm

REVISIONS

ECN	DESCRIPTION	DATE	APPROVED
1			
2			

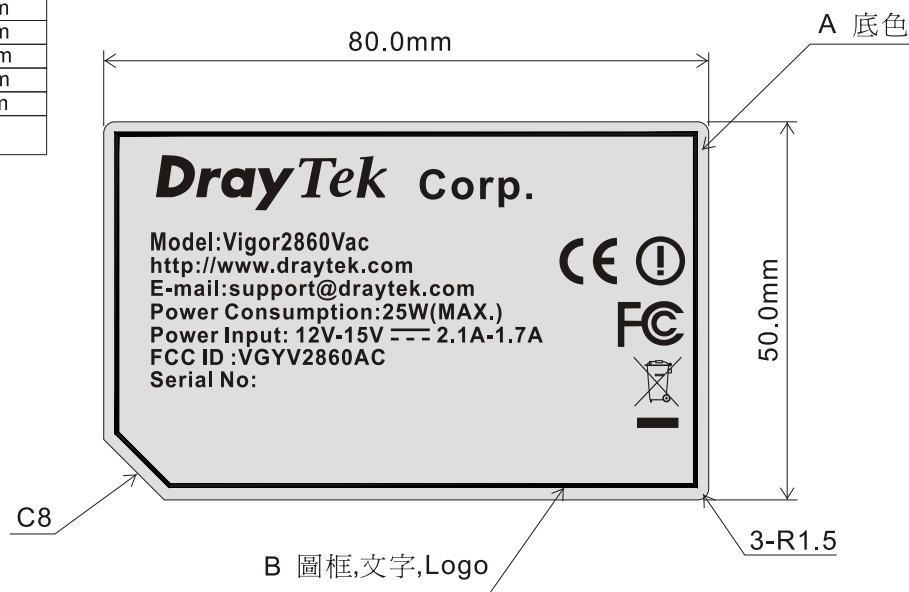

A PANTONE 淺銀

B PANTONE 黑

DIM		MAT'L	CORRUGATED PAPER	No. 26, Fu Shing Road, HuKou County Hsin-Chu Industrial Park, Hsin-Chu, Taiwan 303 ROC TEL: 886-3-5972727 FAX: 886-3-5972121 http://www.draytek.com		TYPE	TITLE	工程圖號	Tolerances unless otherwise specified	
L<200			±1	Doc/no		Vigor2860Vac		503-2286006-00	Angle ±1/2° ±1°	
200<L<500			±1.5	REV. DATE		Material		503-2286006-00	500~ ±0.5 ±1	
500<L<1000			±2	ISSUED DATE		Heat Treatment		503-2286006-00	300~500 ±0.3 ±0.6	
1000<L<1800			±2.5	PAGE. OF		Surface Treatment		503-2286006-00	200~300 ±0.25 ±0.5	
1800<L<3000			±3	Version		SEE NOTES		503-2286006-00	120~200 ±0.2 ±0.4	
3000<L			±5			SEE NOTES		503-2286006-00	60~120 ±0.15 ±0.3	
								503-2286006-00	10~60 ±0.1 ±0.2	
								503-2286006-00	0~10 ±0.05 ±0.1	
								503-2286006-00	CLASS A B	