


Assembled Diagram

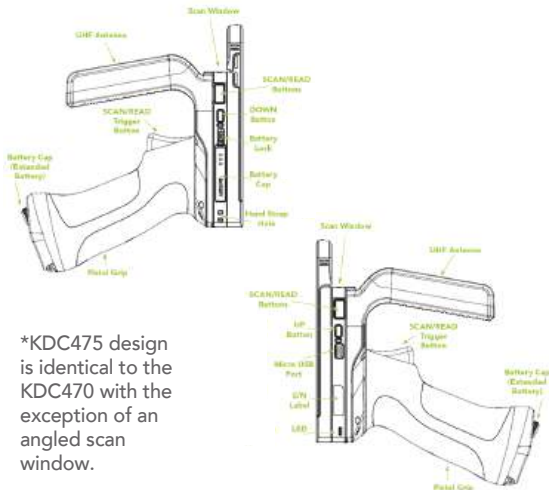

*KDC475 design is identical to the KDC470 with the exception of an angled scan window.

Basic Operation

1. To ensure that the UHF Reader is installed correctly, power on your KDC470/475/480/485 with the UHF reader installed.
2. If the UHF Reader was installed correctly, the KDC will beep once for power on, once again when it is booted up, followed by 2 quick beeps signalling that the UHF Reader is detected and ready for use.
If you do not hear 2 quick beeps, the UHF Reader may not have been correctly installed. Please verify that the installation is correct.

3. The device must be in UHF mode to read UHF tags. This mode must be manually changed.

To enter UHF mode, press the UP button on the KDC for 3 seconds. 1 long and 2 short beeps will sound.



Additional Companions

- ▶ HF Reader
- ▶ 0.5W UHF Reader
- ▶ Extended Battery
- ▶ Pistol Grip
- ▶ KDC600 mPOS

Additional Accessories

- ▶ 1-Slot Charging Cradle

Visit our website for more information.

KOAMTAC

116 Village Blvd, Ste 305, Princeton, NJ 08540
+1 609-256-4700  +1 609-228-4373 
info@koamtac.com | www.koamtac.com

Basic Operation

4. Point the Reader in the direction of the tag(s) you want to read and press the SCAN button or pull the SCAN trigger to read the tags.



5. A successful read will beep once and flash a green light.

1.0W UHF Reader Mini Guide



Toggling Read Modes

There are two read modes in which the SCAN button works: Barcode Mode and UHF mode. They are toggled by pressing the UP button for 3 seconds.



When entered into this mode, 1 long and 1 short beep will be heard. Barcodes can be read with the SCAN button.



When entered into this mode, 1 long and 2 short beeps will be heard. UHF tags can be read with the SCAN button.

Changing UHF Tag Read Mode

The tag read mode is changed by scanning one of the following barcodes or by pressing the DOWN key on the KDC470/475/480/485 for 3 seconds in RFID mode.

The tag read mode is changed in the following order:
Active (default) read -> Single read -> Multiple read

UHF Active Read Mode

Basic operation status. Simultaneous reading of multiple tags while pressing the scan button (max. 10 minutes).

* 3 short beeps will occur when changing mode with the DOWN key.

Active Read Mode



Specs

RFID Details

Standards Supported: EPC Class1 Gen2, EPC Gen2 V2

Nominal Read Range: 20'+ (6+ m) dependent on tag type and operating environment

Frequency: US, EU, JP, KR

Maximum Output Power: 30dBm $\pm$ 1dBm

Read Rate: 200 tags per second

Stores: more than 400,000 RFID tags (96 bits EPC Data)

User Environment

Ingress Protection Rating: IP64

Operating: -4°F to 122°F (-20°C to 50°C)

Storage: -4°F to 140°F (-20°C to 60°C)

Humidity: 5% to 95% (non-condensing)

Battery Characteristics

Barcode, Communication: 1130mAh Lithium-ion battery of KDC470/475/480/485

UHF, Device Charging: 6000mAh Lithium-polymer battery of Pistol Grip

UHF Single Read Mode

Only one tag is read every time the scan button is pressed.

* 1 short beep occur when changing mode with DOWN key.

Single Read Mode



FCC Information
This device complies with Part 15 of the FCC Rules .
Operation is subject to the following two conditions :
(1) This Device may not cause harmful interference, and
(2)This Device must accept any interference received, including interference that may cause undesired operation .
Note : This equipment has been tested and found to comply with the limits for CLASS B digital device, pursuant to Part 15FCC Rules . These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment . This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications . However, there is no guarantee that interference will not occur in a particular installation . If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures ;
1 . 1 . Reorient or relocate the receiving antenna .
1 . 2 . Increase the separation between the equipment and receiver .
1 . 3 . Connect the equipment into an outlet on a circuit different from that to which receiver is connected .
1 . 4 . Consult the dealer or experienced radio/TV technician for help .
WARNING: Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment .
CAUTION : Exposure to Radio Frequency Radiation . (If not subject to measurement SAR) To comply with FCC's RF exposure limits for general population / uncontrolled exposure, the antenna (s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co - located or operating in conjunction with any other antenna or transmitter .

KDC UHF App

KDC UHF is a program which communicates with KOAMTAC's Data Collector (KDC®) via Bluetooth. It enables users to read UHF data, measure performance, and configure the KDC on an iOS or Android device. This app is for demo purposes and to aid developers using our SDK.

- Easily switch between barcode and UHF modes
- Easily switch between UHF tag reading modes
- Increase or decrease UHF power level
- Customize tag parameters
- Reading timeout settings
- Change UHF data types, region, and more!



UHF Multiple Read Mode

When the Scan button is pressed, multiple tags are read simultaneously for the set time (default 10 seconds).

- * Time setting can be changed in Settings ->Reading Timeout.
- * 2 short beeps will occur when changing mode with the DOWN key.

Multiple Read Mode



KTSync & SDK

KTSync® is a program which communicates with KOAMTAC's KDC via Bluetooth. It enables users to read and store data. KTSync is compatible with iOS, Android, Windows, and Mac. It also supports wedging and downloading data from the KDC.

For more information about KTSync, please visit:
www.koamtac.com/support/downloads/applications

The Software Development Kit (SDK) is the perfect solution for creating a custom application to collect data utilizing your KDC. KOAMTAC's SDK covers all major development platforms: Android, iOS, Tizen, Windows, Xamarin, and Cordova. Developers may take advantage of the complimentary SDK and enjoy the full benefits of the KOAMTAC Developer Program.

For more information regarding the KOAMTAC Developer Program or to request the latest SDKs, visit:
www.koamtac.com/support/downloads/sdk
or e-mail sdks@koamtac.com.