

FCC Test Report

FCC EVALUATION REPORT FOR CERTIFICATION	
Project Reference No.	249784
Product	Bluetooth Speaker
Brand Name	
Model	BS1330US
Alternate Model	N/A
Tested according to	FCC Rules and Regulations Part 15 Subpart C 2013 15.247, ANSI C63.4-2009

Tested in period	2014.02.23 to 2014.02.25		
Issued date	2014.03.06		
Name and address of the Test House	 Nemko Shanghai Ltd. Shenzhen Branch Unit CD, Floor 10, Tower 2, Kefa Road 8#, Hi-Technology Park, Nanshan District, Shenzhen, China Phone : +86 755 8221 0420 Fax : +86 755 8221 3363		
Tested by			
	2014/3/6		
	Zone Peng		date
Verified by			
	2014/3/6		
	Daria Liu		date

This form is only for use by Nemko, or by others according to special agreement with Nemko. The report may be reproduced in full. Partial reproduction may only be made with the written content of Nemko Shanghai. This report applies only to the sample(s) tested. It is the manufacturer's responsibility to assure the additional production units of this product are manufactured with identical electrical and mechanical components.

Contents of This Report

1. Client Information	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Scope	5
2. Equipment under Test (EUT)	6
2.1 Identification of EUT	6
2.2 Detail spec:	6
2.3 Additional Information Related to Testing	6
3. General Test Conditions	7
3.1 Location	7
3.2 Operating Environment	7
3.3 Operating During Test	7
3.4 Test Equipment	7
4. Measurement Uncertainty	7
5. Radiated Electromagnetic Disturbances	8
5.1 Test Procedure	8
5.2 Measurement Equipment	8
5.3 Test Result	8
5.3.1 Diagram 5-1	11
5.3.2 Diagram 5-2	12
5.3.3 Diagram 5-3	13
5.3.4 Diagram 5-4	14
5.3.5 Diagram 5-5	15
5.3.6 Diagram 5-6	16
5.3.7 Diagram 5-7	17
5.3.8 Diagram 5-8	18
5.3.9 Diagram 5-9	19
5.3.10 Diagram 5-10	20
5.3.11 Diagram 5-11	21
5.3.12 Diagram 5-12	22
5.3.13 Diagram 5-13	23
5.3.14 Diagram 5-14	24
5.3.15 Diagram 5-15	25
5.3.16 Diagram 5-16	26
5.3.17 Diagram 5-17	27
5.3.18 Diagram 5-18	28
5.3.19 Diagram 5-19	29
5.3.20 Diagram 5-20	30
5.3.21 Diagram 5-21	31
5.3.22 Diagram 5-22	32
5.3.23 Diagram 5-23	33
5.3.24 Diagram 5-24	34
5.3.25 Diagram 5-25	35

5.3.26 Diagram 5-26	36
5.3.27 Diagram 5-27	37
5.3.28 Diagram 5-28	38
5.3.29 Diagram 5-29	39
5.3.30 Diagram 5-30	40
6. 20 dB and 99% bandwidth Test	41
6.1 Test Procedure	41
6.2 Measurement Equipment.....	41
6.3 Test Result:	41
7. Band Edge Compliance Test.....	47
7.1 Test Procedure	47
7.2 Measurement Equipment.....	47
7.3 Test Result	47
8. Carrier Frequency Separation Test	59
8.1 Test Procedure	59
8.2 Measurement Equipment.....	59
8.3 Test Result	59
8.3.1 Diagram 8-1	60
8.3.2 Diagram 8-2	61
8.3.3 Diagram 8-3	62
9. Output Power Test.....	63
9.1 Test Procedure	63
9.2 Measurement Equipment.....	63
9.3 Test Result	63
10. NUMBER OF HOPPING FREQUENCY TEST	70
10.1 Test Procedure	70
10.2 Measurement Equipment.....	70
10.3 Test Result	70
10.3.1 Diagram	70
11. DWELL TIME TEST	71
11.1 Test Procedure	71
11.2 Measurement Equipment.....	71
11.3 Test Result	71
11.3.1 Diagram 11-1	72
11.3.2 Diagram 11-2	72
11.3.3 Diagram 11-3	73
11.3.1 Diagram 11-4	74
11.3.2 Diagram 11-5	75
11.3.3 Diagram 11-6	75
11.3.1 Diagram 11-7	76
11.3.2 Diagram 11-8	77
11.3.3 Diagram 11-9	77
12. POWER LINE CONDUCTED EMISSION TEST	78
12.1 Test Procedure	78
12.2 Measurement Equipment.....	78

12.3 Test Result	78
12.3.1 Diagram 12-1	79
12.3.2 Diagram 12-2	80
13 Antenna requirement.....	81
13.1 Requirement.....	81
13.2 Result.....	81
Appendix A Sample Label	82

1. Client Information

1.1 Applicant

Company Name:	Acoustic Arc International Ltd.
Company Address:	Unit 311B, 3/F., IC Development Centre,6 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong

1.2 Manufacturer

Company Name:	Acoustic Arc International Ltd.
Company Address:	Unit 311B, 3/F., IC Development Centre,6 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong

1.3 Scope

- Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

2. Equipment under Test (EUT)

2.1 Identification of EUT

Category: BlueTooth Speaker

Model Name: BS1330US

Alternate model: N/A

Brand name:



Technical data
(Rating, etc.): As below

2.2 Detail spec:

Carrier Frequency: 2402MHz~2480MHz

Number of Channel: 79

Output Power: 2.95 dBm

Modulation Type: Bluetooth(GFSK, $\pi/4$ DQPSK, 8DPSK)

Mode of operation (duplex, simplex, half duplex) : duplex

Antenna Type: Integral Antenna

Antenna gain: 0 dBi

Input: 5VDC 1A

Output: 2.5W X 2, 5Vdc 1A

Adapter: SWITCHING ADAPTER

Model : ASUC41a-050100

Input: 100V-240VAC 50/60Hz 0.2A

Output: 5.0VDC 1000mA

2.3 Additional Information Related to Testing

CHL : 2402MHz

CHM : 2441MHz

CHH : 2480MHz

3. General Test Conditions

3.1 Location

Global United Technology Services Co., Ltd. -- Nemko ELA 632

2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

FCC Registration No.:600491

IC Registration No.9079A-1

Note: all test are witnessed by NEMKO engineer

3.2 Operating Environment

All tests and measurements were performed in a shielded enclosure or a controlled environment suitable for the tests conducted. The climatic conditions in the test area are automatically controlled and recorded continuously.

Parameters	Recording during test	Accepted deviation
Ambient temperature	20-25°C	15 – 35 °C
Relative humidity	45-55%	30 - 60%
Atmospheric pressure	101.2 kPa -101.3kPa	86-106kPa

3.3 Operating During Test

Test mode: 120V 60Hz

TM1 : continuance TX MODE GFSK CH L

TM2 : continuance TX MODE GFSK CH M

TM3: continuance TX MODE GFSK CH H

TM4: continuance TX MODE 8DPSK CH L

TM5: continuance TX MODE 8DPSK CH M

TM6: continuance TX MODE 8DPSK CH H

TM7: continuance TX MODE $\pi/4$ DQPSK CH L

TM8: continuance TX MODE $\pi/4$ DQPSK CH M

TM9: continuance TX MODE $\pi/4$ DQPSK CH H

TM10: Hopping on

Remark : When measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, have been performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. No findable change appear.

And only choose the worse mode to be the representative test mode

3.4 Test Equipment

The test equipments used in testing are calibrated on a regular basis. For most of the testing equipments accredited calibration is conducted once a year. For certain equipment the calibration interval is longer. Between the calibrations all test equipment are controlled and verified on a regular basis. The test equipments used are defined in each test section of this report.

4. Measurement Uncertainty

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95 %.

Conducted Emission : 0.15~30MHz 3.45dB

Radiated Emission: 30MHz~1000MHz 4.50dB

 1GHz-18GHz 4.70dB

5. Radiated Electromagnetic Disturbances

5.1 Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast.

The EUT were rotated 0 to 360 degree and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. The test result are reported as below.

For below 1GHz

RBW=120 kHz; VBW=300KHz. The frequency range from 30MHz to 1000MHz is checked using QP detector .

For above 1GHz. The frequency range from 1GHz to 25GHz(10th harmonics) is checked.

RBW=1MHz ; VBW=1MHz, PK detector for peak emissions measurement above 1GHz

RBW=1MHz ; VBW=10Hz, PK detector for average emissions measure above 1GHz .

5.2 Measurement Equipment

Equipment	Model No.	Serial No.	Cal. Due	Manufacturer
EMI Test Receiver	ESU26	GTS203	Jul. 04 2014	R&S
BiConiLog Antenna	VULB9163	GTS214	Feb. 26 2014	SCHWARZBECK
Horn Antenna	BBHA9120D	GTS215	Feb. 26 2014	SCHWARZBECK
Horn Antenna	BBHA9170	GTS216	Feb. 26 2014	SCHWARZBECK
Coaxial Cable	N/A	GTS213	Apr. 01 2014	GTS
Coaxial Cable	N/A	GTS211	Apr. 01 2014	GTS
Coaxial cable	N/A	GTS210	Apr. 01 2014	GTS
Coaxial Cable	N/A	GTS212	Apr. 01 2014	GTS
Amplifier	8347A	GTS204	Jul. 04 2014	HP

5.3 Test Result

Spurious emission worse case:

Mode	Freq range	Channel	Test ANT polarity	Diagram	Test Result
GFSK	30MHz-1GHz:	CH LOW	H	5-1	Pass
	30MHz-1GHz:	CH LOW	V	5-2	Pass
	1GHz-18GHz:	CH LOW	H	5-3	Pass
	1GHz-18GHz:	CH LOW	V	5-4	Pass
	18GHz-25GHz:	CH LOW	H	5-5	Pass
	18GHz-25GHz:	CH LOW	V	5-6	Pass
	30MHz-1GHz:	CH MID	H	5-7	Pass
	30MHz-1GHz:	CH MID	V	5-8	Pass
	1GHz-18GHz:	CH MID	H	5-9	Pass
	1GHz-18GHz:	CH MID	V	5-10	Pass
	18GHz-25GHz:	CH MID	H	5-11	Pass
	18GHz-25GHz:	CH MID	V	5-12	Pass

Mode	Freq range	Channel	Test ANT polarity	Diagram	Test Result
GFSK	30MHz-1GHz:	CH HIGH	H	5-13	Pass
	30MHz-1GHz:	CH HIGH	V	5-14	Pass
	1GHz-18GHz:	CH HIGH	H	5-15	Pass
	1GHz-18GHz:	CH HIGH	V	5-16	Pass
	18GHz-25GHz:	CH HIGH	H	5-17	Pass
	18GHz-25GHz:	CH HIGH	V	5-18	Pass

Remark:

If PK value is lower than AV limit , then Both PK and AV deem to comply their own limit .
All modes of operation were investigated and the worst -case emission GFSK mode are reported.

Restriction band worse case :

Connect mode	Antenna Polarity	Diagram	Test Result
GFSK CHL	Horizontal	Diagram 5-19	Pass
	Vertical	Diagram 5-20	Pass
GFSK CHH	Horizontal	Diagram 5-21	Pass
	Vertical	Diagram 5-22	Pass
Pi/4 QPSK CHL	Horizontal	Diagram 5-23	Pass
	Vertical	Diagram 5-24	Pass
Pi/4 QPSK CHH	Horizontal	Diagram 5-25	Pass
	Vertical	Diagram 5-26	Pass
8DPSK CHL	Horizontal	Diagram 5-27	Pass
	Vertical	Diagram 5-28	Pass
8DPSK CHH	Horizontal	Diagram 5-29	Pass
	Vertical	Diagram 5-30	Pass

Remark:

All restriction band have been tested at both CHL,M and H with GFSK ,8DPSK and $\pi/4$ DQPSK modulation , only reported the worse case .

NOTES:

- 1.All modes were measured and the worst case emission was reported.
2. H =Horizontal V=Vertical
3. Emission = Reading +Antenna Factor + Cable Loss –Amp Factor(if exist)
4. Emission level dB μ V = 20 log Emission level μ V/m
5. The lower limit shall apply at the transition frequencies
6. All the emissions appearing within 15.205 Restricted bands shall not exceed the limits shown in 15.209,all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

Remark :


The limit of 15.209 of 3 meter distance is

Frequency MHz	Distance m	Field strength		Distance m	Field strength dBµV/m(QP)
		µV/m	dBµV/m(QP)		
30-88	3	100	40.0	10	30.0
88-216	3	150	43.5	10	33.5
216-960	3	200	46.0	10	36.0
960-1000	3	500	54.0	10	44.0
Above 1000	3	74.0 dBµV/m (PK) 54.0 dBµV/m (AV)		/	/


15.205 Restricted bands of operation:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

5.3.1 Diagram 5-1

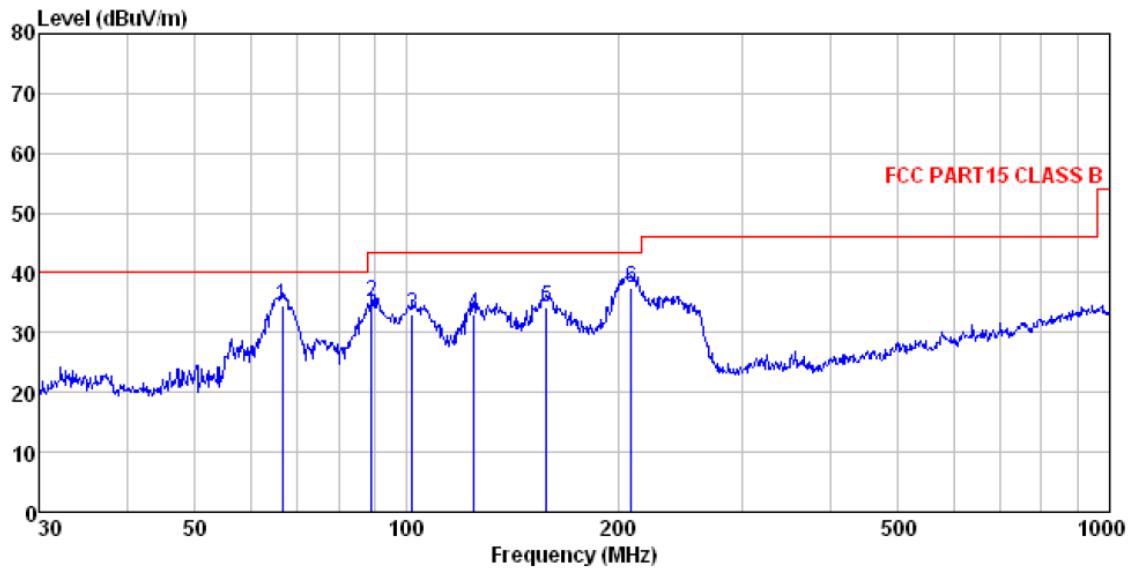


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	66.499	53.52	12.02	0.91	31.90	34.55	40.00	-5.45	QP
2	89.276	51.88	13.76	1.10	31.72	35.02	43.50	-8.48	QP
3	102.001	48.61	14.97	1.21	31.77	33.02	43.50	-10.48	QP
4	124.569	51.71	11.80	1.40	31.88	33.03	43.50	-10.47	QP
5	158.112	54.13	10.58	1.62	32.01	34.32	43.50	-9.18	QP
6	208.580	55.05	12.84	1.89	32.14	37.64	43.50	-5.86	QP

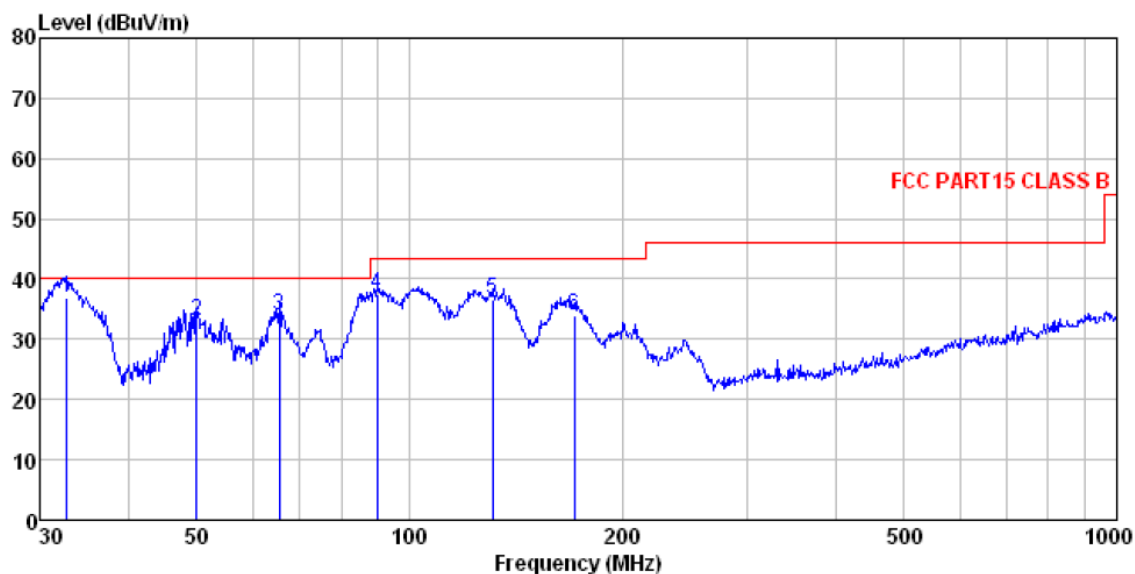


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	32.749	54.01	14.31	0.58	32.06	36.84	40.00	-3.16	QP
2	50.057	48.92	15.25	0.77	31.96	32.98	40.00	-7.02	QP
3	65.343	52.43	12.57	0.90	31.91	33.99	40.00	-6.01	QP
4	89.905	54.09	13.90	1.11	31.72	37.38	43.50	-6.12	QP
5	130.837	56.09	10.88	1.44	31.91	36.50	43.50	-7.00	QP
6	170.793	53.36	11.03	1.69	32.06	34.02	43.50	-9.48	QP

5.3.3 Diagram 5-3

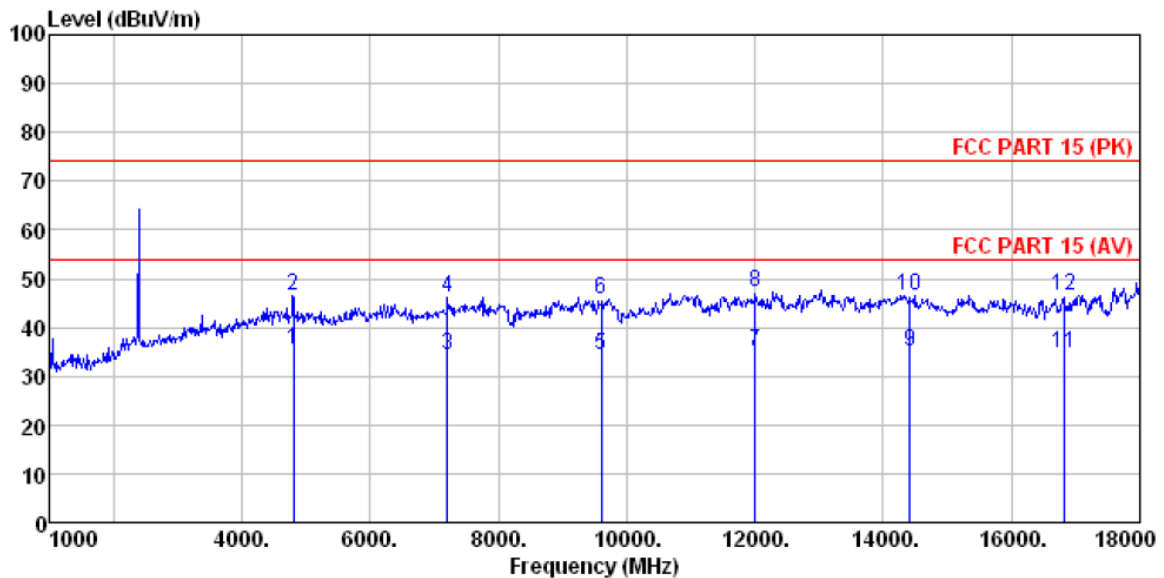


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	4804.000	27.32	31.78	8.60	32.09	35.61	54.00	-18.39	Average
2	4804.000	38.34	31.78	8.60	32.09	46.63	74.00	-27.37	Peak
3	7206.000	18.63	36.15	11.65	32.00	34.43	54.00	-19.57	Average
4	7206.000	30.34	36.15	11.65	32.00	46.14	74.00	-27.86	Peak
5	9608.000	13.97	37.95	14.14	31.62	34.44	54.00	-19.56	Average
6	9608.000	25.10	37.95	14.14	31.62	45.57	74.00	-28.43	Peak
7	12010.000	16.61	39.08	15.03	35.51	35.21	54.00	-18.79	Average
8	12010.000	28.77	39.08	15.03	35.51	47.37	74.00	-26.63	Peak
9	14412.000	8.66	42.41	17.15	33.34	34.88	54.00	-19.12	Average
10	14412.000	20.34	42.41	17.15	33.34	46.56	74.00	-27.44	Peak
11	16814.000	7.86	41.78	18.77	33.82	34.59	54.00	-19.41	Average
12	16814.000	19.69	41.78	18.77	33.82	46.42	74.00	-27.58	Peak

5.3.4 Diagram 5-4

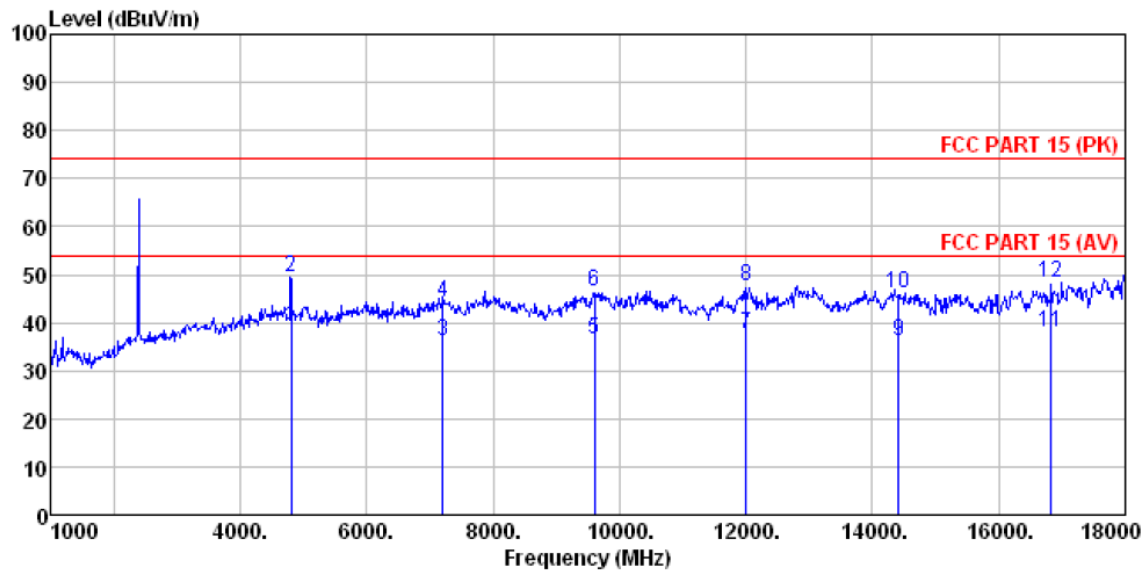


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	4804.000	30.65	31.78	8.60	32.09	38.94	54.00	-15.06	Average
2	4804.000	40.97	31.78	8.60	32.09	49.26	74.00	-24.74	Peak
3	7206.000	20.31	36.15	11.65	32.00	36.11	54.00	-17.89	Average
4	7206.000	28.63	36.15	11.65	32.00	44.43	74.00	-29.57	Peak
5	9608.000	16.00	37.95	14.14	31.62	36.47	54.00	-17.53	Average
6	9608.000	26.17	37.95	14.14	31.62	46.64	74.00	-27.36	Peak
7	12010.000	18.99	39.08	15.03	35.51	37.59	54.00	-16.41	Average
8	12010.000	28.94	39.08	15.03	35.51	47.54	74.00	-26.46	Peak
9	14412.000	10.07	42.41	17.15	33.34	36.29	54.00	-17.71	Average
10	14412.000	19.98	42.41	17.15	33.34	46.20	74.00	-27.80	Peak
11	16814.000	11.32	41.78	18.77	33.82	38.05	54.00	-15.95	Average
12	16814.000	21.47	41.78	18.77	33.82	48.20	74.00	-25.80	Peak

5.3.5 Diagram 5-5

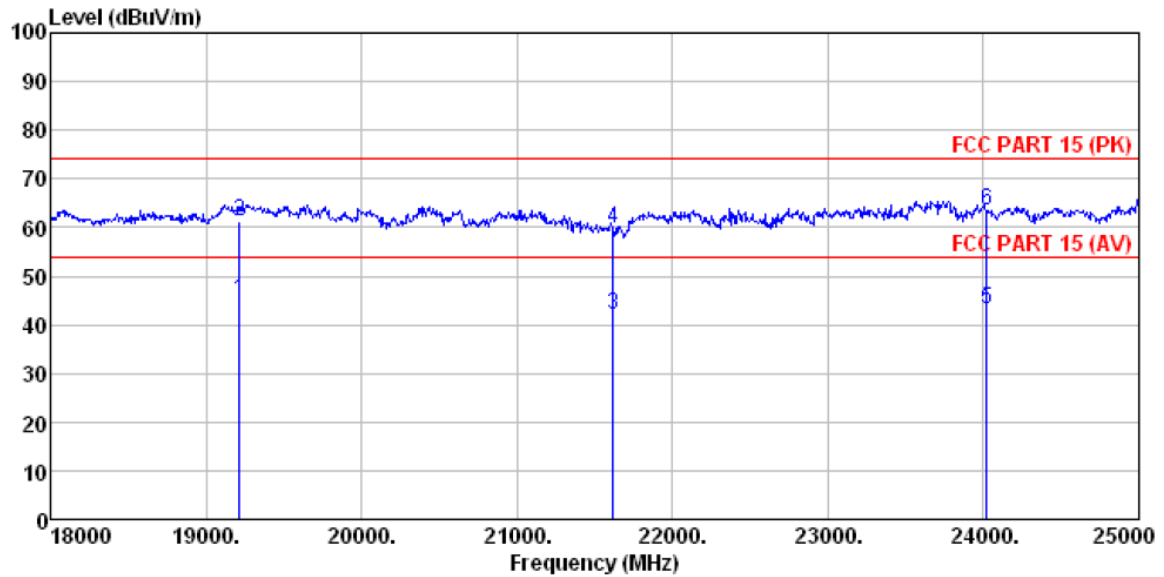


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	19216.000	2.60	50.71	18.75	27.16	44.90	54.00	-9.10	Average
2	19216.000	19.00	50.71	18.75	27.16	61.30	74.00	-12.70	Peak
3	21618.000	-0.62	50.75	19.18	27.41	41.90	54.00	-12.10	Average
4	21618.000	17.14	50.75	19.18	27.41	59.66	74.00	-14.34	Peak
5	24020.000	0.36	50.41	20.17	27.66	43.28	54.00	-10.72	Average
6	24020.000	20.62	50.41	20.17	27.66	63.54	74.00	-10.46	Peak

5.3.6 Diagram 5-6

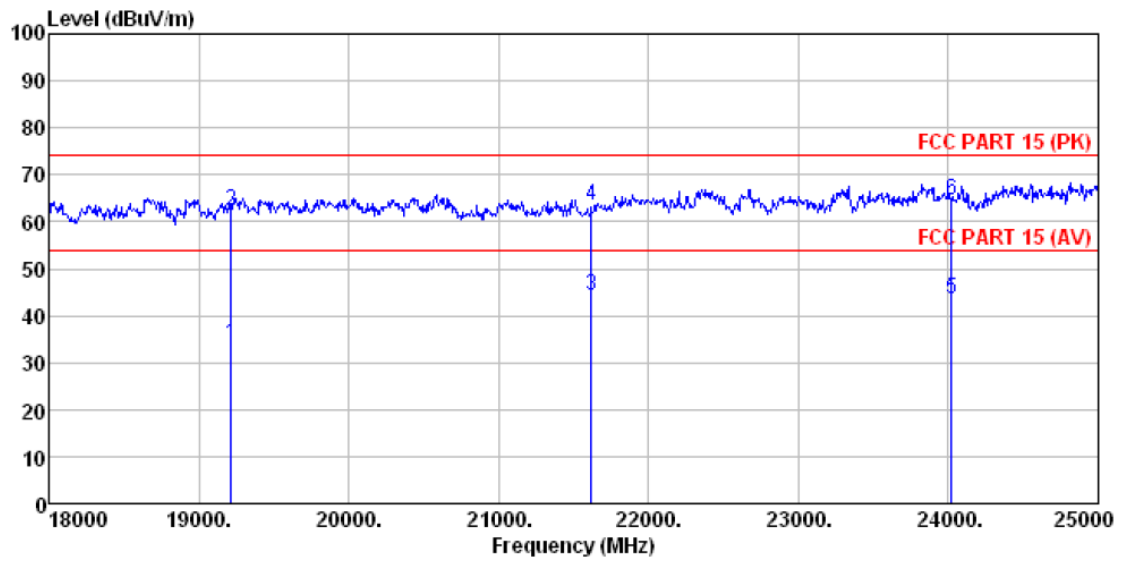


	ReadAntenna	Cable Preamp			Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----MHz	-----dBuV	-----dB/m	-----dB	-----dB	-----dBuV/m	-----dBuV/m	-----dB	-----
1 19216.000	-7.97	50.31	18.75	27.16	33.93	54.00	-20.07	Average
2 19216.000	20.57	50.31	18.75	27.16	62.47	74.00	-11.53	Peak
3 21618.000	1.49	51.09	19.18	27.41	44.35	54.00	-9.65	Average
4 21618.000	20.46	51.09	19.18	27.41	63.32	74.00	-10.68	Peak
5 24020.000	-0.66	51.55	20.17	27.66	43.40	54.00	-10.60	Average
6 24020.000	20.46	51.55	20.17	27.66	64.52	74.00	-9.48	Peak

5.3.7 Diagram 5-7

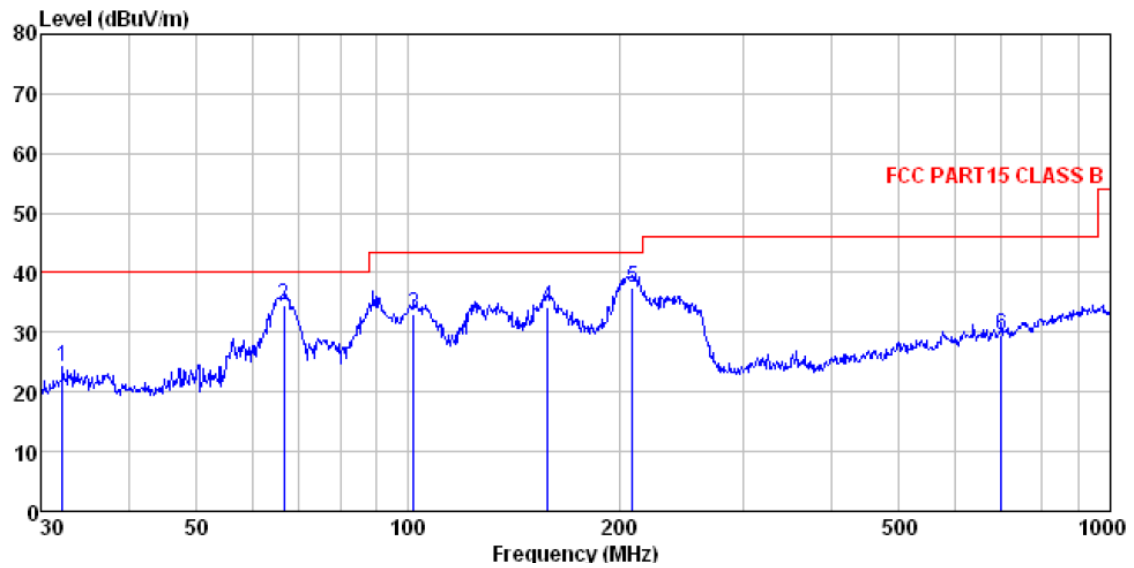


	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
		Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	32.179	41.26	14.32	0.58	32.06	24.10	40.00	-15.90 QP
2	66.499	53.52	12.02	0.91	31.90	34.55	40.00	-5.45 QP
3	102.001	48.61	14.97	1.21	31.77	33.02	43.50	-10.48 QP
4	158.112	54.13	10.58	1.62	32.01	34.32	43.50	-9.18 QP
5	208.580	55.05	12.84	1.89	32.14	37.64	43.50	-5.86 QP
6	699.305	35.95	20.80	4.08	31.19	29.64	46.00	-16.36 QP

5.3.8 Diagram 5-8

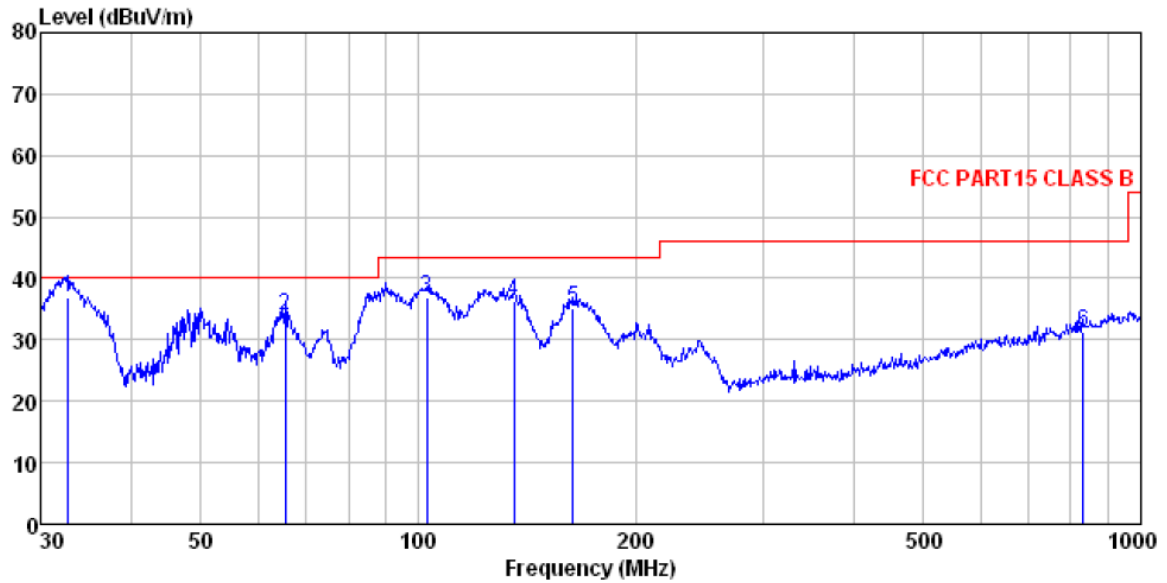


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	32.749	54.01	14.31	0.58	32.06	36.84	40.00 -3.16 QP
2	65.343	52.43	12.57	0.90	31.91	33.99	40.00 -6.01 QP
3	102.719	52.42	14.92	1.22	31.77	36.79	43.50 -6.71 QP
4	135.506	56.27	10.51	1.47	31.93	36.32	43.50 -7.18 QP
5	163.755	54.61	10.77	1.65	32.03	35.00	43.50 -8.50 QP
6	833.317	35.63	22.42	4.58	31.27	31.36	46.00 -14.64 QP

5.3.9 Diagram 5-9

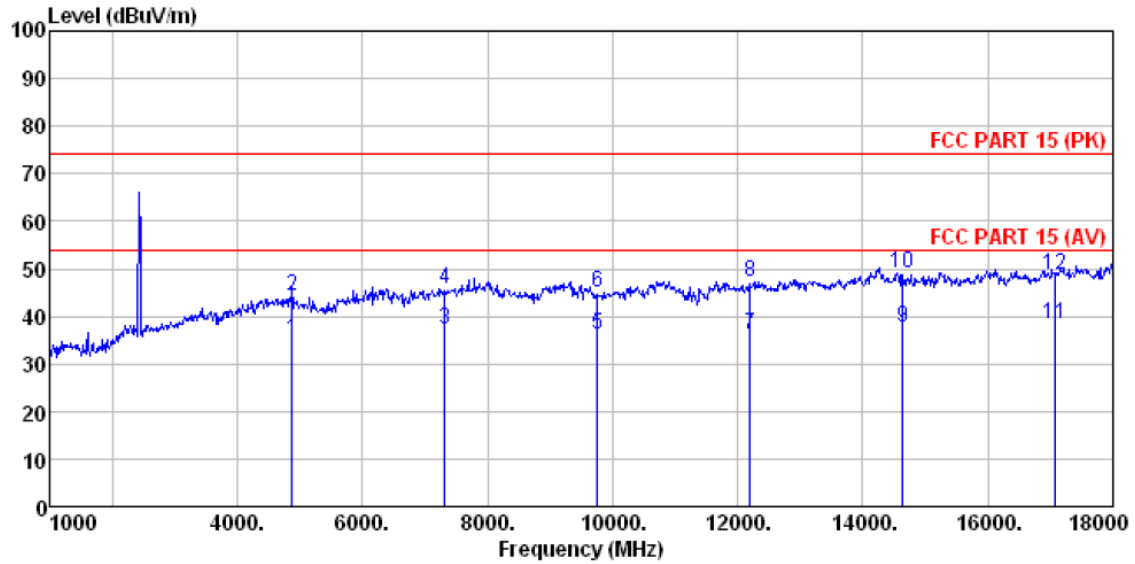


	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4882.000	26.59	31.85	8.67	32.12	34.99	54.00	-19.01 Average
2	4882.000	36.01	31.85	8.67	32.12	44.41	74.00	-29.59 Peak
3	7323.000	20.99	36.37	11.72	31.89	37.19	54.00	-16.81 Average
4	7323.000	29.62	36.37	11.72	31.89	45.82	74.00	-28.18 Peak
5	9764.000	15.09	38.35	14.25	31.62	36.07	54.00	-17.93 Average
6	9764.000	24.02	38.35	14.25	31.62	45.00	74.00	-29.00 Peak
7	12205.000	17.65	38.92	15.16	35.65	36.08	54.00	-17.92 Average
8	12205.000	28.80	38.92	15.16	35.65	47.23	74.00	-26.77 Peak
9	14646.000	12.65	42.21	17.28	34.39	37.75	54.00	-16.25 Average
10	14646.000	23.96	42.21	17.28	34.39	49.06	74.00	-24.94 Peak
11	17087.000	8.32	44.30	18.99	33.31	38.30	54.00	-15.70 Average
12	17087.000	18.65	44.30	18.99	33.31	48.63	74.00	-25.37 Peak

5.3.10 Diagram 5-10

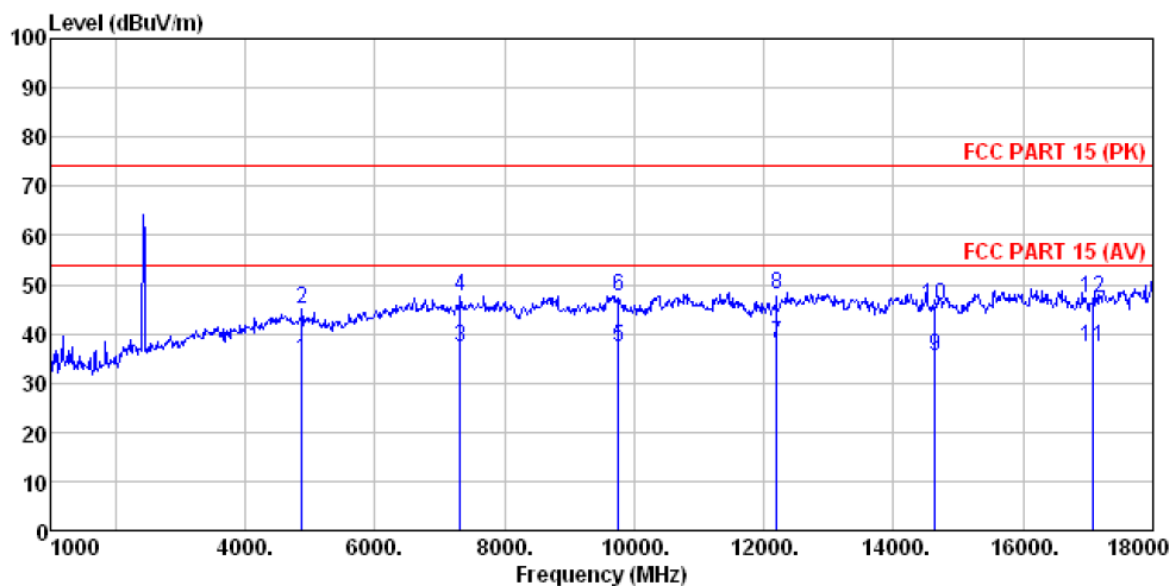


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	4882.000	26.31	31.85	8.67	32.12	34.71	54.00	-19.29	Average
2	4882.000	36.56	31.85	8.67	32.12	44.96	74.00	-29.04	Peak
3	7323.000	21.10	36.37	11.72	31.89	37.30	54.00	-16.70	Average
4	7323.000	31.41	36.37	11.72	31.89	47.61	74.00	-26.39	Peak
5	9764.000	16.32	38.35	14.25	31.62	37.30	54.00	-16.70	Average
6	9764.000	26.79	38.35	14.25	31.62	47.77	74.00	-26.23	Peak
7	12205.000	19.46	38.92	15.16	35.65	37.89	54.00	-16.11	Average
8	12205.000	29.63	38.92	15.16	35.65	48.06	74.00	-25.94	Peak
9	14646.000	10.34	42.21	17.28	34.39	35.44	54.00	-18.56	Average
10	14646.000	20.60	42.21	17.28	34.39	45.70	74.00	-28.30	Peak
11	17087.000	7.38	44.30	18.99	33.31	37.36	54.00	-16.64	Average
12	17087.000	17.42	44.30	18.99	33.31	47.40	74.00	-26.60	Peak

5.3.11 Diagram 5-11

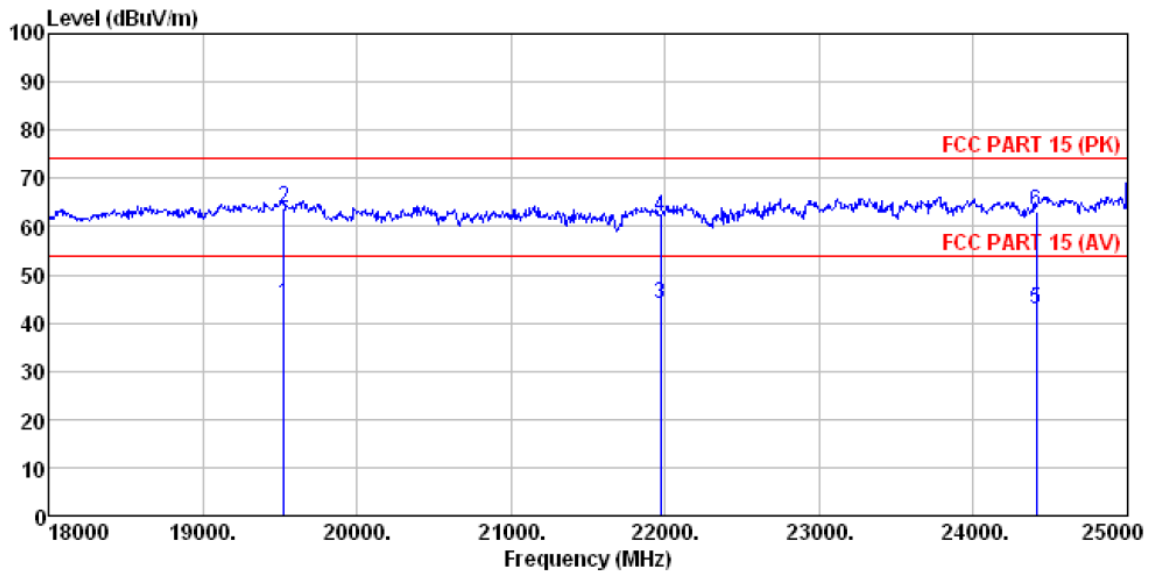


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	19528.000	1.66	50.77	18.84	27.20	44.07	54.00	-9.93	Average
2	19528.000	21.32	50.77	18.84	27.20	63.73	74.00	-10.27	Peak
3	21969.000	1.33	50.68	19.24	27.44	43.81	54.00	-10.19	Average
4	21969.000	19.50	50.68	19.24	27.44	61.98	74.00	-12.02	Peak
5	24410.000	-1.34	50.92	20.85	27.75	42.68	54.00	-11.32	Average
6	24410.000	19.10	50.92	20.85	27.75	63.12	74.00	-10.88	Peak

5.3.12 Diagram 5-12

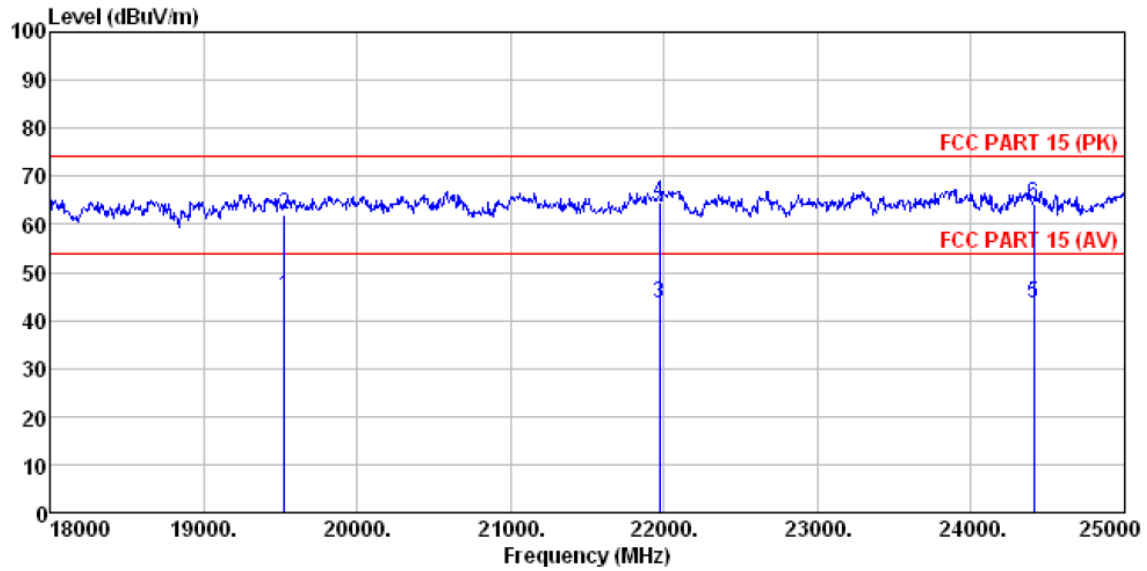


	Read	Antenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 19528.000	3.10	50.40	18.84	27.20	45.14	54.00	-8.86	Average
2 19528.000	20.07	50.40	18.84	27.20	62.11	74.00	-11.89	Peak
3 21969.000	0.51	51.23	19.24	27.44	43.54	54.00	-10.46	Average
4 21969.000	21.50	51.23	19.24	27.44	64.53	74.00	-9.47	Peak
5 24410.000	-1.49	51.77	20.85	27.75	43.38	54.00	-10.62	Average
6 24410.000	19.33	51.77	20.85	27.75	64.20	74.00	-9.80	Peak

5.3.13 Diagram 5-13

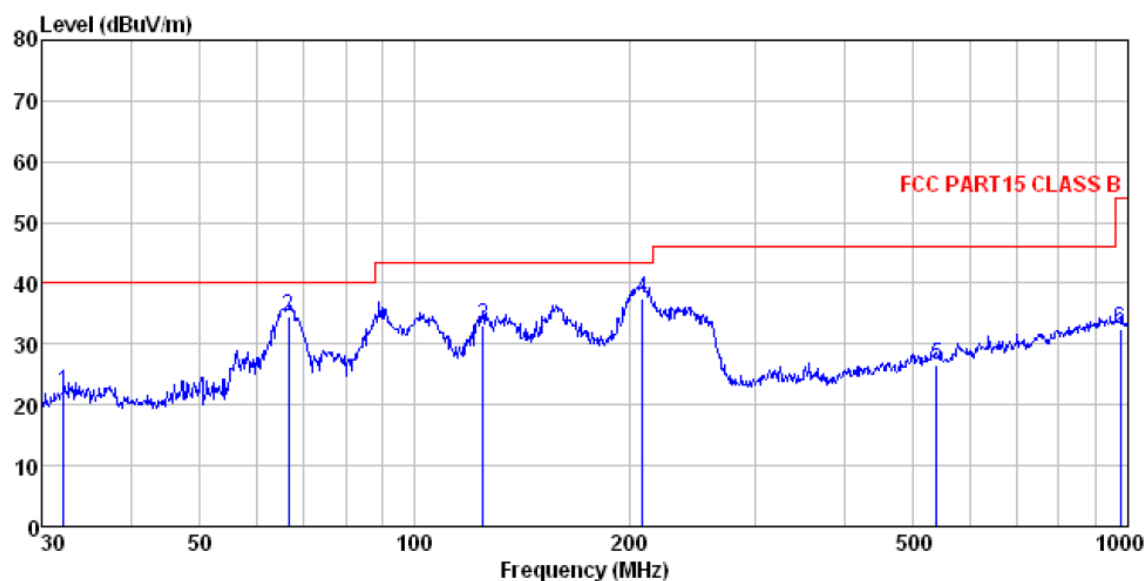


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	32.179	39.26	14.32	0.58	32.06	22.10	40.00	-17.90	QP
2	66.499	53.52	12.02	0.91	31.90	34.55	40.00	-5.45	QP
3	124.569	51.71	11.80	1.40	31.88	33.03	43.50	-10.47	QP
4	208.580	55.05	12.84	1.89	32.14	37.64	43.50	-5.86	QP
5	539.478	35.18	19.36	3.48	31.35	26.67	46.00	-19.33	QP
6	975.753	35.02	23.59	5.14	31.23	32.52	54.00	-21.48	QP

5.3.14 Diagram 5-14

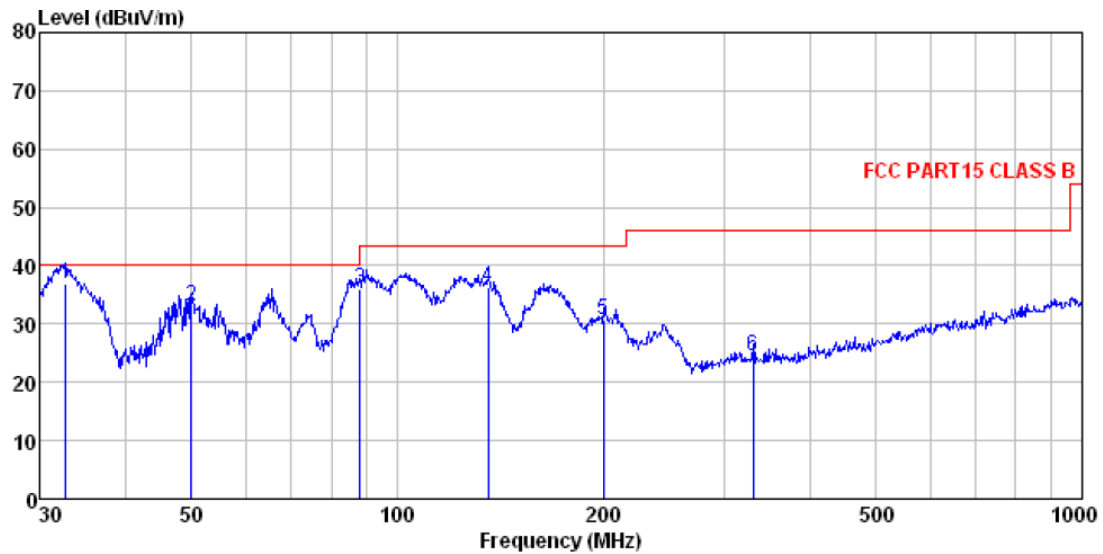


	Freq	ReadAntenna	Cable Preamp			Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	32.749	54.01	14.31	0.58	32.06	36.84	40.00	-3.16 QP
2	50.057	48.92	15.25	0.77	31.96	32.98	40.00	-7.02 QP
3	88.033	53.24	13.32	1.09	31.73	35.92	43.50	-7.58 QP
4	135.506	56.27	10.51	1.47	31.93	36.32	43.50	-7.18 QP
5	199.986	48.38	12.57	1.84	32.14	30.65	43.50	-12.85 QP
6	330.195	38.31	15.79	2.52	32.08	24.54	46.00	-21.46 QP

5.3.15 Diagram 5-15

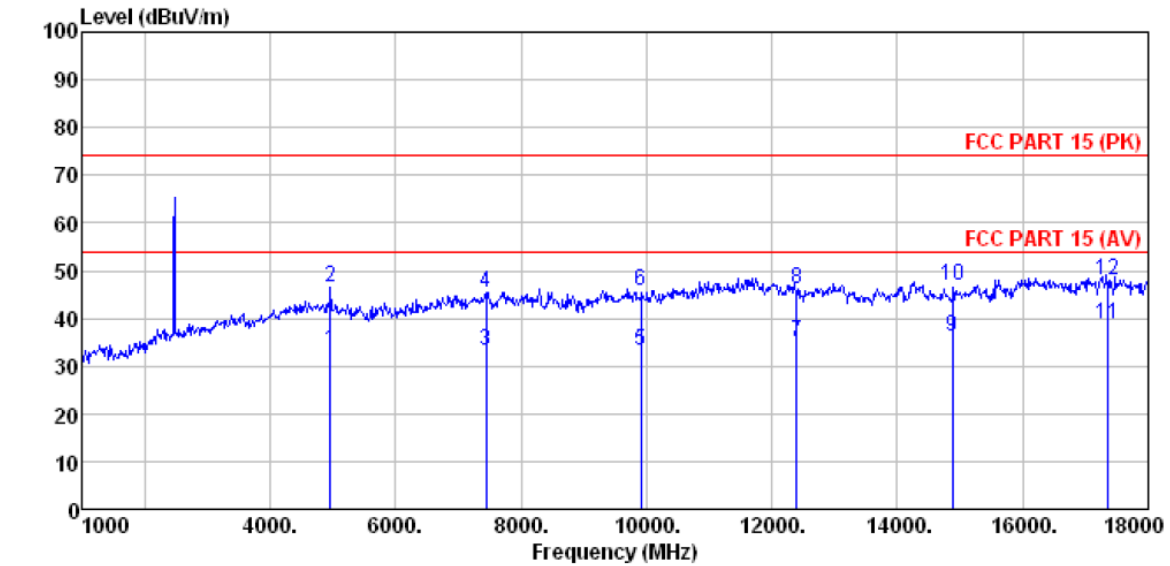


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	4960.000	24.64	31.93	8.73	32.16	33.14	54.00	-20.86	Average
2	4960.000	37.95	31.93	8.73	32.16	46.45	74.00	-27.55	Peak
3	7440.000	16.63	36.59	11.79	31.78	33.23	54.00	-20.77	Average
4	7440.000	28.80	36.59	11.79	31.78	45.40	74.00	-28.60	Peak
5	9920.000	12.06	38.81	14.38	31.88	33.37	54.00	-20.63	Average
6	9920.000	24.40	38.81	14.38	31.88	45.71	74.00	-28.29	Peak
7	12400.000	16.30	38.76	15.27	35.27	35.06	54.00	-18.94	Average
8	12400.000	27.37	38.76	15.27	35.27	46.13	74.00	-27.87	Peak
9	14880.000	12.64	41.52	17.39	35.37	36.18	54.00	-17.82	Average
10	14880.000	23.29	41.52	17.39	35.37	46.83	74.00	-27.17	Peak
11	17360.000	8.09	46.19	18.98	34.45	38.81	54.00	-15.19	Average
12	17360.000	17.31	46.19	18.98	34.45	48.03	74.00	-25.97	Peak

5.3.16 Diagram 5-16

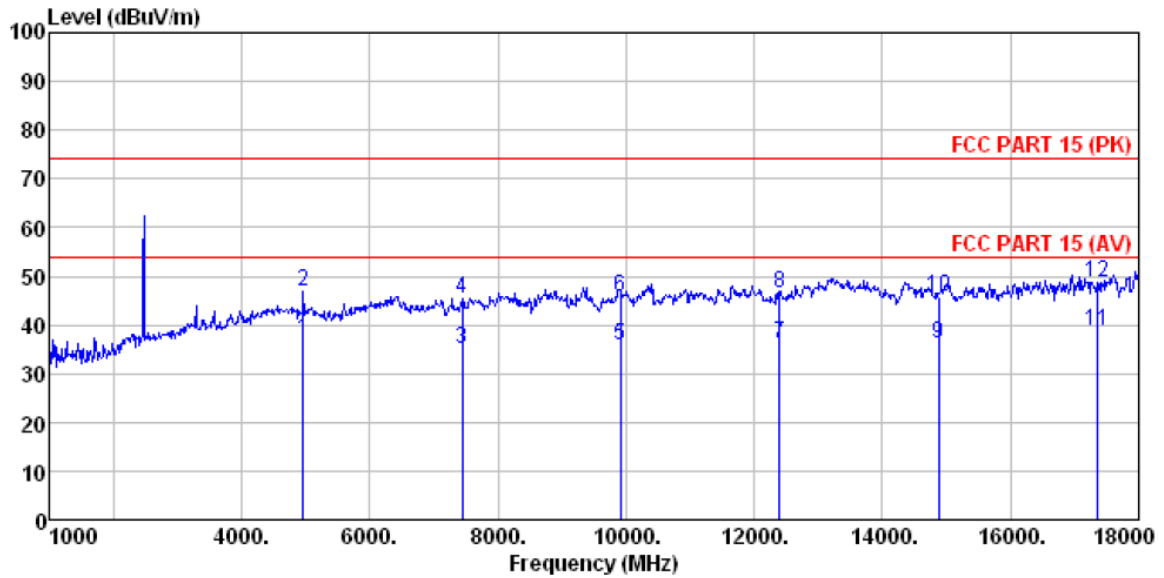


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	4960.000	28.45	31.93	8.73	32.16	36.95	54.00	-17.05	Average
2	4960.000	38.22	31.93	8.73	32.16	46.72	74.00	-27.28	Peak
3	7440.000	18.45	36.59	11.79	31.78	35.05	54.00	-18.95	Average
4	7440.000	28.62	36.59	11.79	31.78	45.22	74.00	-28.78	Peak
5	9920.000	14.35	38.81	14.38	31.88	35.66	54.00	-18.34	Average
6	9920.000	24.35	38.81	14.38	31.88	45.66	74.00	-28.34	Peak
7	12400.000	17.46	38.76	15.27	35.27	36.22	54.00	-17.78	Average
8	12400.000	27.63	38.76	15.27	35.27	46.39	74.00	-27.61	Peak
9	14880.000	12.51	41.52	17.39	35.37	36.05	54.00	-17.95	Average
10	14880.000	22.24	41.52	17.39	35.37	45.78	74.00	-28.22	Peak
11	17360.000	7.89	46.19	18.98	34.45	38.61	54.00	-15.39	Average
12	17360.000	17.84	46.19	18.98	34.45	48.56	74.00	-25.44	Peak

5.3.17 Diagram 5-17

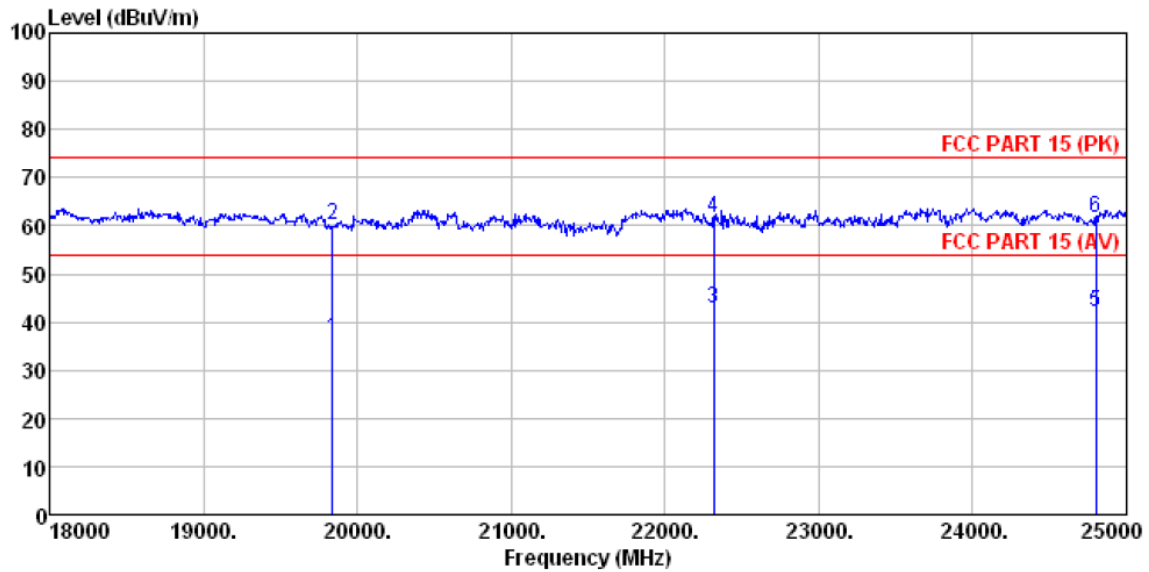


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	19840.000	-5.96	50.82	18.94	27.23	36.57	54.00	-17.43	Average
2	19840.000	17.65	50.82	18.94	27.23	60.18	74.00	-13.82	Peak
3	22320.000	0.24	50.76	19.34	27.47	42.87	54.00	-11.13	Average
4	22320.000	18.99	50.76	19.34	27.47	61.62	74.00	-12.38	Peak
5	24800.000	-3.14	51.43	21.54	27.83	42.00	54.00	-12.00	Average
6	24800.000	16.57	51.43	21.54	27.83	61.71	74.00	-12.29	Peak

5.3.18 Diagram 5-18

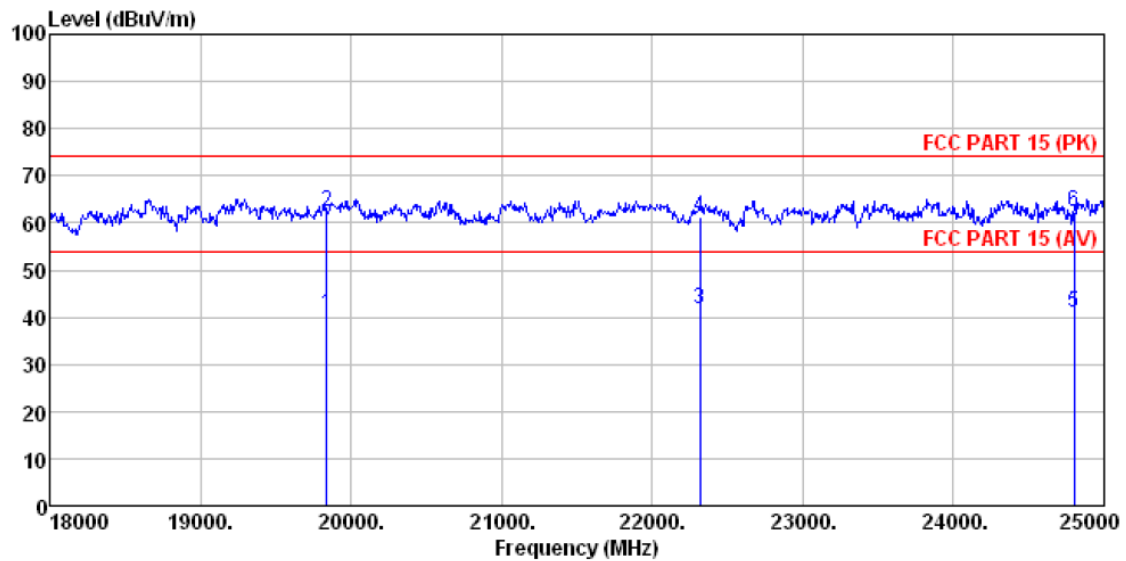


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	19840.000	-1.70	50.49	18.94	27.23	40.50	54.00	-13.50	Average
2	19840.000	20.03	50.49	18.94	27.23	62.23	74.00	-11.77	Peak
3	22320.000	-1.32	51.24	19.34	27.47	41.79	54.00	-12.21	Average
4	22320.000	18.33	51.24	19.34	27.47	61.44	74.00	-12.56	Peak
5	24800.000	-4.80	52.00	21.54	27.83	40.91	54.00	-13.09	Average
6	24800.000	16.66	52.00	21.54	27.83	62.37	74.00	-11.63	Peak

5.3.19 Diagram 5-19

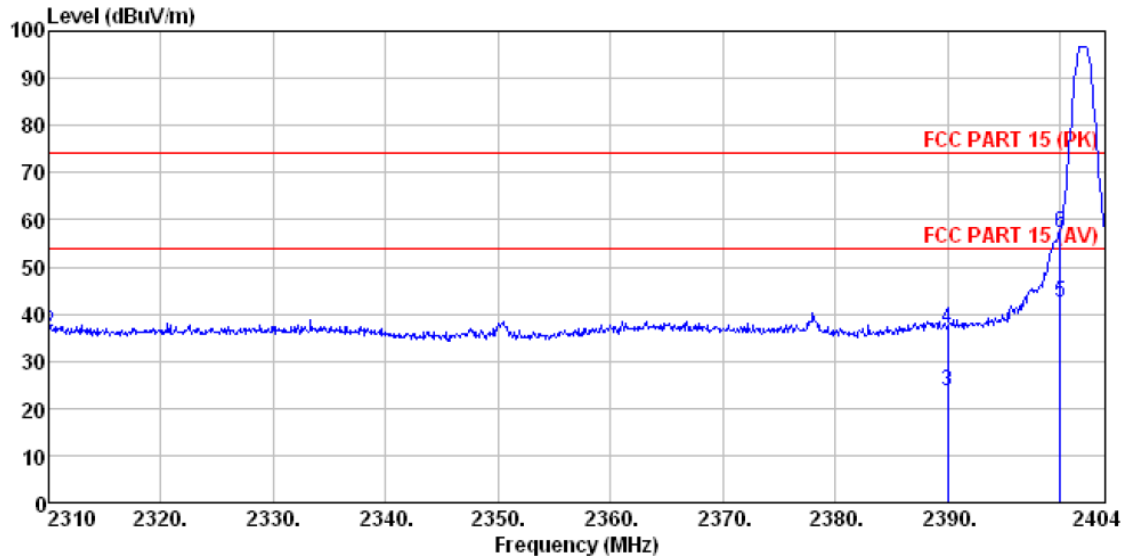


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	24.96	27.91	5.30	34.11	24.06	54.00	-29.94	Average
2	2310.000	37.04	27.91	5.30	34.11	36.14	74.00	-37.86	Peak
3	2390.000	24.74	27.59	5.38	34.01	23.70	54.00	-30.30	Average
4	2390.000	37.91	27.59	5.38	34.01	36.87	74.00	-37.13	Peak
5	2400.000	43.46	27.58	5.39	34.01	42.42	54.00	-11.58	Average
6	2400.000	58.07	27.58	5.39	34.01	57.03	74.00	-16.97	Peak

5.3.20 Diagram 5-20

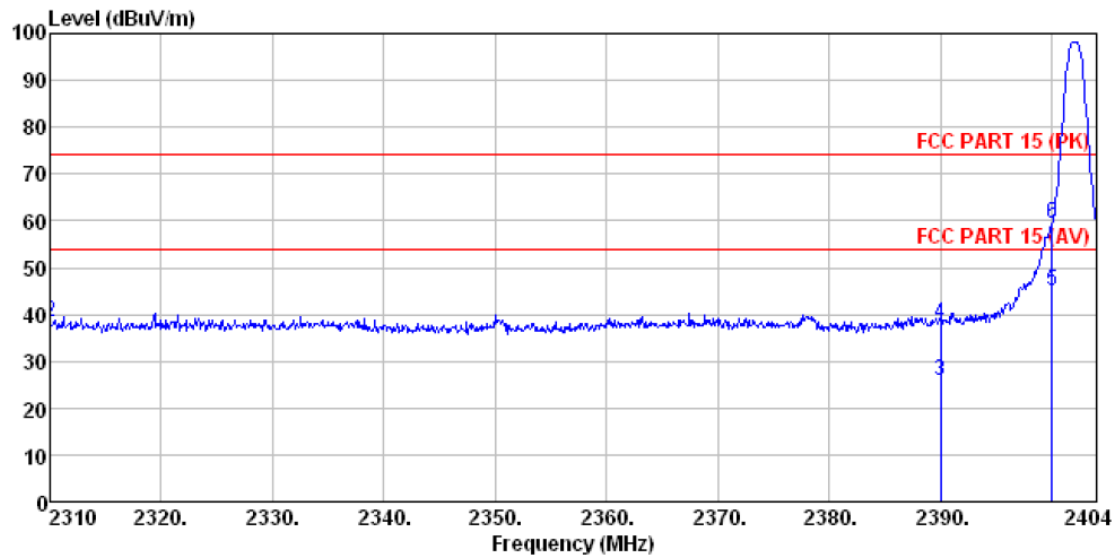


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	26.94	27.91	5.30	34.11	26.04	54.00	-27.96	Average
2	2310.000	39.16	27.91	5.30	34.11	38.26	74.00	-35.74	Peak
3	2390.000	26.75	27.59	5.38	34.01	25.71	54.00	-28.29	Average
4	2390.000	39.01	27.59	5.38	34.01	37.97	74.00	-36.03	Peak
5	2400.000	45.99	27.58	5.39	34.01	44.95	54.00	-9.05	Average
6	2400.000	60.43	27.58	5.39	34.01	59.39	74.00	-14.61	Peak

5.3.21 Diagram 5-21

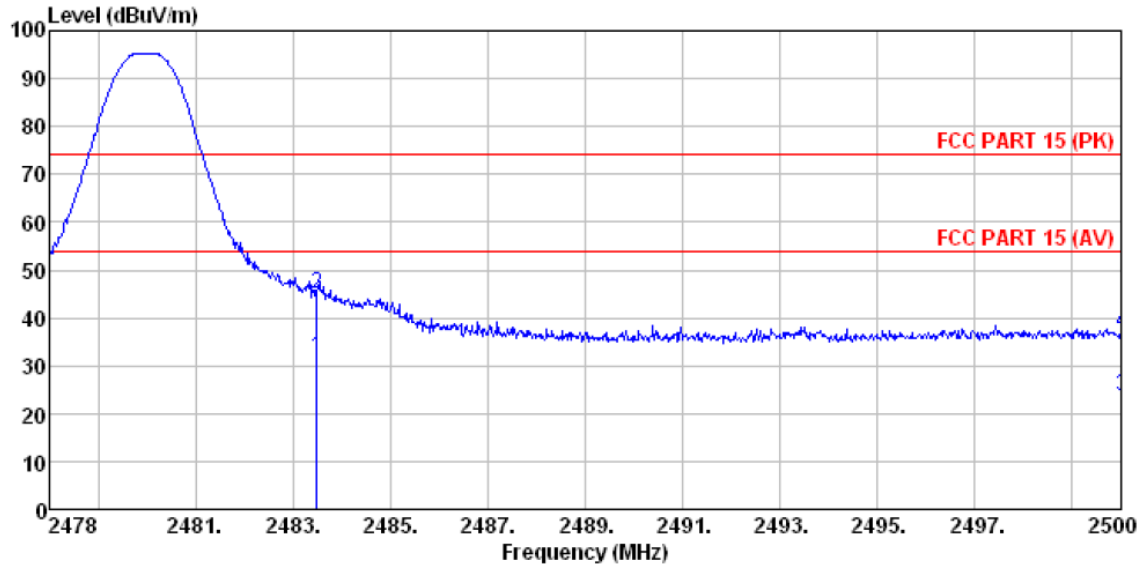


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	32.65	27.53	5.47	33.92	31.73	54.00	-22.27	Average
2	2483.500	45.82	27.53	5.47	33.92	44.90	74.00	-29.10	Peak
3	2500.000	24.40	27.55	5.49	33.90	23.54	54.00	-30.46	Average
4	2500.000	37.79	27.55	5.49	33.90	36.93	74.00	-37.07	Peak

5.3.22 Diagram 5-22

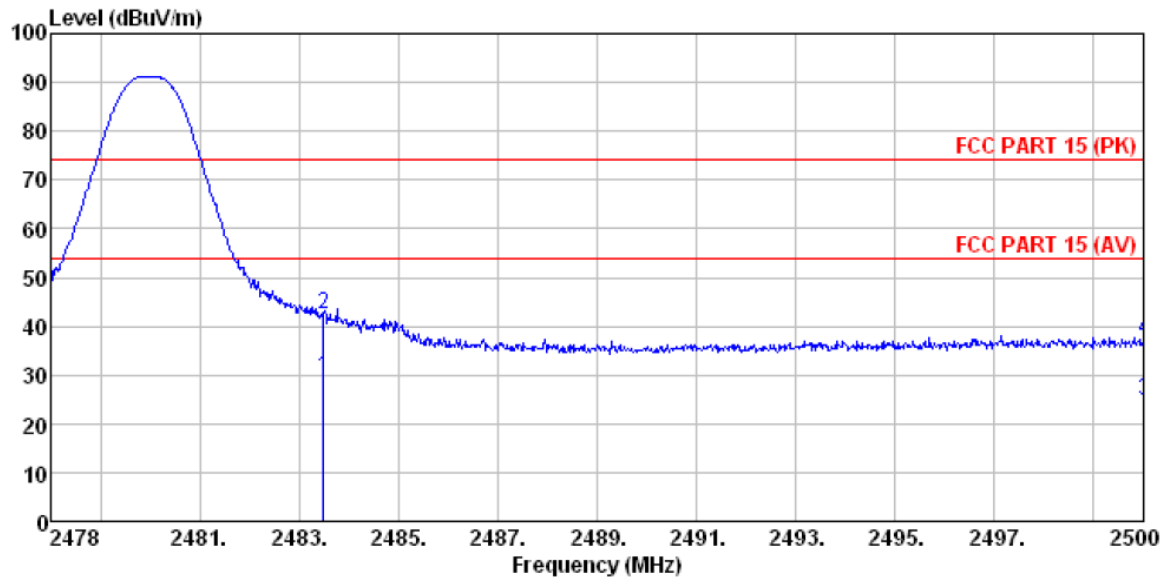


	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	30.33	27.53	5.47	33.92	29.41	54.00	-24.59	Average
2	2483.500	43.22	27.53	5.47	33.92	42.30	74.00	-31.70	Peak
3	2500.000	25.47	27.55	5.49	33.90	24.61	54.00	-29.39	Average
4	2500.000	38.28	27.55	5.49	33.90	37.42	74.00	-36.58	Peak

5.3.23 Diagram 5-23

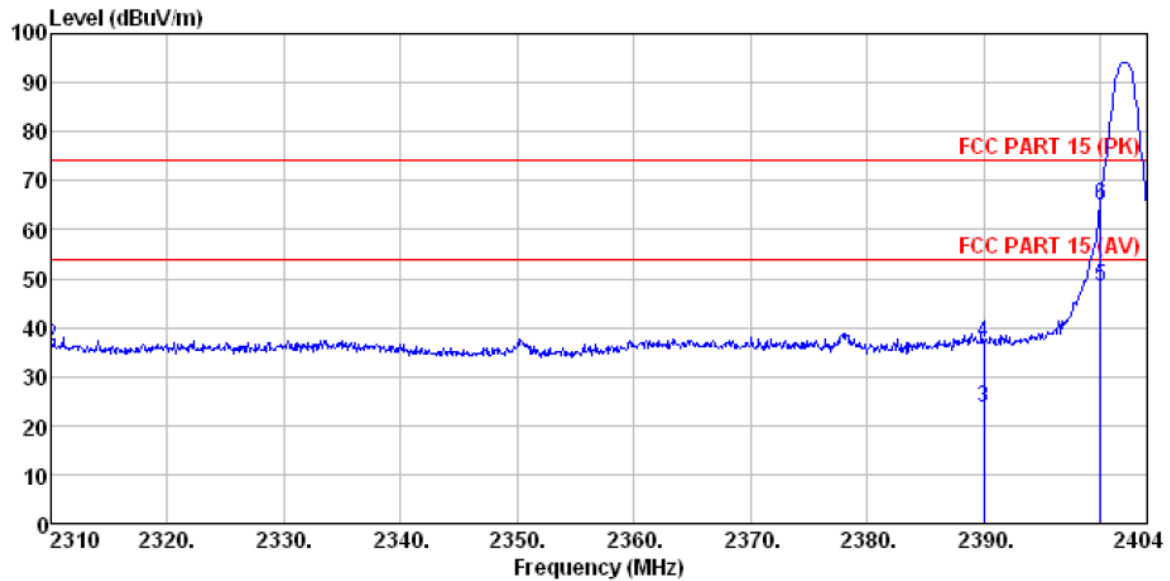


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	24.11	27.91	5.30	34.11	23.21	54.00	-30.79	Average
2	2310.000	37.13	27.91	5.30	34.11	36.23	74.00	-37.77	Peak
3	2390.000	24.65	27.59	5.38	34.01	23.61	54.00	-30.39	Average
4	2390.000	37.78	27.59	5.38	34.01	36.74	74.00	-37.26	Peak
5	2400.000	49.42	27.58	5.39	34.01	48.38	54.00	-5.62	Average
6	2400.000	66.12	27.58	5.39	34.01	65.08	74.00	-8.92	Peak

5.3.24 Diagram 5-24

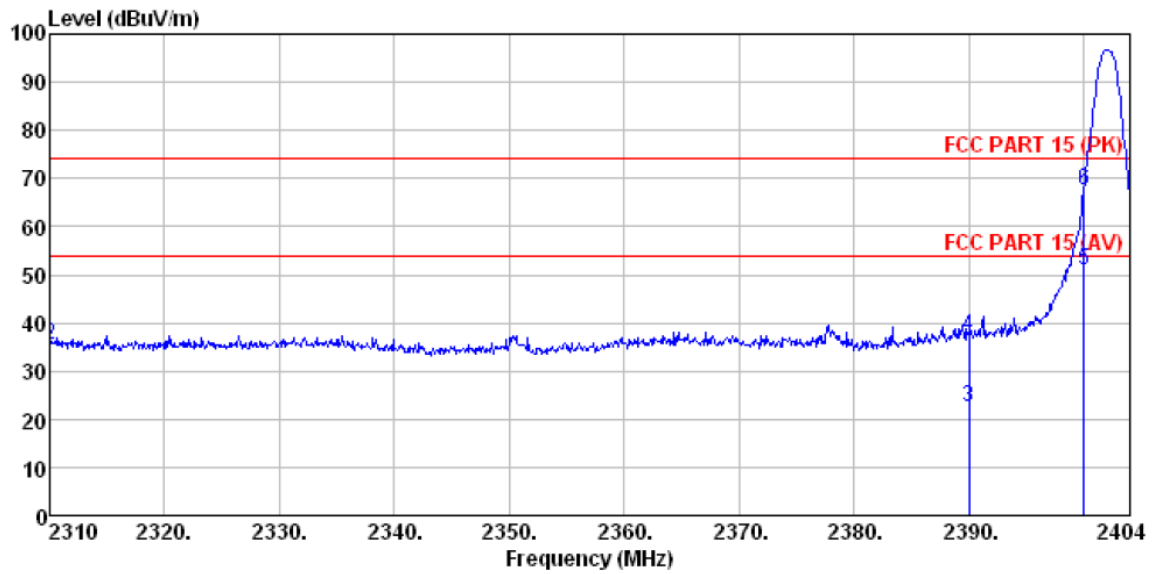


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	22.47	27.91	5.30	34.11	21.57	54.00	-32.43	Average
2	2310.000	36.16	27.91	5.30	34.11	35.26	74.00	-38.74	Peak
3	2390.000	23.40	27.59	5.38	34.01	22.36	54.00	-31.64	Average
4	2390.000	38.14	27.59	5.38	34.01	37.10	74.00	-36.90	Peak
5	2400.000	51.98	27.58	5.39	34.01	50.94	54.00	-3.06	Average
6	2400.000	68.40	27.58	5.39	34.01	67.36	74.00	-6.64	Peak

5.3.25 Diagram 5-25

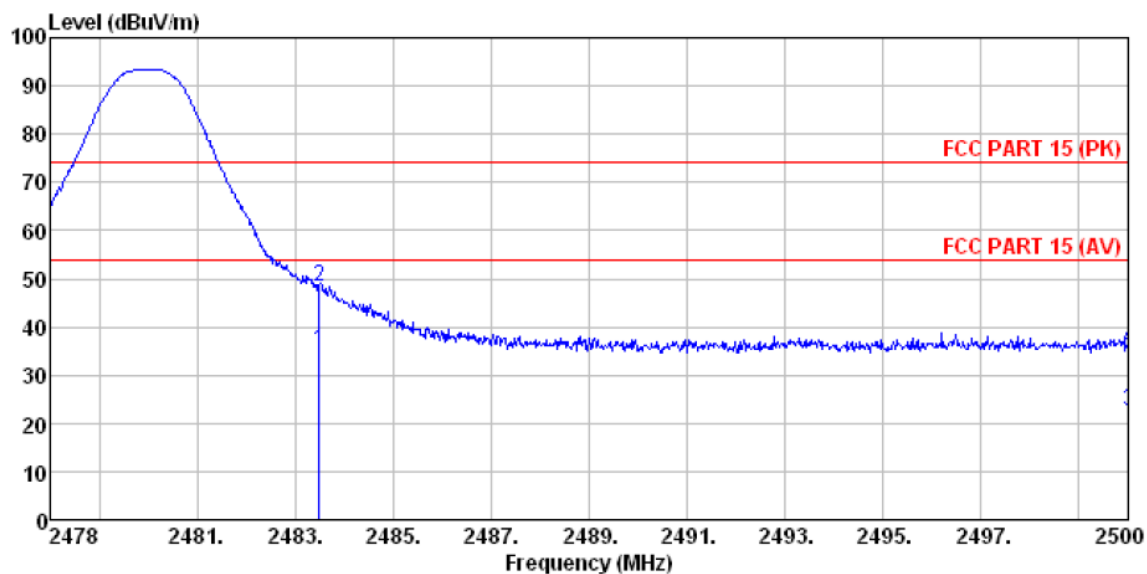


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	36.06	27.53	5.47	33.92	35.14	54.00	-18.86	Average
2	2483.500	49.31	27.53	5.47	33.92	48.39	74.00	-25.61	Peak
3	2500.000	23.30	27.55	5.49	33.90	22.44	54.00	-31.56	Average
4	2500.000	36.21	27.55	5.49	33.90	35.35	74.00	-38.65	Peak

5.3.26 Diagram 5-26

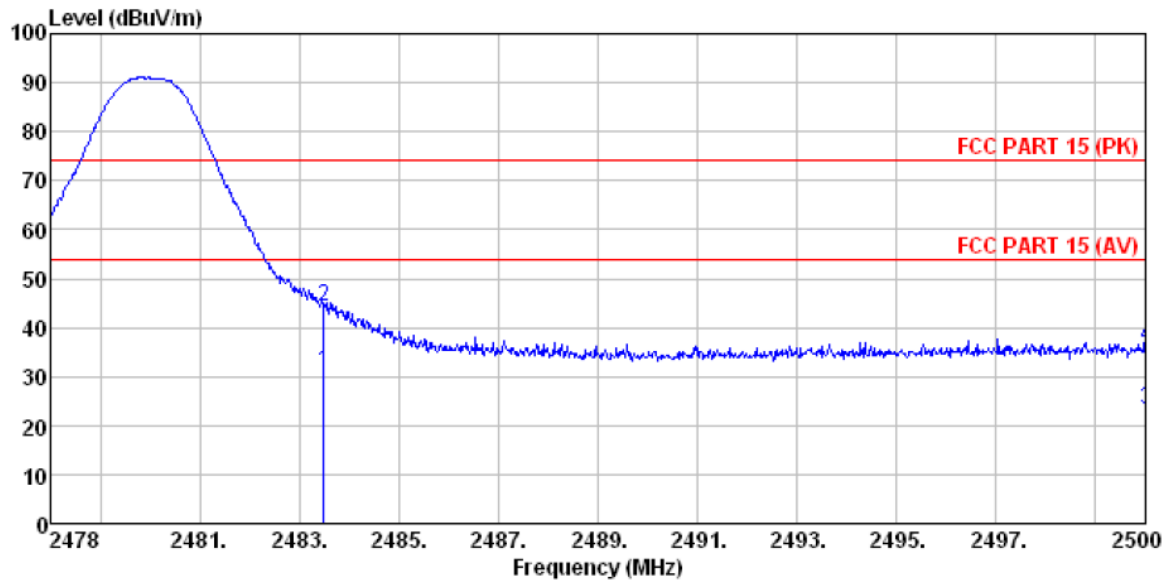


	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	32.07	27.53	5.47	33.92	31.15	54.00	-22.85 Average
2	2483.500	45.11	27.53	5.47	33.92	44.19	74.00	-29.81 Peak
3	2500.000	24.02	27.55	5.49	33.90	23.16	54.00	-30.84 Average
4	2500.000	36.94	27.55	5.49	33.90	36.08	74.00	-37.92 Peak

5.3.27 Diagram 5-27

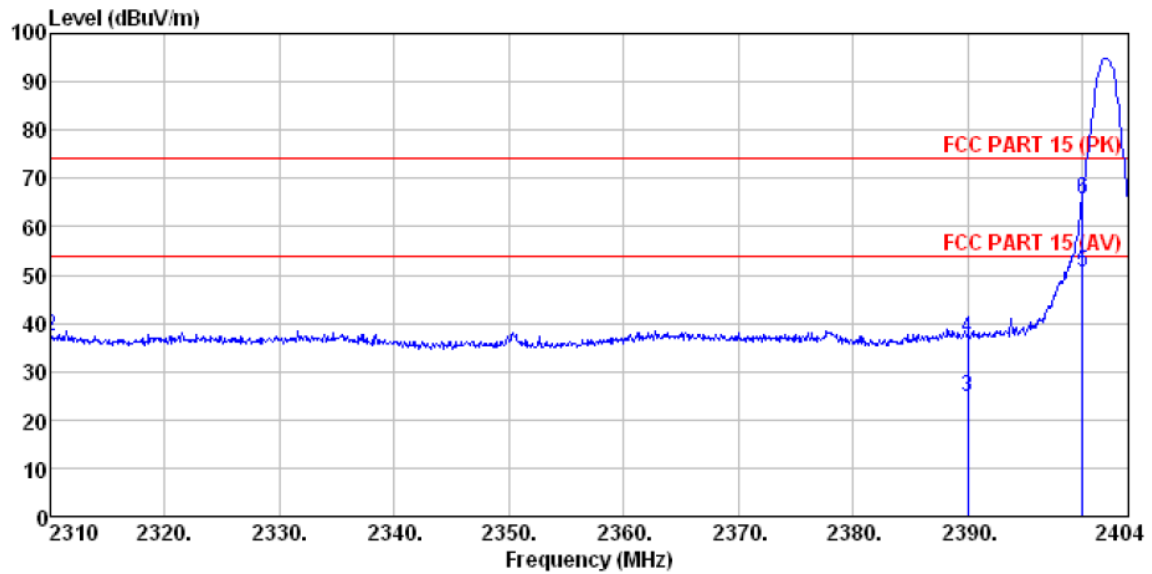


	Freq	ReadAntenna Level	Cable Preamp Factor	Loss Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2310.000	23.66	27.91	5.30	34.11	22.76	54.00	-31.24 Average
2	2310.000	38.03	27.91	5.30	34.11	37.13	74.00	-36.87 Peak
3	2390.000	25.65	27.59	5.38	34.01	24.61	54.00	-29.39 Average
4	2390.000	38.02	27.59	5.38	34.01	36.98	74.00	-37.02 Peak
5	2400.000	51.46	27.58	5.39	34.01	50.42	54.00	-3.58 Average
6	2400.000	66.88	27.58	5.39	34.01	65.84	74.00	-8.16 Peak

5.3.28 Diagram 5-28

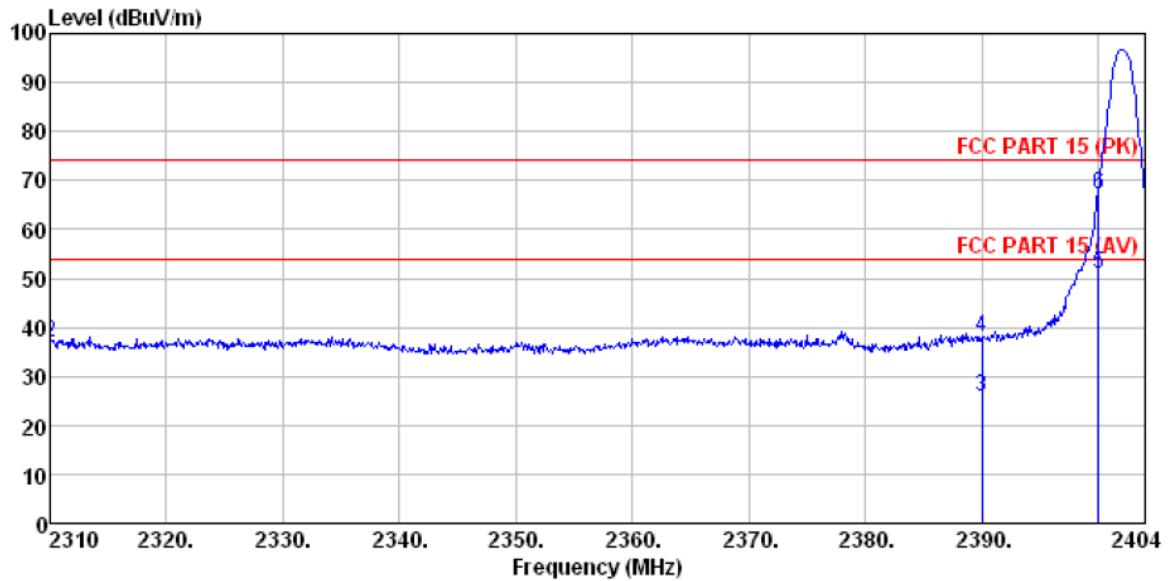


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	2310.000	24.51	27.91	5.30	34.11	23.61	54.00 -30.39 Average
2	2310.000	37.92	27.91	5.30	34.11	37.02	74.00 -36.98 Peak
3	2390.000	26.95	27.59	5.38	34.01	25.91	54.00 -28.09 Average
4	2390.000	39.02	27.59	5.38	34.01	37.98	74.00 -36.02 Peak
5	2400.000	52.00	27.58	5.39	34.01	50.96	54.00 -3.04 Average
6	2400.000	68.34	27.58	5.39	34.01	67.30	74.00 -6.70 Peak

5.3.29 Diagram 5-29

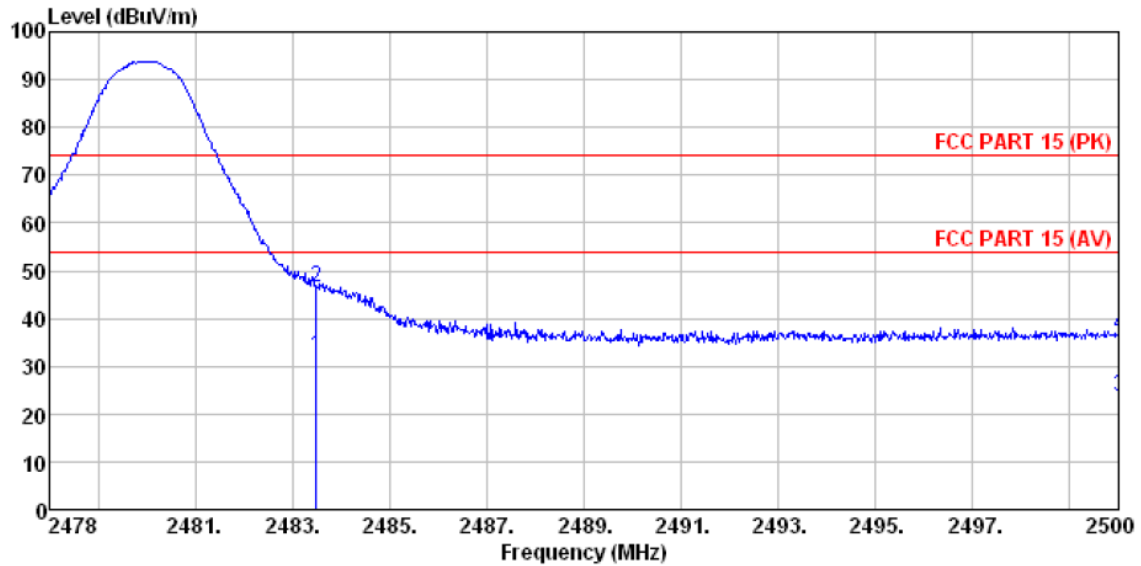

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	33.06	27.53	5.47	33.92	32.14	54.00	-21.86	Average
2	2483.500	47.30	27.53	5.47	33.92	46.38	74.00	-27.62	Peak
3	2500.000	24.32	27.55	5.49	33.90	23.46	54.00	-30.54	Average
4	2500.000	37.52	27.55	5.49	33.90	36.66	74.00	-37.34	Peak

5.3.30 Diagram 5-30

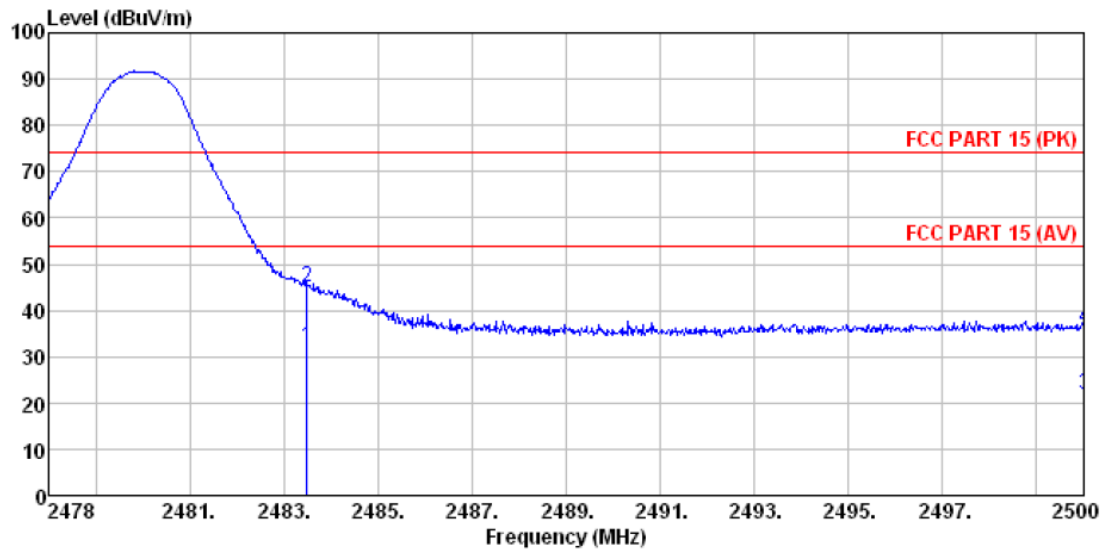

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	32.96	27.53	5.47	33.92	32.04	54.00	-21.96	Average
2	2483.500	45.88	27.53	5.47	33.92	44.96	74.00	-29.04	Peak
3	2500.000	22.45	27.55	5.49	33.90	21.59	54.00	-32.41	Average
4	2500.000	37.18	27.55	5.49	33.90	36.32	74.00	-37.68	Peak

6. 20 dB and 99% bandwidth Test

6.1 Test Procedure

Clause 15.215(c) 20dB Bandwidth:

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


6.2 Measurement Equipment



	Equipment	Calibration Due	Type	Serial No.	Manufacturer
☒	Spectrum	Jul. 04 2014	FSP30	GTS208	RS

6.3 Test Result:

Modulation	Channel	99% bandwidth	20dB bandwidth
GFSK	CHL	827.4265KHz	840.598KHz
	CHM	828.7862KHz	840.533KHz
	CHH	823.6910KHz	840.467KHz


GFSK diagrams are as below:


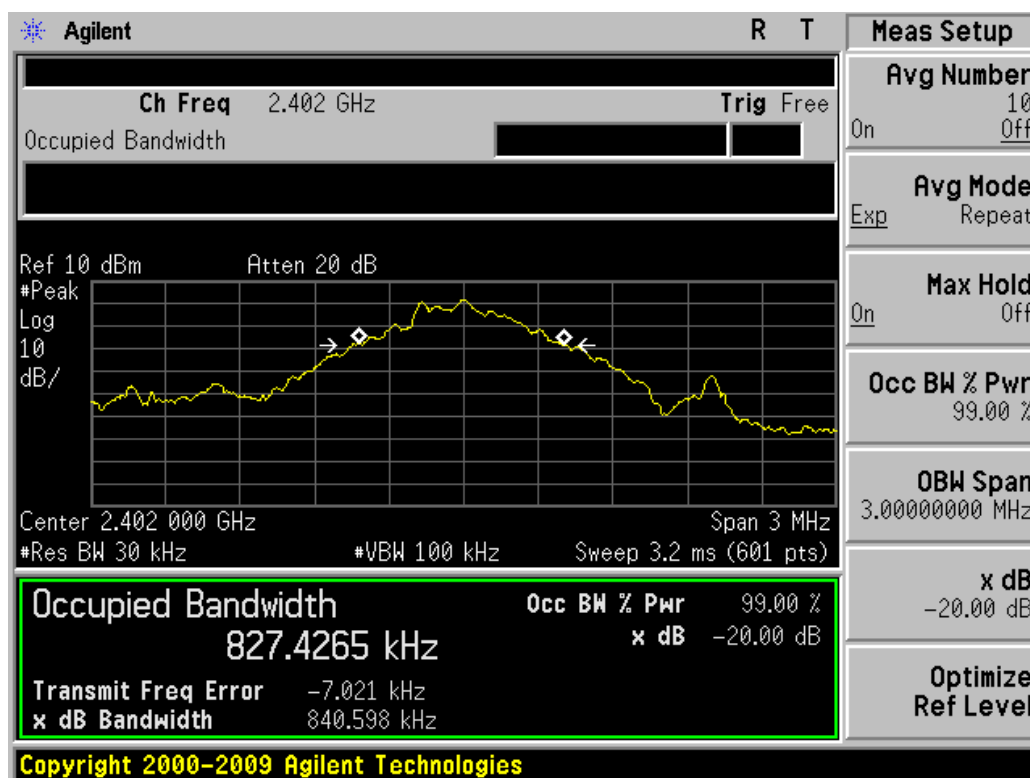


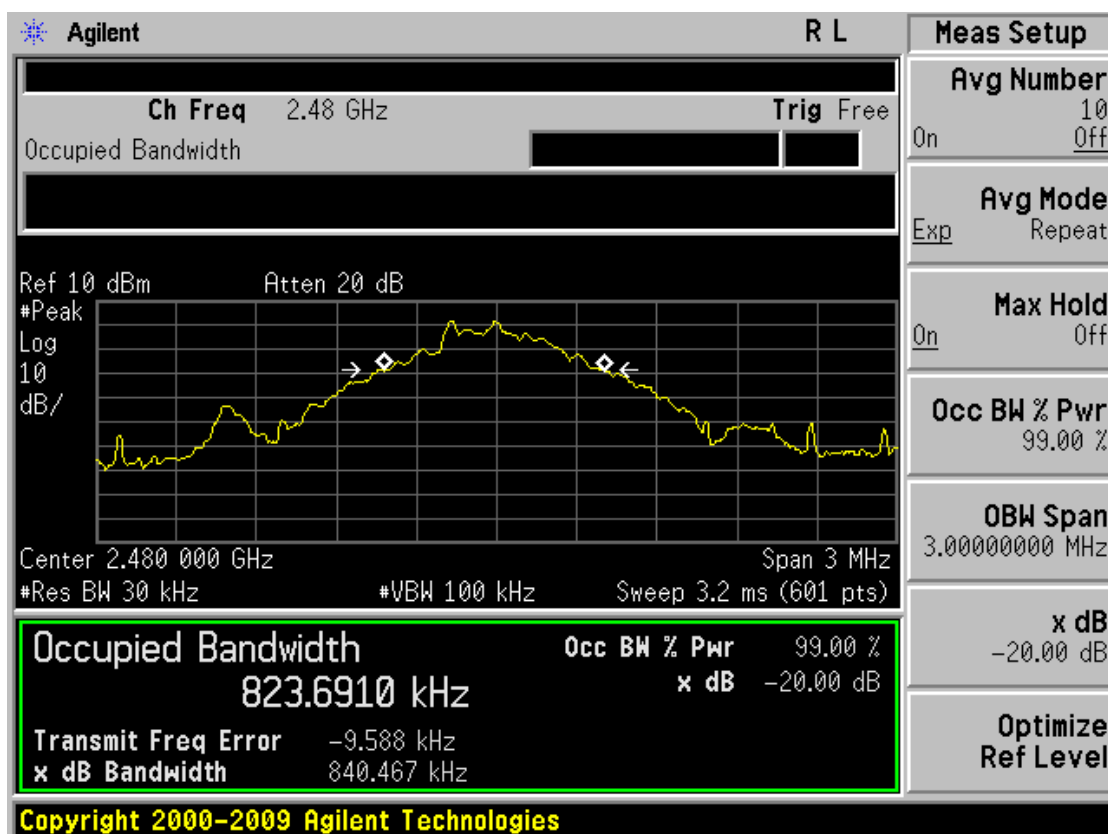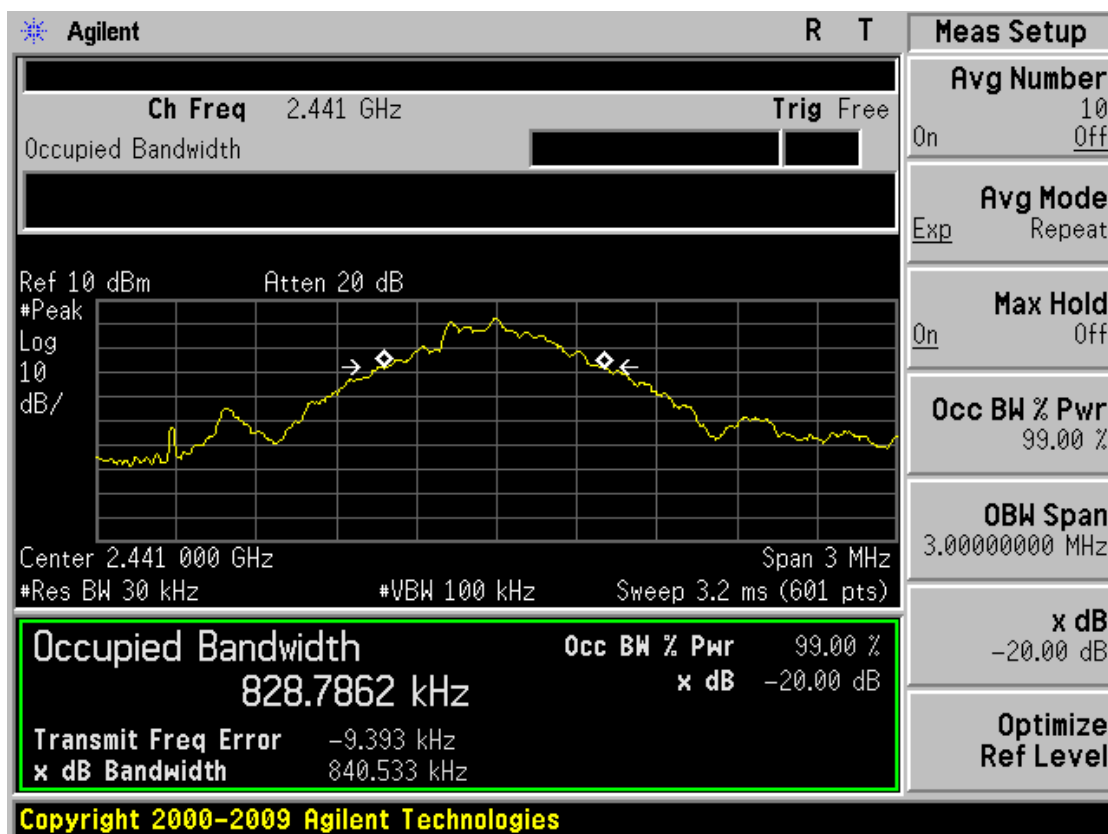

Modulation	Channel	99% bandwidth	20dB bandwidth
8DPSK	CHL	1.1979MHz	1.212MHz
	CHM	1.1918MHz	1.213MHz
	CHH	1.1666MHz	1.211MHz


8DPSK diagrams are as below:


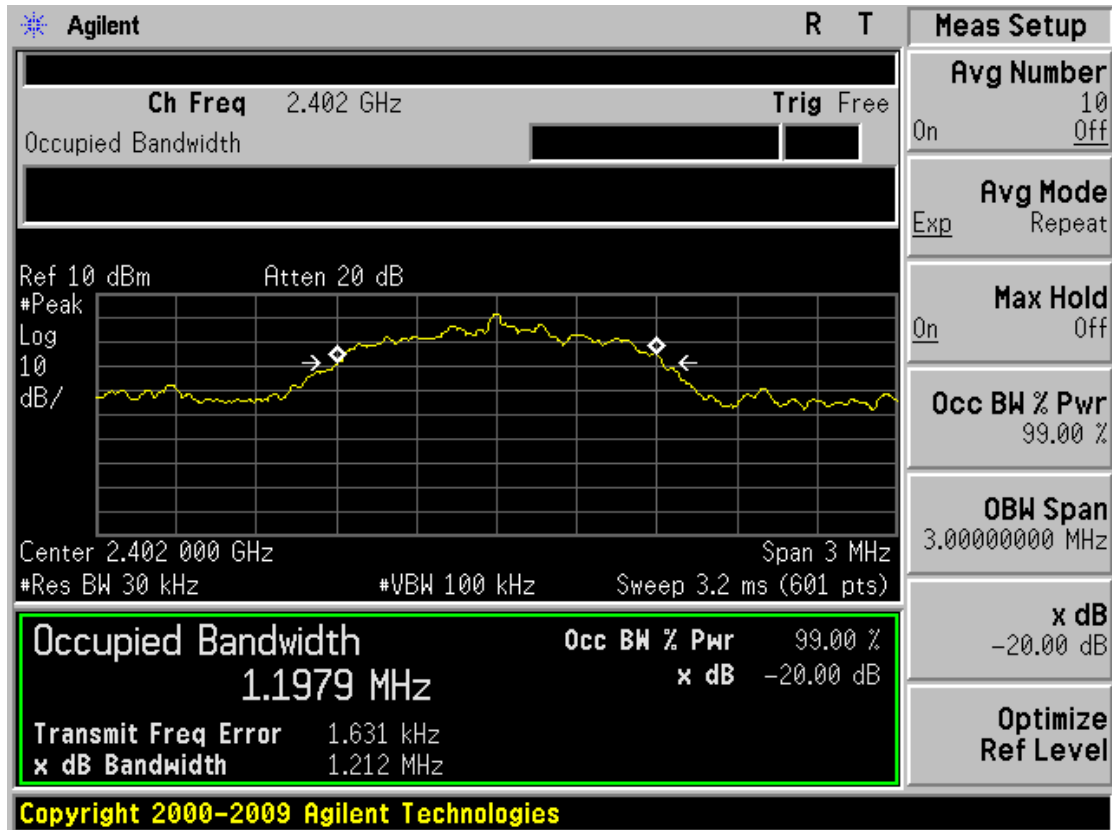


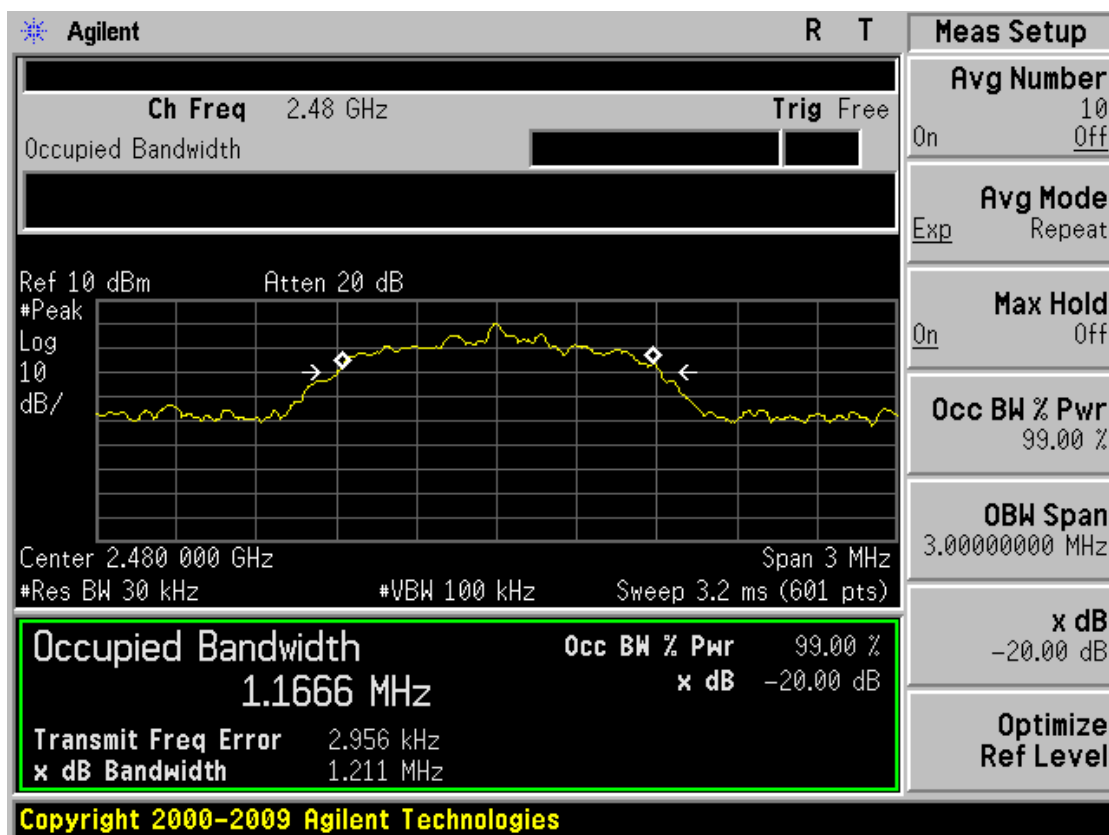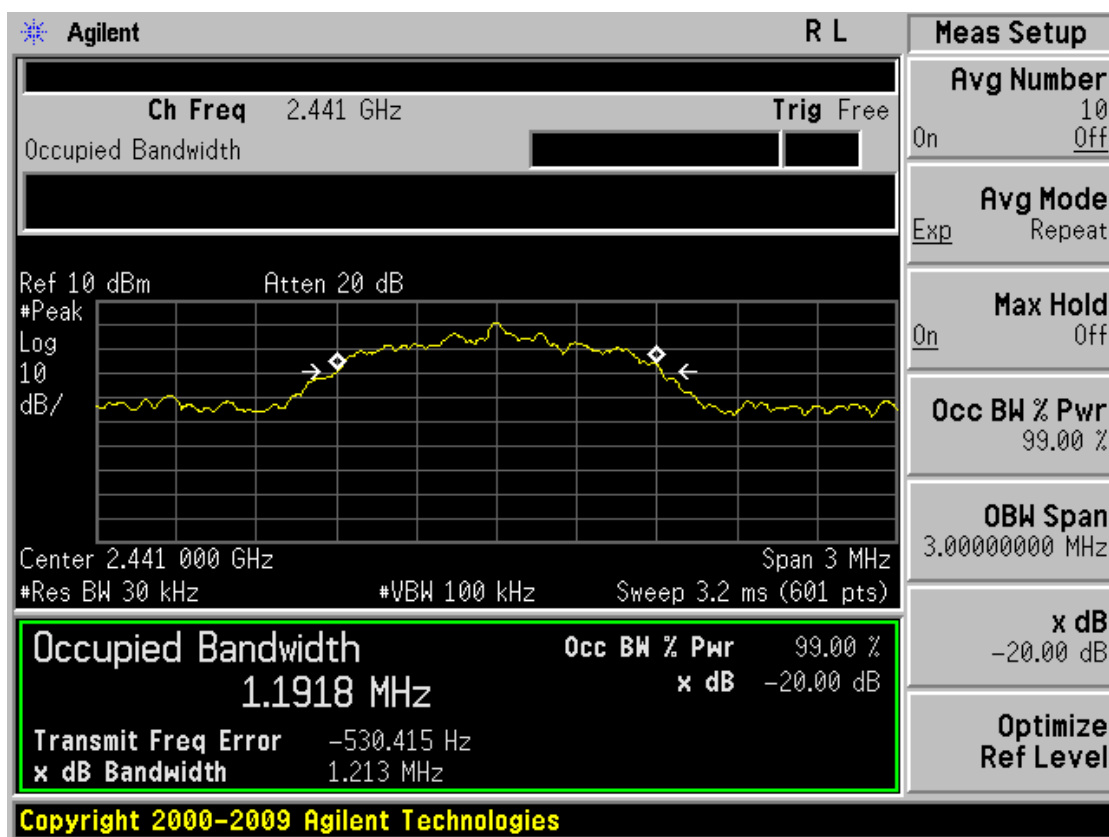

Modulation	Channel	99% bandwidth	20dB bandwidth
$\pi/4$ DQPSK	CHL	1.2213MHz	1.221MHz
	CHM	1.2088MHz	1.220MHz
	CHH	1.1838MHz	1.221MHz

$\pi/4$ DQPSK diagrams are as below:

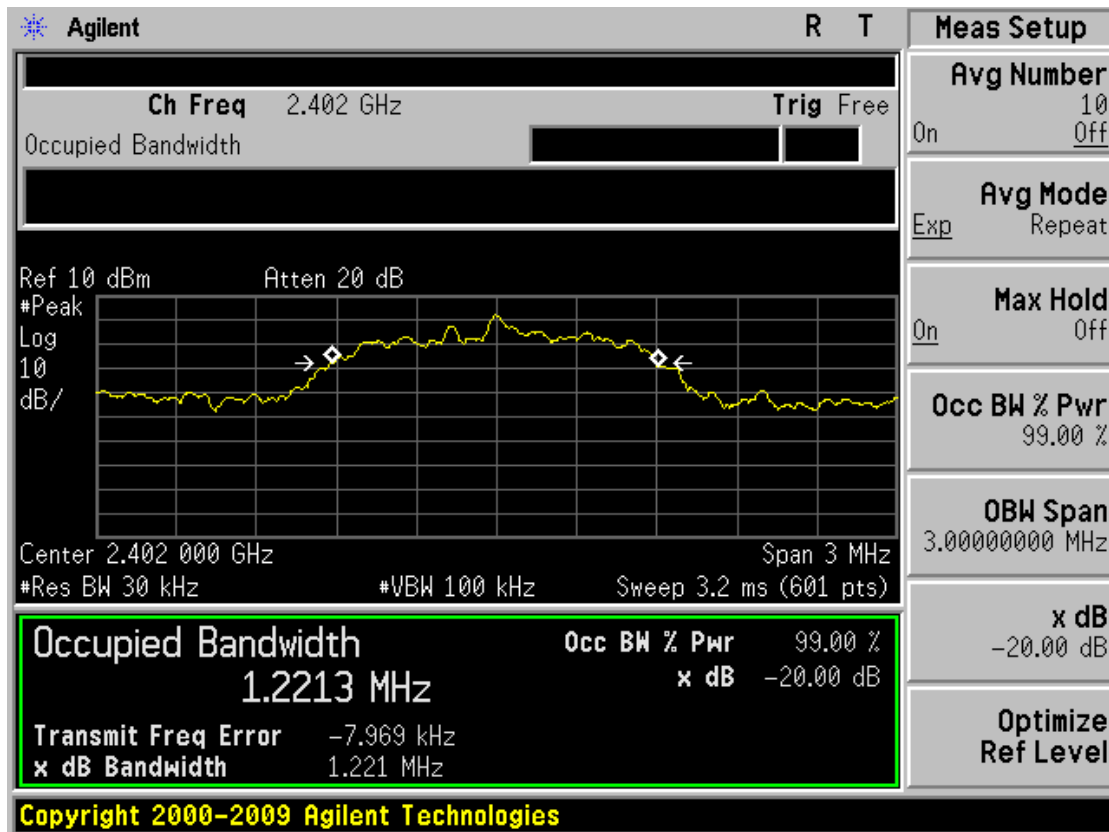

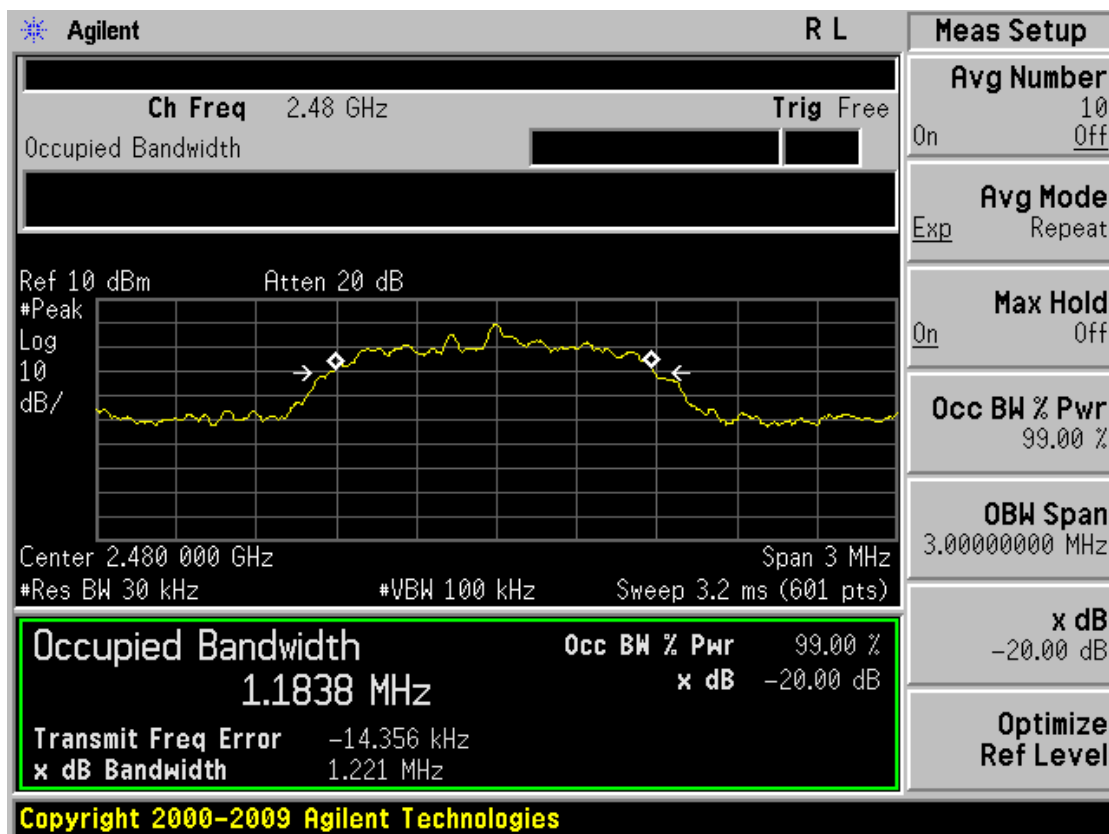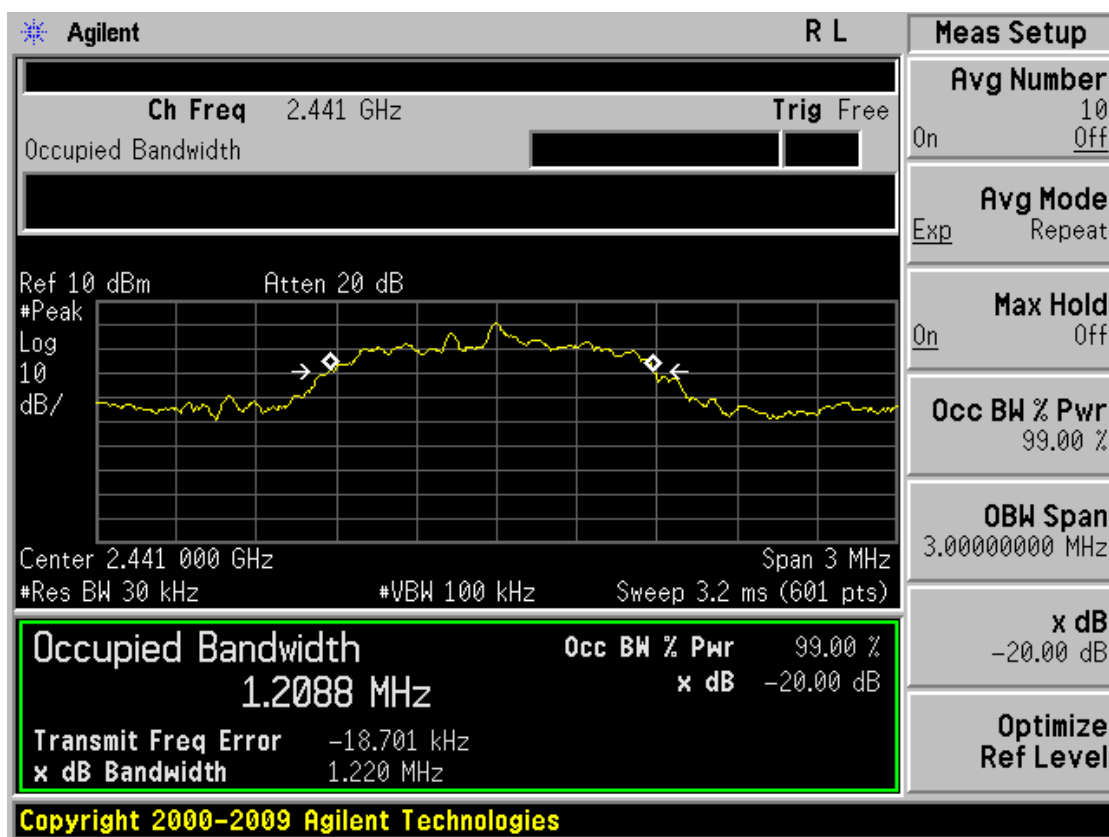

7. Band Edge Compliance Test

7.1 Test Procedure

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.


7.2 Measurement Equipment

	Equipment	Calibration Due	Type	Serial No.	Manufacturer
☒	Spectrum	Jul. 04 2014	FSP30	GTS208	RS


7.3 Test Result

Remark: Worse case is reported as below:


GFSK Hopping off CHL :

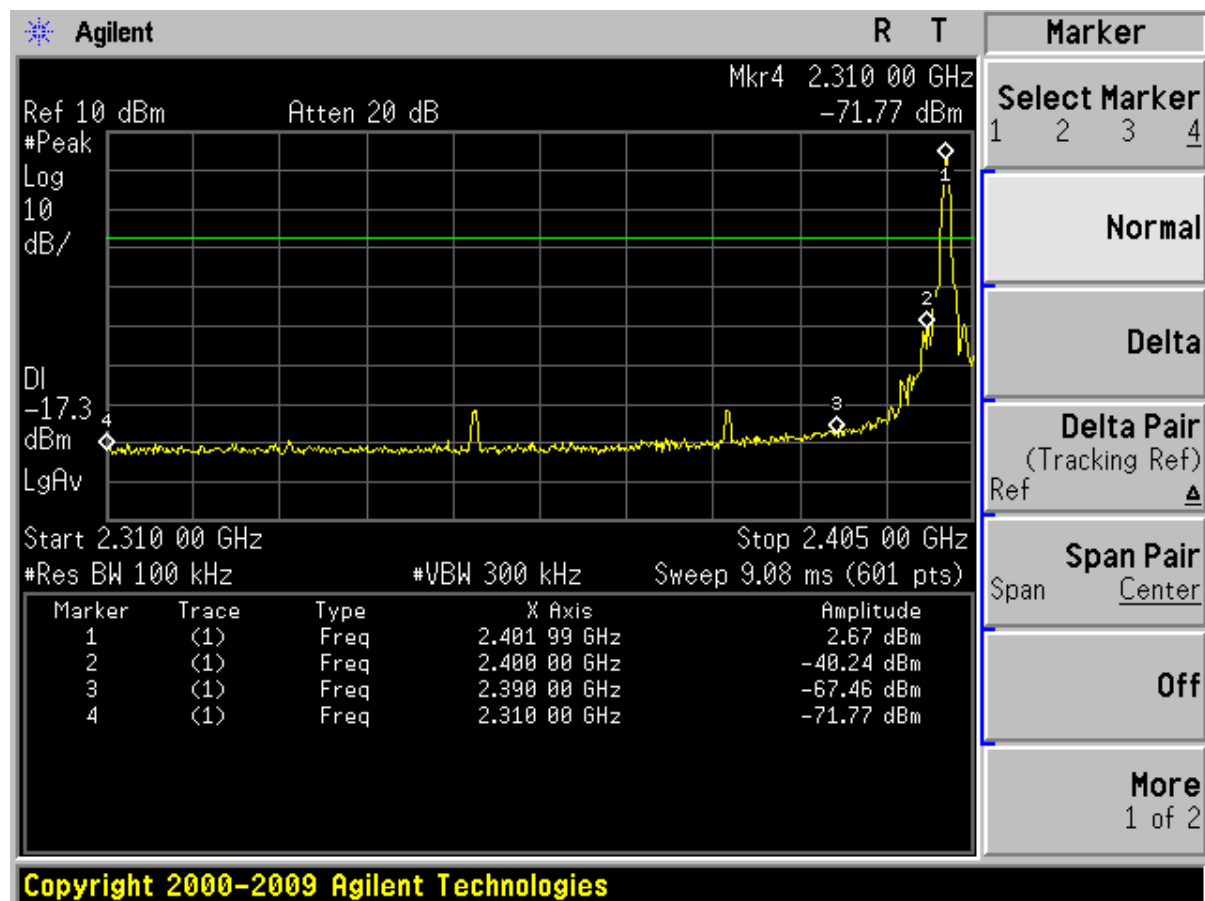


GFSK Hopping off CHH :

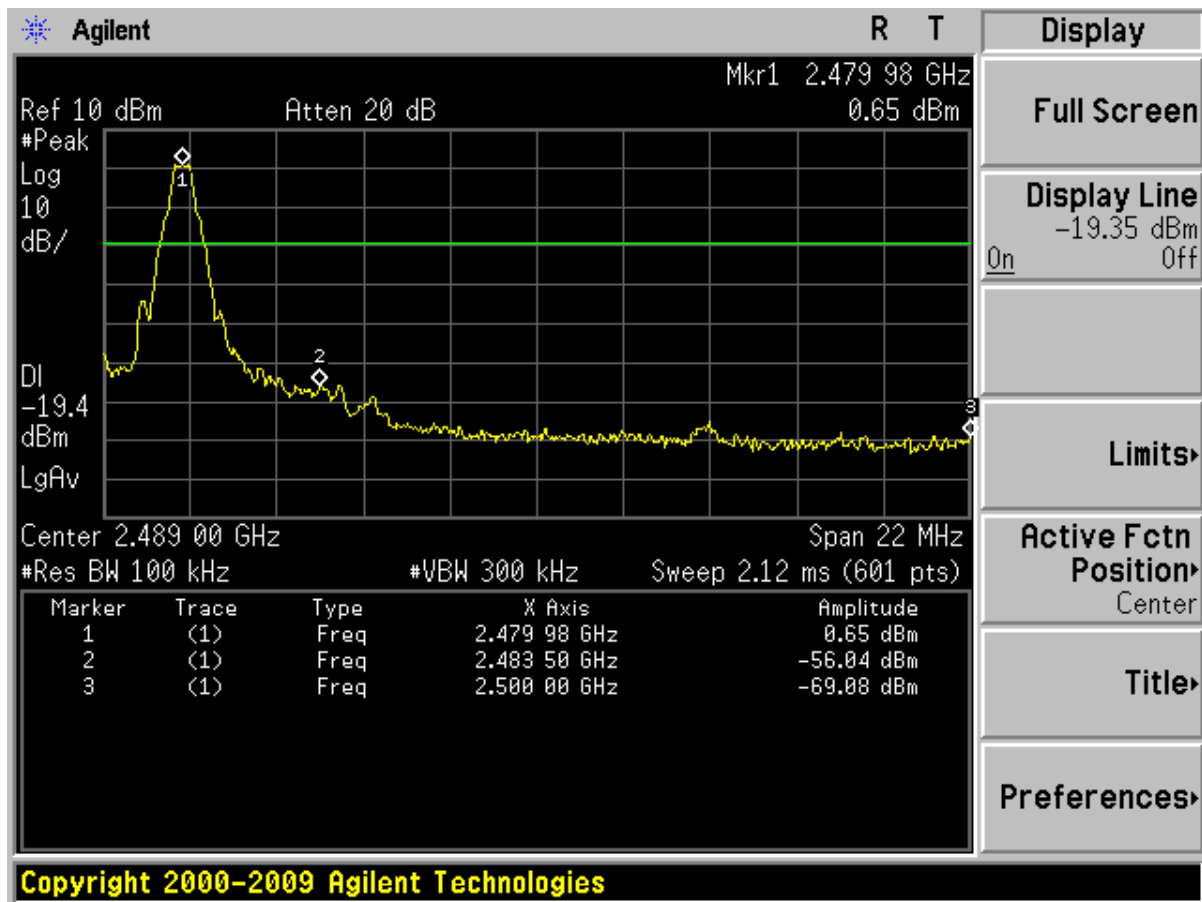


GFSK Hopping on CHL:

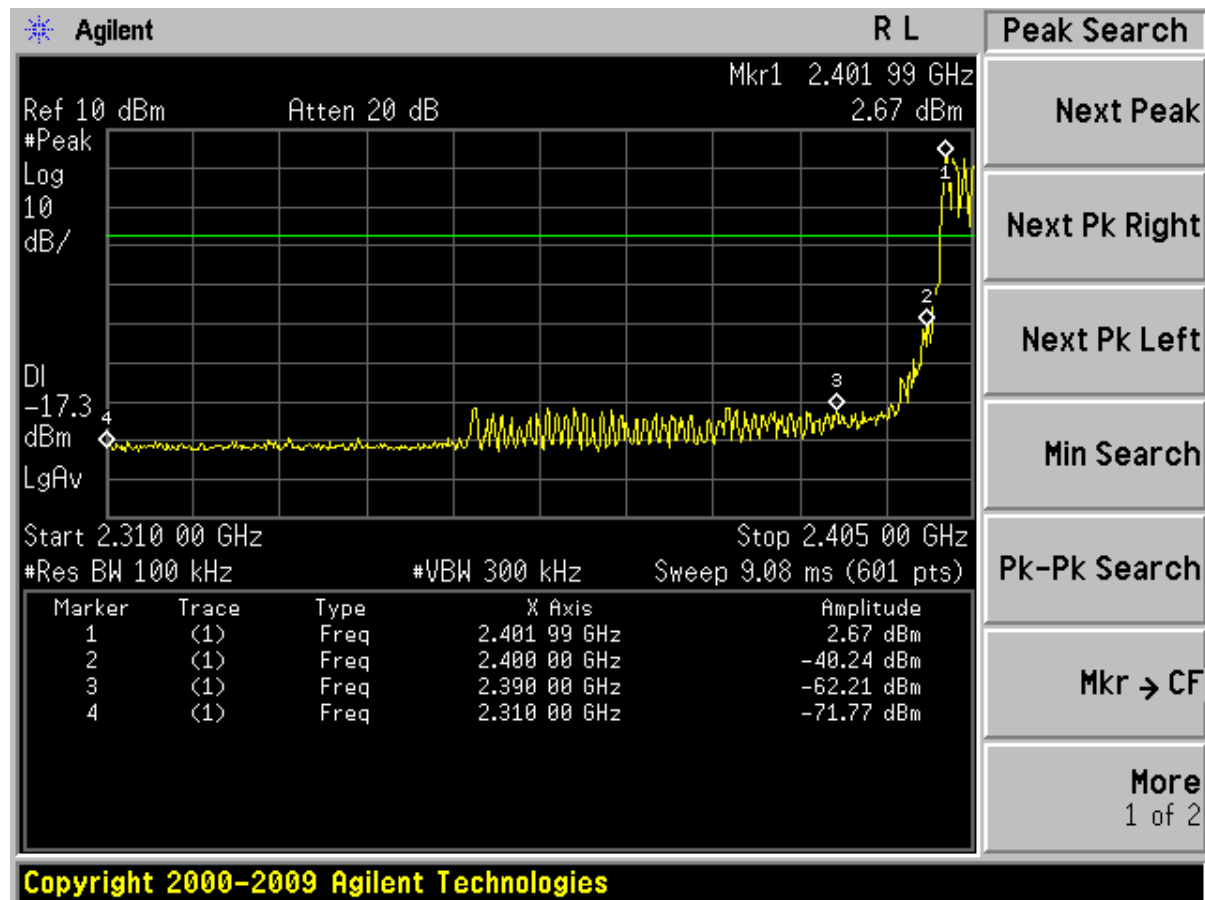


GFSK Hopping on CHH:

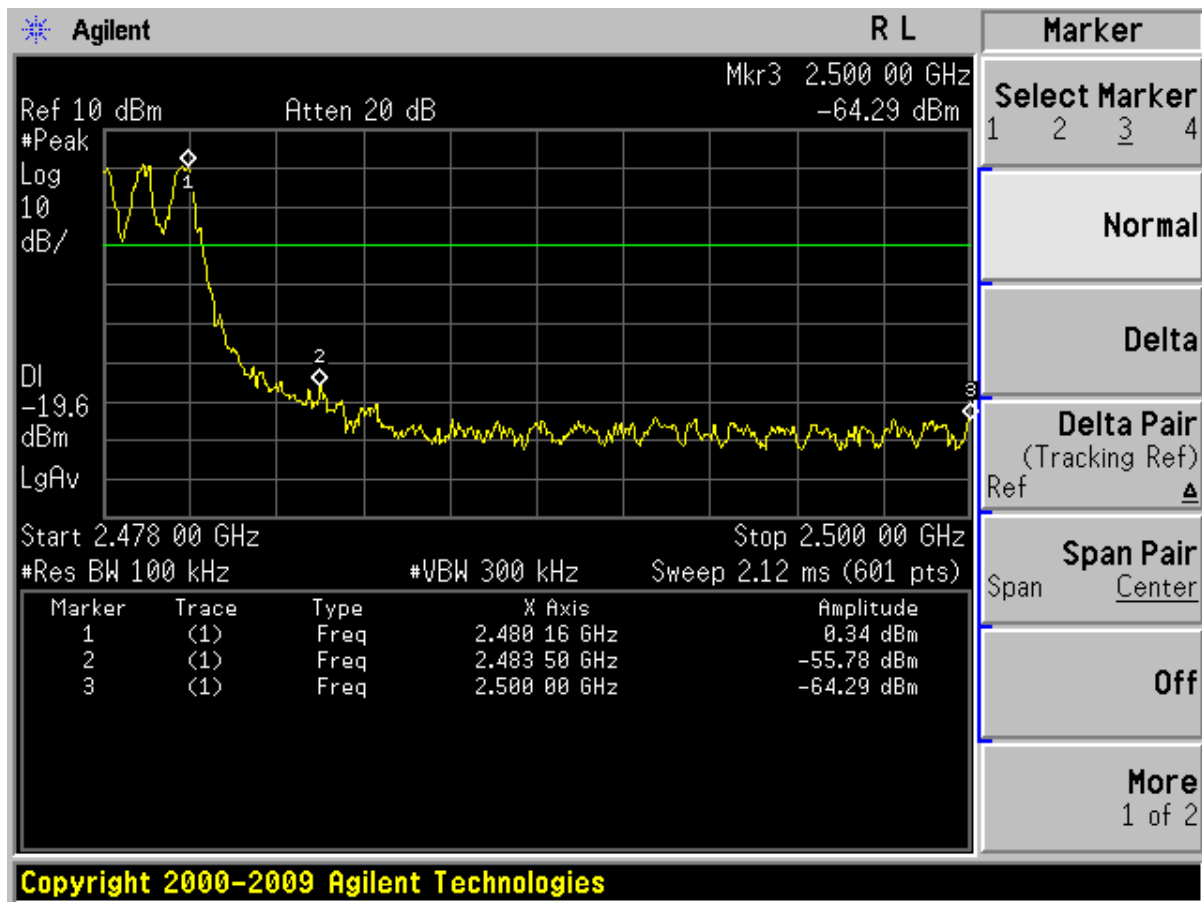


8DPSK Hopping off CHL :

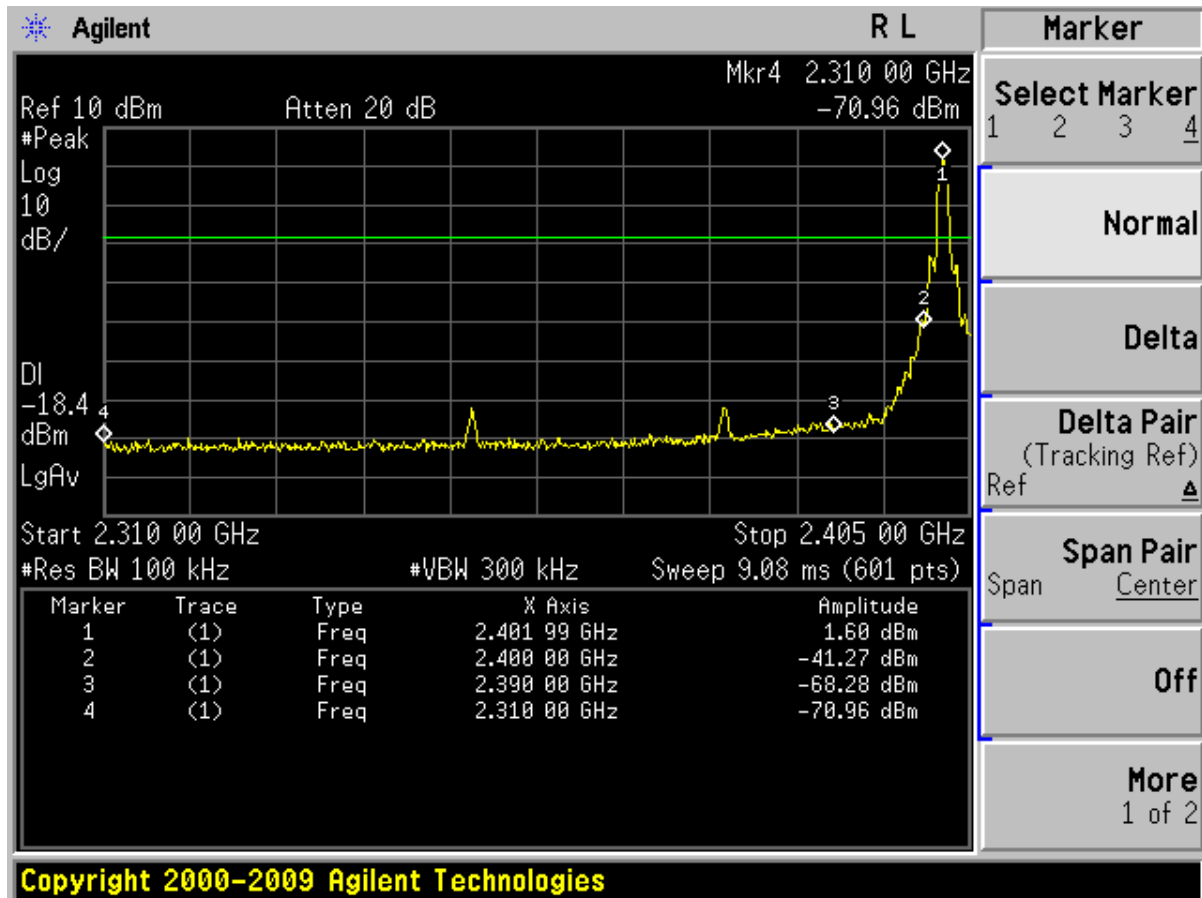


8DPSK Hopping off CHH :

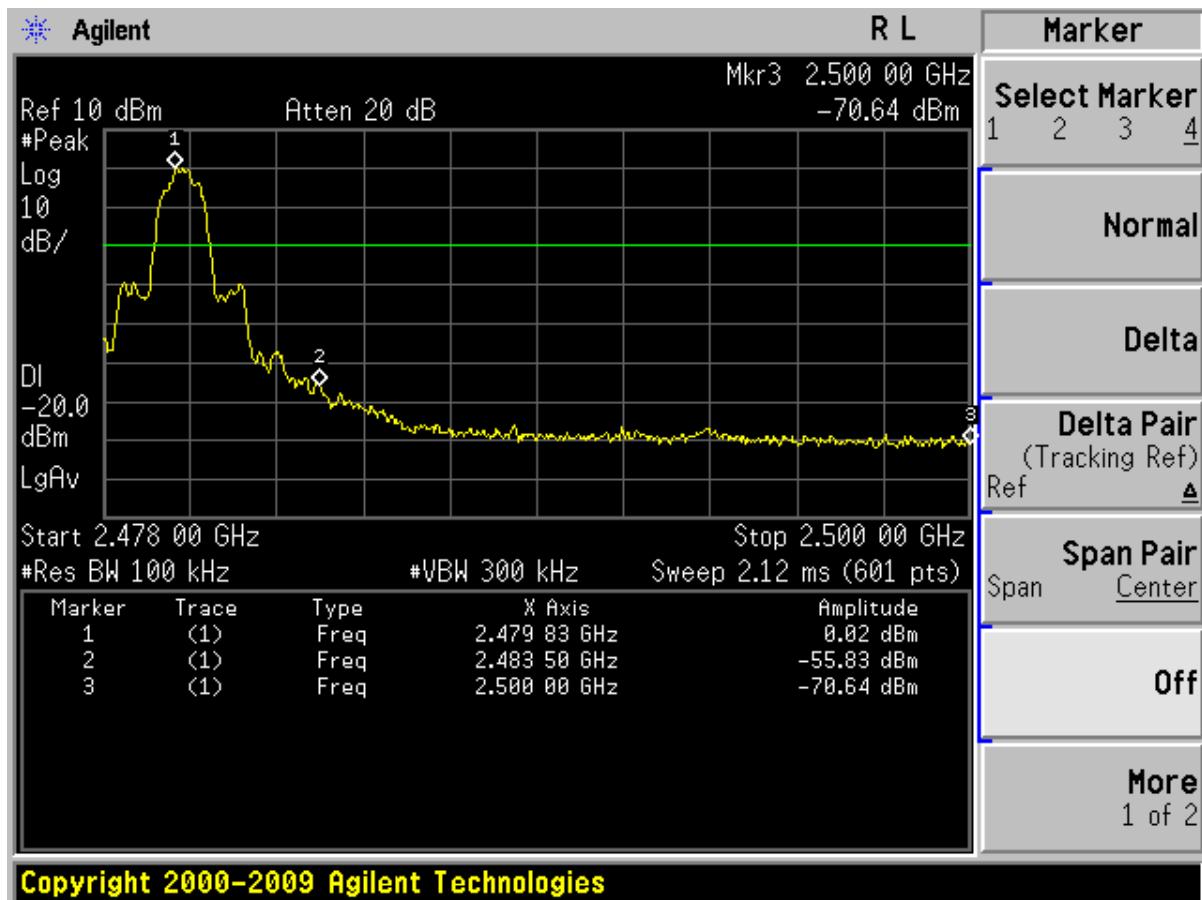


8DPSK Hopping on CHL :

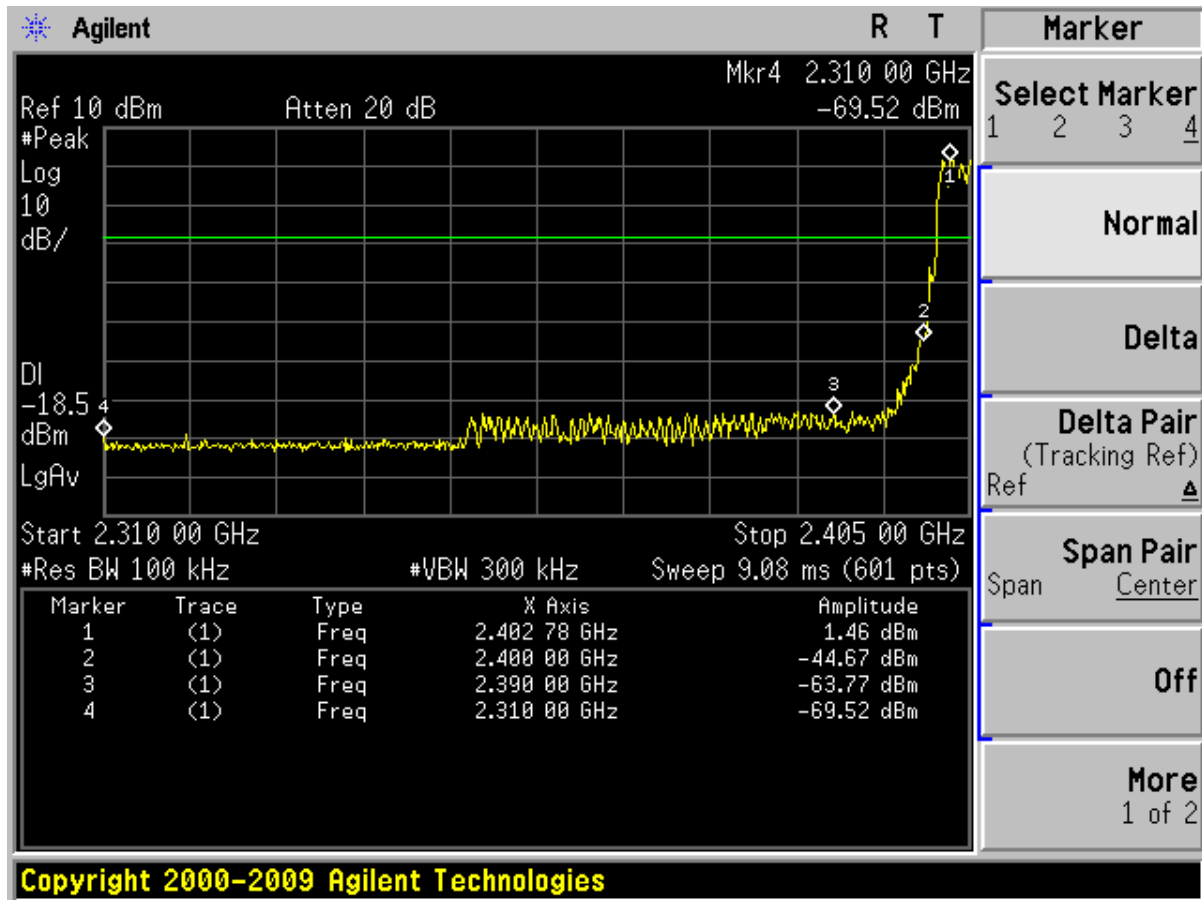


8DPSK Hopping on CHH :

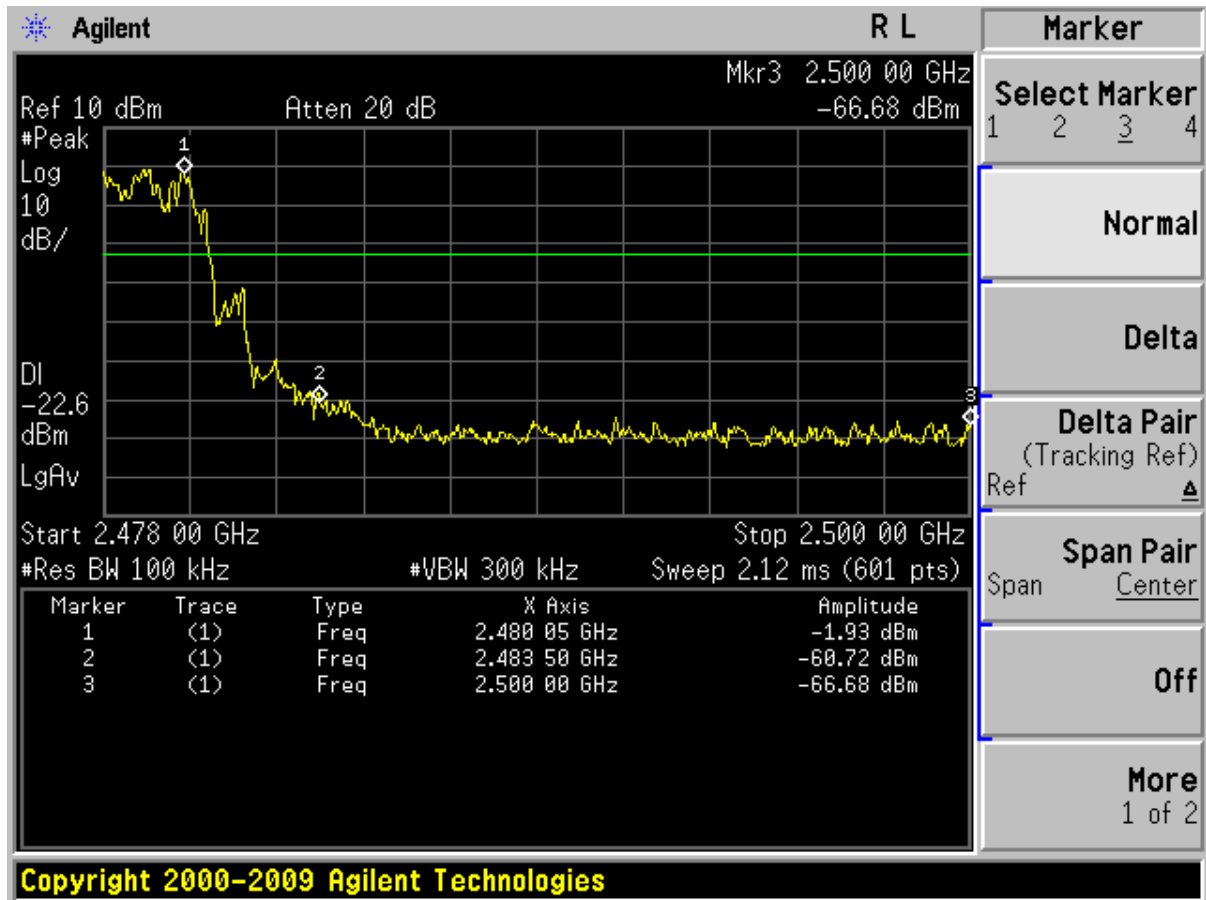


$\pi/4$ DQPSK Hopping off CHL :

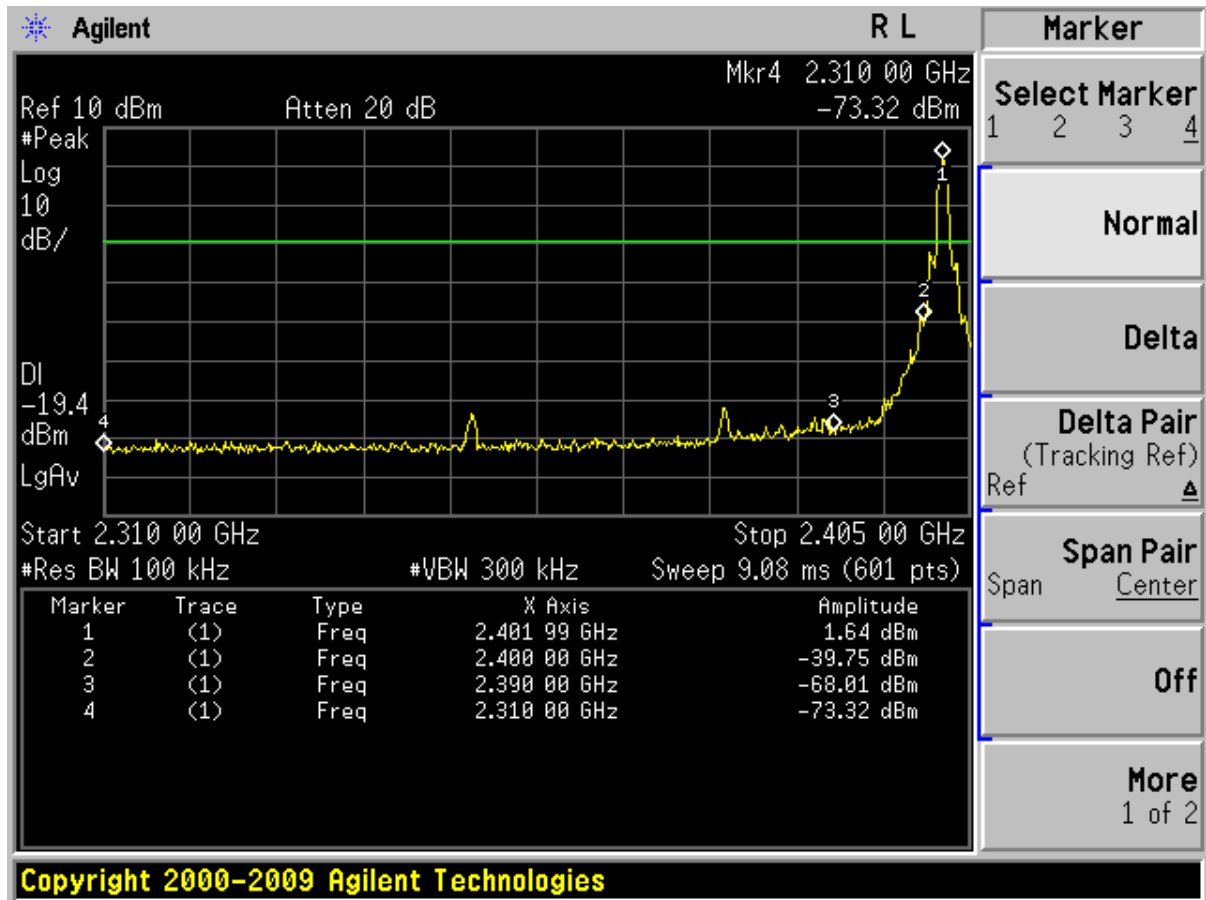


$\pi/4$ DQPSK Hopping off CHH :

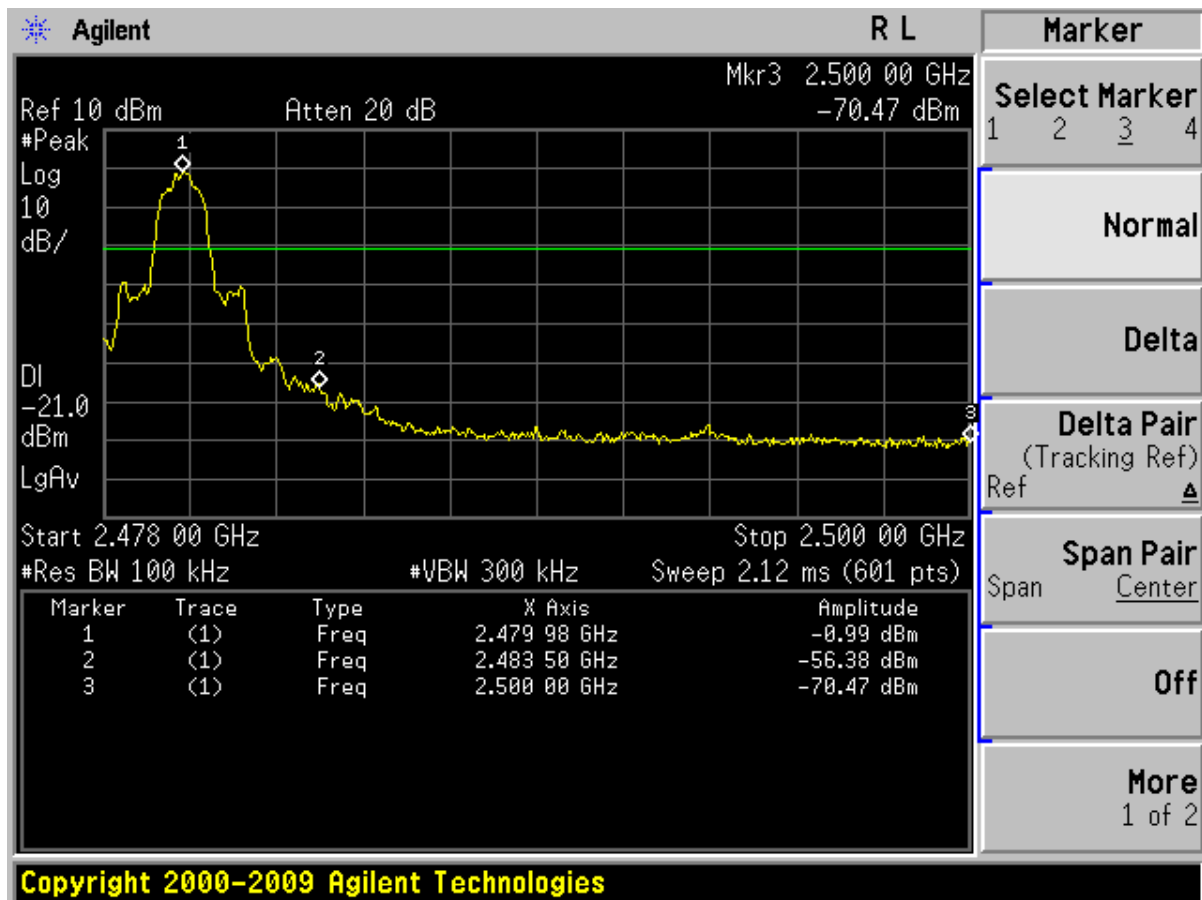

$\pi/4$ DQPSK Hopping on CHL :

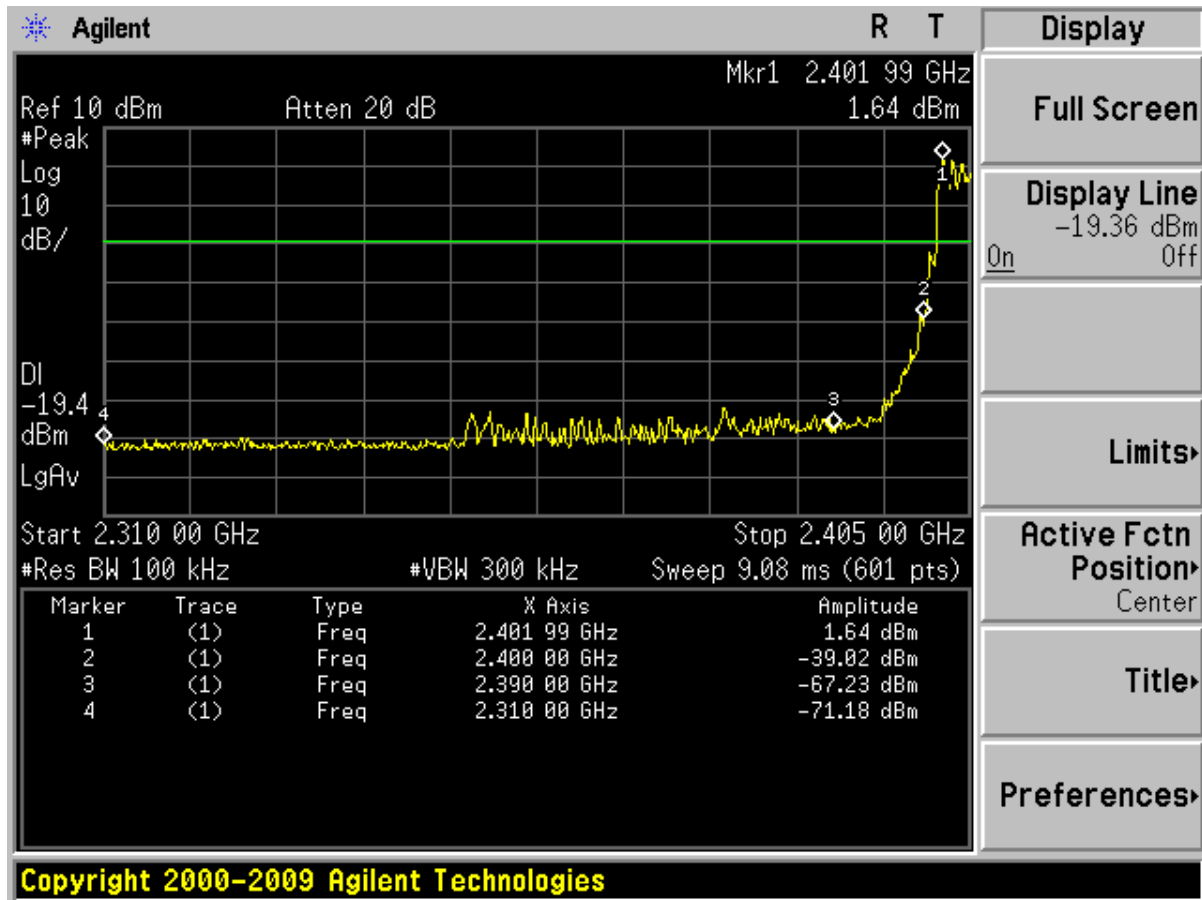

$\pi/4$ DQPSK Hopping on CHH:

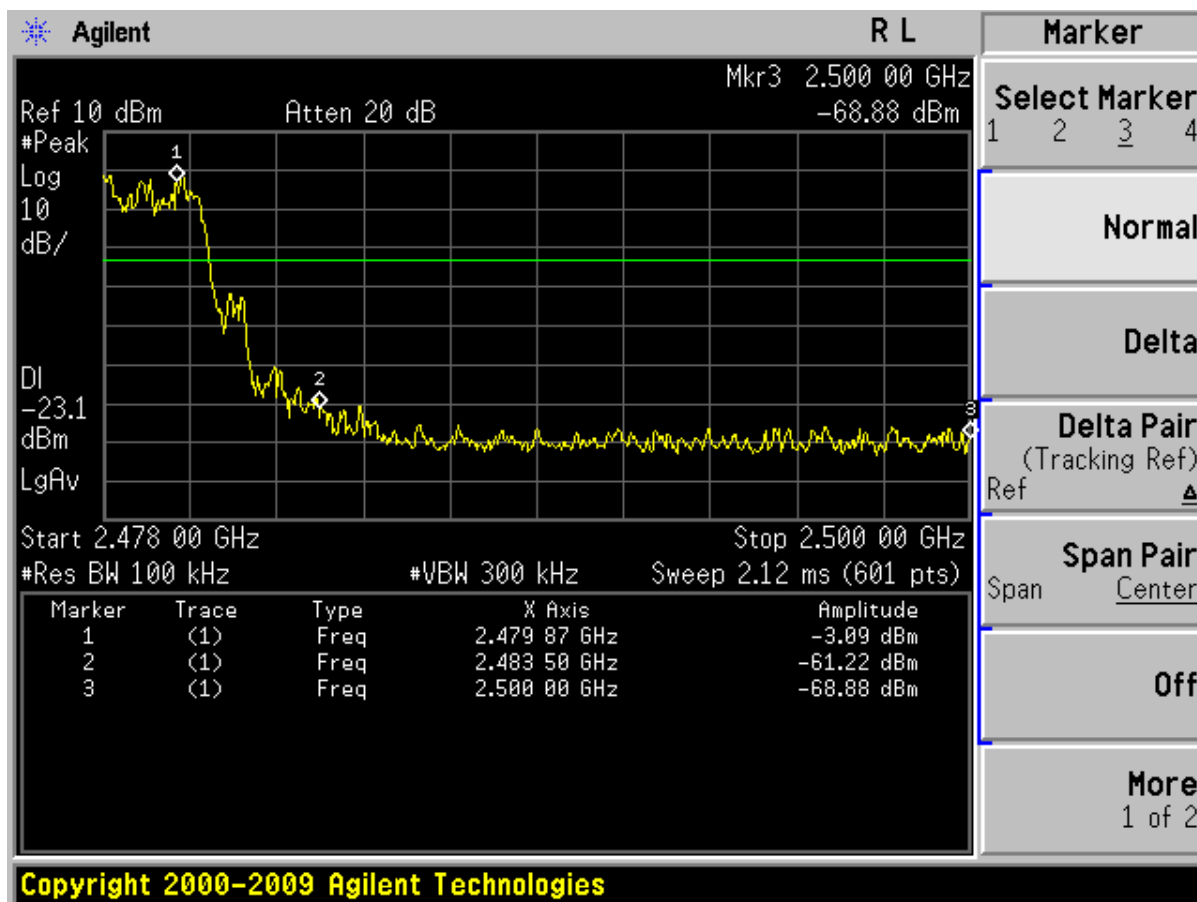

8. Carrier Frequency Separation Test

8.1 Test Procedure

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

The peak detector was used with 100 kHz/300 kHz RBW/VBW

8.2 Measurement Equipment

	Equipment	Calibration Due	Type	Serial No.	Manufacturer
☒	Spectrum	Jul. 04 2014	FSP30	GTS208	RS

8.3 Test Result

Channel separation is referred to 8.3.1 to 8.3.3


Widest channel bandwidth was 1.221MHz.

Two-thirds of Bandwidth is 0.814MHz and greater than 25kHz .

Modulation	Channel separation, kHz	Minimum limit, kHz	Result
GFSK	1MHz	814kHz	Pass
8DPSK	1MHz	814kHz	Pass
$\pi/4$ DQPSK	1MHz	814kHz	Pass


8.3.1 Diagram 8-1

GFSK :

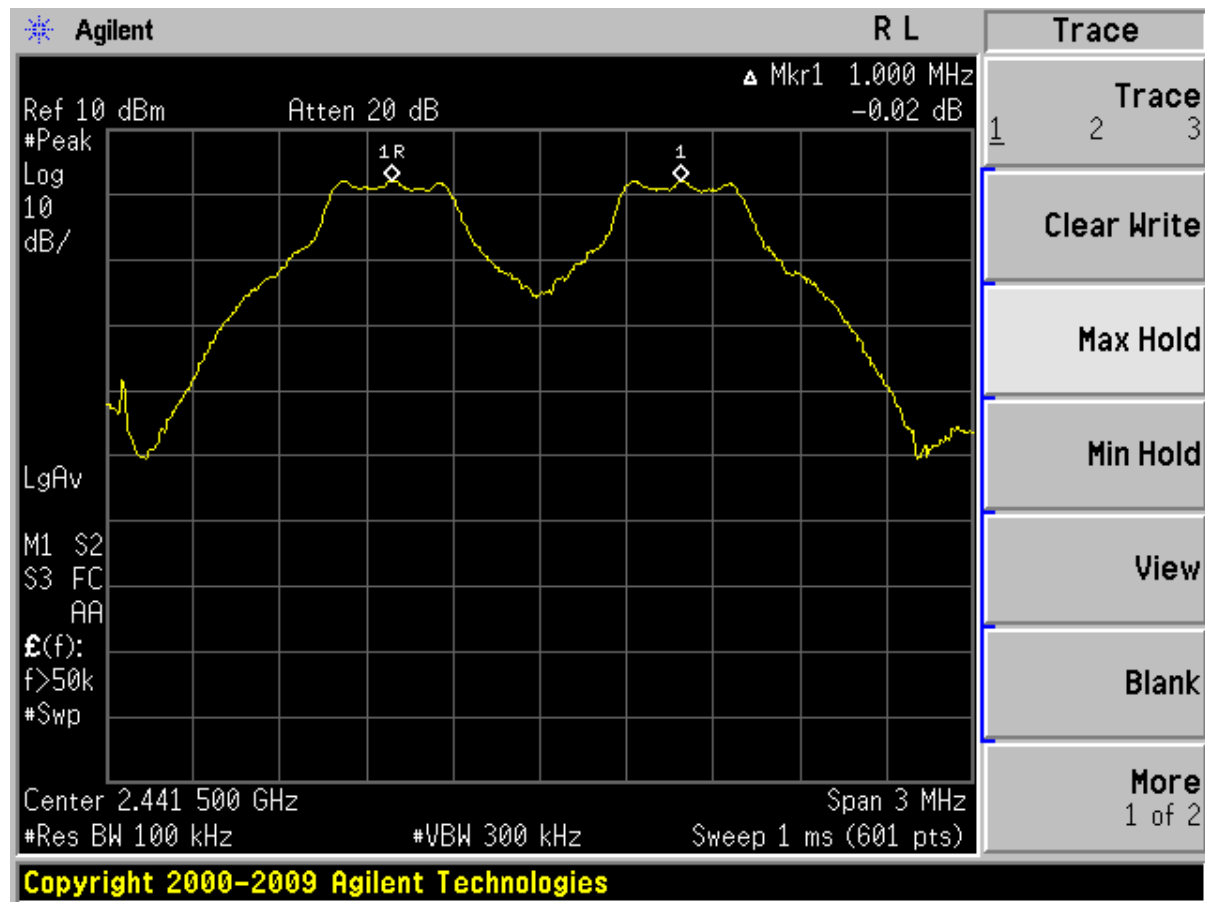


8.3.2 Diagram 8-2

8DPSK :

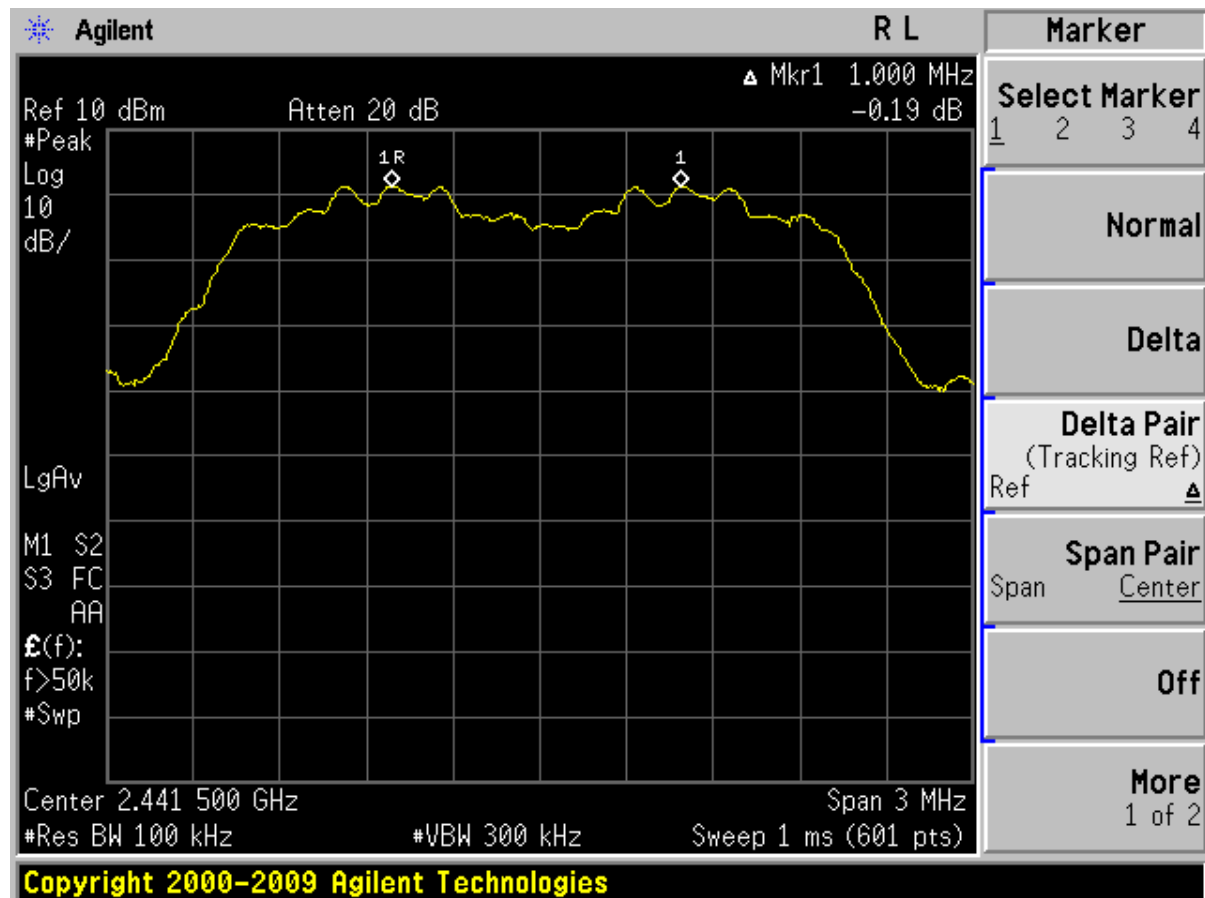

8.3.3 Diagram 8-3

$\pi/4$ DQPSK :

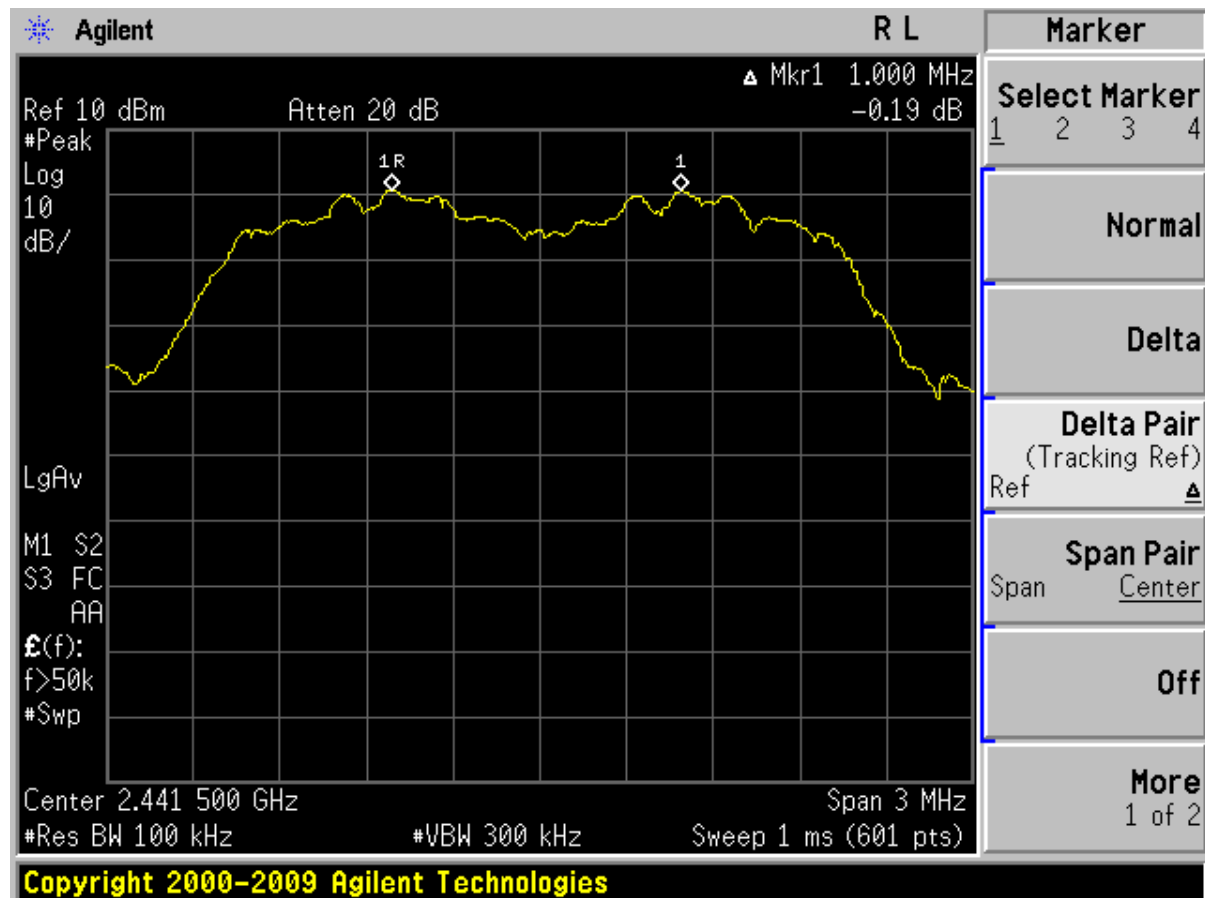

9. Output Power Test

9.1 Test Procedure

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 W.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

9.2 Measurement Equipment

	Equipment	Calibration Due	Type	Serial No.	Manufacturer
☒	Spectrum	Jul. 04 2014	FSP30	GTS208	RS


9.3 Test Result



Remark : 1:RBW>=20dB Bandwidth VBW>=RBW PK detector

GFSK:

Frequency, MHz	Reading dBm	Cable loss dB	Output power, dBm	Power Limit, dBm
2402	1.83	1	2.83	30.00
2441	1.95	1	2.95	30.00
2480	1.20	1	2.20	30.00

Diagram of GFSK is as below:

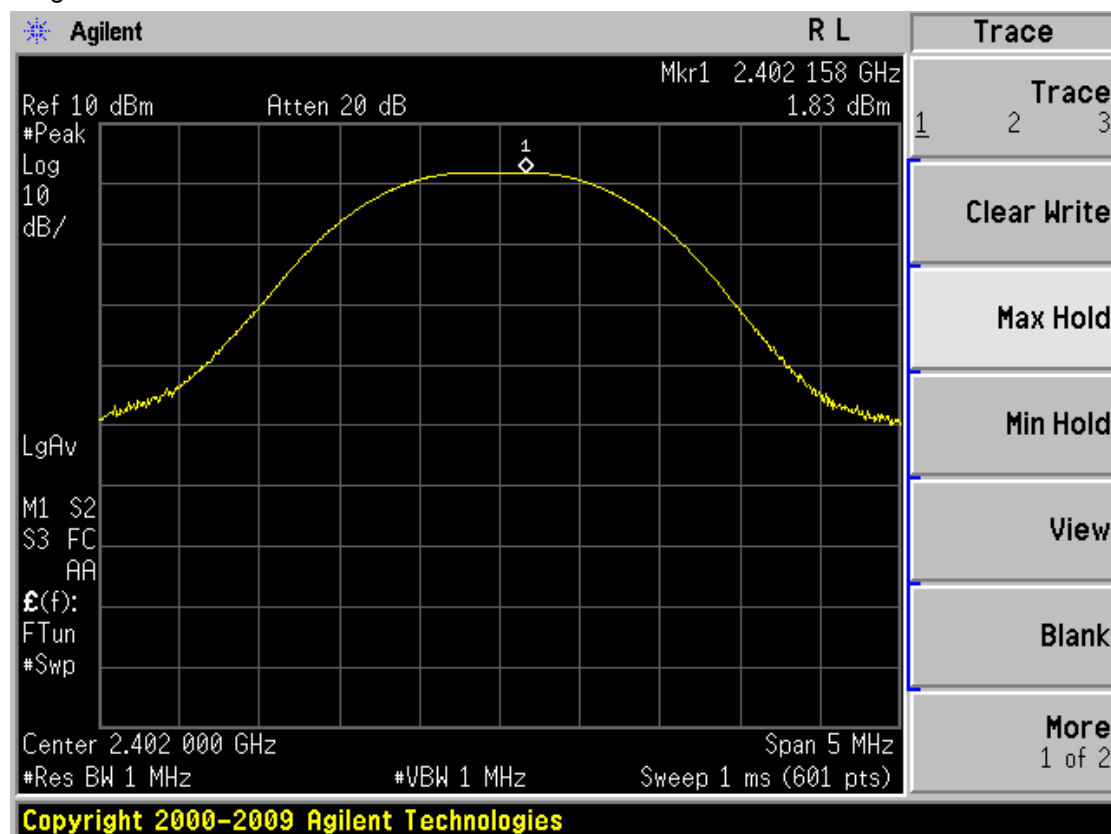


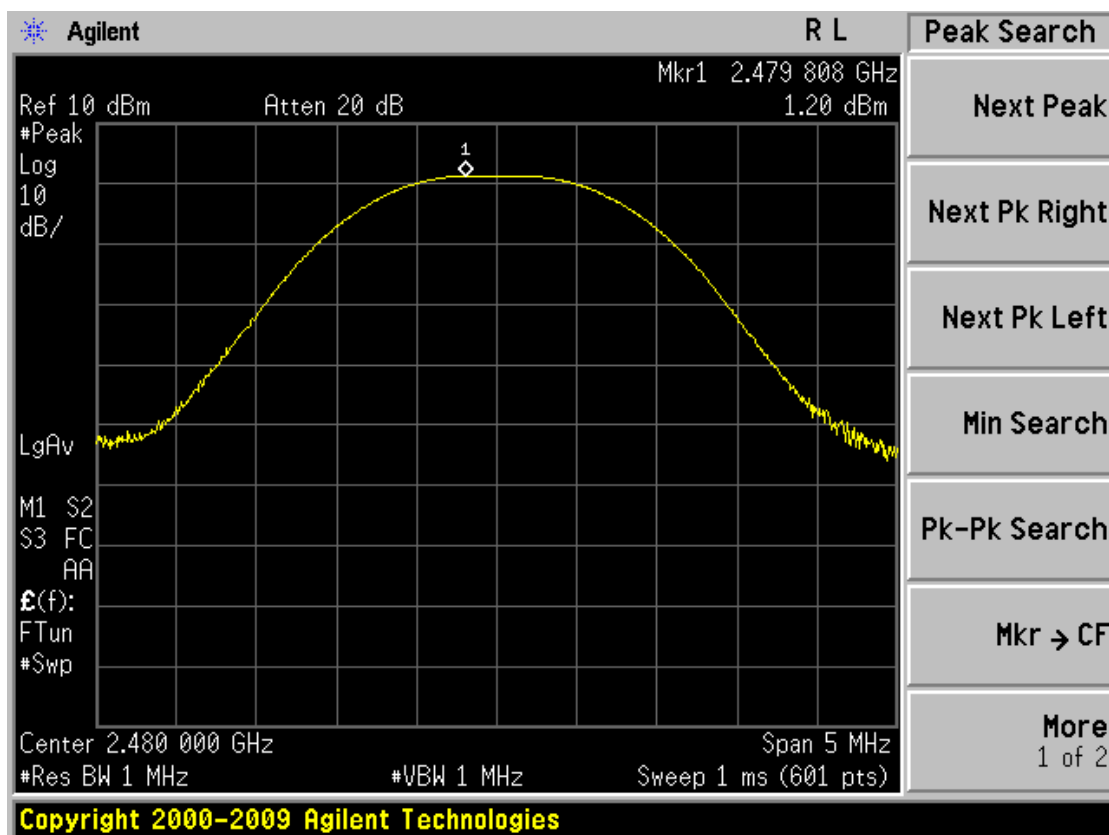
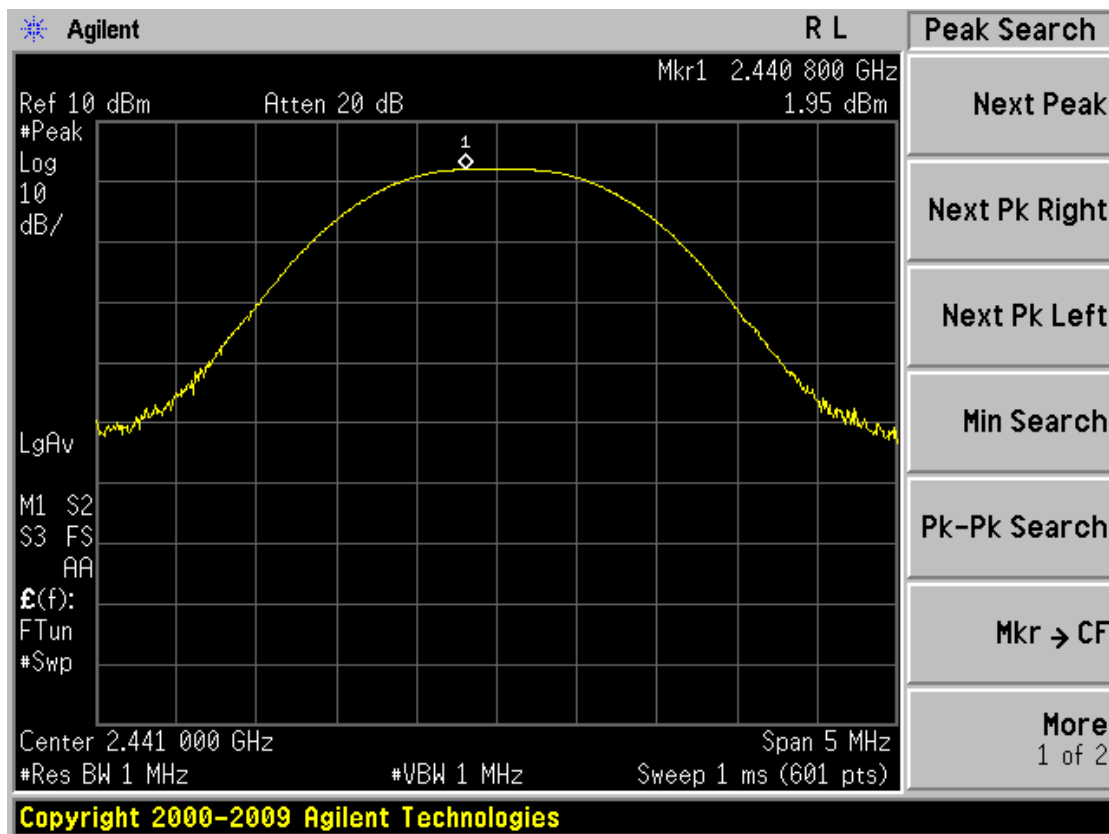


8DPSK:

Frequency, MHz	Reading dBm	Cable loss dB	Output power, dBm	Power Limit, dBm
2402	1.76	1	2.76	30.00
2441	1.28	1	2.28	30.00
2480	0.38	1	1.38	30.00

Diagram of 8DPSK is as below:

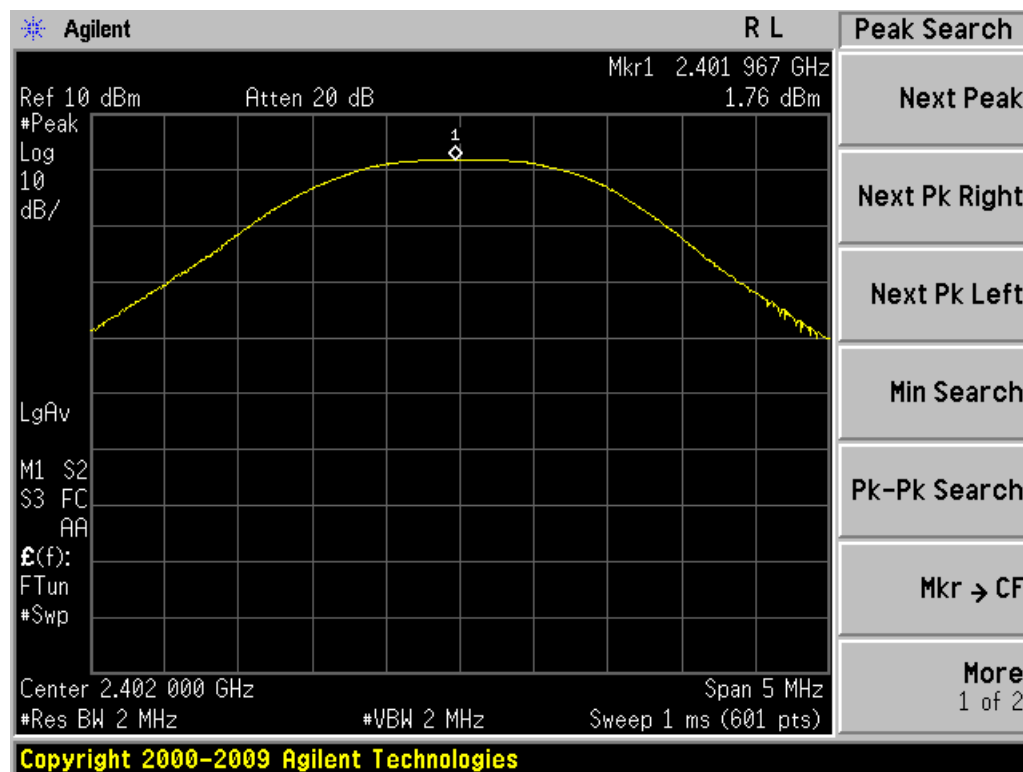


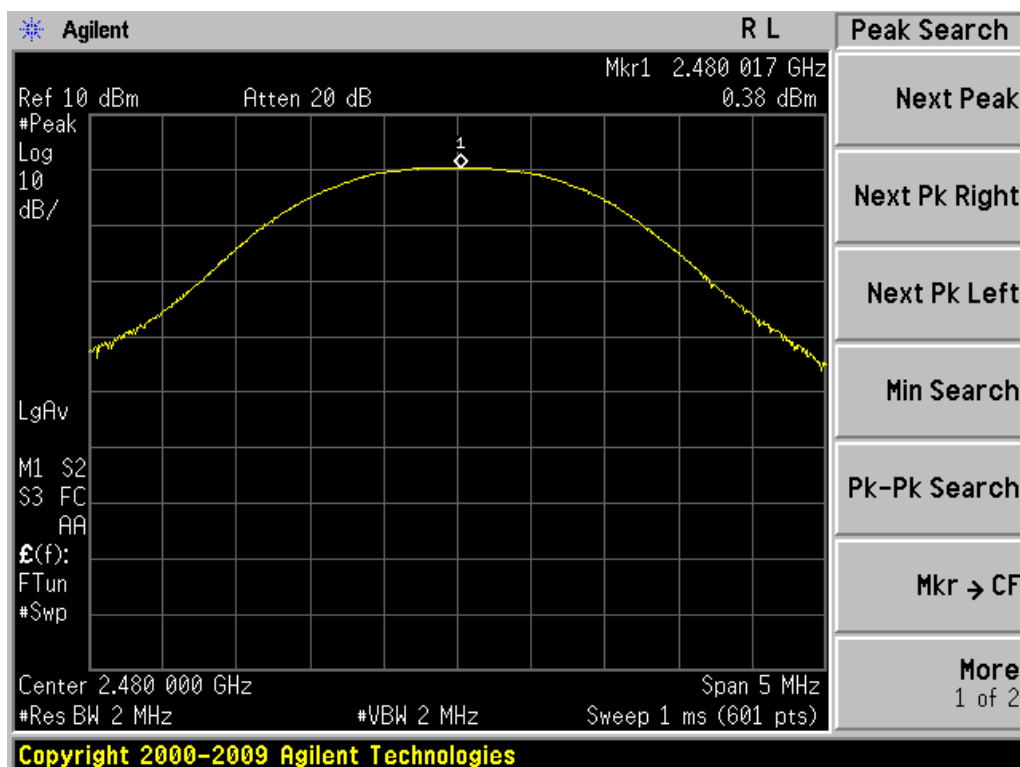
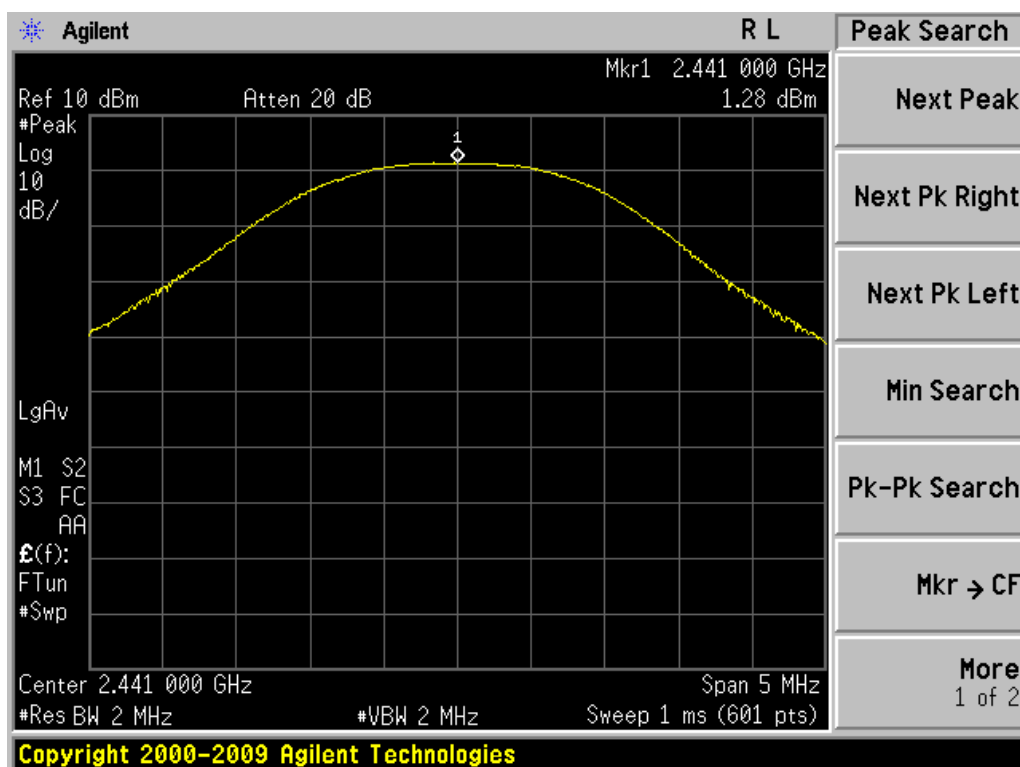


$\pi/4$ DQPSK:

Frequency, MHz	Reading dBm	Cable loss dB	Output power, dBm	Power Limit, dBm
2402	1.82	1	2.82	30.00
2441	0.47	1	1.47	30.00
2480	-0.48	1	0.52	30.00

Diagram of $\pi/4$ DQPSK is as below:

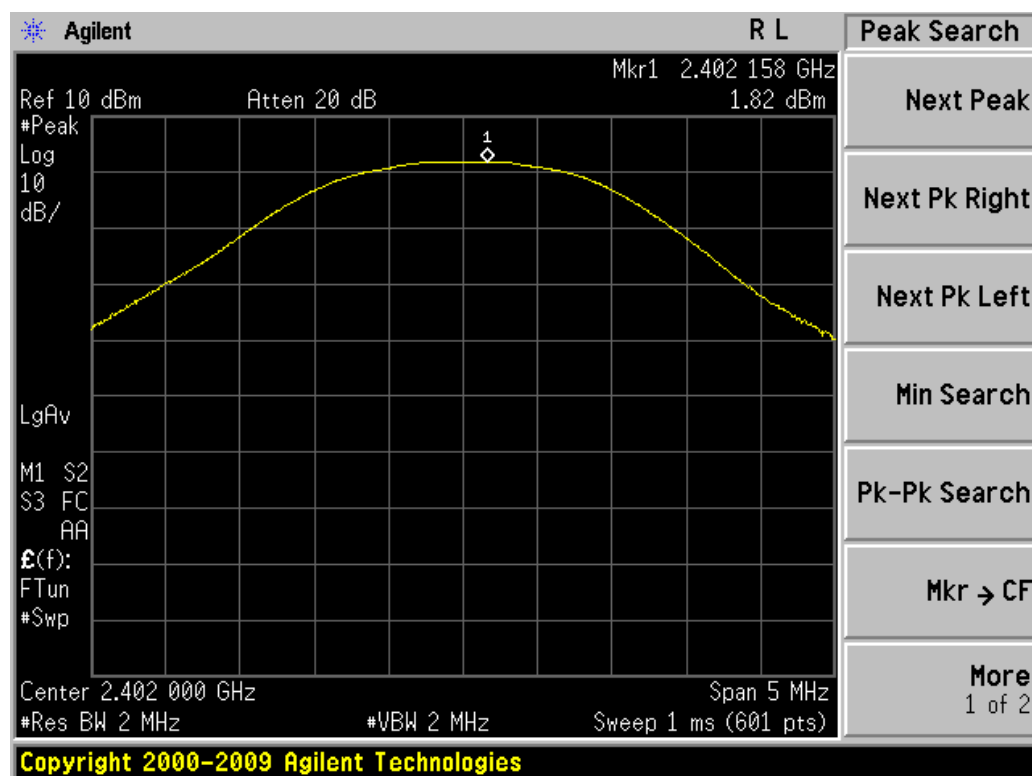

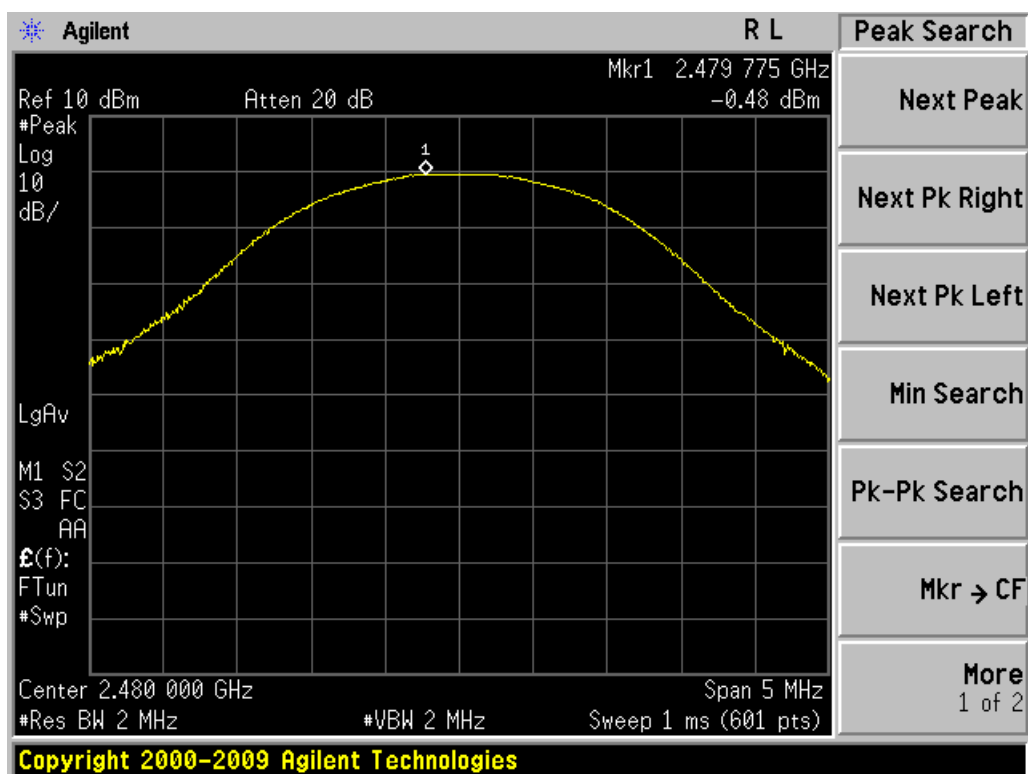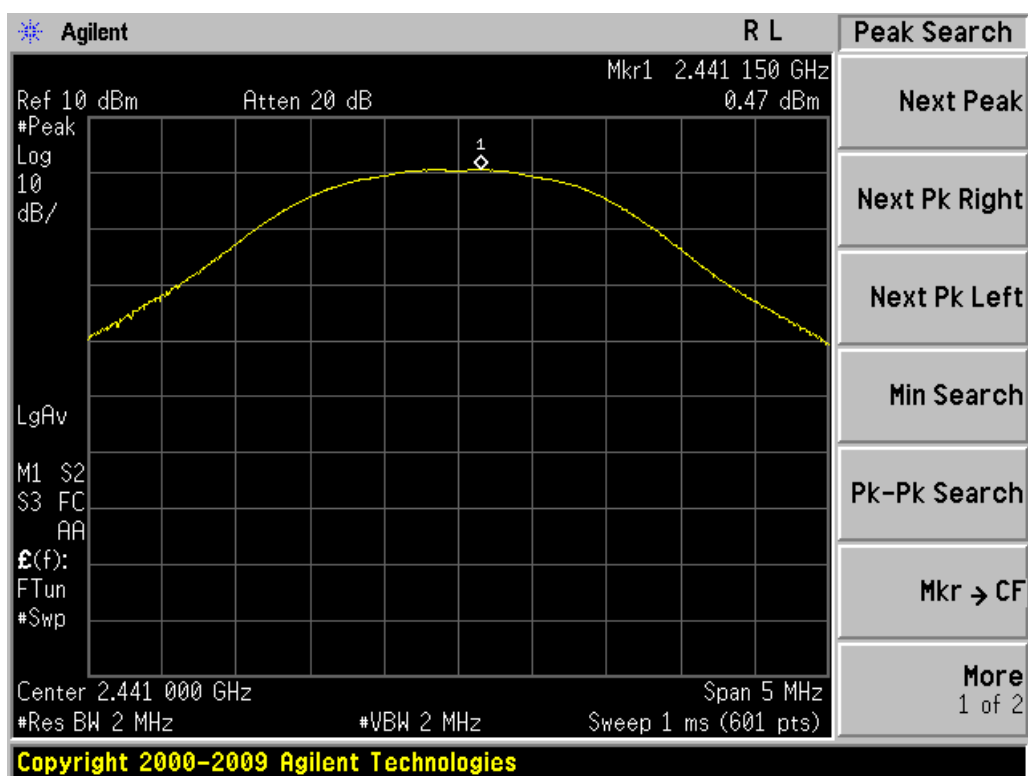

EIRP measurement

GFSK:

Frequency, MHz	Output power dBm	Antenna gain, dBi	EIRP dBm	EIRP Limit, dBm
2441	2.95	0	2.95	36.00

EIRP [dBm] = Output power [dBm] max + antenna gain [dBi]

10. NUMBER OF HOPPING FREQUENCY TEST

10.1 Test Procedure

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Measurement Equipment


	Equipment	Calibration Due	Type	Serial No.	Manufacturer
☒	Spectrum	Jul. 04 2014	FSP30	GTS208	RS

10.3 Test Result

Test mode: Transmitter Hopping on

Number of channels used	Minimum number of channels limit	Margin
79	15	64

10.3.1 Diagram

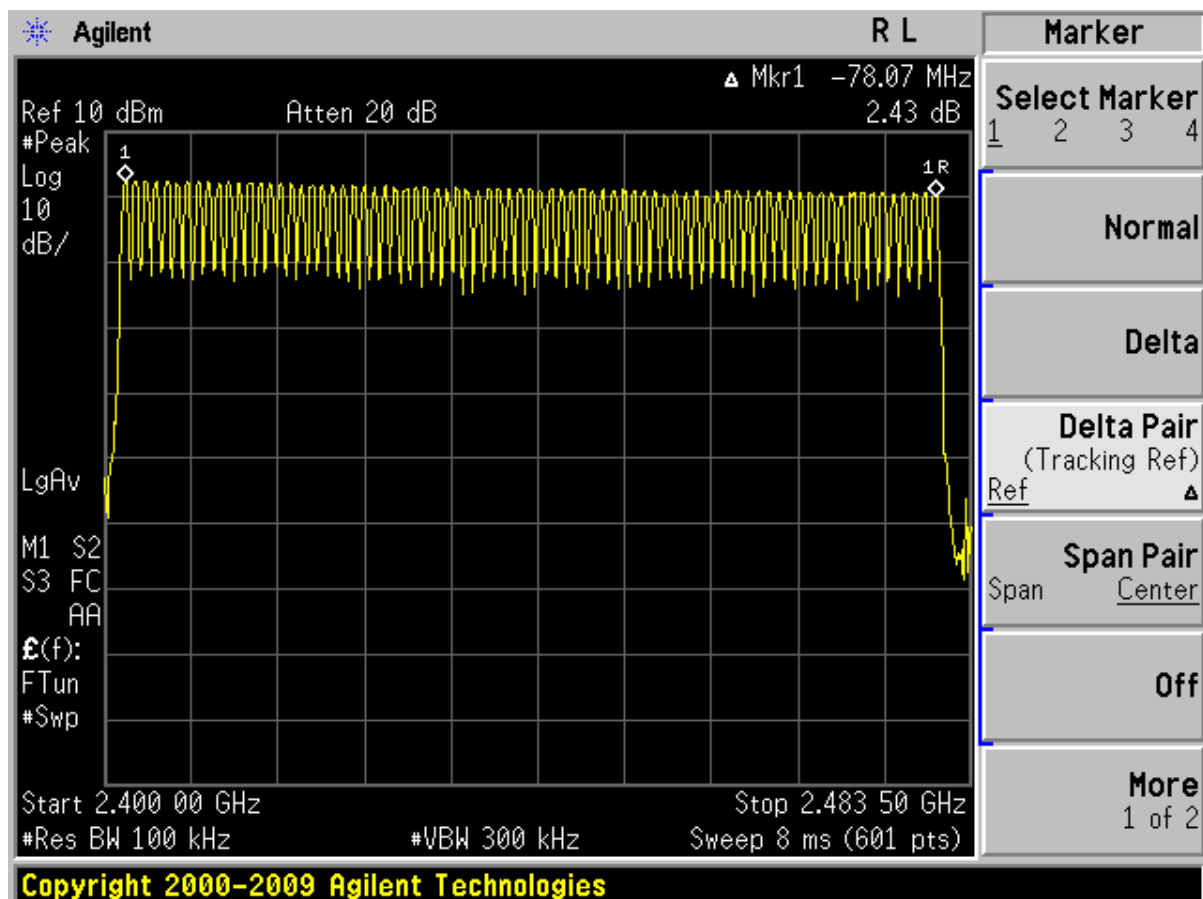

11. DWELL TIME TEST

11.1 Test Procedure

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Measurement Equipment

	Equipment	Calibration Due	Type	Serial No.	Manufacturer
☒	Spectrum	Jul. 04 2014	FSP30	GTS208	RS

11.3 Test Result

Limit:

Total time of occupancy is 0.4 s within a period of time equals number of hopping channels employed multiplied by 0.4 s, which is 0.4 s within the period of time $0.4 \times 79 = 31.6$ s

Remark:

DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, total hops is $10.12 \times 31.6 = 320$


DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, total hops is $5.06 \times 31.6 = 160$

DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, total hops is $3.37 \times 31.6 = 106.6$


GFSK

Grouping	Diagram	Time of occupancy ms	Limit ms	Remark
DH1	11-1	126.944	400	320x 0.3967
DH3	11-2	264	400	160x 1.65
DH5	11-3	308.3938	400	106.6x 2.893


11.3.1 Diagram 11-1

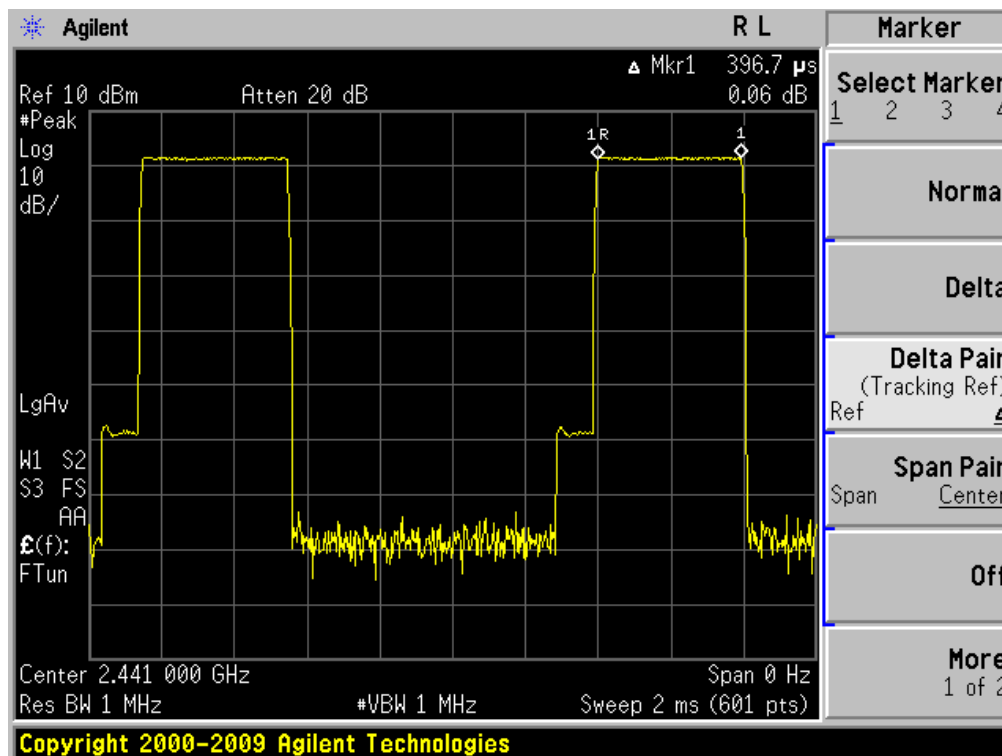

11.3.2 Diagram 11-2

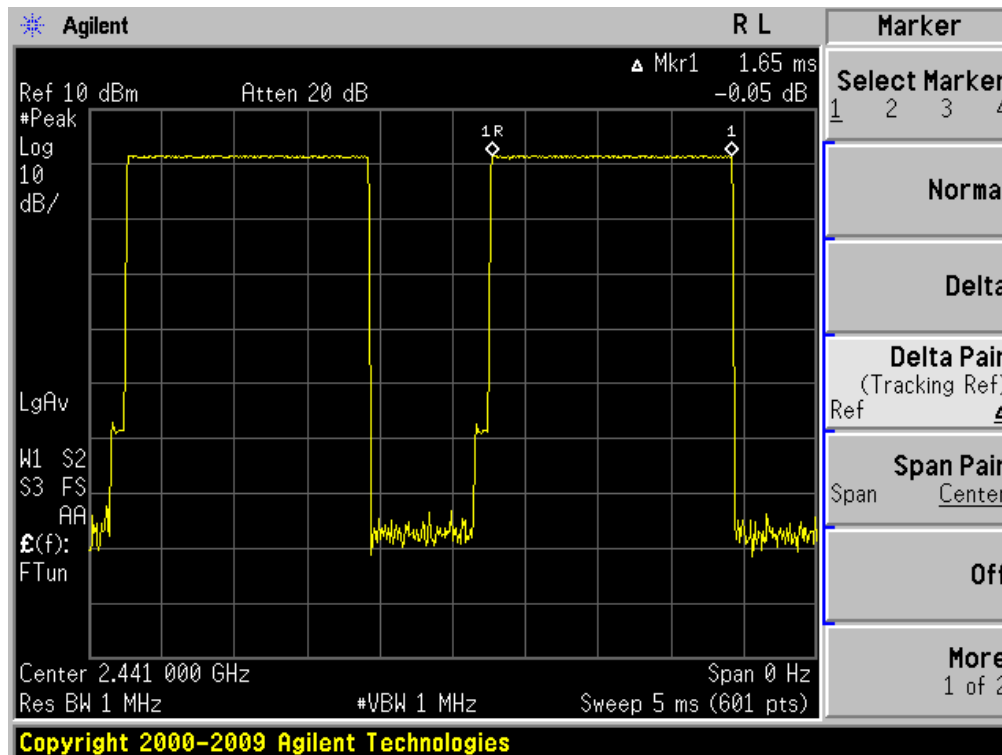


11.3.3 Diagram 11-3

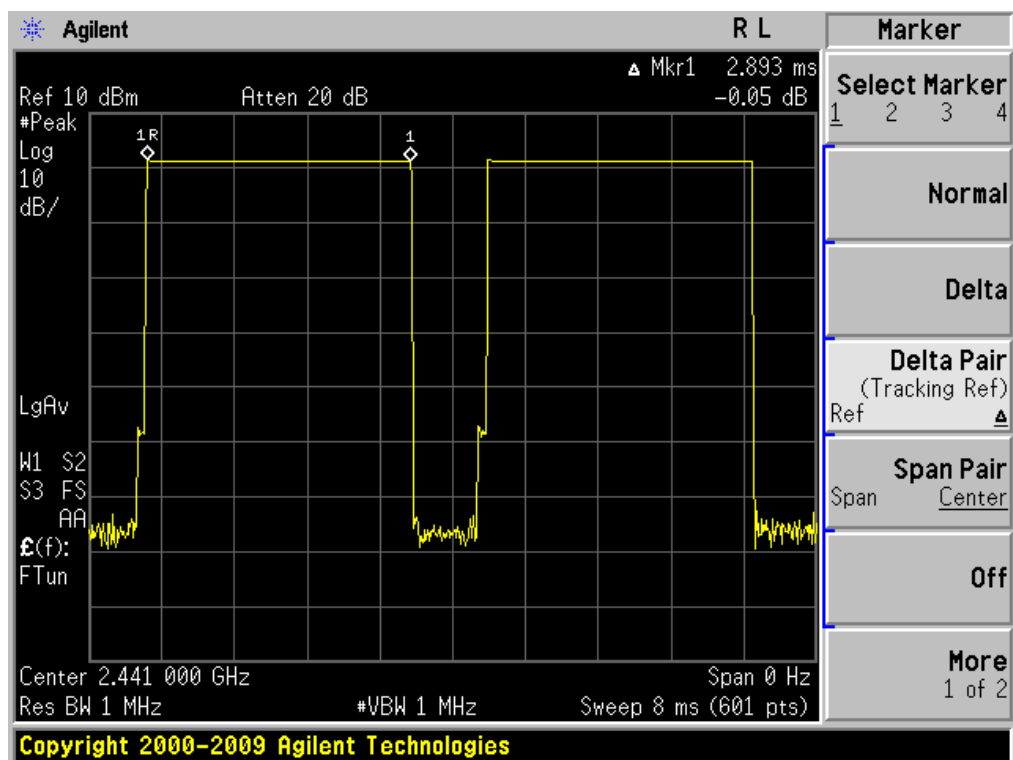


8DPSK

Grouping	Diagram	Time of occupancy ms	Limit ms	Remark
DH1	11-4	131.2	400	320x 0.410
DH3	11-5	265.28	400	160x 1.658
DH5	11-6	309.8862	400	106.6x 2.907


11.3.1 Diagram 11-4

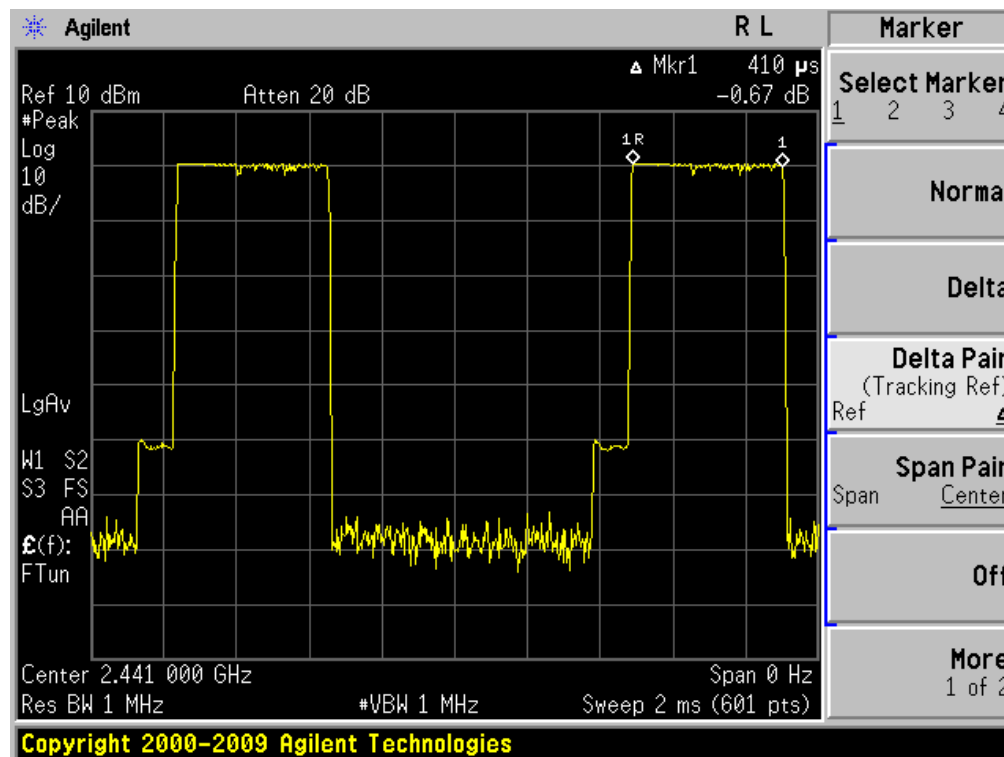

11.3.2 Diagram 11-5

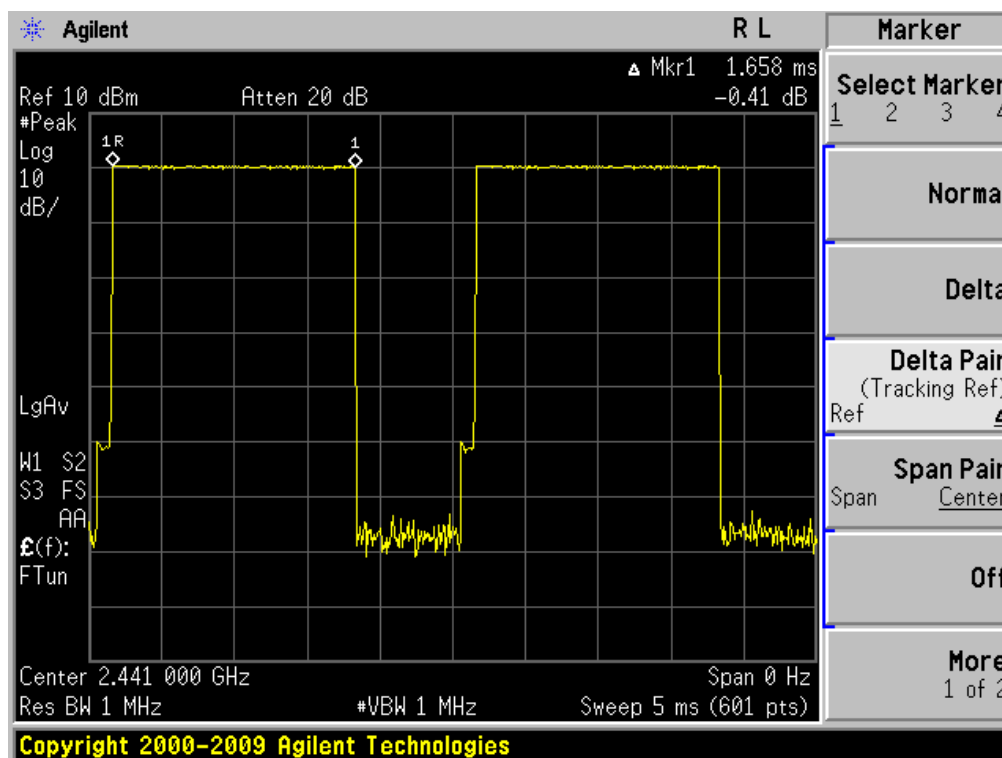


11.3.3 Diagram 11-6

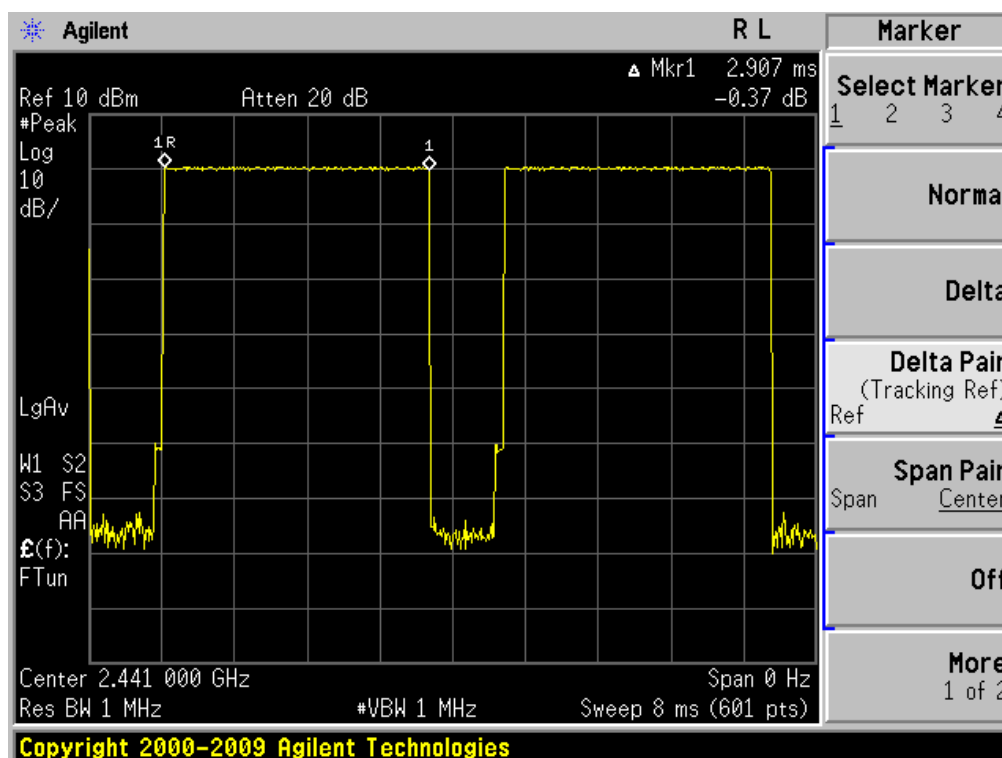


$\pi/4$ DQPSK

Grouping	Diagram	Time of occupancy ms	Limit ms	Remark
DH1	11-7	131.2	400	320x 0.410
DH3	11-8	266.72	400	160x 1.667
DH5	11-9	309.8862	400	106.6x 2.907


11.3.1 Diagram 11-7

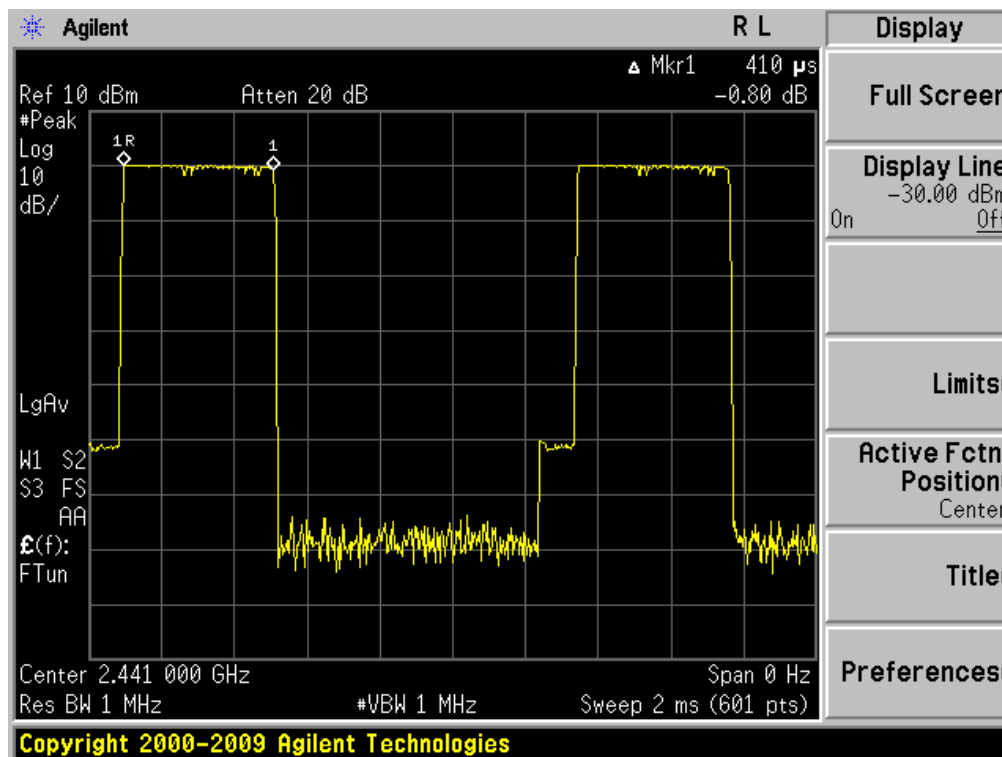

11.3.2 Diagram 11-8

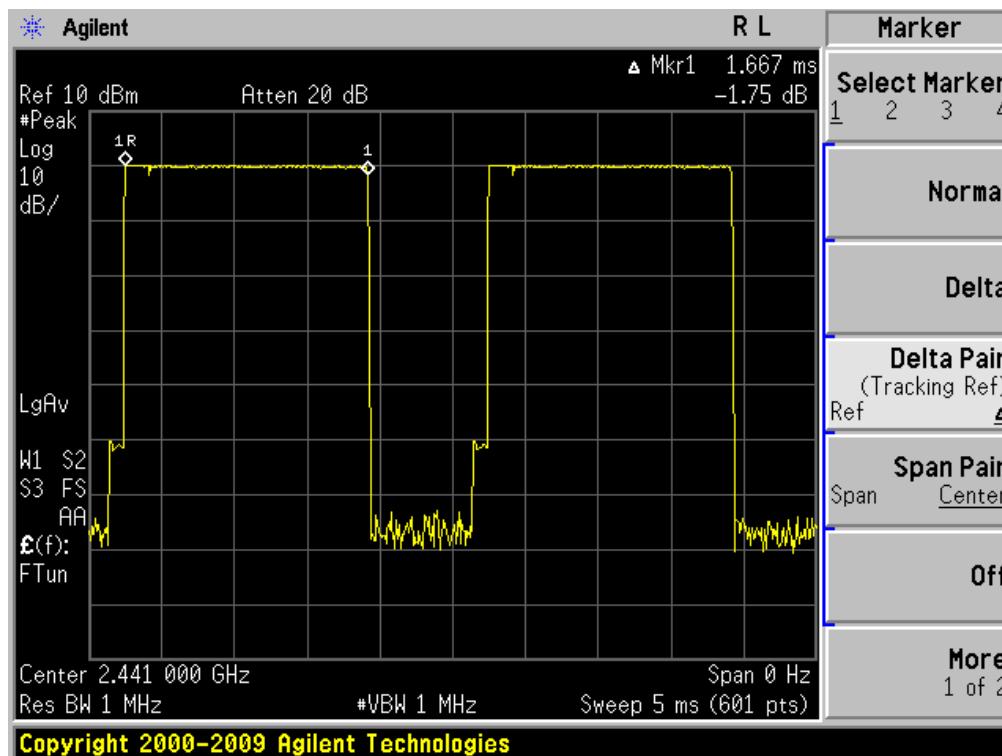

11.3.3 Diagram 11-9

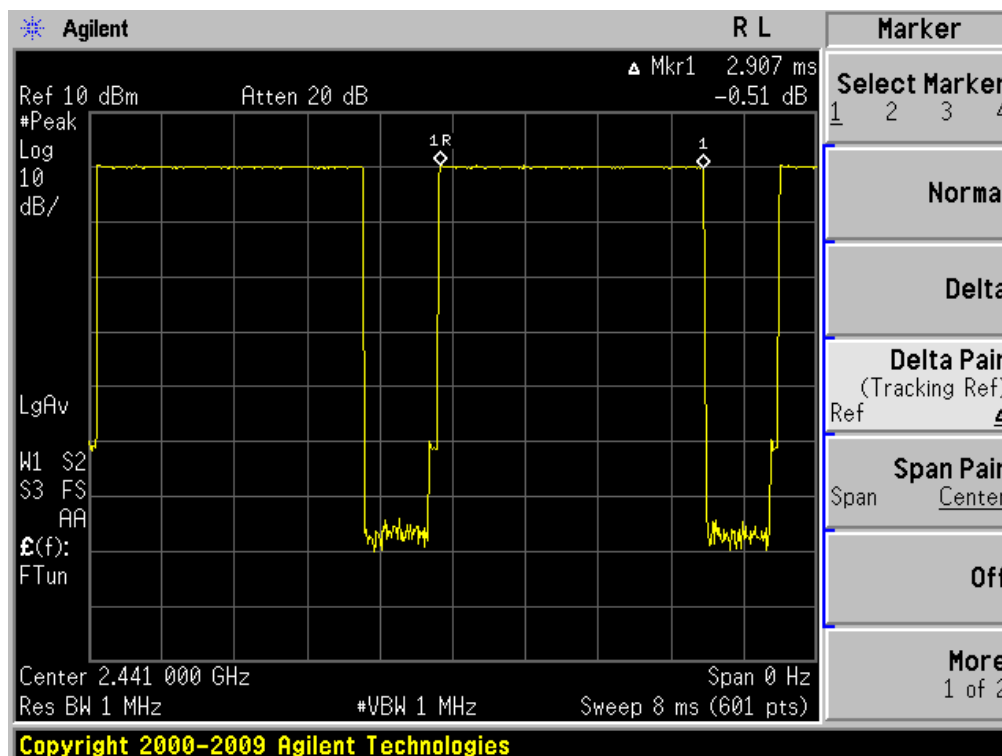

12 POWER LINE CONDUCTED EMISSION TEST

12.1 Test Procedure

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50
*-Decreases with the logarithm of the frequency.		

12.2 Measurement Equipment

	Equipment	Calibration Due	Type	Serial No.	Manufacturer
☒	Shielding Room	Jul. 04 2014	7.0(L)x3.0(W)x3.0(H)	GTS252	ZhongYu Electron
☒	EMI Test Receiver	Jul. 04 2014	ESCS30	1102.4500K30	Rohde & Schwarz
☒	10dB Pulse Limita	Jul. 04 2014	N/A	GTS224	Rohde & Schwarz
☒	LISN	Jul. 04 2014	NSLK 8127	8127549	SCHWARZBECK MESS-ELEKTRONIK
☒	Coaxial Cable	Apr. 01 2014	N/A	N/A	GTS

12.3 Test Result

The EUT was placed on a non-metallic table, 80cm above the ground plane. The other peripheral devices power cord connected to the power mains through another line impedance stabilization network. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4-2009 on conducted Emission test.

Preview measurements:

0.15 MHz to 30 MHz

Receiver settings: PK&AV detector

RBW:9 kHz

TX MODE

Final measurement:

0.15 MHz to 30 MHz


Receiver settings:QP&AV detector

Power Line	Test Data	Test Result
Line	Diagram 12-1	Pass
Neutral	Diagram 12-2	Pass

NOTES:


1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported.
- 3: If PK value is lower than AV limit then no reading value listed in report .If QP value is Lower than AV limit ,then AV value don't listed in report.

12.3.1 Diagram 12-1

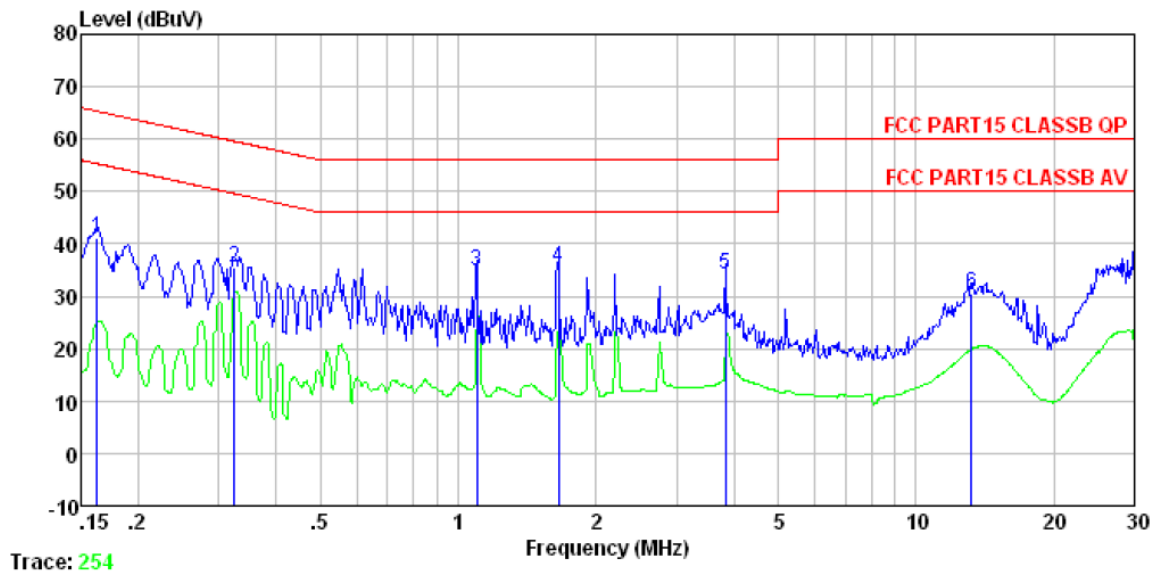

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	40.85	0.07	0.12	41.04	65.34	-24.30	QP
2	0.325	35.49	0.06	0.10	35.65	59.57	-23.92	QP
3	1.100	34.76	0.08	0.13	34.97	56.00	-21.03	QP
4	1.654	35.35	0.09	0.14	35.58	56.00	-20.42	QP
5	3.840	33.75	0.14	0.15	34.04	56.00	-21.96	QP
6	13.197	30.07	0.32	0.21	30.60	60.00	-29.40	QP

12.3.2 Diagram 12-2

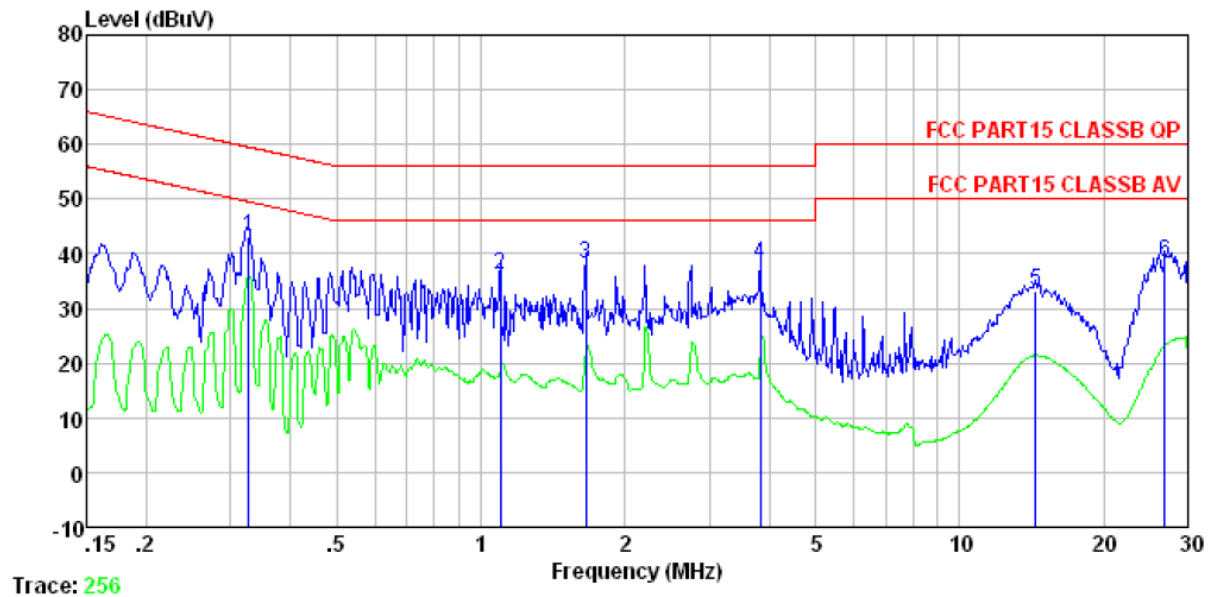

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.327	43.00	0.11	0.10	43.21	59.53	-16.32	QP
2	1.100	35.87	0.13	0.13	36.13	56.00	-19.87	QP
3	1.654	37.85	0.12	0.14	38.11	56.00	-17.89	QP
4	3.840	37.84	0.19	0.15	38.18	56.00	-17.82	QP
5	14.440	32.66	0.28	0.22	33.16	60.00	-26.84	QP
6	26.841	37.15	1.01	0.23	38.39	60.00	-21.61	QP

13 Antenna requirement

13.1 Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2 Result

The antenna used for this product is Internal Patch antenna that no antenna other than that furnished by the responsible party shall be used with the device, The maximum peak gain of this antenna is 0dBi.



Appendix A Sample Label

Labelling Requirements

The sample label shown shall be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

*** The following paragraph specified in the label.

FCC ID: VHC-AAI-BS1330-00

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

*******END OF REPORT*******