

Prüfbericht - Nr.: 10054927 001 <i>Test Report No.:</i>			Seite 1 von 42 <i>Page 1 of 42</i>		
Auftraggeber: <i>Client:</i>			Kodak Alaris Inc 2400 Mt. Read Blvd., Rochester, NY 14615 USA		
Gegenstand der Prüfung: Bluetooth 4.0 Mini USB Adapter <i>Test item:</i>					
Bezeichnung: <i>Identification:</i>		BTA-8000		Serien-Nr.: <i>Serial No.:</i>	
				N/A	
Wareneingangs-Nr.: <i>Receipt No.:</i>		114044517		Eingangsdatum: <i>Date of receipt:</i>	
				2015/12/09	
Prüfort: <i>Testing location:</i>		TÜV Rheinland Taiwan Ltd. 11F., No.758, Sec. 4, Bade Rd., Songshan Dist., Taipei City 105 Taiwan FCC Registration No.: 365730			
Prüfgrundlage: <i>Test specification:</i>		FCC CFR47 Part 15: Subpart C Section 15.247 RSS-247 (05-2015)			
Prüfergebnis: <i>Test Result:</i>		Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test item passed the test specification(s).</i>			
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland Taiwan Ltd.			
geprüft/ tested by:			kontrolliert/ reviewed by:		
					
2016-02-15 Ryan Chen / Project Manager			2016-02-15 Rene Charton/Senior Project Manager		
Datum	Name/Stellung	Unterschrift	Datum	Name/Stellung	Unterschrift
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>	<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>
Sonstiges/ Other Aspects: BR/EDR Mode					
Abkürzungen:			Abbreviations:		
P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet			P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested		
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 PEAK OUTPUT POWER

RESULT: Passed

5.1.3 20dB BANDWIDTH

RESULT: Passed

5.1.4 99% BANDWIDTH

RESULT: Passed

5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100KHz BANDWIDTH

RESULT: Passed

5.1.6 SPURIOUS EMISSION

RESULT: Passed

5.1.7 MAINS CONDUCTED EMISSION

RESULT: Passed

5.1.8 FREQUENCY SEPARATION

RESULT: Passed

5.1.9 NUMBER OF HOPPING FREQUENCY

RESULT: Passed

5.1.10 TIME OF OCCUPANCY

RESULT: Passed

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Passed

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	6
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS	10
4.	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Peak Output Power</i>	<i>15</i>
5.1.3	<i>20dB Bandwidth</i>	<i>19</i>
5.1.4	<i>99% Bandwidth</i>	<i>23</i>
5.1.5	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth..</i>	<i>27</i>
5.1.6	<i>Spurious Emission</i>	<i>32</i>
5.1.7	<i>Mains Conducted Emission.....</i>	<i>33</i>
5.1.8	<i>Frequency Separation.....</i>	<i>34</i>
5.1.9	<i>Number of hopping frequency.....</i>	<i>36</i>
5.1.10	<i>Time of Occupancy.....</i>	<i>38</i>
6.	SAFETY HUMAN EXPOSURE	40
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE.....	40
6.1.1	<i>Electromagnetic Fields.....</i>	<i>40</i>
7.	PHOTOGRAPHS OF THE TEST SET-UP	41
8.	LIST OF TABLES	44
9.	LIST OF PHOTOGRAPHS	44

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix P: Photo

(File: 10054927APPENDIXP)

Appendix D: Test Result of Radiated Emissions

(File: 10054927APPENDIXD)

Test Specifications

The following standards were applied (in bold: product standards, otherwise: basic standards).

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247 RSS-247 Issue 1 May 2015 RSS-Gen, Issue 4, November 2014 ANSI C63.10:2013 Public Notice DA 00-705

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)
FCC Registration No.: 365730

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Last Calibration	Next Calibration
EMI Test Receiver	R&S	ESR7	101062	10-Sep-15	19-Sep-16
Bilog Antenna	TESEQ	CBL6111D	29802	4-Jul-14	3-Jul-16
Spectrum Analyzer	R&S	FSV 40	100921	21-Dec-15	21-Dec-16
Spectrum Analyzer	Agilent	N9010A	MY53470241	1-Apr-15	30-Mar-16
Horn Antenna	ETS-Lindgren	3117	138160	12-Jan-15	11-Jan-17
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	22-Oct-15	21-Oct-17
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	31-Aug-15	31-Aug-16
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	26-Aug-14	26-Aug-16
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM30180	60558	4-Nov-15	3-Nov-16
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	21-Oct-14	20-Oct-16
EMI Test Receiver	R&S	ESCI7	100797	28-Dec-15	27-Dec-16
Spectrum Analyzer	R&S	FSL3	101943	7-Sep-15	7-Sep-16
LISN (1 phase)	R&S	ENV216	101243	1-Jun-15	31-May-16
LISN	R&S	ENV216	101262	16-Jun-15	15-Jun-16

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1 \text{ dB}$
Adjacent channel power	$\pm 3 \text{ dB}$
Radiated emission of transmitter, valid up to 26 GHz	$\pm 6 \text{ dB}$
Radiated emission of receiver, valid up to 26 GHz	$\pm 6 \text{ dB}$
Temperature	$\pm 2 \text{ }^{\circ}\text{C}$
Humidity	$\pm 10 \text{ } \%$

3. General Product Information

3.1 Product Function and Intended Use

Bluetooth Ultimate USB Adapter BTA-8000 enables wireless connectivity of your existing PC or notebook using the latest Bluetooth Technology.
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 Ratings and System Details

Table 4: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	Bluetooth Ultimate USB Adapter
FCC ID	VHVBTV1154
Canada ID	1016B-BTA8000
Canada HVIN	VEN-077A-11
Type Designation	BTA-8000
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	1 MHz (BR and EDR Mode), 2MHz (LE Mode)
Channel number	79 (BR and EDR Mode), 40 (LE Mode)
Extreme Temperature Range	-10°C to 50°C
Operation Voltage	DC 5.0V (from USB Port)
Modulation	GFSK, $\pi/4$ QPSK, 8 DPSK
Antenna gain	-11.27 dBi

Note:

This test report is for the BR and EDR operation mode.

For the LE operation mode, please refer to test report No. 10054928 001

Table 5: Frequency hopping information

Technical Specification	Description
Hopping Range	Hereby we declare that the maximum frequency of this device is: 2402-2480MHz. This is according the Bluetooth Core Specification V2.1+EDR for devices which will be operated in the USA. This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04).
Hopping Sequence	Example of a 79 hopping sequence in data mode: 33,04,21,44,23,42,53,46,55,48,40,59,72,29,76,31,08,73,07,75,09,45,60,39,58,13,47,11,77,52,35,50,65,54,67,56,69,62,71,64, 7,25,27,66,57,70,74,61,78,63,10,41,05,43,15,44,64,68,02,70,06,01,51,03,55,05,03,66,53,49,36,47,
Receiver input bandwidth	The input bandwidth of the receiver is 1MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packer has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

3.3 Independent Operation Modes

The basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Technical Description
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 4. All testing were performed according to the procedures in ANSI C63.10:2013.

Full test was applied on all test modes, but only worst case was shown.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


Description	Manufacturer	Model No.	Serial No.
Notebook(EMC-06)	Lenovo	TP00048A	PB-0F8B2

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

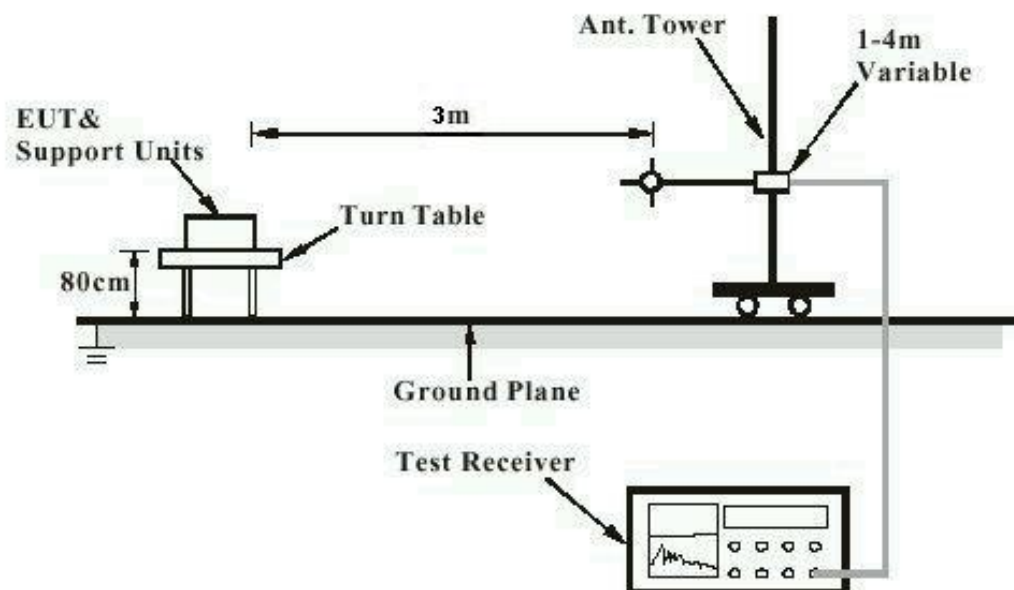

Note: Measurements above 1 GHz are done with a table height of 1.5m

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement


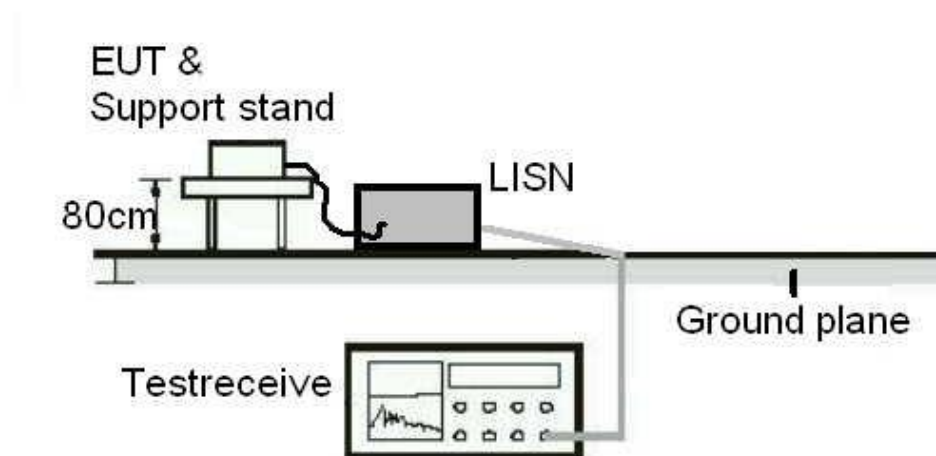


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

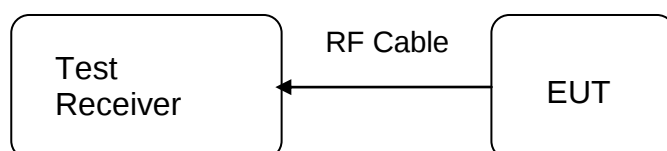

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test standard	:	FCC Part 15.247(b)(4), Part 15.203 and RSS-Gen 8.3
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an internal antenna with an directional gain of -11.27 dBi, and the antenna is a printed PCB trace with no possibility of replacement. Therefore, the EUT is considered to comply the provision.

Refer to EUT photo for details.

5.1.2 Peak Output Power

RESULT:
Passed

Test date : 2016-01-20
 Test standard : FCC Part 15.247(b)(1),
 RSS-247 5.4(2)
 Basic standard : DA 00-705 of March 30, 2000
 Limit : 1 Watt (EBW<1MHz) 0.125W (EBW>1MHz)
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 22°C
 Relative humidity : 52%
 Atmospheric pressure : 101 kPa



Table 6: Test result of Peak Output Power, GFSK modulation

Channel	Channel Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2402	-1.97	0.00064	0.125
Middle Channel	2441	1.04	0.00127	0.125
High Channel	2480	1.45	0.00140	0.125

Table 7: Test result of Peak Output Power, 8DPSK modulation

Channel	Channel Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2402	-3.70	0.00043	0.125
Middle Channel	2441	-0.07	0.00098	0.125
High Channel	2480	0.80	0.00120	0.125

Final Max Value: 1.3964 mW

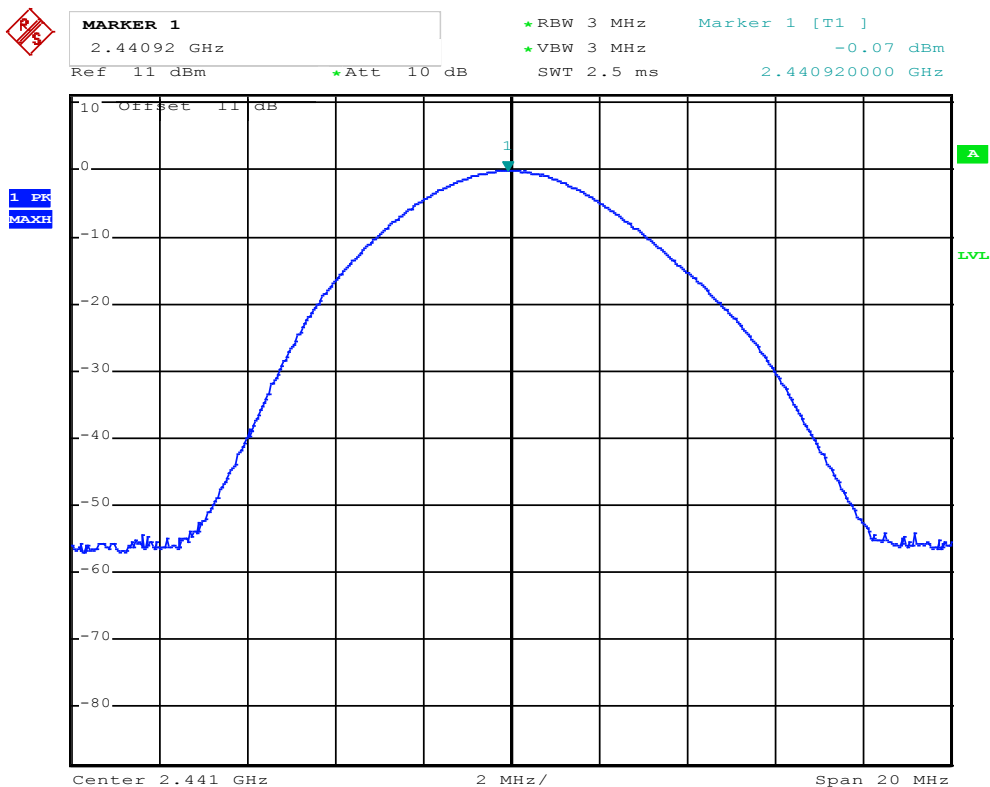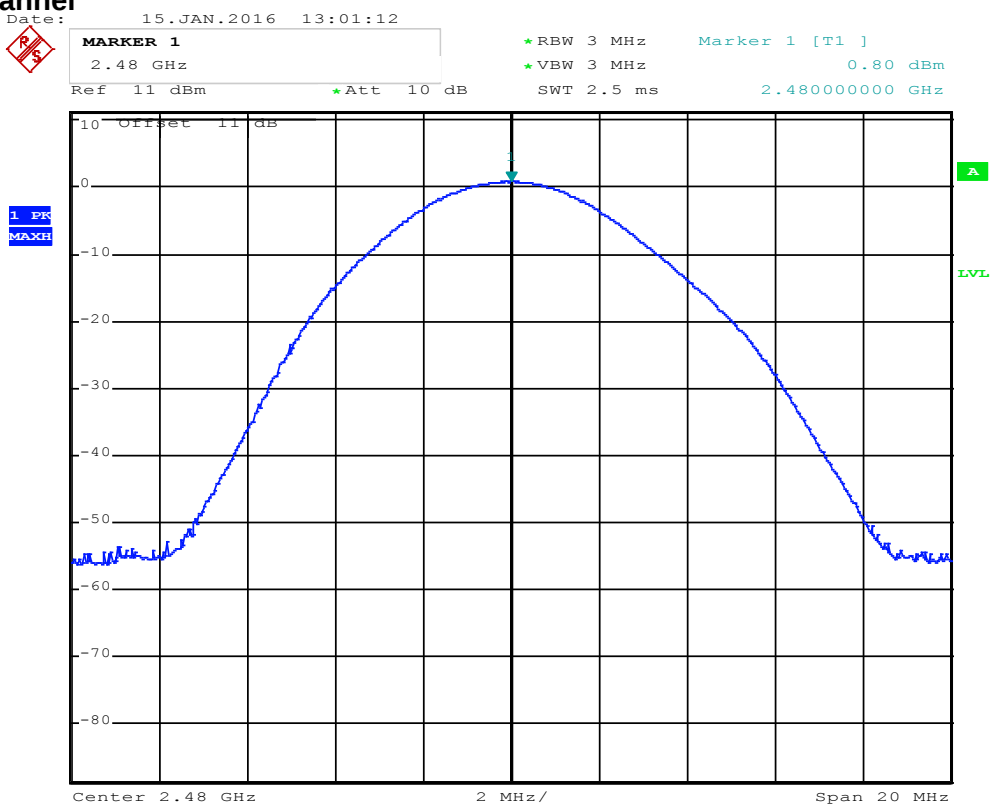Middle Channel

High Channel


5.1.3 20dB Bandwidth

RESULT:
Passed

Test standard : FCC Part 15.247(a)(1), RSS-247 5.1(1)
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 24°C
 Relative humidity : 53%
 Atmospheric pressure : 101 kPa

Table 8: Test result of 20dB Bandwidth, GFSK modulation

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	924.7	1.5	Pass
Mid Channel	2441	916.1	1.5	Pass
High Channel	2480	920.4	1.5	Pass

Table 9: Test result of 20dB Bandwidth, 8DPSK modulation


Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Result
Low Channel	2402	1.2287	1.5	Pass
Mid Channel	2441	1.2373	1.5	Pass
High Channel	2480	1.2417	1.5	Pass

Note: Limit is for Channel Separation of 1 MHz and a power limit of 125 mW.

If the carrier separation frequency of a Bluetooth Device is set at 1 MHz due to the firmware setting and the Bluetooth Standard, then for power <125 mW the limit for the 20 dB Bandwidth, becomes $1 \text{ MHz} / 0.66666 = 1.5 \text{ MHz}$.


Test Plot of 20dB Bandwidth, GFSK modulation

Low Channel

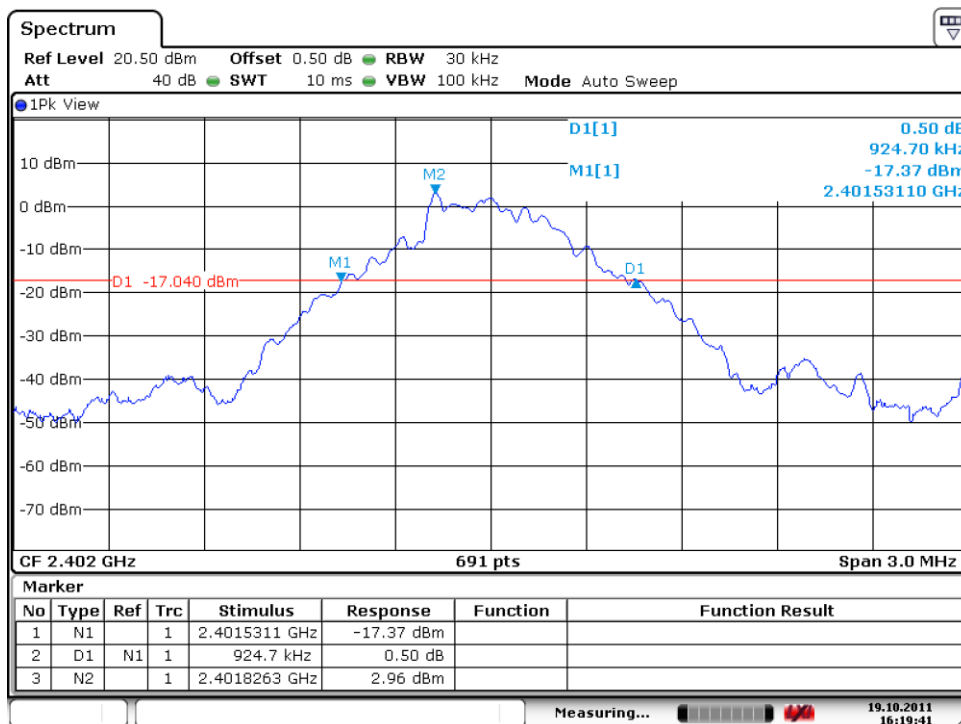


Date: 19.OCT.2011 16:19:41

Middle Channel

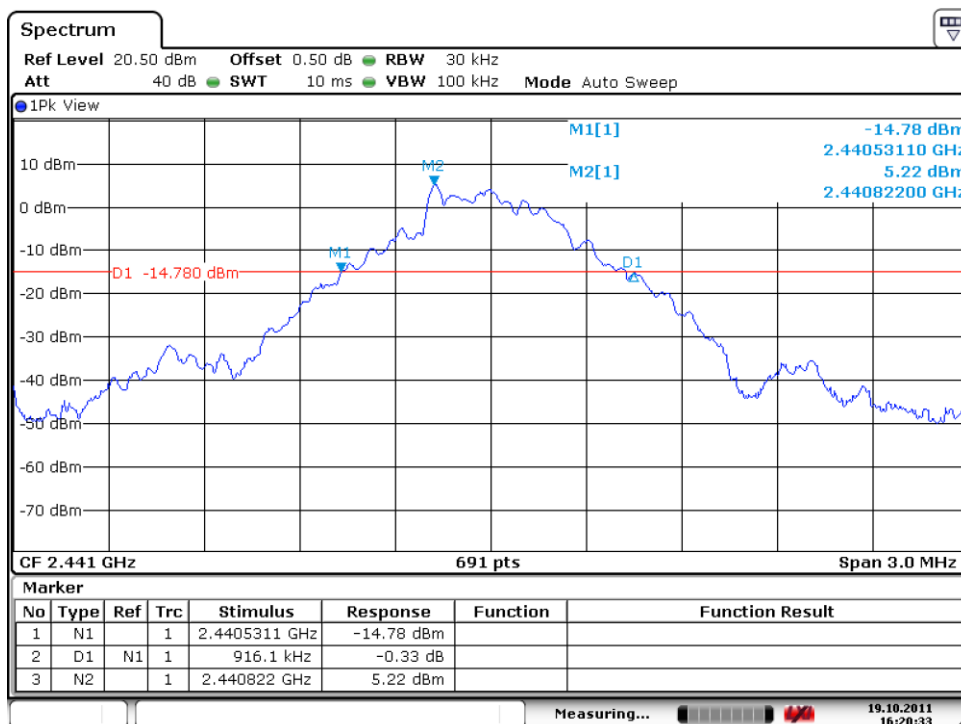

Date: 19.OCT.2011 16:20:33


High Channel

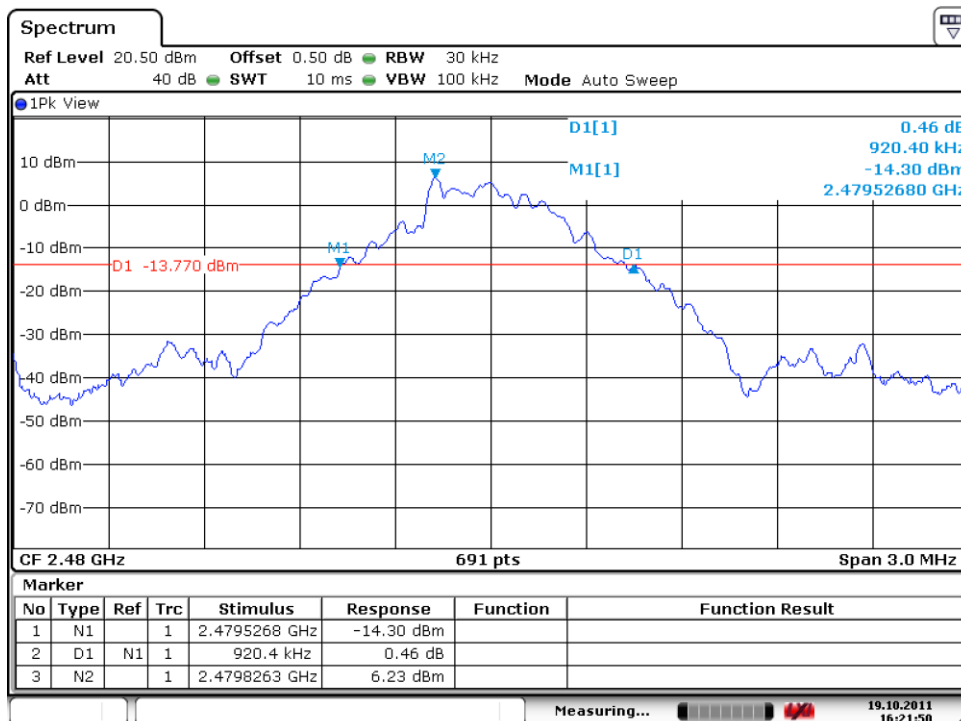


Date: 19.OCT.2011 16:21:50

Test Plot of 20dB Bandwidth, 8DPSK modulation


Low Channel

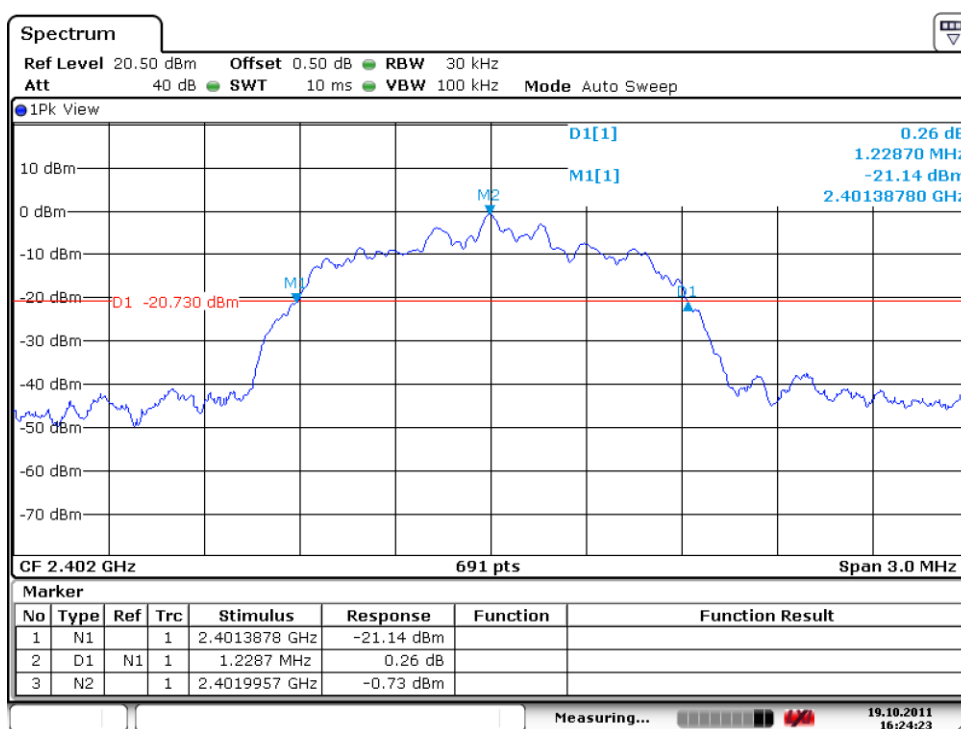

Date: 19.OCT.2011 16:24:23

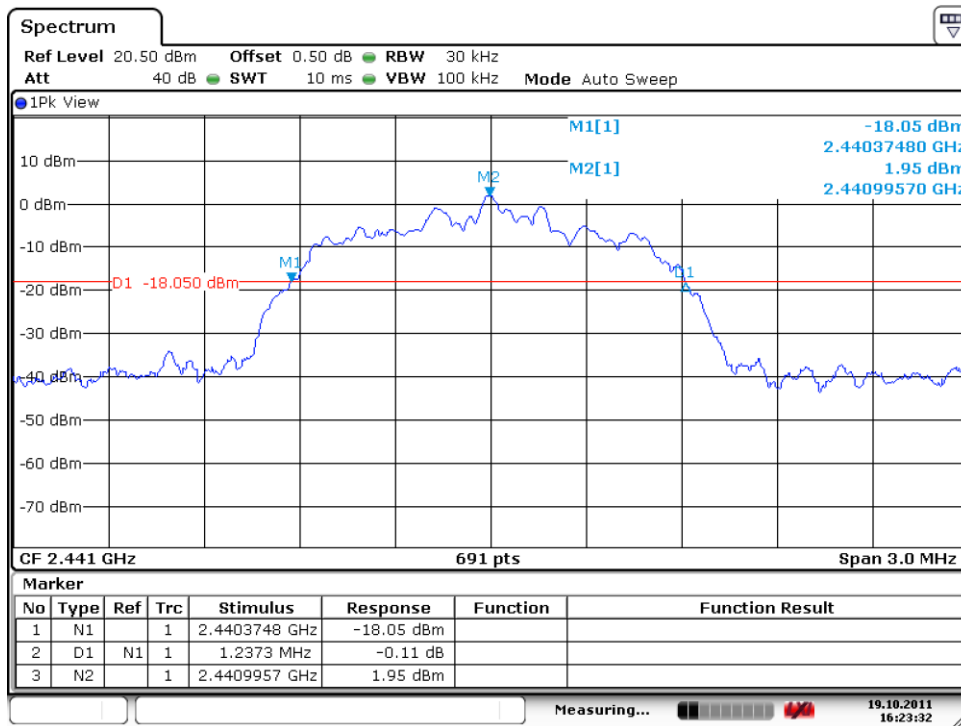Middle Channel


Date: 19.OCT.2011 16:23:32

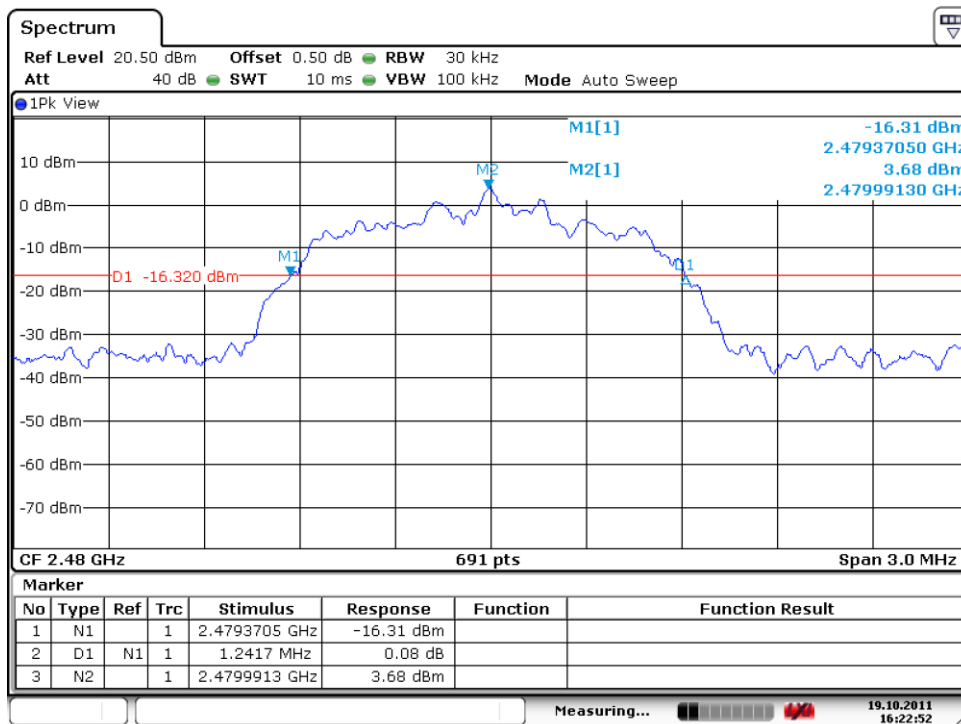High Channel


Date: 19.OCT.2011 16:22:52

5.1.4 99% Bandwidth

RESULT:
Passed

Date of testing : 2012-08-16
 Test standard : RSS-Gen
 Basic standard : RSS-Gen
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 24°C
 Relative humidity : 53%
 Atmospheric pressure : 101 kPa

Table 10: Test result of 99% Bandwidth, GFSK modulation


Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	846.6	--	Pass
Mid Channel	2442	846.6	--	Pass
High Channel	2480	850.9	--	Pass

Table 11: Test result of 99% Bandwidth, 8DPSK modulation

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	1150.5	--	Pass
Mid Channel	2442	1146.2	--	Pass
High Channel	2480	1159.1	--	Pass


Test Plot of 99% Bandwidth GFSK

Low Channel

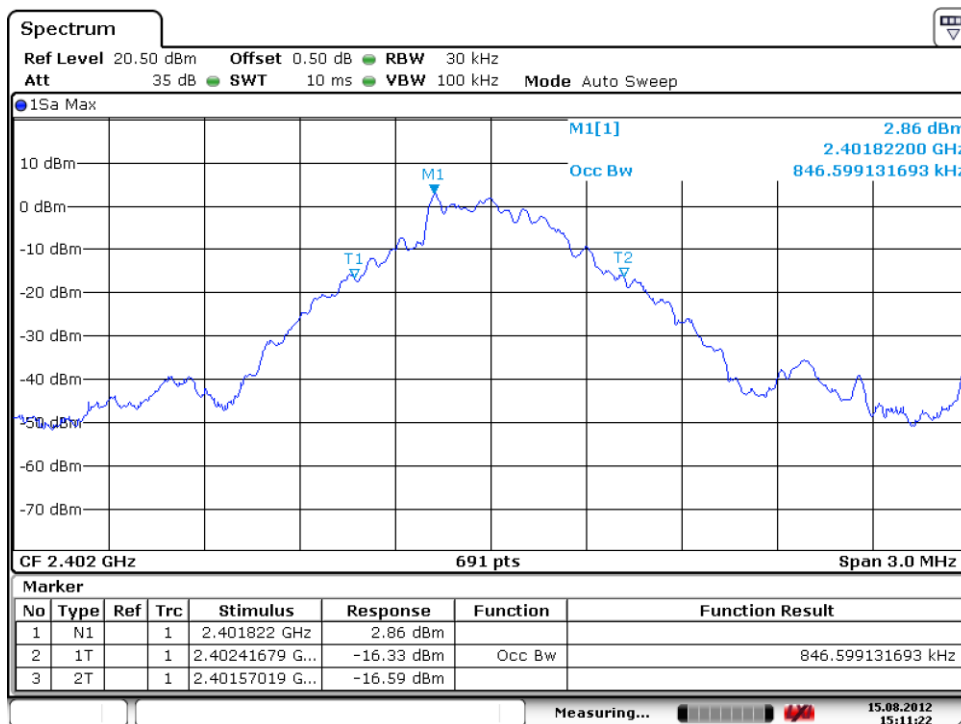


Date: 15.AUG.2012 15:11:22

Middle Channel

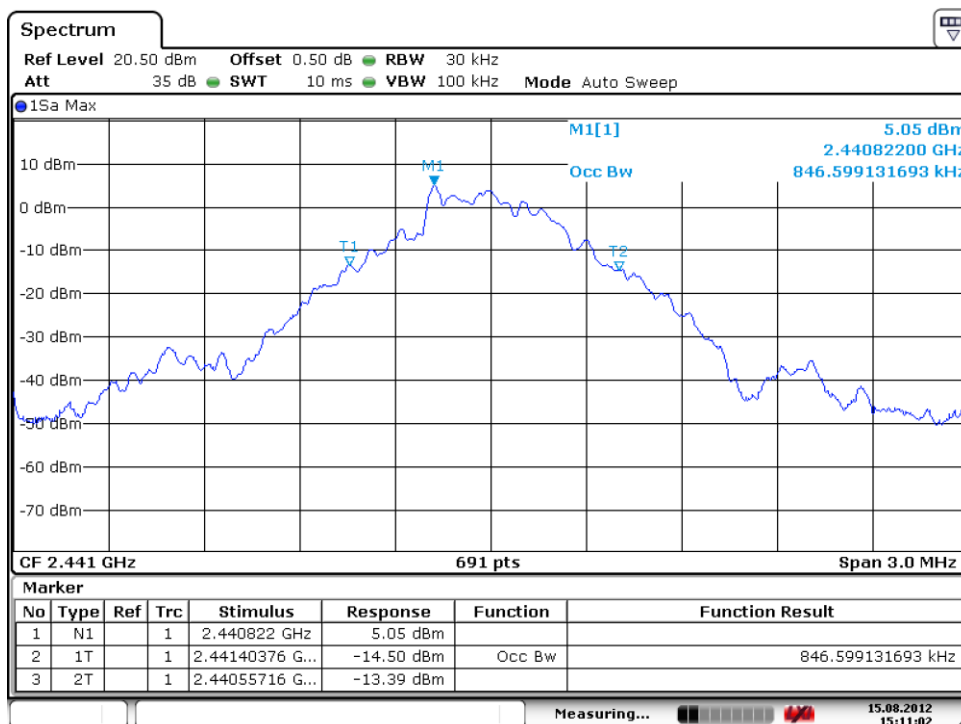

Date: 15.AUG.2012 15:11:02


High Channel

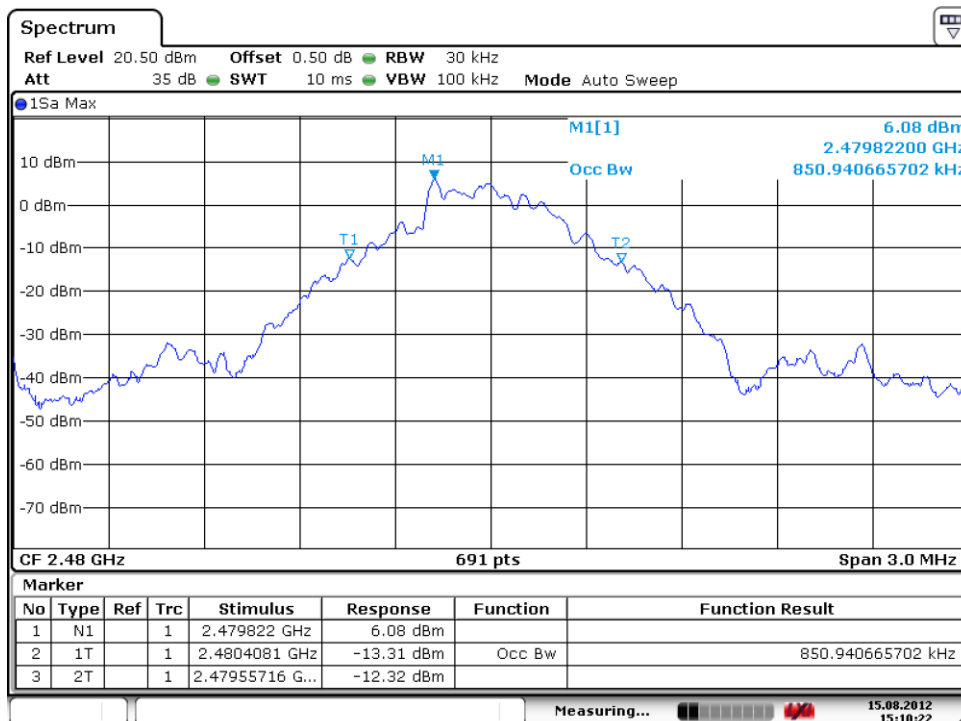



Date: 15.AUG.2012 15:10:22

Test Plot of 99% Bandwidth 8DPSK

Low Channel

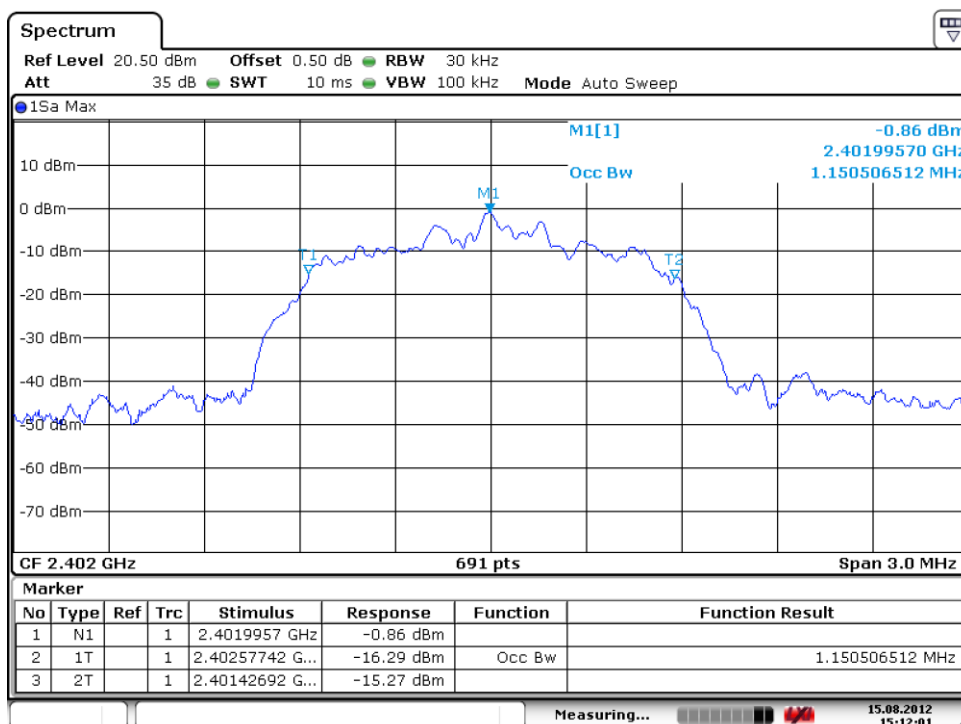

Date: 15.AUG.2012 15:12:00

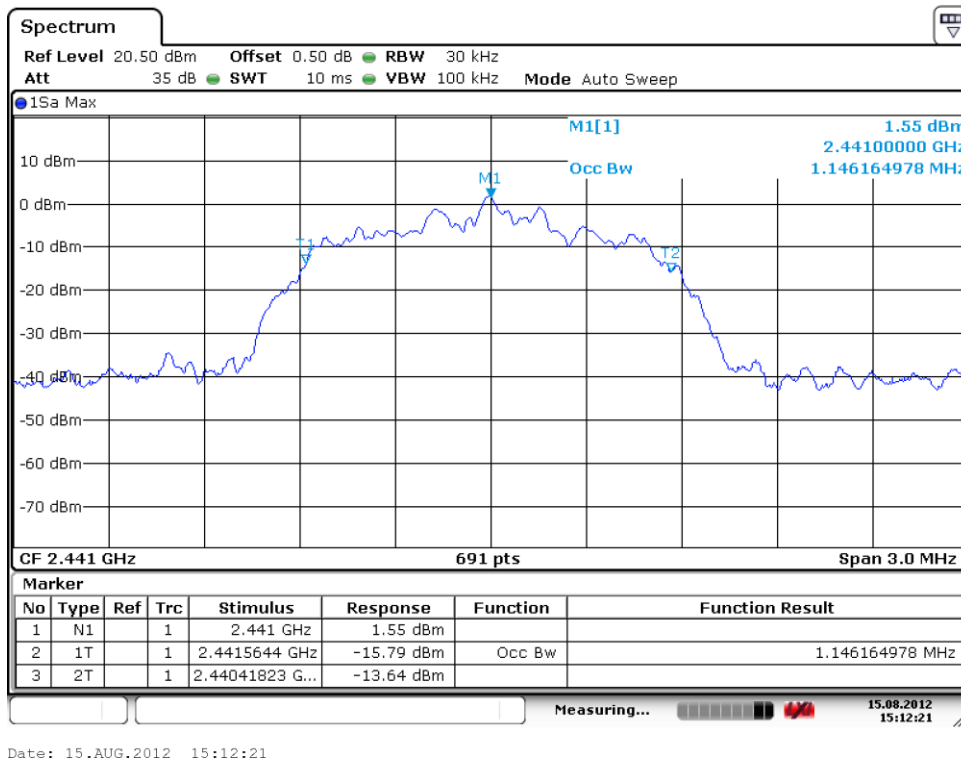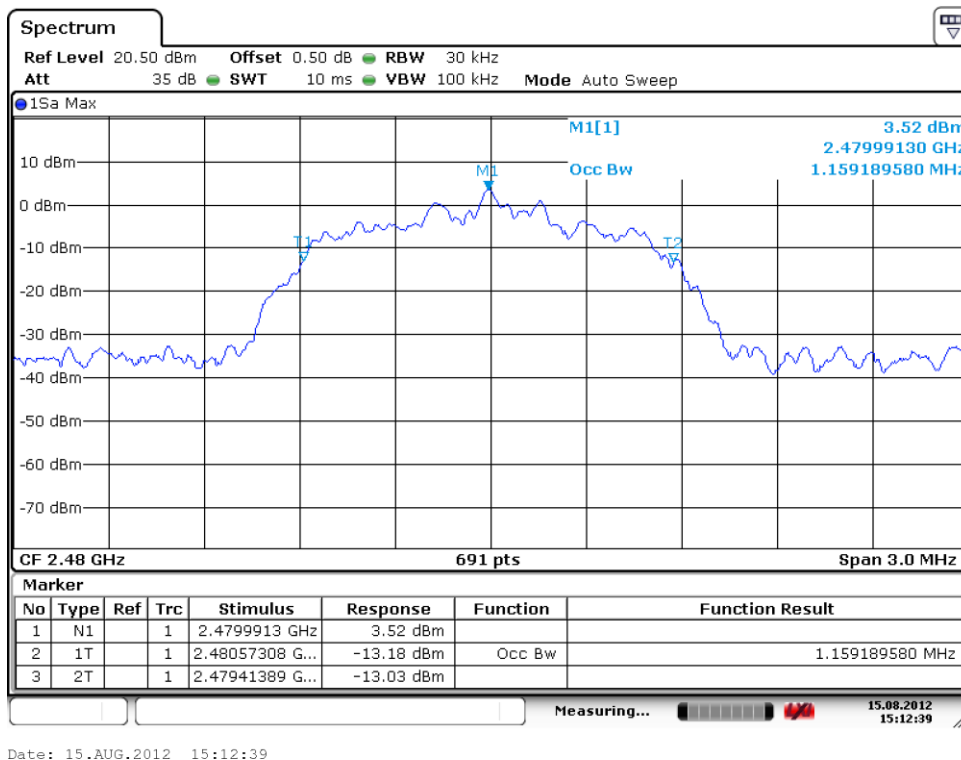Middle Channel

High Channel


Prüfbericht - Nr.: 10054927 001

Test Report No.

Seite 27 von 44

Page 27 of 44

5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), RSS-247 5.5
Basic standard	:	ANSI C63.10: 2013
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup


Test Channel	:	Low/ High
Operation mode	:	A
Ambient temperature	:	22°C
Relative humidity	:	52%
Atmospheric pressure	:	101 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.

Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.


Test Plot of 100kHz Conducted Emissions, GFSK modulation

Low Channel

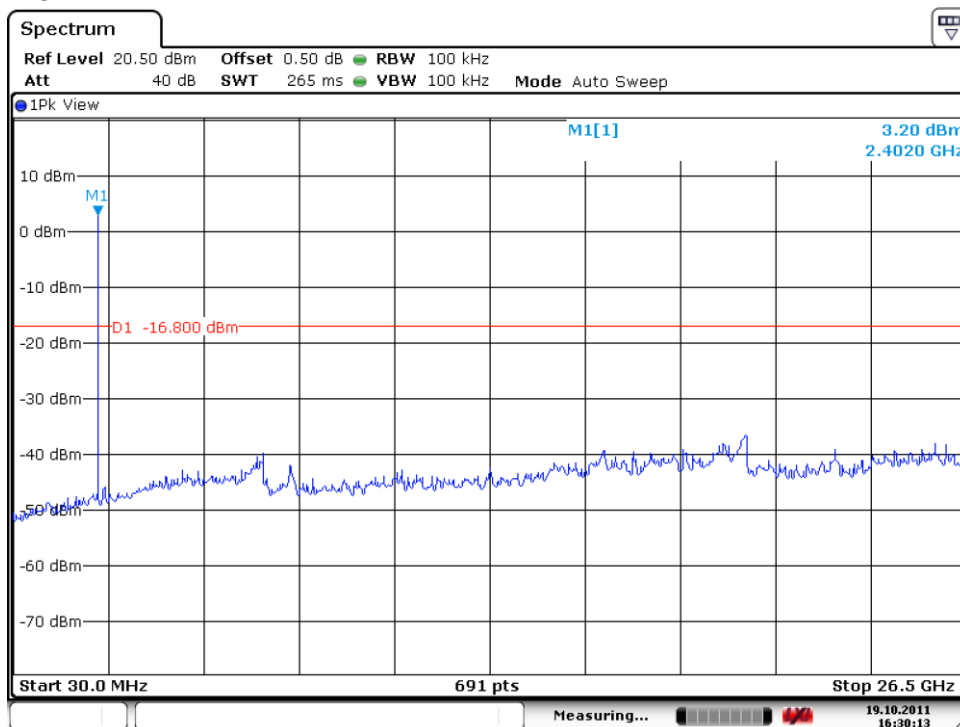

Date: 19.OCT.2011 16:30:13


High Channel

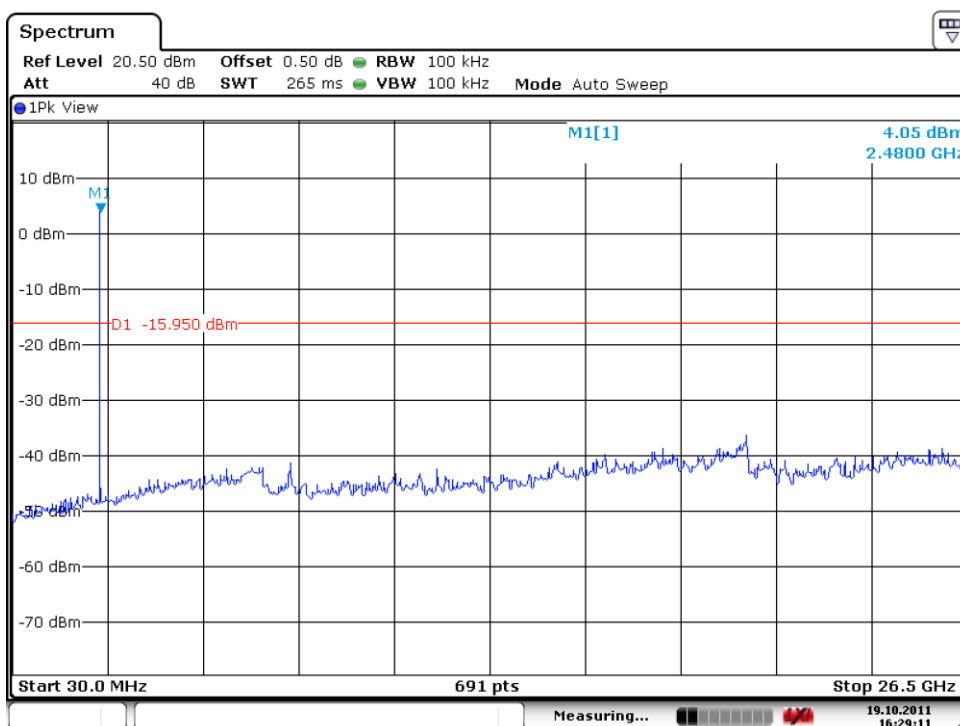

Date: 19.OCT.2011 16:29:11


Test Plot of 100kHz Bandwidth of Frequency Band Edge, GFSK modulation

Low Channel

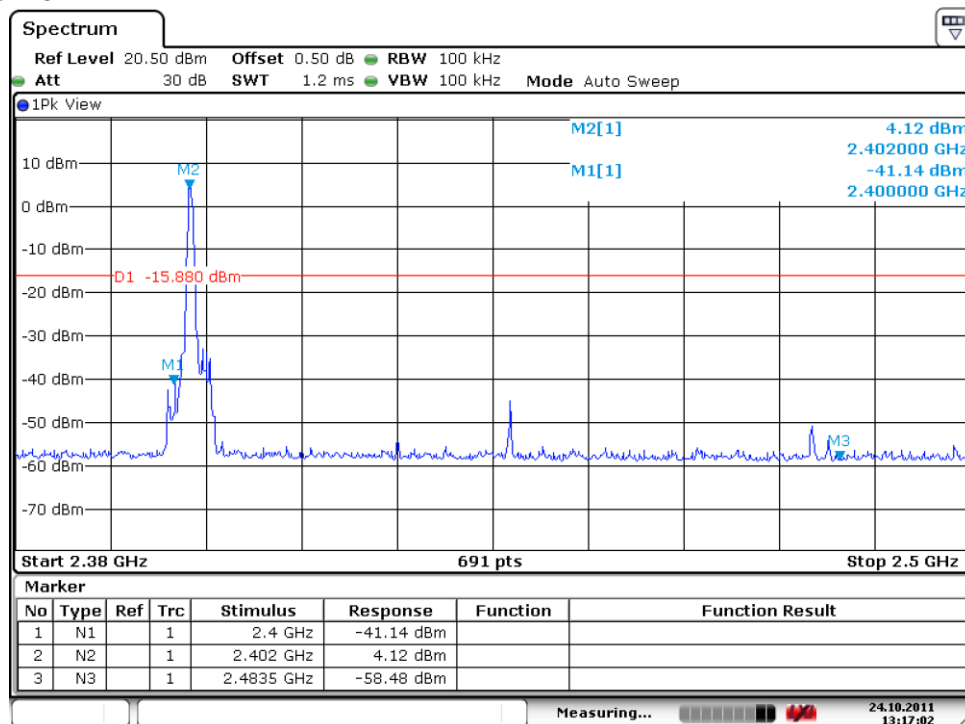

Date: 24.OCT.2011 13:17:02


High Channel

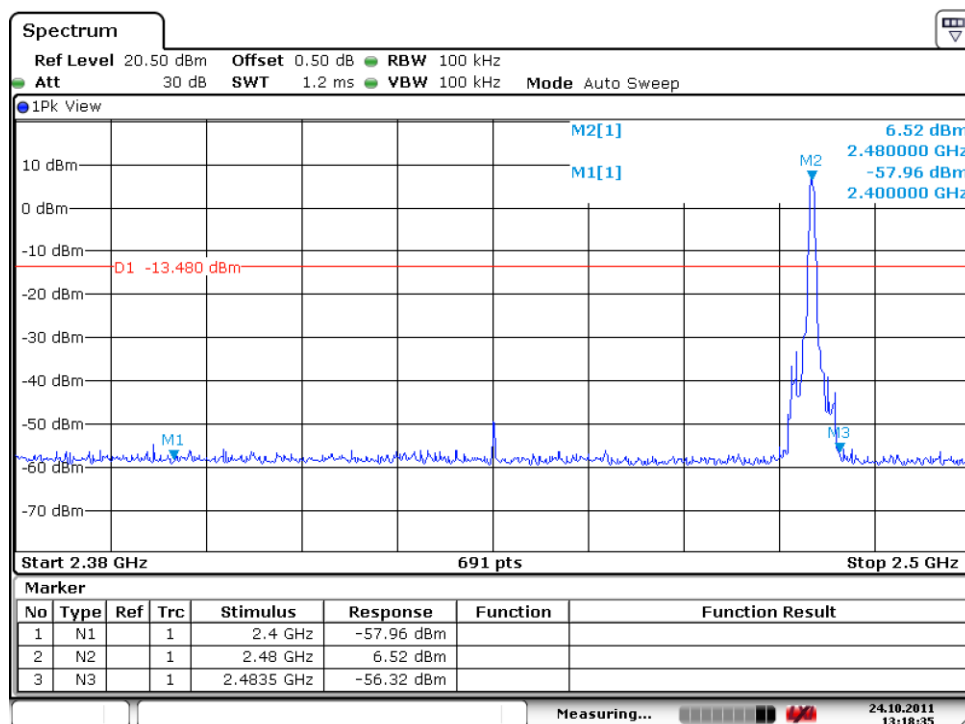

Date: 24.OCT.2011 13:18:35


Test Plot of 100kHz Conducted Emissions, 8DPSK modulation

Low Channel

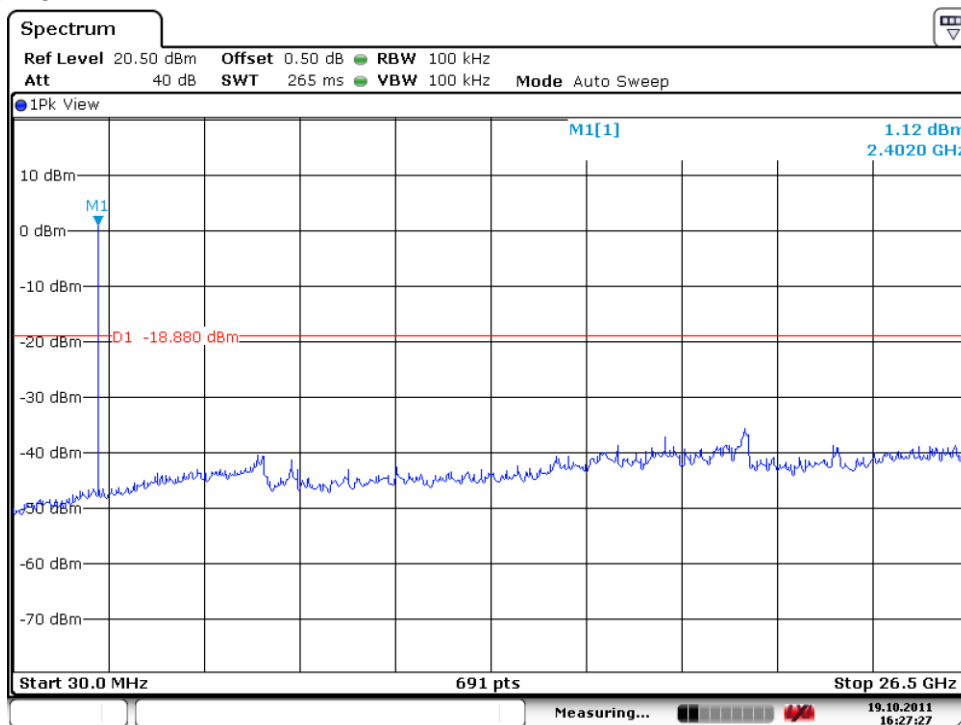

Date: 19.OCT.2011 16:27:27


High Channel

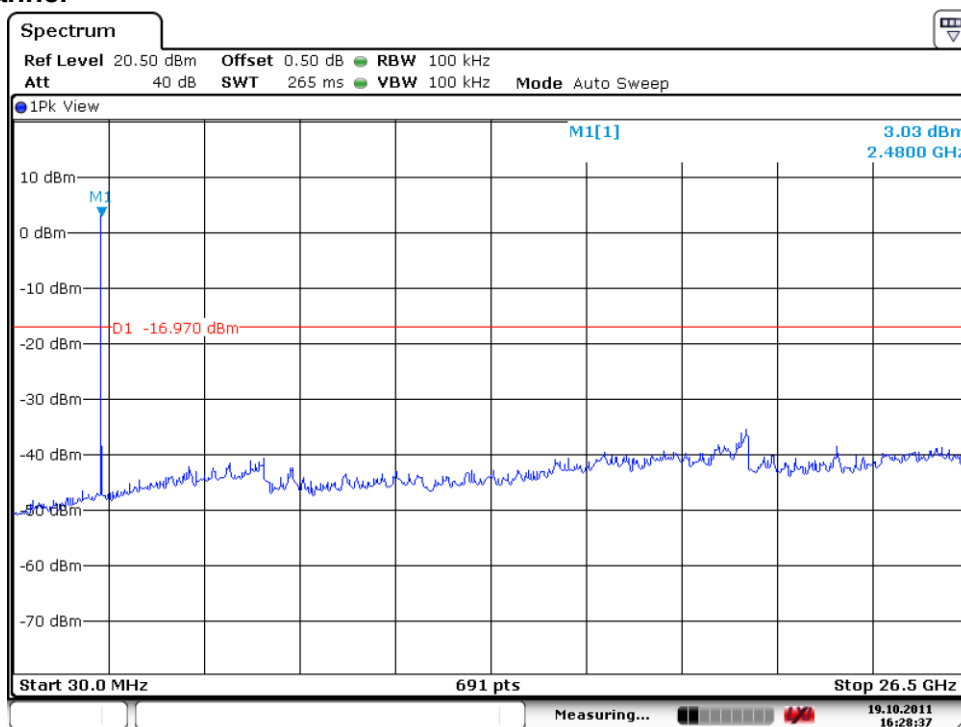

Date: 19.OCT.2011 16:28:37


Test Plot of 100kHz Bandwidth of Frequency Band Edge, 8DPSK modulation

Low Channel

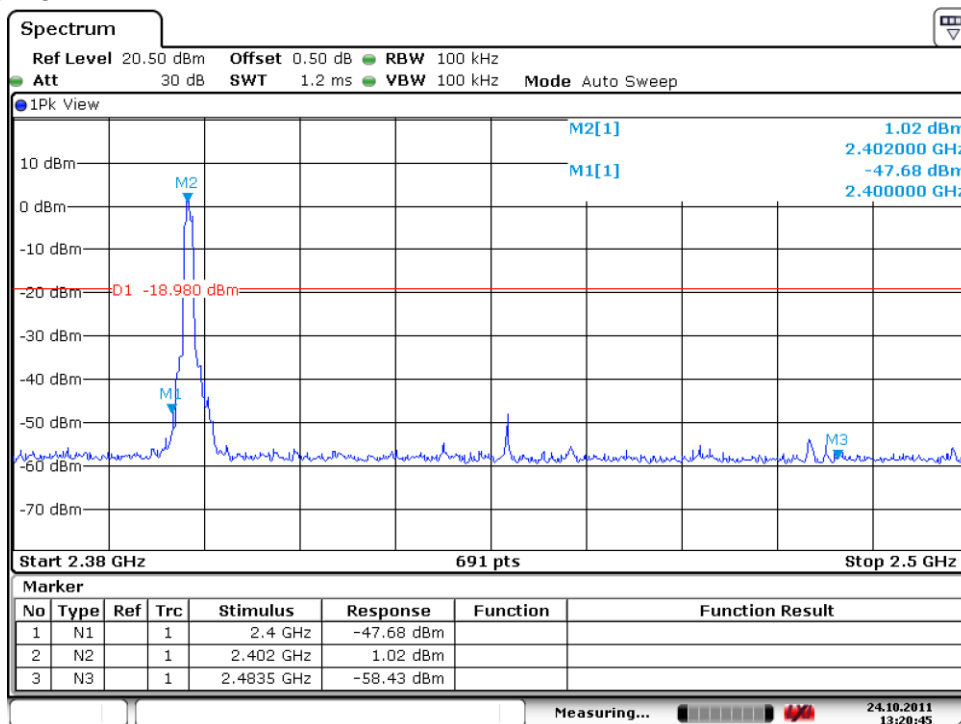

Date: 24.OCT.2011 13:20:45

High Channel

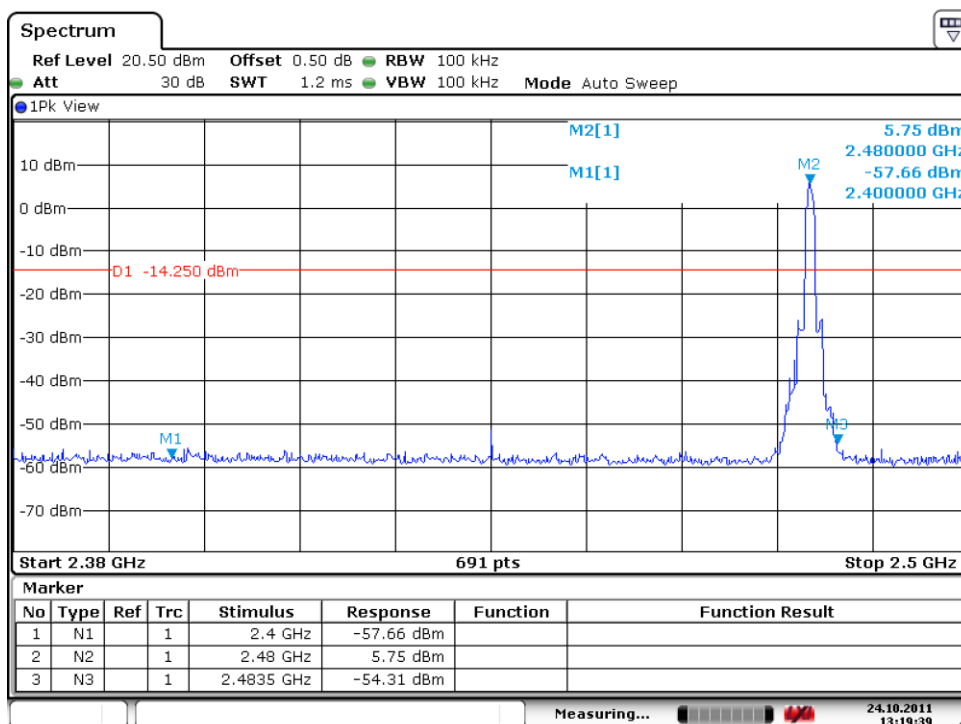

Date: 24.OCT.2011 13:19:39

5.1.6 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-247 5.5 and RSS-Gen 8.9
Basic standard	:	ANSI C63.10: 2013
Limits	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen i4, 8.9 (Table 6), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen i4, 8.9 (Table 4 and 5). Radiated emissions which fall in the restricted bands, as defined in LP0002(2011): 2.7 , must comply with the radiated emission limits specified in LP0002(2011): 2.8 Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and FCC 15.249(a), RSS-Gen i4, 8.9 (Table 4 and 5) and RSS-210 A2.9(a). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in LP0002(2011): 2.8
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A
Ambient temperature	:	24°C
Relative humidity	:	56%
Atmospheric pressure	:	101 kPa

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic. For details refer to Appendix 2. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The Z Axis orientation is the worst-case and recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

Prüfbericht - Nr.: 10054927 001
*Test Report No.***Seite 33 von 44**
Page 33 of 44

5.1.7 Mains Conducted Emission

RESULT:**Passed**

Date of testing : 2011-10-24
Test standard : FCC part 15.207(a)
Basic standard : ANSI C63.10: 2013
Limits : Refer to 15.207(a)
Kind of test site : Shield room

Test setup


Test Channel : Hopping
Operation mode : A
Ambient temperature : 26°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Remark: For details refer to Appendix 3.

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Record Channel	2441	1	≥ 25kHz or 2/3 of 20dB bandwidth	Pass
Record Channel adj 1	2440			
Record Channel adj 2	2442			


Test Plot of Frequency Separation

GFSK

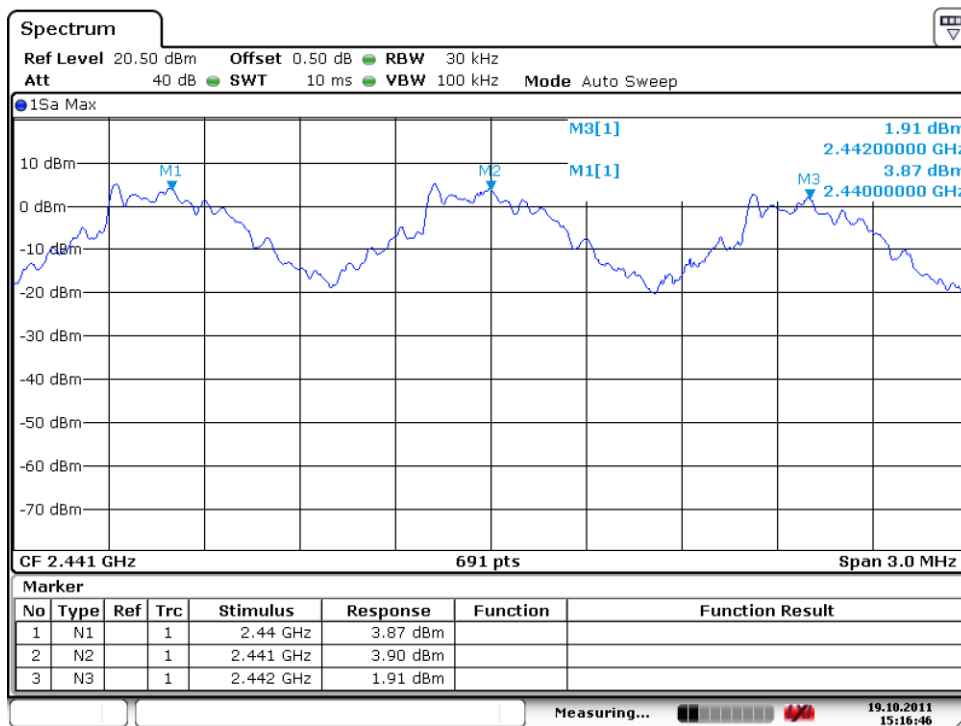

Date: 19.OCT.2011 15:16:45

8DPSK

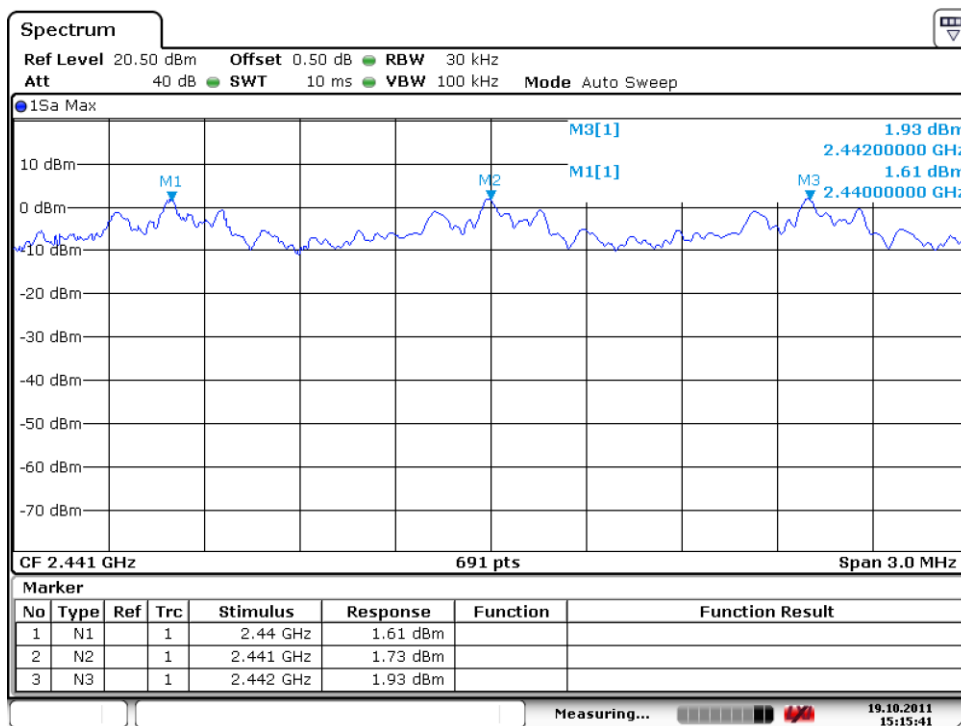

Date: 19.OCT.2011 15:15:41

Prüfbericht - Nr.: 10054927 001

Test Report No.

Seite 36 von 44

Page 36 of 44

5.1.9 Number of hopping frequency

RESULT:**Passed**

Date of testing : 2011-10-19
Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 5.1(5)
Basic standard : ANSI C63.10: 2013
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shield room


Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 24°C
Relative humidity : 53%
Atmospheric pressure : 101 kPa


Table 13: Test result of Number of hopping frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
<u>2400</u> to <u>2483.5</u> MHz	79	≥ 15	Pass

Test Plot of Number of hopping frequencies

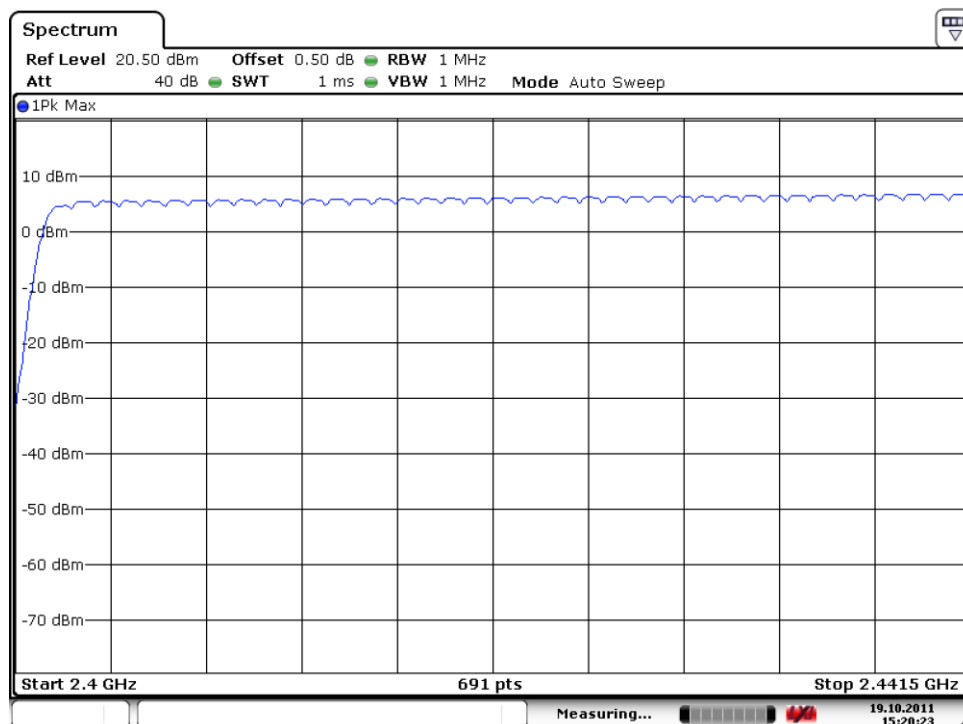

Date: 19.OCT.2011 15:20:23

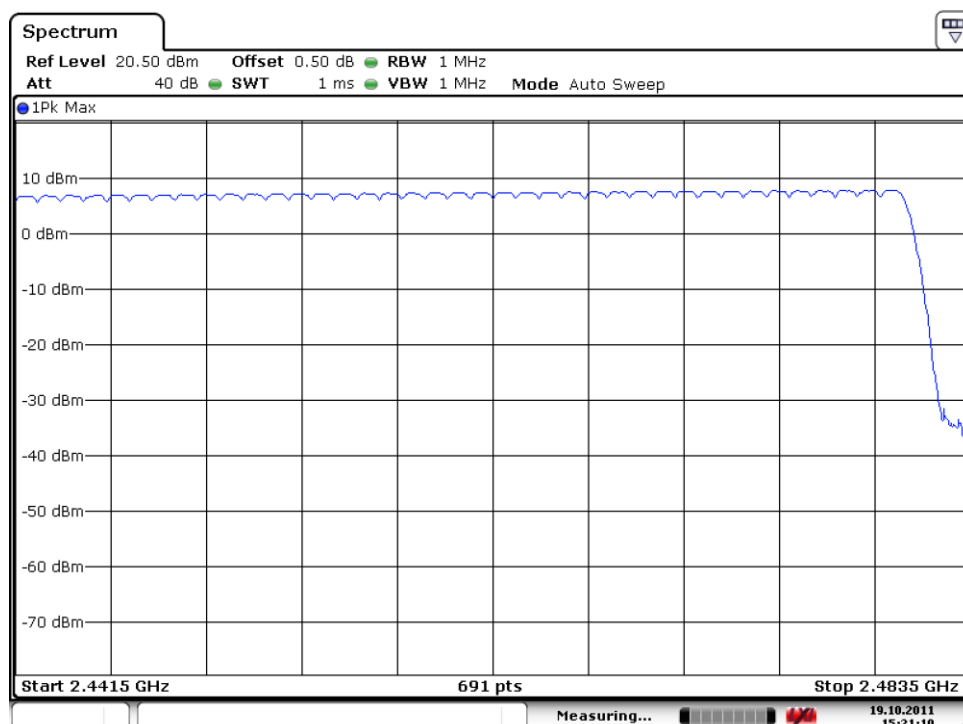

Date: 19.OCT.2011 15:21:10

5.1.10 Time of Occupancy

RESULT:**Passed**

Date of testing : 2011-09-26
Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 5.1(5)
Basic standard : ANSI C63.10: 2013
Limits : 0.4s
Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 24°C
Relative humidity : 53%
Atmospheric pressure : 101 kPa

Table 14: Test result of Time of Occupancy


Data Mode	Captured Burst (s)	Dwell time (s)	Limit (s)	Result
DH5	0.002956	0.3153	0.4	Pass
3-DH5	0.002971	0.3169	0.4	Pass

Note:

Dwell time = Pulse width x (Hopping rate / Number of channels) x Period


Period = 0.4 (seconds/ channel) x 79 (channel) = 31.6 seconds

Test Plot of Time of Occupancy, GFSK modulation

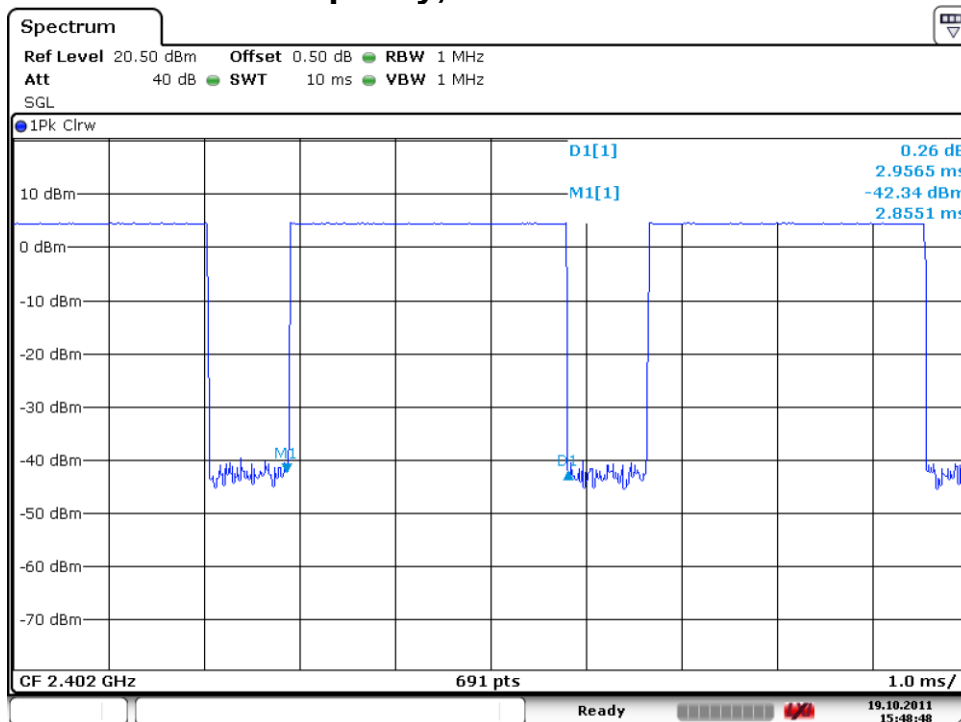

Date: 19.OCT.2011 15:48:48

Test Plot of Time of Occupancy, 8DPSK modulation

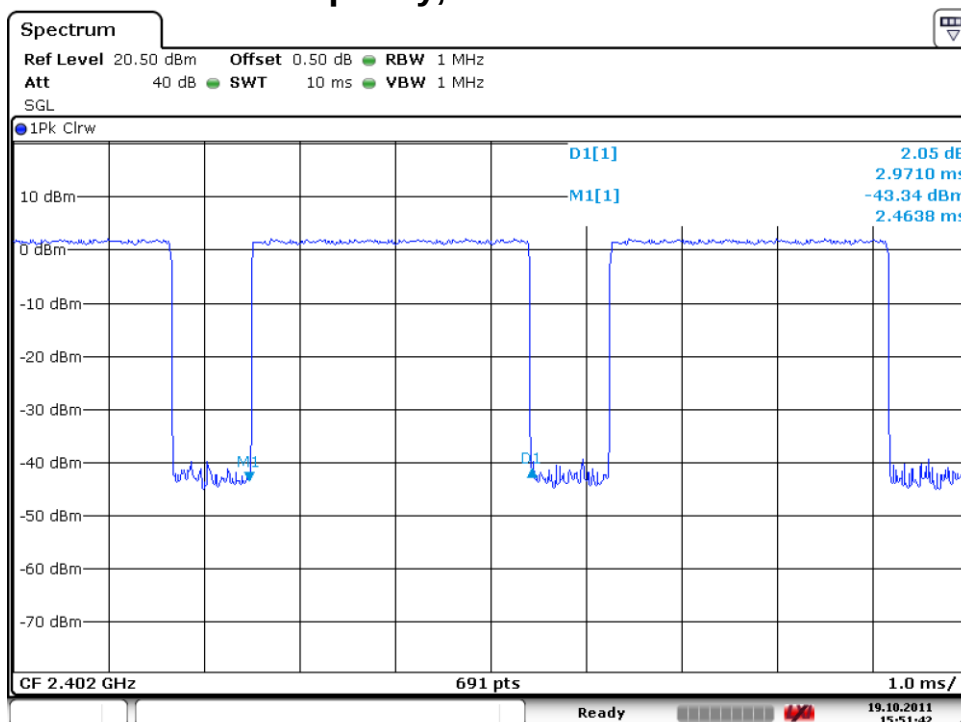

Date: 19.OCT.2011 15:51:42

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields


RESULT:**Passed**

Test standard : FCC KDB Publication 447498


Since maximum peak output power of the transmitter is $1.4\text{mW} < 10\text{mW}$, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile Portable RF Exposure.

7. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)

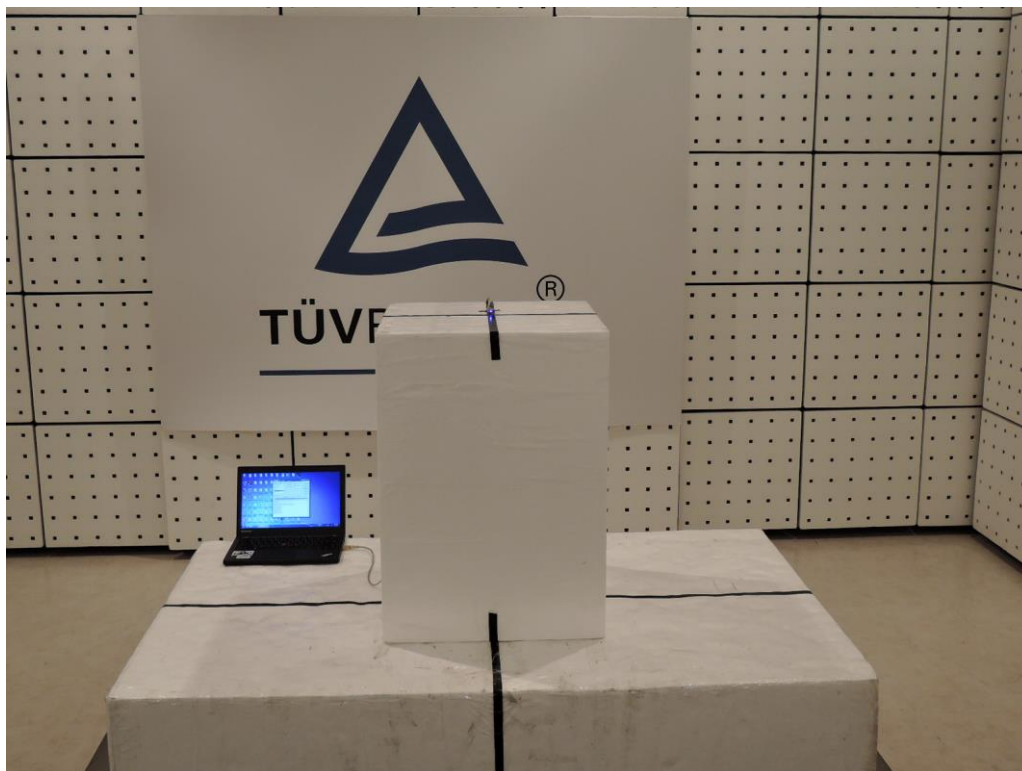

Photograph 2: Set-up for Spurious Emissions (Back View)

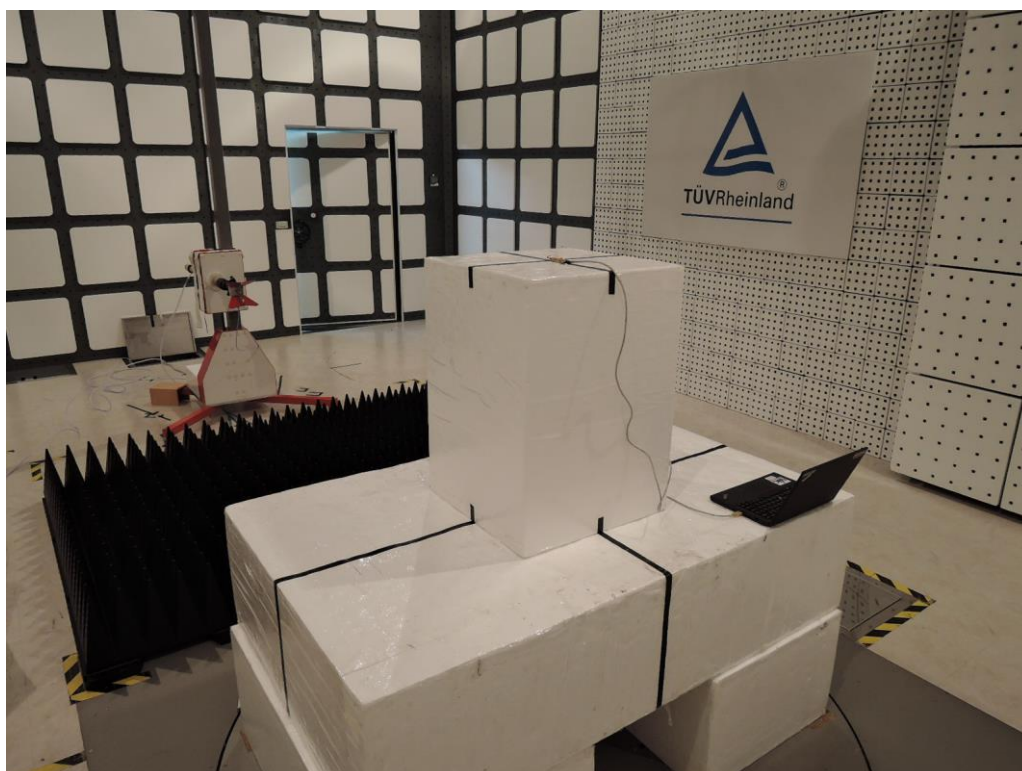

Photograph 3: Set-up for Spurious Emissions (Back View 2)

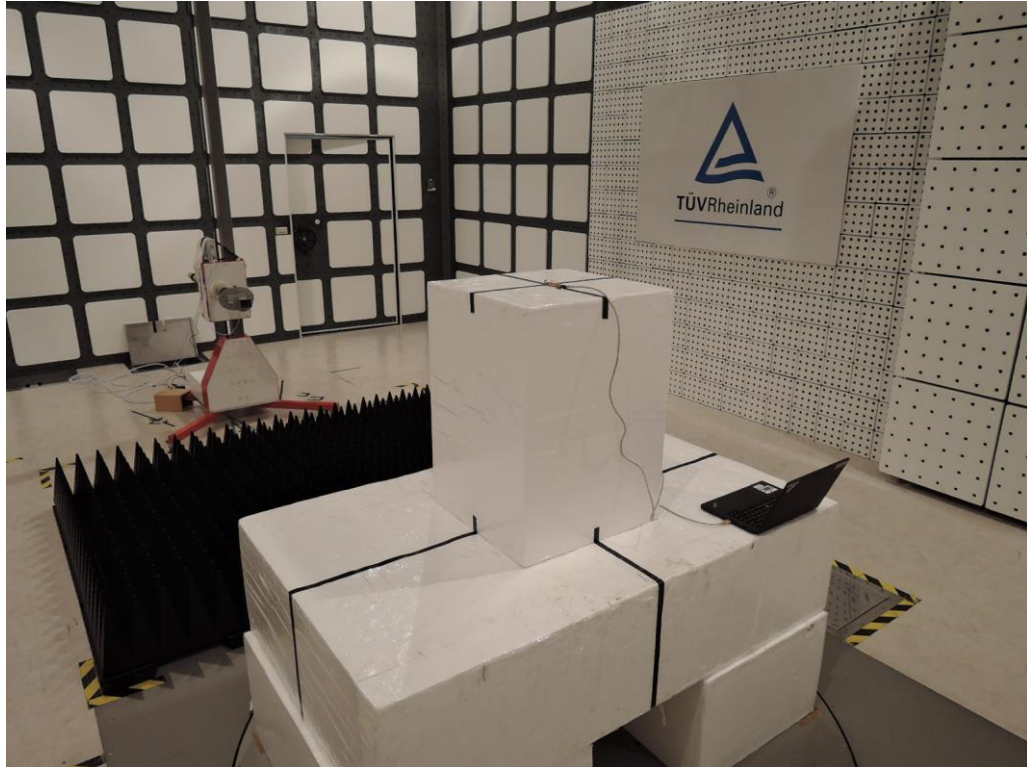

Photograph 4: Set-up for Mains Conducted Emissions (Front View)



Photograph 5: Set-up for Mains Conducted Emissions (Back View)



8. List of Tables

Table 1: Applied Standard and Test Levels	4
Table 2: List of Test and Measurement Equipment	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Technical Specification of EUT	8
Table 5: Frequency hopping information.....	9
Table 6: Test result of Peak Output Power, GFSK modulation.....	15
Table 7: Test result of Peak Output Power, 8DPSK modulation.....	15
Table 8: Test result of 20dB Bandwidth, GFSK modulation.....	19
Table 9: Test result of 20dB Bandwidth, 8DPSK modulation.....	19
Table 10: Test result of 99% Bandwidth, GFSK modulation	23
Table 11: Test result of 99% Bandwidth, 8DPSK modulation	23
Table 12: Test result of Frequency Separation	34
Table 13: Test result of Number of hopping frequency	36
Table 14: Test result of Time of Occupancy.....	38

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	41
Photograph 2: Set-up for Spurious Emissions (Back View)	41
Photograph 2: Set-up for Spurious Emissions (Back View 2)	42
Photograph 3: Set-up for Mains Conducted Emissions (Front View).....	42
Photograph 4: Set-up for Mains Conducted Emissions (Back View)	43