

Prüfbericht-Nr.: <i>Test Report No.:</i>	50346974 001	Auftrags-Nr.: <i>Order No.:</i>	238134479	Seite 1 von 36 Page 1 of 36
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	7-Feb-2020	
Auftraggeber: <i>Client:</i>	Hosiden Corporation 4-33, Kitakyuhoji 1-Chome, Yao-City, Osaka, Japan			
Prüfgegenstand: <i>Test item:</i>	Bluetooth Low Energy Module			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	HRM3012			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C / IC RSS-247 Test report			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247(DTS) ISED RSS-247 (02-2017)			
Wareneingangsdatum: <i>Date of receipt:</i>	15-Feb-2019			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A001062094-002, 006			
Prüfzeitraum: <i>Testing period:</i>	18-Feb-2020~25-Feb-2020			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
Report date / tested by:		kontrolliert von / reviewed by:		
28-Feb-2020 Jack Chang/ Project Manager		28-Feb-2020 Ryan W. T. Chen / Project Manager		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 MAXIMUM CONDUCTED PEAK OUTPUT POWER

RESULT: Passed

5.1.3 6dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Passed

5.1.4 POWER DENSITY

RESULT: Passed

5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100kHz BANDWIDTH

RESULT: Passed

5.1.6 SPURIOUS EMISSION

RESULT: Passed

5.2.1 MAINS CONDUCTED EMISSIONS

RESULT: Passed

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Passed

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
1.2	DECISION RULE OF CONFORMITY.....	5
2.	TEST SITES	6
2.1	TEST FACILITY.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.3	TRACEABILITY	8
2.4	CALIBRATION	8
2.5	MEASUREMENT UNCERTAINTY	8
3.	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	SYSTEM DETAILS AND RATINGS.....	9
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Maximum conducted Peak output power</i>	<i>15</i>
5.1.3	<i>6dB Bandwidth and 99% Bandwidth.....</i>	<i>17</i>
5.1.4	<i>Power Density</i>	<i>23</i>
5.1.5	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....</i>	<i>27</i>
5.1.6	<i>Spurious Emission</i>	<i>33</i>
5.2	MAINS EMISSIONS.....	34
5.2.1	<i>Mains Conducted Emissions.....</i>	<i>34</i>
6.	SAFETY HUMAN EXPOSURE	35

6.1 RADIO FREQUENCY EXPOSURE COMPLIANCE 35
 6.1.1 Electromagnetic Fields.....35

7. LIST OF TABLES 36

1. General Remarks

1.1 Complementary Materials

The following attachments are integral parts of this test report:

Appendix X: Photographs of the Test Set-Up
(File Name: 50346974 001 APPENDIX X)

Appendix P: Photo Documentation internal view
(File Name: 50346974 001 APPENDIX P)

Appendix D: Test Result of Radiated Emissions
(File Name: 50346974 001 APPENDIX D)

Test Specifications

The following standards were applied.

Table 1: Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247 FCC 47CFR Part 2: Subpart J Section 2.1093 ISED RSS-247 Issue 2, Feb 2017 ISED RSS-102 Issue 5, March 2015 ISED RSS-Gen, Issue 5, March 2019 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v05r02 KDB447498 D01 General RF Exposure Guidance v06

1.2 Decision Rule of conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.1 Test Facility

TUV Rheinland Taiwan Ltd.

Radiated/Conducted test at below facility:
No. 458-18, Sec 2, Fenliao., Linkou Dist.
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
IC Canada Registration No.: 25563

Mains Conduction tested at below facility:
11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC RegistrationNo.: 180491
IC Canada Registration No.: 9465A

TAF Accredited NCC Test Lab. No.:3567
TAF ISO17025 Certification effective period: 6th-May-2019 to 05th-May-2022



Testing Laboratory
3567

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESR7	102108	2019/4/17	2020/4/16
Spectrum Analyzer	R&S	FSV40	101112	2019/10/15	2020/10/15
Pre-Amplifier	Agilent	8447D	2944A10772	2019/02/22	2020/2/29
Pre-Amplifier	EMCI	EMC051845SE	980633	2019/2/25	2020/2/29
Pre-Amplifier	EMCI	EMC184045SE	980657	2019/2/23	2020/2/29
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2019/1/14	2020/2/19
Horn Antenna	ETS-Lindgren	3117	00218930	2019/12/6	2020/12/5
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2019/4/12	2020/4/11
Loop Antenna	EMCI	LPA600	287	2020/01/09	2021/1/8
Test Software	Audix	e3	Ver. 9	N/A	N/A
Test Cable	HUBER+SUHNE R	SUCOFLEX 104EA_9k~18G	800056/4EA	2019/4/18	2020/4/17
Test Cable	HUBER+SUHNE R	SUCOFLEX 104_9k~18G	804680/4	2019/4/18	2020/4/17
Test Cable	HUBER+SUHNE R	SUCOFLEX 104_9k~18G	MY37202/4	2019/4/18	2020/4/17
Test Cable	HUBER+SUHNE R	SUCOFLEX 102EA_1G~40 G	800898/2EA	2019/4/18	2020/4/17
Test Cable	HUBER+SUHNE R	SUCOFLEX 102EA_1G~40 G	800901/2EA	2019/4/18	2020/4/17
Test Cable	HUBER+SUHNE R	SUCOFLEX 102EA_1G~40 G	801027/2EA	2019/4/18	2020/4/17
Power Meter	Anritsu	ML2495A	1901008	2019/4/29	2020/4/28
Power Sensor	Anritsu	MA2411B	1725269	2019/4/29	2020/4/28
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100797	2019/01/16	2020/02/29
Two-Line V- Network (for EUT)	Rohde & Schwarz	ENV216	101243	2019/06/23	2020/06/23
Two-Line V- Network	Rohde & Schwarz	ENV216	101262	2019/07/16	2020/07/16
Impedance Stabilization Network	TESEQ	ISN T800	51949	2019/02/20	2020/02/29
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54- 102102-HN	2019/07/25	2020/07/25
Test Software	Audix	e3	Ver. 9	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular schedule using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements .

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
RF power density, conducted	± 3 dB
spurious emissions, conducted	± 3 dB
all emissions, radiated	± 6 dB
Temperature	± 1 °C
Humidity	± 5 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth Low Energy Module. It contains a 2.4GHz compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Table 4: Technical Specification of EUT

Bluetooth Low Energy(125kbps, 500kbps, 1Mbps, 2Mbps)	
Technical Specification	Value
Operating Frequencies	2402~2480MHz
Channel number	40
Operation Voltage	3Vdc
Modulation	GFSK
Antenna gain	0.35dBi
FCC ID	VIYHRM3012
IC ID	7305A-HRM3012
HVIN	HRM3012

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Block Diagram
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: The module is mounted on an Evaluation Board provided by the manufacturer. The EVB is provided with an USB-UART interface which makes it possible to control the module through the test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed in section 3.3 as appropriate.

Software: SerialDebug2.exe
Power setting is 5dBm.

The samples were used as follows:
Conducted sample: A001062094-006
Radiated sample: A001062094-002

Full test was applied on all test modes, but only worst case was shown

Bluetooth Low Energy mode:

Channel Low (2402MHz), Channel Mid (2440MHz) and Channel High (2480MHz) were chosen for full testing. The worst condition was determined based on the test result of Maximum peak output power.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

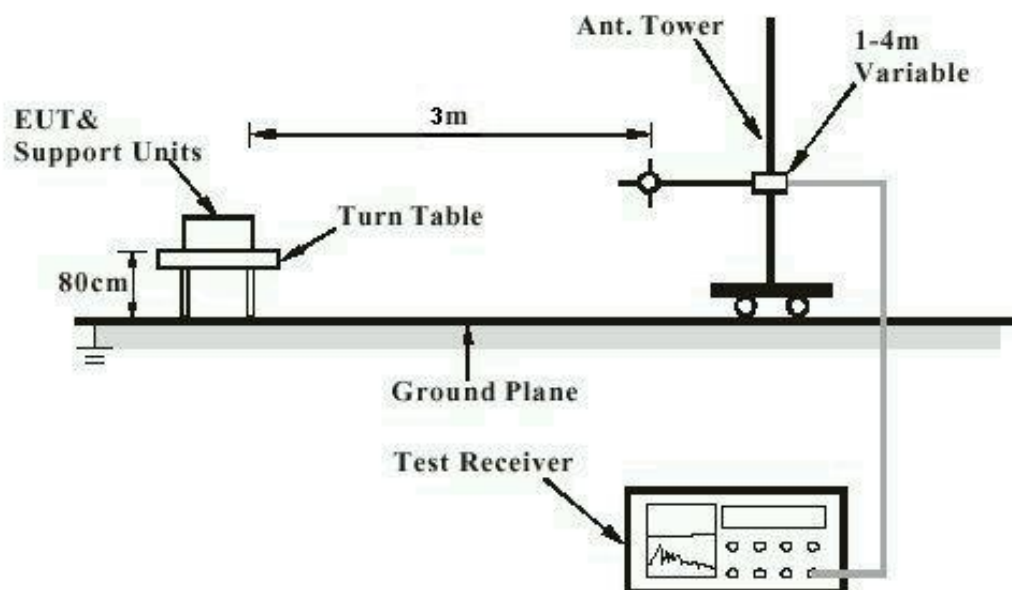
Description	Manufacturer	Model No.
Notebook (Setup)	HP	TPN-C139

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test



Note: Measurements above 1 GHz are done with a table height of 1.5m

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

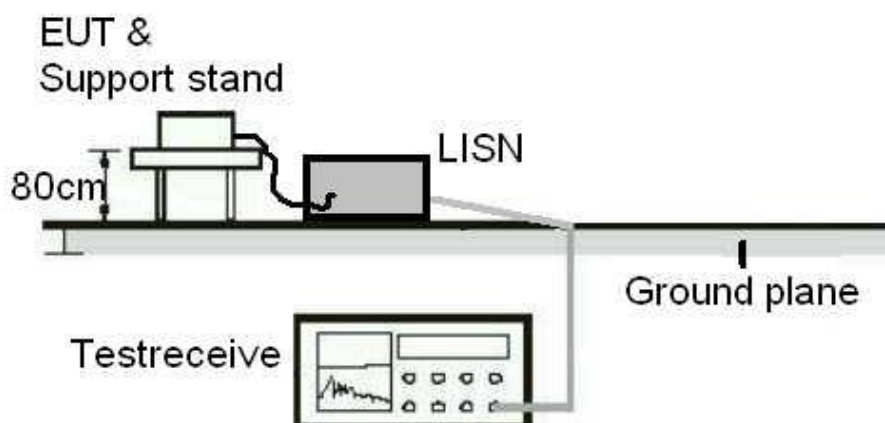
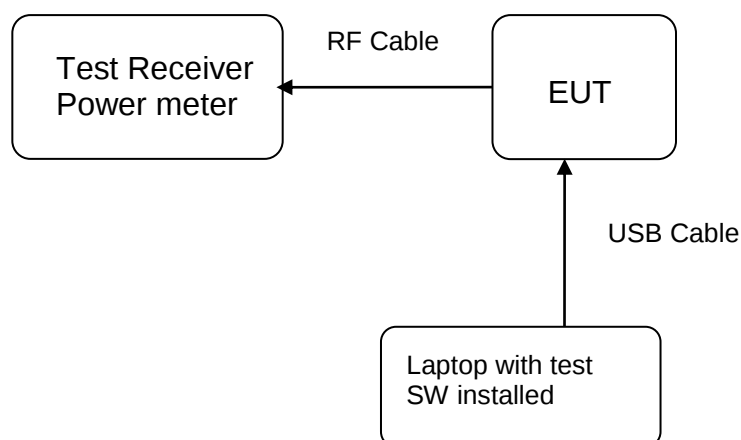


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement



Note: The output power is measured by power meter according to 8.3.1.3 KDB558074 D01 Meas Guidance v05r02 8.3.1.3.

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test standard : FCC Part 15.247(b)(4), Part 15.203 and ISSED
RSS-Gen 6.8

Requirement : use of approved antennas only with directional gains that
do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with Max directional gain of 0.35dBi. The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Maximum conducted Peak output power

RESULT:

Passed

Test standard : FCC Part 15.247(b)(3), ISSED RSS-247 5.4(b)
 Basic standard : ANSI C63.10:2013, KDB558074(8.3.1.3)
 Limit : 1 Watt
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A

Ambient temperature : 20-24 °C
 Relative humidity : 50-65 %
 Atmospheric pressure : 100-103 kPa

Table 5: Test result of Maximum conducted Peak output power, Bluetooth Low Energy 1Mbps

Channel	Channel Frequency (MHz)	Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2402	3.33	0.00215	1
Middle Channel	2440	3.28	0.00213	1
High Channel	2480	3.13	0.00206	1

Table 6: Test result of Maximum conducted Peak output power, Bluetooth Low Energy 2Mbps

Channel	Channel Frequency (MHz)	Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2402	3.28	0.00213	1
Middle Channel	2440	3.29	0.00213	1
High Channel	2480	3.11	0.00205	1

**Table 7: Test result of Maximum conducted Peak output power,
Bluetooth Low Energy 125kbps**

Channel	Channel Frequency	Output Power		Limit
		(dBm)	(W)	
Low Channel	2402	3.31	0.00214	1
Middle Channel	2440	3.25	0.00211	1
High Channel	2480	3.1	0.00204	1

**Table 8: Test result of Maximum conducted Peak output power,
Bluetooth Low Energy 500kbps**

Channel	Channel Frequency	Output Power		Limit
		(dBm)	(W)	
Low Channel	2402	3.27	0.00212	1
Middle Channel	2440	3.35	0.00216	1
High Channel	2480	3.13	0.00206	1

5.1.3 6dB Bandwidth and 99% Bandwidth

RESULT:
Passed

Test standard : FCC Part 15.247(a)(2), ISSED RSS-247 5.2(a)
 ISSED RSS-Gen (Issue 5) 6.7
 Basic standard : ANSI C63.10:2013, KDB558074
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A

Ambient temperature : 20-24°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103 kPa

Table 9: Test result of 6dB Bandwidth, Bluetooth Low Energy 500kbps

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	704.30	>500	Pass
Mid Channel	2440	698.30	>500	Pass
High Channel	2480	686.31	>500	Pass

Table 10: Test result of 6dB Bandwidth, Bluetooth Low Energy 2Mbps

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low Channel	2402	1.36064	>500	Pass
Mid Channel	2440	1.39837	>500	Pass
High Channel	2480	1.41689	>500	Pass

Table 11: Test result of 99% Bandwidth, Bluetooth Low Energy 500kbps

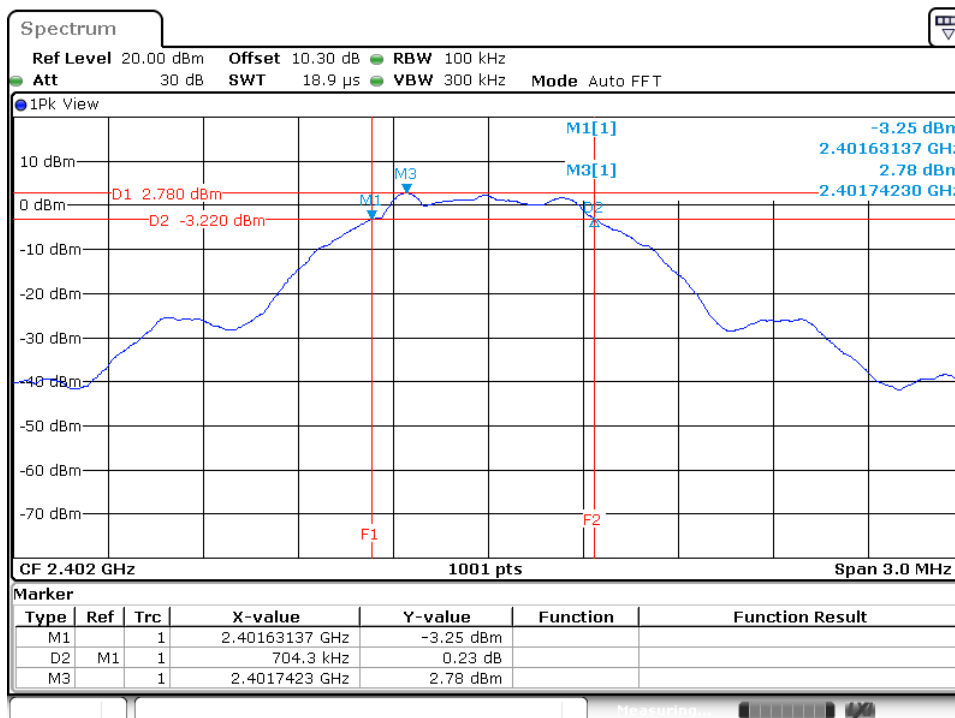
Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Mid Channel	2440	1.0399

Table 12: Test result of 99% Bandwidth, Bluetooth Low Energy 2Mbps

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Mid Channel	2440	2.0620

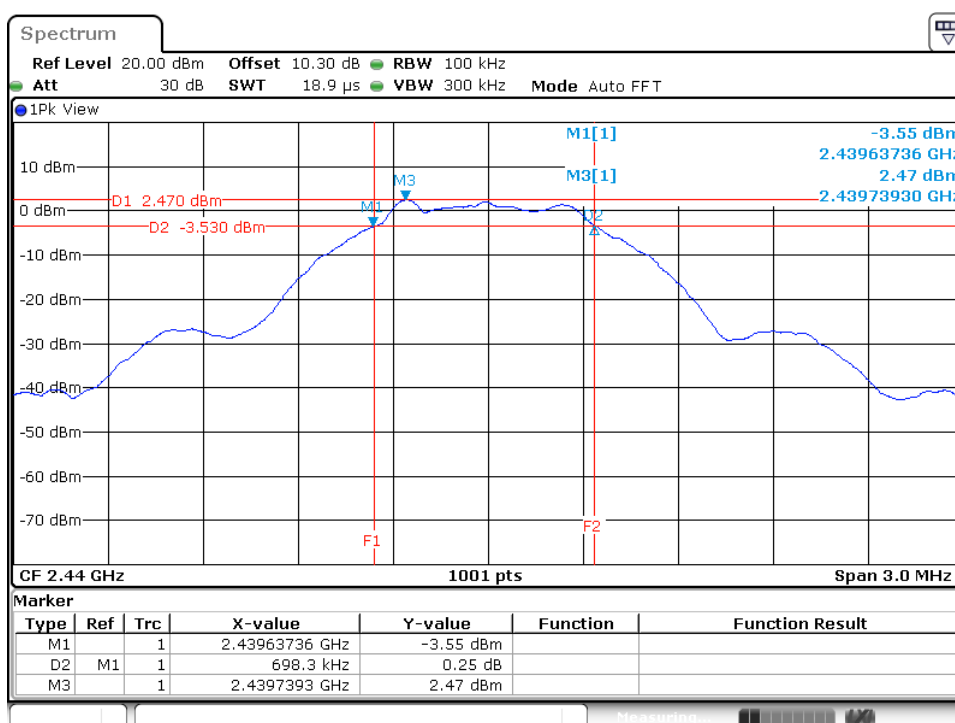
Test Plot of 6dB Bandwidth, Bluetooth Low Energy 500kbps

Low Channel

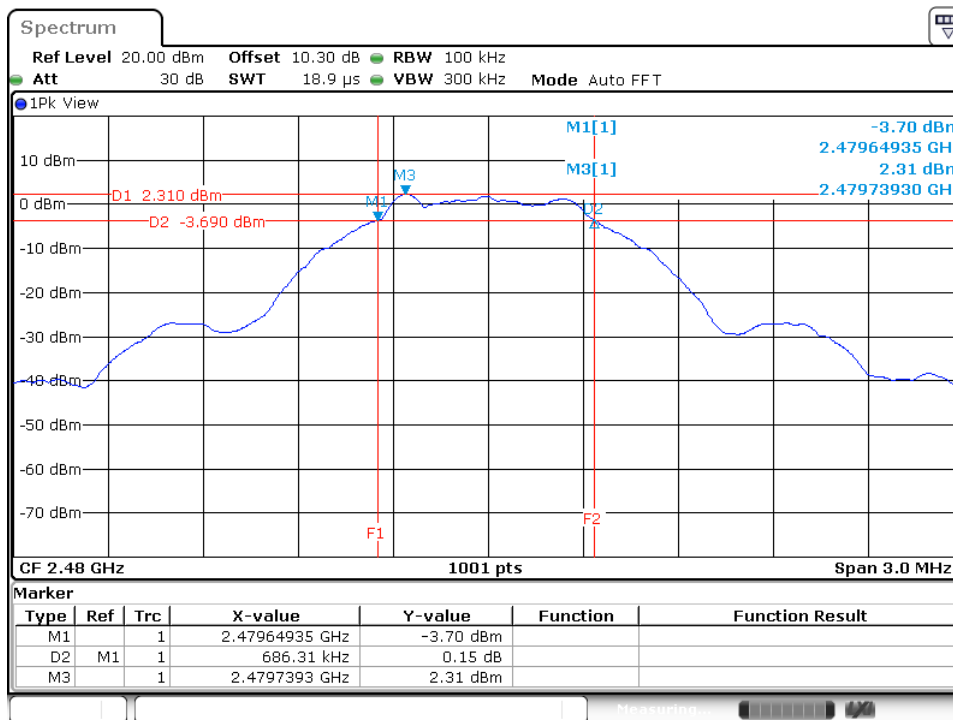
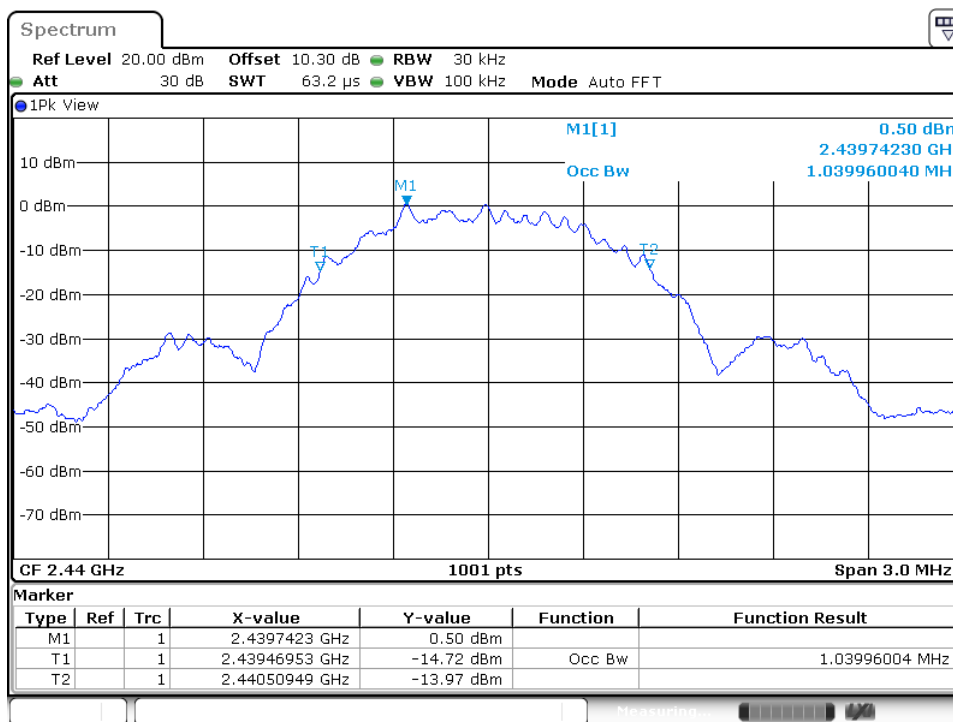


Date: 25.FEB.2020 04:56:22

Middle Channel

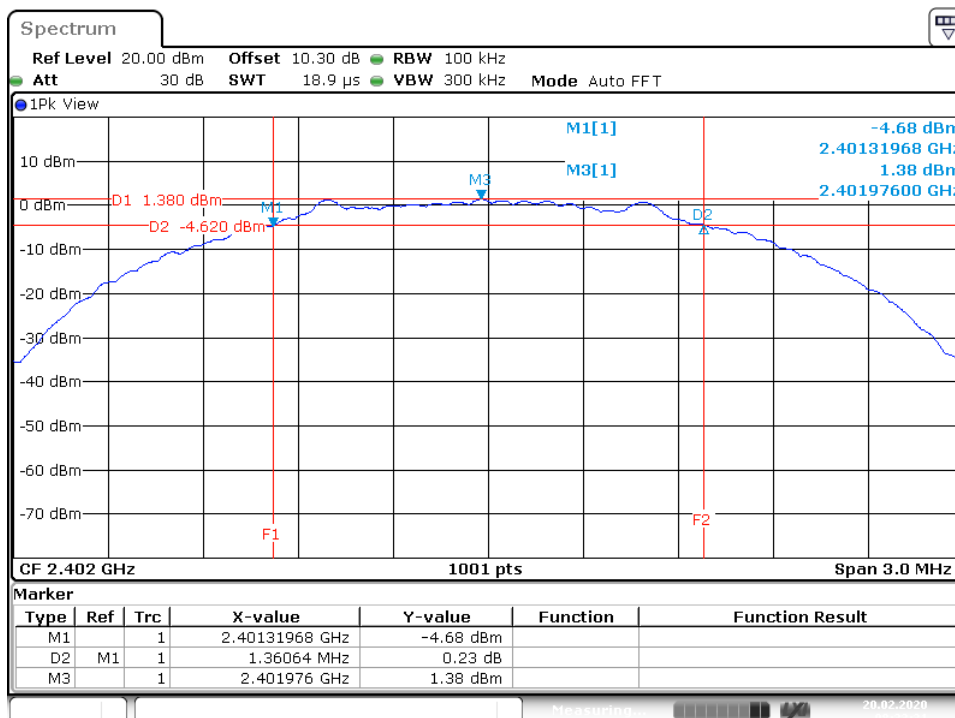


Date: 25.FEB.2020 05:01:09

High Channel

Test Plot of 99% Bandwidth, Bluetooth Low Energy 500kbps
Middle Channel


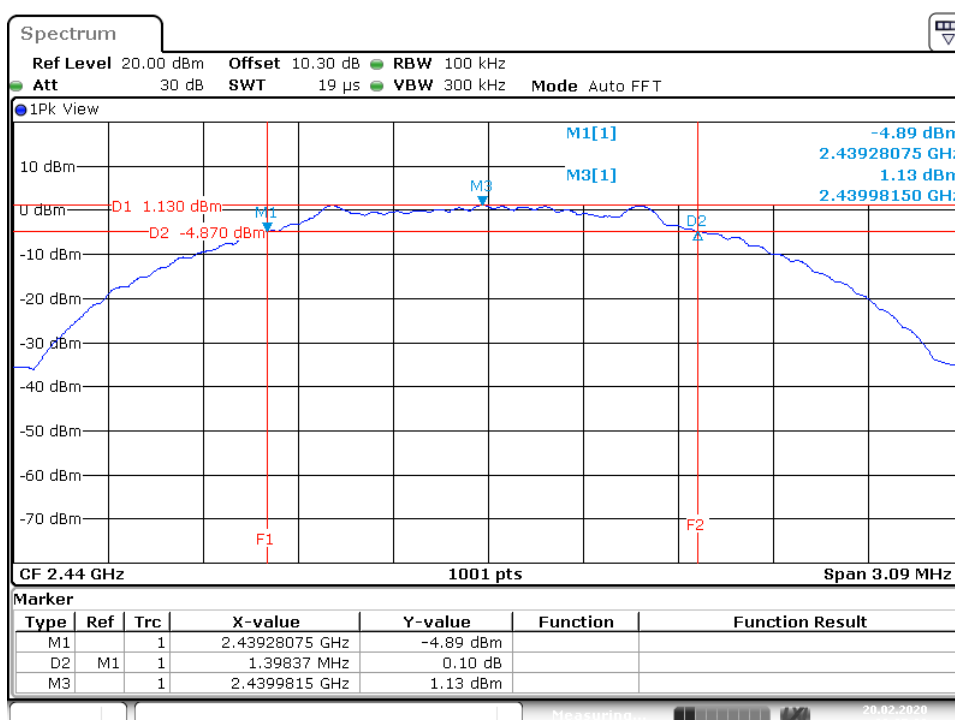
Test Plot of 6dB Bandwidth, Bluetooth Low Energy 2Mbps

Low Channel

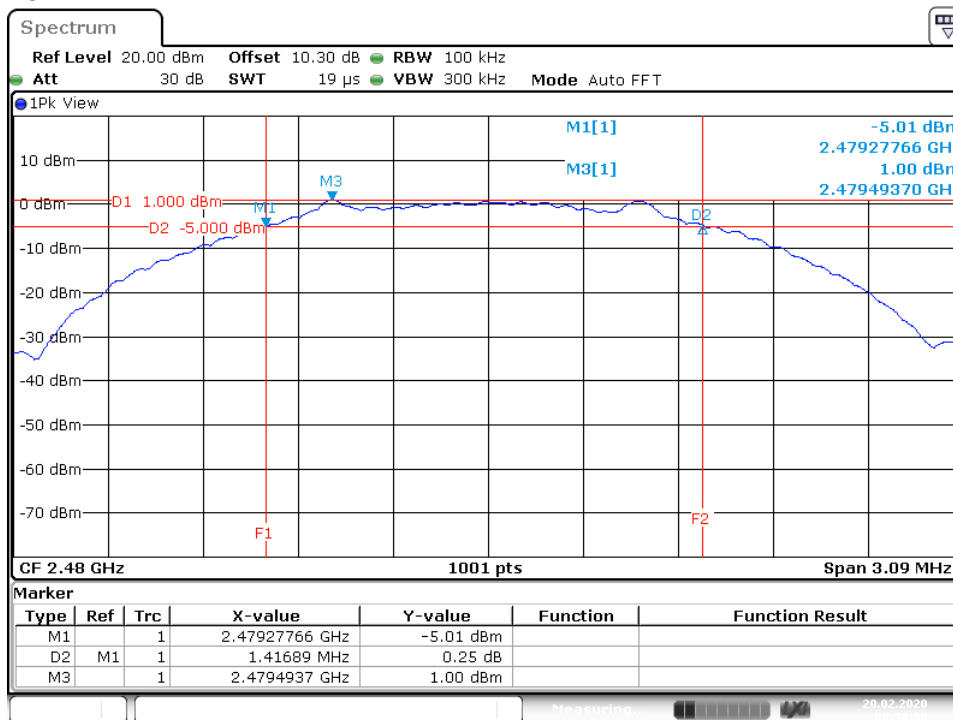


Date: 20.FEB.2020 08:33:31

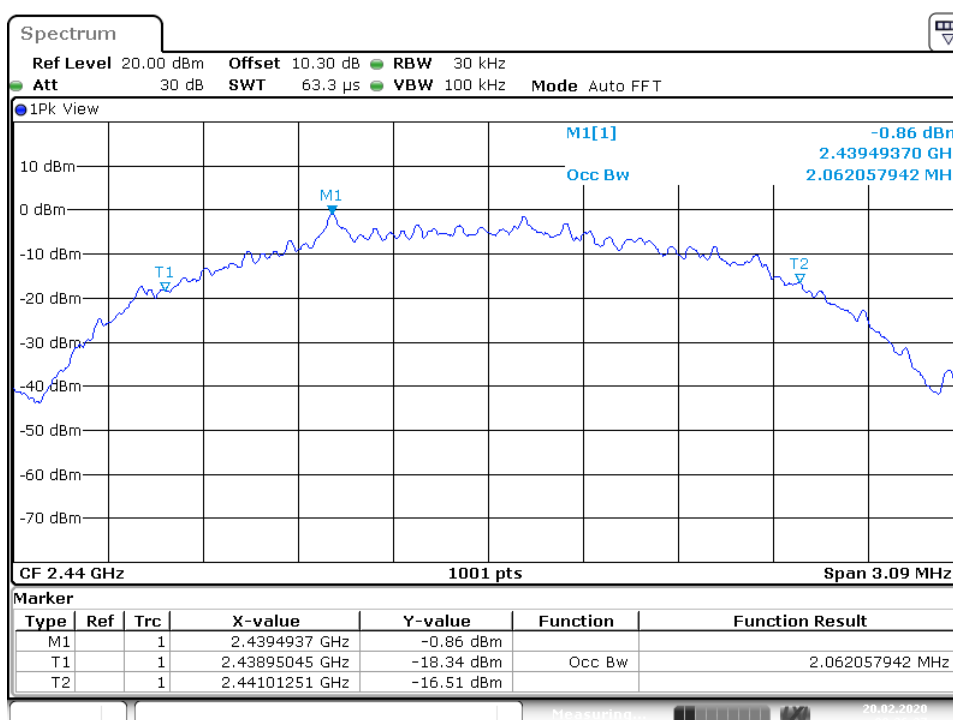
Middle Channel



Date: 20.FEB.2020 08:35:37

High Channel


Date: 20.FEB.2020 08:38:07

Test Plot of 99% Bandwidth, Bluetooth Low Energy 2Mbps
Middle Channel


Date: 20.FEB.2020 08:36:37

5.1.4 Power Density

RESULT:
Passed

Test standard : FCC Part 15.247(e) , ISSED RSS-247 5.2(b)
 Basic standard : ANSI C63.10:2013, KDB558074
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 20-24°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103 kPa

Table 13: Test result of Power Density, Bluetooth Low Energy 500kbps

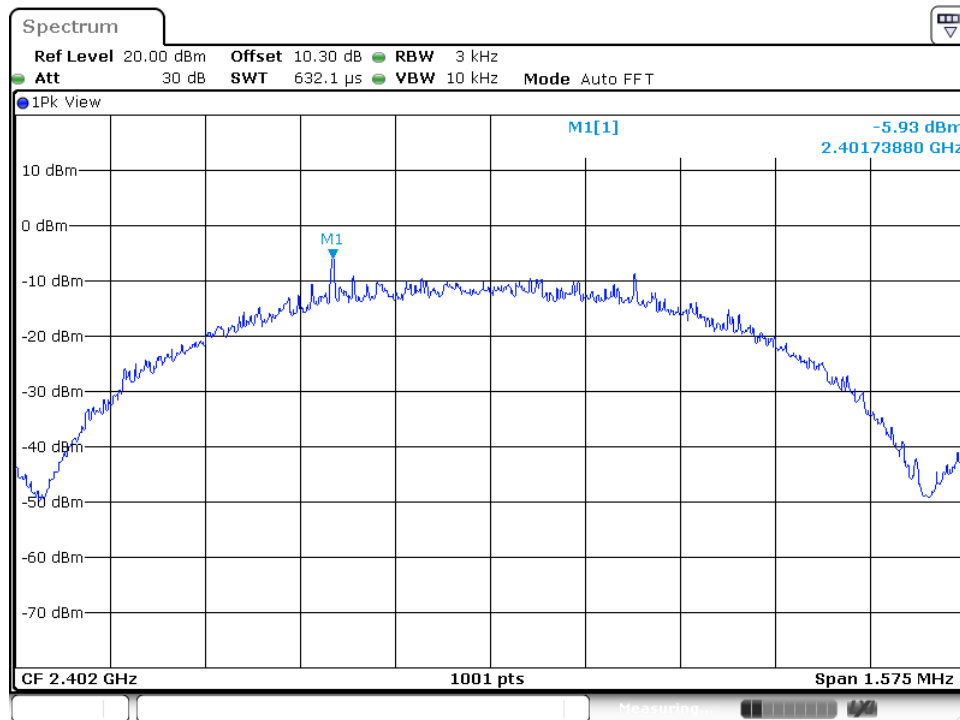
Channel	Channel Frequency (MHz)	Power Density	Limit
		(dBm)	(dBm)
Low Channel	2402	-5.93	8
Middle Channel	2440	-6.06	8
High Channel	2480	-6.26	8

Table 14: Test result of Power Density, Bluetooth Low Energy 2Mbps

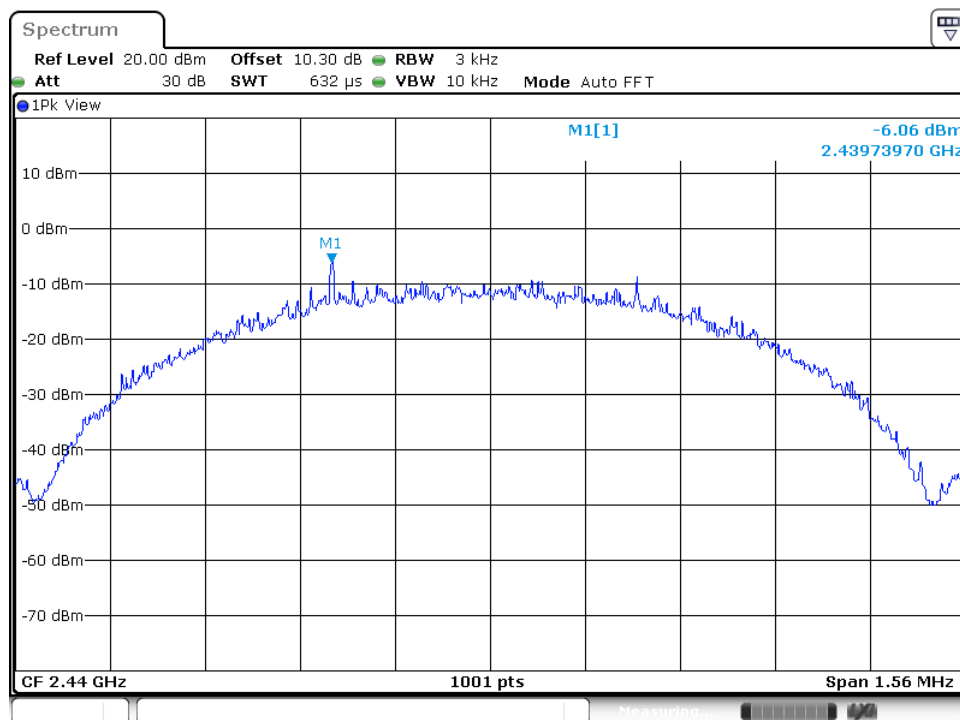
Channel	Channel Frequency (MHz)	Power Density	Limit
		(dBm)	(dBm)
Low Channel	2402	-10.25	8
Middle Channel	2440	-10.66	8
High Channel	2480	-10.46	8

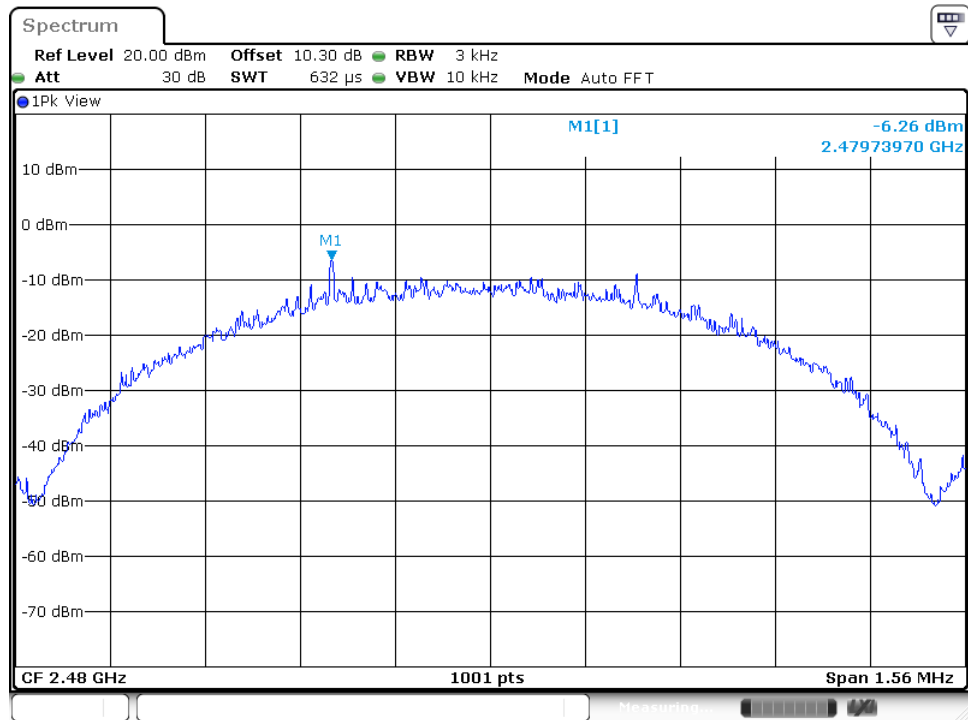
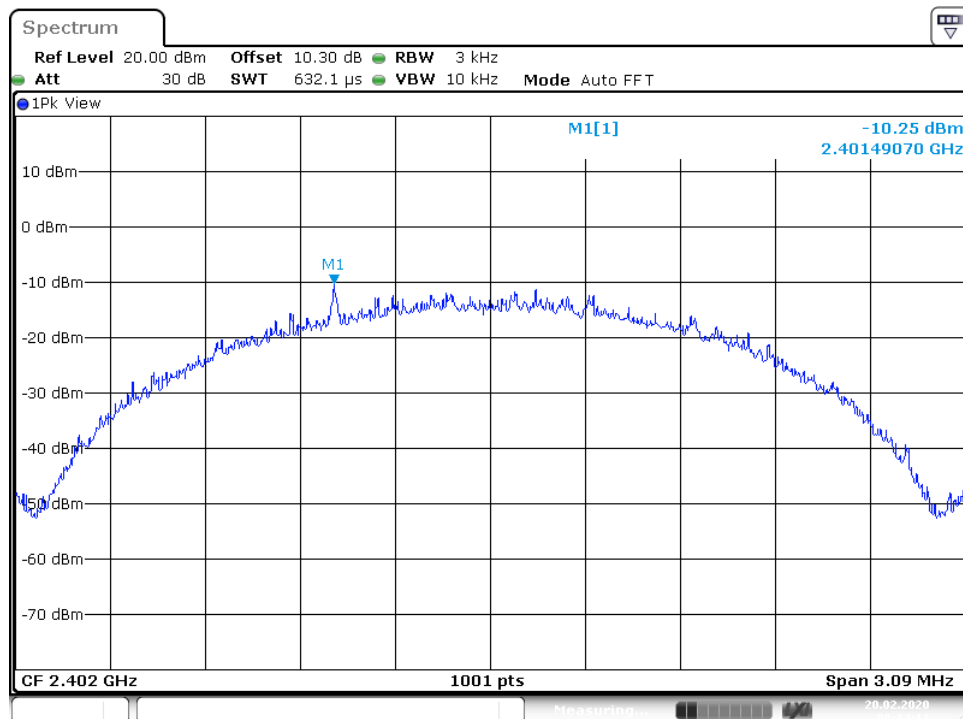
Test Plot of Power Density, Bluetooth Low Energy 500kbps

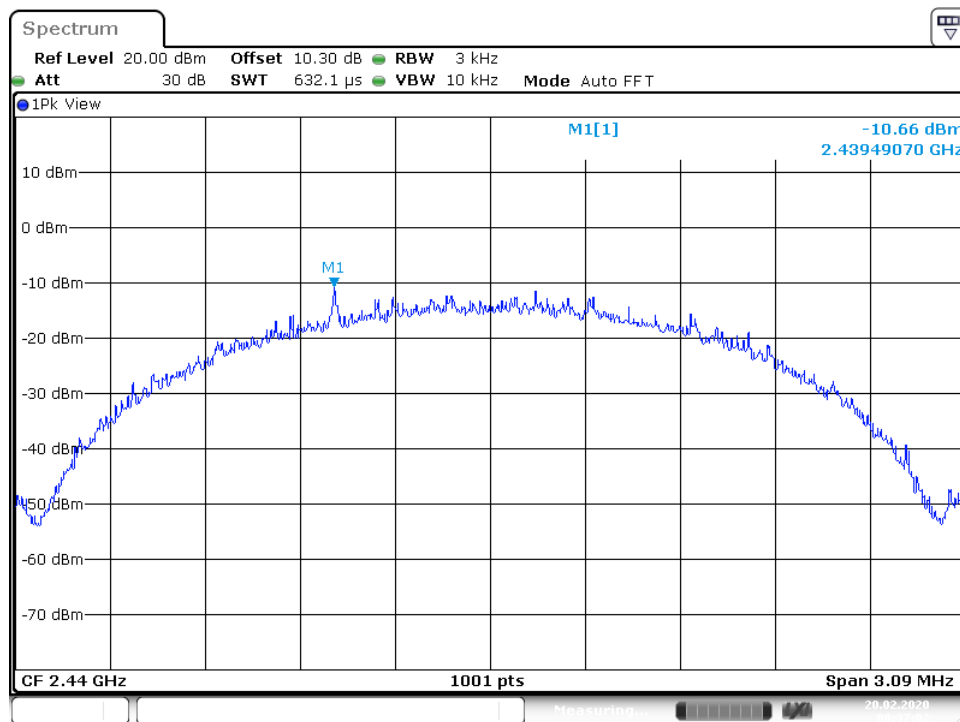
Low Channel



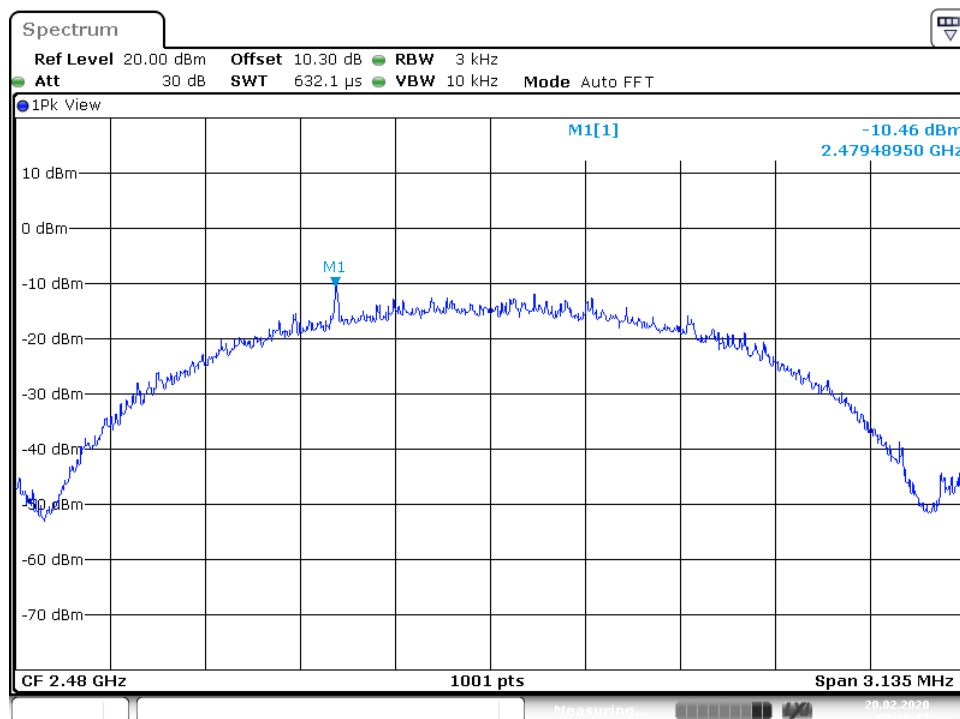
Middle Channel



High Channel

Test Plot of Power Density, Bluetooth Low Energy 2Mbps
Low Channel


Middle Channel


Date: 20.FEB.2020 08:37:02

High Channel


Date: 20.FEB.2020 08:39:17

5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), ISED RSS-247 5.5
Basic standard	:	ANSI C63.10:2013, KDB558074
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup

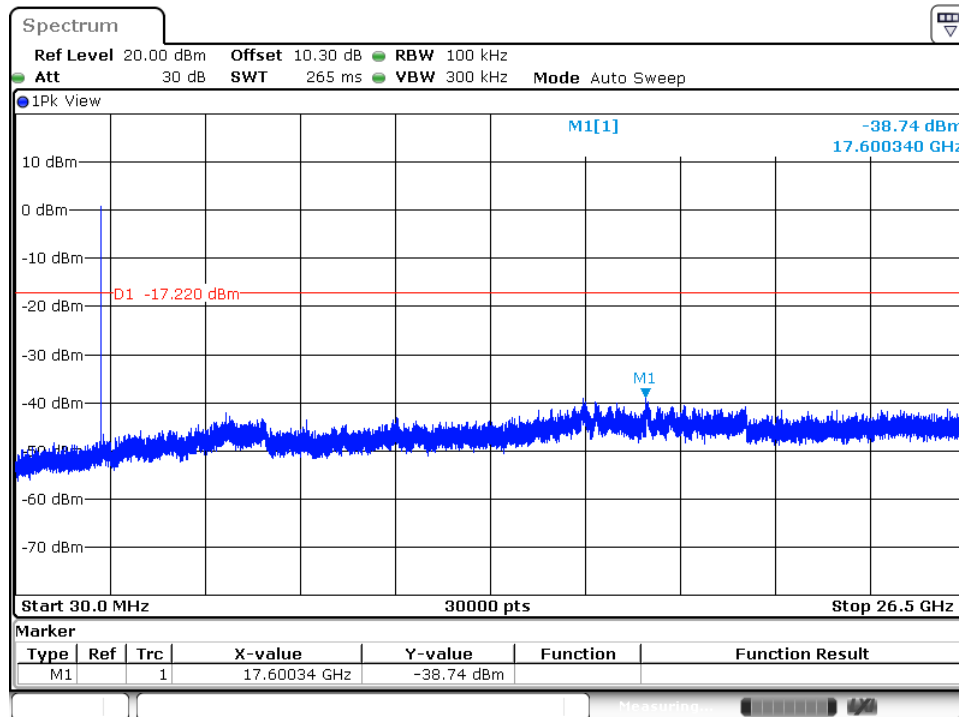
Test Channel	:	Low/ Mid/ High for spurious, Low/ High for Band Edge
Operation mode	:	A
Ambient temperature	:	20-24°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.

Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

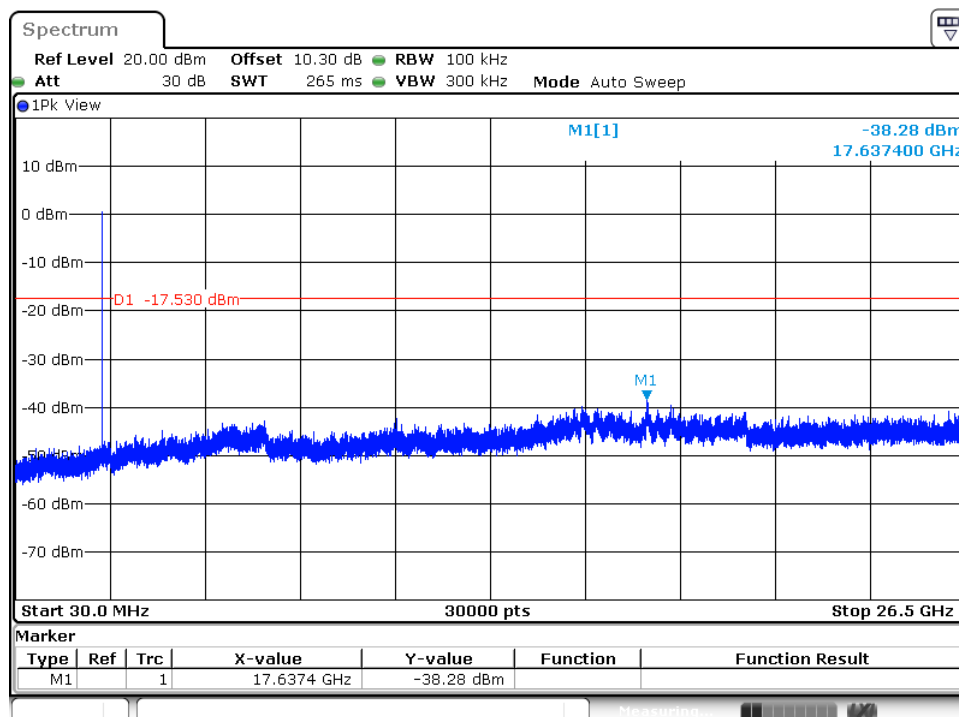
Test Plot 100kHz Conducted Emissions, Bluetooth Low Energy 500kbps

Low Channel

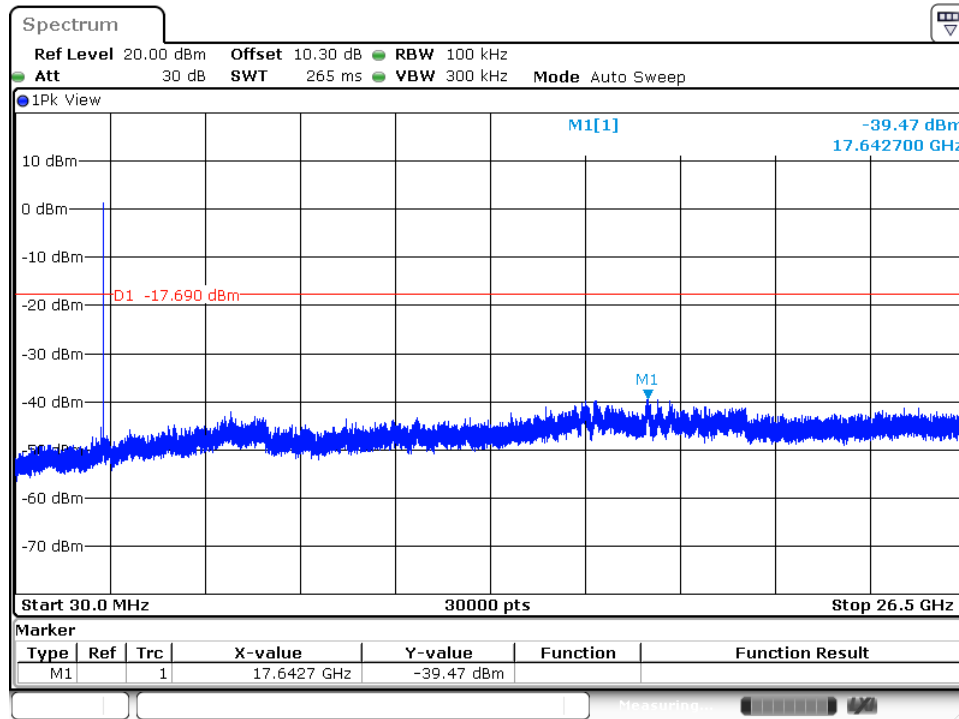


Date: 25.FEB.2020 04:59:41

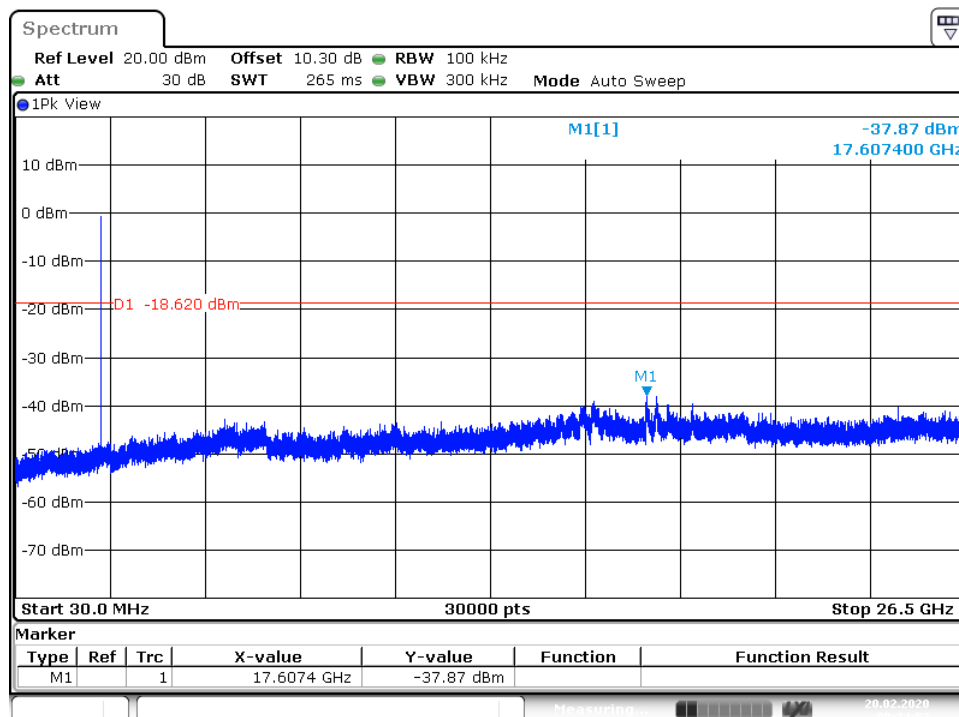
Middle Channel



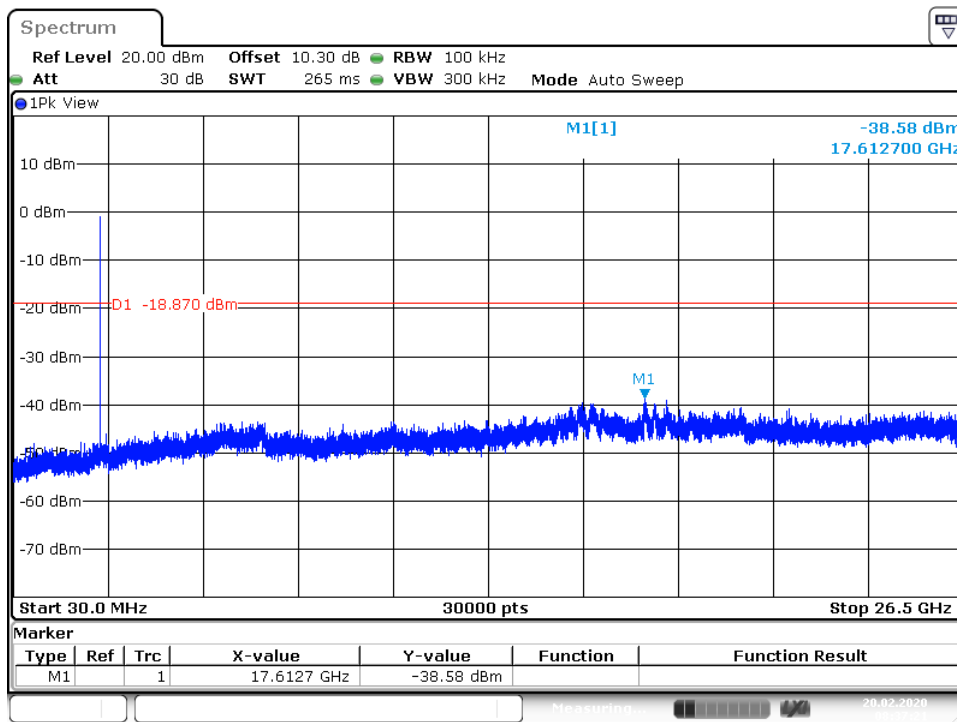
Date: 25.FEB.2020 05:02:26

High Channel


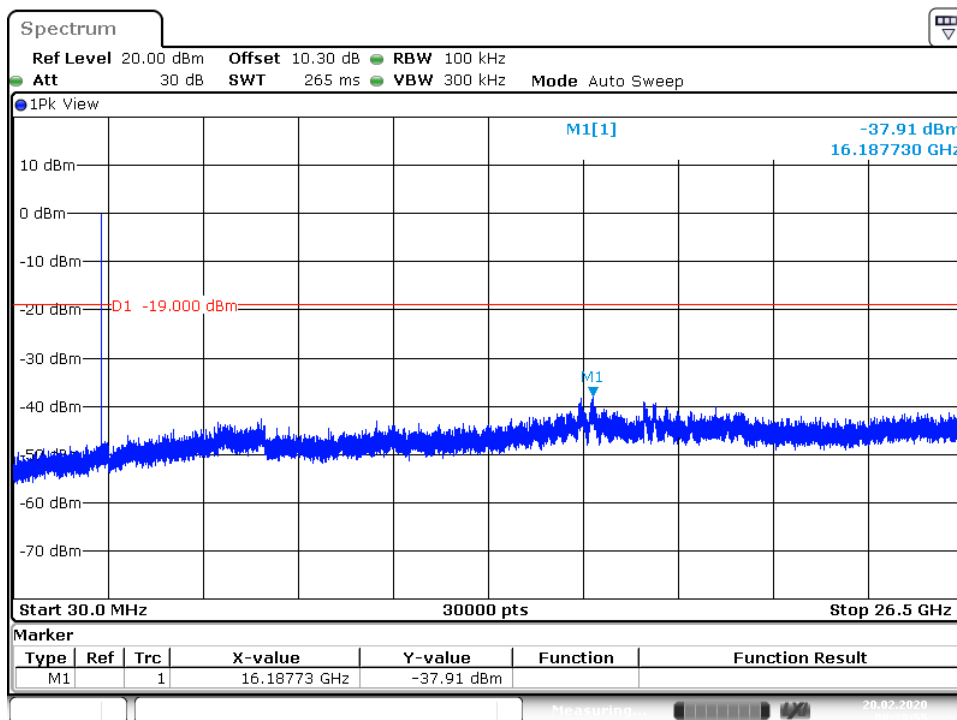
Date: 25.FEB.2020 05:05:08

**Test Plot 100kHz Conducted Emissions,
 Bluetooth Low Energy 2Mbps**
Low Channel


Date: 20.FEB.2020 08:34:51

Middle Channel


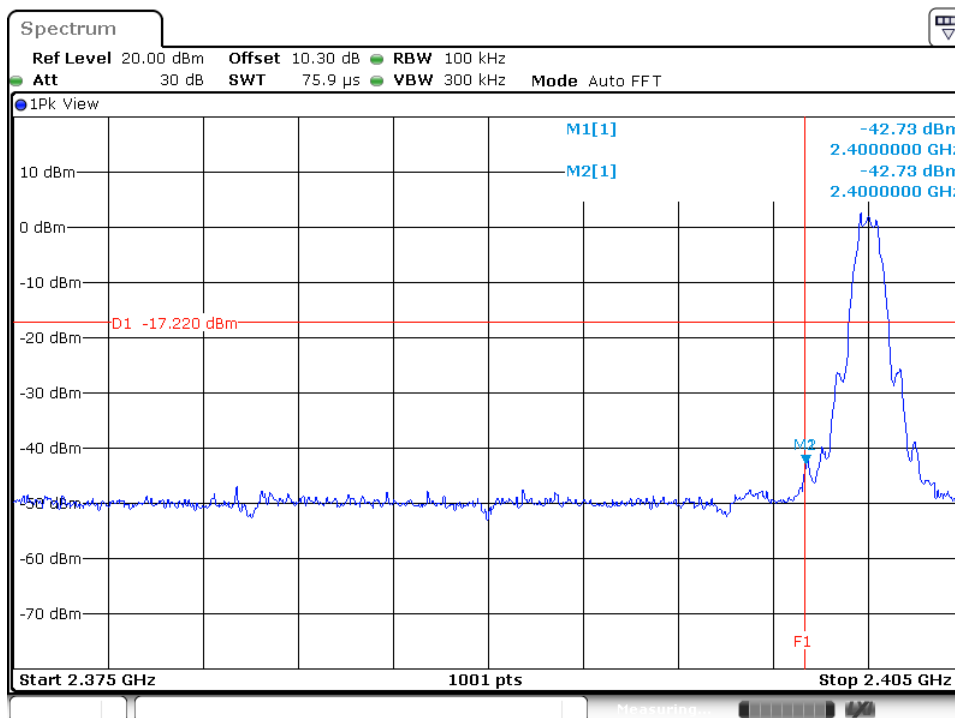
Date: 20.FEB.2020 08:37:21

High Channel


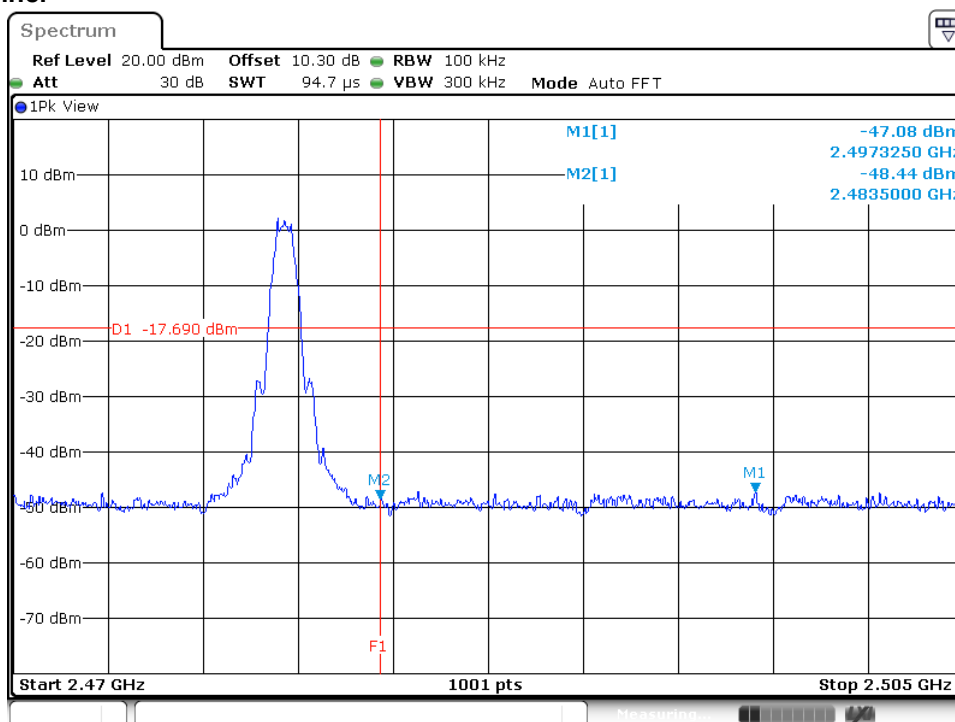
Date: 20.FEB.2020 08:39:55

Test Plot 100kHz RBW of Band Edge, Bluetooth Low Energy 500kbps

Low Channel

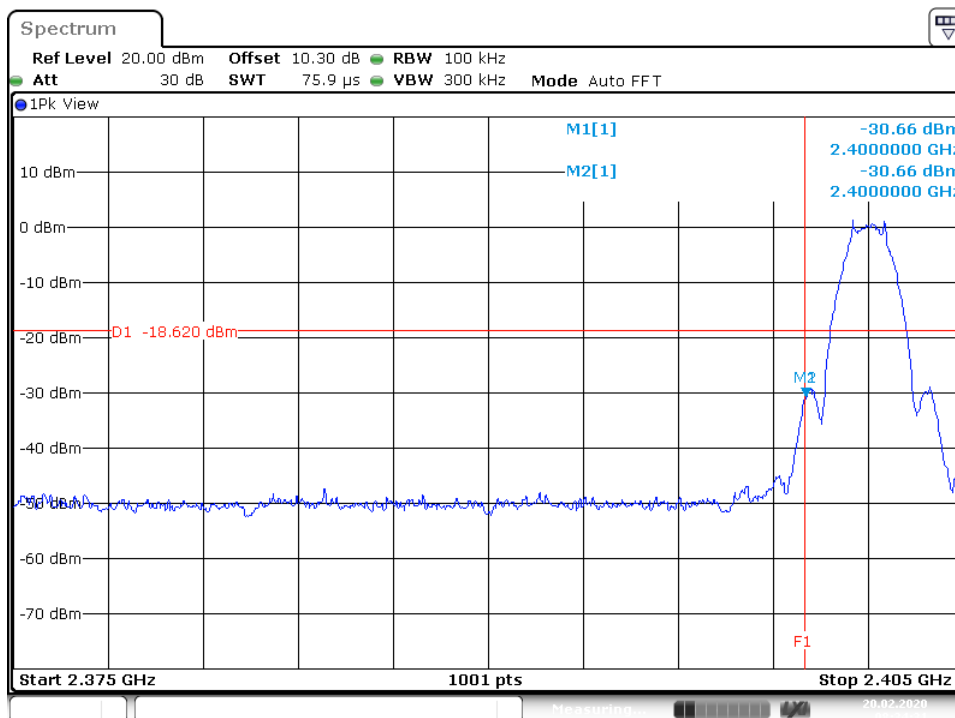


High Channel



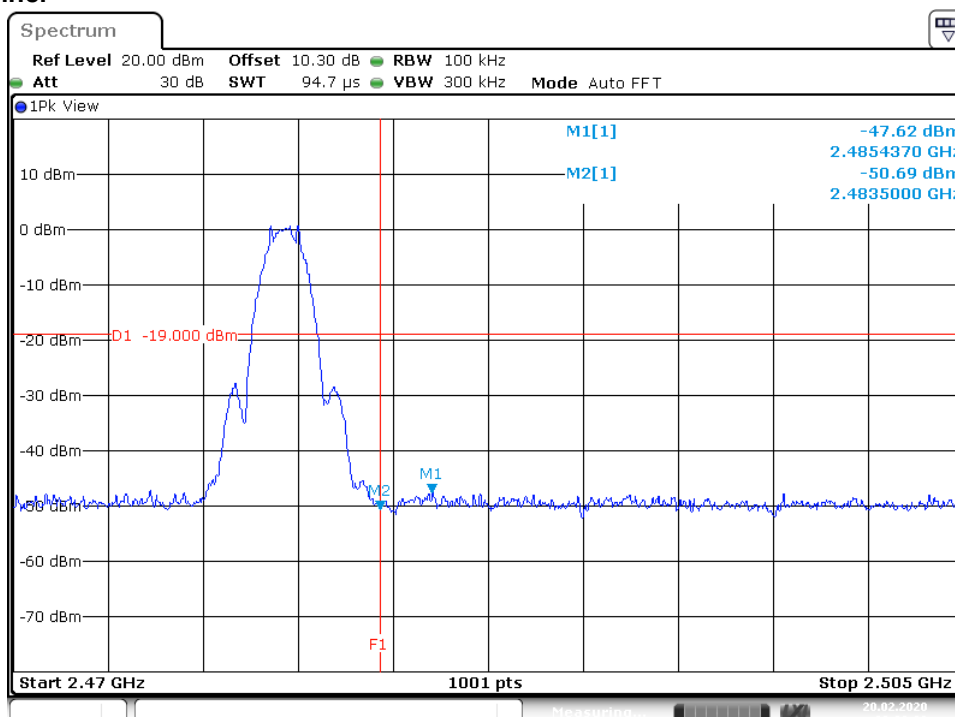
Test Plot 100kHz RBW of Band Edge, Bluetooth Low Energy 2Mbps

Low Channel



Date: 20.FEB.2020 08:34:31

High Channel



Date: 20.FEB.2020 08:39:36

5.1.6 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), FCC 15.205, FCC 15.209, ISED RSS-247 5.5 and ISED RSS-Gen issue 5
Basic standard	:	ANSI C63.10: 2013
Limits	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and ISED RSS-Gen i5, 8.10 (Table 7), must comply with the radiated emission limits specified in FCC 15.209(a) and ISED RSS-Gen i5, 8.9 (Table 5 and 6). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and ISED RSS-Gen i5, 8.9 (Table 5 and 6).
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A, B

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Factor (dB/m)=Antenna Factor(dB/m)+Cable loss (dB)
Level(dBuV/m)=Reading(dBuV)+ Factor(dB/m)

5.2 Mains Emissions

5.2.1 Mains Conducted Emissions

RESULT:**Passed**

Test standard	:	FCC Part 15.207 FCC Part 15.107 ISED RSS-Gen i5 8.8
Limits	:	Mains Conducted emissions as defined in above test standards must comply with the mains conducted emission limits specified
Kind of test site	:	Shielded Room

Test setup

Test Channel	:	Middle
Operation mode	:	A

Remark: For details refer to Appendix D.

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Passed**

Test standard : FCC KDB Publication 447498 D01 v06
47CFR 1.1310
47CFR 2.1093
ISED RSS-102 issue 5

FCC:

Therefore the maximum output power of the transmitter is $2.16\text{mW} < 10\text{mW}$ (Distance: 5 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile Portable RF Exposure.

Canada:

Maximum conducted peak power: 2.16mW
Antenna Gain(Numeric): 0.35dBi
Maximum EIRP available 2.3mW

Since maximum output power of the transmitter is 2.3mW (maximum power) $< 4\text{mW}$ (distance $\leq 5\text{mm}$), hence the EUT is excluded from SAR evaluation according to Table 1 in ISED RSS-102, For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 of ISED RSS-102 are multiplied by a factor of 2.5.

---End---

7. List of Tables

Table 1: Applied Standard and Test Levels	5
Table 2: List of Test and Measurement Equipment	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Technical Specification of EUT	9
Table 5: Test result of Maximum conducted Peak output power, Bluetooth Low Energy 1Mbps	15
Table 6: Test result of Maximum conducted Peak output power, Bluetooth Low Energy 2Mbps	15
Table 7: Test result of Maximum conducted Peak output power, Bluetooth Low Energy 125kbps	16
Table 8: Test result of Maximum conducted Peak output power, Bluetooth Low Energy 500kbps	16
Table 9: Test result of 6dB Bandwidth, Bluetooth Low Energy 500kbps	17
Table 10: Test result of 6dB Bandwidth, Bluetooth Low Energy 2Mbps	17
Table 11: Test result of 99% Bandwidth, Bluetooth Low Energy 500kbps	18
Table 12: Test result of 99% Bandwidth, Bluetooth Low Energy 2Mbps	18
Table 13: Test result of Power Density, Bluetooth Low Energy 500kbps	23
Table 14: Test result of Power Density, Bluetooth Low Energy 2Mbps	23